NOTES:

1. CONTRACTOR MUST FIELD VERIFY MEASUREMENTS AND DIMENSIONS PRIOR TO ANY WORK.
2. CONSTRUCTION STAGING AREA MUST BE COORDINATED WITH RESIDENT ENGINEER.
3. CONSTRUCTION CRANE MUST BE SET UP OUT OF ATCT LINE OF SIGHT. CRANE BOOM MUST CLEAR ATCT ANTENNAS. CONTRACTOR TO SUBMIT AND RECEIVE APPROVAL OF FAA LINE OF SIGHT OBSTRUCTION EVALUATION PRIOR TO START OF WORK.
4. WORK MUST BE STAGED IN SUCH A MANNER TO MAINTAIN ACCESS TO THE FACILITY AT ALL TIMES. ANY FULL CLOSURE OF THE ENTRY WAY MUST BE COORDINATED WITH THE RESIDENT ENGINEER AND FACILITY.
5. ENSURE THAT ALL CONSTRUCTION TRAFFIC OVER EXISTING ROADWAYS MUST BE WITHIN THE DESIGN WEIGHT RANGE OF THE SAID ROADS. REPAIRS TO ANY INCIDENTAL DAMAGE OR DETERIORATION MUST BE AT NO ADDITIONAL COST TO THE FAA.
6. CRANE LOCATION MUST BE COORDINATED WITH THE CITY OF ADDISON. CONTRACTOR WILL BE RESPONSIBLE FOR CITY OF ADDISON APPLICATION COSTS, PERMITS, FEES, AND ADDITIONAL COSTS FOR CONSTRUCTION ACTIVITIES LOCATED IN STREET.
7. CAB GLASS REMOVAL AND REPLACEMENT ACTIVITIES MUST NOT OCCUR WHEN EXTERIOR TEMPERATURE IS ABOVE 80 DEGREES FAHRENHEIT OR DURING BAD WEATHER.
8. TRAFFIC CONTROL WORK MUST BE PERFORMED IN SUCH A MANNER AS TO PERMIT TRAFFIC TO OPERATE WITH THE LEAST AMOUNT OF INCONVENIENCE POSSIBLE. CONTRACTOR TO SUBMIT A TRAFFIC CONTROL PLAN FOR REVIEW AND APPROVAL BY FAA PRIOR TO START OF WORK. SIGNING AND FLAGGING MUST BE UTILIZED. COORDINATE ALL TRAFFIC CONTROL PLANS WITH THE CITY OF ADDISON. COORDINATE WITH ADDISON POLICE, ADDISON CITY OFFICIALS, AND FAA FOR ANY ROAD CLOSURES.
9. TRAFFIC CONTROL EXPENSES FOR MAINTENANCE OF TRAFFIC ASSOCIATED WITH THE PROJECT ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
10. CONTRACTOR MUST SUBMIT A WORK PLAN FOR REVIEW AND APPROVAL BY FAA PRIOR TO START OF WORK.
11. CONTRACTOR PARKING AND STAGING MUST REMAIN CLEAN AND FREE FROM DEBRIS AT ALL TIMES. CONTRACTOR MUST REMAIN A MINIMUM OF 25 FEET AWAY FROM SECURITY FENCE. RESIDENT ENGINEER SHALL DETERMINE FINAL LOCATION OF STAGING AREA.
12. ANY RADIO COMMUNICATION DEVICE MUST HAVE FREQUENCIES APPROVED BY FACILITY FOR USE ONSITE.

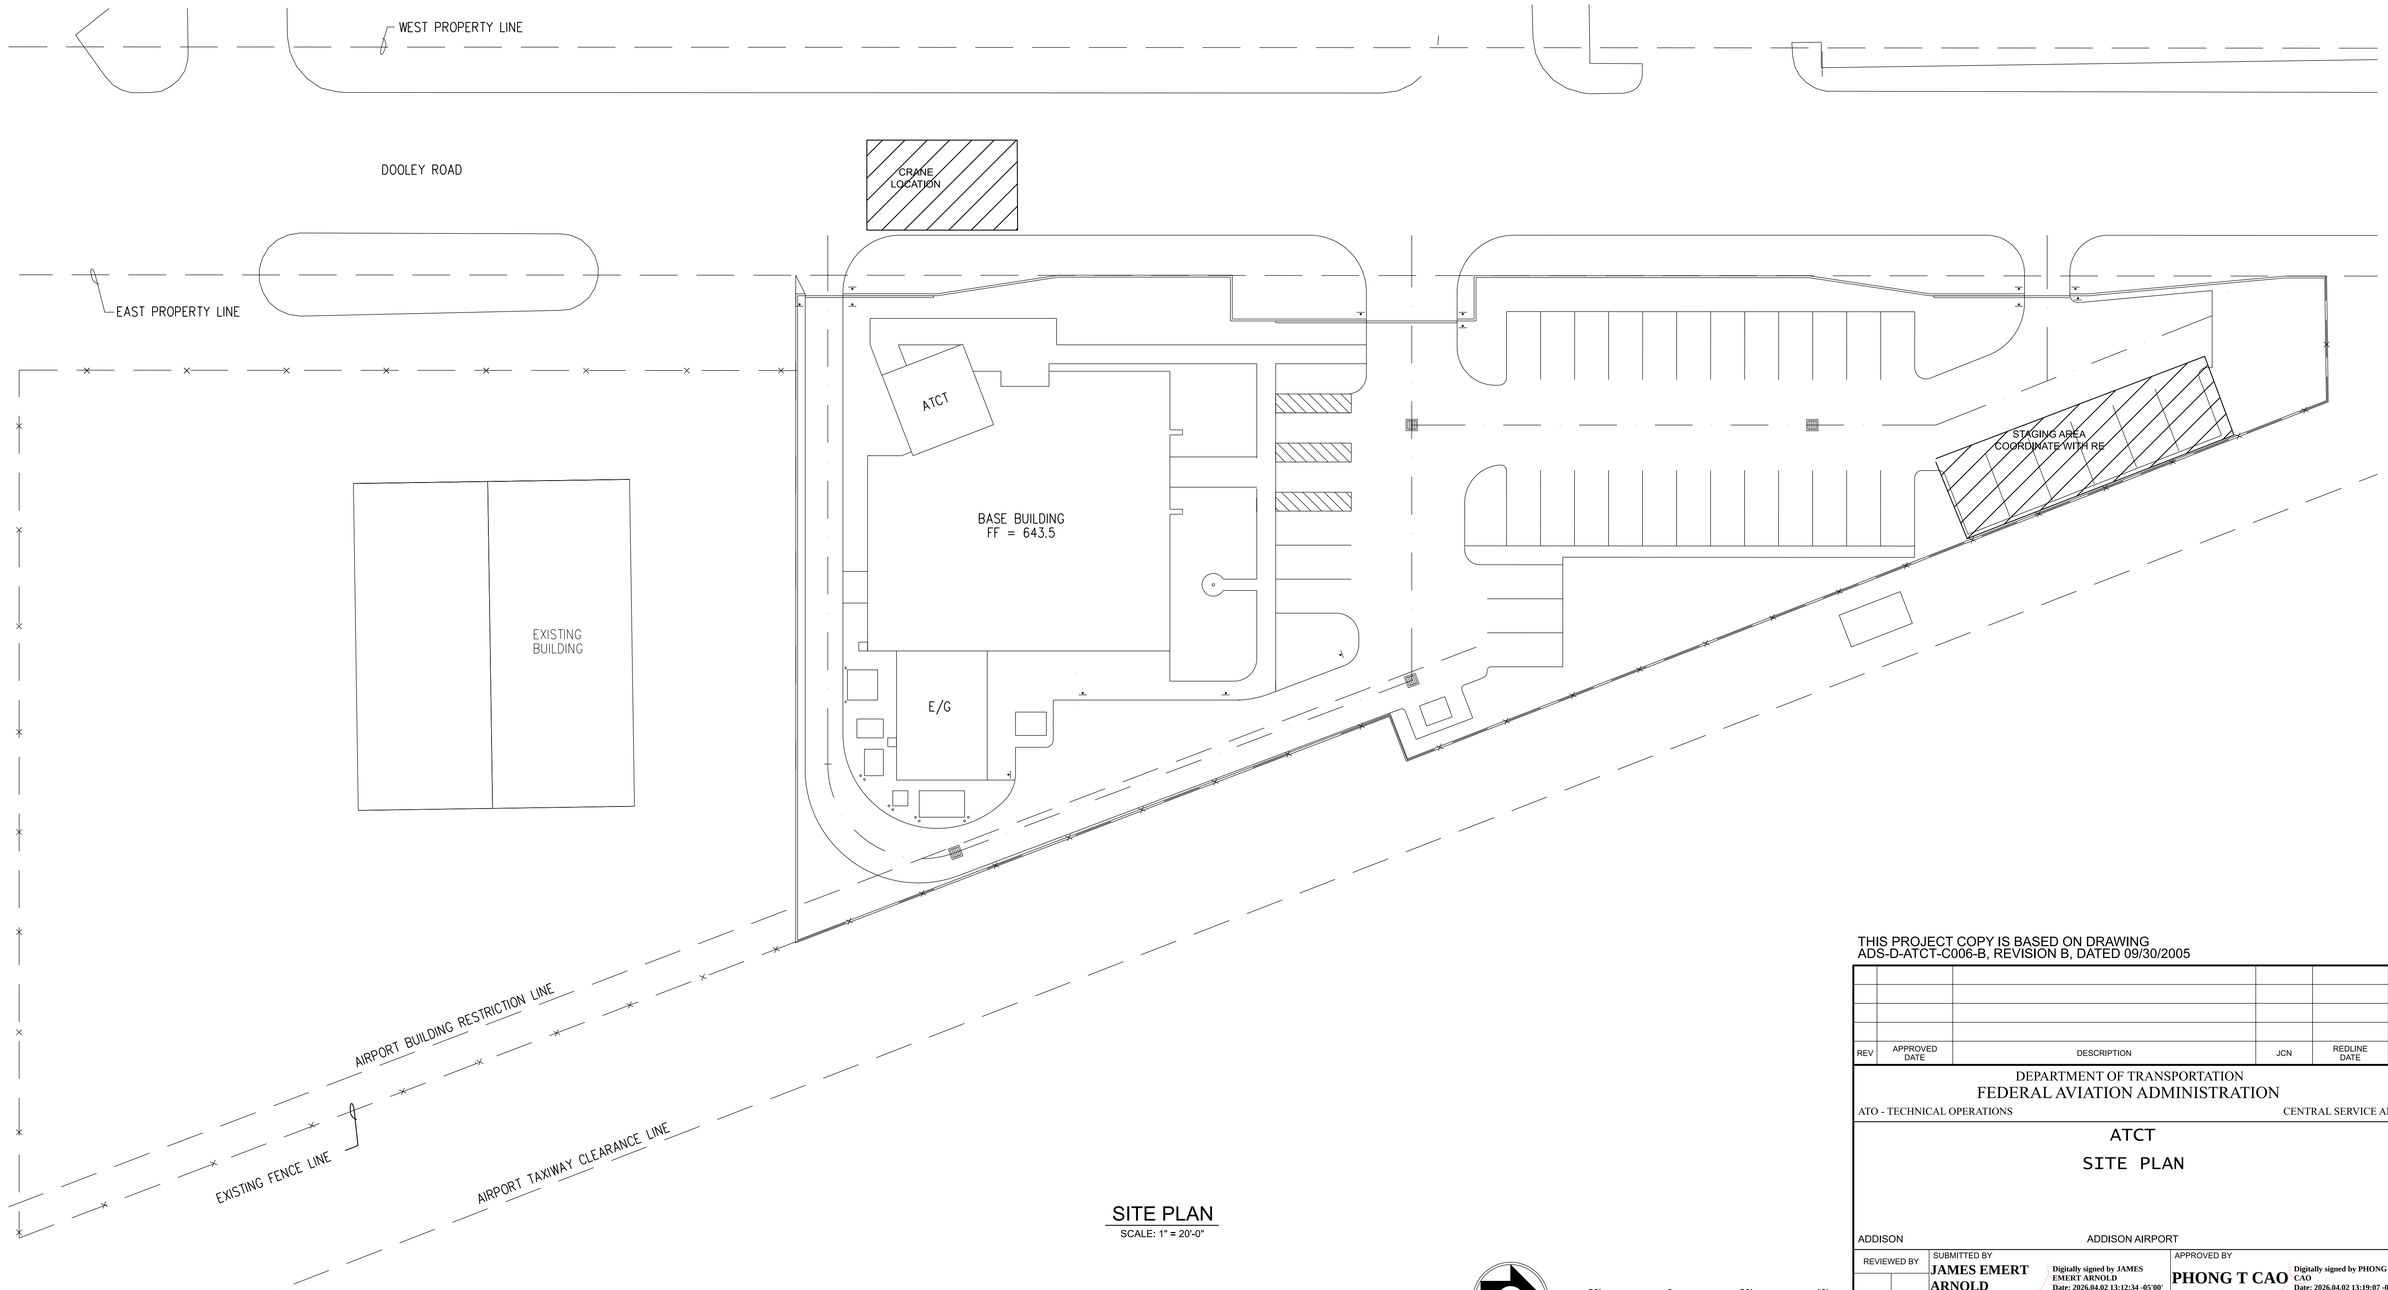

SITE PLAN
SCALE: 1" = 20'-0"

THIS PROJECT COPY IS BASED ON DRAWING
ADS-D-ATCT-C006-B, REVISION B, DATED 09/30/2005

REV	APPROVED DATE	DESCRIPTION	JCN	REDLINE DATE	APVD

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
ATO - TECHNICAL OPERATIONS — CENTRAL SERVICE AREA

ATCT
SITE PLAN

ADDISON — ADDISON AIRPORT — TX

REVIEWED BY	SUBMITTED BY	APPROVED BY
	JAMES EMERT ARNOLD — Digitally signed by JAMES EMERT ARNOLD Date: 2026.04.02 13:12:34 -05'00'	PHONG T CAO — Digitally signed by PHONG T CAO Date: 2026.04.02 13:19:07 -05'00'
	PROJECT ENGINEER	MGR: ENGINEERING - FORT WORTH

DESIGNED JEA	ISSUED BY	DATE 03/25/2026	JCN 24015542	
DRAWN JEA	ENGINEERING SERVICES TERMINAL	DRAWING NO ADS-24015542-A001		REV
CHECKED				

ISSUED FOR: CONSTRUCTION

THIS DRAWING PRODUCED ON ASW REGION CAD SYSTEM

EDMS: ads-24015542-a001.dwg

ads-24015542-a001.dwg
03/31/2026 9:33:39 AM
Plotted by: SRVC-CAEG-EDMS-COORD