

**General Services Administration
Federal Acquisition Service (FAS)
Greater Southwest Region**

**Acquisition ID 47QFWA26K0005
Solicitation ID: TBD**

***FENCE TO FENCE ENVIRONMENTAL SERVICES
for
PATRICK SPACE FORCE BASE, CAPE CANAVERAL
SPACE FORCE STATION, AVON PARK AIR FORCE
RANGE, MALABAR TRAINING ANNEX, AND
JONATHAN DICKENSEN MISSILE TRACKING
ANNEX***

PERFORMANCE WORK STATEMENT (PWS)

30 Jan 2026

SECTION 1 DESCRIPTION/SPECIFICATIONS PERFORMANCE WORK STATEMENT

1.1 BACKGROUND

The requirement within this Performance Work Statement (PWS) is for Environmental Service to support the AFCEC/CZ. The Environmental Services encompasses the full range of methods, technologies, and supporting activities necessary to conduct environmental restoration/remediation, operations and services efforts to address environmental sites and/or conditions at Department of the Air Force (DAF) installations and other locations per technical and regulatory requirements.

1.1.1 Purpose

This PWS outlines the requirements to provide Environmental Services support necessary to meet Air Force Civil Engineer Center (AFCEC) and other customer requirements. This Call order is for **Fence-To-Fence Environmental Services at Patrick Space Force Base, Cape Canaveral Space Force Station, Avon Park Air Force Range, Malabar Training Annex, and Jonathan Dickinson Missile Tracking Annex.** The contract is performance-based, to the maximum extent practicable, in accordance with (IAW) Federal Acquisition Regulations (FAR) Subpart 37.6 *Performance-Based Acquisition* and is considered a commercial procurement IAW with FAR Part 12 *Acquisition of Commercial Products and Commercial Services*.

1.1.2 Agency Mission

Space Launch Delta 45 (SLD 45) delivers assured space launch, range and combat capabilities for the nation. Avon Park Air Force Range (APAFR) provides sustainable world class crucial training focused on advanced realistic and relevant training for joint, interagency and multi-national partners excelling in air-ground integration.

1.2 SCOPE

The Contractor shall provide all personnel, equipment, supplies, facilities, transportation, tools, materials, supervision, non-personal services, and other items and non-personal services necessary to perform **Fence-To-Fence Environmental Services** as defined in this Performance Work Statement except for those items specified as government furnished property and services. The Contractor shall perform to the standards in this contract.

The scope of this environmental operations and services contract provides for environmental compliance, environmental conservation, Pollution Prevention (P2), and environmental operations and maintenance (O&M) support activities necessary to support DAF and AFCEC environmental mission requirements. Environmental Services to be provided will support the DAF Environmental Quality (EQ) program and shall encompass the full range of methods, technologies, and supporting activities necessary to conduct environmental operations and services efforts at DAF installations and other locations IAW technical and regulatory requirements.

Recurring technical support services shall include but not be limited to daily on-site environmental program management, planning, engineering, evaluations, permits, plans, compliance audits, environmental sampling and monitoring, trending and analysis, document review, tracking, record keeping, submitting Contract deliverable items and other environmental support services defined herein, or as requested by the DAF or other designated representatives. The Contractor shall coordinate environmental support with other contractors, DAF organizations, tenants, and commercial space operations. Other contractors, tenants, and commercial space operations are responsible for the origination and full development of environmental documents to include but not limited to permit application packages, supporting fees and request for proposals (RFP) for their specific operations.

Activities include but are not limited to: environmental management system (EMS) audit inspection program; air quality (AQ); hazardous material (HM) management; hazardous waste (HW) management; P2; long-term O&M; long-term monitoring (LTM); petroleum, oil, and lubricants (POL) management; solid waste management; storage tank management; polychlorinated biphenyls (PCBs); asbestos, management plans; lead-based paint (LBP) and other lead-containing materials; wastewater and stormwater studies and permits; drinking water surveillance; environmental baseline surveys (EBSs); Environmental Impact Analysis Process (EIAP). Examples of specific services include tasks such as characterizing waste streams; environmental monitoring, sampling, and analysis; operating a hazardous waste accumulation site; and updating existing environmental plans and permits. These services are identified in Paragraphs 1.8.1 through 1.8.15.

1.3 Period of Performance

The period of Performance for this contract is anticipated to as follows:

Base Year : 01 September 2026 to 31 August 2027

Option Year 1: 01 September 2027 to 31 August 2028

Option Year 2: 01 September 2028 to 31 August 2029

Option Year 3: 01 September 2029 to 31 August 2030

Option Year 4: 01 September 2030 to 31 August 2031

FAR 52.217-8, Option to Extend Services (6-Months): 01 September to 01 March 2032

1.4 Place of Performance/Hours of Performance

The work to be performed under this contract will be performed at Patrick Space Force Base (PSFB), Cape Canaveral Space Force Station (CCSFS), Jonathan Dickinson Missile Tracking Annex (JDMTA), Malabar Transmitter Annex (MTA), satellite locations (e.g. KARS Park, Tel IV, Shiloh, and Cocoa Doppler), and Avon Park Air Force Range (APAFR) all in the State of Florida. PSFB, CCSFS, JDMTA and MTA fall under the United States Space Force (USSF) and may be referred to collectively herein as Space Launch Delta 45 (SLD 45). For purposes of this PWS the United States Air Force (USAF) and the USSF will be collectively referred to as the DAF, as the USSF and USAF policies are typically one and the same. Any instance where the USSF has created its own policy, the Contractor will defer to that policy.

1.5 Contractor Observance of Federal Holidays

The Government observes the following days as holidays:

New Year's Day	Labor Day
Martin Luther King Jr.'s Birthday	Columbus Day
President's Day	Veteran's Day
Memorial Day	Thanksgiving Day
Juneteenth	Christmas Day
Independence Day	

In addition to the days designated as holidays, the Government may also observe the following days:

Any day designated by Federal Statute; Executive Order; or President's Proclamation Operations on Federal holidays, while not normally planned, may be authorized by the Contracting Officer Representative (COR). The Contractor may conduct training on a Federal holiday, if coordinated with the COR a minimum of three days in advance. Authorization for holiday training is not guaranteed.

1.6 Hours of Operation

The Contractor personnel shall be on-site during working hours which are 0730-1630 eastern standard time (EST), Monday through Friday, excluding federal holidays to perform required services unless otherwise required in the contract or approved by the CO. The Contractor shall provide a list of all the employees and their scheduled work hours, if hours change the Contractor shall provide revised list within fifteen (15) days. There may be situations that require the Contractor to perform services outside the working hours, or situational telework and during these scenarios, the Contractor shall coordinate and receive approval in advance with the COR and designated DAF Point of Contact (POC). When the Contractor's work schedule conflicts with a DAF mission requirement, the Contractor shall advise the COR and designated DAF POC and reschedule the work to minimize disruption.

Contractor personnel will not report to Government facilities to work nor remain at the work locations any time the Government is unexpectedly required to close their offices. The Contractor will not be compensated for these Government closures. The Contractor is responsible for all notification of their Contractor staff during times of closure.

1.7 OBJECTIVE

To provide comprehensive on-site environmental services that ensure full compliance with all applicable federal, state, and local regulations, promote responsible environmental stewardship, and support the DAF missions.

1.8 TASKS

The appropriate services to be performed during this Call Order period of performance are identified in Table 1, Summary of Requirements for PSFB, CCSFS, JDMTA, MTA, and APAFR all in the State of Florida.

PSFB = P, CCSFS = C, JDMTA = J, MTA = M, and APAFR = A.

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
BASIC REQUIREMENTS (Will be Exercised in the Years Outlined)						
1.8.1	HAZARDOUS WASTE MANAGEMENT					
1.8.1.1	Hazardous Waste Contract Support (SLD45 Installations, Satellite Locations and APAFR)	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A
1.8.1.3	Recycling, Hazardous Waste (Exclude MTA)	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A
1.8.1.4	Recycling, Other Regulated Waste (Exclude MTA)	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A
1.8.1.5	Reports, HW (SLD45 Installations, Satellite Locations and APAFR)	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A	P, C, J, A
1.8.1.6	Supplies, HW	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A	P, C, J, M, A
1.8.2	HAZARDOUS MATERIAL MANAGEMENT					
1.8.2.1	Installation Hazardous Materials Program Support (SLD45 Installations, Satellite Locations and APAFR)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.2.2	Reporting, Emergency Planning Community Right-To-Know Act (EPCRA) (SLD45 Installations, Satellite Locations and APAFR)	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A
1.8.2.3	IHMP Support, Supplies	Not Applicable				
1.8.3	ENVIRONMENTAL SAMPLING, ANALYSIS AND MONITORING (SAM)					
1.8.3.1	SAM, Waste Characterization (SLD45 Installations, Satellite Locations and APAFR)	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A
1.8.3.2	SAM, Air	Not Applicable				

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.3.3	SAM, NPDES / Other Wastewater (PSFB and CCSFS Only)	P, C	P, C	P, C	P, C	P, C
1.8.3.4	SAM, Storm Water (PSFB, CCSFS and APAFR Only)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.3.5	SAM, LTM, RCRA Closures	Not Applicable				
1.8.3.6	SAM, Permitted Landfills (CCSFS Only)	C	C	C	C	C
1.8.3.7	SAM, RCRA Permitted TSDF (CCSFS Only)	C	C	C	C	C
1.8.3.8	SAM, Toxics	Not Applicable				
1.8.3.9	SAM, P2	Not Applicable				
1.8.3.10	SAM, Leak Detection	Not Applicable				
1.8.3.11	Supplies, SAM	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A	P, C, M, J, A
1.8.3.14	Contract Operated Services, P2 - P2MI – Additional Plans (SLD45 Installations and APAFR)	C	C	C	C	C
1.8.4	AIR QUALITY					
1.8.4.1	Assessment, Air (CCSFS and JDMTA)	C	C	C	C	C
1.8.4.2	Inventory, Air Emissions Inventory Data Management (CCSFS, JDMTA, Satellite Locations and APAFR Only)	C, A	C, A	C, A	C, A	C, A
1.8.4.3	Permit Renewal, Air (CCSFS Only)	C				
1.8.4.4	Permit Renewal, Air, Title V	Not Applicable				
1.8.4.5	Recordkeeping, Air (CCSFS, JDMTA, MTA and Satellite Locations)	C	C	C	C	C
1.8.4.6	Reports, Air (CCSFS and JDMTA)	C	C	C	C	C

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.4.7	Reports, Air Library	Not Applicable				
1.8.4.8	Supplies Air	Not Applicable				
1.8.5	WASTEWATER AND STORMWATER					
1.8.5.1	Permit Renewal, NPDES (Wastewater and/or Stormwater) (PSFB, CCSFS and APAFR)	A	P	P, C	P, C	P, C, A
1.8.5.2	Reports, NPDES (PSFB, CCSFS and APAFR)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.5.3	Implement, Permit Required Practices/Activities < MS4, SW>	Not Applicable				
1.8.5.4	Supplies SW	Not Applicable				
1.8.5.5	Supplies SWAT	Not Applicable				
1.8.5.6	Supplies WWAT	Not Applicable				
1.8.5.11	Contract Operated Services, EC – SWAT-	Not Applicable				
1.8.5.12	Contract Operated Services, EC – WWAT- (CCSFS)	C	C	C	C	C
1.8.5.13	Contract Operated Support, EC – SDWA Drinking Water Management (CCSFS)	C	C	C	C	C
1.8.5.14	Contract Operated Support, EC – SPIL Contractor Spill and Release Consultation Support (CCSFS, JDMTA, MTA and Satellite Locations)	C	C	C	C	C
1.8.6	CULTURAL RESOURCES- Not Applicable					
1.8.7	SOLID WASTE MANAGEMENT					
1.8.7.1	Contract Operated Services, EC - RC-D Landfill Activities (CCSFS)	C	C	C	C	C
1.8.9	ENVIRONMENTAL MANAGEMENT SYSTEM (EMS)					

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.9.7	Contract Operated Services, P2 - P2MI – Other EMS Responsibilities (CCSFS, JDMTA, MTA and Satellite Locations)	C	C	C	C	C
1.8.12	PETROLEUM, OIL, AND LUBRICANT MANAGEMENT					
1.8.12.1.1	Plan Update, SPCC Recertification	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.12.1.2	Plan Update, SPCC Technical Amendments	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.12.1.3	Integrated Contingency Plan Update (One Plan)	Not Applicable				
1.8.12.1.4	Training (Exclude MTA and Satellite Locations)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.12.2	Contract Operated Services, EC - RC-I - Storage Tank Management (CCSFS, JDMTA, MTA and Satellite Locations)	C	C	C	C	C
1.8.14	PUBLIC NOTIFICATIONS, PUBLIC MEETINGS, PUBLIC HEARINGS, AND PUBLIC OUTREACH EVENTS					
1.8.14	Compliance Public Notice	C	C	C	C	C
1.8.15	PERMITS AND FEES (P&F)- Not Applicable					
OPTIONAL REQUIREMENTS (Exercise of these Projects will be executed via modification)						
1.8.1	HAZARDOUS WASTE MANAGEMENT					
1.8.1.7	Plan Update, HW Contingency	Not Applicable				
1.8.1.8	Plan Update, HW Management Plan (SLD45 Installations, Satellite Locations and APAFR)	P, A		P, A		P, A
1.8.1.9	Supplies, Spill Response	Not Applicable				
1.8.1.10	Permit Renewal, RCRA Part B (PSFB and CCSFS Only)	Not Applicable				
1.8.2	HAZARDOUS MATERIAL MANAGEMENT					

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.2.1	Installation Hazardous Materials Program Support (SLD45 Installations, Satellite Locations and APAFR)	M, J	M, J	M, J	M, J	M, J
1.8.3	ENVIRONMENTAL SAMPLING, ANALYSIS AND MONITORING (SAM)					
1.8.3.12	SAM, Drinking Water	Not Applicable				
1.8.3.13	Long Term Groundwater Monitoring	Not Applicable				
1.8.4	AIR QUALITY					
1.8.4.1	Assessment, Air (CCSFS and JDMTA)	J	J	J	J	J
1.8.4.2	Inventory, Air Emissions Inventory Data Management (CCSFS, JDMTA, Satellite Locations and APAFR Only)	J	J	J	J	J
1.8.4.5	Recordkeeping, Air (CCSFS, JDMTA, MTA and Satellite Locations)	M, J	M, J	M, J	M, J	M, J
1.8.4.6	Reports, Air (CCSFS and JDMTA)	J	J	J	J	J
1.8.4.9	Plan Update, Air, Emergency Episode Plan	Not Applicable				
1.8.4.10	Plan Update, CAA, Risk Management Plan	Not Applicable				
1.8.5	WASTEWATER AND STORMWATER					
1.8.5.2	Reports, NPDES (PSFB, CCSFS and APAFR)	M, J	M, J	M, J	M, J	M, J
1.8.5.7	Plan Update, SWMP (PSFB)	P	P	P	P	P
1.8.5.8	Plan Update, SWPPP (PSFB, CCSFS and APAFR)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.5.9	Plan Update Water Sampling/ Monitoring	Not Applicable				
1.8.5.10	Survey, Storm Water Permit Compliance	Not Applicable				

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.5.14	Contract Operated Support, EC – SPIL Contractor Spill and Release Consultation Support (CCSFS, JDMTA, MTA and Satellite Locations)	J	J	J	J	J
1.8.6	CULTURAL RESOURCES- Not Applicable					
1.8.7	SOLID WASTE MANAGEMENT					
1.8.7.2	Integrated Solid Waste Management Plan (ISWMP) (SLD45 Installations and APAFR)	P, A	P, A	P, A	P, A	P, A
1.8.7.3	Solid Waste Minimization and Cost Optimization	Not Applicable				
1.8.8	POLLUTION PREVENTION					
1.8.9	ENVIRONMENTAL MANAGEMENT SYSTEM (EMS)					
1.8.9.1	Maintenance of Environmental Aspect Inventory (EAI)	Not Applicable				
1.8.9.2	Plan Update, EMS Documentation (PSFB, CCSFS and APAFR)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.9.3	Recordkeeping, EMS (PSFB, CCSFS and APAFR)	P, C, A	P, C, A	P, C, A	P, C, A	P, C, A
1.8.9.4	Maintenance, Environmental MDL/MDS	Not Applicable				
1.8.9.5	EMS/EIP External/Internal IG Support	Not Applicable				
1.8.9.6	EMS Auditing Support	Not Applicable				
1.8.9.7	Contract Operated Services, P2 - P2MI – Other EMS Responsibilities (CCSFS, JDMTA, MTA and Satellite Locations)	M, J	M, J	M, J	M, J	M, J
1.8.10	NATIONAL ENVIRONMENTAL POLICY ACT (NEPA)- Not Applicable					

Table 1- Summary of Requirements for Patrick ISS F2F						
PWS Para	Task Description	Base Year	Option Year 1	Option Year 2	Option Year 3	Option Year 4
1.8.11	ENVIRONMENTAL REMEDIATION PROGRAM- Not Applicable					
1.8.12	PETROLEUM, OIL, AND LUBRICANT MANAGEMENT					
1.8.12.1.4	Training (Exclude MTA and Satellite Locations)	J	J	J	J	J
1.8.12.2	Contract Operated Services, EC - RC-I - Storage Tank Management (CCSFS, JDMTA, MTA and Satellite Locations)	M, J	M, J	M, J	M, J	M, J
1.8.13	TOXIC SUBSTANCES CONTROL ACT (TSCA)					
1.8.13.1	Asbestos -Non-EQ Services (SLD 45 Installations and Satellite Locations)	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M
1.8.13.2	Lead-Based Paint and Other Lead-Containing Materials - Non-EQ Services (SLD 45 Installations and Satellite Locations)	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M
1.8.13.3	Polychlorinated Biphenyls- Non-EQ Services (SLD 45 Installations and Satellite Locations)	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M	P, C, J, M
1.8.13.4	Radon- Non-EQ Services	Not Applicable				
1.8.14	PUBLIC NOTIFICATIONS, PUBLIC MEETINGS, PUBLIC HEARINGS, AND PUBLIC OUTREACH EVENTS					
1.8.15	PERMITS AND FEES (P&F) Not Applicable					

Note – PSFB and CCSFS includes applicable Satellite Locations

The detailed service activities to be performed under this call order are identified in the paragraphs below. The Contract shall adhere to both the general requirements and installation-specific requirements for each project, as identified below. Contractor personnel shall possess appropriate certifications and training to accomplish the required services, as specified.

The contractor shall coordinate with the appropriate installation Media Program Manager (MPM) as identified in this PWS. An MPM is the Program Manager responsible for the media or environmental program area related to the PWS section.

1.8.1 Hazardous Waste Management

The Contractor shall perform services in compliance with the Hazardous Materials Transportation Act (HMTA) and 49 Code of Federal Regulations (CFR) – Department of Transportation (DOT); Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA); Resource Conservation and Recovery Act (RCRA), Toxic Substances Control Act (TSCA); other applicable federal (including 40 CFR Part 264/265, Subparts A through E), 40 CFR (Parts 260-266, 268, 270, 273, 279 and 761), 49 CFR 178, state, local laws and regulations; related Department of War (DOW) and DAF directives; current Florida Department of Environmental Protection (FDEP) Operating/Corrective Action/National Pollutant Discharge Elimination Systems (NPDES) Permits and the Hazardous Waste Management Plans (HWMP). HW management services shall include, but are not limited to:

- *HW collection*
- *HW accumulation site activities*
- *implementation and management of waste tracking systems*
- *HW sampling and characterization IAW 40 CFR 261, Identification and Listing of Hazardous Waste*
- *preparation of profile sheets and inventories*
- *inspections of HW accumulation areas*
- *training of installation personnel and contractors on safe and compliant management, handling and storage of waste at accumulation areas*
- *preparation of reports related to HW management*
- *preparation of spill reports as necessary*
- *entering all required HW data into the DAF Enterprise Environmental, Safety, and Occupational Health Management Information System (EESOH-MIS)*
- *support preparation of, and updates to the HWMPs, Waste Analysis Plans, Hazardous Materials/Waste Contingency Plans, and other associated plans as required by law or regulation*
- *utilize T-EMP for plan uploads and updates as required, identification of treatment and disposal sites*
- *recordkeeping*
- *compliance inspection or audit support*
- *contaminated rag exchange/rag laundering*
- *Treatment, Storage, and Disposal Facility (TSDF) operations (excluding any real property upgrades or improvements to the facility)*
- *management for recycling or disposal of similar wastes such as non-hazardous industrial and special waste, used oil, and off-spec fuel, waste consolidation/lab packing, and waste turn-in/preparation for shipment*

Any documents associated with hazardous/non-HW removal and disposal must be sent to the designated DAF personnel in advance for review, approval, and signature as the designated person who will be responsible for approving proposed disposal methods and signing all manifests.

In addition, the contractor will be responsible for cleanup and cleanup costs due to contractor-caused spills and the lawful disposition of contractor-generated HW and excess/expired HM.

The contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. **(CDRL A010)**

1.8.1.1 Hazardous Waste Contract Support (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall provide all personnel, supervision, services and supplies required for the proper and compliant management and operation of the facilities. Services include, but are not limited to, management of the TSDFs; <90-day Hazardous Waste Accumulation Sites (HWAS); oversight and accomplishment of waste Pick-up from all Initial Accumulation Point's (IAPs) HW sampling and characterization; labeling and inventories; waste sites; waste stream identification/re-verification; reports; entering all required data into EESOH-MIS; HW operation/collection; waste consolidation; Industrial Recycling processes; recordkeeping and reports; training and compliance assistance/inspection visits; and adhering to all AF policies and goals on HW reduction. This support includes management and tracking of wastes, manifested under the EPA IDs, such as hazardous, non-hazardous industrial and special waste, Universal Waste, TSCA, used oil/filter, oily wastewater, and off-spec fuel. The Contractor shall prepare HW containers for shipment and coordinate with transport/disposal contractors for turn-in and pick-up from the TSDF or HWAS. The Contractor shall notify the DAF of all changes in HW activities including, but not limited to, new waste stream processes, waste stream process modifications, the location or relocation of accumulation sites, and names of accumulation site managers and alternates.

The Contractor shall coordinate DLA-DS lab packing services at tenant organizations for HW submitted to DLA-DS for disposal. The Contractor will ensure proper CLINS DTIDs, and 1348s are accomplished in EESOH-MIS. Based on DLA-DS disposal requirements all documents will be processed in a timely manner.

Note: There is the potential that the Contractor may be required to manage Environmental Restoration Account (ERA) RCRA and TSCA HW during emergency situations. This management will be for a limited duration, and the ERA contractor remains responsible for the final disposition of all ERA waste. e.g hurricanes.

The Contractor shall assist the DAF with regulatory agency coordination regarding HW activities. This includes but is not limited to the preparation of all potential regulatory notifications and participation in meetings with regulatory personnel as requested by the DAF. The Contractor shall not directly communicate or send submittals to any regulator at any time without prior approval from the DAF. See Attachment D for workload data.
(CDRL A012)

1.8.1.1.1 HW Support Vehicle (Truck)/Forklifts

The Contractor must provide vehicle(s) to support the installation's HW Program. The vehicle should be rated at least ¾ ton and equipped with a Tommy Lift rated at 1000 lbs to support the pick-up of containers. Additionally, the Contractor must provide a forklift. Forklift types may vary depending on lift capacity requirements. Unless otherwise stated, the Contractor must provide a forklift with 5,000 pound lift capacity. Forklifts to be used in hazardous environments,

such as a TSDF, must be explosion-proof (EX) type for safety. The vehicle and forklift are cost reimbursable OLMs through the Consent to Purchase (CTP) process. **SLD45 will provide the Contractor with a forklift for use at CCSFS. Forklifts will not be required at Satellite Locations.** The Contractor shall be responsible for the operation, maintenance and repair costs. **(CDRL A038)**

1.8.1.1.2 *Transfer, Storage and Disposal Facilities and Hazardous Waste Accumulation Site (HWAS) Management (Exclude MTA and Satellite Locations)*

The Contractor shall utilize the existing permitted HW storage facilities listed in the HWMPs and the HW operating permits. The Contractor shall manage the TSDF's/HWASs and provide oversight and assist generators with the management of their HWAS. This includes providing technical assistance and guidance regarding waste consolidation, segregation, management of used oil and off-spec fuel, waste turn-in, facility and container audits (at least weekly), testing of equipment (at least monthly), contingency planning, preparation for shipment and disposal, recordkeeping, housekeeping, container management and facility maintenance work orders. The Contractor shall track and verify the storage time of all containers in the TSDF and HWAS facilities. The Contractor shall highlight all containers that have exceeded 45 calendar days of storage time during any facility audit. The Contractor shall also provide the weekly/monthly audit reports by the end of the next working day. **(CDRL A014, A015, A016, A018)**

1.8.1.1.3 *Universal Waste Facility Management (Exclude MTA and Satellite Locations)*

The Contractor shall operate Universal Waste Accumulation Sites (UWAS) on the installations IAW with procedures outlined in the HWMP and applicable state and federal regulatory guidance. The Contractor shall provide guidance and support, set schedules, and operate the facilities to accommodate customer needs. The Contractor shall keep records of universal waste shipments to include a log, manifest, bill of lading and other shipping documents that may be available. These records shall be maintained and provided to the government quarterly, within three (3) working days following the end of the reporting period. **(CDRL A020)**

The Contractor shall provide technical assistance to organizations for the collection and disposal of empty/partial/defective aerosol cans, spent fluorescent, high intensity discharge lamps, low sodium vapor lamps, and the collection and disposal of other wastes including but not limited to Ni-cad batteries, mercury batteries, and lithium batteries.

1.8.1.1.4 **Initial Accumulation Point Technical Support (Exclude MTA)**

The Contractor shall be available for day-to-day interface with waste generators and the environmental coordinators of waste generating activities to address waste storage, transportation, and disposition questions and concerns. The Contractor shall provide technical assistance, guidance, compliance assistance, consultation, and review of all proposed on-site HW activities, including disposition, performed by waste generators as outlined in the HWMP. The Contractor is not responsible for shop management of generator sites hazardous, non-hazardous and Universal waste at the Initial Accumulation Point (IAP). If the Contractor generates waste that would require an IAP, management of those sites shall be their responsibility.

The Contractor shall also perform, but is not limited to the following tasks:

- Coordinate with the waste generators to ensure record maintenance including correct labeling, dates, quantities of HW and shop level inspections
- Review shop processes, Safety Data Sheets (SDSs) and hazardous material used to ensure all possible waste streams are identified
- Investigate applicable regulatory requirements for proposed activities that will generate HW, provide written determination of approval or denial of the proposed activity to include the regulatory basis for the determination.

(CDRL A016)

1.8.1.1.5 Initial Accumulation Point Audits (Exclude MTA)

The Contractor shall establish and implement an audit program to ensure proper RCRA and TSCA waste and waste container management at all HW sites. The Contractor shall coordinate and conduct audits of all IAP's, at least quarterly, with MPM and site manager(s) to determine time, date and duration of audit. Audits shall include but not be limited to permit compliance, operating records, storage of HW is properly labeled, stored in DOT approved containers, review of accumulation site logs, audit records, training records, required documentation, Shop Level Management Internal Control Toolset (MICT) environmental checklists and site audits.

The Contractor shall provide an audit report annotating point of contact, time, site conditions, noted strengths as well as deficiencies. The base MPM will provide guidance on developing a checklist for these audits tailored from Unit Effectiveness Inspection (UEI) checklists and local guidance. Noted deficiencies identified during the audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide an audit report including further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status updates, corrective action implementation and recommended deficiency closure to the DAF at least monthly and upon request by the DAF.

(CDRL A011, A013, A014, A016)

1.8.1.1.6 Satellite Accumulation Point Audits (Exclude MTA)

The Contractor shall conduct a cursory compliance audit at each Satellite Accumulation Point (SAP) each time waste is picked up from the SAP, completing a written notice if any discrepancies are observed. In addition, the Contractor will visit and audit all SAPs quarterly and perform a detailed audit. The base MPM will provide guidance on developing a checklist for these audits tailored from UEI checklists and local guidance. Noted deficiencies identified during the audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide an audit report including further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status updates, corrective action implementation and recommended deficiency closure to the DAF at least monthly and upon request by the DAF

(CDRL A011, A013, A014, A016)

1.8.1.1.7 Hazardous and Controlled Waste Management, Recordkeeping, Pick-up, Treatment, and Disposal (Exclude MTA)

Schedule and pick-up hazardous and controlled wastes from waste generator sites and ensure management and timely disposal. This support includes completing requirements for RCRA and TSCA wastes such as extremely hazardous, hazardous, non-hazardous, industrial wastewater, special waste, pharmaceutical, used oil, oily waste, and off-spec fuel, oversight of waste consolidation/lab packing, and waste turn-in/preparation for shipment, pick-up of waste for transfer to TSDF or HWAS, as appropriate. The Contractor shall provide customer removal request process, manage, track and verify all HW containers from time of generation until they reach the ultimate disposal facility (i.e., cradle-to-grave). This scope does not include pick-up and disposal of ERA waste, domestic wastewater, bio-hazards, radiological waste or foreign garbage. The Contractor shall keep records of hazardous and controlled waste shipments to include a log, manifest, bill of lading and other shipping documents that may be available. These records shall be maintained and provided to the government quarterly, within three (3) working days following the end of the reporting period.

The Contractor shall also perform, but is not limited to the following tasks:

- Respond to emergency and routine waste pick-up/removal requests within timeframes outlined in the HWMP
- Immediately notify the DAF of any waste found that deviates from the characterization document or shipping papers. Actively work with the waste generators and/or disposal facility to re-characterize and dispose of the waste. Notify the Government if a formal regulatory notification is required for the deviation
- Transport, storage and management of HW items to the HWAS from downrange outside the continental US (OCNUS) sites may be required. **(CDRL A024)**

1.8.1.1.8 Manifest and Land Disposal Restrictions Management (Exclude MTA)

The Contractor shall ensure that Uniform Hazardous Waste Manifests (EPA Form 8700-22) accompany all waste shipped offsite; are completed correctly and prepared to be signed by properly authorized personnel. The Contractor shall utilize EESOH-MIS to develop, maintain and track manifests and maintain all associated reports. In addition, the Contractor shall ensure proper Land Disposal and Notification Certification is attached to the manifest for any Land Disposal Restriction shipments from the installations.

The Contractor shall also perform, but is not limited to the following tasks:

- Follow and maintain the Waste Minimization Plan, and update annually for submission to FDEP
- Manage, track and record all tenant, contractor and utilizing EPA ID's, in EESOH-MIS for recordkeeping purposes and DEPARC data call requirements
- Transfer the removal order information to DLA within the time frames established by DLA.
- The Contractor shall maintain, review, and track disposal manifests, Land Disposal Restriction Certifications, Certificates of Destruction, and other shipment documents
- Ensure all manifests and bills of lading are properly completed and signed
- Track shipments by location and type
- Ensure receipt of returned signed manifest within 45-calendar days of shipment date, or prepare an exception report and forward it to the applicable regulatory agency through the respective Installation Environmental office. File and maintain manifests for a period of

three (3) years in an active file (these may be electronic files as allowed by AFI 51-301, Civil Litigation) **(CDRL A021)**

1.8.1.1.9 Special Requirements for the Disposition of Hypergolic Waste

The Contractor is not responsible for the storage, transport or management of hypergolic waste. However, the Contractor shall track hypergol disposal manifests and input required data into EESOH-MIS within three (3) working days of receipt of manifest.

1.8.1.1.10 Data Management and Technical Support

The Contractor shall provide comprehensive technical support for implementing and evaluating the HW program in accordance with AFMAN 32-7002 and other applicable federal, state and local laws. The Contractor shall perform the following:

- Document all characterization, process descriptions, develop HW profiles, manage the Hazardous Waste Accumulation Sites (HWAS)
- All process descriptions shall be reviewed/validated and updated if needed no less than once every year
- Prepare a quarterly HAZWASTE Report that details trend analysis and composition of waste stream, waste generators, and quantities of waste generated.
- Perform Base-specific HW training to all Base personnel handling hazardous waste to ensure compliance with AFI 32-7042 requirements.
- Provide support in developing and monitoring programs to effectively manage other non-RCRA state regulated waste streams not being managed under other installation programs or protocols including conducting research and development of policies and procedures that meet these requirements/new regulations in support of the management of non-RCRA waste
- The Contractor shall prepare and submit RCRA Regulatory, Permit Discrepancy, Exception Reports, including Manifest Exception Reports to DAF within 24 hours of discovery.

CDRL A019, A021, A022, A023)

1.8.1.2 Recycling

The Contractor shall implement protocols to properly dispose, recycle, or reclaim RCRA Subtitle C HW as appropriate. In addition, the contractor shall develop recommendations for protocol improvements, and once approved by the AF, implement protocols. The protocols developed shall maximize RCRA authorized exclusions, consolidations, variances, or exemptions to reduce the amount of HW and other regulated waste generated, avoid disposal costs, and improve solid waste diversion rates.

The contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. **(CDRL A010)**

1.8.1.3 Recycling, Hazardous Waste (Exclude MTA)

The Contractor shall provide pick-up and management services at shop location to properly recycle or reclaim RCRA Subtitle C HW as appropriate. The Contractor shall maximize RCRA

authorized exclusions, variances, or exemptions to reduce the amount of HW and other regulated waste generated, avoid disposal costs, and improve diversion rates. National stock numbered items requiring demilitarization will be recycled through DLA-DS, such as specialized lead-acid batteries. **(CDRL A029)**

1.8.1.4 Recycling, Other Regulated Waste (Exclude MTA)

The Contractor shall provide pick-up, management, and recycling services for other regulated waste streams. This requirement does not include any direct costs related to off-site recycling activities covered under separate Task Order. Any proceeds generated are owned by the Government and shall be turned over to the Government upon receipt. **(CDRL A030)**

1.8.1.4.1 Used Oil and Oil Filter Recycling

All used oil must be screened prior to collection to ensure it is not contaminated prior to consolidation to minimize material that must be disposed of as a hazardous waste.

At PSFB the Contractor will collect and deliver used oil and metal oil filters to the Material Recycling Facility for processing and recycling. At CCSFS and JDMTA the Contractor shall consolidate and manage used oil for disposal through current used oil recycling company. At APAFR the Contractor shall manage used oil, oil filter and antifreeze for disposal through current used oil recycling company.

1.8.1.4.2 Shop Rag Recycling (Exclude JDMTA, MTA, Satellite Locations and APAFR)

The Contractor shall manage the Laundered Rag Program IAW the HWMP and 40 CFR 261.4.

1.8.1.5 Reports, HW (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall provide all documentation, records, and data in a timely manner that shall not impede the installation from performing required reports. The Contractor shall provide all required documentation and records as noted below. The Contractor shall provide all HW data required by the installation necessary for any other reports (e.g., AF data calls, State or EPA) one (1) week prior to the required submission date for the installation.

1.8.1.5.1 Hazardous Waste and Other Regulated Waste Recycling Report (Exclude MTA)

Report detailing the amount of waste recycled or diverted by location, cost and quantity (in tons) Report due 15 January, 15 April, 15 July and 15 October. **(CDRL A025, A030)**

1.8.1.5.2 Waste Characterization/Analysis Summary Report (Exclude MTA)

This report shall include date of request, requesting organization and facility, waste stream number assigned to each waste characterization, response time from receipt of request to date the waste was sampled, time from the sample turn into the lab to receipt of analyses results, and what sample was analyzed for. The reported items will be the result of the Waste Characterization and Process Waste Questionnaire and Technical Response Package (PWQ/TRP) process. Reports due quarterly summarizing a three (3) month period. The reports are due 15 January, 15 April, 15 July and 15 October. **(CDRL A031)**

1.8.1.5.3 *Quarterly Metric Reports (Exclude MTA)*

The Contractor shall prepare a spreadsheet that identifies the various wastes disposed of each quarter. The spreadsheet shall include a description of the waste stream (including any/all waste codes associated with the waste stream), Waste Characterization, HW profile number and Bill to Department of Defense Activity Address Code (DoDAAC). The spreadsheet shall also include but not be limited to the specific categories identified, e.g., ERA Cleanup Generated HazWaste (lbs), Weapon System Waste (lbs), Conventional Munitions Waste (Total NEW in lbs). The report shall include data about waste shipped under all DoT Special Permits. The reports are due 15 January, 15 April, 15 July and 15 October. **(CDRL A032)**

1.8.1.5.4 *Biennial Hazardous Waste Permit Report (Exclude JDMTA, MTA and APAFR)*

The Contractor shall prepare a biennial HW report (EPA Form 8700-13A/B) for and provide to the DAF No Later Than (NLT) thirty (30) calendar days prior to applicable regulatory due date. The report shall contain all required information as outlined in 40 Code of Federal Regulations (CFR) § 262.41 and § 264.75 and produced in an electronic format as well as hard copy. **(CDRL A029)**

1.8.1.5.5 *Other Permit Reports Required by the RCRA permits*

The Contractor shall prepare and/or review for submittal all reports required by any RCRA permits. These reports shall be IAW applicable state and federal regulatory guidelines and permit requirements. The Contractor shall prepare required reports and submit final to the USAF NLT forty-five (45) calendar days prior to the due date required by the permit, unless specified otherwise. **(CDRL A026, A035)**

1.8.1.5.6 *PCB Exception Reporting*

The Contractor shall prepare and submit regulatory required exception report(s) to the USAF. The report shall detail the measures taken to minimize further environmental contamination. The Contractor shall prepare exception reports for all PCB items for which certificates of disposal have not been received prior to thirteen (13) months from the out-of-service date. The exception reports shall be submitted to the USAF NLT five (5) working days after the occurrence.

The Contractor shall prepare and submit an annual report to the DAF detailing the status of the PCB reuse or disposal no later than 1 Apr of each year.
(CDRL A027)

1.8.1.5.7 *Annual Munitions Burial Sites Inspection Report (Exclude SLD45 Installations)*

The Contractor shall conduct an annual land use control inspection at all the Munitions Burial Sites (33) subject to the FDEP HSWA Permit 38564-009-HH for Avon Park AFR and prepare an annual report that describes the results of the inspection and any deficiencies noted for the sites. The Annual Inspection Report, along with a formal cover shall be submitted to the DAF. The Contractor shall prepare required reports and submit final to the DAF NLT forty-five (45) calendar days prior to the due date required by the permit, unless specified otherwise. **(CDRL A011, A033)**

1.8.1.5.8 Foreign Source Notification (Exclude PSFB, JDMTA, MTA, Satellite Locations and APAFR)

Provide annual Foreign Source Notification for HW shipped from OCONUS locations IAW 40 CFR 264.12. The Contractor shall submit notifications for material being shipped from OCONUS locations a minimum of sixty (60) calendar days prior to shipment. **(CDRL A034)**

1.8.1.6 Supplies, HW (SLD45 Installations and APAFR)

The Contractor shall provide all supplies required for the management and implementation of the installation HW program. Required supplies for HW management may include packaging materials, portable spill supplies, personal protective equipment, tools, scales, instruments, calibration certifications, absorbent pads, booms, drums, liners, containers, neutralization agents, and container labels/markers to mark and ship hazardous waste in compliance with DOT, State and Federal regulatory requirements. Attachment D shows historical supplies data. The Contractor shall prepare a CTP and submit to the COR to include product, product description, quantity and cost. **(CDRL A017, A038)**

1.8.1.7 Plan Update, HW Contingency

Not Applicable

1.8.1.8 Plan Update, HW Management Plan (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall update the installation HW Management Plan in compliance with AF policies, timelines, and formats (e.g., the Air Force's standardized Environmental Management Plan format found in T-EMP). Updates shall ensure the installation plan is current with State and Federal regulations, installation HW program management practices, procedures, inventories, processes, locations, generator sources, waste analysis, roles and responsibilities, training, record keeping and reporting, marking and DOT labeling, environmental management system requirements, installation specifics and safety. **(CDRL A037)**

1.8.1.9 Supplies, Spill Response

Not Applicable

1.8.1.10 Permit Renewal, RCRA Part B (PSFB and CCSFS Only)

The Contractor shall review, prepare and coordinate RCRA permit renewal packages to obtain permit coverage. **(CDRL A039)**

1.8.2 HAZARDOUS MATERIAL MANAGEMENT

The contractor shall perform services in support of HM management and in compliance with the HMTA, CERCLA, RCRA, Emergency Planning and Community Right-to-Know Act (EPCRA), Occupational Safety and Health Administration (OSHA); all other applicable federal, state, and local laws and regulations; related DOW and DAF directives (DAFI 32-7001 and DAFMAN 32-7002 and guidelines included in the *Hazardous Materials Management Process Playbook*); and installation-level protocols, policies, and plans. HM management services shall include, but are not limited to,

- HM product research, evaluation, and substitution recommendations;

- assistance with process authorizations and tracking System Authorization Access Requests (SAARs);
- maintenance of HM control and/or tracking systems including Authorized User Lists (AULs);
- data quality maintenance and technical use support on the use of HM DAF Management Information Systems or web-based management tools (e.g., EESOH-MIS); inspection of HM storage locations;
- development of compliance and P2 education and training materials;
- identifying and inventorying HM; obtaining, filing, and posting of SDSs;
- support in the preparation of Toxic Release Inventory (TRI) Reports and other reports required by EPCRA;
- support of the Hazardous Materials Management Process (HMMP) Team.

The contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. **(CDRL A010)**

1.8.2.1 Installation Hazardous Materials Program Support (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall provide support to the MPM by providing all personnel, supervision, services and supplies required to manage, maintain and implement the Hazardous Material Management Process (HMMP). HAZMAT management services shall include, but are not limited to, product research, evaluation, and substitution recommendations; management of HAZMAT control and/or tracking systems; maintenance of DAF approved database or web-based management tools (e.g., EESOH-MIS); development of compliance and P2 education and training materials; identifying and inventorying HAZMAT; support in the preparation of Toxic Release Inventory (TRI) reports and other reports required by EPCRA; support O&M of the HTA. This includes support and training on EESOH-MIS, data management, metric reporting and shop level training. The Contractor shall comply with Installation HAZMAT tracking business practices and HAZMAT Tracking Activity (HTA) policies and procedures.

The Contractor shall provide technical support as the Installation Administrator for EESOH-MIS. This includes training such as EESOH-MIS user training, EESOH-MIS software updates, Shop Familiarization, General HMMP Familiarization, and HAZMAT Government Purchase Card (GPC) purchases. All trainings shall have clearly described objectives and course content sufficient to meet each objective and a method to determine the training objective was met. The Contractor shall perform duties as the EESOH-MIS SAAR POC to ensure only authorized users have access to EESOH-MIS and proper roles are assigned. This requires tracking all SAAR, DD Form 2875 in accordance with current SAAR Procedures and EESOH-MIS security policy and procedures.

The Contractor shall also perform, but is not limited to the following tasks:

- Develop and annually review applicable HAZMAT purchase training and provide to the DAF by one (1) January 15th each year
- Notify the MPM immediately of any suspect or potential unauthorized HAZMAT found on the installation or no later than the next business day

- Use EESOH-MIS to implement/maintain a HAZMAT/HAZWASTE minimization process to comply with DAF Policies
- Scribe the HMMP Team Meetings IAW HMMP Charter and provide presentation materials, agenda and meeting minutes to the DAF. Meeting presentation materials and agenda shall be provided to the DAF for review prior to submitting to the HMMP Team fifteen (15) working days prior to scheduled meeting. Meeting minutes shall be submitted to the DAF for review and final meeting minutes shall be delivered to the DAF within five (5) working days upon completion of the HMMP meeting (CCSFS only).
- Act as the liaison to the EESOH-MIS help desk
- Generate reports and analyze data as required by installation users
- Track and ensure all SAAR forms are up to date (annual SAAR validation), accurate, and properly approved HM Inspections
(CDRL A040, A041, A042, A043, B002, B003, B004)

1.8.2.1.1 Process Authorization

The Contractor shall provide technical support required to ensure Hazmat Management and tracking occurs in EESOH-MIS or approved DAF database as part of the HMMP. The Contractor shall assist as an Environmental Reviewer for process authorizations submitted in EESOH-MIS. The Contractor shall evaluate materials by performing environmental analysis on process-specific authorizations in EESOH-MIS. The Contractor shall evaluate materials to determine level of tracking required (i.e., process specific, blanket, or exempt) and authorize with or without conditions of use. The environmental review will include pollution prevention considerations to ensure the least hazardous available material is used to the maximum extent possible.

Process authorizations for HAZMAT submitted must consider the inputs from the Bioenvironmental Engineering and Safety offices regarding potential health and safety risks to DAF personnel and resources. CE is the only authorizing office that can approve or disapprove a HAZMAT authorization submitted by the Contractor. Concerns or disapprovals of authorizations must be worked through the MPM.

Note: The Contractor shall ensure all shops and transient contractors have a servicing HTA.

The Contractor shall also perform, but is not limited to the following tasks:

- Assist shops with submitting a process authorization request
- Ensure all shops with HAZMAT processes are identified in EESOH-MIS
- Ensure processes exist for tracking all HAZMAT in EESOH-MIS entering the installation
- Notify the MPM if an HTA or organization and/or shop are not properly tracking HAZMAT in the EESOH-MIS (This includes shelf-life management and disposition requests).
- Notify the MPM of any HAZMAT requests that have not been received within thirty (30) calendar days
- Ensure material not used by a shop or turned into the HTA for the Free Issue Program are properly recorded in EESOH-MIS, (i.e. Transferring material from Shop A to HTA to Shop B or HTA submits a disposition request for final disposal)

- Ensure materials have not previously received a Local Purchase Number and determine if a suitable product is currently authorized, has a different unit of issue, or is listed under a separate Material Stock Number (MSN)
- Submit new product requests to the EESOH-MIS Data Stewards, including new SDS's.
- Contractor will review and provide input into LRS HTA Standard Operating Procedures (SOP) by January 15th of each year
- Monitor SDSs to ensure those in use are current and maintain accuracy
- The contractor shall assist the HTAs to establish a quality control system to verify that issued containers are properly cleared in EESOH-MIS if the installation HMMP team decides to use the EESOH-MIS manual decrement/consumption functionality. If the installation(s) manually decrements, the contractor shall perform an annual reconciliation of shop-level inventory to ensure on-hand quantities match EESOH-MIS quantities
- The contractor shall provide training in support of the IHMP, such as EESOH-MIS user training, Shop Familiarization, and General HMMP Familiarization. All training shall have clearly described objectives and course content sufficient to meet each objective and a method to determine the training objective was met. Training may consist of student handout materials, computer-based learning or other methods that produce consistently reliable training results. The method of delivery can be desk-side, hands-on, classroom, workshop, or briefing. The contractor shall use AF-developed training templates and material where available.

(CDRL A041, A044, B002, B008, B004)

1.8.2.1.2 HM Compliance Site Audits

The Contractor shall conduct annual compliance audits at all HAZMAT customer storage facilities, including those utilized by transient contractors, to verify the accurate tracking of HAZMAT purchases. To ensure timely completion, at least 25% of these annual audits shall be conducted quarterly. The Contractor shall develop/update standardized checklists to facilitate the inspection. The checklist shall address all federal, state and DAF requirements and shall be submitted for approval to MPM prior to use.

After audit completion the Contractor shall conduct an out-brief with shop personnel and provide shop supervisor or POC a copy of the completed checklist.

Deficiencies identified shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide final audit reports to DAF and entry of inspection into approved DAF database within five (5) working days following each audit. Reports will include status of deficiencies and compliance recommendations. The Contractor shall monitor closely all deficiencies in the DAF approved deficiencies database to track and verify corrective and preventive actions, through re-audit, to ensure closure. The Contractor shall provide a status update on corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF.

(CDLR A011, A045, B008)

1.8.2.2 Reporting, Emergency Planning Community Right-To-Know Act (EPCRA) (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall provide engineering and technical services to support the P2 program such as establish inventories (annual volumes and on-hand) and reporting for hazardous materials and waste streams in compliance with EPCRA Reporting requirements in 40 CFR 350 – 372.

The Contractor shall complete a separate EPCRA Section 313 inventory for each facility to identify all nonexempt TRI chemicals (i.e., chemicals and chemical categories listed under 40 CFR 372) which were either manufactured, processed, or otherwise used at each facility during Calendar Year (CY) in quantities which exceeded the respective thresholds.

The Contractor shall complete a separate EPCRA Section 311/312 inventory for each facility to identify all nonexempt OSHA hazardous chemicals (i.e., chemicals which require a Safety Data Sheet [SDS]) and all nonexempt Extremely Hazardous Substances (i.e., chemicals listed under 40 CFR 355) that were present on each facility at any one time during the current CY.

The Contractor shall complete Tier II “Emergency and Hazardous Chemical Inventory” forms to address all chemicals that exceeded the applicable thresholds.

The Contractor shall submit a draft electronic copy of all required forms/reports to the MPM with sufficient time to review and submit to regulatory offices prior to compliance due dates. The Contractor shall complete Section 312 Tier II “Emergency and Hazardous Chemical Inventory” report and forms to address all chemicals that meet or exceed the applicable thresholds. This report will come in two forms, confidential and non-confidential. The Tier II Confidential report shall be provided without material location information, and the Tier II non-confidential report shall be provided with material locations.

The Contractor shall develop, update and maintain Tier II applicable facility location maps. Maps should include facility footprint, facility ingress and egress, facility internal chemical storage location and chemical listings.

Tier II and TRI deliverables shall include a documentation report to explain the assumptions, methodology, raw data, anomalies and exceptions used in developing the submittals.

Document data sources used, defend non-reporting determinations as well as chemicals and chemical categories which exceeded the applicable thresholds, explain calculations and conversions performed to quantify reportable chemicals and explain the rationale for any exemptions applied.

The Contractor shall submit draft electronic copies of all required documents to DAF thirty (30) calendar days prior to compliance due date.

A report shall also be developed to defend non-reporting determinations as well as reported data document data sources used; all chemicals and chemical categories which exceeded the applicable thresholds; calculations and conversions performed to quantify reportable chemicals; and the rationale for any exemptions applied. See Attachment D for workload data.

(CDRL A047, A048, A049, A050)

1.8.2.2.1 EPCRA Data Management/Collection

The Contractor shall create and deliver reports from EESOH-MIS for various regulatory reporting requirements and to maintain program and data quality. Specifically, the contractor shall compile all data necessary to accomplish EPCRA reporting. This shall include data for Tier I/II, and TRI/Form R's. **(CDRL A046)**

1.8.2.2.2 EPCRA Reporting

When compiling the EPCRA chemical inventories specified in this section, the Contractor shall gather data from all available sources and utilize Contractor's non-DAF network to submit regulatory EPCRA reports electronically if required. A comprehensive on-site inspection will be conducted to validate all reported EPCRA chemical inventory and storage information.

Note: The Contractor shall not exclusively rely on authoritative databases and documents to validate chemical inventory and storage information.

The Contractor shall also perform, but is not limited to the following tasks:

- Tier II and TRI deliverables shall include a summary report to explain the assumptions, methodology, raw data, anomalies and exceptions used in developing the submittals
- Document data sources used, defend non-reporting determinations as well as chemicals and chemical categories which exceeded the applicable thresholds, explain calculations and conversions performed to quantify reportable chemicals and explain the rationale for any exemptions applied
- The Contractor shall submit draft electronic copies of all required documents to DAF thirty (30) calendar days prior to compliance due date

(CDRL A046, A050)

1.8.2.2.3 Annual TRI Data Collection

The Contractor shall compile chemical inventory data from EESOH-MIS, TRI-DDS (for range and munitions activities) and from organizations outside EESOH-MIS and TRI-DDS. The Contractor shall prepare a memorandum for the annual TRI data request. The memorandum shall be submitted to DAF NLT on the second Friday in November of the reporting year for approval prior to distribution. The memorandum shall include an up-to-date distribution list with Installation organizations, tenants and contractors providing data outside of EESOH-MIS and TRI-DDS. **(CDRL A051)**

The Contractor shall obtain SDSs for products containing hazardous chemicals that meet or exceed EPA threshold planning quantities not already in EESOH-MIS and forward to the appropriate EESOH-MIS data steward for upload. The Contractor shall submit SDS's to the DAF for submittal to appropriate agencies to satisfy EPCRA Section 311 requirements. **(CDRL A046)**

1.8.2.3 IHMP Support, Supplies

Not Applicable

1.8.3 ENVIRONMENTAL SAMPLING, ANALYSIS AND MONITORING (SAM)

The contractor shall consult the latest version of the DoD Environmental Field Sampling Handbook, the Uniform Federal Policy for Quality Assurance Project Plans (UFP-QAPP), the

Drinking Water Surveillance Technical Guide, and DOW policy pertaining to environmental sampling, laboratory testing operations, and data quality prepared by the DoD Environmental Data Quality Workgroup (<https://denix.osd.mil/edqw/>). Contractor shall collect, measure, sample, analyze, test, and monitor media IAW-approved QAPPs that include appropriate Optimized UFP-QAPP Worksheets that encompass the field sampling plans and other checks for sampling, analysis and monitoring (SAM) completeness (<https://www.epa.gov/fedfac/optimized-uniform-federal-policy-quality-assurance-project-plans-worksheets>). Contractor is responsible for complying with the SAM requirements of permits in effect during the period of performance. SAM for the call order shall include continuous and/or discrete measuring, sampling and analysis of groundwater, surface water, influent, effluent, process streams, soils and any other environmental or process media as specified in this section.

In performance of all the following subsections the Contractor shall perform, but is not limited to the following:

- Provide all required supplies to support the SAM requirements
- Create and maintain, written and electronic records sufficient to recreate each sampling, analytical, testing, and monitoring event
- Provide documentation within a technical data package to include field data sheets, chain of custody forms, raw data, validation, calculations, evaluation, interpretation, trend analysis and corrective actions recommendations
- Perform laboratory and field tests of environmental monitoring and testing equipment to include validation of manual/instrumental methods, continuous monitors, leak detection systems, calibration, analytical support and mathematical models using the U.S. EPA, American Society for Testing and Materials (ASTM), and/or equivalent procedures specified by the DAF
- Provide a designated Contract Quality Assurance Manager (QAM) and Project Chemist to conduct sampling review and subsequent report development
- Upon receipt of sampling results provide an explanatory report within five (5) working days to the DAF that provides explanation of the results.
- Explanatory report shall include, but not limited to the following. Note this report may be separate from reports required for regulatory purposes.
 - Purpose of the sampling event
 - Identification and explanation of any data that exceeds regulatory limits
 - Quality control data that indicates an issue with the sample and/or analysis
 - Trend identification, including identifying factors
 - Environmental conditions that may impact trends
 - Explanation of results that vary from previous sampling events.
- Maintain/update the Environmental Sampling Analysis and Monitoring Plan (ESAM) and create a Quality Assurance Project Plan (QAPP) using the provided DAF ESAM spreadsheet within thirty (30) calendar days after award
- Maintain records of, and derived from, all activities outlined in the appropriate portion of the ESAM tracking spreadsheet, ESAM and QAPP supporting the generation of these sampling and analysis records. Make records available to the DAF within three (3) working days upon request

The Contractor shall upload sampling results and all supporting documentation into the DAF approved data system, in coordination with the installation within ten (10) working days of receipt of results or as otherwise specified by the Government.

Data shall be input into appropriate information systems such as eDASH and the US Environmental Protection Agency (USEPA) and/or state reporting systems. The Contractor shall select laboratories that comply with applicable DOW, DAF, federal, state, and local standards, and requirements to include certification and accreditation programs, as applicable (i.e., DoD Environmental Laboratory Accreditation Program (DoD ELAP) certification). The Contractor shall select laboratories with analytical capabilities sufficient for the methods specified in approved QAPPs and with adequate throughput capacities.

SAM shall be performed using standardized methods such as those prescribed in the following:

- Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods (SW-846), current edition
- 40 CFR 136, Guidelines Establishing Test Procedures for the Analysis of Pollutants
- Standard Examination of Water and Wastewater, current edition
- 40 CFR 60, Appendix A, USEPA Test Methods

The Contractor shall ensure the defensibility of test and analytical results through execution of scientifically sound activities including Project Quality Objectives as outlined in the appropriate sections of approved QAPPs prepared IAW UFP-QAPP. Equipment used and maintained IAW AFMAN 21-113, Metrology and Calibration Program Management and records created from this information must be specified. Equipment calibration must be tracked and monitored. Records shall be maintained with equipment or in shops. Calibration records shall also be entered into appropriate information systems such as eDASH as required.

The Contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report.

(CDRL A010, B008, B010)

1.8.3.1 SAM, Waste Characterization (SLD45 Installations, Satellite Locations and APAFR)

The Contractor shall provide SAM services (i.e. sampling and analysis including all associated sampling supplies) to support HW characterization and the HW program IAW State and Federal regulations and permits. Specifically, the Contractor shall collect and have analyzed samples from containers for HW characterization.

The Contractor shall verify storage, transportation and disposal requirements. The Contractor shall provide the results to the MPM with all proper documentation. For routine The Contractor shall upload waste characterization samples using a Staged Electronic Data Deliverable (SEDD) to EESOH-MIS, in coordination with the installation within five (5) working days of receipt of analysis. At the beginning of each FY the Contractor shall review the waste characterization inventory for any analysis older than five years and conduct a new characterization of those wastes. **(CDRL A052, B010)**

1.8.3.1.1 Process Waste Questionnaire and Technical Response Package Process

The Contractor shall collect and evaluate waste stream information and sampling results from waste generators and customers and provide waste characterization using the DRMS Form 1930 process located in EESOH-MIS. The Contractor shall also use the PWQ/TRP process to determine if wastes are hazardous, universal, or controlled in accordance with applicable regulations and to determine the proper method of disposal for those wastes. Waste characterization to include the TRP shall be provided to the DAF within ten (10) working days from receipt of an accurately completed PWQ. If lab analysis is required, the contractor will have ten (10) working days upon receipt of the completed lab analysis. The Contractor shall complete emergency/rush requests within three (3) working days after receipt of all required data to include any required analysis

For any waste found to deviate from the waste disposal characterization document or shipping papers the Contractor shall actively work with the waste generator/customer and/or disposal facility to re-characterize and dispose of the waste. Notify the DAF within three (3) working days of any waste found to deviate from the characterization document or shipping papers.

All waste determinations and associated instructions shall be recorded and maintained in an approved management system. This system shall include, at a minimum, the following supporting documentation for each waste characterization: generator-provided process waste questionnaire, SDSs, sampling/analysis reports (if applicable), and technical instructions provided to waste generators.

The Contractor shall also perform, but is not limited to the following tasks:

- Interpret regulation and regulatory guidelines applicable to HW disposal on-site (e.g. to Publicly Owned Treatment Works (POTW) / Federally Owned Treatment Works (FOTW)) to determine if specific characterized waste streams qualify for on-site disposal or off-site disposal
- Coordinate with the CCSFS Regional Wastewater Treatment Facility (RWWTF) operator to obtain a written discharge authorization for the wastewater, determine pre-treatment standards if required, and assist in determining discharge restrictions if discharging to the FOTW
- Identify possible candidates for disposal to grade when performing waste characterizations for industrial wastewaters. Prepare a written discharge authorization if release to grade is permitted
- Review analytical results and associated quality assurance data to ensure that the results are usable, acceptable, and defensible
- Any waste characterization response to the waste generator/customer shall include the approved discharge authorization, pre-treatment standards, and discharge restrictions
- Maintain records of any determination and dates and quantities disposed/treated and provide an annual report, DAF On-Site Hazardous Waste Disposal Report
- Maintain EESOH-MIS with all waste characterizations including waste stream information collected from waste generators/customers, sampling results, waste containers, waste sites and other information used as a basis to characterize the waste

(CDRL A035, A040, A053)

1.8.3.2 SAM, Air

Not Applicable

1.8.3.3 SAM, NPDES / Other Wastewater (PSFB and CCSFS Only)

The Contractor shall provide SAM services of domestic and/or industrial wastewater at Patrick SFB lift stations as required by the City of Cocoa Beach ordinances and at CCSFS RWWTF which includes the Rapid Infiltration Basins (RIB), groundwater monitoring wells, and NPDES permit issued under the provisions of Chapter 403, Florida Statutes (F.S.), and applicable rules of the Florida Administrative Code (F.A.C.). The contractor shall upload NPDES sampling results into the AF Water Enterprise Tracking (WET) system, in coordination with the installation. **(CDRL A054)**

1.8.3.4 SAM, Storm Water (PSFB, CCSFS and APAFR Only)

The Contractor shall provide SAM services of storm water as required by the Storm Water Pollution Prevention Plan (SWPPP), installation storm water permits, and Clean Water Act (CWA), and in support of Energy Independence and Security Act (EISA) Section 438 storm water requirements. Specifically, the Contractor shall perform site evaluations and SAM operations that will provide information characterizing the storm water pollution effluents at the installation(s) to determine the status of compliance. The Contractor shall evaluate, and sample as necessary, outfalls and industrial areas as defined the SWPPP/Storm Water Management Plan (SWMP)/Multi-Sector General Permit (MSGP). The Contractor shall sample all outfalls with the frequency identified in the aforementioned plans. The Contractor shall collect and analyze storm water samples in accordance with each installation's storm water permits and plans, in such a way as to identify compliance or non-compliance with the permits and plans. The Contractor shall upload storm water sampling results into the AF WET system, in coordination with the installation(s). When reporting to regulatory agencies is required the Contractor shall complete regulatory agency required report forms and provide to installation(s) for approval. The Contractor shall submit approved data by the due date in accordance with permit. **(CDRL A055, B010)**

1.8.3.5 SAM, LTM, RCRA Closures

Not Applicable

1.8.3.6 SAM, Permitted Landfills (CCSFS Only)

The Contractor shall perform sampling, analysis, and monitoring as required by the RCRA landfill consolidated permit issued under Section 403.061(14) and 403.707, of the Florida Statutes. The Contractor shall use the Field and Laboratory Standard Operating Procedures (DEP-SOP-001/01) referenced in Chapter 62-160 of the F.A.C.. **(CDRL A056)**

1.8.3.7 SAM, RCRA Permitted TSDF (CCSFS Only)

The Contractor shall provide ground water well and soil sampling, analysis, and monitoring as required by the RCRA permit issued under Section 403.722, Florida Statutes (F.S.), and Chapters 62-4, 62-160, 62-730, and 62-780, F.A.C. for the long-term HW TSDF storage facility and EOD facility. Provide point of compliance monitoring (groundwater protection standards) and emission monitoring. **(CDRL A057)**

1.8.3.8 SAM, Toxics

Not Applicable

1.8.3.9 SAM, P2

Not Applicable

1.8.3.10 SAM, Leak Detection

Not Applicable

1.8.3.11 Supplies, SAM (SLD45 Installations and APAFR)

The Contractor shall be responsible for purchasing Sampling, Analysis, and Monitoring supplies for all Medias covered by this task order. The Contractor shall upload sampling results into the appropriate AF data system (i.e. APIMS, WET, etc.) in coordination with the installation(s). The Contractor shall prepare a CTP request and submit to the COR to include product, product description, quantity and cost. **(CDRL A038)**

1.8.3.12 SAM, Drinking Water

Not Applicable

1.8.3.13 Long Term Groundwater Monitoring

Not Applicable

1.8.3.14 Contract Operated Services, P2 - P2MI – Additional Plans (SLD45 Installations and APAFR)

1.8.3.14.1 Environmental Sampling and Monitoring Plan

The Contractor shall review, maintain, update and implement the Environmental Sampling, Analysis, and Monitoring Plan (ESAM) and the ESAM Tracking Spreadsheet. The plan will describe activities where sampling of surface water, groundwater, soils, air, wastewater and stormwater are performed, including frequency of sampling, justification for sampling efforts, identification of regulatory analysis methods, rationale for the analysis of the parameters performed and data quality objectives. The Contractor shall update the ESAM Tracking Spreadsheet to include regulatory sampling that is otherwise contracted out or is completed by others. **(CDRL A064)**

1.8.3.14.2 Operational Plan Environmental Regulatory Review

The Contractor, upon request, shall review and provide comment on plans maintained by the O&M Flight or O&M contractor to ensure compliance with environmental regulatory laws and regulations. The plans include but are not limited to, the Cross-Connection Control Plans, Stormwater Operations and Maintenance Plans, Regional Wastewater Treatment Facility (WWTF) Operations and Maintenance Plan, Lead and Asbestos Management and Operations Plan and the Comprehensive Emergency Management Plan. The Contractor shall provide comments within ten (10) working days to the DAF. **(CDRL A064)**

1.8.4 AIR QUALITY

The Contractor shall perform services in support of the DAF Air Quality Compliance and Resource Management Program and in compliance with the Clean Air Act (CAA); other applicable federal, state and local laws and regulations and related DOW and DAF directives (including DAFMAN 32-7002 and the *Air Quality Program Management Playbook*).

Applicable regulations include but is not limited to Pursuant to Titles I, III, V and VI of the CAA; 40 CFR 60, Standards of Performance for New Stationary Sources; 40 CFR 61, National Emission Standards for Hazardous Air Pollutants, 40 CFR 63, National Emission Standards for Hazardous Air Pollutants for Source Categories; 40 CFR 70, State Operating Permit Programs; 40 CFR 71, Federal Operating Permit Programs, and 40 CFR 82, Subpart F, Recycling and Emissions Reduction.

The Contractor shall provide technical support to system users, assist users with the data migration, provide quality assurance review, analysis and interpretation of the data received by the DAF and generate the necessary regulatory compliance reports utilizing the current DAF database management system and make the appropriate data electronically available. The Contractor shall review and assist with the preparation of documents as requested by DAF. The Contractor shall ensure all Air Quality data is entered, maintained and reviewed monthly in the DAF data management system and is valid, correct and representative of current installation inventory and emission conditions. During their performance of this task the Contractor shall be responsible for entering data for those users that do not have access to the DAF data management system.

Deficiencies identified during inspections, data validation and assessments shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall monitor closely all deficiencies in the DAF approved deficiencies database to track and verify corrective and preventive actions, through re-inspection, to ensure closure. The Contractor shall provide a status update on corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. **(CDRL A011)**

These services shall include, but are not limited to:

- recordkeeping including data collection and data entry, on-site data validation, updating the DAF Air Program Information Management System (APIMS), and maintaining AQ related records
- preparing and maintaining air emissions inventories (AEIs) including criteria pollutants, greenhouse gases (GHG), refrigerant inventories hazardous air pollutants (HAPs), comprehensive triennial updates for potential to emit (PTE), emissions inventory questionnaires (EIQs), field verification with Global Positioning System (GPS) mapping of stationary sources IAW AFI 32-10112, Installation Geospatial Information and Services, and data validation; permit decomposition and compliance assessments;
- reporting including facility operating reports;
- National Emissions Standards for Hazardous Air Pollutants (NESHAPs) reports, New Source Performance Standards (NSPSs) Reports, Air Permit Compliance Reports, Title V

specific reports, Semi-Annual Deviation Reports, annual permit compliance certifications, and other reports required by applicable AQ regulations;

- assessing and preparing for emerging AQ requirements such as new Reasonably Available Control Technology (RACT), Best Available Control Technology (BACT), Lowest Achievable Emission Rate (LAER), and Maximum Achievable Control Technology (MACT) standards for compliance; assessing and assuring compliance with NESHAPs and NSPSs, such as those pertaining to external and internal combustion sources;
- providing data collection, data entry, and data updates to the DAF Air Conformity Applicability Model (ACAM) for EIAP actions;
- *performing Quality Assurance/Quality Control (QA/QC) reviews on current and legacy data entries in APIMS, adding new entries as required, from source logs and providing associated reports;*
- providing local operational and technical assistance for the appropriate use of APIMS; preparing new or modifying existing air permits;
- developing/updating shop-level AQ training materials;
- conducting AQ shop-level audits and provide a status report to DAF. Audits of the sources shall include verifying the best available controls are being utilized and all equipment is performing IAW their manufacturing and regulatory requirements; this shall include but not be limited to inspecting bag houses, paint booths, blast booths, filters, all seals are functional, etc.
- conducting AQ shop-level training;
- performing required analysis requirements including evaluating sources required by exemption, permit, regulations, and enforcement orders, and NESHAP/NSPS compliance support;
- providing guidance on responses to regulator inquiries;
- annually conduct a review of existing, new, modified, and proposed air quality policies, guidance, rules and regulations and researching regulatory requirements;
- Annually update the Air Compliance Source Requirements Guide (ACSR). The ACSR is due NLT than 1 October annually
- performing other activities required by installation air permits and applicable AQ regulations.

The Contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. See Attachment D for workload data. **(CDRL A010)**

1.8.4.1 Assessment, Air (CCSFS and JDMTA)

The Contractor shall conduct opportunity assessments for a specific class, type or category of emissions, equipment, and/or processes. The assessment shall include, but not be limited to, factors such as, applicable and proposed rules and regulations, impact to mission, cost, feasibility, future developments in technology, regulatory climate, and the compliance burden relative to each installation's Aspect Inventory, plans and permits, Environmental Action Plans, Environmental Management System, Enforcement Actions, Inspections and subsequent findings. **(CDRL A065)**

1.8.4.2 Inventory, Air Emissions Inventory Data Management (CCSFS, JDMTA, Satellite Locations and APAFR Only)

The Contractor shall perform field verified Refrigerant and AEI updates (i.e., review and validate APIMS data is representative of current installation conditions) at least annually, as determined by the applicable air permits and DAF policy and guidance (i.e., DAFMAN 32-7002). The Contractor shall perform a comprehensive AEI update on all stationary sources for actual and potential to emit (PTE) emissions. Comprehensive stationary AEI and PTE updates shall encompass all air emission sources at the installation(s) and all associated remote sites, including permitted and non-permitted units, as applicable. All AEIs shall be complete and accurate and accomplished through field verification and APIMS data analysis and shall include criteria pollutants, its precursors, hazardous air pollutants, other state/local toxic air pollutants, ozone depleting substances, refrigerants, and GHG. Along with the compendium of AEI reports generated from APIMS, The Contractor shall prepare a written AEI report that provides a background of the installation, its activities as it relates to the inventory, prior AEIs conducted, applicable pollutant categories, a summary of source categories, summary emission tables, regulatory status based on emission summaries, source information utilized to develop the inventory, emission factors and assumptions used for each emission source category, a summary of new and removed sources since the previous AEI, trend analyses, and all references used to develop the inventory.

The Contractor shall conduct data entry and validate the use of algorithms for emission calculations to conform to DAF Source Guides and/or permit requirements, as necessary. The Contractor shall use information from all air quality operating permits and other applicable air quality information for stationary sources. The Contractor shall not include portable, transient, or non-road sources in the Stationary AEI unless these sources are specifically defined as stationary sources by the State. The PTE shall include criteria pollutants, its precursors, and hazardous air pollutants for stationary sources only. Transient (temporary) sources (e.g., prescribed burns, construction, etc.) shall not be included in the AEIs or PTE. All work must be in accordance with AFMAN 32-7002, *Environmental Compliance And Pollution Prevention*; the most current emission factors and algorithms found in the respective USAF Source Guides; and all operating permits.

Prior to performing the Stationary Source and Refrigerant inventories and AEI / PTE updates, the Contractor shall perform, in coordination with MPM, 100% field verification of equipment and emission sources on an annual basis. The results of the field verification inspection will be used to confirm locations and attributes of the equipment and timed to be incorporated in the current annual comprehensive AEI effort. The Contractor shall be equipped to perform mobilized APIMS computing in the field. The Contractor shall be responsible for documenting verified locations and updating changes. If, in the course of the verification, previously unknown (not currently in APIMS) or discontinued emission sources or equipment are found, The Contractor shall document the new/decommissioned sources and obtain the information required for a complete inventory. The Contractor shall perform an in-depth QA/QC validation on all major emission sources and emission source categories that make up the majority of the AEI emissions annually, as directed by the MPM. When directed by the MPM, field verification shall include GPS mapping for the coordinates of stationary sources IAW AFI 32-10112, *Installation Geospatial Information and Services*.

The Contractor shall be responsible for documenting verified locations by taking pictures of sources and accompanying boiler plates identifying make/model/size, etc. for a photo inventory log and APIMS inclusion. The Contractor shall develop a Microsoft Power Point photo inventory log using the images captured during the AEI Site Visit. The Contractor shall upload source photos to APIMS. The photo log will require a draft, with a two-week review period for comments from the installation. A final report shall be provided in both Power Point and PDF format. The Contractor shall submit a summary of activities performed in support of the field verification inspections to include refrigerant and engine inventories.

The Contractor is required to have access and experience with the APIMS and EESOH-MIS databases to complete this task. APIMS and EESOH-MIS are DOW Common Access Card (CAC) enabled; therefore a CAC is required to perform air quality recordkeeping, AEIs, and reporting functions. APIMS provides access to a partially completed DD Form 2875 (SAAR) at APIMS URL: <https://apims.af.mil/apims>.
(CDRL A066, A067, A069, A070, B001)

1.8.4.3 Permit Renewal, Air (CCSFS Only)

The Contractor shall provide comprehensive technical and engineering support to prepare applications to renew, modify, and add equipment and processes to local permits for CCSFS. The Contractor shall review the current permits and applications, validate the permit conditions, identify new processes and equipment that were not previously included in the existing permit, and prepare an application for renewing and/or modifying the permit incorporating the new processes and equipment. Permit modifications may include administrative or minor modifications, major modifications, insignificant and significant modifications. Some limited permit applications may involve a detailed review of regulation applicability, BACT determination, New Source Review (NSR) to assess emissions offset applicability or netting, Health Risk Assessment (HRA), public notice requirements and dispersion impact modeling. General guidance is available in the following: *the Air Permitting Guide for Stationary Sources at Air Force Installations; Air Force Potential to Emit (PTE) Guide; New Source Review (NSR) Guide for Air Force Installations*.

The Contractor shall first determine if an exemption to permitting applies after reviewing current operations and AF procedures. When required, a technical memorandum, exemption notification, or exemption application shall document the basis for permit exemption for particular air emission sources. To aid in the assessment of permits, the Contractor shall maintain all permits in a readily accessible manner for distribution via electronic mail and hard copy. In accordance with AFMAN 32-7002, *Environmental Compliance and Pollution Prevention*, current versions of all permits shall be uploaded to APIMS within 5-days of receipt of the official permit.

In the event of a need to file an application for a variance in permit condition occurs, the Contractor shall prepare the application package for a variance in accordance with local rules and regulations. Participation at variance board meetings shall be made at the request of the MPM. The Contractor shall also provide advice concerning air quality regulations and prepare written response to a notice to comply (NTC) or notice of violation (NOV). The draft variance

application and NTC/NOV response notifications shall be submitted to the MPM for review and signature approval authority.

The Contractor shall assist SLD45 in planning necessary and appropriate projects and permit management to meet all regulatory compliance deadlines including modifications to permits, equipment or operation procedural changes, preparing required documentation, and recordkeeping. The Contractor shall provide technical support to address and implement specific new and/or changed regulatory requirements, determine impacts to air emission sources and permits on the base, research control technologies required to retrofit sources for compliance, and estimating the cost involved to implement the retrofit. The Contractor shall maintain currency in local, federal, and state rule developments; consult with AF on new requirements; draft formal comments on proposed rule changes; and update AF personnel on change requirements and compliance strategy.

The Contractor shall prepare the application to renew existing permits for the installation(s) including information gathered during the annual Title V maintenance. The Contractor shall review the initial permit application that was submitted previously, validate/update the previous permit conditions, identify new processes and equipment that were not previously included in the existing permit, assess applicable alternative operating scenarios (AOS), and prepare the renewal application incorporating the AOS and prepare an application for renewing the Title V permit incorporating the new processes and equipment. The air permit application shall be submitted for review and comment by the appropriate MPM. The Contractor shall incorporate Air Force comments and deliver a Final permit application to the appropriate Air Force command official for submission to federal and state regulatory authorities as appropriate.
(CDRL A073)

1.8.4.4 Permit Renewal, Air, Title V

Not Applicable

1.8.4.5 Recordkeeping, Air (CCSFS, JDMTA, MTA and Satellite Locations)

The Contractor shall support data gathering, data entry, data management, engineering analysis and computations needed to meet monitoring, recordkeeping and reporting (MRR) requirements of regulated activities associated with applicable construction and operating permits, CFR requirements, state and county administrative codes and source compliance demonstration tests. The Contractor shall compile air quality compliance data into a format that results in the facility's ability to meet reporting requirements related to air quality for USAF, federal, state, and county reporting agencies. All recordkeeping must be maintained in the APIMS in accordance with AFMAN 32-7002.

The Contractor shall ensure the focus of all reviews identified below are on compliance and conformance of the Air Quality Program and adhere to all environmental laws and regulations. The Contractor shall ensure reviews are completed within the bounds of CAA compliance and the Air Quality program related to new processes and their impacts to the Installation mission and future regulatory compliance. See estimated workload in Attachment D. The Contractor shall also perform, but is not limited to the following tasks:

- Track all aspects of permits (general, synthetic minor, or Title V) and air exemption requirements
- Maintain data oversight of APIMS to ensure monthly reports and applicable database updates are provided, valid, complete, and accurate
- Run at least semi-annual air emission reports from APIMS to ensure all activities meet air permit exemption and permit thresholds
- Verify and validate all shop level APIMS air emission data has been entered by others at least monthly
- Obtain, enter and validate air emission data from tenants and contractors not using EESOH-MIS and APIMS at least monthly
- Complete the Air Quality Manager Monthly Compliance Assessment in APIMS by the fifteenth day (15) day of the following month
- Ensure installation organizations complete shop level compliance assessments
- Conduct annual program level compliance assessments for continuous tracking and reporting of each regulated emission unit
- Compile data into the standard formats and using compliance tools prescribed by DAF instructions, pamphlets, and guidance documents

(CDRL A074)

1.8.4.5.1 Data Management and Technical Support

The Contractor shall provide qualified staff with knowledge and experience with USAF air quality environmental data management requirements, processes and systems, as required to provide ongoing technical oversight and quality assurance for this task. This task includes the compilation of data into the standard formats using approved protocols and compliance tools prescribed by AFMAN 32-7002 and applicable USAF air quality guidance documents. This includes all recordkeeping, data management and QA/QC of data required for annual air emissions inventories. As required, The Contractor shall provide technical support to system users, assist users with the data migration, provide quality assurance review and analysis of the data received by the MPM, generate the necessary regulatory compliance reports and make the appropriate data electronically available. **(CDRL A075)**

1.8.4.5.2 Permit Decomposition and Compliance Audits

The Contractor shall provide support as directed by the MPM with installation-specific permit requirements, state and local administrative codes and CFR requirements in compiling baseline environmental compliance data into the APIMS Compliance Management module that results in the facility's ability to meet federal, state, local, and USAF reporting requirements and to address any documented permit deviations and/or demonstrate continuous compliance. This task will result in the update and development of simple shop-level and programmatic checklists configured in the APIMS Compliance Assessment tool for continuous tracking and reporting of each regulated emission unit. Collectively, these tasks of permit evaluation and decomposition, development of site and source specific checklists and programmatic assessments are needed to ensure permit recordkeeping, reporting and compliance monitoring requirements are being met. This task includes the compilation of data into the standard formats and using compliance tools prescribed by USAF instructions, pamphlets, and guidance documents.

The Contractor shall conduct annual compliance audits of facility shops to determine compliance of the shops with the air quality permit conditions and compliance with the CAA. The audits shall implement the shop-level checklists to focus on the regulatory requirements for record keeping, compliance with control measures, and documentation of maintaining compliance with usage limits. The audits will be used to evaluate compliance with operating permits and recommend corrective action to ensure compliance. The Contractor shall document the findings and provide the audit checklists and reports to the MPMs for distribution to the facility shops. The Contractor will investigate any reported exceedance by the shops and provide a summary report to the MPM. The summary reports will be used to document compliance (or noncompliance).

(CDRL A076)

1.8.4.5.3 Air Quality Awareness and Shop-Level Training (Exclude Satellite Locations)

The Contractor shall provide on-site air quality awareness and shop-level training to each installation's personnel and contractors affected by air quality regulations. The training must include discussion on general air quality, air quality compliance tools (i.e., hands-on APIMS module training), operating permits, state and local administrative codes, and applicable CFR requirements. The training shall be tailored to the installation's specific circumstances and requirements (e.g., their specific regulatory agency(ies), installation-specific permitted sources, etc.). The Contractor shall develop the training curriculum in consultation with the designated MPM and submit for approval by the MPM prior to the training event. Any comments received will be addressed and final training curriculum and materials will be submitted prior to the training event. Targeted audiences shall include but not be limited to HVAC and Power Pro shop personnel, permit holders, Unit Environmental Coordinators, Facility Managers, fueling and painting operations. The Contractor is responsible for providing all materials for the proper and timely training of installation personnel to perform their jobs in accordance with all applicable legal, regulatory and compliance requirements for up to thirty (30) training events annually.

(CDRL A077, B004)

1.8.4.5.4 Notification, Deviation, Malfunction and Emergency Reporting (Exclude Satellite Locations and MTA)

Reporting is required under general permit conditions, NSPS, NESHAPs, state and county administrative codes for installation, operation, malfunction and emergencies of regulated sources. The Contractor shall prepare draft initial notifications for startup, malfunctions, releases, and emergencies when triggered by planned and unforeseen events. The Contractor shall prepare prompt deviation reports, IAW CAA, as directed by permit and include a description of the deviation, probable cause of such deviations, excess emissions and any corrective actions or preventive measures taken for the MPM to meet time sensitive notifications. The deviation report shall include a description of the deviation, probable cause of such deviations, excess emissions and any corrective actions or preventive measures taken by the DAF to meet time sensitive notifications. The Contractor shall deliver all draft notification, deviation, malfunction and emergency reporting documents early as possible but no later than two weeks prior to regulatory due date in order to provide adequate internal coordination/approval. The contractor shall anticipate a maximum of two (2) reporting events annually.

(CDRL A078, A079)

1.8.4.5.5 Prevention of Major Source Determination (Exclude JDMTA, MTA and Satellite Locations)

The Contractor shall assist in maintaining actual and potential emission levels below major source thresholds pursuant to the stationary source designations. During permit application review, The Contractor shall provide the MPM with written recommendations to minimize the impact potential from the permit action or identify other stationary source reduction opportunities that could be implemented and realized in the Comprehensive AEI. **(CDRL A080)**

1.8.4.5.6 New Source Review Permitting (Exclude JDMTA, MTA, Satellite Locations and APAFR)

The Contractor shall conduct NSR for all permit applications to determine compliance with available control technology, air quality impact analysis, and offset requirements, resulting from the proposed generation of attainment, non-attainment, and/or hazardous air pollutants by the permit applicant. The Contractor shall assist the MPM by drafting a determination of the significance of each proposed permit action relative to the installation's area/major source status, Net Emissions Increase (NEI) baseline, and emission offset potential which may result from each proposed permit application prior to regulatory review. The contractor can anticipate a maximum of two (2) NSR permit applications annually. **(CDRL A081)**

1.8.4.5.7 Net Emission Increase (Exclude JDMTA, MTA and Satellite Locations)

The Contractor create and manage each installation's NEI baseline. During permit application review, The Contractor shall assess whether operating conditions that determine the permitted emission limits are reasonable or excessive. If The Contractor determines and MPM agree these conditions are excessive, The Contractor shall provide written recommendations which would minimize the potential to emit while still fulfilling the USAF mission objective which triggered the permit application. The Contractor shall also assist the USAF by drafting all documentation needed for capturing, registering and crediting all emission decreases. These emission decreases shall be used to recalculate and restore the installation's NEI baseline. **(CDRL 082)**

1.8.4.5.8 Air Conformity Applicability Assessments (Exclude JDMTA, MTA and Satellite Locations)

The ACAM is the USAF's only authorized application for performing air quality environmental impact assessments under the Environmental Impact Analysis Process (EIAP) which includes requirements under the National Environmental Policy Act (NEPA) and the General Conformity Rule. The Contractor shall provide expertise, assistance and support to MPMs by completing ACAM assessments for Air Quality EIAP, NEPA and General Conformity compliance. This support may include, but is not limited to, remote support in Air Force EIAP Guide Level I and II assessments as required under 40 CFR 93 Subpart B, 32 CFR 989, AFMAN 32-7002, and IAW Air Force EIAP Guide for system authorization requests. The Contractor shall provide up to a maximum of ten (10) Air Quality EIAP Assessments annually. **(CDRL A083)**

1.8.4.5.9 Risk Management Evaluation (Exclude JDMTA, MTA and Satellite Locations)

The Contractor shall perform an evaluation of the quantity of Section 112 (r) listed and regulated substances to ensure the installation has not exceeded a threshold quantity. Should these thresholds be exceeded, the Contractor shall develop and submit under the authority of section 112 (r) of the CAA, 40 CFR 68, Chemical Accident Prevention Provisions and State Regulations

a Risk Management Plan (RMP). The Contractor shall conduct a periodic review and update the RMP, if required, at the frequencies directed by 40 CFR 68.190. The Contractor shall make necessary revisions to remain compliant. If during a review or site inspection a threshold is suspected to be exceeded, immediate notification to the DAF is required. **(CDRL A084, A091)**

1.8.4.6 Reports, Air (CCSFS and JDMTA)

The Contractor shall provide the following reports.

1.8.4.6.1 Installation Air Compliance Source Requirement

During the semi-annual AEI Inventory Inspections, the Contractor shall complete air inventory compliance assessment and report. The assessment will evaluate facilities and air emissions equipment for compliance with acceptable engineering practices, established action plans and regulatory requirements. In person site inspections and compliance assessments of all sources shall include verifying best available controls are implemented and functional at bag houses, paint booths, blast booths, all filters fit and are timely replaced, all seals are functional, etc. are performing IAW their manufacturing and regulatory requirements.

The Contractor shall prepare semi-annual inventory compliance requirements assessment reports ten (10) working days after the inspection period. **(CDRL A085, A090)**

1.8.4.6.2 Air Quality Monthly Review and Report (Exclude JDMTA)

The Contractor shall perform monthly reviews, evaluation and compliance evaluation reports of the air emission equipment that have continuous parameter monitoring systems (CPMS).

The Contractor shall also perform, but is not limited to the following tasks:

- Maintain a master spreadsheet of the 4-hour average rolling temperatures, pressure drop and associated regulatory monitoring requirements for each engine
- Prepare and submit the Semi-Annual Monitoring Reports for DAF review IAW regulatory requirements at least fourteen (14) working days prior to regulatory due date
- Provide oversight during the Emission Controls Performance Tests and annual calibration tests
- Perform QA/QC along with edits of the Draft Performance Test Report to ensure CAA compliance
- Maintain the Site-Specific Monitoring Plan for the CCSFS Oxidation Catalysts as a living document. Edits will be submitted to the DAF at least monthly or immediately after any significant change that may impact compliance

(CDRL A085)

1.8.4.7 Reports, Air Library

Not Applicable

1.8.4.8 Supplies Air

Not Applicable

1.8.4.9 Plan Update, Air, Emergency Episode Plan

Not Applicable

1.8.4.10 Plan Update, CAA, Risk Management Plan

Not Applicable

1.8.5 WASTEWATER AND STORMWATER

The Contractor shall perform services in support of the DAF Water Quality Compliance Program and in compliance with the CWA, NPDES; other applicable federal, state, and local laws and regulations; and related DOW and DAF directives. EQ Program Environmental Services shall include, but are not limited to

- prepare and provide support in preparation of new or renewal NPDES/MS4/MSGP/No Exposure (NEX) (municipal separate storm sewer system) permit applications/packages, forms and documentation or other permit compliance documentation necessary to meet the federal or state requirements for discharges;
- monitoring wastewater treatment systems IAW applicable permits and regulations;
- sampling and analyzing influent and effluent waste streams;
- recordkeeping;
- entering data into the AF Civil Engineer (CE) Information Technology (IT) government-approved system (i.e., WET)

In addition, The Contractor shall:

- *perform comprehensive site compliance evaluations (CSCE) and sampling, analysis, and monitoring operations that will provide profile information characterizing the storm water pollution effluents at the installation to determine the status of compliance.*
- *update and implement the SWPPP and/or SWMP, utilize T-EMP for plan uploads and updates as required.*
- *perform and document training at the installation and facilities as required for compliance with the SWPPP.*
- *complete permit discharge monitoring reports, and other reporting requirements.*
- *maintain the compliance status of CWA NPDES permits in the DAF WET.*

Additionally, The Contractor shall provide support for pretreatment associated requirements for installation discharges to POTW or FOTW. Services shall include:

- pollutant source studies to identify illicit discharges of prohibited waste;
- compliance surveys required by new pretreatment NPDES permit or changed regulations;
- sampling, analysis, and monitoring to determine the status of compliance with the permit and discharge limits.

Pretreatment and/or storm water contaminant source studies and/or implementation of permit required Best Management Practices (BMPs) where outfall exceedances of permit and/or pretreatment limits are documented and recurring.

The Contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. **(CDRL A010, B008)**

1.8.5.1 Permit Renewal, NPDES (Wastewater and/or Stormwater) (PSFB, CCSFS and APAFR)

The Contractor shall prepare a NPDES permit applications for a new permit or to renew an existing NPDES permit. Permit requirements are identified in Attachment D. The permit may apply to a federally owned treatment works, an industrial treatment works, or other process that is not associated with storm water, but requires a NPDES permit. The Contractor shall complete the draft permit applications for new issuance or renewal in its entirety to meet U.S. EPA and/or state regulatory application requirements and the draft NOI for permit renewal.

States often authorize specific point source discharges with specific effluent limitations. The Contractor shall prepare the filing for the installation to include issuance of a new permit request, permit modification requests, reissuance, termination, or a notification of planned changes. The Contractor shall comply with specific U.S. EPA, state, or local standard conditions for a NPDES permit as promulgated in regulations 40 CFR 122 and/or implementing state regulations. At minimum, this effort includes the preparation of NPDES application to include, but not limited to, effluent testing data (contractor may assume the installation will provide effluent test data for specific parameters like flow, pH, Biochemical Oxygen Demand [BOD], Total Suspended Solids [TSS], fecal coliforms, pretreatment program information, toxicity), collection system description, discharge outfall descriptions (location, distance from shore if applicable, depth below surface if applicable, average daily flow rate, receiving water description, topographic map (to be provided by the installation), process flow diagram, operation and maintenance program, scheduled improvements, and physical / chemical treatment process as required. This plan shall be a living document and should be published such that the MPM will be able to update and maintain it easily. A NPDES permit application shall be submitted for review and comment by the MPM. The Contractor shall incorporate Air Force comments and deliver a Final permit application to the MPM. The Contractor shall upload the latest NPDES permit into the DAF WET enterprise and maintain the compliance status of same in the DAF WET enterprise. **(CDRL A099, B001, B010)**

Note: The current permit states to complete any permit revisions no later than 2.5 years from permit issuance, if required. This requirement is dependent on the current TMDL BMAP and the RWWTF efficiency study. Permit revisions may be required based on the sampling and efficiency study results (i.e. zone of discharge changes, plant modifications, etc.)

1.8.5.2 Reports, NPDES (PSFB, CCSFS and APAFR)

The Contractor shall provide reports as required by CWA, NPDES, MS4, INDIVIDUAL and GENERAL permits. Examples of report types include, but are not limited to the following: 1) MS4 Annual Report, 2) monthly, quarterly or other frequency Discharge Monitoring Report (DMR), 3) Annual CSCE Report, 4) Non-Storm Discharge Report (a.k.a. Illicit Discharge Report), 5) Whole Effluent Toxicity Report, and 6) Non-Compliance Notification Report. Provide Country specific requirement/details in lieu of U.S. statutory reason (i.e., Sikes Act).

Required by: 40 CFR 122 and the associated permit. Permit information can be found in Attachment D. **(CDRL A100, A101,A102, A103, A104, A105)**

1.8.5.2.1 *Stormwater Management Requirements*

The Contractor shall perform services in support of the stormwater program. Services shall include, but are not limited to data collection, recordkeeping, completion of permit Discharge Monitoring Reports (DMR), preparation or review of NPDES reports and permits, entering permit and compliance data into the DAF approved database, total maximum daily load (TMDL) stormwater compliance design review, and geospatial mapping of system components.

The Contractor shall provide regulatory agency coordination services to the DAF. This includes but is not limited to the preparation of all potential regulatory notifications and participation in meetings with regulatory personnel as requested by the DAF.

The Contractor shall audit DAF, tenants and other contractors for maintenance and compliance of all necessary environmental permits in accordance with regulations and management plans. The Contractor shall ensure permit compliance reports are accurate and complete. The Contractor shall prepare and submit all required reports to the DAF at least thirty (30) calendar days prior to the regulatory due date.

The Contractor shall perform site evaluations per permit requirements and provide a trend analysis characterizing the stormwater pollution effluents at the installation. The Contractor shall coordinate and correct any discrepancies with the responsible organization prior to submission. The Contractor shall submit the trend analysis to the DAF thirty (30) calendar days after the end of the reporting period.

The Contractor shall prepare and provide to the DAF an annual compliance report detailing MS4 program management to include, but not limited to: Best Management Practices, annual news article, outreach activities, dry weather outfall screenings and certification of non-stormwater discharge per the NPDES permit. The Contractor shall submit the annual report to the DAF thirty (30) calendar days after the end of the reporting period.

The Contractor shall update the current DAF approved permit tracking database within five (5) working days of any noted changes.

The Contractor shall conduct the Annual Comprehensive Site Compliance Evaluation (ACSCE) and include as part of the MSGP SWPPP annual review.

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. **(CDRL A011)**

The Contractor shall review and provide environmental regulatory driven comments on TMDL deliverables provided by others. The Contractor shall provide TMDL regulatory agency coordination services to the DAF. This includes but is not limited to the preparation of all potential regulatory notifications and participation in meetings with regulatory personnel as requested by the DAF. See Attachment D for workload data.

The Contractor shall also perform, but is not limited to the following tasks:

- Ensure the proposed BMPs are cost effective, programmable, and provide the nutrient reduction that is required by regulation
- Coordinate with the O&M Flight to ensure participation throughout Basin Management Action Plan (BMAP) development and implementation on proposed BMP project
- Submit comments to the DAF within ten (10) working days after each review

1.8.5.2.1.1 Stormwater Pollution Prevention Team Support (Exclude PSFB and APAFR)

The Contractor shall appoint a representative to support the Stormwater Pollution Prevention Team (SWPPT).

The Contractor shall also perform, but is not limited to the following tasks:

- Organize and facilitate quarterly Stormwater SWPPT meetings
- Prepare and submit agenda to the DAF for their approval within ten (10) working days of meeting
- Send meeting invite to attendees, including the agenda
- Attend meetings and prepare minutes and track attendance
- Prepare and submit meeting minutes within seven (7) working days after meeting to the DAF for their approval and send final meeting minutes to all attendees within three (3) days of DAF approval

(CDRL A107)

1.8.5.2.1.2 MSGP and MS4 Environmental Compliance Audits

The Contractor shall perform NPDES MSGP, MS4, and NPDES Permitted Construction audits as required by the SWPPP and the SWMP. The Contractor shall submit a compliance audit report within ten (10) working days after the end of each audit. The Contractor shall document changes in site operations or configurations based on observed conditions during site audits and update the SWPPP and SWMP to reflect current conditions within thirty (30) calendar days of each audit completion. **(CDRL A108)**

1.8.5.2.1.3 Federal, State and Local Environmental Non-NPDES Regulated Permits (Exclude PSFB and APAFR)

The Contractor shall review and coordinate all permit documents, including but not limited to formal or informal requests for permits to determine if a new, modified or letter of permit exemption is required. Contractor shall provide a permit applicability determination to the DAF within five (5) working days after receipt of application. The Contractor shall review and provide comments on Draft applications and drawing packages, utilizing e-permitting website or hard copy as applicable, to the DAF.

The Contractor shall prepare the final permit application package to include DAF letterhead. The permitting package may include but not limited to a request for verification of exemption; a

letter modification; RFI responses; or new permit application. The Contractor shall submit complete and correct application packages to the DAF within fifteen (15) working days prior to submittal.

(CDRL A109)

**1.8.5.2.1.3.1 Federal, State and Local Environmental Non-NPDES Regulated Permit Audits
(Exclude PSFB and APAFR)**

The Contractor shall perform and document audits of all permitted activities to include, but not limited to stormwater management systems, shoreline stabilization, dock installation, manatee exclusion devices, wetland impacts and coastal construction. Contractor shall utilize the appropriate regulatory forms as dictated by the issued permit.

The Contractor shall also perform, but is not limited to the following tasks:

- Perform a pre, mid and final compliance audit of all sites requiring permits as well as sites that have been exempted to ensure work is in compliance with all regulatory requirements
- Coordinate audits with the DAF, contract monitor(s), and site manager prior to the audit date
- Track deficiencies to completion of corrective actions and confirm with follow-up site audits

The final permit audit shall ensure compliance with the issued permit, as-built certification or issued exemption.

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. **(CDRL A011, A110)**

1.8.5.2.1.4 ERP Audits (Exclude APAFR)

The Contractor shall perform and document audits of all permitted stormwater management systems at the frequency required per the individual permit. The Contractor shall audit WMD, FDEP, or any other regulatory agency that regulates stormwater management systems. The Contractor shall utilize the appropriate regulatory audit forms for each permitted system. Prior to conducting the audit, the Contractor shall coordinate with the DAF, facility manager or designated POC.

As part of the audits the Contractor shall update the Environmental Resource Permit (ERP) map book and the DAF approved data management system to ensure all permitted boundaries are properly delineated and regulated control structures are identified within their permitted boundary within five (5) working days after audit completion. The Contractor shall submit comments within thirty (30) calendar days after audit completion.

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested

corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. (CDRL A011, A111)

1.8.5.3 Implement, Permit Required Practices/Activities < MS4, SW>

Not Applicable

1.8.5.4 Supplies SW

Not Applicable

1.8.5.5 Supplies SWAT

Not Applicable

1.8.5.6 Supplies WWAT

Not Applicable

1.8.5.7 Plan Update, SWMP (PSFB)

The Contractor shall review, maintain and update the SWMP. The SWMP shall include the Minimum Control Measures (MCMs) to satisfy the MS4 requirements. The MS4 program contains six elements used to control and reduce pollutants discharged into receiving waters. To determine if a goal has been met, there must be measurable goals. The Contractor shall ensure measurable goals as required by federal, state or local regulation have been met. The Contractor shall develop the SWMP using the Air Force's standardized Environmental Management Plan format found in T-EMP. The final signed plan shall be stored in T-EMP. The Contractor shall update the AF WET enterprise to reference to the plan's location in T-EMP and maintain the current status of the SWMP in the AF WET enterprise to include regulatory compliance status. (CDRL A112, B001, B004)

1.8.5.8 Plan Update, SWPPP (PSFB, CCSFS and APAFR)

The Contractor shall review and update the SWPPP. The Contractor shall revise the existing SWPPP to meet current requirements in the United States Environmental Protection Agency National Pollutant Discharge Elimination System Multi Sector General Permit for Storm Water Discharges Associated with Industrial Activity or equivalent state or local permit based on enhancement of BMPs or other updates reflecting process changes. This task involves review of the existing SWPPP to include storm water source review, assessment of contributors to each discharge point, and evaluation of the effectiveness of completed BMPs. The review will be the basis for the Contractor to make recommendations for updates to the plan procedures, structural BMPs and nonstructural BMPs, as necessary. The review will include on-site inspection necessary to verify installation storm water facilities and procedures. The Contractor will review topographic maps and ground verify actual and/or potential areas prone to moderate (3% to 5% slopes) and severe (> 5% slopes) erosion on installation. The review and recommendations will form the basis for the update of the plan. The Contractor shall review applicable federal, state, and local laws, regulations, and/or programs that pertain to SWPPP requirements. The Contractor shall update the installation's SWPPP. The Contractor will conduct the annual report

in accordance with the permit. The Contractor shall use the appropriate current DAF plan template (e.g., T-EMP) or regulatory agency template if suitable and compatible with DAF standards with Base concurrence. The SWPPP will reflect the current Air Force and regulatory requirements and installation's activities. Also included in the re-write will be updates of all figures in the SWPPP based on current site conditions. The purpose of the SWPPP is to develop a site-specific storm water management program that identifies those organizations and offices responsible for implementing and supporting BMPs, including schedules of activities, prohibitions of certain practices, maintenance procedures, and other management practices to prevent or reduce the pollution from significant materials in storm water runoff. Significant materials are those materials which, when exposed to precipitation or storm water run-on, have the potential for polluting the storm water. Some examples for flight line maintenance and operations are various fuels, hydraulic oils, brake fluids, antifreeze/coolants, heavy metals (i.e., copper, lead, and zinc), oils and grease, degreasing solvents, paints, and de-icing/ant icing agents. The Contractor shall submit a draft Technical Memorandum to the government summarizing proposed changes to the SWPPP. This may include changes to potential sources of pollution (include applicable photographs), modification of BMPs, or amendments to plan procedures. The draft Technical Memorandum will be reviewed by the government and comments provided, and the Contractor shall submit a final Technical Memorandum after resolution of comments.

After the final technical memorandum is approved the Contractor shall then update the installation's SWPPP. The minimum key elements the Contractor shall provide for Air Force installation's SWPPP include the implementation of the following types of BMPs when applicable:

- Good Housekeeping
- Material Management
- Routine Visual Inspections (conducted within 24 hours of a rain event of 0.5 inches or more)
- Preventive Maintenance
- Spill Prevention and Response
- Sediment and Erosion Control Measures
- Employee Training
- Record-keeping and Internal Reporting Procedures
- Operational Source Control
- Structural Source Control
- Structural Water Treatment Control

This plan will be a living document and should be published such that the MPM will be able to update and maintain it easily in T-EMP or another approved DAF system. The site drainage maps shall be made available in the latest Geographic Information System (GIS)/GEOBase data and aerial photography. For installation GIS/GEOBase requirements all deliverables shall adhere to the most current version of the installation's Geographic Information Systems Deliverables for Design & Construction and Plans, Surveys & Studies Contract Services. Site maps shall be compatible with the installation's GIS.

The Contractor shall conduct the annual CSCE as part of the SWPPP update. An installation may have one or more combined SWPPP that addresses all industrial discharge permit requirements for the facility. Permit requirements are identified in Attachment D.

The Contractor shall conduct one site visit to each industrial activity site on the base as identified and required in the SWPPP and associated permit(s). If potential problems are identified, the Contractor will document findings and propose solutions to the problem findings identified and submit them to the COR, the MPM, and the appropriate tenant organization. In addition to documenting findings Contractor will include follow-up on corrective actions with appropriate parties and all information will be documented in the SWPPP.

Prepare storm water pollution prevention training presentations for industrial facility personnel after completion of the SWPPP update. Develop and provide Stormwater program handouts to support all of the above, as needed.

(CDRL A113, A114, A115, B001, B004, B010)

1.8.5.9 Plan Update Water Sampling/Monitoring

Not Applicable

1.8.5.10 Survey, Storm Water Permit Compliance

Not Applicable

1.8.5.11 Contract Operated Services, EC – SWAT-

Not Applicable

1.8.5.12 Contract Operated Services, EC – WWAT- (CCSFS)

1.8.5.12.1 Wastewater Management Requirements

The Contractor shall perform services in support of the wastewater program. Services shall include, but are not limited to data collection, recordkeeping, completion of permit discharge monitoring reports, preparation or review of NPDES reports and permits, entering permit and compliance data into the DAF approved database, and geospatial mapping of system components.

The Contractor shall provide regulatory agency coordination services to the DAF. This includes but is not limited to the preparation of all potential regulatory notifications and participation in meetings with regulatory personnel as requested by the DAF.

The Contractor shall audit DAF, tenants and other Contractors for maintenance and compliance of all necessary environmental permitting documentation in accordance with regulations and management plans. See Attachment D for workload data.

1.8.5.12.1.1 Wastewater Outage/Malfunction Reporting

The Contractor shall assist with wastewater malfunction reporting and immediately notify the DAF as soon as they receive notice. The Contractor shall prepare incident reports and supporting documentation for planned and unplanned wastewater outages. The Contractor shall

coordinate with operational shops/personnel and the DAF in preparation of incident and outage reports. The Contractor may submit incident reports to FDEP after coordination with the DAF and approval is granted. The Contractor shall maintain a log of outage events. The Contractor shall enter all spills into a DAF approved database within twenty-four (24) hours and track all planned and unplanned wastewater malfunctions, including any required follow-up actions, to ensure compliance with all regulatory notification requirements. **(CDRL A120)**

1.8.5.12.1.2 Wastewater Permitting for Construction Activities

The Contractor shall review all permit documents, including but not limited to formal or informal requests for permits to determine if a new, modified or letter of permit exemption is required. The Contractor shall provide a permit applicability determination to the DAF within five (5) working days after receipt of application.

The Contractor shall review and provide comments on all regulatory required document to ensure a complete and accurate submittal package is delivered to the DAF. Certifications of Completions shall be submitted within two (2) working days of project completion; multiple partial notices are likely for large projects.

The Contractor shall also perform, but is not limited to the following tasks:

- Perform a final compliance audit of all sites requiring wastewater permits to ensure work is in compliance with all regulatory requirements and permits are ready for signature by the DAF
- Coordinate audits with the DAF, contract monitor(s), and site manager prior to the audit date
- Track deficiencies to completion of corrective actions and confirm with follow-up site audits

The final wastewater audit shall ensure compliance with the wastewater permit and certifications of completion. Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within seven (7) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF.

(CDRL A011, A121)

1.8.5.12.1.3 Wastewater Environmental Compliance Audits

The Contractor shall perform and document semi-annual audits within each fiscal year, for all of the regulated systems, including, but not limited to, wastewater treatment/collection/disposal systems. The Contractor shall use the same checklist as FDEP uses for their inspections or a similar DAF furnished checklist.

The Contractor shall all perform, but is not limited to the following tasks:

- Coordinate audits with DAF and system manager(s) prior to the audit date
- Ensure compliance with regulatory requirements and applicable management/operating plans.

- Deficiencies identified shall be documented in the environmental deficiencies database, tracked to completion of corrective action and corrective action verified
- Provide semi-annual (July and January) Wastewater Operations Compliance Inspection Report. Inspection reports shall include an executive summary of findings. All reports shall be submitted within ten (10) working days after the end of the audit period

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within five (5) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status updates, corrective action implementation and recommended deficiency closure to the DAF at least monthly and upon request by the DAF. **(CDRL A011, A122)**

1.8.5.13 Contract Operated Support, EC – SDWA Drinking Water Management (CCSFS)

The Contractor shall perform services in support of the DAF Safe Drinking Water Surveillance Program and in compliance with the Safe Drinking Water Act (SDWA); other applicable federal, state and local laws and regulations; and related DOW and DAF directives.

The Contractor shall review and provide technical and administrative comments on all Public Water System submittals. **(CDRL A123)**

The Contractor shall maintain proper recordkeeping IAW regulatory and DAF requirements. The Contractor shall annually update, maintain and implement the Drinking Water SOP and ESAM tracking spreadsheet. Annual updates shall be submitted to DAF NLT October 30th of each year. See Attachment D for workload data.

1.8.5.13.1 Drinking Water System Environmental Compliance Audits

The Contractor shall perform and document semi-annual environmental compliance audits for all of the regulated systems, including, but not limited to, drinking water treatment, and storage and transmission systems. The Contractor shall use the same checklist as FDEP uses for their inspections or a similar DAF furnished checklist.

The Contractor shall perform, but is not limited to the following tasks:

- Coordinate audits with system manager(s) prior to the audit date
- Ensure compliance with regulatory requirements and applicable management and operating plans
- Deficiencies identified shall be documented in the environmental DAF approved database
- Provide semi-annual (January and July) Water Operations Compliance Audit Reports to include an Executive Summary of findings within ten (10) working days after the end of the audit period

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and

report status updates, corrective action implementation and recommended deficiency closure to the DAF at least monthly and upon request by the DAF.

(CDRL A011, A124)

1.8.5.13.2 Construction Permit Audits

The Contractor shall review and provide technical and administrative comments on all construction permit renewals or modification applications and ensure payment of permit fees by others are ready for signature and submission.

The Contractor shall assist the USAF with regulatory agency coordination. The Contractor shall ensure that internal controls are in place to effectively track all required drinking water permit certifications associated with drinking water permits for new projects.

The Contractor shall review all projects to coordinate and review all required documents including forms, sampling data, PE of record certification, and other attachments as required. The Contractor shall review all drinking water permit as-built certification packages for completeness, make recommendations, coordinate, and submit to the USAF within two (2) working days of receipt. The Contractor shall coordinate any required corrections with the submitting entity and provide a complete and accurate as-built certification package to the USAF.

The Contractor shall also perform, but is not limited to the following tasks:

- Perform pre, mid and final compliance audits of all sites requiring potable water permits to ensure work is in compliance with all regulatory requirements
- Coordinate audits with the contract monitor(s) prior to the audit date
- The final potable water permit audits shall ensure compliance with the potable water permit and as-built certification requirements.

Deficiencies identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track deficiencies in the DAF approved deficiencies database and report status updates, corrective action implementation and recommended deficiency closure to the DAF at least monthly and upon request by the DAF.

(CDRL A011, A124)

1.8.5.14 Contract Operated Support, EC – SPIL Contractor Spill and Release Consultation Support (CCSFS, JDMTA, MTA and Satellite Locations)

The Contractor shall perform services in support of spill response in compliance with all applicable federal, state, and local laws and regulations; related DOW and DAF directives; and installation-level protocols, policies, and plans.

The Contractor shall follow all spill notification and response procedures established in the Installations Spill Prevention Control and Counter Measure Plans and Hazardous Waste Management Plans.

The Contractor shall provide spill investigation support for all spills per installation emergency response plans and DAFI's. For the purpose of this Contract, spill response does not include cleanup activities, rather spill investigation, communication with the DAF, database entry (e.g. Enforcement Actions, Spills, and Inspections Environmental Reporting [EASIER]), Waste Management support and advice regarding cleanup response.

The Contractor shall respond on-scene at CCSFS during normal business hours within thirty (30) minutes of notification, and within ninety (90) minutes of notification outside normal duty hours. For spills/releases at MTA and satellite locations, the Contractor shall respond within ninety (90) minutes during normal business hours and two (2) hours outside business hours.

For spills/releases at JDMTA, the Contractor shall respond to JDMTA, if directed after consultation with the DAF, within three (3) hours during normal business hours and four (4) hours outside business hours.

The Contractor shall provide fact finding/advisory support for actual and exercise spill response to the DAF. In the event of a spill, the Contractor shall provide verbal initial spill reports to the DAF within one (1) hour of Contractor responding to each event.

The Contractor shall use the DAF approved data management systems (e.g. EASIER) to provide a detailed draft report of the incident, within twenty-four (24) hours or the next business day. All required data fields in EASIER shall be completed; Contractor will not submit the EASIER entries, the DAF will submit the final EASIER report.

Reports for any spill, release or use of Aqueous Film Forming Foam (AFFF) and Synthetic Fluorine-Free Foam (EASIER) shall be drafted in EASIER within two (2) hours of Contractor response to an AFFF incident. *Note, report/response is required for all use of AFFF, including accidental spills or releases. (CDRL A125, A126)*

1.8.6 CULTURAL RESOURCES

Not Applicable

1.8.7 SOLID WASTE MANAGEMENT

The contractor shall perform services in support of integrated solid waste management and in compliance with the Federal Facility Compliance Act of 1992, RCRA, other applicable federal, state, and local laws and regulations, and related DOW and DAF directives and guidance (including AFMAN 32-7002 and the *Integrated Solid Waste Management Playbook*). Integrated solid waste management services shall include, but are not limited to,

- monitoring landfills by performing groundwater sampling and gas monitoring and operating and maintaining monitoring equipment;
- preparing education, awareness, and promotion materials for the installation diversion program;

The contractor shall update (utilizing the DAF approved template) and implement the Integrated Solid Waste Management Plan (ISWMP), perform a Commodity Market Analysis and Feasibility

Study (CMA), and update the Qualified Recycling Program Business Plan (QRP BP) utilizing the current approved template. T-EMP shall be utilized for plan uploads and updates as required.

The contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. See Attachment D for workload data. **(CDRL A010)**

1.8.7.1 Contract Operated Services, EC - RC-D Landfill Activities (CCSFS)

The landfill at CCSFS consists of three permitted elements: an asbestos mono-fill, a construction/demolition debris landfill and a closed municipal solid waste landfill. At this time, operations at the landfill are suspended, with no plan to resume operations in the near future. The three landfill permits are consolidated under a single application permit package but they maintain separate requirements.

ISWMP services shall include preparing required landfill reports for DAF submittal to the regulatory agency. Draft reports shall be submitted for review to the DAF forty-five (45) calendar days prior to regulatory due date. All draft reports will be delivered to the DAF within five (5) working days following DAF comments. Final reports shall be delivered to the DAF within a minimum of seven (7) working days prior to regulatory due date unless specified otherwise.

1.8.7.1.1 Annual Waste Report for the C&D Landfill Report

The Contractor shall prepare the Annual Waste Report for the C&D landfill, IAW 62-701.900(7), F.A.C. and permit requirements. The Contractor shall comply with the above draft and final report time frames indicated above. **(CDRL A145)**

1.8.7.1.2 C&D Landfill Water Quality Technical Report

The Contractor shall prepare a water quality technical report, signed and sealed by a Florida professional geologist or professional engineer with experience in hydrogeological investigations. This report shall be submitted to the DAF every two and a half (2.5) years during the active life of the facility. The report shall summarize and interpret the water quality monitoring results and water level measurements collected during at least the past five (5) years.

The Report shall include, but not be limited to:

- Tabular displays of any data which shows that a monitoring parameter has been detected, and graphical displays of any leachate key indicator parameter detected (such as pH, specific conductance, TDS, TOC, sulfate, chloride, sodium and iron), including hydrographs for all monitor wells
- Trend analysis of all monitoring parameters including evaluation and interpretation of data with compliance risks identified and recommended corrective actions
- Identify and explain comparisons among shallow, middle, and deep zone wells
- Identify and explain comparisons between background water quality and the water quality in detection and compliance wells
- Identify and explain correlations between related parameters such as dissolved solids and specific conductance
- Identify and explain erratic and poorly correlated data

- An interpretation of the ground water contour maps, including an evaluation of ground water flow rates
- An evaluation of the adequacy of the water quality monitoring frequency and sampling locations based upon site conditions

(CDRL A146)

1.8.7.1.3 C&D Debris Disposal Facility Closure Plan with Report

The Contractor shall provide an annual updated closure plan including, but not limited to, an updated operation plan, obtained from the O&M Flight. This plan shall reflect changes in closure design, long-term care requirements and estimated financial closing costs, prepared by recalculating the total cost of closure or long-term care, IAW permit requirements. If operational procedures have not changed, include a statement in the report asserting that. This plan is submitted every five years.

C&D Debris Disposal Facility Report shall be provided IAW with regulatory requirements and shall include, but not be limited to:

- The closure cost estimate shall be prepared by recalculating the total cost of closure or long-term care, in current dollars
- Reflect current site conditions, height of disposal units, extent of waste disposal areas, etc., in the updated operation plan

(CDRL A147)

1.8.7.1.4 Asbestos Monofill Closure Plan with Report

The Contractor shall provide an annual updated closure plan including, but not limited to, an updated operation plan, obtained from the O&M Flight. This plan shall reflect changes in closure design, long-term care requirements and estimated financial closing costs, prepared by recalculating the total cost of closure or long-term care, IAW permit requirements. If operational procedures have not changed, include a statement in the report asserting that. This plan is submitted every five years.

Asbestos Monofill Report shall be provided IAW with regulatory requirements and shall include, but not be limited to:

- The closure cost estimate shall be prepared by recalculating the total cost of closure or long-term care, in current dollars
- Reflect current site conditions, height of disposal units, extent of waste disposal areas, etc., in the updated operation plan

(CDRL A148)

1.8.7.1.5 Class I Landfill Closure Plan with Report

The Contractor shall provide an annual updated closure plan including, but not limited to, an updated operation plan, obtained from the O&M Flight. This plan shall reflect changes in closure design, long-term care requirements and estimated financial closing costs, prepared by recalculating the total cost of closure or long-term care, IAW permit requirements. If operational

procedures have not changed, include a statement in the report asserting that. This plan is submitted every five years to FDEP.

Class I Landfill Report shall be provided IAW with Regulatory Requirements and shall include, but not be limited to:

- A stabilization report per permit requirement. The submittal shall include the technical report required in 62-701.510(8)(b), F.A.C., and shall also address subsidence, barrier layer effectiveness, storm water management, and gas production and management
- A semi-annual gas, surface water and ground water monitoring reports per permit requirement.
- The closure cost estimate shall be prepared by recalculating the total cost of closure or long-term care, in current dollars
- Reflect current site conditions, height of disposal units, extent of waste disposal areas, etc., in the updated operation plan

(CDRL A149)

1.8.7.1.6 Landfill Compliance Audits

The Contractor shall conduct quarterly landfill environmental compliance audits at all of the SLD 45 permitted landfill facilities to ensure regulatory requirements are being maintained. Draft inspection report shall be submitted to the DAF for review within five (5) working days after each quarter. **(CDRL A150)**

1.8.7.1.7 Landfill Permit Renewal

The Contractor shall review, prepare and coordinate landfill permit renewal packages to obtain permit coverage. **(CDRL A151)**

1.8.7.2 Integrated Solid Waste Management Plan (ISWMP) (SLD45 Installations and APAFR)

The Contractor shall provide services to perform an update of the installation ISWMP using the DAF-standardized format, currently within T-EMP, which outlines how the installation(s) will reduce, manage, and dispose of solid waste. This effort will comply with federal and state requirements, as well as DAF and DOW directives. The Contractor will perform a thorough solid waste study of the installation refuse and recyclable sources. Based on this study, the Contractor will provide any recommendations to change any current policies or procedures to create a more cost effective Integrated Solid Waste Management (ISWM) Program. **(CDRL A152)**

1.8.7.2.1 Commodity Market Analysis & Feasibility Study (CMA)

The Contractor will conduct a CMA to be included as an appendix to the ISWMP. The DAF-standardized format in EXCEL must be utilized. Activities include:

1. Perform a commodity market analysis for current and potential recyclable commodities generated by the installation and diverted through the QRP and DLA Disposition Services donation, compost, or other diversion opportunities.
2. Estimate installation-wide generated weight/volume of each recyclable commodity, including activities that handle their own recyclables (e.g., Commissary/AAFES). Where available, utilize existing installation solid waste characterization summaries that are no older than 10 years.

3. Determine availability of commodity buyers/brokers, locally and regionally, for direct sales opportunities for current and potential recyclable commodities.
 - i. If no commodity buyer/broker exists for a specific recyclable commodity, the contractor will document research. However, the contractor will not be required to conduct economic analysis for that specific commodity.
 - ii. If brokers/buyers exist, the contractor will determine buyer/broker requirements for material quantity (e.g., accepts no less than trailer-load transactions), packaging requirements (e.g., baled, loose, cubed), and any costs associated, and document on EXCEL worksheets.
4. Conduct comparable analysis of local versus regional/national market prices for recyclable commodities and document on EXCEL worksheets.
5. Provide a recommendation on whether a QRP shall continue at the installation or whether a QRP shall be initiated (if one is not already present) to include labor category (e.g., civil service, NAF employees, contractors, prison labor, etc.).

(CDRL A153)

1.8.7.2.2 Qualified Recycling Program Business Plan (QRP BP) Update

The installation QRP manages, collects, processes, and sells recyclable commodities in an effort to minimize environmental impacts (i.e., recovering recyclable materials from solid waste disposal streams). Qualifying recyclable materials are collected and segregated from other solid waste materials, processed and sold to recyclable commodity buyers/brokers or diverted through DLA Disposition Service's established scrap sales programs.

If the CMA indicates that the QRP is profitable and the installation has a QRP BP in place, the contractor will provide services to perform an update to the QRP BP in accordance with AF guidance and the DAF-standardized QRP BP format. The QRP BP shall be included as an appendix of the ISWMP.

(CDRL A154)

1.8.7.3 Solid Waste Minimization and Cost Optimization

Not Applicable

1.8.8 POLLUTION PREVENTION

Not Applicable

1.8.9 ENVIRONMENTAL MANAGEMENT SYSTEM (EMS)

A DAF EMS provides an installation-wide systematic framework for managing all its activities to minimize risks to the environment and manage its environmental responsibilities to ensure they are efficiently integrated into overall operations. The elements of a DAF EMS are identified in DAFI 32-7001 and the *Environmental Management System Playbook*.

IAW Air Force Policy Directive (AFPD) 90-8 *Environmental, Safety, and Occupational Health Management and Risk Management*, DoDI 4715.17 *Environmental Management Systems*, AFI 90-201 *The Air Force Inspection System*, and DAFI 32-7001. Services shall include, but are not limited to;

- reviewing, updating, and approving documents related to administration of the overall EMS including the Environmental Action Plans;
- EMS recordkeeping and records management including maintaining documentation and records in AF eDASH management resources (e.g., Management Review Tool, Risk/Aspect Inventory Tool, Tool for Environmental Management Plans, Air Force Inspections Module of the EASIER tool, and the Unit Environmental Coordinator Toolkit);
- and support to the Environmental Inspection Process (EIP) and annual EMS Management Review process.
- Contractor shall provide support to the EMS Coordinator, the EMS Cross-Functional Team (CFT), and the ESOHC.

1.8.9.1 Maintenance of Environmental Aspect Inventory (EAI)

Not Applicable

1.8.9.2 Plan Update, EMS Documentation (PSFB, CCSFS and APAFR)

The contractor shall review/revise/develop EMS plans/manuals/action plans/documentation in eDASH (requires access to eDASH, CAC-enabled). Annual updates are normally completed in-house by members of a CFT. The scope of this effort includes assistance on setting objectives and targets and developing EMS Action Plans (EAPs) for the installation. This shall be done in accordance with DAFI 32-7001, the associated playbook, and use the standardized EMS on eDASH. Objectives and targets are set for prioritized environmental aspects and are to incorporate, as needed, elements of the EMS such as training, internal auditing, employee awareness, etc. The contractor shall take into account objectives and targets set by AFCEC for EO goals and other commitments the DAF has made. The installation's objectives and targets must be set to align with and complement those of the DAF. This may include additional objectives and targets for significant aspects the installation has identified. Objectives and targets are to be included in EAPs. Scope can include developing/updating EAPs that the installation uses to minimize their environmental impacts, manage significant environmental aspects, and translate its policy statement and external directives into concrete actions. The EAPs are to be developed/updated so that both the installation and DAF can monitor and measure the progress in meeting the installation and DAF commitments and obligations and is able to identify where resources should be invested and assist installations with aspect management.

Developed/updated EAPs shall use the AFCEC-directed template. **(CDRL A159)**

1.8.9.3 Recordkeeping, EMS (PSFB, CCSFS and APAFR)

The contractor shall assist the EMS Coordinator and installation environmental program managers in reviewing, updating, and re-approving documents related to administration of the overall EMS. The contractor shall assist installation program managers who are responsible for reviewing, updating, and re-approving documents associated with their environmental programs. This includes electronic and printed versions of EMS and environmental documents, documents of external origin, determining and addressing obsolete documents, and records management. This shall be done in accordance with DAFI 32-7001, the associated playbook, and use the standardized EMS on eDASH (requires access to eDASH, CAC-enabled). **(CDRL A160)**

1.8.9.4 Maintenance, Environmental MDL/MDS

Not Applicable

1.8.9.5 EMS/EIP External/Internal IG Support

Not Applicable

1.8.9.6 EMS Auditing Support

Not Applicable

1.8.9.7 Contract Operated Services, P2 - P2MI – Other EMS Responsibilities (CCSFS, JDMTA, MTA and Satellite Locations)

The Contractor shall appoint a Unit Environmental Coordinator (UEC) who will be the primary point of contact between the environmental functions and the Contractor.

The UEC duties shall include, but not limited to:

- Advise Contractor work area supervisors and employees on EMS policies
- Manage and monitor EMS requirements for the contract
- Participate with and support EMS audits, compliance assessments and regulatory inspections
- Assist with developing corrective actions to address identified findings
- Take the UEC training class as provided by the DAF and document completion of the training
- Represent the Contractor during Quarterly CFT Meetings

1.8.9.7.1 Emergency Preparedness and Response

The Contractor shall support the DAF as requested in emergency preparedness and spill exercises on behalf of the DAF (Note: spill response does not include cleanup activities rather spill investigation, communication with the DAF, database entry (EASIER), Waste Management support and advice regarding cleanup response) and support DAF Emergency Operation Center (EOC) environmental staff as directed during exercises and real-world incidents in accordance with this PWS.

1.8.9.7.2 Legal and Other Requirements

The Contractor shall comply with all environmental legal obligations and applicable regulations. The Contractor shall ensure an annual review of all environmental programs applicable statutory and regulatory requirements, including state and local regulations to maintain program compliance, identify and document new and emerging requirements. Upon Contractor discovery of any new or emerging requirements the Contractor shall notify the DAF within seven (7) working days. Upon notification by the DAF or Contractor discovery of any new and emerging legal requirements the Contractor shall provide the DAF with an analysis of potential mission impacts within thirty (30) days. **(CDRL A166)**

1.8.9.7.3 Operational Controls

The Contractor shall ensure the focus of all reviews identified below are on compliance and conformance of all Department of Air Force environmental programs. The Contractor shall ensure impact considerations are completed for all environmental program areas including but

not limited to: Hazardous Waste, Water Quality, Air Quality, Hazardous Materials, Tanks, EPCRA, Solid Waste Management, and Toxic Substances Control Act (e.g. asbestos, lead). The tasks in this section refer to documentation typically, but not always, prepared by commercial entities, other Contractors or the DAF outside of the environmental functional area.

1.8.9.7.3.1 Design Reviews, Construction Meetings and Air Force Form Reviews

The Contractor shall attend design and construction review meetings, as well as pre, pre-final and post project meetings as requested by the DAF, to evaluate environmental issues.

The Contractor shall review site plans to identify environmental compliance issues. The Contractor shall ensure design constraints align with environmental laws and regulations and other associated environmental concerns. The Contractor shall provide design recommendations that can limit, reduce or eliminate environmental impacts and regulatory concerns, if available. The Contractor shall provide comments to the DAF and track those comments through the design process to be sure they are addressed. The Contractor shall develop a means of tracking the design review process that is accessible to the DAF. The Contractor shall provide comments to DAF within five (5) working days of receipt.

The Contractor shall review, coordinate and provide comments to all DAF forms completed or developed by others, including AF Forms 103, 332 and 813, all comments shall be provided to the DAF within five (5) working days, unless the Contractor requests an extension and is approved by the DAF. The Contractor shall ensure all environmental permits and requirements have been obtained prior to the approval of the AF Form 103.

The Contractor during their AF Form 813 reviews shall ensure potential impacts are clearly and accurately identified. As part of the AF Form 813 development, the Contractor shall run the ACAM for the Proposed Action (See **Section** Error! Reference source not found. for workload). **(CDRL A167)**

1.8.9.7.3.2 Environmental Baseline Survey (EBS) Reviews

The Contractor shall review EBS documents, to include waivers, for completeness and accuracy and to provide information for EBS efforts.

Information reviewed shall include items such as historical records and land use, reports, data, environmental surveys, inspection reports, regulatory agency reports, land use controls or restrictions, Federal Facility Agreements (FFA), notices of violation or noncompliance, consent orders or decrees, current or discontinued permits, titles, deeds, and other real property and environmental conditions records (e.g., floodplain, wetlands, sensitive habitats and species, aerial photographs, and other documents to determine the potential for past/present contamination of real property). If necessary, reviews will involve the investigations of soil, surface and/or subsurface, and aquifer and/or ground water, surface and/or subsurface sampling(s) to determine type, concentration, and extent of contamination.

Responses to Requests for Information (RFIs) submitted by the DAF from the EBS developer shall be provided within five (5) working days of receipt of request. During EBS review the Contractor shall provide comments to the DAF within ten (10) working days of receipt of information request. **(CDRL A168)**

1.8.9.7.3.3 Environmental Impact Analysis Process

The Contractor shall review and comment on NEPA documentation, including Environmental Assessments (EA), Environmental Impact Statements (EIS), Finding of No Significant Impacts (FONSI), Notice of Intent (NOI) and Record of Decisions (ROD). The Contractor shall ensure that all documents are complete, without error and meet all DAF, state, and federal requirements. The Contractor during their Environmental Impact Analysis Process (EIAP) analysis shall ensure potential impacts are clearly and accurately identified. All EIAP documents, except EA's and EIS's, shall be reviewed and comments provided within five (5) working days. EA and EIS review and comment period will be negotiated with the DAF based on complexity. **(CDRL A169)**

1.8.9.7.3.4 EMS Environmental Inspection Process

The Contractor shall comply with all Air Force Inspection System (AFIS) requirements and deadlines including, but not limited to pre-audit preparations, audit participation, attend all pertinent briefings and meetings before, during and after audit, provide all requested information on findings including verification of information. For further details and specific requirements refer to DAFI 90-302, *The Air Force Inspection System* or current DAF inspection guidance.

The Contractor shall act as an inspector, assessor, auditor or sensor for the Installation Environmental Office during the Commander Inspection Process (CCIP) and complete submission of findings reports outlining the activities performed, to include the evaluation assistance of local environmental programs, verification of deficiencies and corrections, and internal evaluations encompassing all applicable DAF Inspection System requirements to the Environmental Office for consideration and action.

1.8.9.7.3.5 Self-Inspections

The Contractor shall complete assigned MICT checklists as outlined in the CCIP to provide an internal self-assessment of Contractor assigned shops. **(CDRL A170)**

1.8.9.7.3.6 Internal and External EMS and Unit Effectiveness Inspection EMS Audits

The Contractor shall support the Installations during EMS conformance and compliance audits conducted internally or external audits focusing on EMS conformance. The EMS audit can be supplemented with a regulatory compliance evaluation of high-risk environmental protocols based on pre-determined installation vulnerabilities. These audits are accomplished through MAJCOM/IG UEI Capstone events, AFCEC EMS Effectiveness Visits or EMS Coordinator Annual Reviews.

1.8.9.7.3.7 Multi-Media Inspections

The Contractor shall participate in shop level compliance and conformance inspections, also known as Multi-Media Inspections, of all environmental program areas necessary for maintaining environmental compliance and conformance of daily operations throughout the installations.

The Contractor shall complete a findings and results report for each shop inspection outlining the activities audited and any deficiencies or best practices noted. The report shall be provided to

the DAF within five (5) working days of inspection completion. The Contractor shall enter an inspection “event” with findings, upon approval by the DAF, in the DAF approved inspections database. **(CDRL A011, A171)**

1.8.9.7.3.8 Corrective and Preventive Action Reports

Deficiencies identified during program reviews, performance evaluations or inspections shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide a report regardless of review, evaluation or inspection outcome. If deficiencies are found the report shall include, but not limited to expanded deficiency details, suggested corrective action(s) and recommended closure procedures. The report will be provided to the DAF within seven (7) working days of program reviews, performance evaluations or inspection completion. The Contractor shall monitor closely all deficiencies in the DAF approved deficiencies database to track and verify corrective and preventive actions, through re-inspection, to ensure closure. The Contractor shall provide a status update on corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. **(CDRL A011, A172)**

1.8.10 NATIONAL ENVIRONMENTAL POLICY ACT (NEPA)

Not Applicable

1.8.11 ENVIRONMENTAL REMEDIATION PROGRAM

Not Applicable

1.8.12 PETROLEUM, OIL, AND LUBRICANT MANAGEMENT

1.8.12.1 Fuel/POL – EQ Services (SLD45 Installations, Satellite Locations and APAFR)

The contractor shall perform services in support of Fuel/POL storage tank management and in compliance with the Oil Pollution Act (OPA) and RCRA all applicable federal, state, and local laws and regulations; and related DOW, and DAF directives (including AFMAN 32-1067 *Water and Fuel Systems*), and program guidance (*POL Tank Management Playbook*).

POL management services shall include, but are not limited to;

- Ensure Spill Prevention, Control, and Countermeasures (SPCC) Plan compliance, aboveground storage tanks (ASTs), underground storage tanks (USTs), sumps, associated piping, and other related equipment
- support in obtaining or renewing appropriate Storage tank registration applications and/or permits
- Update the Storage Tank Accounting and Reporting (STAR) authorized tank inventory in the Air Force Management Information System (AFMIS) with all up-to-date information providing the government with complete tank inventory data. (See AFMAN 32-1067 for details on tank minimum data element requirements for the installation tank inventory.) **(CDRL A187)**
- track/monitor the completion of required monthly and annual POL tank inspections in STAR
- track/monitor the completion of other required tasks associated with RCRA Subpart I compliance such as recurring spill prevention, overfill prevention, and release detection equipment testing

- provide support in preparing for regulatory inspections such as gathering documentation and performing pre-inspection records reviews and assessments
- conduct regulation-required annual oil operator training

1.8.12.1.1 Plan Update, SPCC Recertification

The Contractor shall provide on-site support to conduct an inspection(s) of each site within the installation containing POL, develop an accurate site map, and document SPCC considerations. The contractor shall also provide interim updates for significant technical changes to the installation's SPCC Plan to ensure the plan is rewritten to fully comply with all applicable federal, state, and local regulatory requirements, and ensure all maps and figures are current. The update shall include:

- revision of the Oil Spill Contingency Plan, if required.
- review applicable federal, state, local laws, regulations, programs, and industrial, regulations, and/or programs that pertain to SPCC Plan generation and POL compliance so the SPCC Plan shall address all current DAF and federal, state, and local regulatory requirements, as well as the installation's POL activities
- revise the SPCC Plan to meet the requirements of 40 CFR 112 for all applicable sites at the installation
- provide site diagrams for each new site that meets the requirements of 40 CFR Part 112; update site diagrams to include the site specific SPCC concerns, spill response procedures, and the site operators responsibilities (inspections, spill notifications procedures, etc.). Individual diagrams shall not be required for oil filled equipment sites. All sites can be compiled on one map/diagram for the installation to post the update to the installation geographic interface system or GeoBase system; data must conform to the most current DAF adaptation of the SDSFIE, current version.

The Contractor shall also populate updates to the installation's STAR DAF network authorized tank database. The Contractor shall populate this database with all up-to-date information providing the government complete tank inventory data (See DAFI 32-7044, Storage Tank Compliance, for details on tank minimum data elements requirements for the installation tank inventory).

A draft SPCC shall be submitted for government review and comment. The Contractor shall incorporate comments and deliver a Final SPCC for approval to the installation. The final SPCC Plan will be signed and "certified" by a professional engineer (P.E.) in accordance with the requirements of 40 CFR Part 112 and licensed in the state of the installation as applicable by regulation. The Contractor shall input the updated SPCC Plan and pdf copy into the DAF WET system in coordination with the installation. This plan will be a living document and should be published such that the MPM will be able to update and maintain it easily. **(CDRL A188, B001, B010)**

1.8.12.1.2 Plan Update, SPCC Technical Amendments

The Contractor shall provide interim updates for significant technical changes to the installations SPCC Plans to ensure the plan is rewritten to fully comply with all applicable federal, state, and local regulatory requirements, and ensure all maps and figures are current. The Contractor shall incorporate technical amendments and provide P.E. certification of only those portions of the

plan that have changed due to the technical amendment. The Contractor shall input the updated SPCC Plan and pdf copy in the DAF WET system in coordination with the installation. This plan will be a living document and should be published such that the MPM will be able to update and maintain it easily. **(CDRL A189, B001)**

1.8.12.1.2.1 FRP Update (Exclude CCSFS, JDMTA, MTA, Satellite Locations and APAFR)

The Contractor shall use the information collected during the SPCC on-site visit to update the Facility Response Plan (FRP) to demonstrate the installation's preparedness to respond to a worst case oil discharge. Not all DAF installations require a FRP. Facilities deemed to pose a risk of "Substantial Harm" to the environment are required to prepare FRPs. Determination of this FRP applicability is made either by the facility itself or by the U.S. EPA Regional Administrator. The Contractor shall review applicable federal, state, and local laws, regulations, and/or programs that pertain to the FRP. The FRP shall reflect the current regulatory requirements and installation's POL activities. The Contractor shall revise the FRP to meet the requirements of 40 CFR 112.20 and 112.21. The Contractor shall provide site diagrams for each site that meet the requirements of 40 CFR Part 112. The Contractor shall update the site diagrams, drainage, and evacuation routes. This plan will be a living document and should be published such that the MPM will be able to update and maintain it easily. A draft FRP shall be submitted for government review and comment, and the Contractor shall incorporate comments and deliver a Final FRP. The Contractor shall prepare revisions required by the U.S. EPA Administrator. The Contractor shall input the updated FRP with a pdf copy in the DAF WET system in coordination with the installation. **(CDRL A190, A191, B001)**

1.8.12.1.3 Integrated Contingency Plan Update (One Plan)

Not Applicable

1.8.12.1.4 Training (Exclude MTA and Satellite Locations)

The Contractor shall provide training as required per 40 CFR 112 for each plan they produce. The Contractor shall develop a training plan and a spill prevention briefing package using Microsoft MS PowerPoint that can be used for instructing personnel in the operation and maintenance of equipment to prevent the discharge of oil, the applicability of pollution control laws, rules and regulations and requirements identified in the appropriate plan. **(CDRL A193, B004)**

1.8.12.2 Contract Operated Services, EC - RC-I - Storage Tank Management (CCSFS, JDMTA, MTA and Satellite Locations)

Services include the environmental compliance oversight of USTs, Aboveground Storage Tanks (ASTs), sumps, grease traps, Oil-Water Separators (OWS), bowzers, all oil containers with a capacity greater than or equal to 55 gallons (including but not limited to fuel, used oil, cooking oil, engine oil and oil containing transformers), cranes, elevators, mobile equipment, associated piping, and other POL related equipment.

The Contractor shall provide oversight and technical assistance to POL and Tank custodians for the proper maintenance and compliance of all POL. The Contractor shall review and assist with the preparation of documents as requested by DAF.

1.8.12.2.1 Storage Tank (Petroleum Oil & Lubricant) Environmental Audits

The Contractor shall conduct AST, UST and POL container environmental compliance audits of all DAF operations, tenants, and other contractors. All audits must occur in person at the facility/site. A summary report, which includes compliance status and complete inventory, shall be provided to the DAF for each of the audits required below. The reports shall be provided within three (3) working days of any audit.

The Contractor shall perform, but is not limited to the following tasks:

- Annual compliance audits of all state registered storage tank systems
- Annual compliance audits of federally regulated POL containers greater than or equal to 55 gallons
- Annual compliance audits of all transformers
- Annual compliance audits of state unregulated storage tank systems
- Coordinate audits with DAF and the tank/storage facility manager(s) prior to the audit date
- Audits shall include but not limited to, review of operational testing (leak detection & overfill protection device); training records; Shop Level MICT environmental checklists; inspection records of the tank with all associated piping and/or storage facility to ensure regulatory compliance; evaluation of APIMS/STAR Direct Condition Rating
- Provide program expertise and participate in regulatory inspections

Deficiencies (e.g. regulatory non-compliance items) identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track, through re-inspection, deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF.

(CDRL A011, A195)

1.8.12.2.2 Contractor Conducted Tank Audits

The Contractor shall conduct annual tank audits for all POL found in the data management system adhering to the system defined Annual POL Inspection Assessment which shall include photographs and completion of Direct Condition Rating. The audit results shall be entered into the data management system within five (5) working days.

Deficiencies (e.g. regulatory non-compliance items) identified during audits shall be documented and provided to the DAF by the end of the next working day. The Contractor shall provide further deficiency details, suggested corrective action(s) and recommended closure procedures within three (3) working days of deficiency finding. The Contractor shall track, through re-inspection, deficiencies in the DAF approved deficiencies database and report status update, corrective action implementation and recommended deficiency closure to the DAF at least monthly or upon request by the DAF. **(CDRL A011)**

1.8.12.3 Fuel/POL: Non-EQ Services – Testing, Inspection, Maintenance and Repair

Not Applicable

1.8.12.3.1 Precision Leak Testing

Not Applicable

1.8.12.3.2 Facility Response Readiness Exercises/Drills

The Contractor shall be responsible for training and participation in Facility Response Readiness Exercises/Drills, which will be required on an annual basis regardless of whether any actual spill response occurs. The Contractor may also be tasked to provide training to DAF Fuel/POL personnel. The Contractor may be required to follow the National Preparedness for Response Exercise Program guidelines. **(CDRL A197)**

1.8.13 TOXIC SUBSTANCES CONTROL ACT (TSCA)

The Contractor shall perform asbestos-related services such as preparing and/or updating Asbestos Management Plans, including updating facility asbestos-containing material (ACM) status for DOW schools.

Optional services not eligible for EQ Program funding may include, but are not limited to;

- updating and maintaining asbestos, lead and PCB information databases, as-built drawings, and management plans.
- identify ACM, LBP and PCBs in facilities and equipment (including sampling and analysis);
- assistance in developing ACM, LBP and PCB abatement plans and conducting post-abatement assessments, and support in updating and maintaining the LBP, lead, and PCB database, if any.

The Contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report. **(CDRL A010)**

1.8.13.1 Asbestos -Non-EQ Services (SLD 45 Installations and Satellite Locations)

The Contractor shall perform asbestos-related services. The Contractor shall comply with the TSCA; Asbestos Hazard Emergency Response Act (AHERA); other applicable federal, state and local laws and regulations; and related DoD and AF directives (including AFI 32-1001). Asbestos-related.

The Contractor shall enter data to update and maintain asbestos records, including data from sampling events and abatement activities. Asbestos data shall be kept in hard-copy format and in current electronic databases (DAF approved database), if available. The Contractor shall enter all data within three (3) working days of receipt.

The Contractor shall assist with the preparation and management of documents as requested by the DAF, to include but not limited to:

- Environmental survey documents, compliance documentation, inventories, and asbestos abatement documents (Risk Assessment Code [RAC] closure, ten (10) day notifications, sample test results, etc.)
- Develop and maintain a document management plan identifying content, location, security, and disposition of environmental program document copies, noting asbestos records currently are kept in perpetuity

(CDRL A201)

1.8.13.1.1 Notice of Demolition or Asbestos Renovation

The Contractor shall ensure the annual Notice of Demolition or Asbestos Renovation, for anticipated abatement projects, is accurately completed by the operations abatement contractor. The Contractor shall ensure that the notifications are provided by the abatement contractor to FDEP no later than the following working day after an emergency renovation operation or ordered demolition. **(CDRL A199)**

1.8.13.1.2 Asbestos Abatement Audits

The Contractor shall perform a compliance audit of all sites undergoing asbestos abatement to ensure work is in compliance with all regulatory requirements and abatement notification requirements. The Contractor shall coordinate audits with the DAF, contract monitor(s), and site manager prior to the audit date. The Contractor shall provide a report of audits and track deficiencies to completion of corrective actions and confirm with follow-up site audits. **(CDRL A011, A200, A204, A205)**

1.8.13.2 Lead-Based Paint and Other Lead-Containing Materials - Non-EQ Services (SLD 45 Installations and Satellite Locations)

The Contractor shall perform services in support of AF Policy and Guidance on Lead-Based Paint (LBP) in Facilities, and applicable laws, regulations, and policies governing LBP and other lead-containing materials. The Contractor shall enter data to update and maintain the Facility and Survey LBP environmental records, including data from sampling events and abatement activities. The Contractor shall review and update environmental records within three (3) working days of receipt. LBP data shall be kept in hard-copy format.

The Contractor shall assist with the preparation and management of documents as requested by the DAF, to include but not limited to:

- Environmental survey documents, compliance documentation, inventories, and LBP management documents (notifications, sample test results, etc.)
- Develop and maintain a document management plan identifying content, location, security, and disposition of environmental program document copies, noting LBP records currently are kept in perpetuity

(CDRL A202)

1.8.13.3 Polychlorinated Biphenyls- Non-EQ Services (SLD 45 Installations and Satellite Locations)

The Contractor shall perform Polychlorinated Biphenyls (PCB) related services. The Contractor shall comply with the Toxic Substances Control Act (TSCA); other applicable federal, state and local laws and regulations; and related DOW and AF directives. Polychlorinated Biphenyls (PCB) related services shall include, but are not limited to, producing reports, surveying equipment and materials, sampling and analyzing oil from electrical components, performing record searches to determine the concentrations (i.e., whether they are regulated levels) of PCBs

that are present, removing and disposing of asbestos and PCB equipment and waste, and documenting safe and compliant removal and disposition of PCBs. **(CDRL A011)**

1.8.13.4 Radon- Non-EQ Services

Not Applicable

1.8.14 PUBLIC NOTIFICATIONS, PUBLIC MEETINGS, PUBLIC HEARINGS, AND PUBLIC OUTREACH EVENTS (CCSFS)

As required by AFPD 90-8, DoDI 4715.17, DAFI 32-7001, and DAFI 90-201, and/or DAF EMS Policy/Guidance documents. The Contractor shall submit to the DAF public notifications for statutory, regulatory, or permitted driven activities. Public Notices are typically permit driven requirements and are needed for permit compliance, new permits, permit modifications and permit renewals. All draft public notifications will be provided to the DAF ten (10) working days prior to regulatory due date. Final public notifications will be delivered to the DAF within five (5) working days following DAF comments for final review.

Services shall include but are not limited to,

- support services such as drafting of press releases/notifications, presentations, and handouts for legally mandated public hearings, public meetings/town halls, and other events for purposes such as EIAP or permit applications/renewals. No items shall be issued without prior permission from the DAF.
- provide general support to the DAF Public Affairs office in preparing publications to be distributed for public outreach events such as Earth Day, P2 Awareness Week, air shows, partnering efforts, and other non-regulatory mandated events or notifications.

The Contractor shall not speak for the government unless prior permission has been given by the CO.

The Contractor shall submit a monthly summary of the activities performed in support of this effort to be included in the Contractor's Progress, Status, and Management Report.
(CDRL A010, A212)

1.8.15 PERMITS AND FEES (P&F)

Not Applicable

1.9 OPERATIONAL REQUIREMENTS

The Contractor shall ensure environmental compliance within all Contractor responsibilities IAW all applicable federal, state, and local environmental regulations, Executive Orders, DoD Instructions, DAF directive and non-directive guidance (e.g. Playbooks), Management Plans, and environmental regulatory permits to maintain environmental compliance at all times. The Contractor shall ensure compliance with all changes to regulatory rules and regulations during the contract period. The Contractor shall coordinate and receive approval from the DAF prior to commencement of any changes or modifications any Contractor controlled environmental process or permitted activity.

1.9.1 Safety/Accident Prevention

The Contractor shall be responsible for protecting the lives and health of employees and other persons on the work site; preventing damage to property, materials, supplies, and equipment; avoiding work interruptions; and complying with OSHA regulations and installation safety office requirements. The Contractor shall perform all operations in a prudent, conscientious, safe and professional manner and conform to the safety requirements contained in the Call Order. The Contractor shall maintain training records on site and have written Health and Safety Plans (HSPs) on site and available for workers and/or regulatory review.

The Contractor shall promptly report and record within one (1) hour by telephone or other direct means to the CO or COR, MPM all available facts relating to each instance of damage to Government property or injury to a person. In the event of an accident/mishap, the Contractor shall take reasonable and prudent action to establish control of the accident/mishap scene, prevent further damage to persons or property, preserve evidence until released by the accident/mishap investigative authority through the CO. If the Government elects to conduct an investigation of the accident/mishap, the Contractor shall cooperate fully and assist Government personnel in the conduct of an investigation until said investigation is completed. The Contractor agrees that his personnel and equipment are subject to safety inspections by Government personnel while on federal property. The Contractor shall provide the CO copies of any OSHA Report(s) regarding a project site, submitted during the duration of this contract. **(CDRLs A001, A002, A003)**

1.9.2 Work Site Maintenance

The Contractor shall maintain their work sites to prevent the spread of contamination, provide for the integrity of any samples obtained, provide for the safety of all individuals in the vicinity of work site areas, and prevent the release of any contamination to the environment. The work sites associated with the execution of the Contractor's roles and responsibilities shall be well marked to prevent inadvertent entry into all work areas. Access to work areas shall be monitored and thoroughly controlled. Standard work zones and access points for controlled operations shall be established and maintained as the site conditions warrant.

The Contractor shall ensure compliance with all federal, state, and local regulations, QA/QC protocols and procedures, and respective Installation's plans for decontaminating tools, equipment, or other materials, as required. The Contractor shall keep work areas free from accumulation of waste and non-essential hazardous materials. The Contractor shall remove non-essential equipment from work sites when not in use. The work sites shall be maintained to present an orderly appearance and to maximize work efficiency. Upon completion of work activities, the Contractor shall remove from the work premises any rubbish, tools, equipment, and materials that are not the property of the Government. The Contractor shall properly dispose of any and all construction debris, investigation derived waste, and other waste(s) associated with the activities covered within this PWS. Upon completing work activities, the Contractor shall leave work areas clean, neat, and orderly.

1.9.3 Minimize Impacts to Existing Operations

The Contractor shall use GPS at locations associated with activities included in the PWS, as required. GPS data will be recorded in a format compatible with the latest SDSFIE per Defense Installations Spatial Data Infrastructure. The MPM and COR shall be consulted to properly position sampling locations, solid waste containers, IAPs, storm water outfalls, etc., with respect to site locations, to minimize the disruption of an Installation's activities, minimize disruption of/impact on natural and cultural resources, and avoid penetrating underground utilities. The Contractor shall coordinate any necessary field survey operations with Installation personnel to attain these objectives. All necessary permits and coordination shall be completed prior to commencement of any activities. Frequent communication and coordination with Installation personnel shall be necessary to accomplish these goals. **(CDRL B001)**

1.9.4 Storage

The Contractor shall be responsible for security and weatherproofing of stored material and equipment. Equipment or materials used in work areas requiring storage on the installation shall be placed at site(s) designated by the MPM. Should temporary storage area be necessary, the Contractor shall remove all temporary fences and structures (used to protect materials and equipment) from the installation at the completion of the work, unless otherwise directed by the Call Order. The Contractor shall clean the storage area of all debris and material and perform repairs, as required, to return the site to its pre-project condition. The Contractor shall be responsible for safeguarding all government property provided for Contractor use. The Contractor shall maintain an inventory of government property, a copy of government property control procedures at the site and dispose of government property as directed by the MPM. All HM shall be handled, stored, labeled, and transferred in accordance with applicable federal, DOT, RCRA, OSHA regulations, and HMMP requirements.

1.9.5 Site Access, General Protection/Security Policy, Procedures

The Contractor shall verify that identification credentials presented by all Contractor and subcontractor employees to obtain security badges, passes, cards, or decals used during the duration of this Contract are current and correct. All sources of identification must comply with the REAL ID Act. At a minimum, verification should be conducted with the Social Security Administration (<http://www.ssa.gov/employer/ssnv.htm>), the Federal Bureau of Investigations Criminal Justice Information Services, Identification & Investigative Services Section (304-625-5590) and the Form I- 9 Employment Eligibility Verification (<http://www.uscis.gov/portal/site/uscis>). The Contractor shall monitor its employees to ensure all information remains current and to ensure all security badges or passes are returned to the MPM upon expiration of the badge, upon completion of the project, or when possession of the badge is no longer authorized (e.g., upon removal of contracted personnel from specific projects).

The Contractor shall obtain Installation specific identification and vehicle passes for Contractor and subcontractor personnel, as appropriate. The Contractor shall maintain a list of approved personnel for each project location and shall monitor access passes for the duration of this Contract. The Contractor shall comply with all applicable regulations to obtain CACs for applicable Prime and subcontract personnel.

The Contractor shall obtain and maintain access to the AF Network and all applicable software and web platforms to conduct the work as specified using the DD FORM 2875 (SAAR) or applicable system.

Air Force Network (AFNET) account is required in order to have CAC-enabled access to eDASH and other AF required systems. The installation environmental element chief will sponsor the Contractor to obtain an AFNET account.

The Contractor shall comply with Installation internet and intranet requirements for network account and access to the network to include signing of Non-Disclosure Agreements (NDA) when requested. The DAF will provide For Official Use Only (FOUO) intranet and internet access for accomplishment of work in support of this PWS.

The Contractor shall provide each employee an Identification (ID) Badge, which includes at a minimum, the Company Name, Employee Name and a color photo of the employee. ID Badges for Key Personnel shall also indicate their job title. ID Badges shall be worn at all times during which the employee is performing work under this contract. Each Contractor employee shall wear the ID Badge in a conspicuous place on the front exterior clothing and above the waist except when safety and health reasons prohibit. All Contractor personnel attending meetings or working in other situations where their Contractor status is not obvious to third parties shall identify themselves as such to avoid creating an impression that they are Government Officials.

1.9.6 Key Control

The Contractor shall establish and implement methods of ensuring that all keys issued to the Contractor by the Government are not lost or misplaced and are not used by unauthorized persons. Keys issued shall not be duplicated. The Contractor shall limit access to locked areas to Contractor's employees only. The Contractor shall develop procedures covering key control that will be included in the Call Order Work Plan. **(CDRL A006)**

The Contractor shall report the occurrences of a lost key to the CO or COR and MPM as soon as known. The Contractor shall be required, upon direction of the CO, to rekey or replace the affected lock(s). However, the Government, at its option, may replace the affected lock(s) or perform the rekeying itself.

1.9.7 Permits

The Contractor shall be responsible for coordinating and obtaining any required permits and/or permit modifications applicable to the performance and completion of the work within this PWS; however, the Contractor shall not be responsible for the permit fees associated with obtaining identified permits. For all permits or permit applications that are required prior to installation and operation of equipment requiring a permit, the Contractor shall assist the MPM in compiling data (e.g., air quality compliance data) into a format that results in the facility's ability to obtain a valid construction and operating permit for the installation of the subject equipment. For equipment and other facilities where no permit is required, such data shall be compiled to assist the MPMs in maintaining compliance for affected equipment that does not require a permit in accordance with applicable state, local and federal regulatory requirements. Such documentation shall be developed consistent with the permitting authority's requirements for issuance of the

permit and shall also be used to support DAF reporting requirements. The Contractor shall coordinate with MPM prior to the submission of all permit requests. The Contractor shall maintain a library of these documents at the Contractor's work site office. The Contractor shall comply with all applicable permit conditions. **(CDRL A004)**

1.9.8 Warranty of Installed Equipment and/or Systems

The Contractor shall identify and document equipment and/or system warranties for users of the equipment or systems in the O&M Manual prior to final inspection.

1.9.9 Policy and Requirement Statements

In carrying out the work assignment(s) issued under this Call Order, the Contractor shall furnish the personnel, services, equipment, tools, materials, vehicles, facilities supervision, and other requirements necessary for, or incidental to the performance of work set forth herein.

It is the policy of the AF to use innovative and sustainable approaches to environmental management and technology to accomplish its mission. Sustainable projects may reduce the burden of compliance for the AF but are intended to not deplete resources, degrade the environmental, nor impact human health. The Contractor shall incorporate P2 and sustainability initiatives into all aspects of each Call Order. The Contractor shall operate in a manner that promotes energy management to include energy efficiency, use of renewable energy, and water conservation. The Contractor shall comply with the installation EMS. The Contractor shall also participate in the installation's EMS Audit Inspection, as required.

The Contractor shall function as an integral team member in support of AFCEC and the DAF mission to include sharing of information with other AFCEC Contractors and in cooperation with communities, regulators, and other Government entities.

Contractor requirements shall include the efficient management of resources, the timely submission of accurate deliverables and identify any developing solutions to impediments that may jeopardize the successful project execution. Technical requirements include, but are not limited to, early involvement in the process to allow for the development of the most cost-effective and technically sound approach or solution. The AFCEC client will rely on the Contractor's expertise in recognizing and addressing problematic issues and successful execution of this Call Order.

1.9.10 Applicable Publications

The Contractor shall perform all work in accordance with applicable federal, state, and local laws and regulations, EOs, DOW and/or DAF policies, and installation requirements and installation-level plans, e.g., installation HWMP, HMMP, AQMP, SWPPP, SWMP, ISWMP, QRP, FRP, SPCC, ICP. Applicable DAF references can be found on: www.e-publishing.af.mil or the equivalent DAF website.

The Contractor shall be immediately capable of and have the expertise to understand and address environmental laws and regulations as they pertain to work performed under the Call Order. It is the Contractor's responsibility to identify and comply with all applicable requirements. In addition, the Contractor shall refer to the current versions of the Defense Federal Acquisition

Regulation Supplement (DFARS) Part 223 *Environment, Energy and Water Efficiency, Renewable Energy Technologies, Occupational Safety, and Drug-Free Workplace*, and DoD *Environmental Field Sampling Handbook*, as necessary.

1.10 MANAGEMENT, PLANNING, AND REPORTING REQUIREMENTS

The Contractor shall plan project activities including the development, implementation, and maintenance of project schedules, events, status of resources, report(s) on the activities and progress toward accomplishing project objectives, and document for Government review and approval the results of the project efforts for this Call Order.

1.10.1 Contractor Personnel Training

The Contractor is responsible for the proper and timely training of Contractor personnel to perform their jobs IAW all applicable legal, regulatory, compliance, this PWS, and installation requirements at Contractor expense. Along with proper training, the Contractor personnel shall have the specific expertise necessary to perform their jobs.

The Contractor shall not allow personnel to perform any activities and/or tasks at the installation without proper and adequate qualifications or job competency training at the Contractor's expense. In the event of any identified non-compliance, the Contractor shall, if requested, provide proof of personnel training or qualification (e.g., individual name, training/qualification type, training/qualification certificate, and date of training/qualification) to perform those activities associated with the identified non-compliance as more fully described in this PWS.

1.10.2 Environmental Awareness Training

The Contractor personnel shall take Environmental Awareness Training per AFI 32-7001, to ensure all are aware of the environmental policy and procedures of the respective Installation's EMSs. All Contractor personnel shall be familiar with the environmental requirements that apply to their daily duties and receive the commensurate level of environmental education and training for those duties.

1.10.3 Plans

Contractor accomplishment of a plan includes necessary coordination with installation stakeholders and applicable regulators as required for review, acceptance, and publication. All plans and similar deliverables shall be submitted in both final published (pdf or similar) and editable electronic formats (such as Microsoft Word, Excel or similar) to facilitate the draft review, commentary and subsequent revisions.

1.10.3.1 Quality Program Plan

The Contractor shall prepare and submit a Quality Program Plan (QPP) which shall include the Work Plan (WP), HSP (as required by 29 CFR 1910.120), and Environmental Sampling and Analysis Plan. The Sampling and Analysis Plan shall include the Quality Assurance Project Plan (QAPP), and the Field Sampling Plan (FSP), which is based on the AFCEC Model FSP. Project Data Quality Objectives (DQOs) shall be fully described as required.

Minimum Quality Assurance and Quality Control (QA/QC) requirements identified by the current version of the DoD Quality Systems Manual (QSM) shall be incorporated in the QAPP. All plans required by the Call Order shall receive signature and/or stamp of properly certified Contractor staff, as required by industry standards and/or relevant laws and regulations, and as required in this Call Order. (CDRLs A002, A003, A005, A006, A007)

All work shall be accomplished using Contractor Quality Assurance and Quality Control (QA/QC) protocols, Contractor Work Plan procedures and Safety Work Plan procedures based upon tasks identified in this PWS.

The Contractor is responsible for the completeness and accuracy of all work performed under this contract and for compliance with all parts of the contract, and with properly identifying the requirements of all state and federal laws, as well as regulations furnished by the installation and as set forth in the security protocols. The DAF requires timely, technically accurate, complete and professional quality work in all duties and required deliverables (including draft documents). The Contractor's Quality Management program shall extend oversight to all work on the prime contract and any hired sub-contractors as well as their performance.

The products submitted by the Contractor shall fully meet the requirements of the DAF and any applicable regulatory agency. The Contractor shall ensure all appropriate contractor technical experts review all applicable deliverables to ensure all regulatory requirements are addressed regardless of who generates the deliverable. QA/QC of all deliverables is the sole responsibility of the Prime Contractor.

The Contractor shall correct all deficiencies identified by the DAF or in its own quality control review, relating to completeness or accuracy of the work, compliance with the requirements of this PWS, laws or regulations.

1.10.3.2 Quality Management Plan

The Contractor shall develop and maintain a quality process to ensure services are performed IAW commonly accepted commercial practices and existing quality control systems. The Contractor shall develop and implement procedures to identify, prevent, and ensure the non-recurrence of defective services. However, the government reserves the right to perform inspections on services provided to the extent deemed necessary to protect the government's interests. The Contractor must control the quality of the services and deliverables provided in support of this task; the Contractor must maintain substantiating evidence that services conform to contract quality requirements and furnish such information to the government if requested. As specified in each Call Order, the Contractor shall organize, document, prepare procedures for, and implement a management-driven system to provide maximum assurance that products and services conform to specified requirements. Products and services submitted in the performance of each Call Order shall be according to the standard set forth by the American National Standard Institute (ANSI) / American Society for Quality (ASQ), if applicable, or Best Commercial Practice, and PWS requirements identified in the specific Call Order. All work accomplished by the Contractor shall be of sufficient quality and level of acceptance by federal,

state, and local regulators or code inspectors. The Contractor shall provide a Quality Management Plan (QMP) detailing the execution of this program. **(CDRL A008)**

The QMP shall include all the Contractor's functions typically defined as quality assurance (QA), including inspection, calibration, identification, and correction of discrepancies and documentation. In addition, the QMP must identify the processes and procedures the Contractor will use to track compliance with the Contractor's HSP, as applicable, and the processes and procedures that will be used to correct violations. During performance of work under the Call Order, the government reserves the right to disapprove the quality service/system detailed in the QMP or portions thereof when it fails to meet contractual requirements. Additionally, the government reserves the right to perform inspections, verifications, and other quality evaluations to ensure the requirements of the PWS are being met through the implementation of the QMP. The government will be using a QASP to ensure the requirements of the PWS are being met.

1.10.4 POST AWARD CONFERENCE/PERIODIC PROGRESS MEETINGS

The Contractor shall attend any post award conference convened by the contracting activity or contract administration office in accordance with Federal Acquisition Regulation Subpart 42.5. The contracting officer, GSA PM, Contracting Officer's Representative (COR), and other Government personnel, as appropriate, may meet periodically with the Contractor to review the Contractor's performance. At these meetings the contracting officer will apprise the Contractor of how the government views the Contractor's performance and the Contractor will apprise the Government of problems, if any, being experienced. Appropriate action shall be taken to resolve outstanding issues. These meetings shall be at no additional cost to the government.

1.10.5 Post-Award Meeting/Teleconference

Within 10 days after the issuance of a Call Order, the Contractor shall attend a post-award meeting/teleconference with the installation POC, AFCEC/CZ COR, CO, and *PM at PSFB and APAFR*. The purpose of the meeting shall be to make introductions; discuss the execution of the tasks, roles and responsibilities, performance objectives, standards; coordinate security requirements; discuss schedules; become familiar with and prioritize the work requirements, information, and/or site-specific data addressed under this Call Order; and provide details regarding the transition of work requirements, as necessary. The Contractor shall prepare and submit minutes, agendas, and/or presentations. **(CDRLs B002, B003, B004)**

1.10.6 Progress Meetings

The Contractor shall attend monthly periodic progress meetings/teleconferences with the installation POC and AFCEC/CZ COR. Meetings shall be made available to the CO and PM via teleconference. The Contractor shall prepare and submit minutes, agendas, and/or presentations. The Contractor shall prepare and submit minutes, agendas, and/or presentations. The meeting agenda shall be provided to the DAF at least five (5) business days prior to meeting date. The Contractor shall submit meeting minutes to the DAF within seven (7) business days of meeting conclusion unless otherwise stated in this PWS **(CDRL B002, B003, B004)**

1.10.6.1 Meeting Attendance during Contract Performance

The Contractor shall attend meetings as required in the performance of this Contract. The Contractor shall prepare and distribute meeting minutes, when required, for meetings coordinated by Contractor, DAF, and tenants or contractors which are held at CCSFS. DAF meetings, as described in this PWS, include but are not limited to the Environmental Safety Occupational Health Council (ESOHC), Cross Functional Team (CFT), Working Groups (WG), Contracting Office Construction Meetings, Work Order Review Board (WORB), local partnering and regulatory agency meetings.

The Contractor content for minutes is specific to relevant environmental related topics/requirements for those meetings held at CCSFS. At no time shall the Contractor commit the DAF to any binding agreements during these meetings. The Contractor shall submit meeting minutes to the DAF within seven (7) business days of meeting conclusion unless otherwise stated in this PWS. **(CDRL B002, B003, B004)**

1.10.7 Presentation Materials

The Contractor shall prepare and present briefing packages at meetings coordinated with the Government to include, but not be limited to, the post-award meeting/teleconference, progress meetings, and regulatory meetings, as specified in the PWS. **(CDRLs B002, B003, B004)**

1.10.8 Contractor's Progress, Status, and Management Report (CPSMR)

The Contractor shall prepare and submit a monthly CPSMR. The CPSMR shall be used by the Government to review and evaluate the overall progress of the project, along with any existing or potential problem areas in the Call Order. The CPSMR shall include a summary of the events that occurred during the reporting period, discussion of performance, identification of problems, proposed solutions, corrective actions taken, and any outstanding performance that is a benefit to the Government. The CPSMR shall also include project schedule status. The report format shall be coordinated with the AFCEC/CZ COR. Cost and personnel schedules (tasks and hours breakdown) information shall be included. **(CDRL B008)**

1.10.9 Work Breakdown Structure

The Contractor shall prepare and submit a Work Breakdown Structure (WBS) for the projects and activities to be performed. The WBS shall be used to prepare quotes, develop/update project schedules, and report cost and schedule status. **(CDRL B005)**

1.10.10 Project Planning Chart

The Contractor shall prepare and submit a PPC for approval. The PPC shall detail the project schedule and status through the use of Gantt Charts, which shall depict percent complete for each task within the Call Order. The project schedule shall be reported using the approved WBS. **(CDRL B006)**

1.10.11 Master Document List

The Contractor shall create and maintain a Master Document List (MDL) that includes all documents, whether the document is a deliverable or not, which are prepared during the course of performance. The DAF shall review and have final approval of the MDL and its format. The MDL and documents associated during the completion of contract tasks shall be maintained in a DAF computer network drive and readily available for viewing and submittal to the government **(CDRL B009)**

1.10.12 Synopsis of Environmental Program

The Contractor shall prepare and submit a Synopsis of Environmental Program document that includes all Permits/Plans, MDL, ODC/OLM, GFE and Contractor Furnished Equipment. This Synopsis of Environmental Program document shall be submitted to the GSA PM annually. **(CDRL B012)**

1.10.13 Environmental Program Data Management

The Contractor shall continually track and trend the status of environmental programs using enterprise data collected by the Contractor or others, recognize and evaluate potential problems, and recommend corrective actions to the DAF regarding other contractors, tenant organizations, and commercial space operations on issues and requirements pertaining to the environmental programs using systems and/or as identified in the PWS. The Contractor shall utilize databases that are only authorized for use over the DAF network, accessible to DAF personnel without cost, and applicable for the information being managed. The DAF shall have capability to access program status information as required with minimal Contractor interaction. The DAF reserves the right to modify the information requirements within each database. DAF databases shall be maintained and updated within three (3) business days of receipt of updated information. The DAF may request Contractor support to submit electronic documents to federal, state, or local government's when access is denied to the DAF due to internal IT security protocols.

The Contractor shall review all submitted environmental documents, annotate deficiencies, recommend corrective actions and track their execution/completion by the responsible organization, tenant, or Contractor, in a timely manner. The Contractor shall not implement any corrective actions that may incur additional cost to this Contract without approval from the COR. The Contractor shall inspect commercial space operations upon specific direction of an authorized DAF representative.

Current DAF enterprise data management systems, other approved data management systems, and information tracked by the Contractor shall include, but not be limited to:

1. Environmental permits and plans; expiration/renewal dates and certifications for all permits and all required permit compliance reports
2. Hazardous Waste/Hazardous Material data using EESOH-MIS
3. PCB manifest log and inventory
4. Commanders Inspection Program checklist MICT

5. Air emissions data using APIMS
6. Storage tank and oil container location inventory using STAR
7. SDWA and CWA data using WET
8. EMS data, including Environmental required training, using eDASH
9. Spills, Inspections, Non-compliance issues, environmental deficiencies & corrective action dates using EASIER
10. Environmental sampling data results using applicable DAF database
11. Compliance Site Inventory using applicable DAF database

1.10.14 Funds and Man-Hour Expenditure Report (FMER)

The Contractor shall implement and maintain a cost accounting system and prepare a FMER to correlate the status of expensed funds and man-hours against the progress of the work completed. The FMER and associated graphics shall detail the current project status and identify funds and man-hours required to complete the assigned tasks. **(CDRL C001)**

1.10.15 Laboratories

1.10.15.1 General

The Contractor shall select a laboratory that complies with applicable DAF, Federal, state, and local standards and requirements including certification and accreditation programs (i.e., DoD ELAP), where applicable. The Contractor shall select a laboratory with analytical capabilities sufficient for the methods specified in installation environmental plans (e.g., QAPP, HWMP, SWPPP, SWMP) and adequate throughput capacity to handle the project's analytical workload during all field activities. A laboratory that provides results via electronic files that are compatible with the USEPA SEDD format is required to facilitate importing sample analytical results into EESOH-MIS.

Where applicable, the Contractor shall use only qualified laboratories that have been audited and approved by the appropriate regulatory agencies in which the Call Order is performed. The Contractor shall conduct audits, administer a performance evaluation sample program, verify and validate data, and perform corrective actions in accordance with the Work Plan, applicable permit(s), or other planning document, as specified in the Call Order. All audit reports and performance evaluation results shall be made available to AFCEC personnel upon request. The Contractor shall create and maintain written and electronic records as specified in this Call Order.

1.10.15.2 Data Quality Objectives

The USEPA has developed the DQO Process as the agency's recommended planning process when environmental data are used to select between two alternatives or derive an estimate of contamination. The DQO Process is used to develop performance and acceptance criteria (or DQOs) that clarify study objectives, define the appropriate type of data, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions. The Contractor shall implement the DQO Process to ensure data of adequate quality are collected to support project decisions. Laboratories may be

subject to on-site AFCEC audits of their QA/QC protocols and procedures (not subject to the expense of the Contractor). All laboratories shall meet DQOs specified in installation sampling and analysis requirements, and all laboratories shall perform QA/QC requirements as specified in the project-specific Sampling and Analysis Plan. **(CDRLs A001, A002, A005)**

1.10.15.3 Analytical Data Recordkeeping

If any SAM is performed, the Contractor shall create and maintain, in one location, written and electronic records sufficient to recreate each sampling, analytical, testing, and monitoring event, as specified, and provide documentation within a Technical Data Package to include, but not be limited to, field data sheets, chain of custody forms, raw data, and data validation IAW the approved QAPP. The Contractor shall maintain records of, and derived from, all activities outlined in the appropriate portion of the Work Plan or other planning document (e.g., QAPP) supporting the generation of these sampling and analysis records. The Contractor shall also retain written calculations using information obtained from SAM, and testing activities, to include all raw data. The Contractor shall be responsible for the accuracy and completeness of all data submitted to EESOH-MIS. The Contractor shall make these records available to the Government upon request. **(CDRL B010)**

Note: The Contractor shall not develop a new IT capability without government approval to include databases, websites and SharePoint. The Contractor shall be responsible for the accuracy and completeness of all data submitted. Field activity for projects with groundwater sampling normally includes recording and reporting field parameters and groundwater levels applicable to the sampling event. Chemistry data should consist of the appropriate Laboratory Quality Control (LABQC) data to include sufficient lab blanks and blank spikes per analytical batch (see WP and QAPP). All data submitted by the Contractor shall correspond exactly with the data recorded in the original laboratory reports and other documents associated with sampling and laboratory tasks. The recordkeeping section of the WP requires that laboratories shall maintain electronic and hardcopy records sufficient to recreate each analytical event conducted pursuant to the PWS.

1.10.15.4 Minimum Performance Standards for Environmental Laboratories

The Contractor shall ensure the Government is notified in writing of any change in laboratory certification or accreditation status within 30 calendar days of the change. This written notification requirement applies, but is not limited to, suspension or revocation of certification or accreditation. For contracts in which the Prime Contractor subcontracts laboratory services, a Contractor QAM and Project Chemist must be designated by the Prime Contractor. **(CDRL A002)**

1.10.16 Tracking/Inventory for Hazardous Substances

The Contractor shall be responsible for handling, managing, storing, transporting and disposing of all HM and HW IAW applicable federal, state, and local laws and regulations, EOs, DoD/DAF policies, and installation requirements. Applicable DAF policy includes, but is not limited to, AFMAN 32-7002 and AFMAN 40-201 *Radioactive Materials (RAM) Management*. The Contractor shall immediately report spills of hazardous or toxic materials to the installation POC, AFCEC/CZ COR, GSA CO, and GSA PM IAW the Health Risks section of the PWS herein. The Contractor shall be responsible for cleanup and cleanup costs due to Contractor-caused spills.

The Contractor shall be responsible for the disposition of Contractor-generated HW and excess HM.

In the event the Contractor purchases or uses a product that requires tracking under the HMMP, the Contractor shall follow installation requirements for tracking HM and comply with AFMAN 32-7002. Additionally, the Contractor shall contact the installation POC to obtain technical assistance in achieving and maintaining compliance with HM issue, use, and disposal requirements. The Contractor shall ensure tracking of all HM in EESOH-MIS. The Contractor shall use installation-established procedures (e.g., Hazmat Tracking Activity, etc.) to accomplish tracking. The Contractor shall maintain copies of SDS for all HM used and stored on-site during performance of the Call Order. The Contractor shall not supply or deliver any HM or chemicals to the installation that are listed on the EPCRA toxic chemical list (see AFMAN 32-7002, Chapter 3; EPA 550-B-10-001, *Consolidated List of Chemicals Subject to the EPCRA, CERCLA, and Section 112(r) of the CAA* [i.e., “List of Lists”]; USEPA Office of Land and Emergency Management (OLEM); and www.epa.gov/emergency-response), without prior written approval from the DAF component official and the GSA CO or DAF COR. Contractors using HM on DAF installations must follow the requirements of Section 2.5.5 of AFMAN 32-7002, Chapter 3. **(CDRL A002)**

1.10.17 Information Technology

The Contractor shall not develop or maintain an IT system or product without prior approval granted through the CE IT governance process. The use of a currently approved system is a requirement for acceptance of all data deliverables. If an approved IT system is unavailable, the Contractor shall communicate the requirement with the MPM and AFCEC/CZ COR who will determine the appropriate procedure for IT acquisition.

1.10.18 Photo Documentation

The Contractor shall prepare photo documentation, as requested by the MPM and AFCEC/CZ COR. Documentation shall include but not limited to photos of sites under investigation, field activities, or sample locations, and must be date/time stamped. The Contractor shall obtain approval from the AFCEC/CZ COR and the installation Public Affairs Office prior to taking photographs on the installation. **(CDRL B011)**

Photography is not allowed on DAF restricted or controlled areas except with written approval from the DAF or as conditionally authorized below. The term “photography” (terrestrial, aerial or aquatic) refers to, but is not limited to, still photography, aerial, remote and remotely activated image and video recording (dash cameras), video acquisition, digital imaging, sketching, modeling, electronic spectrum information gathering, and any other equipment able to store, reproduce in whole or part, any portion a DAF Installation.

The Contractor shall submit requests for photo and video authorization to the DAF through written or email communication and be coordinated through the respective public affairs or communications office, unit commander, or security office representative prior to photography being taken. The Contractor shall submit signed authorizations to the COR for recordkeeping. Any personnel granted permission to take photography on DAF areas are reminded that capturing images of the following without additional explicit written approval is prohibited:

1. Within areas marked “Controlled” or “Restricted”
2. Within the airfield environment, flight line or launch complexes
3. At entry control points
4. Base security measures, including but not limited to fence lines, surveillance equipment and restricted-area badges

The Contractor shall coordinate with the unit responsible for the area to be photographed for determination if an escort will be required to ensure only photographs of approved subjects are taken.

NOTE: If it is determined that photographs of unauthorized areas are taken intentionally, the photographer can be apprehended and turned over to the appropriate authorities for disciplinary action.

Photos proposed for release to the general public or non-base affiliated entities shall be submitted to the appropriate DAF for security and policy review and coordination with the appropriate Public Affairs Office, communications office, unit commander, or security office representative. This includes photos to be posted on any public website and photos to be released with contract proposals.

1.10.18.1 *Conditionally Authorized Photography*

The following forms of image and video recording are conditionally authorized and do not require a camera pass or endorsement letter.

1. DAF civilian employees, Active Duty members, and DAF Contractors conducting official duties may take photography at their individual duty locations for official purposes in compliance with facility requirements
2. Images and video may be taken of launch operations only from designated launch viewing sites, a list of these sites can be provided
3. Images and video may be taken of launch operations only from designated historical locations, a list of these sites can be provided

1.11 ADMINISTRATIVE AND MANAGERIAL REQUIREMENTS

The Contractor shall perform management and planning functions, as well as performance measurement, during the course of this effort, as specified in this Call Order.

1.11.1 Coordination

The Contractor shall be responsible for identifying and complying with all applicable requirements as they pertain to the project requirements. The Contractor shall immediately report any potential or actual conflicts between applicable federal, state, and/or local environmental laws or statutes. The Contractor shall notify the DAF of any new and emerging legal requirements within seven (7) working days of awareness and provide the DAF with an analysis of potential mission impacts. **(CDRL A002)**

The Contractor shall plan project activities including the development, implementation, and maintenance of project schedules, events, resources, report(s) and progress, and document for Government review and approval the results of the project.

1.11.1.1 Coordination with Government Offices

The Contractor is responsible for completing specific tasks as assigned and completing those tasks to the satisfaction of an authorized AF official in a specific AF component group to include, but not be limited to, MPM, AFCEC/CZ COR, AFCEC/CZO ISS Chiefs, and AFCEC/CZO. The Contractor may also be required to interface with other AF staff components on certain tasks to include, but not be limited to, legal and public affairs.

1.11.1.2 Coordination with Other Contractors

The Contractor shall cooperate fully with other Contractors and Government employees. The Contractor shall not commit any act that will interfere with the performance of work by any other Contractor or Government employee. The CO will resolve work schedule conflicts between the Call Order and other contracts. The CO will provide written direction to the Contractor to reschedule work when required.

1.11.2 Regulatory Interface

The Contractor shall assist in the application of general and site-specific regulatory requirements that pertain to assigned AFCEC projects and maintain currency with changing DOW regulations and federal, state, and local statutes and regulations.

The Contractor is not an employee of the Government and shall not represent the Government in an official or unofficial capacity without the express prior written permission from the CO. This notwithstanding, in the event that any regulatory representative approaches the Contractor with a stated intent to inspect the activities of the Contractor without the previous direction of the CO, the Contractor shall respectfully inform the regulatory representative that the inspection must be delayed until the CO is properly notified, and a duly appointed AFCEC/CZ COR is present or other direction is issued by the CO. If this is not possible, due to project constraints, the Contractor shall notify the CO, AFCEC/CZ COR, and installation POC at the earliest possible time following the inspection.

The Contractor support shall include but may not be limited to:

1. Attend and provide necessary coordination and technical support for regulatory inspections of permitted, registered and proposed DAF facilities and activities
2. Perform pre-inspections of all permitted, registered systems that may be inspected prior to scheduled regulatory inspections to identify and coordinate corrective actions of any deficiencies
3. Provide the DAF a summary report, written or provided electronically in a system accessible by the DAF, for all regulatory inspections within 24 hours
4. Attend compliance related regulatory agency meetings, negotiations, and partnering workgroup meetings. The Contractor shall attend periodic scheduled meetings and participate at a level commensurate with other team members. The Contractor shall provide necessary documentation, coordination, all technical support for all meetings

- and Contract requirements
5. Perform fact finding and provide recommendations for spills or releases

1.11.3 Document Preparation

Any document preparation accomplished by the Contractor that has legal consequences to the AF shall be submitted through the CO or the AFCEC/CZ COR for appropriate DAF component approval before submission to any regulatory authority external to the DAF. Documents of legal consequence include, but are not limited to:

- (i) Any document requiring affirmative certification by an DAF official that the contents of the document are true and correct to the best of his or her knowledge, e.g., Resource Conservation and Recovery Act [RCRA] permit applications;
- (ii) Any document that could lead to administrative or criminal sanctions against the DAF if the information is determined to be incorrect, misleading, or inaccurate; or
- (iii) Any document providing information about internal DAF operations being requested by an external agency as part of an investigation or inquiry.

1.11.3.1 Communications and Information

The Contractor shall conform to AFMAN 33-326, Preparing Official Communications, AFH33-337, The Tongue & Quill and applicable DAF communication directives while developing, preparing, conducting and submitting official communications. These may include but are not limited to face-to-face briefings, background papers, meeting minutes and forms.

1.11.3.2 Record Keeping File Management

All documents shall be submitted in electronic format unless specifically requested to be delivered as a hard copy by the DAF. The Contractor shall send deliverables to the appropriate DAF, and in the appropriate media type as indicated in the Contract CDRL (See Attachment B). All electronic submittals shall be in DAF approved formats (i.e., Word, Excel, ArcGIS, AutoCAD, pdf format or current approved format) and in compliance with DAF electronic documentation requirements.

All submittals shall be provided to the DAF as draft (technically and grammatically complete), draft final and final documents. The DAF will review draft documents and provide comments within fourteen (14) business days unless otherwise specified. The Contractor shall be responsible for addressing comments, subsequent submittal comments, and any required comment resolution of comments within seven (7) business days, unless specified otherwise in this PWS. The DAF has thirty (30) days to review draft final documents unless otherwise specified in this PWS or determined by regulation. The DAF reserves the right to reject any deliverable that is either technically or grammatically deficient, upon which time the review period timetable is reset. The DAF has final approval of all deliverables. The Contractor shall only sign and seal regulatory required documents *after* the DAF has accepted the document as final.

The DAF shall determine which deliverables are considered highly significant and discuss with the Contractor any action required to ensure expectations are met by both parties. This shall

include document format and adjusted timetable if required. If a total revision of a deliverable is requested the DAF shall provide the Contractor with enough information and time to complete and may need to provide examples, required data and possibly provide hands-on assistance. Documents, Records and Reports created or provided by others during the performance of this Contract including draft, final and supporting documents/records shall be maintained electronically on the DAF provided Local Area Network (LAN) or into the applicable compliance file.

The DAF shall have unrestricted access to these documents/records. All documents/records are property of the DAF and shall not be released to any other agency or individual without prior approval. Adherence to DAF security protocols for all documents managed by the Contractor shall be filed in appropriate locations when not in use. Long term storage of documentation at an employee workstation is not authorized. The Contractor shall adhere to DAF Operational Security (OPSEC) requirements for document markings and storage.

While the majority of deliverables are to be provided by electronic means, there are instances where hard (paper) copies are warranted or required. All paper materials submitted shall be printed on both sides of 50% or greater post-consumer recycled paper.

The Contractor shall provide a record of all contract-related meetings, conferences, conference calls and discussions between the DAF and the Contractor which were participated in by the Contractor's or sub-contractor's representatives. These records shall be dated and shall identify participating personnel, subjects discussed, and conclusions reached. The Contractor shall forward a copy of the memorandum of the meetings within seven (7) business days of the occurrence to the DAF.

1.11.4 Reporting Noncompliance

The Contractor shall immediately report any noncompliance with applicable federal, state, or local environmental laws, or nonconformance with AFIs/DAFIs as applied through the EMS to the appropriate DAF component official through the CO or AFCEC/CZ COR. **(CDRL A001)**

The Contractor can be held responsible for completing corrective actions and/or liable for payment of fines/penalties that result from an enforcement action issued by a regulator if the noncompliance cited is a direct result of the Contractor's action or the Contractor's failure to take an action required by the contract.

1.11.5 Special Notification

1.11.5.1 Health Risks

The Contractor shall immediately report to the CO, GSA PM, AFCEC/CZ COR, and installation POC using verbal telephone or e-mail notification pursuant to the Call Order, any issues or incidents which may indicate potential imminent risk to contracted, federal, or local personnel; the public at large; or the environment. Following the verbal or e-mail notification, a written notice with supporting documentation, to include photographic documentation whenever appropriate, shall be prepared and delivered within three (3) working days to the CO. Upon request of the CO, GSA PM or the AFCEC/CZ COR, the Contractor shall provide pertinent raw

laboratory data immediately (not to exceed two [2] weeks) via e-mail, and then provide final results and laboratory quality data via standard mail as soon as possible. **(CDRL A001)**

1.11.5.2 Identification and Change of Critical Contractor Personnel

The Contractor shall submit an organizational chart displaying personnel involved in the effort, their organization, their respective labor categories, and their roles and responsibilities. The Contractor shall immediately notify the CO, GSA PM, and AFCEC/CZ COR, in writing or e-mail, of any changes in critical Contractor personnel. The Contractor shall obtain CO and AFCEC/CZ COR approval of any proposed changes in project personnel along with the steps taken/proposed to ensure there are no impacts to the schedule or costs associated with individual tasks. The Contractor shall identify to the CO, GSA PM, and AFCEC/CZ COR all subcontractors to be used under the Call Orders issued pursuant to this PWS, prior to signing any subcontract or initiating any work. The Contractor shall provide subcontractor qualifications to the CO, GSA PM and AFCEC/CZ COR prior to subcontractor utilization. **(CDRL A001)**

1.11.5.3 Unexploded Ordnance

If the potential for Unexploded Ordnance (UXO) exists, the Contractor shall ensure the work site has been cleared, i.e., by certified Government officials, of all UXOs prior to commencement of field activities. In other words, this section does not, in any form or fashion, include requirements to complete actual UXO removal work. This section is strictly to outline the procedures if unintended UXO, its components, or materials are encountered. Thus, if UXOs are discovered during field activities, the Contractor shall halt work immediately and report the discovery to the installation POC and AFCEC/CZ COR via telephone to be followed by written notification to the installation POC, AFCEC/CZ COR, CO, and GSA PM. Additionally, the Contractor shall take action to secure the work site and prevent unauthorized entry. Such action may include, but is not limited to, notification of the installation command post, security police, and fire department. Once work has been halted due to the presence or suspected presence of UXO, further work shall not commence until notified by the CO after clearance is authorized by Explosive Ordnance Disposal (EOD) personnel. **(CDRL A001)**

1.11.5.4 Historical and Archeological Sites

Unless working on a site to identify historical/archeological work, if any whole or fragmented skeletal elements (bones), fossils, or historic or archeological artifacts, resources, features, or sites are discovered during field activities, the Contractor shall halt work immediately and report the discovery to the installation POC and AFCEC/CZ COR via telephone, to be followed within 24 hours by written notification to the CO and GSA PM. Additionally, the Contractor shall take action to secure the work site, prevent unauthorized entry, and avoid any further damage or disruption to the location. Permission to proceed with field activities in the area will be granted by the CO, after coordination with the installation or local/regional AFCEC/CZ Cultural Resources Manager (CRM). The Contractor shall not publicize or disclose the existence of said elements, artifacts, etc., to unauthorized persons or entities without specific written permission from the CO, who will coordinate with the local/regional AFCEC/CZ CRM. **(CDRL A001)**

1.12 Data Rights

The AF has unlimited rights to all documents/material produced under this contract. All documents and materials, to include photographs and source codes of any software, produced under this contract shall be AF owned and are the property of the AF with all rights and privileges of the ownership/copyright belonging exclusively to the AF. These documents and materials cannot be used or sold by the Contractor without written permission from the CO. All materials supplied by the AF shall be the sole property of the AF and cannot be used for any other purpose. This right does not abrogate any other AF rights under the applicable Data Rights clause(s). The Contractor shall ensure that all documents or reports produced by the Contractor are marked as Contractor products or that the Contractor participation is appropriately disclosed.

1.13 Report Documentation

Reports presenting data, analyses, and recommendations shall be prepared in a standard format as provided in a clear and concise manner. The report shall be referenced and footnoted. Appendices shall include backup documentation including search methodology, search history, sources contacted, calculations, and assumptions used to reach conclusions. All site drawings shall be of engineering quality with sufficient detail to show interrelations of major features on the site map (i.e., north arrows, keys, scales, etc.). The report shall consist of 8-1/2" by 11" pages with any drawings folded, if necessary, to this size. If a full size drawing is required it may be folded and placed in an envelope pocket that is included in the binder. A decimal paragraphing system shall be used. The report covers shall be durable binders which hold pages firmly while allowing easy removal, addition, or deletion of pages. A report title page shall identify the report title; Point of Contact (POCs) for the installation, service agency, and AFCEC; and date. The responses and reports will reflect a high degree of professionalism and will be factual and editorially correct.

1.14 Proprietary Information

All materials and data, including photographs, gathered and/or developed in the performance of the tasks listed in this PWS shall be the property of the AF and shall only be used by the Contractor and their Sub-Contractors for the execution of this PWS. Additionally, all documents shall be delivered to the government with unlimited rights and without restrictions. The Contractor is not authorized for any other use or distribution of said material without the specific written permission of the COR. After completion of the project, all materials shall be returned to the respective Installation.

Photography on each Installation is restricted and many areas off-limits. The Contractor shall obtain permission from the MPM prior to taking photographs.

1.15 Geospatial Requirements

All products associated with this contract that provide a map representation of the location of installation features (historical, existing, or planned) including installation maps, site plans, area development plans, walls-out as-built depictions, or other related overhead (plan) views of an installation (partial or entire) must adhere to the following requirements. (NOTE: This requirement does not currently involve walls-in facility floor plans or interior renderings.)

All maps and associated data must comply with the latest version of Spatial Data Standards for Facilities, Infrastructure, and Environment (SDSFIE) available from the SDSFIE web site. The SDSFIE web site address will be provided under separate cover. These data will be organized using the latest version of the SDSFIE standard, Air Force Adaptation, approved by the Installation Geospatial Information & Services (IGI&S) Governance Group (IGG) available from the AFCEC Geo Integration Office (GIO) as the USAF lead for IGI&S capabilities. The SDSFIE standard is the authority for file and feature class identification and definition, attribution and valid domain values. When any geospatial information collected as a result of the contract includes information identified in the Common Installation Picture (CIP) or recognized Mission Data Set (MDS) the Contractor will deliver data consistent with the established requirements for the data and will ensure functionality with the receiving system. Information must be collected at no less than 1:1200 scale for base cantonment areas and 1:4800 scale for larger undeveloped base areas. Spatial data will meet or exceed National Map Accuracy Standards at those scales. Metadata will be provided and will use Federal Geographic Data Committee (FGDC) Content Standards for Digital Geospatial Metadata (CSDGM) for organization.

Geospatial data must be delivered in a geo-referenced Geographic Information (GIS) format (feature-based file structures with one-to-one cardinality between spatial records and attribute records) using Environmental Systems Research Institute's (ESRI) geodatabase format. All attribute data as specifically outlined in the Call Order contract must be included either in the GIS data file or as a separate table with a SDSFIE key variable that may be used to relationally join the separate table with the GIS data file. All geospatial data must be delivered using the projection, coordinate system, and coordinate units stipulated by the AFCEC GIO (e.g, WGS-84, North American Datum 1983 (NAD83) projection, State Plane Coordinate System, feet or metric coordinate units). Further guidance on mapping units, coordinate systems and projections is available from the AFCEC GIO and/or Installation GIO. **(CDRL B001)**

Mapping- or Survey-Grade Global Positioning Systems (GPS) or comparable traditional survey methods will be used to collect geospatial data. The use of mapping- or survey-grade GPS will depend on the precision requirements of the product data. These requirements will be specified later in this PWS for all contract activities where geospatial data are involved. In the case of contracts involving utility construction, location and attribute data will be obtained at the time of excavation. Further information about precision requirements should be obtained from the AFCEC GIO or installation GIO.

Source data and product data remain the property of the US Government. The Contractor may be required to explain and demonstrate the company's process for protecting all geospatial data, including but not limited to geometry, attributes, metadata, topologies, and relational database schemas and operations used in association with this PWS. The Contractor may be required to sign a non-disclosure agreement attesting to the same before source data are released. Further information about security and nondisclosure requirements should be obtained from the AFCEC GIO and/or installation GIO. Some installation map data, source and/or product, may be considered by the government to be "sensitive, but unclassified" or "Critical Unclassified Information (CUI)". The intent of this clause is to prevent intentional or unintentional dissemination of "sensitive, but unclassified" information to include unauthorized access to the

source and product data by any entity wishing to do harm to the USAF or U.S. Government while the data resides on the Contractor's computer network. The Contractor is not authorized to release this information to any third party without the explicit consent of the AFCEC or the involved installation. All source information must be returned to the government POC or destroyed upon completion of the project. Special requirements for handling classified map data, if applicable, will be addressed elsewhere in this PWS. Final deliverable geospatial data must be provided to the AFCEC GIO and installation GIO in an electronic, digital format according to specifications provided above.

1.16 Badging/Escort Support

The Contractor shall escort vendors and other contractors as requested by the DAF, unless an area requires special access. The Contractor shall coordinate temporary badging for vendors, other contractors and sub-contractors without current access with the DAF. Badging of regulatory agencies, vendors and other contractors will be provided by the DAF.

1.17 Facility Management (CCSFS)

The Contractor shall assign facility managers in facilities when the Contractor is the sole majority occupant or the primary function within the facility. The Contractor shall perform the responsibilities IAW the most current DAF facility management guidance.

1.18 Local Environmental Requirements

During the fulfillment of this Contract, the Contractor is responsible for maintaining environmental compliance related to all Contractor duties as applicable to federal, state and local environmental laws and regulations. Specific guidance is provided in the following sections.

1.18.1 Work Clearance

The Contractor shall obtain an approved Work Clearance Request DAF Form 103 (digging permit) for all environmental compliance work which involves excavation including any digging or driving an object (more than 4" deep) into the ground. The Contractor shall complete and submit their DAF Form 103, for processing to the DAF and receive DAF approval five (5) business days prior to initiating any dig work. The Contractor shall submit dig waivers and receive DAF approval for projects having prolonged digging activities that extend more than a week to allow digging during critical periods to expedite work. **(CDRL A034)**

1.18.2 Environmental Impact Analysis Process (CCSFS Only)

The DAF may request the Contractor to submit a completed DAF Form 813 accompanying work requests as a result of work being completed by the Contractor. Alternatives to each action (work request) shall be identified on DAF Form 813. The Contractor shall receive, maintain and comply with final approved Environmental Impact Analysis Process (EIAP) documentation prior to expenditure of funds for the requested action. **(CDRL A034)**

1.18.3 Emergency Operations Support (CCSFS Only)

The Contractor shall respond as needed with technical environmental support when the Emergency Operations Center (EOC) is activated, and environmental expertise is required. The Contractor shall provide this support during, but not limited to, all emergency response exercises and real-world emergencies. The Contractor will provide all requested information directly to the DAF for consideration.

1.19 Records Ownership and Disposition at The End of The Contractor's Need Associated with Government Services

All digital files, final hard-copy products, source data acquired for this project, and related materials, including that furnished by the Government, shall become property of the Government and shall be managed in accordance with DAFI 33-322 Records Management. The Contractor will not issue, distribute, or publish these items without explicit Government permission. The Contractor must provide digital copies via CD ROM or other agreed upon digital media in their native format to the government and will return all prepared materials and Government-furnished documents to the COR before the Government can make final payment. Upon completion of the use of the data supplied pursuant to this agreement, the contractor shall return all information certifying that all such data, any and all copies, reproductions, facsimiles, subsets, etc. have either been returned or destroyed.

The US Government information stored, collected, processed, and used on contractor systems shall be protected in a manner that meets DoD and USAF standards for Controlled Unclassified Information (CUI).

At the conclusion of the period of performance, the contractor will delete/remove all US government information from contractor owned computing systems and devices and provide a certification letter to the CO and COR notifying them the actions are completed to include the data, action taken for removal, and the signature of a company official.

1.20 REQUIRED QUALIFICATIONS

The DAF has the right to restrict the employment under the contract of any Contractor employee, prospective Contractor employee or sub-contractor employee, who is identified as a potential threat to the health, safety, security, general well-being or operational mission of the installation and its population.

The Contractor shall provide on-site qualified staff with expertise, knowledge and experience with environmental programs to include, but not limited to regulatory reporting requirements, data management, data validation, DAF processes and systems, as required to provide ongoing technical oversight and quality assurance for this PWS. Experience shall include, but not limited to expertise in assigned program areas, report creation, recordkeeping, data management, QA/QC of deliverables, data validation, interpretation and analysis of laws, regulations and data required for all deliverables, inspections, reviews, and audits.

Required Professional Qualifications

Labor Category Experience	
Labor Category	Experience Requirements
Program Manager	BS Degree + 8 years' experience minimum or MS Degree + 6 years' experience minimum or PhD + 4 years' experience minimum
Project Manager	BS Degree + 8 years' experience minimum or MS Degree + 6 years' experience minimum or PhD + 4 years' experience minimum
Environmental Scientist/Engineer – Senior*	BS Degree + 8 years' experience minimum or MS Degree + 6 years' experience minimum or PhD + 4 years' experience minimum
Environmental Scientist/Engineer – Mid*	BS Degree + 8 years' experience minimum or MS Degree + 6 years' experience minimum or PhD + 4 years' experience minimum
Environmental Scientist/Engineer – Junior*	BS Degree + 4 years' experience minimum or MS Degree + 2 years' experience minimum or PhD + 0 years' experience minimum
Environmental Technician – Senior**	High School Diploma and relevant certification for work to be performed + 8 years' experience minimum or AAS Degree + 6 years' experience minimum. or BS Degree + 4 years' experience minimum
Environmental Technician – Mid**	High School Diploma and relevant certification for work to be performed +6 years' experience minimum or AAS Degree + 4 years' experience minimum. or BS Degree +2 years' experience minimum
Environmental Technician – Junior**	High School Diploma and relevant certification for work to be performed +6 years' experience minimum or AAS Degree +4 years' experience minimum. or BS Degree +2 years' experience minimum

Labor Category Experience	
Labor Category	Experience Requirements
GIS Analyst, Senior	BS Degree +6 years' experience minimum or MS Degree +4 years' experience minimum
GIS Analyst, Junior	BS Degree +2 years' experience minimum or MS Degree +1 years' experience minimum
Administrative Specialist	High School Diploma +4 years' experience minimum or AAS Degree +1 years' experience minimum

Note:

* This category also refers to other engineers and scientists such as: Chemical, Civil, Mechanical, Electrical, Structural, Fire Protection, and Geotechnical engineers, and Archaeologists, Architects, Biologists, Chemists, Geologists, Hydrogeologists, Ecologists, Toxicologists, Industrial Hygienists, and Hazardous Waste Specialists, etc.

**This category includes technician support such as: HW accumulation site operators, Database support, technical editors, etc.

The Contractor shall obtain necessary licenses, and certifications; give all required notices; maintain all professional training and licensure as required by federal, state, and local laws or regulations, and USAF and DoD instructions to perform the requirements of this PWS. Any document, as related to this PWS, requiring the signature of a Florida licensed Professional Engineer (PE) shall be the responsibility of the Contractor. The Contractor shall maintain records of such requirements and make the documentation available to the Government for review when requested.

1.20.1 Special Qualifications

Note: Identification of Contractor Employees: All contract personnel attending meetings, answering Government telephones, and working in other situations where their Contractor status is not obvious to third parties are required to identify themselves as Contractors. They must also ensure that all documents or reports produced by Contractors are suitably marked as Contractor products or that Contractor participation is appropriately disclosed.

1.20.2 Contract Project Manager

The Contractor shall provide a contract project manager (CPM) who shall be responsible for the performance of the work. The name of this person and an alternate who shall act for the contractor when the manager is absent shall be designated in writing to the contracting officer. The CPM or alternate shall have full authority to act for the contractor on all contract matters relating to daily operation of this contract. The CPM or alternate shall be available between

0730 to 1730, Monday thru Friday except Federal holidays or when the government facility is closed for administrative reasons.

The CPM and alternate shall:

1. Have a combination of relevant education and experience applicable to the tasks in this PWS as described below:
 - a. CPM
 - i. BS Degree + eight (8) years of experience minimum or
 - ii. MS Degree + six (6) years of experience minimum or
 - iii. PhD + four (4) years of experience minimum
 - iv. At least four (4) years of direct program management experience managing a program similar in size and scope to this contract
 - b. Alternate
 - i. BS Degree + five (5) years of experience minimum or
 - ii. MS Degree + three (3) years of experience minimum or
 - iii. PhD + two (2) years of experience minimum
 - iv. At least two (2) years of direct program management experience managing a program similar in size and scope to this contract
2. Be responsible for the technical and administrative performance of this PWS and for routine technical discussions with the GSA and DAF staff
3. Be responsible for the accuracy and completeness of all submittals
4. Serve as the single POC and liaison for all work required
5. Designate Contractor appropriate personnel to participate with and support EMS audits, compliance assessments and regulatory inspections and if necessary, assist with developing corrective actions to address identified issues
6. Be supported by technical specialists from the Contractor's staff, as necessary, to provide guidance to assure accuracy and completeness of all submittals
7. Maintain the necessary security clearance to access GSA and DAF computer systems
8. Maintain all personnel records that are used to gain access to the installations and computer systems regarding Common Access Cards, Defense Biometric Identification Systems pass, and Local Area Network systems
9. Provide the COR and DAF with a 24/7 telephone access number (CCSFS)
10. Be available at all times during normal business hours (CCSFS)
11. Be available within 120 minutes (2 hours), after normal business hours (CCSFS)
12. Provide notification to the COR of any extended absences
13. Be able to read, write, speak, and understand English
14. Meet with the COR at least monthly at a mutually agreeable time/place to discuss inspections, discrepancies, corrective actions taken, and other contract related issues

1.20.3 Media Specific Experience

The Contractor shall provide qualified staff with knowledge and experience with DAF environmental data management requirements, processes and systems, as required to provide ongoing technical oversight and quality assurance for this task. This task includes the

compilation of data into the standard formats using approved protocols and compliance tools prescribed by applicable DAF guidance documents. This includes all recordkeeping, data management and QA/QC of data required. As required, the Contractor shall provide technical support to system users, assist users with the data migration, provide quality assurance review and analysis of environmental data received by the DAF Program Managers (PMs), generate the necessary regulatory compliance reports and make the appropriate data electronically available.

All Contractor personnel fulfilling the below positions shall demonstrate relevant education and work experience throughout the period of performance of this Contract.

The Media Manager and Technical Lead are considered key personnel positions and shall be located on-site.

- Media Manager Level – Ten (10) years of relevant work experience, consistent with the tasks of this PWS, in assigned media areas with bachelor's degree
- Technical Lead – Five (5) years of relevant work experience, consistent with the tasks of this PWS, in assigned media areas or possess a bachelor's degree with a minimum of two (2) years of relevant work experience consistent with the tasks of this PWS, in assigned media areas
- Technician Level – Two (2) years of relevant work experience, consistent with the tasks of this PWS, in assigned media areas or possess an associate's degree

Contractor personnel shall also meet the following additional minimum qualifications at time of award and throughout the Contract (as demonstrated with supporting documentation such as copies of training certificates, letters, licenses, etc.) as required within their specific program area.

1.20.3.1 Hazardous Waste

- Current DOT – 49 CFR 172.704 “HazMat Employee” training requirements meeting the general and function specific training to include initial and three-year refresher training, as applicable
- Current RCRA annual HW Refresher training
- Be capable of obtaining a valid commercial driver's license with the “H” endorsement should the requirement become necessary
- Working knowledge of the HW Management regulations and DOT HM regulations within the state
- OSHA 29 CFR 1910.120, *Hazardous Waste Operations and Emergency Response*

1.20.3.2 Petroleum Oil and Lubricants/Tanks

- All personnel performing Fuel/POL/Tanks compliance work must have all certifications required by federal or state regulations for inspections, sampling or other required activities including STI Tank Integrity Management Certification
- All Contractor personnel working UST compliance requirements must possess Class B Operator certification per 40 CFR 280 (or state equivalent)

1.20.3.3 Sampling, Testing, Analysis and Monitoring

- The Contractor Media Manager shall possess a bachelor's in chemistry
- The Contractor shall be proficient in sampling techniques, analysis and interpretation to ensure valid, accurate and reliable analytical results

SECTION 2 SPECIAL CONTRACT REQUIREMENTS

2.1 Homeland Security Presidential Directive-12 (HSPD-12)

Homeland Security Presidential Directive 12 (HSPD-12) was issued to implement the policy of the United States to enhance security, increase Government efficiency, reduce identity fraud, and protect personal privacy by establishing a mandatory, Government-wide standard for secure and reliable forms of identification issued by the Federal Government to its employees and Contractors (including Contractor employees). Under this directive, the heads of executive departments and agencies are required to implement programs to ensure that identification issued by their departments and agencies to Federal employees and Contractors meets the Standard.

This policy can be found at the following website:

<http://www.whitehouse.gov/news/releases/2004/08/20040827-8.html> .

In performance of services under this task, Contractor shall ensure all its personnel who require physical access to federally controlled facilities and access to federally controlled information systems by 27 October 2007, have been issued identification in compliance with HSPD-12 policy. In their proposals, offeror's shall confirm they will comply with the government client's identification procedure that is implementing HSPD-12 policy.

The Security/Identification point of contact for the client agency that is responsible for implementing their HSPD-12 compliant policy is:

POC Name	Dyran Wright
Office Symbol	AFIMSC/DSH
Address	2261 Hughes Ave., Ste 155
City, State, Zip	JB SA-Lackland, TX 78236
email address	Dyran.wright.2@us.af.mil
Telephone #:	210-395-8822

All costs associated with obtaining necessary clearances shall be borne by the Contractor.

When a Contractor or their Subcontractors are required to have physical access to a Federal controlled facility or access to a Federal information system, the Contractor shall comply with agency personal identity verification procedures in contracts that implement Homeland Security Presidential Directives-12 (HSPD- 12).

2.2 Security

Federal Information Security Management Act (FISMA) of 2002 Compliance:

FISMA compliance is access through annual accreditation and certification as required by Department of Defense Information Assurance Certification and Accreditation Process (DIACAP) governed by Department of Defense Instruction 8510.01, dated November 28, 2007.

Note: This requirement must be met on any procurement, IT, PS, etc., where the contractor will have access to government electronic information.

In order to satisfy this requirement, GSA requires the FISMA point of contact for the client agency that is responsible for maintaining their annual FISMA accreditation and certification:

Provide your agency official for FISMA compliance below:

POC Name	Richard Booth
Office Symbol	HAF AFCEC/CTNS
Address	2261 Hughes Ave, Ste 155
City, State, Zip	JBSA-Lackland, TX 78236
email address	210-395-0733
Telephone Number	richard.booth.3@us.af.mil

2.3 Other Security

All Contractor personnel require a minimum of a National Agency Check with Inquiries (NACI) Tier-1 (SF85) for any position that requires access to the internet, use of automated systems, or unescorted entry into restricted or controlled areas prior to reporting for duty in any Call Order. The investigation is not for a security clearance; it is for a position of trust. This is a mandatory requirement set forth in DoD 5200.1-R and AFI 16-1404, *Air Force Information Security Program*. All documentation required for security certification shall be the responsibility of the Contractor. No foreign nationals shall be employed for any Call Order issued under this contract without prior approval of the Government. All costs associated with obtaining necessary investigations and clearances shall be borne by The Contractor.

The Contractor shall be responsible to ensure all badges, Common Access Cards, Federal facility keys, and issued government property (if applicable) are returned to the installation or COR upon the termination of sponsorship and/or work assignment.

The Contractor shall ensure that all personnel accessing information systems have the proper and

current information assurance certification to perform information assurance functions described in DoD 8570.01-M, Information Assurance Workforce Improvement Program. The Contractor shall meet the applicable information assurance certification requirements and obtain DoD-approved information assurance workforce certifications appropriate for each category and level as listed in the current version of the DoD 8570.01-M Information Assurance Workforce Improvement Program Manual. Certified Contractor personnel performing information assurance functions whose certification lapses shall be denied access to DoD information systems, or have their access downgraded to a level appropriate for a lower certification status. Upon request by the COR, The Contractor shall provide documentation supporting the information assurance certification status of personnel performing information assurance functions.

2.4 Records/Data

All software (databases/code) produced at the request of the client becomes the sole property of the United States Government and shall enter the public domain and is non-proprietary. Subsequent use of this software for commercial purposes by the Contractor or any other entity may occur only after a properly filed Freedom of Information Act (FOIA) request has been approved by the Government. Any such subsequent use shall attribute the origin of the software to the client.

All digital files, final hard-copy products, source data acquired for this project, and related materials, including that furnished by the Government, shall become property of the Government and shall be managed in accordance with DAFI 33-322 Records Management. The Government, for itself and such others as it deems appropriate, will have unlimited rights under this contract to all information and materials developed under this contract and furnished to the Government and documentation thereof, reports and listings, and all other items pertaining to the work and services pursuant to this agreement including any copyright. Unlimited rights under this contract are rights to use, duplicate, or disclose data, and information, in whole or in part in any manner and for any purpose whatsoever without compensation to or approval from the Contractor. The Government will at all reasonable times have the right to inspect the work and will have access to and the right to make copies of the above-mentioned items.

The Contractor will not issue, distribute, or publish these items without explicit Government permission. The Contractor must provide digital copies via CD ROM or other agreed upon digital media in their native format to the government and will return all prepared materials and Government-furnished documents to the COR before the Government can make final payment. Upon completion of the use of the data supplied pursuant to this agreement, the Contractor shall return all information certifying that all such data, any and all copies, reproductions, facsimiles, subsets, etc. have either been returned or destroyed.

The US Government information stored, collected, processed, and used on Contractor systems shall be protected in a manner that meets DoD and USAF standards for Controlled Unclassified Information (CUI).

At the conclusion of the period of performance, the Contractor will delete/remove all US government information from Contractor owned computing systems and devices and provide a

certification letter to the CO and COR notifying them the actions are completed to include the data, action taken for removal, and the signature of a company official.

All deliverables become the sole property of the United States Government. The Government, for itself and such others as it deems appropriate, will have unlimited rights under this contract to all information and materials developed under this contract and furnished to the Government and documentation thereof, reports and listings, and all other items pertaining to the work and services pursuant to this agreement including any copyright. Unlimited rights under this contract are rights to use, duplicate, or disclose data, and information, in whole or in part in any manner and for any purpose whatsoever without compensation to or approval from the Contractor. The Government will at all reasonable times have the right to inspect the work and will have access to and the right to make copies of the above-mentioned items. All digital files and data, and other products generated under this contract, shall become the property of the Government.

Copyright: Any software and computer data/information developed, as a component of this contract shall have the following statement attached to documentation:

“This computer program is a work effort for the United States Government and is not protected by copyright (17 U.S. Code 105). Any person who fraudulently places a copyright notice on, or does any other act contrary to the provisions of 17 U.S. Code 506(c) shall be subject to the penalties provided therein. This notice shall not be altered or removed from this software or digital media, and is to be on all reproductions.”

2.5 Government Property (GFP) and/or Government Furnished Information (GFI)

2.5.1 GFP

GFP is being provided. The contractor shall comply with FAR 52.245-1 and its alternates as appropriate. The GFP is listed in Attachment D. GFP will be provided at the time of award. The Contractor will have thirty (30) working days to validate and verify the accuracy and quality of the items provided with the MPM and provide a signed inventory to the COR.

2.5.2 GFI

There are no additional services, facilities, utilities, equipment or materials being provided by the Government in performance of the requirements of this contract services.

2.5.2.1 Government Furnished Computer Hardware, Software and Other Information Technology Equipment (ITE)

The Government will provide the Contractor with basic equipment and property (e.g., laptops, desktops, monitors (as needed)). The Contractor shall keep an inventory of GFE and/or GFP, which shall be made available to the COR or CO upon request. The Contractor shall manage, maintain, protect and control all GFE/GFP in support of this contract and subsequent task orders in accordance with the clause at FAR 52.245-1. All GFE and/or GFP provided to the

Contractor to perform work under this task order shall be returned to the Government at the end of the period of performance.

2.5.2.2 Desktop Computers and Other ITE

The DAF will furnish and maintain desktop computers and other ITE as identified in the contract. The Contractor shall provide for maintenance of all GFE including the purchasing of supplies for the maintenance (e.g., paper, printer malfunctions repairs, filters, lubricants, ink, etc.). If GFE is determined to have incurred damage due to disregard of manufacturer instructions, misuse, lack of maintenance, or negligent behavior, the Contractor shall be liable for required repairs or replacement. The Contractor shall ensure all ITE on the LAN maintain security updates and regular logins to maintain share space access. New ITE requests will be reviewed at the time of request to determine if ITE replacement is warranted and if funding is available. For ITE still under warranty, the Contractor will coordinate with the manufacturer as necessary for any repairs.

2.5.2.3 Software Management

Not Applicable

2.5.2.4 Computer Security Compliance

IT security planning, implementation, and compliance is the responsibility of the entire Contractor workforce at all DAF areas. The Contractor shall ensure the objectives of Computer Security (COMPUSEC) are met; to protect & maintain confidentiality, integrity, availability, authentication, and non-repudiation of information system resources and information processed throughout the system's life cycle. The Contractor shall report to the DAF any observed suspicious network activity for further investigation or initiate IT security incident response action with-in one hour of detection.

2.6 Invoice Requirement

2.7 Other Direct Costs/ Order Level Materials

2.8 Transition

ATTACHMENT A

Acronyms and Definitions

Some terms used in the listing below are not referenced in the PWS.

ACAM	Air Conformity Applicability Model
ACOR	Alternate Contracting Officer's Representative
AEI	Air Emission Inventory
AF	Air Force
AFCEC	Air Force Civil Engineer Center
AFI	Air Force Instruction
AFMAN	Air Force Manual
AMP	Asset Management Plan
APIMS	Air Program Information Management System
ANSI	American National Standard Institute
API	American Petroleum Institute
ARPA	Archaeological Resources Protection Act
ASQ	American Society for Quality
AST	Above-Ground Storage Tank
ASTM	American Society for Testing and Materials
AUL	Authorized User List
CAA	Clean Air Act
CAC	Common Access Card
CAP	Centralized Accumulation Point
CARB	California Resources Board
CDRL	Contract Data Requirements List
CERCLA Act	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	Code of Federal Regulations
CLINS	Contract Line Items
CO	Contracting Officer
CONUS	Continental United States (excludes Alaska and Hawaii)
COR	Contracting Officer Representative
COTR	Contracting Officer's Technical Representative
COTS	Commercial-Off-the-Shelf
CPARS	Contractor Performance Assessment Reporting System
CPM	Critical Path Method
CPR	Cost Performance Report
CPSMR	Contractor's Progress, Status, and Management Report
CWA	Clean Water Act
DAF	Department of the Air Force
DD250	Department of Defense Form 250 (Receiving Report)
DD254	Department of Defense Contract Security Requirement List
DFARS	Defense Federal Acquisition Regulation Supplement

DIDs	Data Item Description(s)
DMDC	Defense Manpower Data Center
DOD	Department of Defense
DOW	Department of War
DQOs	Data Quality Objectives
ELAP	Environmental Laboratory Accreditation Program
EMS	Environmental Management Systems
EO	Executive Order
EOD	Explosive Ordnance Disposal
EPA	Environmental Protection Agency
EPCRA	Emergency Planning and Community Right to Know Act
ESOHC	Environmental, Safety, and Occupational Health Council
FAR	Federal Acquisition Regulation
FBI	Federal Bureau of Investigation
FGS	Final Governing Standards
FRAQMD	Feather River Air Quality Management District
GIS	Geographic Information System
GPS	Global Positioning System
GFE	Government Furnished Equipment
GFP	Government Furnished Property
GSU	Geographically Separated Unit
HAZMAT	Hazardous Materials
HAZMART	Hazardous Materials Pharmacy
HIPAA	Health Insurance Portability and Accountability Act of 1996
HM	Hazardous Materials
HMA	Hazardous Materials Act
HMBP	Hazardous Materials Business Plan
HMMP	Hazardous Material Management Process
HMTA	Hazardous Materials Transportation Act
HWSF	Hazardous Waste Storage Facility
HTA	Hazmat Tracking Activity
IAW	In accordance with
ICRMP	Integrated Cultural Resources Management Plans
IHMP	Installation Hazardous Material Management Program
IAP	Initial Accumulation Point
ISS	Installation Support Section
LABQC	Laboratory Quality Control
MPM	Media Program Manager
MDL	Master Document List
NAGPRA	Native American Graves Protection and Repatriation Act
NEPA	National Environmental Policy Act
NHPA	National Historic Preservation Act
NPDES	National Pollution Discharge and Elimination System
OCI	Organizational Conflict of Interest
OCONUS	Outside Continental United States (includes Alaska and Hawaii)
ODC	Other Direct Costs

OSHA	Occupational Safety and Health Administration/Act
P2	Pollution Prevention
PCBs	Polychlorinated Biphenyls
POC	Point of Contact
POL	Petroleum, Oil, Lubricants
PPC	Project Planning Chart
PRS	Performance Requirements Summary
PSS	Professional Services Schedules
PWS	Performance Work Statement
QA	Quality Assurance
QAM	Quality Assurance Manager
QA/QC	Quality Assurance and Quality Control
QAP	Quality Assurance Program
QAPP	Quality Assurance Project Plan
QASP	Quality Assurance Surveillance Plan
QC	Quality Control
QCP	Quality Control Program
QMP	Quality Management Plan
QPP	Quality Program Plans
QSM	Quality Systems Manual
RCRA	Resource Conservation and Recovery Act
SAAR	System Authorization Access Request
SAM	Sampling, Analysis, and Monitoring
SDS	Safety Data Sheet
SPCC	Spill Prevention, Control, and Countermeasures
STAR	Storage Tank Accounting and Reporting
SWMP	Stormwater Management Plan
SWPPP	Stormwater Pollution Prevention Plan
TITO	Transition In/Transition Out
TE	Technical Exhibit
TRI	Toxic Release Inventory
TSDF	Treatment, Storage and Disposal Facility
UFP	Uniform Federal Policy
UFP-QAPP	Uniform Federal Policy for Quality Assurance Project Plans
UST	Underground Storage Tank
UXO	Unexploded Ordnance
WET	Water Enterprise Tracking
WBS	Work Breakdown Structure

ATTACHMENT B
CONTRACT DATA REQUIREMENTS LIST (CDRL)

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
		EXHIBIT A				
A001	1.9.1, 1.10.14.2, 1.11.4, 1.11.5.1-4	Notice of Conflicts/ Issues, Reporting Noncompliance, qualifications	As Required	As Required	1E	1E
A002	1.9.1, 1.10.3.1, 1.10.14.2, 1.10.14.4, 1.10.15, 1.11.1	Health Risks/ Critical Issues Notification	Within 3 Business Days	As Required	1E	1E
A003	1.10.3.1	OSHA Reports	Within 1 Hour of Event	As Required	1FE	Telephone, 1EH
A004	1.9.7	Environmental Permits	As Required	As Required	1E	2EH
A005	1.10.3.1, 1.10.14.2	Quality Program Plan (QPP)	30 days after award	One report; annual revisions	1DE, 1FE	1DE, 1FE
A006	1.9.6, 1.10.3.1	Technical and Management Project Activities Work Plan (WP)	30 days after award	One report; annual revisions	1DE, 1FE	1DE, 1FE
A007	1.10.3.1	Quality Assurance Project Plan (QAPP)	30 days after award	One report; annual revisions	1DE, 1FE	1DE, 1FE
A008	1.10.3.2	Quality Management Plan (QMP)	30 days after award	One report; annual revisions	1DE, 1FE	1DE, 1FE
A009	N/A	Real Property Facilities - As-Built Drawings	N/A	N/A	N/A	N/A
A010	1.8.1, 1.8.1.2, 1.8.2, 1.8.3, 1.8.4, 1.8.5, 1.8.7, 1.8.13, 1.8.14	Program Management Activity Summary (All Programs)	within the CPSMR	Monthly	1FE	1FE
A011	1.8.1.1.5, 1.8.1.1.6, 1.8.2.1.2, 1.8.4, 1.8.5.2.1, 1.8.5.2.1.3.1, 1.8.5.2.1.4, 1.8.5.12.1.2, 1.8.5.12.1.3, 1.8.5.13.1,	Audit deficiency tracking and reporting	As required	As required	1DE, 1FE	1DE, 1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
	1.8.5.13.2, 1.8.9.7.3.7, 1.8.9.7.3.8, 1.8.12.2.1, 1.8.12.2.1, 1.8.12.2.2, 1.8.13.1.2, 1.8.13.3					
A012	1.8.1.1	EESOH-MIS database updates	As required	As required	1FE	1FE
A013	1.8.1.1.5, 1.8.1.1.6	Compliance Site Visit Checklist	As Required	As Required	1FE	1FE
A014	1.8.1.1.2, 1.8.1.1.5, 1.8.1.1.6	Compliance Site Visit Report	Within 3 Business Days of Site Visit	As Required	1FE	1FE
A015	1.8.1.1.2	HW Weekly Report	As required	Weekly	1FE	1FE
A016	1.8.1.1.2, 1.8.1.1.4, 1.8.1.1.5, 1.8.1.1.6	HW Inspection Logs/Report	As required	Weekly	1FE	1FE
A017	1.8.1.6	Equipment Testing Report	As required	Monthly	1FE	1FE
A018	1.8.1.1.2	List of Containers that Exceed 45-day Storage	As required	Weekly	1FE	1FE
A019	1.8.1.1.10	HW Profiles	As required	As required	1FE	1FE
A020	1.8.1.1.3	Shipment Documents	Last business day of month	Monthly	1FE	1FE
A021	1.8.1.1.8, 1.8.1.1.10	Exception Report	As required	As required	1FE	1DE, 1FE
A022	1.8.1.1.10	HAZWASTE Report	As required	Quarterly	1FE	1DE, 1FE
A023	1.8.1.1.10	HW training	As required	As required	1DE, 1FE	1DE, 1FE
A024	1.8.1.1.7	Non-Hazardous/Special Waste Report	As required	As required	1FE	1DE, 1FE
A025	1.8.1.5.1	Diverted HW Report	5 Days after end of reporting month	Monthly	1FE	1DE, 1FE
A026	1.8.1.5.5	Waste Minimization Plan, Progress Report and Certification	As required	As required	1FE	1DE, 1FE
A027	1.8.1.5.6	PCB Exception reporting and report	As required	As required	1FE	1DE, 1FE
A028	N/A	Source Reduction Evaluation and Plan Review	N/A	N/A	N/A	N/A
A029	1.8.1.5.4	Biennial Report	Thirty (30) calendar days prior to the due date	Biennial	1FE	1DE, 1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A030	1.8.1.5.1	Hazardous Waste and Other Regulated Waste Recycling Report	15 January, 15 April, 15 July and 15 October	Quarterly	1DE, 1FE	1DE, 1FE
A031	1.8.1.5.2	Waste Characterization/Analysis Summary Report	As required	Semi-annually	1DE, 1FE	1DE, 1FE
A032	1.8.1.5.3	Quarterly Metric Reports	As required	Quarterly	1DE, 1FE	1DE, 1FE
A033	1.8.1.5.7	Annual Munitions Burial Sites Inspection Report	Forty-five (45) calendar days prior to the due date required by the permit	Annually	1DE, 1FE	1DE, 1FE
A034	1.8.1.5.8	Foreign Source Notification	Sixty (60) calendar days prior to shipment	As required	1FE	1DE, 1FE
A035	1.8.1.5.5, 1.8.3.1.1	Other Permit Reports Required by the RCRA permits	Forty-five (45) calendar days prior to the due date required by the permit	As required	1FE	1DE, 1FE
A036	N/A	HW Contingency Plan	N/A	N/A	N/A	N/A
A037	1.8.1.8	Hazardous Waste Management Plan Update	As required	Annually	1DE, 1FE	1DE, 1FE
A038	1.8.1.6, 1.8.3.11	Consent to Purchase (CTP)	As Required	As Required	1DE, 1FE	1DE, 1FE
A039	1.8.1.10	HW Permit Renewal	As Required	As Required	1DE, 1FE	1DE, 1FE
A040	1.8.2.1, 1.8.3.1.1	EESOH-MIS database updates	As Required	As Required	1FE	1FE
A041	1.8.2.1, 1.8.2.1.1	HM training	As Required	As Required	1DE, 1FE	1DE, 1FE
A042	1.8.2.1	SAAR Validation report	As Required	As Required	1FE	1FE
A043	1.8.2.1	EESOH-MIS User Log	As Required	Quarterly	1FE	1FE
A044	1.8.2.1.1	Process Authorization	10 days from receipt of PWQ	As required	1DE, 1FE	1DE, 1FE
A045	1.8.2.1.2	HM Compliance Site Audit reports	As Required	As Required	1DE, 1FE	1DE, 1FE
A046	1.8.2.2.1, 1.8.2.2.2, 1.8.2.2.3	EPCRA Data	As Required	As Required	1FE	1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A047	1.8.2.2	EPCRA Section 313 TRI Inventory Forms	1-May	Annually	1DE, 1FE	1DE, 1FE
A048	1.8.2.2	EPCRA Section 311/312 Tier II Inventory Forms	1-Feb	Annually	1DE, 1FE	1DE, 1FE
A049	1.8.2.2	EPCRA Section 311/312 Tier II Documentation Report	1-Feb	Annually	1DE, 1FE	1DE, 1FE
A050	1.8.2.2, C.3.2.2.2	EPCRA Section 313 TRI Documentation Report	1-May	Annually	1DE, 1FE	1DE, 1FE
A051	1.8.2.2.3	TRI data request memorandum	Second Friday in November	Annually	1DE, 1FE	1DE, 1FE
A052	1.8.3.1	SAM, Waste Characterization Sampling Report	30 days after sampling event	As required	1FE	1FE
A053	1.8.3.1.1	Process Waste Questionnaire and Technical Response Package	ten (10) working days from receipt of an accurately completed PWQ	As required	1DE, 1FE	1DE, 1FE
A054	1.8.3.3	SAM NPDES/ Other Waste Water Sampling Report	As Required	As required	1FE	1FE
A055	1.8.3.4	SAM, Storm Water Sampling Report	As Required	As required	1FE	1FE
A056	1.8.3.6	SAM, Permitted Landfill sampling report	As Required	As Required	1DE, 1FE	1DE, 1FE
A057	1.8.3.7	SAM, RCRA Permitted TSDF sampling report	As Required	As Required	1DE, 1FE	1DE, 1FE
A058	N/A	SAM Toxics Report	N/A	N/A	N/A	N/A
A059	N/A	SAM P2 Report	N/A	N/A	N/A	N/A
A060	N/A	SAM, Leak Detection Report	N/A	N/A	N/A	N/A
A061	N/A	SAM Drinking Water	N/A	N/A	N/A	N/A
A062	N/A	Long-Term Groundwater Sampling Plan Update	N/A	N/A	N/A	N/A
A063	N/A	Long-Term Groundwater Sampling Report	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A064	1.8.3.14.1, 1.8.3.14.2	Misc. SAM & Operational Plan Regulatory Review	As Required	As required	1DE, 1FE	1DE, 1FE
A065	1.8.4.1	Opportunity Assessments	As Required	Annually	1DE, 1FE	1DE, 1FE
A066	1.8.4.2	Comprehensive Stationary AEI	As Required	Triennial	1DE, 1FE	1DE, 1FE
A067	1.8.4.2	PTE Report	As Required	Triennial	1DE, 1FE	1DE, 1FE
A068	N/A	Mobile AEI	N/A	N/A	N/A	N/A
A069	1.8.4.2	AEI Report	60 days prior to regulatory due date	Annually	1DE, 1FE	1DE, 1FE
A070	1.8.4.2	Field Verification Report	Within 30 days after field activities	Annually	1FE	1FE
A071	N/A	Title V Permit Renewal Application Package	N/A	N/A	N/A	N/A
A072	N/A	Synthetic Minor Permit Renewal Application Package	N/A	N/A	N/A	N/A
A073	1.8.4.3	Air General Permit Renewal	60 days prior to regulatory due date	As Required	1DE, 1FE	1DE, 1FE
A074	1.8.4.5	APIMS database updates	As Required	As Required	1FE	1FE
A075	1.8.4.5.1	Data Management and Technical Support	As Required	As Required	1DE, 1FE	1DE, 1FE
A076	1.8.4.5.2	Permit Decomposition and Compliance Audit	As Required	As Required	1DE, 1FE	1DE, 1FE
A077	1.8.4.5.3	Air Quality Awareness and Shop-level Training	As Required	Annually	1DE, 1FE	1DE, 1FE
A078	1.8.4.5.4	Notification Documents	two weeks prior to regulatory due date	As Required	1DE, 1FE	1DE, 1FE
A079	1.8.4.5.4	Deviation Reports	two weeks prior to regulatory due date	As Required	1DE, 1FE	1DE, 1FE
A080	1.8.4.5.5	Prevention of Major Source Determination	As Required	As Required	1DE, 1FE	1DE, 1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A081	1.8.4.5.6	NSR Permit Application Review	60 days prior to regulatory due date	As Required	1DE, 1FE	1DE, 1FE
A082	1.8.4.5.7	NEI Written Analysis/Recommendations	As Required	As Required	1DE, 1FE	1DE, 1FE
A083	1.8.4.5.8	Air Quality EIAP Assessments	As Required	As Required	1DE, 1FE	1DE, 1FE
A084	1.8.4.5.9	Risk Management Evaluation	As Required	As Required	1DE, 1FE	1DE, 1FE
A085	1.8.4.6.1, 1.8.4.6.2	Emission Reports	As Required	As Required	1DE, 1FE	1DE, 1FE
A086	N/A	Air Pollution Emission Notice	N/A	N/A	N/A	N/A
A087	N/A	Refrigerant I/M Report	N/A	N/A	N/A	N/A
A088	N/A	Engine I/M Report	N/A	N/A	N/A	N/A
A089	N/A	Green House Gas Report	N/A	N/A	N/A	N/A
A090	1.8.4.6.1	Semi-Annual/Annual Compliance Verification and Certification Reports	60 days prior to regulatory due date	As Required	1DE, 1FE	1DE, 1FE
A091	1.8.4.5.9	RMP Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A092	N/A	Air Permit Tracking Spreadsheet	N/A	N/A	N/A	N/A
A093	N/A	Fuel Certification Reports 40 CFR 60 Subpart Dc	N/A	N/A	N/A	N/A
A094	N/A	NSR Modeling Assessment	N/A	N/A	N/A	N/A
A095	N/A	AAFES NESHAP 6C Reports	N/A	N/A	N/A	N/A
A096	N/A	Annual AER	N/A	N/A	N/A	N/A
A097	N/A	Air Emergency Episode Plan	N/A	N/A	N/A	N/A
A098	N/A	CAA, Risk Management Plan	N/A	N/A	N/A	N/A
A099	1.8.5.1	NPDES permit application	As Required	As Required	1DE, 1FE	1DE, 1FE
A100	1.8.5.2	MS4 Annual Report	60 days prior to due date	Annually	1DE, 1FE	1DE, 1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A101	1.8.5.2	Discharge Monitoring Report	As Required	Monthly	1DE, 1FE	1DE, 1FE
A102	1.8.5.2	Annual Comprehensive Site Compliance Evaluation	As Required	Annually	1DE, 1FE	1DE, 1FE
A103	1.8.5.2	Illicit Discharge Report	As Required	Annually	1DE, 1FE	1DE, 1FE
A104	1.8.5.2	Whole Effluent Toxicity Report	60 days prior to due date	Annually	1DE, 1FE	1DE, 1FE
A105	1.8.5.2	Non-Compliance Notification Report	As Required	As Required	1DE, 1FE	1DE, 1FE
A106	N/A	Best Management Practice Report	N/A	N/A	N/A	N/A
A107	1.8.5.2.1.1	Meeting Minutes	As Required	As Required	1DE, 1FE	1DE, 1FE
A108	1.8.5.2.1.2	MSGP and MS4 Environmental Compliance Audits	As Required	As Required	1DE, 1FE	1DE, 1FE
A109	1.8.5.2.1.3	Non-NPDES Regulated Permits	As Required	As Required	1DE, 1FE	1DE, 1FE
A110	1.8.5.2.1.3.1	Non-NPDES Regulated Permit Audits	As Required	As Required	1DE, 1FE	1DE, 1FE
A111	1.8.5.2.1.4	ERP Audits	As Required	As Required	1DE, 1FE	1DE, 1FE
A112	1.8.5.7	SWMP Updates	90 days prior to due date	Annually	1DE, 1FE	1DE, 1FE
A113	1.8.5.8	SWPPP Updates	90 days prior to due date	Annually	1DE, 1FE	1DE, 1FE
A114	1.8.5.8	Site Visit Report	Within 10 days after the site visit	As Required	1FE	1FE
A115	1.8.5.8	Storm Water Pollution Prevention Training	As Required	As Required	1DE, 1FE	1DE, 1FE
A116	N/A	Water Sampling/ Monitoring Plan Update	N/A	N/A	N/A	N/A
A117	N/A	Storm Water Survey	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A118	N/A	Industrial Facility Monthly Inspection Report	N/A	N/A	N/A	N/A
A119	N/A	Industrial Stormwater Permit Annual Report	N/A	N/A	N/A	N/A
A120	1.8.5.12.1.1	Wastewater Outage/Malfunction Reporting	As Required	As required	1DFE	1DFE
A121	1.8.5.12.1.2	Wastewater Permitting Review	As Required	As required	1DFE	1DFE
A122	1.8.5.12.1.3	Wastewater Compliance Audits	Semi-Annual	Within ten (10) working days after the end of the audit period	1DFE	1DFE
A123	1.8.5.13	Drinking Water Regulatory Document Review	As Required	As required	1DFE	1DFE
A124	1.8.5.13.1, 3.5.13.2	Drinking Water Compliance Audits	Semi-Annual	Within ten (10) working days after the end of the audit period	1DFE	1DFE
A125	1.8.5.14	Spill Reports	As Required	As required	1FE	1FE
A126	1.8.5.14	Spill Data Management and Technical Support	As Required	As required	1DFE	1DFE
A127	N/A	Curation Assessment Report	N/A	N/A	N/A	N/A
A128	N/A	Artifact Collection catalog	N/A	N/A	N/A	N/A
A129	N/A	Consultation Letters	N/A	N/A	N/A	N/A
A130	N/A	Updated Native American Tribes and Interested Parties Contact List	N/A	N/A	N/A	N/A
A131	N/A	HCPI Forms	N/A	N/A	N/A	N/A
A132	N/A	NAGPRA Plans of Action and Comprehensive Agreements	N/A	N/A	N/A	N/A
A133	N/A	Monitor CR Report	N/A	N/A	N/A	N/A
A134	N/A	Archaeological Site Monitoring Reports	N/A	N/A	N/A	N/A
A135	N/A	NRHP Update Summary Report	N/A	N/A	N/A	N/A
A136	N/A	CR Work Plan	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A137	N/A	Phase I Survey Reports	N/A	N/A	N/A	N/A
A138	N/A	Phase II Survey Reports	N/A	N/A	N/A	N/A
A139	N/A	State Site Form	N/A	N/A	N/A	N/A
A140	N/A	Historic Building Survey Report	N/A	N/A	N/A	N/A
A141	N/A	HABS/HAER Report	N/A	N/A	N/A	N/A
A142	N/A	Cultural Resources Inventory Reports and Forms	N/A	N/A	N/A	N/A
A143	N/A	ICRMP Update	N/A	N/A	N/A	N/A
A144	N/A	Landfill Closure Report	N/A	N/A	N/A	N/A
A145	1.8.7.1.1	Annual Waste Report for the C&D Landfill Report	As Required	Annually	1DE, 1FE	1DE, 1FE
A146	1.8.7.1.2	C&D Landfill Water Quality Technical Report	Submitted once every two and a half (2.5) years	As Required	1DE, 1FE	1DE, 1FE
A147	1.8.7.1.3	C&D Debris Disposal Facility Closure Plan with Report	Submitted once every five (5) years	As Required	1DE, 1FE	1DE, 1FE
A148	1.8.7.1.4	Asbestos Monofill Closure Plan with Report	As Required	Annually	1DE, 1FE	1DE, 1FE
A149	1.8.7.1.5	Class I Landfill Closure Plan with Report	Submitted once every five (5) years	As Required	1DE, 1FE	1DE, 1FE
A150	1.8.7.1.6	Landfill Compliance Audits	Five (5) working days after each quarter	Quarterly	1DE, 1FE	1DE, 1FE
A151	1.8.7.1.7	Landfill Permit Renewal	As Required	Annually	1DE, 1FE	1DE, 1FE
A152	1.8.7.2	ISWMP Update	As Required	Annually	1DE, 1FE	1DE, 1FE
A153	1.8.7.2.1	Commodity Market Analysis & Feasibility Study	As Required	Annually	1DE, 1FE	1DE, 1FE
A154	1.8.7.2.2	QRP Business Plan Update	As Required	Annually	1DE, 1FE	1DE, 1FE
A155	N/A	Pollution Prevention Opportunity Assessment	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A156	N/A	P2 equipment monitoring Report	N/A	N/A	N/A	N/A
A157	N/A	P2 Goal Progress Tracking Database Update	N/A	N/A	N/A	N/A
A158	N/A	Environmental Aspect Inventory Update	N/A	N/A	N/A	N/A
A159	1.8.9.2	EMS Action Plan Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A160	1.8.9.3	eDASH Update	As Required	As Required	1FE	1FE
A161	N/A	EMS training	N/A	N/A	N/A	N/A
A162	N/A	EMS Project Activities Report	N/A	N/A	N/A	N/A
A163	N/A	Risk Aspect Inventory	N/A	N/A	N/A	N/A
A164	N/A	Environmental MDL/MDS	N/A	N/A	N/A	N/A
A165	N/A	EMS Audit Report	N/A	N/A	N/A	N/A
A166	1.8.9.7.2	Changing Legal and Other Requirements	As Required	As Required	1DE, 1FE	1DE, 1FE
A167	1.8.9.7.3.1	Design Reviews, Construction Meetings and Air Force Form Reviews	As Required	As Required	1DE, 1FE	1DE, 1FE
A168	1.8.9.7.3.2	Environmental Baseline Survey (EBS) Reviews	As Required	As Required	1DE, 1FE	1DE, 1FE
A169	1.8.9.7.3.3	Environmental Impact Analysis Reviews	As Required	As Required	1DE, 1FE	1DE, 1FE
A170	1.8.9.7.3.5	Self-Inspections reports	As Required	As Required	1DE, 1FE	1DE, 1FE
A171	1.8.9.7.3.7	Multi-Media Inspections	As Required	As Required	1DE, 1FE	1DE, 1FE
A172	1.8.9.7.3.8	Corrective and Preventive Action Reports	As Required	As Required	1DE, 1FE	1DE, 1FE
A173	N/A	Environmental Baseline Survey Phase I Report	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A174	N/A	Environmental Baseline Survey Phase II Report	N/A	N/A	N/A	N/A
A175	N/A	Environmental Assessments	N/A	N/A	N/A	N/A
A176	N/A	Environmental Impact Statements	N/A	N/A	N/A	N/A
A177	N/A	Findings of No Significant Impact	N/A	N/A	N/A	N/A
A178	N/A	EIS Records of Decision	N/A	N/A	N/A	N/A
A179	N/A	Socioeconomic Impact Analysis Studies	N/A	N/A	N/A	N/A
A180	N/A	NEPA Training	N/A	N/A	N/A	N/A
A181	N/A	Noise and Vibration Studies	N/A	N/A	N/A	N/A
A182	N/A	Weapon System Noise Analysis for Environmental Studies	N/A	N/A	N/A	N/A
A183	N/A	Air Installation Compatible Use Zone Reports	N/A	N/A	N/A	N/A
A184	N/A	Long-Term Operations Plans	N/A	N/A	N/A	N/A
A185	N/A	5-Year Reviews	N/A	N/A	N/A	N/A
A186	N/A	AFCEC Optimization Plan	N/A	N/A	N/A	N/A
A187	1.8.12.1	POL tank inventory update	entered in STAR	As Required	1FE	1FE
A188	1.8.12.1.1	SPCC Plan 5-Year Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A189	1.8.12.1.2	SPCC Plan Annual Update	As Required	Annually	1DE, 1FE	1DE, 1FE
A190	1.8.12.1.2.1	FRP 5-Year Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A191	1.8.12.1.2.1	FRP Annual Update	As Required	Annually	1DE, 1FE	1DE, 1FE
A192	N/A	ICP Plan Update	N/A	N/A	N/A	N/A
A193	1.8.12.1.4	Spill Prevention Training	As Required	As Required	1DE, 1FE	1DE, 1FE
A194	N/A	Monthly POL Tank Inspection	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A195	1.8.12.2.1	Annual POL Tank Inspection audit reports	entered in STAR	Annually	1FE	1FE
A196	N/A	Precision Leak Testing Report	N/A	N/A	N/A	N/A
A197	1.8.12.3.2	Facility Response Readiness Exercises/Drill Training	As Required	Annually	1DE, 1FE	1DE, 1FE
A198	1.8.13	Asbestos Management Plan Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A199	1.8.13.1.1	Asbestos notice of demolition review	As Required	As Required	1DE, 1FE	1DE, 1FE
A200	1.8.13.1.2	Asbestos audit report	As Required	As Required	1DE, 1FE	1DE, 1FE
A201	1.8.13.1	Asbestos Database Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A202	1.8.13.2	LBP and Lead Abatement Plans review	As Required	As Required	1DE, 1FE	1DE, 1FE
A203	N/A	Post-Abatement Assessments	N/A	N/A	N/A	N/A
A204	1.8.13.1.2	LBP and Lead Database Update	As Required	As Required	1DE, 1FE	1DE, 1FE
A205	1.8.13.1.2	PCB Equipment and Materials Survey	As Required	As Required	1DE, 1FE	1DE, 1FE
A206	N/A	Pre-Mitigation radon surveys	N/A	N/A	N/A	N/A
A207	N/A	Radon Sampling and Analysis Report	N/A	N/A	N/A	N/A
A208	N/A	Radon Management Plan	N/A	N/A	N/A	N/A
A209	N/A	Radon Mitigation Plan	N/A	N/A	N/A	N/A
A210	N/A	Post-Mitigation Assessment	N/A	N/A	N/A	N/A
A211	N/A	Toxic Substance Management Plan database update	N/A	N/A	N/A	N/A
A212	1.8.14	Press Releases/Notifications	As Required	As Required	1DE, 1FE	1DE, 1FE
A213	N/A	Public Outreach Presentations and Handouts	N/A	N/A	N/A	N/A

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
A214	N/A	Confirmation of Permit Fee Payment	N/A	N/A	N/A	N/A
		EXHIBIT B				
B001	1.8.4, 1.8.4.2, 1.8.5.1, 1.8.5.7, 1.8.5.8, 1.8.12.1.1, 1.8.12.1.1.1, 1.8.12.1.2, 1.9.3, 1.15	Technical Data Package-Geographic Information System (GIS)	As required	As required	1FE	1FE
B002	1.8.1.1, 1.8.2.1, 1.8.2.1.1, 1.8.7.2.1, 1.8.9.3, C.10.2, 1.10.5, 1.10.6, 1.10.6.1, 1.10.7	Meeting Minutes	2 days following meeting	As required	1FE	1FE
B003	1.8.2.1, 1.8.9.3, C.10.2, 1.10.5, 1.10.6, 1.10.6.1, 1.10.7	Meeting Agenda	7 days prior to meeting	As required	1DE, 1FE	1DE, 1FE
B004	1.8.1.1.3, 1.8.2.1, 1.8.2.1.1, 1.8.4.5.3, 1.8.5.7, 1.8.5.8, 1.8.9.3, 1.8.12.1.4 1.10.5, 1.10.6, 1.10.6.1, 1.10.7	Presentation Materials	7 days prior to meeting	As required	1DE, 1FE	1DE, 1FE
B005	1.10.9	Contract Work Breakdown Structure (WBS)	15 days after award	As required	1FE	1FE
B006	1.10.10	Project Planning Chart (PPC)	15 days after award	As required	1FE	1FE
B007	N/A	Integrated Master Schedule (IMS)	N/A	N/A	N/A	N/A
B008	1.8.1, 1.8.1.1.3, 1.8.1.2, 1.8.1.3, 1.8.2, 1.8.2.1.1,	Contractor's Progress, Status, and Management Report (CPSMR)	30 days after award; 5 calendar days after the	Monthly	1FE	1FE

CDR L	PWS Para	Deliverable Title	Date of Submission	Frequency	Distribution	
					1 = Number of Copies	
					D = Draft Version	
					F = Final Version	
					E = Electronic Copy	
					H = Hard Copy	
					AFCEC	MPM
	1.8.2.1.2, 1.8.2.1.3, 1.8.2.1.4, 1.8.2.3, 1.8.3, 1.8.4, 1.8.5, 1.8.5.3, 1.8.7, 1.8.7.2.1, 1.8.7.3, 1.8.9.2, 1.10.8		end of the reporting period			
B009	1.10.11	Master Document List (MDL)	5 calendar days after the end of the reporting period	Quarterly	1FE	1FE
B010	1.8.3, 1.8.3.1, 1.8.3.3, 1.8.3.4, 1.8.5.1, 1.8.5.8, 1.8.12.1.1, 1.10.14.3	Technical Data Package- ERPIMS	As required	As required	1FE	1FE
B011	1.10.17	Digital Imaging	As required	As required	1FE	1FE
B012	1.10.12	Synopsis of Environmental Program	30 days after the option year award	Annually	To GSA PM	
		EXHIBIT C				
C001	1.10.14	Funds and Man-Hour Expenditure Report	As required	As required	1FE	1FE

NOTES:

1. Copies of deliverables shall be furnished to the appropriate Government personnel. The Contractor shall deliver each report in accordance with the direction in the chart in this attachment.
2. Deliverables are to be transmitted with a cover letter, on the Prime Contractor's letterhead, describing the contents. Concurrently, a copy of the deliverable and the cover letter shall be attached to the task in GSA's Electronic Ordering System (ASSIST). The Contractor must submit their required deliverables/reports as part of this Call Order through ASSIST.

ATTACHMENT C
LIST OF SUPPORTING DOCUMENTS

- HWMP
- RCRA Permit
- Air Permits
- Water Permits
- SWPPP
- SWMP
- SPCC Plan
- ISWMP
- Installation Sampling and Analysis Plan
- TSCA
- AF standardized templates for plans or any other AF specific submittal.

ATTACHMENT D ENVIRONMENTAL REGULATORY PROGRAM DETAILS

This attachment provides additional information to assist with understanding the level of effort required at each installation. The following tables provide current quantities and requirements based on historical knowledge and are provided for proposal purposes to aid with the quantification of the required services. These numbers are subject to change.

Hazardous Waste and Other Regulated Waste Details

Table 1: Hazardous Waste Workload

	PSFB	CCSFS	JDMTA	MTA	Avon
Number of Initial Accumulation Points (IAP)	90-115	50-95	1	0	4
Number of Central Hazardous Waste Accumulation Storage (HWAS) Facilities (90-, 180-, 270-day)	10-15	20-30	1	0	1
Number of Permitted TSDF	2	2	0	0	0
Number of Universal Waste Collection Points	1	1	0	0	1
Number of Used Oil Collection Points	20	15-25	1	0	1
Number of Open Burn/Open Detonation (OB/OD) Permits	0	1	0	0	0
Average number of daily container transfers (IAP to HWAP on-site TSDF)	2-5/day	2-5/day	0	0	1/week
Universal Waste Facility Man Hours Per Month	1-2	32-60	0	0	0
Hazardous Waste Shop Inspections	90-115/qtly	50-95/qtly	1/qtly	0	4/qtly

Table 2: Hazardous & Controlled Waste Management

	PSFB	CCSFS	JDMT A	MT A	Avon	Frequency
Pounds	8K-12 K	25K-40 K	0	0	0	Annually
External Manifests & LDR's	20-30	20-30	0	0	0	Annually
Offsite Shipments from Permitted Facilities	4-10	4-10	0	0	0	Annually
Offsite Shipments from Mainland Annexes	0	0	1-2	0	0	Annually

	PSFB	CCSFS	JDMT A	MT A	Avon	Frequen cy
Offsite Shipments data management from downrange (OCONUS)	N/A	1-2	0	0	0	Annually
Waste Streams Characterized	100-300	100-300	2-10	1-3	5-8	Annually

Table 3: Industrial Recycling Processes

	Required				
Process	PSFB	CCSF S	JDMT A	MT A	Avon
Aerosol Can Puncturing	No	No	No	No	No
HHM (Household Material) Collection and Distribution	No	No	No	No	No
Used Oil Recovery	Yes	Yes	No	No	Yes
Oil Filter Recycling	Yes	Yes	No	No	Yes
Absorbents Recycling	No	No	No	No	No
Anti-freeze Recycling	No	Yes	No	No	Yes
Solvent Distillation	No	No	No	No	No
Tank Water Bottoms	No	No	No	No	No
Drum Washing/Crushing	No	No	No	No	No
Waste Characterization	Yes	Yes	Yes	Yes	Yes
Rag Laundering	Yes	Yes	No	No	No
JP-8 (Clarus Titan) Recycler Unit	No	No	No	No	No
Floor Scrubber Water Evaporator	No	No	No	No	No
Industrial Wastewater/Trident "OWS"	No	Yes	No	No	No
Diesel Recycling for Burn Program (storage only)	No	No	No	No	Yes

Hazardous Materials Management Program Details

Table 4: IHMP Workload

Tasks	SLD 45	Avon	Frequency
SAARS (Revalidate/maintain)	300-400	1-5	Annually
Reactivate Locked EESOH-MIS Accounts	7-15	2-3	Monthly
EESOH-MIS Material / Process Authorizations	60-80	5-10	Monthly
Load/Maintain EESOH-MIS data for Transient Contractor shop accounts	10-20	5-10	Monthly
Add Shops in EESOH-MIS	3-8	1-3	Annually
Run EESOH-MIS Reports	25-35	1-10	Annually
Prepare/Update Training Materials (EESOH-MIS, HAZMAT and HAZMAT GPC)	1-3	1-3	Due 15 Jan Annually
Lead and Record HMMP Meetings (CCSFS)	1	1	Quarterly
Support HMMP Meetings (APAFR and PSFB)			
Shop HAZMAT Inspections	160-200	10-20	Annually

Table 5: EPCRA Memo Workload

Tasks	SLD 45 Qty	Avon Qty
EPCRA TRI Data Memo	1	1

Air Quality Program Details

Table 6: Air Quality Workload

● Attainment Status - In Attainment ● Criteria Pollutants – Minor Source ● Hazardous Air Pollutants – Area HAP Source				
		Approximate Number of Sources		
Stationary Source Category	APIMS Source Code	CCSFS	JDMTA	APAFR
Abrasive Cleaning	ABCL	1	0	0
Storage Tanks, Registered	AST, UST	35	1	3
Storage Tanks, Non-registered	AST, UST	73	2	12
Aircraft Engine Testing	JET	0	0	0
External Combustion	ECOM	5	0	0
Fire Fighter Training	FIRE	1	0	1
Fuel Dispensing & Transfer	FDSP	2	1	1
Fuel Dispensing & Transfer	FLD	10	1	5
Landfills	LAND	2	0	0
General Chemical Use	CHEM, DEGR	8	1	1
Munitions Open Burning/Open Detonation	OBOD	86	0	0
Pesticide Application	PEST	1	1	1
Small Arms Firing	MUN	0	0	75
Stationary Internal Combustion Engines	ICOM	55	2	14
Surface Coating	SURF	1	0	1
Welding	WELD	1	0	1
Wet Cooling Towers	COOL	15	2	0
Woodworking	WOOD	2	0	0
Refrigerant Equipment	COOL	200	15	0
Tank Usage Log	Consumption	10	1	3

Table 7: Air Quality Management Workload

Tasks	CCSFS	JDMTA	APAFR	FREQUENCY
Comprehensive Stationary AEI with APIMS Update and Report ^{1,2}	1	1	1	Annually

Tasks	CCSFS	JDMTA	APAFR	FREQUENCY
PTE Report ¹	1	1	1	Annually
Refrigerant Inventory ¹	1	1	0	Annually
Installation Air Compliance Source Requirement (ACSR) ¹	1	1	0	Annually
Air Quality Shop Audits	100-130	3-5	0	Semi-Annually
Title V Synthetic Minor Annual Operating Report	0-1	0	0	Annually
Title V Synthetic Minor Semi-Annual Air Operating Compliance Report	0-1	0	0	Semi-Annually
Air Quality Monthly Review and Report	1	0	0	Monthly
Continuous Parameter Monitoring System Analysis and Report	1	0	0	Monthly
Continuous Parameter Monitoring System Regulatory Report	1	0	0	Semi-Annual

¹ = Total Emission Sources are referenced in the Summary of Air Quality Management Requirements Table 10 Above

² = Include GHG AEI from APIMS

Table 8: Air Quality Management

Tasks	PSFB	CCSFS	JDMTA	APAFR	FREQUENCY
Permit Decomposition and Compliance Assessments	0	3	1	0	Monthly
Air Quality Regulations, Guidance and Policy Review	1	1	1	0	Annually
Exemption Analysis	0-3	1-10	0-1	0	Annually
New Source Review	1	7-15	0	0	Annually
Net Emission Increase Assessment	0-5	1-10	0-1	0	Annually
Prevention of Major Source Determination	0-1	0-10	0-1	0	Annually
Risk Management Evaluation	0-1	0-4	0-1	0	Annually
ACAM	0-25	0-50	0-5	0	Annually
Notification, Deviation, Malfunction and Emergency Reporting	0	0-2	0	0	Annually

¹ = Total Emission Sources are referenced in the Summary of Air Quality Management Requirements Table 10 Above

² = Include GHG AEI from APIMS

Sampling, Testing, Analysis and Monitoring Program Details

Table 9: Waste Characterization Workload

TASKS	SLD 45	APAFR
Average annual count of unknown samples	24	5
Average annual count of new waste streams requiring sampling for characterization	115	2
Average annual count of resampling existing waste streams	60	2

Table 10: Sampling for Waste Characterization Workload

Type	Analysis	Pollutant	CCSFS/JDM TA	PSFB/MT A	APAF R
Liquid/Sol id	TCLP 8 Metals	RCRA 8 – Liquids/Solids	12-16/Yr	38-42/Yr	1-2/Yr
Liquid/Sol id	TCLP Metals	RCRA Metals – Liquids/Solids	12-16/Yr	12-14/Yr	1-2/Yr
Liquid/Sol id	TCLP SVOCs	Ignitable Liquids/Solids	14-18/Yr	12-14/Yr	1-2/Yr
Liquid/Sol id	TCLP VOCs	Ignitable Liquids/Solids	14-18/Yr	12-14/Yr	1-2/Yr
Liquid/Sol id	Corrosivity	Liquids/Solids	5-7/Yr	5-7/Yr	1-2/Yr
Liquid/Sol id	Reactivity	Liquids/Solids	5-7/Yr	5-7/Yr	1-2/Yr
Liquid/Sol id	Herbicides	Liquids/Solids	3-5/Yr	3-5/Yr	1-2/Yr
Liquid/Sol id	Pesticides	Liquids/Solids	3-5/Yr	3-5/Yr	1-2/Yr
Liquid/Sol id	Metals/Inorgan ics	Liquids/Solids	22-24/Yr	10-14/Yr	1-2/Yr
Liquid/Sol id	PCBs	Liquids/Solids	5-7/Yr	5-7/Yr	0/Yr
Liquid/Sol id	Energy recovery (metals, halogens, flash point, PCBs)	USED Oil*/ Used Fuels/ POLs/Liquids	10-15/Yr	10-15/Yr	1-2/Yr

Type	Analysis	Pollutant	CCSFS/JDM TA	PSFB/MT A	APAF R
Liquid/Sol id	TCLP 8 Metals	RCRA 8 – Liquids/Solids	12-16/Yr	38-42/Yr	1-2/Yr
Liquid/Sol id	Flash points	Ignitable Liquids/Solids	10-15/Yr	10-15/Yr	1-2/Yr
Liquid/Sol id	BTEX	Fuel/ POL products - Liquids	10-15/Yr	10-15/Yr	1-2/Yr
Liquid/Sol id	Energy recovery (metals, halogens, flash point, PCBs)	POL/Fuel Spill Absorbents/Material - Solids	10-15/Yr	10-15/Yr	1-2/Yr
Liquid/Sol id	BTEX	Oily Absorbents/POL Spill Materials	10-15/Yr	10-15/Yr	1-2/Yr
Liquid/Sol id	FL-PRO	Liquids/Solids	8-10/Yr	8-10/Yr	1-2/Yr
Liquid/Sol id	pH	N/A	3-5/Yr	16-18/Yr	1-2/Yr
Liquid/Sol id	Specific Gravity	N/A	8-10/Yr	12-14/Yr	1-2/Yr
Liquid/Sol id	Total cyanide	Inorganic Liquids	2-4/Yr	2-4/Yr	1-2/Yr
Liquid/Sol id	Phenols	Inorganic Liquids	2-4/Yr	2-4/Yr	1-2/Yr
Liquid/Sol id	Total Alkalinity	Inorganic Liquids	2-4/Yr	2-4/Yr	1-2/Yr
Liquid/Sol id	Nitrates/Nitrite s	Inorganic Liquids	2-4/Yr	2-4/Yr	1-2/Yr
Liquid/Sol id	Total Metals (Cr, Pb)	Liquids	2-4/Yr	2-4/Yr	1-2/Yr
Liquid/Sol id	Asbestos	Solids	2/Yr	4-6/Yr	1-2/Yr
Liquid/Sol id	Total Mercury/TCLP Mercury	Inorganic Liquids	2-4/Yr	2-4/Yr	1-2/Yr

Wastewater and Stormwater Program Details

Table 11: Stormwater Management Workload

TASKS	PSFB	CCSFS	MTA	JDMTA	APAF R	Frequency
MSGP facility site inspections	0	1	0	0	5	Annually
MSGP facility site inspections	0	0	0	0	5	Quarterly
Discharge Monitoring Reports	Per Permit	Per Permit	0	0	Per Permit	
MSGP facility site inspections	0	3	0	0	5	Monthly
MSGP Stormwater Outfall Visual Monitoring	0	4	0	0	3	Quarterly
MSGP Industrial Stormwater Outfall inspections	0	16	0	0	3	Quarterly
ERP Application Evaluation/Determination/Comments	0	15-20	0	0	0	Annually
ERP As-Built Certifications	0	15-20	0	0	0	Annually
ERP Audits	0	85-90	0	0	0	Annually
Complete SJRWMD Inspection Form EN-47	0	85-90	0	0	0	Annually
Complete Work Task/AF Form 332 to submit ERP Inspection Findings	0	85-90	0	0	0	Annually
SJRWMD ERP Project Evaluation/Determination/Application/Review Comment/Coordinate	0	10-15	0	0	0	Annually
USACE Individual or Nationwide Permit Evaluation/Determination/Application/Review Comment/Coordinate	0	5-7	0	0	0	Annually
Phase II MS4 Annual Report	1	0	0	0	0	Annually
Public Education and Outreach BMPs: Publish Article	0	0	0	0	0	Annually
Public Education and Outreach BMPs: Training documentation	0	0	0	0	0	Monthly
Public Involvement/Participation BMPs: SWPPT meetings	0	1	0	0	0	Quarterly
Public Involvement/Participation BMPs: Community Outreach event	0	0	0	0	0	Annually
IDDE BMPs: Maintain inventory of base storm sewer system	0	0	0	0	0	Monthly
IDDE BMPs: Conduct dry weather screening of 35 MS4 outfalls (This is in addition to the quarterly MSGP outfall inspections; Includes ALL outfalls that reach Banana River, not just MSGP permitted).	0	0	0	0	0	Annually
IDDE BMPs: Update IDDE SOP in SWMP (Should be done during annual SWMP update)	1	0	0	0	0	Annually
Construction Site Stormwater Runoff Control BMPs: NPDES CGP Inspections (3 per CGP project, start, middle, end)	0	0	0	0	0	Annually

Table 12: Wastewater Management Workload

TASKS	PSFB	CCSFS	MTA	JDMT A	APAF R	Frequency
RWWTF Effluent Sludge Dry Sampling	0	1	0	0	0	Quarterly
RWWTF Groundwater Well Monitoring	0	10	0	0	0	Monthly
RWWTF Reclaimed Water Reporting	0	1	0	0	0	Annually
RWWTF Outage/Malfunction Reporting	0	5-10	0	0	0	Annually
Discharge Monitoring Report	0	Per Permit	0	0	0	
Operations Compliance Inspection	0	1	0	0	0	Semi-annual ly
WW Construction Permits/Inspections/Certifications	0	4-6	0	0	0	Annually

Drinking Water

Table 13: Drinking Water Management Workload

TASKS	PSFB Qty	CCSFS Qty	Frequency
DW System Environmental Compliance Audit	0	2	Annually
DW Construction Permit Audits	0	6-10	Annually

Note: Historical Documents are searchable using FDEP [NEXUS Website](#). Search criteria should use Facility ID, as listed in **Section** Error! Reference source not found., Table 29: Inventory of Permit and Certification in the Facility-Site ID field.

Solid Waste

Table 14: Integrated Solid Waste Audit Workload

TASKS	CCSFS	Frequency
Landfill Inspections	1	Quarterly

Environmental Management System Support

Table 15: Environmental Management System Workload

TASKS	PSFB/MTA	CCSFS/JDMTA	APAFR	Frequency
ESOH Meetings	2	0	0	Annually
Cross Functional Team Meetings	1	0	0	Quarterly
IHMP Team Meetings	1	0	0	Quarterly
Water Quality Working Group Meeting	1	1	0	Quarterly
Stormwater Pollution Prevention Team Meeting	0	1	0	Quarterly

TASKS	PSFB/MTA	CCSFS/JDMTA	APAFR	Frequency
Drinking Water Working Group Meeting	0	0	0	Quarterly
Emergency Response (Exercise & Real World)	5-8	5-8	0	Annually
Contractor Provided Training Hazardous Waste	10-15 Events	10-15 Events	0	Annually
Contractor Provided Training Hazardous Materials	10-15 Events	10-15 Events	0	Annually
Contractor Provided Training Air Quality	10-15 Events	10-15 Events	0	Annually
Contractor Provided Training Water Quality	10-15 Events	10-15 Events	0	Annually
Contractor Provided Training Storage Tank	0	10-15 Events	0	Annually
Recordkeeping, Document & Records Management eDASH updates (Includes MTA & JDMTA)	1	20-45	0	Monthly
Data Call Reporting Support (All Program Areas)	1	1	1	Annually
Project Design Reviews, 30%, 60%, 90% (All Program Areas)	0	90-120	5	Annually
Project Meetings (pre, pre-final and post construction meetings)	0	40-70	5	Annually
EAs/FONSI Reviews (All Program Areas)	0	3-8	1	Annually
EIS/ROD (All Program Areas)	0	1-2	1	Annually
NOIs (All Program Areas)	0	1-2	1	Annually
AF Form 103 (All Program Areas)	0	400-600	10	Annually
AF Form 332 (All Program Areas)	0	600-800	10	Annually
AF Form 813 (All Program Areas)	0	80-100	10	Annually
EBS/EBS Waivers (All Program Areas)	0	5-15	1	Annually
EBS Information Requests (All Program Areas)	0	5-15	1	Annually
Internal & External EMS & UEI Inspections	1	1	1	Annually (Internal) Tri-Annually (External)
Multi-Media Inspections (SLD 45) (All Program Areas)	0	40-50	0	Annually

Storage Tank Management

Table 16: Storage Tank/POL Workload

Tasks	PSF B	CCSF S	MT A	JDMT A	APAF R	Frequency
Storage Tank Registrations	0	1-5	0	0	0	As Required
Storage Tank Inspections (Registered)	0	30-40	1	1	0	Annual
Storage Tank Inspections (Unregistered)	0	60-100	2	1	0	Annual
POL Containers (>= 55 gallons) Inspections	0	100-200	10-25	1-3	0	Quarterly
Transformer Inspections	0	400-450	10-25	10-25	0	Annual
Oil Containers (Mobile and including Used Cooking Oil)	0	10-20	1-2	1-2	0	Annual
Oil Filled Operational Equipment (Elevators, Engine Crank Cases, and Dielectric oil tanks at radars)	0	10-20	1-2	1-2	0	Annual

Permits and Public Notice

Table 17: Inventory of Permit and Certifications

Permit Name	Program	Installation	Permit Length (Years)	Facility Site ID	Contract Year Due	Permit Expiration Date
Recovered Materials Certification	Recycling	Patrick	1	105654	All Years	June 30 th of Each Year
Cape Canaveral SFS - SW WACS I.D.: 16451, Consolidated (C&D Debris Disposal Facility, No. 0026050-014-SO; Asbestos Monofill, No. 0026050-015-SO; Closed Class I Landfill, No. 0026050-016-SF) Permit	Solid Waste	Cape Canaveral	10	16451	Base Year	12/9/2026
Cape Canaveral SFS Operation of a Hazardous Waste Storage Facility, Thermal Treatment Unit and Continuation of Site Wide Corrective Action Permit 0070725-HO-006	Hazardous Waste	Cape Canaveral	5	FL2800016121	Option Year 3	3/3/2030
Patrick SFB Operating Permit, 0070733-006-HO	Hazardous Waste	Patrick	5	FL2570024404	Base Year	6/3/2027

Permit Name	Program	Installation	Permit Length (Years)	Facility Site ID	Contract Year Due	Permit Expiration Date
Cape Canaveral SFS – Domestic Wastewater Permit FL0102920-014-DWIP	NPDES Wastewater	Cape Canaveral	5	FL0102920	Option Year 3	5/29/2030
Patrick SFB NPDES MSGP FLR05A948-006	NPDES Stormwater	Patrick	5	FLR05A948	Option Year 4	9/30/2030
Cape Canaveral SFS NPDES MSGP FLR05A947-004	NPDES Stormwater	Cape Canaveral	5	FLR05A947	Option Year 4	5/10/2026
Avon Park Air Force Range, Industrial Stormwater, FLR05F328-004	NPDES Stormwater	Avon Park	5	FLR05F328	Base Year	7/10/2026
NEX – Facility ID: FLRNEF674-002 – Hazardous Waste Storage Facility Building #10993	NPDES Stormwater	Patrick	5	FLRNEF674	Option Year 3	6/26/2030
NEX – Facility ID: FLRNEE740-004 – Hazardous Waste Storage Facility Building #947	NPDES Stormwater	Patrick	5	FLRNEE740	Option Year 2	11/10/2028
NEX – Facility ID: FLRNEE741-004 – Hazardous Waste Storage Facility Building #44205	NPDES Stormwater	Cape Canaveral	5	FLRNEE741	Option Year 2	11/10/2028
NEX – Facility ID: FLRNEF390-002 – Aircraft Maintenance Hangar BLDG 44	NPDES Stormwater	Avon Park	5	FLRNEF390	Option Year 4	6/16/2026
NEX – Facility ID: FLRNEF391-002 – Hazardous Waste Storage Area BLDG 27	NPDES Stormwater	Avon Park	5	FLRNEF391	Option Year 4	6/16/2026
Air General Permit – 0090005-019-AG	Air Quality	Cape Canaveral	5	AIR_0090005	Base Year	06/1/2027
Patrick SFB NPDES MS4 FLR04E074 Cycle 3	NPDES Stormwater	Patrick	5	FLR04E074	Option Year 3	EST 01/01/2026


Note: Permits are searchable using FDEP [NEXUS Website](#). Search criteria should use the Facility Site ID.

Toxic Substances Control Act

Table 18: Toxic Substances Control Act Workload

TASK	PSFB	CCSFS	JDMTA	MTA	APAFR	Frequency
Asbestos Database Entry	1-3	3-5	1-3	0	0	Monthly
Asbestos Inspections	1-3	1-3	1-3	0	0	Annually
Notifications, Report	1-3	1-3	1-3	0	0	Annually
Notifications, Renovation and Demolition	1-3	1-3	1-3	0	0	Annually
Lead Base Paint Database Entry	1-3	3-5	1-3	0	0	Monthly

LOCATION MAPS

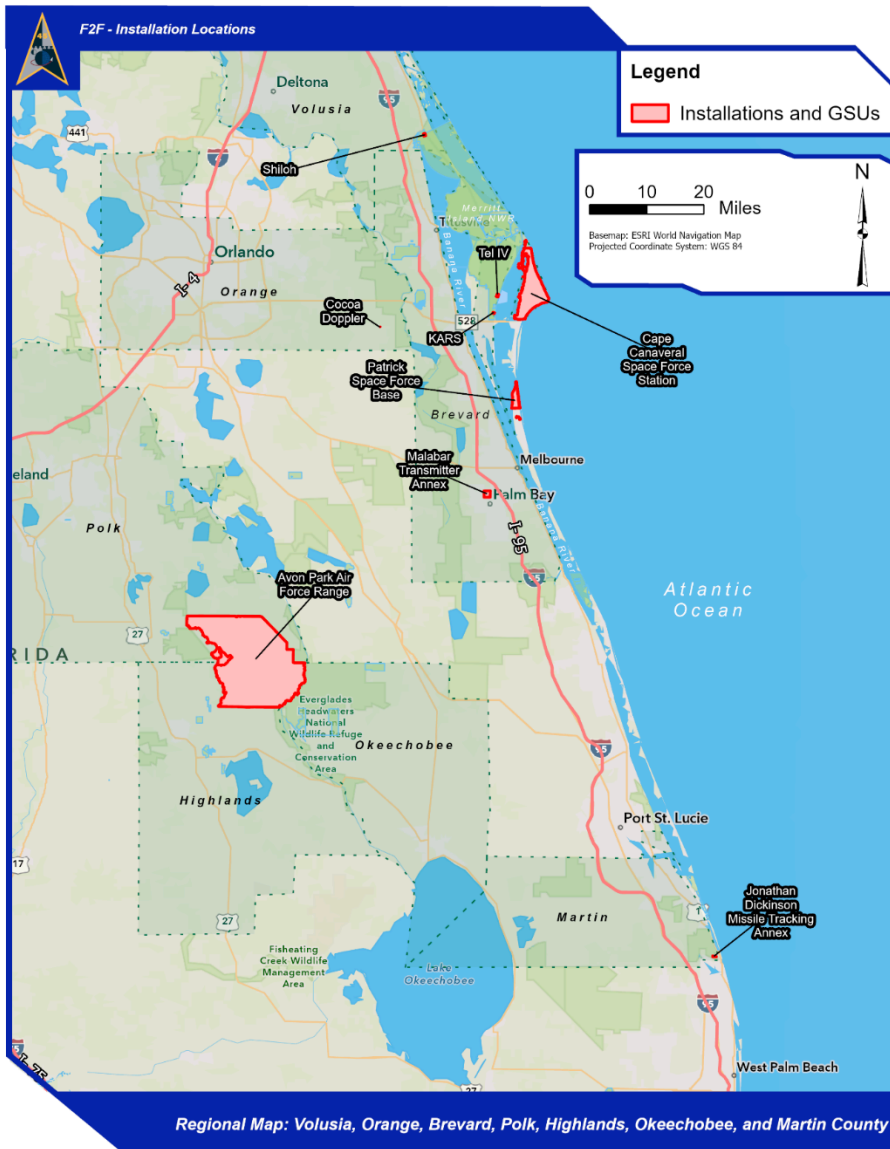

GOVERNMENT FURNISHED PROPERTY AND EQUIPMENT

The GFP and GFE tables below summarizes the specific property the Contractor shall be provided under this contract.

Patrick ISS F2F – Summary of Government Provided Facilities¹

Installation	Facility Number	Description	Square Footage
CCSFS	44200	Hazardous Waste Storage Facility	4613
CCSFS	44205	Hazardous Waste Storage Facility	2850

CCSFS	44210	Hazardous Waste Storage Facility	870
CCSFS	55118	Lights Cage/HW Storage Facility	809
CCSFS	1704	Office Space	2788
CCSFS	1704	First Floor Office Space (Wet Lab)	
PSFB	947	TSDF	1814
PSFB	942	<90 Day Facility	297
PSFB	534	Civil Engineering Environmental Offices	~100
APAFR	27	Hazardous Waste Storage Facility	540
APAFR	29	Office Space	48

¹ Government reserves the right to re-locate the Contractor to other similar functional areas.

SLD 45 GFE – Serial Number Managed Items

Line No.	Item Name	Item Description	Part/Model #	Serial #	Location	Unit Cost	Qty
1	Forklift	Forklift	2F61/525E-7	FGA1M-1290-07904	44200/44205	\$33,217.40	1
2	Lift Truck	Lift Truck Drum Jack- Orange	7931/51826	No Serial # tag (missing)	44200	\$1,330.00	1
3	Hydraulic Drum Tipper	Hydraulic Drum Tipper	HDD-72-10-9	5279098	44205	\$3,000.00	1
4	Disc Copier	CD/Disc Copier	Dup8024183	03-8041712	1704	\$1,800.00	1

SLD 45 GFE – Non Serial Number Managed Items

Line No.	Item Name	Item Description	Part/Model #	Location	Unit Cost	Qty
1	Book Case	Book Case	6231 & 6242	1704	\$48.00	2
2	File Cabinet	5 drawer metal File Cabinet	HON	1704	\$299.00	2
3	File Cabinet	5 drawer lateral File	HON	1704	\$579.00	1
4	Shelf	6 Shelf roll-top Cabinet	Write Line	1704	\$1,242.00	1
5	File Cabinet	2 Drawer Rolling File Cabinet	MODULAR	1704	\$140.00	1
6	File Cabinet	3 Drawer Rolling File Cabinet	MODULAR	44633	\$169.00	1

Line No.	Item Name	Item Description	Part/Model #	Location	Unit Cost	Qty
7	Cabinet	Double Door metal Cabinet	F012952	1704	\$199.00	1
8	Cabinet	Wardrobe Cabinet	WOOD	1704	\$199.00	1
9	Drum Storage	Drum Storage 3x60x46	7938	44200	\$639.00	2
10	Pump Oil Transfer	Pump Oil Transfer	DTT5009 / TT548	44200, 947	\$150.00	4
11	Cabinet	Cabinet, Flam 2 Drawer, Yellow	EAGLE 7952	44633, 44205, 44200, 44205	\$228.00	5
12	Pallet spill drum	Pallet, Spill 4 Drum	varied	55118, 44210, 44633, 44200, 44205; 947, 942	\$64.00	120
13	Pallet spill drum	Pallet, Spill 2 Drum	varied	55118, 44210, 947, 942	\$150.00	18
15	Drum Pallet	Drum Clamshell Pallets	ULTRATECH 25206	44200, 44205, 44633	\$1,000.00	4
16	Scales	Scales	various	44200, 44205, 55118, 55111, 947 & 942	\$2,500.00	3
17	Drum Grabber	Drum Grabber	various	44200, 44205, 947, 942	\$200.00	4
18	Pallet Jack	Pallet Jack	various	44200, 44205, 55118, 947, 942	\$200.00	5
19	Drum Dolly	Drum Dolly	various	44200, 44205, 55118, 947, 942	\$100.00	10
20	Wrenches	Impact Wrenches	various	947, 942	\$1,600.00	2
22	Bulb Eater	Fluorescent Lamp crushing system		55118		1

APAFR GFE – Non Serial Number Managed Items

Equipment Name	Facility Number	Description	Qty
Scale	27	180-Day Hazwaste Facility	1
Spill containment	27	180-Day Hazwaste Facility	4
Spill Kit	27	180-Day Hazwaste Facility	1
Fork Lift Drum Forks	27	180-Day Hazwaste Facility	1

SAMPLING AND MONITORING SPREADSHEETS

Patrick Space Force Base

NOTE: Total number of samples provided in this informational spreadsheet does not take into account QA/QC checks or blanks required by FDEP SOP.

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples Per Year	Sampled by	Analyzed by	Requirement From
Domestic Wastewater	POTW requirements LS# 650	Arsenic (Ar)	1	Annually	1	F2F Contractor	F2F Contractor	City of Cocoa Beach Ord 1370 & Wastewater Discharge Permit 004
		Cadmium (Cd)						
		Chromium (Cr)						
		Copper (Cu)						
		Lead (Pb)						
		Molybdenum (Mo)						
		Nickel (Ni)						
		Selenium (Se)						
		Silver (Ag)						
		Zinc (Zn)						
		Mercury (Hg)						
		Total Kjeldahl Nitrogen (TKN)						
		Total Phosphorus (TP)						
		Total Suspended Solids (TSS)						
		Biological Oxygen Demand (BOD) 5 day						
		Oil & Grease						
		Total Phenolics						
		1,1,1-Trichloroethane						
1,1,2,2-Tetrachloroethane								
1,1,2-Trichloroethane								

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples Per Year	Sampled by	Analyzed by	Requirement From
		1,1-Dichloroethane						
		1,1-Dichloroethylene						
		1,2-Dichlorobenzene						
		1,2-Dichloroethane						
		1,2-Dichloropropane						
		1,3-Dichlorobenzene						
		1,4-Dichlorobenzene						
		2-Chloroethyl Vinyl Ether						
		Acrolein (Propenal)						
		Acrylonitrile						
		Benzene						
		Bromodichloromethane						
		Bromoform						
		Bromomethane						
		Carbon Tetrachloride						
		Chlorobenzene						
		Chloroethane						
		Chloroform						
		Chloromethane						
		cis-1,2-Dichloroethylene						
		cis-1,3-Dichloropropene						
		Cyanide						
		Dibromochloromethane						
		Ethylbenzene						
		Methyl tert-butyl Ether (MTBE)						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples Per Year	Sampled by	Analyzed by	Requirement From
		Total Recoverable Zinc (Zn)						
		Total Recoverable Copper (Cu)						
		Total Suspended Solids (TSS)						
		Chemical Oxygen Demand (COD)						
	NPDES OUTFALLS	Visual Examination	4	Quarterly	16			
	MSGP Facility Inspections	Inspections - Monthly	2	Monthly	24			
		Inspections - Quarterly	6	Quarterly	24			
		Inspections - Annually	13	Annually	13			
		MSGP Outfall Inspections	Quarterly	22	Quarterly			
	Annually		15	Annually	15			
	MS4 Dry Weather Screenings	Screenings	35	Annually	35			
Potable Water	FDEP Regulatory Requirements (PWS ID #: 3054128)	Microbiological (Bacte)	9	Monthly	108	Bioenvironmental	KSCCM	FDEP ID 3054128
		Volatile Organics (VOCs)	2	Every 3 years	0	Cocoa	Cocoa	
		Synthetic Organic Contam.	2	Every 3 years	0			
		Nitrate & Nitrite (as N)	2	Annually	0			
		Primary Inorganics	2	Every 3 years	0			

[illegible]

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		Manganese (Mn)						
		Sodium (Na)						
		Total Dissolved Solids (TDS)						
		Nitrogen, Nitrate, Total (as N)						
		Nitrogen, Nitrite, Total (as N)						
		TN						
		TP						
Domestic Wastewater -WWTF	Reclaimed Water-Effluent for the RWWTF	1,1,1-trichloroethane						
		1,1,2-trichloroethane						
		1,1-dichloroethylene						
		1,2,4-trichlorobenzene						
		1,2-dichlorobenzene						
		1,2-dichloroethane						
		1,2-dichloropropane						
		1,2-trans-dichloroethylene						
		1,4-dichlorobenzene						
		2,3,7,8-tetrachlorodibenzo-p-dioxin						
		2,4-dichlorophenoxyacetic acid						
		Alachlor						
		Aluminum (Al)						
		Antimony (Sb)						
		Arsenic (As)						
		Atrazine						
		Barium (Ba)						
		Benzene						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		Benzo(a)pyrene						
		Beryllium (Be)						
		Bis (2-ethylhexyl) adipate						
		Bis (2-ethylhexyl) phthalate						
		Cadmium (Cd)						
		Carbofuran						
		Carbon tetrachloride						
		Chlordane (technical)						
		Chloride (Cl)						
		Chromium (Cr)						
		Cis-1,2-dichloroethene						
		Copper (Cu)						
		Cyanide, Free						
		Dalapon						
		Dibromochloropropane (DBCP)						
		Dichloromethane (methylene chloride)						
		Dinoseb						
		Diquat						
		Endothall						
		Endrin						
		Ethylbenzene						
		Ethylene dibromide (1,2-dibromoethane)						
		Fluoride						
		Foaming Agents						
		Gamma BHC (Lindane)						
		Glyphosate						
		Gross Alpha						
		Heptachlor						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		Heptachlor epoxide						
		Hexachlorobenzene						
		Hexachlorocyclopentadiene						
		Iron (Fe)						
		Lead (Pb)						
		Manganese (Mn)						
		Mercury (Hg)						
		Methoxychlor						
		Monochlorobenzene						
		Nickel (Ni)						
		Nitrite plus Nitrate, as N (NOx)						
		Nitrogen, Nitrate, Total as N						
		Nitrogen, Nitrite, Total as N						
		Oxamyl (vydate)						
		PCBs						
		Pentachlorophenol						
		pH						
		Picloram						
		Radium 226 + Radium 228						
		Selenium (Se)						
		Silver (Ag)						
		Silvex						
		Simazine						
		Sodium (Na)						
		Styrene						
		Sulfate						
		Tetrachloroethylene						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		Thallium (Tl)						
		Toluene						
		Total Dissolved Solids (TDS)						
		Toxaphene						
		Trichloroethylene						
		Trihalomethane, Total by summation						
		Vinyl chloride						
		Xylenes						
		Zinc (Zn)						
Domestic Wastewater -WWTF	Domestic Residuals at WWTF - TCLP RCRA 8 Metals	Arsenic (As)	1	Quarterly	4	F2F Contractor	F2F Contractor	FDEP Permit FL0102920-014-DW1P
		Barium (Ba)						
		Cadmium (Cd)						
		Chromium (Cr)						
		Lead (Pb)						
		Mercury (Hg)						
		Selenium (Se)						
		Silver (Ag)						
NPDES Outfalls	Sector Q - Air Force Wharf Outfalls, Poseidon Wharf Outfalls, Trident Submarine Wharf Outfalls	Total Recoverable Aluminum (Al)	3	Quarterly	12	F2F Contractor	F2F Contractor	NPDES FLR05A947
		Total Recoverable Iron (Fe)						
		Total Recoverable Lead (Pb)						
		Total Recoverable Zinc (Zn)						
	NPDES Outfalls	Visual Examination	4	Quarterly	16			
	MSGP Facility Inspections	Inspections - Monthly	3	Monthly	36			

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		2,4-dinitrotoluene						
		2,6-dinitrotoluene						
		2-amino-4,6-dinitrotoluene						
		2-nitrotoluene						
		3-nitrotoluene						
		4-amino-2,6-dinitrotoluene						
		4-nitrotoluene						
		Aluminum (Al)						
		Arsenic (As)						
		Barium (Ba)						
		Cadmium (Cd)						
		Chromium (Cr)						
		Copper (Cu)						
		Diethyl phthalate						
		Hexahydro-1,3,5-tri-nitro-1,3,5-triazine (RDX)						
		Lead (Pb)						
		Magnesium (Mg)						
		methyl-2,4,6-trinitrophenylnitramine (Tetryl)						
		Nitrate as N						
		Nitrite as N						
		Nitrobenzene						
		Nitroglycerin						
		Octahydro-1,3,5,7-tetra-1,3,5,7-nitro-tetrazocine (HMX)						
		Pentaerythritol tetranitrate (PETN)						
		Perchlorate						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		Potassium (K)						
		Selenium (Se)						
		Sulfate						
		Titanium (Ti)						
		Vanadium (V)						
		Total Well Depth each November	6	Annual (November)	6	F2F Contractor	F2F Contractor	
EOD Thermal Treatment Unit Soil	Soil Monitoring	1,3,5-trinitrobenzene						
		1,3-dinitrobenzene						
		2,4,6-trinitrotoluene						
		2,4-dinitrotoluene						
		2,6-dinitrotoluene						
		2-amino-4,6-dinitrotoluene						
		2-nitrotoluene						
		3-nitrotoluene						
		4-amino-2,6-dinitrotoluene						
		4-nitrotoluene						
		Aluminum (Al)						
		Arsenic (As)						
		Barium (Ba)						
		Cadmium (Cd)						
		Chromium (Cr)						
		Copper (Cu)						
		Diethyl phthalate						
		Hexahydro-1,3,5-tri-nitro-1,3,5-triazine (RDX)						
		Lead (Pb)						
		Magnesium (Mg)						

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
		methyl-2,4,6-trinitrophenyl nitramine (Tetryl)						
		Nitrate as N						
		Nitrite as N						
		Nitrobenzene						
		Nitroglycerin						
		Octahydro-1,3,5,7-tetra-ni tro-1,3,5,7-tetrazocine (HMX)						
		Pentaerythritol tetranitrate (PETN)						
		Potassium (K)						
		Selenium (Se)						
		Sulfate						
		Titanium (Ti)						
		Vanadium (V)						
Potable Water	FDEP Regulatory Requirements (PWS ID #3054140)	Microbiological (Bacte)	12	Twice Monthly	288	NEMCON	KSC Micro Lab	FDEP ID # 3054140
		Volatile Organics (VOCs)	1	3 years	0	Cocoa	Cocoa	
		Pesticides & PCBs (PPCBs)	1	3 years	0			
		Nitrate & Nitrite (as N)	1	Annually	0			
		Primary Inorganics	1	3 years	0			
		Asbestos	1	Every 9 years (Due in 2013 and every 9 years after)	1 (Only every 9 years)	NEMCON	NEMCON	
		Lead & Copper	28	Every 3 years (Due 2012 and	28 (Only every 3 years)	NEMMCON	KSC Micro Lab	

Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples per yr	Sampled by	Analyzed by	Requirement From
				every 3 years after)				
Potable Water	Permit Clearances	Microbiological (Bacte)	Variable	As required by construction permit	Dependent upon construction operations	Construction contractor	Construction contractor	FDEP
Potable Water	Other water system sampling/monitoring	pH, chlorine, iron, lead and bacteria	~50/yr	As Required	50	MESC	MESC	Customers
		Primary SDWA chemicals	1	Annually	1	Cocoa	Cocoa	AFI 48-119, SDWA
		Secondary SDWA chemicals	1	Annually	1			
		Stage 2 HAA5	2	Quarterly	8	NEMCON	KSC Micro Lab	FDEP ID 3054128
		Operational Incoming Trihalomethanes	1	Bi-weekly	24			
		Stage 2 Trihalomethanes	2	Quarterly	8			
Potable Water	Malfunctions-Line breaks and planned outages	Microbiological (Bacte) for malfunctions	40 per yr estimate	As Requested	240	Non-environmental	Non-environmental	FDEP malfunction
		Chlorine residual for malfunctions	40 per yr estimate	As Requested	240			

Avon Park Air Force Range

NOTE: Total number of samples provided in this informational spreadsheet does not take into account QA/QC checks or blanks required by FDEP SOP.

NOTE: Total number of samples provided in this informational spreadsheet does not take into account Q1/Q2 checks or blanks required by FDEL 501.								
Program	Description	Parameter	Number of Sites	Sample Frequency	Total Number of Samples Per Year	Sampled by	Analyzed by	Requirement From
NPDES Outfalls - Operational Sampling	Non-Permitted Operational Sampling - UTES/CE facilities, TSF and Inactive Landfill LF-33	Antimony	3	Quarterly (year 2 and year 4 of permit only)	12	F2F Contract or	F2F Contract or	This list is non-permit required sampling to be performed only in year 2 and year 4 of the permit. However, note that there is some overlap between the permitted required sampling for the inactive LF-33 ¹ and TSF ² as listed below and annotated in the
		Arsenic (As)						
		Benzene						
		Cadmium (Cd)						
		Chemical Oxygen Demand (COD) ²						
		Chloride (Cl)						
		Ethylbenzene						
		Manganese (Mn)						
		Mercury (Hg)						
		Nitrate + Nitrite (NOx)						
		Oil & Grease						
		pH						
		Selenium (Se)						
		Silver (Ag)						
		Toluene						
		Total Phenolics						
		Total Phosphorous as P (TP)						
		Total Recoverable Aluminum ²						
		Total Recoverable Copper ²						
		Total Recoverable Iron ^{1,2}						
Total Recoverable Lead ²								

HAZARDOUS WASTE DISPOSAL CODES

The Hazardous Waste Codes noted in the tables below summarizes the current DLA contracted codes which should be used under this contract

Patrick Space Force Base Waste Disposal Codes

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HC0006	PARTS WASHER FLUID	55 GAL Drum	1	461.00	D005, D011, D010, D006, D007, D004, D008
HC0011	NA3082, HAZARDOUS WASTE, LIQUID, N.O.S., 9, III, RQ (D008)	55 GAL Drum	1	106.00	D008
HC0011	NA3082, HAZARDOUS WASTE, LIQUID, N.O.S., 9, III, RQ (D008)	55 GAL Drum	1	216.00	D008
HC0011	NA3082, HAZARDOUS WASTE, LIQUID, N.O.S., 9, III, RQ (D008)	55 GAL Drum	1	278.00	D008
HC0026	WASTEWATER GENERATED BY	30 GAL Drum	1	170.00	D008, D010, D006, D007, D011
HC0026	WASTEWATER GENERATED BY	55 GAL Fiberboard or Plastic Drum	1	195.00	D006, D007, D011, D010, D008
HC0051	ETHYLENE GLYCOL	30 GAL Drum	1	282.00	D005, D008, D006, D007
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	326.00	D005, D007, D008, D006
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	338.00	D007, D006, D005, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	387.00	D006, D007, D005, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	484.00	D005, D006, D007, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	495.00	D006, D007, D008, D005
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	506.00	D008, D006, D005, D007

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	513.00	D006, D005, D007, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	525.00	D007, D005, D006, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	531.00	D005, D006, D007, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	538.00	D005, D007, D008, D006
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	542.00	D005, D007, D006, D008
HC0051	ETHYLENE GLYCOL	55 GAL Drum	1	546.00	D008, D005, D007, D006
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	120.00	D008, D007, D006
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	128.00	D006, D007, D008
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	174.00	D008, D007, D006
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	217.00	D008, D006, D007
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	225.00	D007, D006, D008
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	228.00	D006, D007, D008
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	228.00	D008, D007, D006
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	235.00	D006, D008, D007
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	235.00	D007, D008, D006
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	237.00	D008, D006, D007
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	256.00	D006, D008, D007
HD0004	ACTIVATED CARBON, FIBER	13 YD Pallet	1	260.00	D006, D007, D008
HD0004	ACTIVATED CARBON, FIBER	5 GAL Fiberboard or Plastic Drum	1	14.00	D006, D007, D008
HD0008	HAZARDOUS WASTE SOLID	55 GAL Drum	1	1,400.00	D006, D007, D008

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HD0008	HAZARDOUS WASTE SOLID	55 GAL Drum	1	2,400.00	D006, D007, D008
HD0009	PAINT CHIPS CONTAINING MERCURY AND METALS	55 GAL Drum	1	50.00	D008, D005, D009
HD0009	PAINT CHIPS CONTAINING MERCURY AND METALS	55 GAL Drum	1	62.00	D009, D005, D008
HD0009	PAINT CHIPS CONTAINING MERCURY AND METALS	55 GAL Drum	1	80.00	D008, D009, D005
HD0026	UN1396, WASTE ALUMINUM POWDER, UNCOATED, MIXTURE (DANGEROUS	30 GAL Drum	1	87.00	D001, D003
HD0062	LEAKING LEAD ACID BATTERY	20 GAL Fiberboard or Plastic Drum	1	20.00	D008
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	90.00	D003
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	91.00	D003
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	92.00	D003
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	98.00	D003
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	103.00	D003
HD0093	PAPER FILTERS CONTAINING ALUMINUM	55 GAL Drum	1	105.00	D003
HD0094	CATHODE RAY TUBE	5 GAL Fiberboard or Plastic Drum	1	5.00	D008, D005, D009, D006, D007

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HD0094	CATHODE RAY TUBE	10 GAL Fiberboard or Plastic Drum	1	6.00	D006, D009, D005, D008, D007
HD0110	NA3077, HAZARDOUS WASTE, SOLID, N.O.S., RQ (D008)	55 GAL Drum	1	625.00	D008
HD0115	NIGHT GOGGLE (IMAGE INTENSIFIER TUBES)	5 GAL Fiberboard or Plastic Drum	1	20.00	D006, D008
HD0117	PURPLE K FIRE EXTINGUISHANT	55 GAL Drum	1	581.00	D005
HD0117	PURPLE K FIRE EXTINGUISHANT	55 GAL Drum	1	611.00	D005
HG0001	MIXTURES OF PAINTS,	5 GAL Drum	1	15.00	D007, D040, D005, D018, D008, D001, D035, D039
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	95.00	D005, D035, D007, D039, D001, D008, D018, D040
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	97.00	D001, D018, D039, D005, D040, D007, D008, D035
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	99.00	D001, D035, D039, D005, D008, D018, D007, D040
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	111.00	D035, D007, D039, D005, D018, D001, D008, D040
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	112.00	D001, D039, D040, D035, D018, D005, D007, D008
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	112.00	D007, D039, D018, D008, D001, D005, D035, D040

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	112.00	D018, D005, D008, D007, D001, D040, D035, D039
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	126.00	D001, D008, D005, D039, D018, D035, D007, D040
HG0001	MIXTURES OF PAINTS,	55 GAL Drum	1	129.00	D005, D040, D007, D001, D018, D035, D008, D039
HJ0056	PAINT WASTE INCLUDING	55 GAL Drum	1	51.00	F003, D008, D018, D001, D007, F005, D006, D005
HJ0056	PAINT WASTE INCLUDING	55 GAL Drum	1	371.00	D008, D018, D005, F003, F005, D001, D006, D007
HJ0077	WASTE FLAMABLE LIQUID	5 GAL Fiberboard or Plastic Drum	1	5.00	D001, D019, D021, D008, D035, D018, D007, D005, D011, D040
HJ0077	WASTE FLAMABLE LIQUID	5 GAL Fiberboard or Plastic Drum	1	12.00	D005, D018, D011, D019, D001, D007, D008, D040, D021, D035
HJ0077	WASTE FLAMABLE LIQUID	5 GAL Fiberboard or Plastic Drum	1	16.00	D008, D040, D005, D035, D007, D021, D001, D011, D019, D018
HJ0082	EXCESS MATERIALS	55 GAL Drum	1	266.00	D019, D018, D005, D008, D035, D001, D006, D007
HJ0082	EXCESS MATERIALS	5 GAL Fiberboard or Plastic Drum	1	20.00	D006, D007, D018, D019,

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
					D001, D005, D035, D008
HJ0240	GAS MIXTURE	55 GAL Drum	1	297.00	D008, D018, D001
HJ0299	USED OIL CONTAINING MINERAL SPIRITS	55 GAL Drum	1	410.00	D001
HJ0299	USED OIL CONTAINING MINERAL SPIRITS	55 GAL Drum	1	448.00	D001
HJ0400	GASOLINE/DIESEL MIXTURE	30 GAL Drum	1	49.00	D001, D018, D008
HJ0400	GASOLINE/DIESEL MIXTURE	30 GAL Drum	1	120.00	D001, D018, D008
HJ0400	GASOLINE/DIESEL MIXTURE	30 GAL Drum	1	191.00	D008, D018, D001
HJ0400	GASOLINE/DIESEL MIXTURE	30 GAL Drum	1	211.00	D018, D008, D001
HK0012	WASTE PAINT SOLIDS	30 GAL Drum	1	90.00	D035, D039, D040, D005, D006, D007, D028, D008, D010, D004
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	200.00	D007, D008, D006
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	103.00	D008, D006, D007
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	117.00	D008, D006, D007
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	132.00	D006, D007, D008
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	138.00	D006, D008, D007
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	159.00	D006, D008, D007
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	165.00	D007, D008, D006
HK0014	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	208.00	D007, D006, D008
HK0014	TCLP METAL SOLID DEBRIS	13 YD Pallet	1	119.00	D007, D008, D006

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HK0015	METHYLENE CHLORIDE BASED	5 GAL Fiberboard or Plastic Drum	1	5.00	F005, D006, D007, F002, D008
HK0015	METHYLENE CHLORIDE BASED	5 GAL Fiberboard or Plastic Drum	1	5.00	F005, D006, D008, F002, D007
HK0015	METHYLENE CHLORIDE BASED	5 GAL Fiberboard or Plastic Drum	1	6.00	D006, D008, D007, F002, F005
HK0015	METHYLENE CHLORIDE BASED	5 GAL Fiberboard or Plastic Drum	1	12.00	D007, D008, F005, D006, F002
HK0015	METHYLENE CHLORIDE BASED	5 GAL Fiberboard or Plastic Drum	1	19.00	D008, F002, F005, D007, D006
HK0117	SOLIDS WITH METALS	55 GAL Drum	1	72.00	D006, D005, D008, D007, D035
HK0117	SOLIDS WITH METALS	55 GAL Drum	1	120.00	D035, D008, D007, D005, D006
HK0117	SOLIDS WITH METALS	55 GAL Drum	1	137.00	D005, D006, D008, D007, D035
HK0117	SOLIDS WITH METALS	55 GAL Drum	1	142.00	D005, D035, D008, D006, D007
HK0117	SOLIDS WITH METALS	55 GAL Drum	1	144.00	D035, D006, D008, D005, D007
HK0118	SMOKELESS POWDER FOR SMALL ARMS (100 POUNDS OR LESS)	1 EA Box	1	9.00	D030, D003
HK0118	SMOKELESS POWDER FOR SMALL ARMS (100 POUNDS OR LESS)	1 EA Box	1	10.00	D003, D030
HK0118	SMOKELESS POWDER FOR SMALL ARMS (100 POUNDS OR LESS)	1 EA Box	3	10.00	D030, D003

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HK0118	SMOKELESS POWDER FOR SMALL ARMS (100 POUNDS OR LESS)	5 EA Fiber or Plastic Box	1	11.00	D003, D030
HK0118	SMOKELESS POWDER FOR SMALL ARMS (100 POUNDS OR LESS)	5 EA Fiber or Plastic Box	5	14.00	D003, D030
HK0119	TCLP METAL SOLID DEBRIS	55 GAL Drum	2	182.00	D006
HK0119	TCLP METAL SOLID DEBRIS	55 GAL Drum	1	206.00	D006
HL4033	HALOGEN TEST KITS	5 GAL Fiberboard or Plastic Drum	1	5.00	D007, D006, D008, D009
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	1 EA Box	1	350.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Drum	1	65.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Drum	1	68.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Drum	1	77.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Drum	1	88.00	
ND0003	PETROLEUM CONTAMINANTS	30 GAL Drum	1	114.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
	INCLUDE HYDROCARBON FUELS SUCH AS DIE				
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	65.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	86.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	2	88.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	90.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	105.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	106.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	114.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE	55 GAL Drum	1	115.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
	HYDROCARBON FUELS SUCH AS DIE				
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	118.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	120.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	2	123.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	2	124.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	128.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	130.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	131.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	2	135.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	137.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	154.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	156.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	157.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	163.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	172.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	178.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	2	183.00	
ND0003	PETROLEUM CONTAMINANTS	55 GAL Drum	1	214.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
	INCLUDE HYDROCARBON FUELS SUCH AS DIE				
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	55 GAL Drum	1	220.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Fiberboard or Plastic Drum	1	45.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Fiberboard or Plastic Drum	1	52.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Fiberboard or Plastic Drum	1	95.00	
ND0003	PETROLEUM CONTAMINANTS INCLUDE HYDROCARBON FUELS SUCH AS DIE	30 GAL Fiberboard or Plastic Drum	1	125.00	
ND0006	FILTRATION MEDIA	15 GAL Drum	1	80.00	
ND0006	FILTRATION MEDIA	55 GAL Drum	2	300.00	
ND0053	USED OIL FILTERS (PAPER)	15 GAL Drum	1	21.00	
ND0053	USED OIL FILTERS (PAPER)	15 GAL Drum	3	23.00	
ND0053	USED OIL FILTERS (PAPER)	30 GAL Drum	1	58.00	
ND0053	USED OIL FILTERS (PAPER)	55 GAL Drum	1	139.00	
ND0077	AFFF SOLIDS WITH PFOA	55 GAL Drum	4	500.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
NJ0002	NJ0002	55 GAL Drum	1	404.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	229.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	299.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	377.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	437.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	446.00	
NJ0006	ACRYLIC, LATEX AND/OR	55 GAL Drum	1	506.00	
NJ0006	LATEX PAINT AND WATER BASED PRODUCTS	55 GAL Drum	1	182.00	
NJ0006	LATEX PAINT AND WATER BASED PRODUCTS	55 GAL Drum	1	225.00	
NJ0006	LATEX PAINT AND WATER BASED PRODUCTS	55 GAL Drum	1	235.00	
NJ0006	LATEX PAINT AND WATER BASED PRODUCTS	55 GAL Drum	1	324.00	
NJ0039	SPENT COOKING OIL AND WATER	55 GAL Drum	1	398.00	
NJ0040	NON-REGULATED MATERIAL (PFOA/PFOS FIRE SUPPRESSION LIQUID)	265 GAL Tote Bin	6	2,120.00	
NJ0042	CLEANING COMPOUNDS,	55 GAL Drum	1	450.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	2	289.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	316.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	364.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	392.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	401.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	402.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	427.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	428.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	431.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	436.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	453.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	455.00	
NJ0058	PHOTO PROCESSING WASTE	55 GAL Drum	1	466.00	
NJ0074	CONTAMINATED USED OIL WITH WATER	55 GAL Drum	1	423.00	
NJ0074	CONTAMINATED USED OIL WITH WATER	30 GAL Fiberboard or Plastic Drum	1	211.00	
NK0026	EMPTY CONTAINERS	55 GAL Drum	1	100.00	
NK0026	EMPTY CONTAINERS	55 GAL Fiberboard or Plastic Drum	10	50.00	
NK0044	NON-REGULATED MATERIAL (NON-HAZARDOUS PHARMACEUTICALS)	55 GAL Drum	1	252.00	
NL1854	SOLDER FLUX NO 30	5 GAL Fiberboard or Plastic Drum	1	5.00	
QD0009	PCB BALLAST	55 GAL Drum	1	468.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
RC0001	REGULATED MATERIAL (WASTEWATER WITH HYDROCARBONS)	30 GAL Drum	1	218.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	77.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	100.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	1,300.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	133.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	140.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	285.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	325.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	555.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	2	750.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	760.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	775.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	970.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	1,050.00	
TD0001	FLOURESCENT LAMPS	1 EA Wooden Box	1	1,520.00	
TD0003	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING	1 EA Wooden Box	1	5.00	
TD0003	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING	1 EA Wooden Box	1	70.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
TD0004	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING	1 EA Wooden Box	1	10.00	
TD0004	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING	1 EA Wooden Box	1	70.00	
TD0005	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING	1 EA Wooden Box	1	85.00	
TD0006	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING (HID LAMPS)	1 EA Wooden Box	1	10.00	
TD0006	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING (HID LAMPS)	1 EA Wooden Box	1	33.00	
TD0006	SPENT MERCURY-CONTAINING LAMPS FOR RECYCLING (HID LAMPS)	1 EA Wooden Box	1	75.00	
TD0008	VENTED NICKEL-CADMIUM WET CELL BATTERIES	1 EA Wooden Box	1	773.00	
TD0010	NICKEL/CADMIUM DRY CELL B	20 GAL Fiberboard or Plastic Drum	1	150.00	
TD0010	NICKEL/CADMIUM DRY CELL B	20 GAL Fiberboard or Plastic Drum	1	180.00	
TD0016	LITHIUM BATTERIES	20 GAL Fiberboard or Plastic Drum	1	125.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
TD0016	LITHIUM BATTERIES	20 GAL Fiberboard or Plastic Drum	1	140.00	
TD0016	LITHIUM BATTERIES	20 GAL Fiberboard or Plastic Drum	1	250.00	
TD0016	LITHIUM BATTERIES	30 GAL Fiberboard or Plastic Drum	1	240.00	
TD0018	LOW PRESSURE SODIUM	1 EA Wooden Box	1	20.00	
TD0018	LOW PRESSURE SODIUM	1 EA Wooden Box	1	65.00	
TD0018	LOW PRESSURE SODIUM	1 EA Wooden Box	1	165.00	
TD0019	BROKEN SPENT MERCURY CONTAINING LAMPS FOR RECYCLING (DOT NON	5 GAL Fiberboard or Plastic Drum	1	78.00	
TD0019	BROKEN SPENT MERCURY CONTAINING LAMPS FOR RECYCLING (DOT NON	30 GAL Fiberboard or Plastic Drum	1	40.00	
TD0022	LED LAMPS	1 EA Wooden Box	1	55.00	
TD0024	NICKEL METAL HYDRIDE	20 GAL Fiberboard or Plastic Drum	1	50.00	
TD0024	NICKEL METAL HYDRIDE	20 GAL Fiberboard or Plastic Drum	1	85.00	
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	65.00	
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	133.00	
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	170.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	180.00	
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	240.00	
TD0025	LITHIUM ION BATTERIES	20 GAL Fiberboard or Plastic Drum	1	260.00	
UR0009	OFF SPEC USED OIL CONTAINING HALOGENS	30 GAL Drum	1	153.00	
UR0009	OFF SPEC USED OIL CONTAINING HALOGENS	30 GAL Drum	1	222.00	
UR0009	OFF SPEC USED OIL CONTAINING HALOGENS	30 GAL Drum	1	254.00	
UR0009	OFF SPEC USED OIL CONTAINING HALOGENS	30 GAL Drum	1	259.00	
UR0020	USED OIL (CONTAINING 2 TO <50 PP, PCBS)	55 GAL Drum	1	405.00	
UR0020	USED OIL (CONTAINING 2 TO <50 PP, PCBS)	55 GAL Drum	1	419.00	
UR0020	USED OIL (CONTAINING 2 TO <50 PP, PCBS)	55 GAL Drum	1	425.00	
HL 5071	HAZARDOUS METALS	5 GAL Drum	1	25.00	D018
ACID/LP#1	WASTE CORROSIVE LIQUID	55 GAL Fiberboard or Plastic Drum	1	100.00	D011, D002, D007, D005, D006
ACID/LP#1	WASTE CORROSIVE LIQUID	55 GAL Fiberboard or Plastic Drum	1	106.00	D005, D002, D006, D007, D011
ACID/LP#2	WASTE NITRIC ACID SOLUTION	55 GAL Fiberboard or Plastic Drum	1	149.00	D002, D011, D005, D007, D006

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
ACID/LP#3	WASTE CORROSIVE LIQUID	30 GAL Fiberboard or Plastic Drum	1	32.00	D002
HL Metals	HAZARDOUS METALS	5 GAL Fiberboard or Plastic Drum	1	23.00	D008, D006, D009, D007
HL Metals	HAZARDOUS METALS	20 GAL Fiberboard or Plastic Drum	1	20.00	D006, D008, D007, D009
HWL/LP#11	HAZARDOUS WASTE LIQUID	5 GAL Fiberboard or Plastic Drum	1	2.00	D007
HWL/LP#11	HAZARDOUS WASTE LIQUID	5 GAL Fiberboard or Plastic Drum	1	10.00	D005, D007
HWS/LP#10	HAZARDOUS WASTE SOLID	5 GAL Fiberboard or Plastic Drum	1	10.00	D011
HWS/LP#10	HAZARDOUS WASTE SOLID	55 GAL Fiberboard or Plastic Drum	1	53.00	D008, D005, D007, D011, D006, D010
NRL/LP#15	NON-REGULATED LIQUID	5 GAL Fiberboard or Plastic Drum	1	10.00	
NRL/LP#15	NON-REGULATED LIQUID	55 GAL Fiberboard or Plastic Drum	1	70.00	
NRS/LP#13	NON-REGULATED SOLID	55 GAL Fiberboard or Plastic Drum	1	19.00	
NRS/LP#13	NON-REGULATED SOLID	55 GAL Fiberboard or Plastic Drum	2	100.00	
WCLF/LP#4	WASTE CORROSIVE LIQUID, FLAMMABLE	5 GAL Fiberboard or Plastic Drum	1	7.00	D002, D001
ACID/LP#1A	WASTE CORROSIVE LIQUID	55 GAL Drum	1	488.00	D005, D002, D007
ALUMP/LP#21	WASTE ALUMINUM POWDER, UNCOATED	15 GAL Drum	1	40.00	D003, D001

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
CORRLIQTX#17	WASTE CORROSIVE LIQUIDS, TOXIC	30 GAL Fiberboard or Plastic Drum	1	9.00	D002, D005, D006, D007, D011
CORRLIQTX#17	WASTE CORROSIVE LIQUIDS, TOXIC	30 GAL Fiberboard or Plastic Drum	1	100.00	D002, D005, D007
FLAMLIQ/LP#8	WASTE FLAMMABLE LIQUID	30 GAL Fiberboard or Plastic Drum	1	33.00	U220, D001, D011
POISON/LP#12	WASTE SODIUM CYANIDE	5 GAL Fiberboard or Plastic Drum	1	25.00	P106
CORRLIQ/LP#20	WASTE DIISOCTYL ACID PHOSPHATE	5 GAL Fiberboard or Plastic Drum	1	1.00	D002
CORRSOL/LP#16	CORROSIVE SOLID	30 GAL Fiberboard or Plastic Drum	1	75.00	
HL FLAM CORRa	FLAMMABLE AND CORROSIVE LIQUIDS	5 GAL Fiberboard or Plastic Drum	1	5.00	D002, D001
INORBASE/LP#5	WASTE CORROSIVE LIQUID, BASIC, INORGANIC	55 GAL Fiberboard or Plastic Drum	1	94.00	D002
INORBASE/LP#5	WASTE CORROSIVE LIQUID, BASIC, INORGANIC	55 GAL Fiberboard or Plastic Drum	1	100.00	D002, D006, D011
NLNDI G335A-B	NON HAZARDOUS PHOTO PROCESSING WASTE	5 GAL Fiberboard or Plastic Drum	1	5.00	
NLNDI G335A-B	NON HAZARDOUS PHOTO PROCESSING WASTE	20 GAL Fiberboard or Plastic Drum	1	45.00	
FLAMSOLID/LP#7	WASTE FLAMMABLE, CONTAINING FLAMMABLE LIQUIDS	55 GAL Fiberboard or Plastic Drum	1	100.00	D001, F005
NitInorg LP#24	WASTE NITRATES INORGANIC	30 GAL Fiberboard or Plastic Drum	1	75.00	D001, D005

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
OXIDSOLID/LP#6	WASTE OXIDIZING SOLID	30 GAL Fiberboard or Plastic Drum	1	8.00	D011, D001
CORBASORG LP#20	WASTE CORROSIVE LIQUID	30 GAL Drum	1	75.00	D002
FLAMLIQCOR/LP#9	WASTE FLAMMABLE LIQUIDS, CORROSIVE	30 GAL Fiberboard or Plastic Drum	1	16.00	D005, D011, D001, D007, D002
FLAMLIQCOR/LP#9	WASTE FLAMMABLE LIQUIDS, CORROSIVE	55 GAL Fiberboard or Plastic Drum	1	100.00	U220, D011, D002, D005, D006, D001, U002, D007
NITRICACIDRF#19	WASTE NITRIC ACID, RED FUMING	5 GAL Fiberboard or Plastic Drum	1	5.00	D001, D002
NITRICACIDRF#19	WASTE NITRIC ACID, RED FUMING	5 GAL Fiberboard or Plastic Drum	1	10.00	D002, D001
NL CONTROLLED 8	AMINES, LIQUID, CORROSIVE, N.O.S., OR POLYAMINES, LIQUID, CO	5 GAL Fiberboard or Plastic Drum	1	44.00	
BromineSol LP#23	BROMINE SOLUTION	5 GAL Fiberboard or Plastic Drum	1	5.00	D002
BromineSol LP#23	BROMINE SOLUTION	5 GAL Fiberboard or Plastic Drum	2	15.00	D002
CORLIQOXID LP#21	WASTE CORROSIVE LIQUID OXIDIZING	30 GAL Fiberboard or Plastic Drum	1	75.00	D005, D006, D011, D002
CORRLIQTOX/LP#18	WASTE CORROSIVE LIQUIDS. TOXIC	5 GAL Fiberboard or Plastic Drum	1	4.00	D002, U134
HL PHARM WARFRIN	WARFIN PHARMACEUTICALS	5 GAL Fiberboard or Plastic Drum	1	10.00	D005, P001
NONHAZLAB solids	NON HAZARDOUS WASTE SOLIDS	20 GAL Fiberboard or Plastic Drum	1	7.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HL FLAM CORR METALS	FLAMMABLE AND METALS	20 GAL Fiberboard or Plastic Drum	1	22.00	D018, D001, U220, D005, D007, D035
Acetic Acid glaLP#22	WASTE ACETIC ACID, GLACIAL	5 GAL Fiberboard or Plastic Drum	1	10.00	D002, D001

Cape Canaveral Space Force Station Waste Disposal Codes

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HA0055	MIX INORGANIC ACID WASTE	15 GAL Drum	1	103.00	D002, D009, D007, D006, D008, D011, D004, D010
HC0026	PARTS WASHER WITH METALS	10 GAL Drum	1	76.00	D008, D010, D011, D006, D007
HC0051	ETHYLENE GLYCOL / WATER	55 GAL Drum	1	394.00	D005, D007, D006, D008
HD0008	HAZARDOUS SOLID DEBRIS	55 GAL Drum	1	52.00	D007, D008, D006
HD0008	HAZARDOUS SOLID DEBRIS	55 GAL Drum	1	62.00	D006, D007, D008
HD0008	HAZARDOUS SOLID DEBRIS	55 GAL Drum	1	64.00	D007, D008, D006
HD0020	DEACTIVATION OF D003 IN THERMAL TREATMENT UNIT	55 GAL Drum	1	224.00	D006, D004, D005, D008
HD0020	DEACTIVATION OF D003 IN THERMAL TREATMENT UNIT	55 GAL Drum	1	480.00	D004, D005, D006, D008
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	500.00	D009, D008
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	393.00	D008, D009

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	433.00	D009, D008
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	451.00	D009, D008
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	458.00	D008, D009
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	466.00	D008, D009
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	471.00	D008, D009
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	489.00	D008, D009
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	497.00	D008, D009
HD0031	CRUSHED/BROKEN FLUORESCENT LAMPS	55 GAL Drum	1	501.00	D008, D009
HD0070	TRENCH DEBRIS W/METALS PCBS	55 GAL Drum	1	379.00	D007, D008, D006
HD0094	PRINTED CIRCUIT BOARDS	55 GAL Drum	1	146.00	D006, D008, D007, D005
HD0094	PRINTED CIRCUIT BOARDS	55 GAL Drum	1	173.00	D008, D005, D007, D006
HD0094	PRINTED CIRCUIT BOARDS	55 GAL Drum	1	184.00	D006, D005, D007, D008
HD0111	NA3077, HAZARDOUS WASTE, SOLID, N.O.S., RQ (D008)	55 GAL Drum	1	102.00	D008
HF0003		55 GAL Drum	1	99.00	U133
HF0003		55 GAL Drum	2	397.00	U133

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HF0007	MOP AND SOP WIPES	14 GAL Fiberboard or Plastic Drum	1	11.00	U133
HF0007	MOP AND SOP WIPES	14 GAL Fiberboard or Plastic Drum	1	18.00	U133
HF0038	HAZARDOUS WASTE, SOLID, N.O.S. (P068, U133), RQ (HYDRAZZINE)	5 GAL Fiberboard or Plastic Drum	1	4.00	U098, U133, P068
HF0038	HAZARDOUS WASTE, SOLID, N.O.S. (P068, U133), RQ (HYDRAZZINE)	5 GAL Fiberboard or Plastic Drum	1	7.00	P068, U098, U133
HF0038	HAZARDOUS WASTE, SOLID, N.O.S. (P068, U133), RQ (HYDRAZZINE)	5 GAL Fiberboard or Plastic Drum	1	7.00	U133, P068, U098
HF0038	HAZARDOUS WASTE, SOLID, N.O.S. (P068, U133), RQ (HYDRAZZINE)	5 GAL Fiberboard or Plastic Drum	1	7.00	U133, U098, P068
HF0038	HAZARDOUS WASTE, SOLID, N.O.S. (P068, U133), RQ (HYDRAZZINE)	5 GAL Fiberboard or Plastic Drum	1	9.00	U098, U133, P068
HF0039	WASTE TOXIC LIQUIDS, FLAMMABLE, ORGANIC, N.O.S., (CONTAINS M	5 GAL Fiberboard or Plastic Drum	1	2.00	P068, U133, U098
HF0039	WASTE TOXIC LIQUIDS, FLAMMABLE, ORGANIC, N.O.S., (CONTAINS M	5 GAL Fiberboard or Plastic Drum	1	2.00	U098, U133, P068
HF0039	WASTE TOXIC LIQUIDS, FLAMMABLE, ORGANIC, N.O.S., (CONTAINS M	5 GAL Fiberboard or Plastic Drum	1	2.00	U133, U098, P068

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HF0039	WASTE TOXIC LIQUIDS, FLAMMABLE, ORGANIC, N.O.S., (CONTAINS M	10 GAL Fiberboard or Plastic Drum	1	2.00	U098, P068, U133
HF0039	WASTE TOXIC LIQUIDS, FLAMMABLE, ORGANIC, N.O.S., (CONTAINS M	10 GAL Fiberboard or Plastic Drum	1	2.00	U098, U133, P068
HG0001	WASTE AEROSOLS	55 GAL Drum	1	60.00	D001, D005, D018, D007, D008, D035, D039, D040
HG0001	WASTE AEROSOLS	55 GAL Drum	1	72.00	D018, D035, D040, D005, D039, D008, D001, D007
HG0001	WASTE AEROSOLS	55 GAL Drum	1	77.00	D040, D039, D007, D001, D008, D018, D005, D035
HG0001	WASTE AEROSOLS	55 GAL Drum	1	84.00	D001, D018, D035, D039, D040, D008, D005, D007
HG0001	WASTE AEROSOLS	55 GAL Drum	1	84.00	D005, D039, D001, D018, D040, D007, D008, D035
HG0001	WASTE AEROSOLS	55 GAL Drum	1	93.00	D005, D039, D040, D035, D001, D018, D008, D007
HG0001	WASTE AEROSOLS	55 GAL Drum	1	94.00	D018, D040, D039, D035, D001, D005, D007, D008
HG0001	WASTE AEROSOLS	55 GAL Drum	1	98.00	D005, D008, D035, D007, D040, D001, D039, D018

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HG0001	WASTE AEROSOLS	55 GAL Drum	1	98.00	D039, D001, D040, D008, D035, D005, D007, D018
HG0001	WASTE AEROSOLS	55 GAL Drum	1	105.00	D018, D040, D007, D005, D001, D008, D039, D035
HG0001	WASTE AEROSOLS	55 GAL Drum	1	105.00	D035, D039, D008, D040, D007, D018, D005, D001
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	183.00	D007, D008, F002, D019, D022, D011, D006, D009, D010, F005, D001, D004, D005, F003
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	187.00	D006, D011, D004, D019, D022, F003, D007, F005, D001, D009, F002, D005, D010, D008
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	197.00	D001, D011, D004, F002, D019, D022, D007, D010, D005, D006, D009, F003, F005, D008
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	199.00	D004, D006, D007, D022, D019, F003, D008, D010, D011, F002, F005, D001, D005, D009

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	213.00	D001, D006, D008, D011, D019, D022, D005, D007, D010, F003, F005, D004, D009, F002
HJ0012	HALOGENATED SOLVENTS	30 GAL Drum	1	218.00	D007, F002, F005, D005, D006, D008, D010, D019, D004, D011, D022, D009, F003, D001
HJ0077	ADHESIVES, HARDENERS,	55 GAL Drum	1	225.00	D011, D018, D040, D007, D019, D035, D008, D001, D005, D021
HJ0077	ADHESIVES, HARDENERS,	55 GAL Drum	1	267.00	D001, D007, D019, D021, D011, D035, D040, D005, D018, D008
HJ0077	ADHESIVES, HARDENERS,	30 GAL Fiberboard or Plastic Drum	1	68.00	D005, D007, D018, D035, D008, D019, D021, D011, D001, D040
HJ0082	WASTE PAINT	55 GAL Drum	1	399.00	D008, D035, D005, D019, D039, D001, D006, D018, D007
HJ0082	WASTE PAINT	55 GAL Drum	1	463.00	D006, D035, D001, D005, D008, D019, D039, D007, D018
HJ0083	WASTE PAINT W MEK, MIK,	55 GAL Drum	1	79.00	D005, D007, D018, D035,

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
					D019, D001, D006, D008
HJ0213	HAZARDOUS PAINT WASTE	30 GAL Drum	1	35.00	D018, D008, D035, D001, D005, F003, D007, D006, D022, F005
HJ0213	HAZARDOUS PAINT WASTE	55 GAL Drum	1	66.00	D035, D001, D005, D018, F003, F005, D006, D007, D008, D022
HJ0213	HAZARDOUS PAINT WASTE	55 GAL Drum	1	90.00	D035, D005, D006, D022, D008, F003, D007, F005, D001, D018
HJ0305	CHEMICAL SYNTHESIS ORGANIC WASTE	55 GAL Drum	1	378.00	D002, F002, D001
HJ0305	CHEMICAL SYNTHESIS ORGANIC WASTE	55 GAL Drum	1	432.00	F002, D001, D002
HJ0401	MIXTURE OF KEROSENE AND GREASE	85 GAL Steel Drum	1	345.00	D001, D018
HK0027	SOLIDIFIED DEBRIS CONTAIN	55 GAL Drum	1	75.00	D004, D029, D028, D006, D005, D007, D010, F002, F005, D008
HK0027	SOLIDIFIED DEBRIS CONTAIN	55 GAL Drum	1	87.00	D006, D004, D010, D008, F002, D029, D005, D028, F005, D007
HK0027	SOLIDIFIED DEBRIS CONTAIN	55 GAL Drum	1	117.00	D010, D028, F002, D004, D006, D005, D007, D008, D029, F005

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HK0027	SOLIDIFIED DEBRIS CONTAIN	55 GAL Drum	1	121.00	D004, D010, D005, D008, D028, F002, F005, D029, D006, D007
HK0106	DEBRIS CONTAMINATED WITH OILS, LUBRICANTS, SOLVENTS, PAINTS,	55 GAL Drum	1	103.00	D005, D035, D022, D040, F005, D028, D039, D008, D007, D018, D023, F002
HL1302	EXPIRED ALODINE	5 GAL Fiberboard or Plastic Drum	1	10.00	D007, D002
HL2135	HAZARDOUS LAB PACK	5 GAL Fiberboard or Plastic Drum	1	8.00	D006, D008, D011
HL2640	HAZARDOUS LAB PACK	5 GAL Fiberboard or Plastic Drum	1	10.00	D001, D002
HL2652	HAZARDOUS LAB PACK	20 GAL Fiberboard or Plastic Drum	1	18.00	D002
HL3700	MERCURY BULB FILTERS	5 GAL Fiberboard or Plastic Drum	2	8.00	D009
HL4033	HALOGEN TEST KITS	5 GAL Fiberboard or Plastic Drum	1	2.00	D006, D007, D009, D008
HX0002	HAZARDOUS WASTE SOLID	14 GAL Fiberboard or Plastic Drum	1	11.00	P078
HX0002	HAZARDOUS WASTE SOLID	14 GAL Fiberboard or Plastic Drum	1	13.00	P078
HX0006	NEUTRALIZED SOLUTION	55 GAL Drum	1	397.00	P078
HX0018	OXIDIZER FILTERS, SOLID DEBRIS	5 GAL Fiberboard or Plastic Drum	1	4.00	P078

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HX0018	OXIDIZER FILTERS, SOLID DEBRIS	5 GAL Fiberboard or Plastic Drum	4	7.00	P078
HX0018	OXIDIZER FILTERS, SOLID DEBRIS	5 GAL Fiberboard or Plastic Drum	1	9.00	P078
HX0021	UNNEUTRALIZED OXIDIZER RINSEWATER	55 GAL Drum	1	397.00	D002, P078
HX0021	UNNEUTRALIZED OXIDIZER RINSEWATER	55 GAL Fiberboard or Plastic Drum	1	99.00	P078, D002
NC0049	NON-REG MAT (PERCHLORATE CONT WASTE WATER)	20 GAL Fiberboard or Plastic Drum	1	143.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	80.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	120.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	182.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	203.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	206.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	20 GAL Drum	1	267.00	
ND0003	NON REGULATED MATERIAL	30 GAL Drum	1	82.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
	(PETROLEUM SOLID WASTE)				
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	75.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	83.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	89.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	97.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	2	98.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	3	100.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	101.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	124.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	2	129.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	131.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	133.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	136.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	139.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	150.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	151.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	162.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	163.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	166.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	167.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	169.00	
ND0003	NON REGULATED MATERIAL	55 GAL Drum	1	171.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
	(PETROLEUM SOLID WASTE)				
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	178.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	187.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	189.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	194.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	202.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	204.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	208.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	2	226.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	239.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	335.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	337.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	361.00	
ND0003	NON REGULATED MATERIAL (PETROLEUM SOLID WASTE)	55 GAL Drum	1	382.00	
ND0009	NON-REGULATED MATERIAL (PETROLEUM CONTAMINATED SOIL)	30 GAL Drum	1	156.00	
ND0009	NON-REGULATED MATERIAL (PETROLEUM CONTAMINATED SOIL)	55 GAL Drum	1	209.00	
ND0009	NON-REGULATED MATERIAL (PETROLEUM CONTAMINATED SOIL)	55 GAL Drum	1	234.00	
ND0009	NON-REGULATED MATERIAL (PETROLEUM CONTAMINATED SOIL)	55 GAL Drum	1	398.00	
ND0011	NON PCB BALLASTS	55 GAL Drum	1	300.00	
ND0011	NON PCB BALLASTS	55 GAL Drum	1	255.00	
ND0011	NON PCB BALLASTS	55 GAL Drum	2	283.00	
ND0011	NON PCB BALLASTS	55 GAL Drum	1	371.00	
ND0016	WASTE CONTAINS ONE OR MOR	10 GAL Drum	1	128.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
ND0016	WASTE CONTAINS ONE OR MOR	55 GAL Drum	1	435.00	
ND0053	USED OIL FILTERS	55 GAL Drum	1	113.00	
ND0053	USED OIL FILTERS	55 GAL Drum	1	130.00	
ND0053	USED OIL FILTERS	55 GAL Drum	1	133.00	
ND0053	USED OIL FILTERS	30 GAL Fiberboard or Plastic Drum	1	62.00	
ND9005	BRAKE & CLUTCH LINING W/ASBESTOS	30 GAL Drum	1	192.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	1	224.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	1	251.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	1	263.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	2	309.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	1	325.00	
NJ0002	ETHYLENE GLYCOL	55 GAL Drum	1	386.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	124.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	134.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	176.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	208.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	231.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	268.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	283.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	350.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	416.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	423.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	452.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	457.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	482.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	483.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	492.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	495.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	496.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	503.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	507.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	508.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	514.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	519.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	521.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	527.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	529.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	546.00	
NJ0006	LATEX, ACRYLIC WASTES	55 GAL Drum	1	628.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
NJ0025	NON-RCRA REGULATED ADHESI	30 GAL Drum	1	79.00	
NJ0025	NON-RCRA REGULATED ADHESI	30 GAL Drum	1	153.00	
NJ0025	NON-RCRA REGULATED ADHESI	55 GAL Drum	1	104.00	
NJ0040	NON REGULATED MATERIAL (PFOA/PFOS FIRE SUPPRESSION LIQUID)	55 GAL Drum	1	458.00	
NJ0042	DETERGENT SOLUTION	55 GAL Drum	1	320.00	
NK0015	IPA/SOLVENT RAGS	15 GAL Fiberboard or Plastic Drum	1	22.00	
NK0015	IPA/SOLVENT RAGS	15 GAL Fiberboard or Plastic Drum	1	25.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	214.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	333.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	355.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	359.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	378.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	433.00	
NK0032	NON REGULATED MATERIAL (PETROLEUM HYDROCARBON SLUDGES)	55 GAL Drum	1	486.00	
QD9001	PCB BALLASTS	55 GAL Drum	1	208.00	
TD0002	PLASTIC COATED LAMPS	1 YD3 Fiber or Plastic Box	1	40.00	
TD0005	INTEGRAL COMPACT LAMPS (CFL)	1 EA Box	1	75.00	
TD0005	INTEGRAL COMPACT LAMPS (CFL)	1 EA Wooden Box	1	100.00	
TD0006	SPENT HPS/HID LAMPS	1 EA Box	1	85.00	
TD0006	SPENT HPS/HID LAMPS	1 EA Wooden Box	1	101.00	
TD0006	SPENT HPS/HID LAMPS	1 EA Wooden Box	1	116.00	
TD0006	SPENT HPS/HID LAMPS	1 YD3 Fiber or Plastic Box	1	101.00	
TD0010	NICKEL/CADMIUM DRY CELL	20 GAL Fiberboard or Plastic Drum	1	66.00	
TD0010	NICKEL/CADMIUM DRY CELL	20 GAL Fiberboard or Plastic Drum	1	159.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
TD0010	NICKEL/CADMIUM DRY CELL	20 GAL Fiberboard or Plastic Drum	1	176.00	
TD0011	MERCURY CONTAINING	5 GAL Fiberboard or Plastic Drum	1	5.00	
TD0011	MERCURY CONTAINING	1.25 GAL Fiberboard or Plastic Drum	1	2.00	
TD0013	UNBROKEN MERCURY THERMOSTATS	6.5 GAL Drum	1	5.00	
TD0015	BATTERIES (UNIVERSAL WASTE - NICAD BATTERIES)	55 GAL Drum	1	14.00	
TD0015	BATTERIES (UNIVERSAL WASTE - NICAD BATTERIES)	55 GAL Drum	1	191.00	
TD0015	BATTERIES (UNIVERSAL WASTE - NICAD BATTERIES)	55 GAL Drum	1	212.00	
TD0015	BATTERIES (UNIVERSAL WASTE - NICAD BATTERIES)	55 GAL Drum	1	223.00	
TD0016	SINGLE & MULTICEL LITHIUM	6.5 GAL Drum	1	16.00	
TD0016	SINGLE & MULTICEL LITHIUM	6.5 GAL Drum	1	21.00	
TD0016	SINGLE & MULTICEL LITHIUM	5 GAL Fiberboard or Plastic Drum	1	7.00	
TD0016	SINGLE & MULTICEL LITHIUM	6 GAL Fiberboard or Plastic Drum	1	156.00	
TD0018	LOW PRESSURE SODIUM LAMPS	1 EA Box	1	190.00	
TD0018	LOW PRESSURE SODIUM LAMPS	1 EA Wooden Box	1	150.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
TD0018	LOW PRESSURE SODIUM LAMPS	1 YD3 Fiber or Plastic Box	1	305.00	
TD0022	SPENT LED/INCANDESCENT LAMPS FOR RECYCLING (DOT NON-REG)	1 EA Box	1	35.00	
TD0022	SPENT LED/INCANDESCENT LAMPS FOR RECYCLING (DOT NON-REG)	1 EA Wooden Box	1	210.00	
TD0024	NICKEL METAL HYDRIDE BATT	20 GAL Fiberboard or Plastic Drum	1	85.00	
TD0024	NICKEL METAL HYDRIDE BATT	20 GAL Fiberboard or Plastic Drum	1	88.00	
TD0025	USED RECHARGE LITHIUM BAT	20 GAL Fiberboard or Plastic Drum	1	52.00	
TD0025	USED RECHARGE LITHIUM BAT	20 GAL Fiberboard or Plastic Drum	1	106.00	
TD0025	USED RECHARGE LITHIUM BAT	20 GAL Fiberboard or Plastic Drum	1	117.00	
TD0025	USED RECHARGE LITHIUM BAT	20 GAL Fiberboard or Plastic Drum	1	121.00	
TD0025	USED RECHARGE LITHIUM BAT	20 GAL Fiberboard or Plastic Drum	1	154.00	
TD0026	PROJECTOR LAMPS	1 EA Wooden Box	1	25.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	400.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	130.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	203.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	246.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	304.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	350.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	370.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	379.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	384.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	388.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	2	394.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	2	396.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	404.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	409.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	413.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	2	414.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	1	416.00	
UR0020	TRANSFORMER OIL <50 PPM PCBS	55 GAL Drum	2	432.00	
UR0028	USED OIL & WATER EMULSION FROM TRIDENT PLANT	5000 GAL Cargo Tank	3	40,000.00	
HAZFLAM	HAZ LAB PACK FLAMMABLES	20 GAL Fiberboard or Plastic Drum	1	20.00	D001
HAZFLAM	HAZ LAB PACK FLAMMABLES	20 GAL Fiberboard or Plastic Drum	1	35.00	D001

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HD0009F	TOXIC PAINT CHIPS	5 GAL Fiberboard or Plastic Drum	1	9.00	D005, D008, D009, D007
HJ0304F	METAL 3D PRINT WASTE	5 GAL Drum	1	32.00	D001
HJ0304F	METAL 3D PRINT WASTE	5 GAL Drum	1	39.00	D001
HJ0304F	METAL 3D PRINT WASTE	5 GAL Drum	1	57.00	D001
HJ0309F	CONTAMINATED SOLIDS W/RESIDUE	55 GAL Drum	1	118.00	D001, F002
HJ0309F	CONTAMINATED SOLIDS W/RESIDUE	55 GAL Drum	1	138.00	D001, F002
HJ0312F	DEG ACETONE WASH - LAB WASTE	55 GAL Drum	1	349.00	D002, D001, F003
HJ0315F	LAB PROCESS WASTE	55 GAL Drum	1	267.00	F002, D001, D002
HJ0320F	LAB WASTE - BY-PRODUCT GENERATED DURING CHEMICAL SYNTHESIS	55 GAL Drum	1	354.00	D002, D001
HJ0321F	LAB WASTE FLAMMABLE CORROSIVE	55 GAL Drum	1	305.00	D002, D001
HJ0321F	LAB WASTE FLAMMABLE CORROSIVE	55 GAL Drum	1	341.00	D002, D001
HJ0322F	ROTOVAP WASTE - LAB WASTE	55 GAL Drum	1	204.00	D001, F002
HJ0400F	GASOLINE DIESEL MIXTURE	30 GAL Drum	1	201.00	D008, D001, D018
HJ0400F	GASOLINE DIESEL MIXTURE	30 GAL Drum	2	336.00	D008, D001, D018
HJ0400F	GASOLINE DIESEL MIXTURE	30 GAL Drum	2	358.00	D008, D018, D001
HJ0400F	GASOLINE DIESEL MIXTURE	30 GAL Drum	1	391.00	D008, D001, D018
HJ0400F	GASOLINE DIESEL MIXTURE	55 GAL Drum	2	64.00	D018, D001, D008

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HL5072F	LAB PACK - SPENT PARTS WASHER FLUID (OZZY JUICE)	20 GAL Drum	1	30.00	D006
HL5080F	LAB PACK - AMINES PRODUCT	5 GAL Fiberboard or Plastic Drum	1	5.00	D002
HL5095F	LAB PACK - READY STRIP PAINT REMOVER	5 GAL Fiberboard or Plastic Drum	1	5.00	D002
HL5099F	EXCESS DYSOL	5 GAL Fiberboard or Plastic Drum	1	20.00	D001
HLPACID	LAB PACK ACIDS	5 GAL Fiberboard or Plastic Drum	1	3.00	D002, D011, D007, D008, D006
HLPACID	LAB PACK ACIDS	5 GAL Fiberboard or Plastic Drum	1	5.00	D007, D006, D008, D002, D011
HLPACID	LAB PACK ACIDS	20 GAL Fiberboard or Plastic Drum	1	30.00	D008, D011, D007, D002, D006
IDW/IRP	IRP IDW WASTE	55 GAL Drum	1	425.00	D043
NJ0072F	DIESEL EXHAUST FLUID	30 GAL Drum	1	261.00	
HLPFLAMCORR	LAB PACK FLAM CORROSIVE	5 GAL Fiberboard or Plastic Drum	1	10.00	D002, D001
HLPTOXSOLID	LAB PACK TOXIC SOLIDS	5 GAL Fiberboard or Plastic Drum	1	5.00	D006, D007, D008, D011
HLPTOXSOLID	LAB PACK TOXIC SOLIDS	5 GAL Fiberboard or Plastic Drum	1	5.00	D006, D007, D011, D008
IRP/HW LEAD	IRP CLEANUP HW CONTAINS LEAD	55 GAL Drum	1	400.00	D008
HLPTOXLIIQUID	LAB PACK TOXIC LIQUIDS	5 GAL Fiberboard or Plastic Drum	1	3.00	D008, D007, D006, D009, D011

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
HLPTOXLIQUID	LAB PACK TOXIC LIQUIDS	5 GAL Fiberboard or Plastic Drum	1	10.00	D006, D007, D008, D009, D011
NHLabPack-DLA	NON HAZ LAB PACK	5 GAL Fiberboard or Plastic Drum	2	5.00	
NHLabPack-DLA	NON HAZ LAB PACK	5 GAL Fiberboard or Plastic Drum	2	40.00	

Avon Park Air Force Station Waste Disposal Codes

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
AP003	UNIVERSAL WASTE - FLORESCENT BULBS	4 FT3 Fiber or Plastic Box	1	42.00	
AP003	UNIVERSAL WASTE - FLORESCENT BULBS	4 FT3 Fiber or Plastic Box	1	45.00	
AP003	UNIVERSAL WASTE - FLORESCENT BULBS	4 FT3 Fiber or Plastic Box	1	48.00	
AP004	UNIVERSAL WASTE - LITHIUM ION BATTERIES	5 GAL Fiberboard or Plastic Drum	1	8.00	
AP005	UNIVERSAL WASTE - BATTERIES, NICAD	1 EA Pallet	1	170.00	
AP005	UNIVERSAL WASTE - BATTERIES, NICAD	5 GAL Fiberboard or Plastic Drum	1	5.00	
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	106.00	
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	110.00	
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	118.00	

Waste Code ID	Waste Name	Drum/Tank Size (gal)	Number Shipped This Size	Subtotal Net Weight (lbs)	EPA Waste Code ID
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	119.00	
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	140.00	
AP006	NON REGULATED SOLID - FLOOR SWEEP	55 GAL Drum	1	154.00	
AP007	DIESEL FUEL CONTAMINATED WITH WATER	55 GAL Drum	1	350.00	D001
AP007	DIESEL FUEL CONTAMINATED WITH WATER	55 GAL Drum	1	420.00	D001
AP009	UNIVERSAL WASTE - LOW PRESSURE SODIUM BULBS	1 EA Fiber or Plastic Box	1	3.00	
AP009	UNIVERSAL WASTE - LOW PRESSURE SODIUM BULBS	3 FT Fiberboard or Plastic Drum	1	29.00	
AP012	UW, MERCURY CONTAINING EQUIPMENT	5 GAL Fiberboard or Plastic Drum	1	3.00	D009
AP018	WASTE PAINT, POL	55 GAL Drum	1	120.00	D001
AP018	WASTE PAINT, POL	55 GAL Drum	1	133.00	D001
AP018	WASTE PAINT, POL	55 GAL Drum	1	186.00	D001
AP022	WASTE ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID	55 GAL Drum	1	395.00	D008
AP025	UW - MERCURY VAPOR LAMPS	3 FT Fiberboard or Plastic Drum	1	29.00	D009
AF 029	FLAMMABLE GAS N.O.S	5 GAL Fiberboard or Plastic Drum	1	11.00	D001