





United States Department of Agriculture
Forest Service

(R10) ALASKA REGION
TONGASS NATIONAL FOREST
PETERSBURG AND WRANGELL RANGER DISTRICTS

HELICOPTER PAD RECONSTRUCTION: ETOLIN, FARRAGUT & FOOLS PEAK

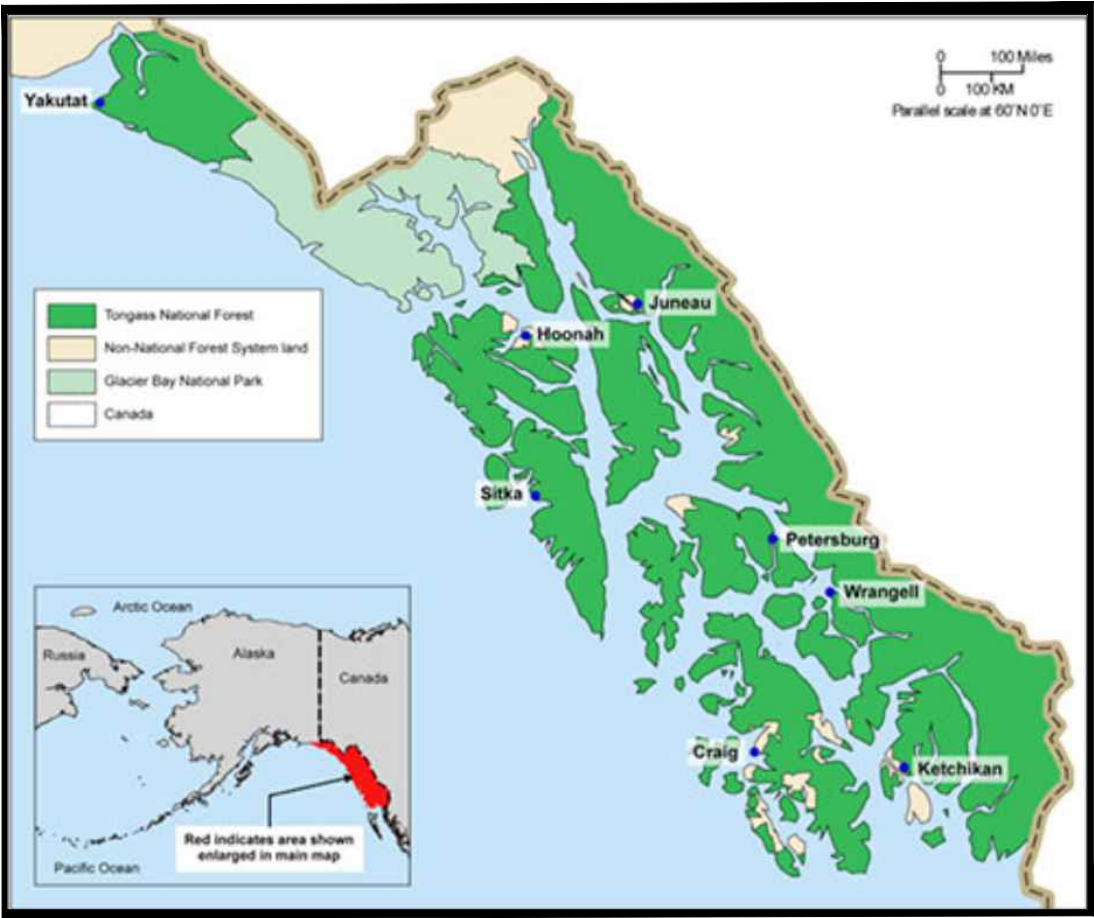

FOREST LOCATION MAP

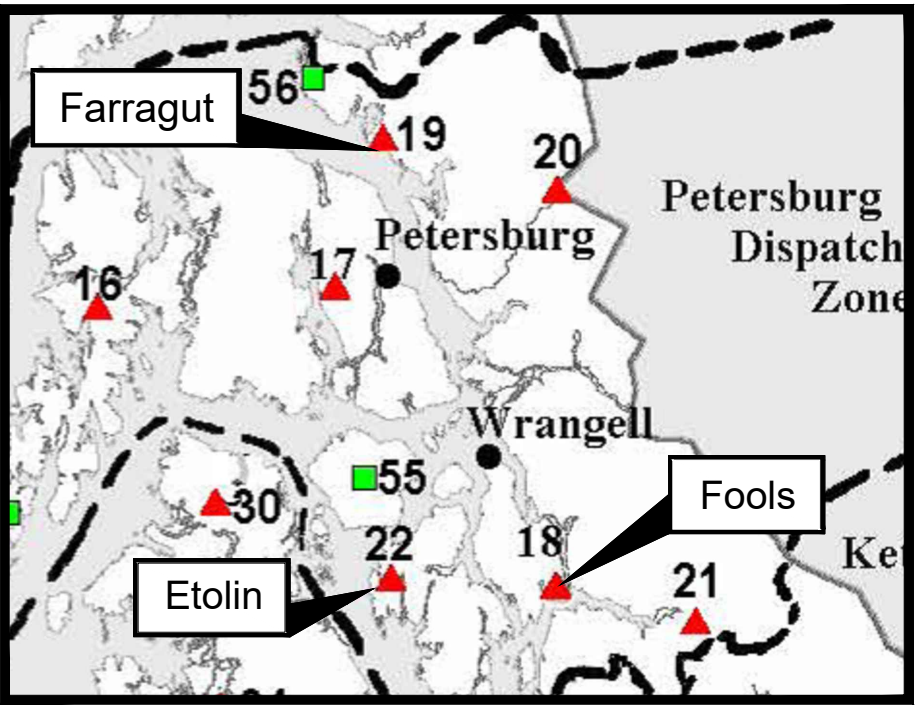

PROJECT LOCATION MAP

TRAVEL DIRECTIONS:

ETOLIN REPEATER AND HELICOPTER PAD IS LOCATED ON ETOLIN ISLAND IN THE KEATING RANGE ROUGHLY 22 MILES SOUTHWEST OF WRANGELL ALASKA AT APPROXIMATELY 2907 FT ELEVATION. ACCESS IS BY HELICOPTER. THE WORK IS WITHIN THE UNITED STATES FOREST SERVICE OWNED PROPERTY, IN USFS REGION 10, WRANGELL RANGER DISTRICT WITHIN SOUTHEAST ALASKA.

FARRAGUT REPEATER AND HELICOPTER PAD IS LOCATED ROUGHLY 20 MILES NORTH OF PETERSBURG ALASKA, EAST OF FARRAGUT BAY AT APPROXIMATELY 3560 FT ELEVATION. ACCESS IS BY HELICOPTER. THE WORK IS WITHIN THE UNITED STATES FOREST SERVICE OWNED PROPERTY, IN USFS RANGER DISTRICT WITHIN SOUTHEAST ALASKA.

FOOLS REPEATER AND HELICOPTER PAD IS LOCATED ROUGHLY 21 MILES SOUTH OF WRANGELL ALASKA ON WRANGELL ISLAND, EAST OF FOOLS INLET AT APPROXIMATELY 3102 FT ELEVATION. ACCESS IS BY HELICOPTER. THE WORK IS WITHIN THE UNITED STATES FOREST SERVICE OWNED PROPERTY, IN USFS REGION 10, WRANGELL RANGER DISTRICTS WITHIN SOUTHEAST ALASKA.

INDEX OF SHEETS

SHEET	SHEET TITLE
1	COVERSHEET
2	CONSTRUCTION NOTES AND SUPPLEMENTAL SPECIFICATIONS
3	HELICOPTER PAD
4	HELICOPTER PAD DETAILS
5	STAIR AND PIER DETAILS
6	CABLE TIE AND TELESCOPING ROD DETAILS
7	ETOLIN LOCATION AERIAL OVERVIEW AND LOCATION SCHEDULE
8	FARRAGUT LOCATION AERIAL OVERVIEW AND LOCATION SCHEDULE - OPTION 01
9	FOOLS LOCATION AERIAL OVERVIEW AND LOCATION SCHEDULE - OPTION 02

RECOMMENDED BY:

DAVID LICON
Digitally signed by DAVID LICON
Date: 2025.07.08 08:50:09 -08'00'

FACILITIES PROGRAM MANAGER

RUEBEN GLAVES
Digitally signed by RUEBEN GLAVES
Date: 2025.07.08 08:54:24 -08'00'

FOREST ENGINEER

DATE

DATE

APPROVED:

CAREY CASE
Digitally signed by CAREY CASE
Date: 2025.07.08 10:41:36 -08'00'

PETERSBURG DISTRICT RANGER

VICTORIA HOUSER
Digitally signed by VICTORIA HOUSER
Date: 2025.07.08 12:02:50 -08'00'

WRANGELL DISTRICT RANGER

JORDAN HALL
Digitally signed by JORDAN HALL
Date: 2025.07.08 12:33:51 -08'00'

REGIONAL DIRECTOR OF ENGINEERING

DATE

DATE

DATE

6/25/25 15:57 MELINDAKEMP C:\USERS\MELINDAKEMPODOCUMENTS\HELPAD\CONSTRUCTION PACKAGE\DRAWINGS\HELPAD 2025V2.DWG;

CONSTRUCTION NOTES AND SUPPLEMENTAL SPECIFICATIONS

1.0 GENERAL
DEVIATIONS FROM PLANS SHALL HAVE APPROVAL BY ENGINEER PRIOR TO WORK.

REPAIR, RESTORE, OR REPLACE ALL BUILDINGS, STRUCTURES, FENCES, LANDSCAPING, TREES, AND VEGETATION DESTROYED OR DAMAGED DURING COURSE OF WORK TO OWNER’S SATISFACTION, UNLESS SPECIFIED IN DRAWINGS. IF OWNER AGREES TO CHANGES TO FEATURES OR GRADING NOT IN DRAWINGS, ESTABLISH A WRITTEN AGREEMENT WITH OWNER REGARDING DESIRED WORK, PRICE, AND RELATED DETAILS.

REMOVE AND DISPOSE OF ALL WASTE MATERIALS, CONSTRUCTION DEBRIS, AND GARBAGE FROM ALL WORK SITES AND STAGING SITES PRIOR TO DEMOBILIZATION.

1.1 SPECIFICATIONS
THESE NOTES ARE IN ADDITION TO THE SPECIFICATIONS INCLUDED IN THE PROJECT MANUAL.

1.2 CODES
PERFORM WORK IN ACCORDANCE WITH DRAWINGS, SPECIFICATIONS, AND NOTES HEREIN. MINIMUM PROVISIONS OF 2024 INTERNATIONAL BUILDING CODE AND LOCAL AMENDMENTS APPLY WHERE DETAILS ARE NOT SHOWN OR DESCRIBED. ALL APPLICABLE OSHA AND STATE OF ALASKA LABOR REGULATIONS APPLY.

1.3 QUALITY CONTROL AND QUALITY ASSURANCE
CONTRACTOR SHALL MAINTAIN CONSTRUCTION AND DOCUMENTATION QUALITY CONTROL FOR REVIEW BY OWNER AND ENGINEER AS NECESSARY, INCLUDING A CURRENT DRAWING SET THAT REFLECTS MODIFICATIONS TO ORIGINAL DESIGN DRAWINGS. OWNER SHALL PROVIDE ENGINEERING REVIEW AND QUALITY ASSURANCE SERVICES AS NECESSARY FOR GENERAL COMPLIANCE WITH DRAWINGS AND SPECIFICATIONS.

1.4 ALTERNATIVES, SUBSTITUTIONS, AND CHANGES
ALL ALTERNATIVES, SUBSTITUTIONS, AND "APPROVED EQUAL" CHANGES PROPOSED BY CONTRACTOR ARE SUBJECT TO APPROVAL BY ENGINEER. SUBMIT COMPLETE DOCUMENTATION REQUIRED TO EVALUATE PROPOSALS TO ENGINEER FOR REVIEW AT LEAST TWO WEEKS PRIOR TO CONSTRUCTION OF SUBJECT WORK.

1.5 EXISTING CONDITIONS
EXISTING COMPONENT LOCATIONS, DEPTHS, SIZES, AND RELATED DETAILS ARE IN PART BASED ON RECORD DRAWINGS AND DOCUMENTATION BY OTHERS. THERE IS NO GUARANTEE TO THE ACCURACY OF THE INFORMATION, EITHER EXPRESSED OR IMPLIED.

VERIFY EXISTING CONDITIONS AS REQUIRED TO COMPLETE THE WORK IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS. NOTIFY THE ENGINEER IMMEDIATELY UPON DISCOVERY OF EXISTING CONDITIONS CONFLICTING WITH DESIGN DOCUMENTS.

1.5.1 EXISTING UTILITIES
PROTECT ALL EXISTING UTILITIES. LOCATIONS OF EXISTING UTILITIES AS NOTED ON DRAWINGS ARE APPROXIMATE, AND NO ASSURANCE IS GIVEN THAT LOCATIONS ARE CORRECT OR COMPLETE. PRIOR TO BEGINNING WORK, CONTRACTOR SHALL VERIFY TRUE LOCATIONS TO AVOID DAMAGE AND DISRUPTION. DAMAGE CAUSED BY CONTRACTOR SHALL BE REPAIRED IMMEDIATELY AT NO COST TO OWNER.

2.0 EARTHWORK
RESTORE ALL TEMPORARY EXCAVATIONS AND FILLS TO PRE-CONSTRUCTION CONTOURS AND CONDITIONS. WITHOUT EXCEPTION, GRADE FINISHED GROUND TO PREVENT PONDING OF WATER.

3.0 CONCRETE
CAST-IN-PLACE CONCRETE SHALL BE PLACED DIRECTLY ON CLEAN, COMPETENT, AND COMPACTED BASE COURSE OR SOUND BEDROCK, FREE OF LOOSE ROCK AND SOIL. REMOVE ALL STANDING WATER AND DEBRIS FROM WITHIN FORM PRIOR TO PLACEMENT. CONCRETE SHALL BE A DENSE WORKABLE MIX THAT CAN BE PLACED WITHOUT EXCESS SURFACE MOISTURE. MIXING, PLACEMENT, CONSOLIDATION, AND CURING SHALL CONFORM TO ACI 301 AND ACI 318. CONCRETE SHALL HAVE 4,000 PSI MINIMUM 28-DAY COMPRESSIVE STRENGTH, 4 TO 7% ENTRAINED AIR, 4 INCH MAX SLUMP, 45 MAXIMUM WATER/CEMENT RATIO, 3/4" MAXIMUM AGGREGATE SIZE.

PREBLENDED CONCRETE MIX IS CONDITIONALLY APPROVED PENDING SUBMISSION, REVIEW, AND APPROVAL OF A HIGH-QUALITY PREBLENDED CONCRETE MIX PRODUCT WITH A 28-DAY COMPRESSIVE STRENGTH OF 4,000 PSI, MINIMUM, SUCH AS QUIKRETE, SAKRETE, OR APPROVED EQUAL. FOLLOW ALL MANUFACTURER’S WRITTEN DIRECTIONS FOR STORAGE, HANDLING, PREPARATION, AND USE.

3.1 CONCRETE REINFORCEMENT COVER
STEEL CONCRETE REINFORCEMENT SHALL BE WELL-SECURED AND SUPPORTED AT CORRECT HEIGHT ON STEEL OR PLASTIC REBAR CHAIRS, WELL-CURED CONCRETE BLOCKS, OR EQUAL PRIOR TO PLACING CONCRETE. SUPPORTS SHALL NOT DAMAGE OR PUNCTURE INSULATION, VAPOR BARRIER, OR OTHER UNDERLAYMENT. PROVIDE 3 INCHES COVER WHERE CONCRETE IS CAST AGAINST EARTH, 2 INCHES COVER AT ALL OTHER EDGES, UNLESS NOTED OTHERWISE ON DRAWINGS.

3.2 CONCRETE COMPACTION
COMPACT USING A VIBRATOR TO FILL FORMS COMPLETELY FULL WITHOUT ANY AIR POCKETS IN ONE SEQUENCE AS FOLLOWS:
A. INSERT VIBRATOR IN CLEAN VERTICAL MOTIONS CLEARING CONCRETE SURFACE BEFORE RE-PENETRATING INTO CONCRETE
B. VIBRATOR SHALL NOT BE DRAGGED THROUGH CONCRETE NOR USED TO FLOW OR SPREAD CONCRETE INTO PLACE AS VOIDS WILL DEVELOP
C. VIBRATOR SHALL NOT BE HELD FOR AN EXTENDED TIME IN ONE PLACE OR LEFT IN FORMS DURING DELAYS AS CONSTITUENT SEGREGATION AND FORMATION OF LAITANCE ON CONCRETE SURFACE WILL OCCUR
D. VIBRATOR SHALL NOT BE HELD AGAINST FORMS, REBAR, ANCHORS, OR OTHER EMBEDMENTS AS DAMAGE AND DISTORTION WILL OCCUR
E. VIBRATOR SHALL BE HIGH FREQUENCY INTERNAL UNIT OF PNEUMATIC, ELECTRIC, OR HYDRAULIC TYPE WITH MINIMUM FREQUENCY OF 5,000 CYCLES PER MINUTE, CAPABLE OF VISIBLY AFFECTING A PROPERLY DESIGNED MIXTURE WITH 1-INCH SLUMP FOR A DISTANCE OF AT LEAST 18 INCHES AWAY FROM VIBRATOR

3.3 CONCRETE CURING
APPLY CURING COMPOUND OR COVER CONCRETE SURFACE FOR 7 DAYS MINIMUM WITH WET BURLAP FREE OF CHEMICALS THAT COULD WEAKEN OR DISCOLOR CONCRETE. PLACE AND SECURE PLASTIC SHEETING TO LIMIT MOISTURE LOSS, SUSTAIN HYDRATION, AND PROTECT FROM RAIN DAMAGE, OR APPROVED EQUAL METHOD. CONCRETE SHALL CURE UNDISTURBED FOR FIRST 24 HOURS MINIMUM.

PROTECT FROM FREEZING PER ACI 306 FOR FIRST 72 HOURS MINIMUM. USE INSULATION, TARPS, AND HEATERS WHEN AMBIENT AIR TEMPERATURE IS BELOW 40°F TO ENSURE CONCRETE TEMPERATURE DOES NOT FALL BELOW 55°F. PROVIDE SUFFICIENT MOISTURE TO AVOID DRYING OF CONCRETE WHEN USING HEATERS FOR FREEZE PROTECTION.

DO NOT ENGAGE EMBEDMENTS, DRILL, OR PERFORM OTHER WORK OR APPLY STRESSES UNTIL CONCRETE HAS ATTAINED 3,000 PSI MINIMUM COMPRESSIVE STRENGTH OR 7 DAYS MINIMUM HAVE PASSED SINCE PLACEMENT.

4.0 EPOXY
HILTI HIT-HY 200A OR 200R OR BETTER INJECTABLE TWO-COMPONENT EPOXY OR OTHER APPROVED BY ENGINEER FOR ANCHORS POST-INSTALLED IN HARDENED CONCRETE. FOLLOW MANUFACTURER’S EXACT WRITTEN DIRECTIONS FOR PRODUCT USE, INCLUDING PREPARATION OF CONCRETE, ANCHOR INSTALLATION, AND TIGHTENING.

SUFFICIENT MATERIAL SHALL BE PLACED IN HOLE TO EJECT EXCESS ALL AROUND ANCHOR FOLLOWING ANCHOR INSTALLATION TO ENSURE THAT HOLE IS COMPLETELY FULL AND SEALED FROM WATER INTRUSION. CONTINUE TO SUPPORT MEMBERS SO THAT ANCHOR IS NOT ENGAGED UNTIL SPECIFIED CURE TIME HAS BEEN REACHED FOR ACTUAL WEATHER CONDITIONS AT SITE.

5.0 GROUT
BASF SET 45, EUCLID CHEMICAL EUCCO-SPEED RED LINE, JET SET COMPLETE REPAIR, OR OTHER HIGH-STRENGTH, NON-SHRINK GROUT APPROVED BY ENGINEER. FOLLOW MANUFACTURER’S WRITTEN DIRECTIONS FOR PREPARATION OF CONTACT SURFACES AND PRODUCT USE.

6.0 DRAIN PIPE
HIGH DENSITY CORRUGATED POLYETHYLENE PIPE (HDPE CPP) MANUFACTURED PER AASHTO M252/M294, TYPE S SPECIFICATION, AND CONFORM TO ASTM D3350, CELL CLASSIFICATION 324420C OR ASTM D1248, CLASS C, CATEGORY 4, GRADE P33.

7.0 HARDWARE
TYPE 304 STAINLESS STEEL HEX CAP SCREWS WITH NUTS AND WASHERS.
TYPE 304 STAINLESS STEEL EYEBOLT, CLOSED AND WELDED WITH HEX NUT. STAINLESS STEEL 3-WIRE STRNAD 3/8" DIAMETER MEDIUM STRENGTH TYP 304, PER ASTM A-368

8.0 REINFORCING STEEL
REINFORCING STEEL SHALL BE DEFORMED BILLET STEEL CONFORMING TO ASTM A-614, GRADE 60, Fy=60,000 PSI. UNLESS OTHERWISE NOTED LENGTHS OF LAPS ON HOOPS SHALL BE 8", NO LAP JOINTS SHALL BE ALLOWED EXCEPT HOOPS.

9.0 HELICOPTER LANDING PAD COMPONENTS
- ALUMINUM STRUCTURAL MEMBERS: 6061-T6 ALUMINUM
- CHANNELS: ALUMINUM ASSOCIATION STANDARD CHANNELS (AAS).
- I-BEAMS: ALUMINUM ASSOCIATION STANDARD I-BEAMS (AAS).
- ALUMINUM PLATE: 6061-T6
- ALUMINUM WELDING: WELDING SHALL BE IN ACCORDANCE WITH THE AMERICAN WELDING SOCIETY (AWS) D1.2-14 STRUCTURAL ALUMINUM WELDING CODE FOR CLASS II STRUCTURES. ALL ELECTRODES SHALL BE ER5356 FOR WELDING ALUMINUM ALLOY 6061.
- ALUMINUM GRATING: 1.5" I-BAR GRATING, 6063-T6 ALUMINUM, BOCKED BY SWAGING, BEARING BAR THICKNESS: 0.25", BEARING BAR SPACING: 1.1875", SURFACE GROOVED, CROSS BAR SPACING: 4.0". USE MCNICHOLS GRATING GIA 150 OR APPROVED EQUAL.
- TELESCOPING STEEL JACK POST: McMASTER-CARR NO. 2946T3 OR APPROVED EQUAL.

10.0 ROCK BOLTS
SPIN-LOCK TYPE ROCK BOLT. WILLIAMS FORM ENGINEERIN GCORPORATION – MODEL R1S-5/8" DIA OR APPROVED EQUAL. USE COUPLING NUT AND THREADED ROD TO EXTEND TAILS TO MEET THE DESIGN DRAWING REQUIREMENTS.

ABBREVIATIONS AND ACRONYMS

AASHTO	AMERICAN ASSOCIATION OF STATE HIGHWAY & TRANSPORTATION OFFICIALS
ACI	AMERICAN CONCRETE INSTITUTE
APPROX	APPROXIMATE
ASTM	ASTM INTERNATIONAL
CL or c	CENTERLINE
CONC	CONCRETE
CPP	CORRUGATED POLYETHYLENE PIPE
d or °	DEGREES
DIA or Ø	DIAMETER
(E), EXIST	EXISTING
EA	EACH
EL	ELEVATION
EQ	EQUAL
f’c	CONCRETE COMPRESSIVE STRENGTH AT 28 DAYS
FT or ’	FOOT/FEET
GALV	GALVANIZED
HDG	HOT-DIP GALVANIZED
HORIZ	HORIZONTAL
ID	INSIDE DIAMETER
IN or "	INCH/INCHES
MAX	MAXIMUM
MIN	MINIMUM
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
(P)	PROPOSED
PERF	PERFORATED
PSI	POUNDS PER SQUARE INCH
PT	PRESSURE TREATED
SS	STAINLESS STEEL OR SANITARY SEWER, PER CONTEXT
STA	STATION
TYP	TYPICAL
UE	UNDERGROUND ELECTRICAL
VERT	VERTICAL



United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

90% PRELIMINARY
DOCUMENTS NOT
FOR CONSTRUCTION

1		
3		
2		
4		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK

TONGASS NATIONAL
FOREST

PETERSBURG & WRANGELL
RANGER DISTRICTS

DRAWING TITLE

CONSTRUCTION NOTES
AND SUPPLEMENTAL
SPECS

DATE 03/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO. 02
DRAWN M. KEMP	
CHECKED X.XXX	
PROJECT NO.	SHEET 02 OF 09



United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

90% PRELIMINARY
DOCUMENTS NOT
FOR CONSTRUCTION

4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME


HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK
TONGASS NATIONAL
FOREST


PETERSBURG & WRANGELL
RANGER DISTRICTS

DRAWING TITLE


HELICOPTER PAD

DATE 03/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO. 03
DRAWN M.KEMP	
CHECKED X.XXX	
PROJECT NO.	SHEET 02 OF 09

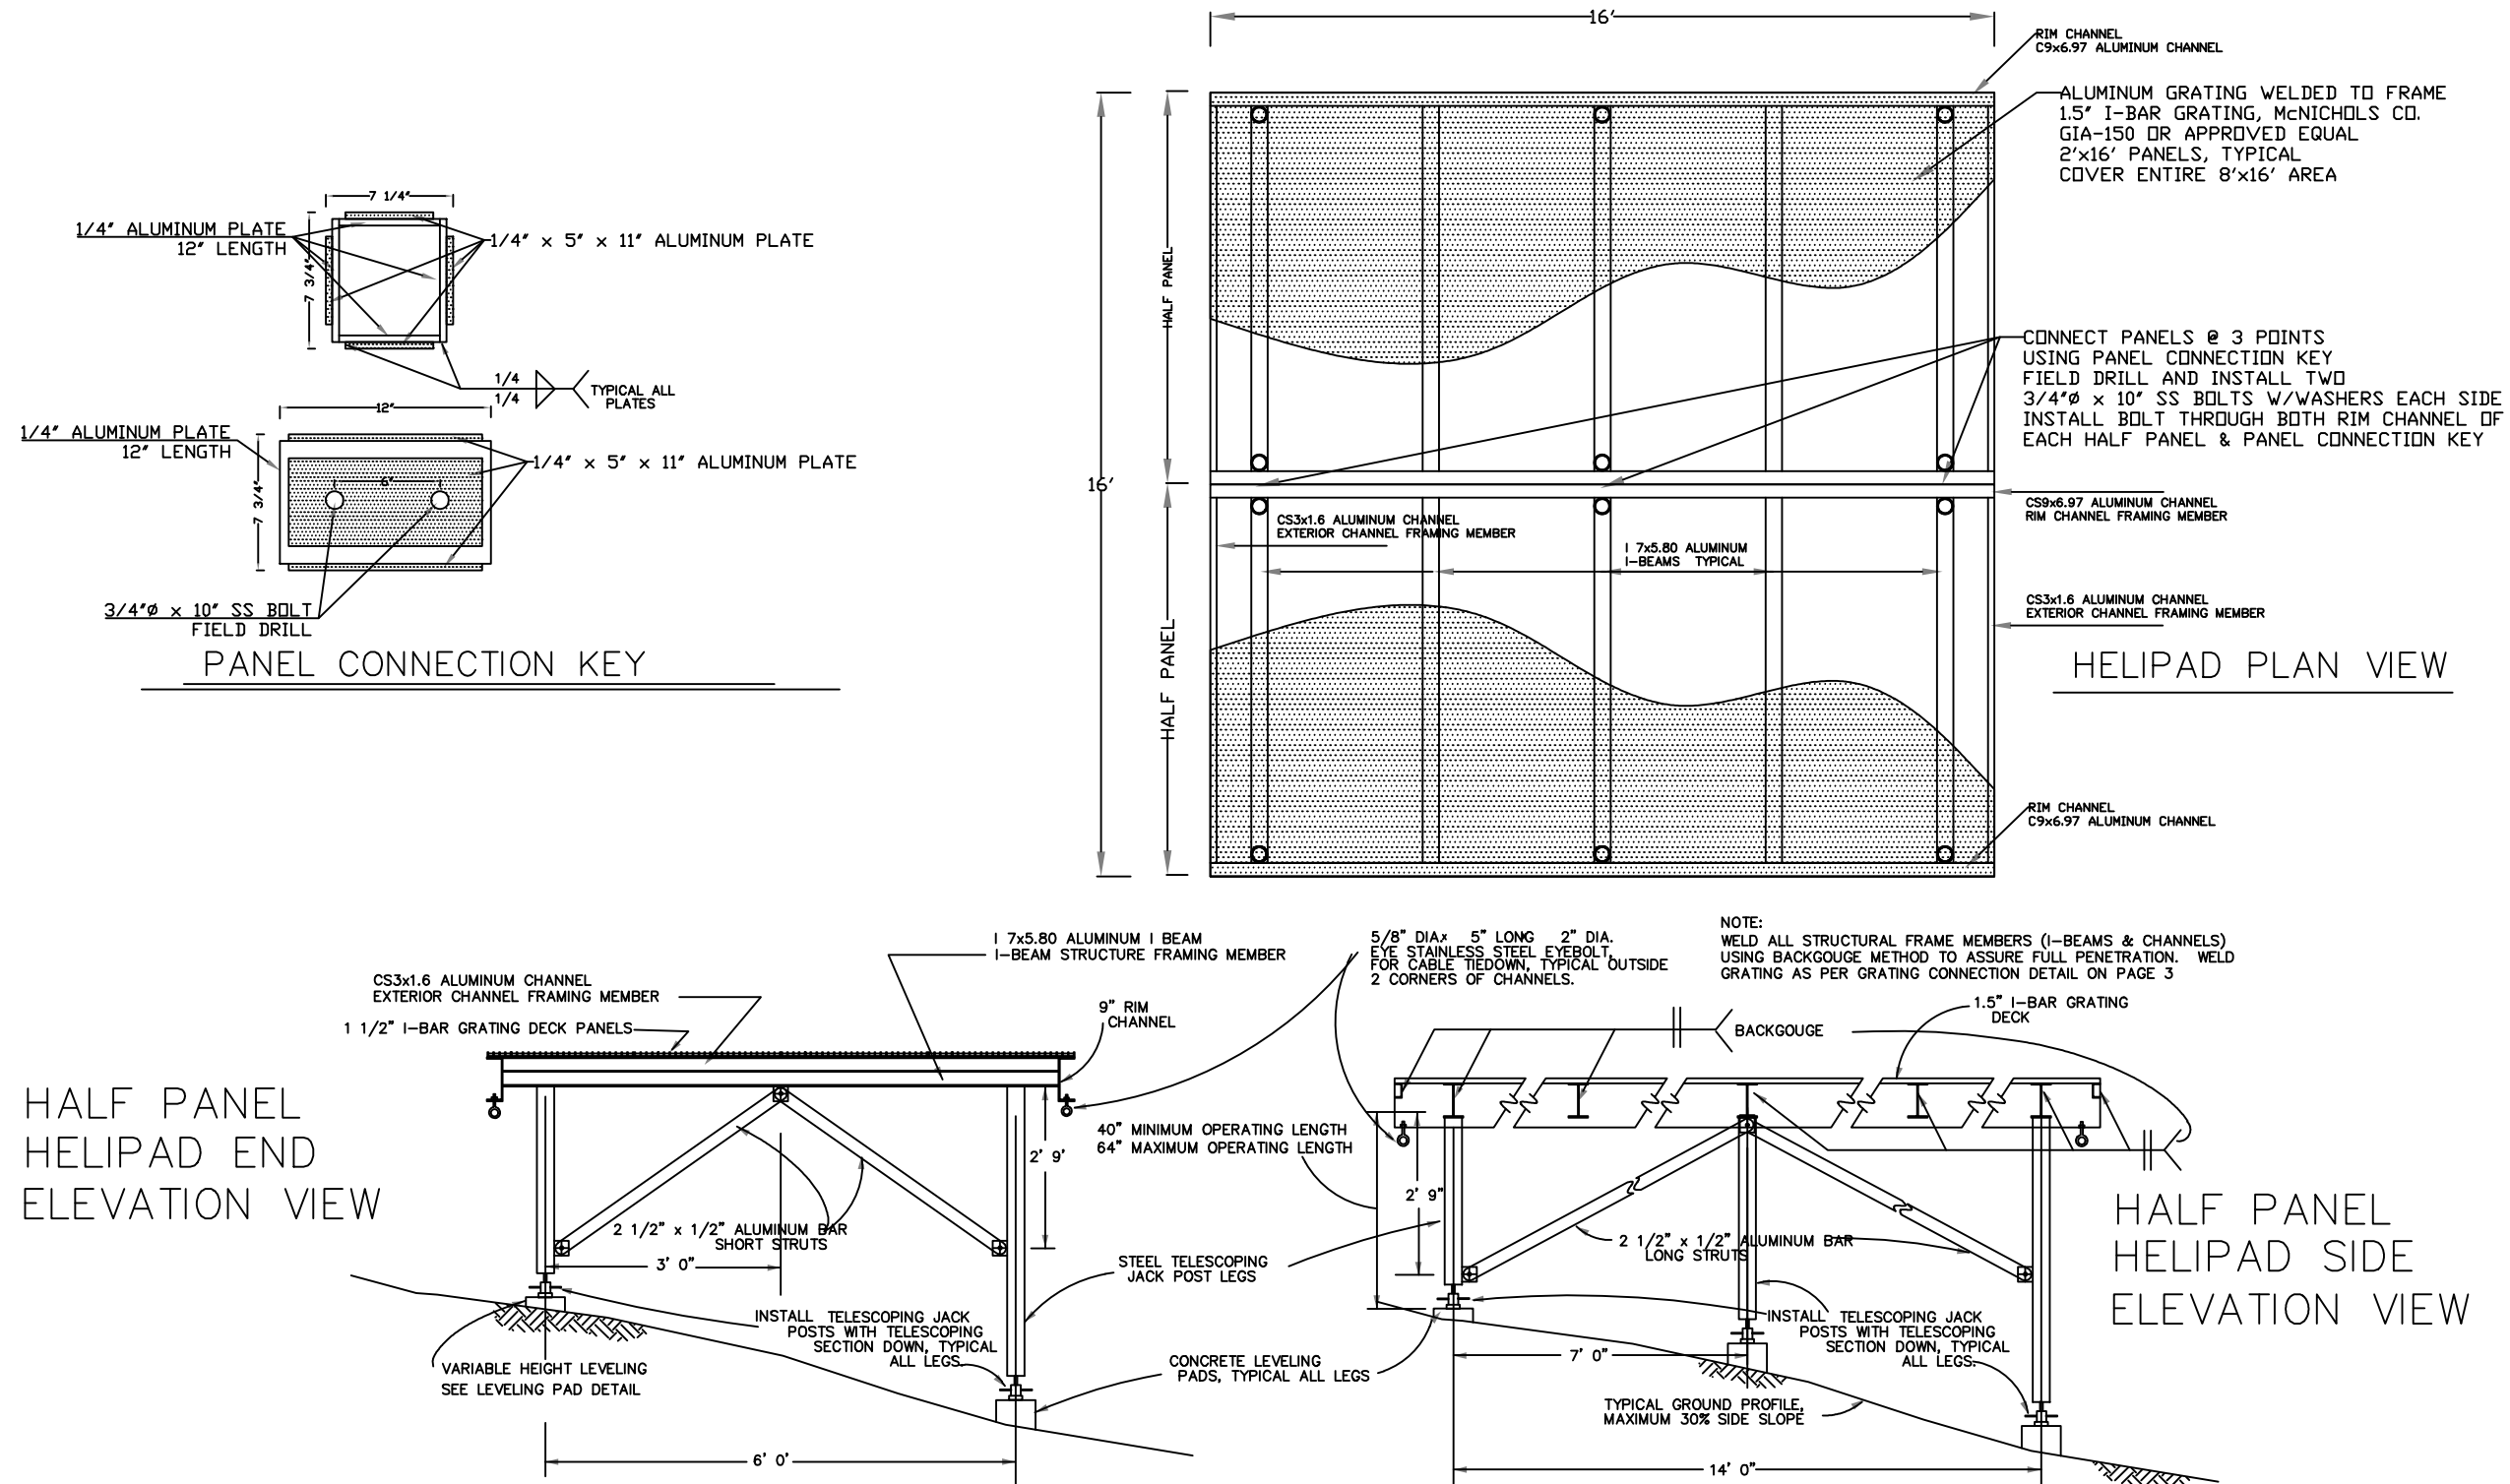

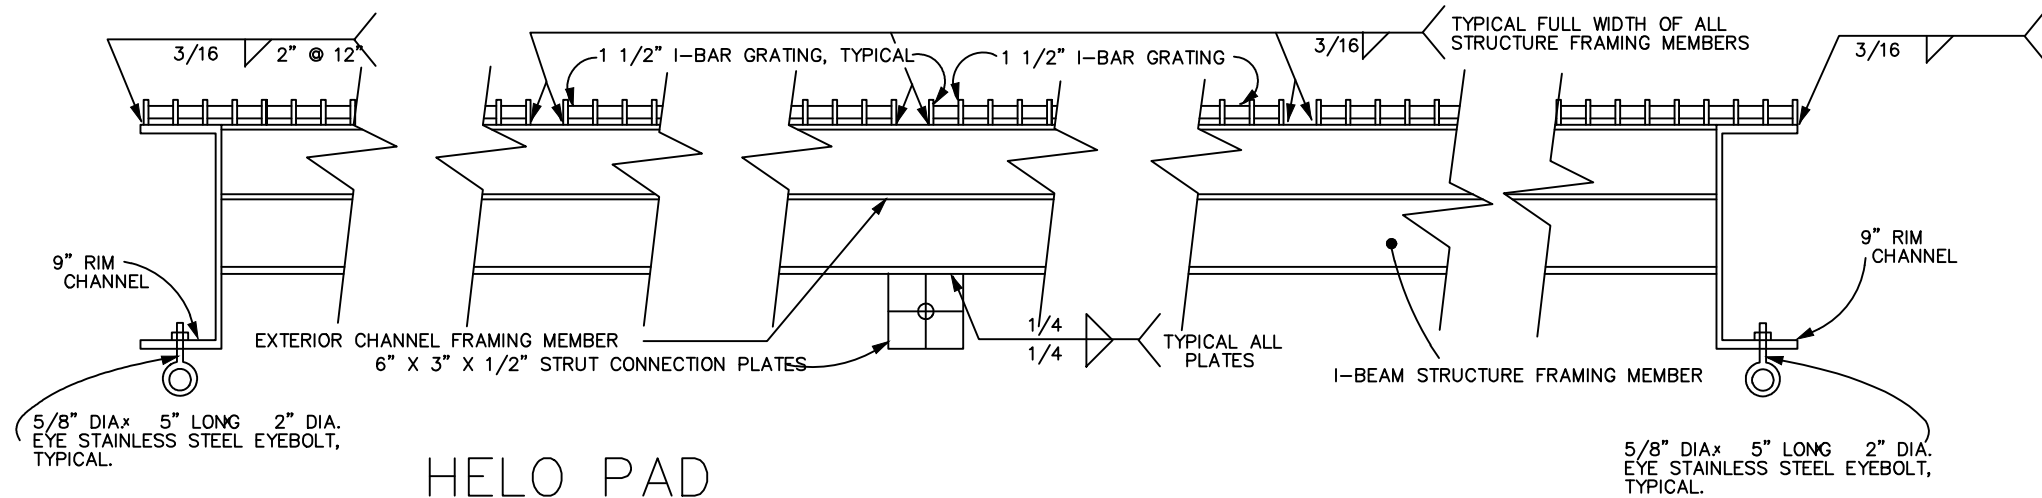

HELO PAD
GRATING CONNECTION DETAIL

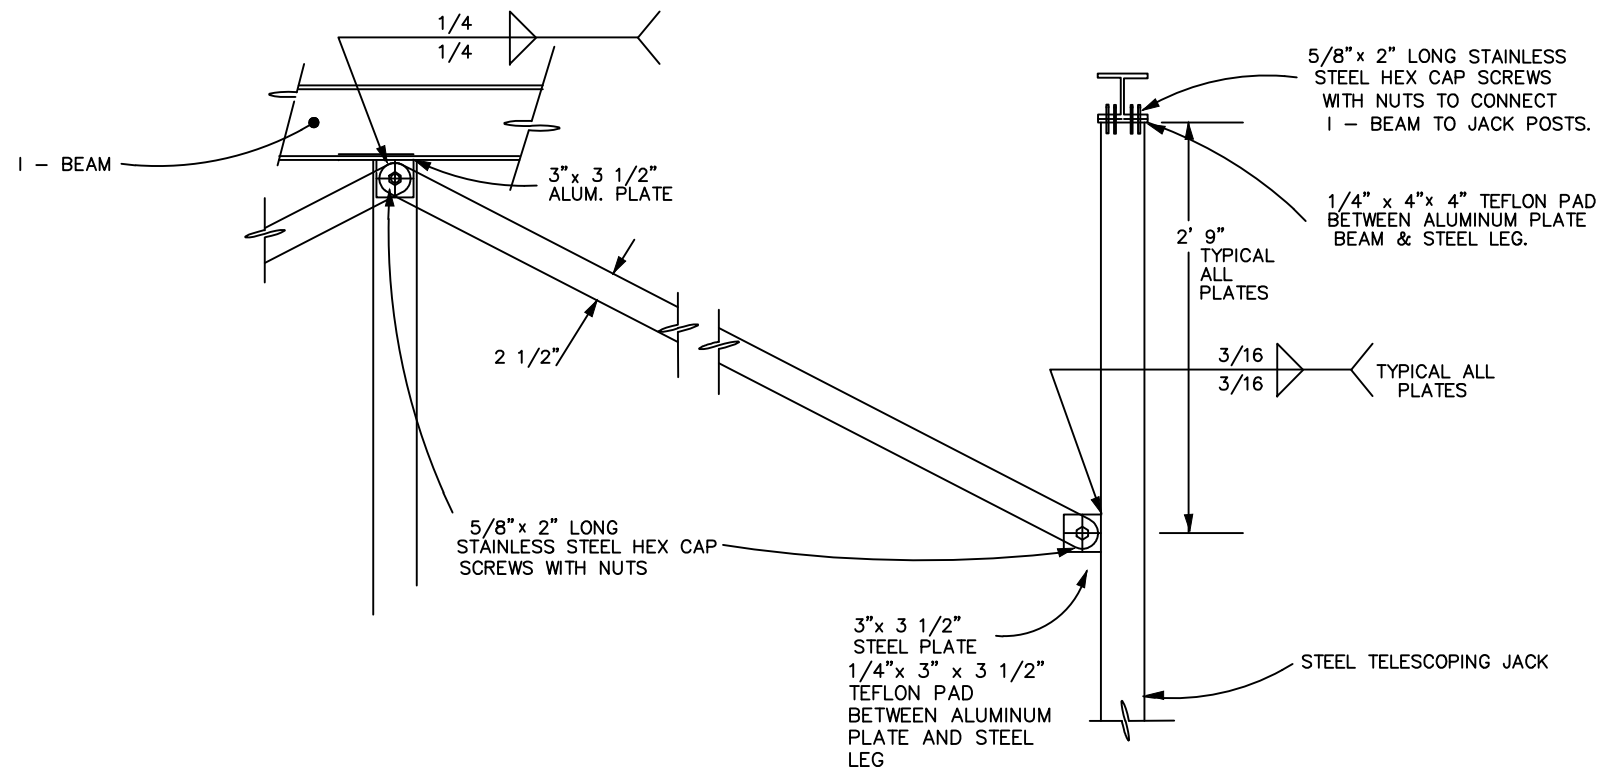

HELO PAD
LEG CONNECTION DETAIL



United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

90% PRELIMINARY
DOCUMENTS NOT
FOR CONSTRUCTION

4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

**HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK**
TONGASS NATIONAL
FOREST


PETERSBURG & WRANGELL
RANGER DISTRICTS

DRAWING TITLE


**HELICOPTER PAD
DETAILS**

DATE 03/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO.
DRAWN M.KEMP	04
CHECKED X.XXX	
PROJECT NO.	SHEET 02 OF 09

FABRICATE STEPS IN FIELD - LENGTH WILL VARY
ATTACH TWO SETS OF STAIRS AT OPPOSITE
SIDES OF HELICOPTER PAD



LEVELING PAD DETAIL

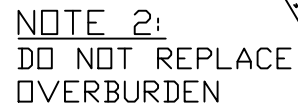

NOTE 3:
MINIMUM HEIGHT OF PIER OR
LEVELING PAD IS 4". IF
PIER IS LESS THAN 12", USE
ROCK BOLTS TO ATTACH
DIRECTLY TO STEEL POST
BASE PLATE.

NOTE 1:
BUILD PADS AS CLOSE TO
GROUND AS PRACTICAL FOR
HELICOPTER USAGE & SAFETY

← FINAL HEIGHT WILL BE ABOVE OVERBURDEN

— 2 EACH PIER-
5/8"Ø ROCK BOLT-
12" MINIMUM IN BEDROCK



R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

90% PRELIMINARY
DOCUMENTS NOT
FOR CONSTRUCTION

4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

**HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK
TONGASS NATIONAL
FOREST**


**PETERSBURG & WRANGELL
RANGER DISTRICTS**

DRAWING TITLE

STAIR AND PIER DETAIL


DATE 03/26/2025	ARCHIVE NO.	
DESIGNER X.XXX	DRAWING SHEET NO.	
DRAWN M.KEMP	05	
CHECKED X.XXX		
PROJECT NO.	SHEET 02 OF 09	

6/30/25 15:30 MELINDAKEMP C:\USERS\MELINDAKEMP\DOCUMENTS\HELIPAD CONSTRUCTION PACKAGE\DRAWINGS\HELIPAD 2025\2.DWG;

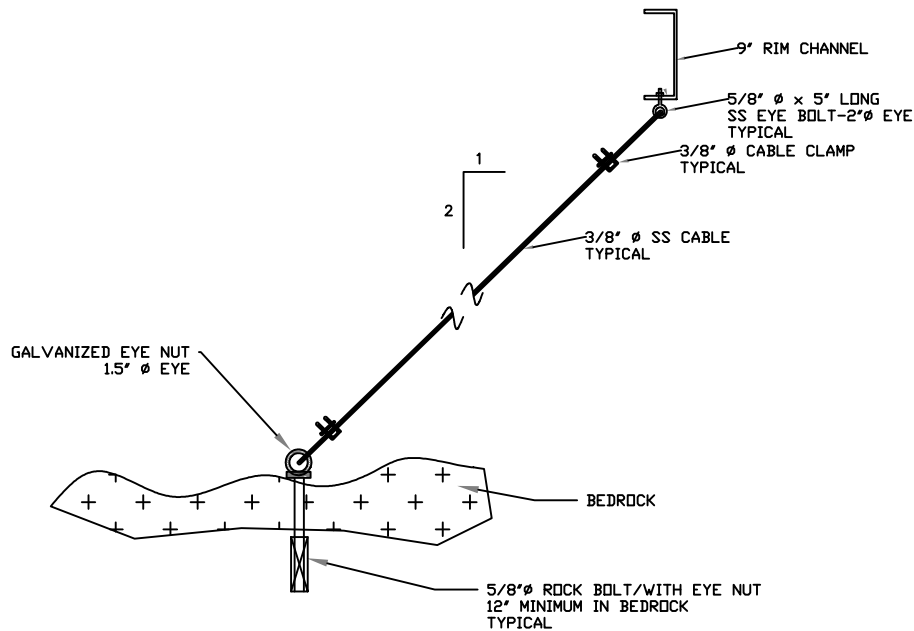

CABLE TIE @ EACH CORNER OF
HELICOPTER PAD – TYPICAL

TELESCOPING STEEL JACK
POST COLUMN PROFILE

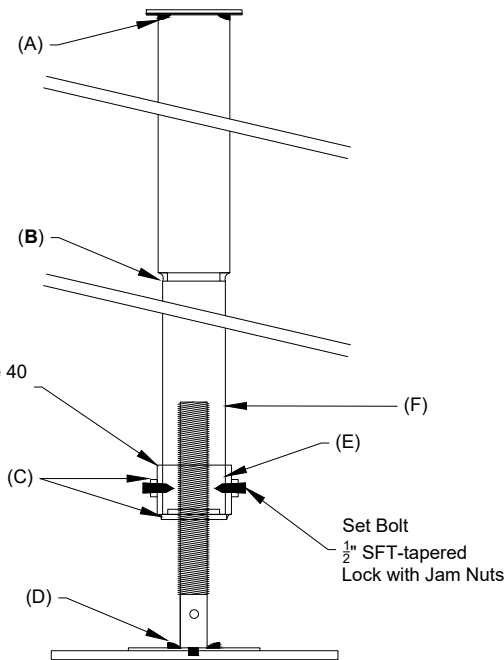

TOP: Teflon Plate
0.125" Plate and Centering Tabs
End of Pipe Length: 32.625"

MIDDLE: Pipes Welded at 1st Notch

BASE: 0.375" x 4.5" x 9"
0.125" Plate with Centering Tabs
Threaded Nut with "Cup" Assy, welded
Set screws in nuts welded to "Cup"
Pipe Sits in Cup, Fastened with Set Screws

- GENERAL NOTES:**
- Weld points are full circumference welds.
 - Coat Telescoping Steel Jack Post, threads and associated fasteners with POR 15 Rust Preventative and cover with POR-15 Top Coat for UV Protection (Color: Silver) or approved equal per manufacturers recommendations.

- SHEET KEYNOTES:**
- Weld the top plate to the upper/outer sleeve column.
 - Weld the outer sleeve column to the inner sleeve column.
 - Cut/weld a sleeve to the adjustment collar and weld 2 nuts to the surface of the collar that will provide a locking mechanism to the inner sleeve column.
 - Weld the threaded adjustment rod assembly to the bottom plate
 - Field drill the inner set hold on the inner sleeve column - a small piece of copper pipe/tubing to be used as a guide to prevent burring the threads as we drill the inner pipe to receive the set - nut.
 - Field cut the inner sleeve column to a rough length to be determined at the time of grade determination.



United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS

90% PRELIMINARY
DOCUMENTS NOT
FOR CONSTRUCTION

4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

**HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK**

**TONGASS NATIONAL
FOREST**

PETERSBURG & WRANGELL
RANGER DISTRICTS


DRAWING TITLE

**CABLE TIE AND
TELESCOPING ROD
DETAILS**

DATE 03/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO. 06
DRAWN M.KEMP	
CHECKED X.XXX	
PROJECT NO.	SHEET 06 OF 09

6/30/25 15:30 MELINDAKEMP C:\USERS\MELINDAKEMP\DOCUMENTS\HELIPAD\CONSTRUCTION PACKAGE\DRAWINGS\HELIPAD 2025V2.DWG;

Site Locations				
SITE NAME	LATITUDE	LONGITUDE	ELEVATION (feet)	EXISTING HELIPAD DESCRIPTION
ETOLIN	56° 8'49.00"N	132° 37' 23.00"W	3116	8' X 8' ALUMINUM GRATE PAD
FARRAGUT	57° 7'20.70"N	133° 2'41.17"W	3946	8' X 8' ALUMINUM GRATE PAD
FOOLS	56° 12' 54.01"N	131° 58' 33.01"W	3481	8' X 8' ALUMINUM GRATE PAD

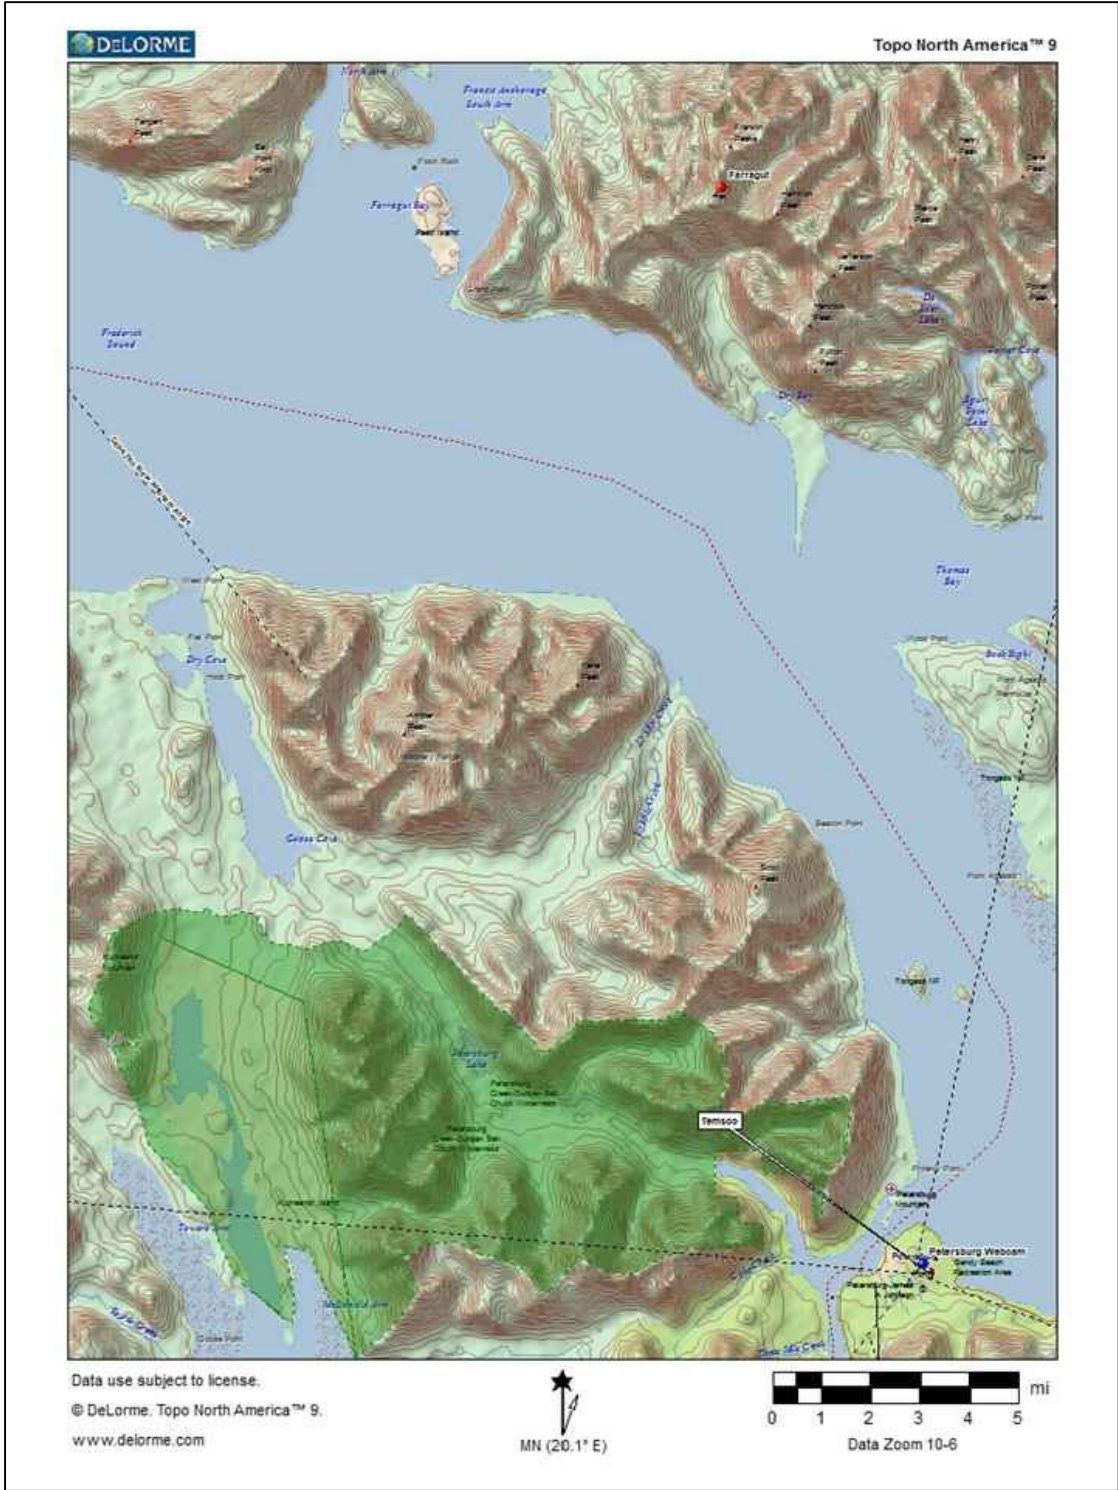

1 TOPO MAP OF FARRAGUT LOCATION FROM NEAREST AIRPORT
NOT TO SCALE



2 EXISTING 8'X8' ALUMINUM PAD ADJACENT TO RADIO EQUIPMENT
NOT TO SCALE



3 AERIAL OVERVIEW OF FARRAGUT REPEATER SITE
NOT TO SCALE

USDA

FOREST SERVICE

U.S. DEPARTMENT OF AGRICULTURE

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS		
4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK
TONGASS NATIONAL
FOREST



PETERSBURG & WRANGELL
RANGER DISTRICTS

DRAWING TITLE

FARRAGUT LOCATION
AERIAL OVERVIEW AND
LOCATION SCHEDULE

DATE 06/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO. 08
DRAWN M.KEMP	
CHECKED X.XXX	
PROJECT NO.	SHEET 08 OF 09

Site Locations				
SITE NAME	LATITUDE	LONGITUDE	ELEVATION (feet)	EXISTING HELIPAD DESCRIPTION
ETOLIN	56° 8'49.00"N	132° 37' 23.00"W	3116	8' X 8' ALUMINUM GRATE PAD
FARRAGUT	57° 7'20.70"N	133° 2'41.17"W	3946	8' X 8' ALUMINUM GRATE PAD
FOOLS	56° 12' 54.01"N	131° 58' 33.01"W	3481	8' X 8' ALUMINUM GRATE PAD

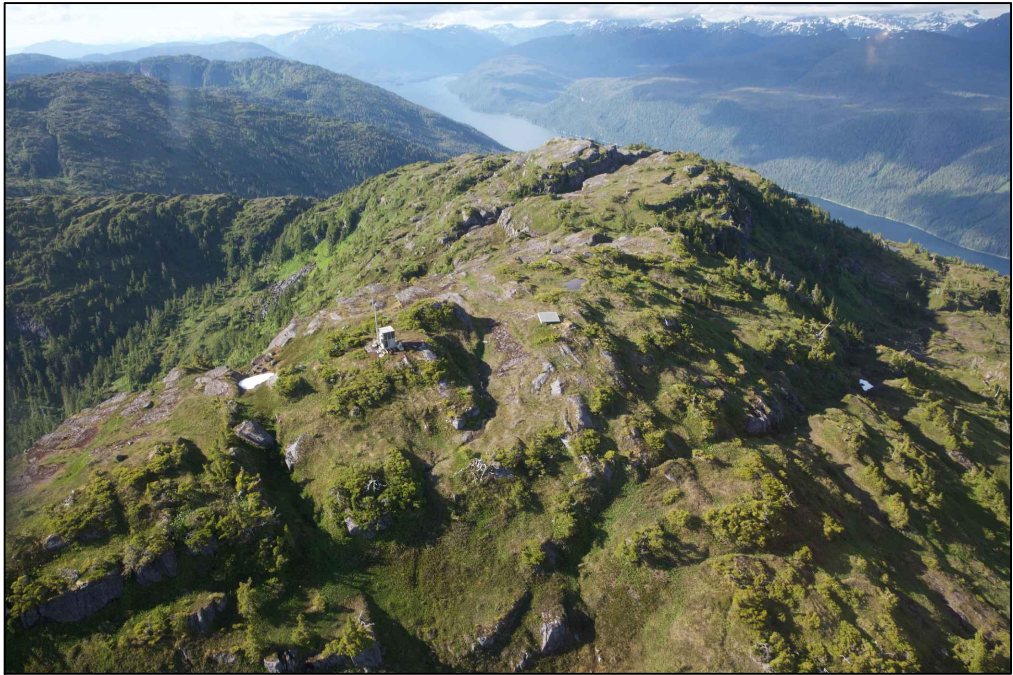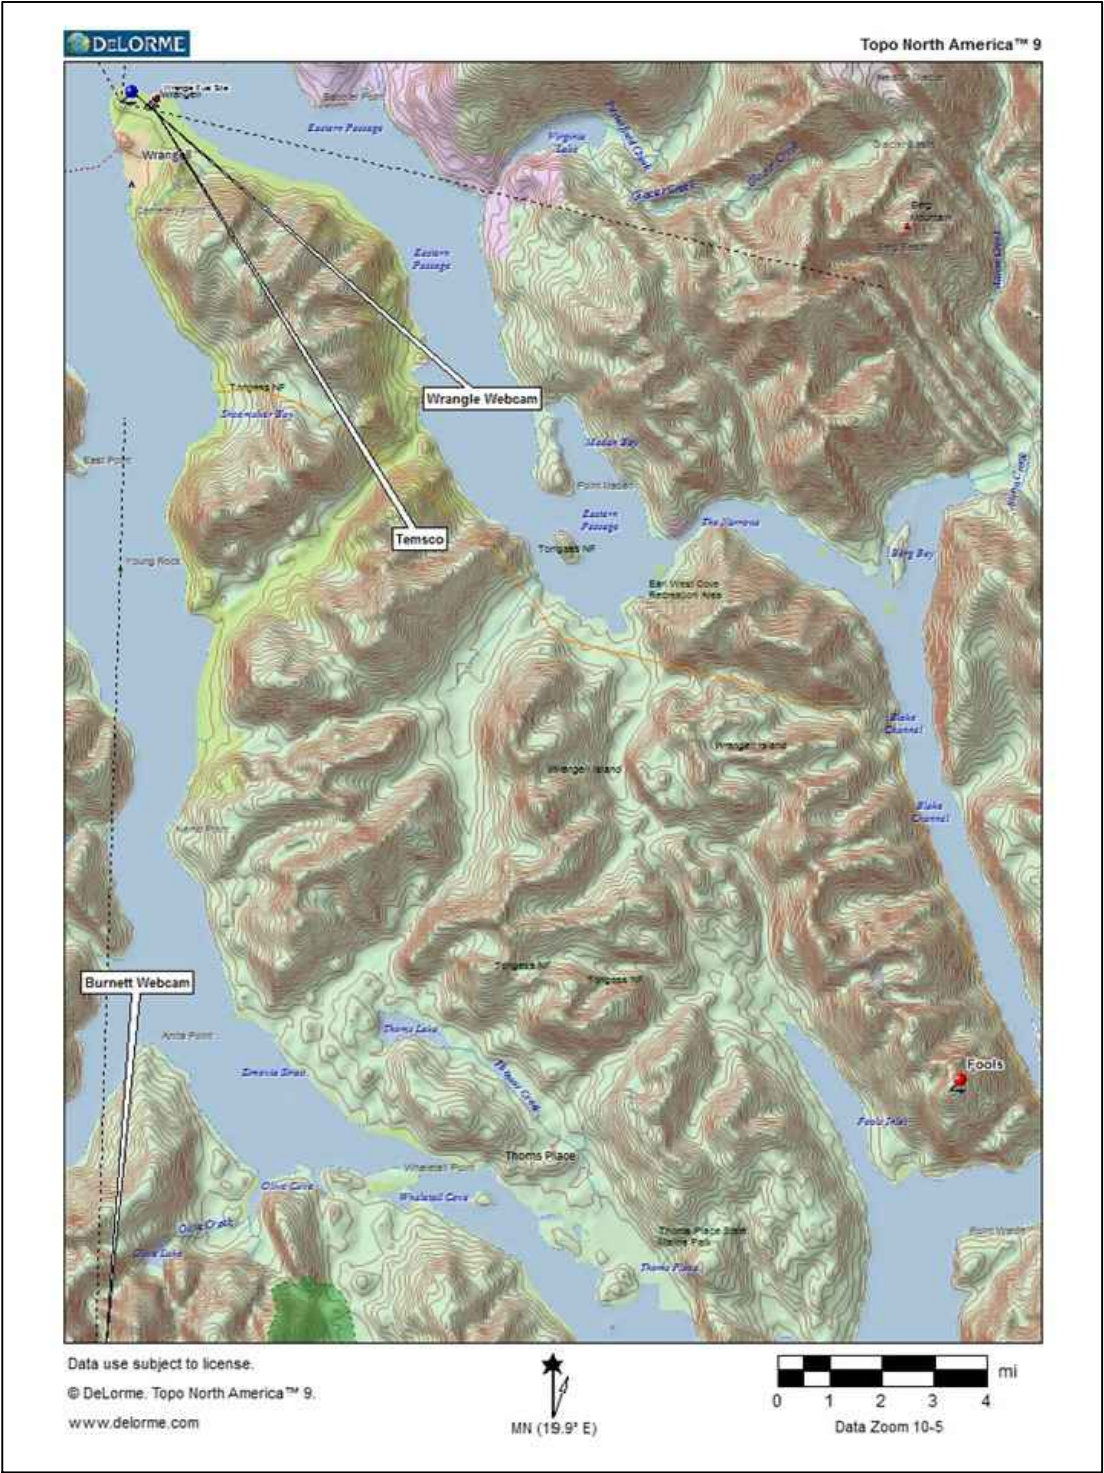

2 AERIAL OVERVIEW OF FOOLS SITE
NOT TO SCALE



3 EXISTING 8'X8' ALUMINUM GRATE PAD AT FOOLS
NOT TO SCALE

USDA

FOREST SERVICE

UNITED STATES DEPARTMENT OF AGRICULTURE

United States Department of Agriculture
Forest Service

R10
ALASKA REGION

STAMPS, LOGOS, AND SEALS		
4		
3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

HELICOPTER PAD
RECONSTRUCTION:
ETOLIN,
FARRAGUT &
FOOLS PEAK
TONGASS NATIONAL
FOREST

PETERSBURG & WRANGELL
RANGER DISTRICTS

DRAWING TITLE

FOOLS LOCATION
AERIAL OVERVIEW AND
LOCATION SCHEDULE

DATE 06/26/2025	ARCHIVE NO.
DESIGNER X.XXX	DRAWING SHEET NO. 09
DRAWN M.KEMP	
CHECKED X.XXX	
PROJECT NO.	SHEET 09 OF 09