

ATTACHMENT 1 – SPECIFICATIONS

Submerged Traveling Screen Replaceable Tracks

John Day-Willow Creek Project, Oregon

1. SCOPE

John Day Lock and Dam has Submerged Traveling Screens (STS). The STS's have Replaceable Tracks that the roller chains moving the screen rides on. There are two different styles of Replaceable Tracks made of three sections. Each STS uses two of each style of track. For this effort the contractor shall provide 12 of each section. This QTY per section shall be enough to make 12 each style of Replaceable Tracks. Contractor shall provide a physical and digital copy of the technical drawings and product data sheets for the material. Specifications for each of the Replaceable tracks are listed in this document.

2. SPECIFICATIONS

- a. ALL REPLACEABLE TRACKS SECTIONS SHALL
 - i. Be made of UHMW Polyethylene
 - ii. All have the same width and thickness.
 1. Width: 2in
 2. Thickness: 0.75in
 - iii. Have slots made on the one side of the track section. All track sections will have multiple slots, quantity will vary per section. First Slot location will differ per each track section. Slots after the first one will be 9in apart. Slots details in images below:

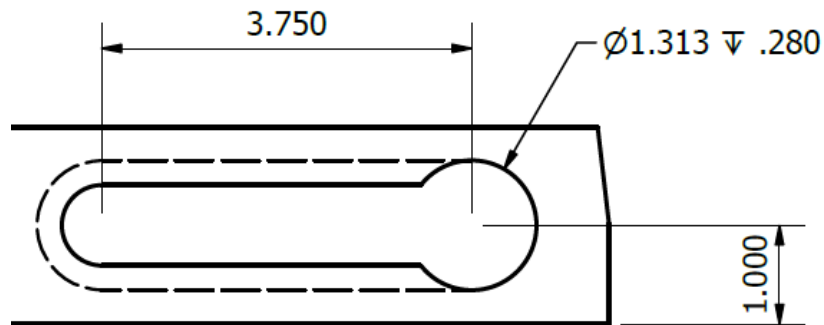


Figure 1: Top view of the Replaceable Tracks Slots.

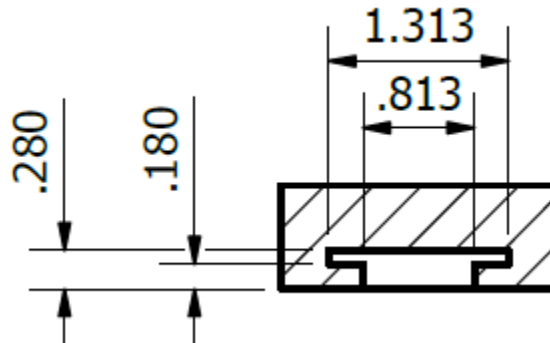


Figure 2: Section view of a Slot on the Replaceable Tracks.

- iv. All machined surfaces shall be cleaned and deburred.

b. DETAILS ON EACH REPLACEABLE TRACK SECTIONS

- i. 25-3 REPLACEABLE TRACK (1)
 1. Track Length: 69.000in
 2. Number of Slots: 7
 - a. Slot spacing from the end of Track: 11.000in
 3. See Drawing **M-101** for more details.
 4. Quantity of tracks needed: 12
- ii. 25-3 REPLACEABLE TRACK (2)
 1. Track Length: 74.000in
 2. Number of Slots: 8
 - a. Slot spacing from the end of the track: 7.750in
 3. See Drawing **M-102** for more details.
 4. Quantity of tracks needed: 12
- iii. 25-3 REPLACEABLE TRACK (3)
 1. Track Length: 57.250in
 2. Number of Slots: 6
 - a. Slot spacing from the end of the track: 9.000in
 3. See Drawing **M-103** for more details.
 4. Quantity of tracks needed: 12
- iv. 25-4 REPLACEABLE TRACK (4)
 1. Track Length: 69.000in
 2. Number of Slots: 7
 - a. Slot spacing from the end of the track: 11.000in
 3. See Drawing **M-104** for more details.
 4. Quantity of tracks needed: 12
- v. 25-4 REPLACEABLE TRACK (5)
 1. Track Length: 74.000in
 2. Number of Slots: 8
 - a. Slot spacing from the end of the track: 7.000in
 3. See Drawing **M-105** for more details.
 4. Quantity of tracks needed: 12
- vi. 25-4 REPLACEABLE TRACK (6)
 1. Track Length: 55.250in
 2. Number of Slots: 6
 - a. Slot spacing from the end of the track: 9.000in
 3. See Drawing **M-106** for more details.
 4. Quantity of tracks needed: 12
- vii. Drawings for tracks can be found in the **“Replacement Tracks Drawings”** document.
- viii. NOTE: Sections 25-3 Replaceable Track (1) through 25-3 Replaceable Track (3) make one of the styles of the Replaceable Track. Sections 25-4 Replaceable Track (4) through 25-4 Replaceable Track (6) make up the other style of Replaceable Track.

c. THE CONTRACTOR SHALL

- i. Provide 12 of each of the Replaceable Tracks mentioned in the section B and deliver them to John Day Lock and Dam. They all must meet the requirements stated in section A and B.
- ii. Submit for approval prior to delivery a digital copy of the technical drawings and product data sheets for the material used.
- iii. Provide 1 physical copy and 1 digital copy of the Replaceable Tracks technical drawings, and product data sheets of material.
- iv. REQUIREMENTS above.

3. WARRANTY

- a. Warranty provisions of these Specifications shall apply, except that notwithstanding inspection and acceptance, all replaceable tracks warranted to conform to these specifications upon receipt and acceptance at delivery site.

4. SHIPMENT

- a. The following general requirements apply to the Replaceable Track Sections:
 - i. Shipping General
 - 1. Prepare all components for shipment in a manner to protect them from damage. The Contractor must be responsible for and make good at no extra cost to the Government damage resulting from improper preparation, as well as for damage occurring during inspection, or shipping.
 - 2. If steel banding is used, use adequate protection so that it does not harm Replaceable Track Sections.
 - 3. All packaging materials used become the property of the Government.
 - ii. Shipment the Replaceable Track Sections.
 - 1. Provide packaging, package for shipment, and provide transportation project facility.

5. SCHEDULE AND DELIVERY

- a. Government Personnel at site to deliver. Normal working hours at John Day Dam are 6:30 a.m. to 5:00 p.m., Monday through Thursday. The delivery shall arrive between 7:00 a.m. and 3:00 p.m. during normal working days. This is to allow for unloading and inspection. The delivery shall be made to the north side of the dam. Delivery address is as follows:

John Day Lock and Dam
I-84, Exit 109
Rufus, Oregon 97050