

STATEMENT OF WORK

BLDG #565 Carpet Tile 1st Floor

16 Dec. 2025

1. SCOPE OF WORK

The work will include providing all necessary labor, equipment, transportation, materials, and support accessories, to remove existing glue down carpet, wall base, stair nosing and transitions. Contractor will be responsible for lifting or moving any furniture required for proper removal and installation of carpet. Furnish and install selected 24"x24" carpet tiles with "Tile Tabs" adhesive tabs, 4 inch rubber base and transitions to match existing. Stair nosing, riser and treads will match existing in color and quality. Contractor may be required to man the job to support an elevated work schedule for completion 1 month from start date.

For the auditorium area, if approved under this contract, stair nosing, riser and treads will match existing in color and quality.

2. DEMOLITION

The contractor shall demo existing flooring material, all transition and all wall base and stair nosing in designated areas. All building material shall be disposed of off MacDill AFB.

3. FLOOR PREPARATION

Anything other than mechanical removal of flooring material and non-water base adhesives and any additional floor preparation that may be required as a result of unforeseen conditions shall be brought to the attention to the Contracting Officer Representative (COR).

4. ASBESTOS ABATEMENT

Should the Contractor encounter Asbestos Containing Material (ACM) which must be disturbed, the Contractor shall cease all work that would disturb the ACM and shall immediately notify the COR.

5. SITE MAINTENANCE AND CLEANUP

a. **SITE MAINTENANCE** – The Contractor shall protect adjacent property, building, and their contents from dust, dirt, or other materials.

b. **CLEANUP** – Daily, the Contractor shall collect all trash, debris, refuse, garbage, etc., which is generated and place it in the appropriate containers with lids or approved covers.

6. LOCATION OF WORK

Work is located at building 565 1st floor


7. PERIOD OF PERFORMANCE

All work is to be started within 30 days and completed within 60 days of purchase order award. Contractor will immediately notify COR of delays due to mandated carpet goods suppliers.

Bldg. 565 1st Floor Carpet Replacement Project

Main Building
TOTAL SQ.FT. = 22,773

Auditorium
TOTAL SQ.FT. = 10,757
Total Stair Nosing 888 LF.

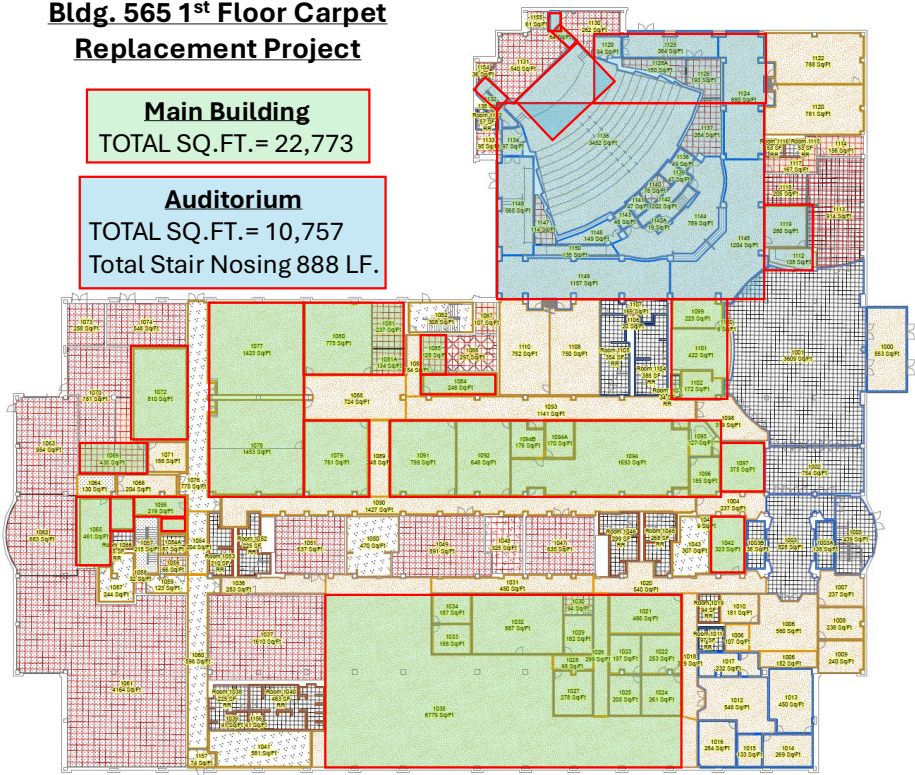

- Legend**
- No Service
 - L1F - Prestige Fac
 - L1R - Prestige RR
 - L2F - Basic Fac
 - L2R - Basic RR
 - L3F - Academic Fac
 - L3R - Academic RR
 - L4F - Special Fac
 - L4R - Special RR
- Floor Material**
- carpet
 - carpet tile
 - ceramic tile
 - marble
 - vinyl - sheet
 - vinyl tile
 - mixed
 - raised floor
 - concrete
 - wood
 - fiberglass
 - rubber
 - metal
 - unknown

Custodial		
Service Level	Material	SqFt
L1F - Prestige Fac	carpet tile	11959
L1F - Prestige Fac	ceramic tile	5905
L1F - Prestige RR	vinyl tile	19
L1R - Prestige RR	ceramic tile	1095
L2F - Basic Fac	carpet tile	33193
L2F - Basic Fac	ceramic tile	87
L2F - Basic Fac	concrete	345
L2F - Basic RR	rubber	3694
L2R - Basic RR	ceramic tile	2592
NS - No Service	carpet tile	2284
NS - No Service	ceramic tile	1181
NS - No Service	concrete	12243
NS - No Service	rubber	828
NS - No Service	vinyl tile	297

Service Level	Total SqFt
---------------	------------

Bldg. 565 1st Floor Carpet Replacement Project

Main Building
TOTAL SQ.FT.= 22,773

Auditorium
TOTAL SQ.FT.= 10,757
Total Stair Nosing 888 LF.

