

EMERGENCY CALL 911



NORTH



PROJECT
XGFG 262010

INDEX TO DRAWINGS

- 1 - T1 - TITLE SHEET
- 2 - T2 - WORK SITE ACCESS & LOCATION
- 3 - C1 - SITE PLAN REMOVALS
- 4 - C2 - ENLARGED PLAN
- 5 - D1 - CONCRETE DETAILS
- 6 - D2 - GUTTER DETAIL & LANDSCAPE PLAN


IMPORTANT CONTACTS

608-245-4548	CONTRACTING OFFICE
608-245-4571	BASE ENGINEERING
608-245-4530	BASE SECURITY
608-245-4561	BASE FIRE DEPT.
608-245-4537	BASE SAFETY

JUNE 2026


EMERGENCY CALL 911

T1
SHEET

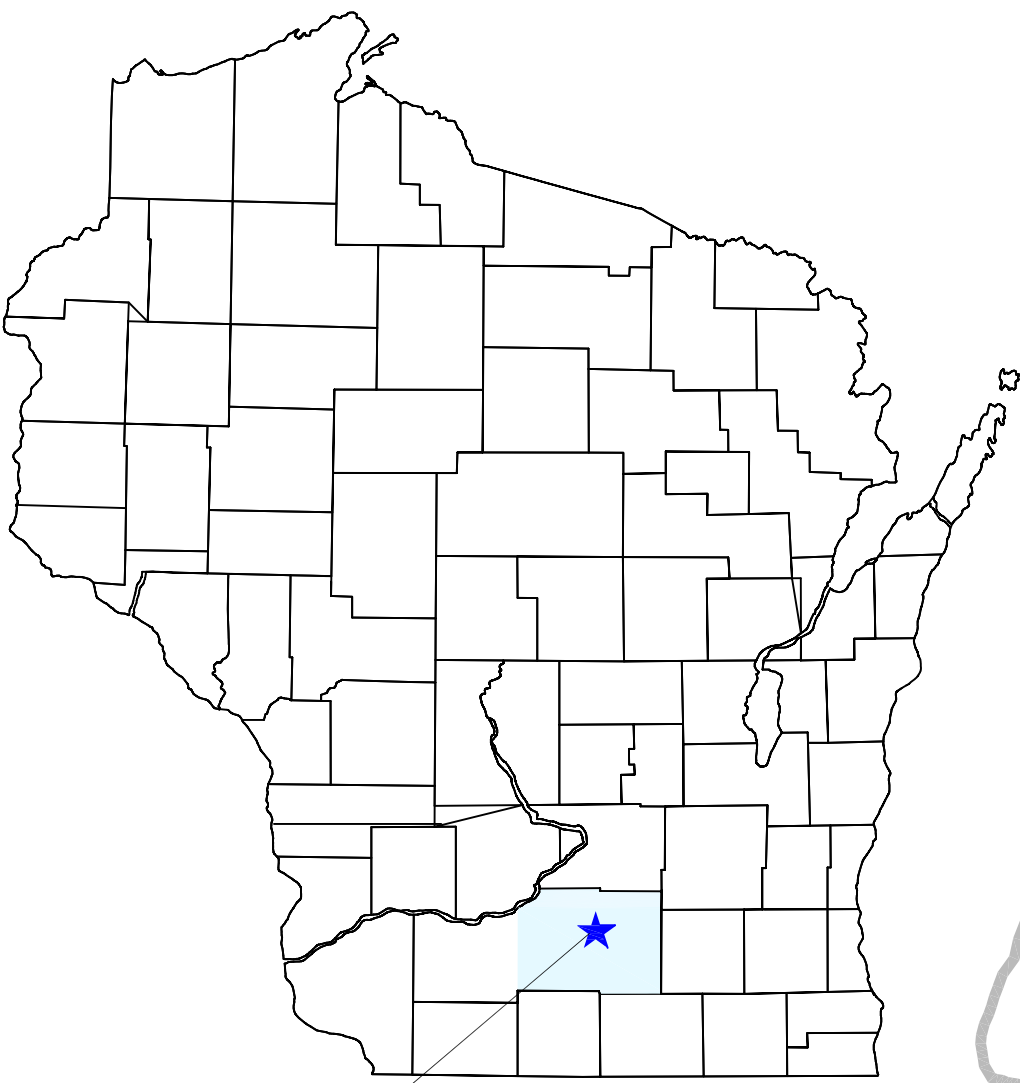

TRUAX FIELD
MADISON, WI

WISCONSIN AIR NATIONAL GUARD
TRUAX FIELD
AIR NATIONAL GUARD BASE
115TH FIGHTER WING

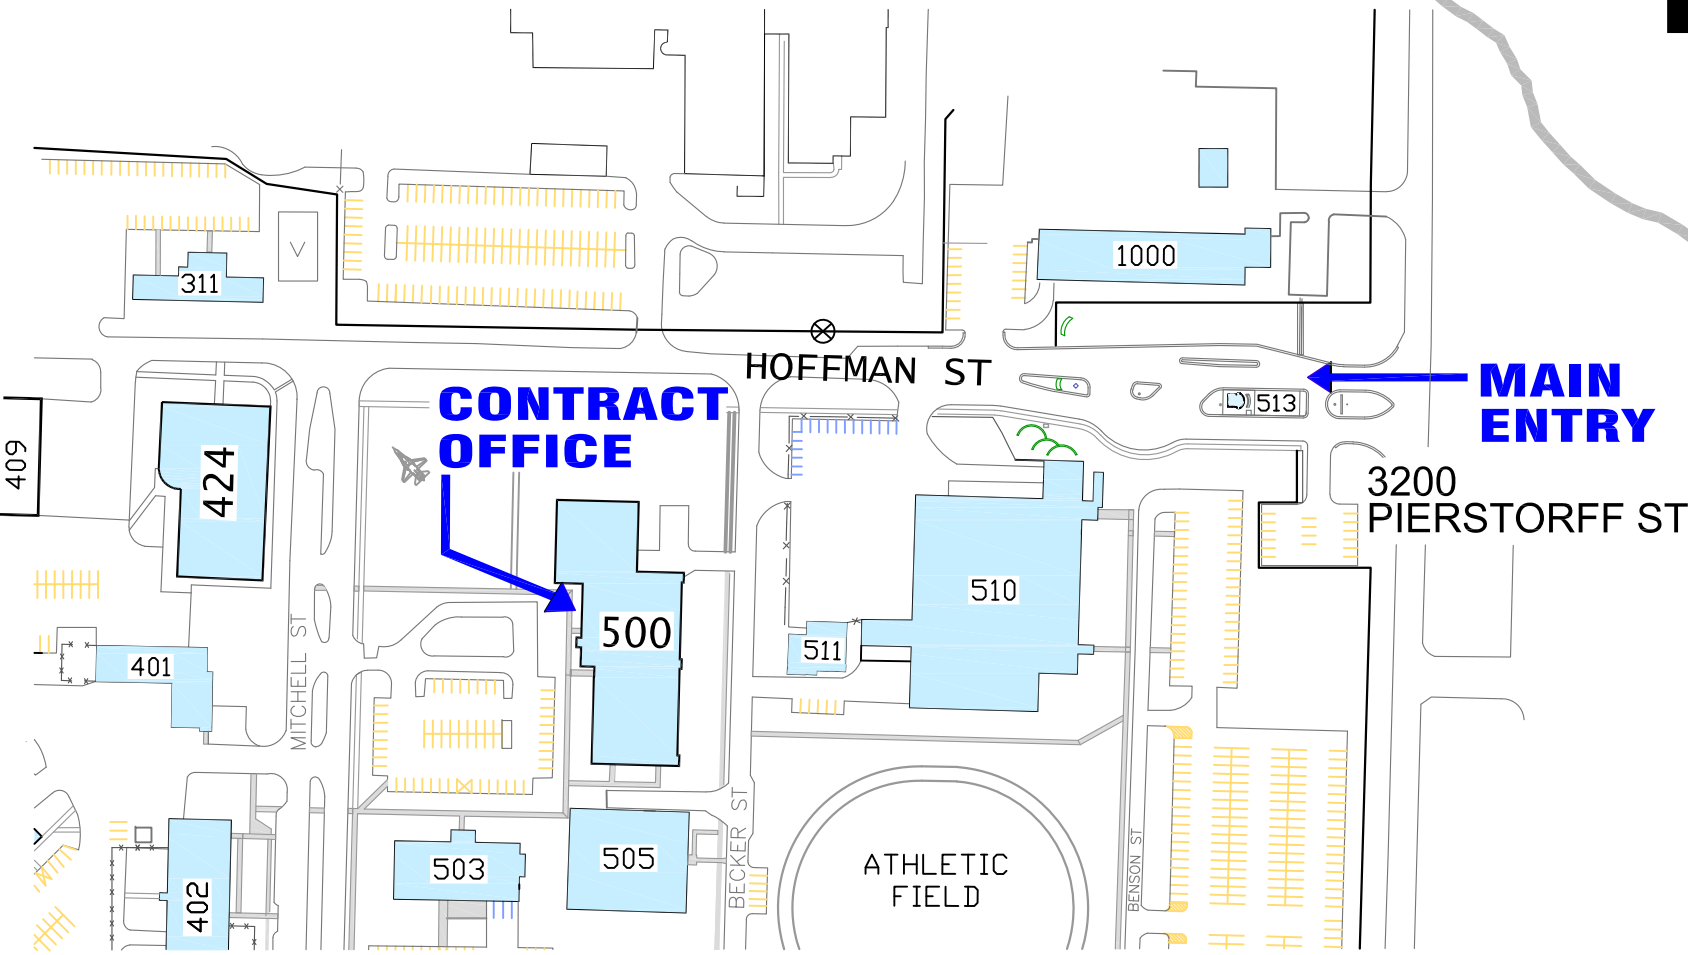


PROJECT LOCATION

115TH FIGHTER WING
TRUAX FIELD AIR NATIONAL GUARD BASE

NORTH



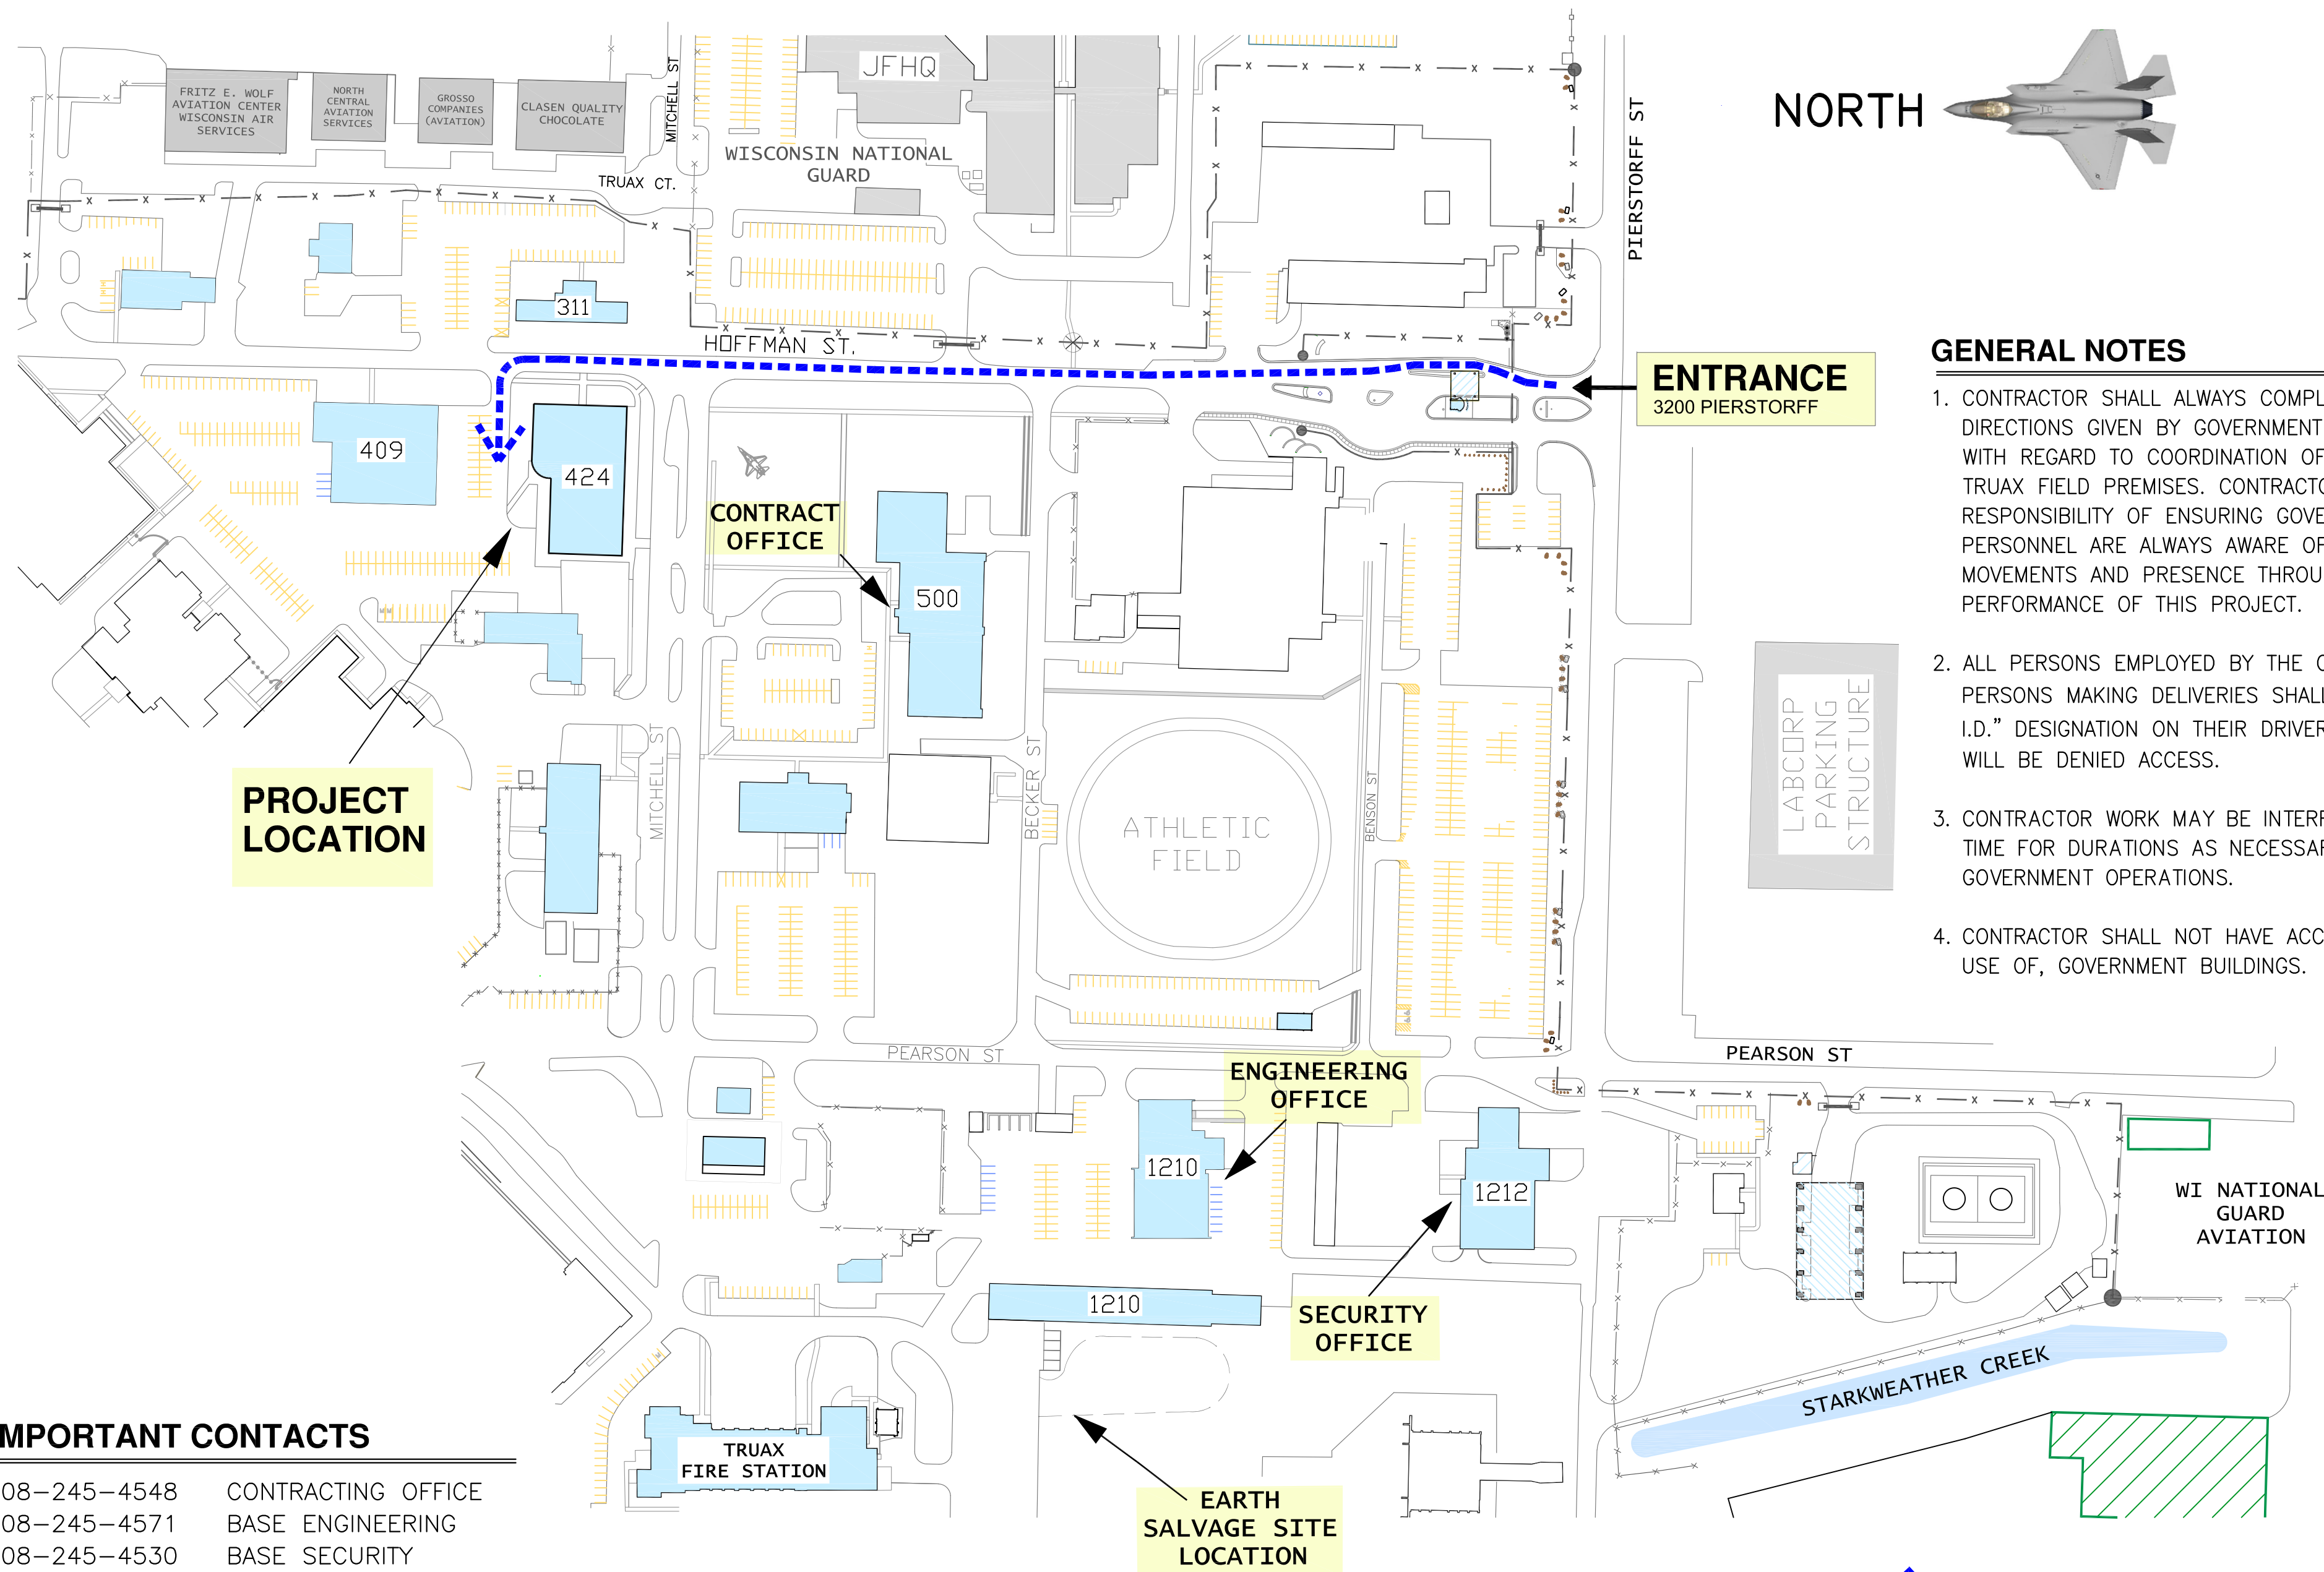

NORTH



GENERAL NOTES

1. CONTRACTOR SHALL ALWAYS COMPLY WITH DIRECTIONS GIVEN BY GOVERNMENT PERSONNEL WITH REGARD TO COORDINATION OF EFFORTS ON TRUAX FIELD PREMISES. CONTRACTOR SHALL BEAR RESPONSIBILITY OF ENSURING GOVERNMENT PERSONNEL ARE ALWAYS AWARE OF THEIR MOVEMENTS AND PRESENCE THROUGHOUT THE PERFORMANCE OF THIS PROJECT.
2. ALL PERSONS EMPLOYED BY THE CONTRACTOR AND PERSONS MAKING DELIVERIES SHALL HAVE "REAL I.D." DESIGNATION ON THEIR DRIVER'S LICENSE OR WILL BE DENIED ACCESS.
3. CONTRACTOR WORK MAY BE INTERRUPTED AT ANY TIME FOR DURATIONS AS NECESSARY FOR GOVERNMENT OPERATIONS.
4. CONTRACTOR SHALL NOT HAVE ACCESS TO, OR USE OF, GOVERNMENT BUILDINGS.

IMPORTANT CONTACTS

608-245-4548 CONTRACTING OFFICE
608-245-4571 BASE ENGINEERING
608-245-4530 BASE SECURITY
608-245-4561 BASE FIRE DEPT.
608-245-4537 BASE SAFETY

1 PARTIAL TRUAX FIELD BASE MAP



WHILE
DRIVING
ON BASE



MAXIMUM
ON BASE

JUNE 2026




DRAWN BY: DJW

XGFG 262010
REPAIR B424 ENTRANCE

WORK SITE ACCESS & LOCATION

WISCONSIN AIR NATIONAL GUARD
115th FIGHTER WING
TRUAX FIELD AIR NATIONAL GUARD BASE
3110 Mitchel Street
MADISON, WI 53704-2591
608 245-4571

T2

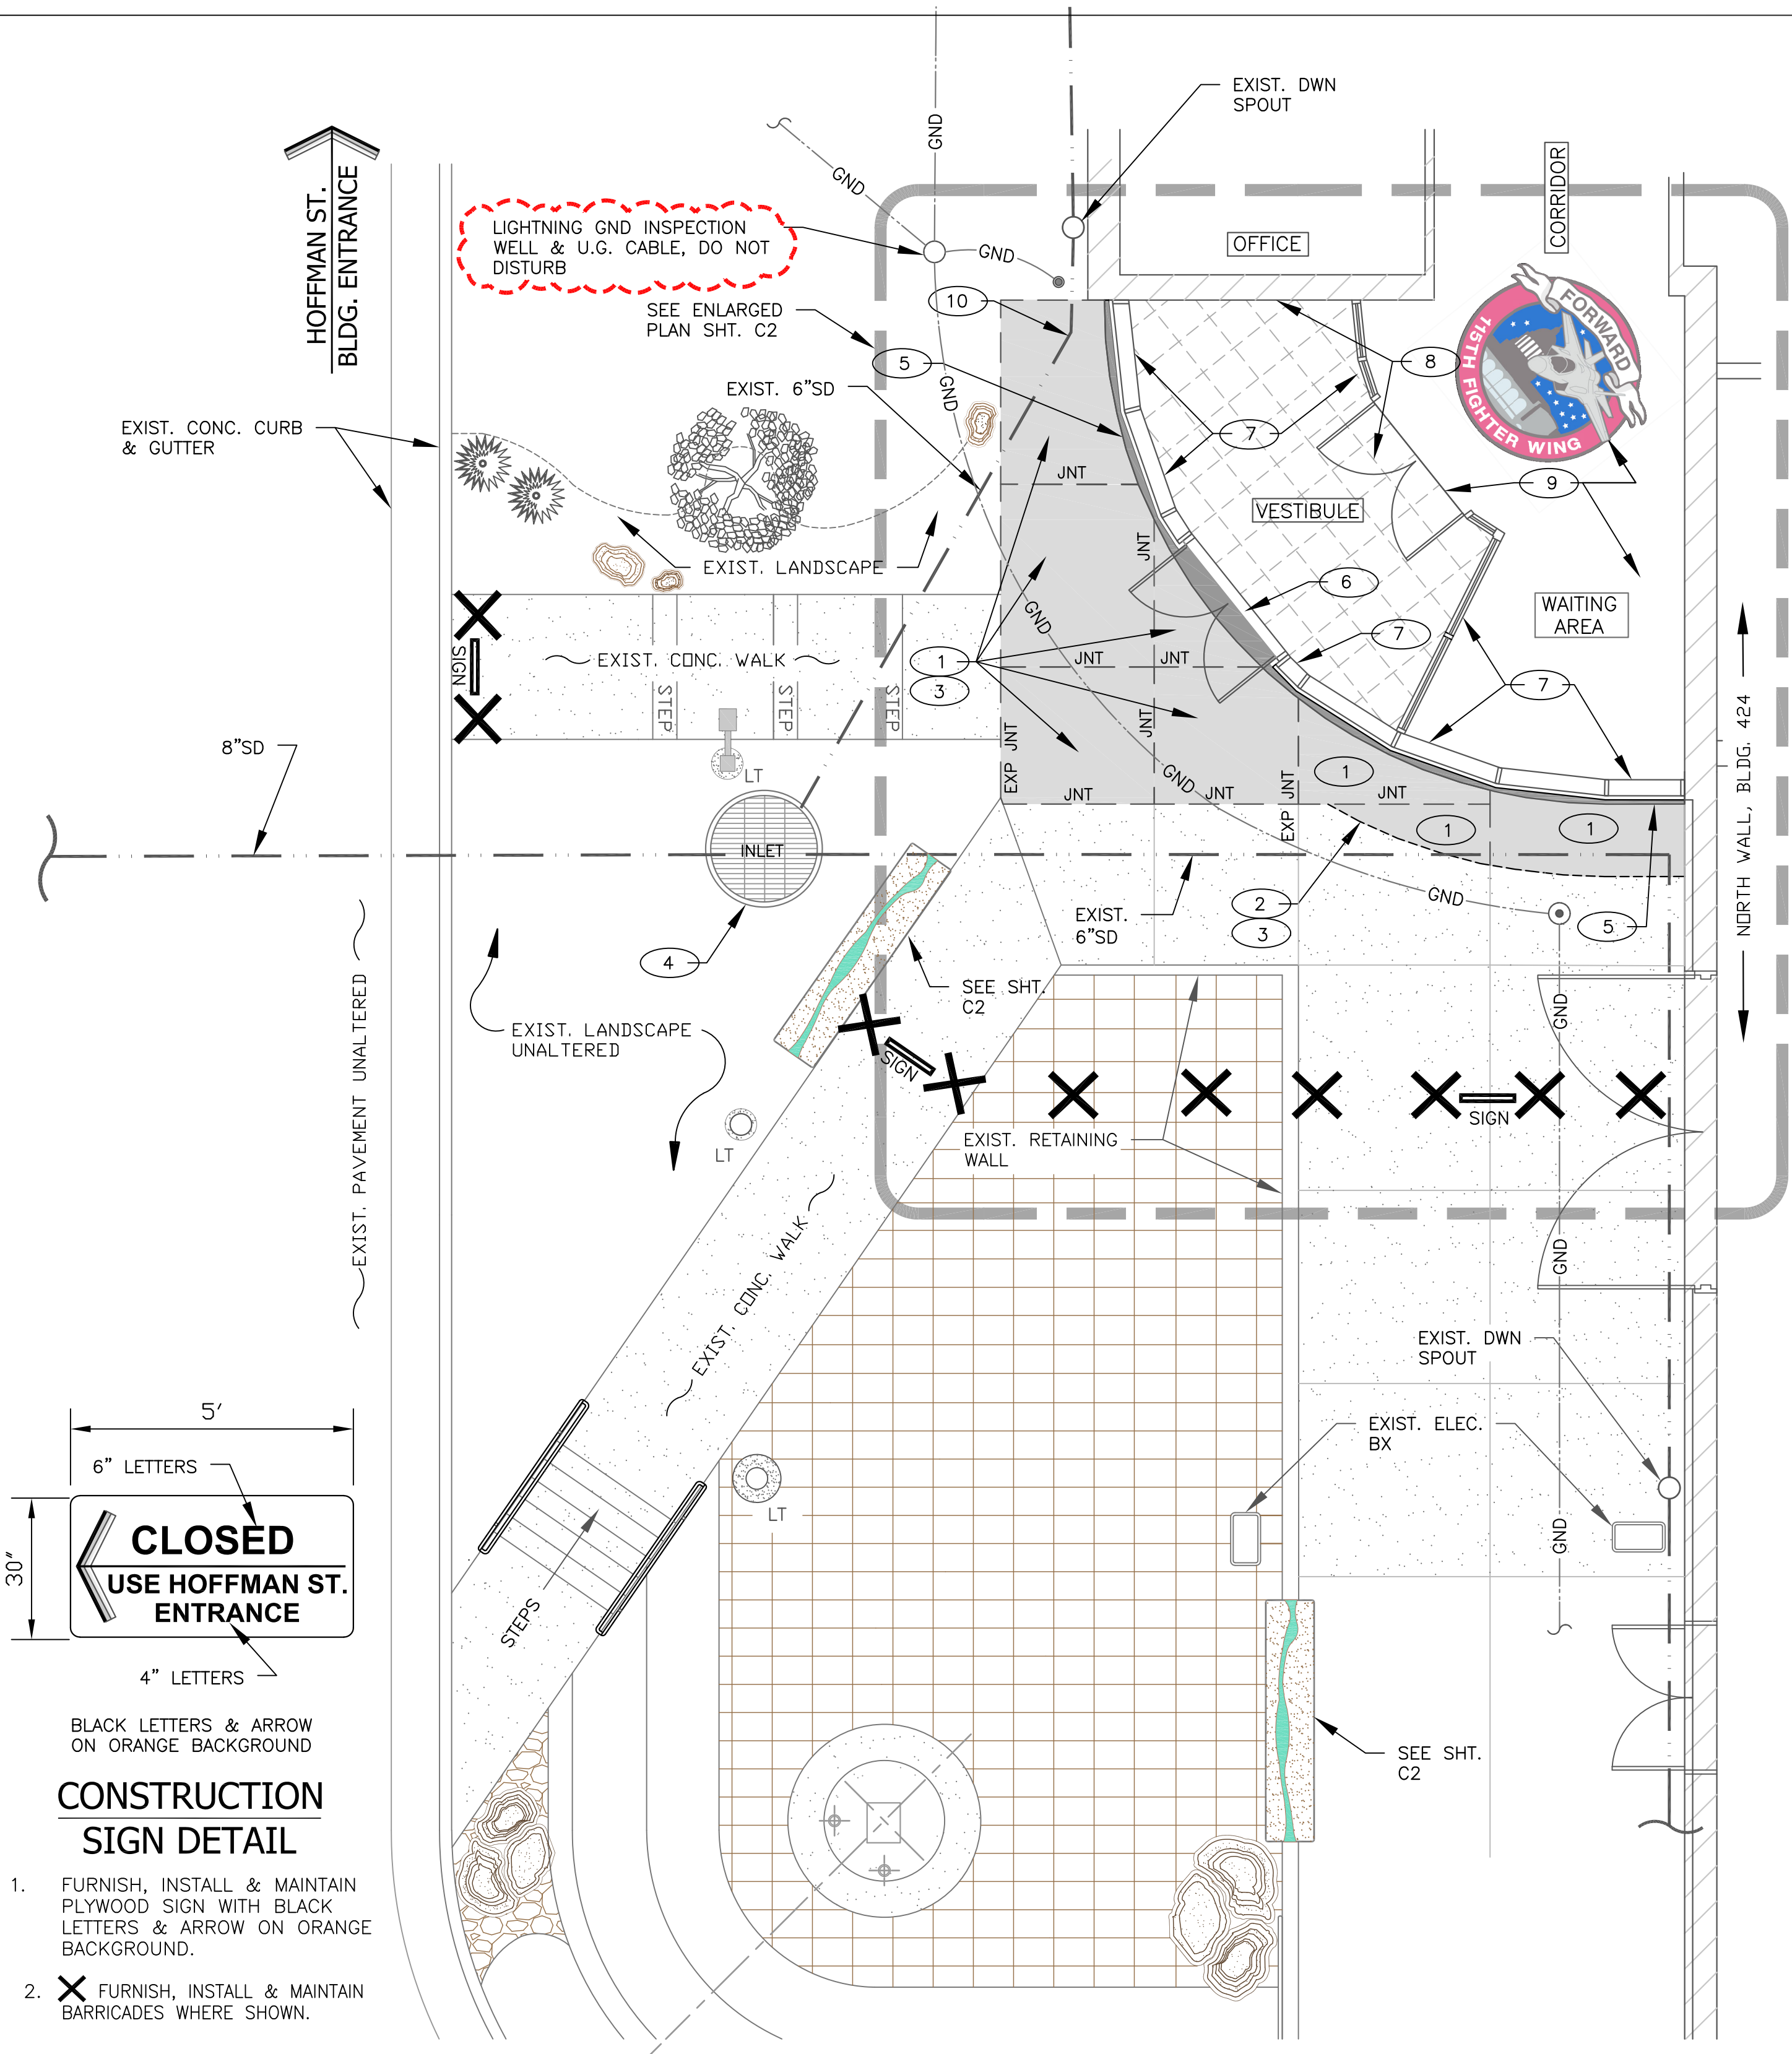

GENERAL NOTES


1. PERMISSION AND ESCORT FROM GOVERNMENT PERSONNEL IS REQUIRED AT ALL TIMES TO ENTER BUILDING 424.
2. SITE HOUSEKEEPING: THIS SITE SHALL BE KEPT ESPECIALLY CLEAN THROUGHOUT THE PROGRESS OF WORK. THERE SHALL BE NO ALLOWABLE MARKS ON THE EXIST. CONCRETE FROM CONTRACTORS OPERATIONS. NO RUBBER TIRE MARKS FROM EQUIPMENT, NO SPILLAGE FROM CONCRETE, EARTH AND LANDSCAPING MATERIALS. NO PHYSICAL SCUFFS, CHIPS OR SCRATCHES ARE PERMISSIBLE.
3. THE CONTRACTOR, SUBCONTRACTOR(S), WORKERS AND SUPPLIERS SHALL KEEP THE SITE AND SURROUNDING AREA FREE FROM DEBRIS, WASTE, MATERIALS AND EQUIPMENT AT ALL TIMES.
4. CONTRACTOR SHALL MAINTAIN A CLEAN, NEATLY ORGANIZED AND CONTAINED STAGING AREA TO INCLUDE, TEMPORARY TOILET(S), WASTE CONTAINER(S), AND EQUIPMENT AND MATERIAL STAGING.
5. CONTRACTOR SHALL MAKE REPAIRS AND RESTORE ALL AREAS DAMAGED FROM EQUIPMENT, AS RESULT OF HIS OPERATIONS OR HIS SUBCONTRACTORS TO THE SATISFACTION OF THE GOVERNMENT'S CONTRACTING OFFICER.
6. RESTORE LAWN DAMAGED BY CONTRACTOR OPERATIONS AND TO FINISH LANDSCAPE. FURNISH AND INSTALL TOPSOIL AS REQUIRED TO FILL AND RESTORE AREAS. BLEND INTO GRADE OF EXISTING LAWN. NEW GRASS #40 SEED MIXTURE. BLEND IN AND OVER-SEED. CONTRACTOR SHALL PROVIDE SUFFICIENT HOSES, SPRINKLERS, TIMERS LABOR AND THE LIKE TO KEEP SEEDED AREAS WELL MOISTENED UNTIL HEALTHY GROWTH & MOW LAWN MINIMUM ONE TIME TO 3" HEIGHT.

KEYED NOTES (X)

1. REMOVE 6" THICK CONCRETE SLABS FULL DEPTH TO JOINTS (JNT) SHOWN. FULL DEPTH SAWCUT ALONG JOINTS AS REQUIRED FOR CLEAN STRAIGHT EDGES AND REMOVE CONCRETE WITHOUT DAMAGING ABUTTING CONCRETE OR BUILDING SURFACES THAT SHALL REMAIN UNALTERED.
2. SAWCUT & REMOVE CONC. SLAB FULL DEPTH (APPROX. 6" THICK) CONFORMING TO RADIUS OF BUILDING FOUNDATION WALL.
3. REMOVE ALL EARTHEN AND AGG. MATERIAL FROM AREA OF REMOVED SLABS TO A DEPTH OF NOT LESS THAN 8" AND REMOVE SPOIL FROM SITE. USE CARE TO NOT UNDERMINE SLABS THAT REMAIN.
4. STORM WATER INLET UNALTERED.
5. EXIST. CONC. FDN. WALL UNALTERED. REMOVE ALL SEALANT AND JNT. MATERIAL, CLEAN ENTIRE SURFACE. DO NOT DAMAGE WINDOW FLASHING.
6. REMOVE ALUM. THRESHOLD AND REINSTALL OVER A BED OF SEALANT.
7. PROTECT EXIST. ALUM. & GLASS ENCLOSURE THROUGHOUT THE PROJECT FROM REMOVAL AND CONSTRUCTION OPERATIONS INCLUDING DENTS, SCRATCHES, MATERIAL RESIDUE AND DIRT, ETC.
8. REMOVE ALL CARPET TILE FLOORING AND VINYL BASE IN VESTIBULE AND PREPARE CONCRETE TO RECEIVE NEW TERRAZZO FLOOR & WALK-OFF MAT FLUSH WITH EXISTING TERRAZZO FINISH FLOOR.
9. PROTECT UNALTERED TERRAZZO FLOOR AND LOGO.
10. EXCAVATE FOR STORM DRAIN CONNECTION.

 DRAWN BY: DJW	JUNE 2026 XGFG 262010 REPAIR B424 ENTRANCE
	SITE PLAN REMOVALS
	WISCONSIN AIR NATIONAL GUARD 115 TH FIGHTER WING TRUAX FIELD AIR NATIONAL GUARD BASE 3110 Mitchell Street MADISON, WI 53704-2591 608 245-4571

C1

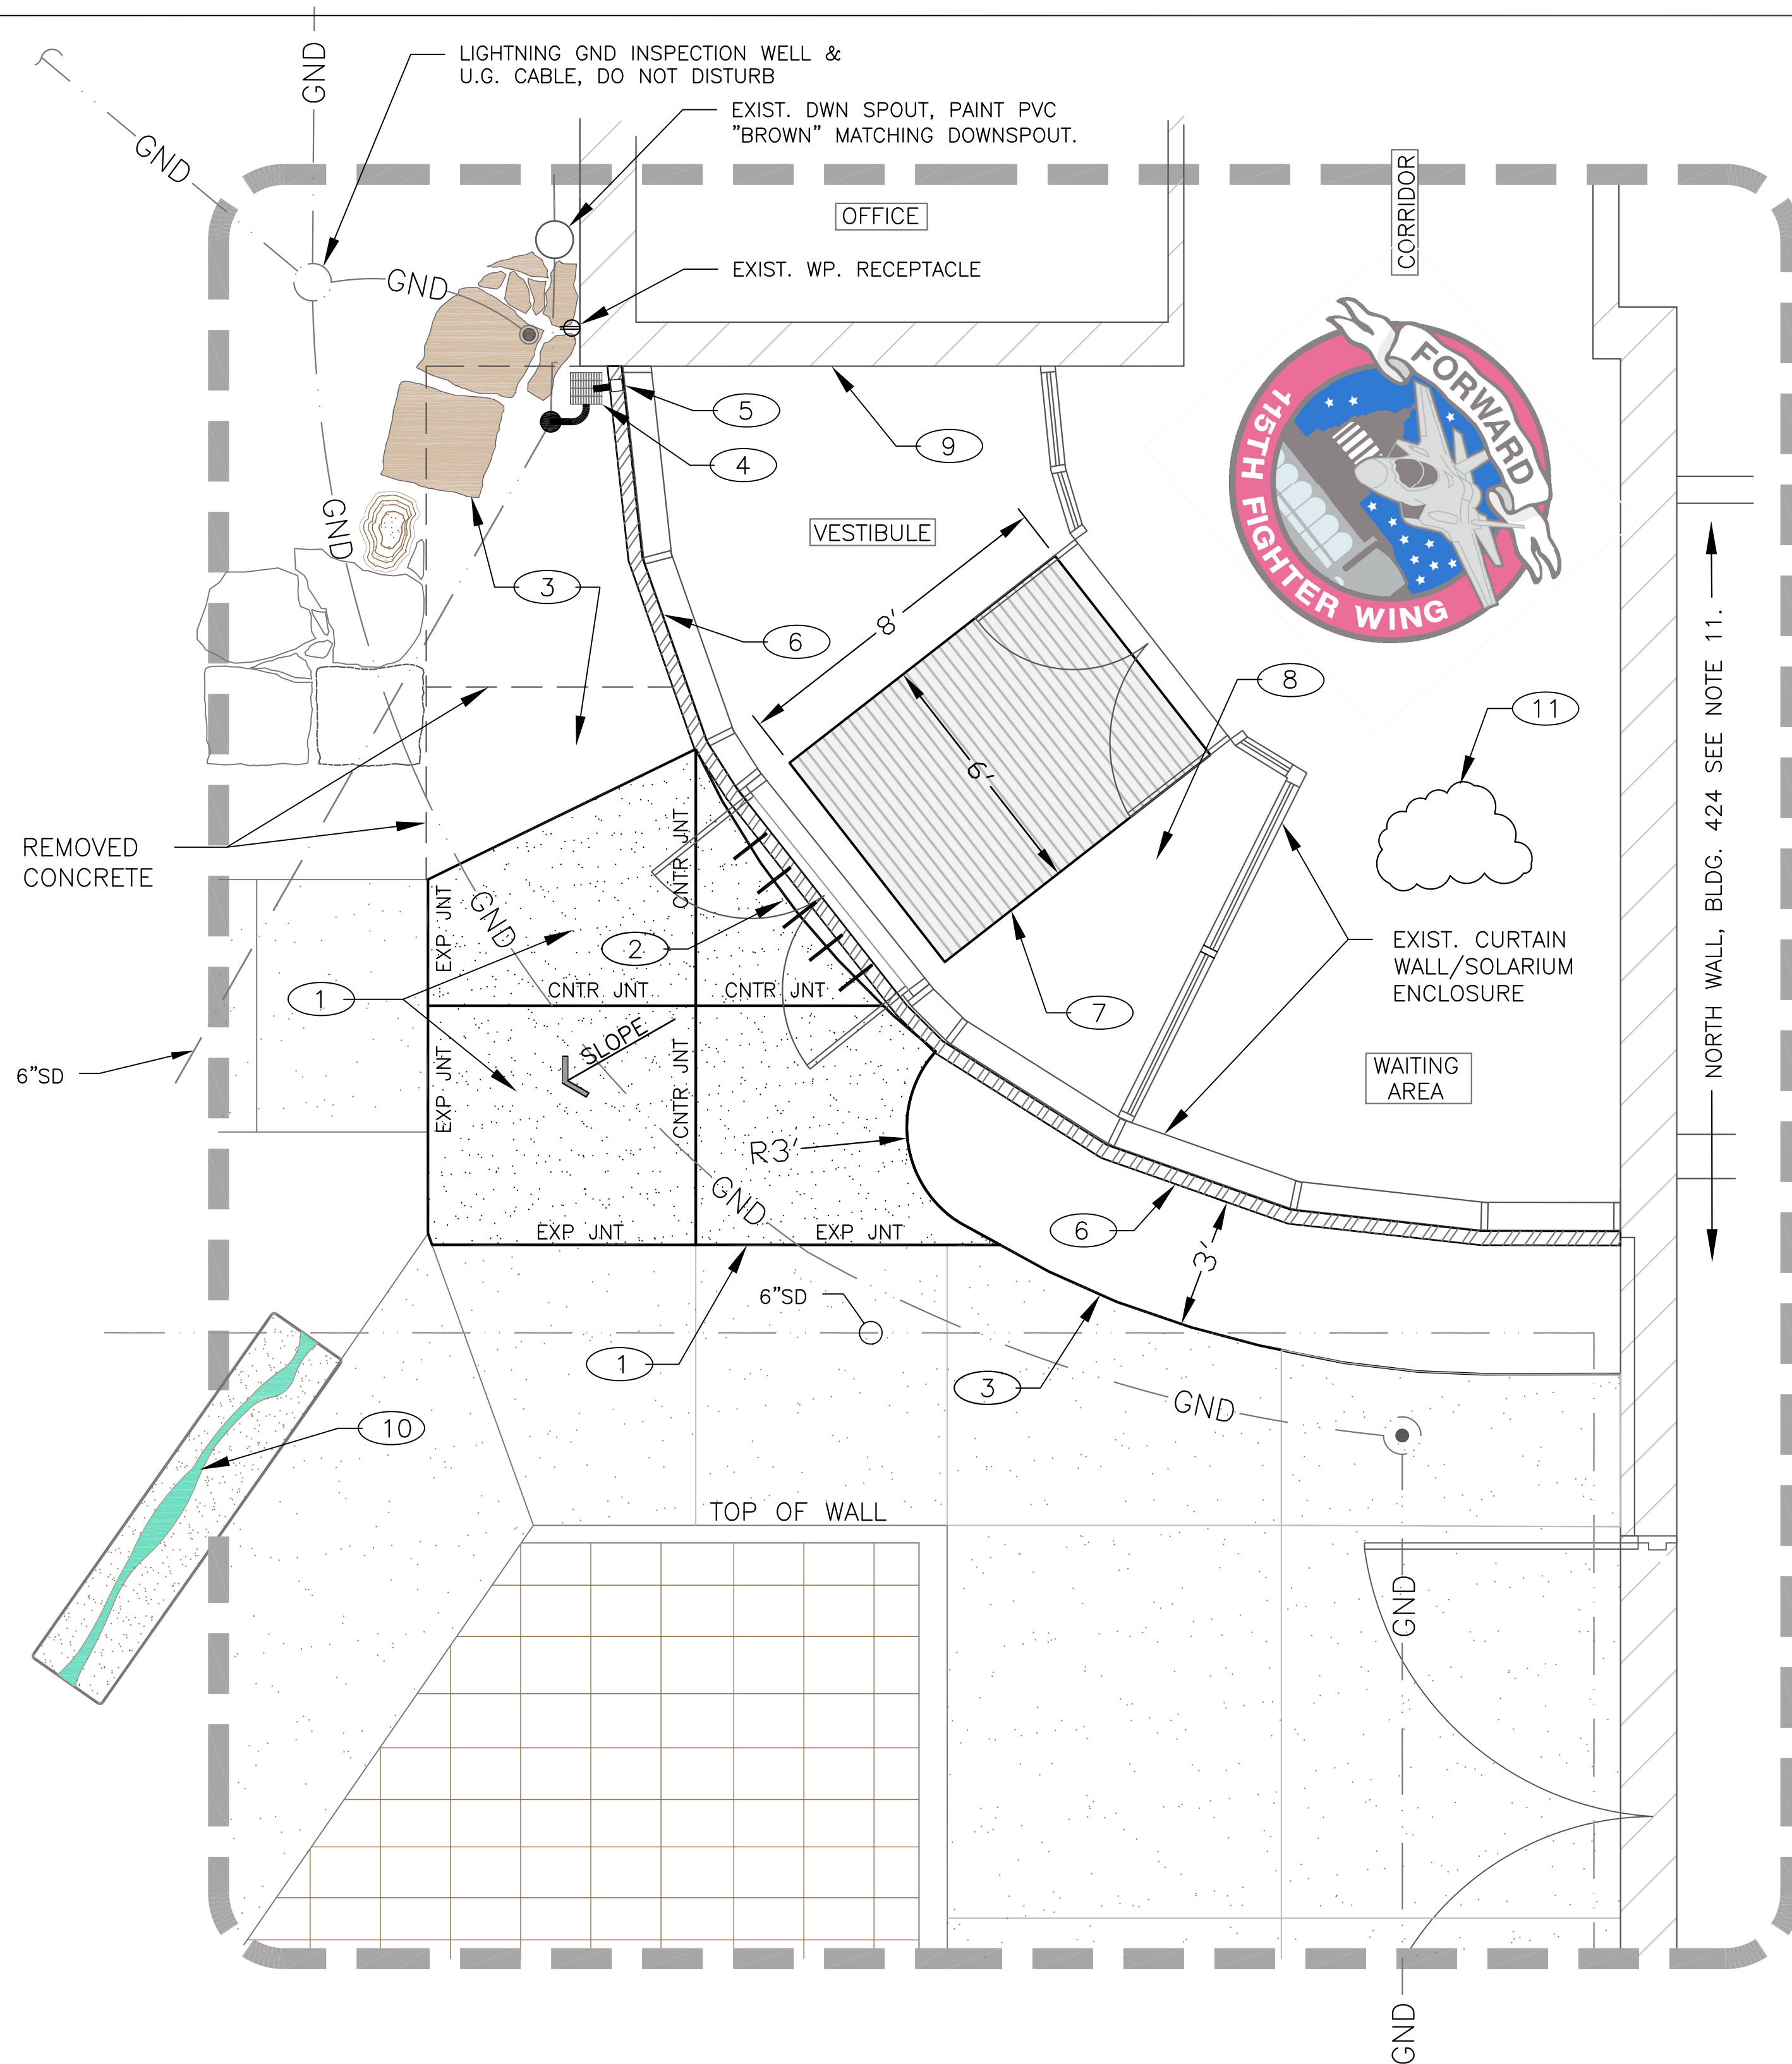

NORTH



KEYED NOTES

1. FURNISH & PLACE NEW 6" THICK 3000 PSI CONCRETE SLAB. FURNISH AND PLACE OVER PREPARED BASE NOT LESS THAN 4" SAND BED, GEOTEXTILE BARRIER AND NOT LESS THAN 4" COMPACTED AGG BASE AS DETAILED ON SHEET 1/D1. MATCH EXIST. ADJACENT FINISH, JOINTING AND EDGING.
2. NEW CONCRETE AT DOORWAY SHALL BE THICKENED TO 8". ATTACH TO THE BLDG. FOUNDATION. USE 5, 1" DIA. SMOOTH DOWELS SPACED 12" C-C ACROSS DOOR OPENING. MAINTAIN 1/2" EXPANSION JOINT SEE DETAIL 2/D1.
3. EXTEND LANDSCAPE AREA TO INFILL AT REMOVED CONCRETE. LANDSCAPING INCLUDES RESTORED LAWN, WEED BARRIER; NOT LESS THAN 4" OF NEW TOPSOIL, 2" (MIN) BARK MULCH LAYER AND PLANTINGS. FURNISH AND PLACE CLEAN EARTHEN FILL TO REPLACE EXCAVATED BASE AND REMOVED CONCRETE. SEE DETAIL 1A&B/D2.
4. FURNISH AND INSTALL NEW PVC CATCH BASIN. TOP SHALL BE BLACK OR GREEN 9" SQ. GRATE. CONNECT TO EXIST. 6" PVC UNDERDRAIN.
5. FURNISH AND INSTALL 2.5" WELDED ALUMINUM DOWNSPOUT, SEE NOTE 6. DOWNSPOUT SHALL SPILL ONTO CB. GRATE WITH 4" AIR GAP. FURNISH AND INSTALL HEAT TAPE NEATLY UP THE DOWNSPOUT AND ALONG ENTIRE GUTTER LENGTH. ENERGIZE SELF-REGULATING HEAT TAPE FROM EXISTING EXTERIOR RECEPTACLE.
6. REMOVE EXIST. ALUM. DRIP FLASHING; FURNISH & INSTALL NEW WELDED 0.125" ALUMINUM SEAMLESS GUTTER TAPERED TO DRAIN TO DOWNSPOUT. MATCH EXIST. ALUM. COLOR & FINISH AND CONFORM TO THE SHAPE OF THE EXIST. SEGMENTED STRUCTURE, SEE DETAIL 2/D2.
7. FURNISH AND INSTALL INSET ALUMINUM FRAME WALK-OFF MAT WITH REMOVABLE CARPET STRIPS CENTERED BETWEEN DOORS AS SHOWN. STANDARD COLOR SELECTED BY GOVT.
8. PREPARE CONCRETE FLOOR IN VESTIBULE FOR NEW 3/8" THICK EPOXY TERRAZZO FLOOR AND FURNISH & INSTALL NEW TERRAZZO FLOOR SYSTEM MATCHING AND ABUTTING EXIST. TERRAZZO FLOOR IN WAITING AREA.
9. NEW 4" HIGH TERRAZZO BASEBOARD.
10. REMOVE EPOXY INFILL IN TWO CONCRETE BENCHES, SEE SHEET C1. FURNISH AND INSTALL NEW PRE-BLENDED COLORED MORTAR MADE WITH PORTLAND CEMENT, HYDRATED LIME, MASONRY SAND, AND PIGMENT. MEET ASTM C270 AND C1714 TYPES N, WITH INTEGRAL WATER REPELLENT.
11. CURRENTLY, A LEAK IN THE BUILDING ENVELOPE RESULTS IN PUDDLED WATER ON THE FLOOR IN THE WAITING AREA DURING STORM CONDITIONS. CONTRACTOR SHALL COMMISSION INVESTIGATIVE PROFESSIONAL SERVICE EXPERIENCED AND SPECIALIZING IN BUILDING ENVELOPE ANALYSIS. DETERMINE STORMWATER PATHWAY INTO STRUCTURE, SUBMIT WRITTEN REPORT ALONG WITH RECOMMENDED REPAIR(S) TO THE GOVERNMENT. QUAIST CONSULTING & TESTING INC. 1055 INDIANHEAD DRIVE MOSINEE, WI 54455, 715-693-8378, QCT-USA.COM OR OTHER QUALIFIED ANALYTICAL CONTRACTOR.

JUNE 2026




DRAWN BY: DJW

XGFG 262010
REPAIR B424 ENTRANCE

ENLARGED PLAN

WISCONSIN AIR NATIONAL GUARD
115TH FIGHTER WING
TRUAX FIELD AIR NATIONAL GUARD BASE
3110 Mitchell Street
MADISON, WI 53704-2591
608 245-4571

C2

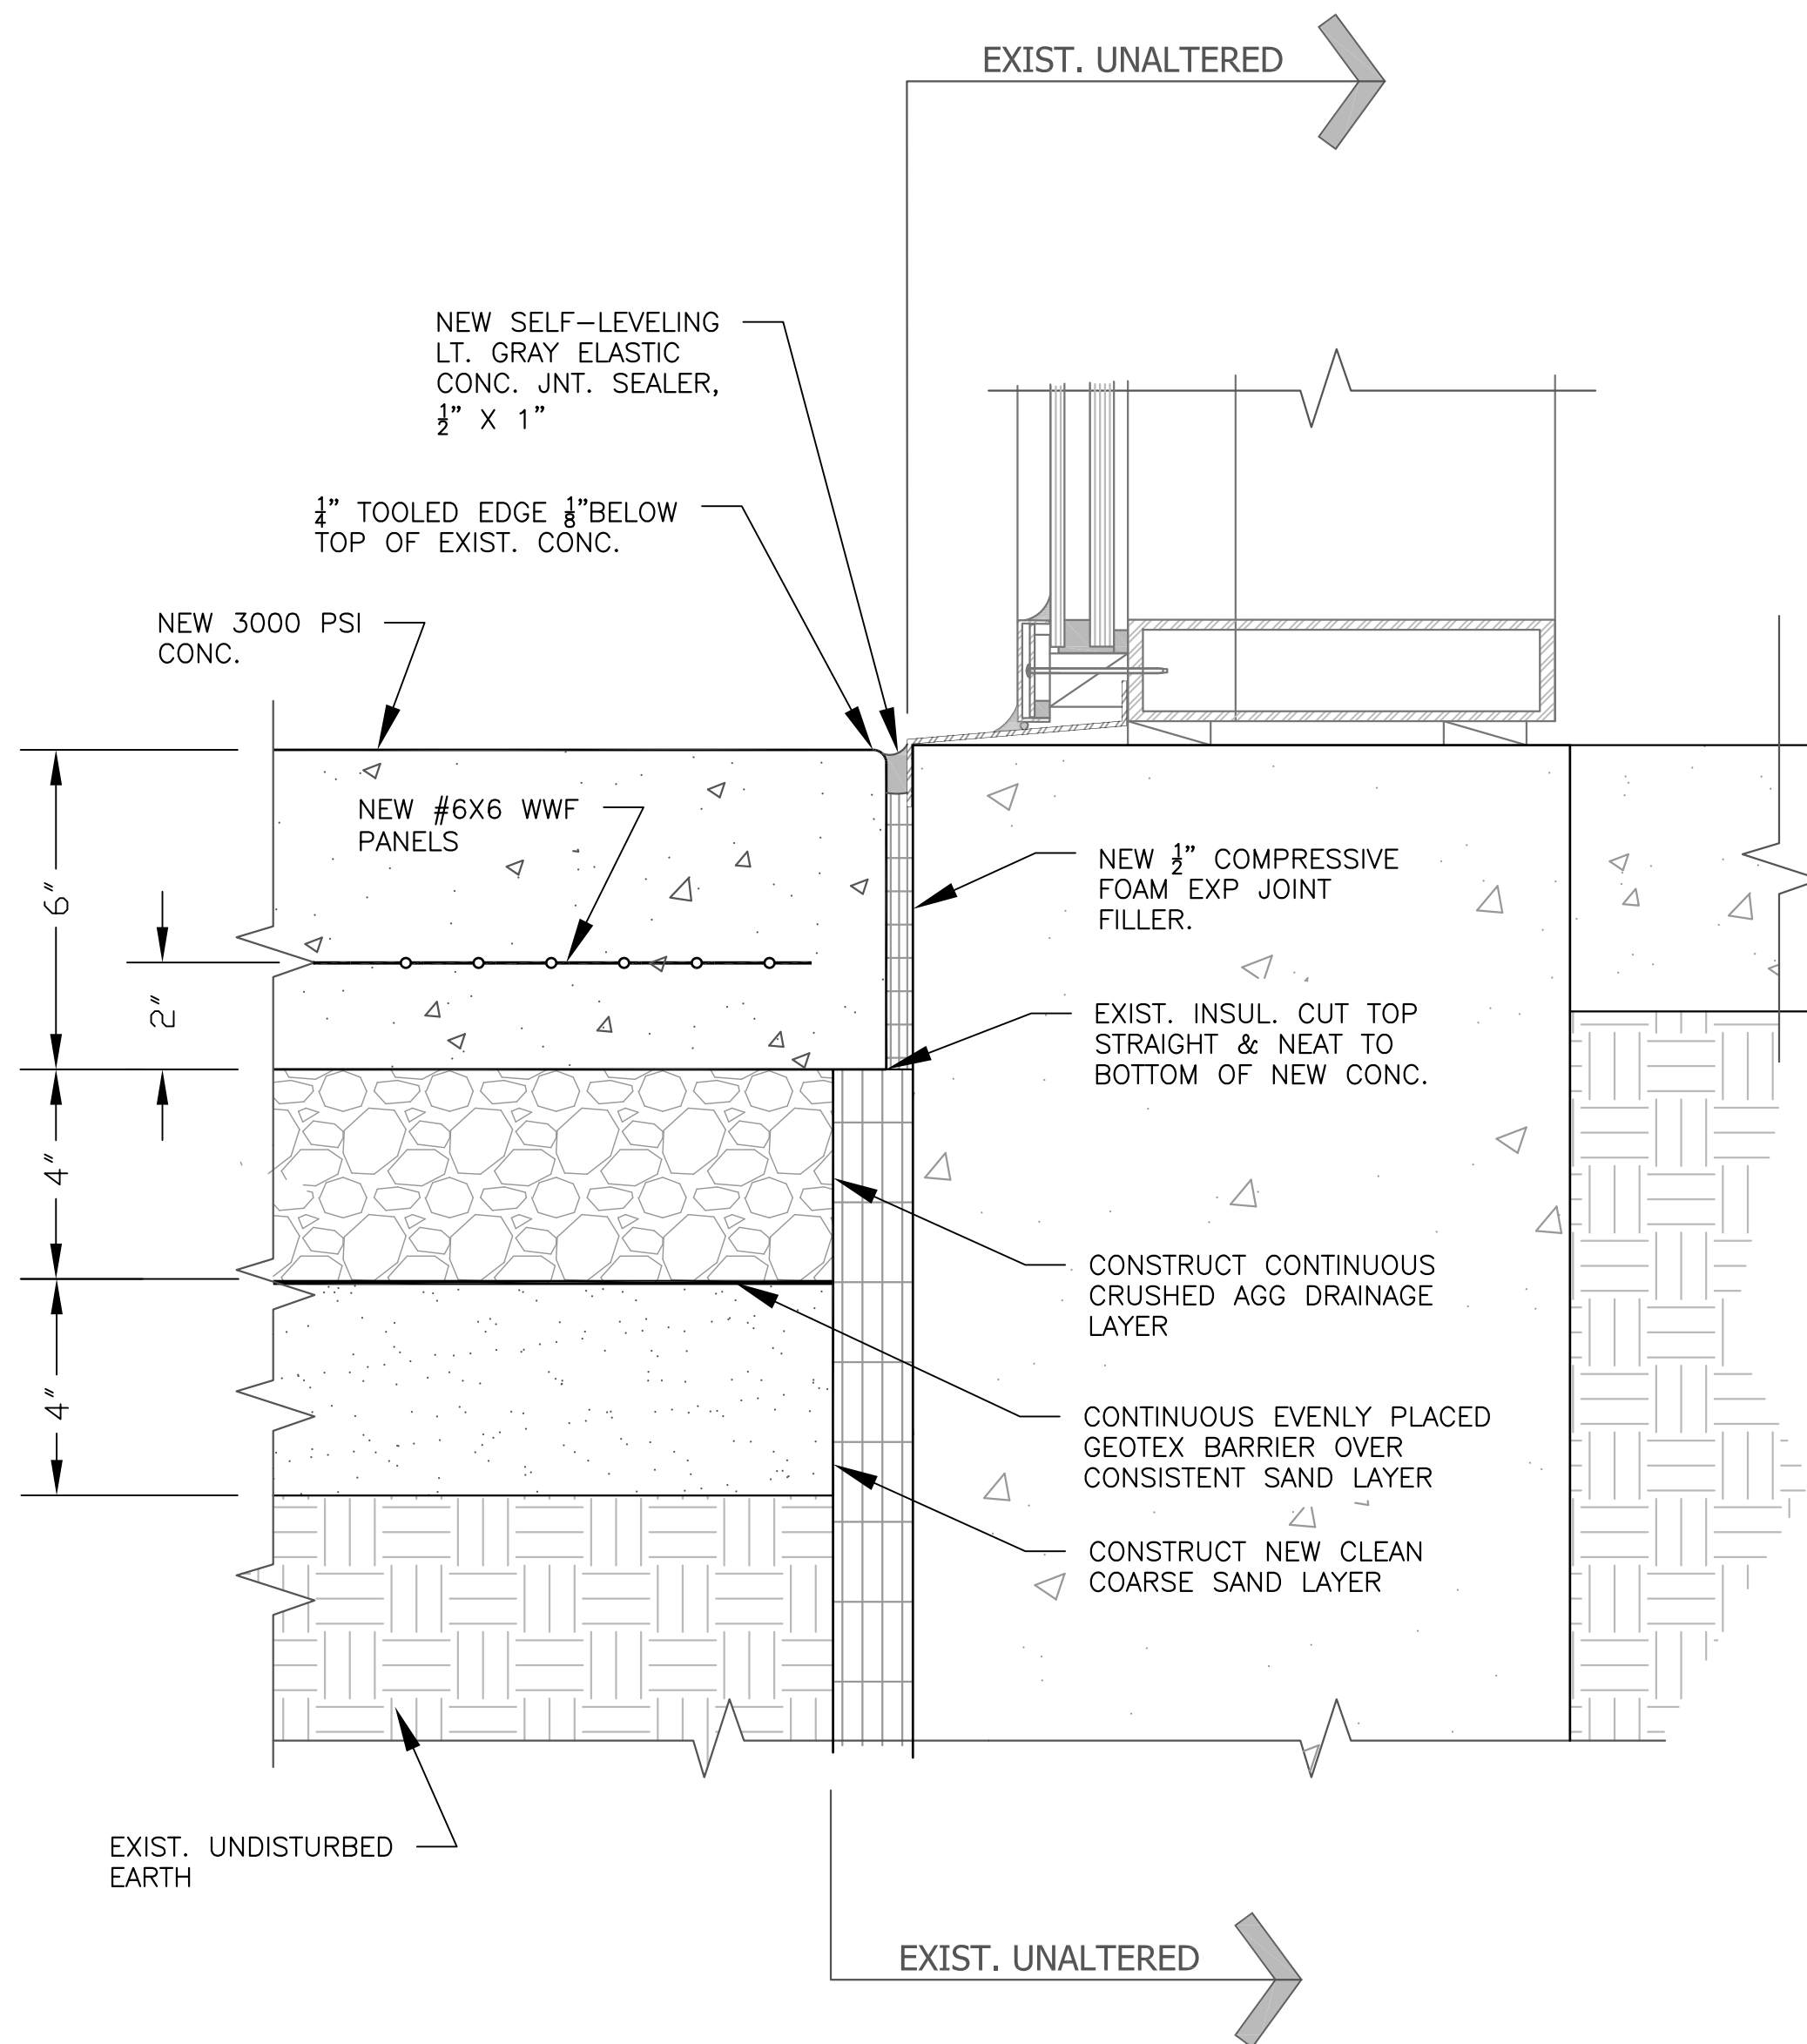


1. EXPANSION JOINTS SHALL BE $\frac{1}{2}$ " WIDE, FULL DEPTH OF CONCRETE AND CONTINUOUS UNINTERRUPTED LENGTH.
2. CONCRETE JOINT SEALANT SHALL BE APPLIED NEATLY FLOWING INTO JOINT IN FULL CONTACT WITH CONCRETE VERTICAL FACES AND THE EXPANSION MATERIAL. DO NOT APPLY CONCRETE SEALANT UNTIL CONCRETE IS CURED AND THE JOINT IS DRY.

1
D1 NEW 6" CONCRETE ABUTTING
FDN @ CURTAIN WALL

NOTE: REMOVE ALUM. STOREFRONT DBL DOORS AS REQ. FOR NEW WORK.

1. REMOVE THRESHOLD, CLEAN CONCRETE SURFACE & REINSTALL, SET IN CONTINUOUS BED OF SEALANT.
2. REMOVE ADJUSTABLE WEATHERSTRIPING BETWEEN DOOR PANELS. REPLACE WITH NEW (LIKE ITEM) AND ADJUST TO FULLY SEAL OPENING. FURNISH & INSTALL NEW DARK BRONZE ALUM. BRUSH TYPE ASTRAGAL, PEMKO 29324_NB (MS) BRUSH SEAL MEETING STILE SPLIT ASTRAGAL WITH SNAP COVER (CONCEALED FASTENERS) OR OTHER APPROVED PRODUCT.
3. FURNISH & INSTALL NEW DOOR SWEEP WEATHER SEAL ON BOTH DOOR PANELS.
4. ADJUST DOOR PANELS FOR BEST FIT, WEATHER SEAL AND OPERATION.

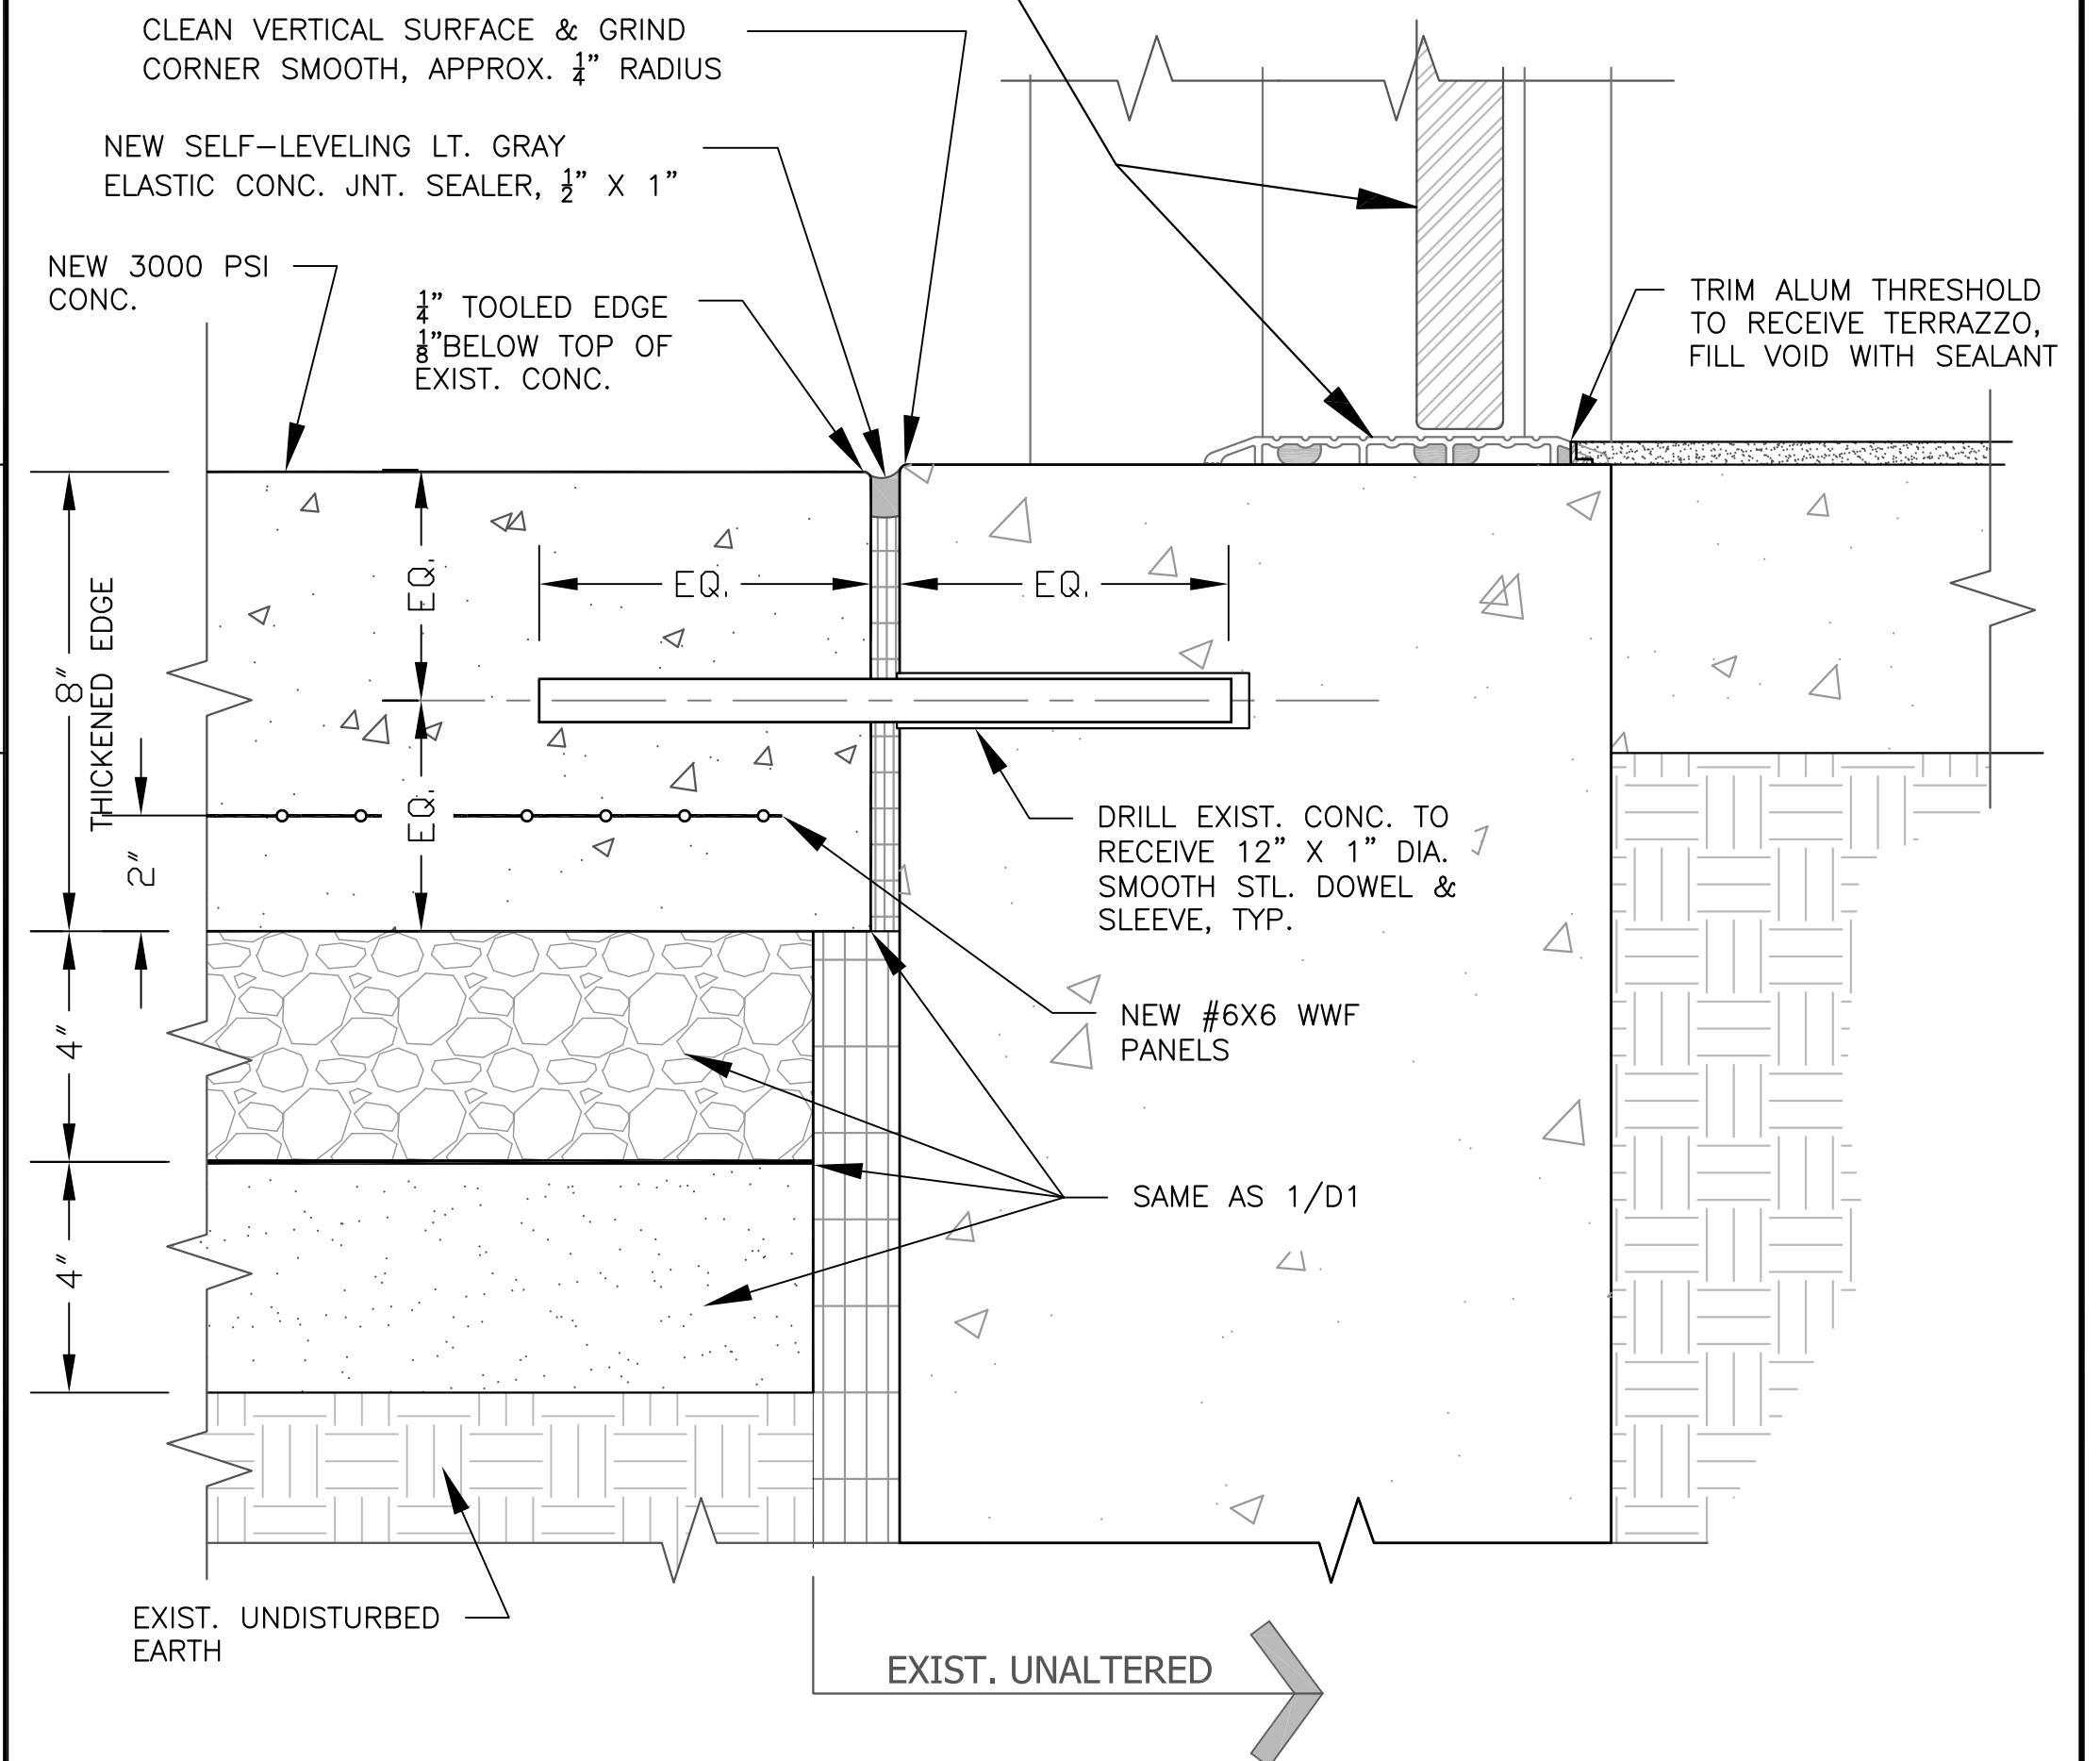

1. EXPANSION JOINTS SHALL BE $\frac{1}{2}$ " WIDE, FULL DEPTH OF CONCRETE AND CONTINUOUS UNINTERRUPTED LENGTH.
2. CONCRETE JOINT SEALANT SHALL BE APPLIED NEATLY FLOWING INTO JOINT IN FULL CONTACT WITH CONCRETE VERTICAL FACES AND THE EXPANSION MATERIAL. DO NOT APPLY CONCRETE SEALANT UNTIL CONCRETE IS CURED AND THE JOINT IS DRY.

2
D1 NEW 8" CONCRETE ABUTTING FDN @
CURTAIN WALL MAIN ENTRY DOORS

JUNE 2026




DRAWN BY: DJW

XGFG 262010
REPAIR B424 ENTRANCE


**CONCRETE
DETAILS**

WISCONSIN AIR NATIONAL GUARD
115TH FIGHTER WING
TRUAX FIELD AIR NATIONAL GUARD BASE
3110 Mitchell Street
MADISON, WI 53704-2591
608 245-4571

D1

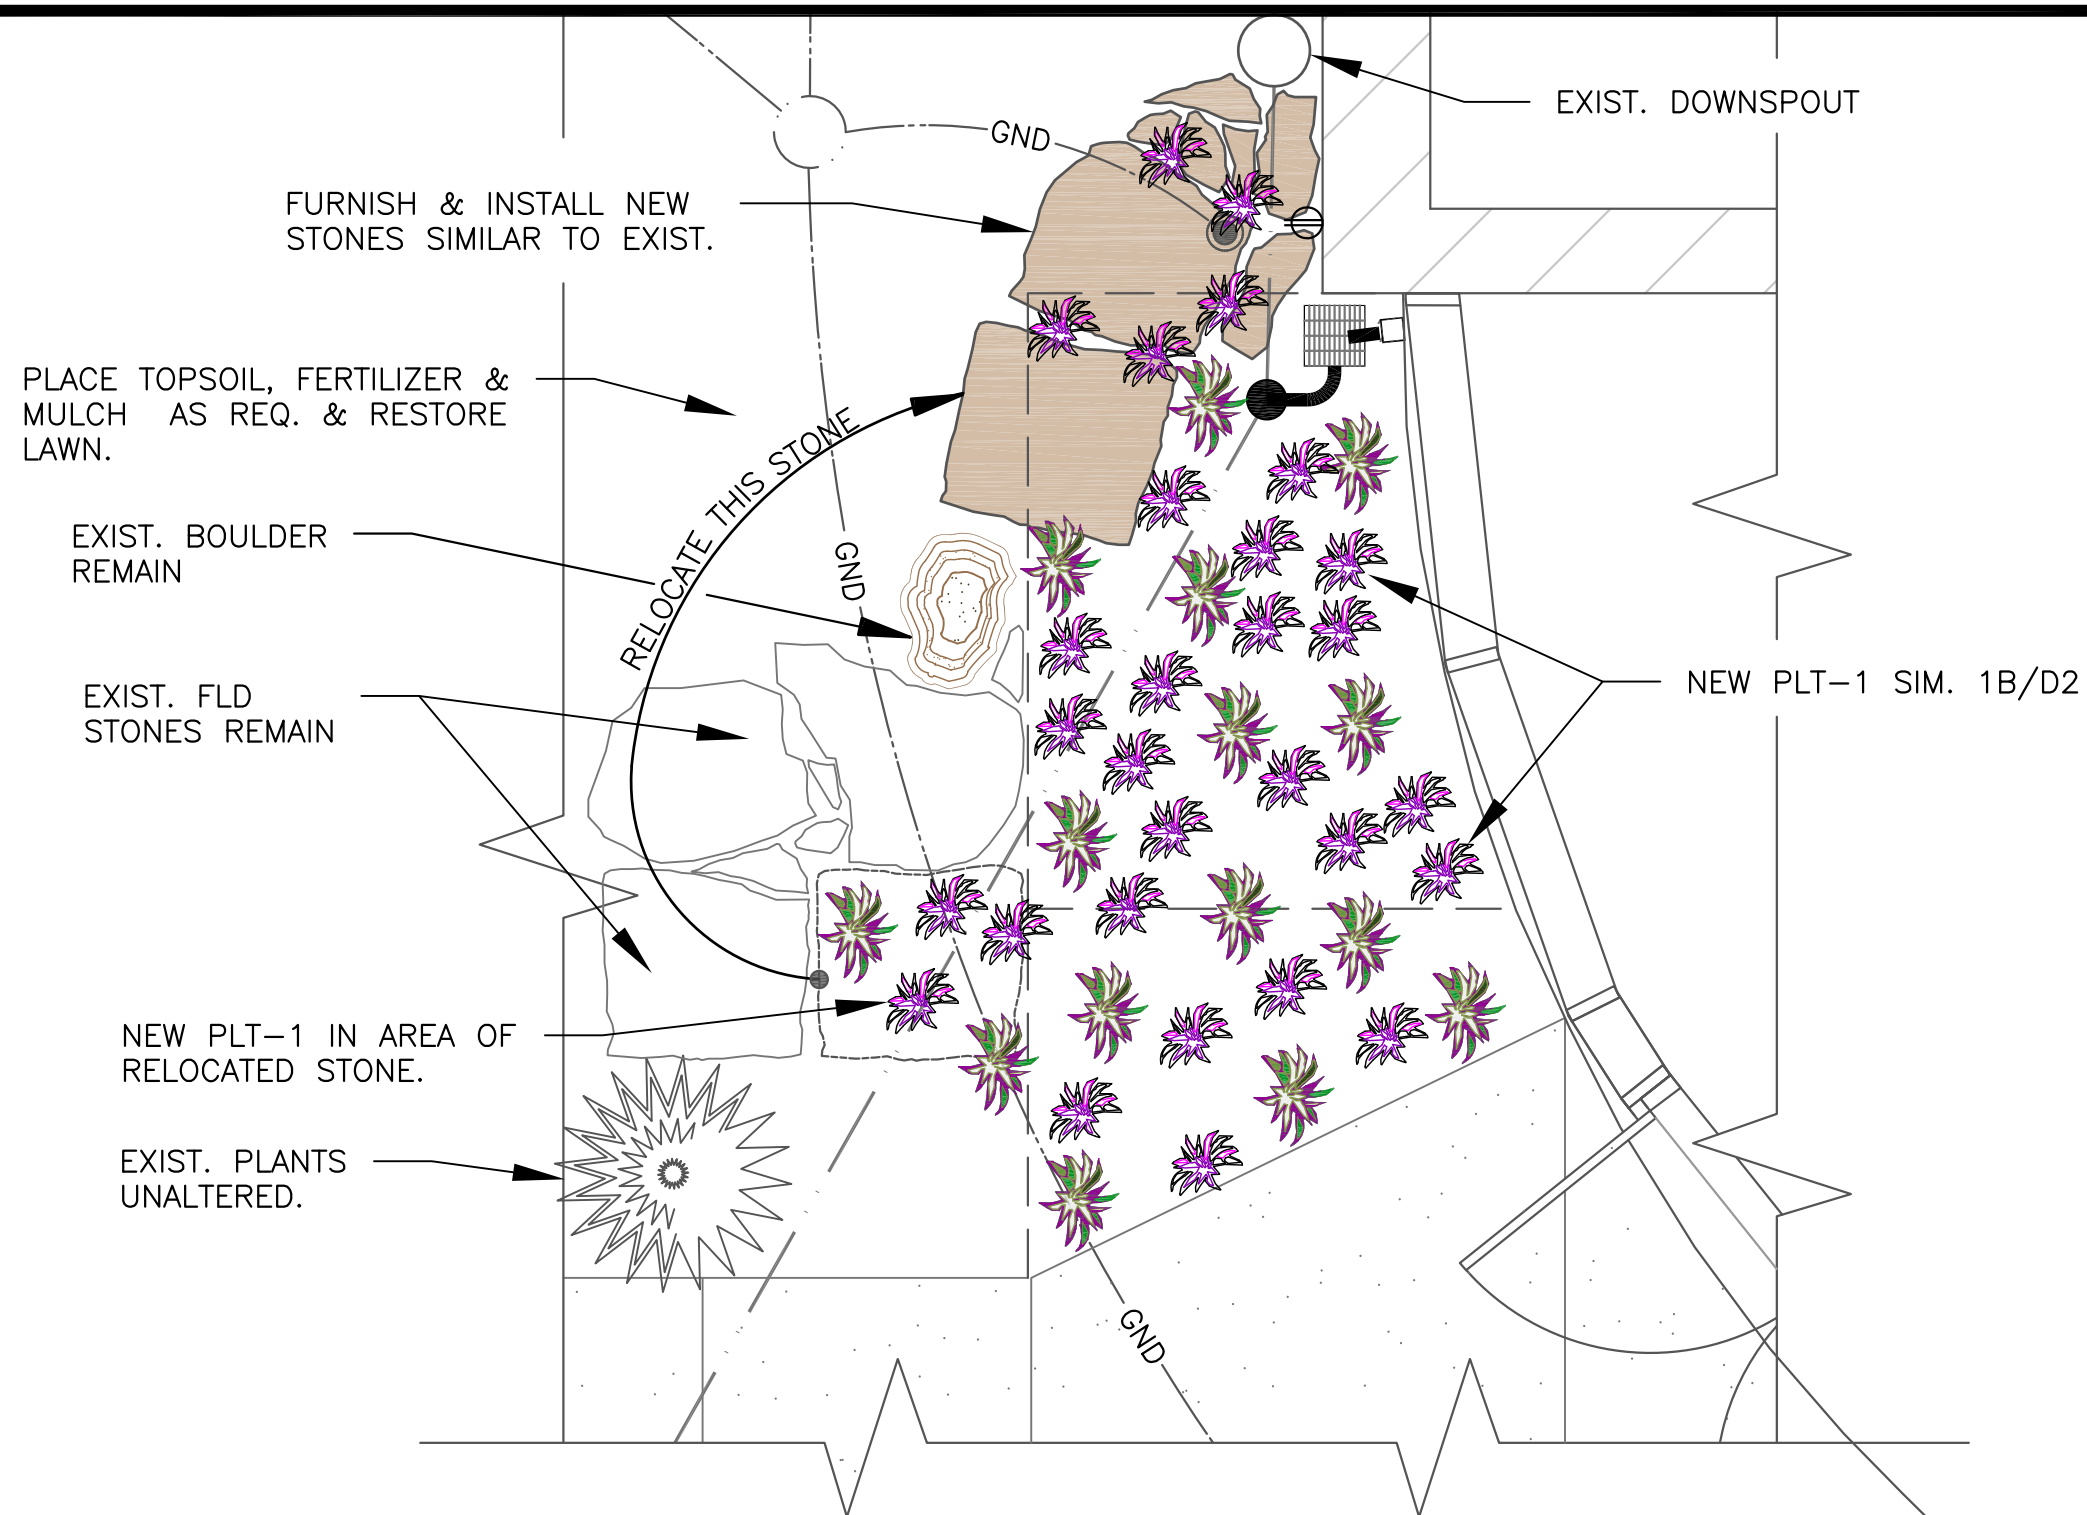


1A NEW LANDSCAPE BED

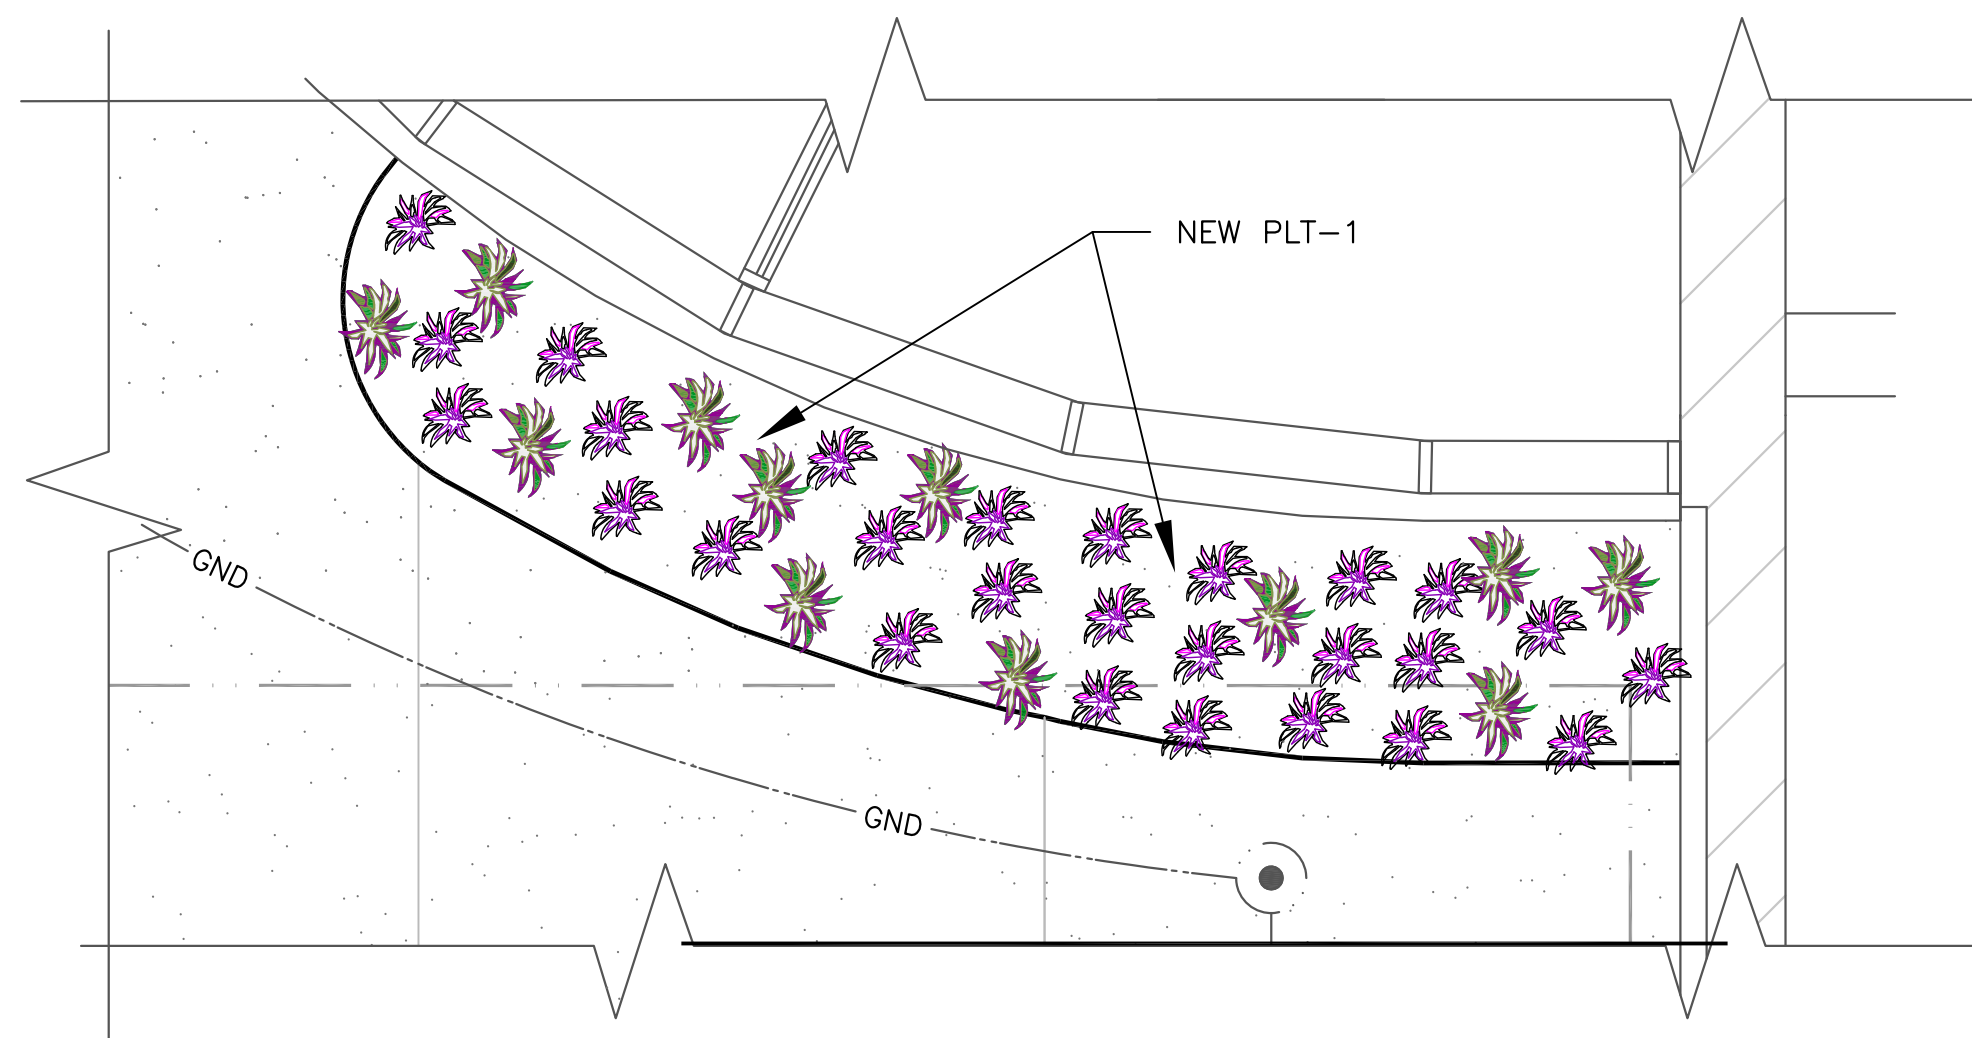

1B NEW PLANTING BED

1. PLT-1: FURNISH POTTED "MAHOGANY BUGLEWEED." A MIX OF COLORS. GROUND COVER PLANTS SPACED NOT MORE THAN 12" (40-45 PLANTS) APART BETWEEN FIELD STONES SIMILAR TO EXISTING. COMPLY WITH NURSERY INSTRUCTIONS FOR PLANTING AND CARE UNTIL ESTABLISHED GROWTH. WATER AND FURNISH & INSTALL NOT-LESS-THAN, 2" THK BED OF RED SHREDDED BARK MULCH THROUGHOUT.

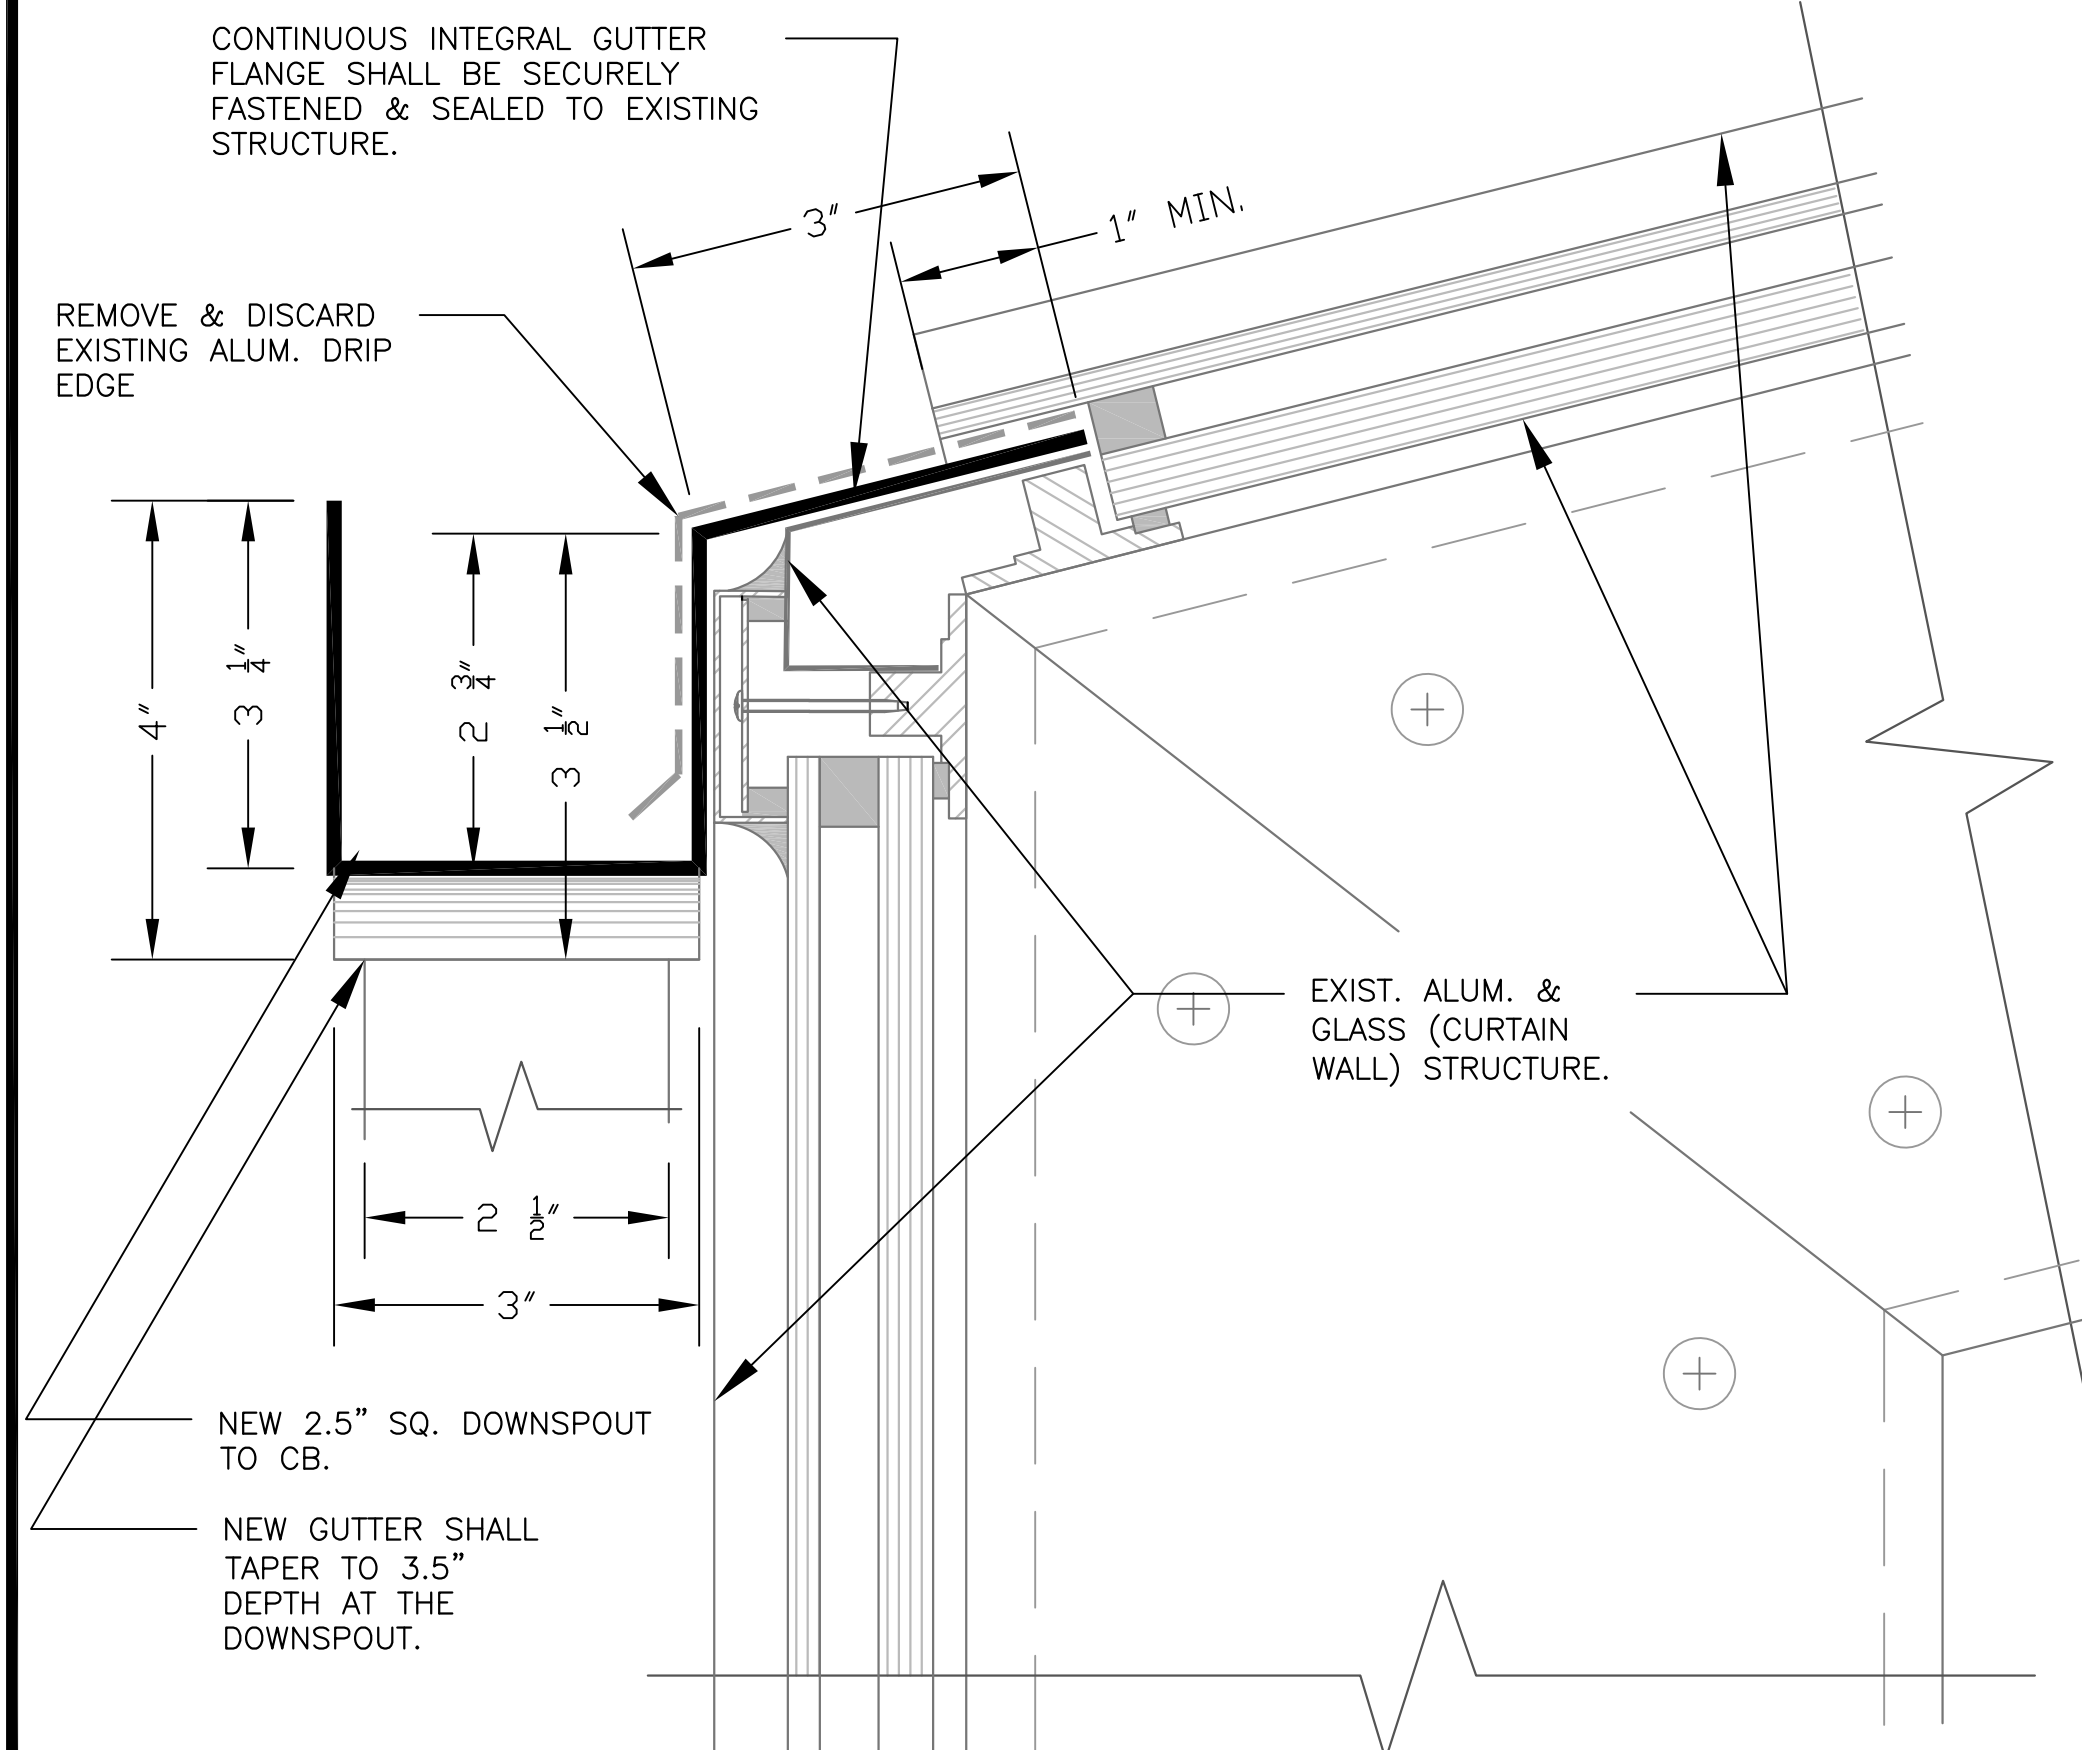

1. FABRICATE, FURNISH & INSTALL NEW CONTINUOUS SEAMLESS 0.125" ALUM. GUTTER. INCLUDE FASTENING SYSTEM AND SEALANTS FOR COMPLETE LEAK-PROOF SYSTEM. ONE MECHANICALLY CONNECTED & SEALED BUTT SEAM SHALL BE ALLOWED TO FACILITATE INSTALL.
2. THE GUTTER SHALL CONTINUE FROM THE FAR END (WEST) TO THE DOWN SPOUT (EAST). FABRICATE 2-1/2" SQ. DOWNSPOUT SAME STYLE & FINISH AS GUTTER, WELD ALL CONNECTIONS. FURNISH AND INSTALL NOT LESS THAN 2 HANGERS AFFIXING DOWNSPOUT TO STRUCTURE.
3. GUTTERS, DOWNSPOUTS, FASTENERS AND FLASHING SHALL BE DESIGNED AND INSTALLED BY, OR IN CLOSE COORDINATION, WITH THE ORIGINAL DESIGNER AND INSTALLER - WISCONSIN SOLAR DESIGN, INC. ALL WORK MODIFYING THE EXISTING WINDOW WALL ENCLOSURE SHALL BE ACCOMPLISHED IN SUCH A WAY AS TO MAINTAIN THE EXISTING WARRANTY.

2 NEW FABRICATED WELDED 0.125" CONTINUOUS ALUM. GUTTER

JUNE 2026



DRAWN BY: DJW

XGFG 262010
REPAIR B424 ENTRANCE

GUTTER DETAIL & LANDSCAPE PLAN

WISCONSIN AIR NATIONAL GUARD
115TH FIGHTER WING
TRUAX FIELD AIR NATIONAL GUARD BASE
3110 Mitchell Street
MADISON, WI 53704-2591
608 245-4571

D2