



CONTRACT SPECIFICATIONS

Work Order 26-275 Replace potable water valve on pier at CGC GREENBRIER

AT

**UNITED STATES COAST GUARD
CGC GREENBRIER UPH BUILDING,
NATCHEZ, MS 39120**

**PROJECT NUMBER 31769753
2026**

SECTION 01 11 00

SUMMARY OF WORK

PART 1 GENERAL

1.1. GENERAL DESCRIPTION

1.1.1. General Work Requirements

Furnish all labor, tools, equipment, and materials for a new potable water connection.

The Base Bid work generally includes, but is not limited to, the following:

- A. Contractor will replace inground 2.5-inch valve (Figure 1) that connects city water to current underground piping for potable water hookups. Replacement 2.5-inch valve (Figure 2) is already purchased by unit and is in inventory. Contractor will remove and replace all PVC piping after the valve. There are approximately 25 feet of below ground piping between the valve and where it reaches the surface near the wooden fence.
- B. Contractor will remove and replace 2.5-inch 80 Schedule PVC piping that connects 2.5-inch inground valve to potable water hookups. There are approximately 65 feet of piping from valve that comes above ground and runs across wooden railing towards the tramway (Figure 3). The piping then reduces to 2.0 inch and runs underneath the tramway and down approximately 88 feet (Figure 4). Contractor will add a reducer from 2.5 inch to 2.0-inch 80 Schedule for the PVC that will run underneath the tramway.
- C. Contractor will have two sections of piping that tee off from the 2-inch PVC piping under the tramway and reduce to 1.5-inch 80 schedule PVC piping. The 1.5-inch Piping will come around the side of the tram and serve as access to the potable water hookup. The hookups will have a bleed valve on one side and a cut off valve on the other side with a 1.5-inch NH thread adapter to act as the potable water hook up location. The NH thread will be facing down towards the bottom of the tramway, and the bleed valve will be facing up. These hook up locations will be approximately located next to the two highest pins next to the tram, 87 feet apart.
- D. Contractor will need to coordinate with the city water company for shutoff and turn back on. Potable water shall not be shut off to the building longer than the workday.

- E. This summary is not all inclusive and delineates only that work items deemed as major to the contract. Ancillary work items necessary to attain the completed project shall be included in the contract as inherent to the work.

1.1.2. SPECIFIC WORK REQUIREMENTS

A. Qualifications

- (1) The installation shall be performed by a contractor certified in the state of Mississippi.
- (2) The installation shall comply with the most current edition of the International Plumbing Code (IPC) and the Uniform Plumbing Code (UPC).

B. Additional Performance Requirements

- (1) Contractor shall be responsible for disposing of the material that is being replaced.

1.1.3. SPECIAL WORK REQUIREMENTS

A. Comply with all hot work requirements of the Coast Guard unit.

B. Coordinate all staging and laydown areas with the Coast Guard prior to work starting.

1.2. TEMPORARY FACILITIES OR UTILITIES

None required.

1.3. PROJECT PERFORMANCE PERIOD

- A. The total contract performance period shall include not only the time needed to complete the base bid and approved option items, but it also includes the time needed to submit, review, and approve all material submittals, and complete all project record (closeout) documents. After work begins at the site, perform the work continuously during normal working hours and show daily progress until all work is complete.
- B. The total contract performance period is 120 calendar days.

1.4. LOCATION

The work is located at:

U.S. Coast Guard Cutter GREENBRIER
44 L E Barry Rd
Natchez, Mississippi 33120

Arrangements for visiting the site may be made by contacting:

Chief Patrick Holom
Email: Patrick.T.Holom@uscg.mil
Telephone: (601) 431-0879

1.5. DRAWINGS ACCOMPANYING SPECIFICATION

There are no drawings accompanying this specification.

1.6. WORK HOURS

1.6.1. Normal Working Hours

- A. Perform all work at the site from Monday through Friday from 7:00am to 4:00 pm, unless otherwise approved. This project requires a special schedule to prevent operational interruptions during the installation process. Please refer to the scope section for detailed coordination of working hours. The contractor shall plan a schedule to minimize disruptions to building operations.
- B. Performing the work beyond the listed working hours is at the discretion of the Coast Guard unit and the contractor must gain prior approval.

1.7. SPECIFIC ENVIRONMENTAL REQUIREMENTS

There are no specific environmental requirements. Refer to section titled Environmental for general environmental requirements.

1.8. SAFETY PROGRAM

1.8.1. General

The Contractor is wholly responsible for work site safety. Implement a safety program that protects the lives and health of personnel in the construction area, prevents damage to property and avoids work interruptions. Provide appropriate safety measures including but not limited to barricades, signs and signal lights as well as complying with the requirements of all applicable federal, State and local safety laws, rules and regulations.

1.9. AVAILABILITY OF UTILITY SERVICES

- A. Reasonable amounts of the following utilities will be made available to the Contractor without charge.
 - (1) Electricity, and
 - (2) Potable Water.
- B. The Contractor shall pay all costs incurred in connecting, converting, and transferring the utilities to the work. The contractor shall be responsible for making connections including providing back flow preventers, transformers and for disconnection. The contractor shall provide temporary toilet facilities for their personnel.

1.10. UNDERGROUND AND CONCEALED UTILITIES

- A. Any utility locations provided are diagrammatic, not exact.
- B. Physically verify the location and elevation of the existing underground and concealed utilities local to the work area. Employ techniques to scan the construction site including electromagnetic and sonic equipment prior to commencing the work. Mark the surface of the ground where existing underground utilities are discovered.

1.11. UTILITY OUTAGES

Identify the utility, reason for interruption, proposed time of interruption, and duration of interruption. Do not interrupt utilities until authorized by the Contracting Officer's Representative (COR).

1.12. CONTRACTOR USE OF PREMISES

The work shall be performed on a Coast Guard operational military installation. Become familiar with and obey station fire, traffic, and security regulations. Personnel shall not stray from the immediate area of work or direct avenues of ingress and egress unless authorized in advance by the COR. Isolate each construction area with temporary partitions and dust controls. Provide movable high-visibility safety fencing about all work areas and equipment laydown areas located outdoors. Provide temporary covers on excavations that remain open overnight.

1.13. CLEANUP

The Contractor shall keep the work area, including the laydown and storage area, free from accumulations of waste materials on a daily basis and comply with all federal, state, and local regulations pertaining to the storage, transport, and

disposal of wastes. The Contractor shall not use Coast Guard waste disposal facilities including garbage cans, trash piles, or dumpsters.

1.14. ENVIRONMENTAL

1.14.1. Protection of the Environment

The Contractor shall comply with all applicable federal, state, and local laws and regulations for the protection of the environment, including but not limited to the Endangered Species Act (ESA), Bald and Golden Eagle Protection Act (BGEPA), the Migratory Bird Treaty Act (MBTA), National Historic Preservation Act (NHPA), the Resource Conservation and Recovery Act (RCRA), and Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA).

1.14.2. Generated Waste

- A. Any waste generated because of the project shall either be recycled or be disposed of in accordance with RCRA requirements.
- B. Any hazardous waste shall be manifested off site with the Coast Guard unit listed as the Generator and signatory. Any hazardous waste shall be analyzed, characterized, stored, and disposed of in accordance with RCRA and all applicable federal, state, and local laws and ordinances.
- C. Hazardous waste shall be properly transported and delivered to an appropriate facility. The Contractor shall submit for COR approval the proposed disposal facility, qualifications of the transporters, and the draft hazardous waste manifest.

1.15. DISPOSITION OF MATERIALS

- A. All materials including construction debris and equipment shall be removed from Government property. The Government will not be responsible for the condition or loss of, or damage to, such property after notice to proceed. Materials and equipment shall not be viewed by prospective purchasers or sold on the site.
- B. The Contractor shall submit the disposal receipt from the landfill within 10 working days of disposal.

1.16. STORM PROTECTION

The Contractor shall take every practicable precaution to minimize danger from storms to personnel, the work, and to adjacent property. Precautions shall include, but not be limited to, closing all opening, removing all loose materials, tools, and

equipment from exposed locations, and removing or securing scaffolding and other temporary work.

1.17. RECEIPT OF MATERIALS

The Contractor is responsible to receive all equipment, materials, and supplies.

1.18. DELIVERY AND STORAGE

The Contractor is responsible for the proper transport and storage of all equipment and materials.

1.19. SECURITY

- A. Submit a list of the names of all personnel working on the project site prior to the preconstruction conference for approval. The roster shall be submitted via email, and at a minimum, include the first name, last name, job description, and company of employment.
- B. Immediately submit a new list upon a change in on-site project personnel. Refer to the paragraph titled, Special Notice Prior Notification, for notification requirements. Only personnel on the approved list are allowed onto the project site.
- C. All approved personnel shall carry a valid, Government-issued identification while on Government property in conformance with the Real ID Act of 2005. Non-compliant personnel shall be escorted off Government property.

1.20. FINAL INSPECTION AND ACCEPTANCE

- A. Electronically submit a written request for final acceptance to the Coast Guard.

1.21. WARRANTIES

- A. Endorse all warranties or guarantees to the Government.

1.22. TRAINING

- A. The Contractor shall provide training to unit personnel in the operation of the equipment. The Operation and Maintenance Manuals shall be approved and provided to the unit prior to the training.

1.23. SUBMITTALS

- A. Submittals will be reviewed by the Coast Guard and returned within 10 working days after receipt, unless otherwise stated.

1.24. SUBMITTAL LIST

A. ROSTER OF PERSONNEL

- (1) As required by the paragraph titled Security.

B. PROJECT SCHEDULE

- (1) Prepare a Construction Progress Schedule. It shall include all major milestones and events for the entire duration of the construction contract.

C. SAFETY PLAN

- (1) At a minimum, describe the general safety program and identify specific safety provisions for hazards incidental to the contract work such as elevated working surfaces, or similar conditions of the work. Comply with the paragraph titled Safety Program.

D. PRODUCT DATA

- (1) Submit the product data sheet for each manufactured item. It shall include the manufacturer's descriptive literature of cataloged products, equipment drawings, diagrams, performance and characteristic curves and catalog cuts. Submit complete descriptive data for each type of material. Clearly mark data to indicate the type of material to be provided.

1.24.2. OPERATION AND MAINTENANCE MANUALS

A. Submit electronically and provide the following:

- (1) Contact information for the prime contractor, sub-contractor, and major equipment vendor/supplier;
- (2) Warranty information;
- (3) Test procedures;
- (4) Results of all testing and commissioning procedures;
- (5) Performance data;
- (6) A control sequence describing start-up, operation and shut-down instructions;
- (7) Installation instructions;
- (8) Maintenance instructions;
- (9) Operating instructions;

(10) Parts list.



Figure 1:



Figure 2:



Figure 3:



Figure 4:
Where the 2.5 inch pipe will go underneath the tram and reduce to 2.0 inch.

Figure 5:



View of tram from top. Potable water connections will be at first and second pin respectively

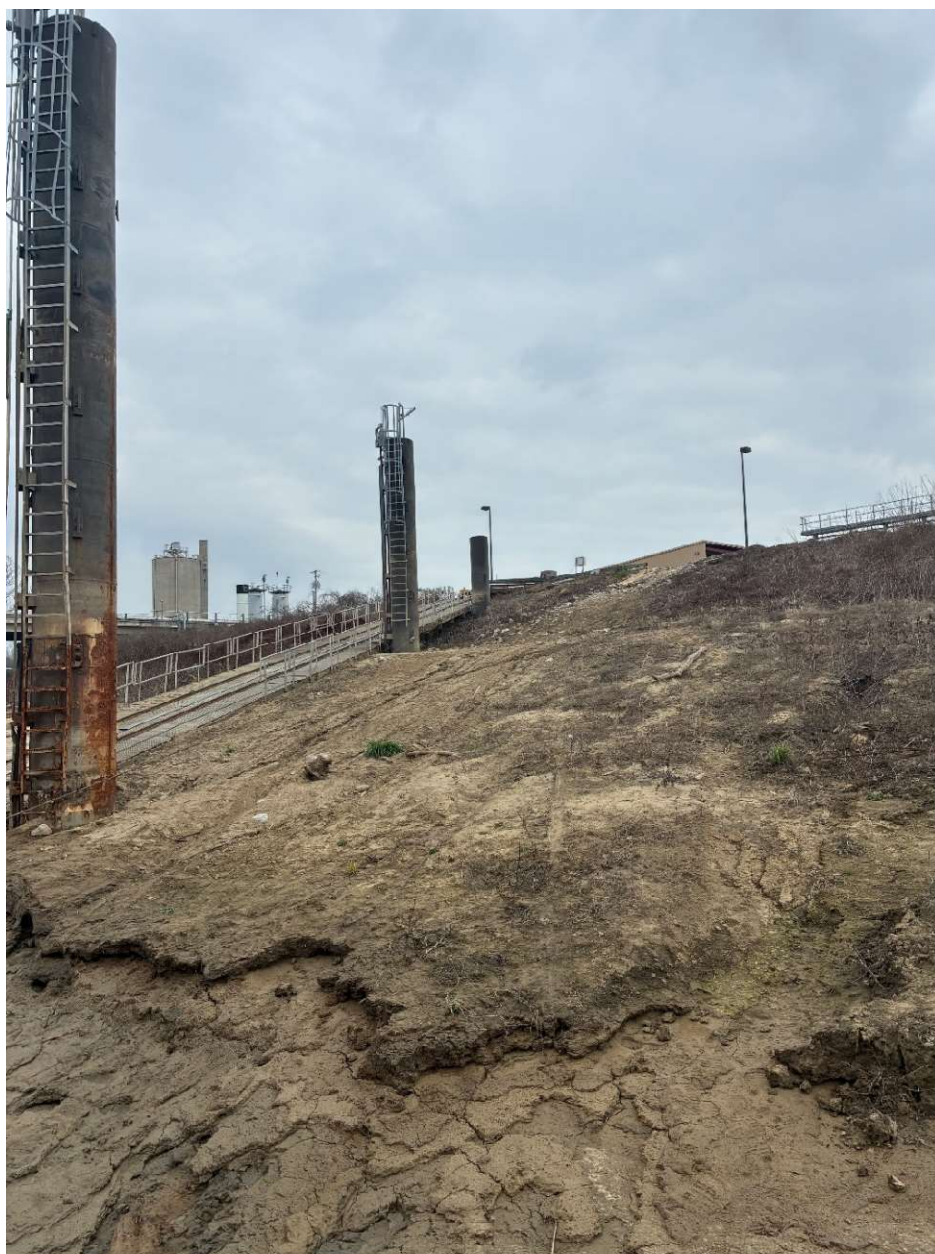


Figure 6:

View of Tram from bottom. Piping will run underneath the tram until the second pin



Figure 7:

Existing Potable Water Connection that will be replaced. One side will have a bleed valve, and the other side will have a valve and 1.5 inch NH threaded hookup



Figure 8:

View of existing potable water PVC pipe. Potable water PVC pipe is the first 2 inch PVC pipe from the right.

-- End of Section --