

WWYK240176

REPLACE INDUSTRIAL WASTE LIFT STATIONS 6N & 6S, B62501

KEY PLAN:

2135

2119

2137

2139

2140

2123

PROJECT LOCATION

TINKER GATE PASS & ID B6611

VANCE GATE

EAKER GATE

BASE CIVIL ENGINEER B400

CONTRACTING B3

FIRE DEPARTMENT B117

BASE OPERATIONS B240

HRUSKOCY GATE

LANCER GATE

LIBERATOR GATE

PROJECT LOCATION

HOPE GATE

PIAZZA GATE

GOTT GATE

TRUCK GATE

FUTURE TRUCK GATE

LEGEND

CONTRACTOR HAUL ROUTE

FUTURE HAUL ROUTE

TINKER AFB, OK VICINITY MAP

PROJECT LOCATION

GENERAL NOTES:

1. BRAND NAMES: REFERENCE TO SPECIFIC BRAND NAMES OR COMPANIES IS FOR THE PURPOSE OF ESTABLISHING MINIMUM QUALITY STANDARDS, IDENTIFICATION AND GUIDANCE AND IS NOT INTENDED TO LIMIT SELECTION OF OTHER MANUFACTURERS THAT ARE EQUAL OR EXCEED THE SPECIFIED ITEMS IN TERMS OF PHYSICAL PROPERTIES, INCLUDING, COLOR RANGE, FINISH, DURABILITY, APPEARANCE, PERFORMANCE CHARACTERISTICS, AND OTHER FACTORS. OTHER PRODUCTS, MATERIALS, COLORS AND SYSTEMS, MAY BE SUBMITTED FOR EVALUATION AND APPROVAL/DISAPPROVAL BY THE CONTRACTING OFFICER.

2. THIS SET OF CONSTRUCTION DOCUMENTS SHALL BE CONSIDERED AS A WHOLE IN THAT THE GENERAL CONTRACTOR AND ALL THE SUB-CONTRACTORS ARE RESPONSIBLE FOR THE INFORMATION PRESENTED ON ALL SHEETS ON THE SET OF DRAWINGS AND ALL SECTIONS OF THE SPECIFICATIONS.

3. THE CONTRACTOR IS RESPONSIBLE FOR ERECTING ALL CONSTRUCTION FENCING AND BARRICADES AS REQUIRED TO PROTECT CONSTRUCTION MATERIAL AND TO PREVENT ANY UNAUTHORIZED PERSONNEL FROM ENTERING THE CONSTRUCTION SITE.

4. ANY DAMAGE TO THE EXISTING GROUNDS OR FACILITIES CAUSED BY CONSTRUCTION TRAFFIC OR ANY CONSTRUCTION OPERATION SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR TO MATCH OR EXCEED EXISTING CONDITIONS AT NO ADDITIONAL COST TO THE GOVERNMENT.

5. ALL WORK NOTED & LOCATED IN THESE DOCS SHALL BE UNDERSTOOD BY THE CONTRACTOR TO REQUIRE ALL NEW LABOR & MATERIALS UNLESS SPECIFICALLY NOTED TO BE "EXISTING" OR "BY OTHERS".

PROJECT DRAWING INDEX

SEQ.	SHT.	SHEET TITLE
		GENERAL
1	G-101	GENERAL NOTES & VICINITY MAP
		DISCIPLINE
2	C-101	AERIAL IMAGE WITH UTILITIES, 6N & 6S B62501
3	C-102	DEMOLITION AND NEW WORK WASTE LIFT STATION 6N & 6S
4	P-101	PLUMBING DEMOLITION AND NEW WORK PLAN LAYOUT
5	P-501	PLUMBING DETAILS
6	P-601	PLUMBING CONTROLS
7	E-101	ELECTRICAL DEMOLITION AND NEW WORK PLAN LAYOUT

SIGNATURES

CORROSION ENGINEER: (CECE)	DATE:
CE OPERATIONS: (CECO)	DATE:
ZONE MANAGER:	DATE:
CONSTRUCTION MANAGEMENT: (CECE)	DATE:
FIRE DEPARTMENT	DATE:
SAFETY:	DATE:
INDUSTRIAL HYGIENE:	DATE:
ENVIRONMENTAL:	DATE:
ASBESTOS EVALUATION:	DATE:
COMMUNICATIONS: (COMM)	DATE:
USING AGENCY:	DATE:
REVIEWED BY:	DATE:
REVIEWED BY:	DATE:
DESIGN MANAGER: (CECE)	DATE:
CHIEF DESIGN BRANCH: (CECE)	DATE:
CHIEF ENGINEER DIR: (CECE)	DATE:
BASE CIVIL ENGINEER: (CE)	DATE:

APMC

AIR FORCE MATERIEL COMMAND

72 ABW CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

CONCEPT DESIGN

WWYK240176

REPLACE INDUSTRIAL WASTE LIFT STATIONS 6N & 6S, B62501

TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS

MARK	DATE	DESCRIPTION

MANAGEMENT INFORMATION

ISSUE DATE: 5 FEB 2026

DESIGN GROUP: TEPA-CSAG

DESIGNED BY: J. ALLEN

DRAWN BY: S. STARR

CHECKED BY: J. WHEELER

DESIGN FILE LOCATION: Eng\Design\2020\2024\20240176\SUPPORT\DRAWINGS\MODEL


GENERAL NOTES AND VICINITY MAP

SHEET TITLE

SHEET NUMBER

G-101

SHEET 1 OF 7

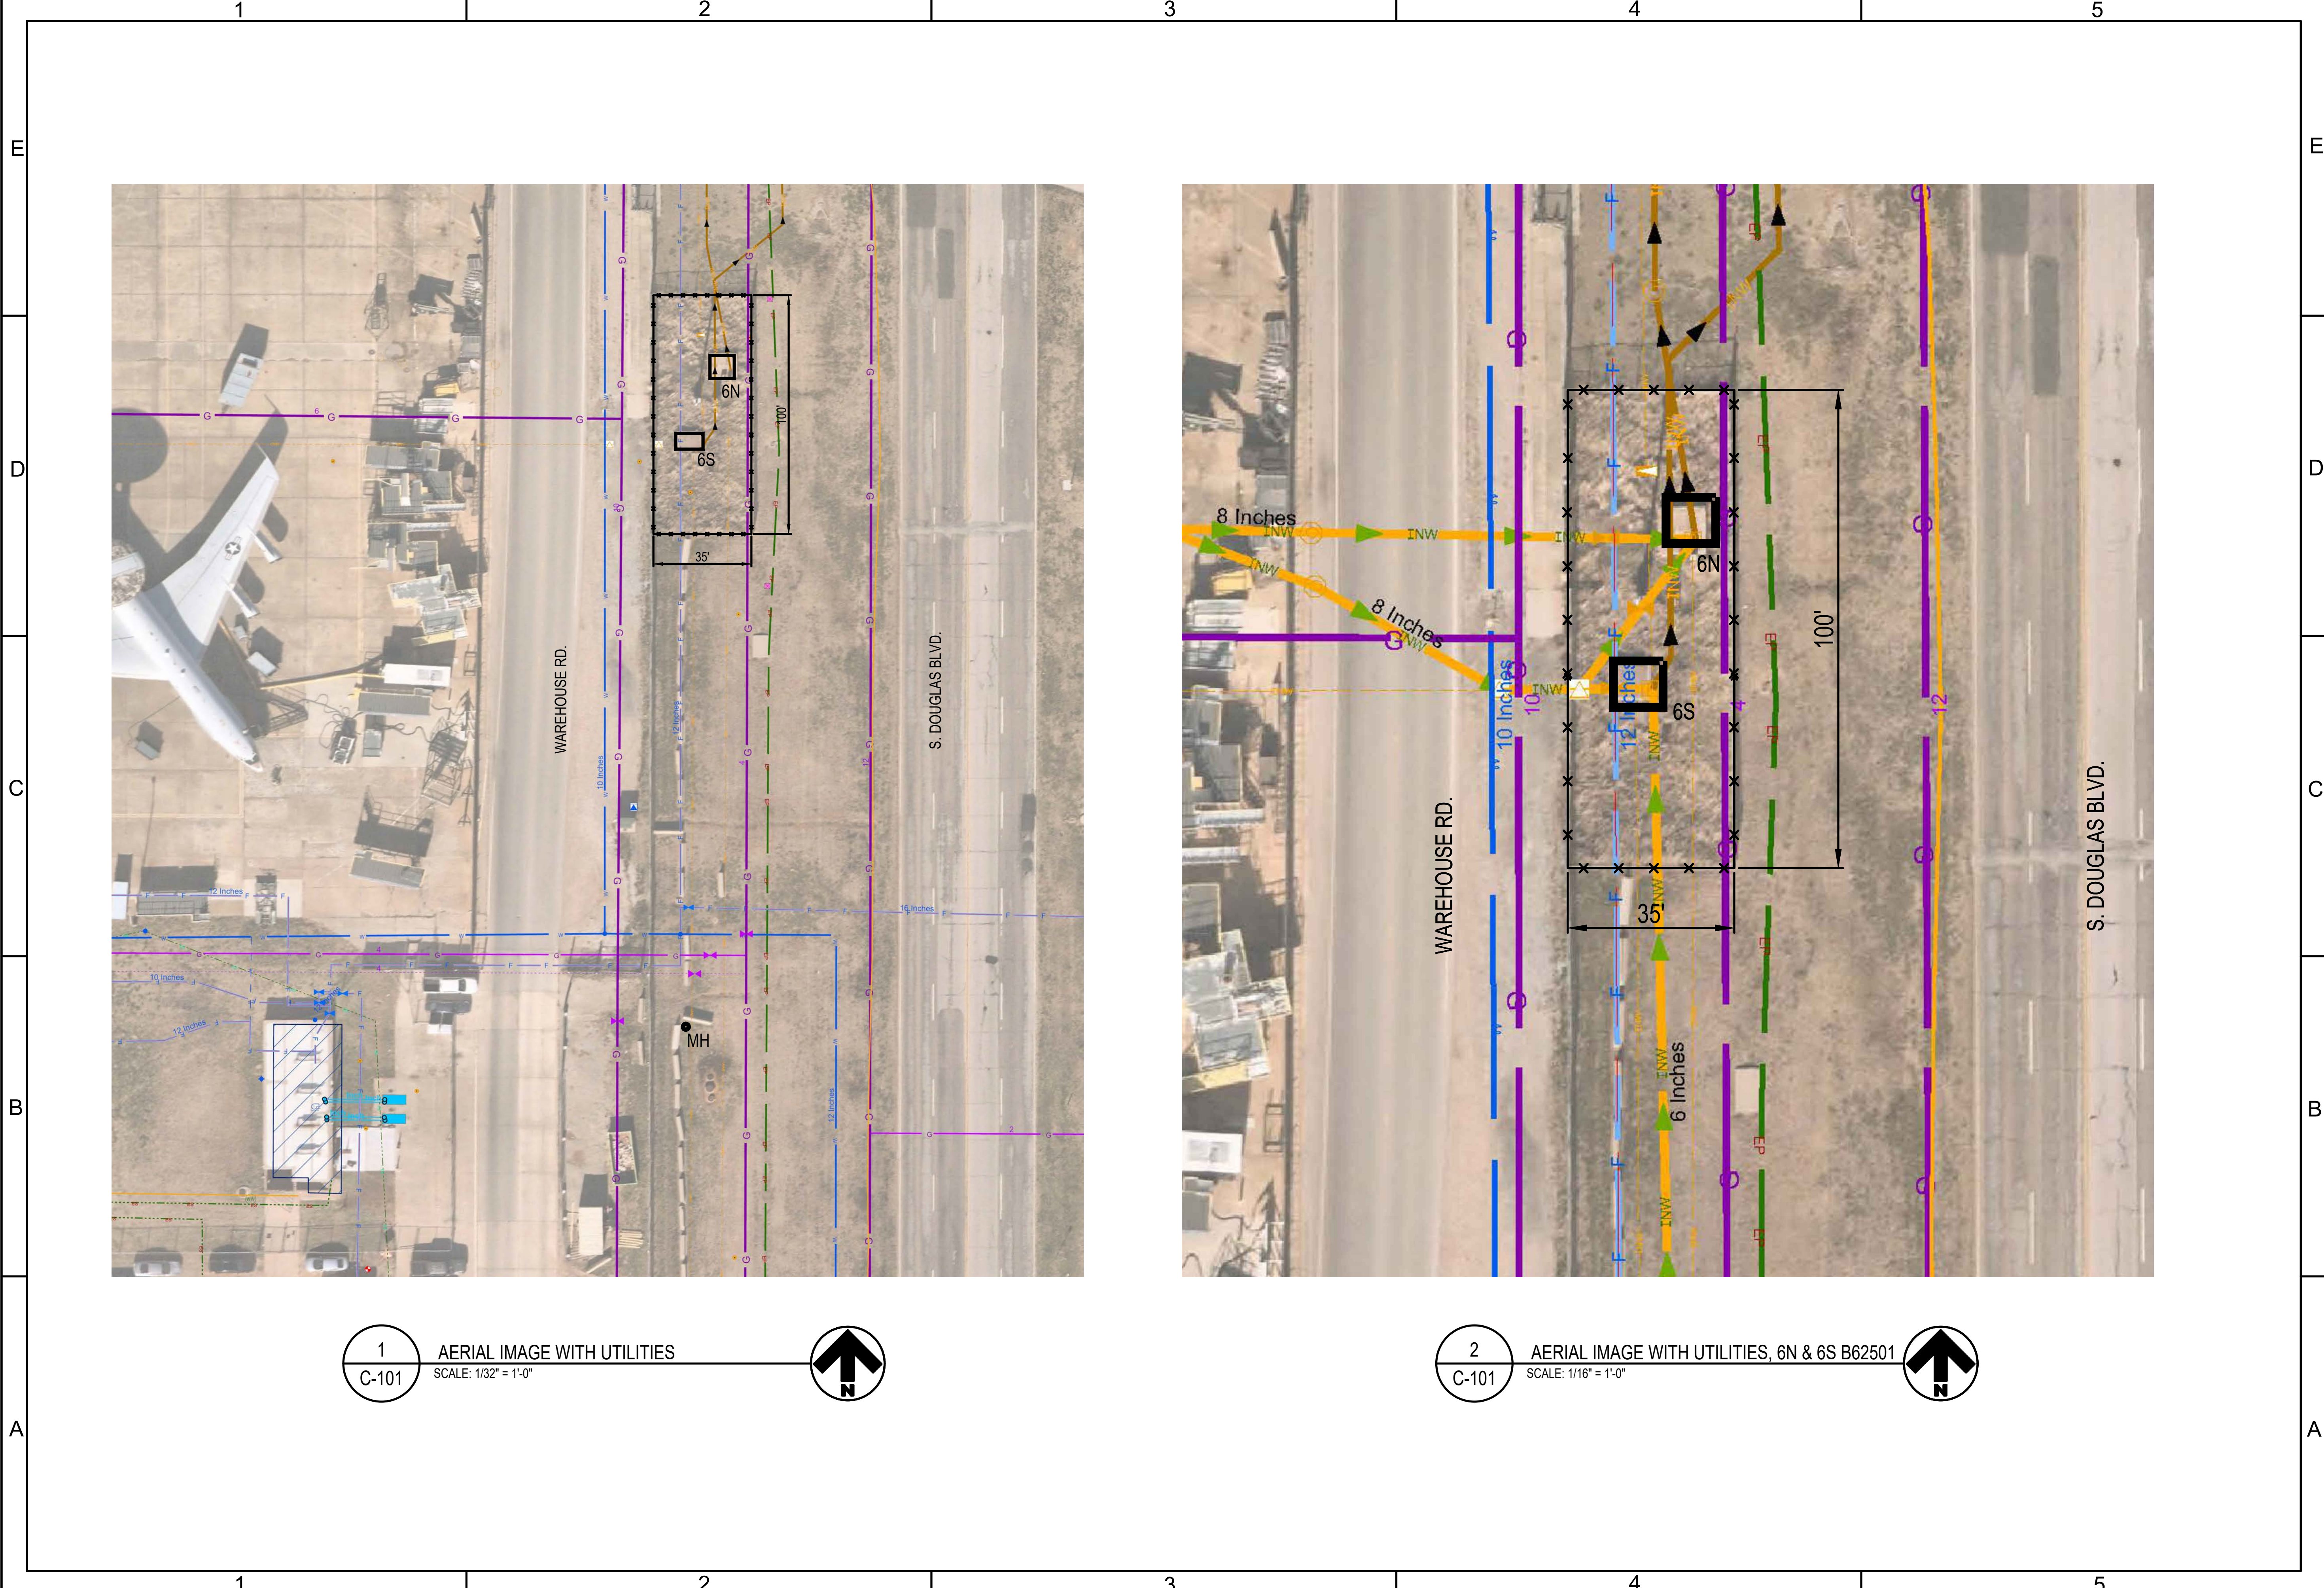

1
C-101
AERIAL IMAGE WITH UTILITIES
SCALE: 1/32" = 1'-0"

2
C-101
AERIAL IMAGE WITH UTILITIES, 6N & 6S B62501
SCALE: 1/16" = 1'-0"



AIR FORCE MATERIEL COMMAND
72 ABW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

CONCEPT
DESIGN


PROJECT INFORMATION
WWYK240176
REPLACE INDUSTRIAL WASTE
LIFT STATIONS 6N & 6S, B62501
TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE DATE	DESCRIPTION	MARK	DATE
5 FEB 2026	DESIGN GROUP: TEPA-CSAG		
	DESIGNED BY: J. ALLEN		
	DRAWN BY: S. STARR		
	CHECKED BY: J. WHEELER		

DESIGN FILE LOCATION:
Eng1\Design\2020\2024\20240176\Support\Drawings\Model

AERIAL IMAGE WITH
UTILITIES, 6N & 6S B62501

SHEET NUMBER
C-101
SHEET 2 OF 7

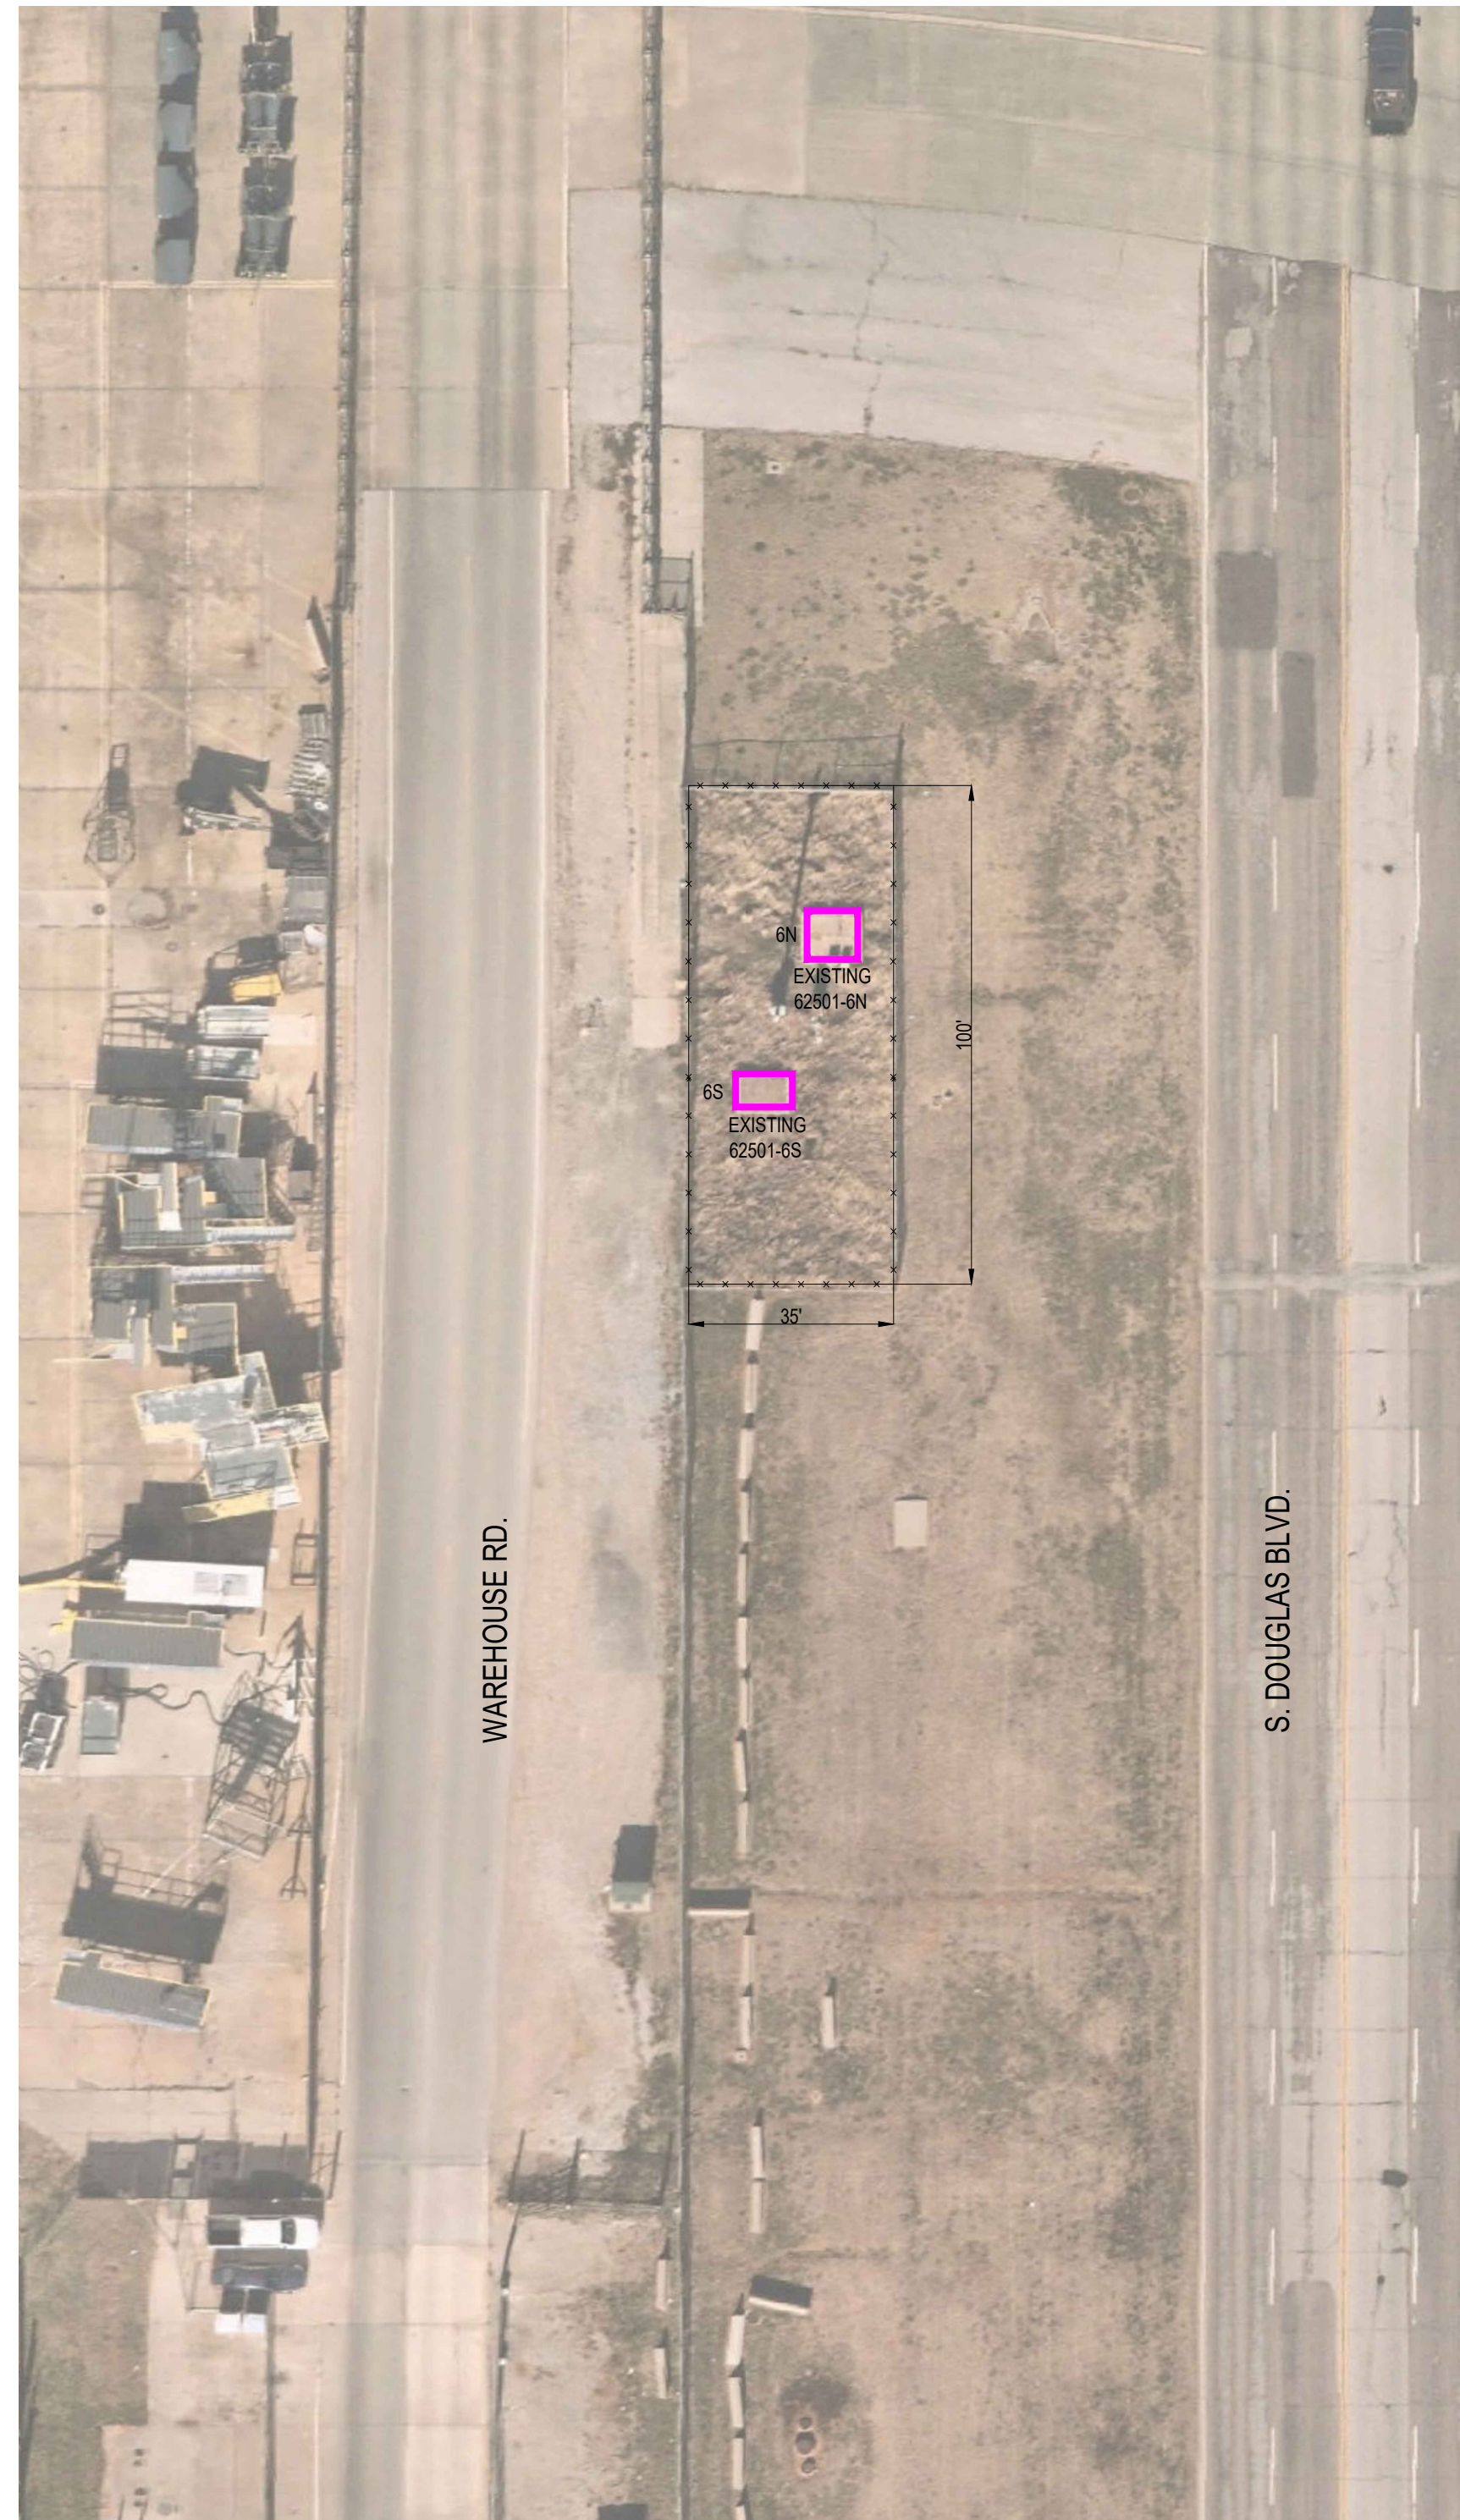

1 DEMOLITION WORK WASTE LIFT STATION 6N & 6S
C-102 SCALE: 1/32" = 1'-0"



2 NEW WORK WASTE LIFT STATION 6N & 6S
C-102 SCALE: 1/32" = 1'-0"

GENERAL NOTES

1. DURING THE DEMOLITION OF THE INDUSTRIAL WASTE STATION, IT IS PRESUMED THAT ASBESTOS-CONTAINING MATERIALS (ACM) AND/OR LEAD-BASED PAINT (LBP) WILL BE PRESENT. THE CONTRACTOR IS REQUIRED TO TEST FOR THESE MATERIALS ONCE THEY ARE EXPOSED. IF THE CONTRACTOR ENCOUNTERS ANY SUSPECT ENVIRONMENTAL CONDITIONS AT ANY TIME, THEY MUST IMMEDIATELY NOTIFY THE CONTRACTING OFFICER (CO) AND THE CONTRACTING OFFICER'S REPRESENTATIVE (COR).
2. AN EM SURVEY INDICATES THERE ARE NO ASBESTOS CONTAINING MATERIALS (ACM), HEAVY METALS (HM, OR LEAD BASED PAINT (LBP) CONCERNS FOR AREA(S) WHERE WORK IS TO BE PERFORMED. IF AT ANY TIME THE CONTRACTOR ENCOUNTERS SUSPECT ENVIRONMENTAL CONDITIONS, THEY SHALL NOTIFY THE CO AND THE COR.
 1. ANY DEWATERING NEEDS TO BE PUMPED AND HAULED TO THE IWTP
 2. ANY EXCAVATION NEEDS TO BE STORED IN A LINED CONTAINER, TESTED, AND DISPOSED OF, IN ACCORDANCE WITH SAMPLING RESULTS. (REF. TINKER HAZARDOUS WASTE MANAGEMENT PLAN).
3. IF AT ANY TIME THE CONTRACTOR ENCOUNTERS SUSPECT ENVIRONMENTAL CONDITIONS NOT IDENTIFIED ABOVE, THEY SHALL NOTIFY THE CO AND THE COR.
4. THIS DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
5. PROVIDE CONCRETE PAD FROM EXISTING GATE TO ELECTRICAL PANELS, INDUSTRIAL WASTE VALVE VAULT AND INDUSTRIAL WASTE LIFT STATION. THE REMAINDER OF THE AREA INSIDE THE FENCE AREA TO BE GRAVEL.
6. REMOVE EXISTING INDUSTRIAL WASTE LIFT STATIONS (6N AND 6S) AND ASSOCIATED PIPING, VALVES, AND STRUCTURES IN A PHASED SEQUENCE.
7. BACKFILL AND COMPACT EXCAVATED AREAS IN CONTROLLED LIFTS TO ACHIEVE REQUIRED DENSITY AND STABILITY.
8. PROPERLY DISPOSE OF ALL REMOVED MATERIALS IN ACCORDANCE WITH LOCAL ENVIRONMENTAL REGULATIONS AND TINKER AFB STANDARDS.
9. REROUTE THE DISCHARGE FROM LIFT STATION 6S TO CONNECT INTO THE LIFT STATION 6N SYSTEM TO CONSOLIDATE INDUSTRIAL WASTE FLOWS.
10. DECOMMISSION AND DEMOLISH LIFT STATION 6S ONCE FLOW HAS BEEN SUCCESSFULLY REDIRECTED.
11. SEQUENCE ALL WORK TO MAINTAIN CONTINUOUS OPERATION OF THE INDUSTRIAL WASTE SYSTEM AND MINIMIZE SERVICE DISRUPTIONS.
12. EXCAVATE AND PREPARE SUBGRADE FOR THE INSTALLATION OF THE NEW LIFT STATION AND ASSOCIATED VALVE VAULTS.
13. CONSTRUCT CONCRETE PAD VALVE VAULT AND INSTALL GRAVEL WALKWAYS AROUND LIFT STATION AREAS TO SUPPORT LONG-TERM MAINTENANCE ACCESS.
14. INSTALL NEW INDUSTRIAL WASTE PIPING AND AN 8" VALVE BOX WITH COVER TO CONNECT TO THE EXISTING SYSTEM.
15. PERFORM FINAL GRADING TO ESTABLISH POSITIVE DRAINAGE AWAY FROM STRUCTURES AND RESTORE DISTURBED AREAS IN ACCORDANCE WITH TINKER AFB STANDARDS.
16. PROVIDE MINIMUM 4 FT WIDE GRAVEL PATHS AROUND CONCRETE PADS AND ACCESS POINTS FOR PERSONNEL MOBILITY.

CONCEPT DESIGN

WWYK240176
REPLACE INDUSTRIAL WASTE
LIFT STATIONS 6N & 6S, B62501

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS		
		MARK	DATE	DESCRIPTION
ISSUE DATE: 5 FEB 2026				
DESIGN GROUP: TEPA-CSAG				
DESIGNED BY: J. ALLEN				
DRAWN BY: S. STARR				
CHECKED BY: J. WHEELER				
DESIGN FILE LOCATION:				
Eng\Design\2020\2024\20240170\Support\Drawings\Model				

DEMOLITION AND NEW
WORK WASTE LIFT
STATION 6N & 6S

SHEET NUMBER_____

C-102

SHEET 3 OF 7

