

DRAWINGS

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

GENERAL CONTROL SYMBOLOGY

T

THERMOSTAT

S

TEMPERATURE SENSOR

HS

HUMIDITY SENSOR

H

HUMIDISTAT

PS

DUCT PRESSURE SENSOR

CD

CARBON MONOXIDE DETECTOR

SD

SMOKE DETECTOR

W

WATER METER

E

ELECTRIC METER

ESS

EMERGENCY STOP BUTTON

N

NIGHT THERMOSTAT

DUCT SIZE IN INCHES
(NET INSIDE DIMENSIONS)
(RECTANGULAR DUCT SHOWN)
DIA INDICATES ROUND DUCT.
DIAO. INDICATES OVAL DUCT.
FOR RECTANGULAR DUCT:
FIRST FIGURE: SIDE SHOWN
SECOND FIGURE: SIDE NOT SHOWN

36x24

S1

900

AIR QUANTITY
(CFM)

DEVICE IDENTIFICATION

SUPPLY DIFFUSER

RETURN REGISTER OR GRILLE

EXHAUST REGISTER OR GRILLE

SUPPLY REGISTER OR GRILLE, SIDEWALL

RETURN/EXHAUST REGISTER OR GRILLE, SIDEWALL

PIPING SYSTEMS

— • —

DOMESTIC COLD WATER

— -- —

DOMESTIC HOT WATER

— --- —

DOMESTIC HOT WATER RETURN

— SS —

SANITARY SEWER

— — —

VENT

— G —

NATURAL GAS

— F —

FIRE PROTECTION

— NPW —

NON-POTABLE WATER

— HRR —

HEAT RECOVERY RETURN

— HRS —

HEAT RECOVERY SUPPLY

— — —

EXISTING PIPING TO BE REMOVED

— CHS —

CHILLED WATER SUPPLY

— CHR —

CHILLED WATER RETURN

— HWS —

HEATING WATER SUPPLY

— HWR —

HEATING WATER RETURN

— CD —

CONDENSATE DRAIN

— RS —

REFRIGERANT SUCTION

— RL —

REFRIGERANT LIQUID

— RD —

ROOF DRAIN

— MU —

MAKE-UP WATER

— (E) —

EXISTING PIPING TO REMAIN

PIPING SYMBOLS

CONTINUATION

DROP IN PIPE

VALVE IN RISER

ELBOW, 90 DEG.

ELBOW UP, 90 DEG.

ELBOW DOWN, 90 DEG.

ELBOW, 45 DEG.

TEE

UNION

UNION, FLANGED

TEE, OUTLET TURNED DOWNWARD

TEE, OUTLET TURNED UPWARD

PIPE PITCH

PRV

PRESSURE RELIEF VALVE

TPRV

TEMP & PRESS RELIEF

PA

ANCHOR

BALL VALVE

GLOBE VALVE

GATE VALVE

CHECK VALVE

PLUG VALVE

DOUBLE CHECK VALVE BACKFLOW PREVENTER

FIRE DEPARTMENT CONNECTION

PRESSURE GAGE WITH SHUT OFF COCK AND SIPHON OR PULSATION DAMPENER

CAP

FD

FLOOR DRAIN WITH TRAP

DIRECTION OF FLOW

FLOOR PENETRATION

WH

WALL HYDRANT

WCO

WALL CLEANOUT

HB

HOSE BIB

THERMOMETER

AV

AIR VENT, AUTOMATIC

AIR VENT, MANUAL

EL

EXPANSION LOOP

PG

GUIDE

EXPANSION JOINT

FLEXIBLE CONNECTOR

PT

PRESSURE/TEMPERATURE TEST PORT

BALL JOINT

FS

FLOOR SINK WITH TRAP

WFD

WATER FLOW DETECTOR

CALIBRATED BALANCING VALVE

AUTOMATIC FLOW CONTROL VALVE

BUTTERFLY VALVE

MODULATING TWO-WAY

MODULATING THREE-WAY

REDUCED PRESSURE BACKFLOW PREVENTER

OS&Y VALVE

THERMOMETER GAGE

BLIND FLANGE

GENERAL ABBREVIATIONS

AFF

- ABOVE FINISHED FLOOR

BOD

- BOTTOM OF DUCT ELEV.

BOP

- BOTTOM OF PIPE ELEV.

CFM

- CUBIC FEET PER MINUTE

CL

- CENTERLINE

CLG

- CEILING

COND-

CONDENSATE/CONDENSER

CONN-

CONNECTION/CONNECT

DB

- DRY BULB TEMPERATURE

DDC

- DIRECT DIGITAL CONTROL

DX

- DIRECT EXPANSION

EA

- EXHAUST AIR

EAT

- ENTERING AIR TEMP.

ELEV

- ELEVATION

EMCS-

ENERGY MONITORING AND CONTROL SYSTEM

ESP

- EXTERNAL STATIC PRESSURE

ETR

- EXISTING TO REMAIN

EWT

- ENTERING WATER TEMP.

FC

- FAIL CLOSED

FD

- FLOOR DRAIN

FLA

- FULL LOAD AMPS

FO

- FAIL OPEN

GA

- GAUGE

HD

- HUB DRAIN

IE

- INVERT ELEVATION

LAT

- LEAVING AIR TEMP.

LWT

- LEAVING WATER TEMP.

NC

- NORMALLY CLOSED

NO

- NORMALLY OPEN

NPS

- NOMINAL PIPE SIZE

NPT

- NATIONAL PIPE THREAD

NTS

- NOT TO SCALE

OA

- OUTSIDE AIR

OBD

- OPPOSED BLADE DAMPER

OS&Y

- OUTSIDE STEM AND YORK

Pa

- PASCAL

PD

- PRESSURE DROP

RA

- RETURN AIR

RPM

- REVOLUTIONS PER MINUTE

SA

- SUPPLY AIR

SOG

- SLAB ON GRADE

SP

- STATIC PRESSURE

TOD

- TOP OF DUCT ELEVATION

TOP

- TOP OF PIPE ELEVATION

TOS

- TOP OF SLAB/ TOP OF STEEL

TSP

- TOTAL STATIC PRESSURE

VAV

- VARIABLE AIR VOLUME

VP

- VELOCITY PRESSURE

VTR

- VENT THRU ROOF

W

- WATTS

WB

- WET BULB

WC

- WATER COLUMN

WG

- WATER GAUGE

GENERAL NOTES

A.

MECHANICAL LAYOUTS ARE SCHEMATIC. PROVIDE ANY ADDITIONAL DROPS, RISES, OR OFFSETS REQUIRED FOR A COMPLETE INSTALLATION. COORDINATE EXACT ROUTING OF WORK WITH ALL OTHER TRADES AND OBSTRUCTIONS. COORDINATE EXACT LOCATIONS OF CEILING MOUNTED WORK WITH LIGHTS, CEILING GRID, AND OTHER OBSTRUCTIONS.

B.

UNLESS OTHERWISE INDICATED ROUTED, ROUTE ALL DUCTWORK AND PIPING ABOVE CEILINGS. ROUTE ALL DUCTWORK AND PIPING AS HIGH AS POSSIBLE IN AREAS WITHOUT CEILINGS. ROUTE ALL DUCTWORK AND PIPING TIGHT TO STRUCTURE.

C.

DUCT DIMENSIONS ARE INSIDE CLEAR DIMENSIONS. INCREASE SHEET METAL DIMENSIONS ON LINED DUCTWORK TO MAINTAIN THE INSIDE CLEAR DIMENSIONS INDICATED.

D.

UNLESS OTHERWISE INDICATED, PROVIDE DUCT RUNOUTS TO TERMINAL UNITS SAME SIZE AS TERMINAL UNIT INLET.

E.

FLEXIBLE DUCT RUNOUTS TO TERMINAL AIR DEVICES SHALL BE SAME SIZE AS DIFFUSER CONNECTION. LIMIT FLEX TO 5 FEET.

F.

INSTALL CALIBRATED BALANCING VALVES AND VENTURIS WITH A MINIMUM UNRESTRICTED STRAIGHT RUN OF 5 PIPE DIAMETERS UPSTREAM AND 3 PIPE DIAMETERS DOWNSTREAM.

H.

ALL WORK INDICATED IS NEW.

I.

SOME SYMBOLS INDICATED ON THIS LEGEND SHEET MAY NOT APPEAR OF THE DRAWINGS.

K.

MOUNT CO2 SENSORS AND TEMPERATURE SENSORS 48 INCHES AFF.

L.

ALL PIPING LOW POINTS SHALL HAVE DRAIN VALVES WITH HOSE CONNECTION AND CAP.

M.

ALL PIPING HIGH POINTS SHALL HAVE VALVED AIR VENTS.

N.

PROVIDE 1-INCH DUCT LINER ON ALL TRANSFER DUCT.

ARCHITECTURAL & FINISH NOTES

1.

REMOVE EXISTING ACOUSTIC CEILING TILES. PROTECT AND STORE FOR THE DURATION OF CONSTRUCTION. RE-INSTALL SALVAGED AND PROTECTED ACOUSTIC CEILING TILES IN EXISTING CEILING GRID AT THE COMPLETION OF WORK.

2.

PROTECT EXISTING T-BAR CEILING GRID ASSEMBLY FOR THE DURATION OF CONSTRUCTION. LIMIT REMOVAL OF CEILING GRID TO AREAS WHERE REQUIRED TO PERFORM WORK. SALVAGE AND PROTECT GRID COMPONENTS FOR RE-INSTALLATION.

3.

AT REMOVED GRILLS, RETURNS OR OTHER COMPONENTS IN GYPSUM WALLBOARD, HARD CEILINGS, PATCH CEILING TO NEAREST JOIST OR STRUCTURAL MEMBER. PROVIDE JOINT COMPOUND, PREP AND PAINT TO MATCH EXISTING ADJACENT FINISHES.

REFERENCE SYMBOLOGY

DETAIL NO.

DETAIL LOCATION

REF: DET.NN/MZZ

000

ROOM NUMBER

Ø

ROUND DUCT

POINT OF CONNECTION BETWEEN NEW AND EXISTING WORK

EXISTING WORK TO BE REMOVED

EXISTING WORK TO REMAIN

POINT BETWEEN WORK TO REMAIN AND WORK TO BE REMOVED

US Army Corps of Engineers
NEW ENGLAND DISTRICT
886 VIRGINIA ROAD
CONCORD, MA 01742-751

DESIGNED BY:
M. BOLDT

DRAWN BY:
M. BOLDT

CHECKED BY:
C. CHARLES

SUBMITTED BY:
M. HOLMQUIST

SIZE:
ANSI D

ISSUE DATE:
OCTOBER 2025

SOLICITATION NO.:



CONTRACT NO.:

US ARMY CORPS OF ENGINEERS
BUFFUMVILLE DAM
48 OLD OXFORD RD
CHARLTON, MA 01507

MECHANICAL LEGEND

SHEET ID

M-001

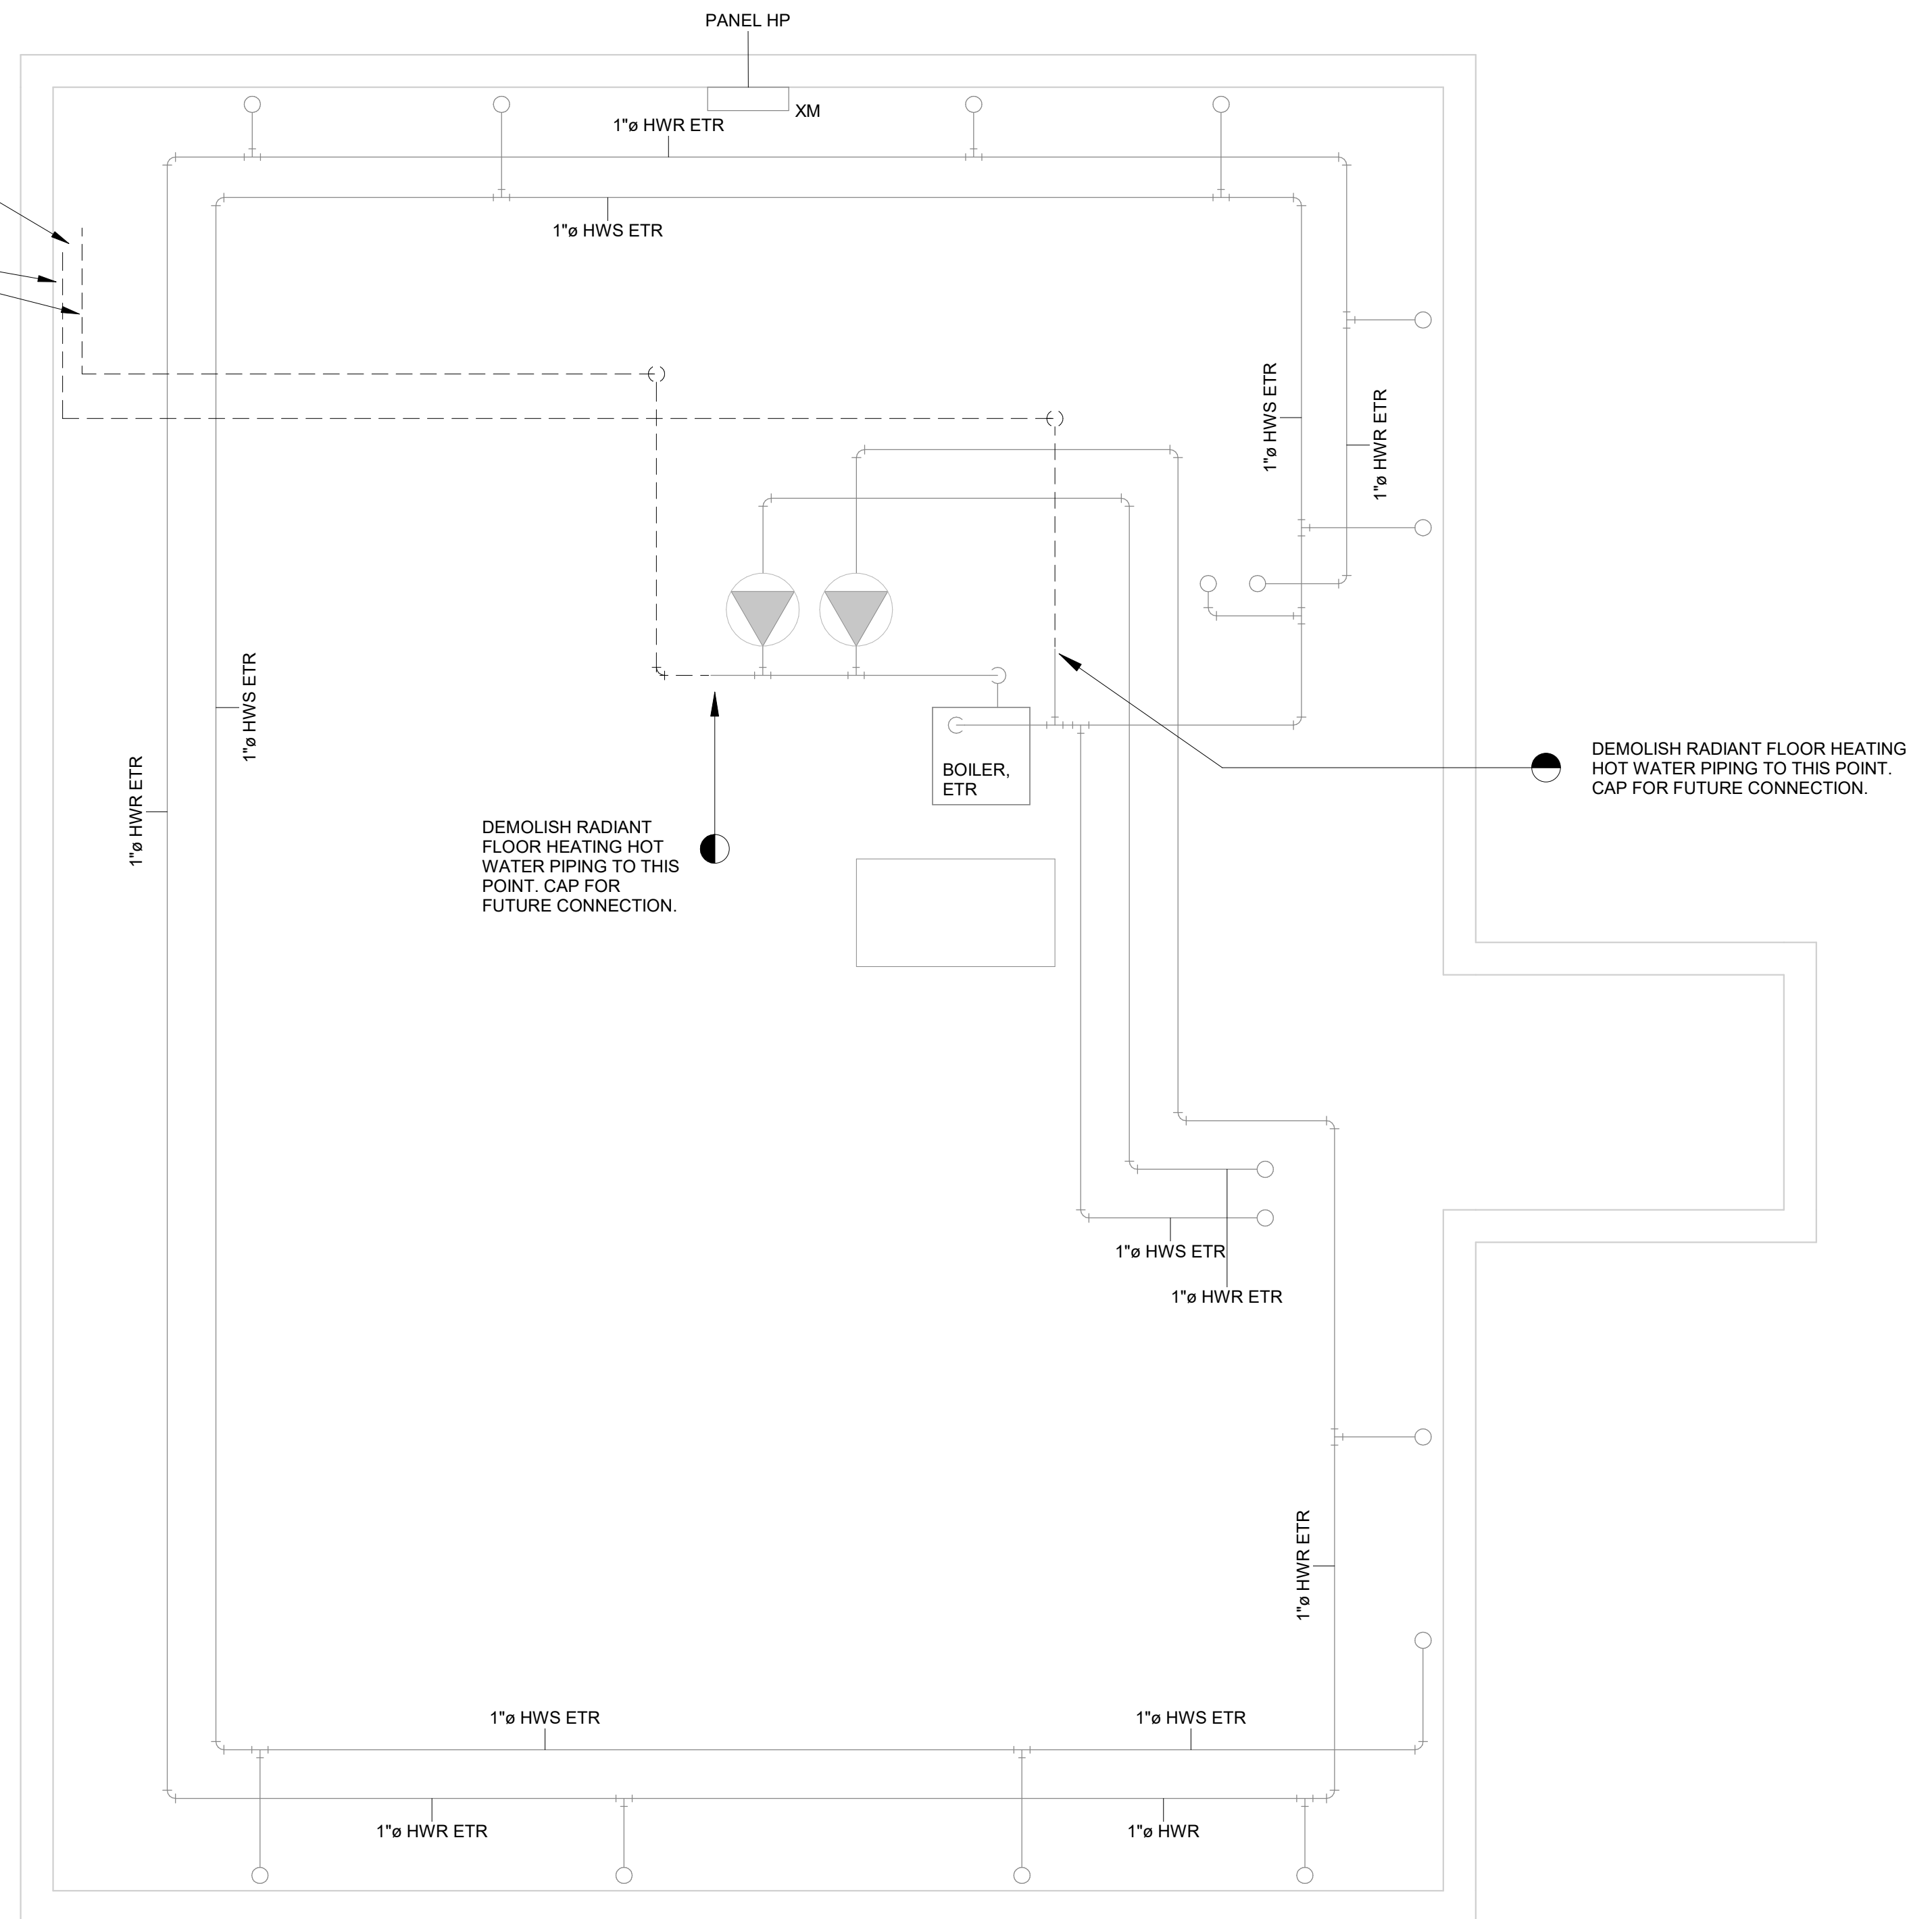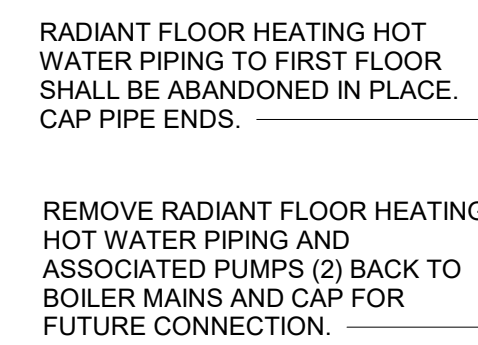



**US Army Corps
of Engineers ®**

NEW ENGLAND DISTRICT 696 VIRGINIA ROAD CONCORD, MA 01742-2751	DRAWN BY:	M. BOLDT	SOLICITATION NO.:	001-006181-20-02
	CHECKED BY:	C. CHARLES	CONTRACT NO.:	
	SUBMITTED BY:	M. HOLMQUIST		
	SIZE:	MH		

BUFFUMVILLE DAM
 48 OLD OXFORD RD
 CHARLTON, MA 01507

SHEET ID

MD-101

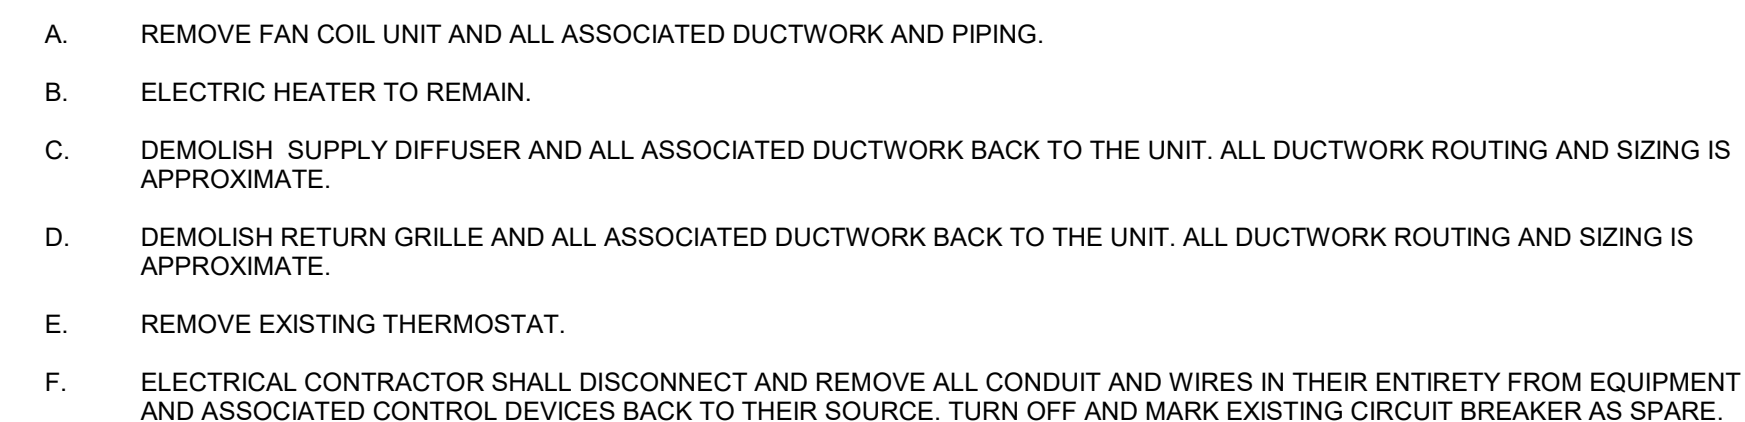

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

AIR TERMINAL SCHEDULE

TYPE	DIMENSIONS (IN)	MATERIAL	DEFLECTION TYPE	MAXIMUM PRESSURE DROP (IN WG)	MAXIMUM N.C.	NOTES
L	12" x 16"	EXTRUDED ALUMINUM	STATIONARY LOUVER, DRAINABLE BLAD	.1	25	1,2
R	24" x 24"	EXTRUDED ALUMINUM	EGGCRATE	.1	25	1,2
S1	12" x 12"	EXTRUDED ALUMINUM	PLAQUE	.1	25	1,2,3
S2	12" x 12"	EXTRUDED ALUMINUM	PLAQUE	.1	25	1,2,4

1. DIFFUSER NECK DIAMETER SHALL MATCH DUCTWORK SIZE SHOWN ON DRAWINGS.
2. MAXIMUM NOISE CRITERIA SHALL BE DRIVING FACTOR IN AIR TERMINAL SELECTION.
3. TYPE S1 AND R1 TO BE INSTALLED IN 24" x 24" LAY IN T-BAR CEILING.
4. TYPE S2 AND R2 TO BE INSTALLED IN HARD CEILING.

ENERGY RECOVERY VENTILATOR UNIT SCHEDULE

Equipment Tags	Equipment Number	MINIMUM AIRFLOW (CFM)	OUTSIDE AIRFLOW (CFM)	ARRANGEMENT	MAX ESP (IN H2O)	FILTER	ELECTRICAL DATA (VOLT/PHASE/HERTZ)	WEIGHT (LB)	NOTES
ERV	1	400	400	HORIZONTAL	2.5	MERV 13	120 V, 1 PHASE, 60 Hz	145.5	1

1. ERV SHALL BE MOUNTED PER ERV DETAIL AND MANUFACTURERS REQUIREMENTS.

ELECTRICAL KEYNOTES

- A. ELECTRICAL CONTRACTOR TO INSTALL NEW ELECTRICAL CONNECTION TO SUPPORT CONDENSING UNIT 'HP-1'. ROUTE NEW 2#0 AWG & 1#10 AWG GND, 3/4". FROM NEW 30A-2P CIRCUIT BREAKER IN PANEL PP-1 (CIRCUIT 25.27) TO CONDENSING UNIT VIA NEW LOCAL DISCONNECTING MEANS ADJACENT TO THE UNIT. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION. NEW CIRCUIT BREAKER SHALL MATCH EXISTING PANELBOARD RATINGS AND CHARACTERISTICS.
- B. ELECTRICAL CONTRACTOR TO INSTALL NEW ELECTRICAL CONNECTION TO SUPPORT CONDENSING UNIT 'HP-2'. ROUTE NEW 2#0 AWG & 1#10 AWG GND, 3/4". FROM NEW 35A-2P CIRCUIT BREAKER IN PANEL PP-1 (CIRCUIT 29.31) TO CONDENSING UNIT VIA NEW LOCAL DISCONNECTING MEANS ADJACENT TO THE UNIT. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION. NEW CIRCUIT BREAKER SHALL MATCH EXISTING PANELBOARD RATINGS AND CHARACTERISTICS.
- C. PROVIDE FEED FROM CORRESPONDING CONDENSING UNIT (HP-1 OR HP-2) PER MANUFACTURER'S RECOMMENDATION. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- D. ELECTRICAL CONTRACTOR TO INSTALL NEW ELECTRICAL CONNECTION TO SUPPORT ENERGY RECOVERY VENTILATOR UNIT 'ERV-1'. ROUTE NEW 2#12 AWG & 1#12 AWG GND, 3/4". FROM NEW 15A-1P CIRCUIT BREAKER IN PANEL PP-1 (CIRCUIT 37) TO UNIT VIA NEW LOCAL DISCONNECTING MEANS LOCATED ADJACENT TO EQUIPMENT. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION. NEW CIRCUIT BREAKER SHALL MATCH EXISTING PANELBOARD RATINGS AND CHARACTERISTICS.
- E. ELECTRICAL CONTRACTOR TO INSTALL NEW ELECTRICAL CONNECTION TO SUPPORT CEILING MOUNTED FAN FORCED HEATER 'CH-1'. ROUTE NEW 2#12 AWG & 1#12 AWG GND, 3/4". FROM NEW 20A-1P CIRCUIT BREAKER IN PANEL MDP (CIRCUIT 32) TO CH-1. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION. NEW CIRCUIT BREAKER SHALL MATCH EXISTING PANELBOARD RATINGS AND CHARACTERISTICS.
- F. ELECTRICAL CONTRACTOR TO INSTALL NEW ELECTRICAL CONNECTION TO SUPPORT CEILING MOUNTED FAN FORCED HEATER 'CH-2'. ROUTE NEW 2#12 AWG & 1#12 AWG GND, 3/4". FROM NEW 20A-1P CIRCUIT BREAKER IN PANEL MDP (CIRCUIT 34) TO CH-2. REFER TO THE ELECTRICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION. NEW CIRCUIT BREAKER SHALL MATCH EXISTING PANELBOARD RATINGS AND CHARACTERISTICS.

KEYNOTES

1. CLEAN EXISTING FINNED TUBE.
2. PROVIDE NEW CEILING MOUNTED FAN FORCED HEATER. PROVIDE T-BAR FRAME KIT TO MOUNT IN LAY-IN CEILING. PROVIDE ASSOCIATED SINGLE-POLE THERMOSTAT WITH MANUAL CONTROLS.
3. INSTALL VOLUME DAMPER FOR EACH ASSOCIATED SUPPLY AIR DIFFUSER. AFTER SYSTEM IS INSTALLED, VERIFY AIR FLOWS AT EACH DIFFUSER MEET DESIGN CFM VALUES.
4. PROVIDE NEW ENERGY RECOVERY VENTILATOR AND ASSOCIATED DUCTWORK. INSTALL PER MANUFACTURERS DRAWINGS AND ERY MOUNTING DETAIL. INSTALL WITH EASILY ACCESSIBLE FILTERS. AFTER INSTALLATION PERFORM A THOROUGH TESTING OF ALL COMPONENTS, INCLUDING FAN SPEED CONTROL, ENERGY RECOVERY FUNCTION, AND CONDENSATE DRAINAGE. DOCUMENT ALL TEST RESULTS.
5. PROVIDE NEW THERMOSTAT AT 4' ABOVE FINISHED FLOOR ASSOCIATED WITH CORRESPONDING FAN COIL UNIT. CONNECT TO ASSOCIATED IN-DUCT TEMPERATURE SENSOR
6. PROVIDE NEW FAN COIL UNIT. INSTALL PER MANUFACTURERS DRAWINGS AND FAN COIL UNIT MOUNTING DETAIL. ENSURE COMPLIANCE WITH ASSOCIATED REFRIGERANT SAFETY REGULATIONS. AFTER INSTALLATION, PERFORM A THOROUGH TESTING OF THE HEAT PUMP SYSTEM, VERIFY PROPER OPERATION OF ALL COMPONENTS, INCLUDING FAN SPEED CONTROL, AIR FLOW HEATING/COOLING MODES, AND CONDENSATE DRAINAGE. DOCUMENT ALL TEST RESULTS.
7. PROVIDE NEW AIR SOURCE HEAT PUMP. INSTALL PER MANUFACTURERS RECOMMENDATIONS AND HEAT PUMP DETAIL ON EXISTING CONCRETE PAD. ENSURE COMPLIANCE WITH ASSOCIATED REFRIGERANT SAFETY REGULATIONS. AFTER INSTALLATION, PERFORM A THOROUGH TESTING OF THE HEAT PUMP SYSTEM, VERIFY PROPER OPERATION OF ALL COMPONENTS, INCLUDING FAN SPEED CONTROL, HEATING/COOLING MODES, AND CONDENSATE DRAINAGE. DOCUMENT ALL TEST RESULTS.

FAN COIL UNIT SCHEDULE1

EQUIPMENT TAG	EQUIPMENT NUMBER	ARRANGEMENT	REFRIGERANT TYPE	DESIGN SUPPLY AIR FLOW CFM (MEDIUM FAN SPEED)	COIL DUTY				FILTER	ELECTRICAL DATA (VOLT/PHASE/HERTZ)	NOTES
					COOLING		HEATING @ 17 °F				
					MIN. TOTAL CAPACITY (MBH)	LAT DB (°F)	MIN. TOTAL CAPACITY (MBH)	LAT DB (°F)			
FCU	1	HORIZONTAL	R454B	1250	44	55	29.6	95	MERV 8	208 V, 1 PHASE, 60 Hz	1.2
FCU	2	HORIZONTAL	R454B	640	24	55	15.3	95	MERV 8	208 V, 1 PHASE, 60 Hz	1.2

1. FAN COIL UNITS TO COME WITH INTEGRAL CONDENSATE LIFTS. IF INTEGRAL CONDENSATE LIFTS ARE NOT AVAILABLE, CONDENSATE PUMPS SHALL BE PROVIDED.
2. FAN COIL UNITS SHALL BE MOUNTED AS PER MANUFACTURER REQUIREMENTS.
3. FAN COIL UNITS SHALL MEET THE HEATING AND COOLING REQUIREMENTS WHILE RUNNING IN THE MEDIUM FAN SPEED SETTING WITH THE ABILITY TO RUN AT A HIGHER FAN SPEED AS THE OUTDOOR TEMPERATURE DROPS AND THE SYSTEMS BECOME LESS EFFICIENT.

CONDENSING UNIT SCHEDULE


EQUIPMENT TAG	EQUIPMENT NUMBER	COMPRESSOR	REFRIGERANT TYPE	COIL DUTY					ELECTRICAL DATA (VOLT/PHASE/HERTZ)	WEIGHT	NOTES
				COOLING			HEATING				
				MIN. TOTAL CAPACITY (MBH)	EAT DB (°F)	EAT WB (°F)	MIN. TOTAL CAPACITY (MBH)	EAT DB (°F)			
HP	1	INVERTER-DRIVEN	R32 OR R454B	44	96	74	30	3	208 V, 1 PHASE, 60 Hz	85 lb	1
HP	2	INVERTER-DRIVEN	R32 OR R454B	24	96	74	24	3	208 V, 1 PHASE, 60 Hz	70 lb	1

1. HEAT PUMPS SHALL COME WITH LOW AMBIENT KITS.

CEILING MOUNTED FAN FORCED HEATER SCHEDULE

EQUIPMENT TAG	EQUIPMENT NUMBER	KW	MOUNTING	ELECTRICAL DATA (VOLT/PHASE/HERTZ)	BTU/HR	NOTES
CH	1	1.5	CEILING	120 V, 1 PHASE, 60 Hz	5120	1.2
CH	2	1.5	CEILING	120 V, 1 PHASE, 60 Hz	5120	1.2

1. CEILING MOUNTED FAN FORCED HEATERS ENCLOSURES SHALL BE MINIMUM 14 GAUGE STEEL
2. UNITS TO BE CONTROLLED WITH 120 V THERMOSTAT.

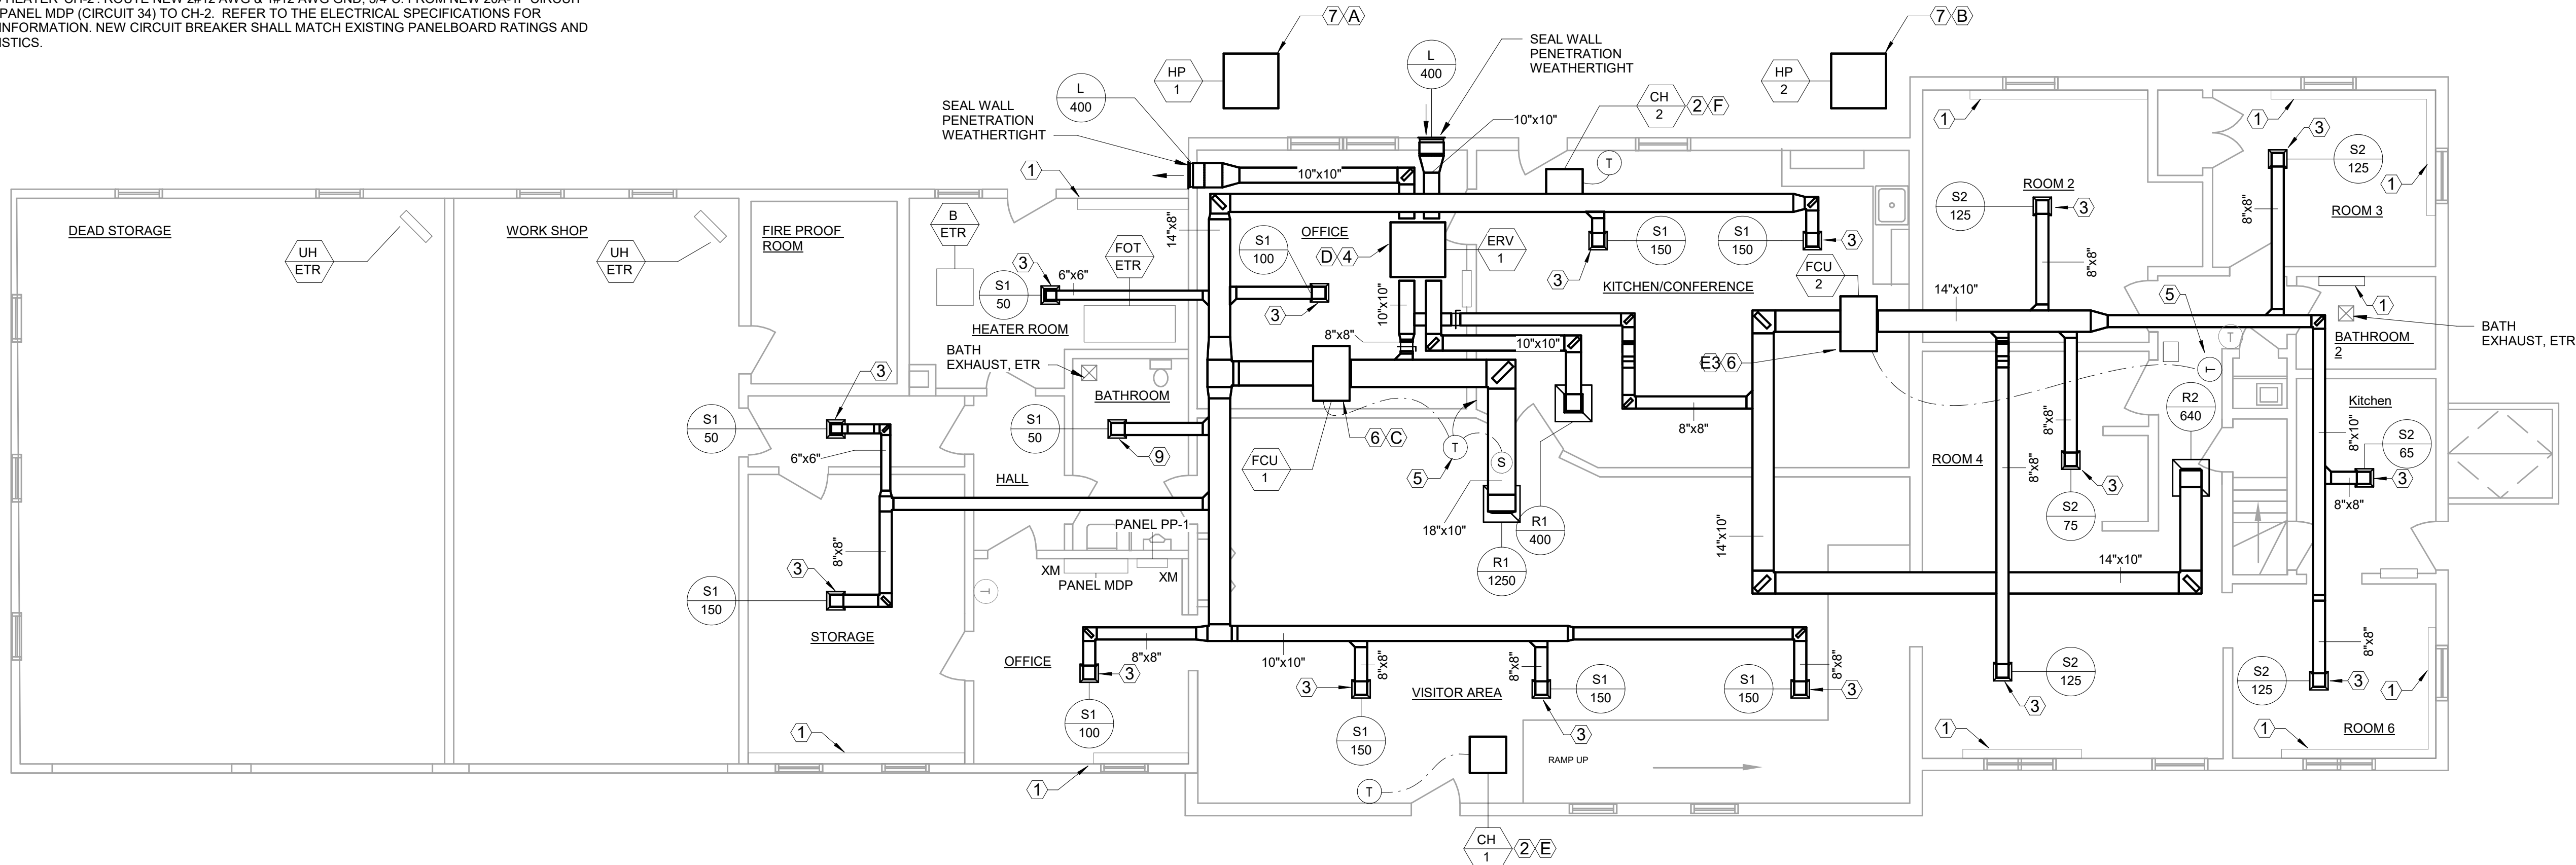

**US Army Corps
of Engineers ®**

[illegible]

US ARMY CORPS OF ENGINEERS NEW ENGLAND DISTRICT 696 VIRGINIA ROAD CONCORD, MA 01742-2751	DESIGNED BY:	ISSUE DATE:
	M. BOLDT	OCTOBER 2025
	CHECKED BY:	SOLICITATION NO.:
	M. BOLDT	
	C. CHARLES	CONTRACT NO.:
	SUBMITTED BY:	
	COLLECTOR:	MMH
	SIZE:	
	ANSI D	

BUFFUMVILLE HVAC REPAIR
 BUFFUMVILLE DAM
 48 OLD OXFORD RD
 CHARLTON, MA 01507


FIRST FLOOR DUCTWORK PLAN


SHEET ID

M-102

1. ENCLOSURE SHOULD COVER WALL IN ENTIRETY AS SHOWN ON DRAWINGS.
2. ENCLOSURE SHALL BE RESIDENTIAL STYLE WITH A SLOPED TOP, WHITE IN COLOR

1. PROVIDE NEW INSULATION ON EXISTING HEATING HOT WATER PIPING. PIPE INSULATION SHALL BE 1" FLEXIBLE ELASTOMERIC CELLULAR AND SHALL BE MINIMUM R-3.
2. PROVIDE CONDENSATE DRAIN PIPING FROM EQUIPMENT TO EXTERIOR WALL AND DOWN TO 1' ABOVE GRADE. CONDENSATE DRAIN PIPING SHALL BE 1/2" CONDENSATE DRAIN PIPING SHALL BE SIZED IN ACCORDANCE WITH THE EQUIPMENT MANUFACTURER'S RECOMMENDATIONS AND/OR ASHRAE STANDARD 15.
3. PROVIDE REFRIGERANT LIQUID AND REFRIGERANT SUCTION PIPING. REFRIGERANT PIPING SHALL BE SIZED, INSTALLED AND LEAK-TESTED IN ACCORDANCE WITH ASHRAE STANDARD 15, LOCAL CODES, AND MANUFACTURER'S RECOMMENDATIONS. REFRIGERANT PIPING SHALL BE COPPER AND THE LENGTH SHALL BE MINIMIZED FOR EFFICIENCY.
4. EXTERIOR CONDENSATE AND REFRIGERANT LINESET TO BE INSTALLED IN A UV RESISTANT ARCHITECTURAL SLEEVE.

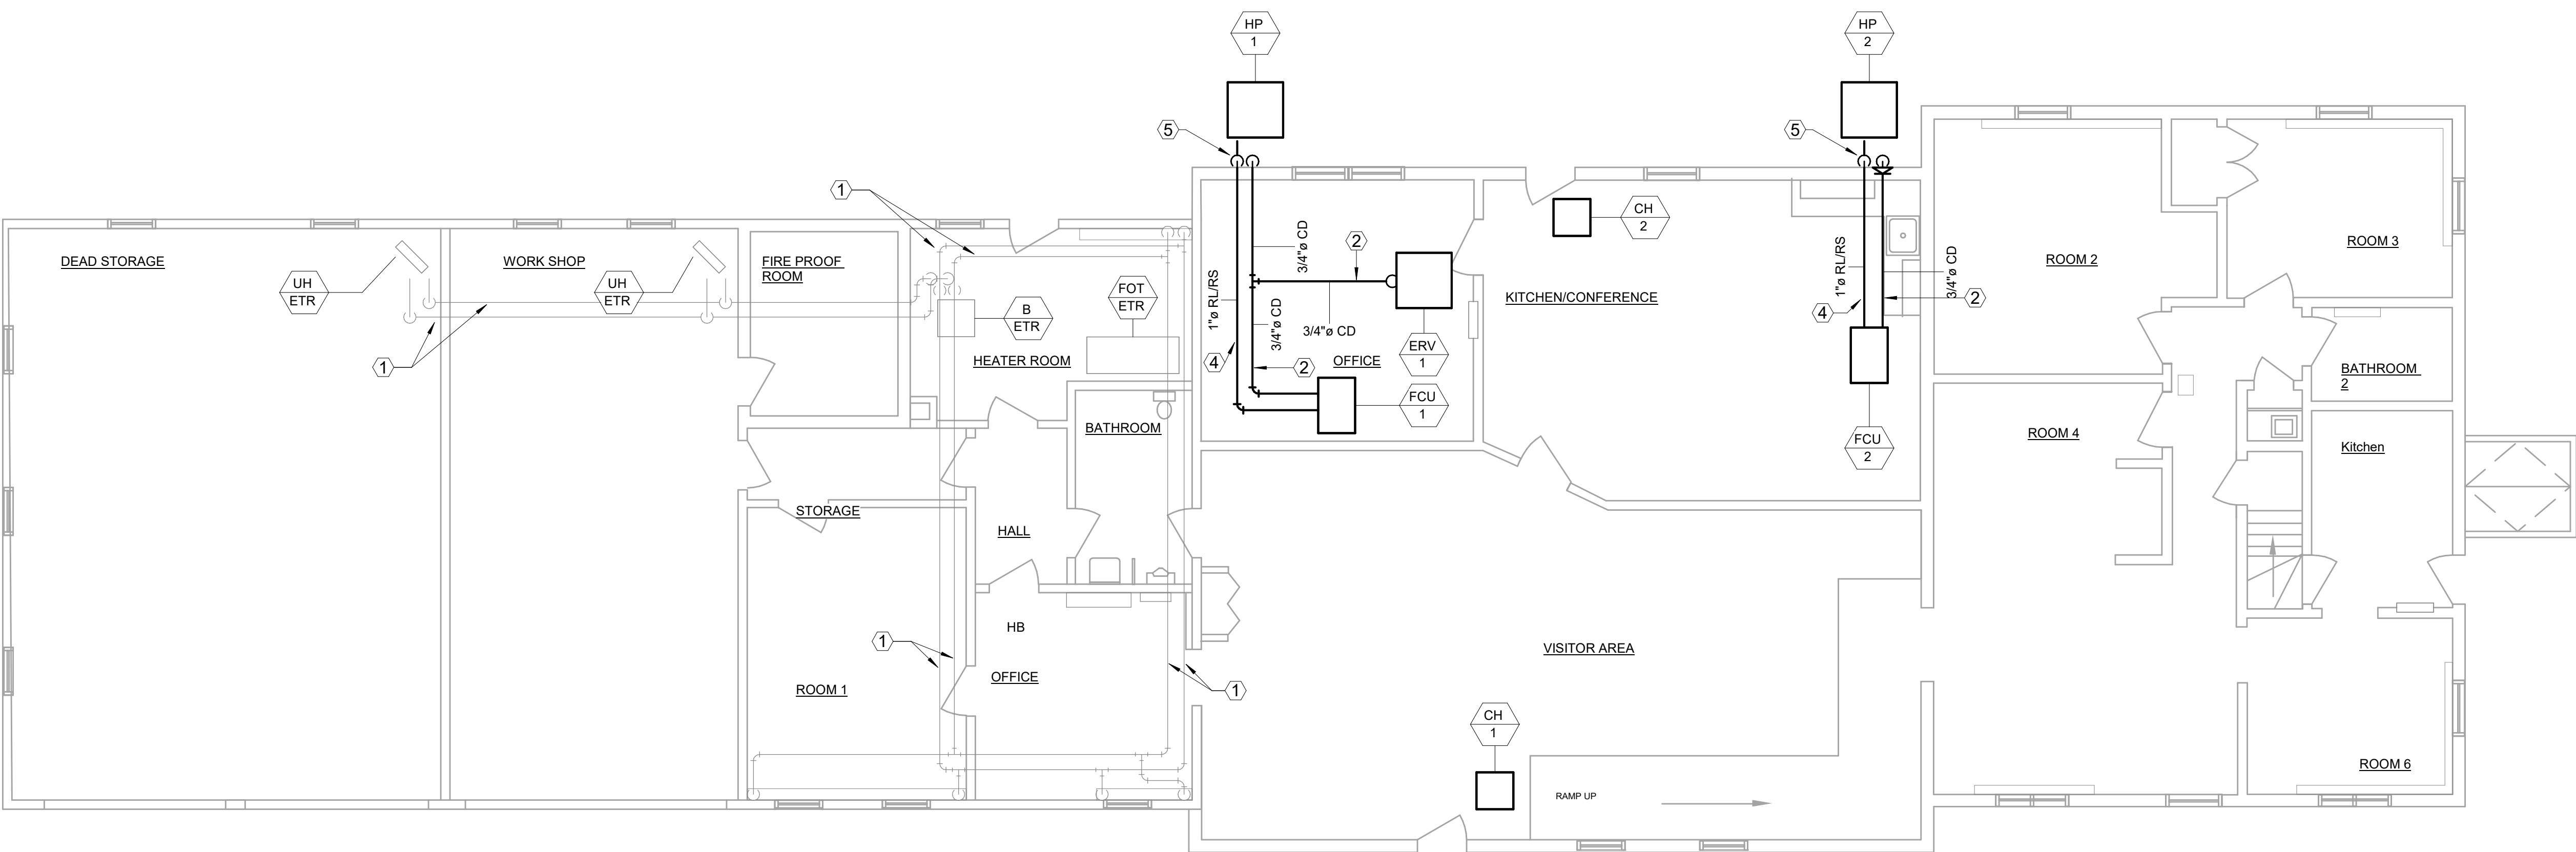




NTS



NTS



A4

NOT TO SCALE

