

Reconstruction Era National Historical Park
706 Craven Street
Beaufort, SC 29902

Darrah Hall
22 Penn Center Circle West
St. Helena Island, SC 29920

STATEMENT OF WORK
Replace Outdated Wiring

DATED
March 13, 2026



NATIONAL PARK SERVICE
Southeast Region
Major Acquisition Buying Office

1. Background

Darrah Hall is a Folk-style structure located within the Penn Center Historic District on St. Helena Island, South Carolina. The building is believed to have been constructed by students as part of a training program modeled after the Tuskegee and Hampton Institutes. Portions of the building are believed to have been constructed using salvaged materials from the original Darrah Hall.

Historically, the structure served as a public gathering space for community activities including farmers' days, temperance meetings, theatrical performances, and other community events. In later years the facility was used as an indoor basketball court, and portions of the court markings remain visible.

Darrah Hall is a contributing historic structure within the Penn Center campus and is now managed by Reconstruction Era National Historical Park.

In 2022, project work was completed to install a new mechanical and electrical service system including:

- HVAC equipment
- Power shutoff panels
- Electrical panel and breakers
- Electrical outlets and associated conduit

All installed service components meet current **National Electrical Code (NEC)** requirements and will remain in place as part of this project.

The remaining branch circuit wiring serving outlets, switches, and lighting fixtures is outdated and requires replacement to ensure safe operation and compliance with NEC standards



HVAC



Power shutoff panels





New Panel



New outlet covers

2. Current Conditions

Existing electrical wiring runs from the electrical panel through **Schedule-40 PVC conduit located beneath the building structure.**

Current observed conditions include:

- Conduit runs beneath the structure are accessible for maintenance and wiring replacement.
- Outlet junction boxes are mounted beneath the building and attached to exterior floor joists.
- Ceiling conduit is metal, exposed, and accessible for wiring replacement.
- Interior wall paneling and chair rail do not need to be removed to complete wiring replacement.

These conditions allow electrical wiring replacement to occur with minimal disturbance to the historic fabric of the structure.



Wall outlet junction
Boxes



Conduit



Junction box



Schedule 40 PVC
conduit

2.1 Required Services.

The work consists of replacing outdated electrical wiring and devices with a fully NEC-compliant system.

Contractor will:

- Remove existing non-compliant electrical wiring to outlets, switches, and fixtures.
 - Coordinate with COR to access the facility.
 - The contractor shall replace existing branch circuit wiring serving outlets, switches, and lighting fixtures within Darrah Hall while retaining the electrical panel and service entrance installed in 2022.
 - Contractor shall replace damaged or non-compliant junction boxes as necessary to meet current National Electrical Code (NEC) requirements.
 - The contractor shall complete all work within **eight (8) working days** after issuance of the Notice to Proceed.
-

3. Scope of Work

The contractor shall provide **all labor, supervision, materials, tools, and equipment** required to replace existing electrical branch circuit wiring serving outlets, switches, and lighting fixtures within Darrah Hall.

The electrical panel and service entrance installed in 2022 shall remain in place and will not be replaced.

Work shall include:

3.1 Removal

The contractor shall remove existing non-compliant branch circuit wiring serving:

- Electrical outlets
- Lighting fixtures
- Switches

Removed materials shall be disposed of in accordance with applicable regulations.

3.2 Electrical Installation

The contractor shall install new NEC-compliant electrical wiring including:

- 12 AWG THHN copper conductors
- Electrical connectors and wire nuts
- Branch circuit wiring runs from the electrical panel to outlets, switches, and fixtures
- Replacement of damaged or non-compliant junction boxes as necessary to meet NEC requirements

3.3 Electrical Components

Installation shall include:

- Branch circuit conductors
- Junction boxes

- Conduit fittings and connectors
- Mounting hardware and fasteners

3.4 Testing and Commissioning

Upon completion of installation, the contractor shall:

- Test all branch circuits
- Verify proper grounding and bonding
- Confirm proper connection to panel breakers
- Ensure system compliance with NEC standards
- Demonstrate operational functionality to the COR

If existing conditions require deviation from the described approach, the contractor shall notify the COR prior to proceeding. Work shall be performed in accordance with the National Electrical Code (NEC) and applicable federal, state, and local electrical regulations.

4. Electrical Device Quantities (Estimated)

The following quantities are provided for contractor estimating purposes.

Device	Estimated Quantity
Lighting Fixtures	Approx. 12
Light Switches	Approx. 8
Electrical Outlets	Approx. 14
4x4 Junction Boxes	17
Primary Junction Box	1


Quantities are approximate. Contractors are encouraged to attend a site visit to verify existing conditions prior to submitting a proposal.

These quantities align with material estimates used in the Independent Government Cost Estimate (IGCE).


5. Electrical Reference Plan

An annotated electrical reference diagram will be provided with the solicitation package. The diagram identifies approximate locations of:

- Electrical outlets
- Lighting fixtures
- Light switches
- Electrical panel

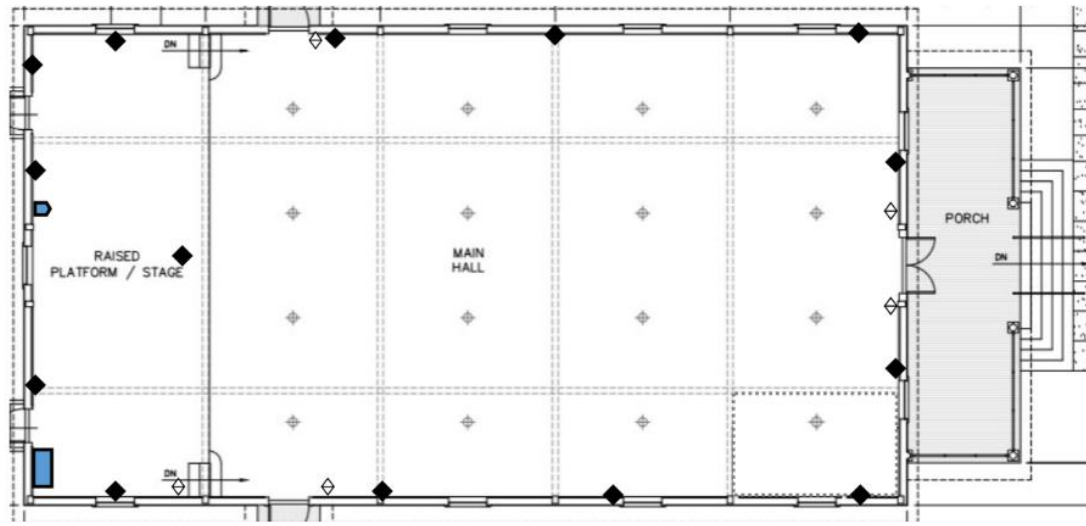

- ◆ 110 Outlet: 13
- 220 Outlet: 1
- ⋄ Light Switch: 10
- ⊕ Light: 16
- Breaker Box: 1

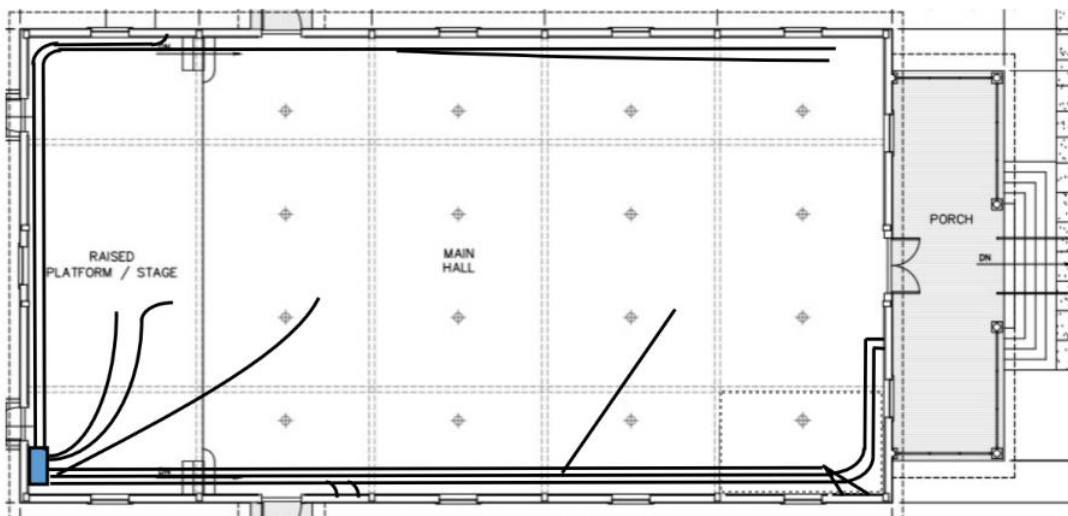

Path of electrical conduit
under building

The diagram is intended to assist contractors in estimating wiring runs and labor requirements.

6. Contractor Responsibilities:

Duns number and contact information must be included on quote. Vendor must be registered in SAMS at www.sam.gov and to receive payment must be registered in IPP.gov. As defined in accordance with FAR 4.1102 and further prescribed at FAR 52.204-7.

Contractor management will ensure that employees properly comply with the performance work standards outlined in the statement of work, specifications, and contract documents. The tasks, duties, and responsibilities set forth in the Statement of Work and Specifications may not be interpreted or implemented in any manner that results in any contractor employee creating or modifying Federal policy, obligating the appropriated funds of the United States Government, overseeing the work of Federal employees, providing direct personal services to any Federal employee, or otherwise violating the prohibitions set forth in Parts 7.5 and 37.1 of the Federal Acquisition Regulation (FAR).

Period of performance:

Upon award of this contract, work will be **completed within 8 working days**.

The NPS reserves the right to accept or reject all proposals based on the requirements described in the Statement of Work.

A site visit is highly encouraged and will be conducted at the vendor's request.

7. Government Furnished Property, Materials & Supplies. NA

8. Park Point of Contact (POC) and Contract Officer Representative will be Sean Daly. Contact information is listed below:

Sean Daly
Maintenance Work Leader
Reconstruction Era National Historical Park
706 Craven Steet, Beaufort, SC 29902
Work Cell: 843-941-0661
Email: Sean_daly@nps.gov

Secondary POC:
Michael (Top) Trevino
Facility Manager/Contract Officer Representative
Reconstruction Era National Historical Park
706 Craven Street, Beaufort, SC 29902
Work Cell: 843-592-0329

9. Management. The contractor shall manage the total work effort in accordance with effective and efficient management principles and safe working practices to ensure on-time completion of this contract.

10. Safety & Environmental Compliance.

- The contractor shall comply with pertinent provisions of the Occupational Safety and Health Act (OSHA), and state, local, safety laws.
- The contractor shall report immediately to the COR all accidents resulting in employee injury or death or damage to property while performing this contract.
- The contractor shall be licensed for electrical work.

10.1. Insurance. The Contractor shall be insured in accordance with South Carolina insurance regulations. The Government is not responsible for damage to Contractor's equipment, vehicles, tools or materials or their employees and the personal property brought on-site. The Government will not accept any liability due to contractor employee negligence.

- **Workers Compensation:** The contractor shall furnish proof of workers compensation insurance to the Contracting Officer for those employees performing work related to this contract and shall comply with the Workman's Compensation Laws of South Carolina.
 - **Liability:** The Contractor shall maintain a level of insurance that will protect the contractor and the Government from any claims because of bodily injury (including death) and property damage which may arise from and during the performance of this contract and shall submit proof of insurance to the Contracting Officer.
-

11. Performance Requirements Summary (PRS). The contractor performance requirements are summarized into required services that relate directly to successful contract completion. The performance standard identifies the minimum acceptable levels of service allowed.

PWS Section	Required Service	Standard	Incentive/ Disincentive
2	Required services	100% compliance	Receipt of payment

12. Motor Vehicle & Traffic Regulations. NA

13. Employee Badges/Parking. No badges necessary/Parking is available.

14. Replacement of Contractor Employee for Security Reasons. The Government retains the right to request removal of the contractor's employee(s), regardless of prior clearances.

15. Non-Payment for Additional Work. Any additional contractor performed services not specified in this contract, either at its own volition or at the request of an individual other than an appointed Contracting Officer, except as may be explicitly authorized in the contract, shall be performed at the financial risk of the contractor. Only an appointed Contracting Officer is authorized to bind the Government to a change in specifications, contract terms, or conditions.

16. Conflict of Interest. The contractor shall not employ Government employees if such employment would create a conflict of interest or be contrary to the policies contained in conflict-of-interest directives.

17. Quality Control. The contractor shall provide potential frameworks, templates, and methodology to assist with decision process. The Performance Requirements Summary establishes performance standards that are the minimum requirements for acceptable performance of required services. The contractor's QCP shall address methods for remedying poor performance. The Contractor shall develop QCP and submit with proposal package. The Contractor's QCP includes:

- Required services identified in Performance Requirements Summary
- Progress meetings with COR

17.1. Quality Assurance. The COR will monitor the contractor's performance under this contract using face-to-face meetings. The quality assurance procedures specified in the Government's Quality Assurance Surveillance Plan (QASP). The QASP may be modified after contract award upon review and acceptance of the contractor's QCP to ensure both plans are mutually supportive. The purpose of the QASP is to ensure that the required services are performed in accordance with the contract requirements. The plan ensures reliable and continued operation by precluding unnecessary complaints and unacceptable performance. Government's QASP includes:

- Acceptance of the contractor's quality control plan
- Random inspection of the contractor's work
- Communicating customer complaints
- Progress meetings with the contractor

The implementation of this QASP does not relieve the contractor of its responsibility to implement and abide by the QCP incorporated into this contract, and to provide acceptable

performance of all required services listed herein. At the CO's discretion, the contractor may incur a payment deduction for lack of compliance with the QCP, SOW or PRS.

18. Contractor's Proposal Package. The following deliverables are to be submitted with offer in response to RFQ.

1. Technical approach to performing required services.
 2. Contractor safety plan.
 3. Contractor's QCP
 4. Proof of Insurance–Business Liability & Workers Compensation
 5. Certification ALL LEVELS
 6. Contractor will provide work experience with at least 3 references pertaining to this type of work. (See attached questionnaire)
 7. This contract will be based on most advantageous to the government.
-

19. Inspection. The Government will conduct inspection upon completion of required services.