

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN:	Rev:	Key Op:
APL-40	USS NUECES		38HZA53302R		A01

TITLE:

Potable Water Piping in 2-26-4; replace

JOB SPECIFICATION

Anticipated Award Date 06/30/2026	Production Completion Date: 08/27/2026	PREPARING ACTIVITY:	
POP Start Date: 07/07/2026	POP End Date: 09/28/2026	SASEBO	
PREPARED BY: T.YOSHINAGA	CODE P YO	DATE 7/9/2025	
APPROVED BY: S.MURAKAMI	CODE S225		
CONCURRED BY: T.TAKAMASU	CODE S234		
ASSIST PLANNER'S NAME:	CODE		
ASSIST PLANNER'S NAME:	CODE		
ASSIST PLANNER'S NAME:	CODE		
DESCRIPTION:			
JSN(S): AP40-L381 CASREP #			
S/F CONTACT: SCHUCHARD D. / PASCHKE, J. CWP # CCNS #			
T. ESCRITOR-YAMADA			
Approved by S300/S900 PM S320 Date: 7/18/2025 Avl: 6CM			
LWC:			
Work Completed			
S/Force: Rate: Date:			
SHIPSUPT: Date: SRF CONTROL NO.: 1301363234			
WORK CERTIFICATION SIGNATURES			
COMPLETION OF WORK REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE DATE:

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN: 38HZA53302R	Rev:	Key Op: A01
APL-40	USS NUECES				

TITLE:

Potable Water Piping in 2-26-4; replace

1. SCOPE:

1.1 Title: Potable Water Piping in 2-26-4; replace

1.2 Location of Work:

1.2.1 AC Diesel GEN Room No.2 Upper Level A-318-E (2-26-4)

1.3 Identification:

1.3.1 Quantity (2 FT), 2-1/2 Inch IPS Cold Potable water Piping
Located in 1.2.1, CuNi90/10 Piping, See ENCLOSURE (A)

1.3.1.1 Quantity (One EA), Sample of Insulation and Lagging
on 2-1/2 Inch IPS Cold Potable water Piping Located in 1.2.1,
NH-Armaflex and Cloth MIL-C-20079

1.3.2 Quantity (One EA), Sample of Insulation and Lagging on
Overhead Located in 1.2.1, Around Cold Potable Water Piping Listed in
1.3.1, 2 Inch Thermal Insulation

2. REFERENCES:

2.1 Standard Items (FY26)

2.2 S9AA0-AB-GOS-010 REV 11, General Specifications for Overhaul of
Surface Ships (GSO)

2.3 607-2281864 Rev A, Insulation & Sheathing Below Main Deck

2.4 S9086-VH-STM-010/CH-635/Rev 3, Thermal, Fire, Acoustic Insulation

3. REQUIREMENTS:

3.1 Obtain each sample listed in 1.3.1.1 and 1.3.2 from existing
insulation and lagging and analyze each sample for Asbestos-Containing
Material.

(V) "REPORT"

3.1.1 Submit One legible condition report listing results from a
licensed laboratory to SUPERVISOR.

3.2 Remove existing and install new cold potable water piping to replace
cold potable water piping listed in 1.3.1.

3.2.1 Accomplish the requirements of 009-12 of 2.1, including Table
One Column A, Lines One through 10.

3.2.1.1 Fabricate each backing ring in accordance with Line

6.

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN: 38HZA53302R	Rev:	Key Op: A01
APL-40	USS NUECES				

TITLE:

Potable Water Piping in 2-26-4; replace

3.3 Accomplish a chemical disinfection of each affected cold potable water piping listed in 1.3.1, in accordance with Section 532p of 2.2.

3.3.1 Accomplish a bacteriological test for each affected cold potable water piping.

3.3.1.1 Bacteriological testing must be accomplished by local government agency or licensed Japanese laboratories.

(V) REPORT

3.3.1.2 Submit One legible condition report listing results of the requirements of 3.3.1 with certification that water is safe for human consumption.

(V) (G) "OPERATING PRESSURE TEST"

3.4 Witness operating pressure test to be conducted by ship's force to verify tightness of each weld joint and mechanical joint affected by this work item, until the specified criteria is verified. Allowable leakage: None. - S130

3.5 Accomplish the requirements of 009-11 of 2.1 for insulation and lagging affected by this work item, using 2.3 for guidance.

3.6 Accomplish the requirements of 009-32 of 2.1 for cleaning and preservation of each new and disturbed surface to match surrounding areas.

3.6.1 A brush or spray may be used as a paint application for acoustic insulation in 635-7.2.4 of 2.4 as applicable.

4. NOTES:

4.1 Initial Condition - Potable water piping is leaking and temporary patch.

5. GOVERNMENT FURNISHED MATERIAL:

5.1 SRF will provide following material.

MATERIAL LIST									
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	HAZ MAT	DOC NO.	QTY REQD/ UNIT	PARA NO.
001			M	PIPE, 2-1/2"IPS, 2.875"OD X 0.083"WT, MIL-T-18420, CNA 90/10	3B 4710 002898007	N		5/FT	3.2
002			C	ELBOW, 2-1/2"IPS, 45 DEG, BW, 200#, 810-1385990, CNA 90/10	9B 4730 007254465	N		1/EA	3.2
003			M	PIPE COVERING, 2-1/2"IPS, 2.875"ID X 3/4"THK X 6FT, NH ARMAFLEX, NON-HALOGEN RUBBER FOAM, NHT21034	9Q 5840 SA4552493	N		2/EA	3.5

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN: 38HZA53302R	Rev:	Key Op: A01
APL-40	USS NUECES				

TITLE:


Potable Water Piping in 2-26-4; replace

MATERIAL LIST									
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	HAZ MAT	DOC NO.	QTY REQD/ UNIT	PARA NO.
004			M	INSULATION SHEET, 3/4"THK X 3FT W X 4FT L, NH ARMAFLEX, NON HALOGEN RUBBER FOAM	9B 5970 015644038	N		12/SF	3.5
005			M	GLASS CLOTH, 5 FT W X 50 YD, MIL-C-20079H TY.I, CL.3, LW	9B 8305 001487363	N		1/RO	3.5
006			M	ADHESIVE, NEOPRENE, MIL-A-24179A TY.II, CL.1, 520, R-373, 1 GL/UI	9B 8040 005508835	Y		1/GL	3.5
007			M	ADHESIVE, WHITE, MIL-DTL-3316D CL.1, GR.A 1GL/UI	9B 8040 002738708	Y		1/GL	3.5
008			C	RUBBER SHEET, RUBBER, 1/8" X 36" X 36", MIL-G-1149 TY.I, CL.1, HS 50, CPR	9B 9320 007295103	N		1/EA	3.5
009			M	WELDING ELECTRODE, 1/16" X 36", MIL-RN67, MIL-E-21562, CL.2, GTAW	9B 3439 000888988	Y		1/BX	3.2
010			M	INSULATION BLOCK, THERMAL, 2"THK X 36"L X 24"W, MIL-DTL-32585 TY-I FM-1 FC-B, U/I CONTAINS 10 EA/BX	9Q 5640 008098315	N		1/BX	3.5
011			M	TAPE,TEXTILE, 2" WIDTH X 50 YD/RO, WHITE, MIL-C-20079 TY-II CL-1	9B 8315 002671632	N		2/RO	3.5
012			M	CAP,SNAP FASTENER, MIN 0.27" DIA CAP SHANK & 0.879" DIA CAP HEAD, ALUMINUM	9B 5325 007377648	N		1/HD	3.5

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN:	Rev:	Key Op:
APL-40	USS NUECES		38HZA53302R		A01

TITLE:

Potable Water Piping in 2-26-4; replace

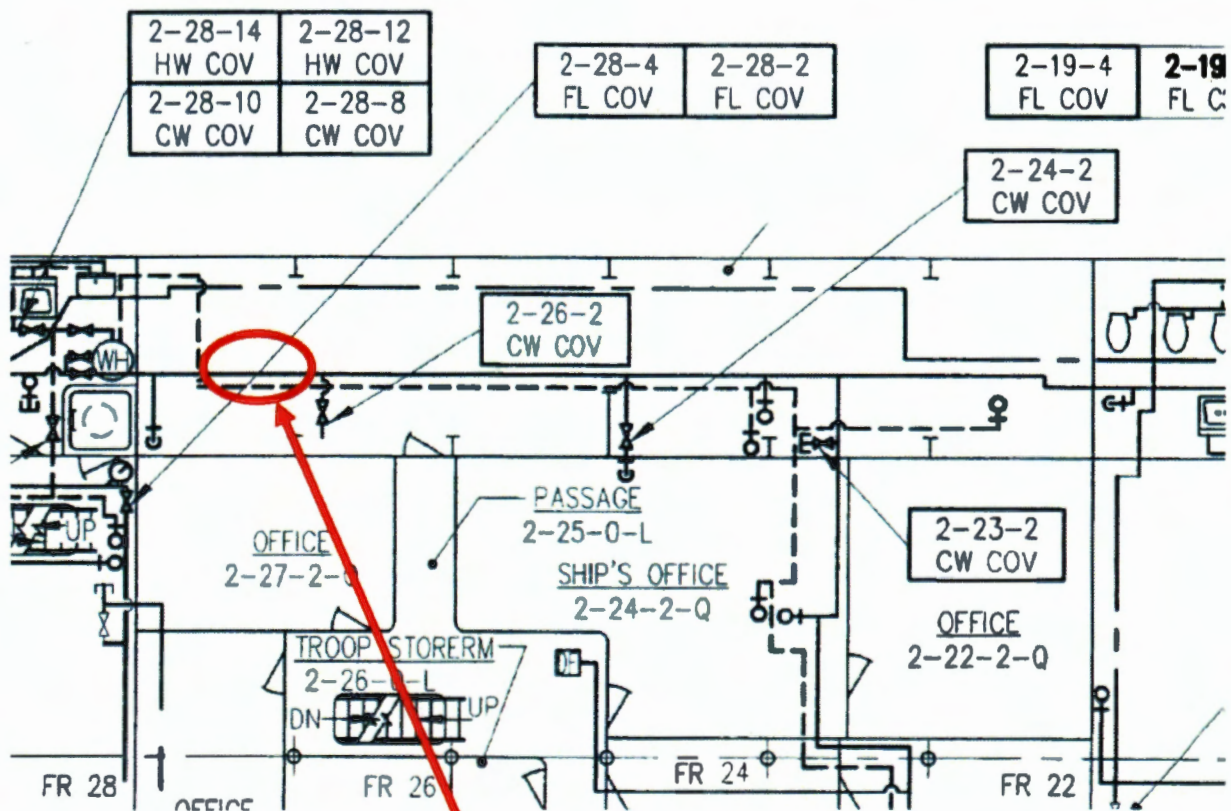

ID:1.3.1, 2-1/2 Inch IPS Cold Potable Water Piping



AC Diesel GEN Room No.2 Upper Level A-318-E (2-26-4)

ENCLOSURE (A) 1/1