

PROJECT INFORMATION:

Project Name:

Repair Airfield Pavement - Taxiway A Phase 1 & 2

Project No:

XTLF 24-1011PA & XTLF24-1011 PB

Project Location:

VANCE AFB, ENID OK


Project Status:

100%

Issue Date:

NOVEMBER 2025

RELEVANT CODE DOCUMENTS	
DOCUMENT TITLE	
UFC 3-260-02- 2016 PAVEMENT DESIGN FOR AIRFIELDS	

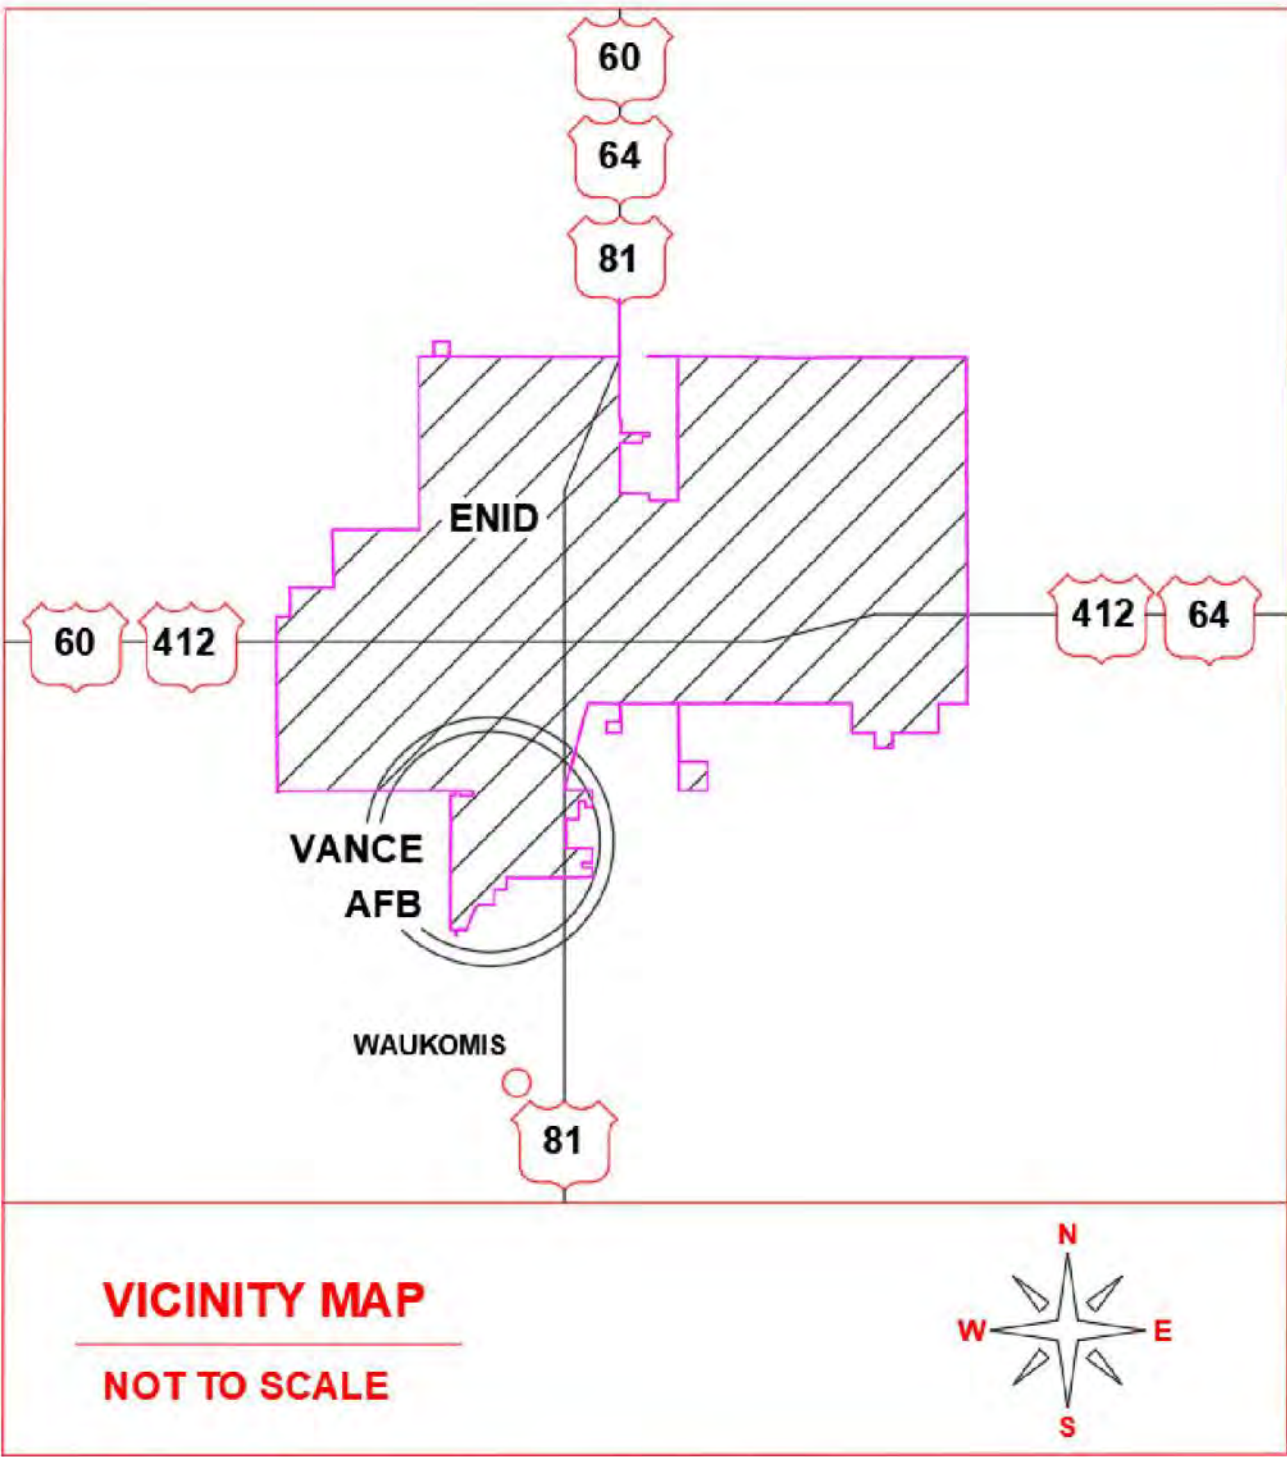

UNITED STATES AIR FORCE AIR EDUCATION TRAINING COMMAND
VANCE AFB, OK

ASRC

FEDERAL

Field Services

140 Channel St, Suite 205

Vance AFB, OK 73705

(580) 213-7772

CA# 8716 Expires: June 30, 2026

SHEET INDEX			
SHEET NUMBER	SHEET NAME	REVISIONS	DATE
GI001	TITLE & INDEX SHEET		
GI002	PROJECT LOCATION & HAUL ROUTE		
GI003	FREE ZONE FENCE PLAN		
CS100	OVERALL SITE PLAN		
CS101	SITE PLAN (1 OF 6)		
CS102	SITE PLAN (2 OF 6)		
CS103	SITE PLAN (3 OF 6)		
CS104	SITE PLAN (4 OF 6)		
CS105	SITE PLAN (5 OF 6)		
CS106	SITE PLAN (6 OF 6)		
CS400	ENLARGED SITE PLAN		
CS401	TEMPORARY STRIPING PLAN		
CS402	FINAL STRIPING PLAN		
CP501	CONCRETE PAVEMENT REPAIR DETAILS		
CP502	AIRFIELD PAINT STRIPING DETAILS		

1 1/2"(ACTUAL SIZE)

DRAWING SIZE INTENDED TO BE
24" x 36"

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA

Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Date									
Description									
Revision Number									



DRAWN BY: JJJ	CHECKED BY: CWT
PROJECT NO.:	XTLF 24-1011
DATE:	NOVEMBER 2025
DESIGN STAGE:	FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

TITLE & SHEET INDEX

GI001



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: J.J.L.	CHECKED BY: C.W.T.
PROJECT NO.:	XTLF 24-1011
DATE:	NOVEMBER 2025
DESIGN STAGE:	FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

PROJECT LOCATION & HAUL ROUTE

GI002

GENERAL NOTES

- REFER TO SPECIFICATION 32 01 29.61 PARTIAL DEPTH PATCHING OF RIGID CONCRETE FOR REQUIREMENT RELATED TO TEST PATCHING.
- APPROVED HAUL AND ACCESS ROUTES ARE NOTED ON THE PLAN. THE CONTRACTOR SHALL USE ONLY ACCESS ROUTES THAT ARE PREVIOUSLY APPROVED BY CONSTRUCTION MANAGEMENT.
- ALL NON-HAZARDOUS DEMOLITION WASTE PRODUCTS SHALL BECOME THE PROPERTY OF THE CONTRACTOR.
- CONTRACTOR SHOULD SCHEDULE WORK IN ACCORDANCE WITH THE APPROVED CONSTRUCTION SEQUENCE SUBMITTED DURING THE NON-PERFORMANCE PERIOD OF THE SCHEDULE F OF THE SPECIFICATIONS.
- WORK TO BE PERFORMED DURING NO FLYING HOURS (NIGHTS, SATURDAYS, HOLIDAYS).
- AREAS OF WORK NOTED AS ALLOWED DURING FLYING HOURS SHOWN ON PLANS. OPERATING EQUIPMENT MUST PAUSE MOVEMENT WHILE AIRCRAFT PASS BY WORK AREA.
- DEDICATED STREET SWEEPERS REQUIRED FOR ALL EQUIPMENT CROSSINGS.
- EXISTING CONSTRUCTION INFORMATION PROVIDED WITHIN THESE PLANS IS BASED ON RECORD DRAWINGS AND FIELD INVESTIGATION AND MAY VARY WITHIN THE PROJECT. NOTIFY CONSTRUCTION MANAGER OF DISCREPANCIES BETWEEN THE CONSTRUCTION DOCUMENTS AND FIELD CONDITIONS.
- THE CONTRACTOR SHALL INSTALL NEW SOD IN ALL DISTURBED AREAS.
- REFER TO PROJECT SPECIFICATIONS FOR ADDITIONAL INFORMATION TO THE PROJECT.
- RESTORE ALL STRIPING DAMAGED BY CONSTRUCTION.
- RESTORE SITE TO ORIGINAL CONDITIONS.

CONSTRUCTION SIGNAGE

CONTRACTOR TO PROVIDE CONSTRUCTION SIGNAGE AT ROAD INTERSECTIONS AND PARKING LOT ENTRANCES AND EXITS TO PREVENT TRAFFIC ENTERING CONSTRUCTION ZONE.

LEGEND

-
- PROJECT LOCATION

PRIMARY INDUSTRIAL INSPECTION ENTRYSECONDARY BASE ENTRY AND ALL VEHICLE EXIT ROUTEBENCHMARK

KEYNOTES

- PRIMARY HAUL ROUTE.
- SECONDARY HAUL ROUTE TO BE USED ONLY WHEN PRIMARY ROUTE GATE IS CLOSED.
- PROJECT LOCATION.
- FACILITY 288 CIVIL ENGINEERING INCLUDING CONSTRUCTION MANAGEMENT.
- FACILITY 500 CONTRACTING FLIGHT.
- FACILITY 72 VISITOR'S CENTER, USE FOR PASS APPROVAL PRIOR TO BEGINNING WORK.
- FACILITY 75 COMMERCIAL VEHICLE INSPECTION.
- MATERIAL LAY DOWN AREA.

ABBREVIATIONS

ADA - AMERICANS WITH DISABILITIES ACT

AFB - AIR FORCE BASE

ASTM - AMERICAN SOCIETY FOR TESTING AND MATERIALS

AC - ASPHALTIC CONCRETE

℄ - CENTER LINE

EX - EXISTING

ELEV - ELEVATION

MAX - MAXIMUM

MIN - MINIMUM

NTS - NOT TO SCALE

PCC - PORTLAND CEMENT CONCRETE

PVC - POLYVINYL CHLORIDE

PVI - POINT OF VERTICAL INTERSECTION

RCP - REINFORCED CONCRETE PIPE

STA. - STATION


ST - STORM MANHOLE / JUNCTION

STD - STANDARD


UFC - UNIFIED FACILITY CRITERIA

TG - TOP OF GRATE

TYP - TYPICAL

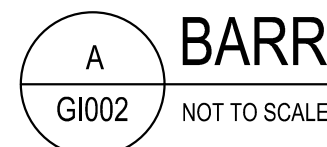


BARRICADE DETAIL

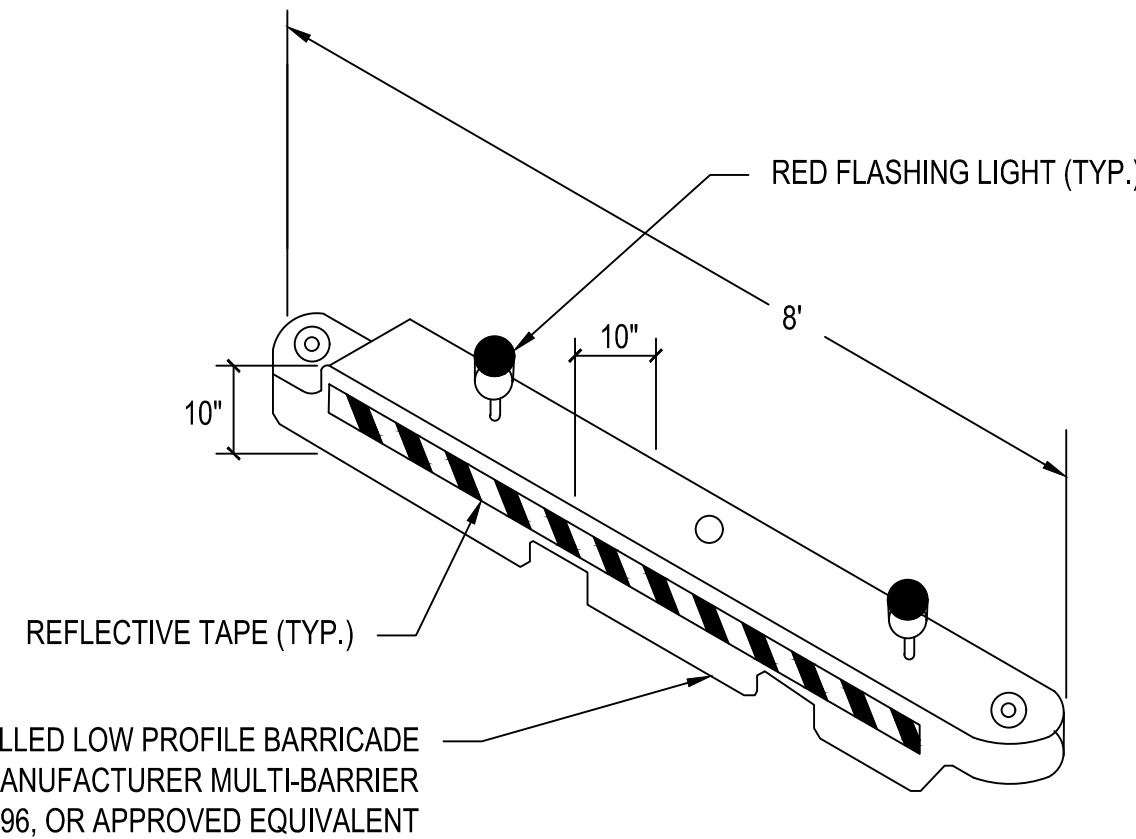

LIGHTED BARRICADE NOTES:

- FLASHING LIGHTS MUST BE AT LEAST FIVE CANDELAS EFFECTIVE INTENSITY AND FLASH AT A RATE OF 55 TO 160 FLASHES PER MINUTE.
- INSTALL LIGHTED BARRICADE IN AREAS WHEN AIRFIELD IS CLOSED IF CLOSER THAN 150 FEET TO ACTIVE AREA.

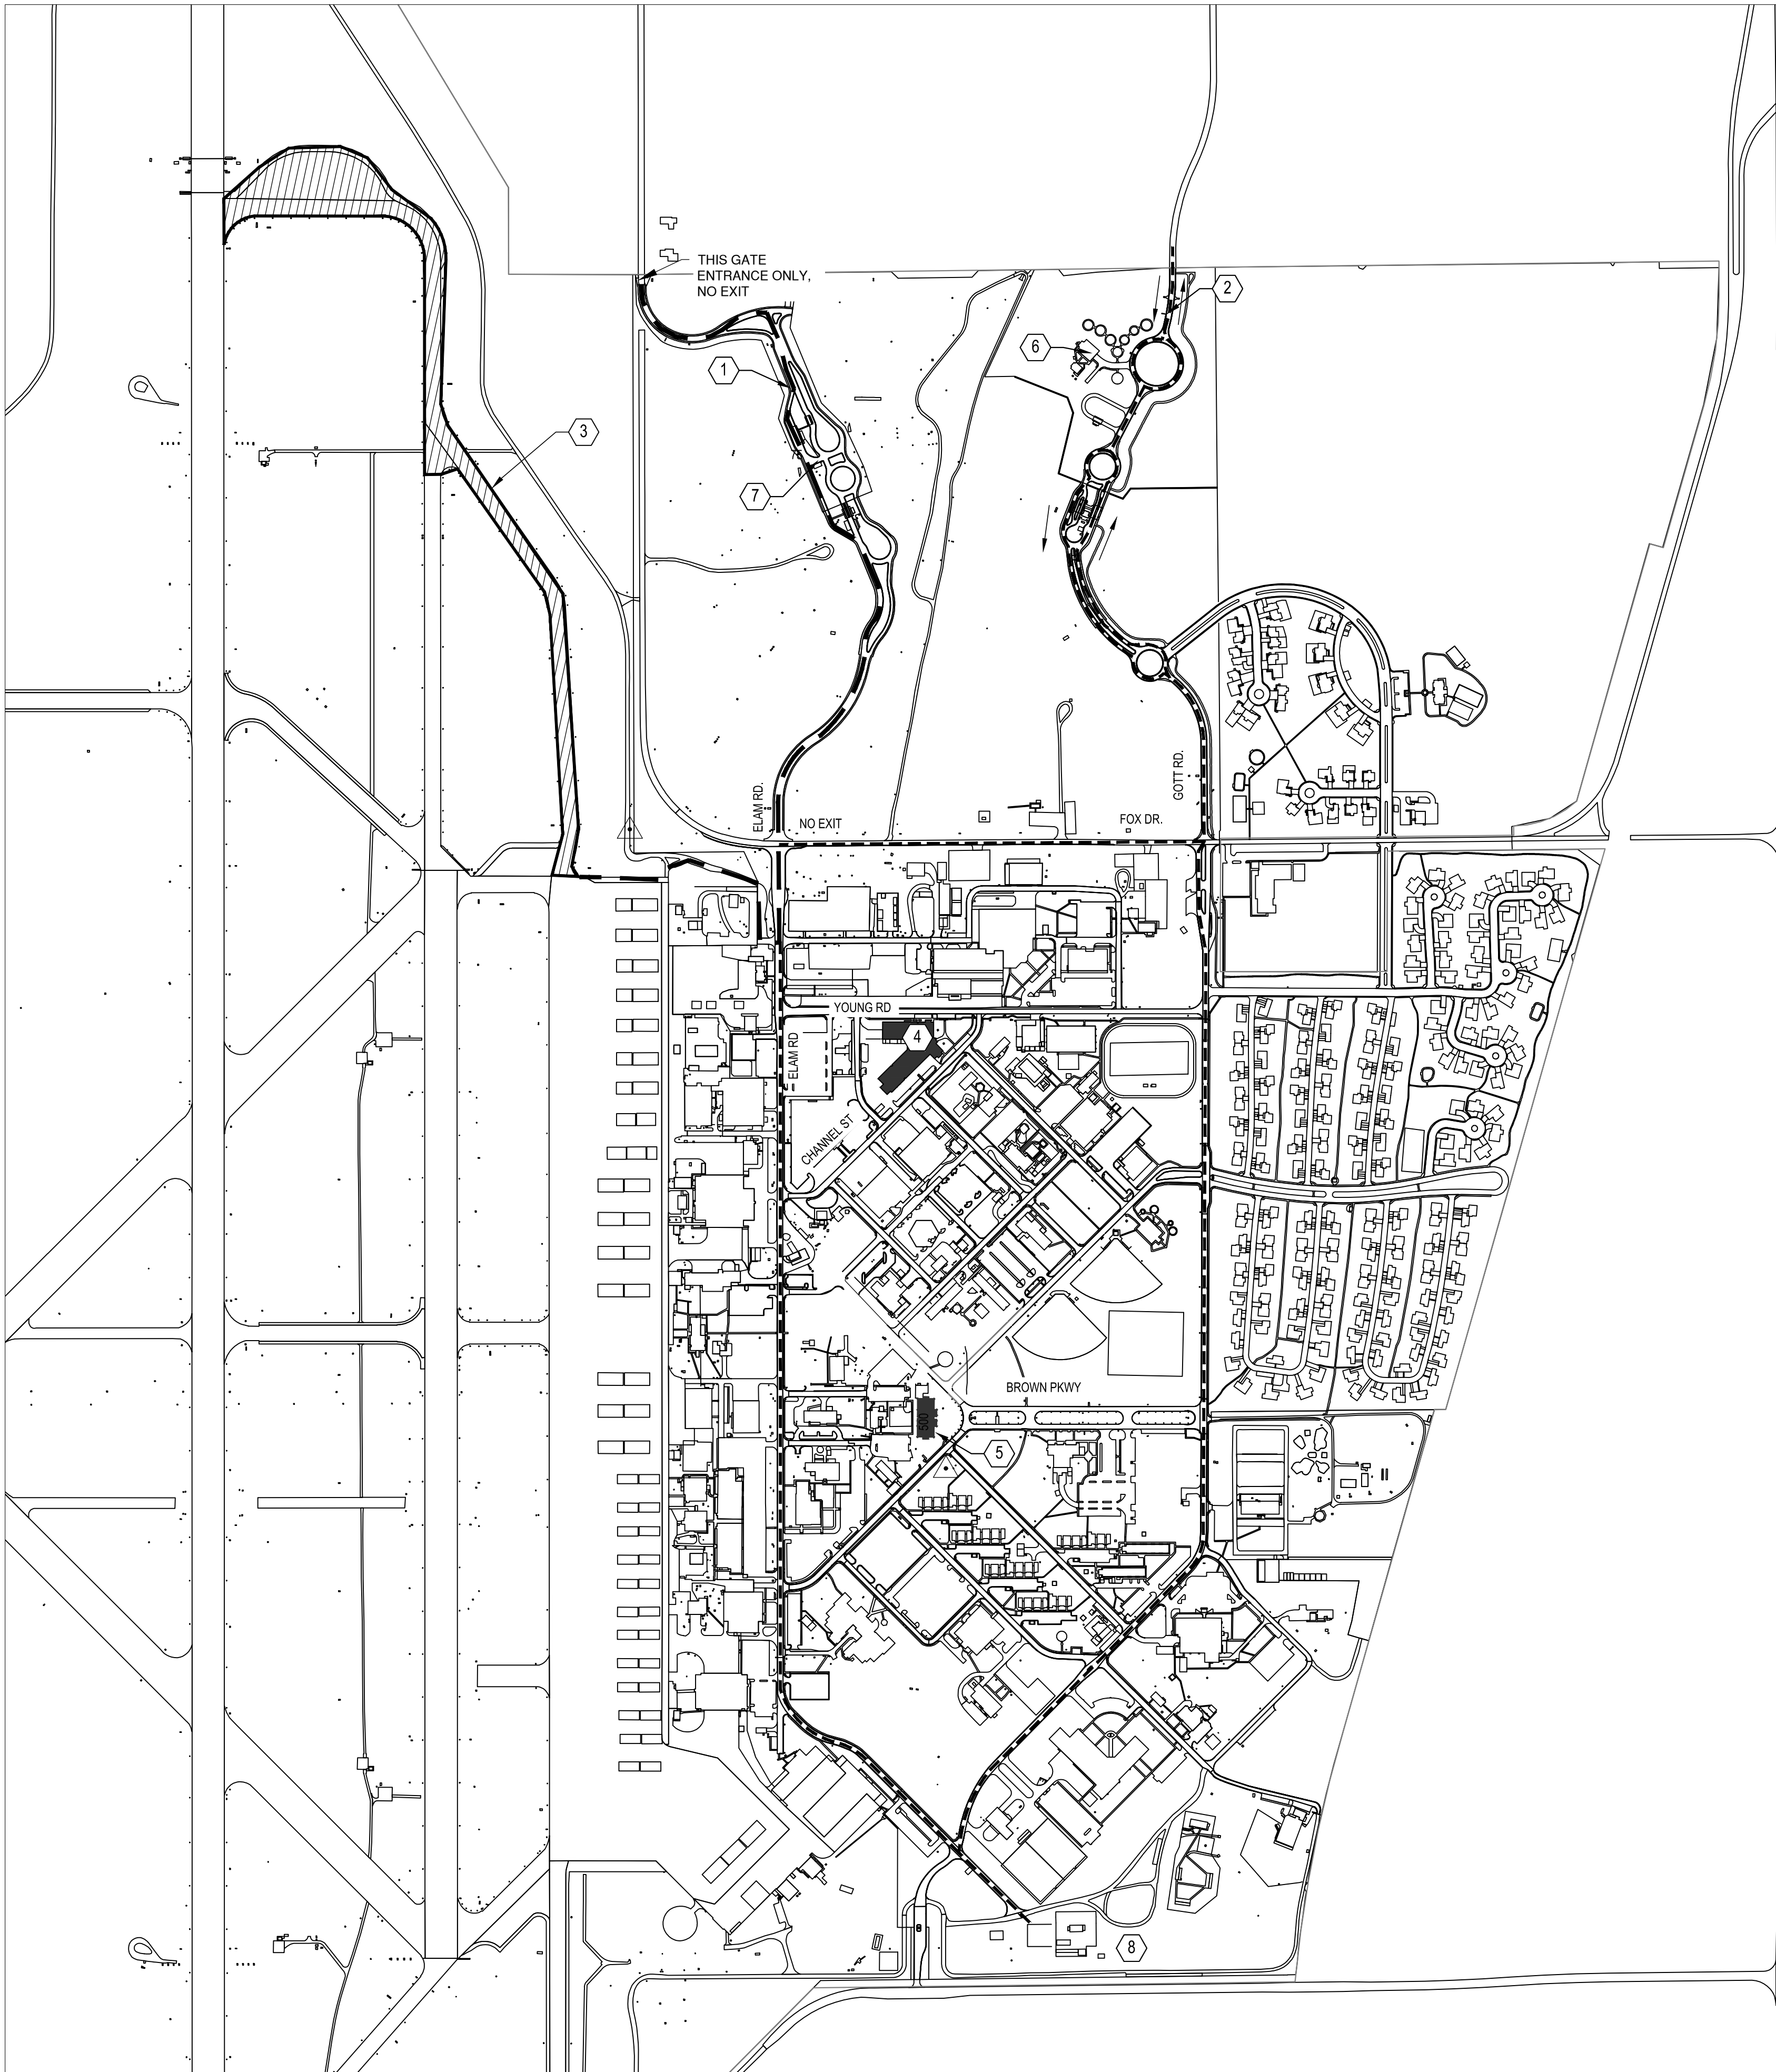

A
GI002
LOCATION AND HAUL ROUTE
NOT TO SCALE FOR LOCATION GENERAL REFERENCE ONLY






UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

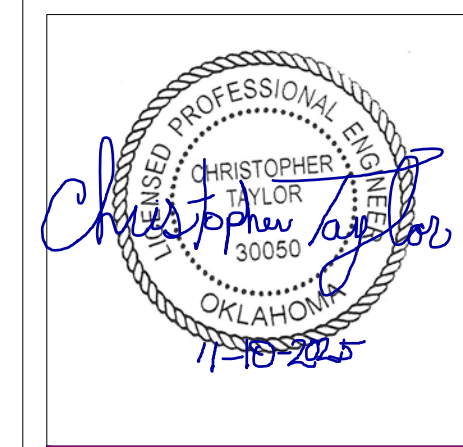[illegible]

DRAWN BY: J.L.II

CHECKED BY: CWT

PROJECT NO.:

XTLE 24-1011

DATE-

NOVEMBER 2025

DESIGN STAGE:


FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

FREE ZONE FENCE PLAN

GI003

DATE: NOVEMBER 2025


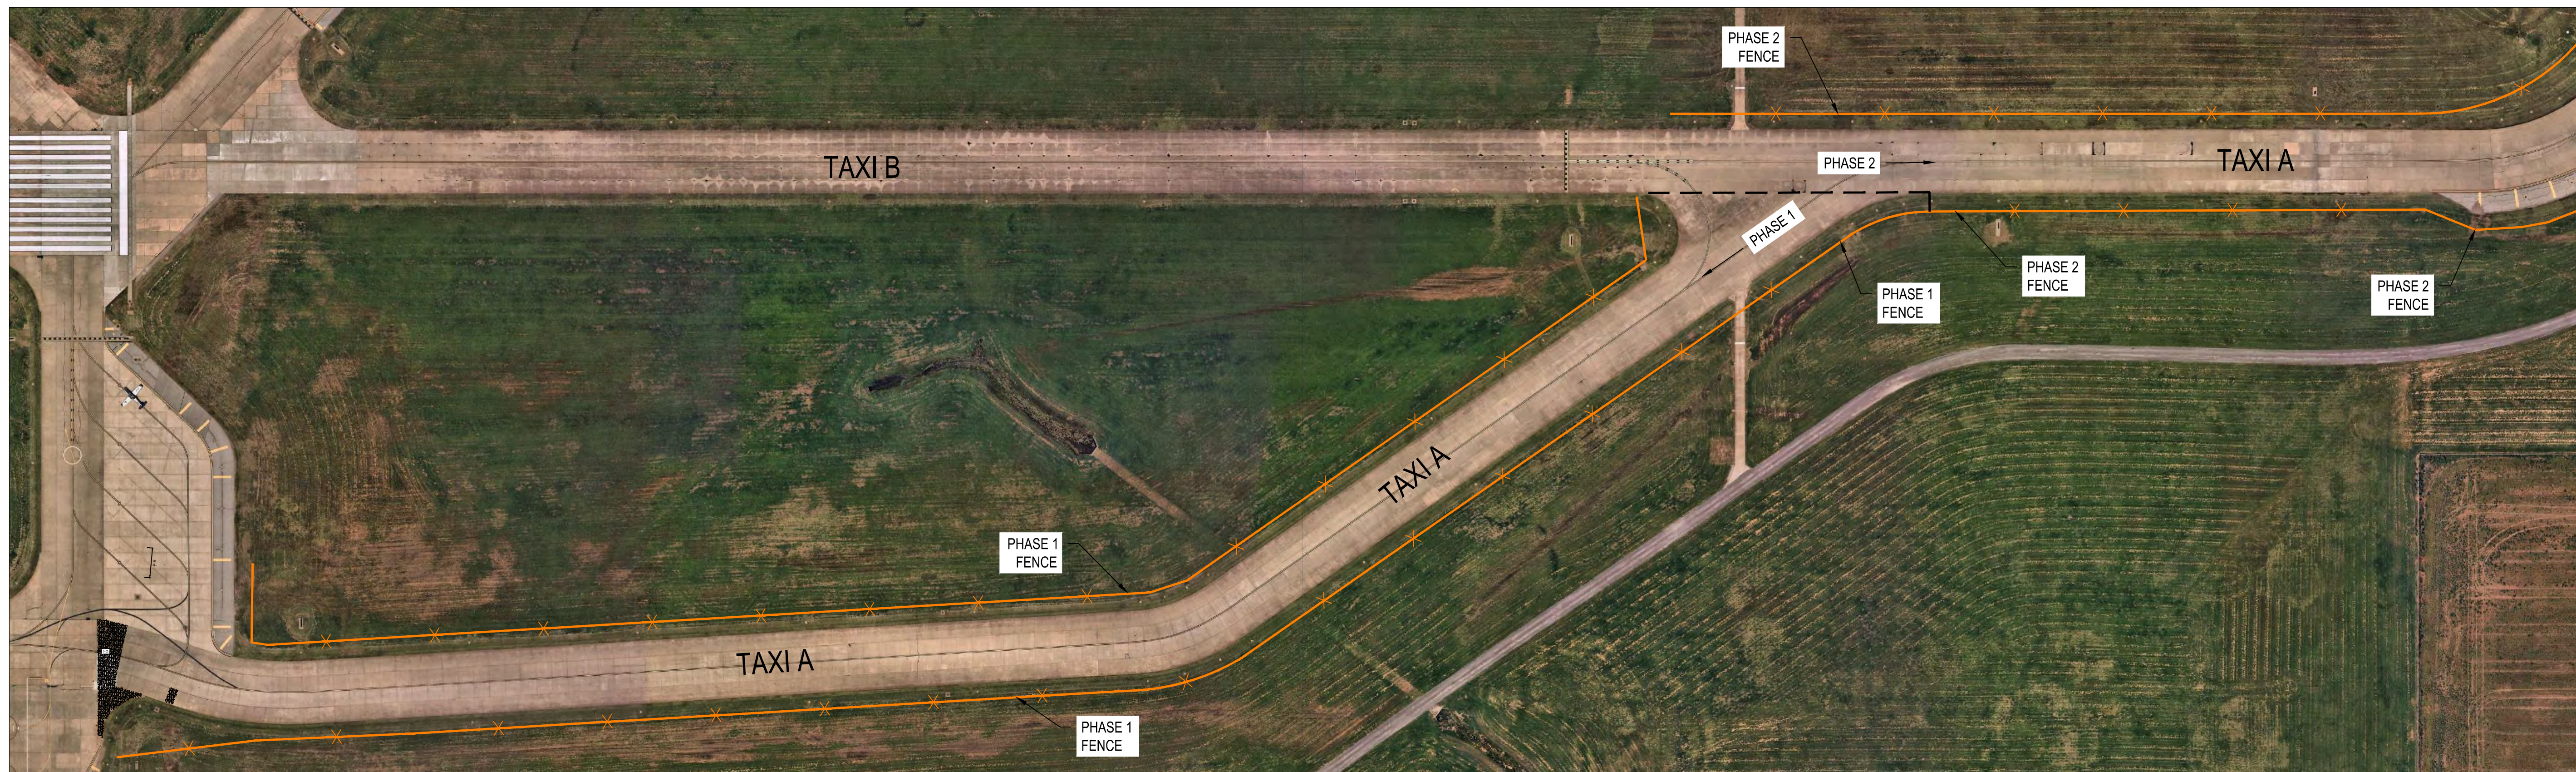


GENERAL NOTES

1. SEE SHEETS CS101 THRU CS106 FOR REPAIR LOCATIONS AND DETAILS.
2. PERMISSIBLE FENCE TYPES INCLUDE COMMON SILT FENCE OR ORANGE CONSTRUCTION SAFETY FENCE.
3. CONTRACTOR TO PROVIDE FREE ZONE FENCE.


LEGEND

FREE ZONE FENCE

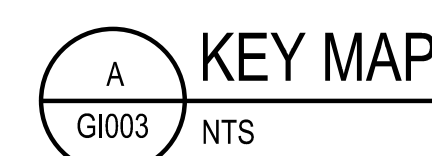

GENERAL NOTES

1. SEE SHEETS CS101 THRU CS106 FOR REPAIR LOCATIONS AND DETAILS.
2. REFER TO SPECIFICATIONS SECTIONS FOR ADDITIONAL MATERIAL INFORMATION.

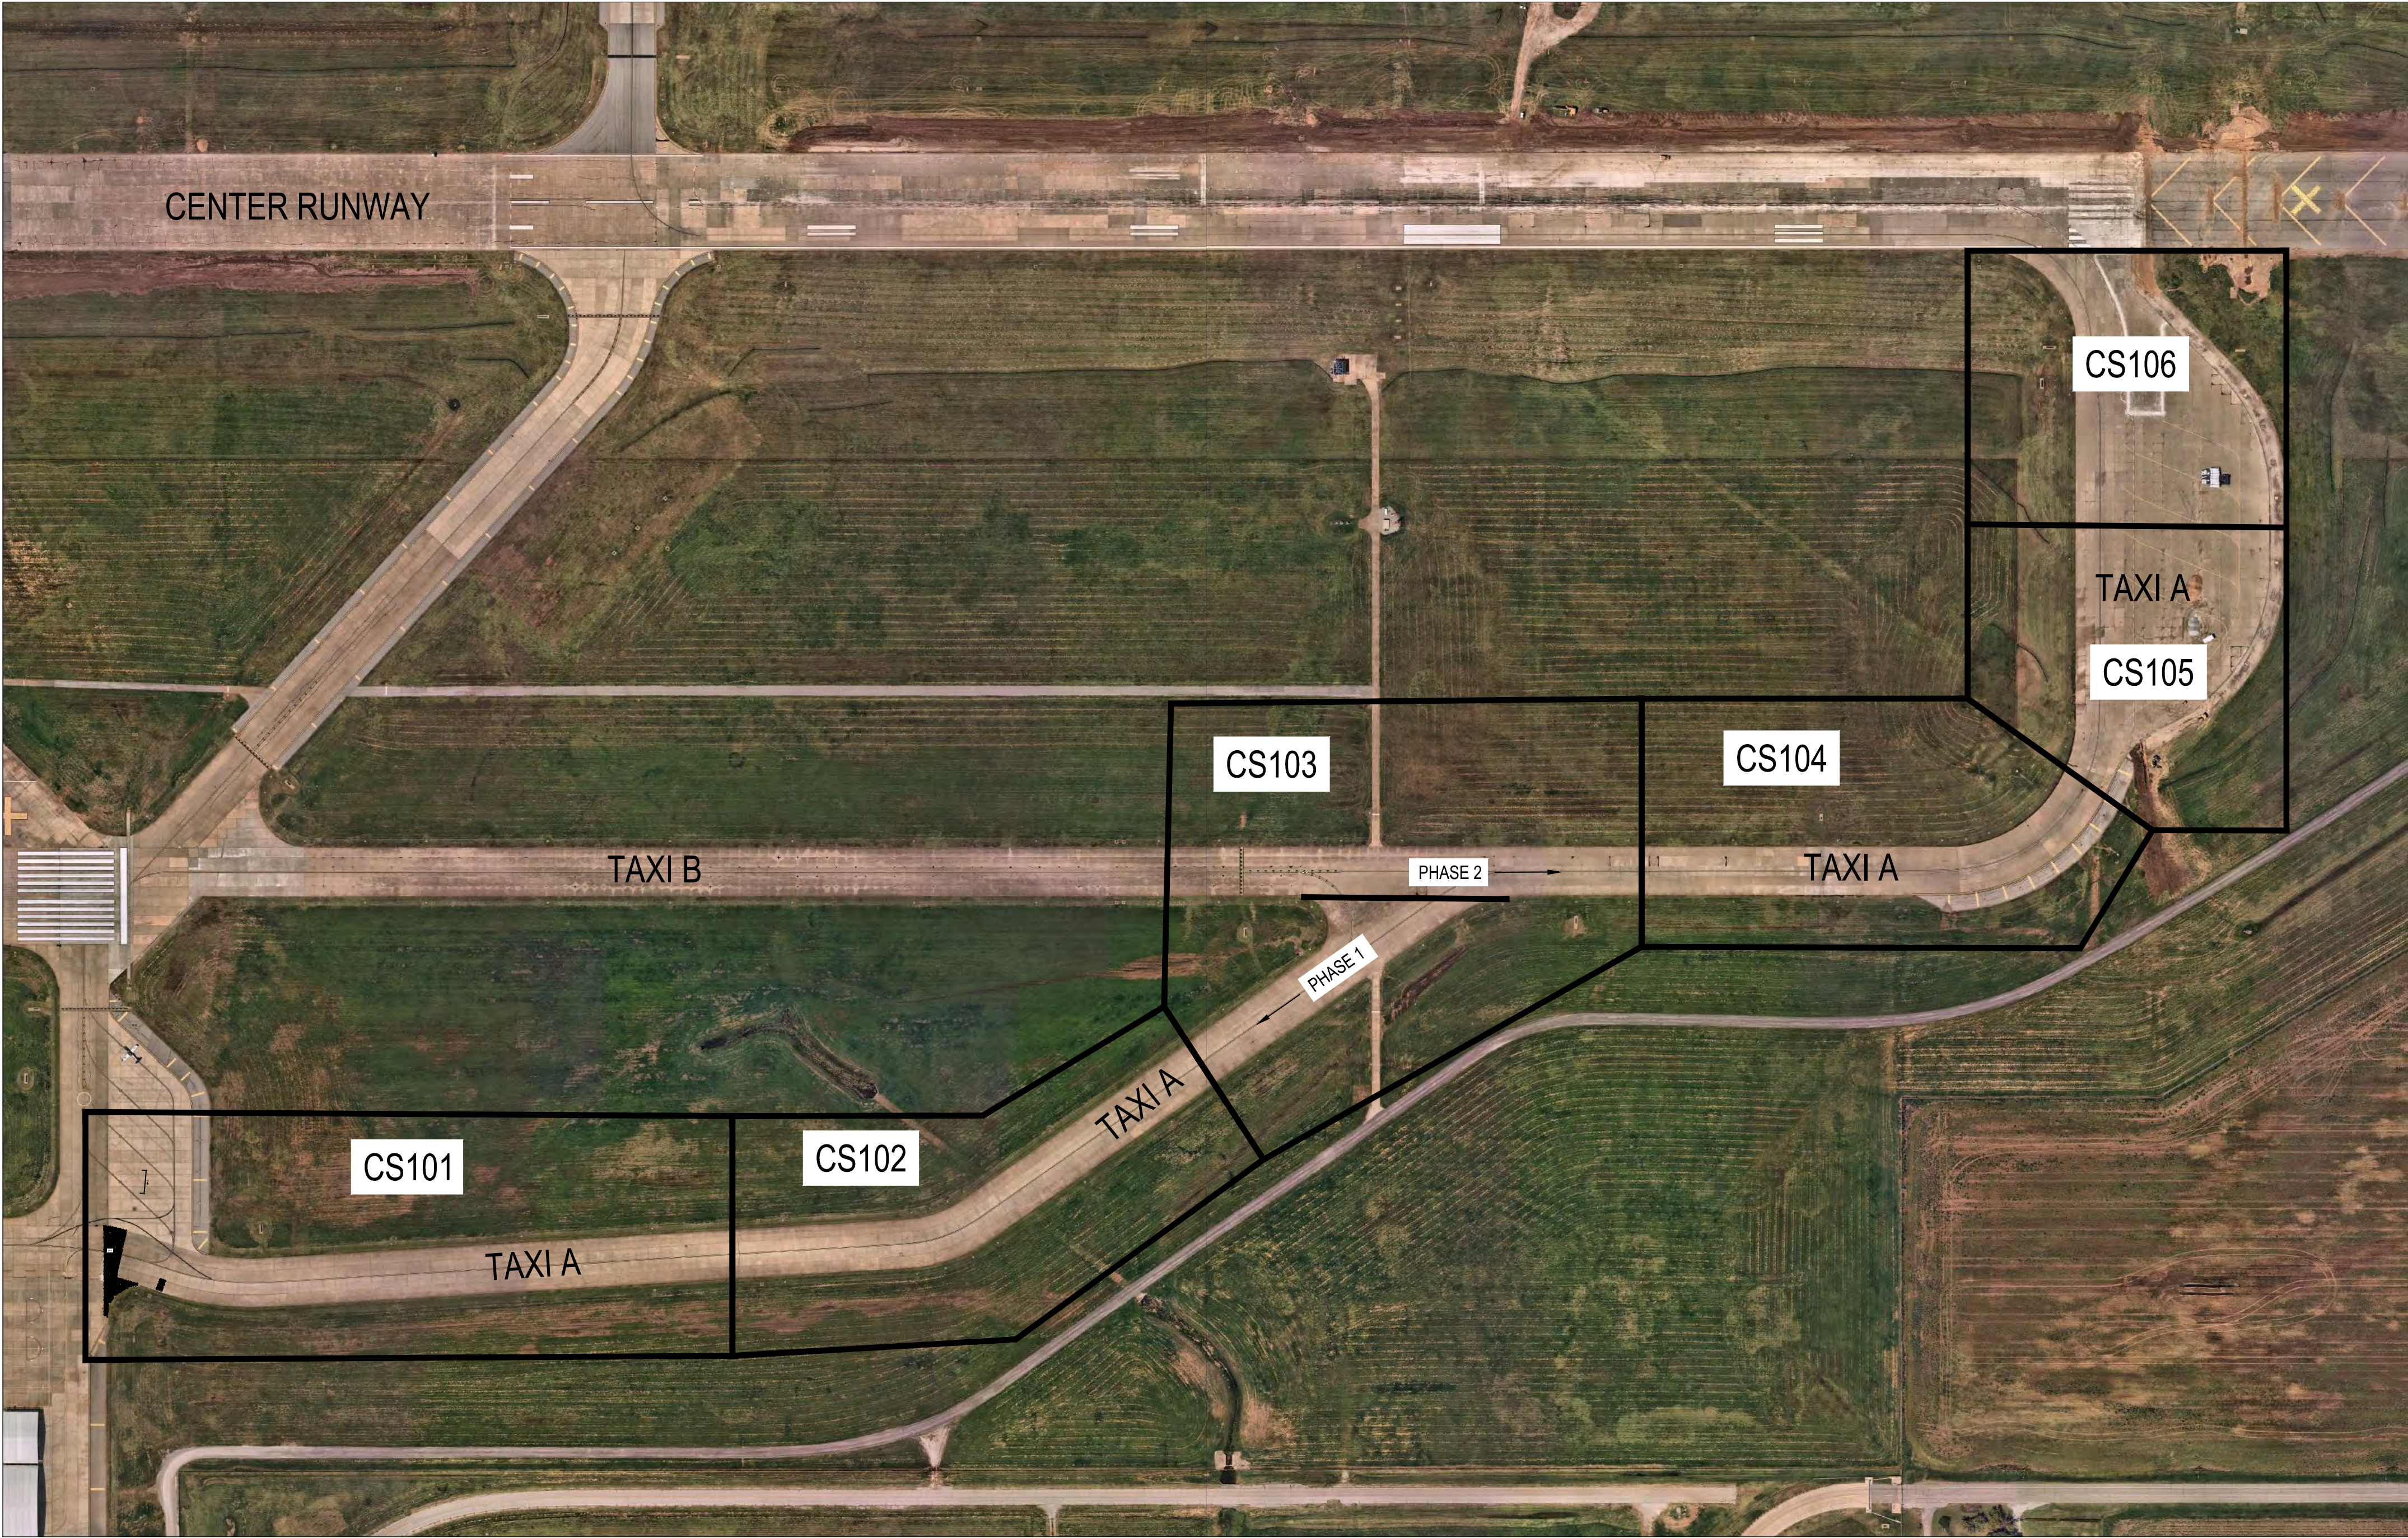

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA

Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JJJ

CHECKED BY: CWT

PROJECT NO.: XTLP 24-1011

DATE: NOVEMBER 2025

DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

OVERALL SITE PLAN

CS100



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Revision Number	Description	Date



DRAWN BY: JJJ
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A



SITE PLAN (1 OF 6)

CS101

KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
- FULL DEPTH PATCH. SEE DETAIL G-CP501
- ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
- CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
- DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
- PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
- CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
- REPAIR JOINT SPALLING. SEE DETAIL D-CP501
- REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501. STA 00+00 TO APPROXIMATELY STA 3+00

LEGEND

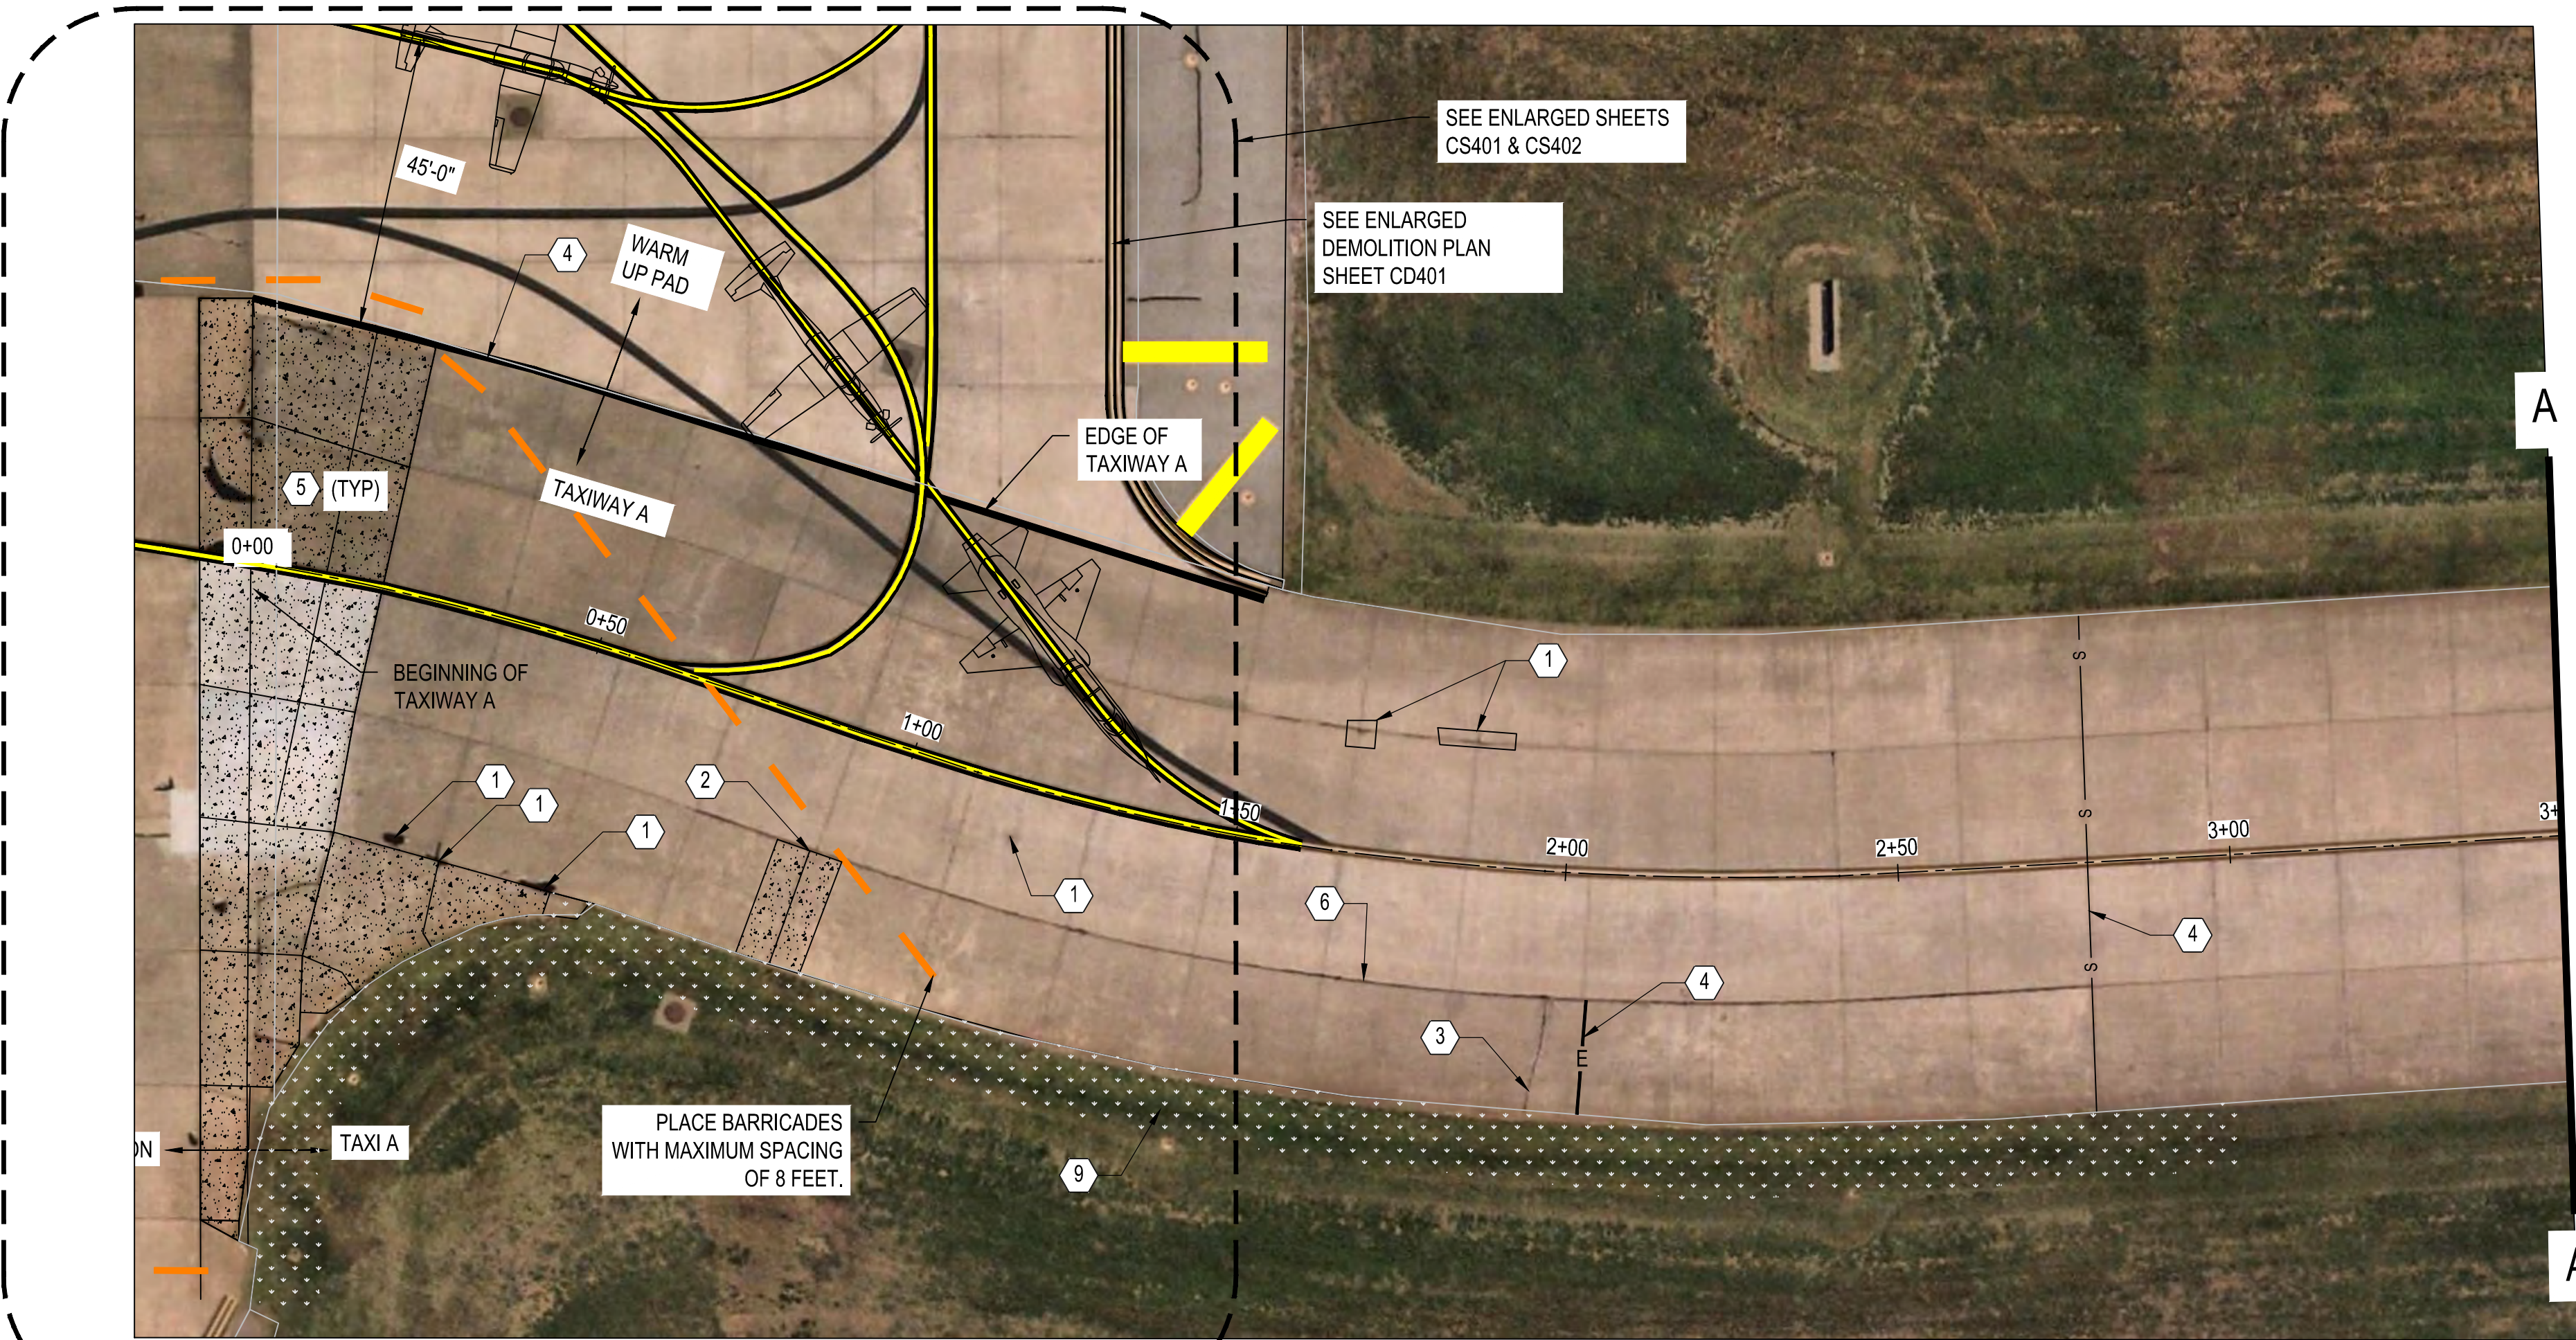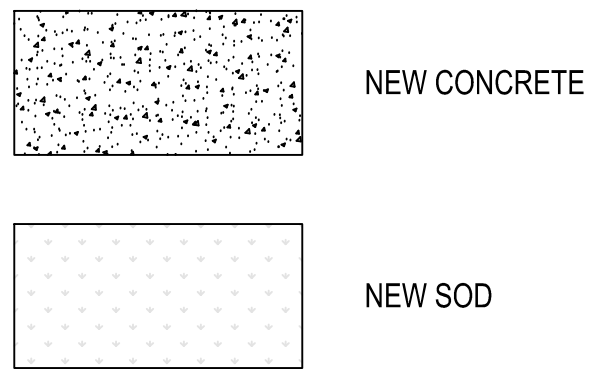

NOTE: WORK INSIDE OF BARRIERS PERMITTED DURING FLYING HOURS

A TAXI A STA 0+00 TO STA 3+50 1" = 20'



B TAXI A STA 3+50 TO STA 7+00 1" = 20'

0 20' 40'
SCALE: 1" = 20'



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JJJ CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

SITE PLAN (2 OF 6)


CS102

DATE: NOVEMBER 2025

PROJ TITLE: REPAIR AIRFIELD PAVEMENTS TAXIWAY A



C TAXI A STA 7+00 TO STA 12+00
CS102 1" = 20'

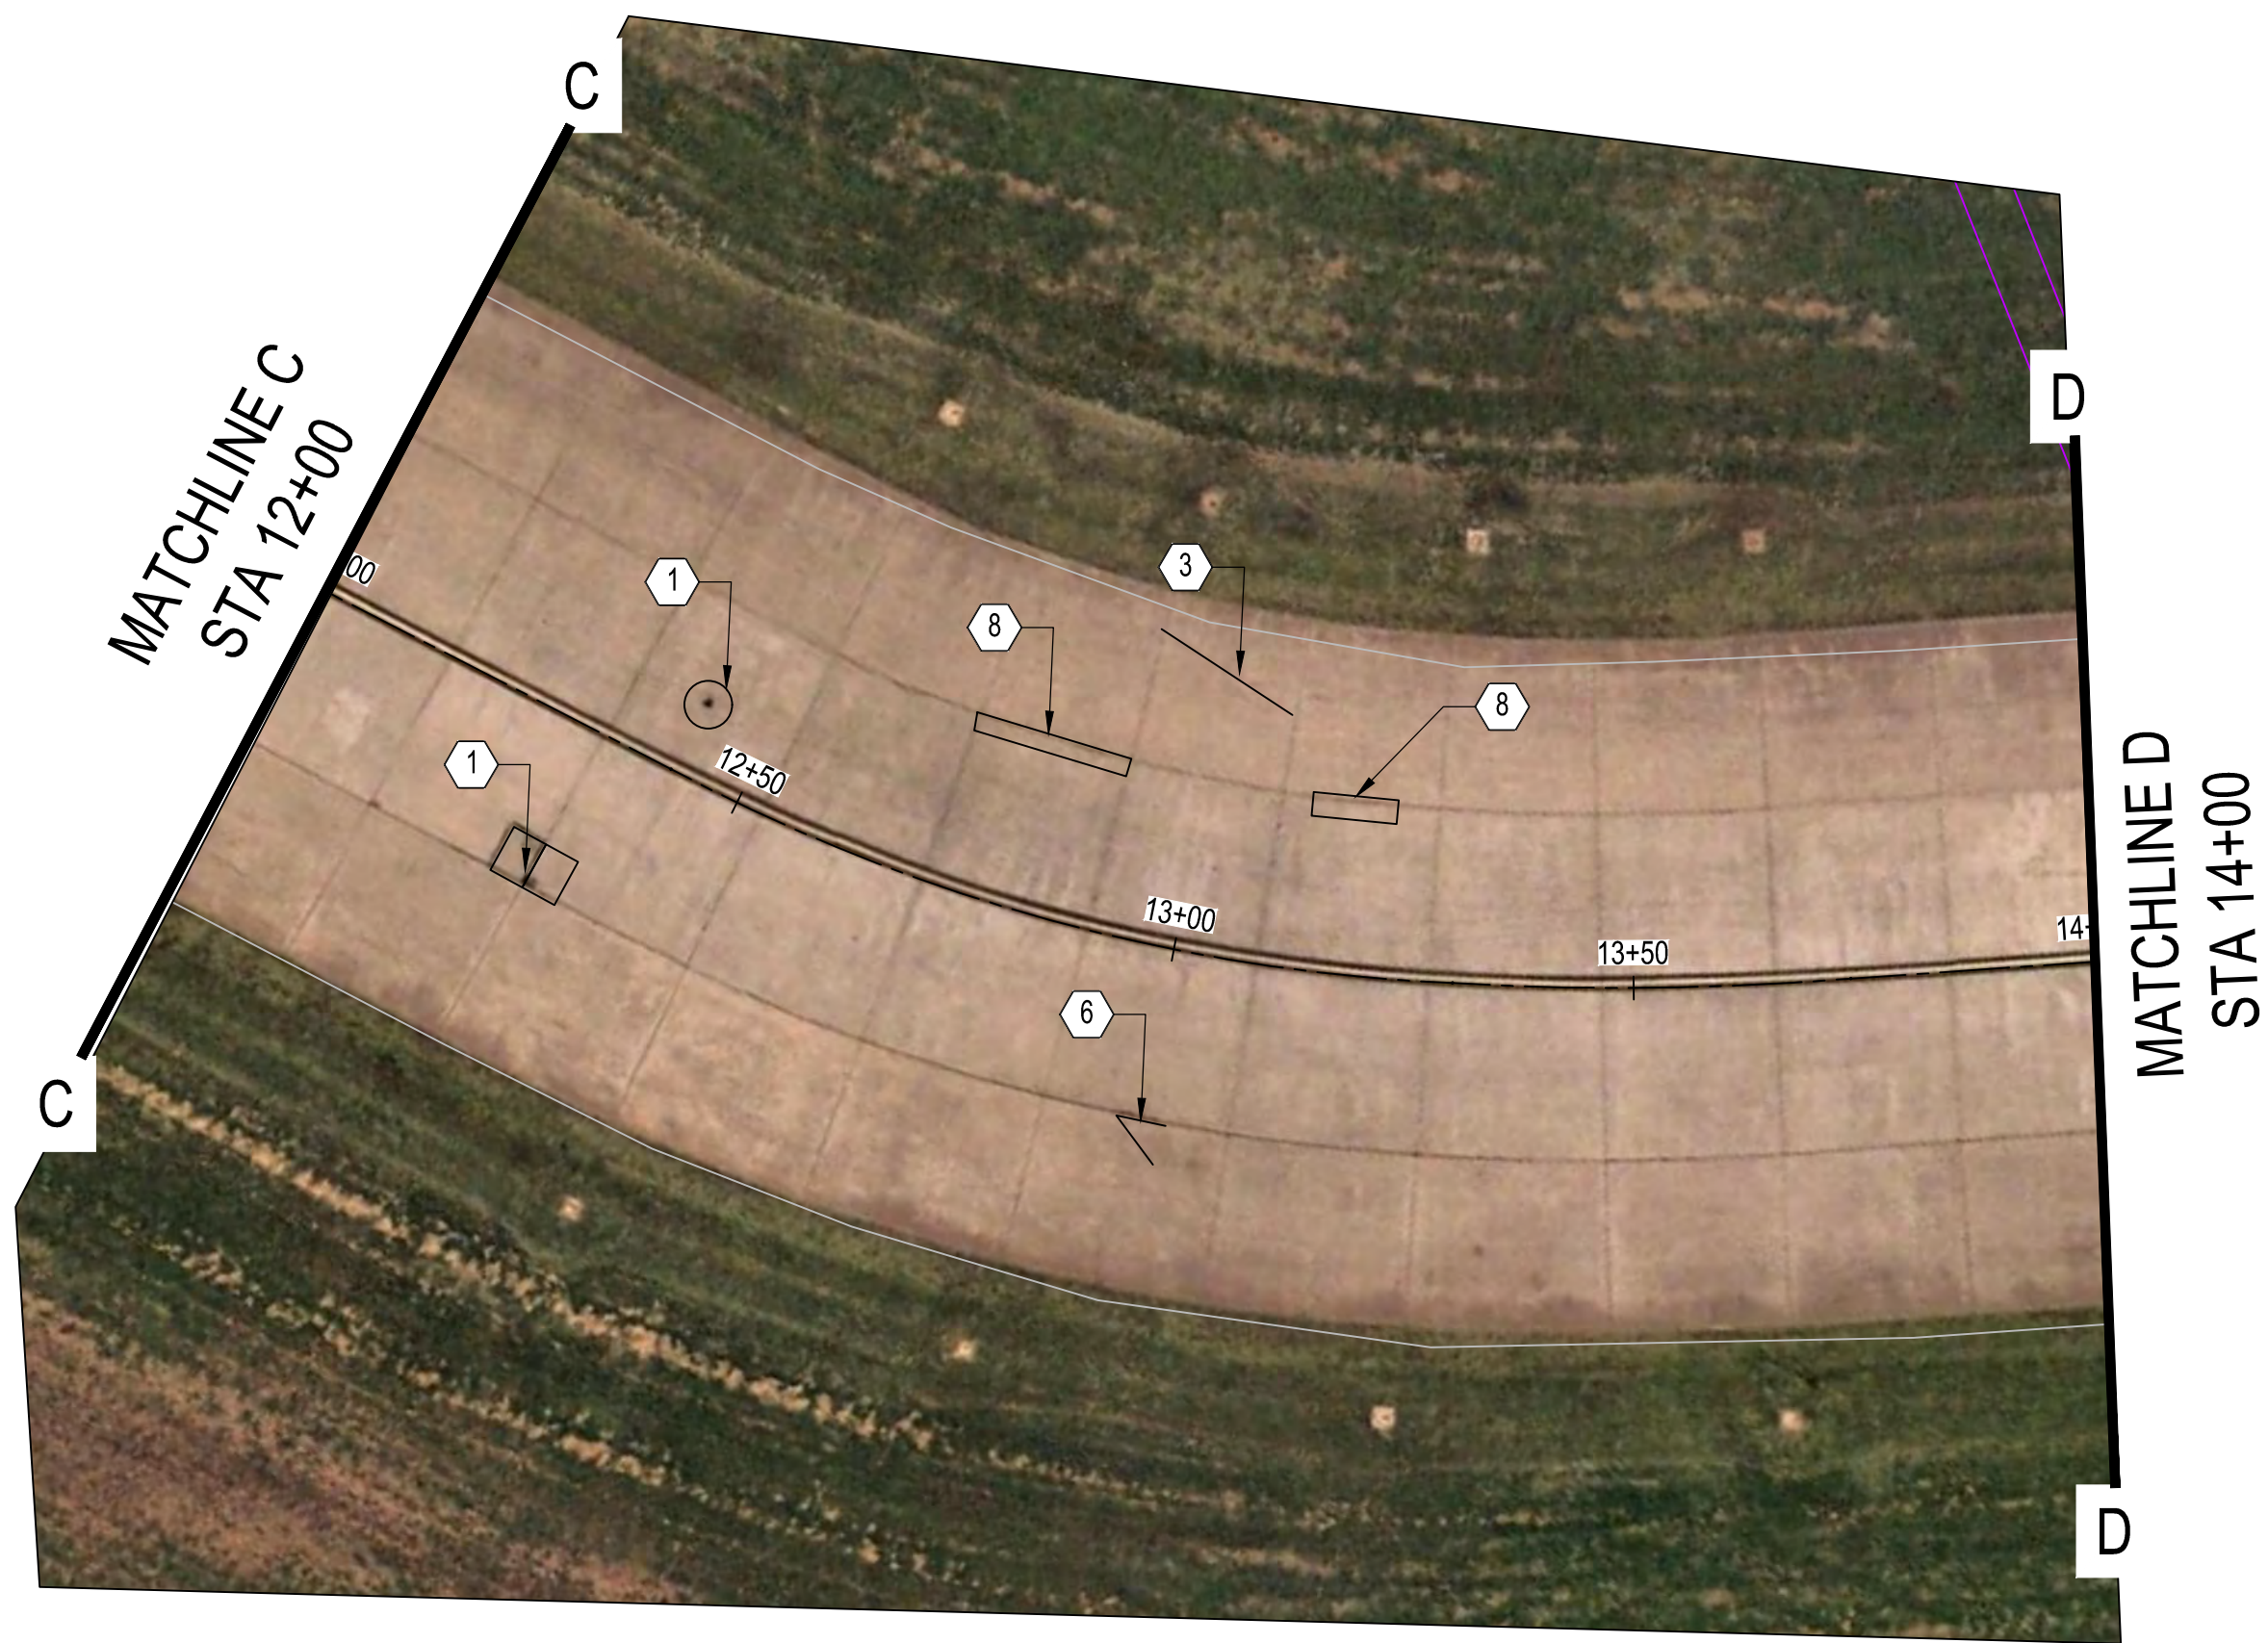


D TAXI A STA 12+00 TO STA 14+00
CS102 1" = 20'



E TAXI A STA 14+00 TO STA 17+00
CS102 1" = 20'

KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
- FULL DEPTH PATCH. SEE DETAIL G-CP501
- ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
- CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
- DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
- PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
- CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
- REPAIR JOINT SPALLING. SEE DETAIL D-CP501
- REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501.
STA 00+00 TO APPROXIMATELY STA 3+00

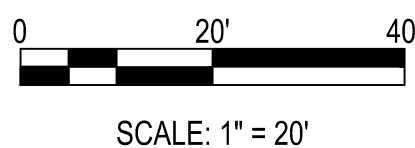



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA

ASRC
FEDERAL
Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JLL
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION





REPAIR AIRFIELD PAVEMENTS TAXIWAY A
SITE PLAN (3 OF 6)

CS103
DATE: NOVEMBER 2025

KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
 - FULL DEPTH PATCH. SEE DETAIL G-CP501
 - ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
 - CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
 - DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
 - PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
 - CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
 - REPAIR JOINT SPALLING. SEE DETAIL D-CP501
 - REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501.
- STA 00+00 TO APPROXIMATELY STA 3+00

LEGEND

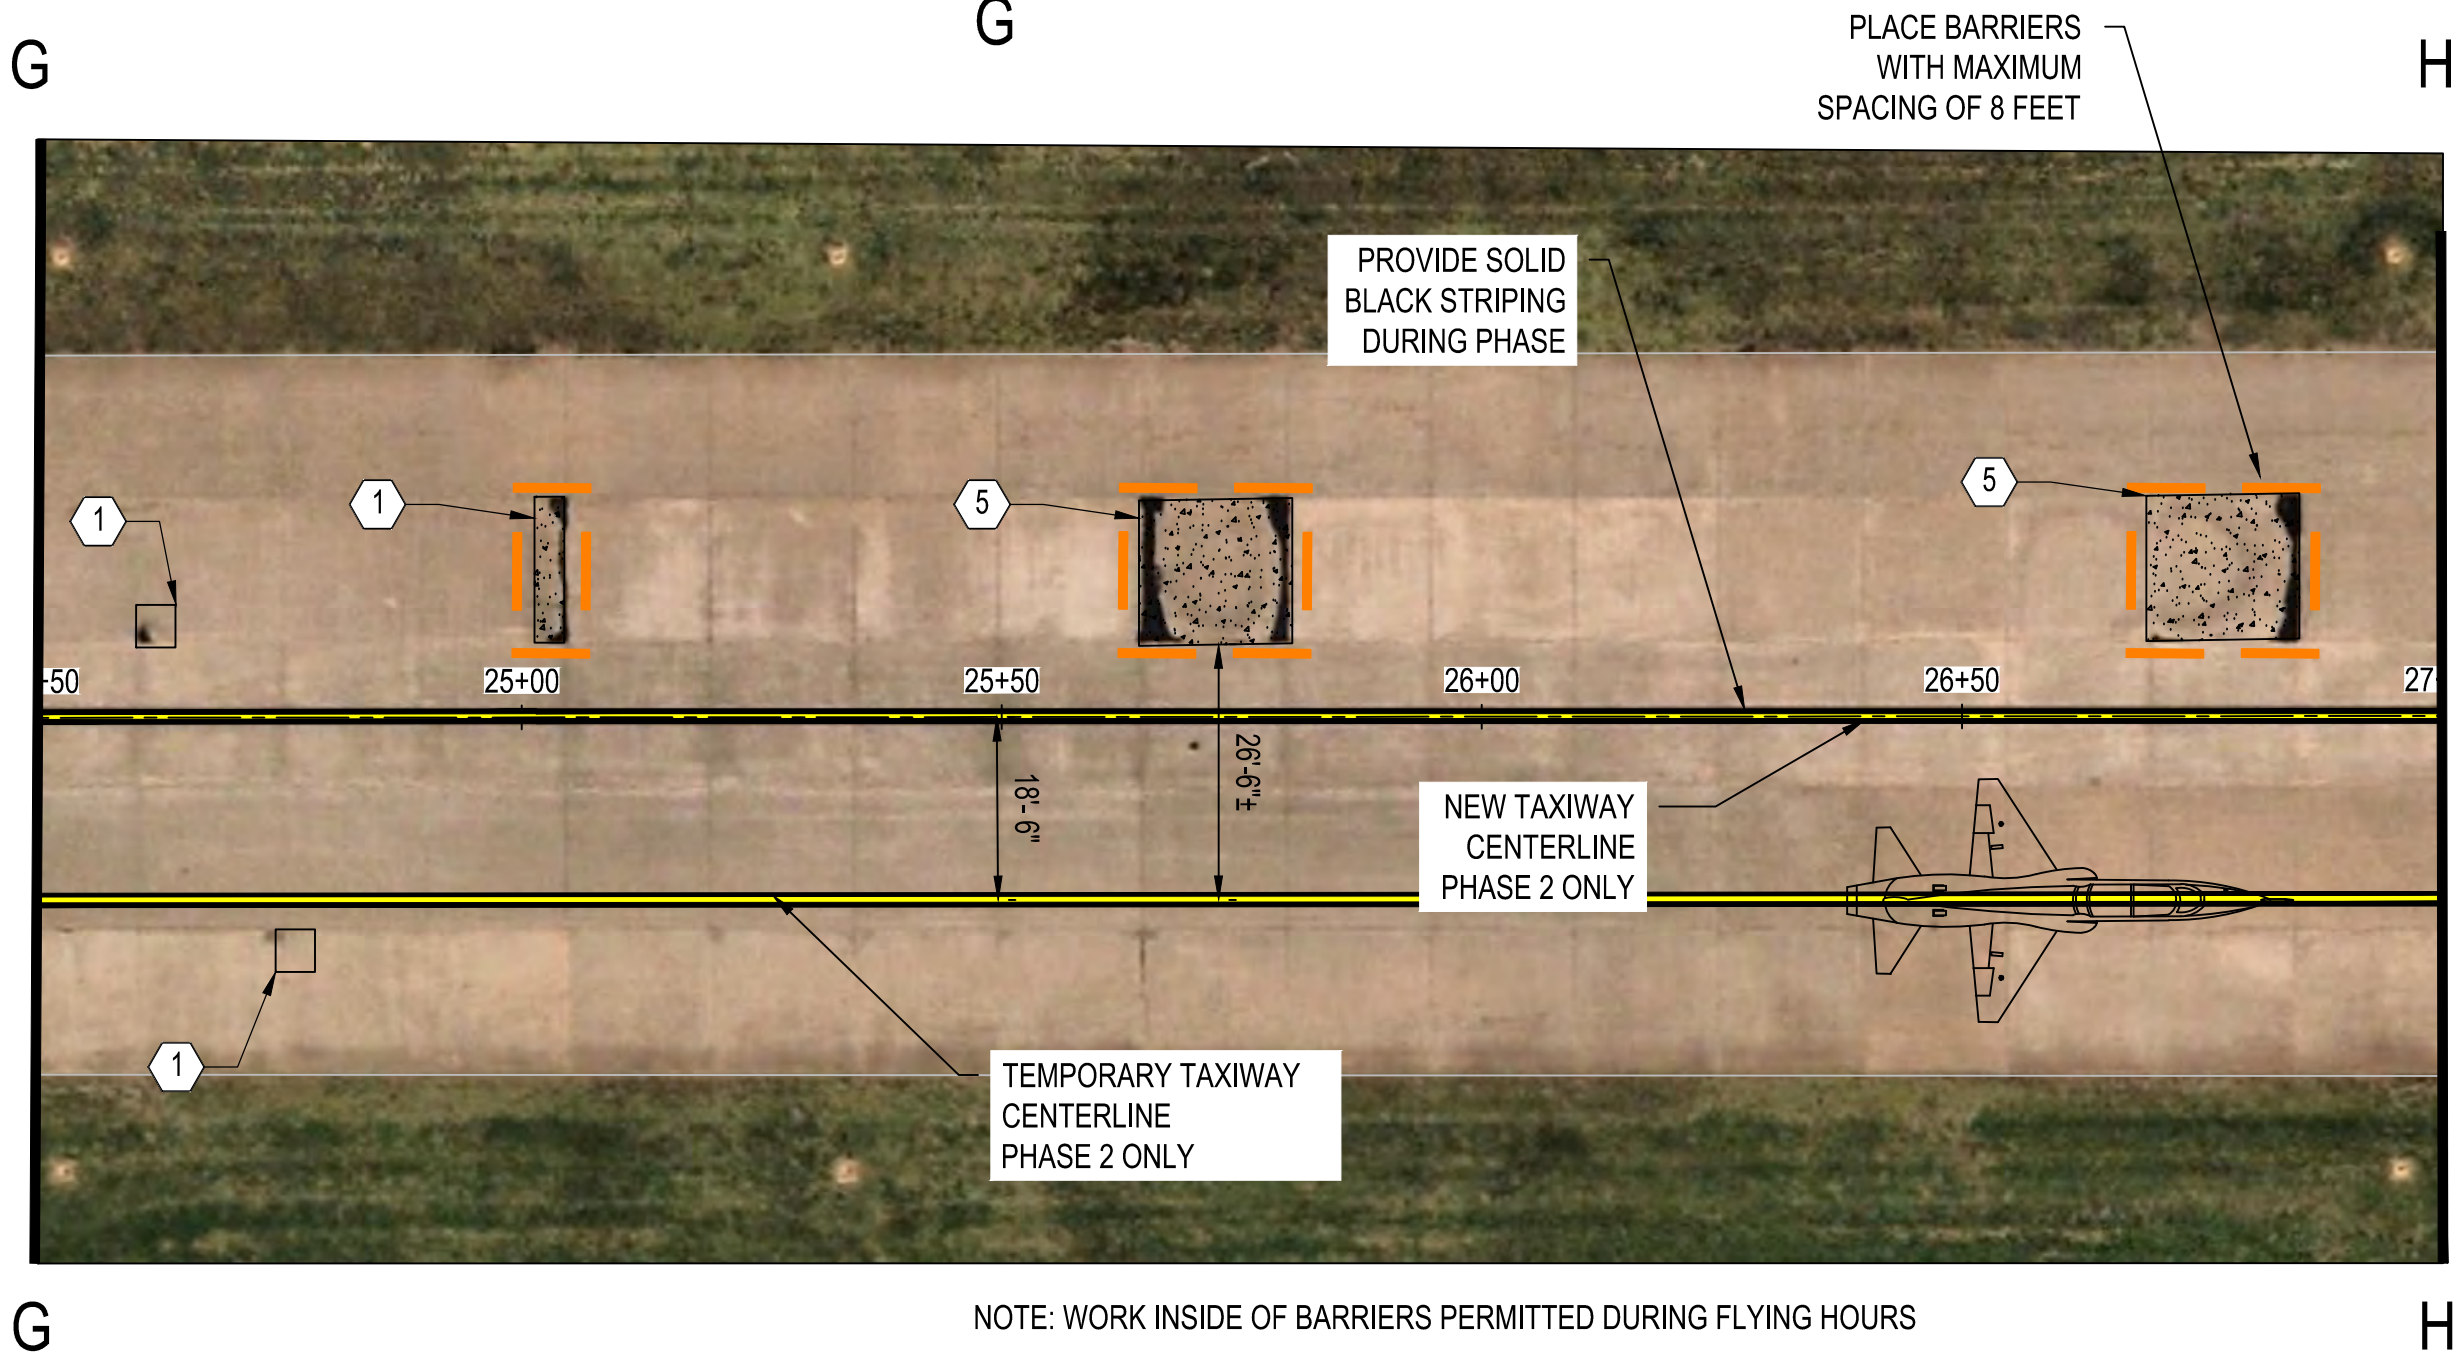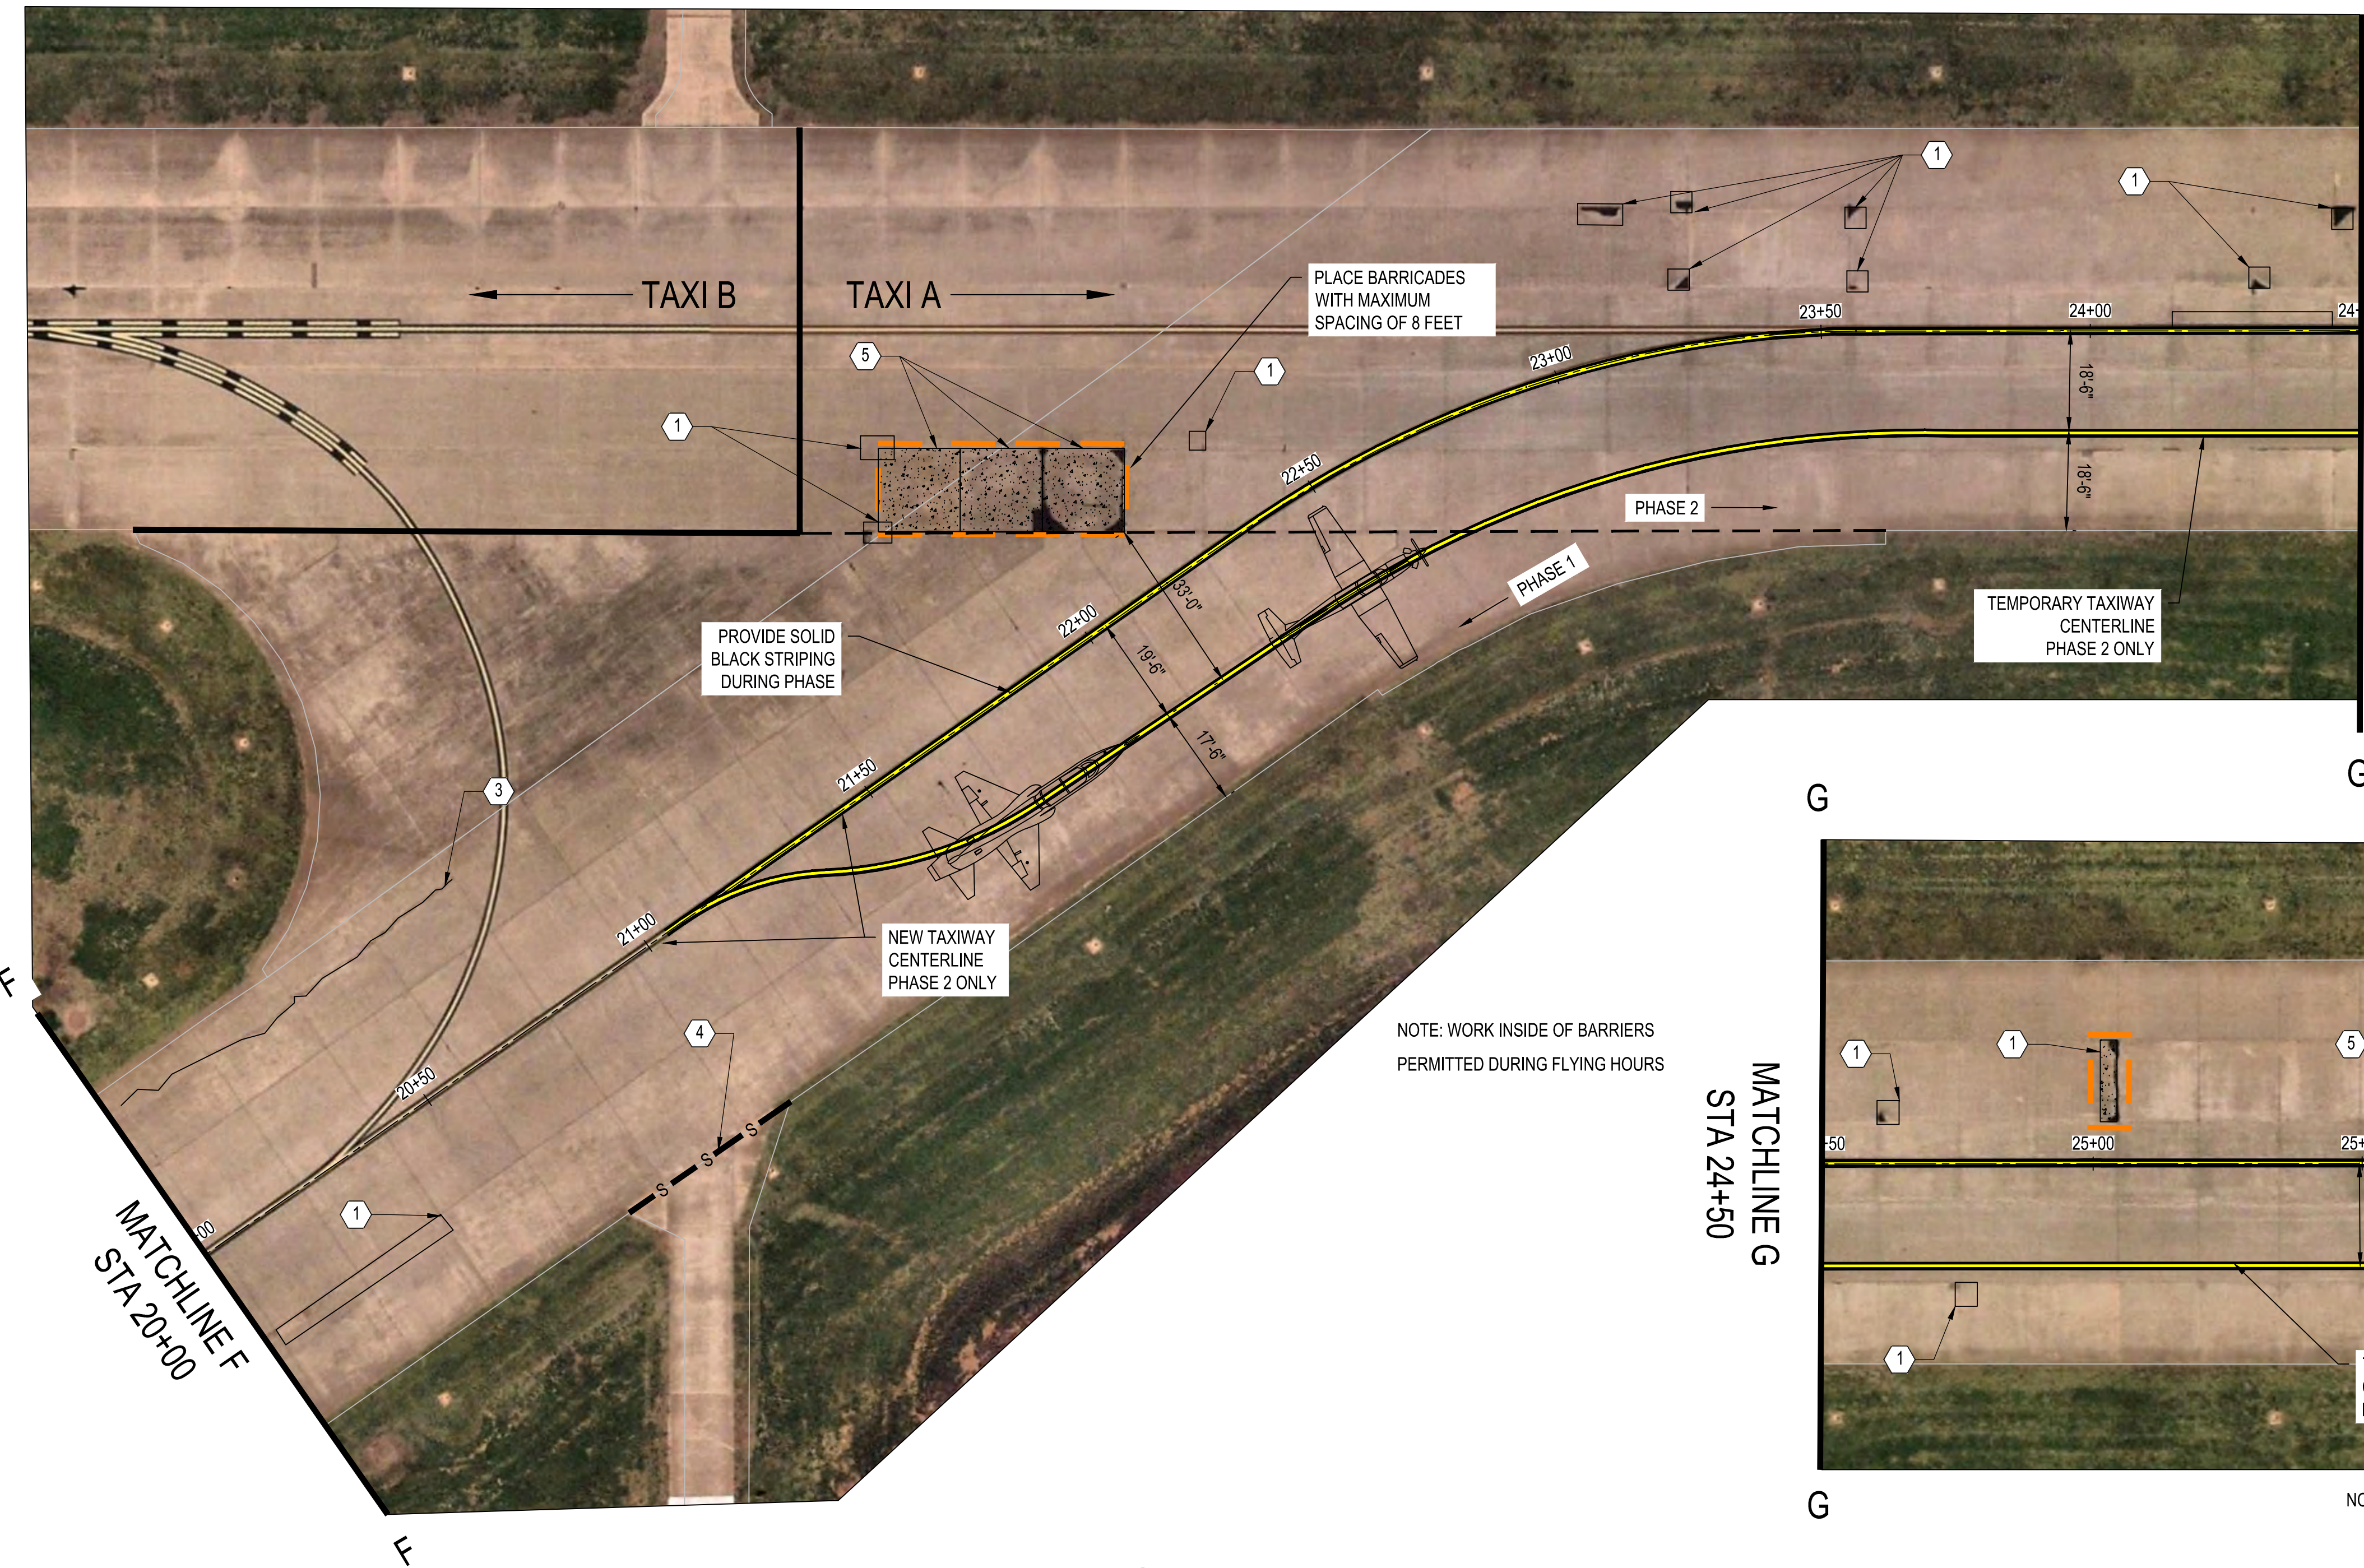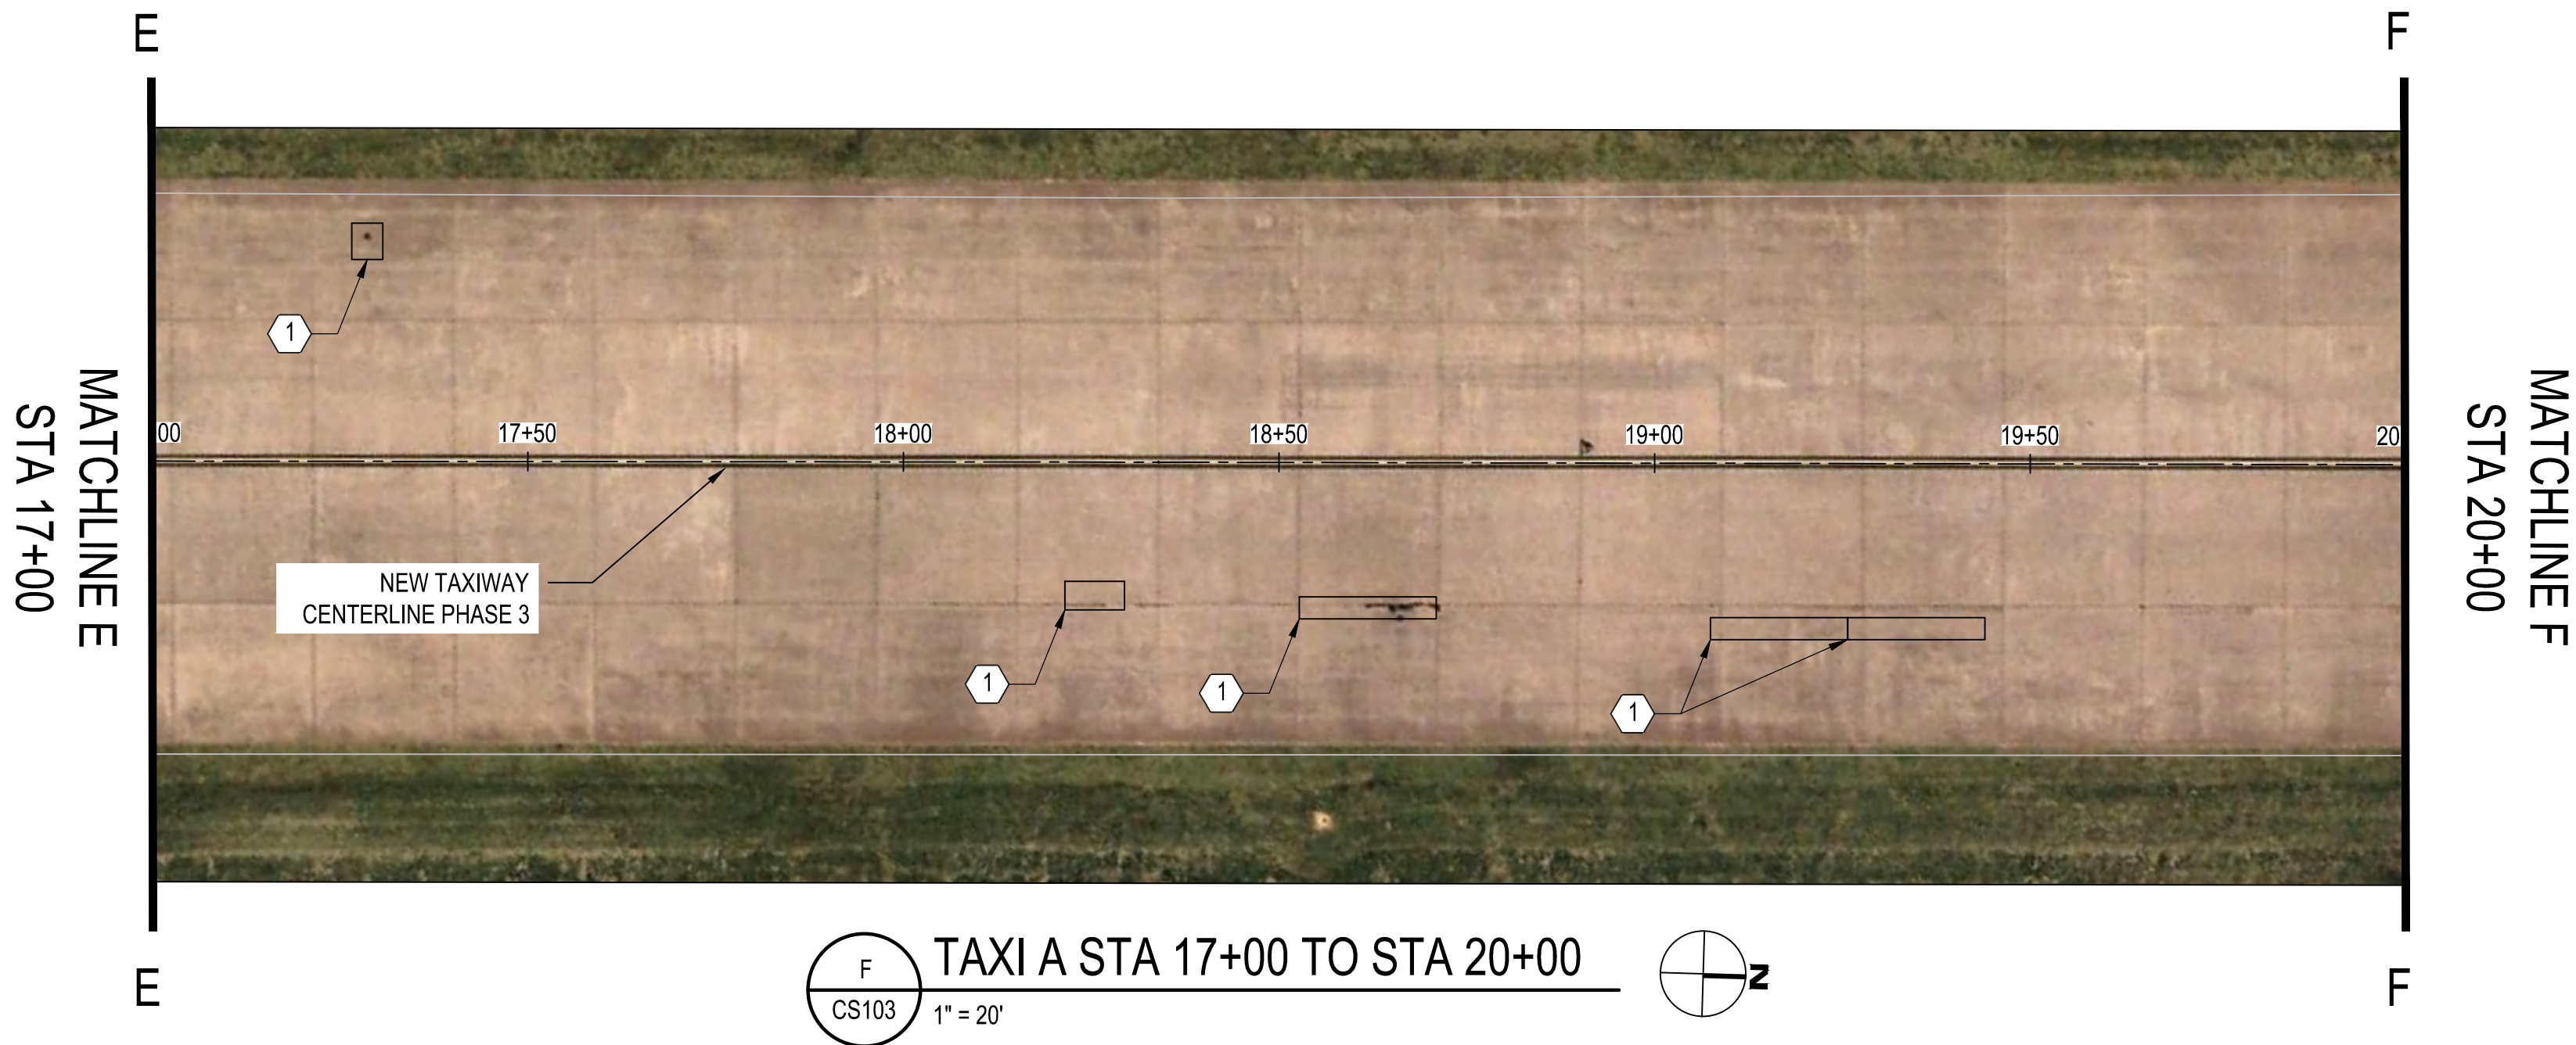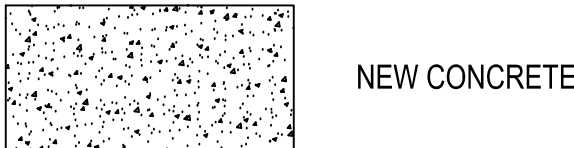



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JJJ
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A



SITE PLAN (4 OF 6)

CS104

DATE: NOVEMBER 2025



TAXI A STA 27+00 TO STA 31+00
CS104 1" = 20'

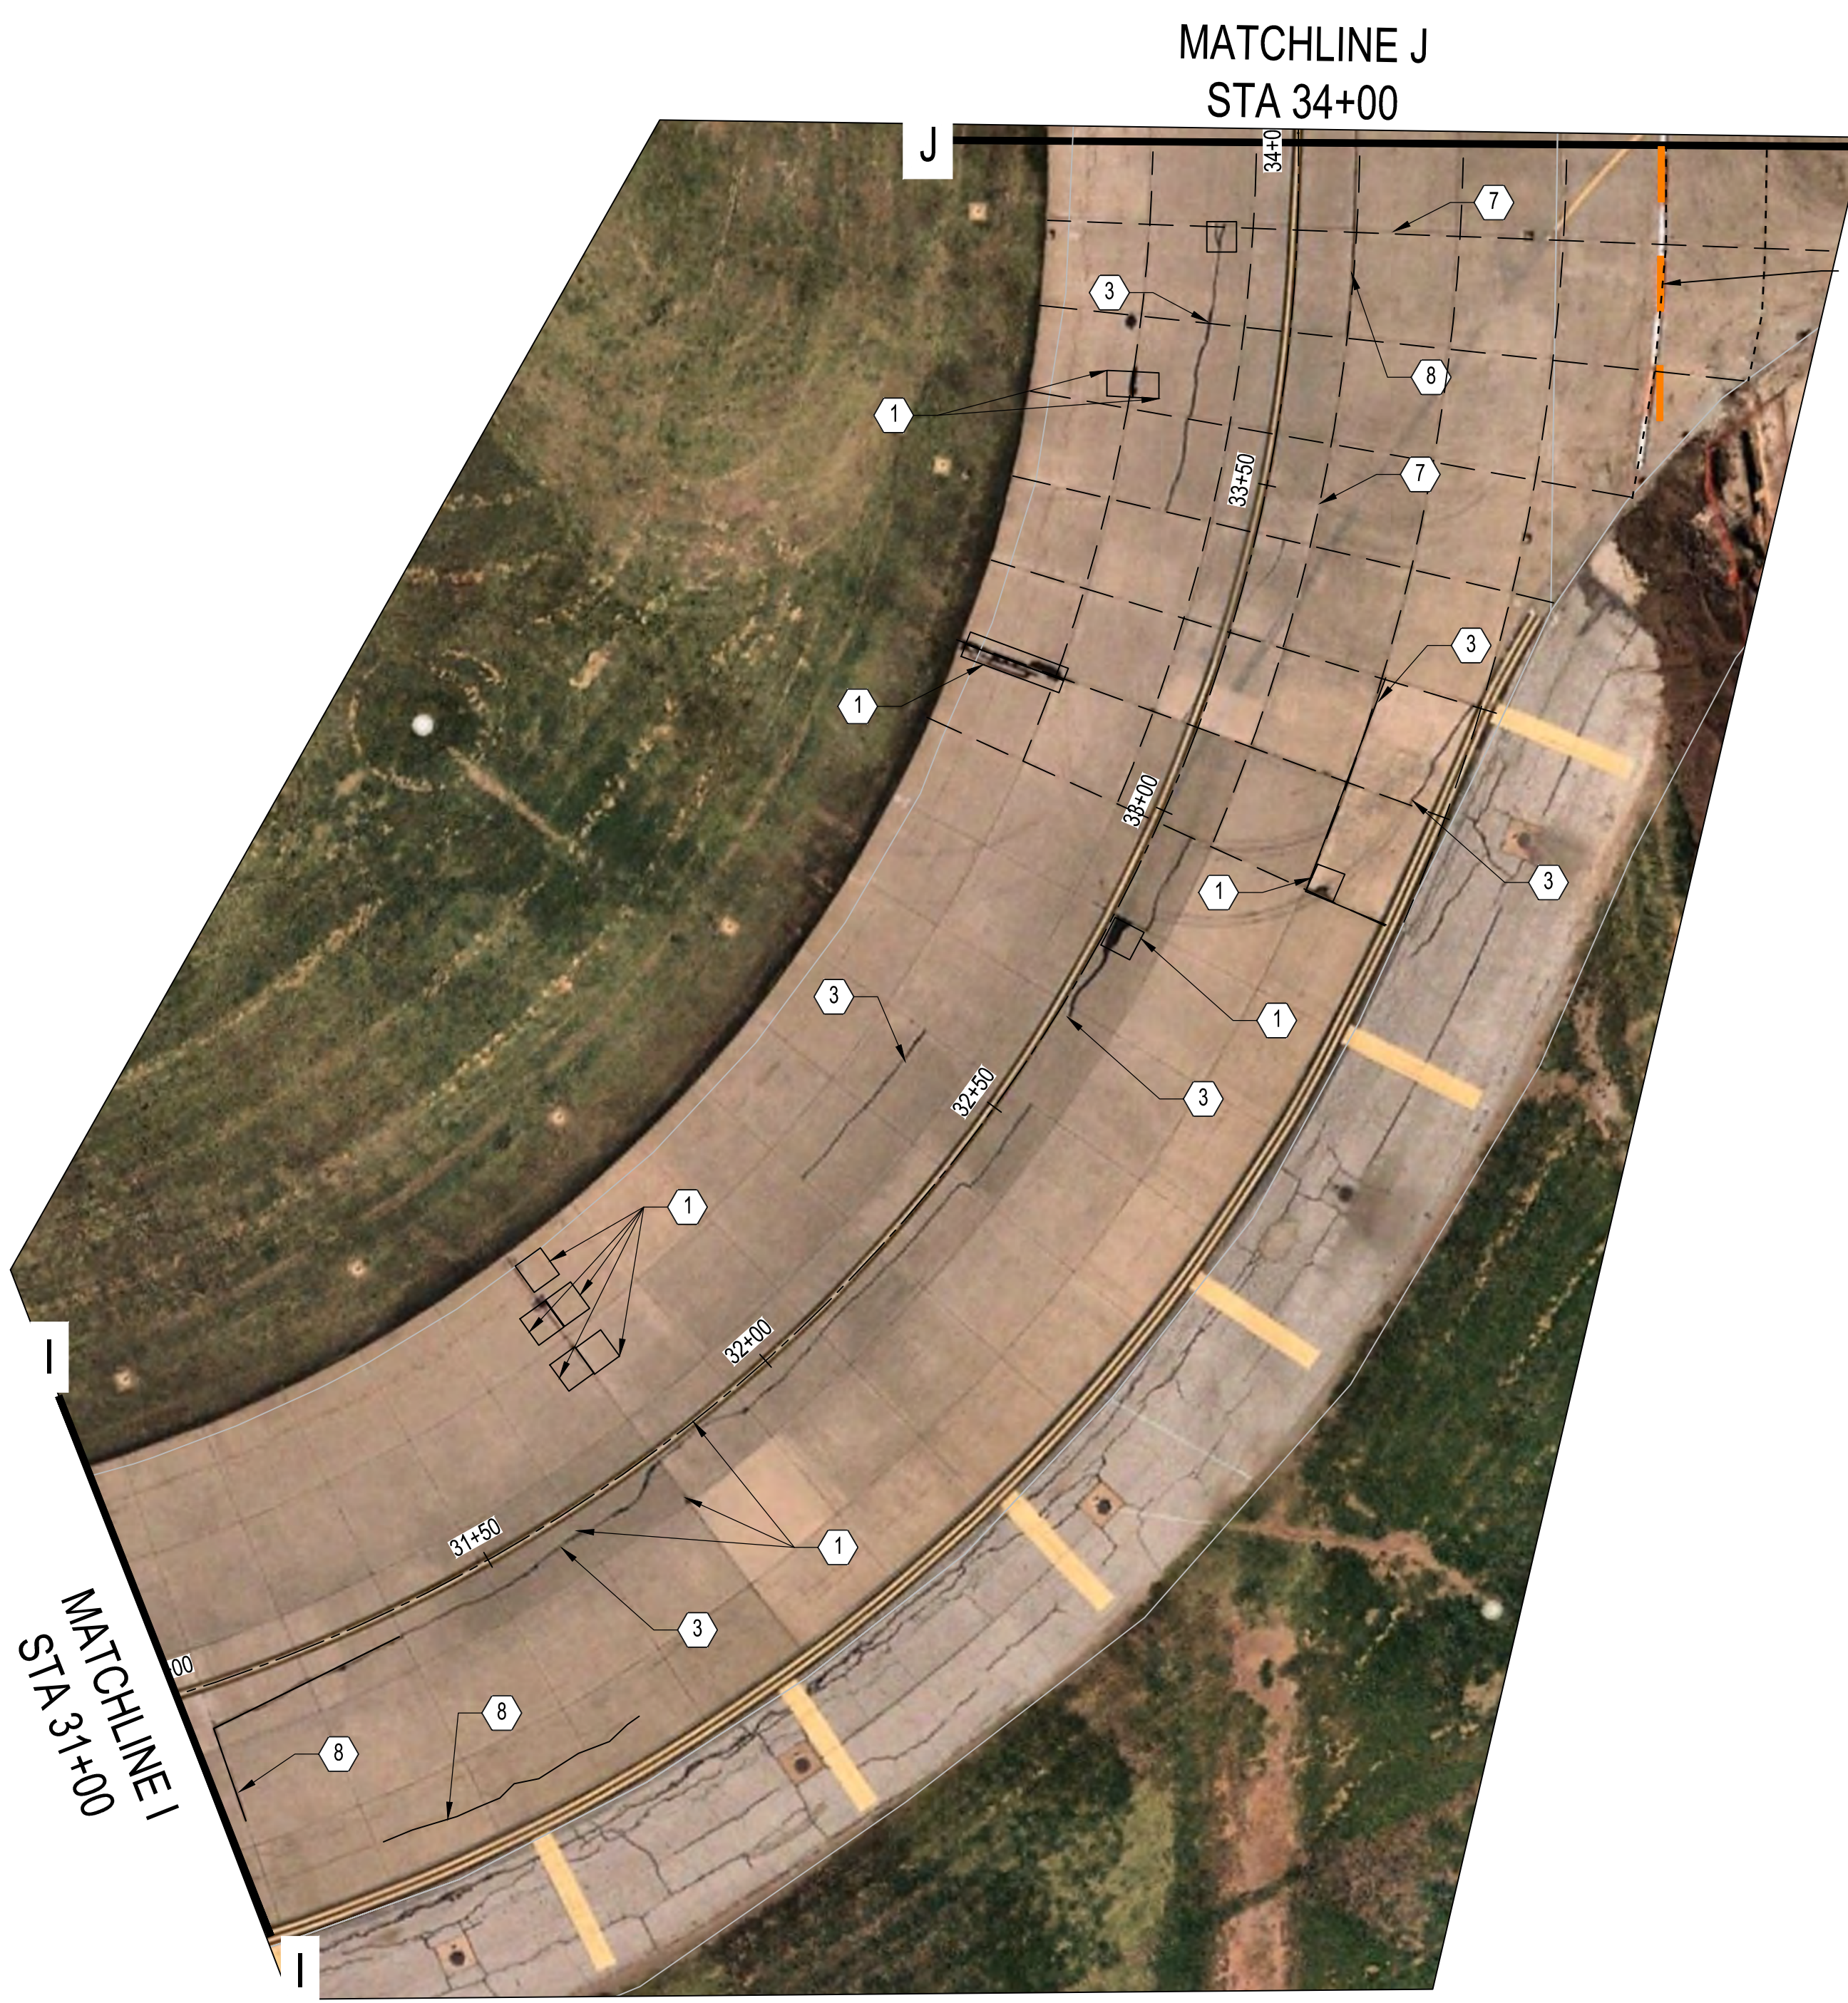

TAXI A STA 31+00 TO STA 34+00
J CS104 1" = 20'



LEGEND

--- CONTRACTION JOINT

KEY NOTES

1. PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
2. FULL DEPTH PATCH. SEE DETAIL G-CP501
3. ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
4. CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
5. DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
6. PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
7. CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
8. REPAIR JOINT SPALLING. SEE DETAIL D-CP501
9. REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501. STA 00+00 TO APPROXIMATELY STA 3+00





UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JLL
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A
SITE PLAN (5 OF 6)


CS105



MATCHLINE J
STA 34+00

MATCHLINE K
37+00

TAXI A STA 34+00 TO STA 37+00
CS105 1" = 20'



LEGEND

- NEW CONCRETE
- CONTRACTION JOINT



KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
- FULL DEPTH PATCH. SEE DETAIL G-CP501
- ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
- CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
- DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
- PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
- CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
- REPAIR JOINT SPALLING. SEE DETAIL D-CP501
- REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501.
STA 00+00 TO APPROXIMATELY STA 3+00

0 20' 40'
SCALE: 1" = 20'




LEGEND

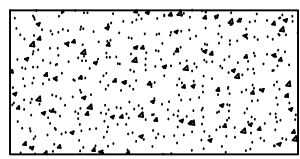-  NEW CONCRETE
-  CONTRACTION JOINT

KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
- FULL DEPTH PATCH. SEE DETAIL G-CP501
- ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
- CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
- DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
- PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
- CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
- REPAIR JOINT SPALLING. SEE DETAIL D-CP501
- REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501.
STA 00+00 TO APPROXIMATELY STA 3+00

 TAXI A STA 37+00 TO STA 38+68±
1" = 20'



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JLL
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

SITE PLAN (6 OF 6)

CS106



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA

ASRC
FEDERAL
Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date



DRAWN BY: JLL
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

ENLARGED SITE PLAN

CS400

- NOTE:
- NO CHANGES IN THE JOINTING PATTERN SHALL BE MADE WITHOUT WRITTEN APPROVAL OF THE DESIGN ENGINEER
 - REFER TO DETAIL H/CP501 JOINT TYPE B.
 - REFER TO DETAIL K/CP501 FOR NON-DOWELED CONTRACTION JOINT, TYPE N.
 - REFER TO DETAIL L/CP501 FOR DOWELED CONSTRUCTION JOINT, TYPE D.
 - RECORDS INDICATE 10.25" THICK PAVEMENTS AND 12" THICK BASE.

- DEMOLISH PAVEMENT AND CONCRETE BASE
- PROVIDE LIGHTED BARRICADES. SEE DETAIL A / GI002
- NEW REINFORCED CONCRETE



FULL DEPTH SAW CUT, ALIGN AND MATCH CORNERS.

KEY NOTES

- PARTIAL DEPTH PATCH. SEE DETAIL D-CP501
- FULL DEPTH PATCH. SEE DETAIL G-CP501
- ROUTE AND SEAL CRACK. SEE DETAIL C-CP501
- CUT NEW SPECIAL EXPANSION JOINT, TYPE E. SEE DETAIL E-CP501
- DEMOLISH AND REPLACE PANEL. SEE DETAIL F-CP501 & G-CP501
- PANEL SEPARATION REPAIR, TYPE E. SEE DETAIL A-CP501
- CUT NEW CONTRACTION JOINT. SEE DETAIL B-CP501
- REPAIR JOINT SPALLING. SEE DETAIL D-CP501
- REMOVE GRASS / SOIL THATCH ALONG EDGE OF TAXIWAY. SEE DETAIL I-CP501.
- STA 00+00 TO APPROXIMATELY STA 3+00

0 10' 20'
SCALE: 1" = 10'

A TAXI A ENLARGED SITE PLAN
CS400 1" = 10'

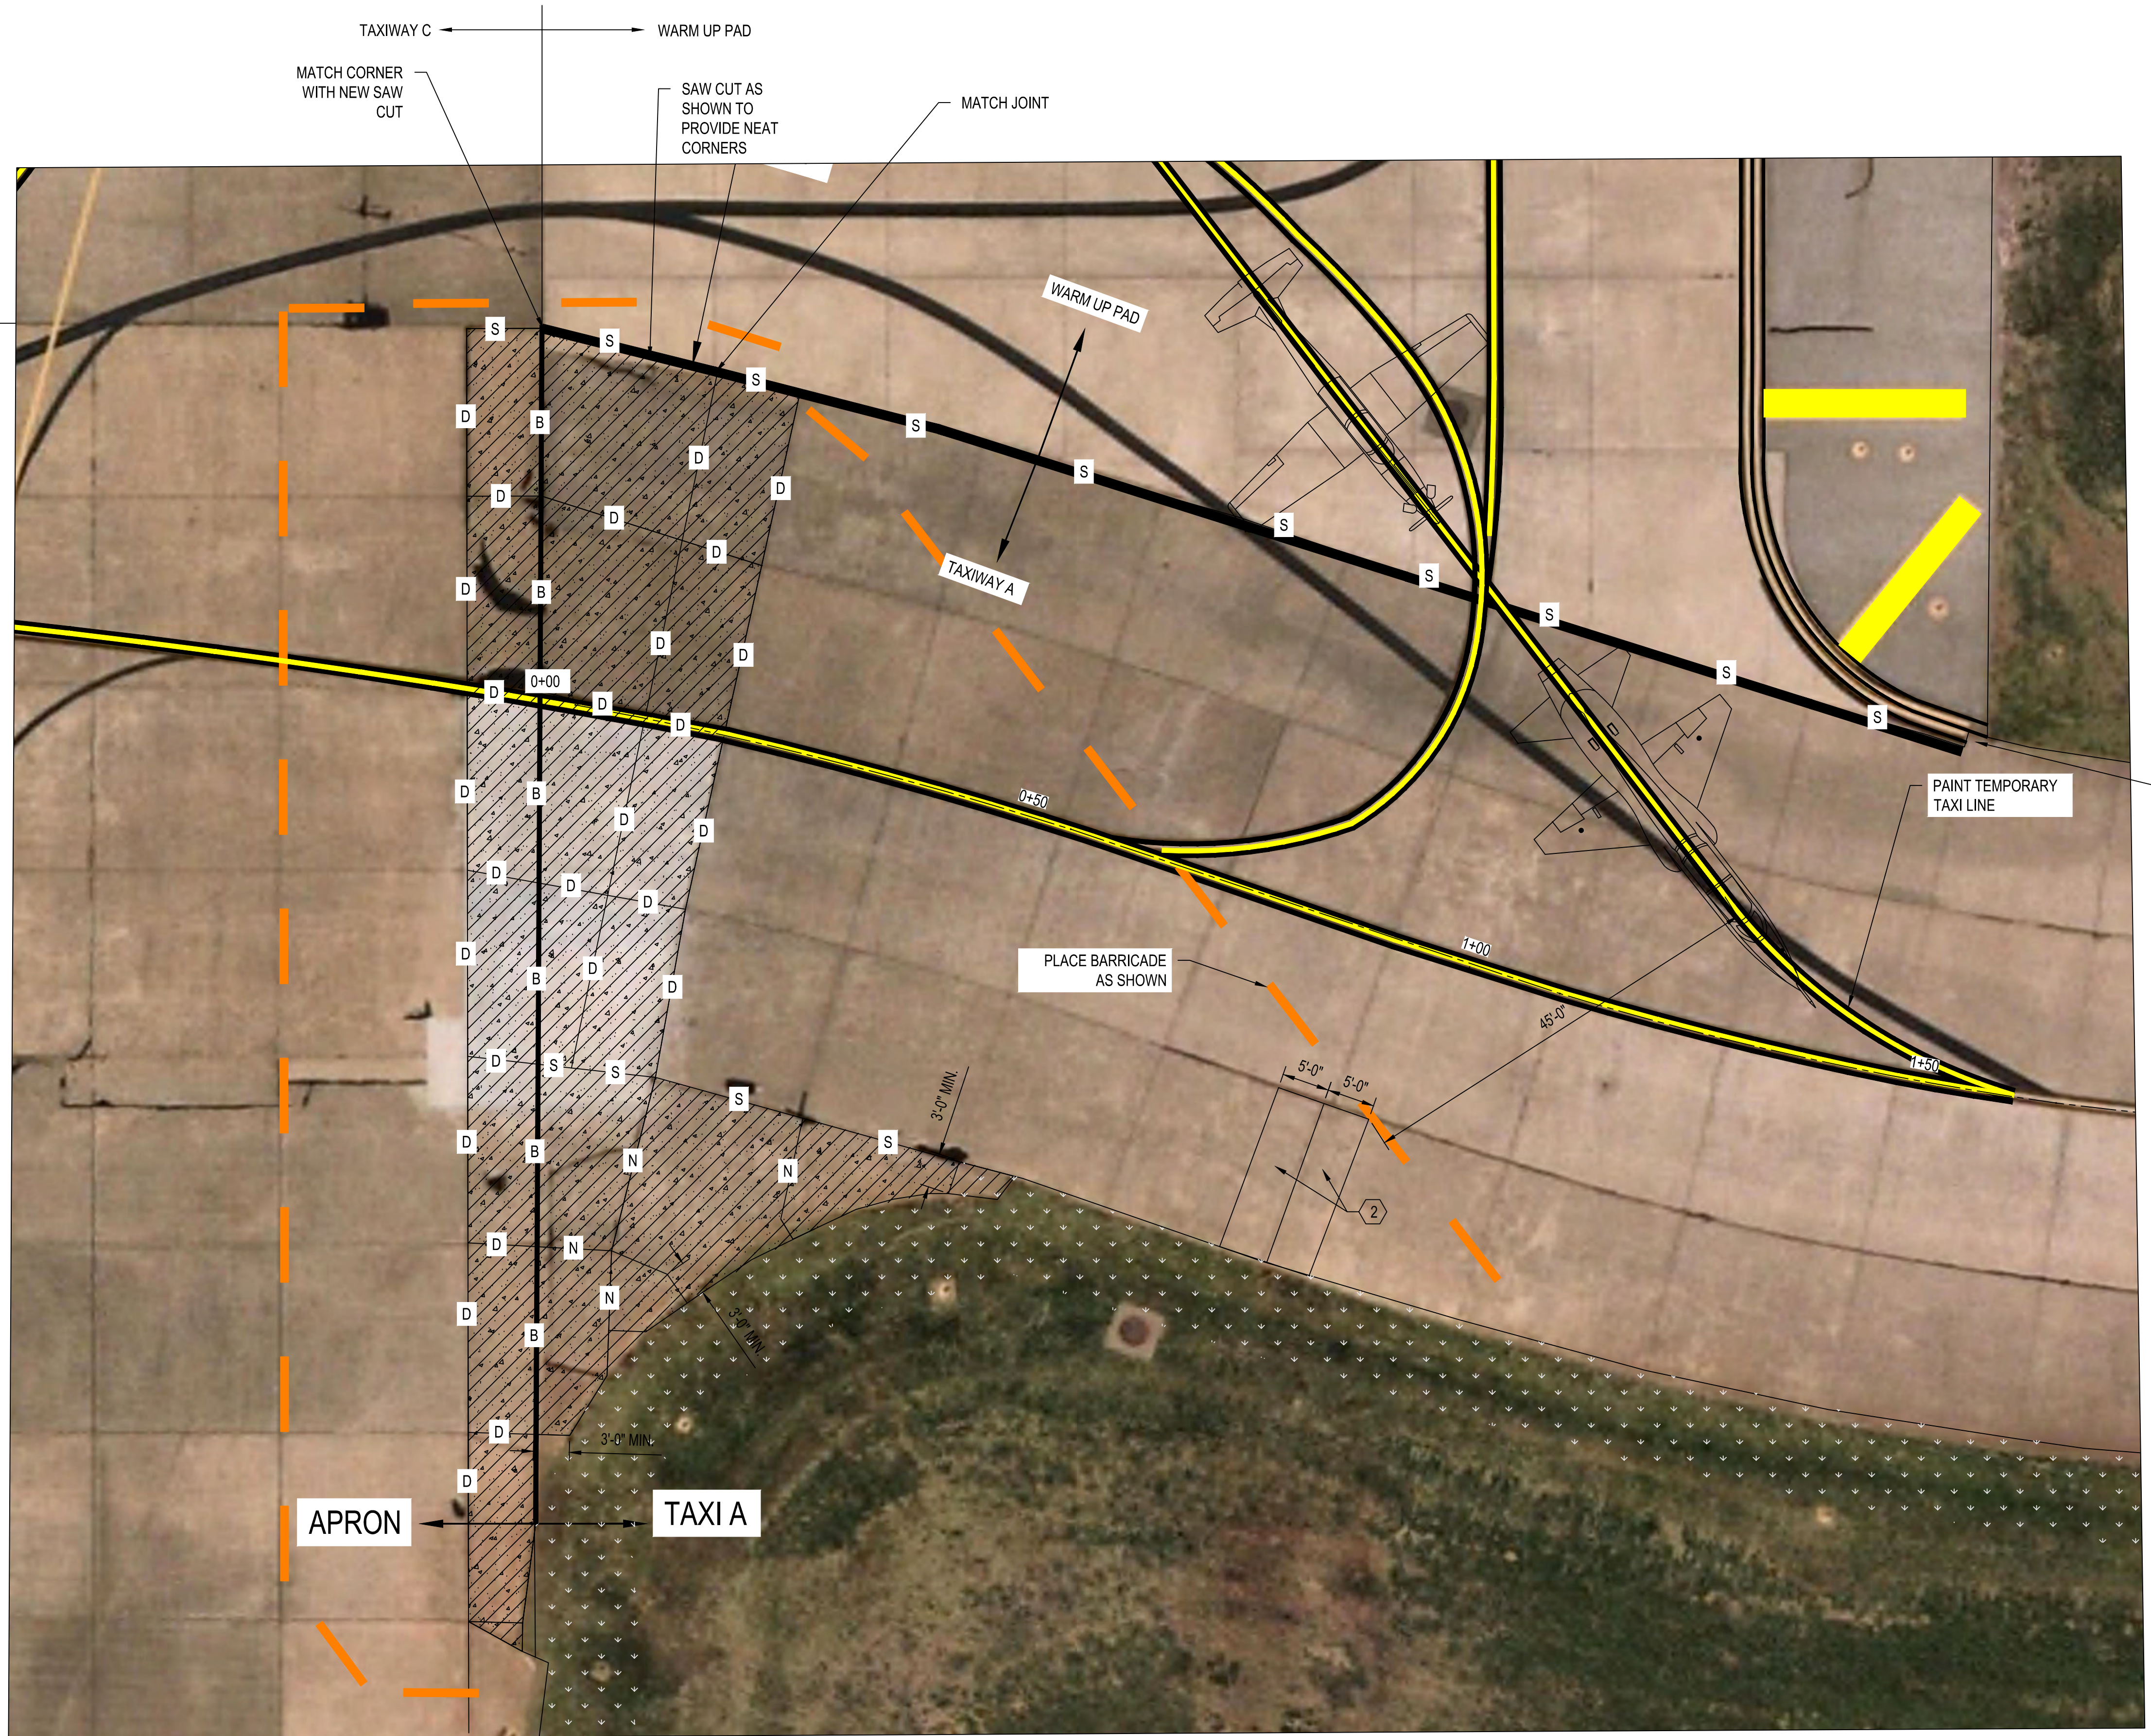



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date




DRAWN BY: JJJL
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

TEMPORARY STRIPING PLAN

CS401

DATE: NOVEMBER 2025

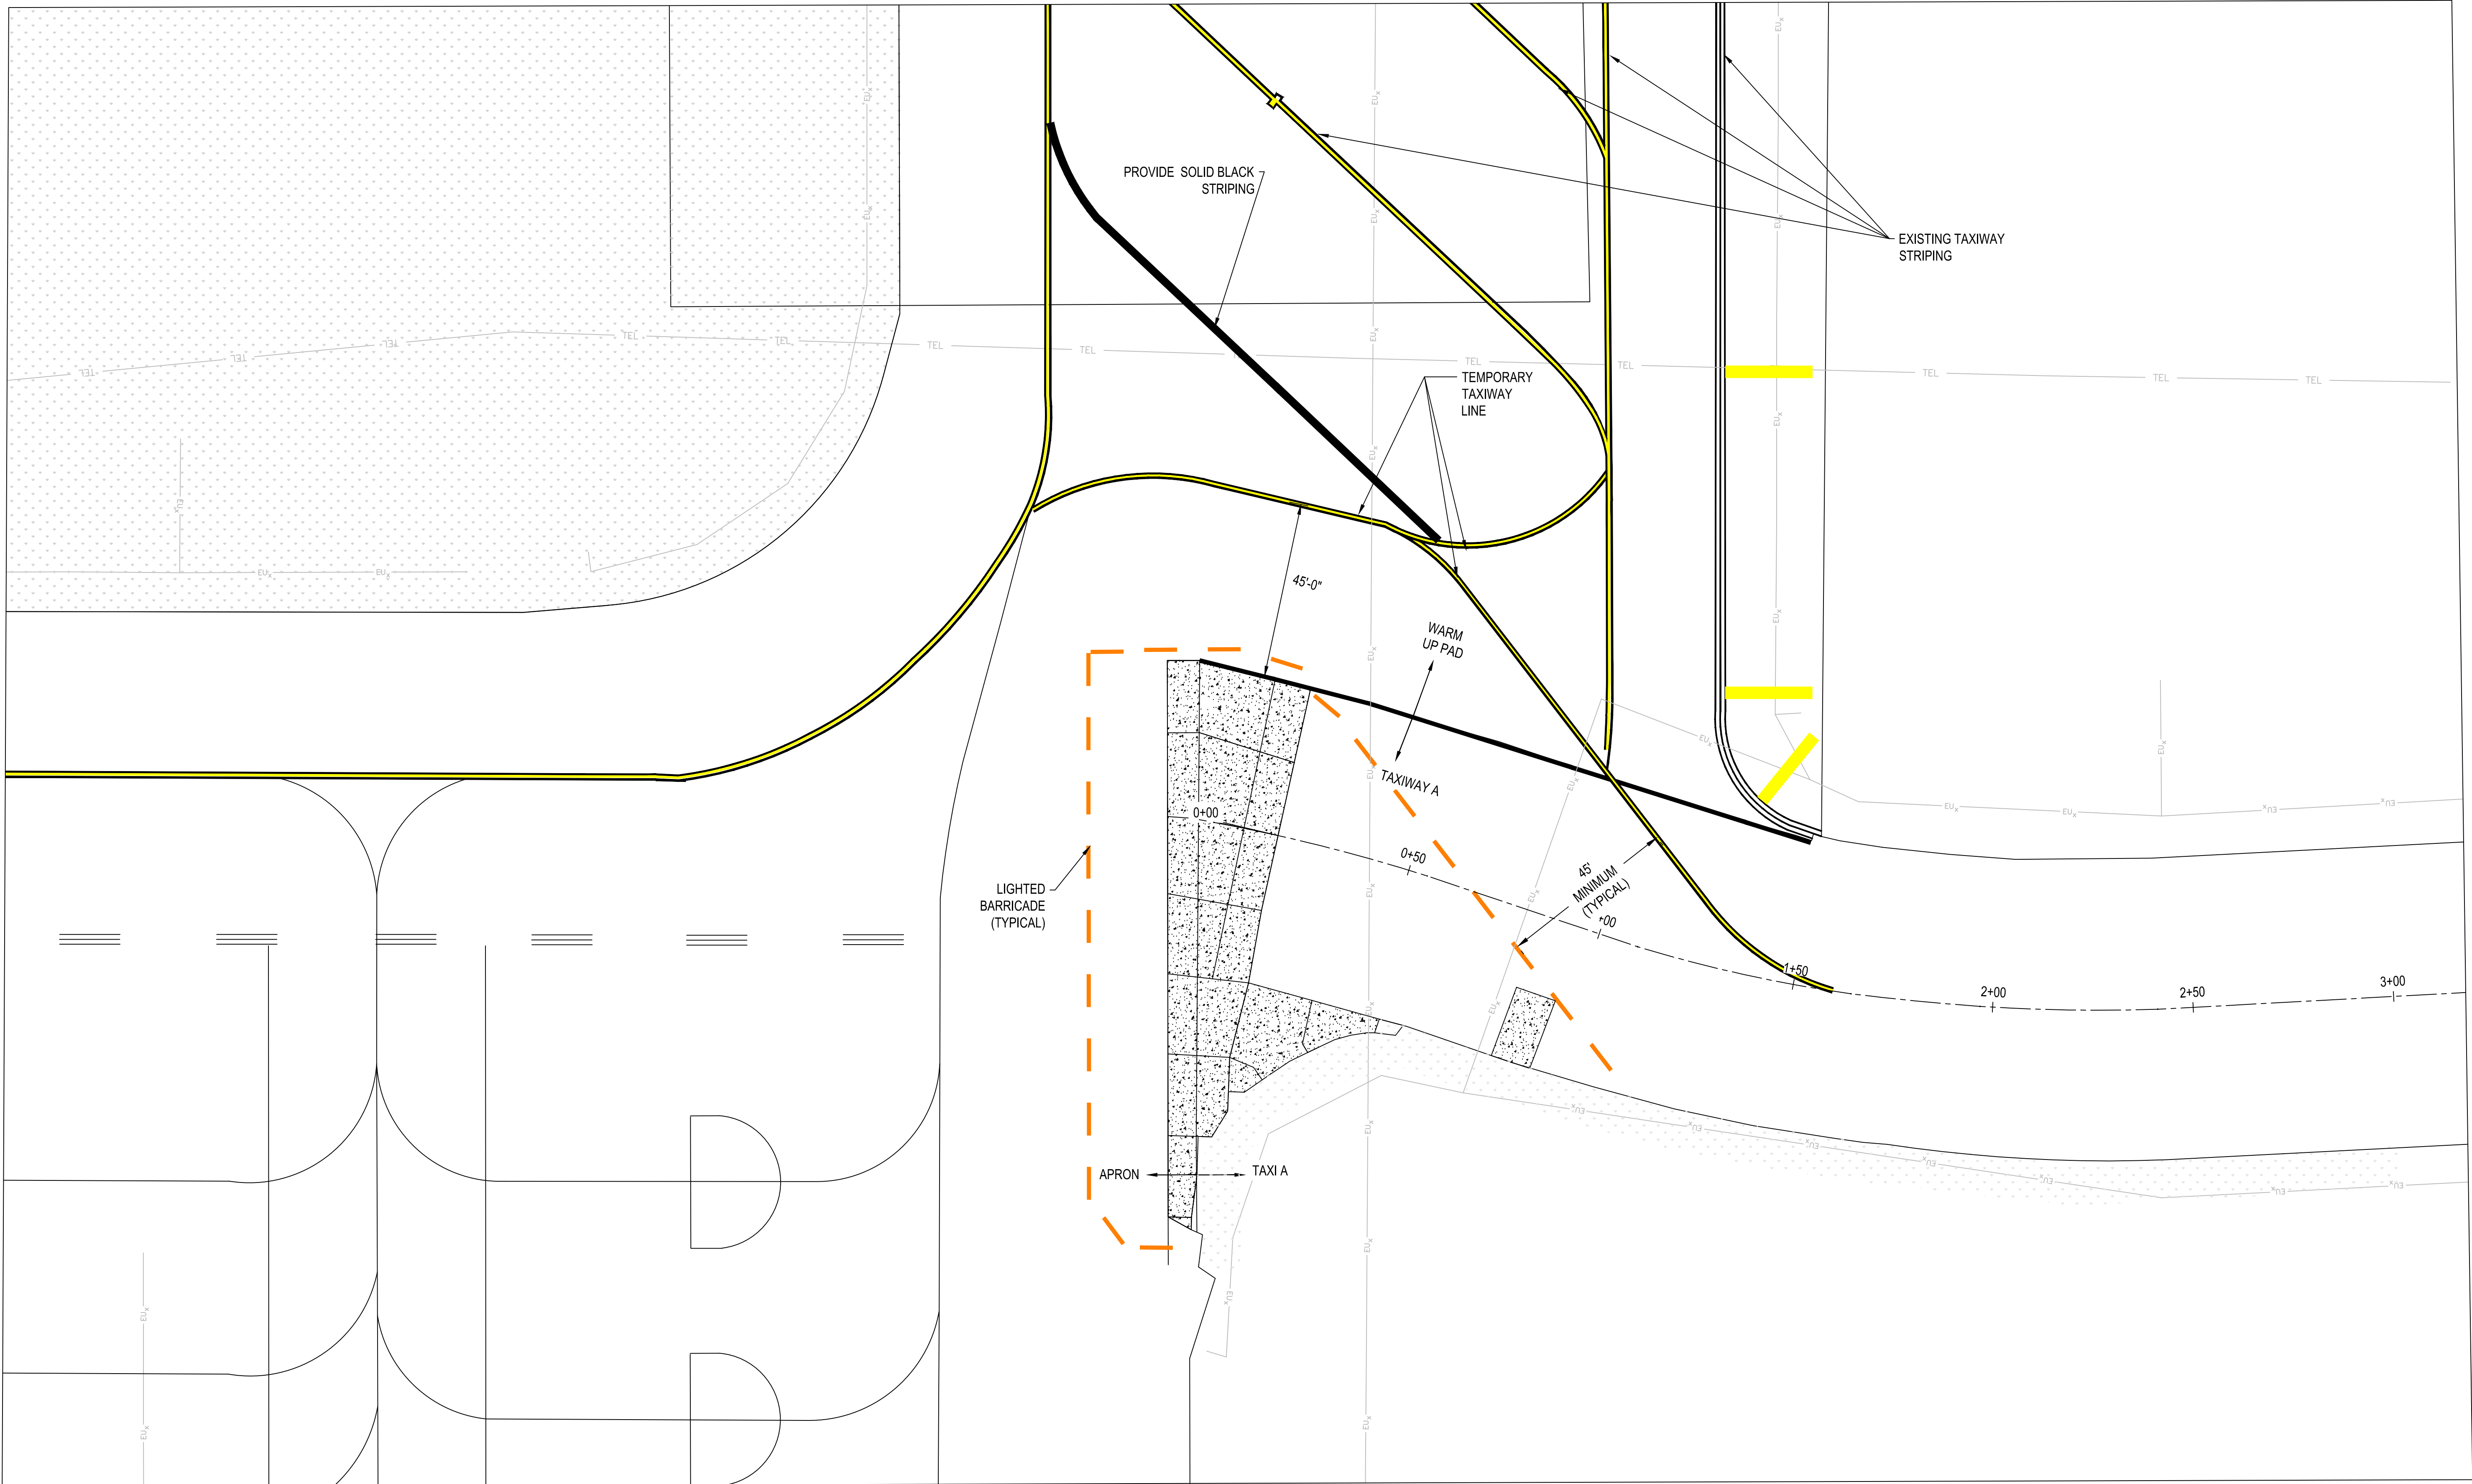

- NEW CONCRETE
- PROVIDE LIGHTED BARRICADES. SEE DETAIL A / GI002
- PAINT TEMPORARY TAXILINE SEE DETAIL C/CP502



SCALE: 1" = 20'

A TEMPORARY STRIPING PLAN
CS401 1" = 20'



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date




DRAWN BY: JIL
CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

FINAL STRIPING PLAN

CS402

DATE: NOVEMBER 2025

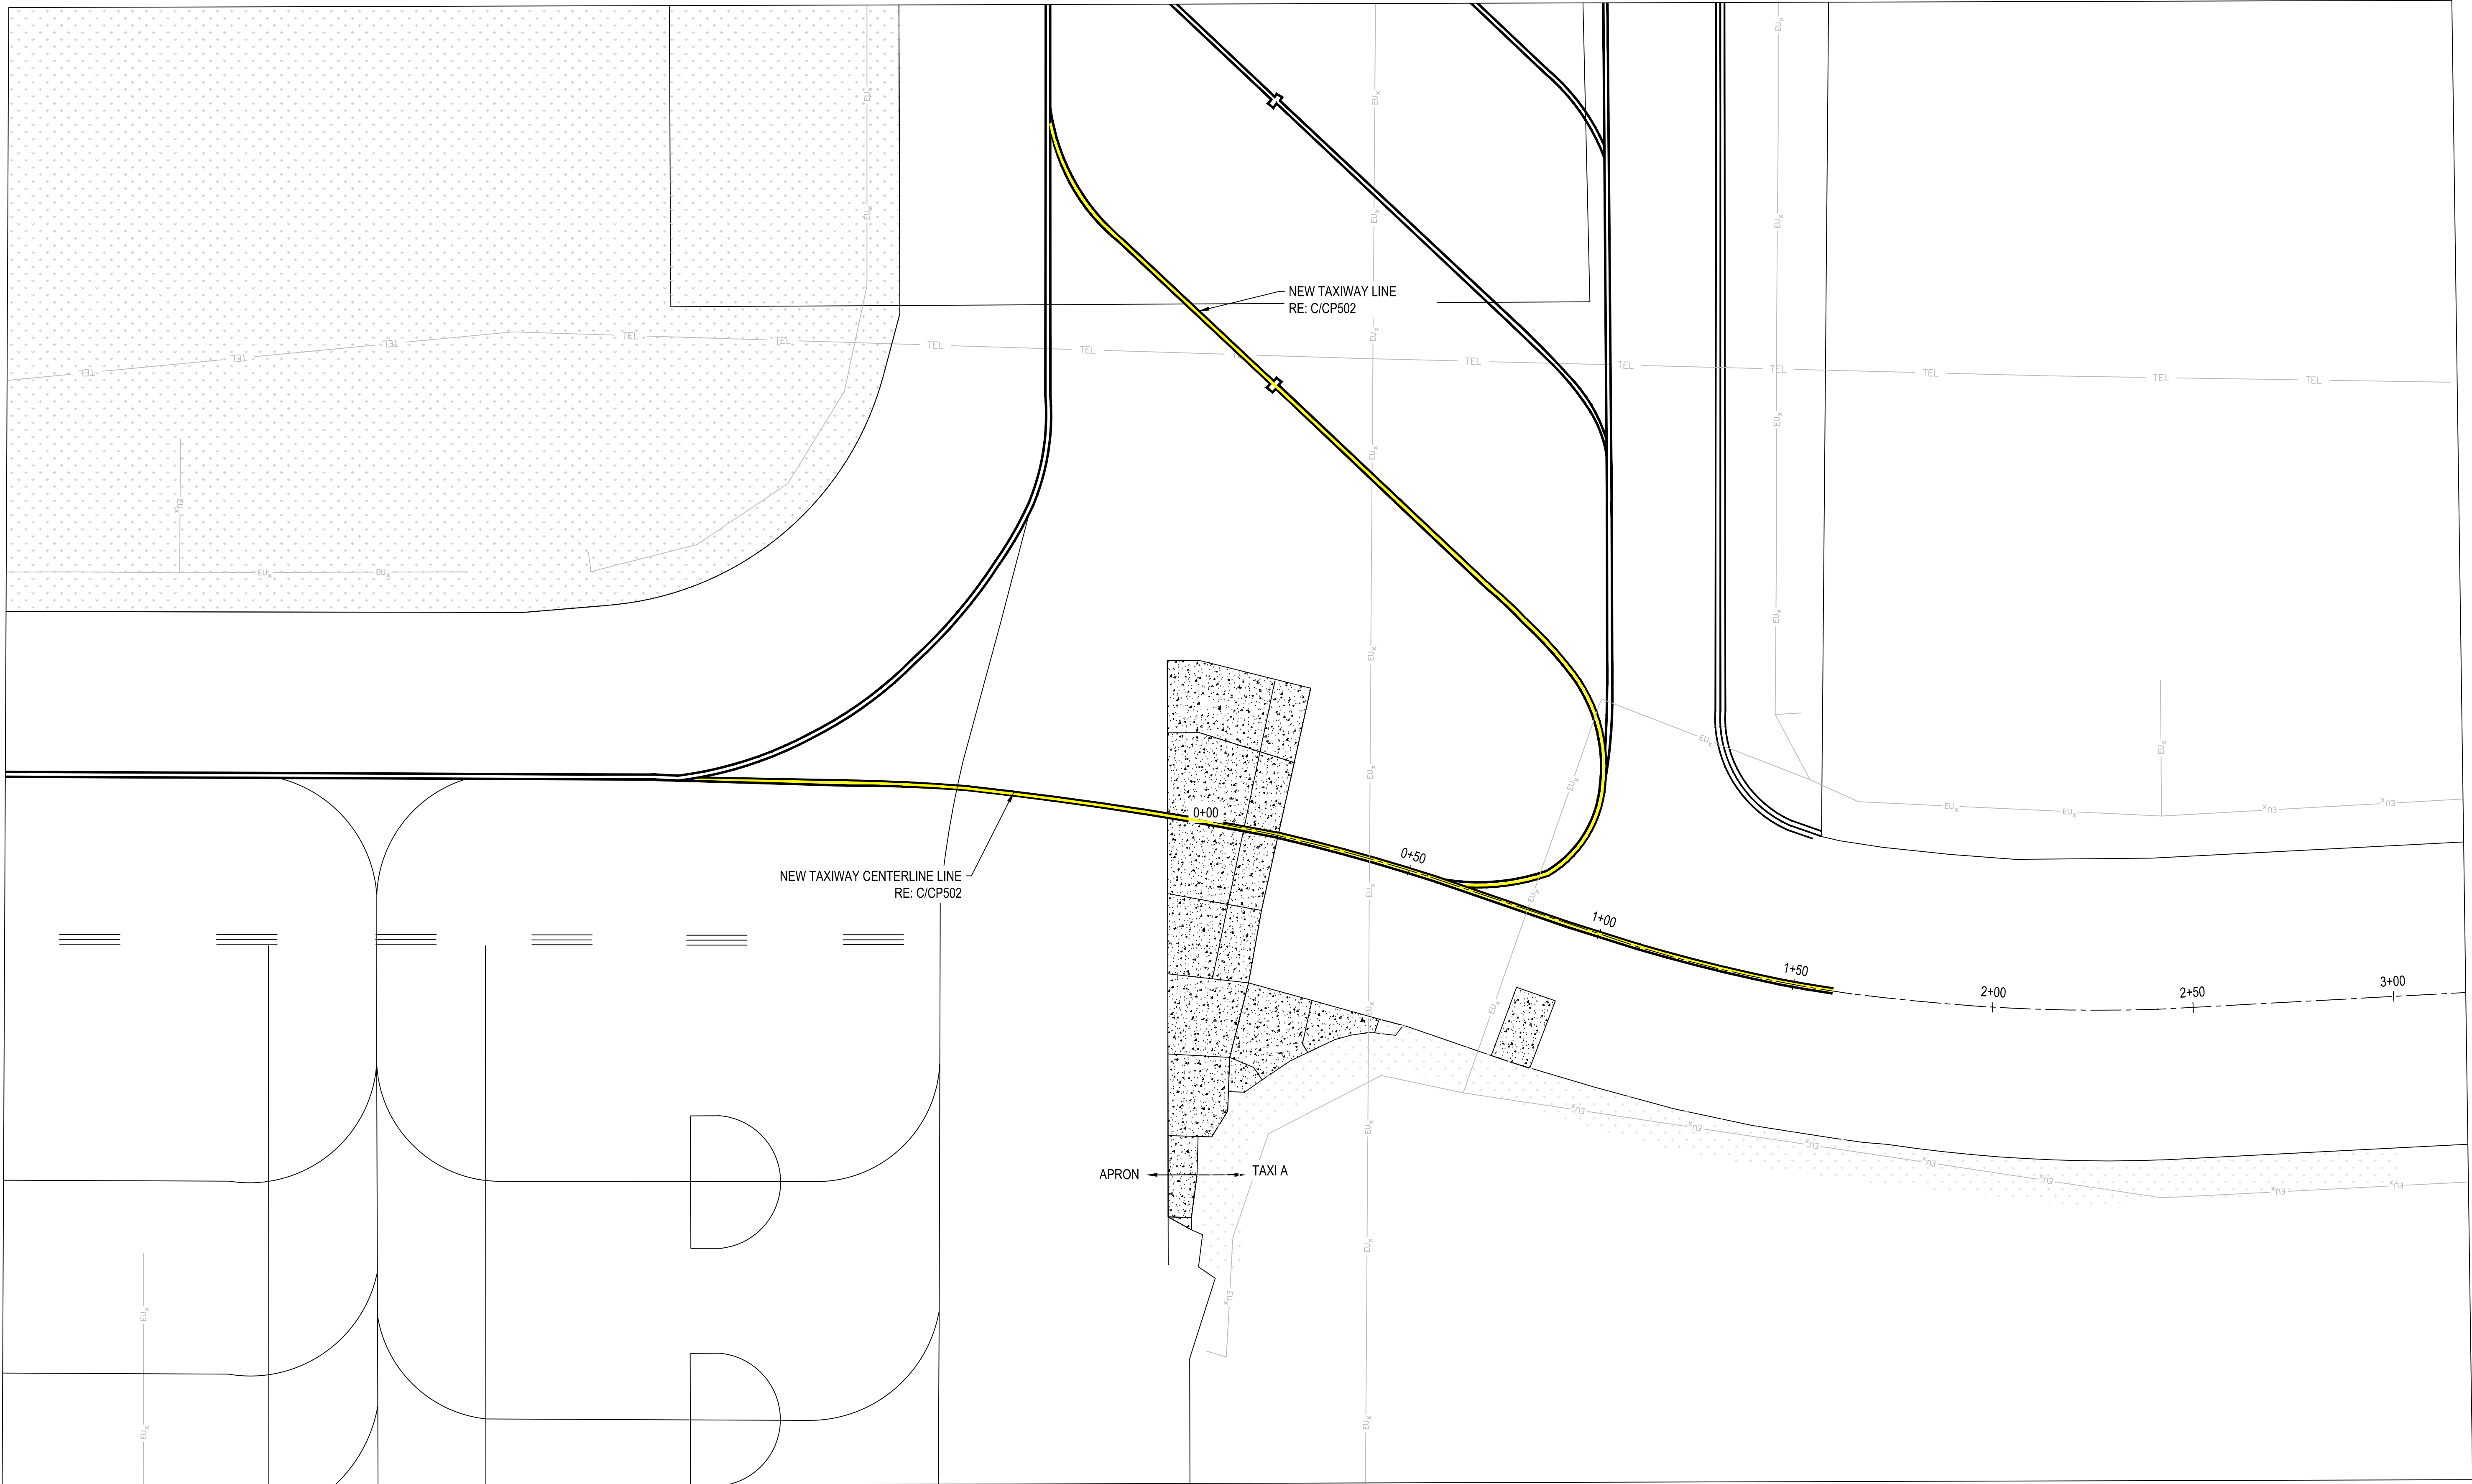

A
CS401
FINAL STRIPING PLAN
1" = 20'

- NEW CONCRETE
- PROVIDE LIGHTED BARRICADES. SEE DETAIL A / G1002
- PAINT TEMPORARY TAXILINE SEE DETAIL C/CP502

0 20' 40'
SCALE: 1" = 20'

PROJ TITLE: REPAIR AIRFIELD PAVEMENTS TAXIWAY A



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



Revision Number	Date	Description



DRAWN BY: JLL CHECKED BY: CWT
PROJECT NO.: XTLP 24-1011
DATE: NOVEMBER 2025
DESIGN STAGE: FOR CONSTRUCTION


REPAIR AIRFIELD PAVEMENTS TAXIWAY A

CONCRETE PAVEMENT REPAIR DETAILS

CP501

CONSTRUCTION JOINT, CONTRACTION JOINT OR CRACK JOINT DIMENSION TABLE FOR SILICONE SEALANT				
JOINT WIDTH ①	DEPTH OF RESERVOIR ②	SEALANT RECESS DEPTH ③	SEALANT THICKNESS ④	BACKER ROD DIAMETER ⑤
3/8"	1 1/4"	1/8" TO 1/4"	3/16"	1/2"
1/2"	1 3/4"	1/8" TO 1/4"	1/4"	5/8"
3/4"	1 3/4"	1/8" TO 1/4"	3/8"	7/8"
7/8"	1 3/4"	1/8" TO 1/4"	7/16"	1"
1"	2"	1/8" TO 1/4"	1/2"	1 1/8"
OVER 1"	OVER 2"	1/8" TO 1/4"	1/2"	1 1/4"


NOTE: REFER TO SPECIFICATIONS FOR FULL REQUIREMENTS.

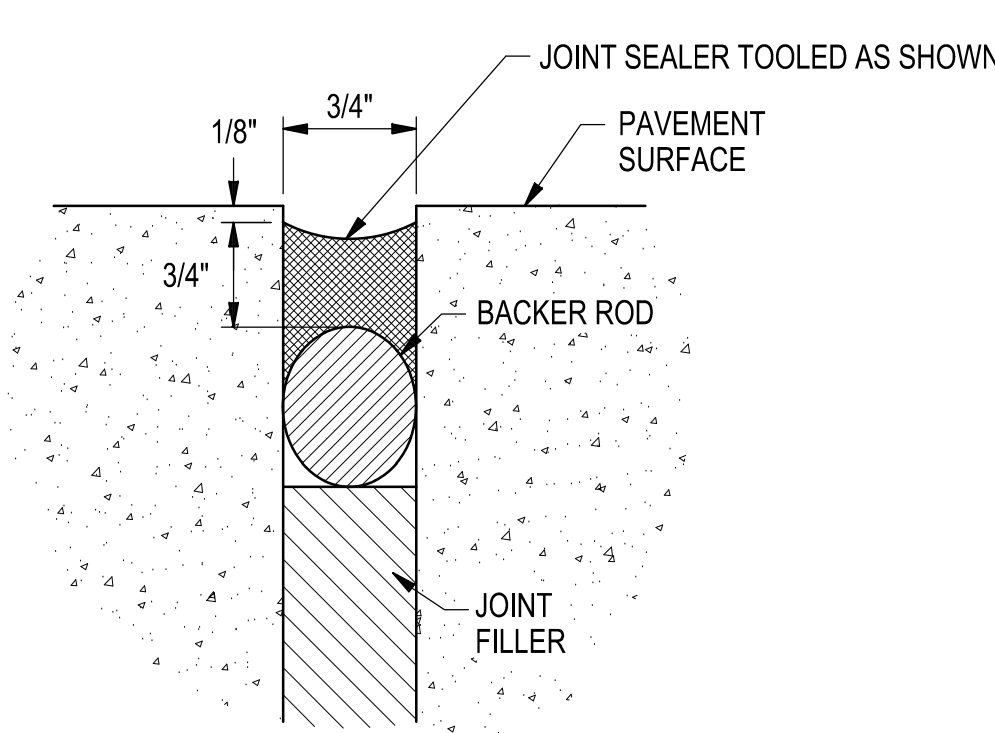

REFER TO SPECIFICATION SECTION
32 01 19.61 FOR FULL REQUIREMENTS


EXPANSION JOINT AND SEALANT DETAIL - TYPE E

A
CP501
NTS

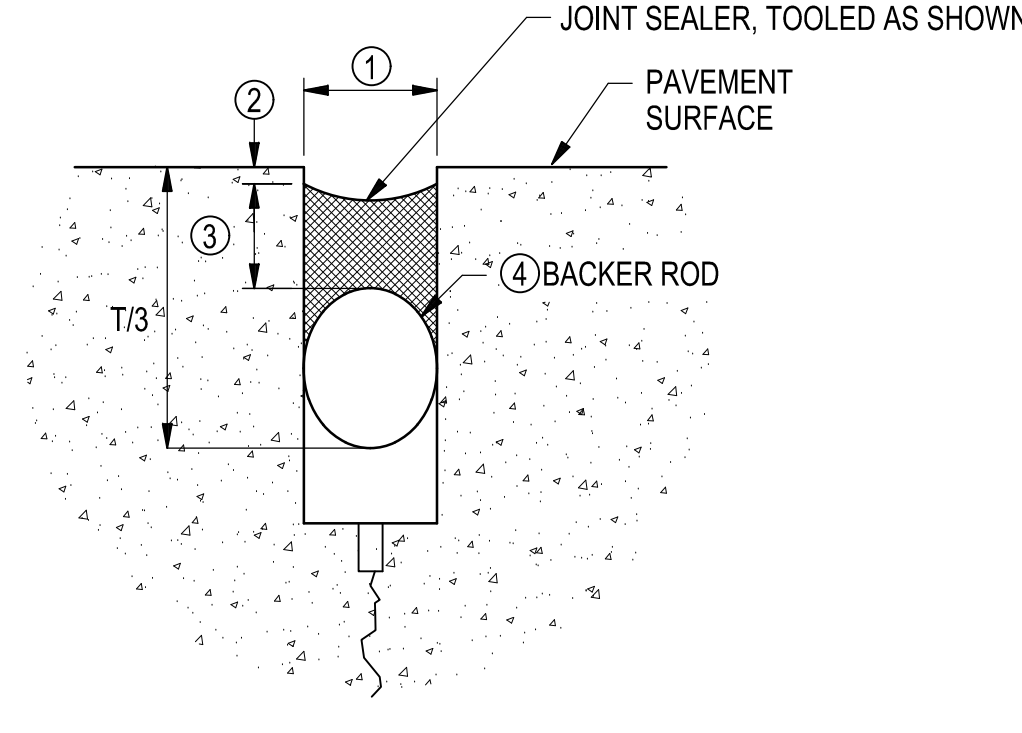

TYPICAL JOINT RE-SEALING NOTES:




1. REMOVE ALL COMPRESSION SEAL, ALL LOOSE AGGREGATE, VEGETATION, OLD SEALANT BACK TO SOUND PAVEMENT.
2. WATER BLAST JOINT WALLS AND BOTTOM.
3. AIR BLOW RESERVOIR TO REMOVE DEBRIS AND DRY JOINT.
4. PRIME JOINT RESERVOIR WALLS AS RECOMMENDED BY SEALANT MANUFACTURER.
5. INSTALL NEW SEALANT MATERIAL AND TOOL.
6. REFER TO SPECIFICATION SECTION 32 01 19.61 FOR FULL REQUIREMENTS.

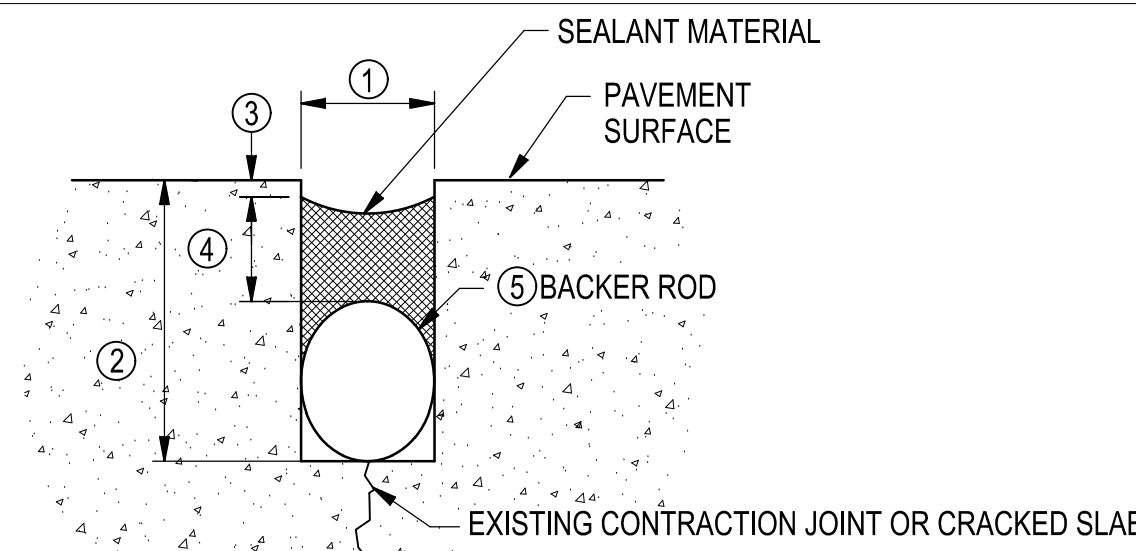


TYPICAL P.C.C. CRACK SEALING NOTES:

1. REMOVE ALL LOOSE AGGREGATE, VEGETATION, OLD SEALANT BACK TO SOUND PAVEMENT.
2. ROUTE/SAW CRACKS TO THE DEPTH SHOWN, OR AS DIRECTED BY THE ENGINEER, BASED ON FIELD CONDITION.
3. CLEAN RESERVOIR BY WATER BLASTING AND AIR-BLASTING.
4. INSTALL BACKER ROD. BACKER ROD DIAMETER SHALL BE AT LEAST 25% LARGER THAN THE SEALANT RESERVOIR WIDTH; AND/OR PER MANUFACTURER'S RECOMMENDATION.
5. INSTALL NEW SEALANT MATERIAL TYPICAL SHAPE FACTOR OF SILICONE SEALANT IS 0.5; AND/OR PER MANUFACTURE'S RECOMMENDATION.
6. REFER TO SPECIFICATION SECTION 32 01 19.61 FOR FULL REQUIREMENTS.


B CP501 TYPICAL PCC JOINT RESEALING DETAIL - TYPE T

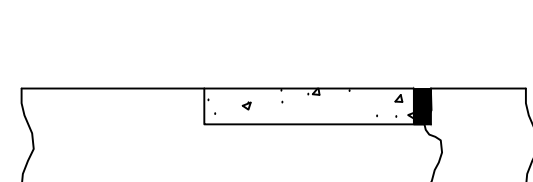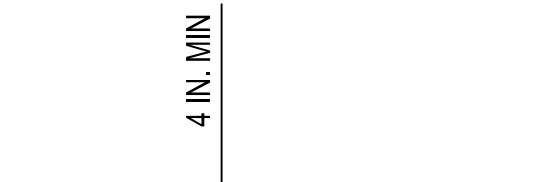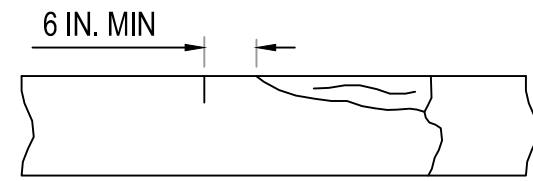

C CP501 TYPICAL PCC CRACK SEALING DETAIL

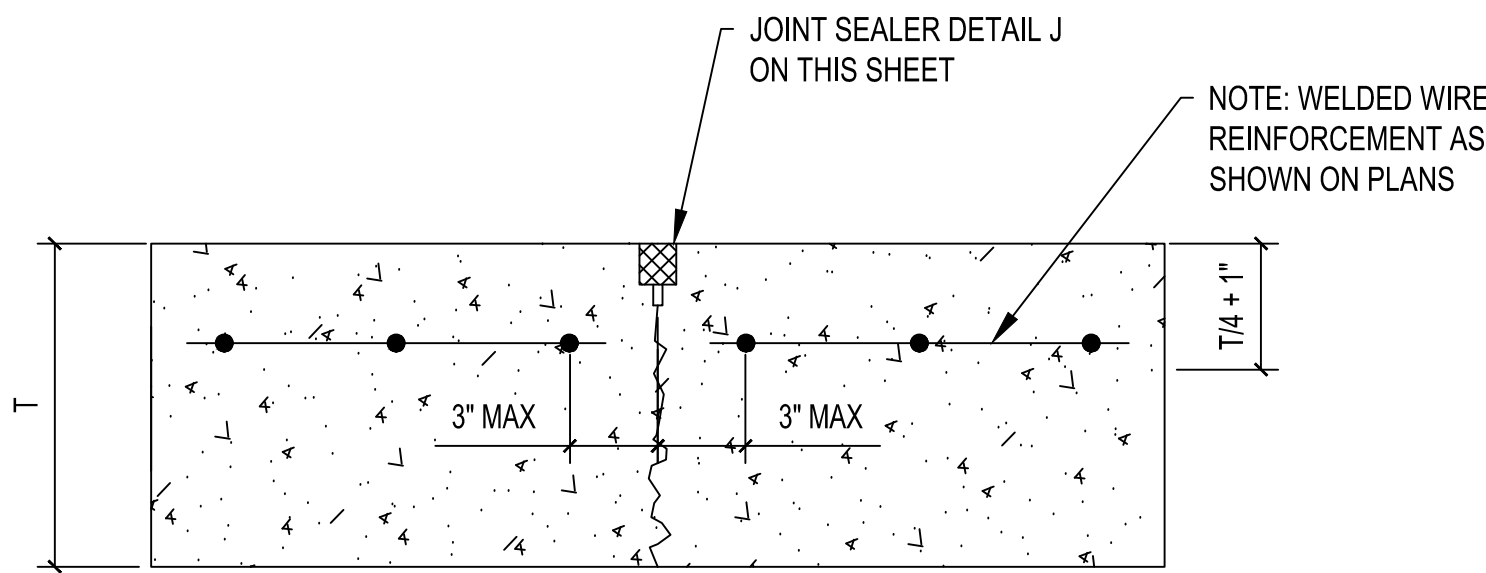


K CP501 NON-DOWELED CONTRACTION JOINT - TYPE N

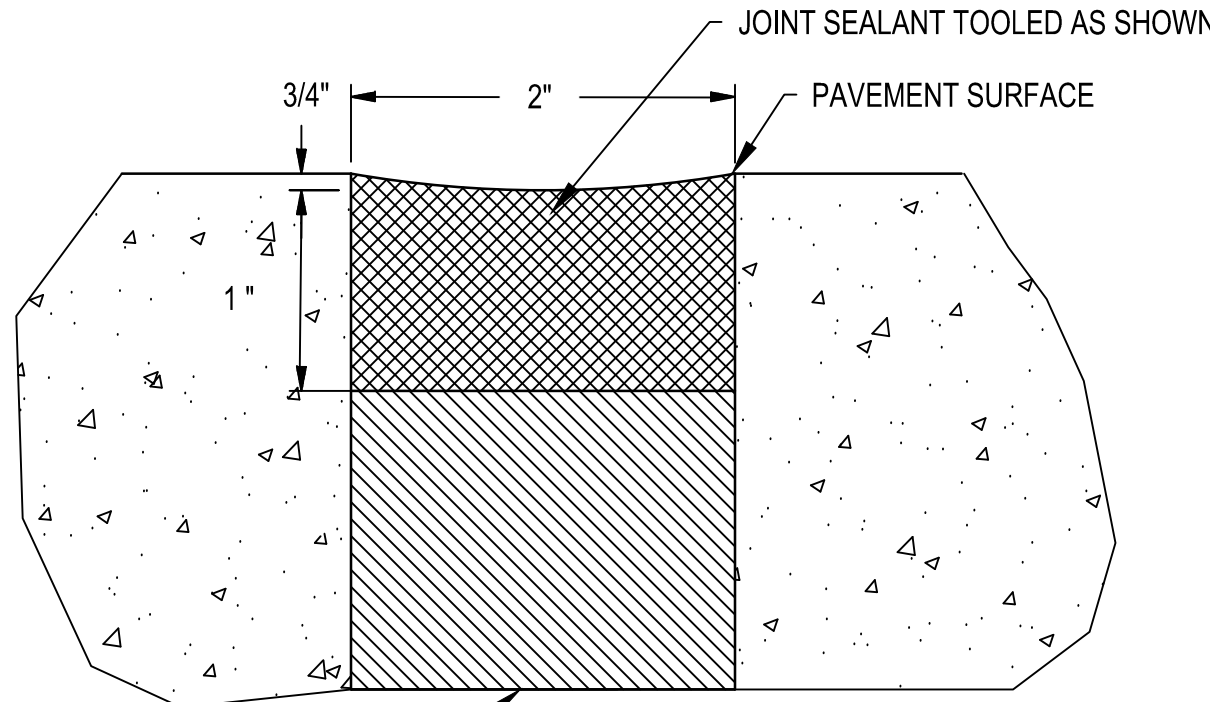


JOINT FILLER, EXTRUDED
POLYSTYRENE CLOSED-CELL FOAM,
ASTM C578 TYPE IV, 25 PSI MINIMUM

E CP501 SPECIAL EXPANSION JOINT DETAIL - TYPE S

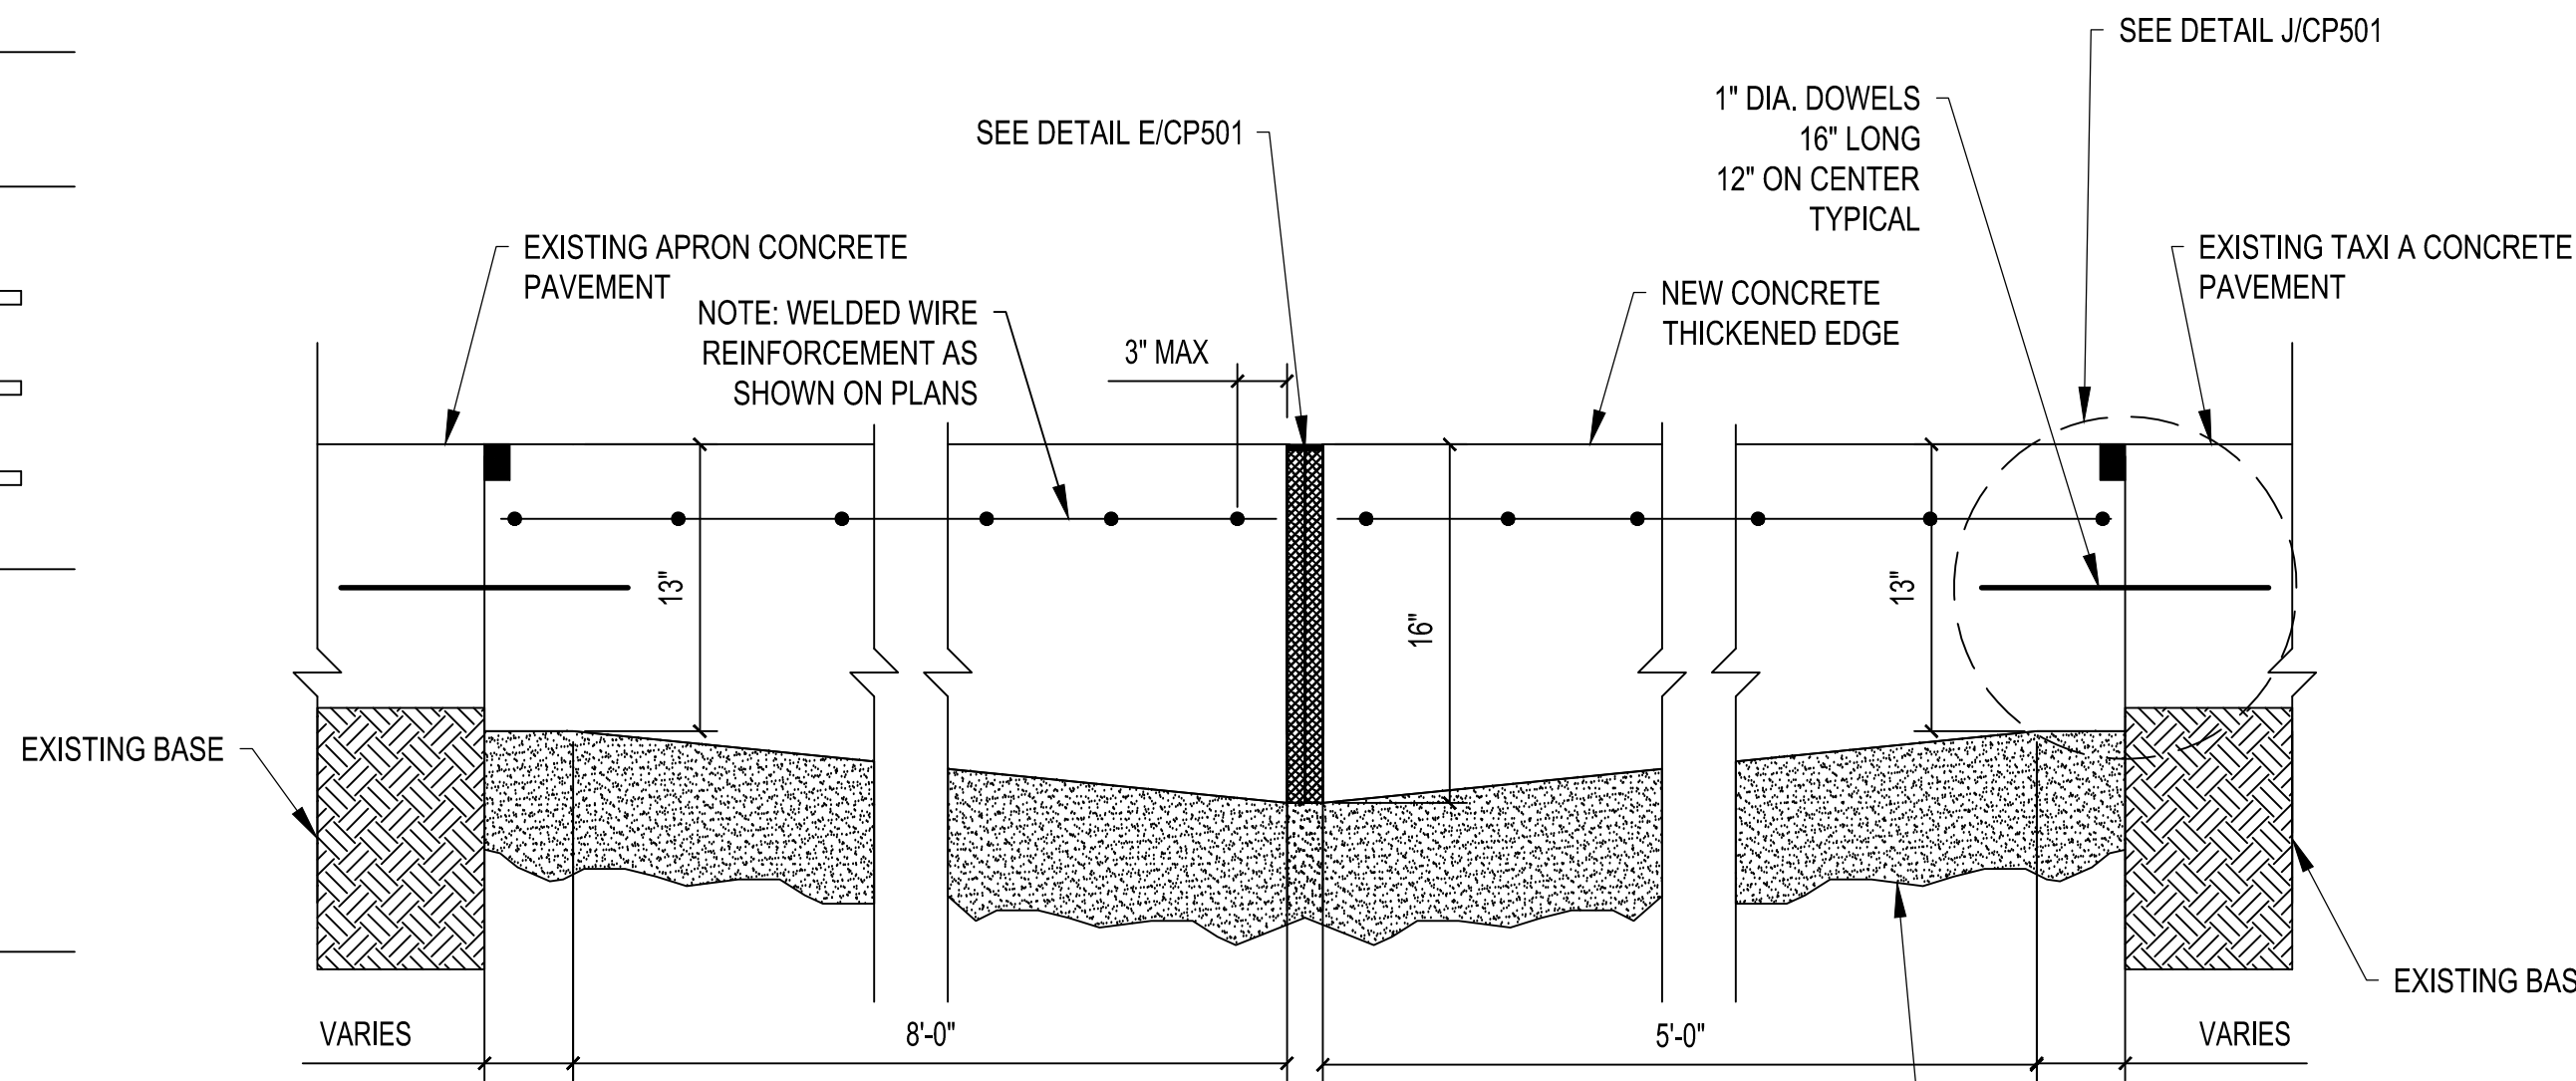


H CP501 EXPANSION JOINT AT NEW CONCRETE SLABS - TYPE B

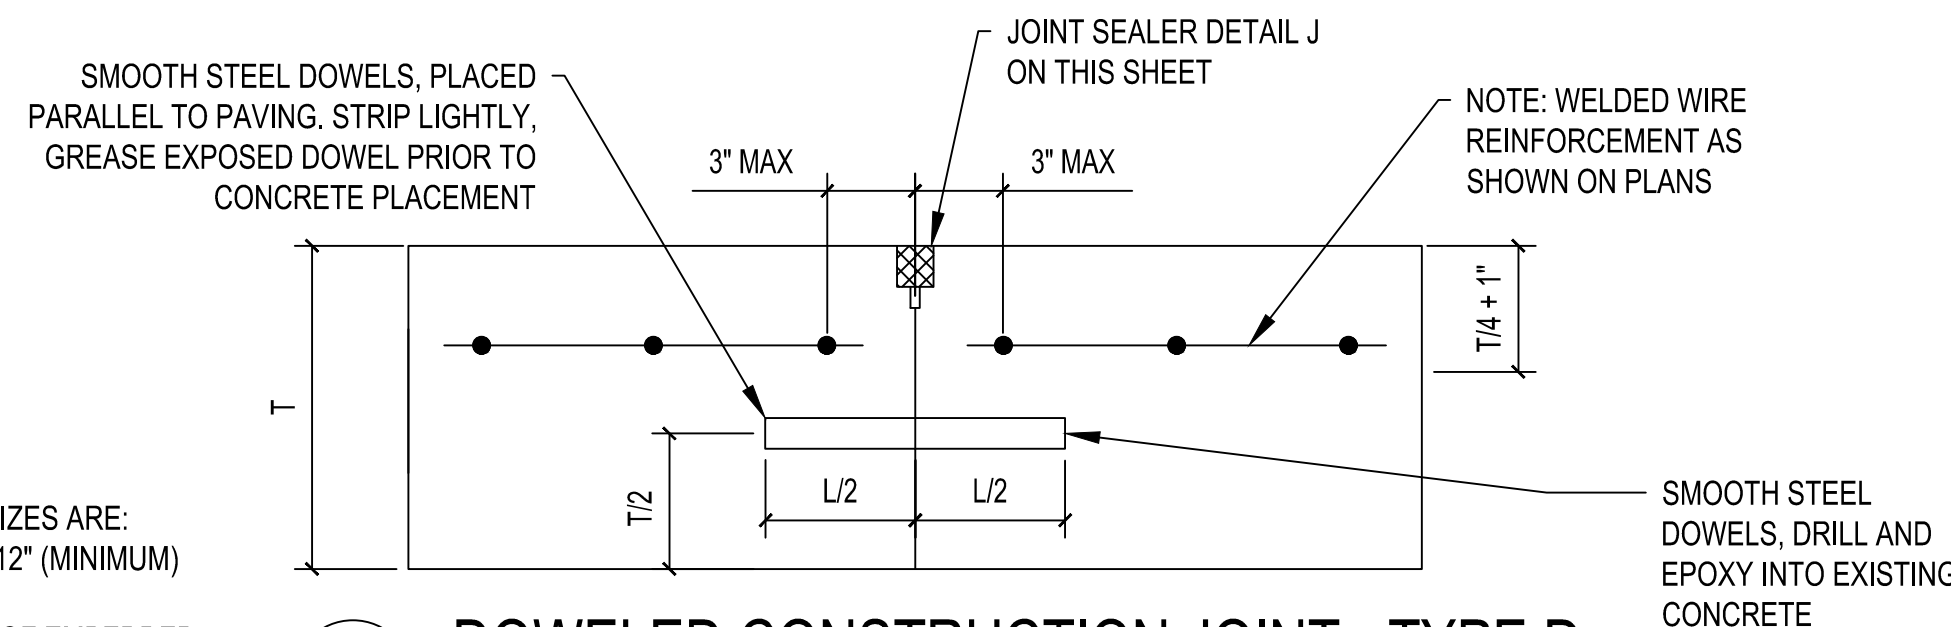


L CP501 DOWELED CONSTRUCTION JOINT - TYPE D


(ALSO USE WHERE PAVING OPERATIONS STOP)

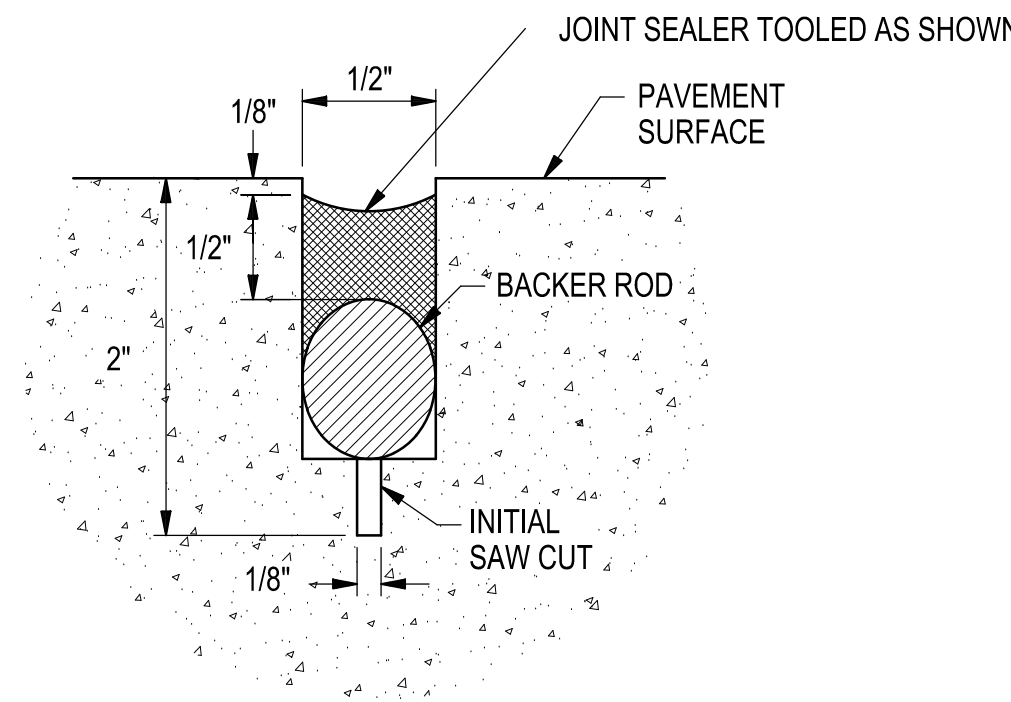


J CP501 CONTRACTION & CONSTRUCTION JOINT AND SEALANT DETAIL

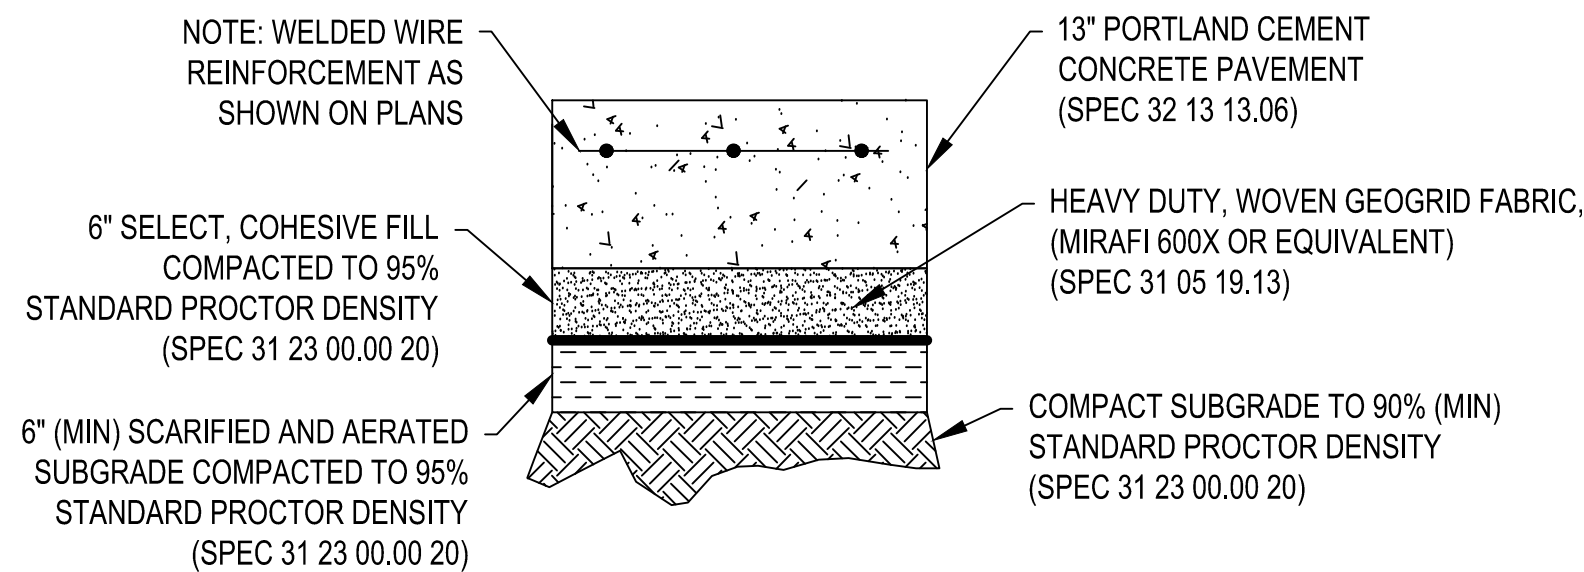

F CP501 TYPICAL CONCRETE PAVEMENT SECTIONS

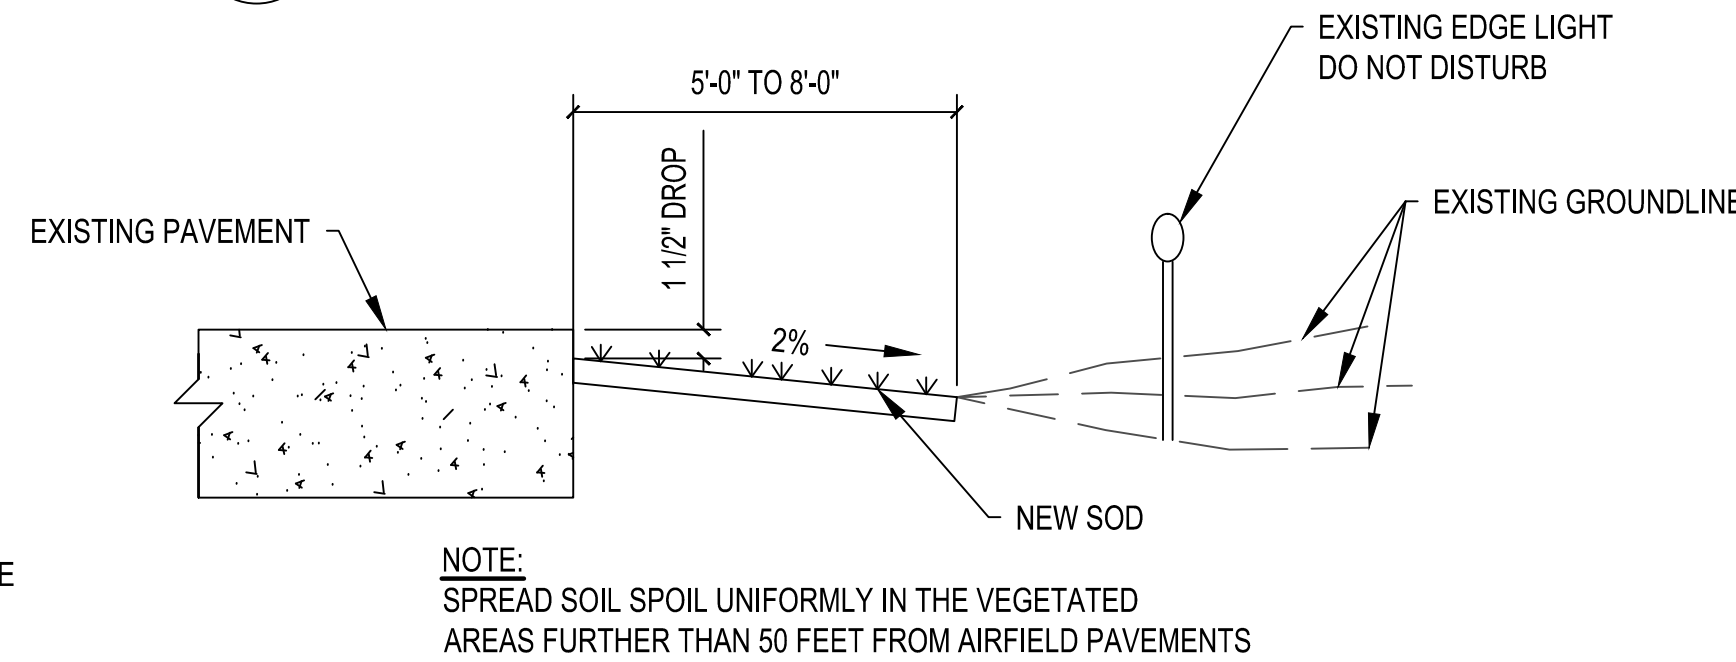

I CP501 TYPICAL SODDING DETAIL

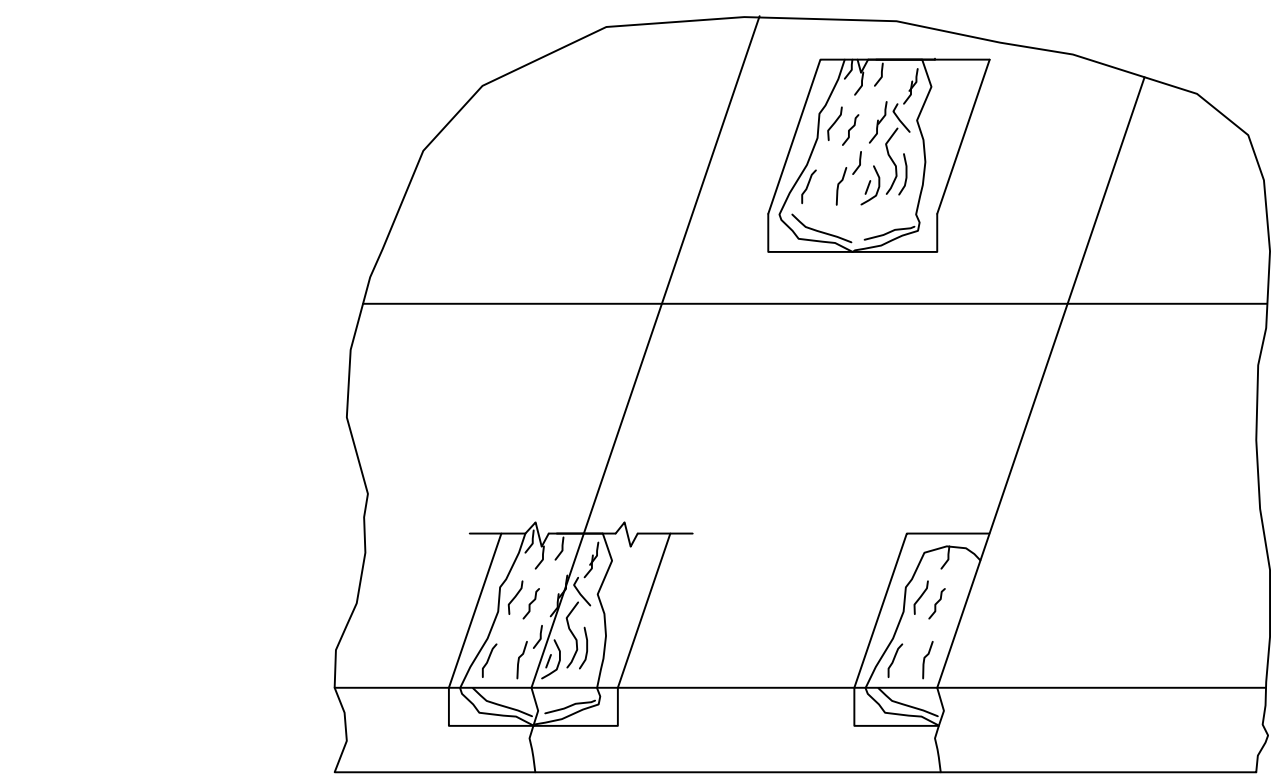

TOP VIEW


CONSTRUCTION JOINT
SEE DETAIL B/CP501

SIDE VIEW

SOME SPALL REPAIR AREAS ARE NOT IDENTIFIED ON THESE PLANS. THEY ARE AT THE DISCRETION OF THE BASE ENGINEER. CONTRACTOR SHALL COORDINATE WITH THE BASE ENGINEER TO IDENTIFY SPALL REPAIRS.

REFER TO SPECIFICATION SECTION 32 01 29.61 FOR FULL REQUIREMENTS
REFERENCE UFC 3-270-01 O&M MANUAL: ASPHALT AND CONCRETE PAVEMENT MAINTENANCE AND REPAIR

D CP501 PARTIAL DEPTH PATCH REPAIR AT CORNERS, JOINTS, OR MID PANEL (BY:SAW AND CHIP)

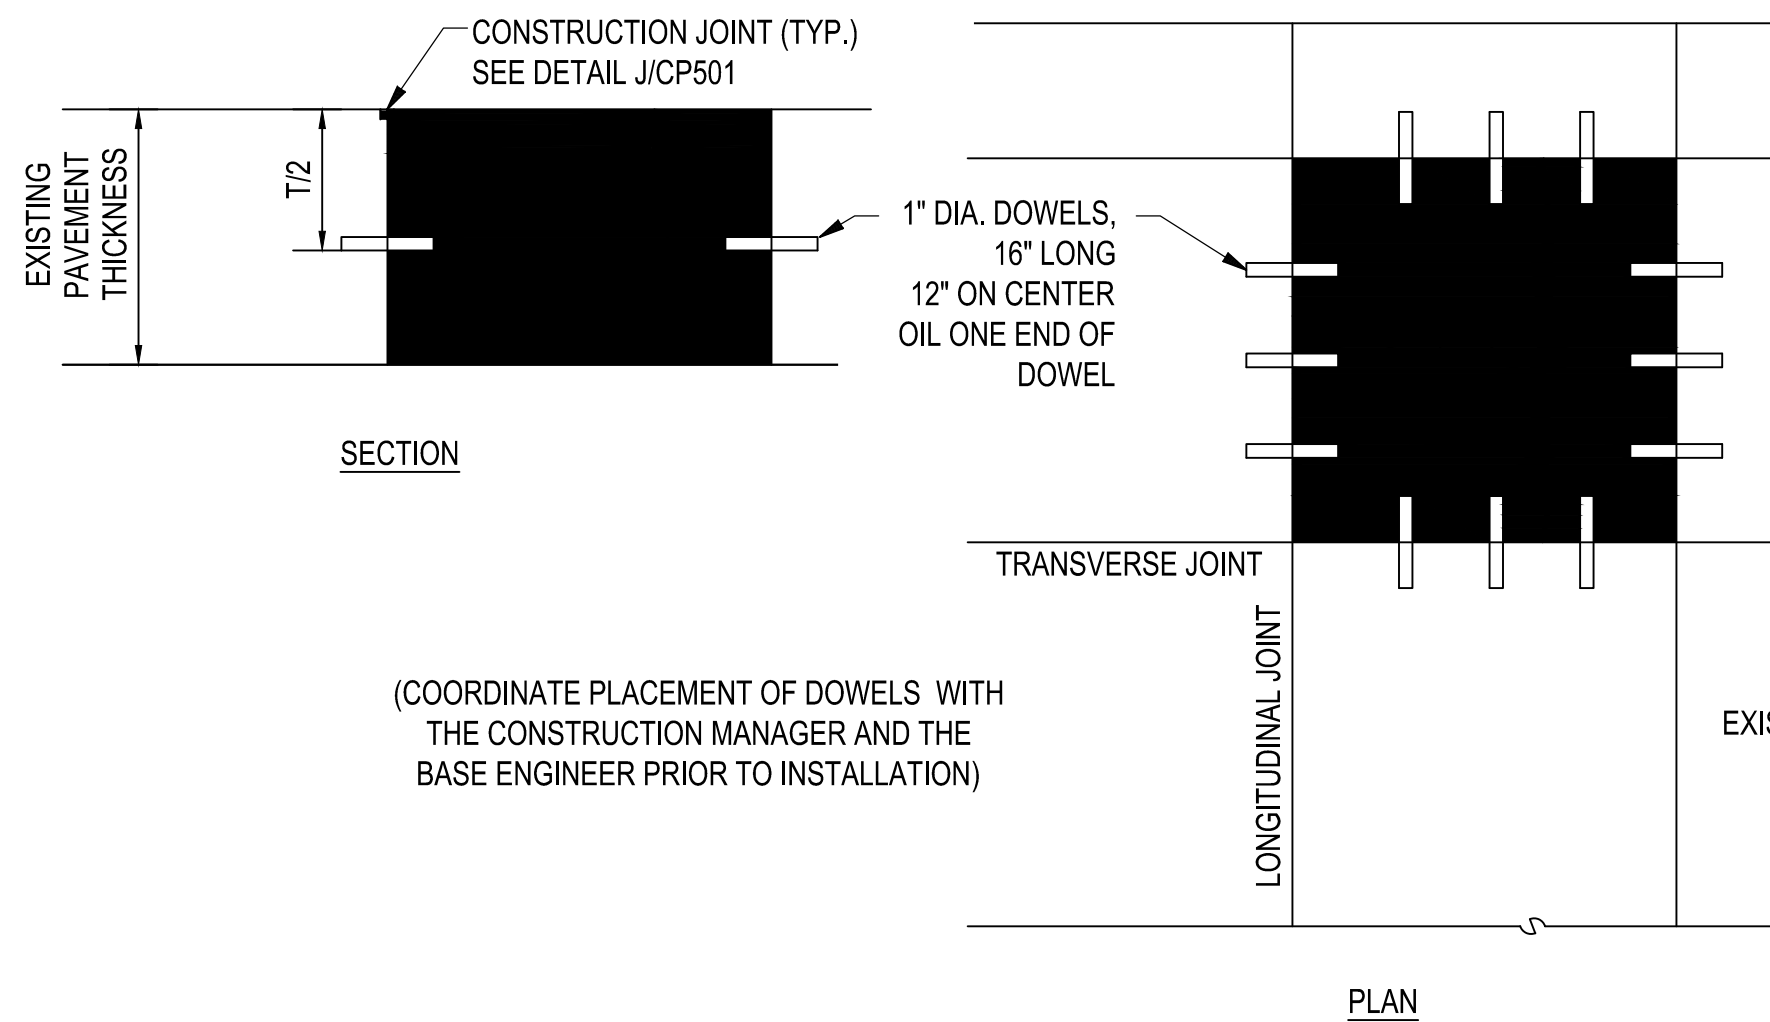

(COORDINATE PLACEMENT OF DOWELS WITH
THE CONSTRUCTION MANAGER AND THE
BASE ENGINEER PRIOR TO INSTALLATION)

G CP501 FULL DEPTH PATCH OR PANEL REPLACEMENT



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA

ASRC
FEDERAL

Field Services
140 Channel St., Suite 205
Vance AFB, OK 73705
(580) 213-7772
CA# 8716 EXPIRES
JUNE 30, 2026

Revision Number	Description	Date




DRAWN BY: JJJ	CHECKED BY: CWT
PROJECT NO.:	XTLF 24-1011
DATE:	NOVEMBER 2025
DESIGN STAGE:	FOR CONSTRUCTION

REPAIR AIRFIELD PAVEMENTS TAXIWAY A

AIRFIELD PAINT STRIPPING DETAIL

CP502

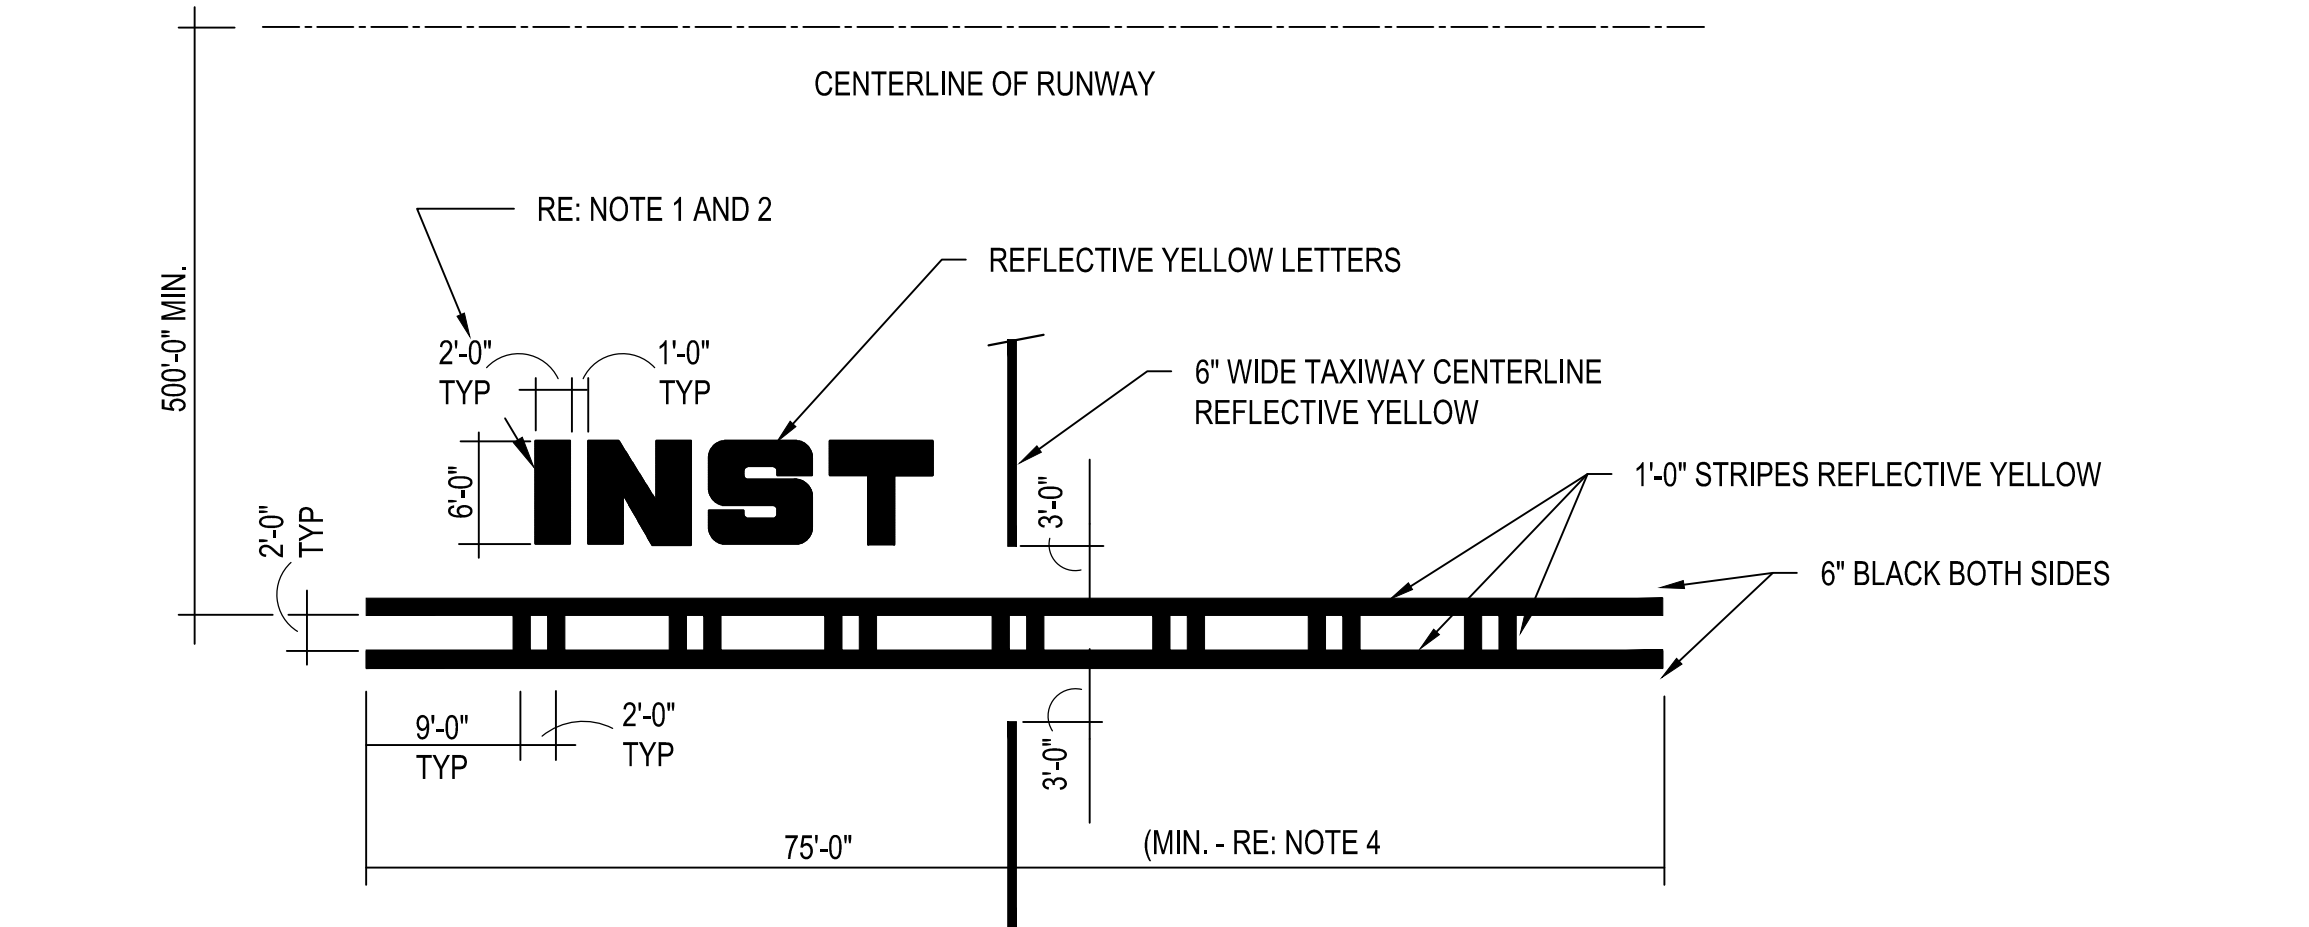


C INSTRUMENT HOLDING POSITION MARKINGS PLAN

CP502 NOT TO SCALE

NOTES FOR INSTRUMENT HOLD

- LOCATE LETTERS "INST" ON RUNWAY SIDE OF THE HOLD LINE AND ON THE LEFT SIDE OF CENTERLINE
- THE "INST" DESIGNATOR MUST BE PLACED SYMMETRICAL BETWEEN THE TAXIWAY CENTERLINE AND THE TAXIWAY EDGE.

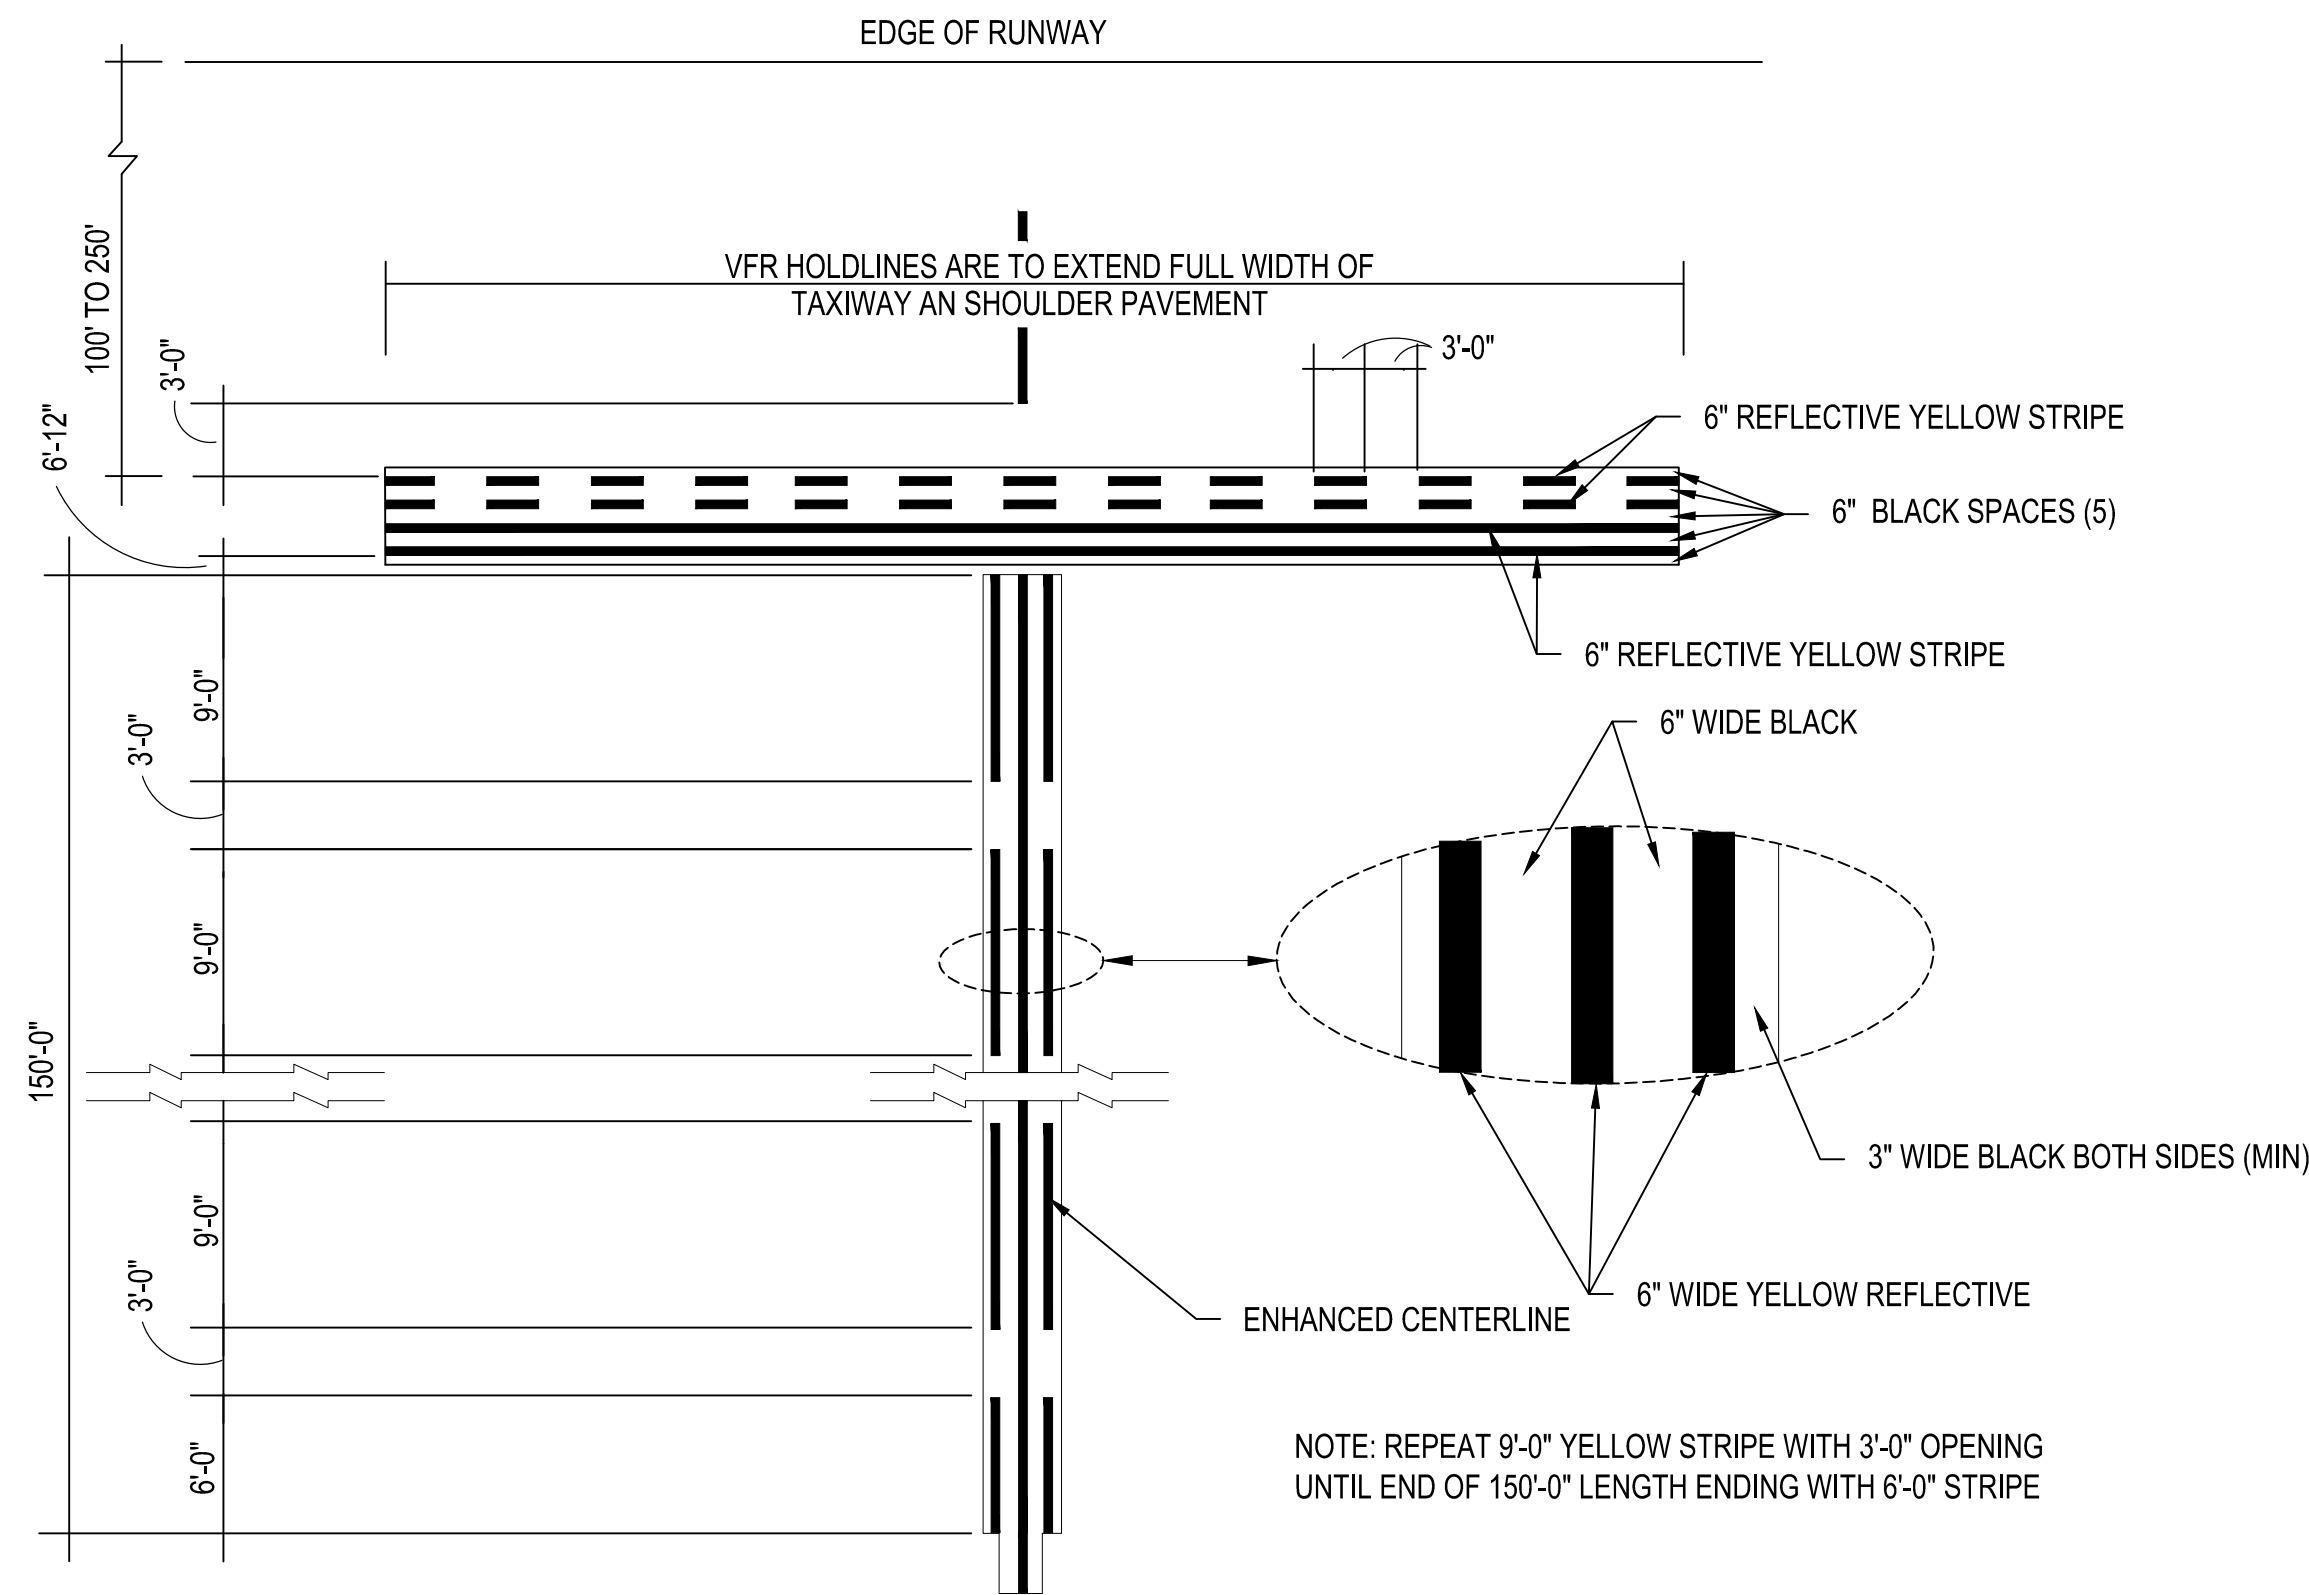

B VFR HOLDING POSITION MARKING PLAN

CP502 NOT TO SCALE (HOLDING POSITION PER LF (LENGTH VARIES); REF. YELLOW = 1.51 SF / LF AND BLACK = 2.98 SF / LF)
(ENHANCED CENTERLINE TOTAL: REF. YELLOW = 189 SF AND BLACK = 261 SF)



C TAXIWAY CENTERLINE

CP502 NOT TO SCALE (REF. YELLOW = 0.5 SF / LF AND BLACK = 1.0 SF / LF)