



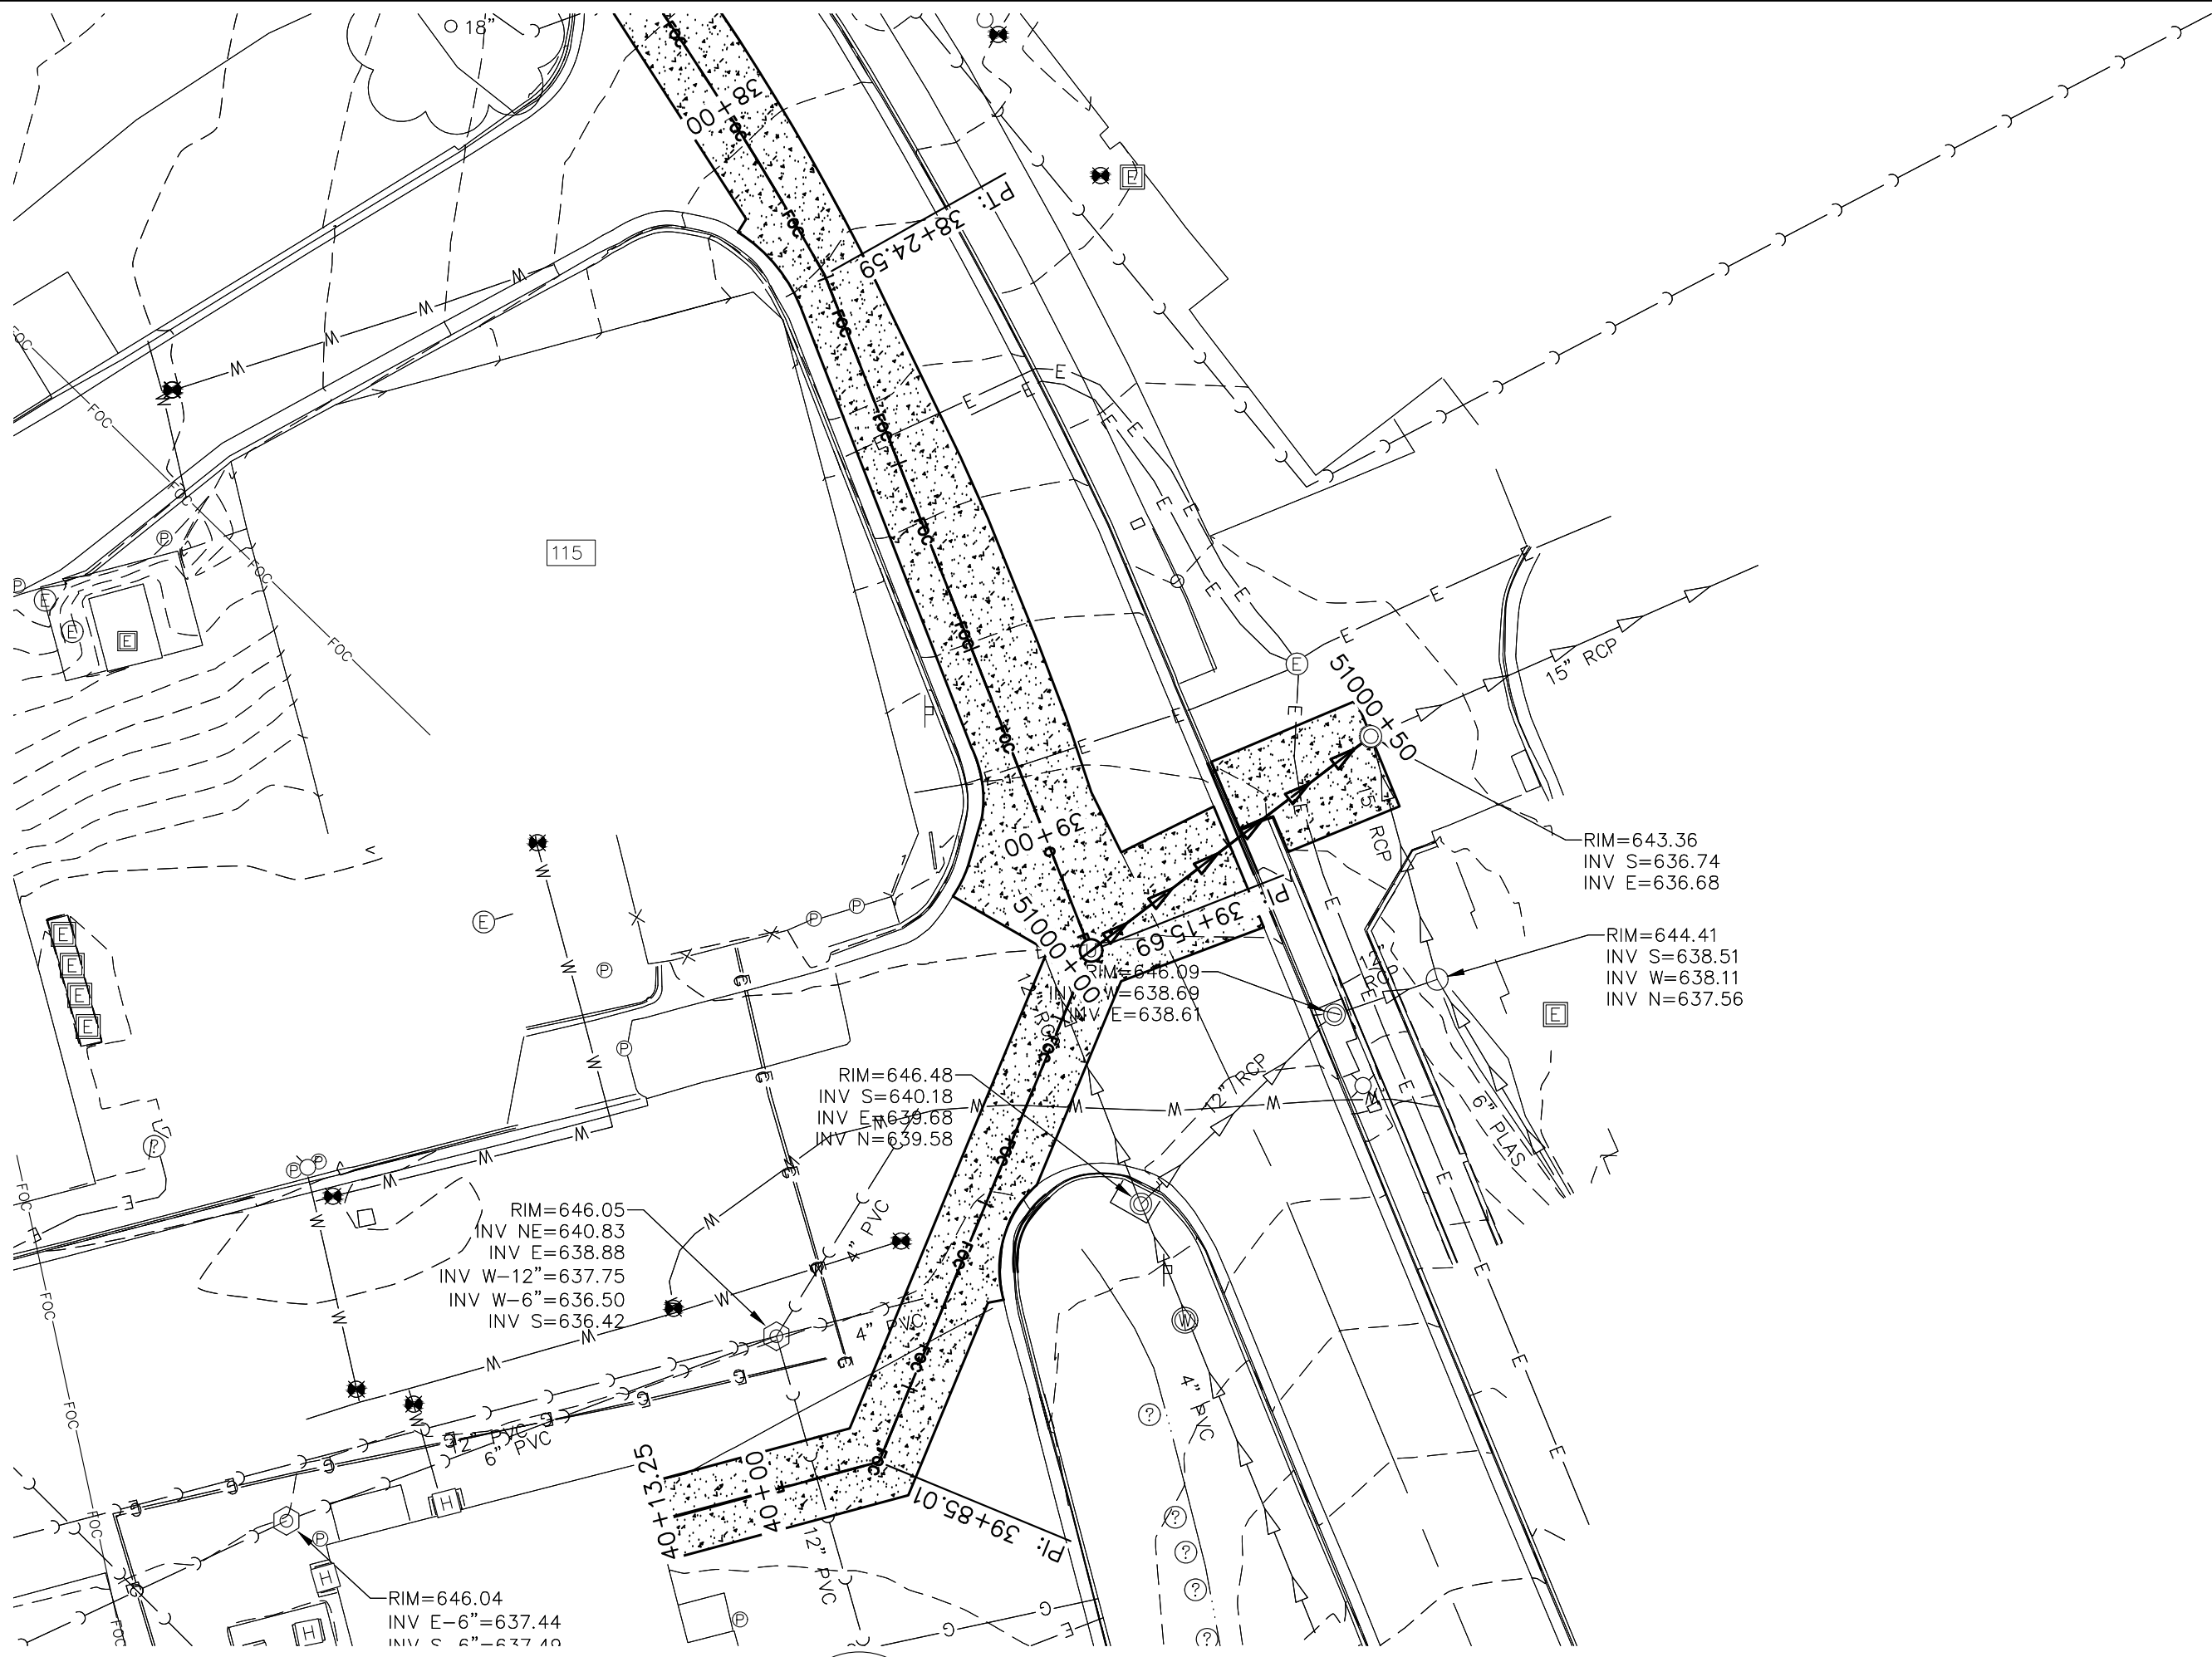


MANHOLE STORM 22
SCALE: 1"=20'

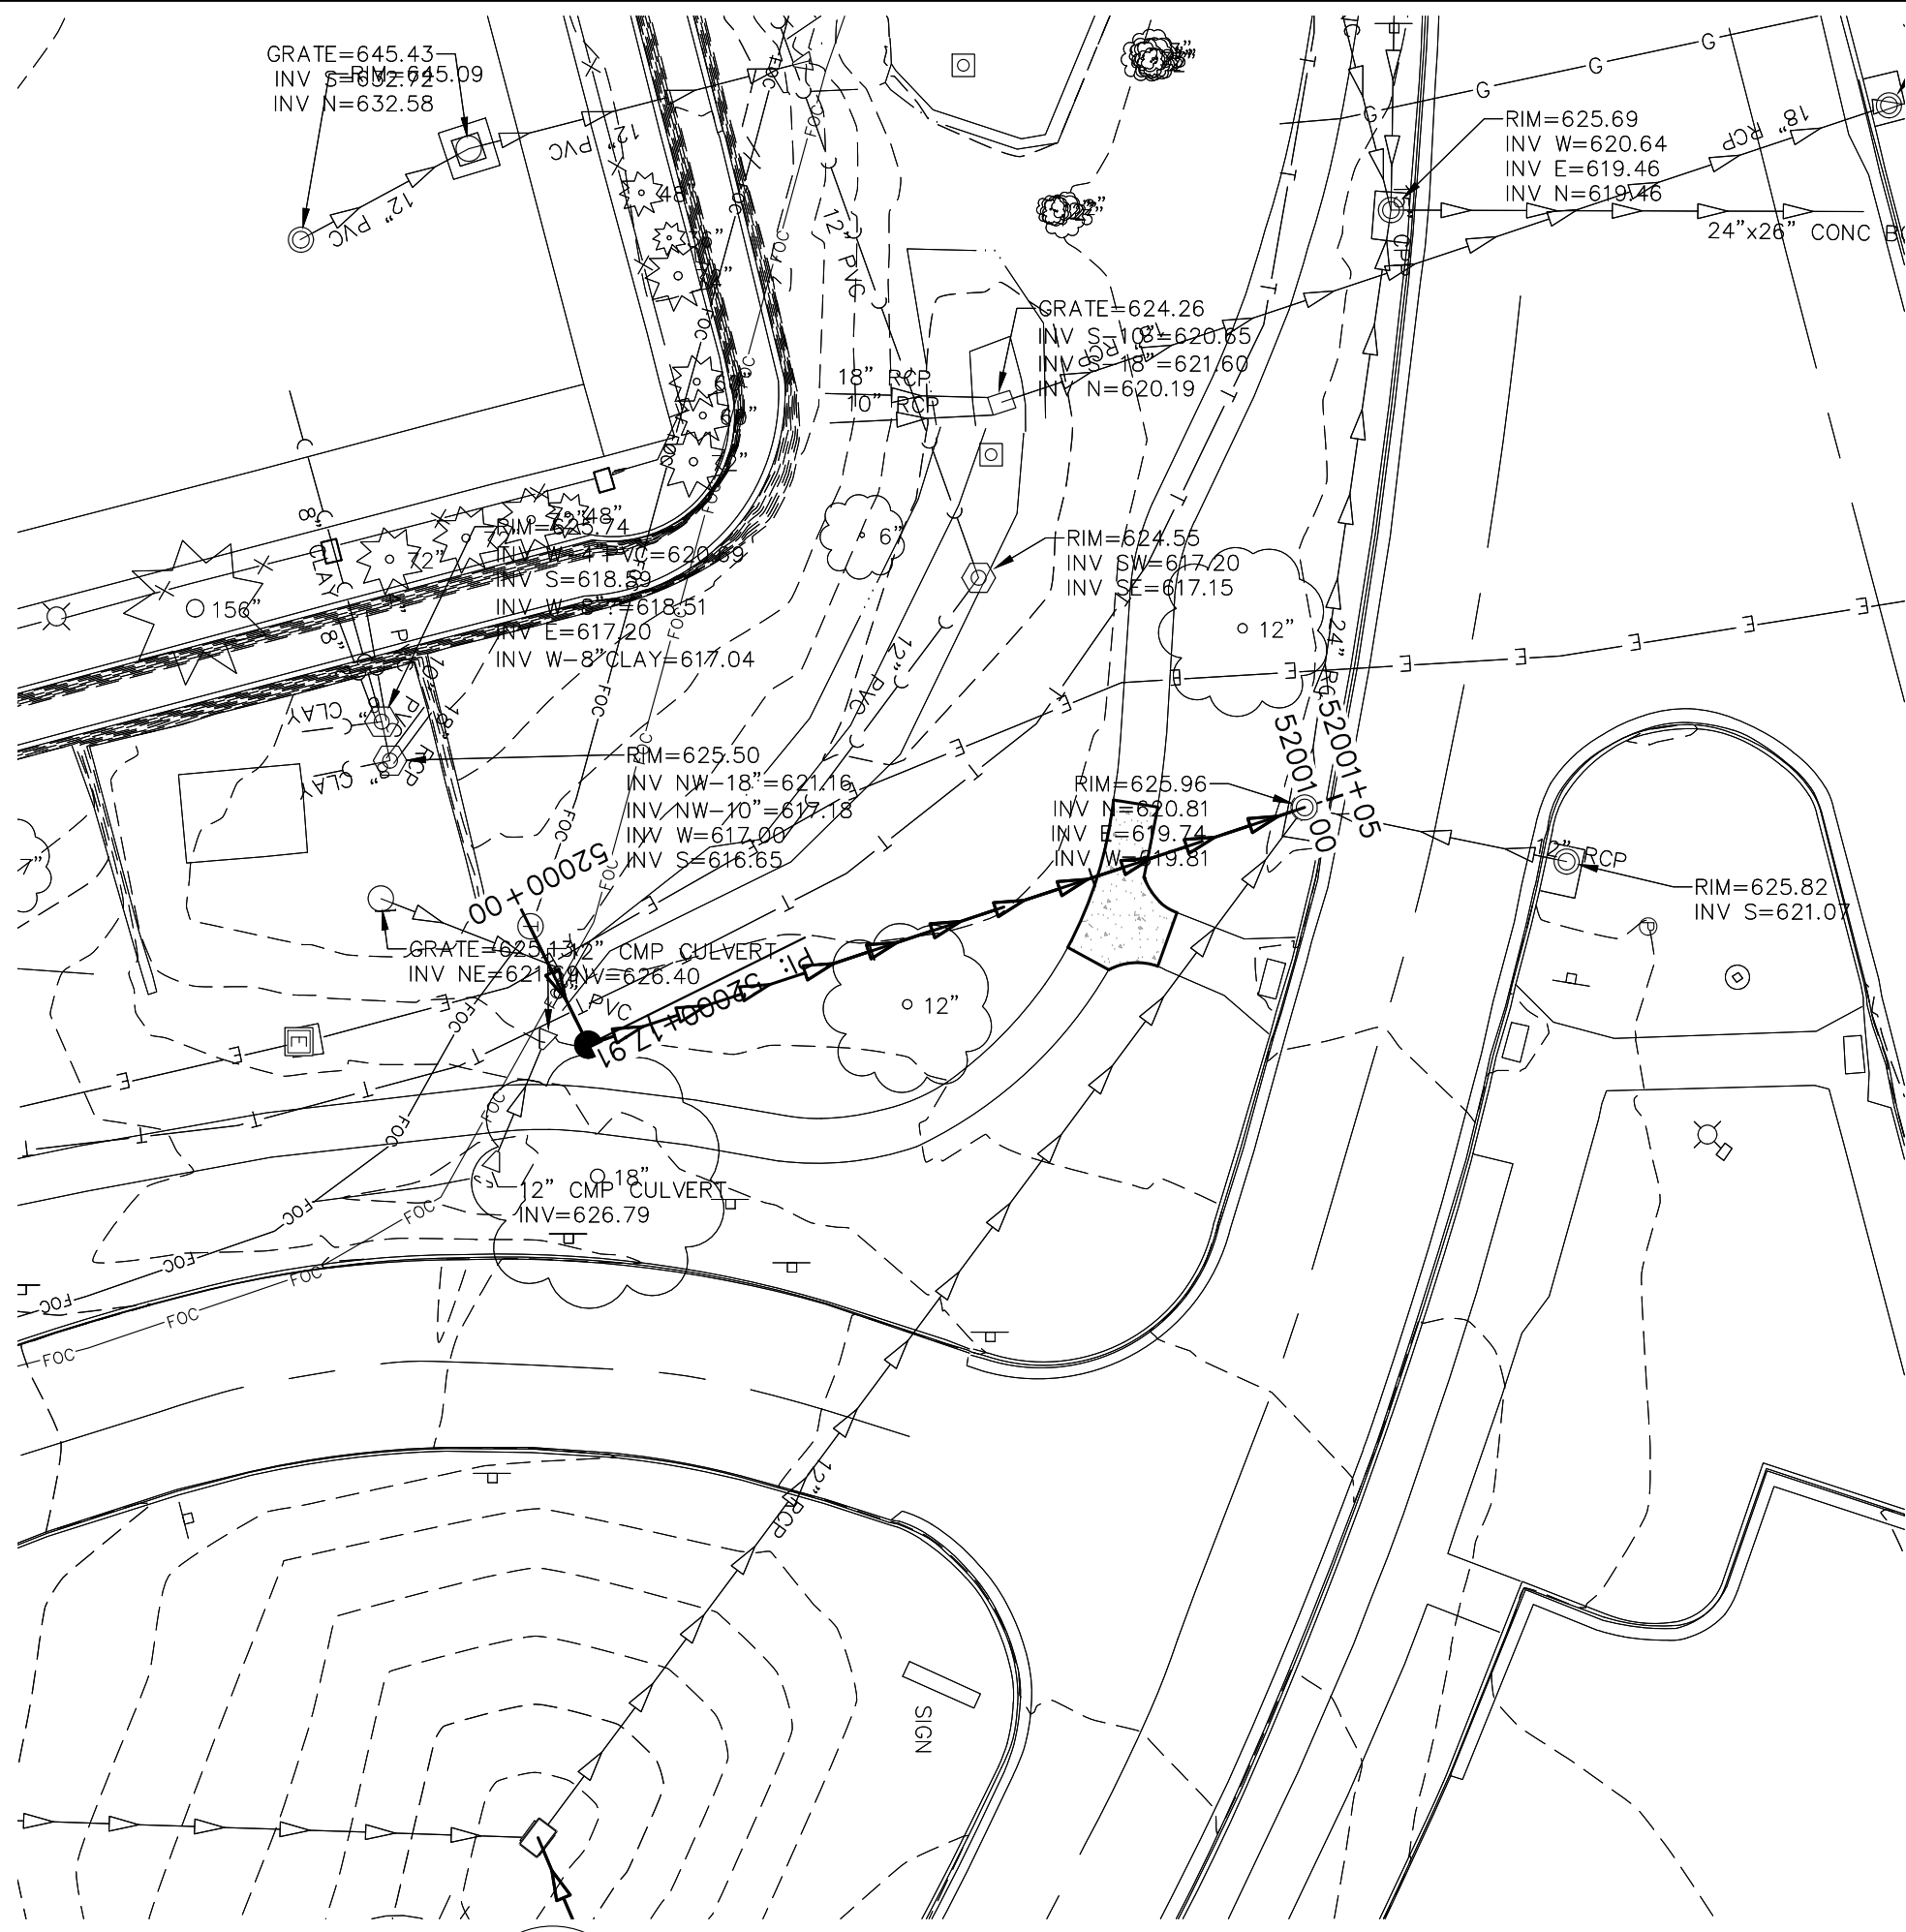


MANHOLE STORM 23
SCALE: 1"=20'

PROFILE VIEW OF 18004375.03 PROPOSED MH 22
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

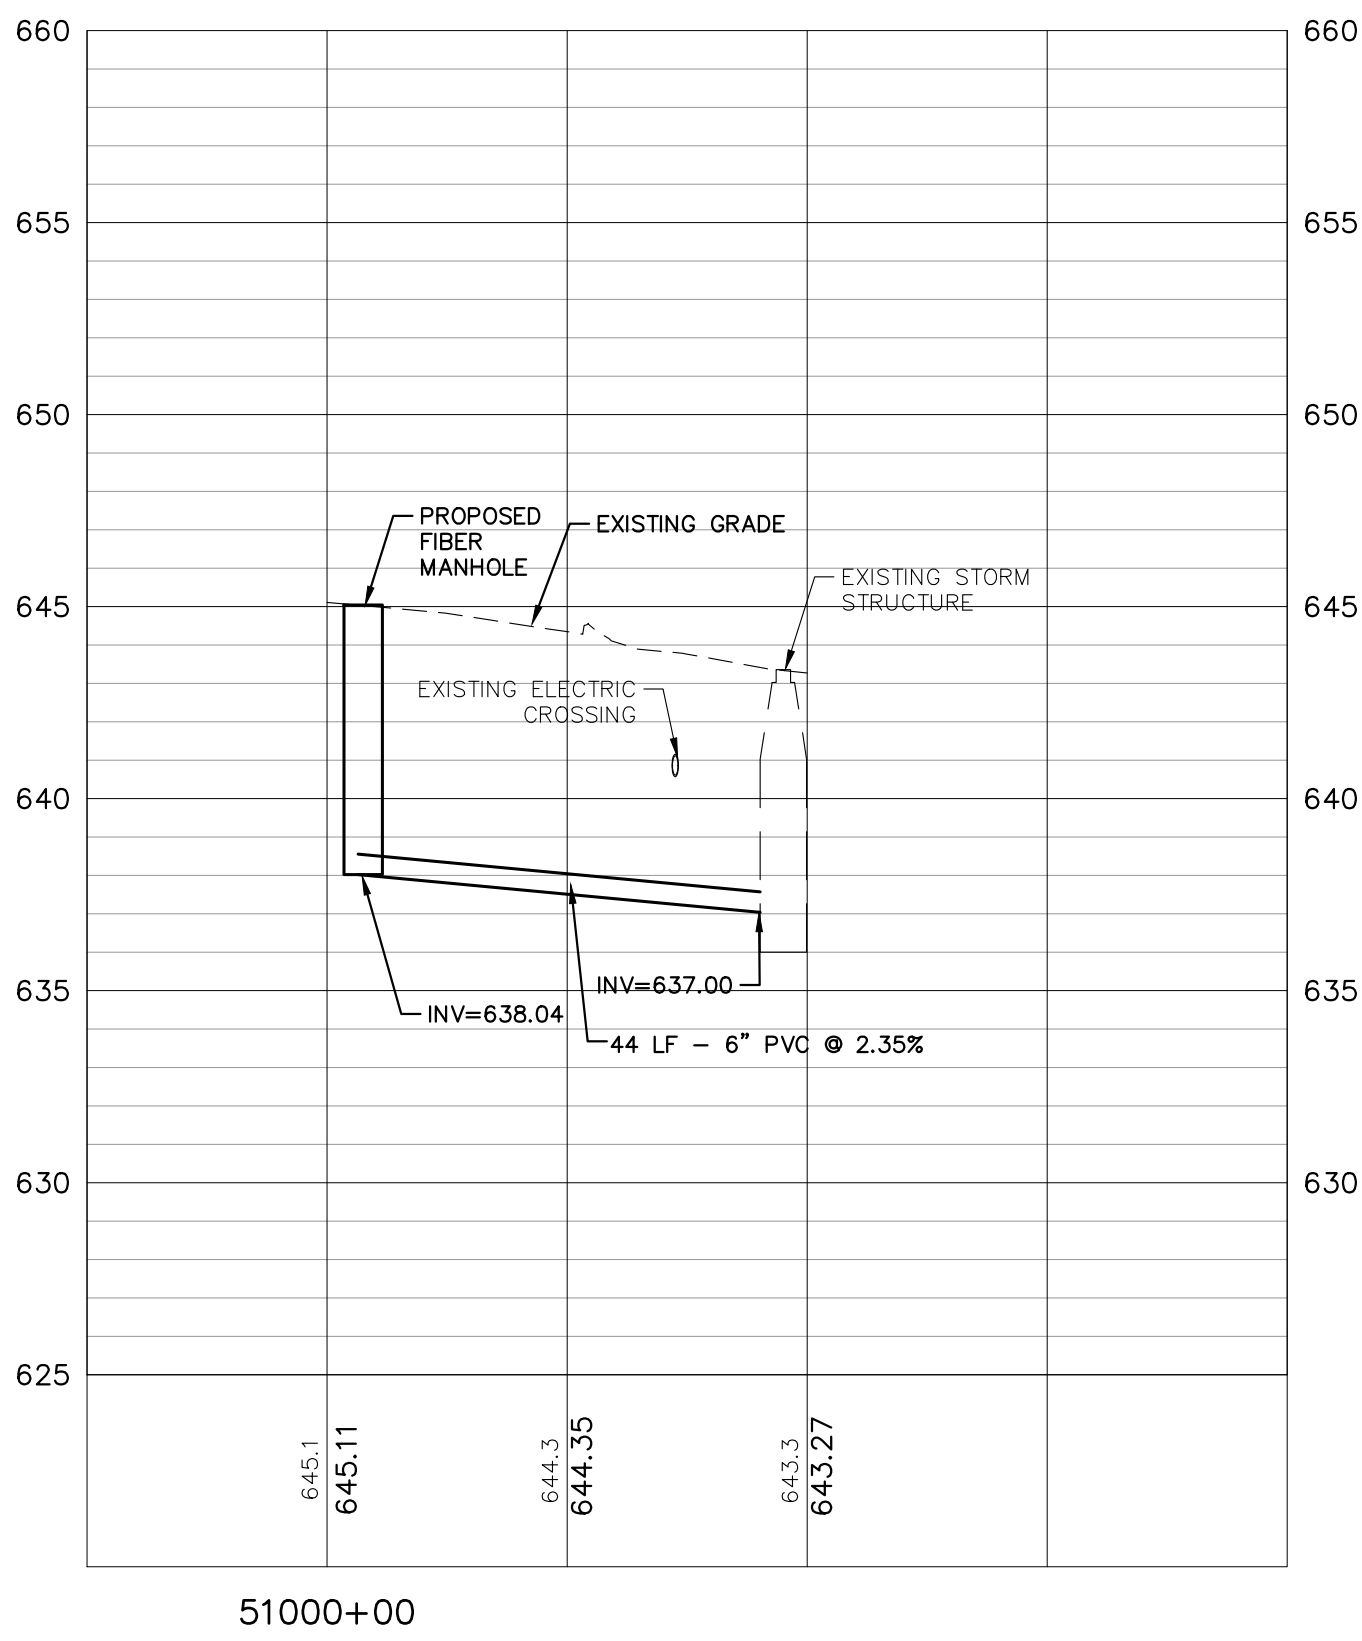

MANHOLE STORM 22

PROFILE VIEW OF 18004375.03 PROPOSED MH 23
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

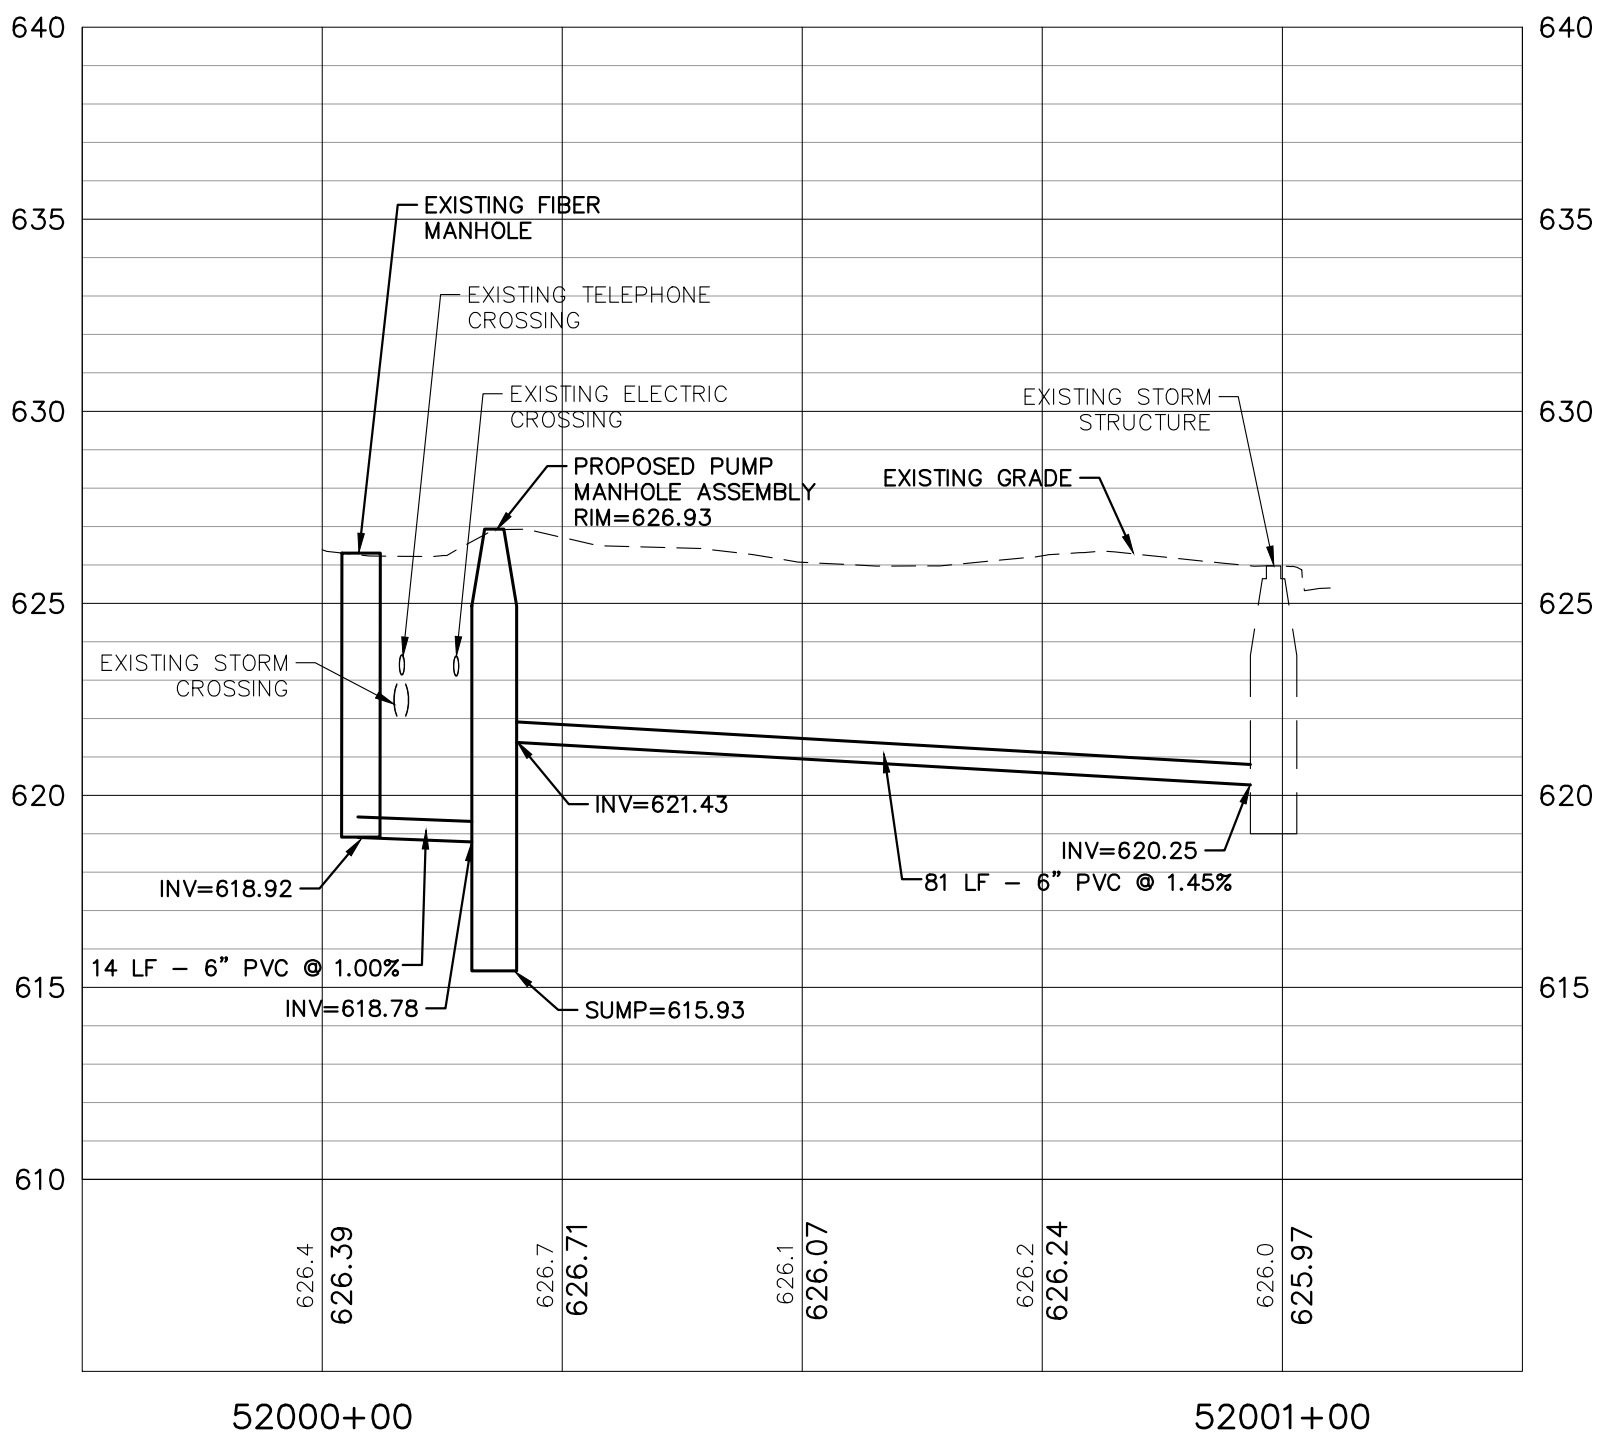

MANHOLE STORM 23

NOTE:
ALL UTILITY DEPTHS ARE APPROXIMATE
AND SHOULD BE VERIFIED BY CONTRACTOR
USING GROUND PENETRATING RADAR AND POTHOLING.

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
95% CONSTRUCTION DOCUMENTS	6.23.22
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23
Revisions:	Date:

CONSULTANT

IMEG

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

Romanyk Consulting
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP

LINNEA K. SHAW
062-074863
OF ILLINOIS

Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title
STORM PLAN AND PROFILE 22 & 23

Approved:

Phase
FINAL BID DOCUMENTS

Sprinklered
FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES - MILWAUKEE, WI

Location
5000 W. NATIONAL AVENUE MILWAUKEE, WI

Issue Date
SEPTEMBER 5, 2025

Checked
RJJ





Drawn
LKS

Project Number
695-21-700

Building Number


Drawing Number
100-CU126

of

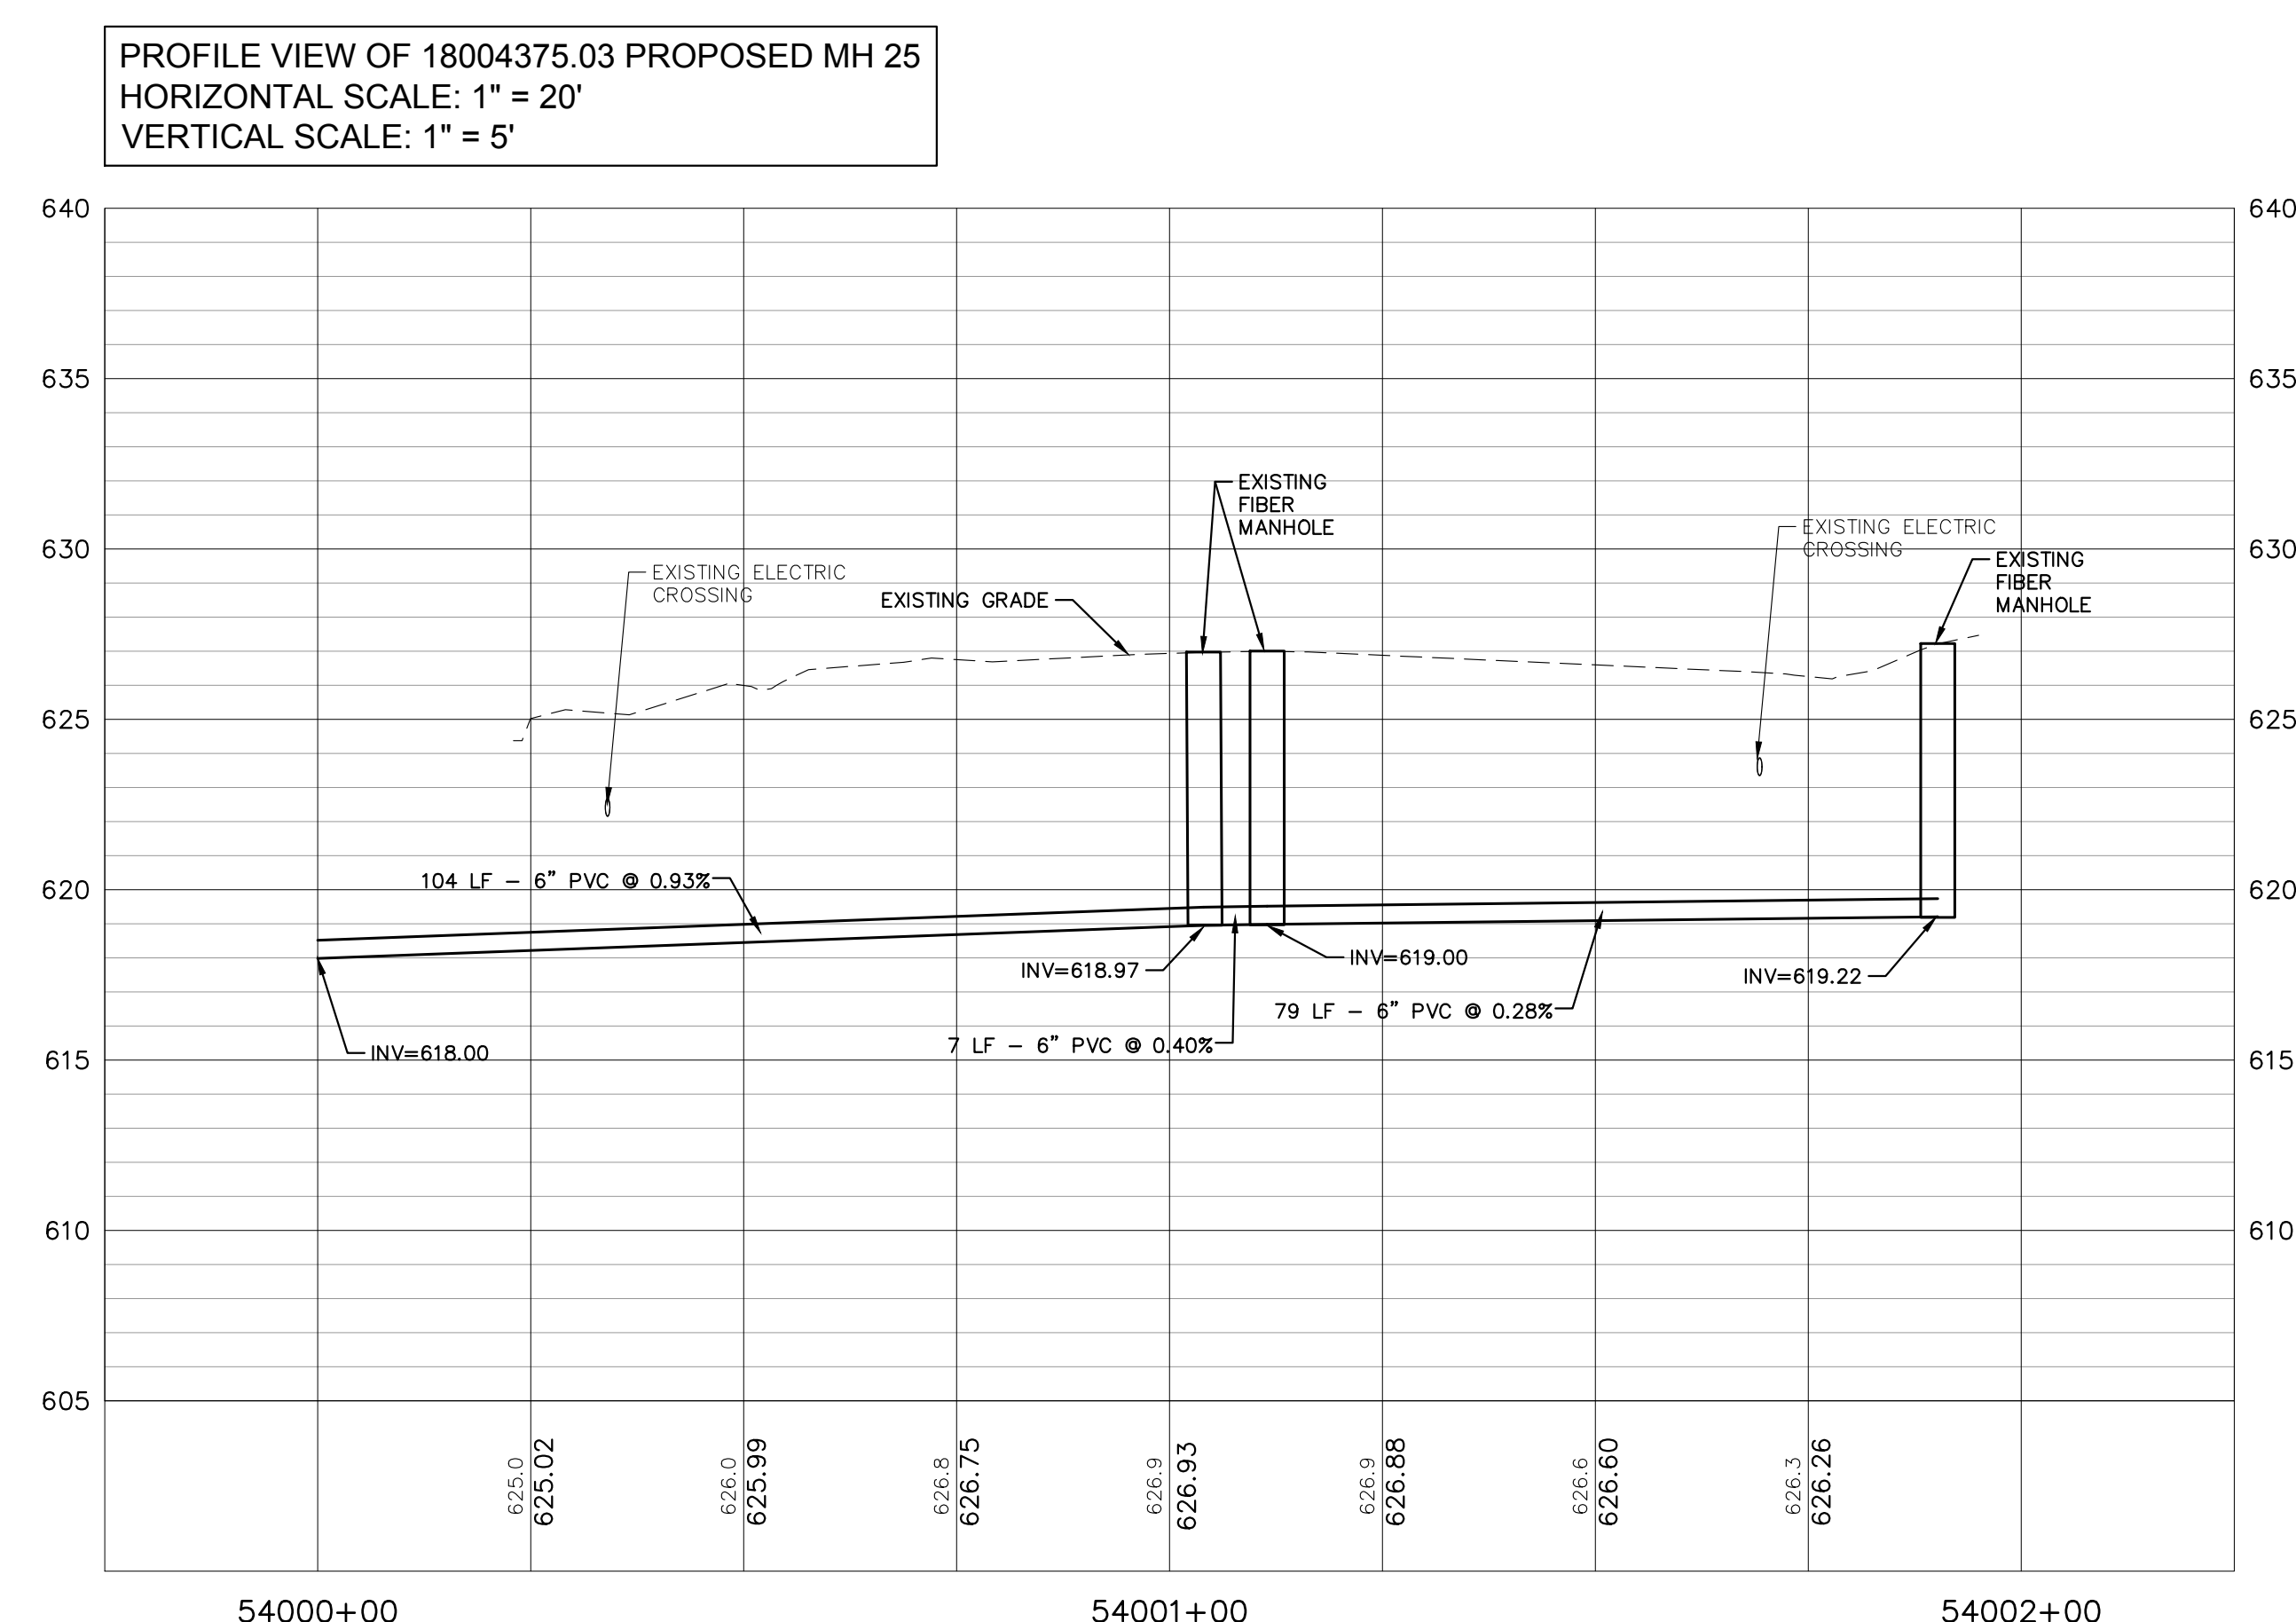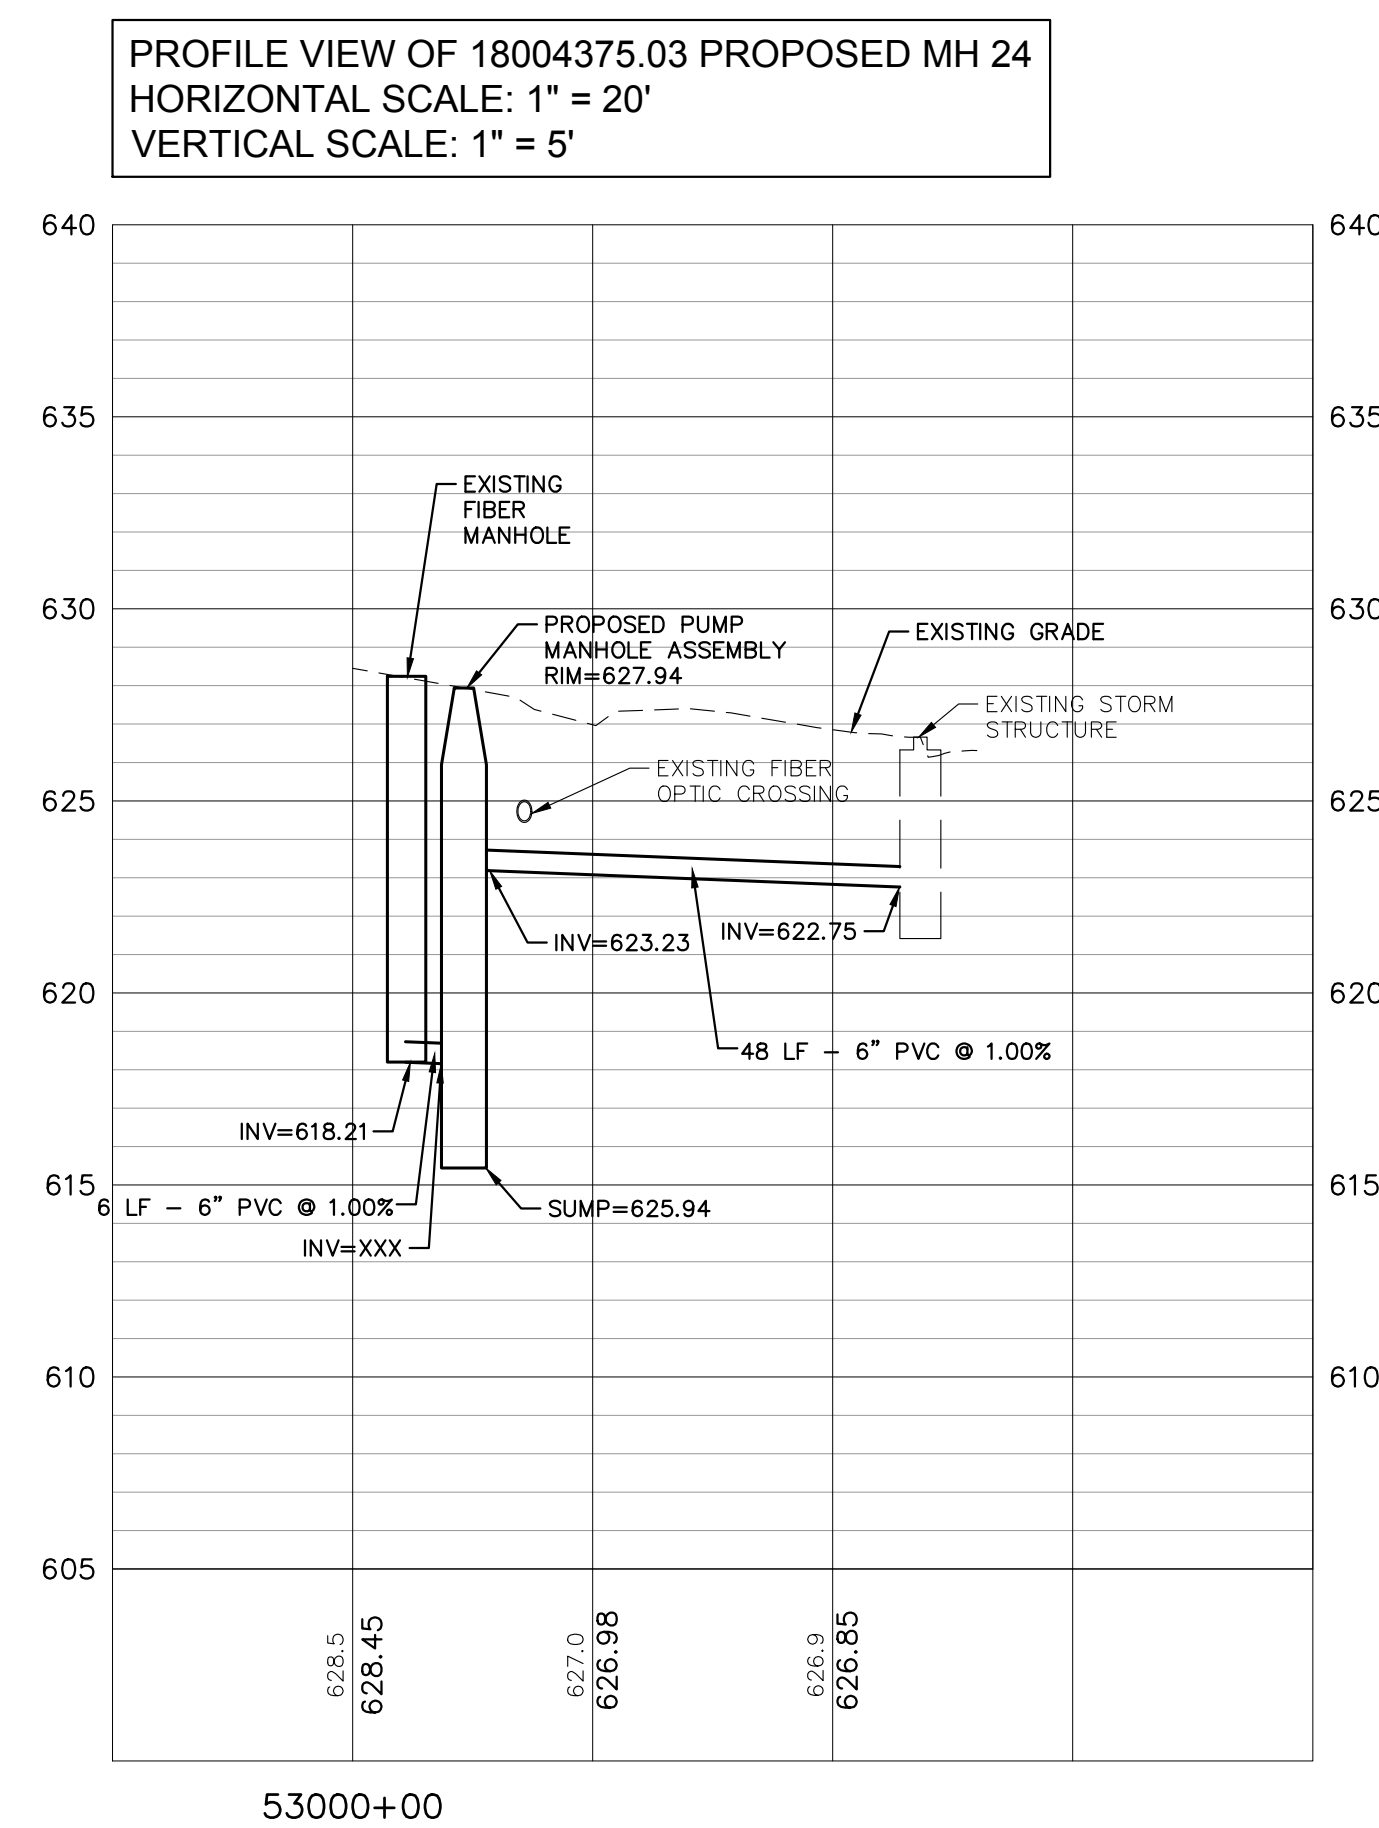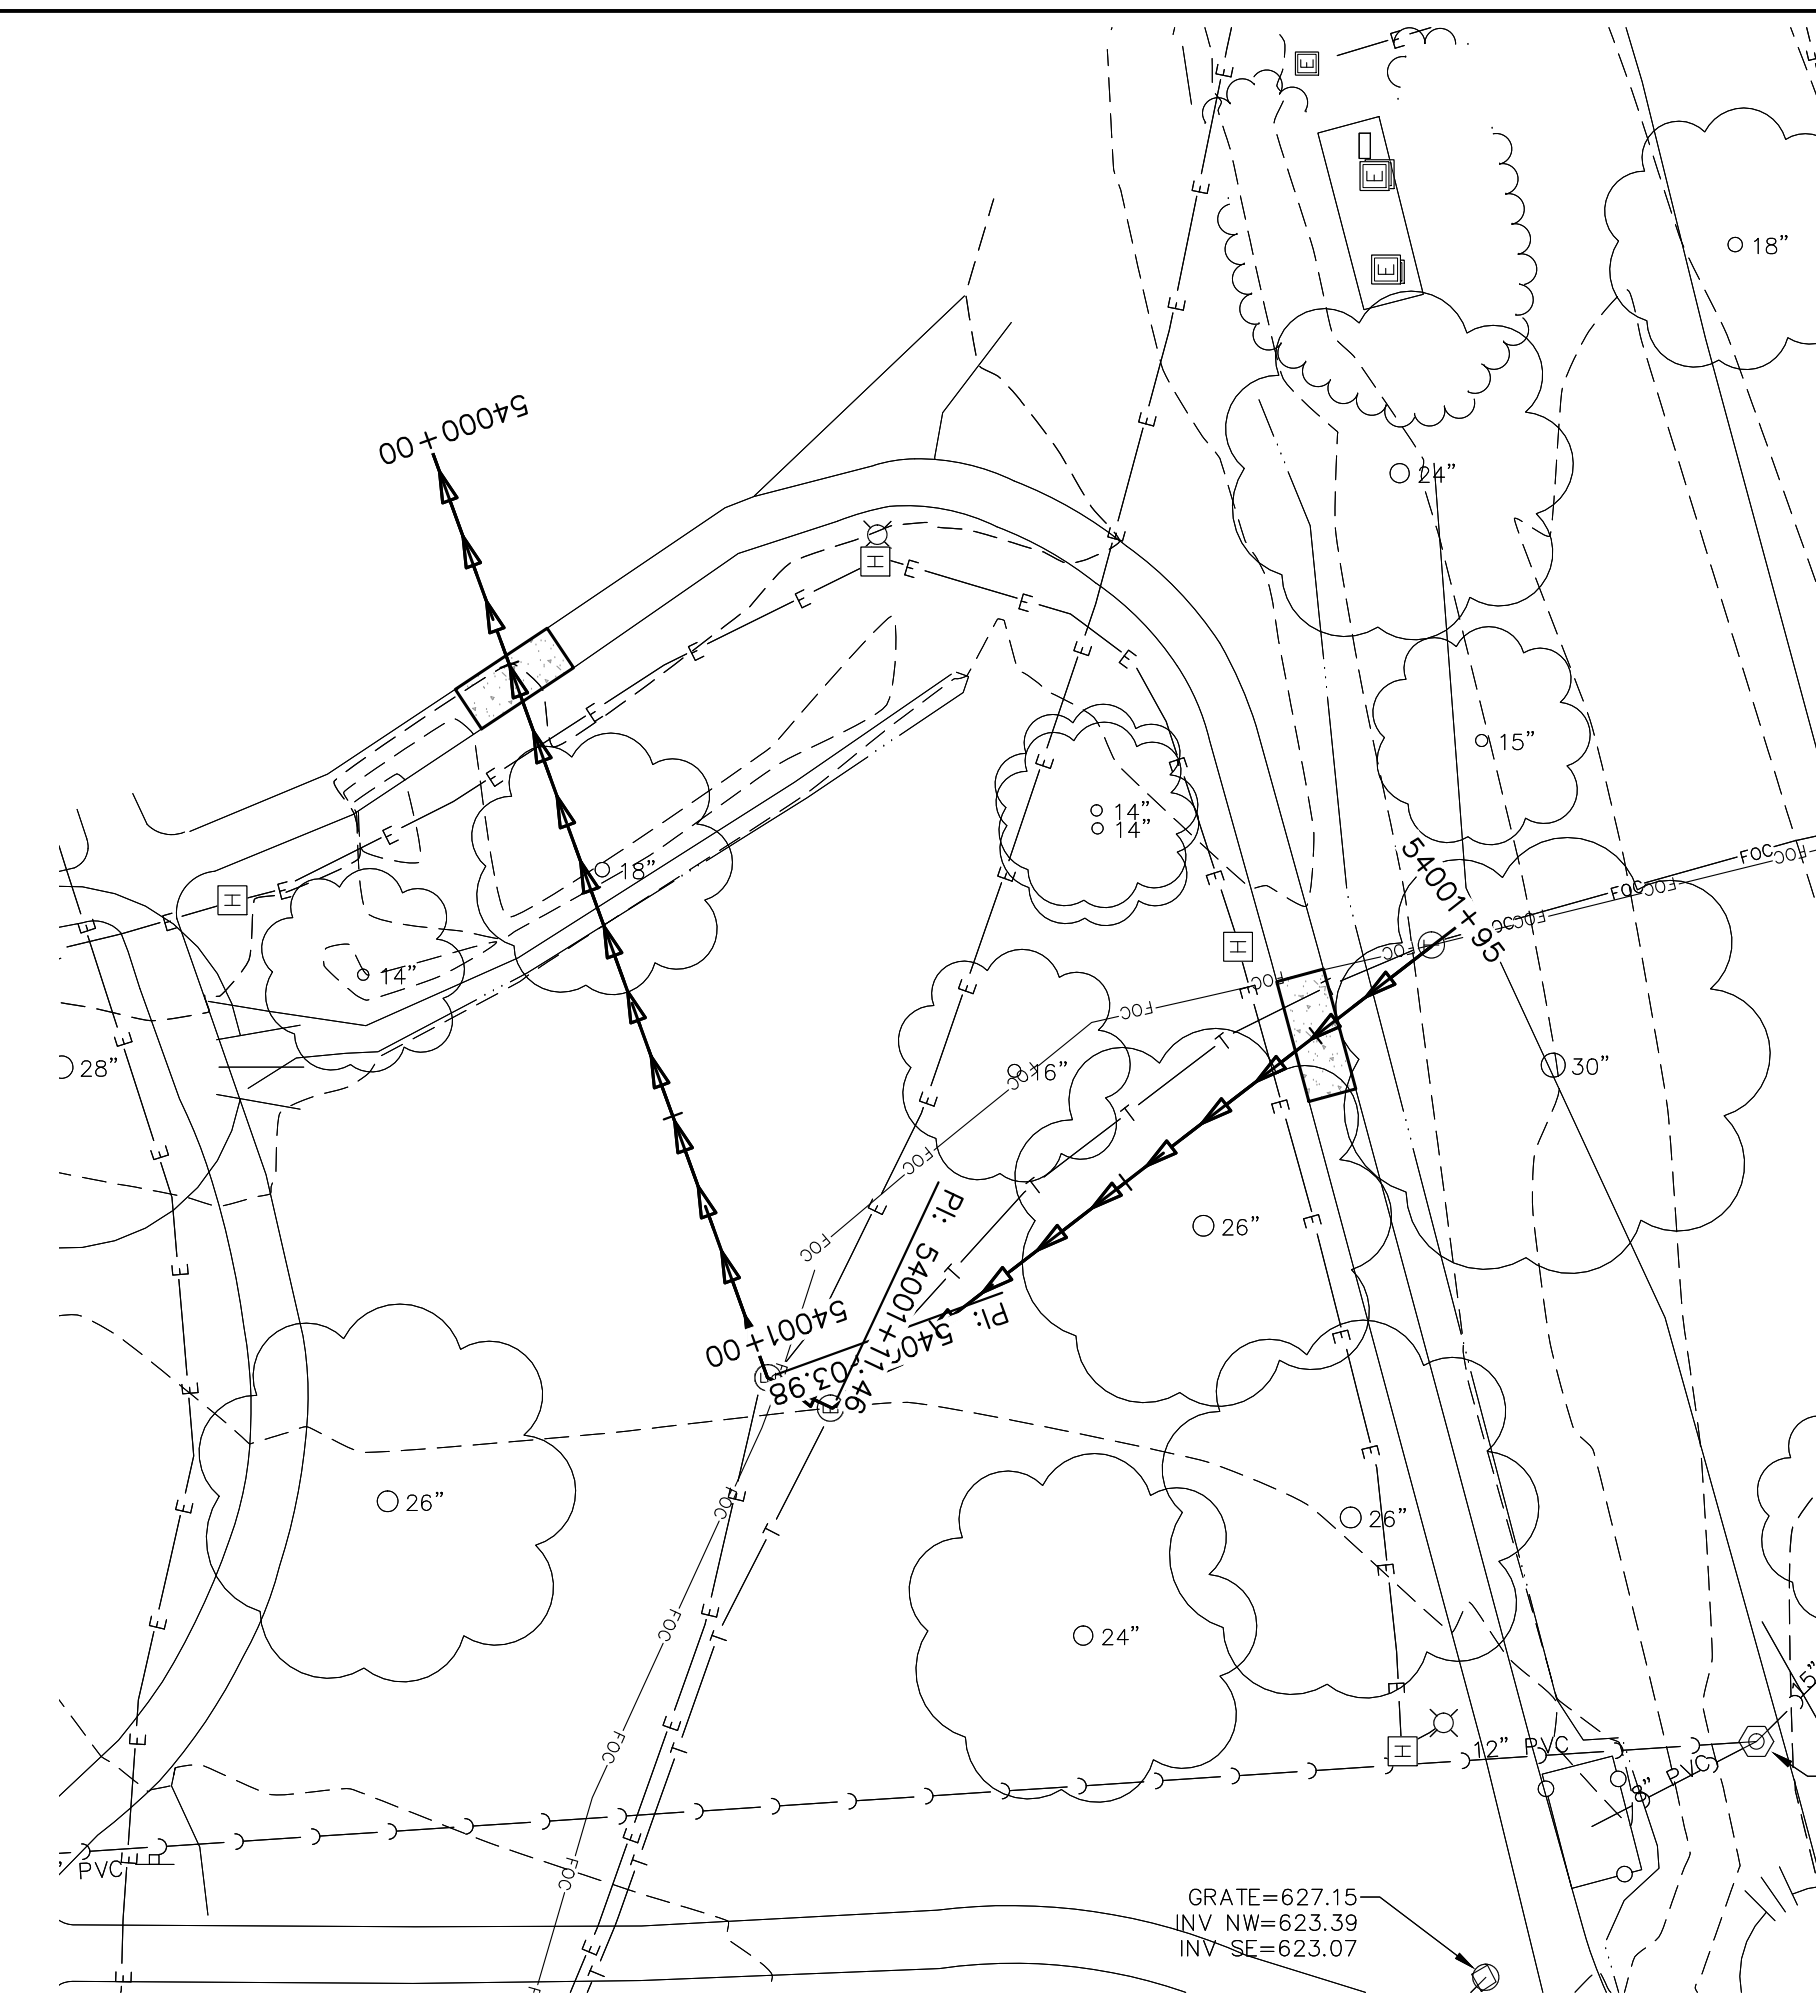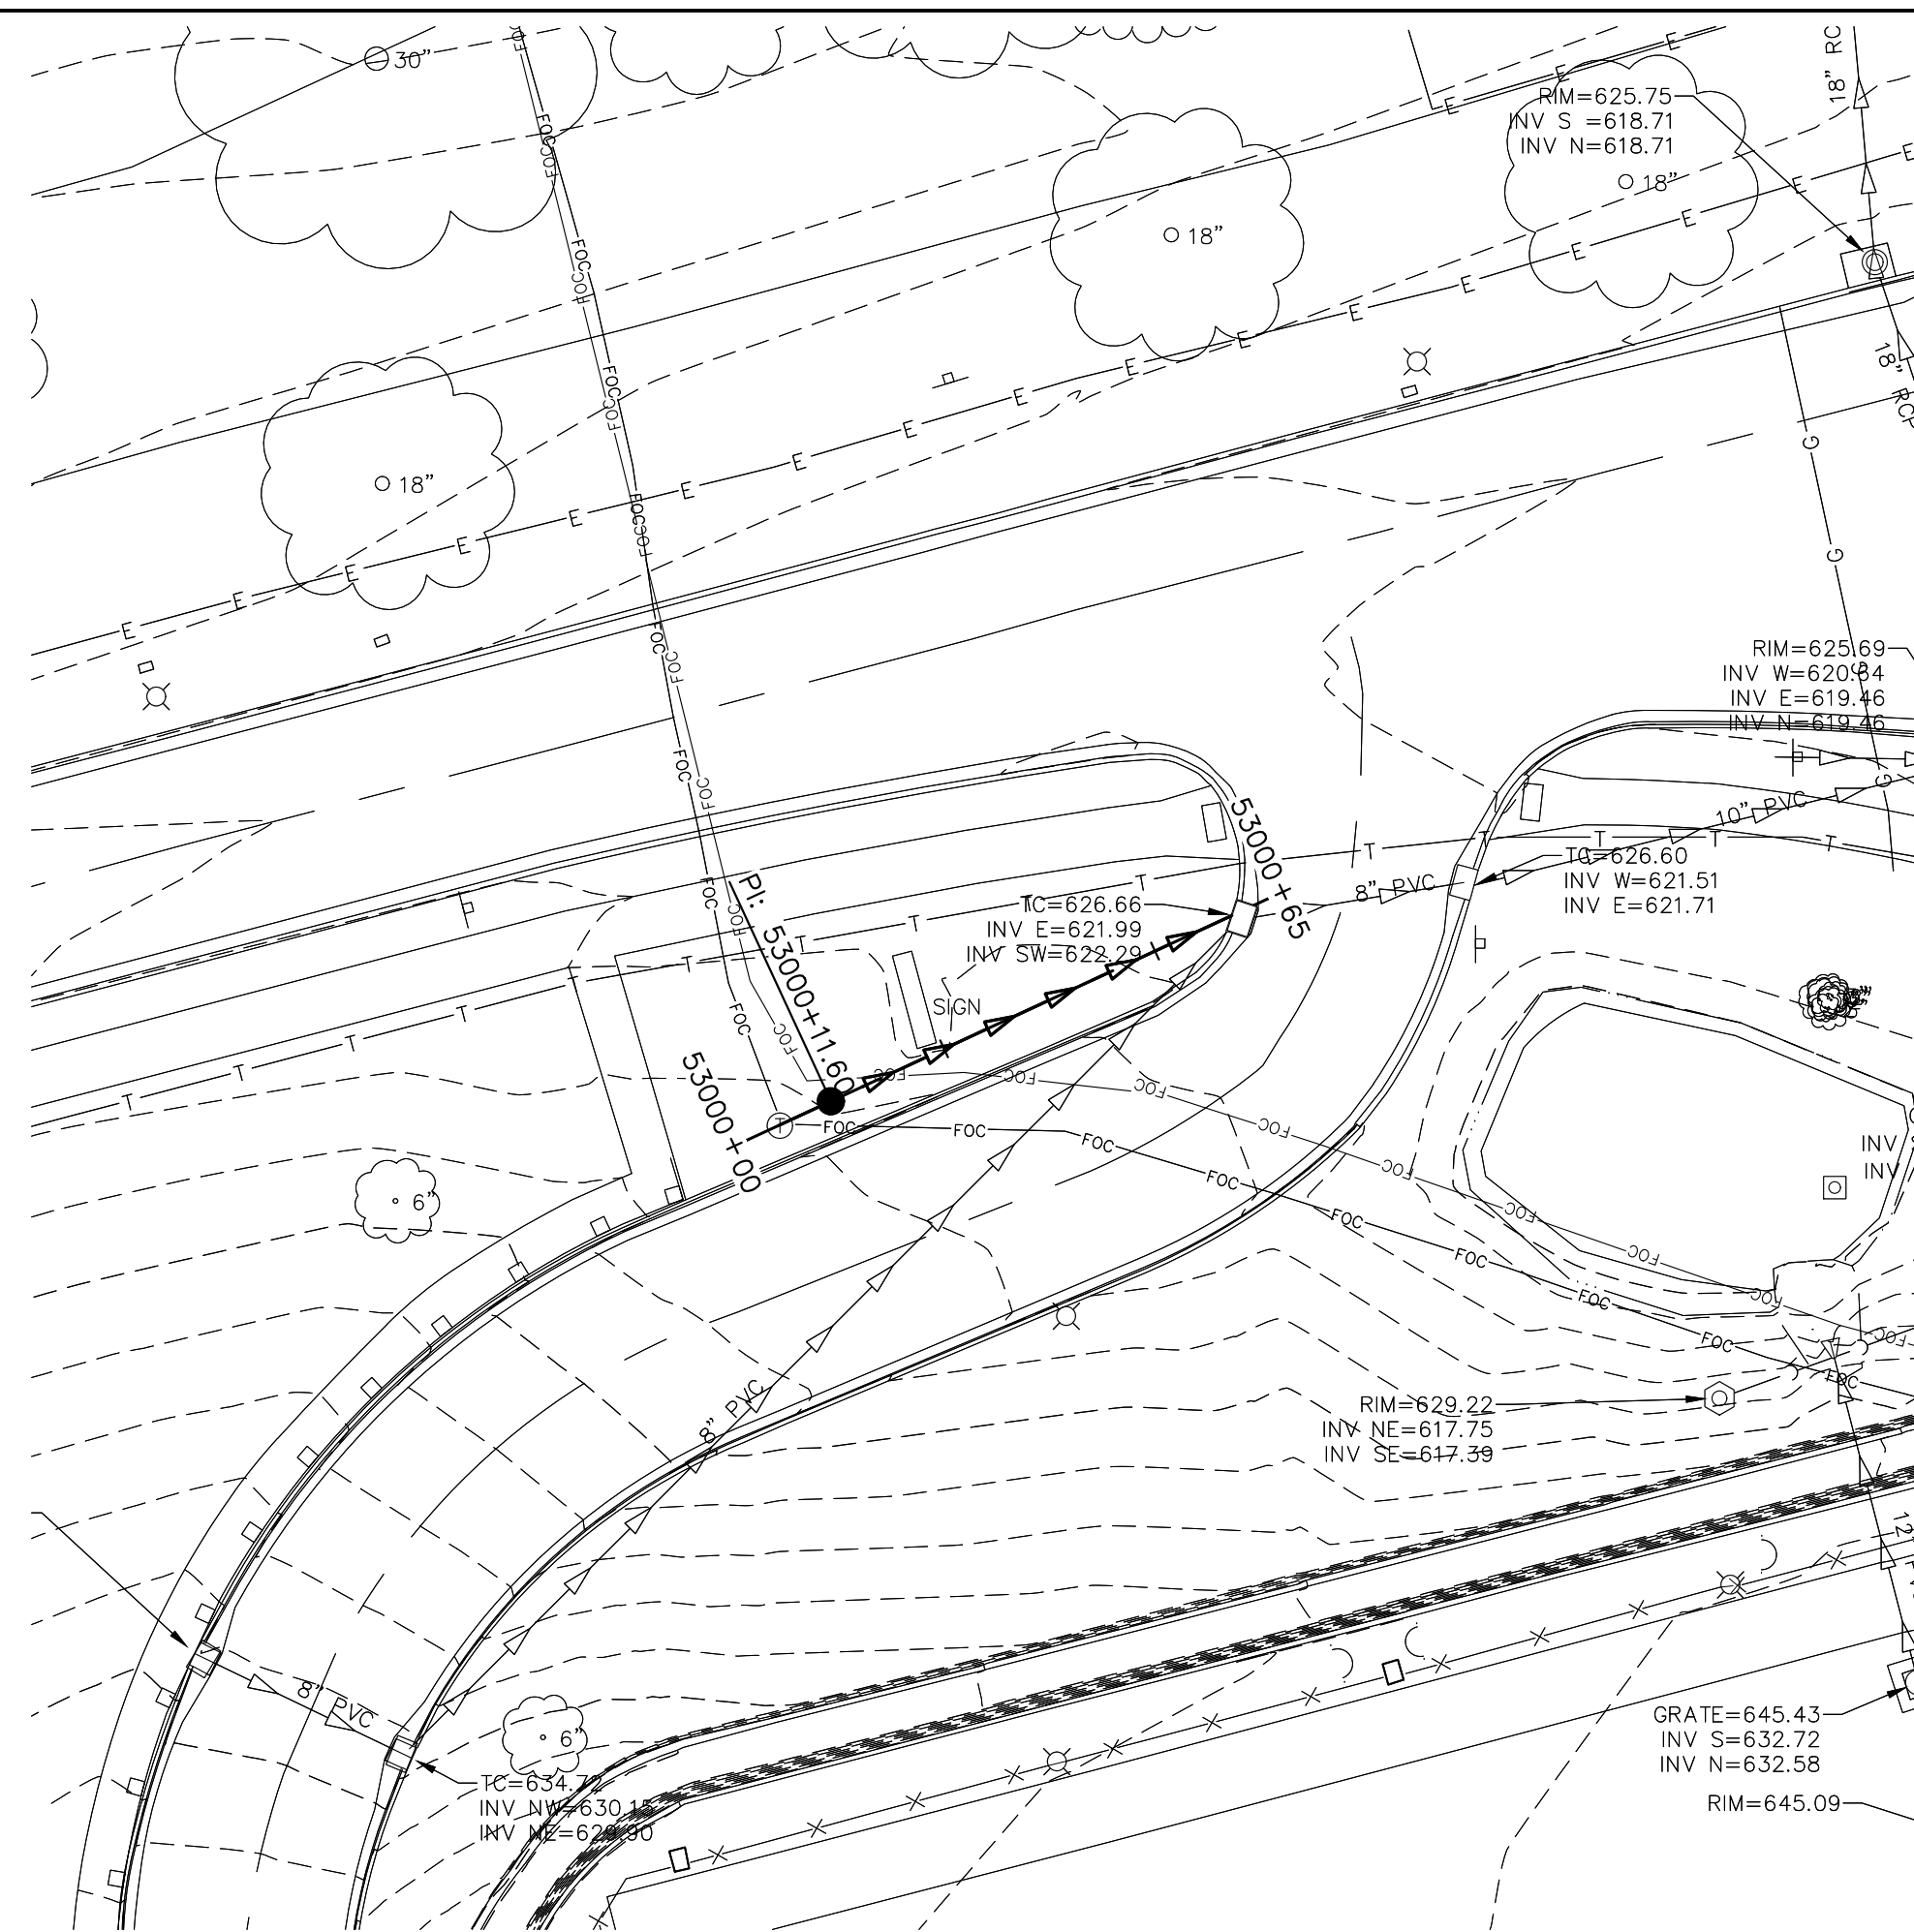


NOTE:
ALL UTILITY DEPTHS ARE APPROXIMATE
AND SHOULD BE VERIFIED BY CONTRACTOR
USING GROUND PENETRATING RADAR AND POTHOLING.


35% SCHEMATIC DESIGN SUBMISSION	5.17.21	CONSULTANT	 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02	ARCHITECT/ENGINEER OF RECORD	 Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093		Office of Construction and Facilities Management	 U.S. Department of Veterans Affairs	Drawing Title	Project Title	Phase	Project Number
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21								STORM PLAN AND PROFILE 24 & 25	FINAL BID DOCUMENTS	EHRM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI	695-21-700
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21											Building Number
95% CONSTRUCTION DOCUMENTS	6.23.22											
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23											
									Approved:	Sprinklered	Location	Drawing Number
										FULLY SPRINKLERED	5000 W. NATIONAL AVENUE MILWAUKEE, WI	100-CU127
Revisions:	Date:								Issue Date	Checked	Drawn	of
									SEPTEMBER 5, 2025	RJJ	LKS	

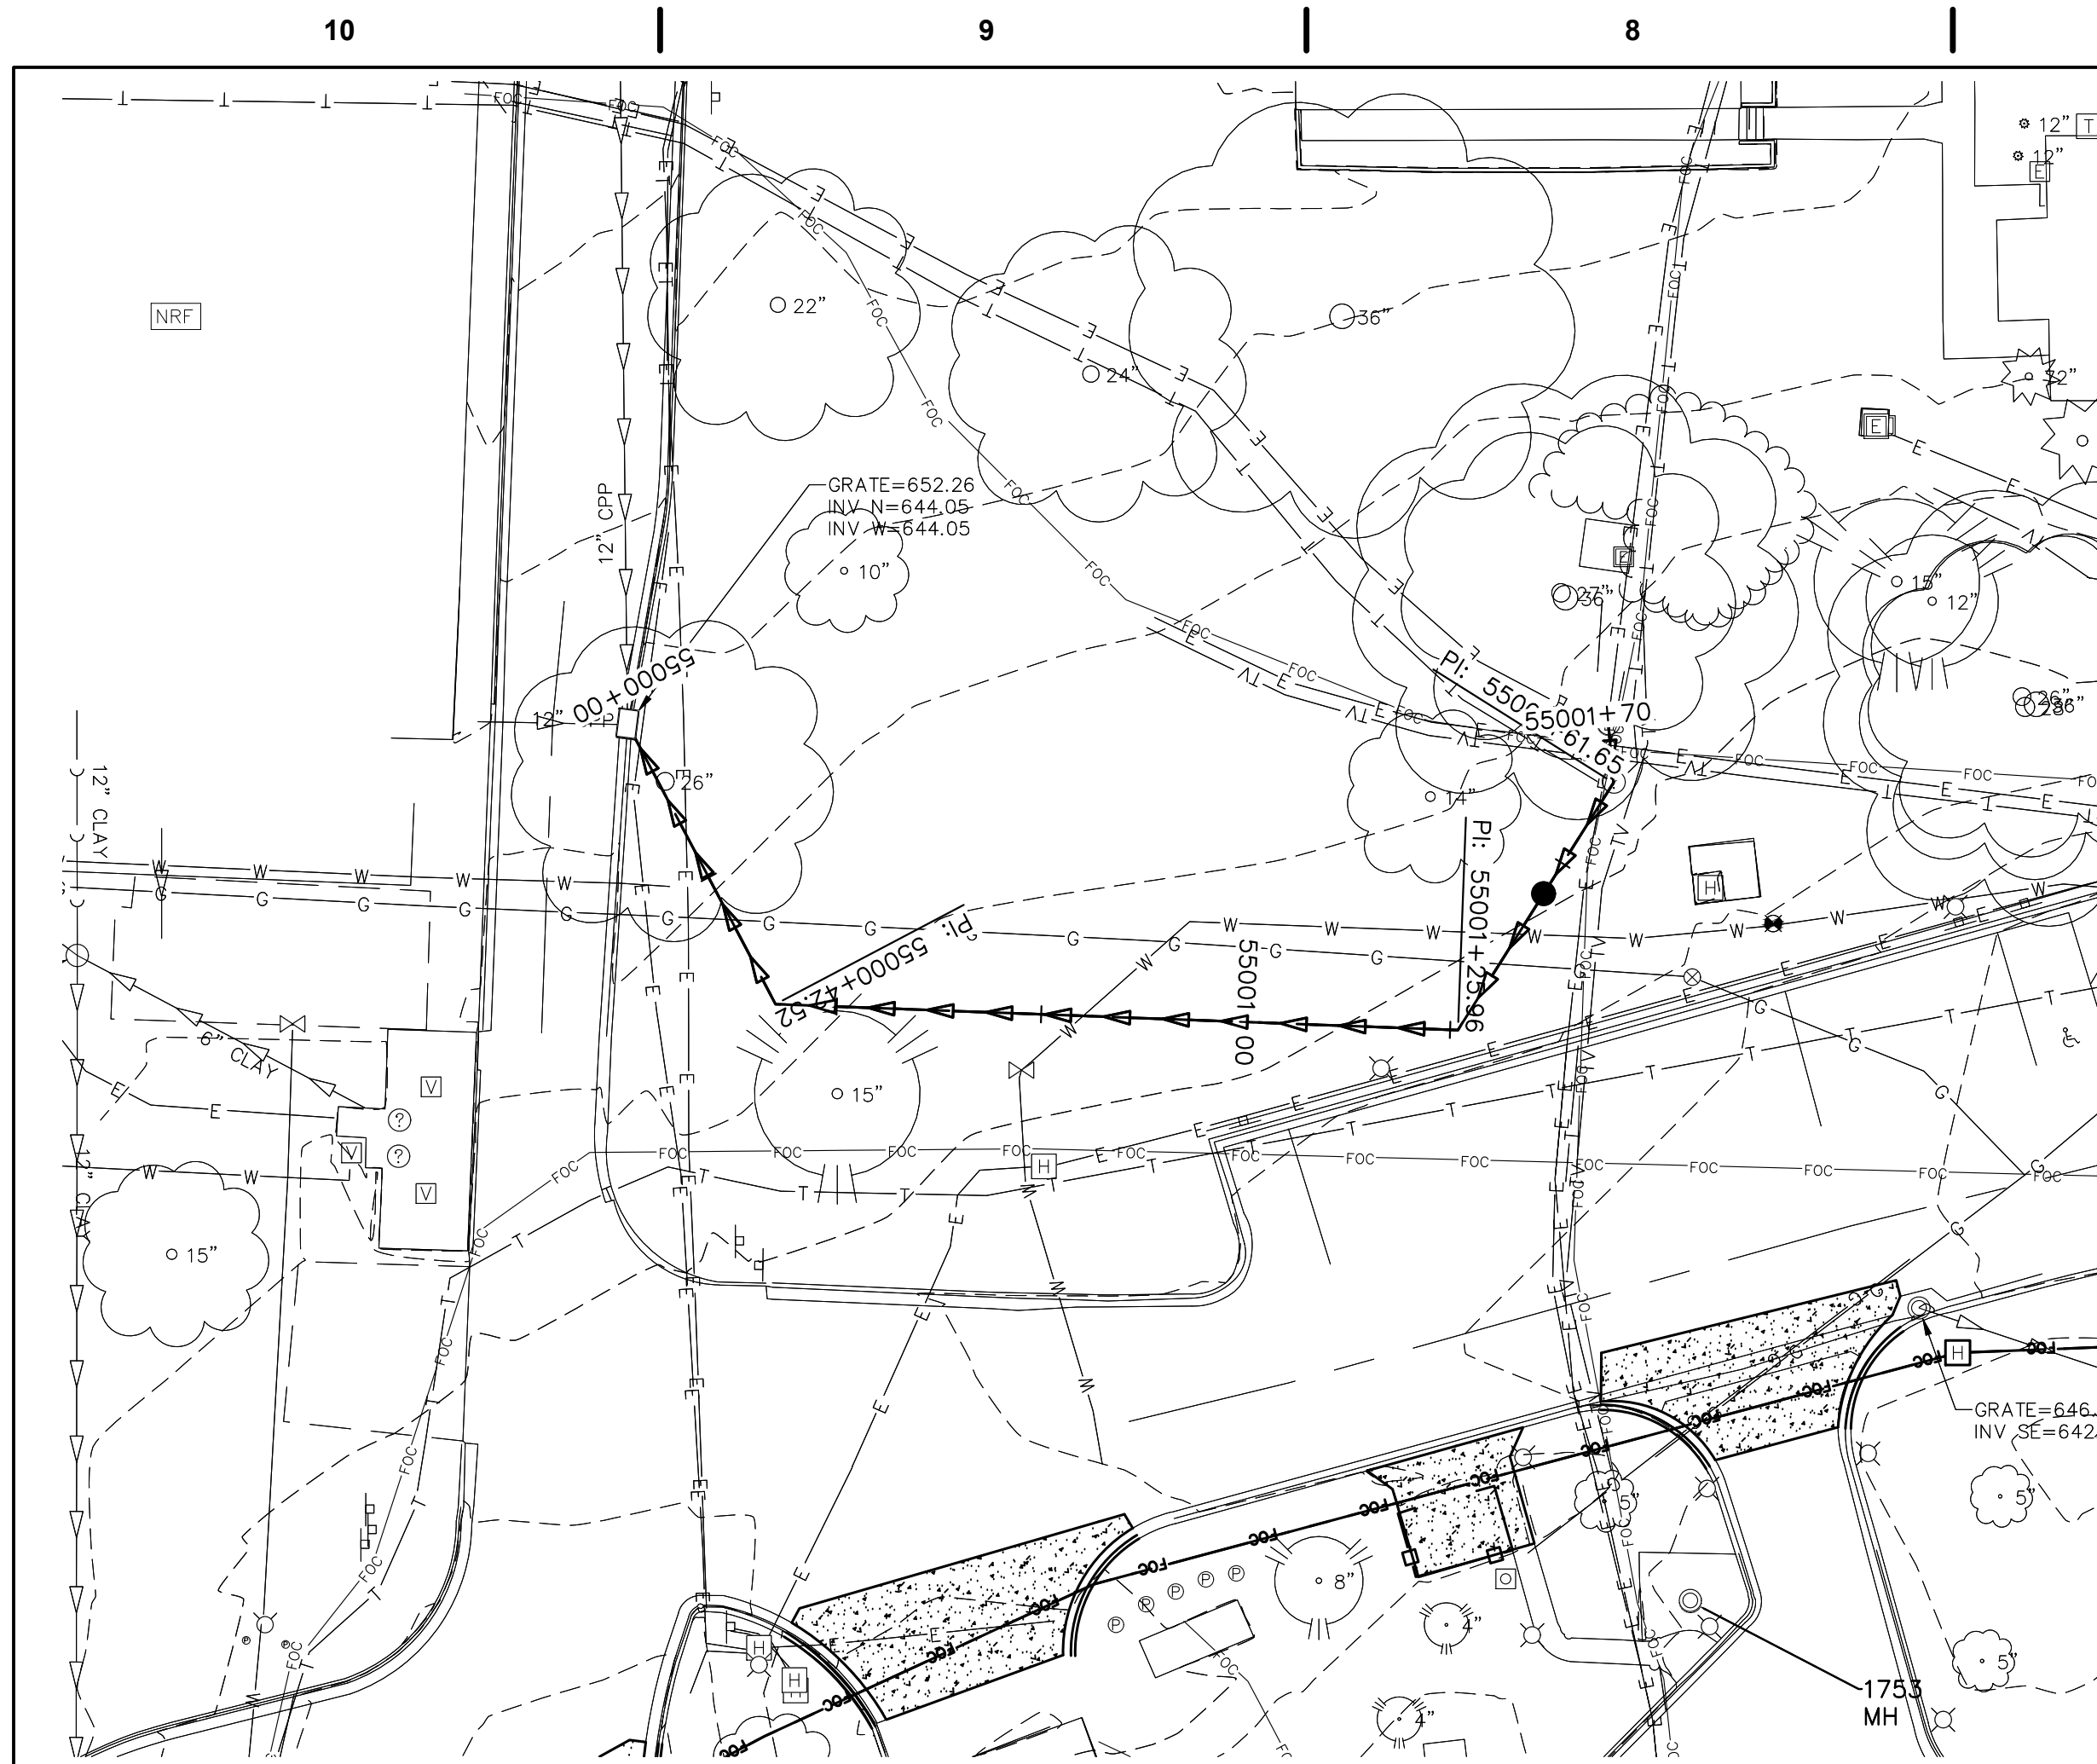

MANHOLE STORM 26
SCALE: 1"=20'

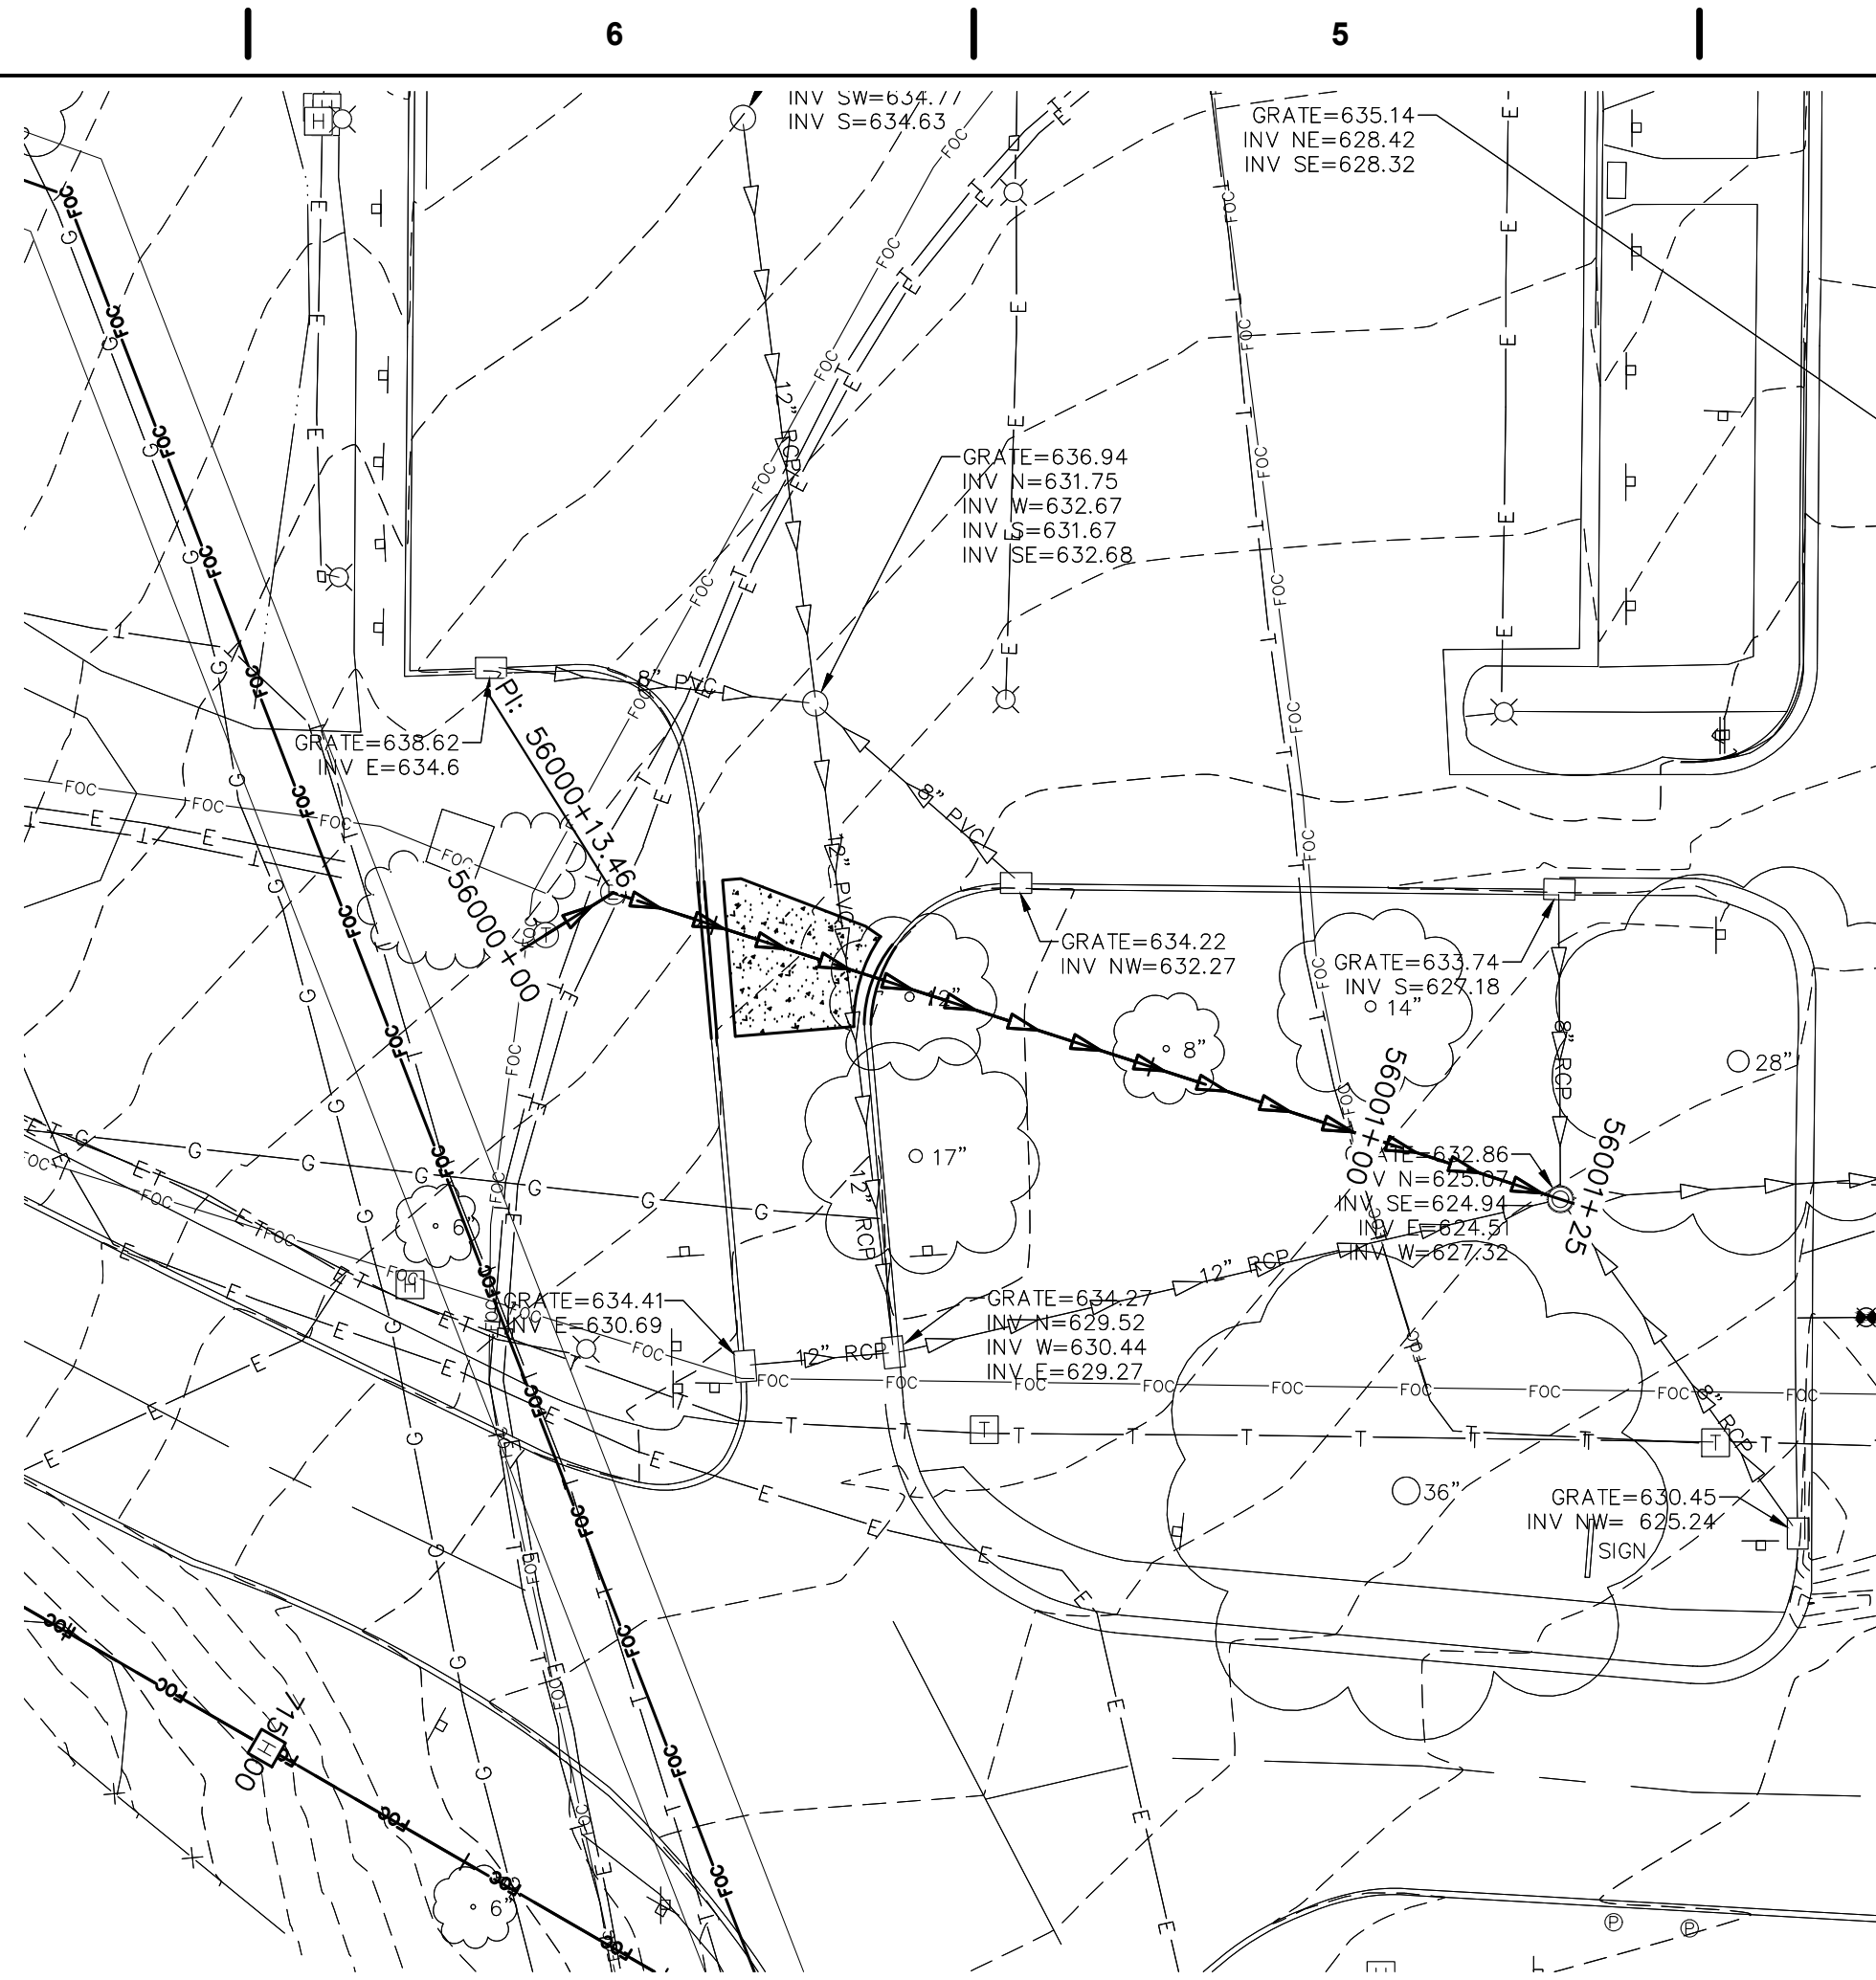


MANHOLE STORM 27
SCALE: 1"=20'

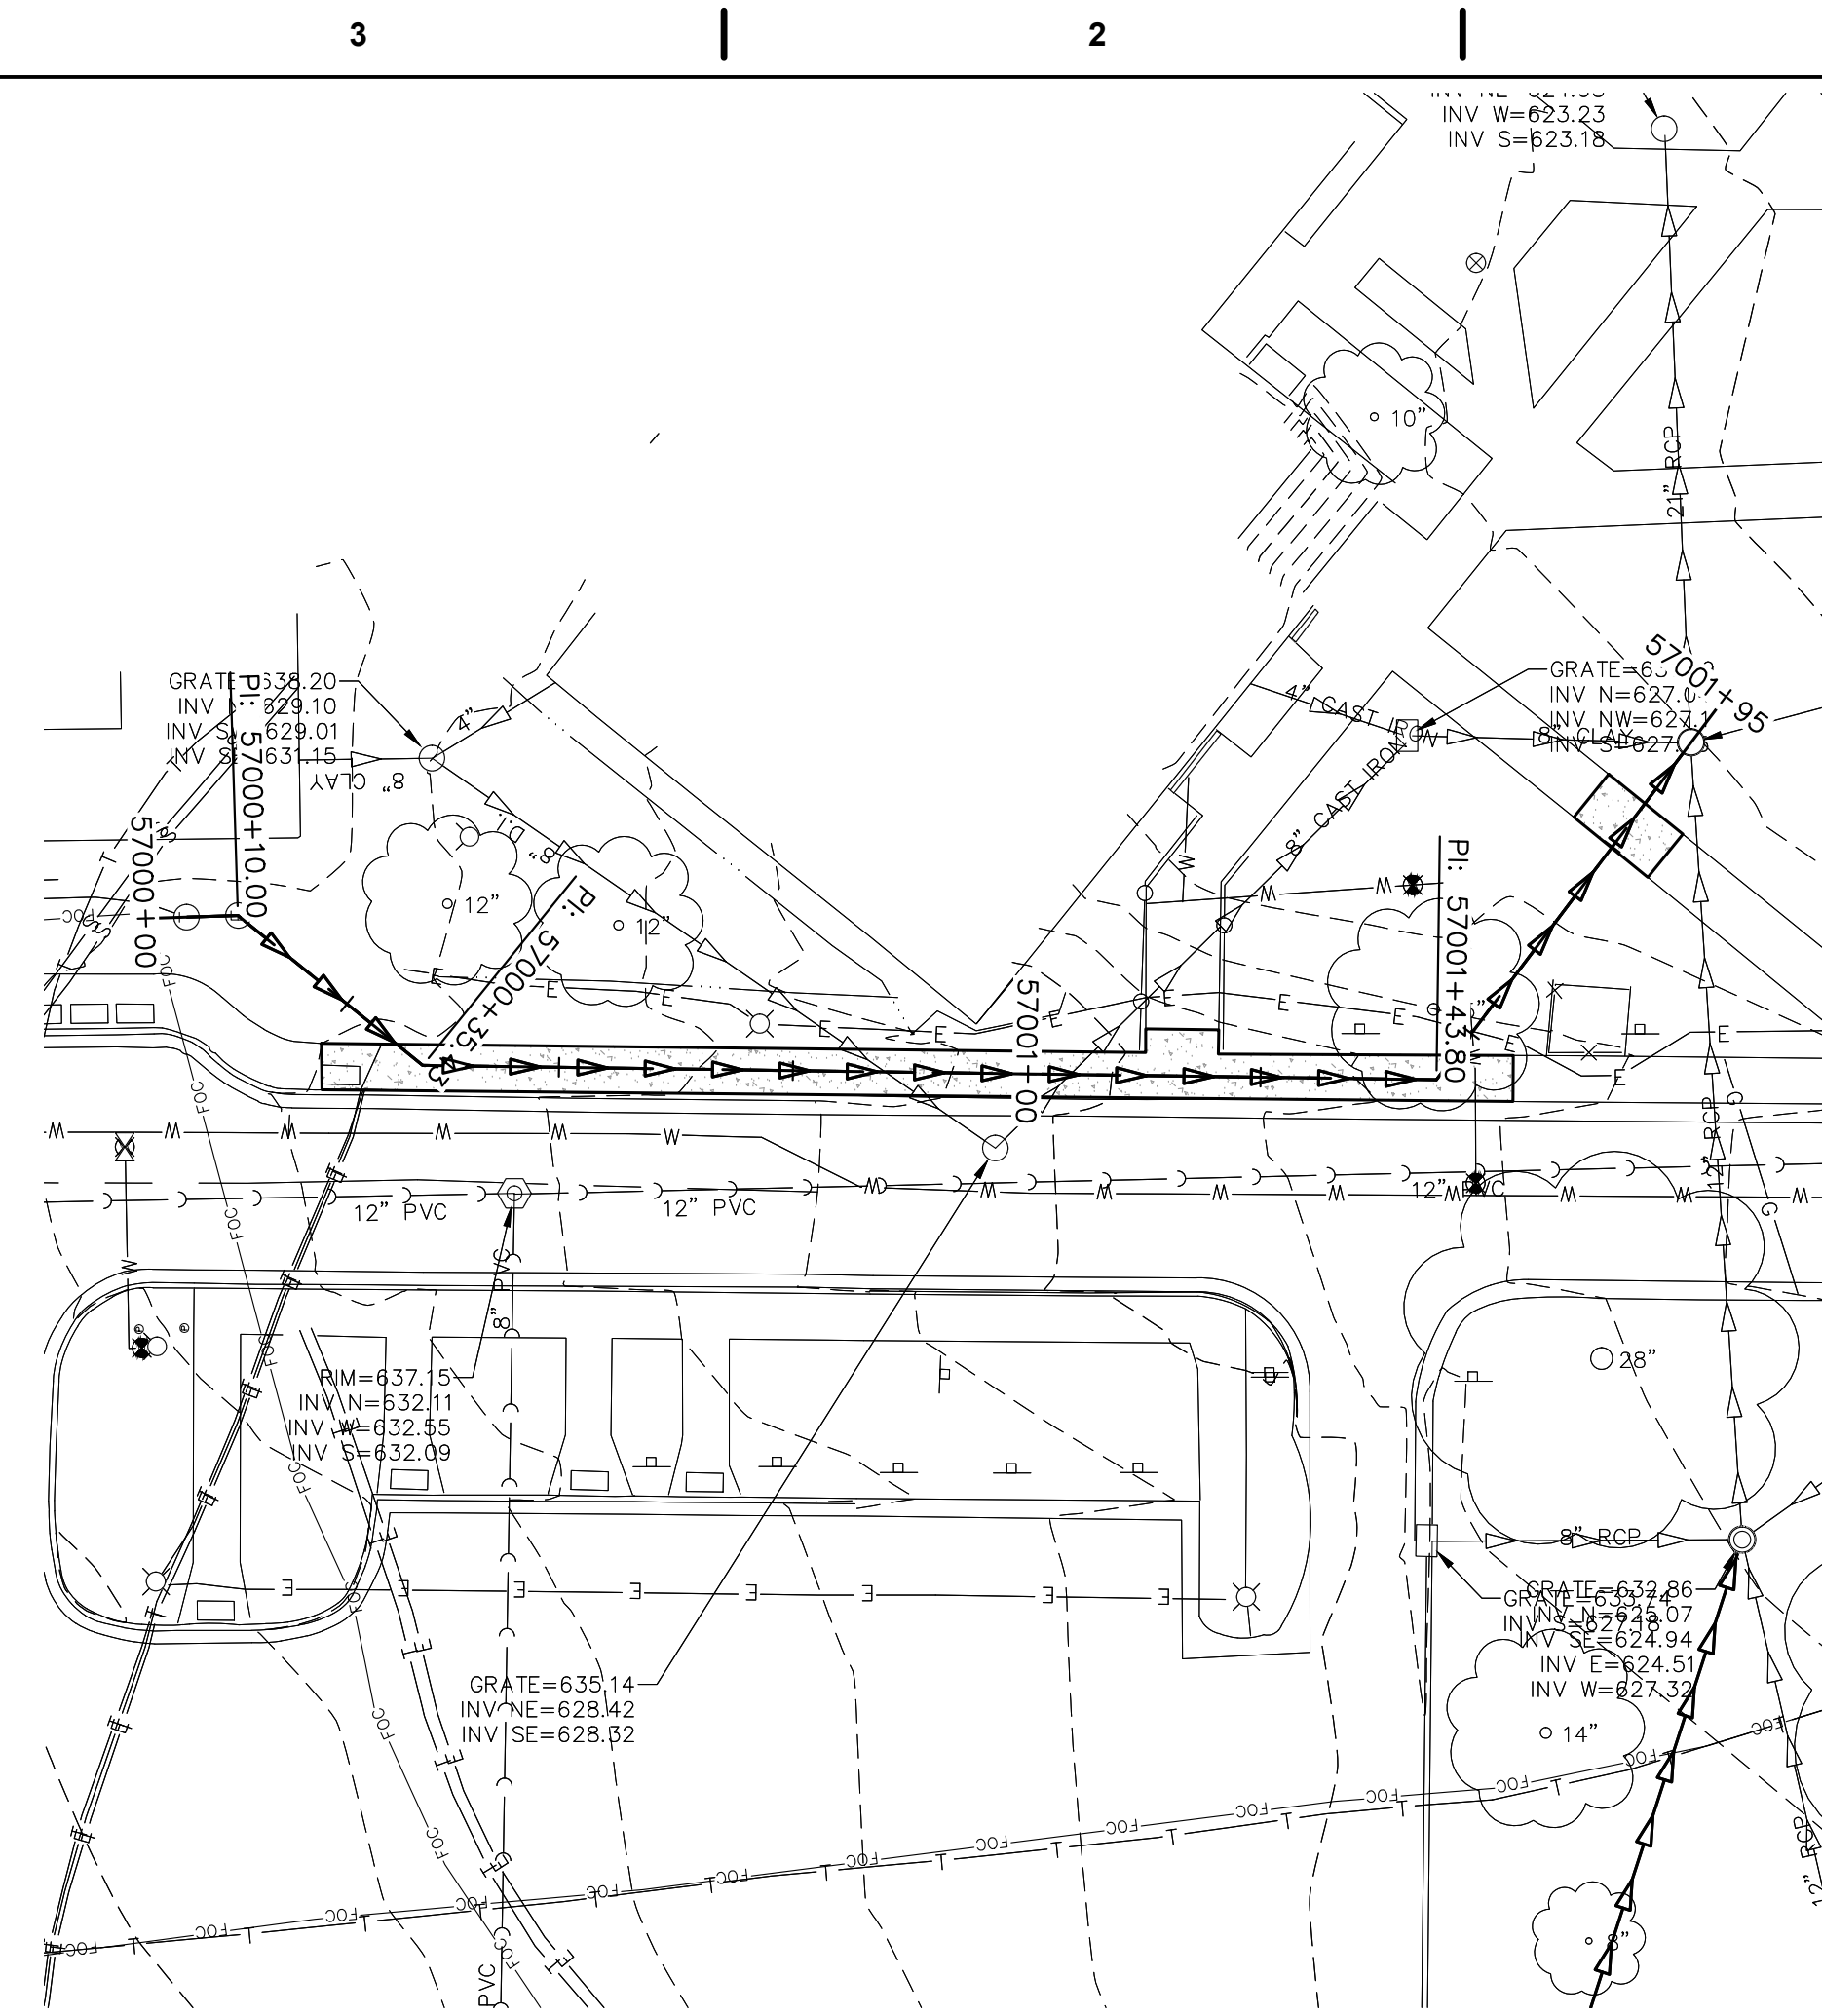


MANHOLE STORM 28
SCALE: 1"=20'

PROFILE VIEW OF 18004375.03 PROPOSED MH 26
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

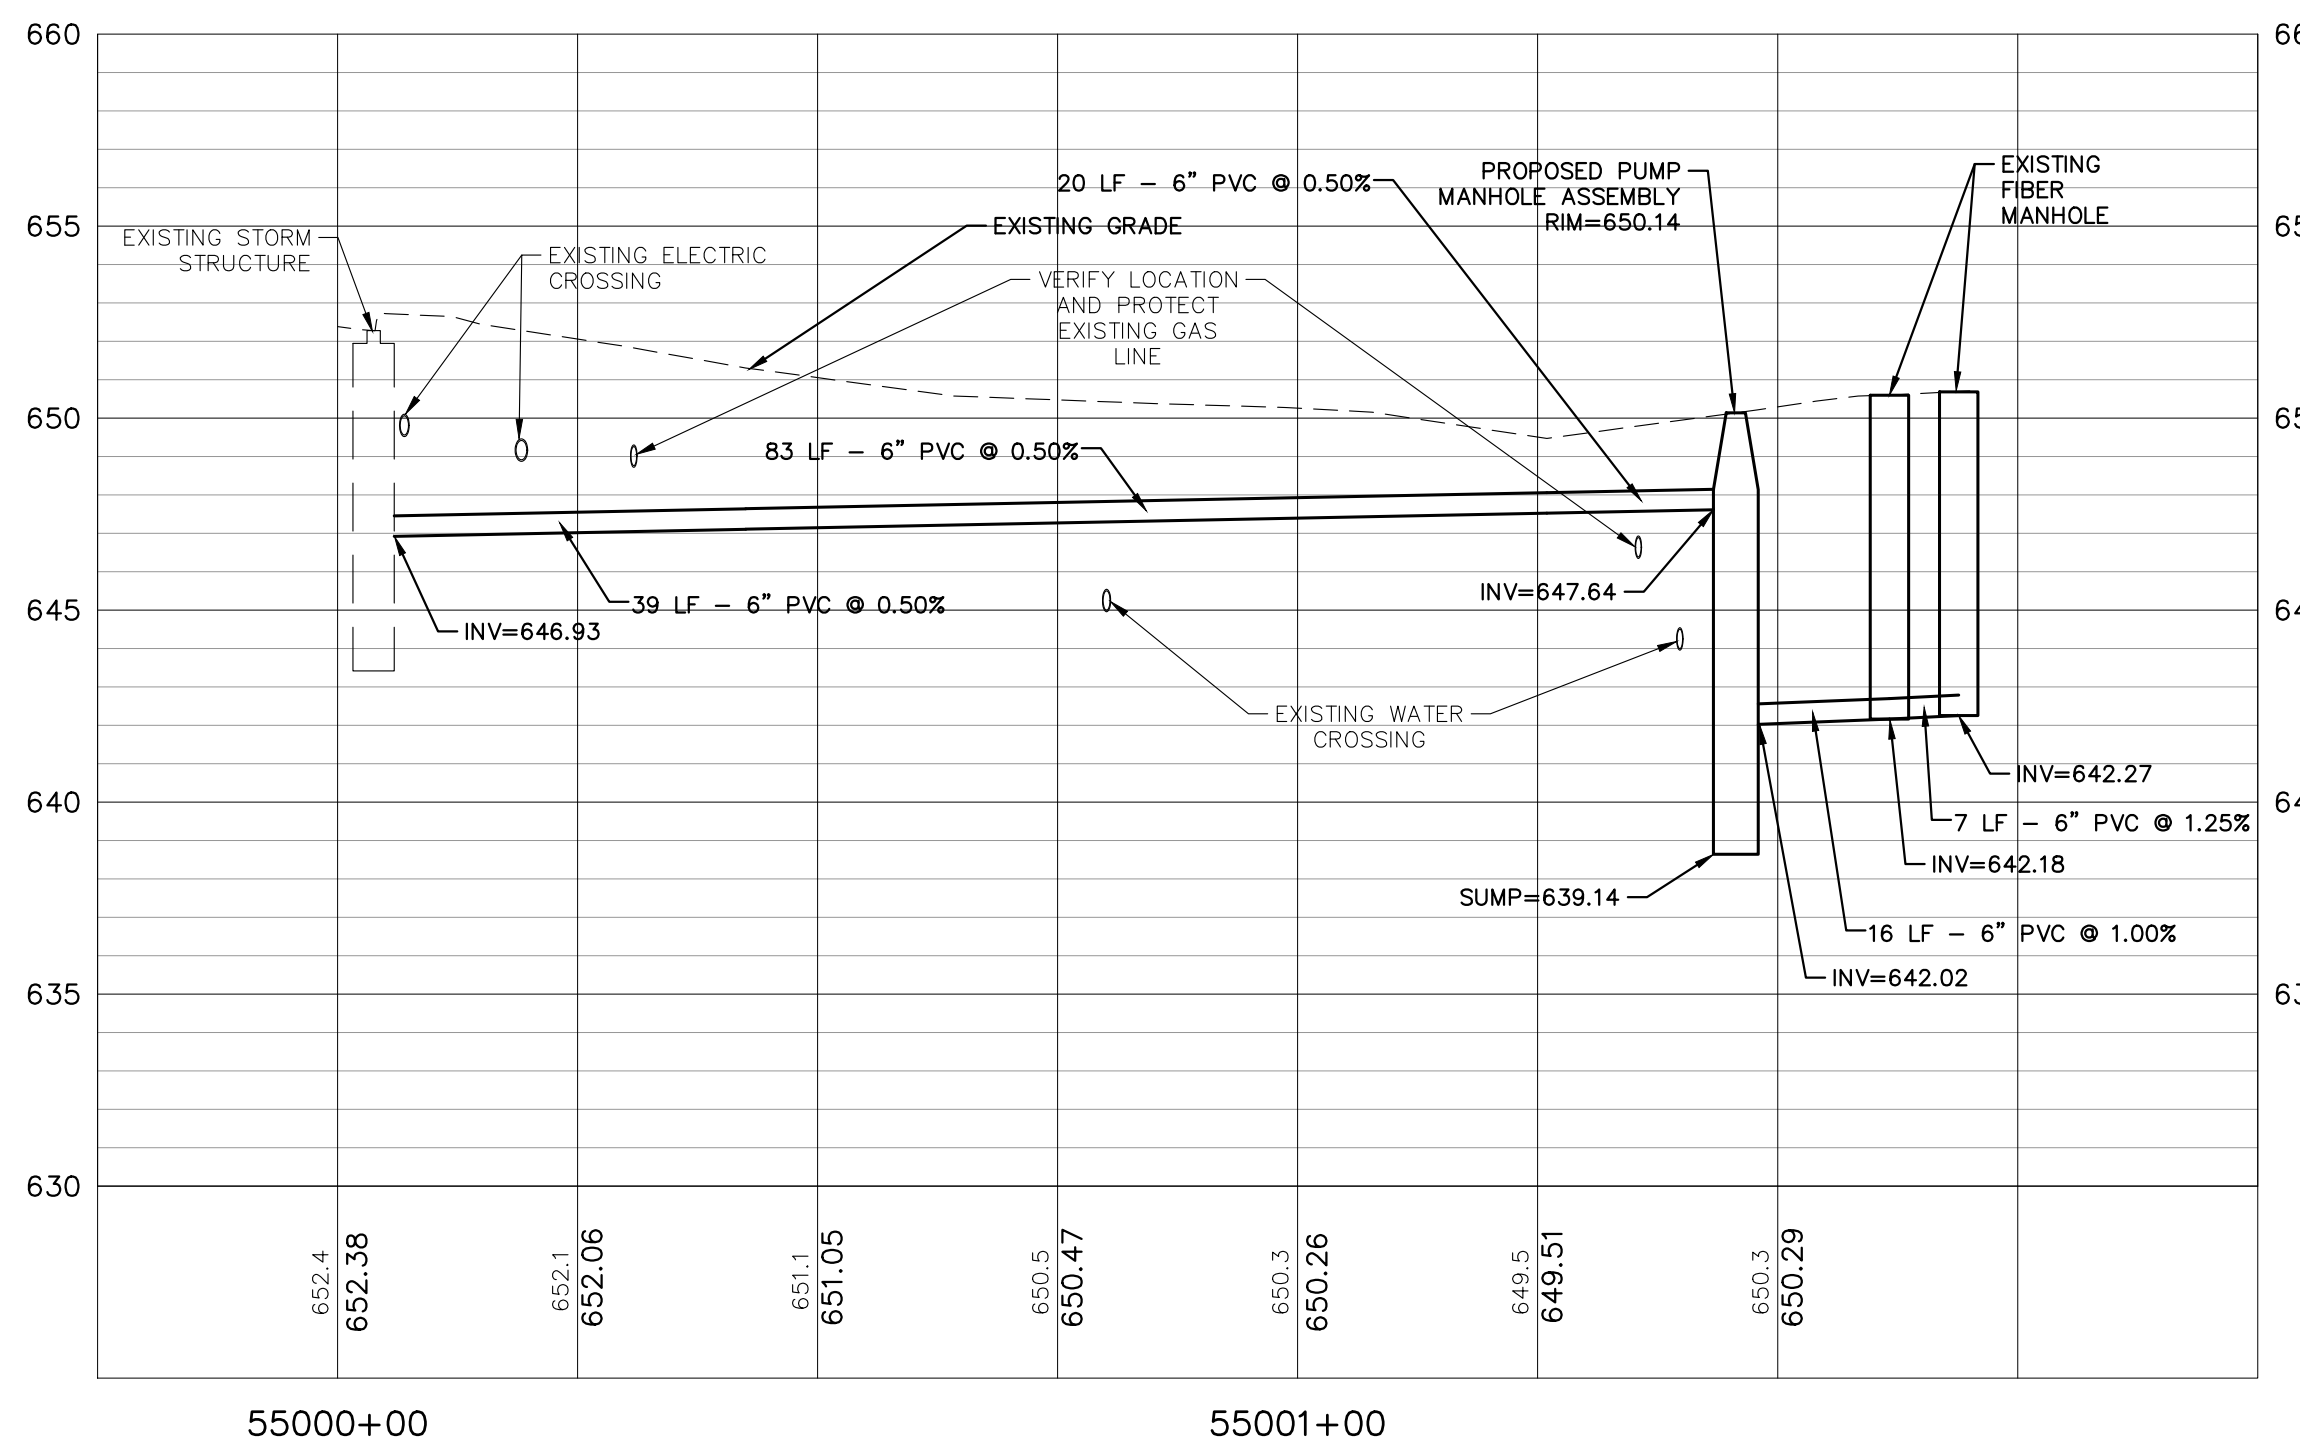


MANHOLE STORM 26

PROFILE VIEW OF 18004375.03 PROPOSED MH 27
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

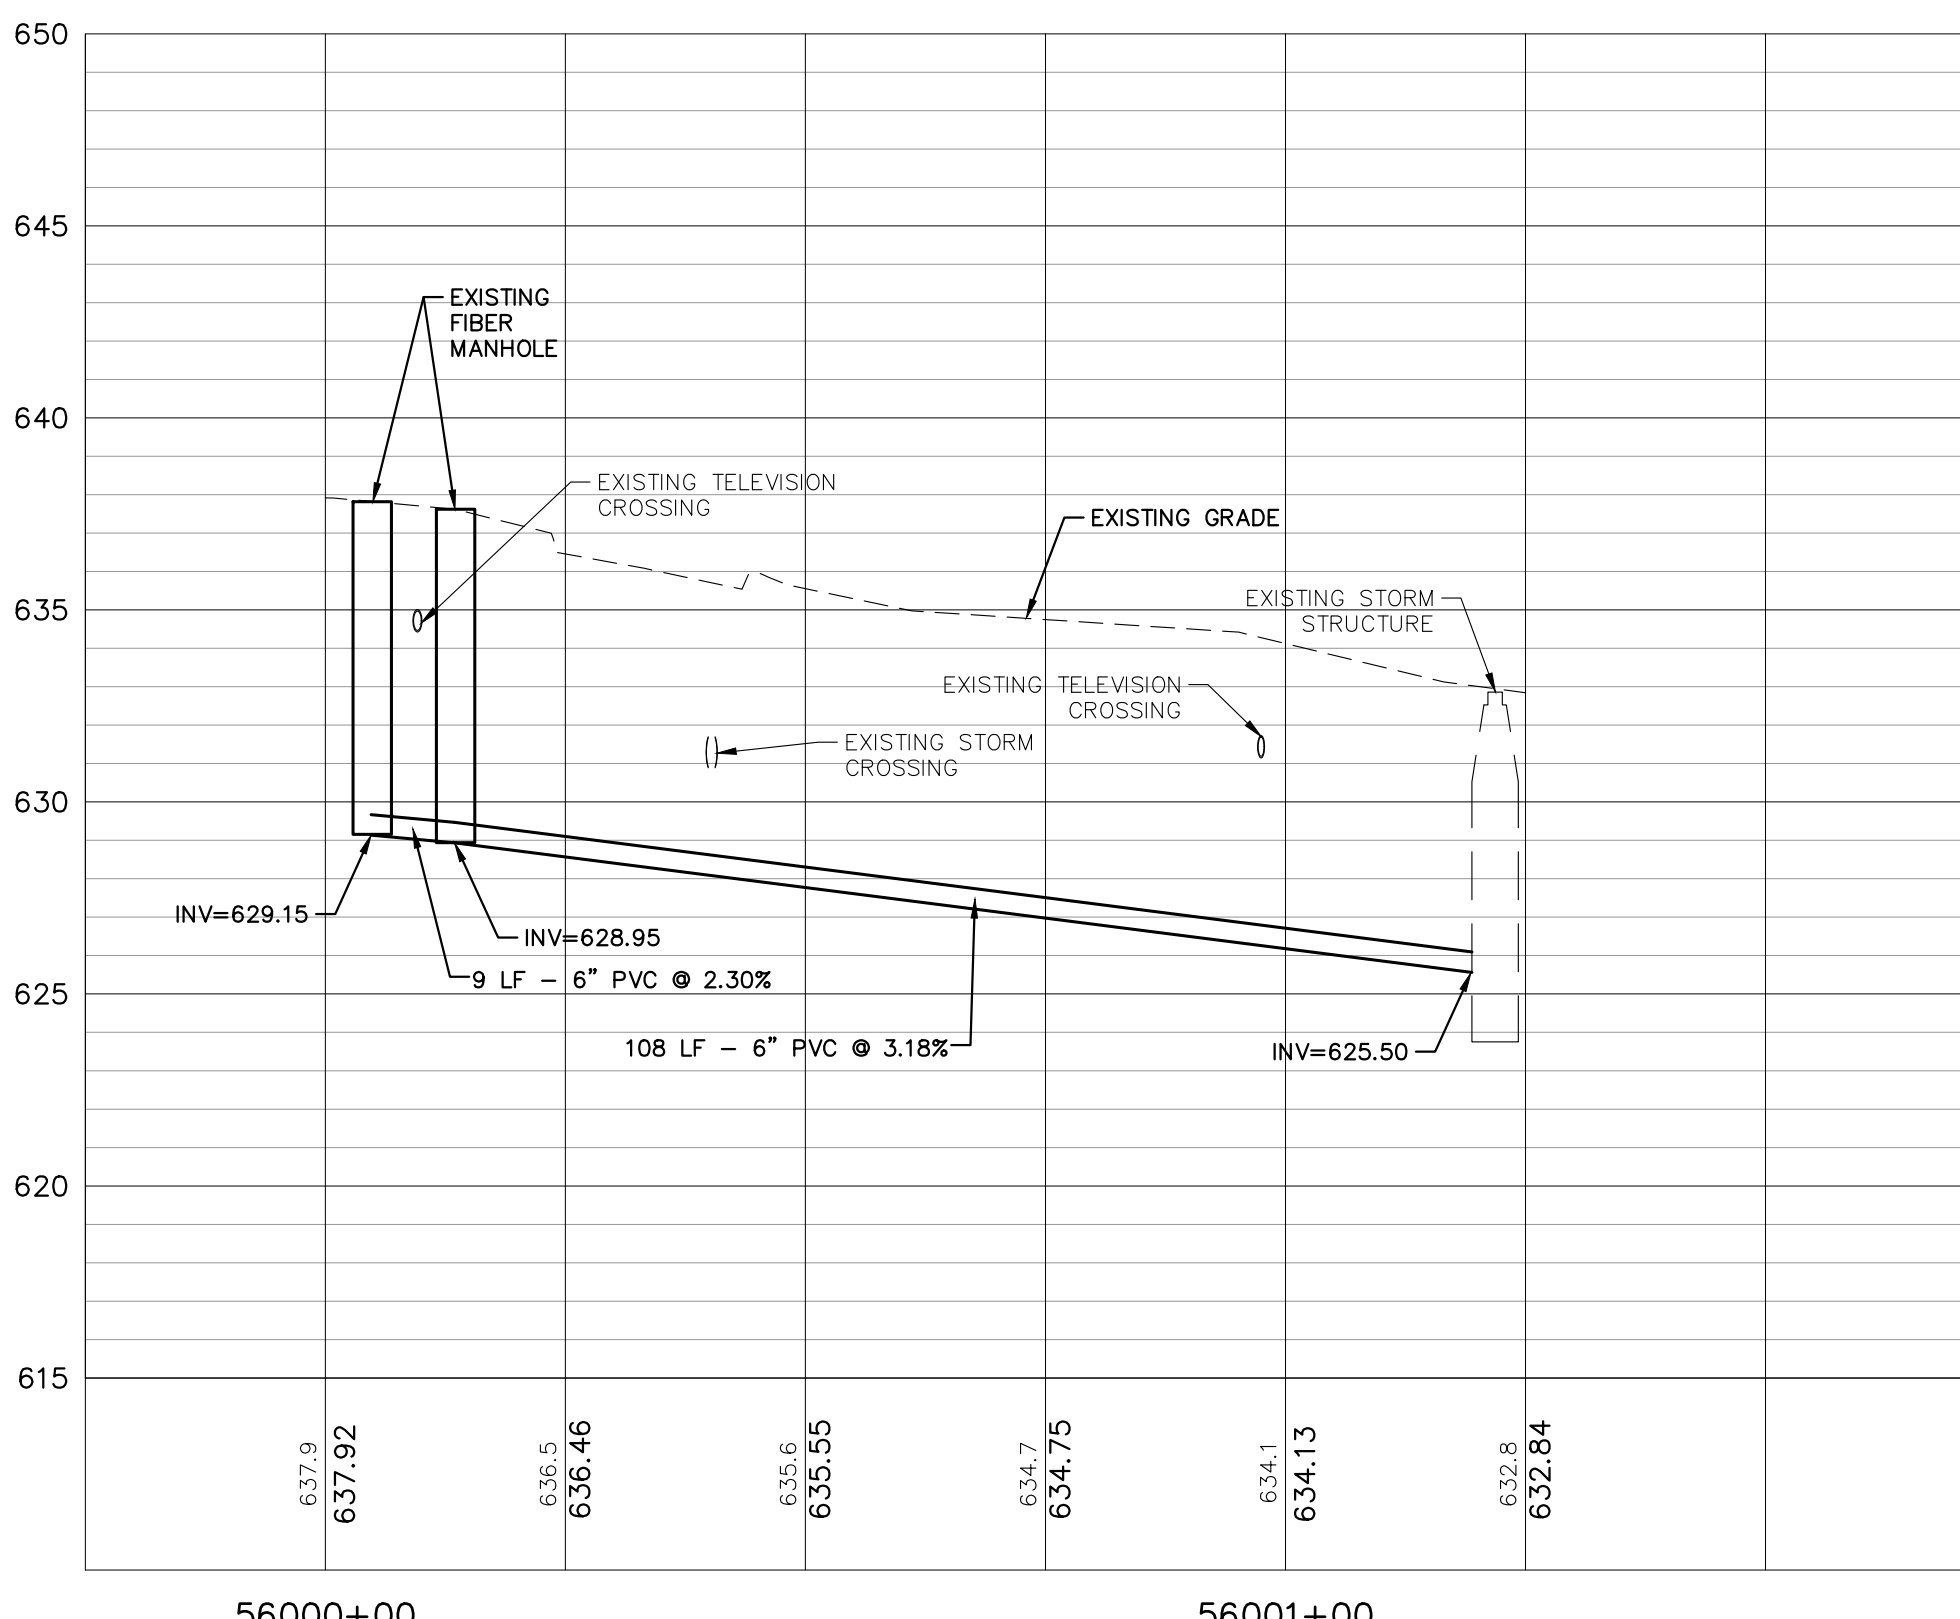

MANHOLE STORM 27

PROFILE VIEW OF 18004375.03 PROPOSED MH 28
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

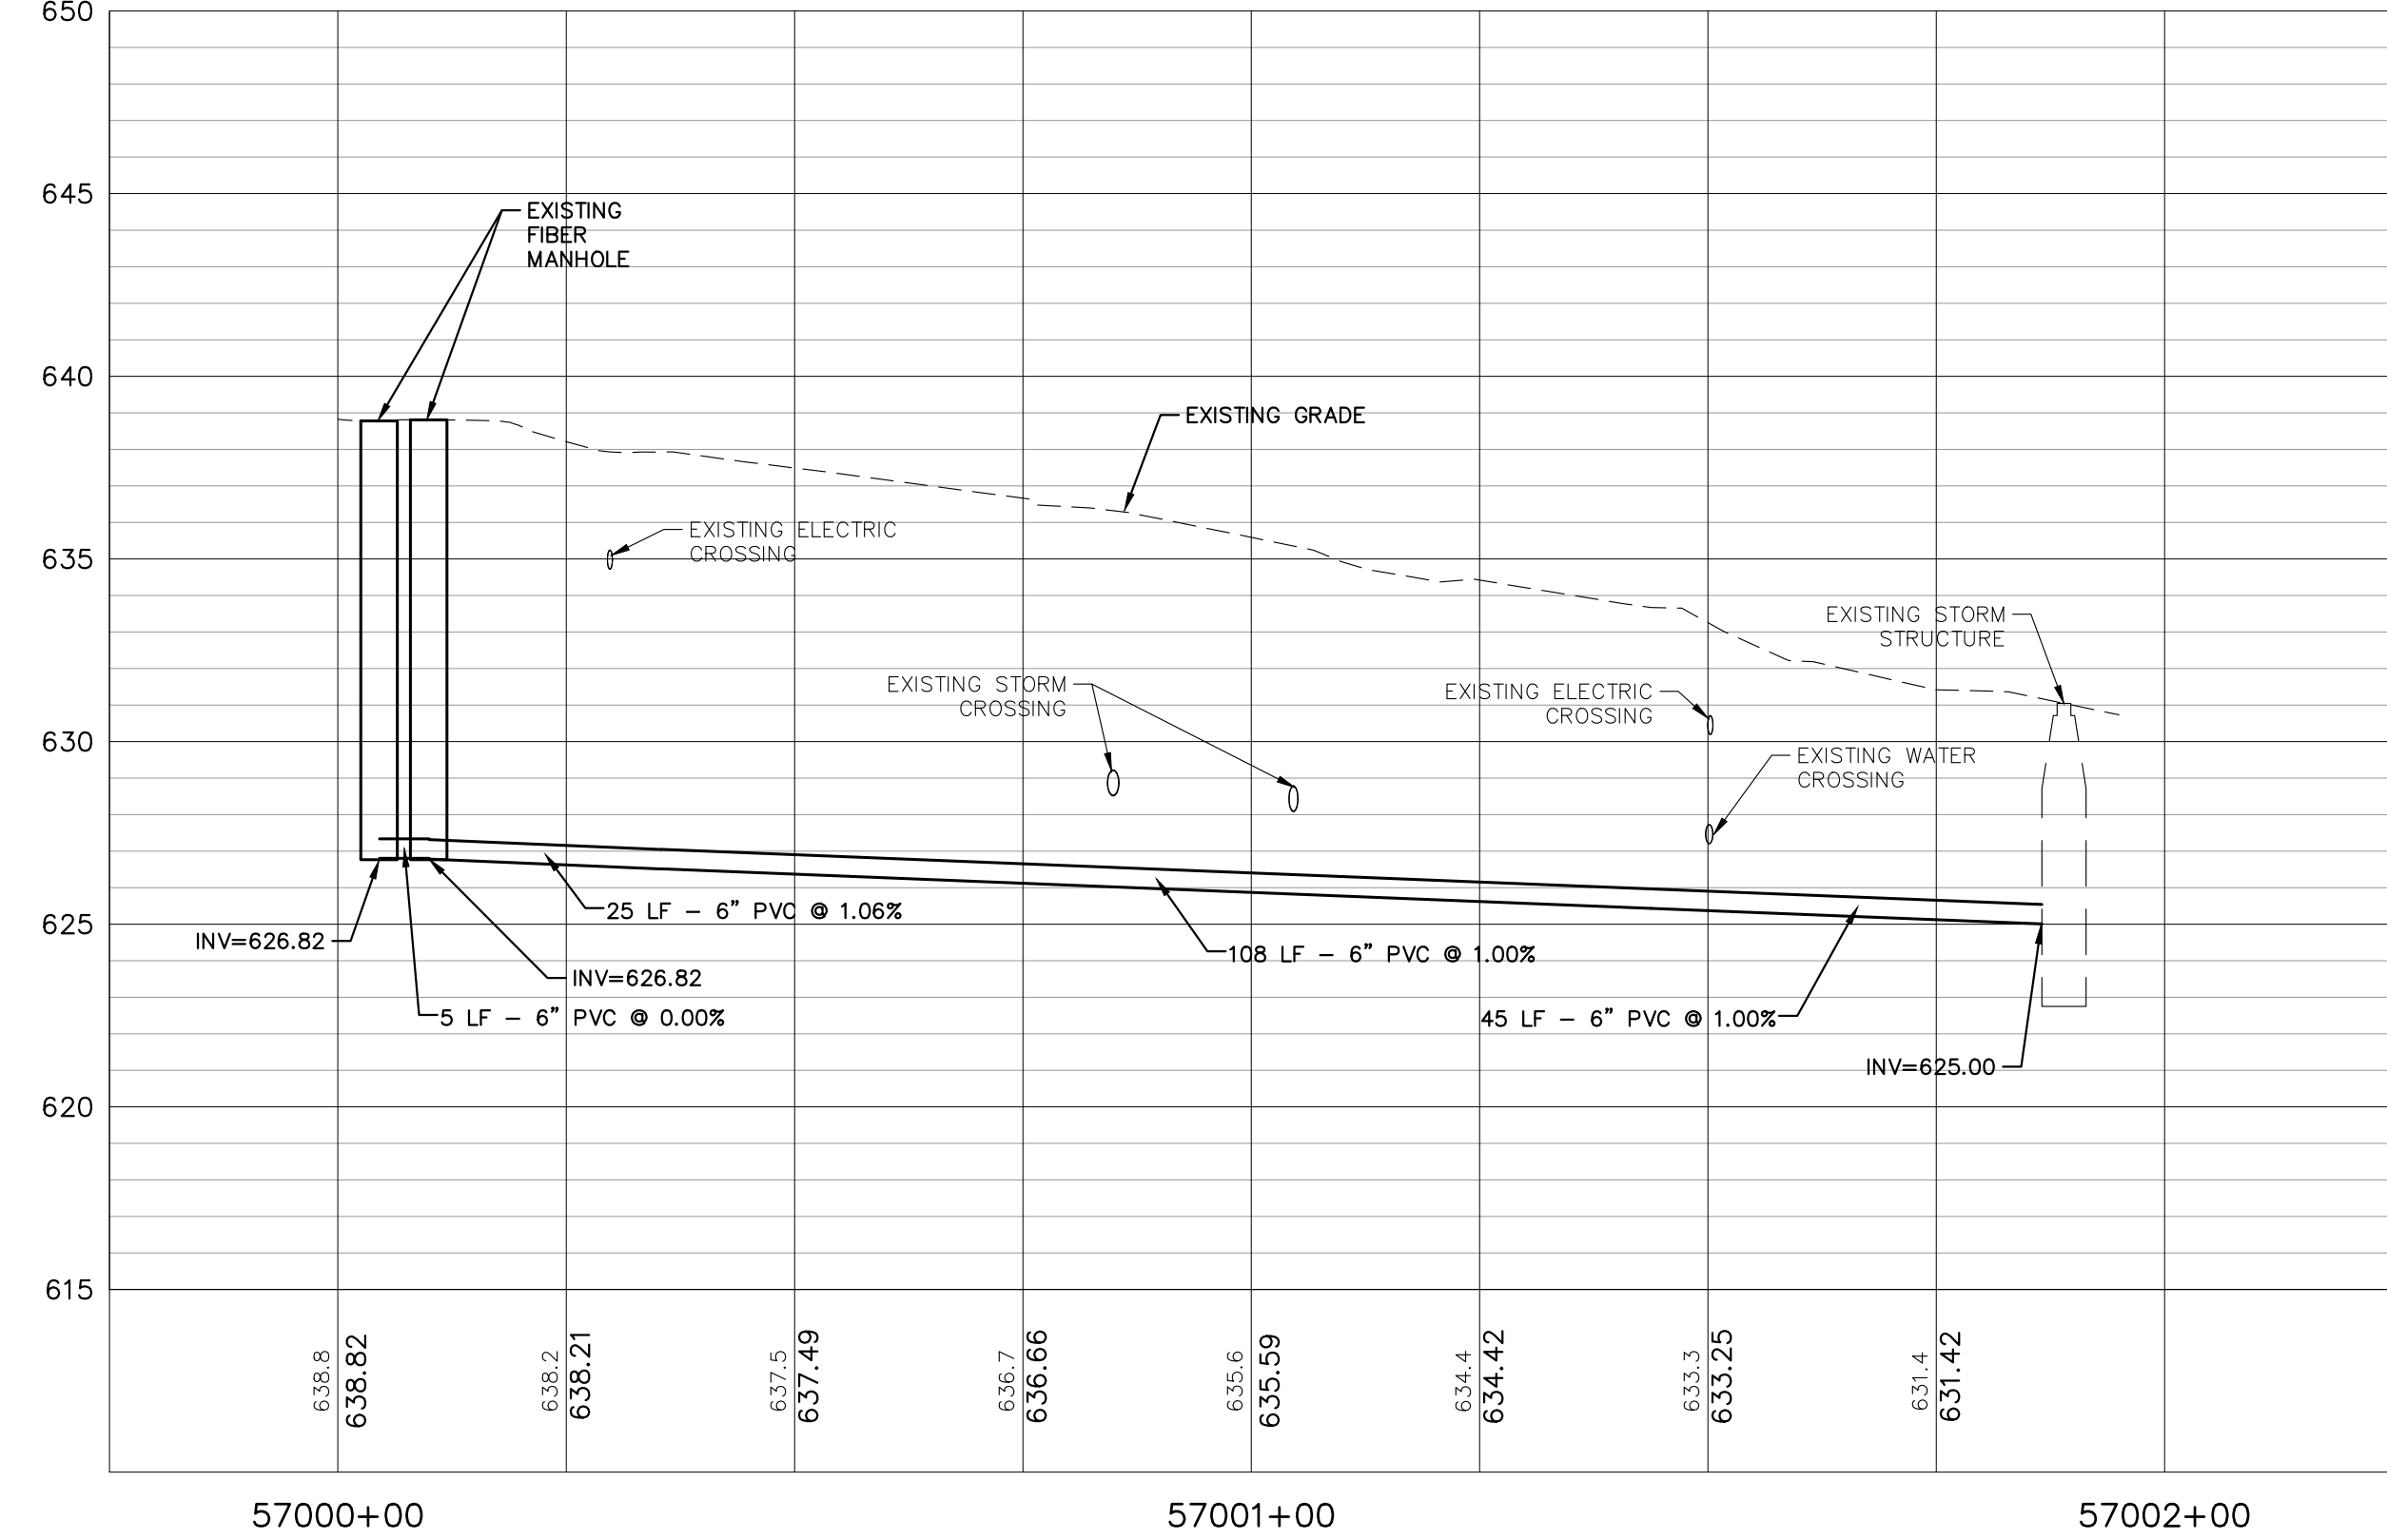

MANHOLE STORM 28

NOTE:
ALL UTILITY DEPTHS ARE APPROXIMATE
AND SHOULD BE VERIFIED BY CONTRACTOR
USING GROUND PENETRATING RADAR AND POTHOLING.

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
95% CONSTRUCTION DOCUMENTS	6.23.22
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23
Revisions:	Date:

CONSULTANT
IMEG
15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD
Romanyk Consulting Focusing on what matters
Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP
REGISTERED PROFESSIONAL ENGINEER LINNEA K. SHAW 062-074863 OF ILLINOIS


Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title STORM PLAN AND PROFILE 26,27 & 28
Approved:


Phase FINAL BID DOCUMENTS
Sprinklered FULLY SPRINKLERED

Project Title EHRM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI
Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI
Issue Date SEPTEMBER 5, 2025
Checked RJJ
Drawn LKS

Project Number 695-21-700
Building Number
Drawing Number 100-CU128
of

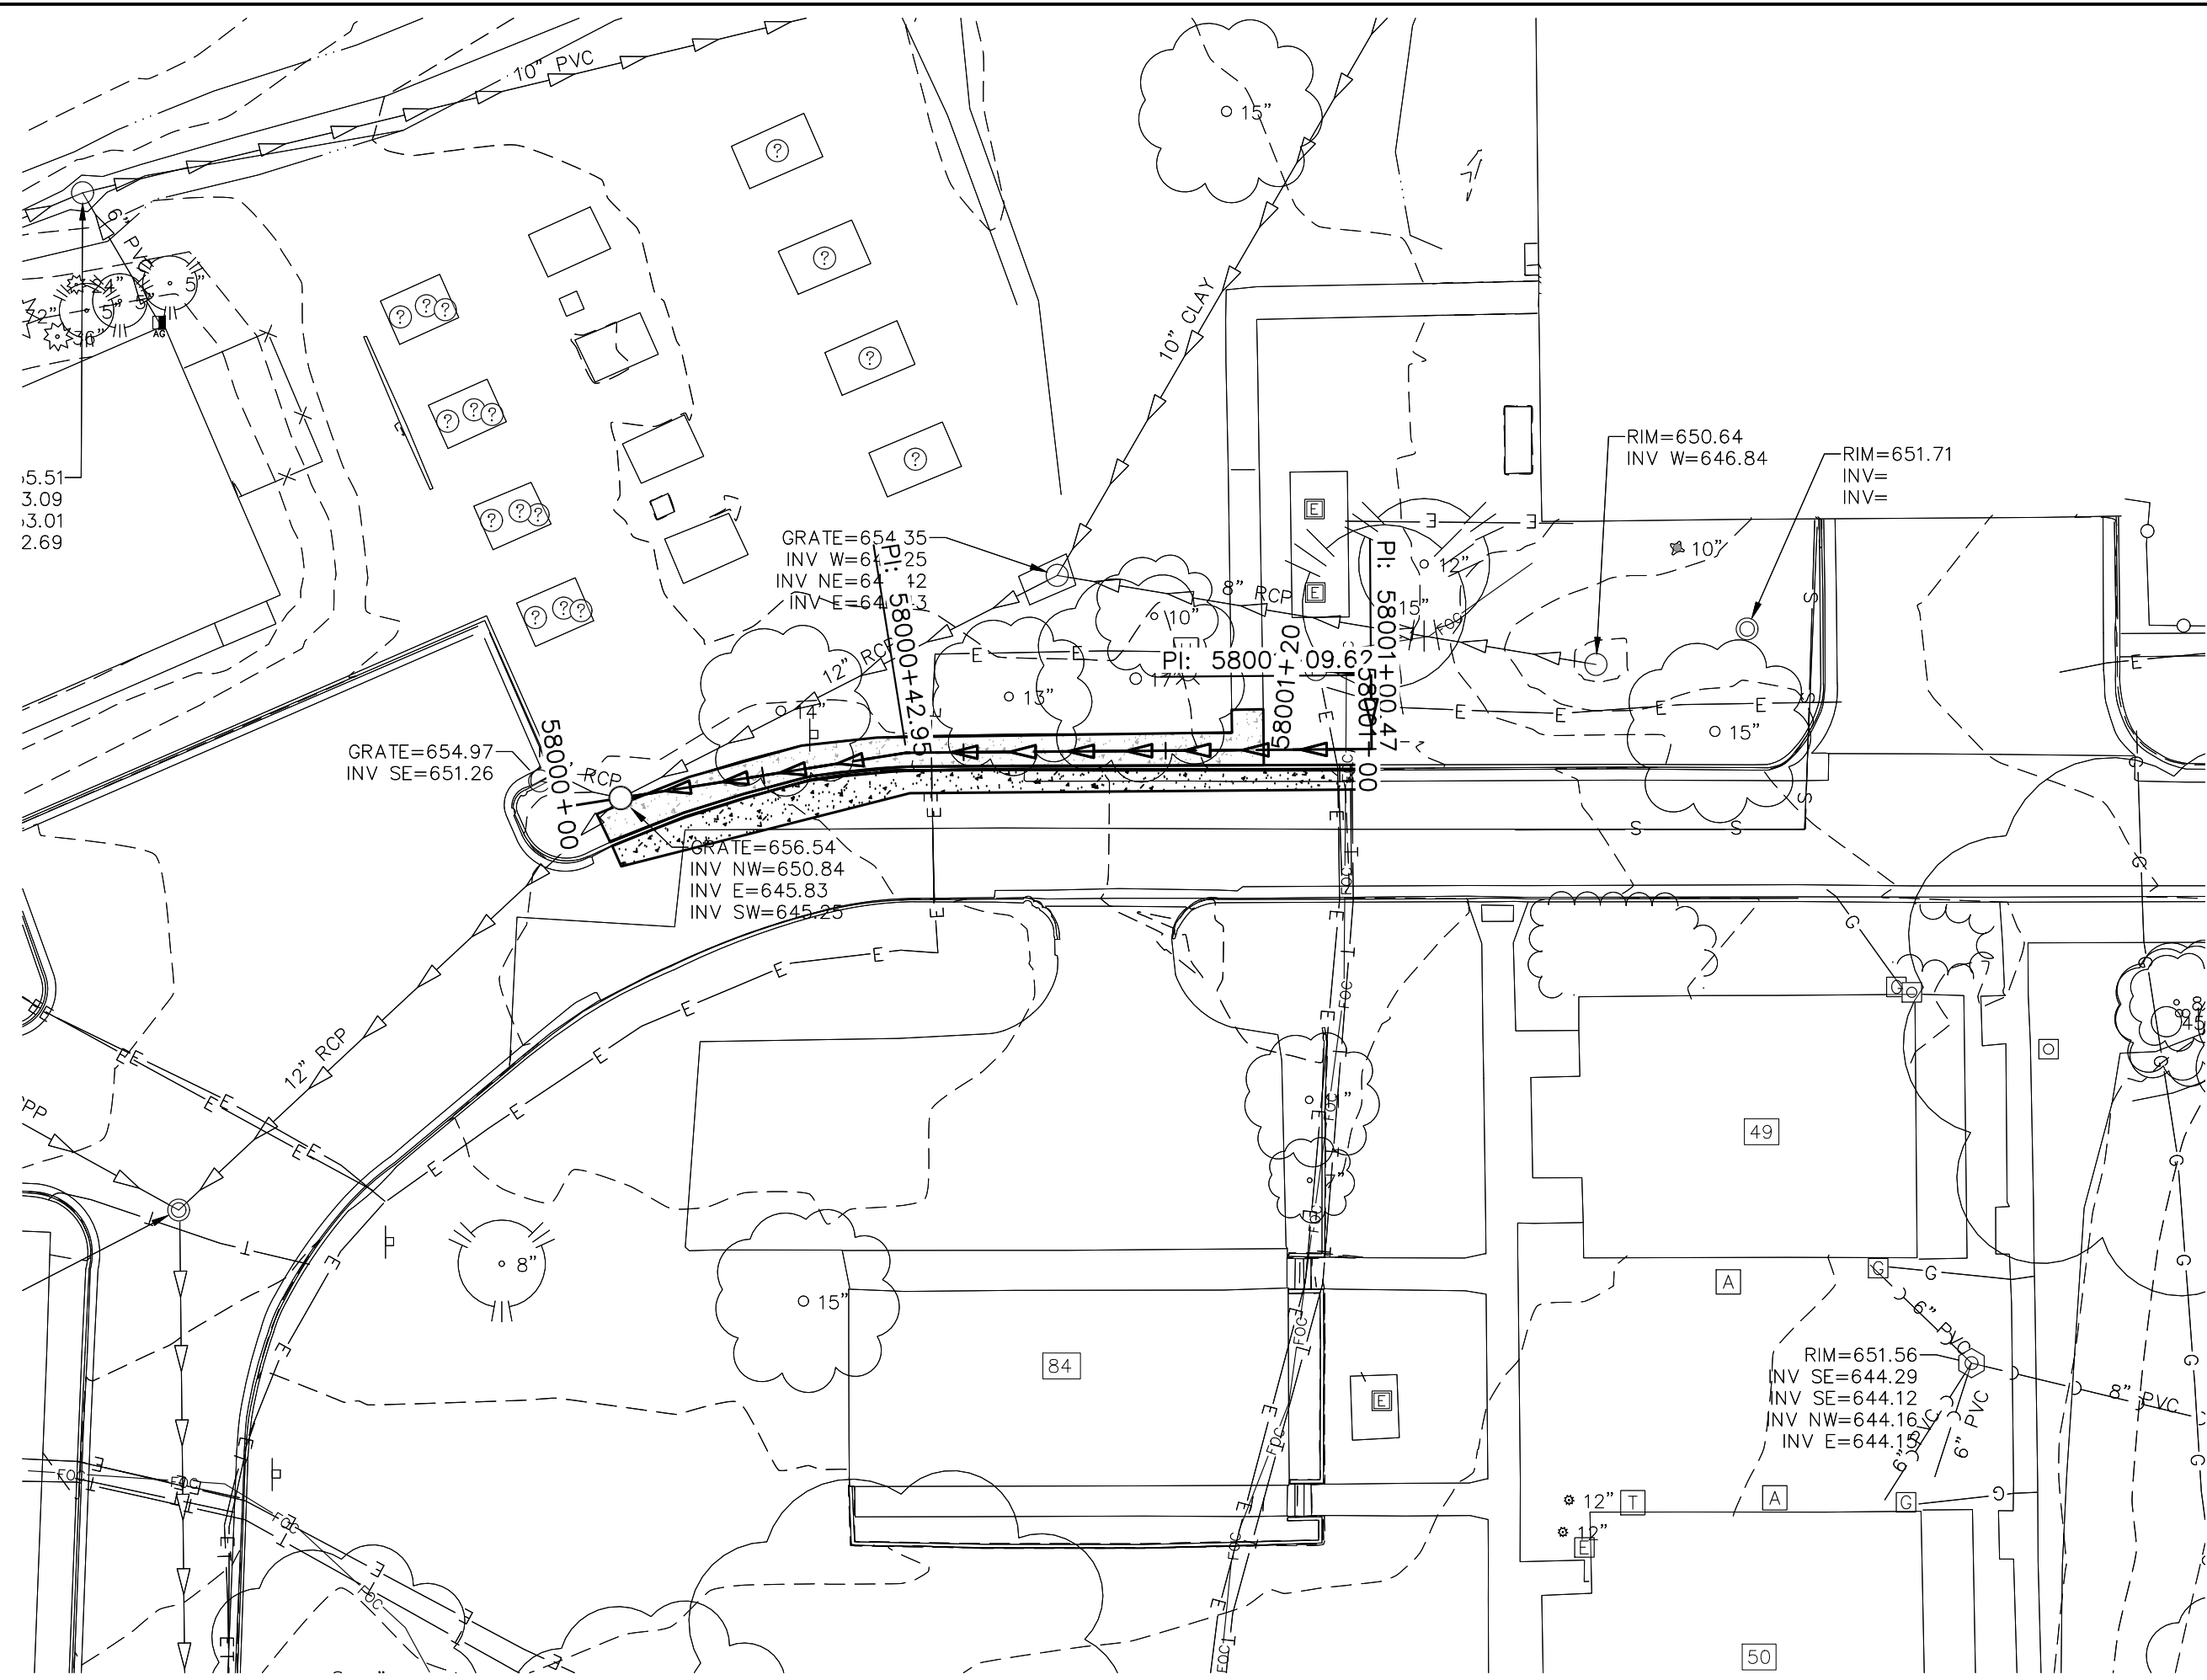


MANHOLE STORM 29
SCALE: 1"=20'

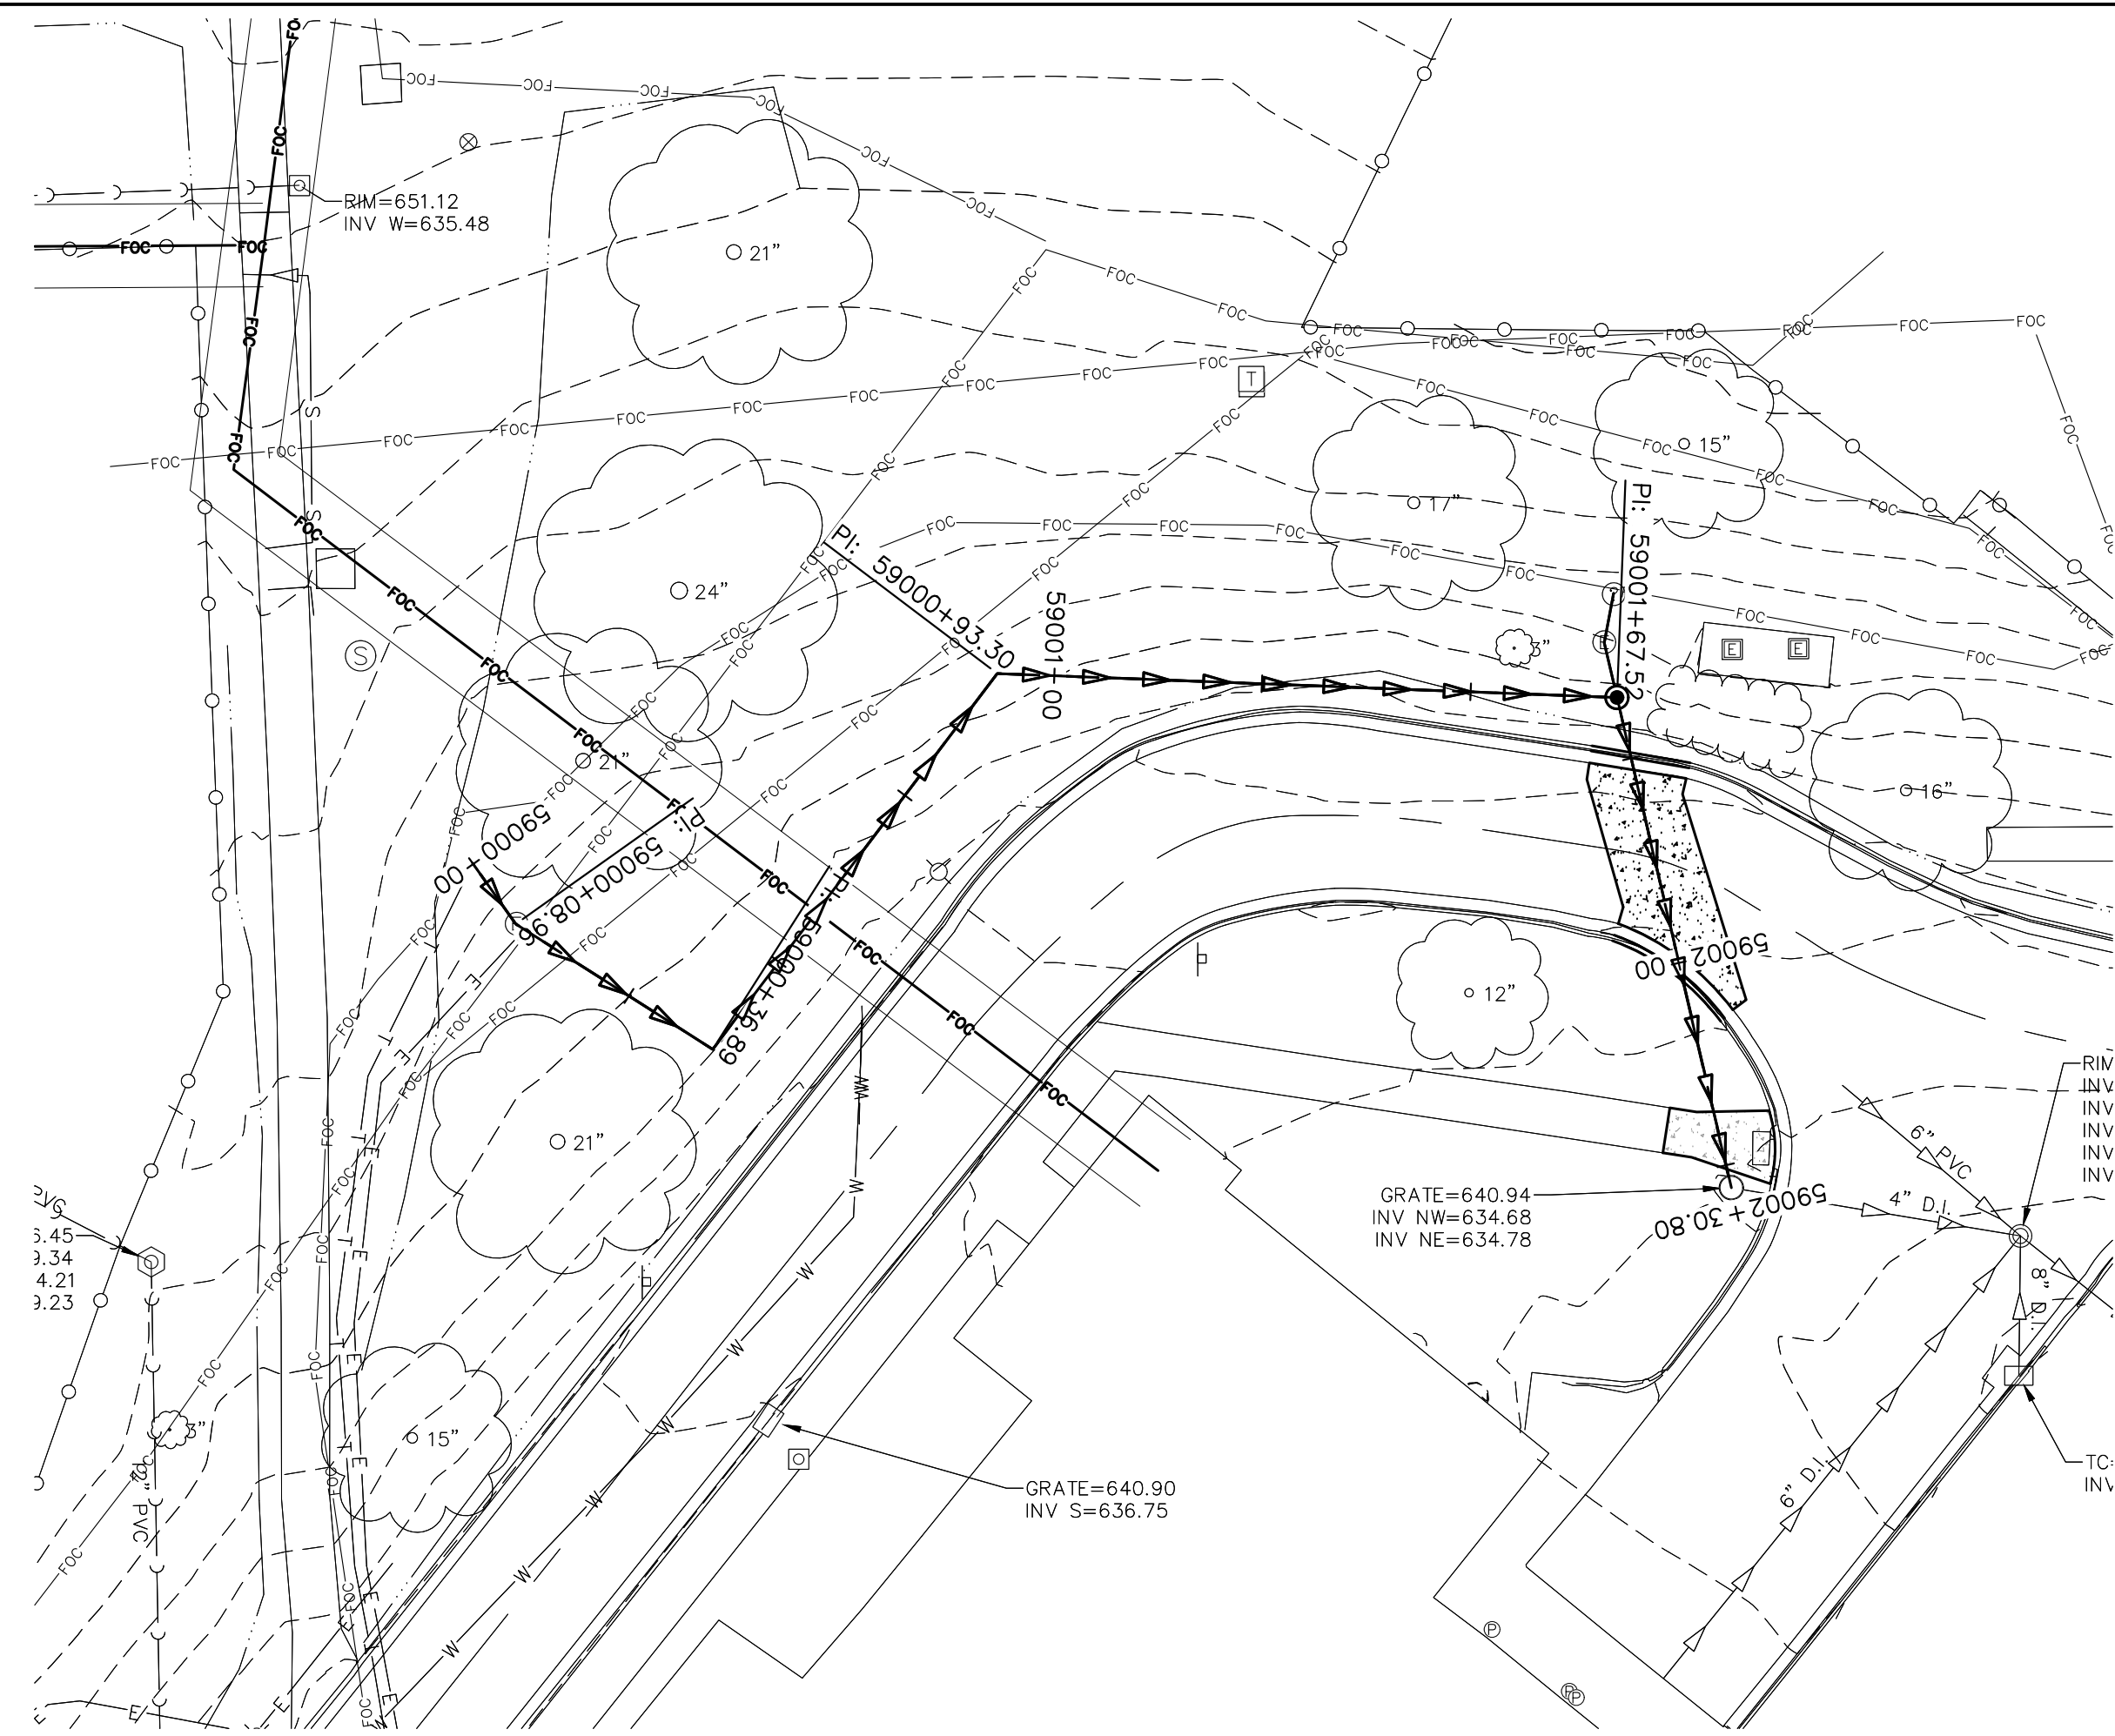


MANHOLE STORM 30
SCALE: 1"=20'

PROFILE VIEW OF 18004375.03 PROPOSED MH 29
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

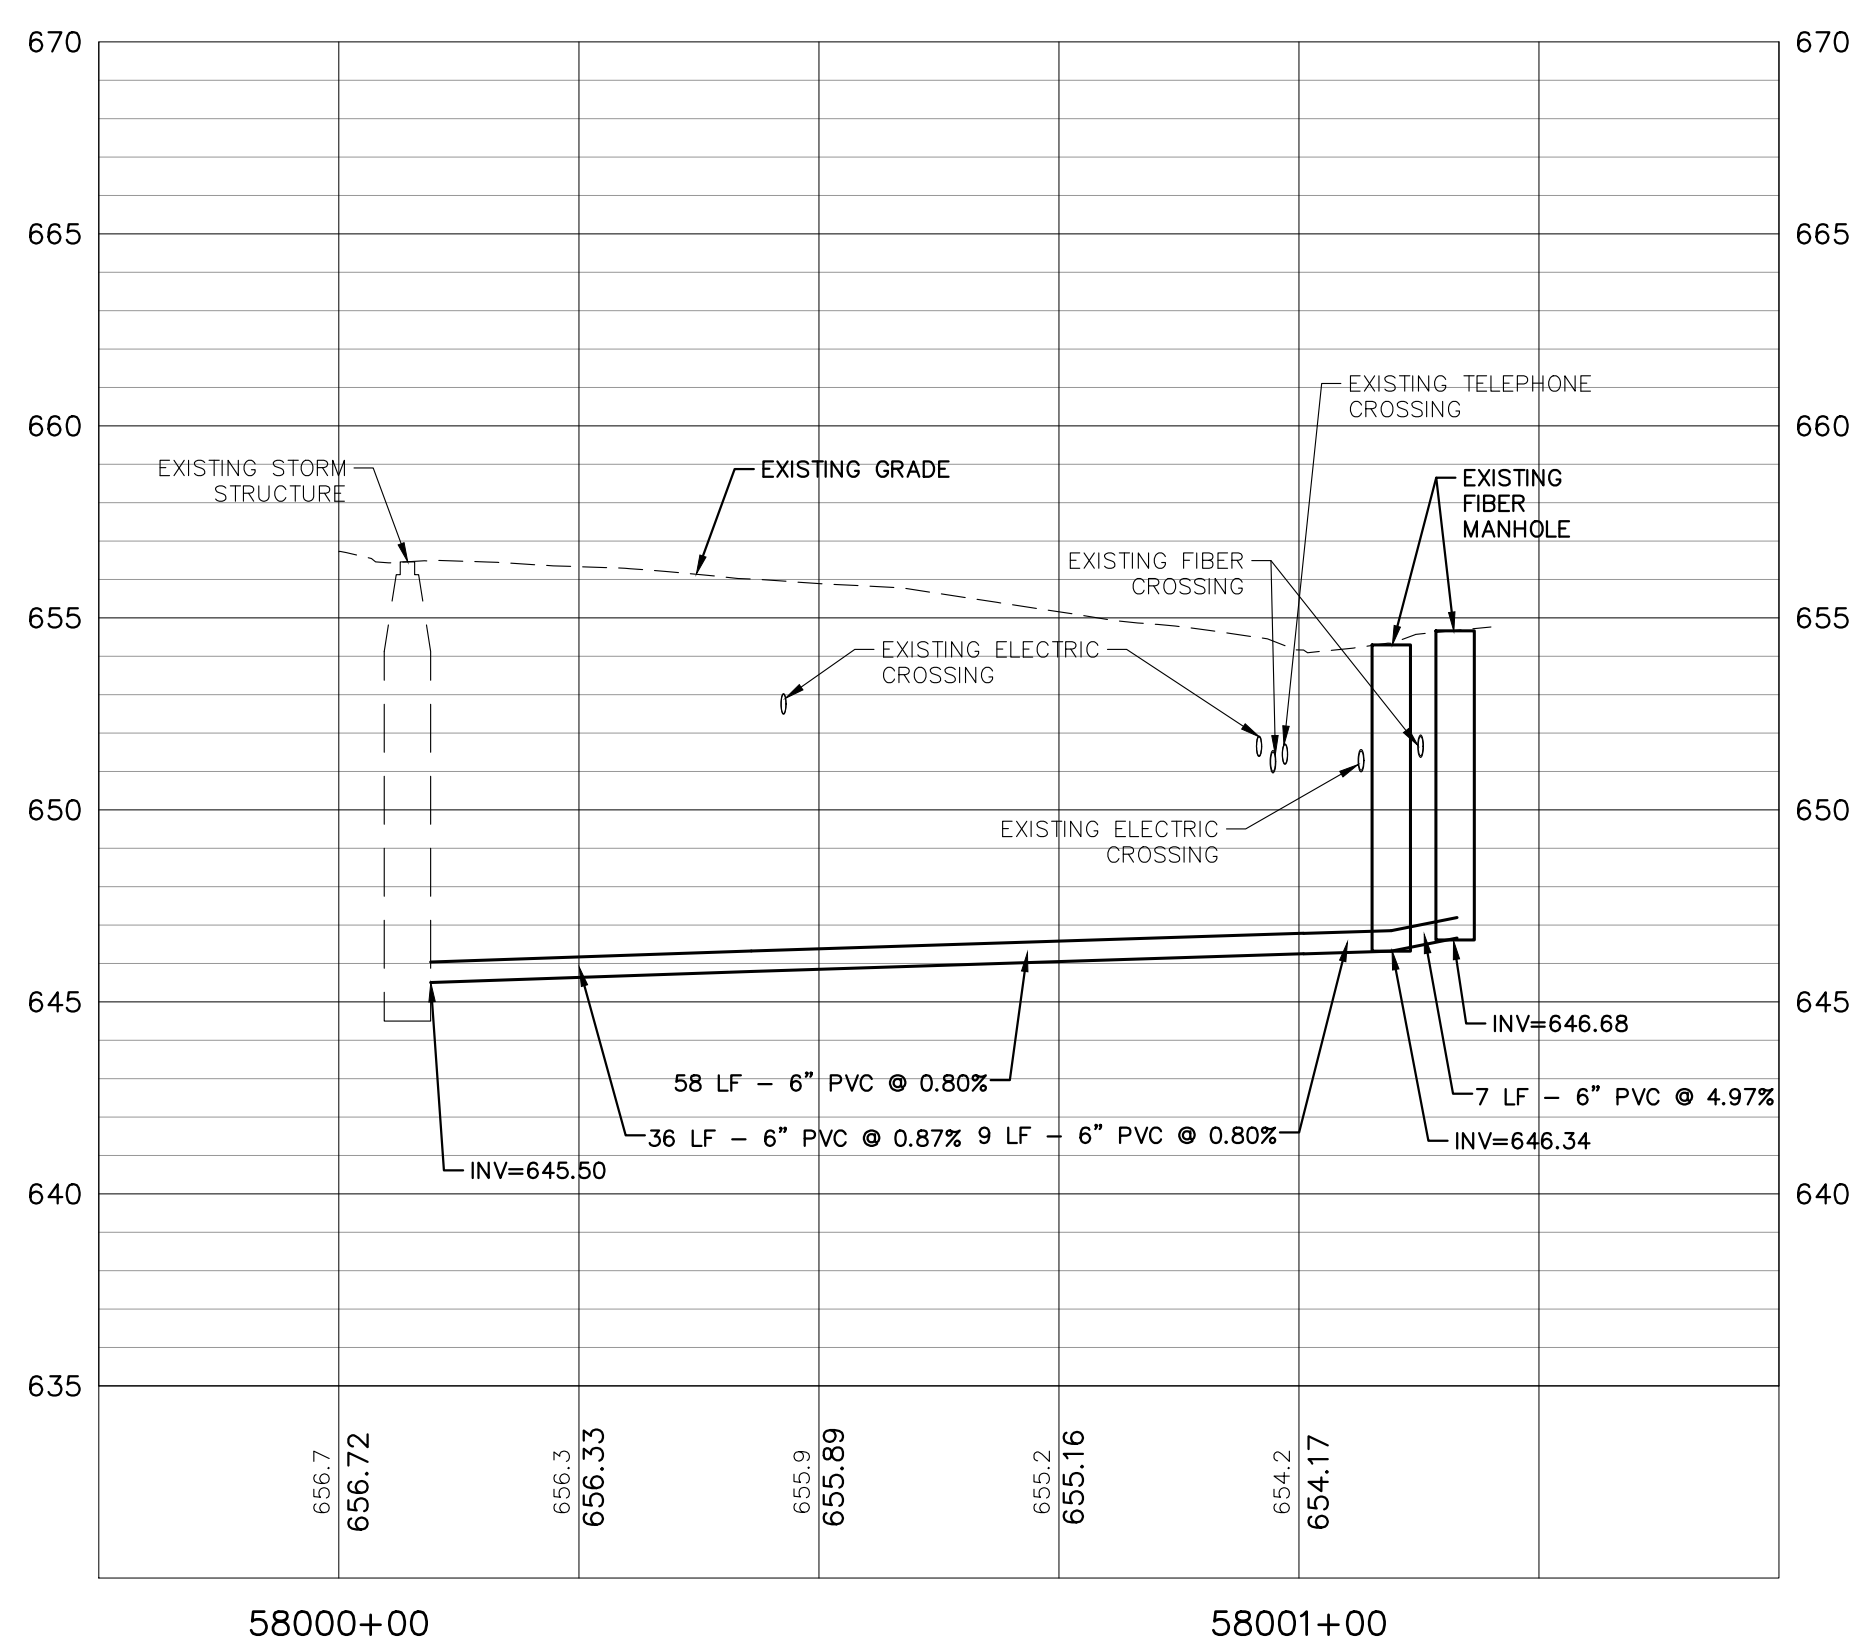

MANHOLE STORM 29

PROFILE VIEW OF 18004375.03 PROPOSED MH 30
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

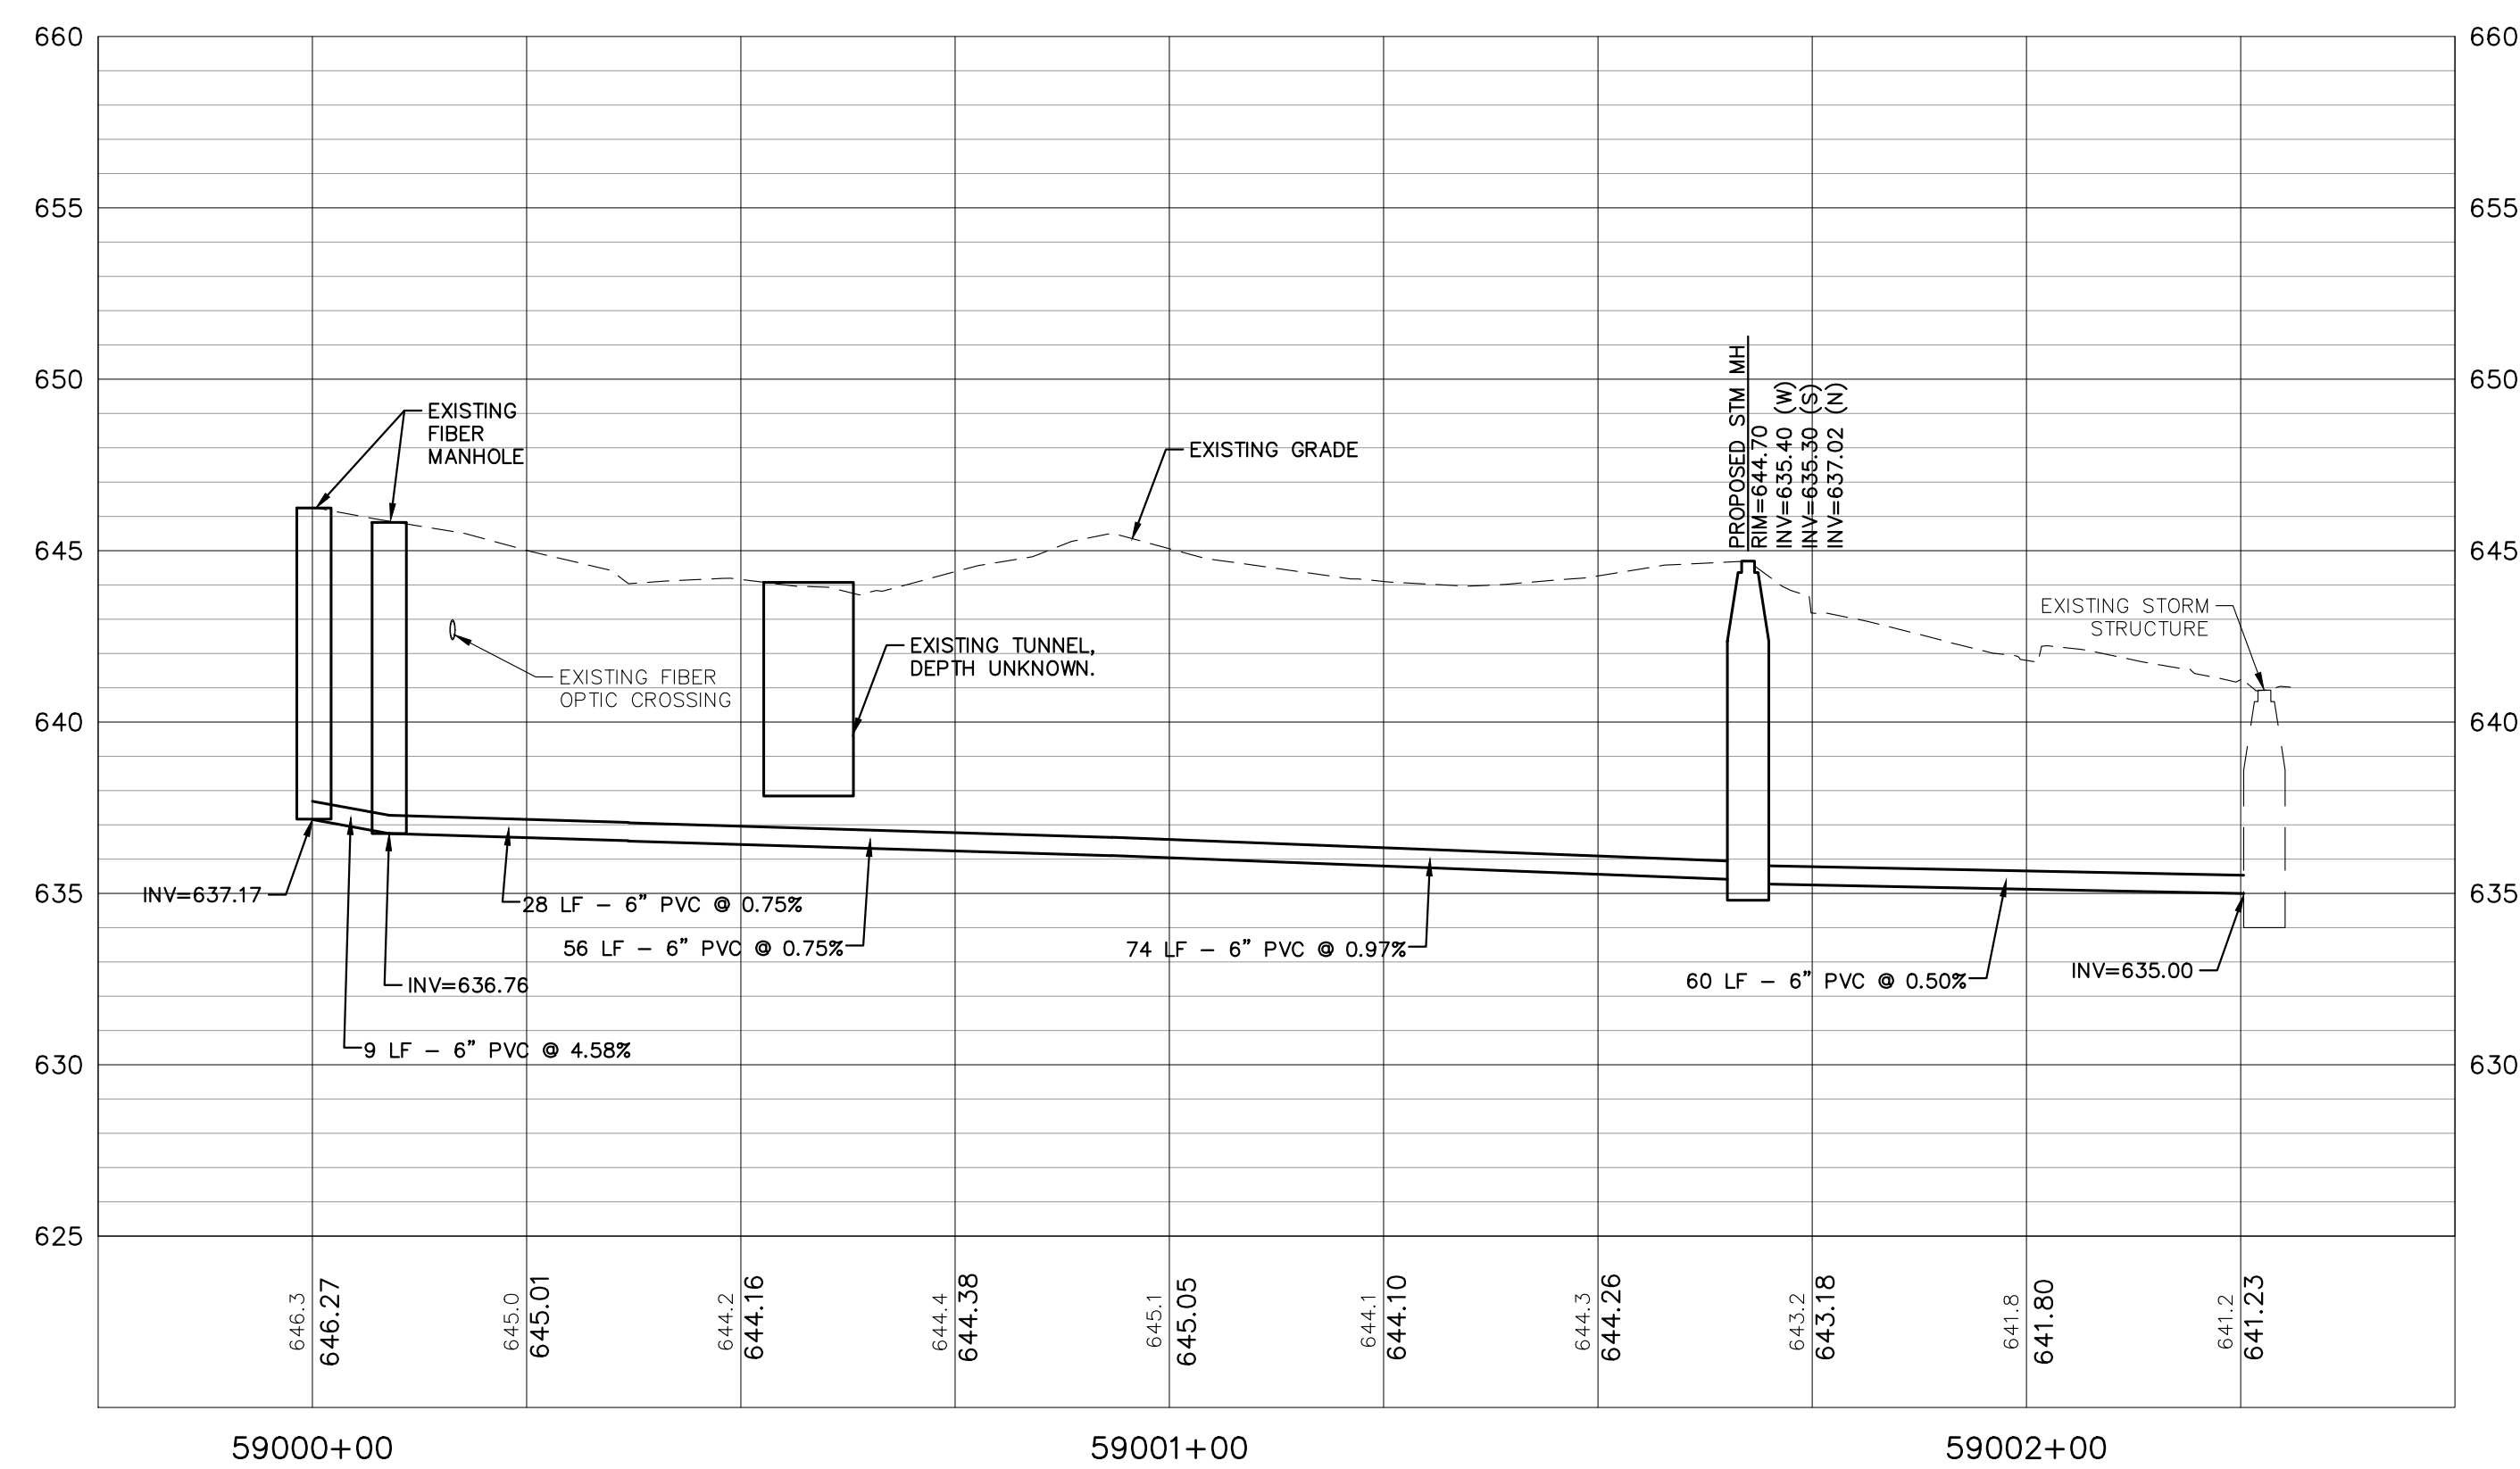

MANHOLE STORM 30

NOTE:
ALL UTILITY DEPTHS ARE APPROXIMATE
AND SHOULD BE VERIFIED BY CONTRACTOR
USING GROUND PENETRATING RADAR AND POTHOLING.

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
95% CONSTRUCTION DOCUMENTS	6.23.22
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23
Revisions:	Date:

CONSULTANT
IMEG
15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD
Romanyk Consulting Focusing on what matters
Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP
LINNEA K. SHAW 062-074863 OF ILLINOIS


Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title STORM PLAN AND PROFILE 29 & 30
Approved:

Phase FINAL BID DOCUMENTS
Sprinklered FULLY SPRINKLERED


Project Title EHRM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI
Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI
Issue Date SEPTEMBER 5, 2025
Checked RJJ
Drawn LKS

Project Number 695-21-700
Building Number
Drawing Number 100-CU129
of

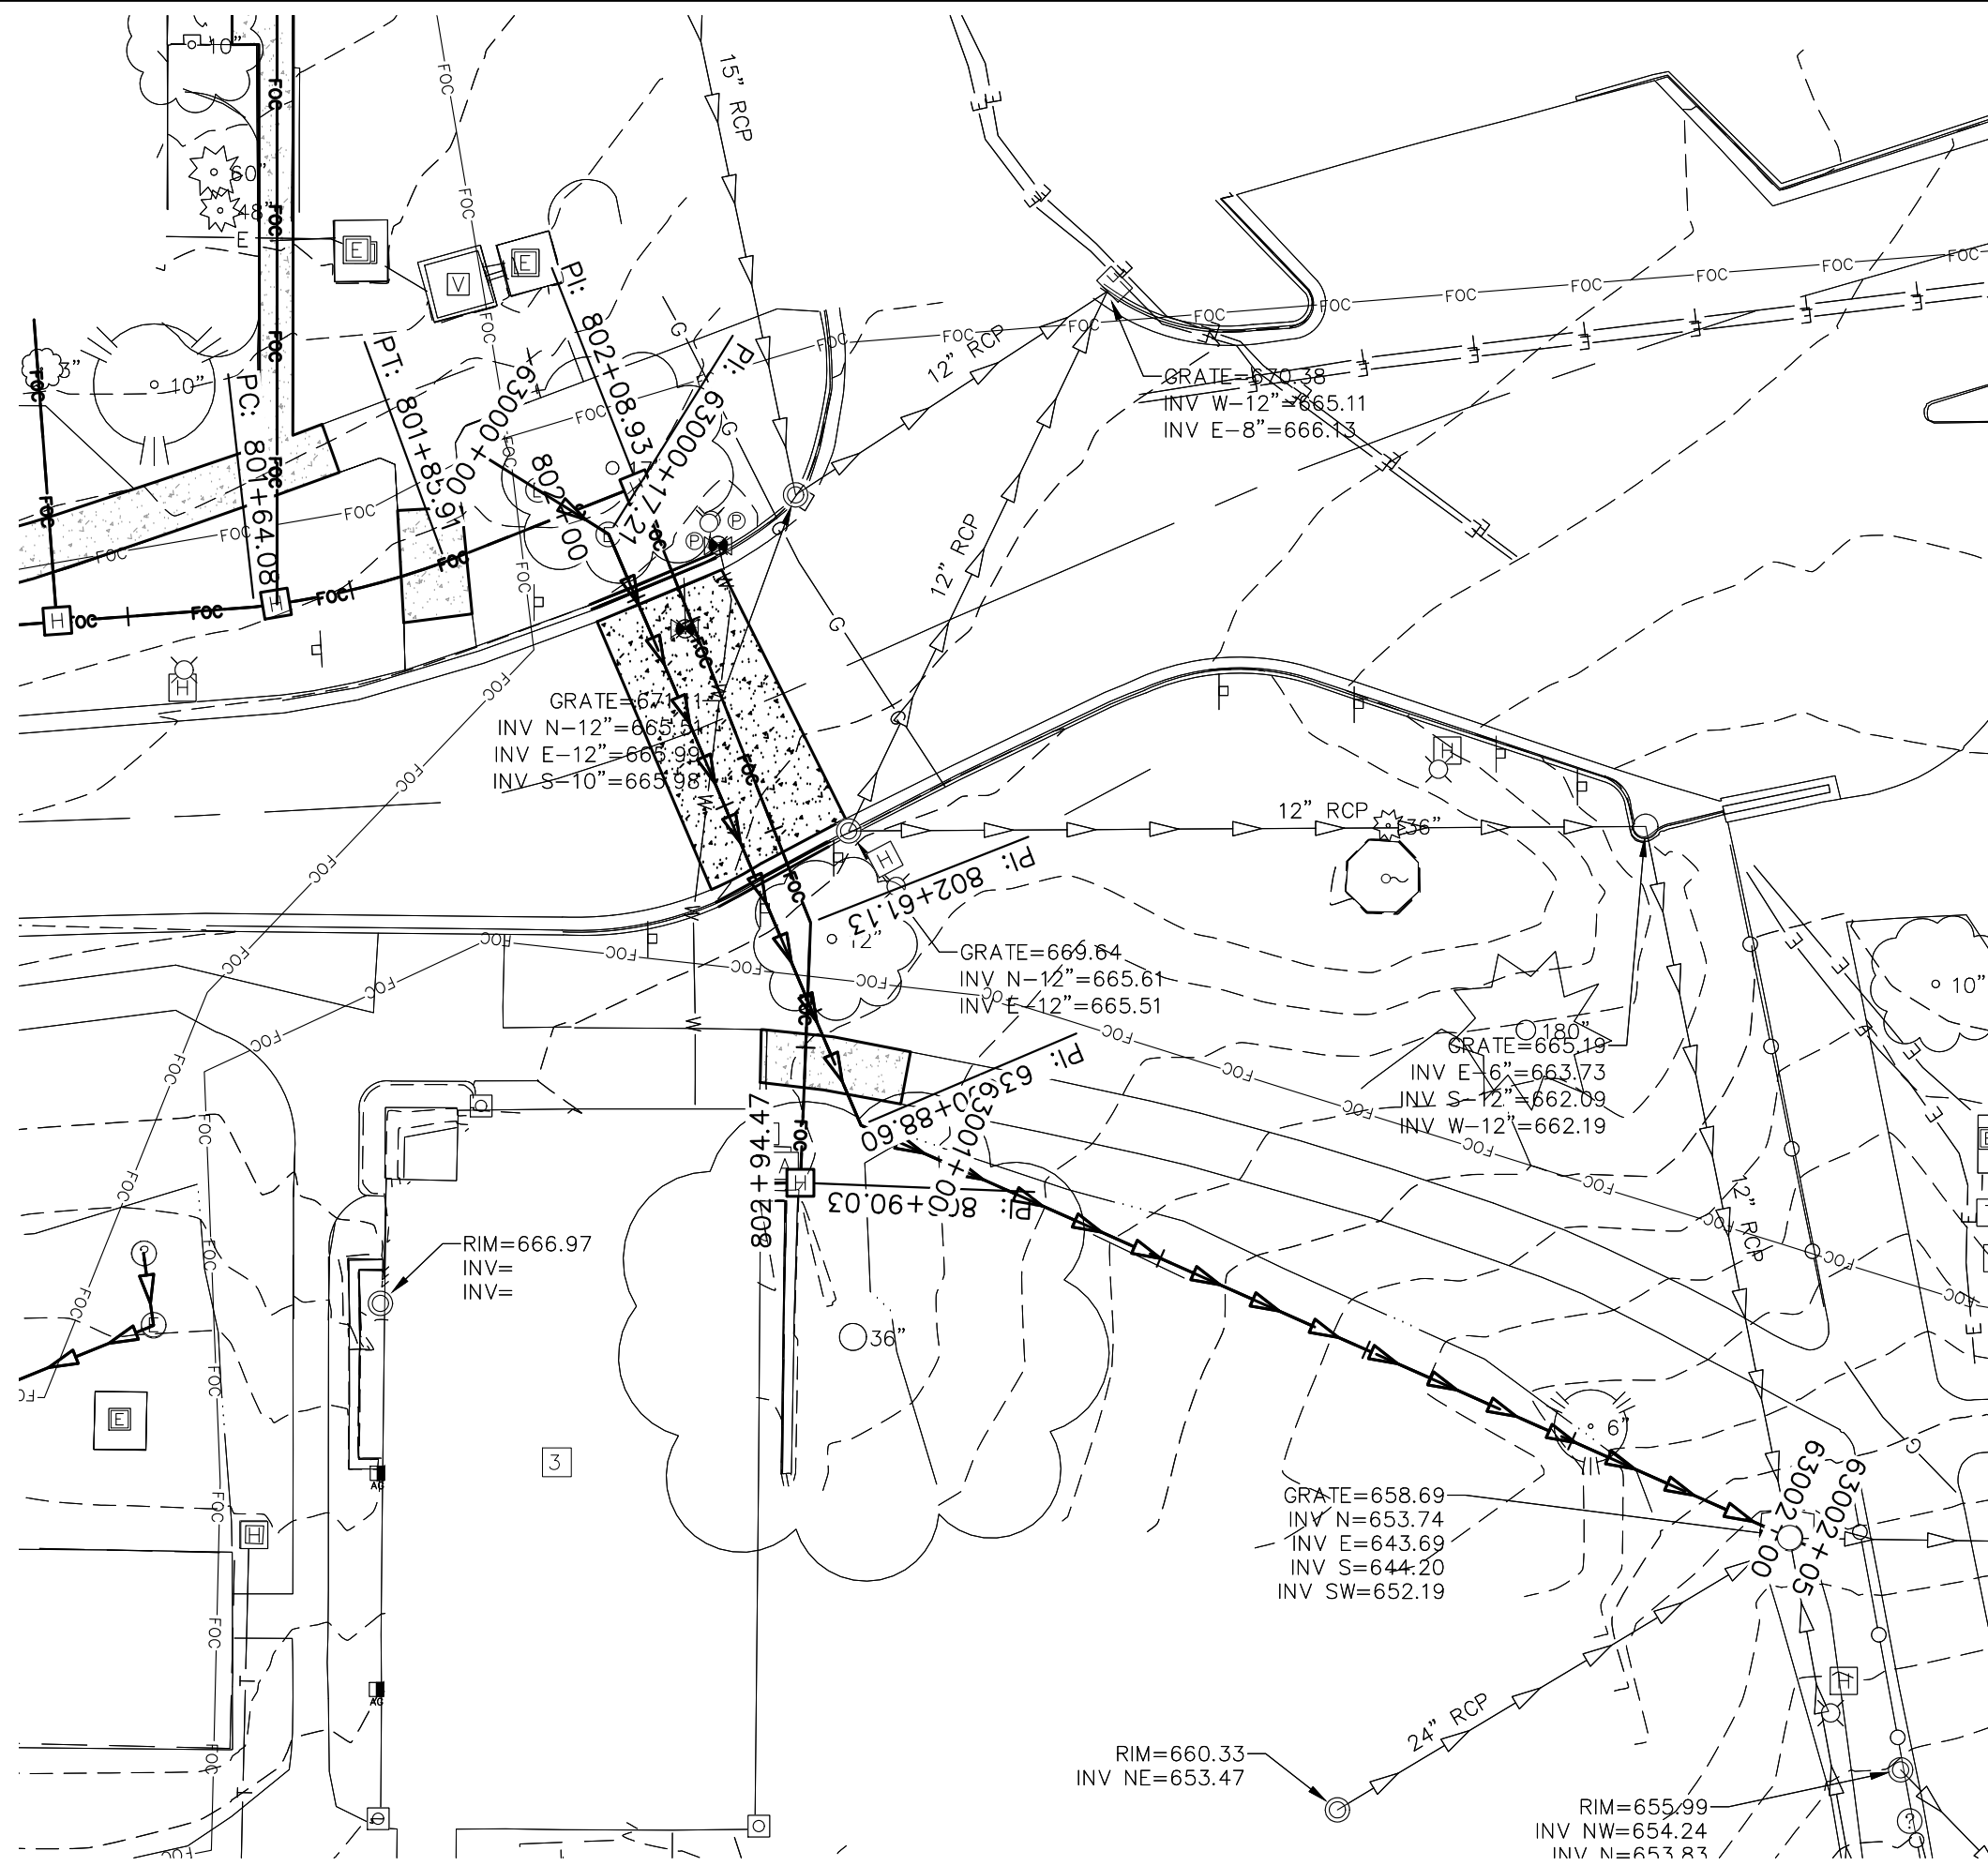

MANHOLE STORM 34
SCALE: 1"=20'

PROFILE VIEW OF 18004375.03 PROPOSED MH 34
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

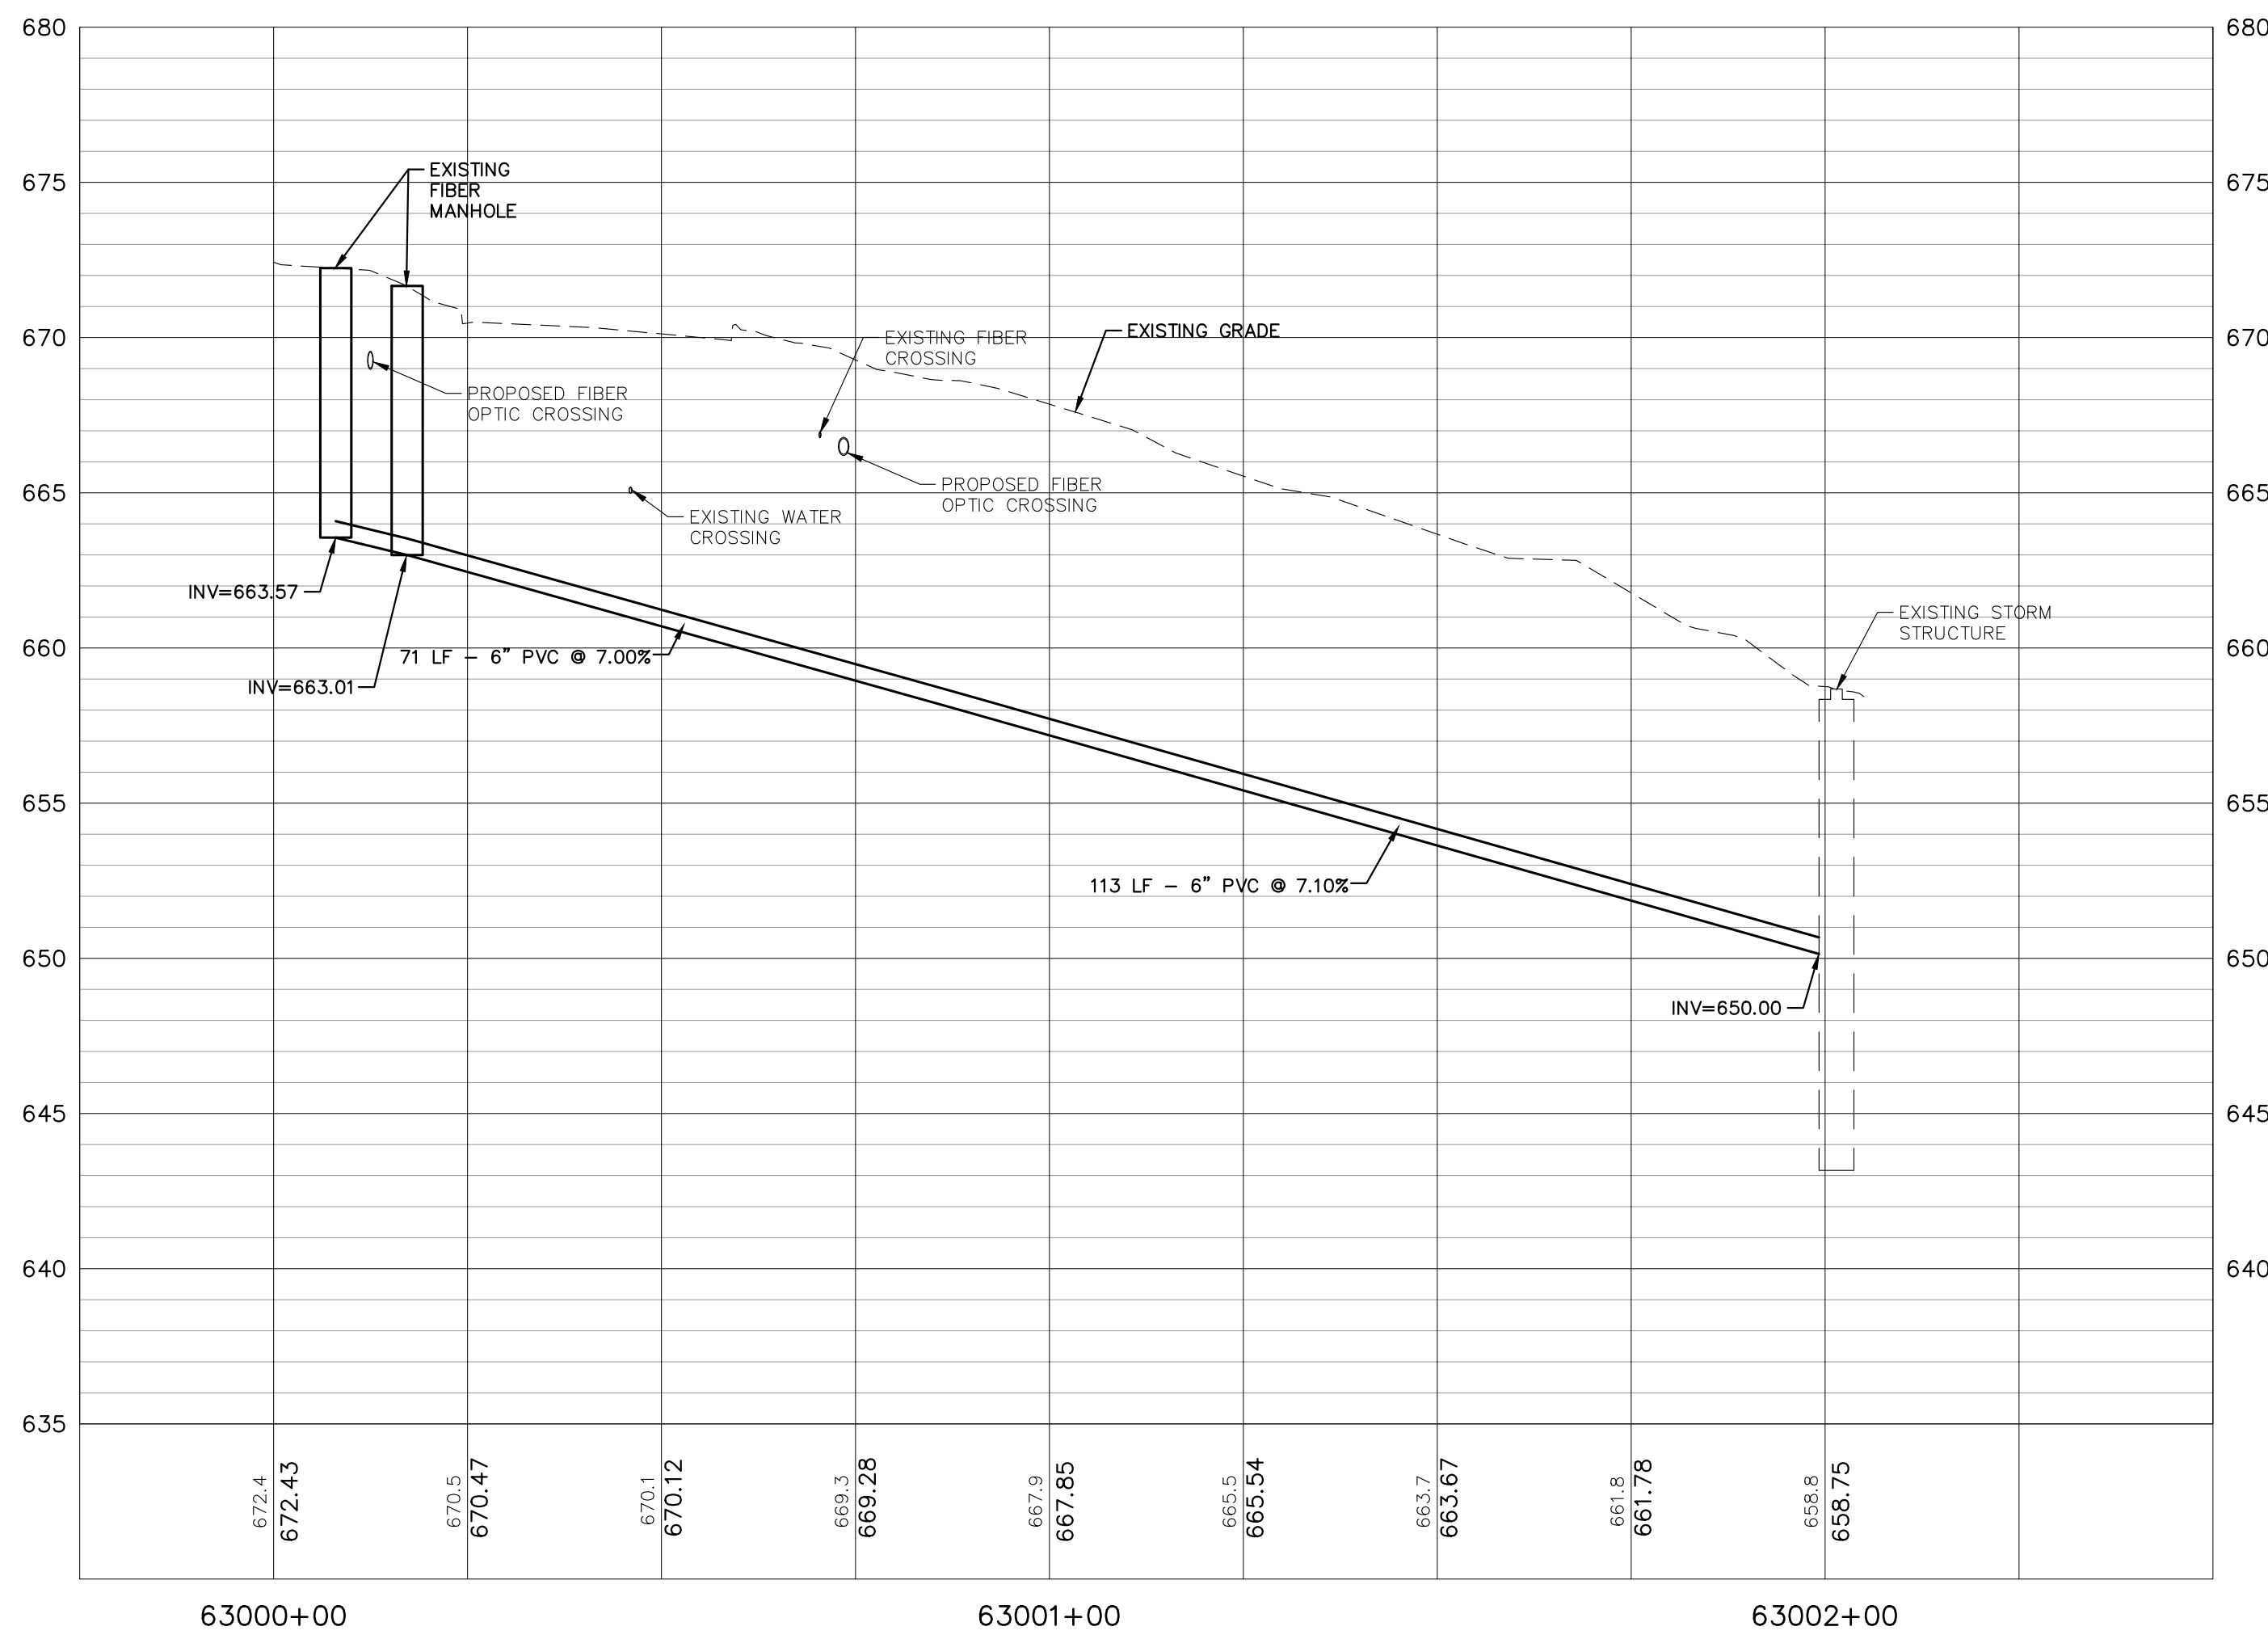

MANHOLE STORM 34

NOTE:
ALL UTILITY DEPTHS ARE APPROXIMATE
AND SHOULD BE VERIFIED BY CONTRACTOR
USING GROUND PENETRATING RADAR AND POTHOLING.

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
95% CONSTRUCTION DOCUMENTS	6.23.22
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23
Revisions:	Date:

CONSULTANT
IMEG
15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD
Romanyk Consulting Focusing on what matters
Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP
LINNEA K. SHAW 062-074863 OF ILLINOIS


Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title STORM PLAN AND PROFILE 34 & 35
Approved:

Phase FINAL BID DOCUMENTS
Sprinklered FULLY SPRINKLERED


Project Title EHRM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI
Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI
Issue Date SEPTEMBER 5, 2025
Checked RJJ
Drawn LKS

Project Number 695-21-700
Building Number
Drawing Number 100-CU131
of

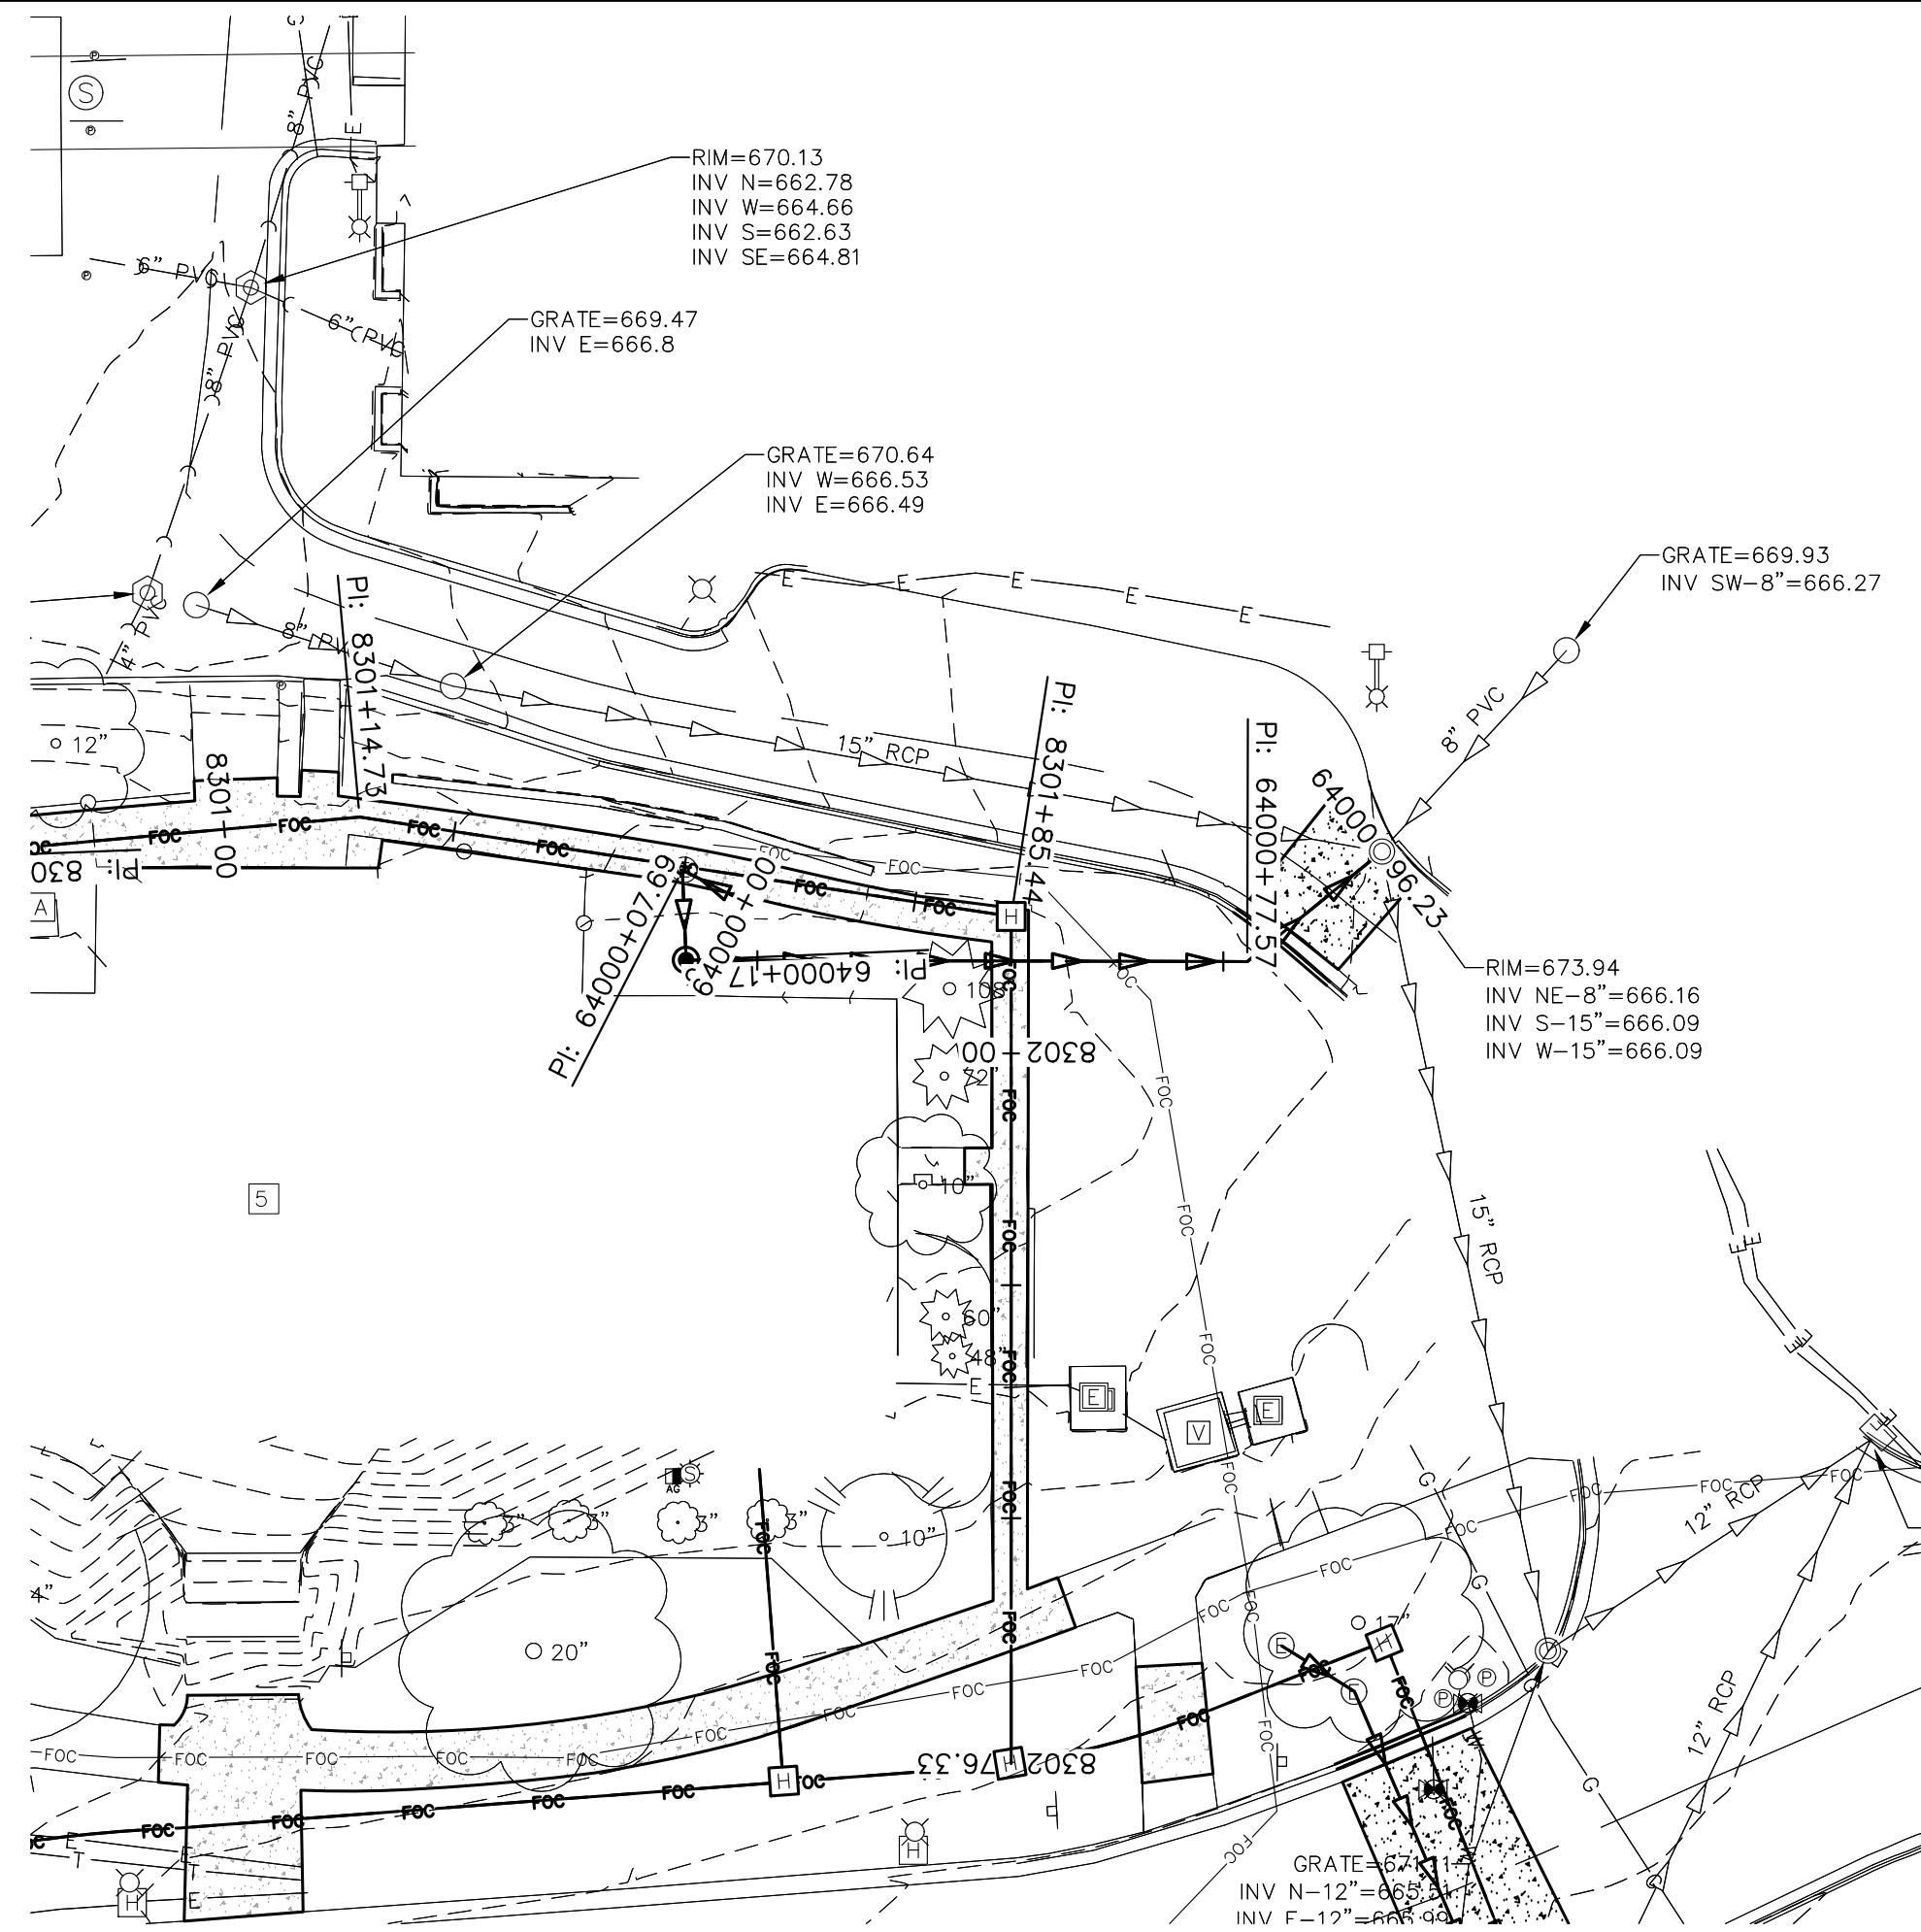

MANHOLE STORM 35
SCALE: 1"=20'

PROFILE VIEW OF 18004375.03 PROPOSED MH 35
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 5'

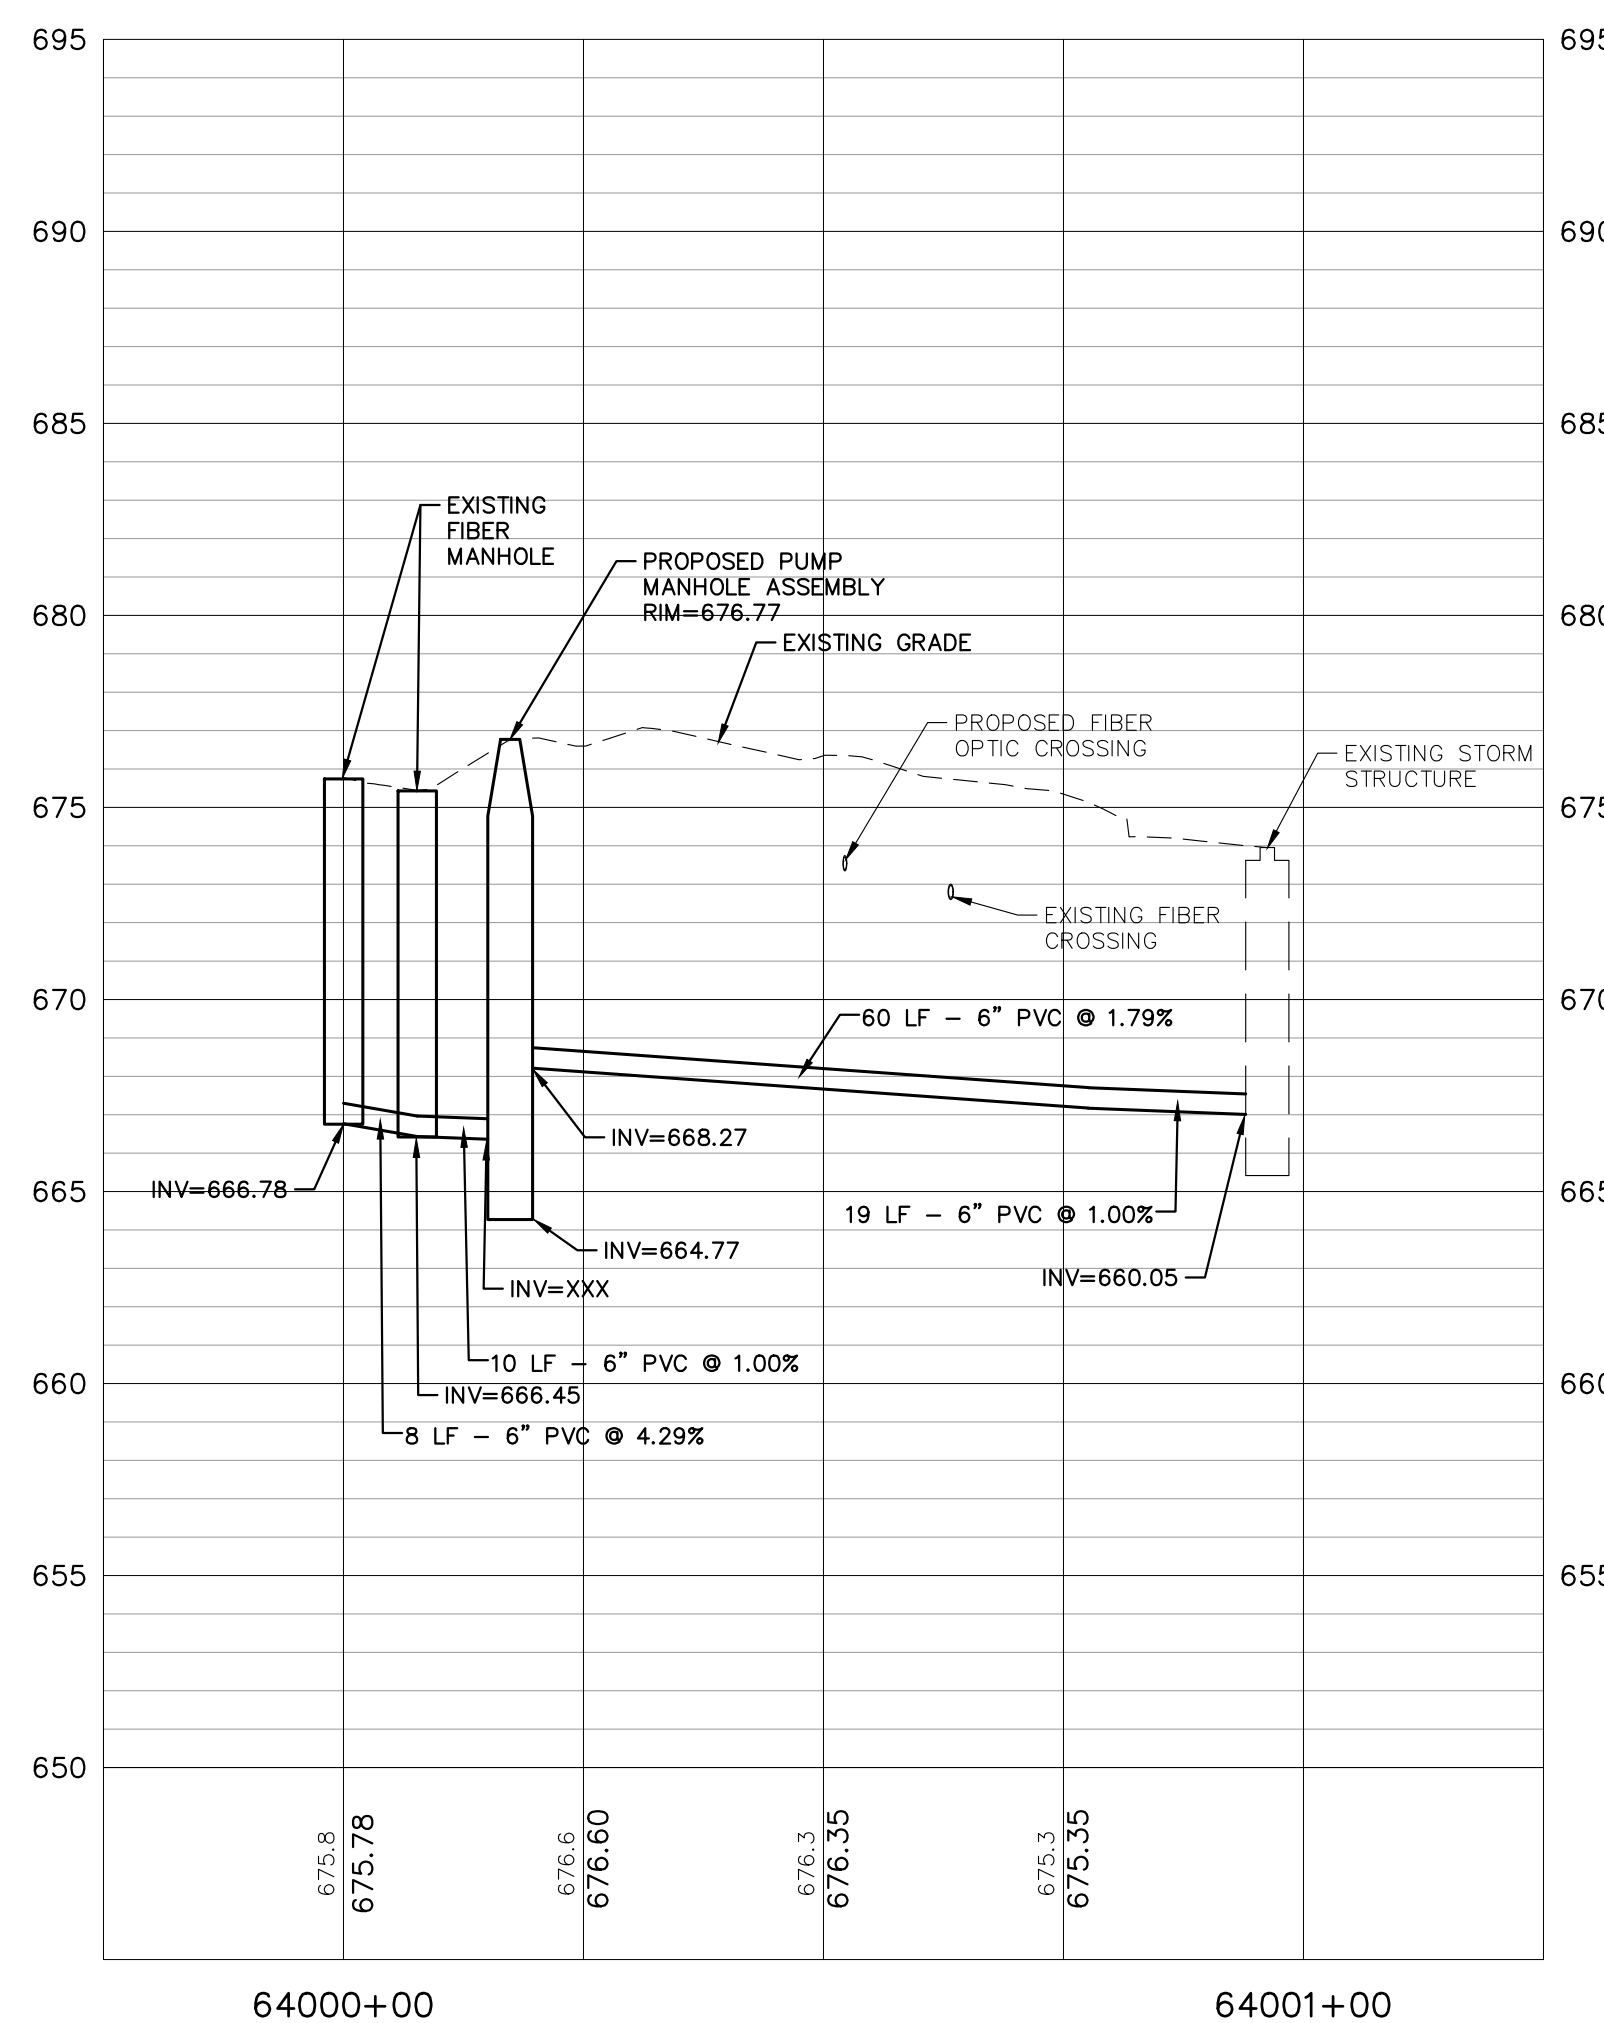

MANHOLE STORM 35

F


E

D

C


B

A

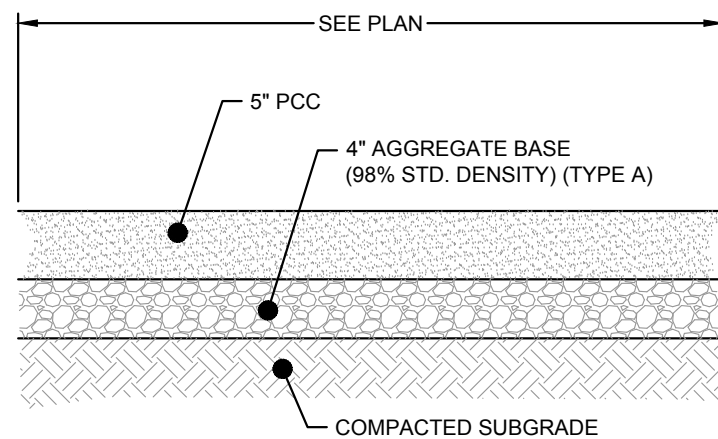


1 PCC SIDEWALK DETAIL
NTS

NOTE: PCC SHOWN AS REFERENCE ONLY. CONTRACTOR CAN SUBMIT FOR APPROVED EQUAL.

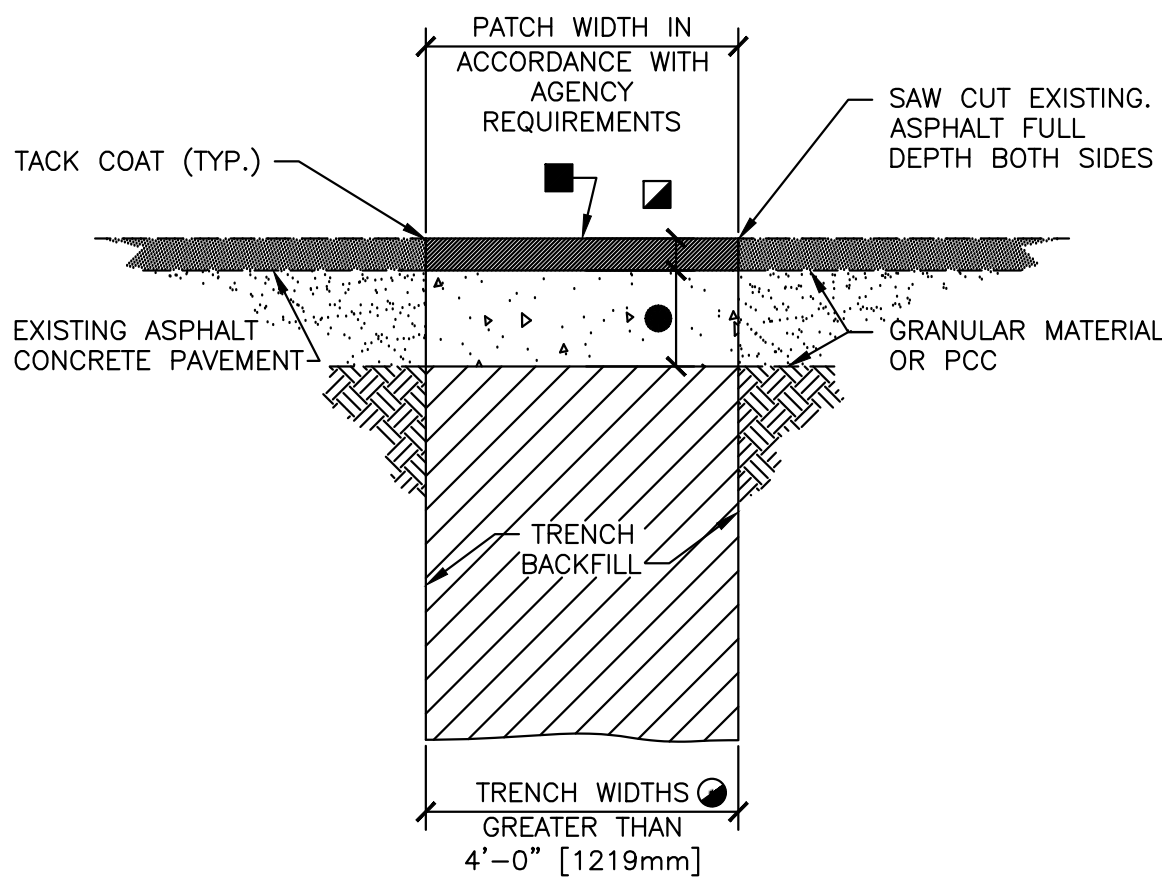


- FOR TRENCH WIDTHS 4' [1219mm] OR LESS REFER TO VA STANDARD DETAIL 32 12 16-01 "TYPE 1 UTILITY TRENCH PATCH". FOR TRENCH WHERE PORTLAND CEMENT CONCRETE (PCC) PAVEMENT EXISTS, REFER TO 32 12 16-03 "TYPE 3 UTILITY TRENCH PATCH".
 - 2" [50mm] MINIMUM OR THICKNESS OF EXISTING PAVEMENT WHICHEVER IS GREATER.
 - BITUMINOUS SURFACE TREATMENT (CHIPSEAL) REQUIRED ONLY FOR LONGITUDINAL TRENCHES WITH WIDTHS GREATER THAN 6' [1829mm].
 - 4" [100mm] MINIMUM ABC OR THICKNESS OF EXISTING GRANULAR BASE COURSE MATERIALS (E.G. ABC & SELECT MATERIAL) WHICHEVER IS GREATER.
- PORTLAND CEMENT CONCRETE (PCC) THICKNESS EQUAL TO EXISTING.
- REFER TO VA STANDARD DETAIL 32 12 16-04 "UTILITY TRENCH PAVEMENT PATCH NOTES" FOR ADDITIONAL INFORMATION.


5 TYPE 2 UTILITY TRENCH PATCH
NTS

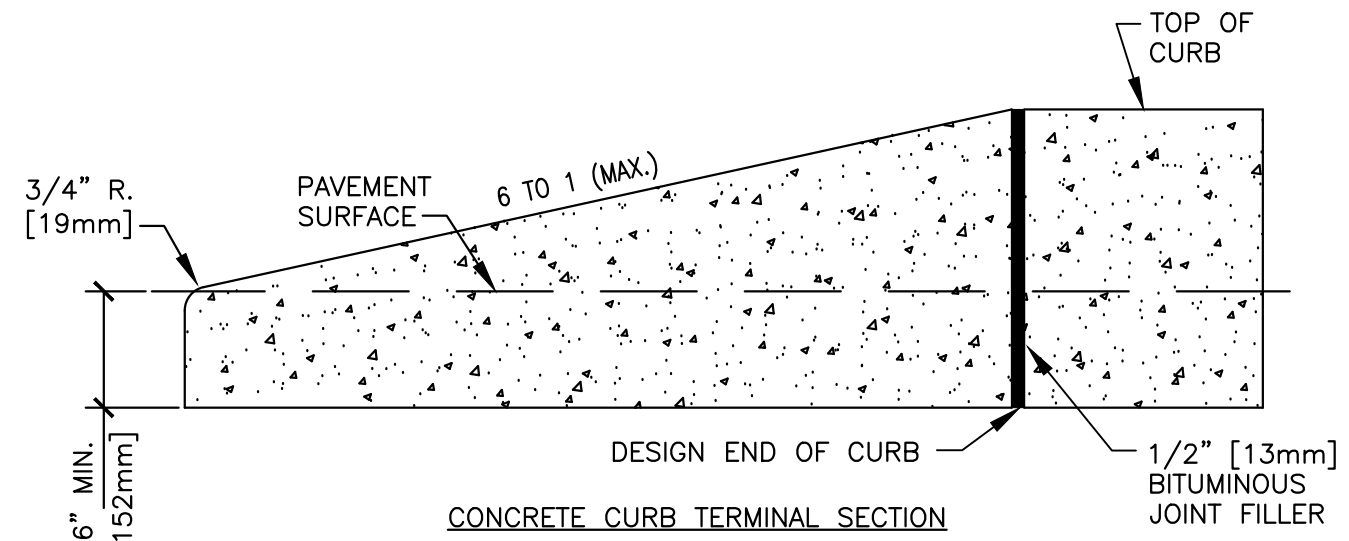

- CONCRETE CURB TERMINAL SECTION
- NOTES:
- ALL CONCRETE CURBS AND TRANSITIONS, SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 2,500 PSI.
 - MAXIMUM SPACING ON SCORED JOINTS SHALL BE 15' [4572mm].
 - 1/2" [13mm] THICK EXPANSION JOINTS SHALL BE LOCATED AT TANGENT POINTS IN CURB RETURNS, TRANSITIONS, AND AT A MAXIMUM OF 60' [1828.8cm] INTERVALS. EXPANSION MATERIAL SHALL ALSO BE PLACED BETWEEN CURBS AND ADJACENT STRUCTURES, SIDEWALKS, DRIVEWAYS AND CURB ACCESS RAMPS. THE 1/2" [13mm] JOINT FILLER SHALL EXTEND THE FULL DEPTH OF THE CONCRETE.
 - CONCRETE SHALL BE FINISHED WITH A STEEL TROWEL FOLLOWED BY BRUSHING WITH A FINE BRUSH ALONG THE LENGTH OF THE CURB OR CURB AND GUTTER.
 - SINGLE CURB MAY BE CONSTRUCTED BY THE USE OF FORMS OR MAY BE SLIP FORMED.
 - ALL EXPOSED EDGES AND HAND TOOLED JOINTS SHALL BE FINISHED WITH A TOOL HAVING A 1/4" [6mm] RADIUS UNLESS A LARGER RADIUS IS INDICATED BY THE APPLICABLE STANDARD DETAIL OR PROJECT PLANS.
 - FOR REVEALS OF 6" [152mm] TO LESS THAN 8" [203mm].
 - FOR REVEALS OF 8" [203mm] TO 10" [254mm].

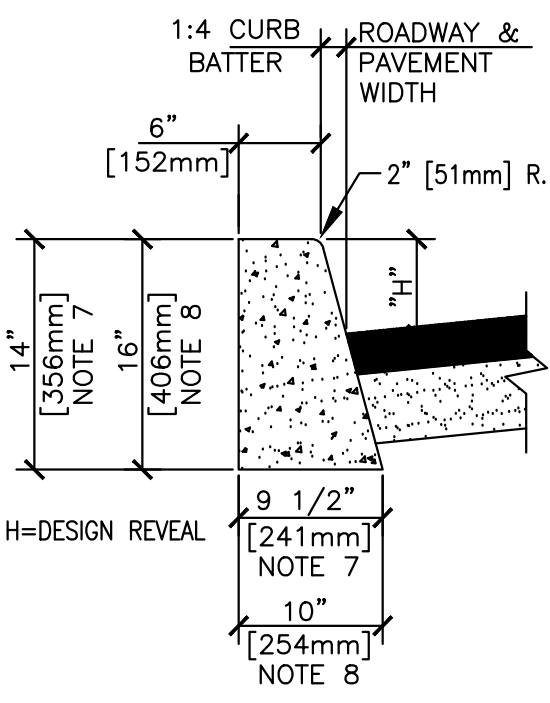


2 CONCRETE CURB AND TERMINAL SECTION
NTS

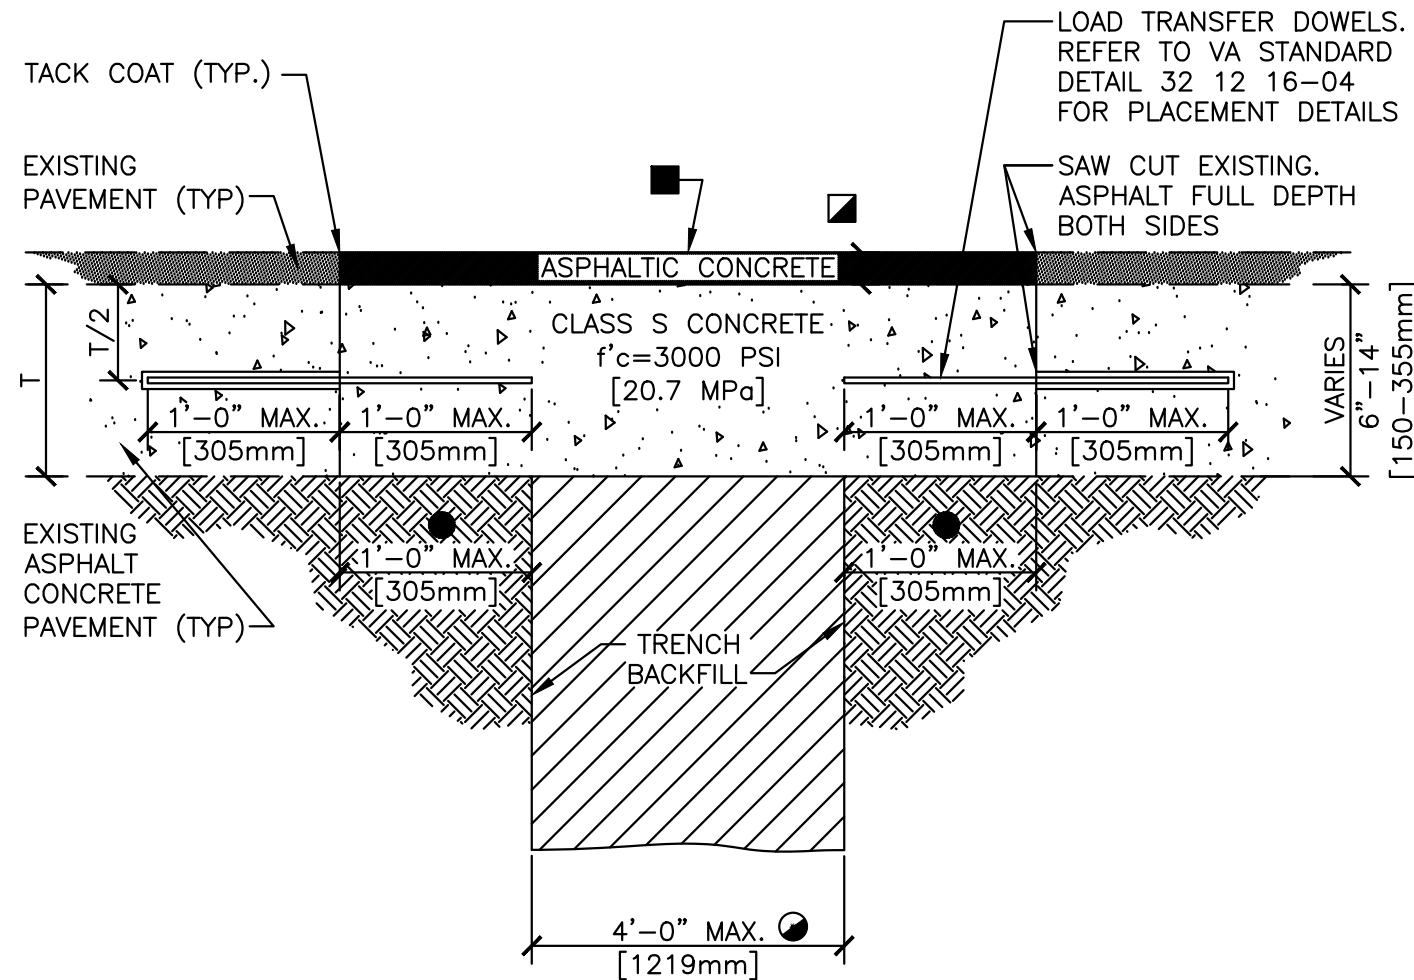


- FOR TRENCH WIDTHS EXCEEDING 4' [1219mm] DELETE LOAD TRANSFER DOWELS.
- 2" [50mm] MINIMUM OR THICKNESS OF EXISTING PAVEMENT WHICHEVER IS GREATER.
- BITUMINOUS SURFACE TREATMENT (CHIPSEAL) REQUIRED ONLY FOR LONGITUDINAL TRENCHES WITH WIDTHS GREATER THAN 6' [1829mm].
- REFER TO NOTE 13 ON VA STANDARD DETAIL 32 12 16-04 "UTILITY TRENCH PAVEMENT PATCH NOTES".

REFER TO VA STANDARD DETAIL 32 12 16-04 "UTILITY TRENCH PAVEMENT PATCH NOTES" FOR ADDITIONAL INFORMATION.

6 TYPE 3 UTILITY TRENCH PATCH
NTS

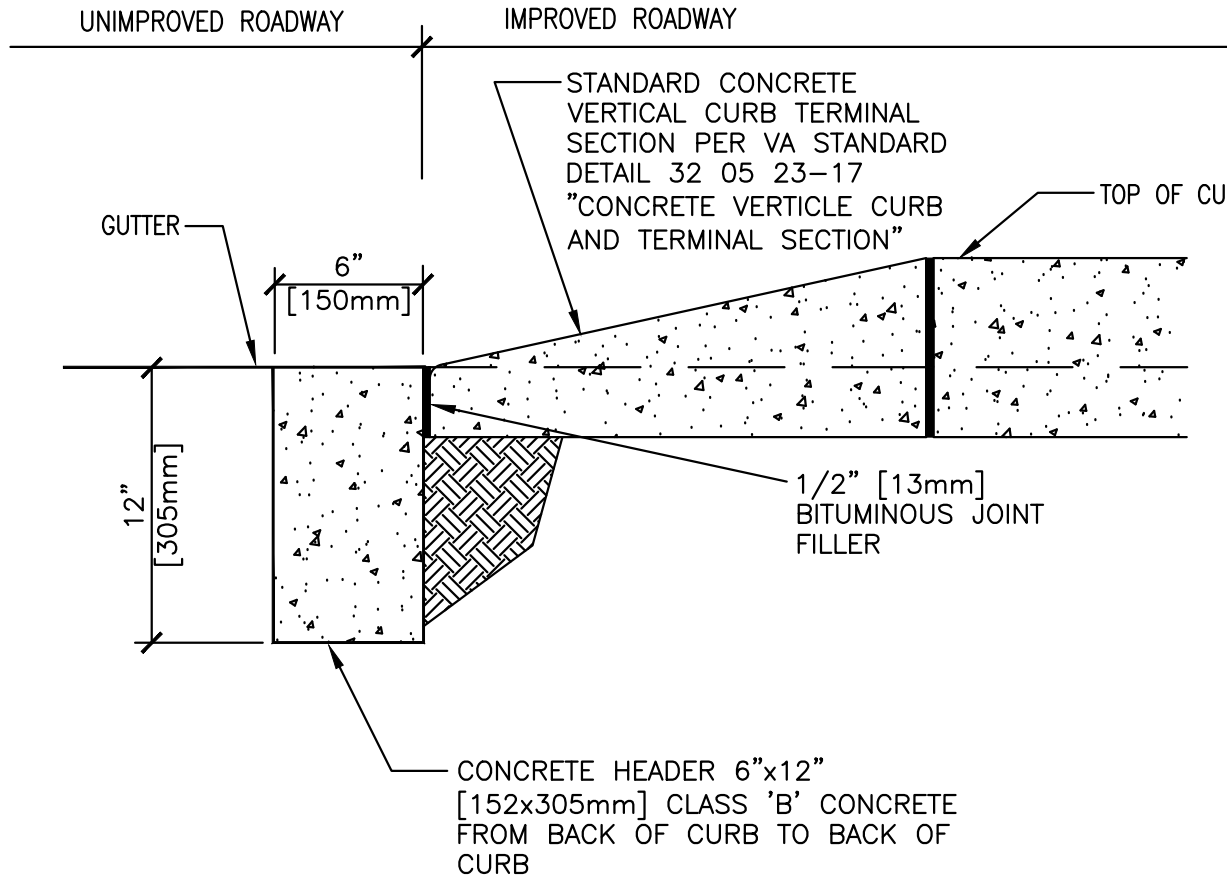


3 CONCRETE HEADER
NTS

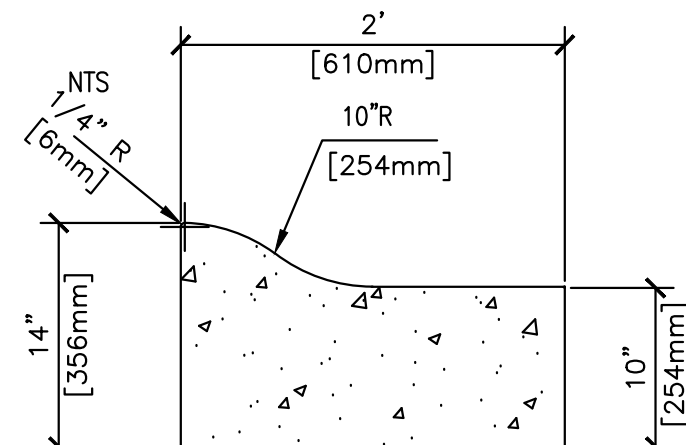


NOTE: CROSS SLOPE OF GUTTER SAME AS PAVEMENT.

4 MOUNTABLE CONCRETE CURB AND GUTTER
NTS

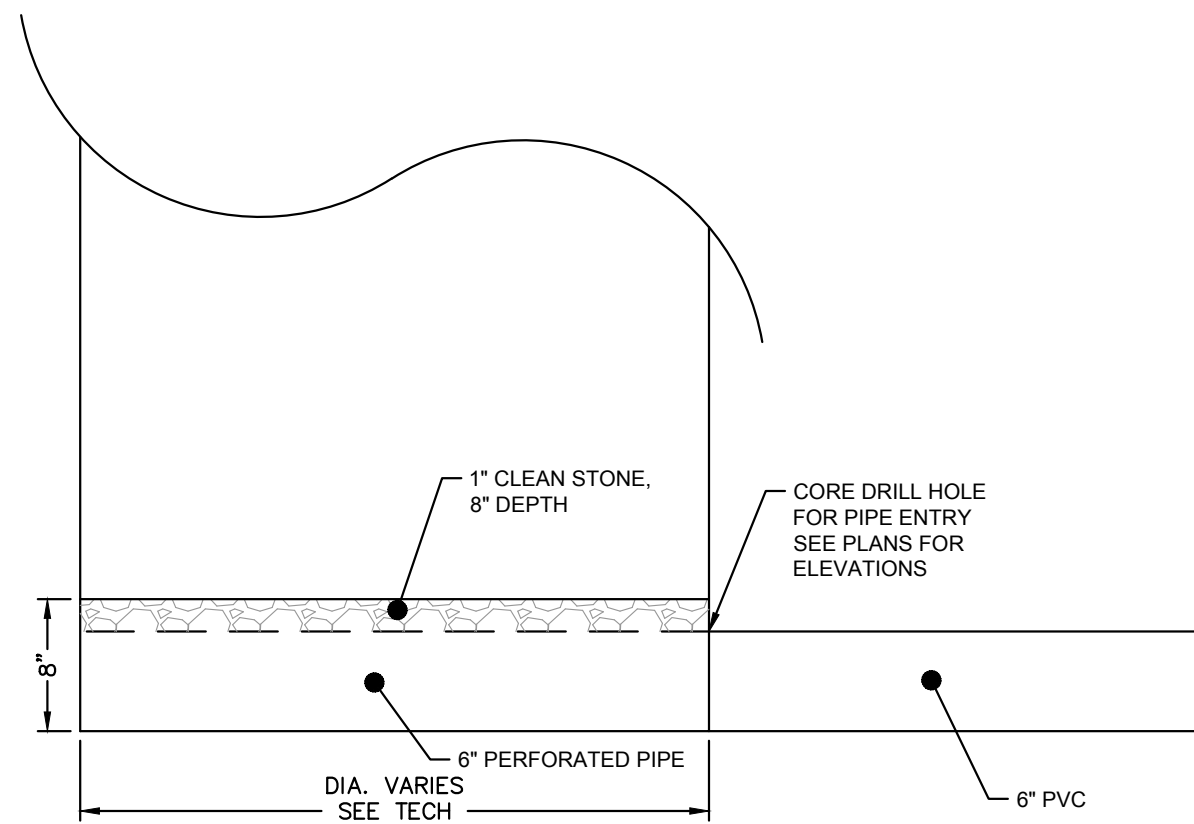


7 MANHOLE DRAINAGE DETAIL
NTS

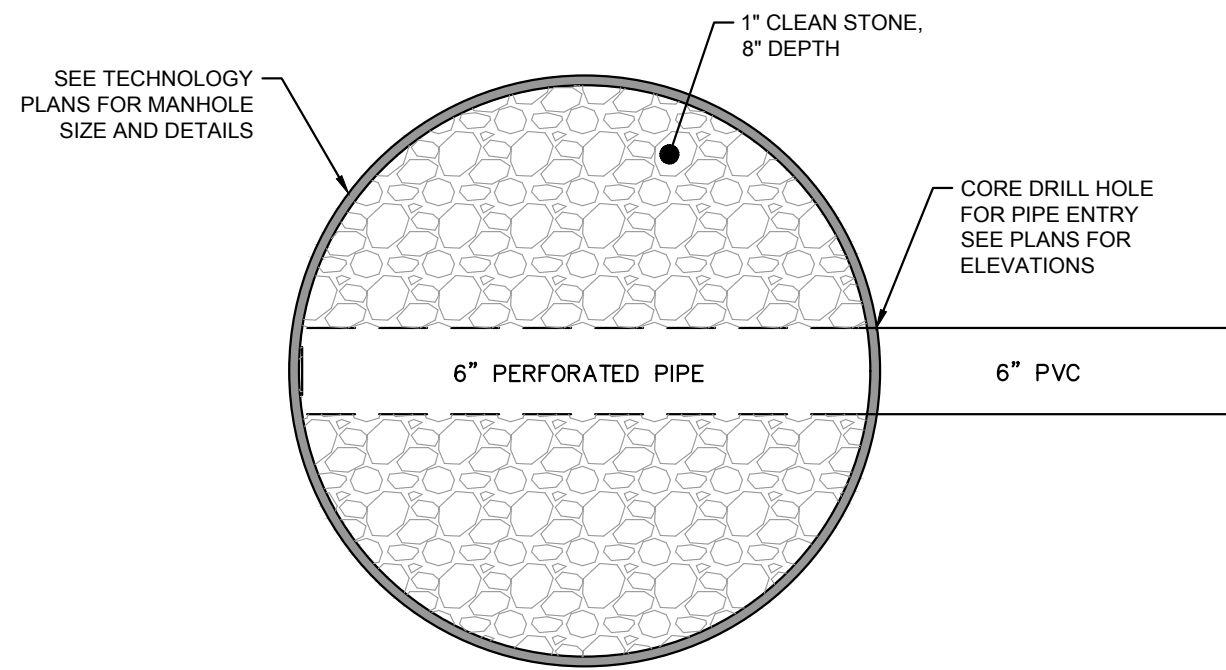

GENERAL NOTES


- MATERIAL AND COMPACTION REQUIREMENTS FOR PIPE BEDDING/SHADING SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS FOR THE APPLICABLE UTILITY PIPE.
 - TRENCH BACKFILL SHALL COMMENCE 1 FOOT [305mm] ABOVE THE TOP OF PIPE AND SHALL BE PER SECTION 312011.
 - BACKFILL COMPACTION REQUIREMENTS SHALL BE PER SECTION 312011.
 - THE 1 FOOT [305mm] TRENCH "SHOULDER" AREAS SHALL BE DELETED FOR TYPE 2 TRENCHES.
 - PORTLAND CEMENT CONCRETE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 320523.
 - ASPHALTIC TACK MATERIAL SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 321216.
 - ASPHALTIC CONCRETE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 321216 FOR THE TYPE SPECIFIED.
 - BITUMINOUS SURFACE TREATMENT (CHIP SEAL) SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 321216 FOR THE TYPE SPECIFIED.
 - LOAD TRANSFER DOWELS FOR JOINTS TRANSVERSE TO THE ROADWAY CENTERLINE SHALL BE SMOOTH STEEL DOWELS IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 320523. DOWELS SHALL BE SIZED AND SPACED AS FOLLOWS:
- | PCCP THICKNESS | DOWEL SIZE | DOWEL LENGTH | DOWEL SPACING |
|----------------|--------------|--------------|---------------|
| 6" [150mm] | #5 [No. 16] | 12" [305mm] | 18" [455mm] |
| 7" [180mm] | #6 [No. 19] | 15" [380mm] | 15" [380mm] |
| 8" [180mm] | #8 [No. 19] | 15" [380mm] | 12" [305mm] |
| 10" [180mm] | #10 [No. 19] | 15" [380mm] | 12" [305mm] |
- DEFORMED TIE BARS SHALL BE USED IN TRENCH PATCHES LONGITUDINAL TO THE ROADWAY CENTERLINE WHEN THE TRENCH LENGTH IS GREATER THAN 50 FEET [15240mm]. TIE BARS SHALL BE 24 INCHES [610mm] LONG, DEFORMED #4 [No. 13] BARS FOR PCCP LESS THAN 8 INCHES [205mm] THICK AND #5 [No. 16] BARS IF 8 INCHES [205mm] THICK OR MORE. TIE BARS SHALL BE PLACED 30 INCHES [760mm] CENTER-TO-CENTER.
 - HOLES SHALL BE DRILLED 1 FOOT [305mm] INTO THE EXISTING SLAB FOR TIE BARS AND 7 INCHES [180mm] FOR DOWELS. HOLES SHALL BE OF A DIAMETER SUFFICIENT TO ACCOMMODATE THE TIE BAR ANCHORAGE OR DOWEL CAP. TIE BARS SHALL BE ANCHORED WITH AN APPROVED HIGH VISCOSITY EPOXY.
 - IF THE CONCRETE SLAB REMAINING NEXT TO A LONGITUDINAL OR TRANSVERSE JOINT IS LESS THAN 6 FEET [1829mm] AT ITS NARROWEST WIDTH, REMOVE AND REPLACE THE EXISTING CONCRETE TO THE JOINT.

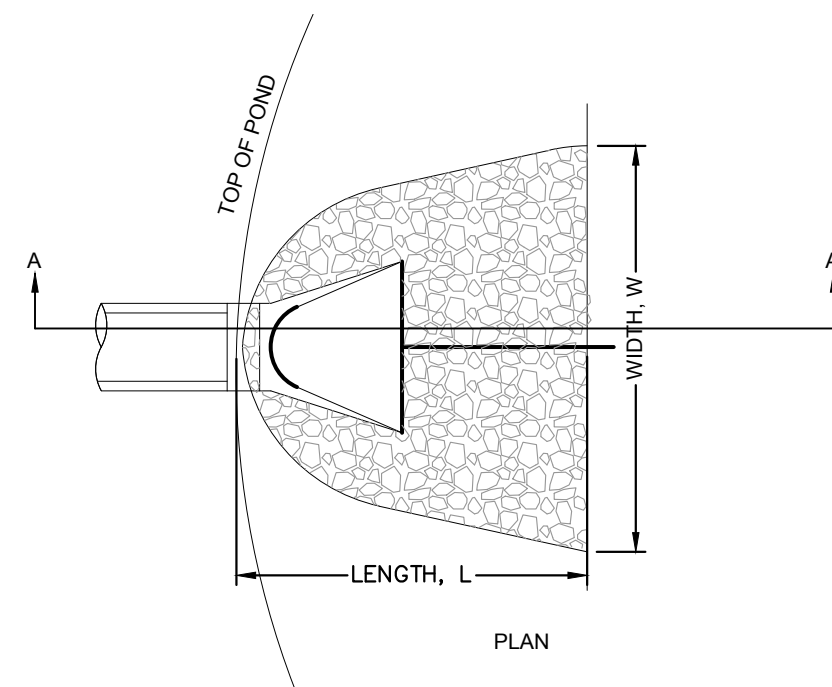

NOTES:

- DETAIL DERIVED FROM SUDAS (DWG NO. 9040.111).

L (R)	T (R)	W (FT.)	REVIEW
3	1	2.5	MEDIUM RIP RAP

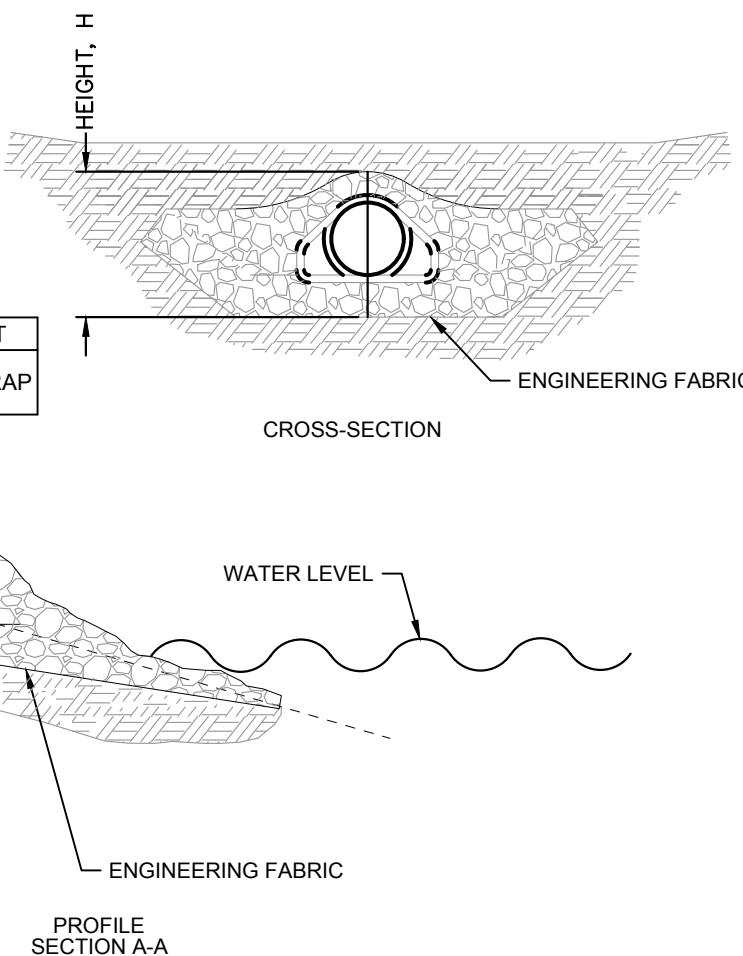

8 PIPE OUTLET NEAR POND
NTS

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
95% CONSTRUCTION DOCUMENTS	6.23.22
95% CONSTRUCTION DOCUMENTS RESUBMISSION	6.6.23
Revisions:	Date:

CONSULTANT

IMEG

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

Romanyk Consulting
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP

SEAL OF PROFESSIONAL ENGINEER
LHNEA K. SHAW
062-074863
OF ILLINOIS

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title
CIVIL DETAILS

Approved:

Phase
FINAL BID DOCUMENTS

Sprinklered
FULLY SPRINKLERED

Project Title
EHM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI

Location
5000 W. NATIONAL AVENUE MILWAUKEE, WI

Issue Date
SEPTEMBER 5, 2025

Checked
RJJ

Drawn
LKS

Project Number
695-21-700

Building Number

Drawing Number
100-CK100

34 of 34

F

E

D

C

B

A

8/20/2025 10:31:15 AM

\\lsc\Active\Projects\2018\180043751\VirtualDesign\Revit\Structural\Revit Model\ISO_180043751_03_VA MILWAUKEE EHRM_C.rvt

DESIGN CRITERIA

1. STRUCTURE HAS BEEN DESIGNED TO COMPLY WITH:

IBC 2021	
ASCE 7-16	
ACI 318-19	
2. SNOW:	
GROUND SNOW	30 PSF
SNOW EXPOSURE FACTOR	0.9
THERMAL FACTOR	1.0
IMPORTANCE FACTOR	1.0
FLAT-ROOF SNOW	20 PSF
DESIGN SNOW	20 PSF
3. WIND:	
BASIC WIND SPEED	V ULT = 107 MPH
IMPORTANCE FACTOR	1.0
EXPOSURE CLASS	B
MWFRS DESIGN WIND PRESSURE	BY EQUIPMENT MANUFACTURER

GENERAL

- DURING THE CONSTRUCTION PERIOD, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SAFETY OF PERSONNEL AND PROPERTY ON AND AROUND THE JOBSITE. THE CONTRACTOR SHALL PROVIDE ADEQUATE SHORING, BRACING, GUYS, ETC. IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL SAFETY ORDINANCES.
- ALL DRAWINGS ARE CONSIDERED TO BE A PART OF THE CONTRACT DOCUMENTS. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE REVIEW AND COORDINATION OF ALL DRAWINGS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO A CLARIFICATION CAN BE ISSUED. ANY WORK PERFORMED IN CONFLICT WITH THE CONTRACT DOCUMENTS OR ANY CODE REQUIREMENTS SHALL BE CORRECTED BY THE CONTRACTOR AT THEIR OWN EXPENSE AND AT NO EXPENSE TO THE OWNER OR ARCHITECT.
- STRUCTURAL SUBSTITUTIONS MAY BE ALLOWED WITH THE APPROVAL OF THE STRUCTURAL ENGINEER. SUPPLIER SHALL PROVIDE SEALED DESIGN CALCULATIONS OR SUITABLE PRODUCT LITERATURE FOR THE COMPONENTS.
- ALL DIMENSIONS AND SITE CONDITIONS SHALL BE VERIFIED BY THE CONTRACTOR AT THE JOBSITE PRIOR TO CONSTRUCTION. START OF SHOP DRAWINGS, START OF CONSTRUCTION, AND/OR FABRICATION OF MATERIALS. IF DISCREPANCIES ARE ENCOUNTERED, OR CONDITIONS DEVELOP THAT ARE NOT COVERED BY THE CONTRACT DOCUMENTS, THE ARCHITECT SHALL BE NOTIFIED FOR CLARIFICATION.
- CONTRACTOR SHALL PROVIDE AND BE RESPONSIBLE FOR THE PROTECTION AND REPAIR OF ADJACENT EXISTING SURFACES AND AREAS WHICH MAY BE DAMAGED AS A RESULT OF NEW WORK.
- STRUCTURAL DRAWINGS INCLUDE DESIGN REQUIREMENTS AND DIMENSIONS FOR STRUCTURAL INTEGRITY BUT DO NOT SHOW ALL DETAIL DIMENSIONS TO FIT INTRICATE ARCHITECTURAL AND MECHANICAL DETAILS. CONTRACTOR SHALL SO CONSTRUCT THE WORK SO IT WILL CONFORM TO THE CLEARANCES REQUIRED BY ARCHITECTURAL, MECHANICAL, AND ELECTRICAL DESIGN.
- ALL SYMBOLS AND ABBREVIATIONS USED ON THE DRAWINGS ARE CONSIDERED TO BE CONSTRUCTION STANDARDS. IF CLARIFICATION IS REQUIRED, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.
- DO NOT SCALE DRAWINGS. PRINTED DIMENSIONS HAVE PRECEDENCE OVER SCALED DRAWINGS AND LARGE-SCALE OVER SMALL-SCALE DRAWINGS. CONTRACTOR TO DETERMINE FINAL DIMENSION WITH ARCHITECT.
- TYPICAL DETAILS SHALL APPLY TO SITUATIONS OCCURRING ON THE PROJECT THAT ARE THE SAME OR SIMILAR TO THOSE SPECIFICALLY REFERENCED. WHERE NO DETAILS ARE GIVEN, CONSTRUCTION SHALL BE AS SHOWN FOR SIMILAR WORK.
- THE CONTRACT DOCUMENTS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE METHOD OF CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY TO PROTECT THE STRUCTURE AND SAFETY OF WORKMEN DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING AND SHORING FOR LOADS DUE TO CONSTRUCTION EQUIPMENT, ETC. OBSERVATION VISITS TO THE SITE BY THE ARCHITECT OR STRUCTURAL ENGINEER SHALL NOT INCLUDE INSPECTION OR APPROVAL OF THE ABOVE ITEMS AND DO NOT IN ANY WAY RELIEVE THE CONTRACTOR OF THEIR RESPONSIBILITIES FOR THE ABOVE.
- SEE ARCHITECTURAL, ELECTRICAL AND MECHANICAL DRAWINGS FOR DETAILS, CONDITIONS, PITS, TRENCHES, PADS, DEPRESSIONS, ROOF/FLOOR OPENINGS, STAIRS, SLEEVES, ITEMS TO BE EMBEDDED OR ATTACHED TO STRUCTURAL ELEMENTS, ETC., NOT SHOWN ON THE STRUCTURAL DRAWINGS.
- ESTABLISH AND VERIFY ALL OPENINGS AND INSERTS FOR MECHANICAL, ELECTRICAL AND PLUMBING WITH APPROPRIATE TRADE CONTRACTORS. OPENING SIZES AND LOCATIONS SHOWN FOR DUCTS, PIPE, INSERTS AND OTHER PENETRATIONS WHEN SHOWN ARE FOR GENERAL INFORMATION ONLY AND SHALL BE VERIFIED PRIOR TO FORMING.
- NO HOLES, NOTCHES, BLOCK-OUTS, ETC. ARE ALLOWED IN STRUCTURAL ELEMENTS UNLESS SPECIFICALLY DETAILED ON THE STRUCTURAL DRAWINGS OR APPROVED BY THE STRUCTURAL ENGINEER.
- PENETRATIONS SHALL BE CAST-IN-PLACE AND SHALL NOT BE PERMITTED EXCEPT AS SHOWN IN THE STRUCTURAL DRAWINGS.
- BEFORE SUBMITTING A PROPOSAL FOR THIS WORK, EACH PARTY SHALL VISIT THE PREMISES AND BECOME FULLY ACQUAINTED WITH CONDITIONS IN FIELD. TEMPORARY CONSTRUCTION REQUIRED, QUANTITIES AND TYPE OF EQUIPMENT, ETC. THE PROPOSAL SHALL INCLUDE ALL SUMS REQUIRED TO DO THE WORK.

REINFORCING STEEL

- ALL REINFORCING STEEL SHALL BE DETAILED AND PLACED IN CONFORMANCE WITH THE AMERICAN CONCRETE INSTITUTE "ACI DETAILING MANUAL" (SP-006) EXCEPT AS OTHERWISE SHOWN, NOTED OR SPECIFIED.
- CONCRETE REINFORCING STEEL SHALL BE HIGH STRENGTH NEW BILLET STEEL CONFORMING TO THE FOLLOWING STANDARDS:
DEFORMED BARS: ASTM A615, GR 60 Fy = 60 KSI
MINIMUM CONCRETE COVER SHALL BE PROVIDED AS FOLLOWS TO THE OUTERMOST REINFORCING BARS:
CAST AGAINST AND PERMANENTLY IN CONTACT WITH GROUND 3"
EXPOSED TO WEATHER OR IN CONTACT WITH GROUND 2"
#6 BARS OR LARGER 1 1/2"
#5 BARS OR SMALLER NOT EXPOSED TO WEATHER OR IN CONTACT WITH GROUND 1 1/2"
SLABS, JOISTS AND WALLS WITH #14 AND #18 BARS 3/4"
SLABS, JOISTS AND WALLS WITH #11 BARS OR SMALLER 3/4"
- SUPPORTS FOR REINFORCEMENT SHALL HAVE CLASS 2 PROTECTION AS DEFINED IN THE CRSI MANUAL OF STANDARD PRACTICE, UNLESS OTHERWISE NOTED.
- WHERE REINFORCEMENT LENGTH IS SPECIFIED, NO SPLICES ARE PERMITTED WITHIN THE SPECIFIED LENGTH WITHOUT APPROVAL BY THE STRUCTURAL ENGINEER.
- CUTTING OF REINFORCING WHICH CONFLICTS WITH EMBEDDED OBJECTS OR SLEEVES IS NOT ACCEPTABLE.
- REINFORCING BARS SHALL BE BENT COLD, AND NO METHOD OF FABRICATION SHALL BE USED WHICH WOULD BE INJURIOUS TO THE MATERIAL. HEATING OF BARS FOR BENDING IS NOT PERMITTED.
- FIELD WELDING OR BENDING OF REINFORCING IS NOT PERMITTED EXCEPT AS INDICATED ON THE DRAWINGS OR AS APPROVED BY THE STRUCTURAL ENGINEER.
- ALL CONCRETE NOT OTHERWISE SPECIFIED SHALL BE REINFORCED TO THE MINIMUM REQUIREMENT OF ACI 318.

EARTHWORK


- FOUNDATION DESIGN IS IN ACCORDANCE WITH THE BUILDING CODE ALLOWABLE BEARING PRESSURES, NO NEW GEOTECHNICAL REPORT HAS BEEN PROVIDED BY THE OWNER FOR THIS PROJECT.
- SOIL PROPERTIES PER THE GEOTECHNICAL REPORT:
ALLOWABLE NET SOIL BEARING PRESSURE: 1500 PSF (ASSUMED)
FOOTINGS
- CARE SHALL BE EXERCISED WHEN EXCAVATING OR GRADING ADJACENT TO EXISTING STRUCTURES OR IMPROVEMENTS TO NOT DAMAGE OR UNDERMINE FOUNDATIONS, WALLS, SLABS, UTILITIES, ETC.
- CONTRACTOR SHALL INVESTIGATE SITE DURING CLEARING AND EARTHWORK OPERATIONS FOR FILL MATERIAL OR BURIED STRUCTURES SUCH AS CESSPOOLS, CISTERNS AND FOUNDATIONS. IF ANY SUCH MATERIAL OR STRUCTURES ARE FOUND, ARCHITECT/ENGINEER SHALL BE NOTIFIED IMMEDIATELY. ALL ABANDONED FOUNDATIONS, UTILITIES AND OTHER STRUCTURES THAT INTERFERE WITH NEW CONSTRUCTION SHALL BE REMOVED.
- ALL FOOTINGS AND SLABS ON GRADE SHALL BE PLACED ONTO FIRM UNDISTURBED SOIL OR CONTROLLED COMPACTED FILL. REMOVING ANY EXISTING FILL, ORGANIC MATERIAL, OR UNSUITABLE SOILS. EXPOSED NATURAL SOIL SHALL BE PROOF ROLLED BELOW SLABS ON GRADE.
- FOUNDATION ELEVATIONS SHOWN DESIGNATE A MINIMUM DEPTH WHERE AN ADEQUATE SOIL BEARING PRESSURE IS EXPECTED. FOOTINGS, PIERS AND/OR WALLS SHALL BE LOWERED OR EXTENDED AS REQUIRED TO REACH SOIL MEETING THE DESIGN BEARING PRESSURE.
- ALL REQUIRED BACKFILL AND UTILITY TRENCH BACKFILL WITHIN THE BUILDING AREA SHALL BE MECHANICALLY COMPACTED IN 8" LAYERS TO 95% MAXIMUM DRY DENSITY PER ASTM D1557 AND TO THE APPROVAL OF THE INSPECTION AGENCY

35% SCHEMATIC DESIGN SUBMISSION	5.17.21
65% DESIGN DEVELOPMENT SUBMISSION	6.15.21
65% DESIGN DEVELOPMENT RESUBMISSION	8.25.21
Revisions:	Date:

CONSULTANT



ARCHITECT/ENGINEER OF RECORD

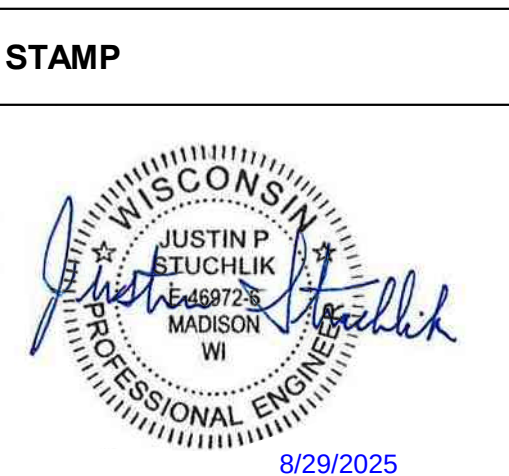

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
GENERAL NOTES, EQUIPMENT PLAN AND DETAIL
Approved:

Phase
FINAL BID DOCUMENTS
Sprinklered
FULLY SPRINKLERED

Project Title EHRM INFRASTRUCTURE UPGRADES - MILWAUKEE, WI	Project Number 695-21-700
Location 9000 W. NATIONAL AVENUE MILWAUKEE, WI	Drawing Number S001
Issue Date SEPTEMBER 5, 2025	Checked KATGOL
Drawn WALLEW	

CAST-IN-PLACE CONCRETE

- ALL CONCRETE WORK SHALL CONFORM TO THE CORRESPONDING EDITION OF THE AMERICAN CONCRETE INSTITUTE PUBLICATIONS: ACI 117, ACI 301, ACI 305.1, ACI 308.1, ACI 308.1, ACI 318 AND SP-006, UNLESS OTHERWISE NOTED.
- CONCRETE MATERIALS SHALL CONFORM TO:
CEMENT: ASTM C150, TYPE I OR II
FLY ASH: ASTM C618, TYPE C OR F
FINE AND COARSE AGGREGATE: ASTM C33
WATER: POTABLE
AIR-ENTRAINING ADMIXTURE: ASTM C260
WATER REDUCING ADMIXTURE: ASTM C494
CONCRETE STRENGTHS SHALL CONFORM TO:

INTENDED USE	STRENGTH (PSI)	EXPOSURE CLASS
UNLESS OTHERWISE NOTED	5000	F3, C2

- NORMAL-WEIGHT 28-DAY STRENGTH UNLESS OTHERWISE NOTED.
- THE MODULUS OF ELASTICITY OF ALL CONCRETE SHALL EXCEED 57,000 SQRT(f_c) FOR NORMAL-WEIGHT CONCRETE OR w_c1.5 33 SQRT(f_c).
- CROSS REFERENCE ARCHITECTURAL AND STRUCTURAL DRAWINGS TO ENSURE PROPER DIMENSIONS AND PLACEMENT OF ALL ANCHOR BOLTS, INSERTS, NOTCHES, AND EDGES OF WALLS/FOUNDATIONS PRIOR TO PLACING CONCRETE.
- UNLESS OTHERWISE NOTED, ALL FOOTINGS SHALL BE CENTERED UNDER WALLS, PIERS OR COLUMNS.
- PRIOR TO PLACING CONCRETE, THE CONTRACTOR SHALL ENSURE ALL REINFORCING AND EMBEDMENTS, INCLUDING COLUMN ANCHOR BOLTS, ARE PROPERLY LOCATED AND SECURELY TIED IN PLACE.
- PROVIDE SLEEVES FOR PLUMBING AND ELECTRICAL PENETRATIONS THROUGH CONCRETE BEFORE PLACING. SECURE SLEEVES TO PREVENT MOVEMENT DURING PLACING OPERATIONS. SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR LOCATIONS.
- CONFIRM WITH ARCHITECT THAT MATERIALS TO BE EMBEDDED ARE SUITABLE FOR EMBEDMENT IN CONCRETE.
- CONDUIT, PIPES, AND SLEEVES EMBEDDED IN CONCRETE SHALL CONFORM TO REQUIREMENTS OF ACI 318, SECTIONS 20.7 AND 20.8.
- NO ALUMINUM SHALL BE ALLOWED IN THE CONCRETE WORK UNLESS COATED TO PREVENT ALUMINUM-CONCRETE REACTION.
- PROJECTING CORNERS OF BEAMS, WALLS, COLUMNS, ETC., SHALL BE FORMED WITH A 3/4 INCH CHAMFER, UNLESS OTHERWISE NOTED ON ARCHITECTURAL DRAWINGS.
- SLOPE SLABS TO DRAINS OR FOR POSITIVE DRAINAGE IF NO DRAINS ARE PRESENT AND PROVIDE DEPRESSIONS WHERE SHOWN ON THE STRUCTURAL AND/OR ARCHITECTURAL DRAWINGS WITHOUT REDUCING THE THICKNESS OF SLAB INDICATED. FOR SLAB-ON-GRADE DEPRESSIONS GREATER THAN 1 INCH, SEE DETAILS FOR ADDITIONAL REINFORCING.
- CONCRETE SHALL NOT BE PERMITTED TO DROP MORE THAN 5 FEET.
- IF CONCRETE IS PLACED BY PUMPING, SUPPORT SHALL BE PROVIDED FOR THE HOSE. THE HOSE SHALL NOT BE ALLOWED TO RIDE ON THE REINFORCING AND OTHER EMBEDDED ITEMS.
- CONCRETE SLABS SHALL BE CURED BY KEEPING CONTINUOUSLY WET FOR 7 DAYS. FORMS FOR CONCRETE WALLS SHALL BE LEFT IN PLACE FOR 7 DAYS OR MAY BE STRIPPED AFTER 3 DAYS AND COATED WITH AN APPROVED CURING COMPOUND.
- NO LOADS SHALL BE PLACED ON STRUCTURAL CONCRETE SLABS WITHIN 7 DAYS AFTER CONCRETE IS PLACED. AFTER CONCRETE IS PLACED, IN NO CASE SHALL THE SUPERIMPOSED CONSTRUCTION LOADS BE GREATER THAN SPECIFIED DESIGN LIVE LOADS, UNLESS THE WORK IS SHORED.
- NOTIFY THE ARCHITECT/STRUCTURAL ENGINEER 48 HOURS MINIMUM PRIOR TO ALL POURS.
- CONTRACTOR SHALL SURVEY ALL CONCRETE WORK WITHIN 48 HOURS OF PLACING CONCRETE TO ENSURE PLACEMENT IS IN ACCORDANCE WITH PROJECT REQUIREMENTS.
- NO CONCRETE SHALL BE PLACED ONTO OR AGAINST SUBGRADES CONTAINING FREE WATER, FROST, ICE OR SNOW.
- DURING WINTER CONSTRUCTION, ALL FOOTINGS SHALL BE PROTECTED FROM FROST PENETRATION UNTIL THE BUILDING IS ENCLOSED AND TEMPORARY HEAT IS PROVIDED.
- GENERAL CONTRACTOR TO PROVIDE SHOP DRAWINGS FOR SIZE, LOCATION AND HEIGHT OF MECHANICAL EQUIPMENT PADS ON CONCRETE SLAB ON STEEL DECK AND SLAB-ON-GRADE.
- THE PROPOSED MATERIALS AND MIX DESIGN SHALL BE FULLY DOCUMENTED AND REVIEWED BY THE TESTING AGENCY. RESPONSIBILITY FOR OBTAINING THE REQUIRED DESIGN STRENGTH IS THE CONTRACTOR'S. SUBMIT TEST DATA ON EACH PROPOSED MIX FOR REVIEW IN ACCORDANCE WITH THE APPLICABLE CODE. MIX DESIGNS SUBMITTED WITHOUT THE REQUIRED TEST DATA WILL BE RETURNED WITHOUT REVIEW.

TESTING, INSPECTIONS, AND OBSERVATIONS

- THE STRUCTURAL ENGINEER DOES NOT PROVIDE INSPECTIONS OF CONSTRUCTION. STRUCTURAL ENGINEER MAY MAKE PERIODIC OBSERVATIONS OF THE CONSTRUCTION. SUCH OBSERVATIONS SHALL NOT REPLACE REQUIRED INSPECTIONS BY THE GOVERNING AUTHORITIES OR SERVE AS "SPECIAL INSPECTIONS" AS MAY BE REQUIRED BY CHAPTER 17 OF THE INTERNATIONAL BUILDING CODE.
- SEE ARCHITECTURAL, CIVIL, MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS OR SPECIFICATIONS FOR TESTING AND INSPECTION REQUIREMENTS OF NON-STRUCTURAL COMPONENTS.
- DUTIES OF THE INSPECTION AGENCY PER IBC CHAPTER 17:
 - SUBMIT A PROPOSED TESTING AND INSPECTION PROGRAM TO THE OWNER, THE ARCHITECT AND THE STRUCTURAL ENGINEER FOR REVIEW AND APPROVAL AT LEAST TWO WEEKS PRIOR TO COMMENCEMENT OF WORK.
 - PERFORM ALL TESTING AND INSPECTION REQUIRED PER APPROVED TESTING AND INSPECTION PROGRAM.
 - FURNISH INSPECTION REPORT TO THE BUILDING OFFICIAL, THE OWNER, THE ARCHITECT, STRUCTURAL ENGINEER AND THE GENERAL CONTRACTOR. THE REPORTS SHALL BE COMPLETED AND FURNISHED WITHIN 48 HOURS OF INSPECTED WORK.
 - SUBMIT A FINAL SIGNED REPORT STATING WHETHER THE WORK REQUIRING SPECIAL INSPECTION WAS, TO THE BEST OF THE SPECIAL INSPECTION AGENCY'S KNOWLEDGE, IN CONFORMANCE WITH THE APPROVED PLANS AND SPECIFICATIONS.
- SPECIAL INSPECTIONS AND TESTS ARE REQUIRED FOR MATERIALS AND SYSTEMS REQUIRED TO BE INSTALLED IN ACCORDANCE WITH ADDITIONAL MANUFACTURER'S INSTRUCTIONS THAT PRESCRIBE REQUIREMENTS NOT CONTAINED IN CHAPTER 17 OF THE IBC OR IN STANDARDS REFERENCED BY THE IBC. THESE ITEMS INCLUDE:
 - POST-INSTALLED ANCHORS - INSPECTION
- THE FOLLOWING WORK SHALL BE INSPECTED BY THE SPECIAL INSPECTOR UNLESS SPECIFICALLY WAIVED BY THE BUILDING OFFICIAL.

VERIFICATION AND INSPECTION TASK	CONTINUOUS	PERIODIC	MATERIAL STD REFERENCE	IBC REFERENCE
CONCRETE CONSTRUCTION				
1. INSPECT REINFORCEMENT, AND VERIFY PLACEMENT		X	ACI 318: CH 20, 25.2, 25.3, 26.2.1-26.6.3	1908.4
2. MATERIAL IDENTIFICATION OF REINFORCING (TYPE/GRADE)		X	AISC 341: TABLE J9.1	
3. REINFORCING STEEL HAS NOT BEEN REBENT IN THE FIELD		X	AISC 341: TABLE J9.1	
4. REINFORCING STEEL HAS BEEN TIED AND SUPPORTED AS REQUIRED		X	AISC 341: TABLE J9.1	
5. REINFORCING STEEL CLEARANCES HAVE BEEN PROVIDED		X	AISC 341: TABLE J9.1	
6. INSPECT ANCHORS CAST IN CONCRETE		X	ACI 318: 17.8.2	
7. INSPECT ANCHORS POST-INSTALLED IN HARDENED CONCRETE MEMBERS:				
a. ADHESIVE ANCHORS INSTALLED IN HORIZONTALLY OR UPWARDLY INCLINED ORIENTATIONS TO RESIST SUSTAINED TENSION LOADS	X		ACI 318: 17.8.2.4	
b. MECHANICAL ANCHORS AND ADHESIVE ANCHORS NOT DEFINED IN 4.a		X	ACI 318: 17.8.2	
8. VERIFY USE OF REQUIRED DESIGN MIX		X	ACI 318: CH 19, 26.4.2, 26.4.4	1904.1, 1904.2, 1908.2, 1908.3
9. PRIOR TO CONCRETE PLACEMENT, FABRICATE SPECIMENS FOR STRENGTH TESTS, PERFORM SLUMP AND AIR CONTENT TESTS, AND DETERMINE THE TEMPERATURE OF THE CONCRETE	X		ASTM C172, ASTM C31, ACI 318: 26.5, 26.12	1908.10
10. INSPECT CONCRETE PLACEMENT FOR PROPER APPLICATION TECHNIQUES	X		ACI 318: 26.5	1908.6, 1908.7, 1908.8
11. VERIFY MAINTENANCE OF SPECIFIED CURING TEMPERATURE AND TECHNIQUES		X	ACI 318: 26.5.3-26.5.5	1908.9
12. VERIFY IN-SITU CONCRETE STRENGTH		X	ACI 318: 26.11.2	
13. INSPECT FORMWORK FOR SHAPE, LOCATION, AND DIMENSIONS OF THE CONCRETE MEMBER BEING FORMED		X	ACI 318: 26.11.2(b)	


VERIFICATION AND INSPECTION TASK	CONTINUOUS	PERIODIC	MATERIAL STD REFERENCE	IBC REFERENCE
SOILS				
1. VERIFY MATERIALS BELOW SHALLOW FOUNDATIONS ARE ADEQUATE TO ACHIEVE THE DESIGN BEARING CAPACITY		X		
2. VERIFY EXCAVATIONS ARE EXTENDED TO PROPER DEPTH AND HAVE REACHED PROPER MATERIAL		X		
3. PERFORM CLASSIFICATIONS AND TESTING OF COMPACTED FILL MATERIAL		X		
4. VERIFY USE OF PROPER MATERIALS, DENSITIES, AND LIFT THICKNESSES DURING PLACEMENT AND COMPACTION OF COMPACTED FILL	X			
5. PRIOR TO PLACEMENT OF COMPACTED FILL, INSPECT SUBGRADE AND VERIFY THAT SITE HAS BEEN PREPARED PROPERLY		X		

1 NEW EQUIPMENT PAD









1/8" = 1'-0"

2 EQUIPMENT PAD SECTION


3/4" = 1'-0"

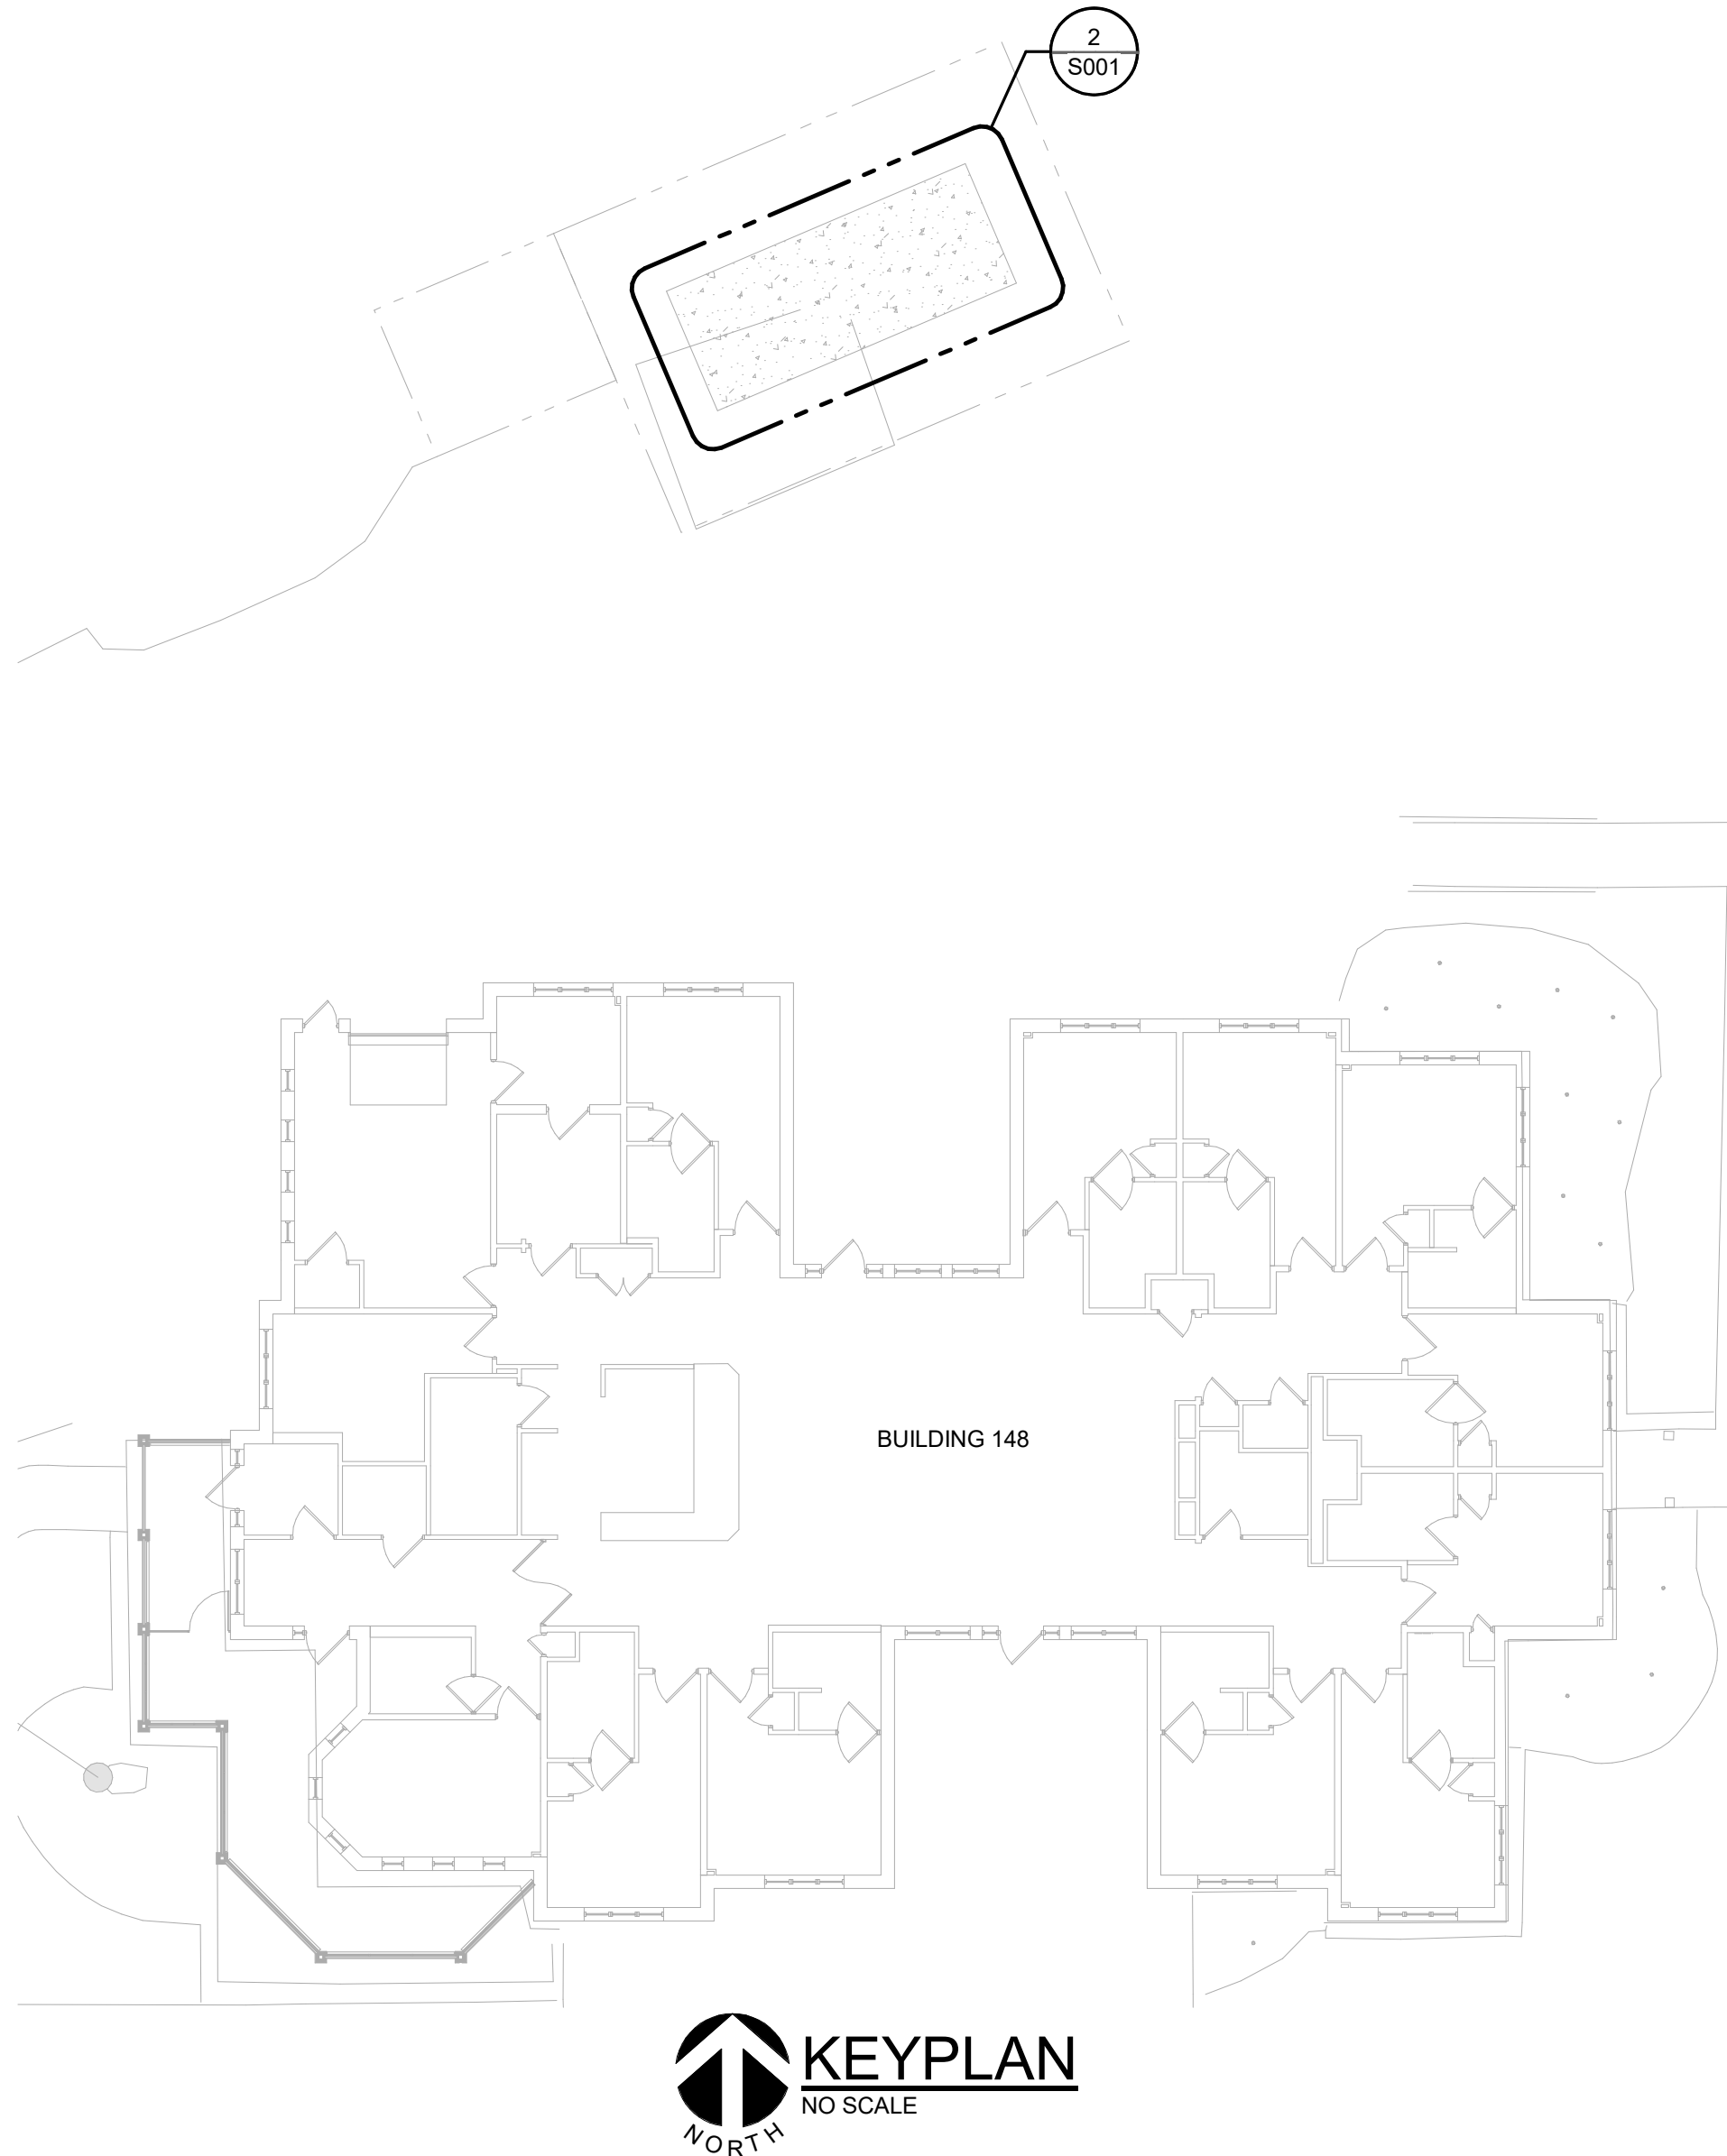

- NOTES:
- REFER TO ELECTRICAL DRAWINGS FOR SIZE AND LOCATION OF GENERATOR.
 - COORDINATE LOCATION OF NEW GENERATOR PAD AND DIMENSIONS WITH ELECTRICAL CONTRACTOR AND CIVIL DRAWINGS.

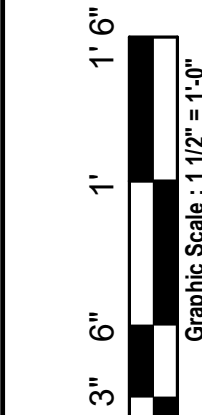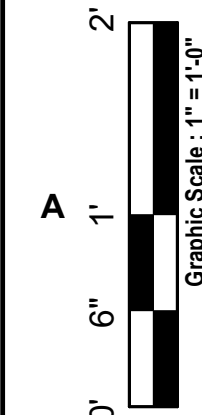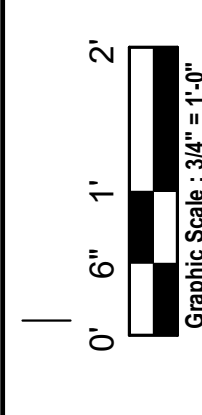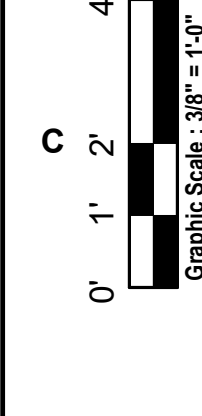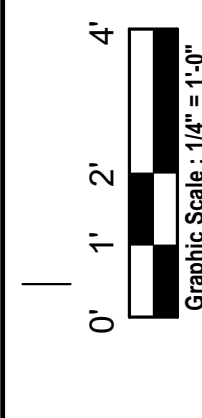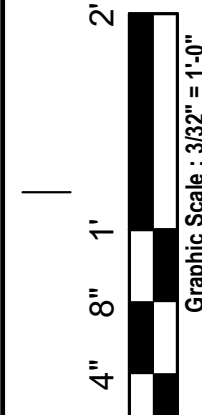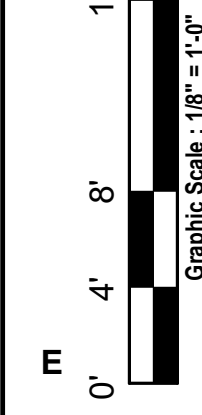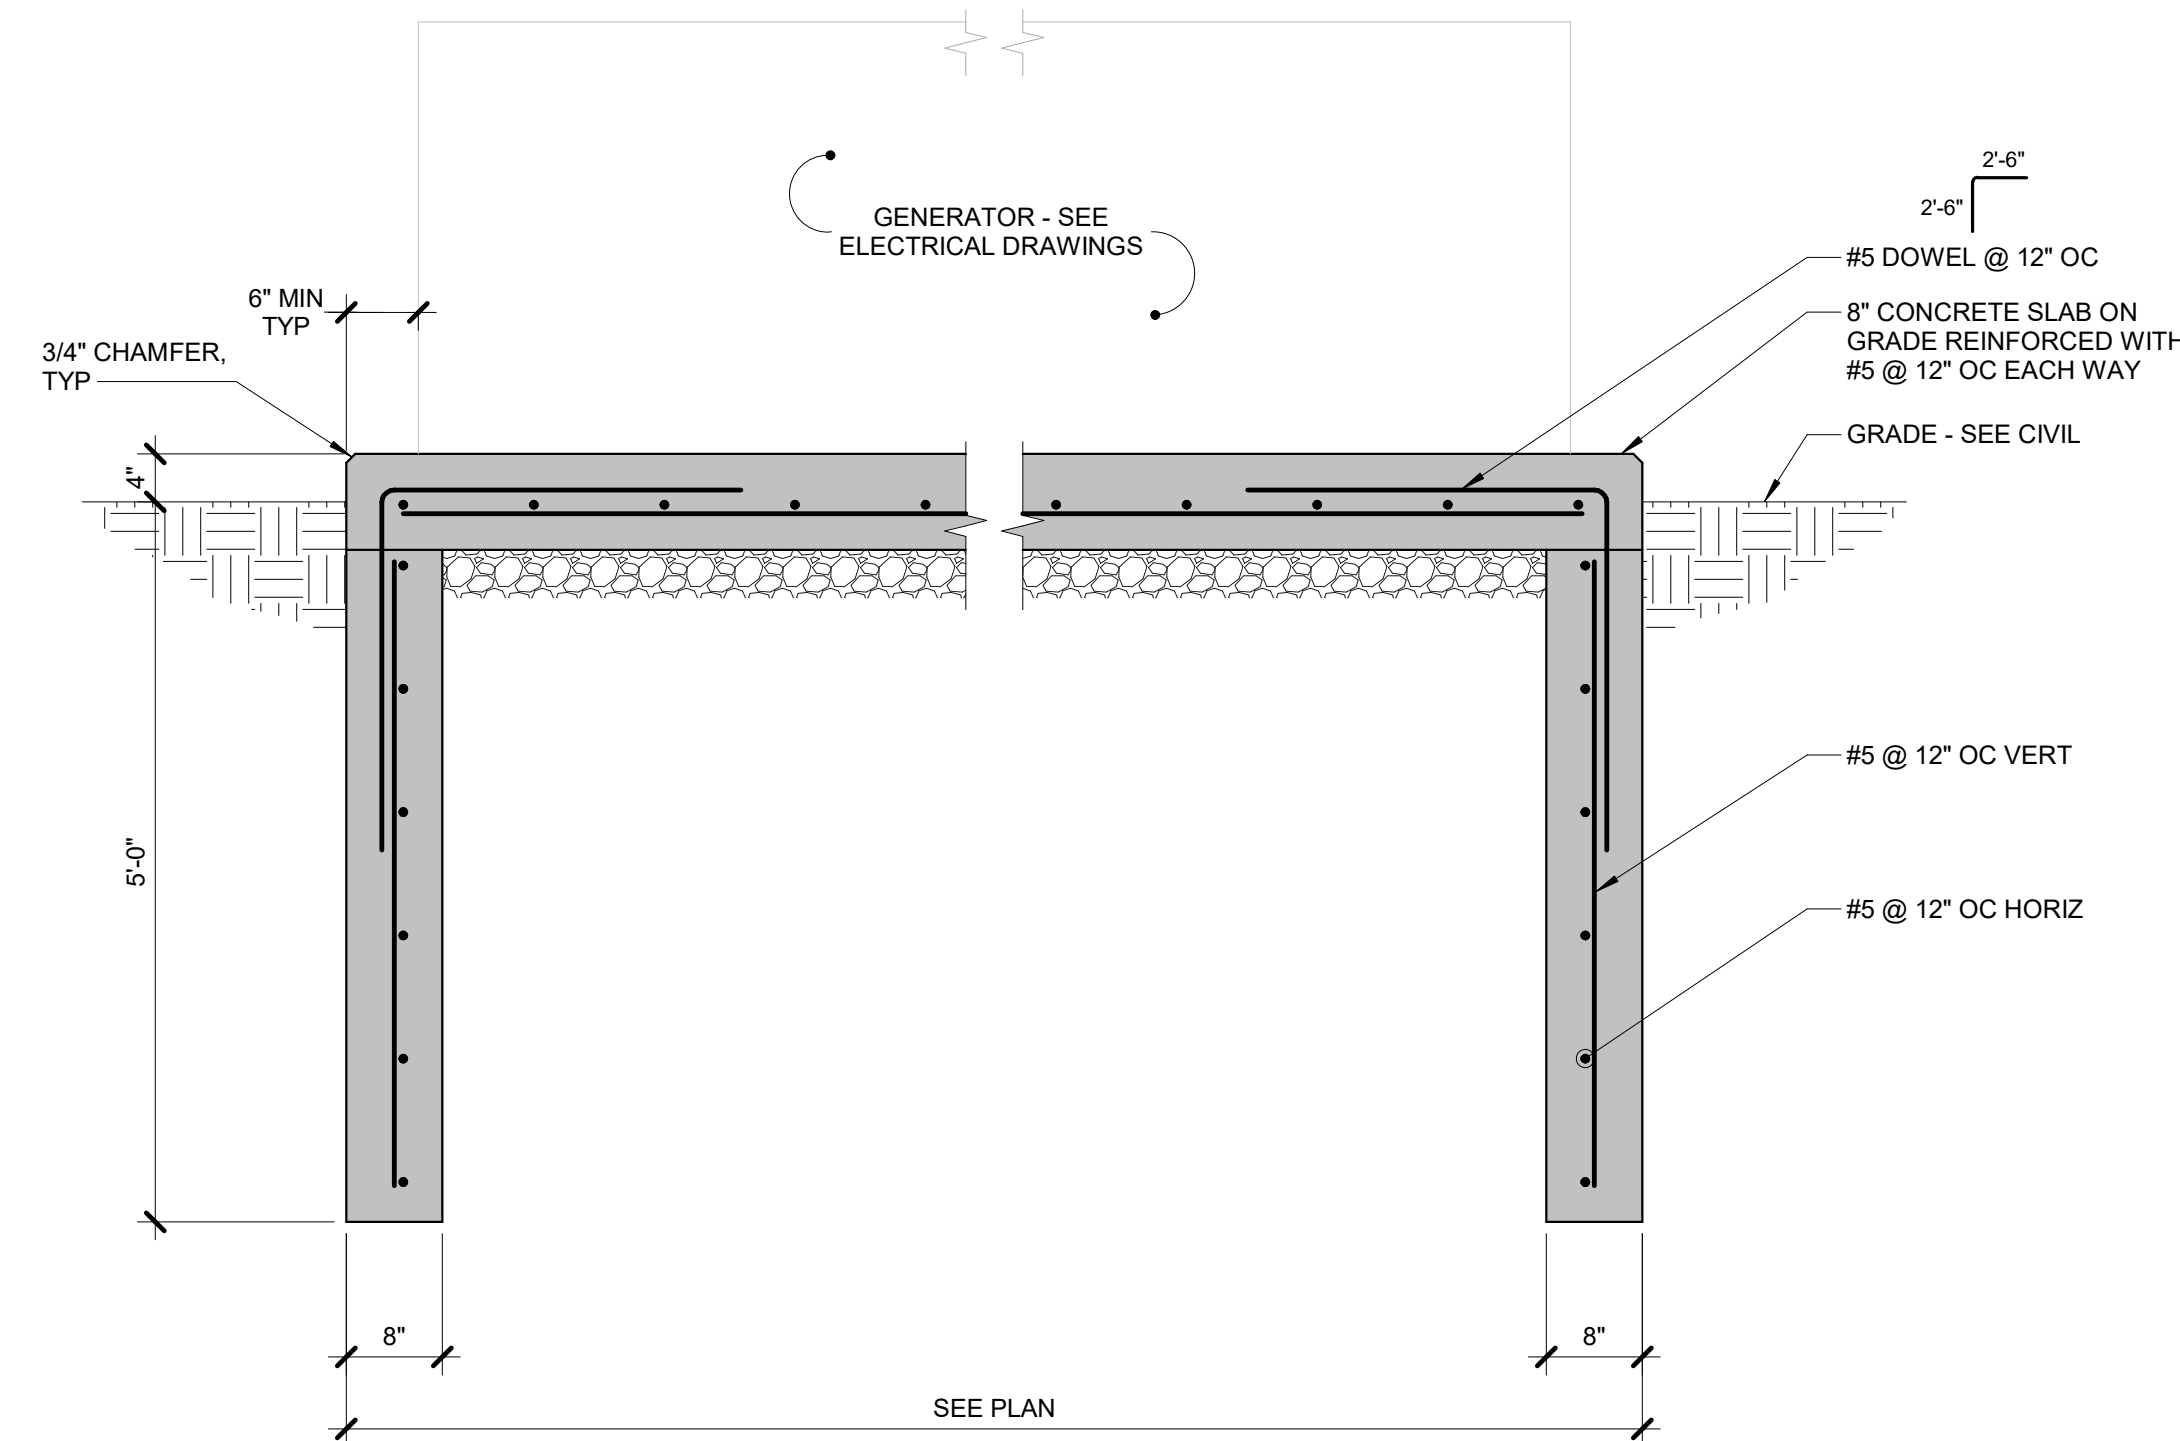

9/3/2025 12:31:35 PM
A
B
C
D
E
F
Autodesk Docs (DCCFM) East - Milwaukee EHRM (R24) (Consolidated Model) (R24) v01

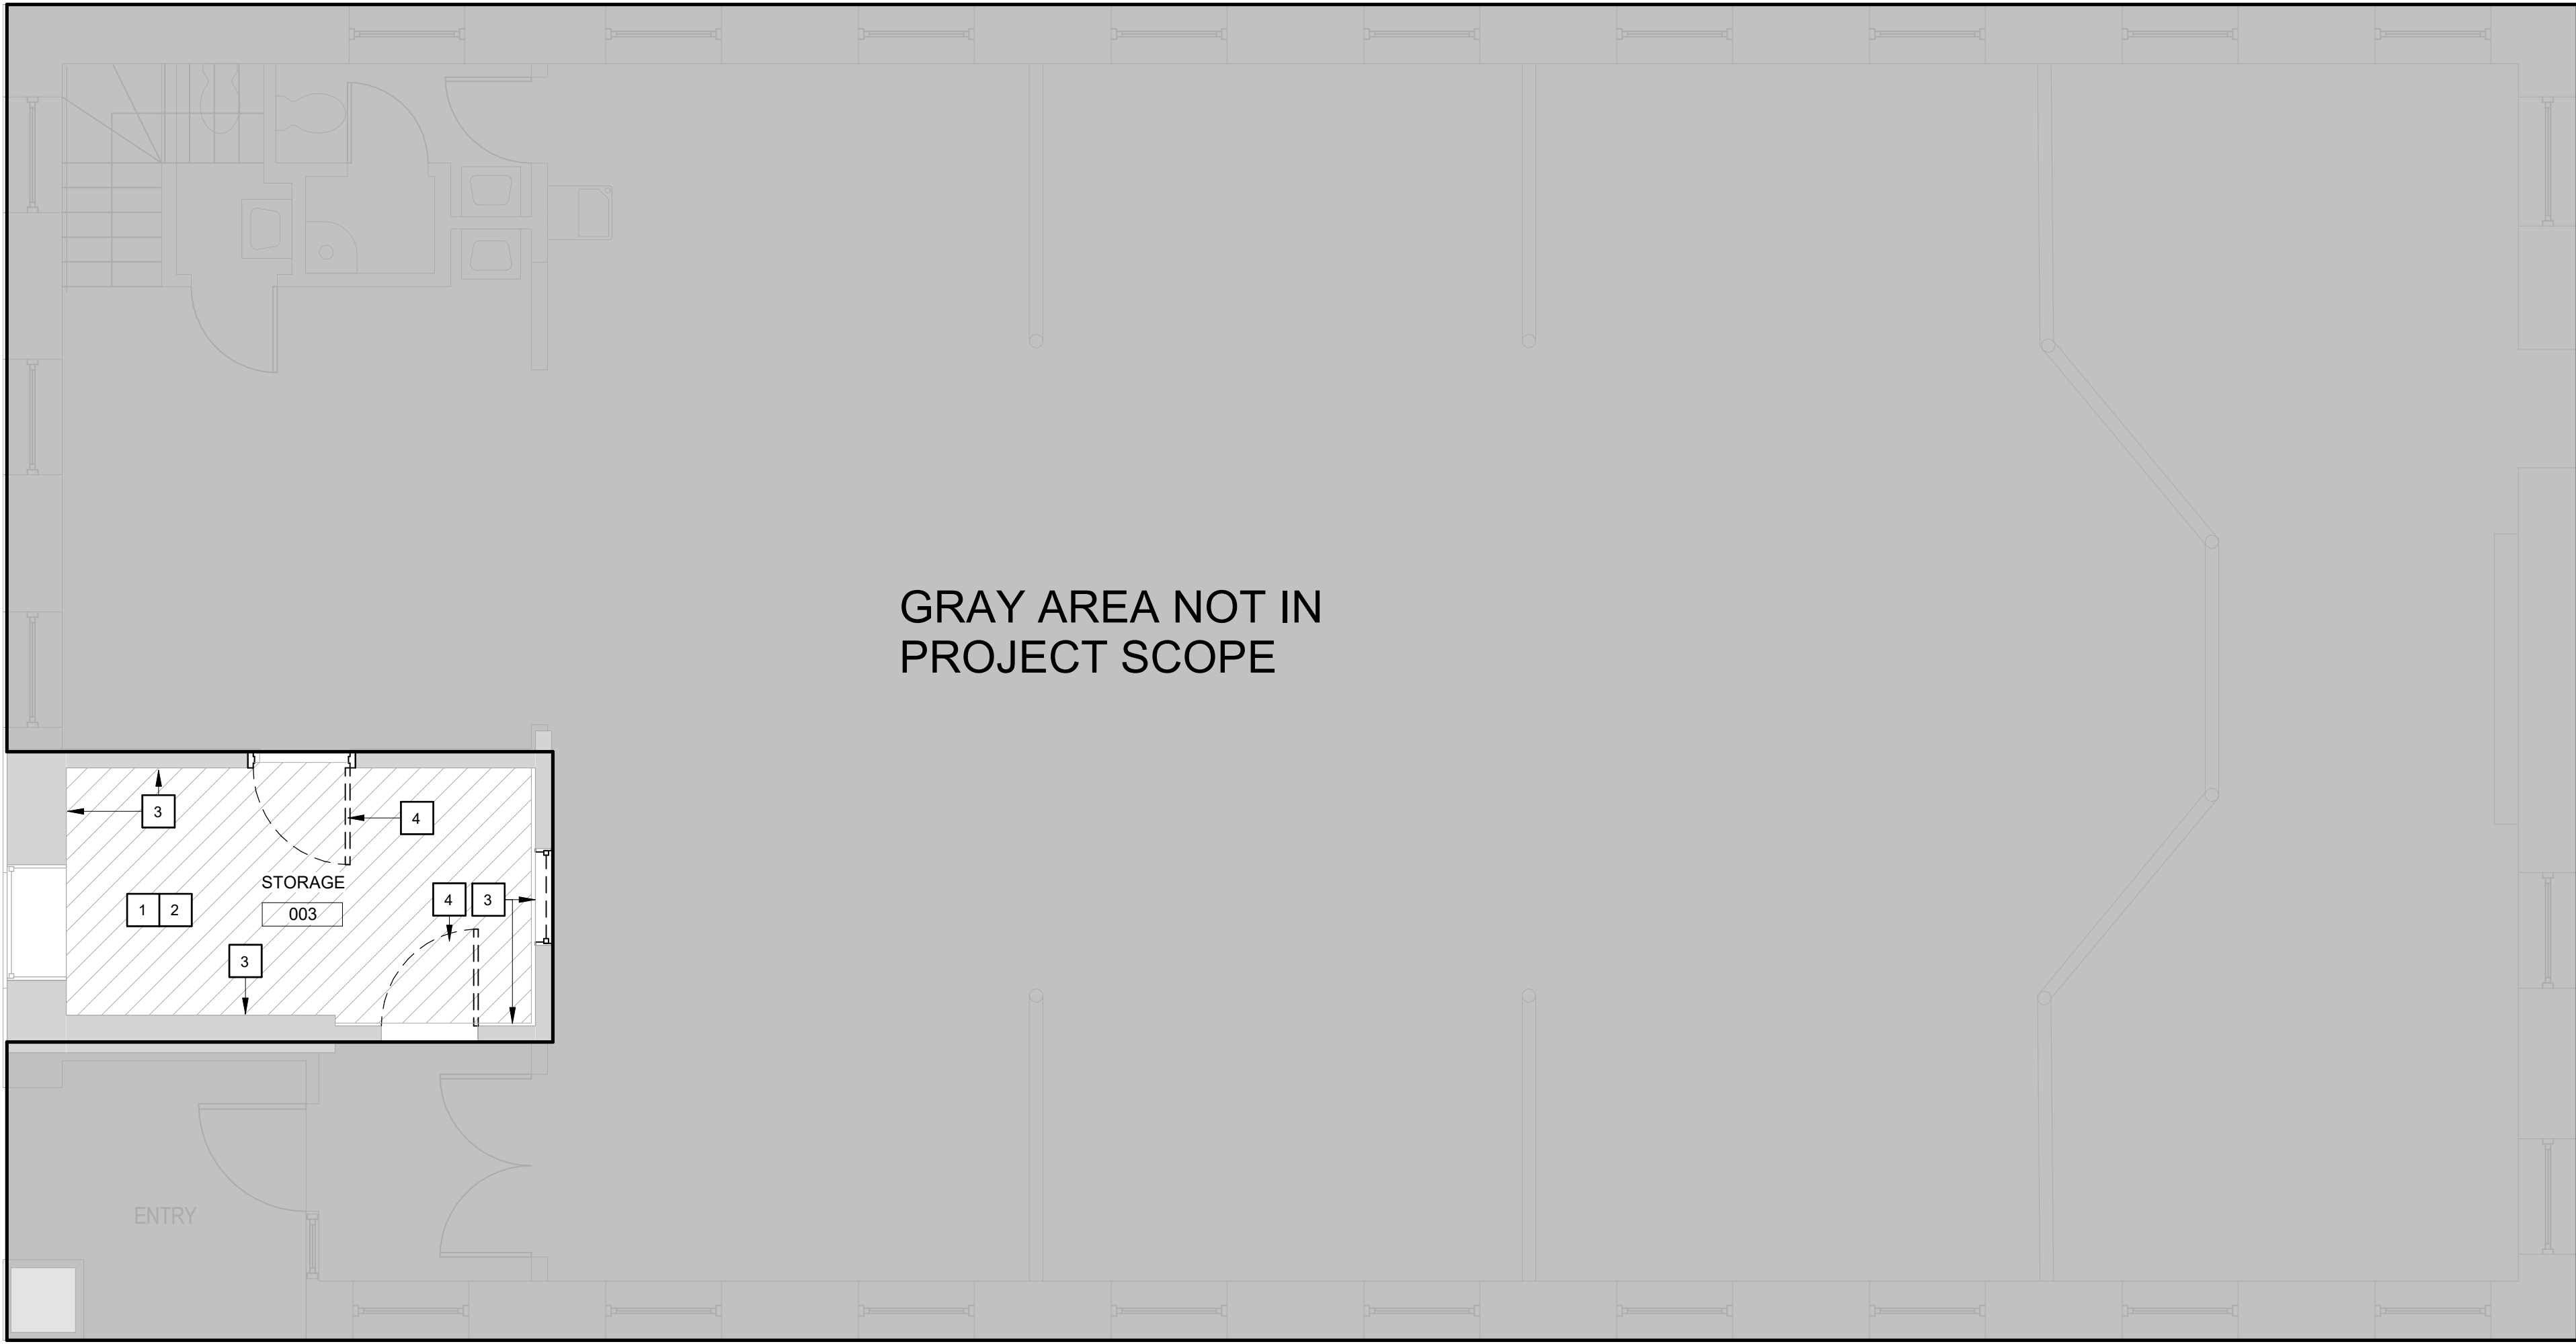

1 BUILDING 03 FIRST FLOOR DEMO PLAN
1/4" = 1'-0"



2 BUIDLING 3 FIRST FLOOR DEMO RCP
1/4" = 1'-0"



DEMO KEYNOTES		#
Note Number	Note	
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL. STORE AT VA DESIGNATED LOCATION.	
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL BASE, WALL COVERING, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.	
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTI, GYP BD ON NON-DEMO SIDE. REFER TO FINISH SCHEDULE FOR NEW FINISHES. REFER TO THE FLOOR PLAN FOR NEW WORK.	
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE MATERIALS. PREPARE WALL TO BE INFILLED.	
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.	
7	DEMO EXISTING CASEWORK.	
8	REMOVE EXISTING TEL-COMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.	
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.	
10	DEMO EXISTING SOFFIT.	
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TINT FROM INTERIOR OF WINDOW (TYP.). DEMO EXISTING TRIM AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.	
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.	

DEMO LEGEND	
	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS.
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED -REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN

RCP DEMO LEGEND	
	DEMO ACT CEILING
	DEMO HUNG LIGHT FIXTURE

RCP KEYNOTES		#
NOTE NUMBER	NOTE	
1	EXPOSED CEILING	
2	DEMO EXISTING CEILING FINISHES AND FIXTURES	
3	REPLACE CEILING TILES IN AREA OF WORK	
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK	
5	PATCH AND REPAIR EXISTING CEILING	
9	EXPOSED CEILING, PATCH, REPAIR AND PAINT AS REQUIRED.	
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.	

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 8'-6" AFF U.N.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS, EQUIPMENT, DOOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH NEW CONSTRUCTION. BRING ANY DISCREPANCIES AND OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

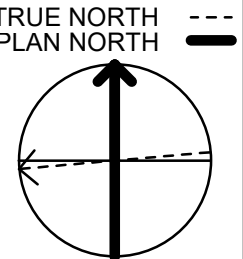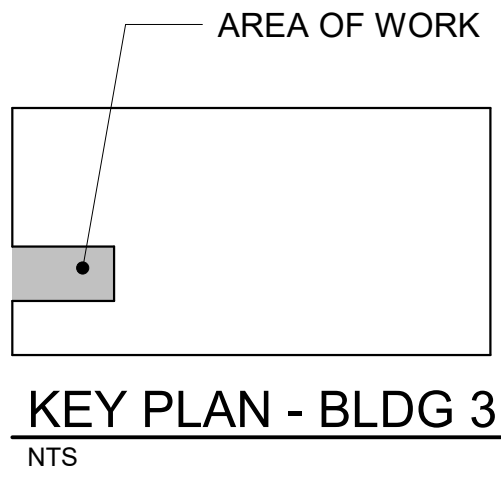

Revisions:	Date:

CONSULTANT

IMEG

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

Romanyk Consulting
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP

REBECCA G. OLSON
001.011033
STATE OF ILLINOIS
9.5.2025

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title
BUILDING 03 FIRST FLOOR DEMO PLAN & RCP

Approved:

Phase
FINAL BID DOCUMENTS

Sprinklered

Project Title
EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI

Location
5000 W. NATIONAL AVENUE MILWAUKEE, WI

Issue Date
SEPTEMBER 5, 2025


Checked
RCO


Drawn
HS

Project Number
695-21-700

Building Number
03

Drawing Number
03-AD101

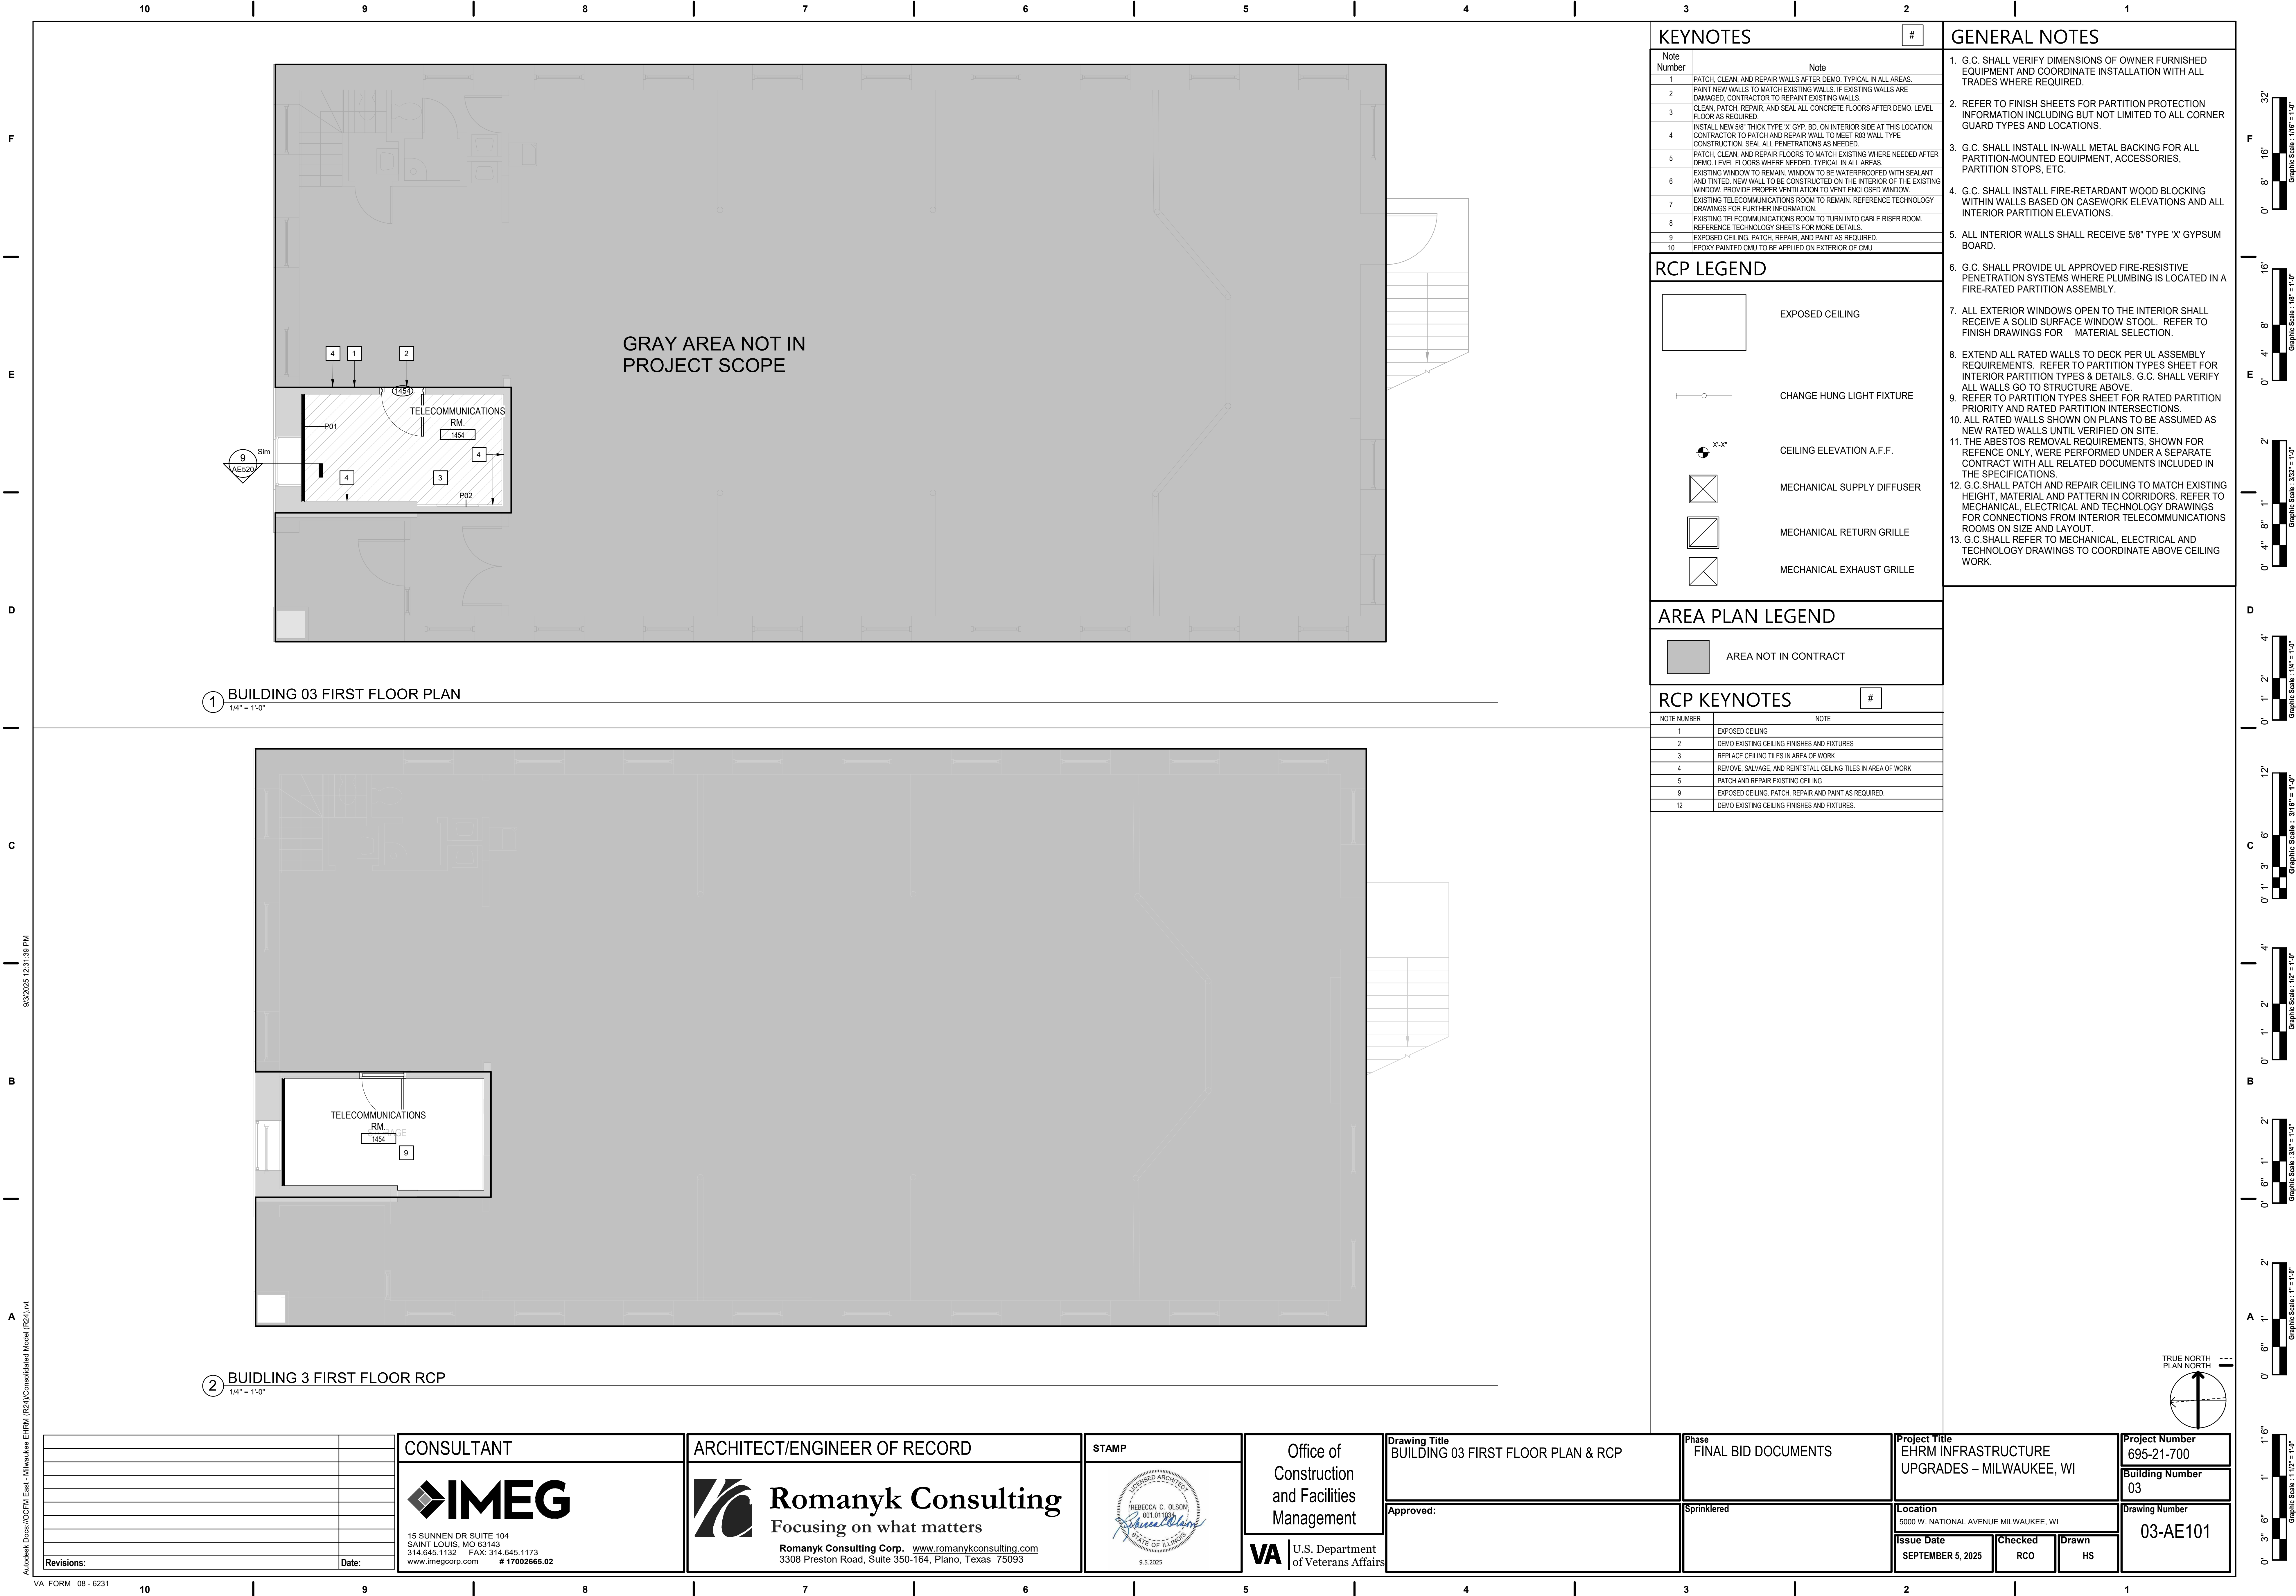

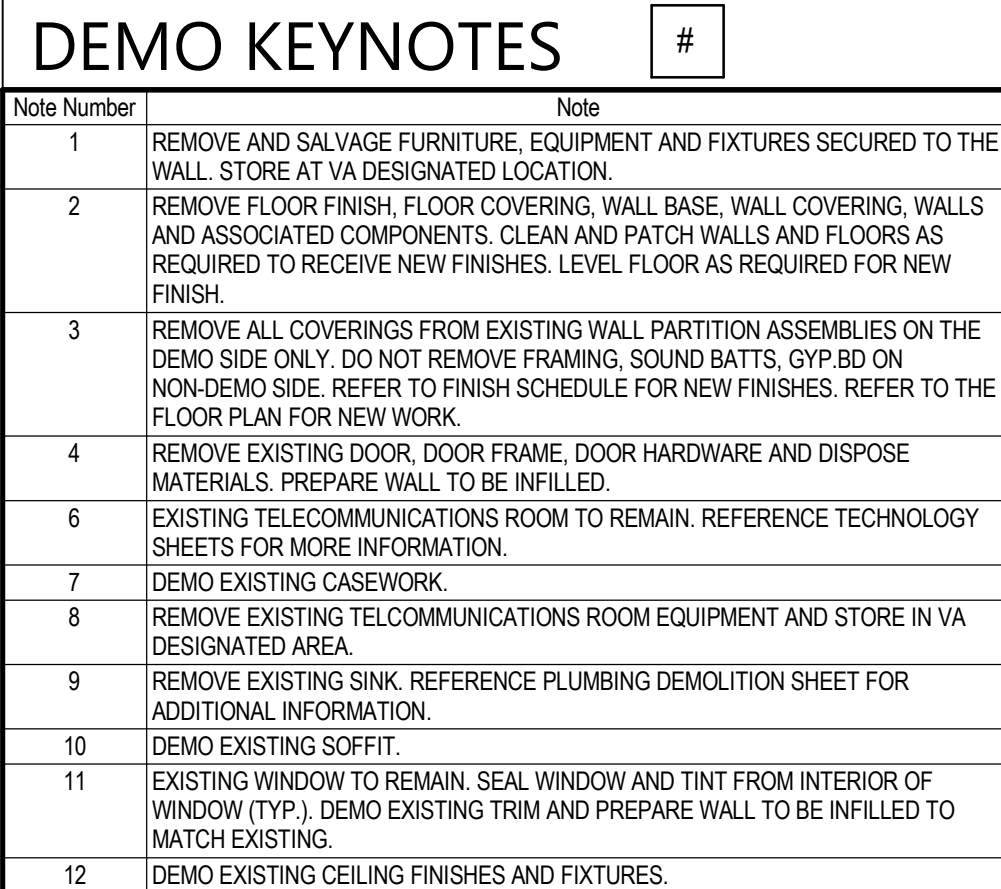

DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE. U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. RD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)


AREA OF WORK


KEY PLAN - BLDG 4

NTS

TRUE NORTH
PLAN NORTH

The diagram shows a key plan of a building with a shaded area of work on the right side. A north arrow indicates the orientation, with True North and Plan North marked. The plan is labeled 'KEY PLAN - BLDG 4' and 'NTS' (Not To Scale).

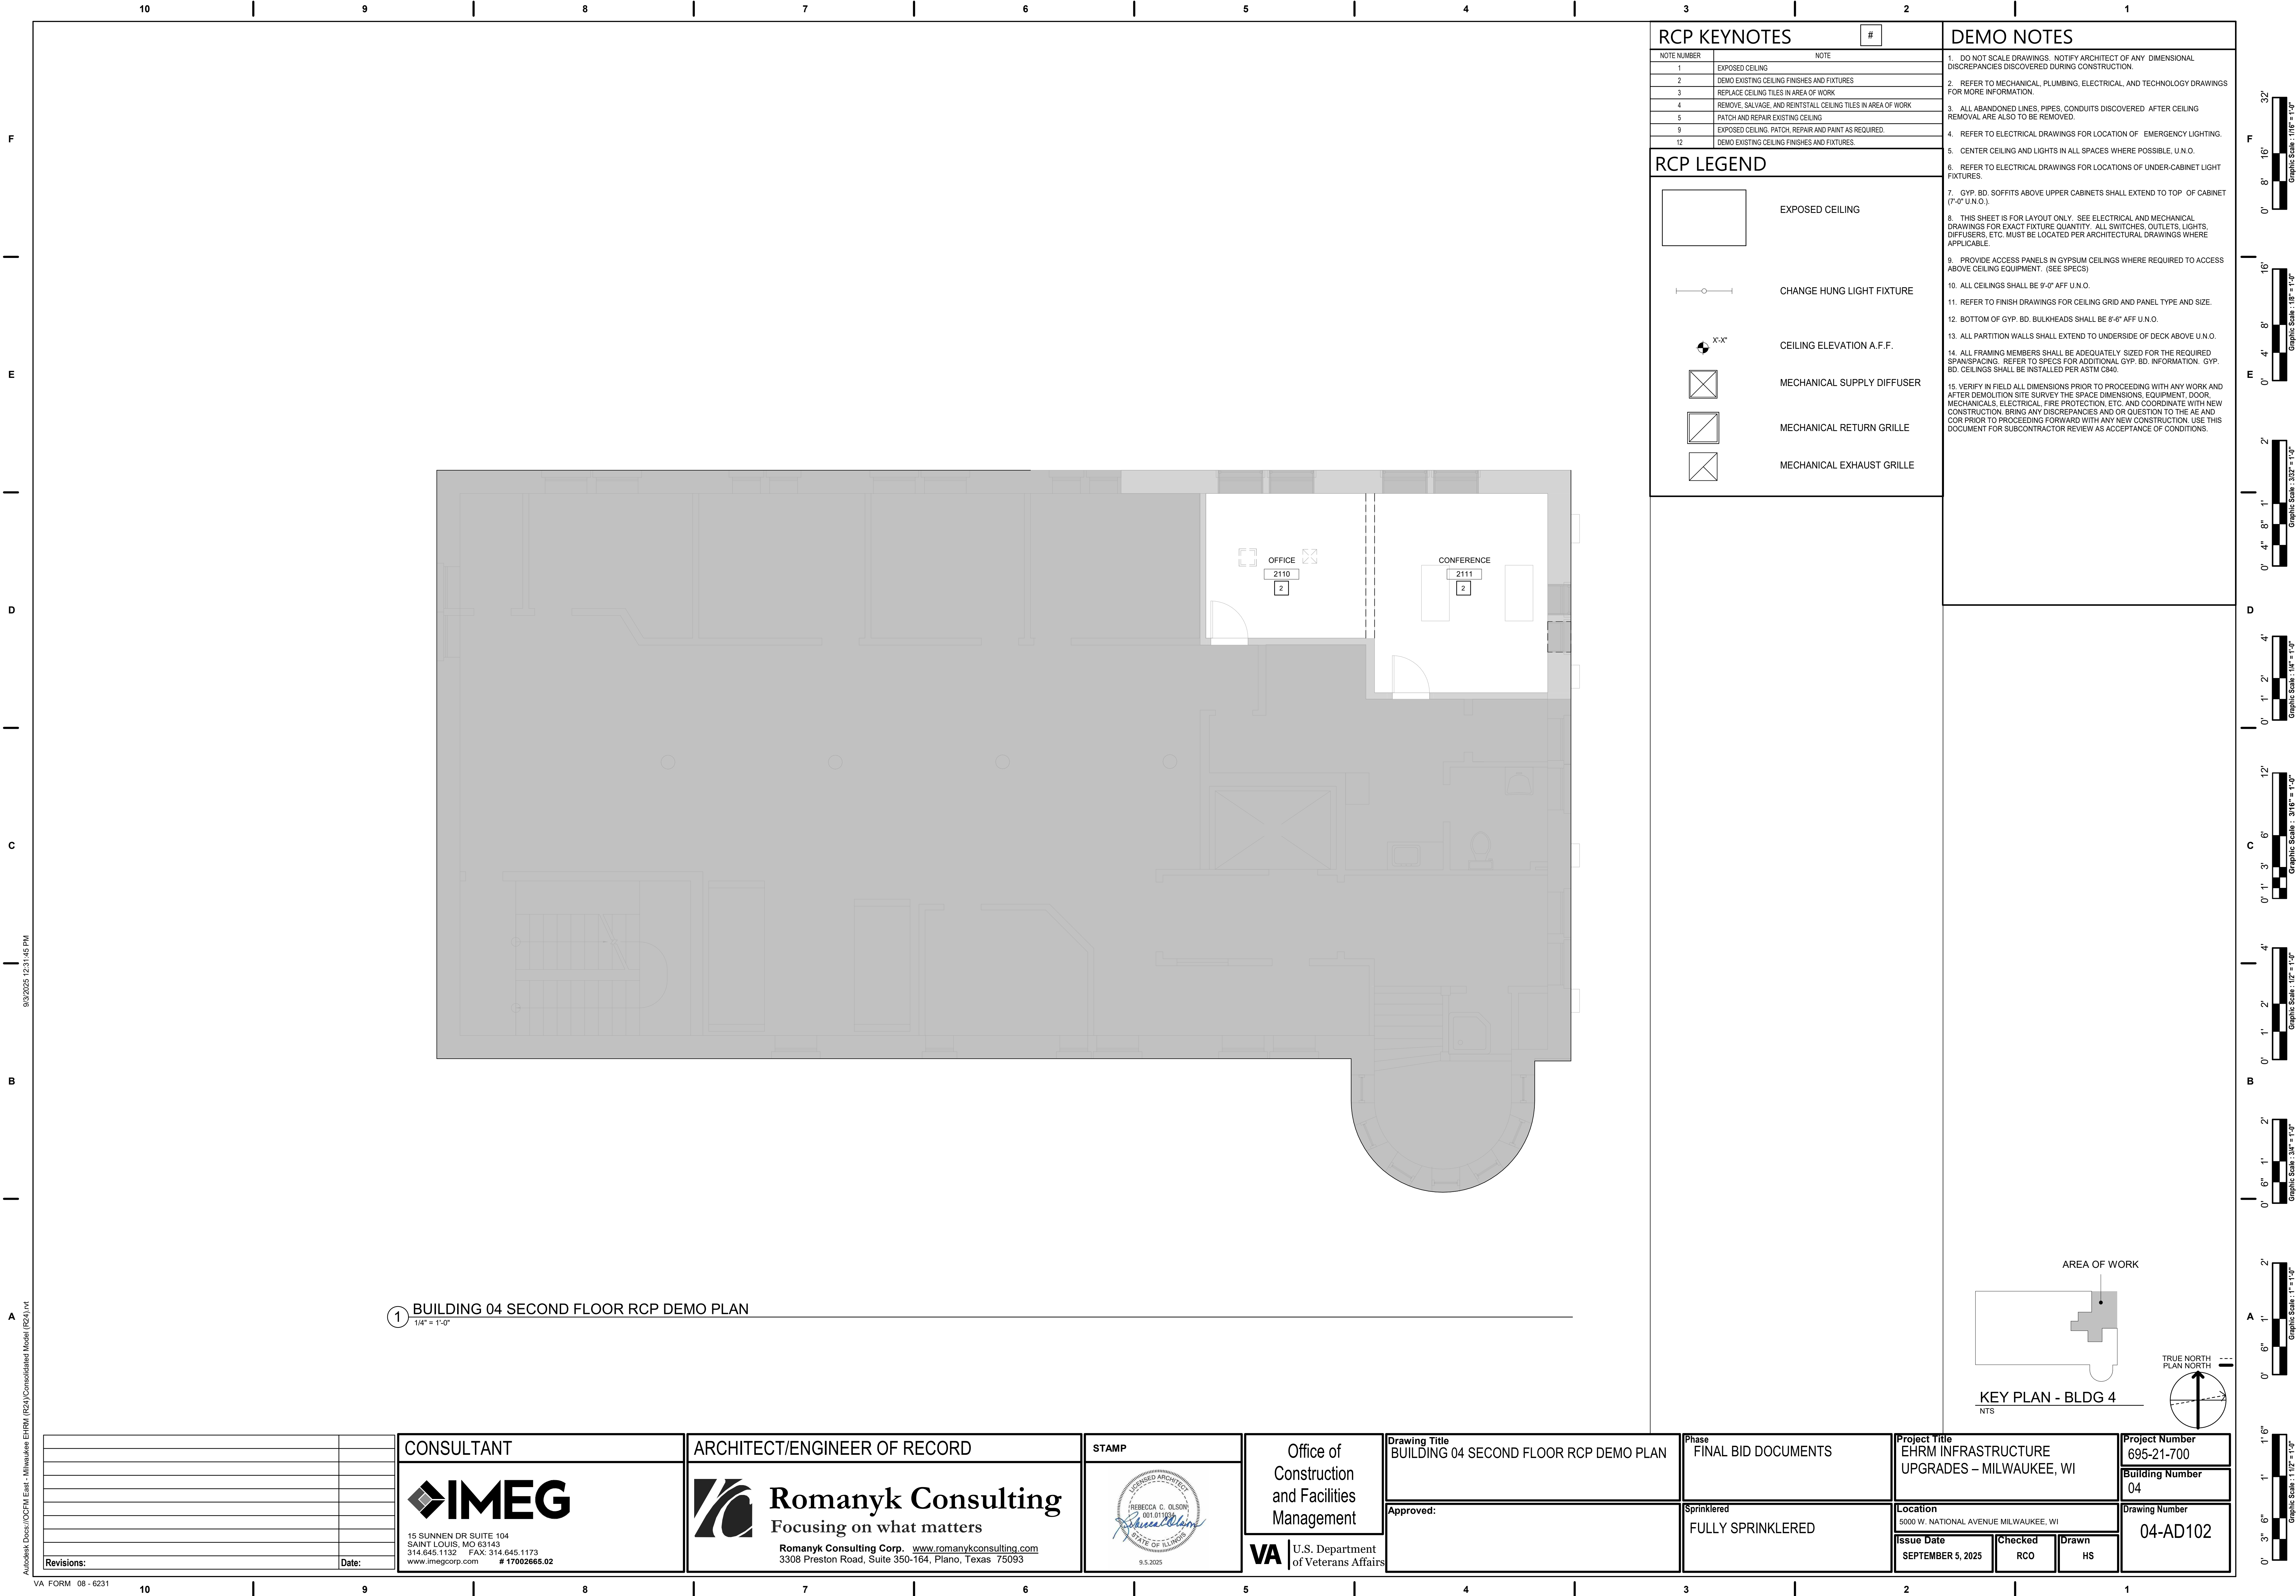

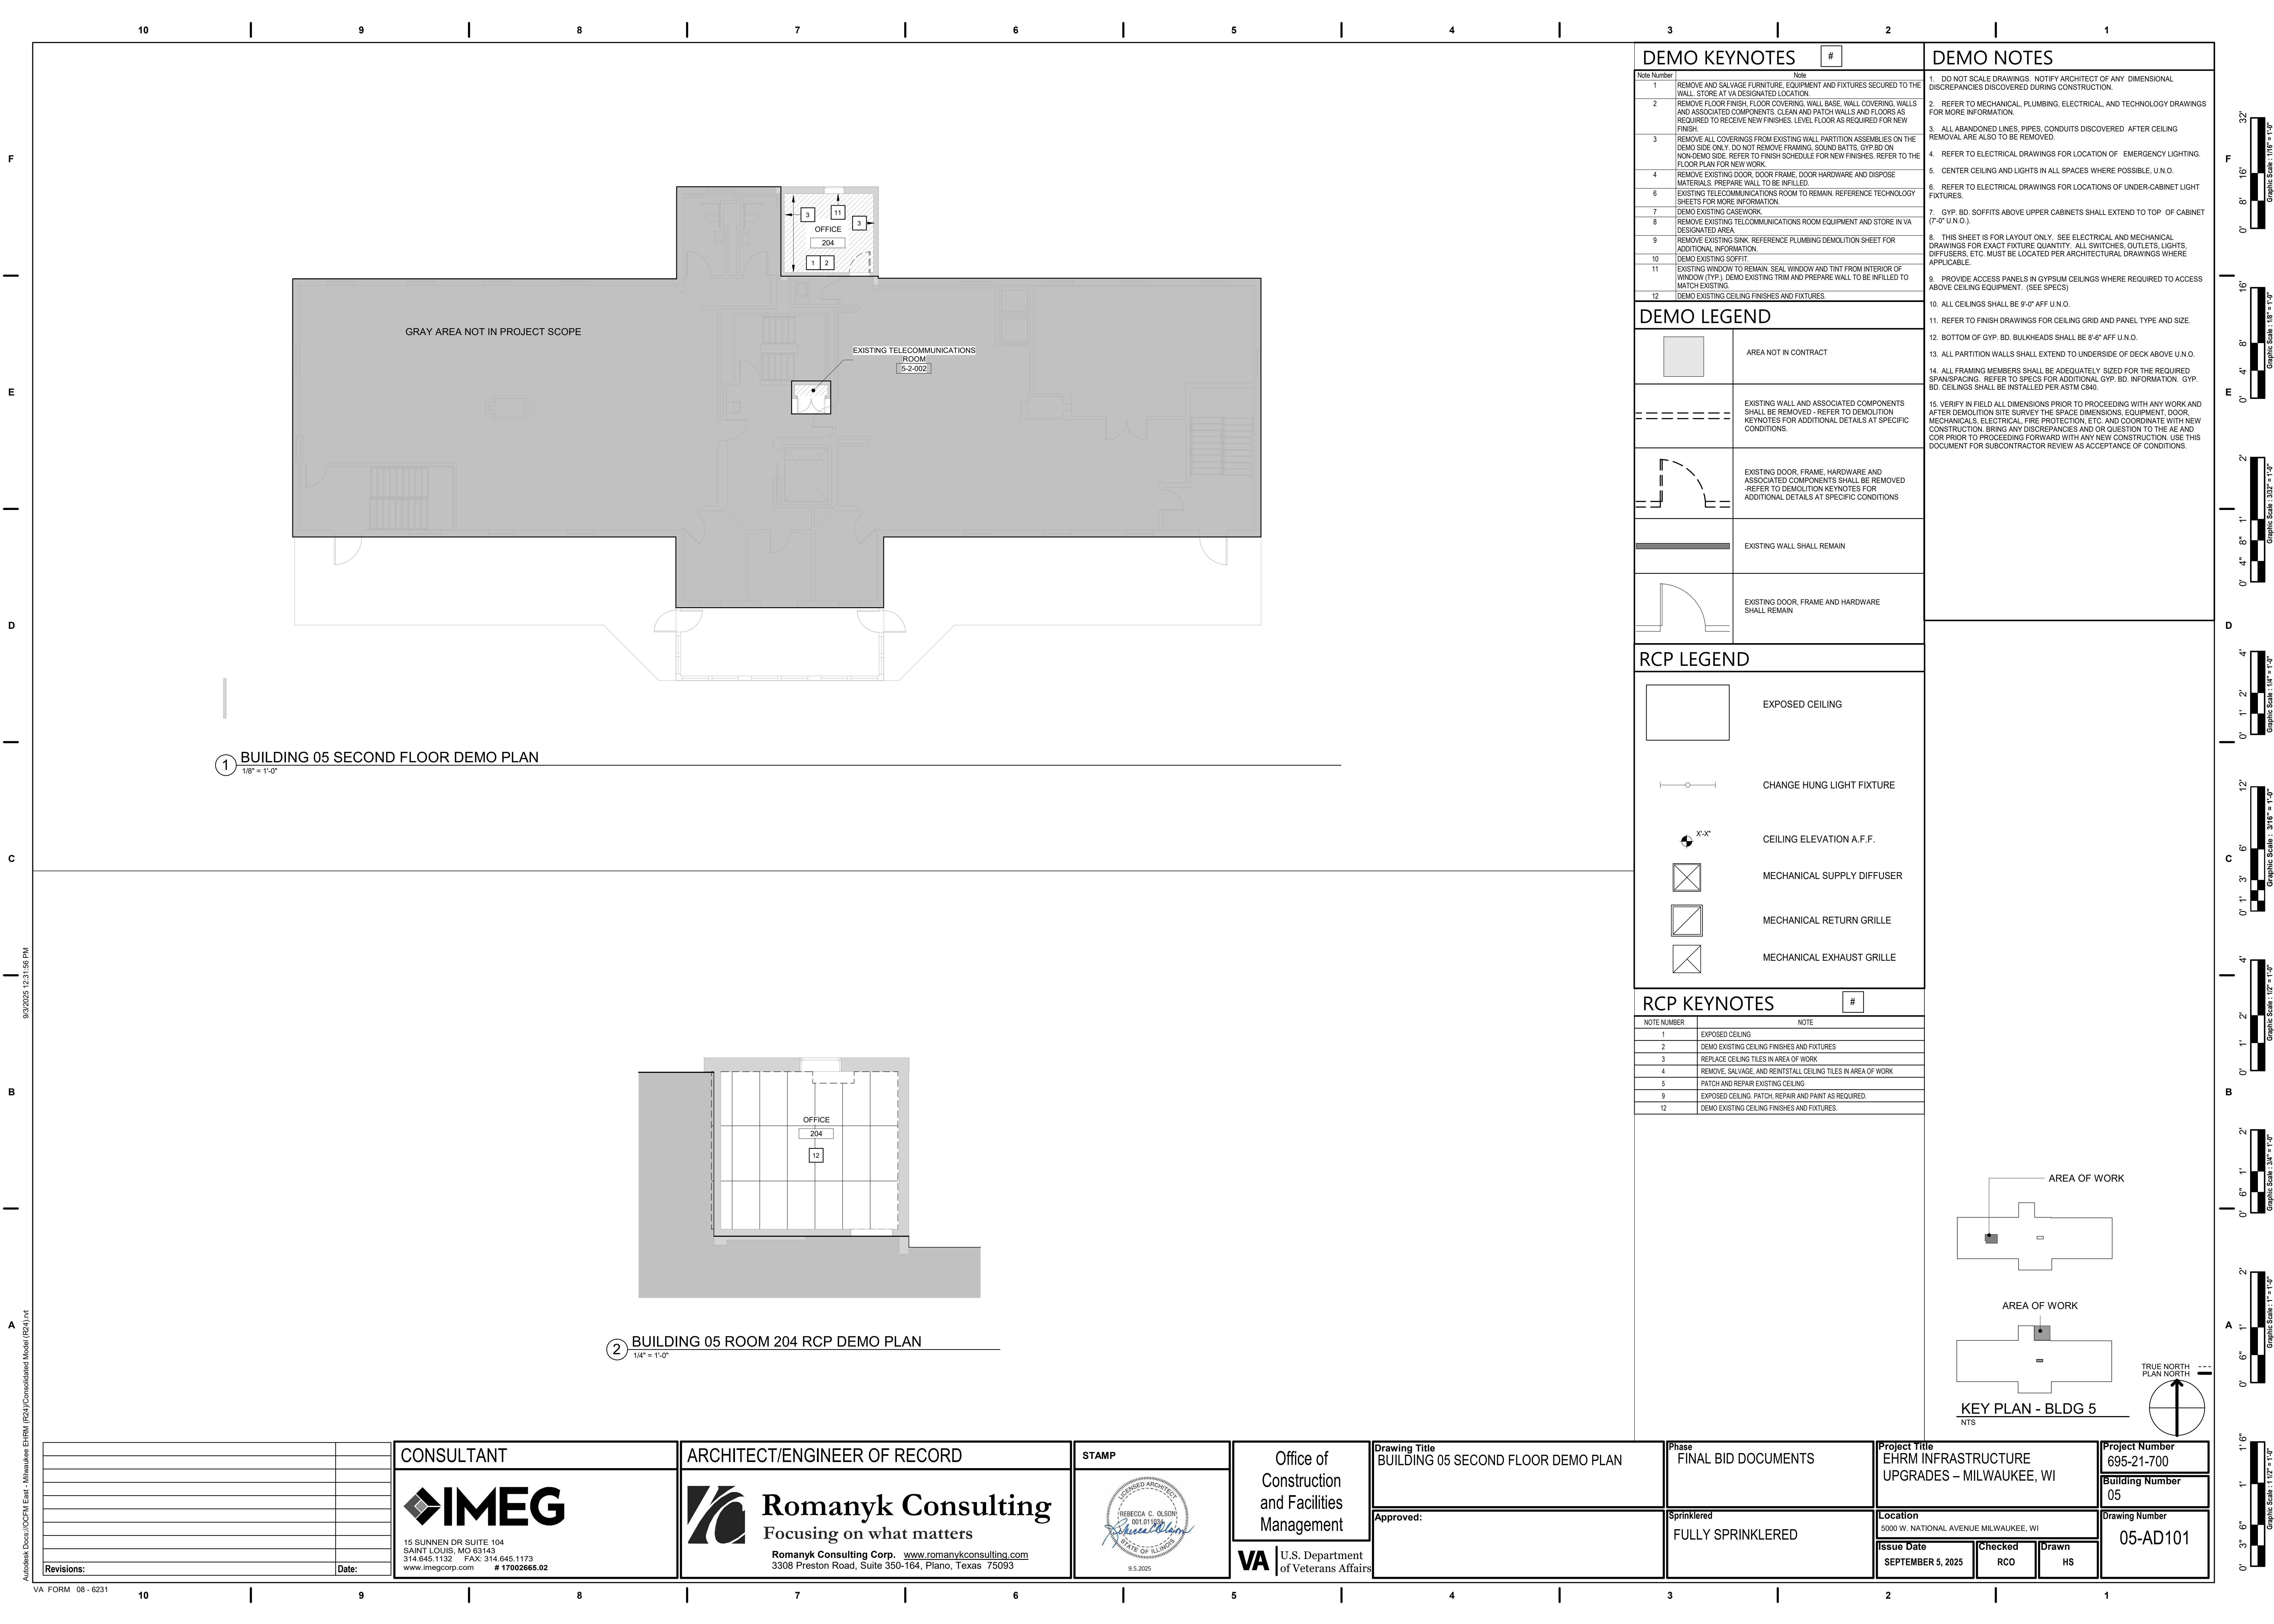



	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN
---	---

Document on Sustainable Management and Use of Commons






Project Number 695-21-700
Building Number 06
Drawing Number 06-AD102




1 BUILDING 06 THIRD FLOOR OVERALL DEMO PLAN
1/8" = 1'-0"

DEMO KEYNOTES		#
Note Number	Note	
	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL, STORE AT 1A UNDESIGNATED LOCATION.	
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL BASE, WALL COVERINGS, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOORS AS REQUIRED FOR NEW FINISH.	
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTIS, GYPSUM OR DEMO SIDE REFER TO FINISH SCHEDULE FOR REMOVAL REFER TO THE FLOOR PLAN FOR NEW WORK.	
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE. MATERIALS PREPARE WALL TO BE INFILLED.	
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.	
9	REMOVE EXISTING CASEWORK.	
9	REMOVE EXISTING TELECOMMUNICATIONS ROOM EQUIPMENT AND STORE IN 1A UNDESIGNATED AREA.	
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.	
10	REMOVE EXISTING SPOFF.	
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TINT FROM INTERIOR OF WINDOW (TYP). DEMO EXISTING TINT AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.	
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.	

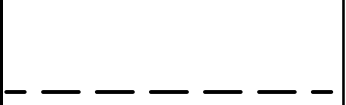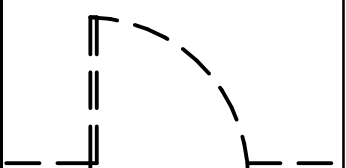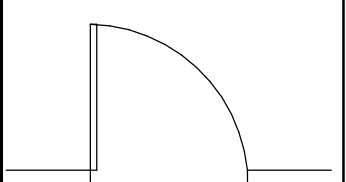
DEMO LEGEND	
	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED -REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN

DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE. U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY, ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. SHALL BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 8'-0" AFF U.N.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS, EQUIPMENT, DOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH NEW CONSTRUCTION. BRING ANY DISCREPANCIES AND/OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

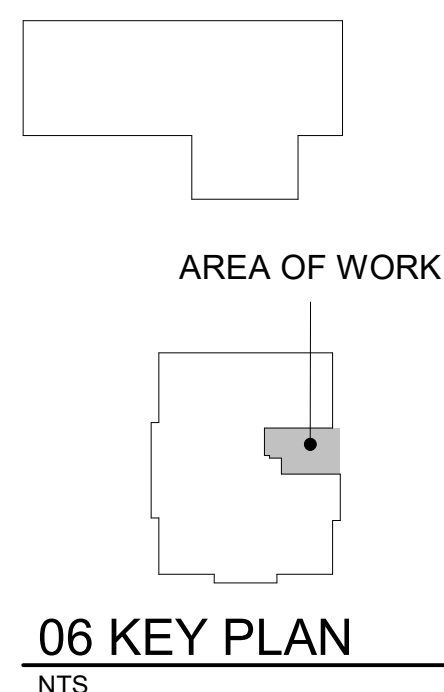

06 KEY PLAN

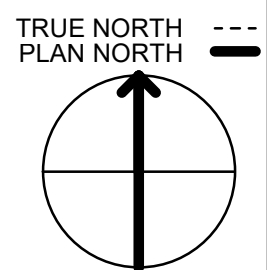[illegible]



DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE. U.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY, ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE SPECIFIED AND AVAILABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILING SHALL BE 6'-0" AFF. U.O.

11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 6'-6" AFF U.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILING SHALL BE INSTALLED PER ASTM C440.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS. EQUIPMENT, DOOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH NEW CONSTRUCTION. BRING ANY DISCREPANCIES AND/OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

RCP KEYNOTES	
NOTE NUMBER	NOTE
1	EXPOSED CEILING
2	DEMO EXISTING CEILING FINISHES AND FIXTURES
3	REPLACE CEILING TILES IN AREA OF WORK
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK
5	PATCH AND REPAIR EXISTING CEILING
9	EXPOSED CEILING, PATCH, REPAIR AND PAINT AS REQUIRED.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.



CONSULTANT

 **IMEG**

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

STAMP

ILLINOIS REGISTERED ARCHITECT
REBECCA C. OLSON
001.011034
Rebecca Olson
STATE OF ILLINOIS


9.5.2025

Drawing Title
BUILDING 06 FIRST FLOOR ENLARGED DEMO
PLAN & RCP


Approved:


Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		
Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		
Issue Date SEPTEMBER 5, 2025	Checked RCO	Drawn HS


Project Number 695-21-700
Building Number 06
Drawing Number 06-AD104

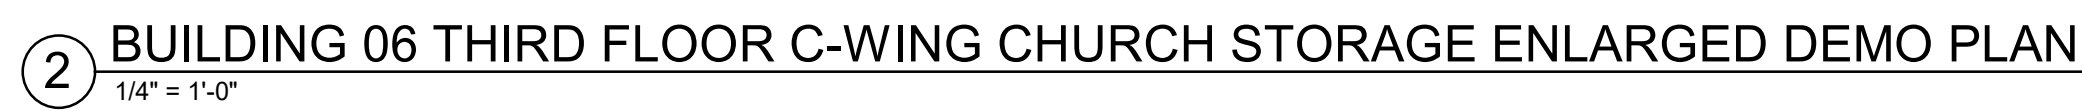

NOTE NUMBER	NOTE
1	EXPOSED CEILING
2	DEMO EXISTING CEILING FINISHES AND FIXTURES
3	REPLACE CEILING TILES IN AREA OF WORK
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK
5	PATCH AND REPAIR EXISTING CEILING
9	EXPOSED CEILING. PATCH, REPAIR AND PAINT AS REQUIRED.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

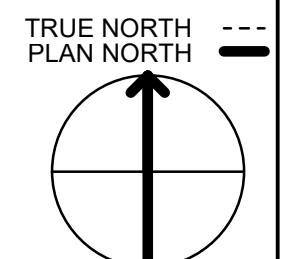[illegible][illegible]

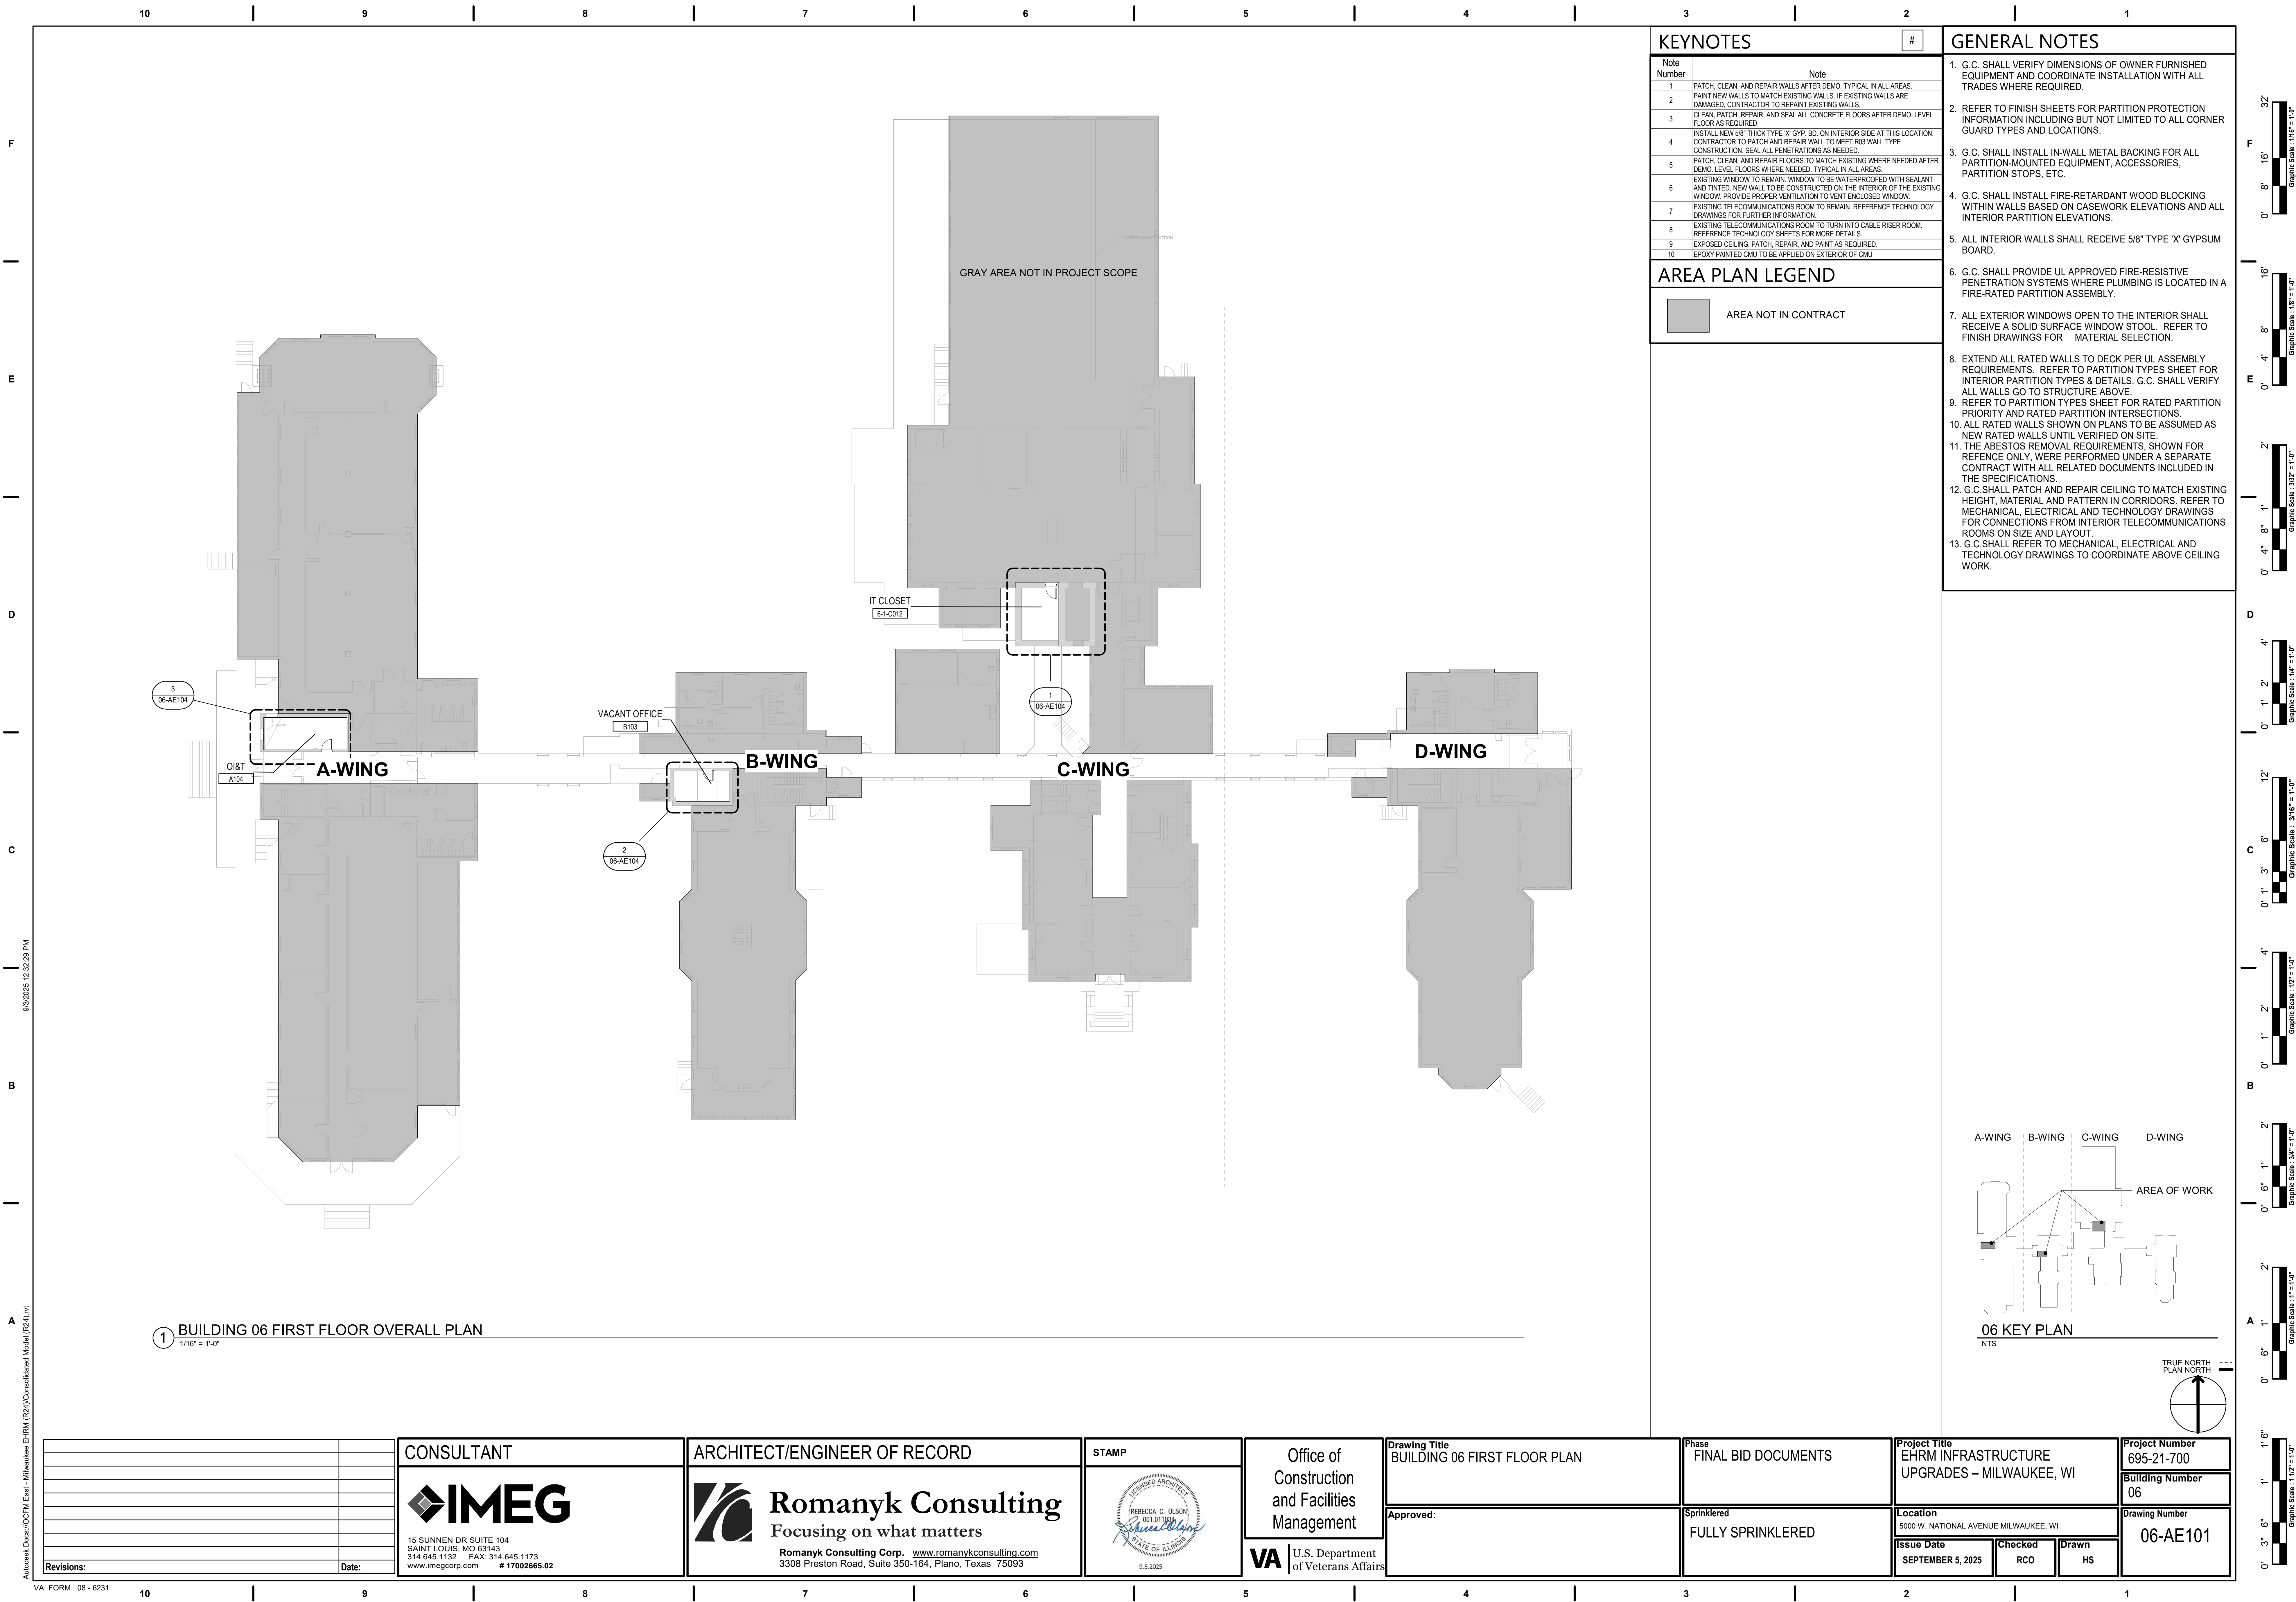



 AREA NOT IN CONTRACT

- ## GENERAL NOTES
1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
 2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
 3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
 4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
 5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
 6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
 7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
 8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
 9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
 10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
 11. THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
 12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. DRAW FOR MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS ON SIZE AND LAYOUT.
 13. G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

[illegible]

F

E

D


C

B

A

9/3/2025 12:32:35 PM

Autodesk Docs://OCFM East - Milwaukee EHRM (R24)/Consolidated Model (R24).rvt

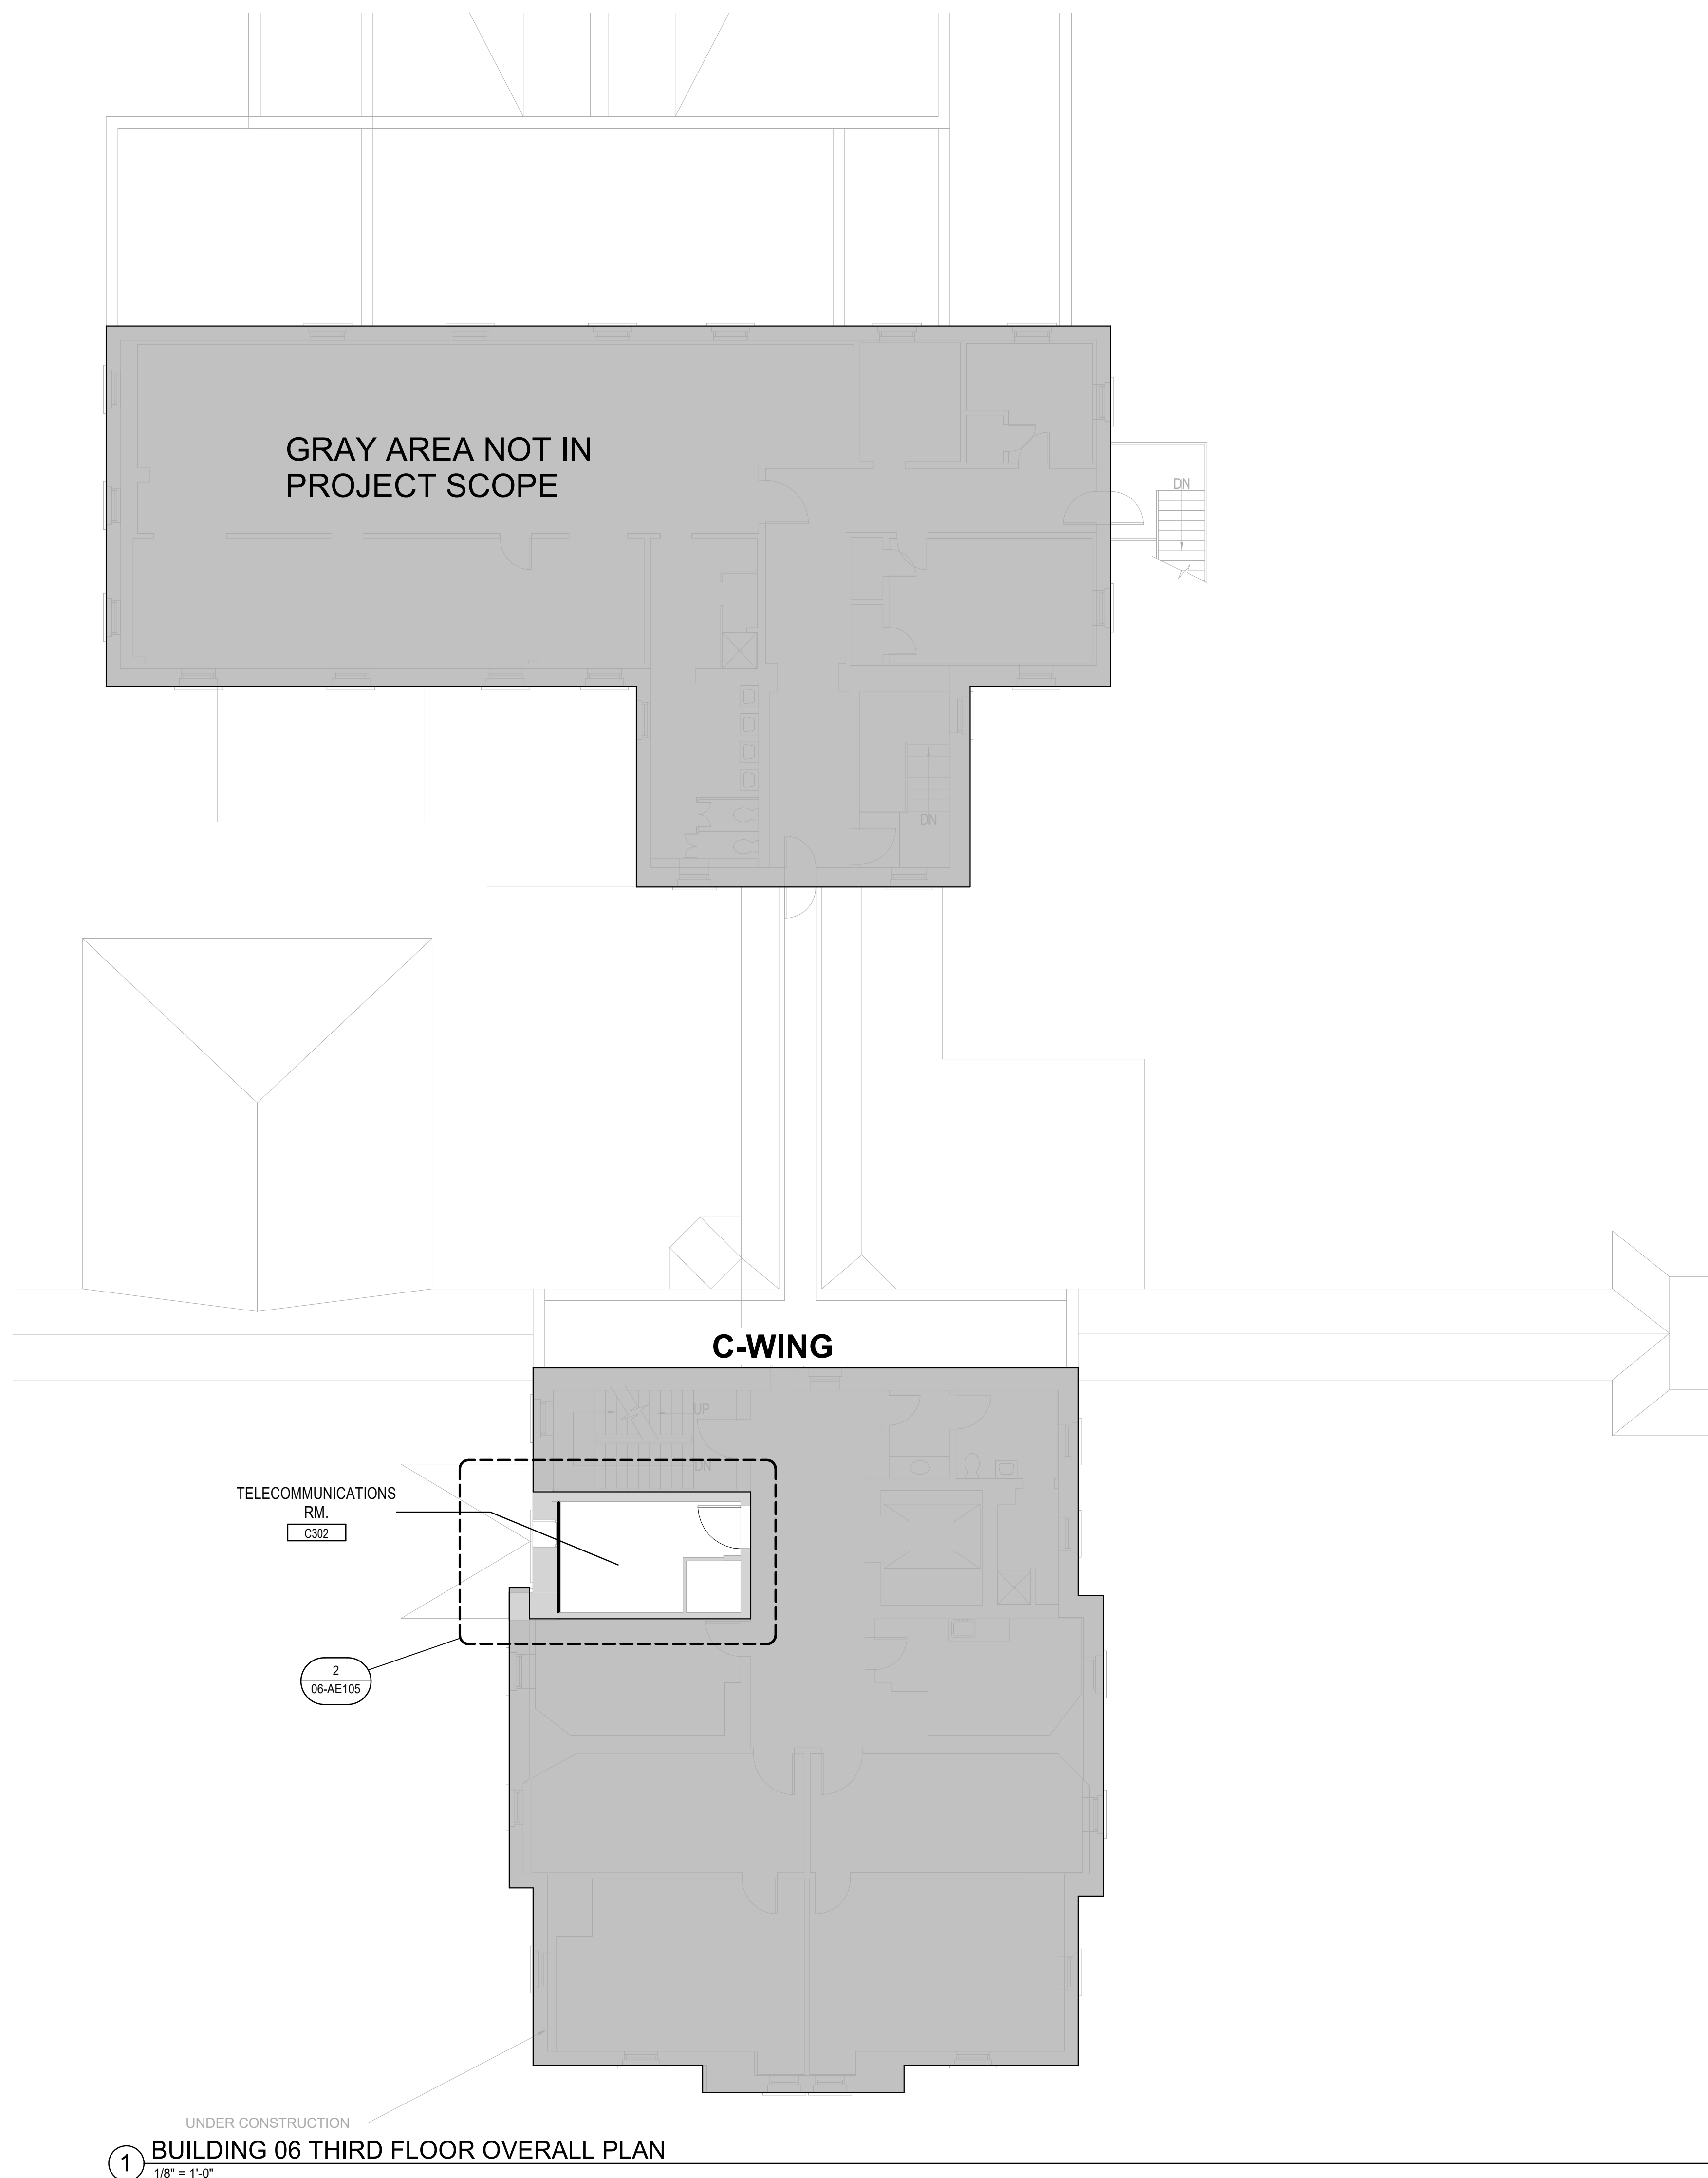

C-WING


TELECOMMUNICATIONS
RM.
C302

2
06-AE105

UNDER CONSTRUCTION










1 BUILDING 06 THIRD FLOOR OVERALL PLAN
1/8" = 1'-0"

AREA PLAN LEGEND



GENERAL NOTES


1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
11. THE ASBESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS OF SIZE AND LAOUT.
13. G.C. SHALL REF. TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

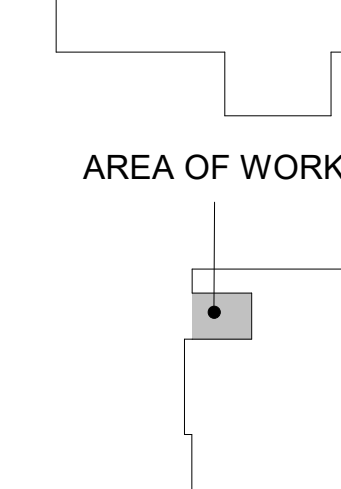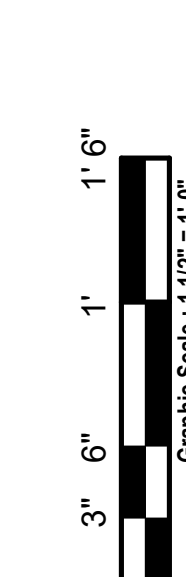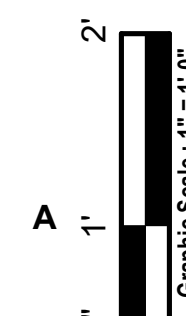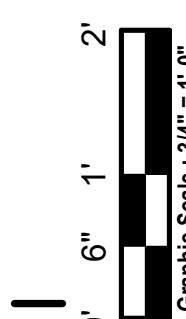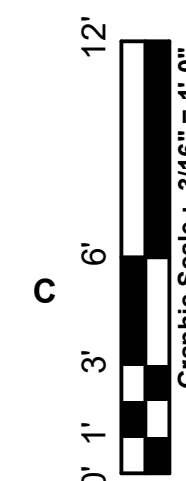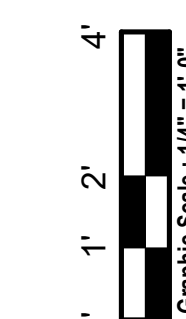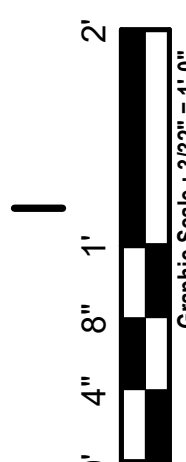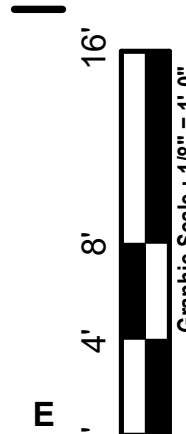


TRUE NORTH
PLAN NORTH



		CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title BUILDING 06 THIRD FLOOR OVERALL PLAN		Phase FINAL BID DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		Project Number 695-21-700	
		 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02		 Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093				 U.S. Department of Veterans Affairs		Approved:		Sprinklered FULLY SPRINKLERED		Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		Drawing Number 06- AE103	
Revisions:		Date:										Issue Date SEPTEMBER 5, 2025		Checked RCO		Drawn HS	

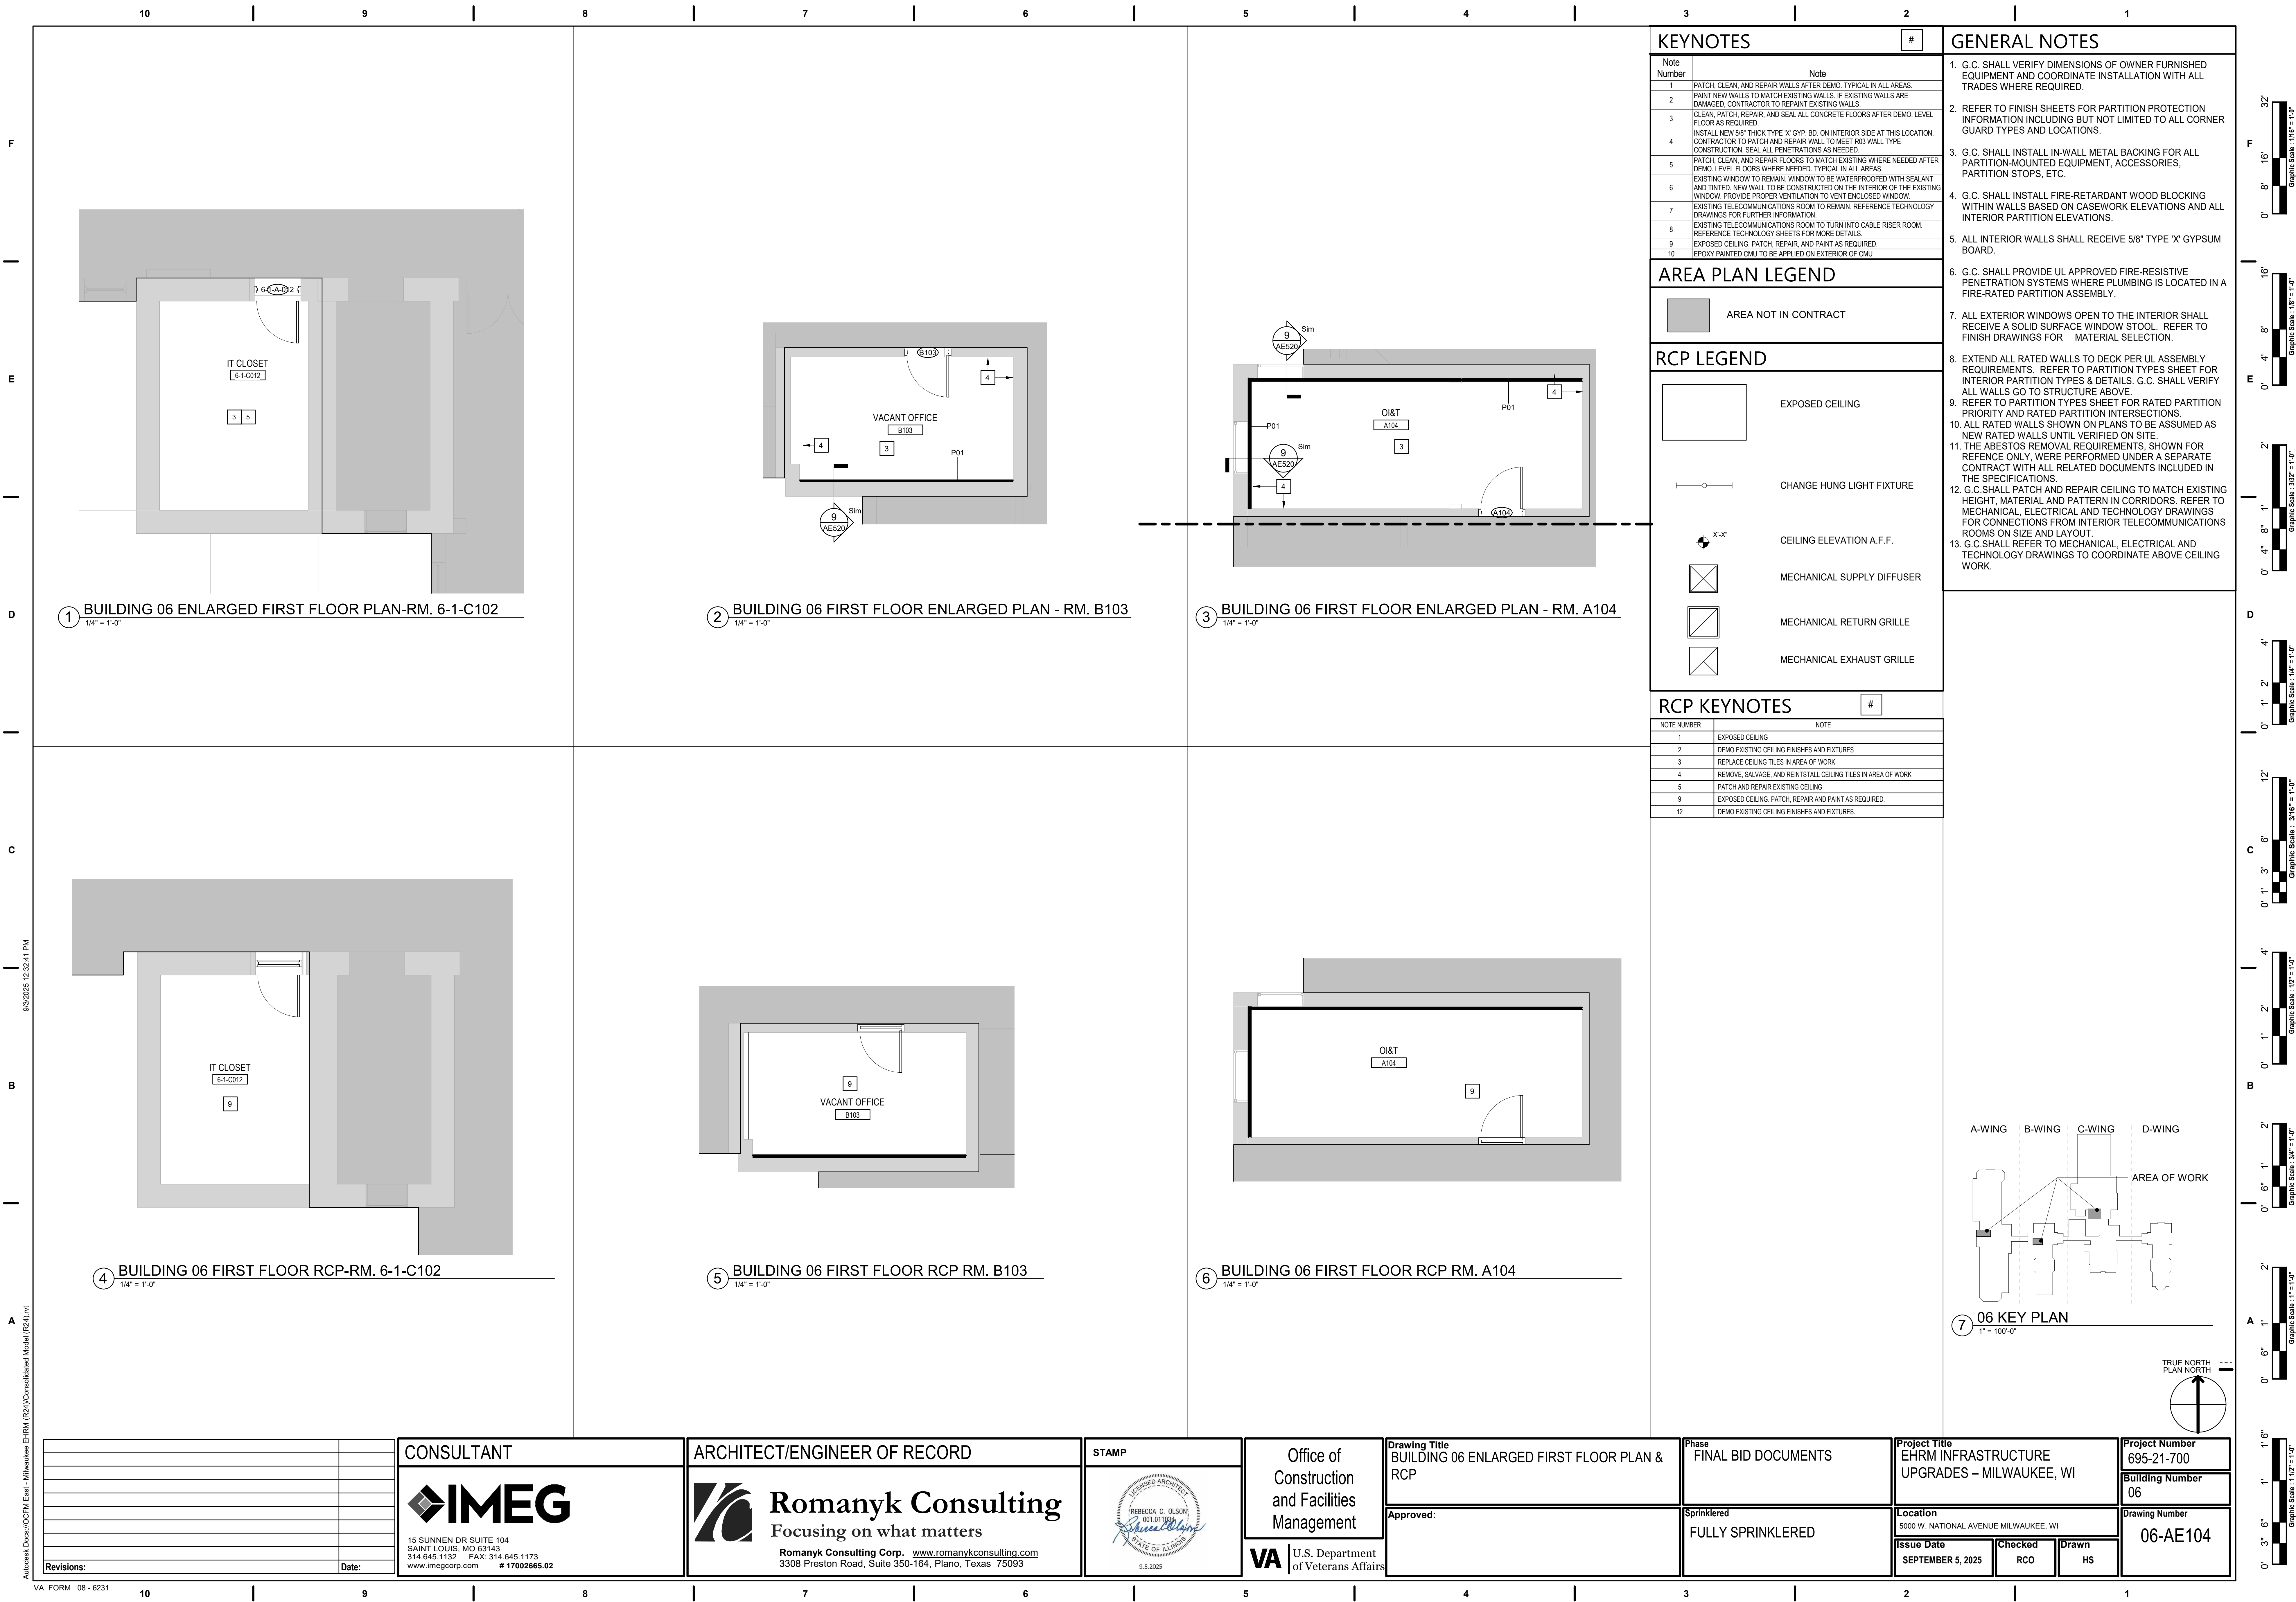

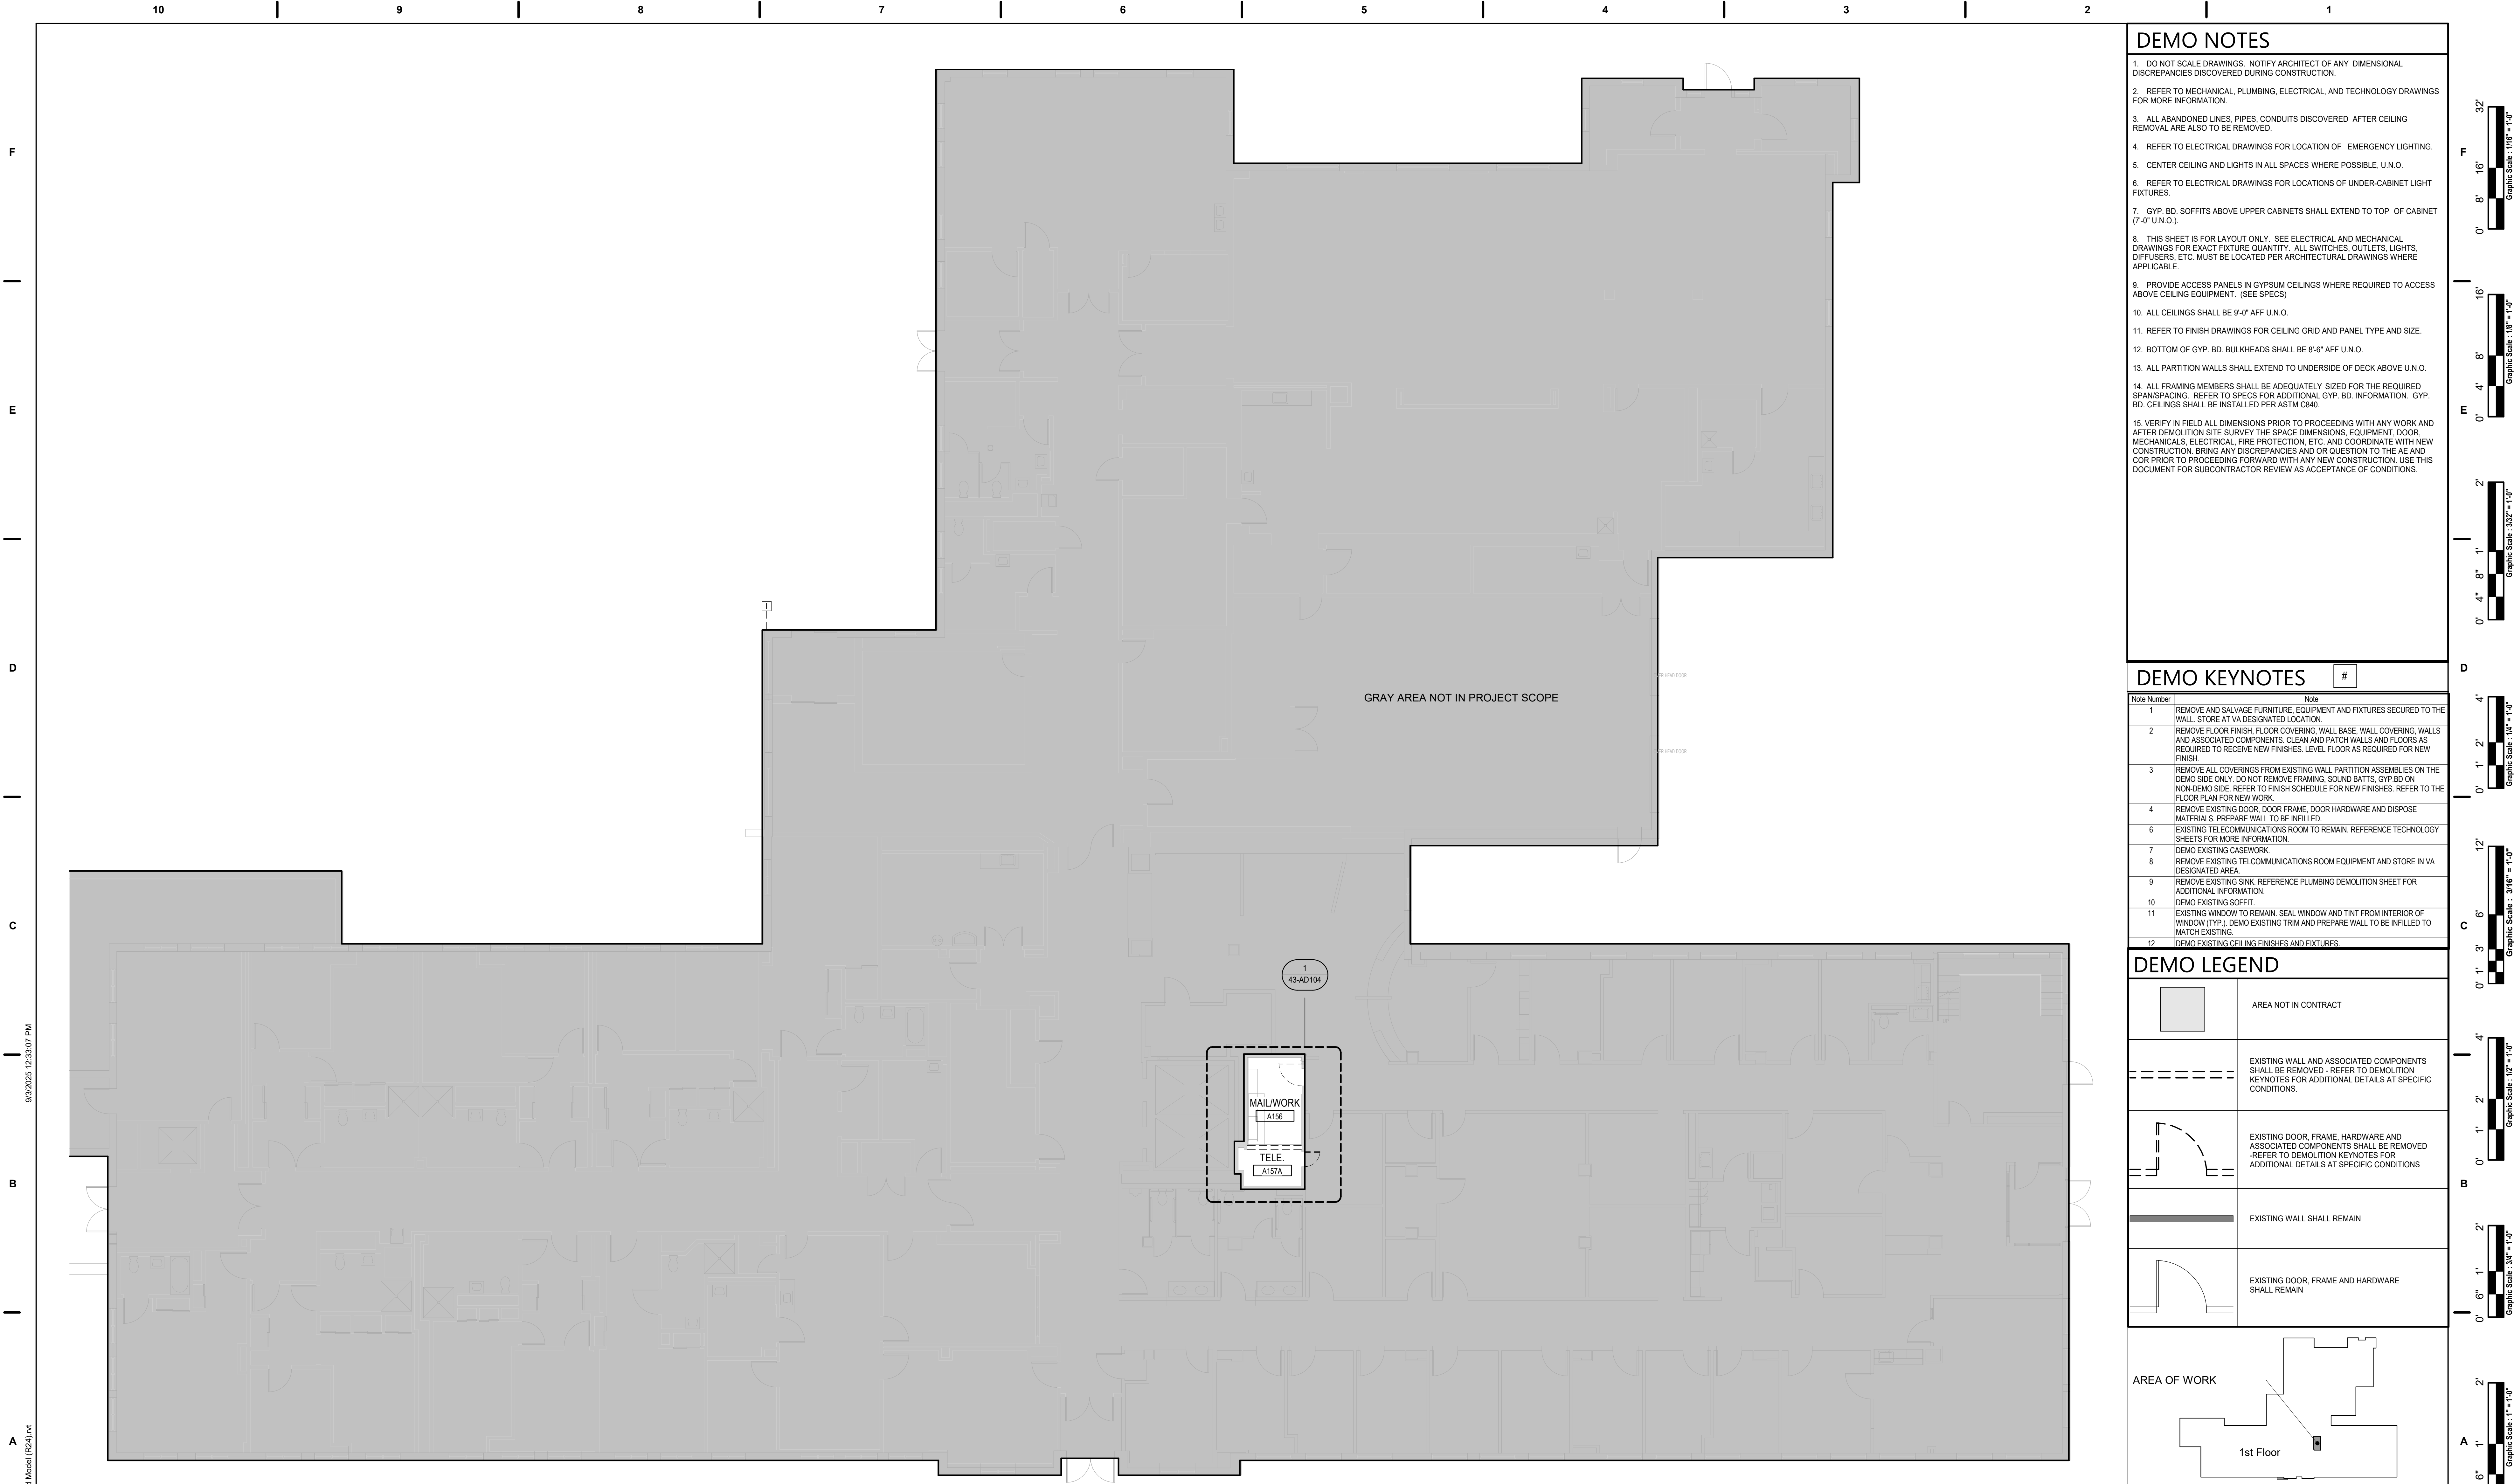

1 BUILDING 43 FIRST FLOOR DEMO PLAN
1/8" = 1'-0"

		CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title BUILDING 43 FIRST FLOOR DEMO PLAN		Phase FINAL BID DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		Project Number 695-21-700	
		 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02		 Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093				VA U.S. Department of Veterans Affairs		Approved:		Sprinklered FULLY SPRINKLERED		Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		Building Number 43	
Revisions:		Date:										Issue Date SEPTEMBER 5, 2025		Checked RCO		Drawn HS	
														Drawing Number 43-AD101			

Architect: Davis / DCDM East - Milwaukee

0' 3' 6' 1' 1" 1/2" = 1'-0"





DEMO NOTES


- DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
- REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
- ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
- CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
- GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
- THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
- PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
- ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
- REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
- BOTTOM OF GYP. BD. BULKHEADS SHALL BE 8'-6" AFF U.N.O.
- ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
- ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
- VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS, EQUIPMENT, DOOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH NEW CONSTRUCTION. BRING ANY DISCREPANCIES AND OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.


DEMO KEYNOTES


Note Number	Note
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL. STORE AT VA DESIGNATED LOCATION.
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL BASE, WALL COVERING, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTS, GYP BD ON NON-DEMO SIDE. REFER TO FINISH SCHEDULE FOR NEW FINISHES. REFER TO THE FLOOR PLAN FOR NEW WORK.
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE MATERIALS. PREPARE WALL TO BE INFILLED.
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.
7	DEMO EXISTING CASEWORK.
8	REMOVE EXISTING TELECOMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.
10	DEMO EXISTING SOFFIT.
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TINT FROM INTERIOR OF WINDOW (TYP.). DEMO EXISTING TRIM AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO LEGEND

	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS.
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN

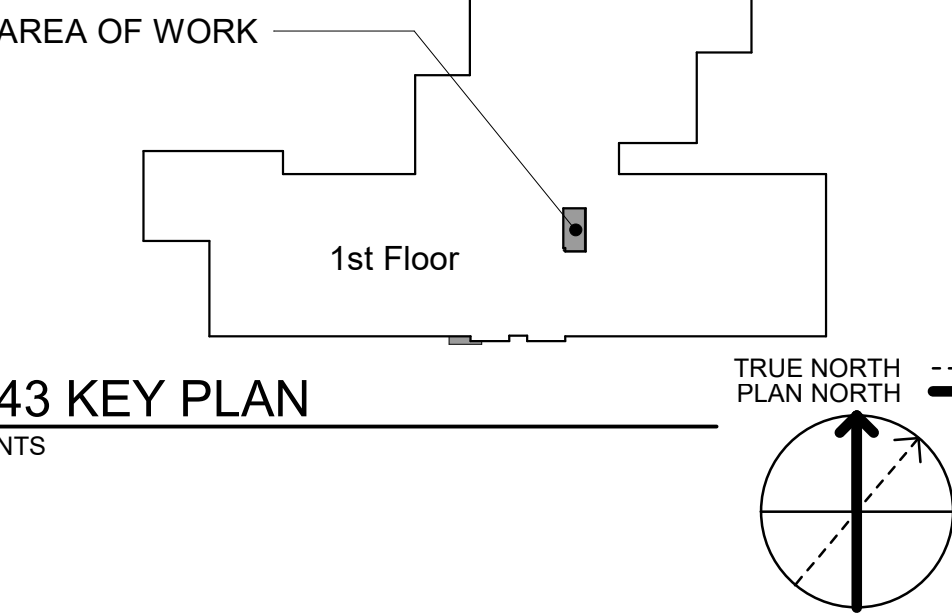

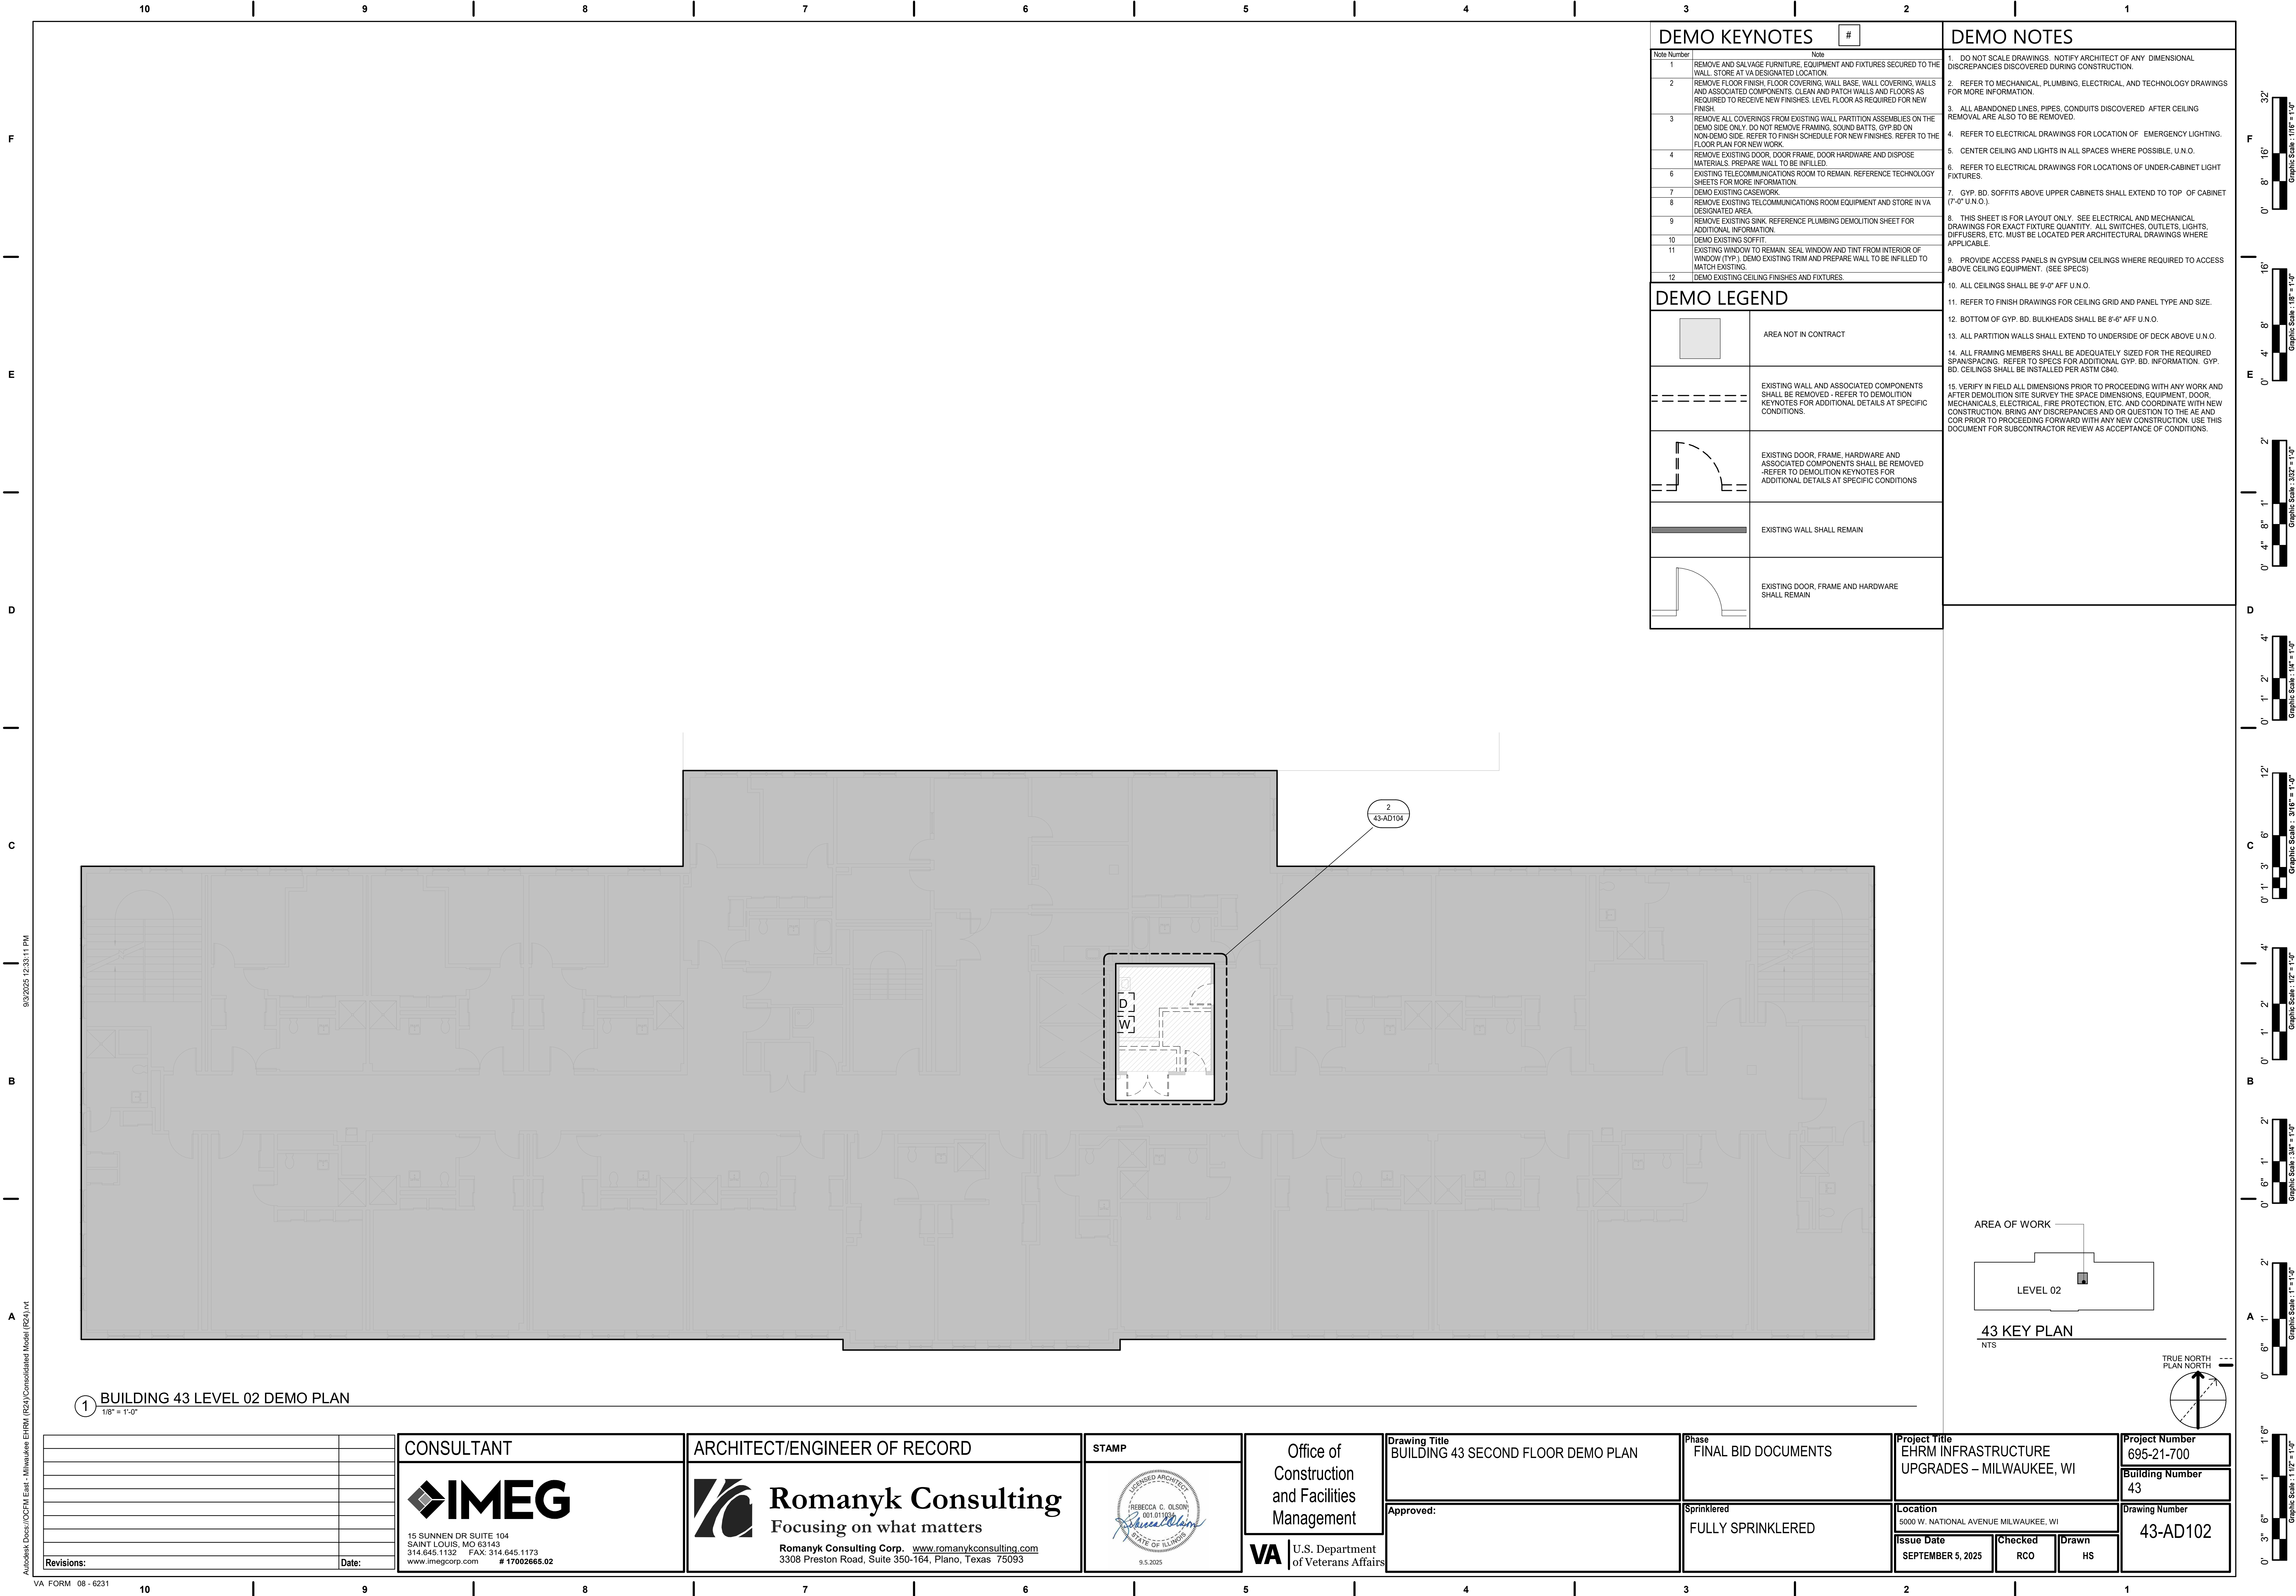

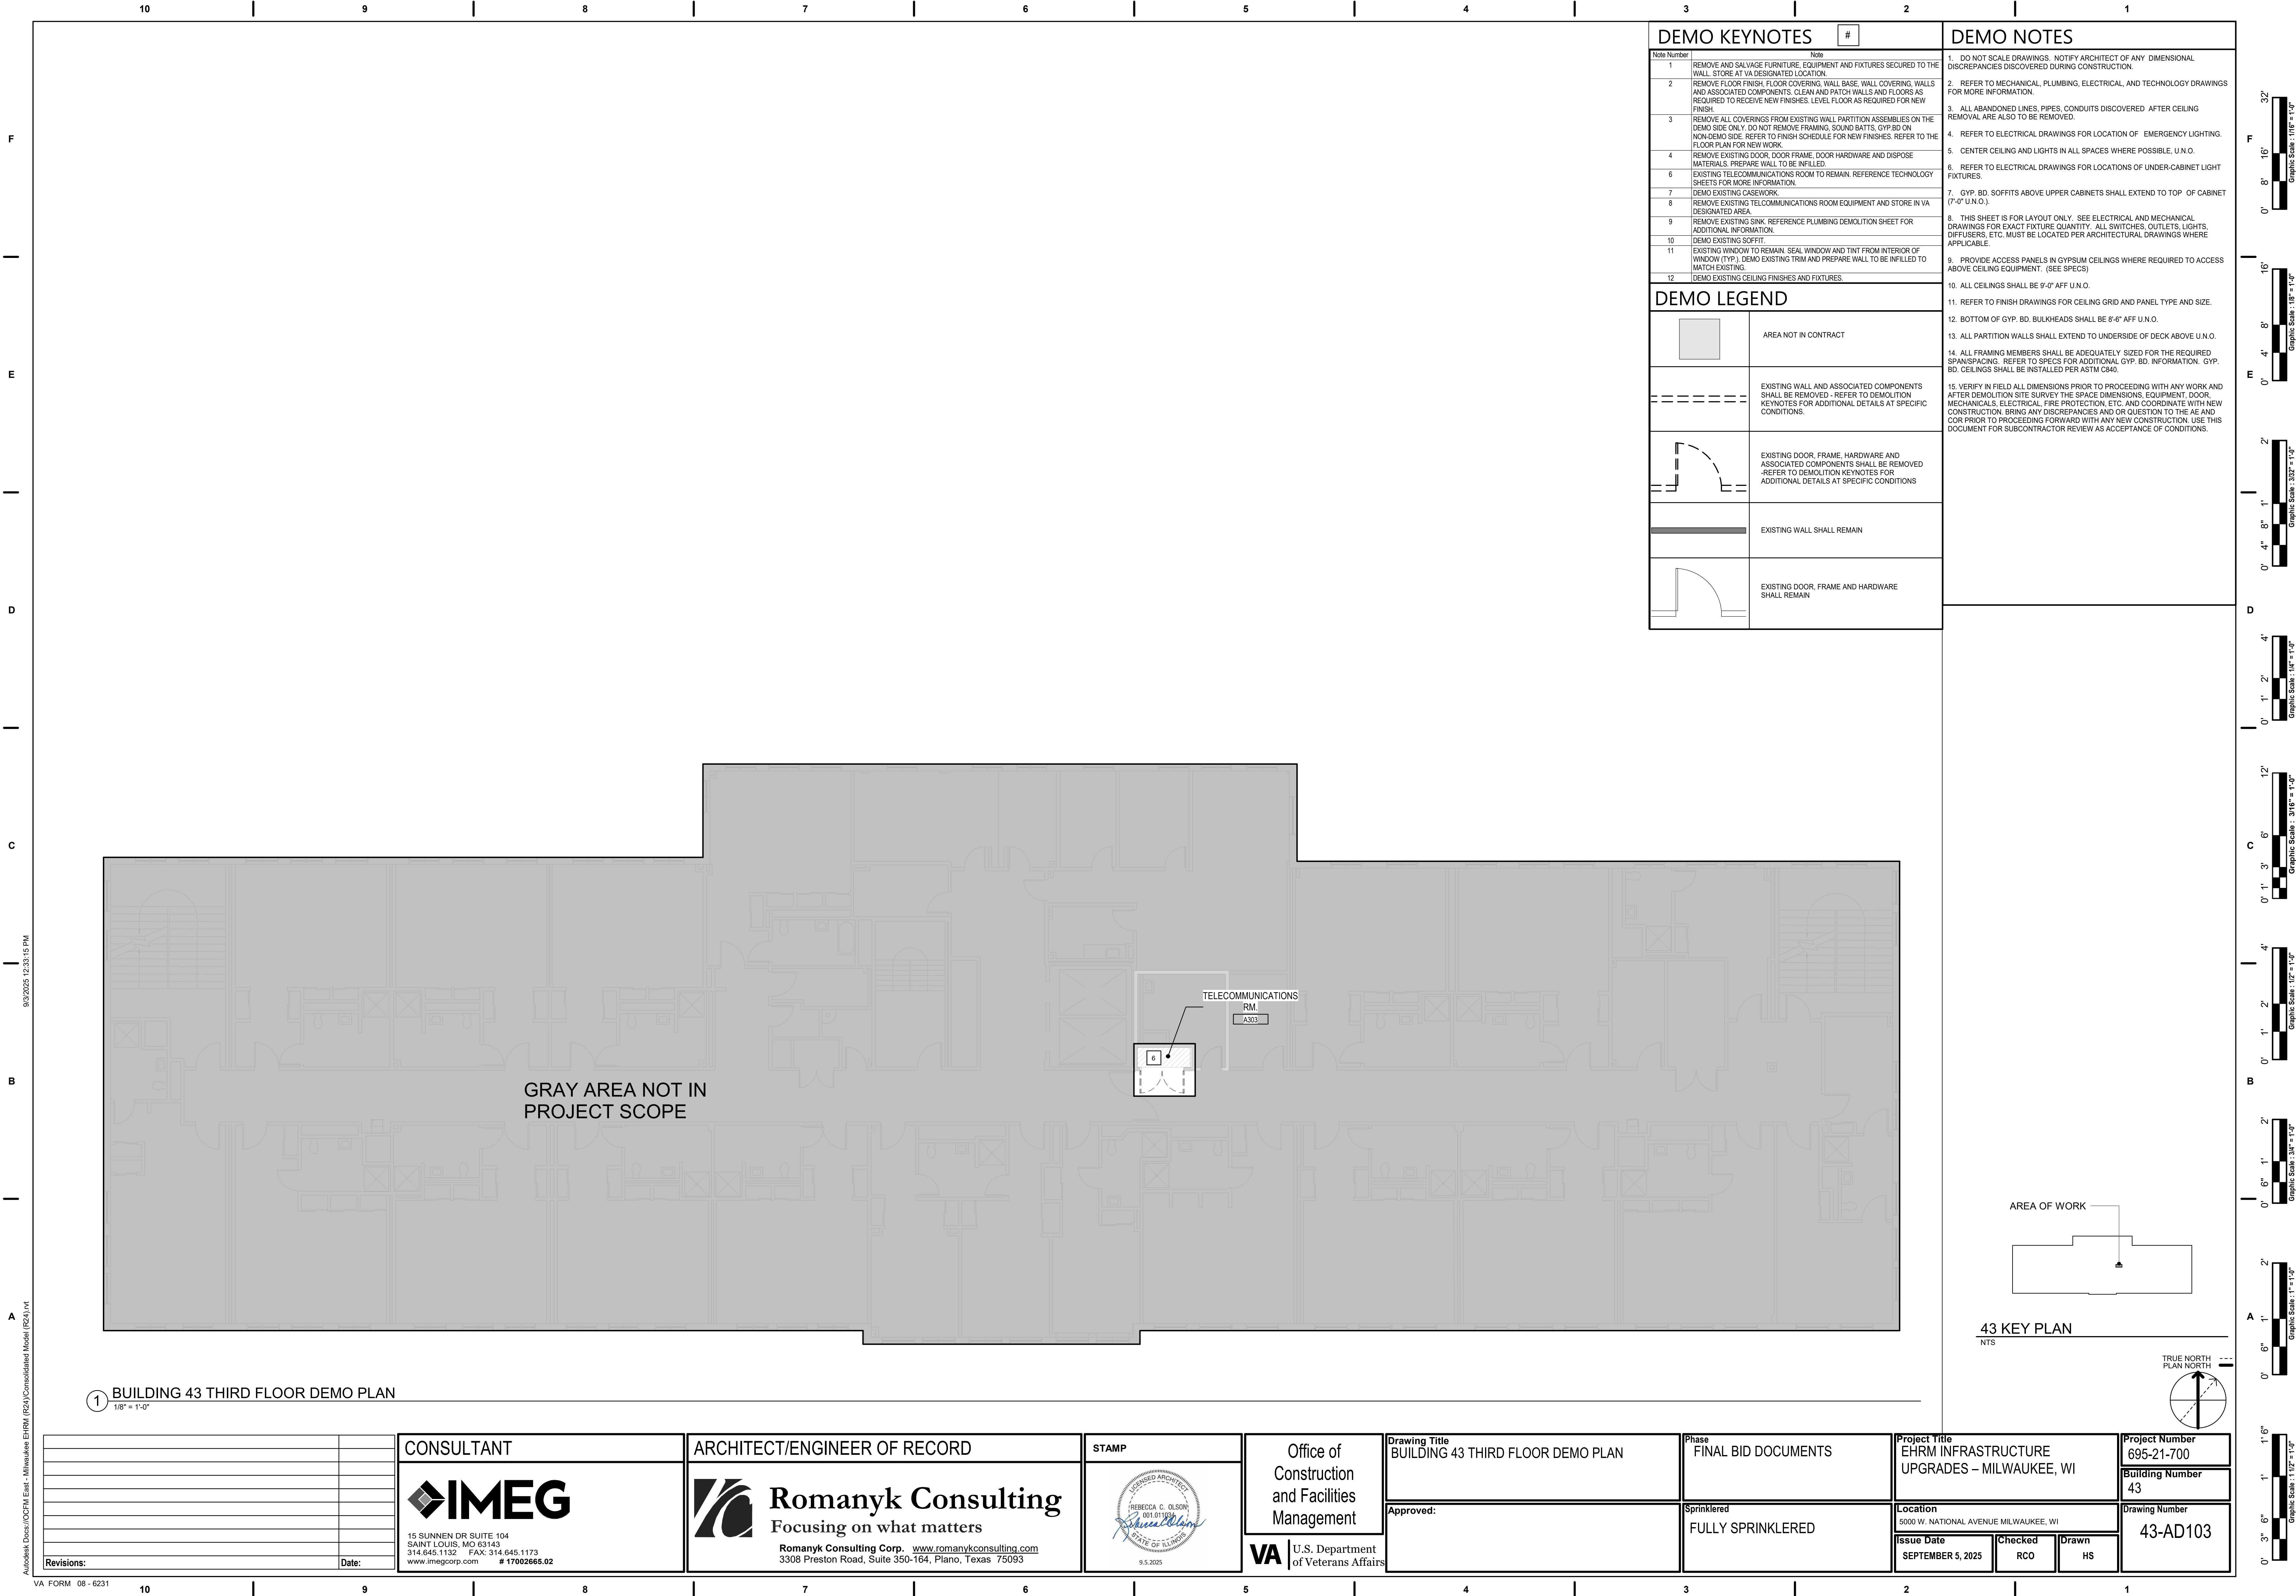

F


E

D


C

B


A

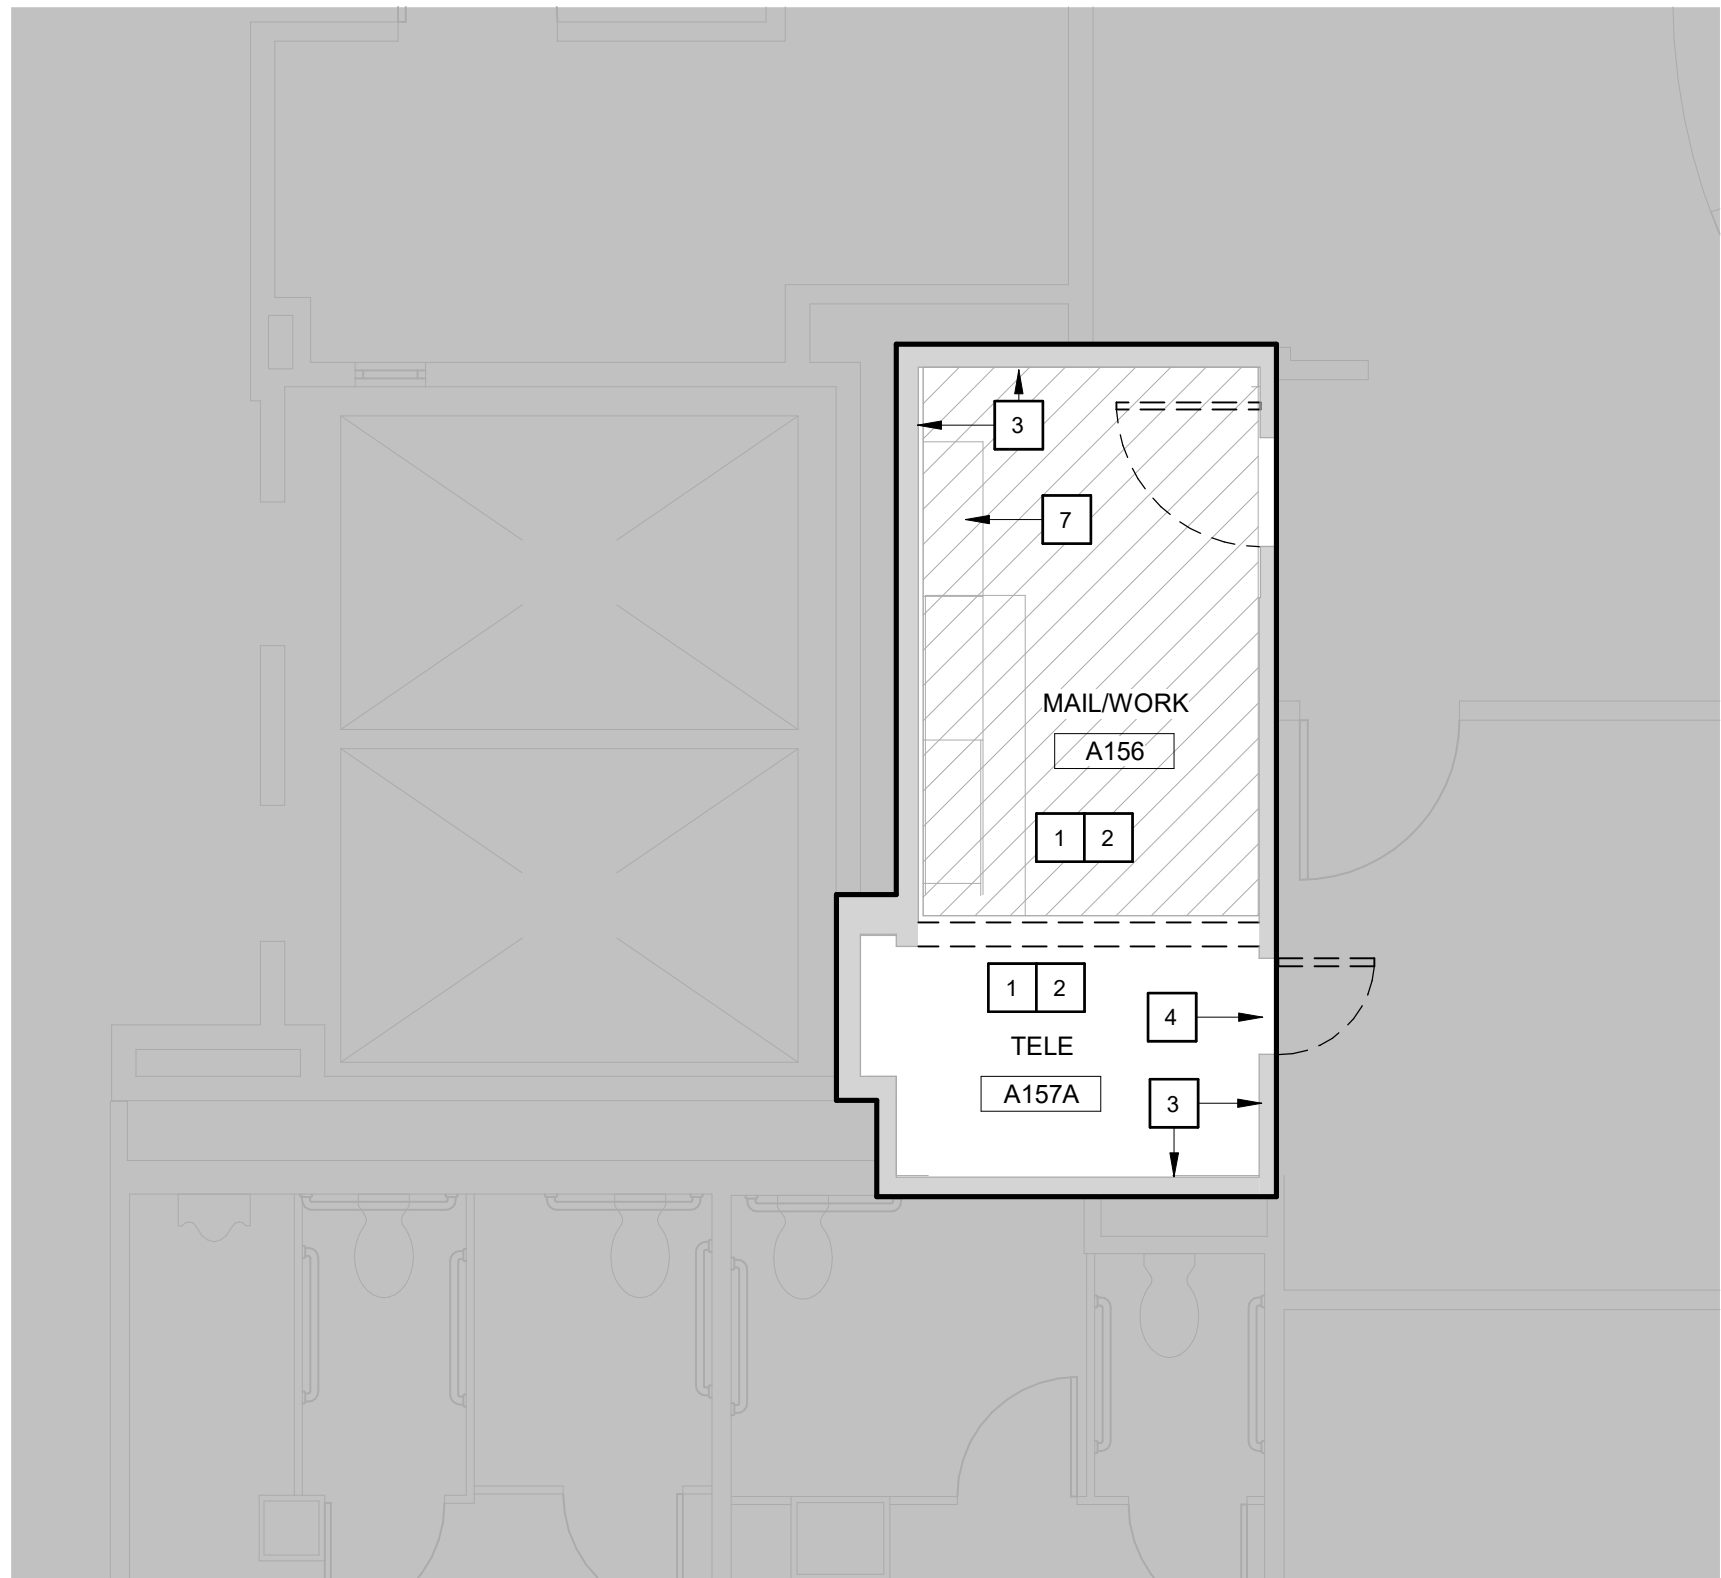


1 BUILDING 43 FIRST FLOOR ENLARGED DEMO PLAN
1/4" = 1'-0"

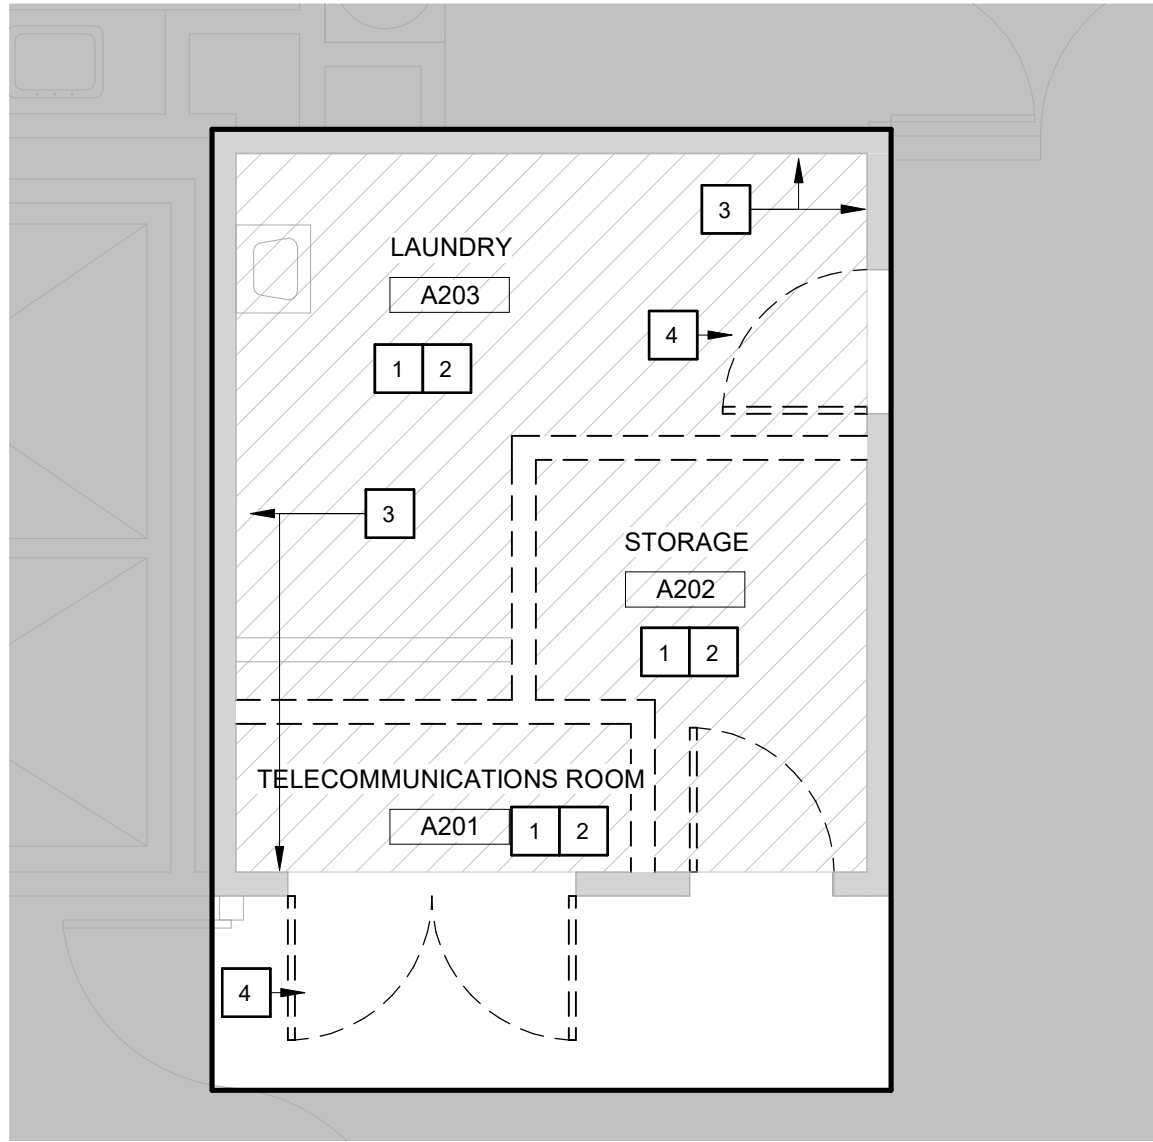

2 BUILDING 43 SECOND FLOOR ENLARGED DEMO PLAN
1/4" = 1'-0"

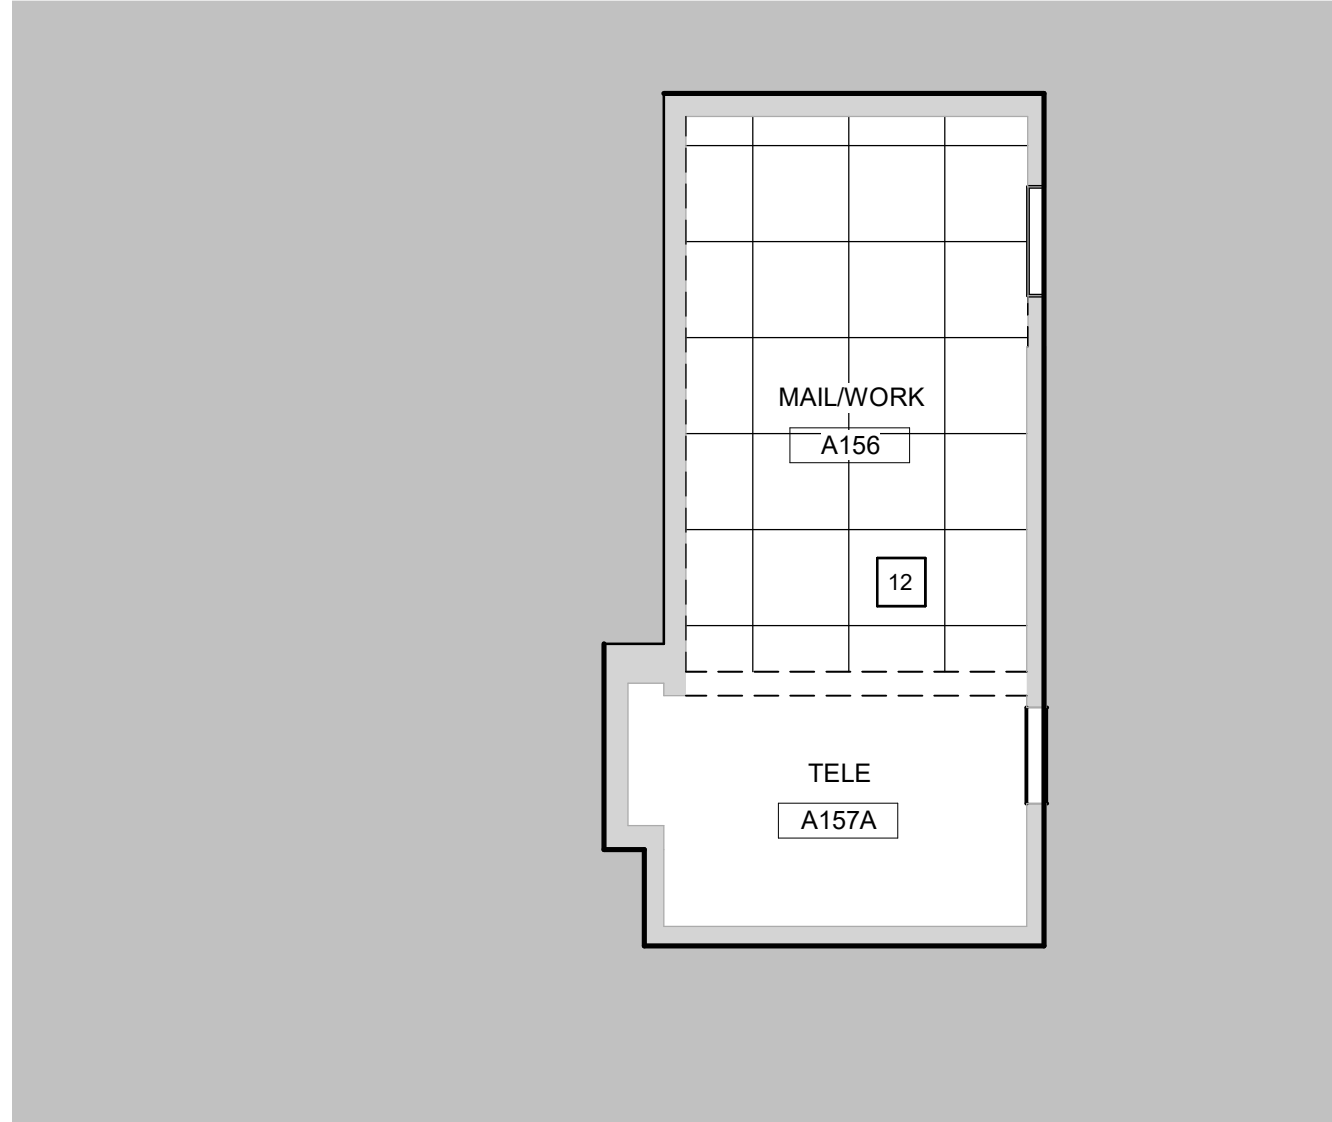

3 BUILDING 43 FIRST FLOOR RCP DEMO PLAN
1/4" = 1'-0"

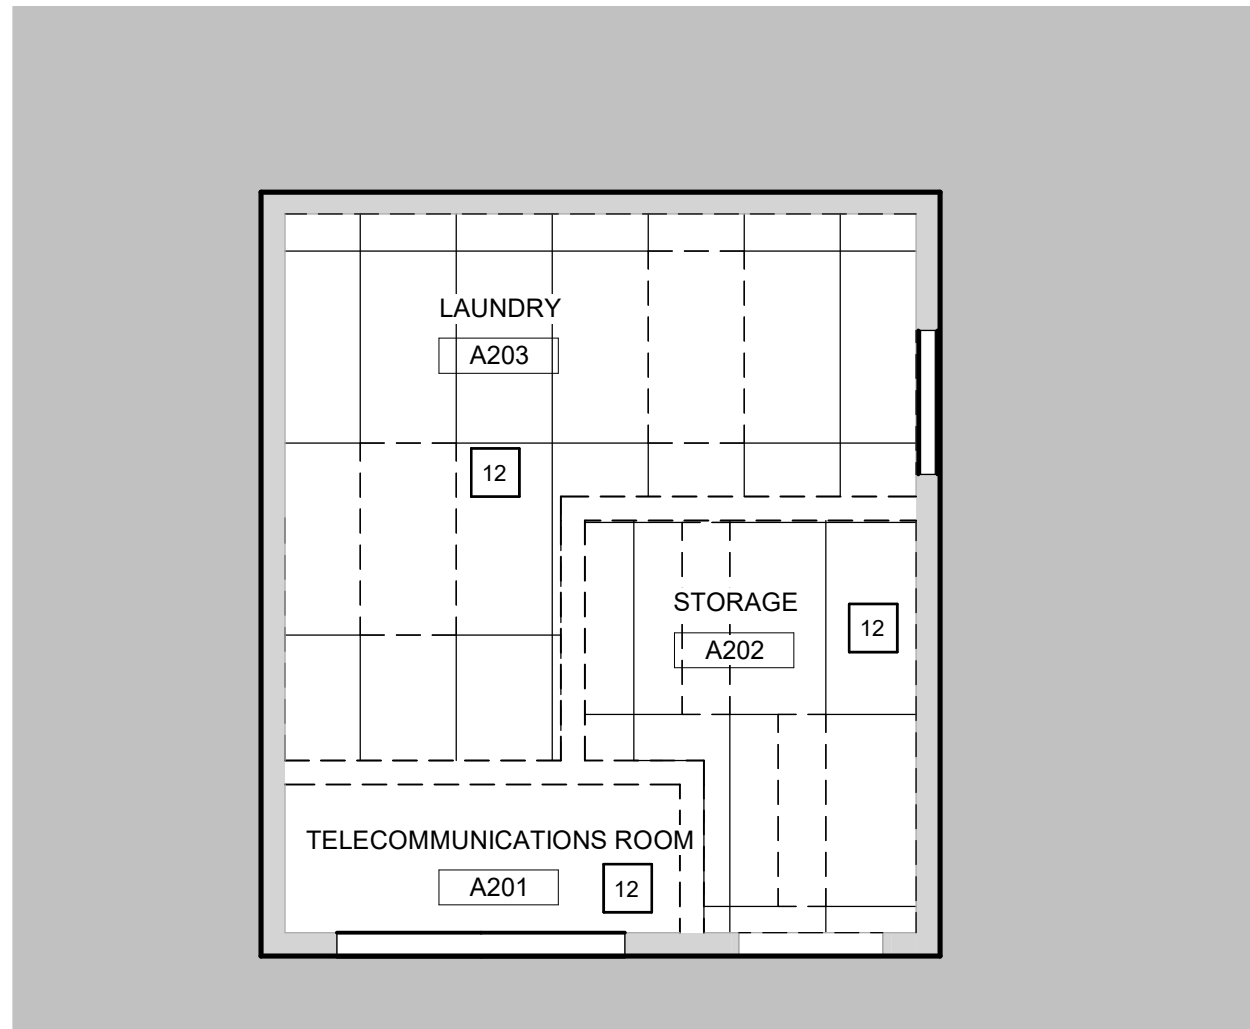

4 BUILDING 43 SECOND FLOOR RCP DEMO PLAN
1/4" = 1'-0"

DEMO KEYNOTES

Note Number	Note
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL. STORE AT VA DESIGNATED LOCATION.
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL BASE, WALL COVERING, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTIS, GYP BD ON NON-DEMO SIDE. REFER TO FINISH SCHEDULE FOR NEW FINISHES. REFER TO THE FLOOR PLAN FOR NEW WORK.
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE MATERIALS. PREPARE WALL TO BE INFILLED.
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.
7	REMOVE EXISTING CASEWORK.
8	REMOVE EXISTING TEL COMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.
10	DEMO EXISTING SCFFIT.
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TINT FROM INTERIOR OF WINDOW (TYP.). DEMO EXISTING TRIM AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO LEGEND

	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS.
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED -REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN

RCP LEGEND


	EXPOSED CEILING
	CHANGE HUNG LIGHT FIXTURE
	CEILING ELEVATION A.F.F.
	MECHANICAL SUPPLY DIFFUSER
	MECHANICAL RETURN GRILLE
	MECHANICAL EXHAUST GRILLE

RCP KEYNOTES

NOTE NUMBER	NOTE
1	EXPOSED CEILING
2	DEMO EXISTING CEILING FINISHES AND FIXTURES
3	REPLACE CEILING TILES IN AREA OF WORK
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK
5	PATCH AND REPAIR EXISTING CEILING
9	EXPOSED CEILING. PATCH, REPAIR AND PAINT AS REQUIRED.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO NOTES

- DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
- REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
- ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
- CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
- GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
- THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
- PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
- ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
- REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
- BOTTOM OF GYP. BD. BULKHEADS SHALL BE 8'-6" AFF U.N.O.
- ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
- ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
- VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS. EQUIPMENT, DOOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH NEW CONSTRUCTION. BRING ANY DISCREPANCIES AND OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

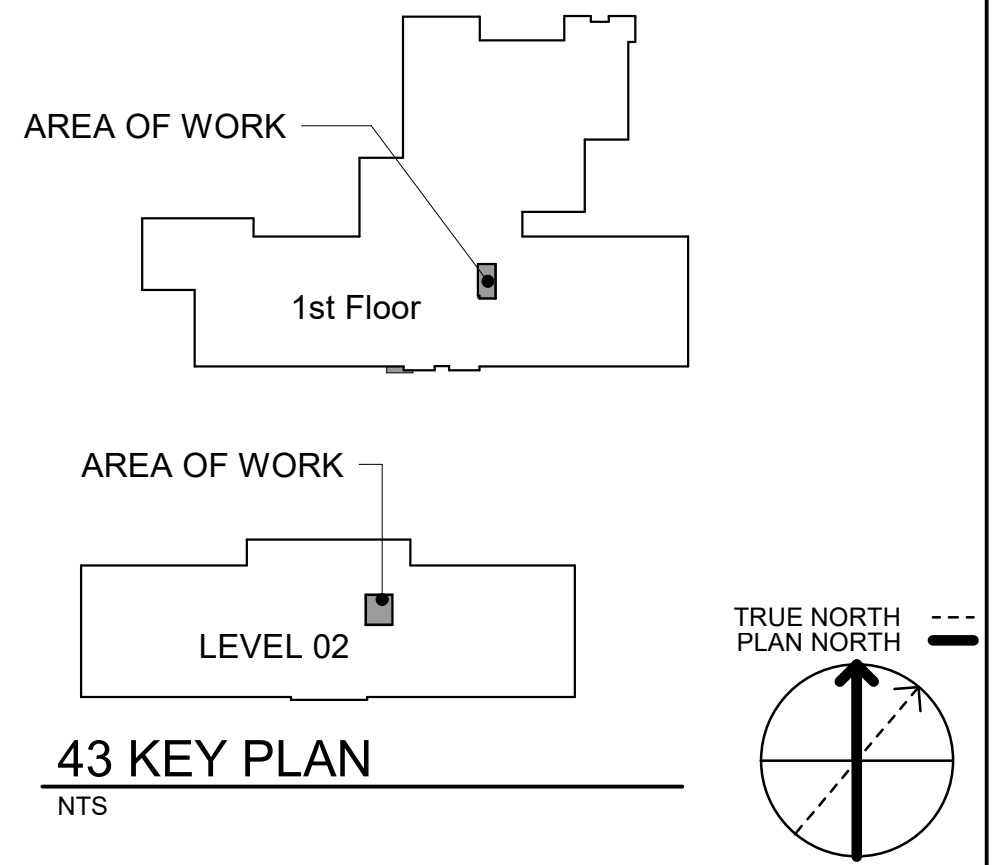

Revisions:	Date:

CONSULTANT

IMEG

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

Romanyk Consulting
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP

REBECCA C. OLSON
001.011033
STATE OF ILLINOIS
9.5.2025

Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title
BUILDING 43 FIRST FLOOR ENLARGED DEMO
PLAN & RCP

Approved:

Phase
FINAL BID DOCUMENTS

Sprinklered
FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE
UPGRADES – MILWAUKEE, WI

Location
5000 W. NATIONAL AVENUE MILWAUKEE, WI

Issue Date
SEPTEMBER 5, 2025


Checked
RCO


Drawn
HS

Project Number
695-21-700

Building Number
43

Drawing Number
43-AD104

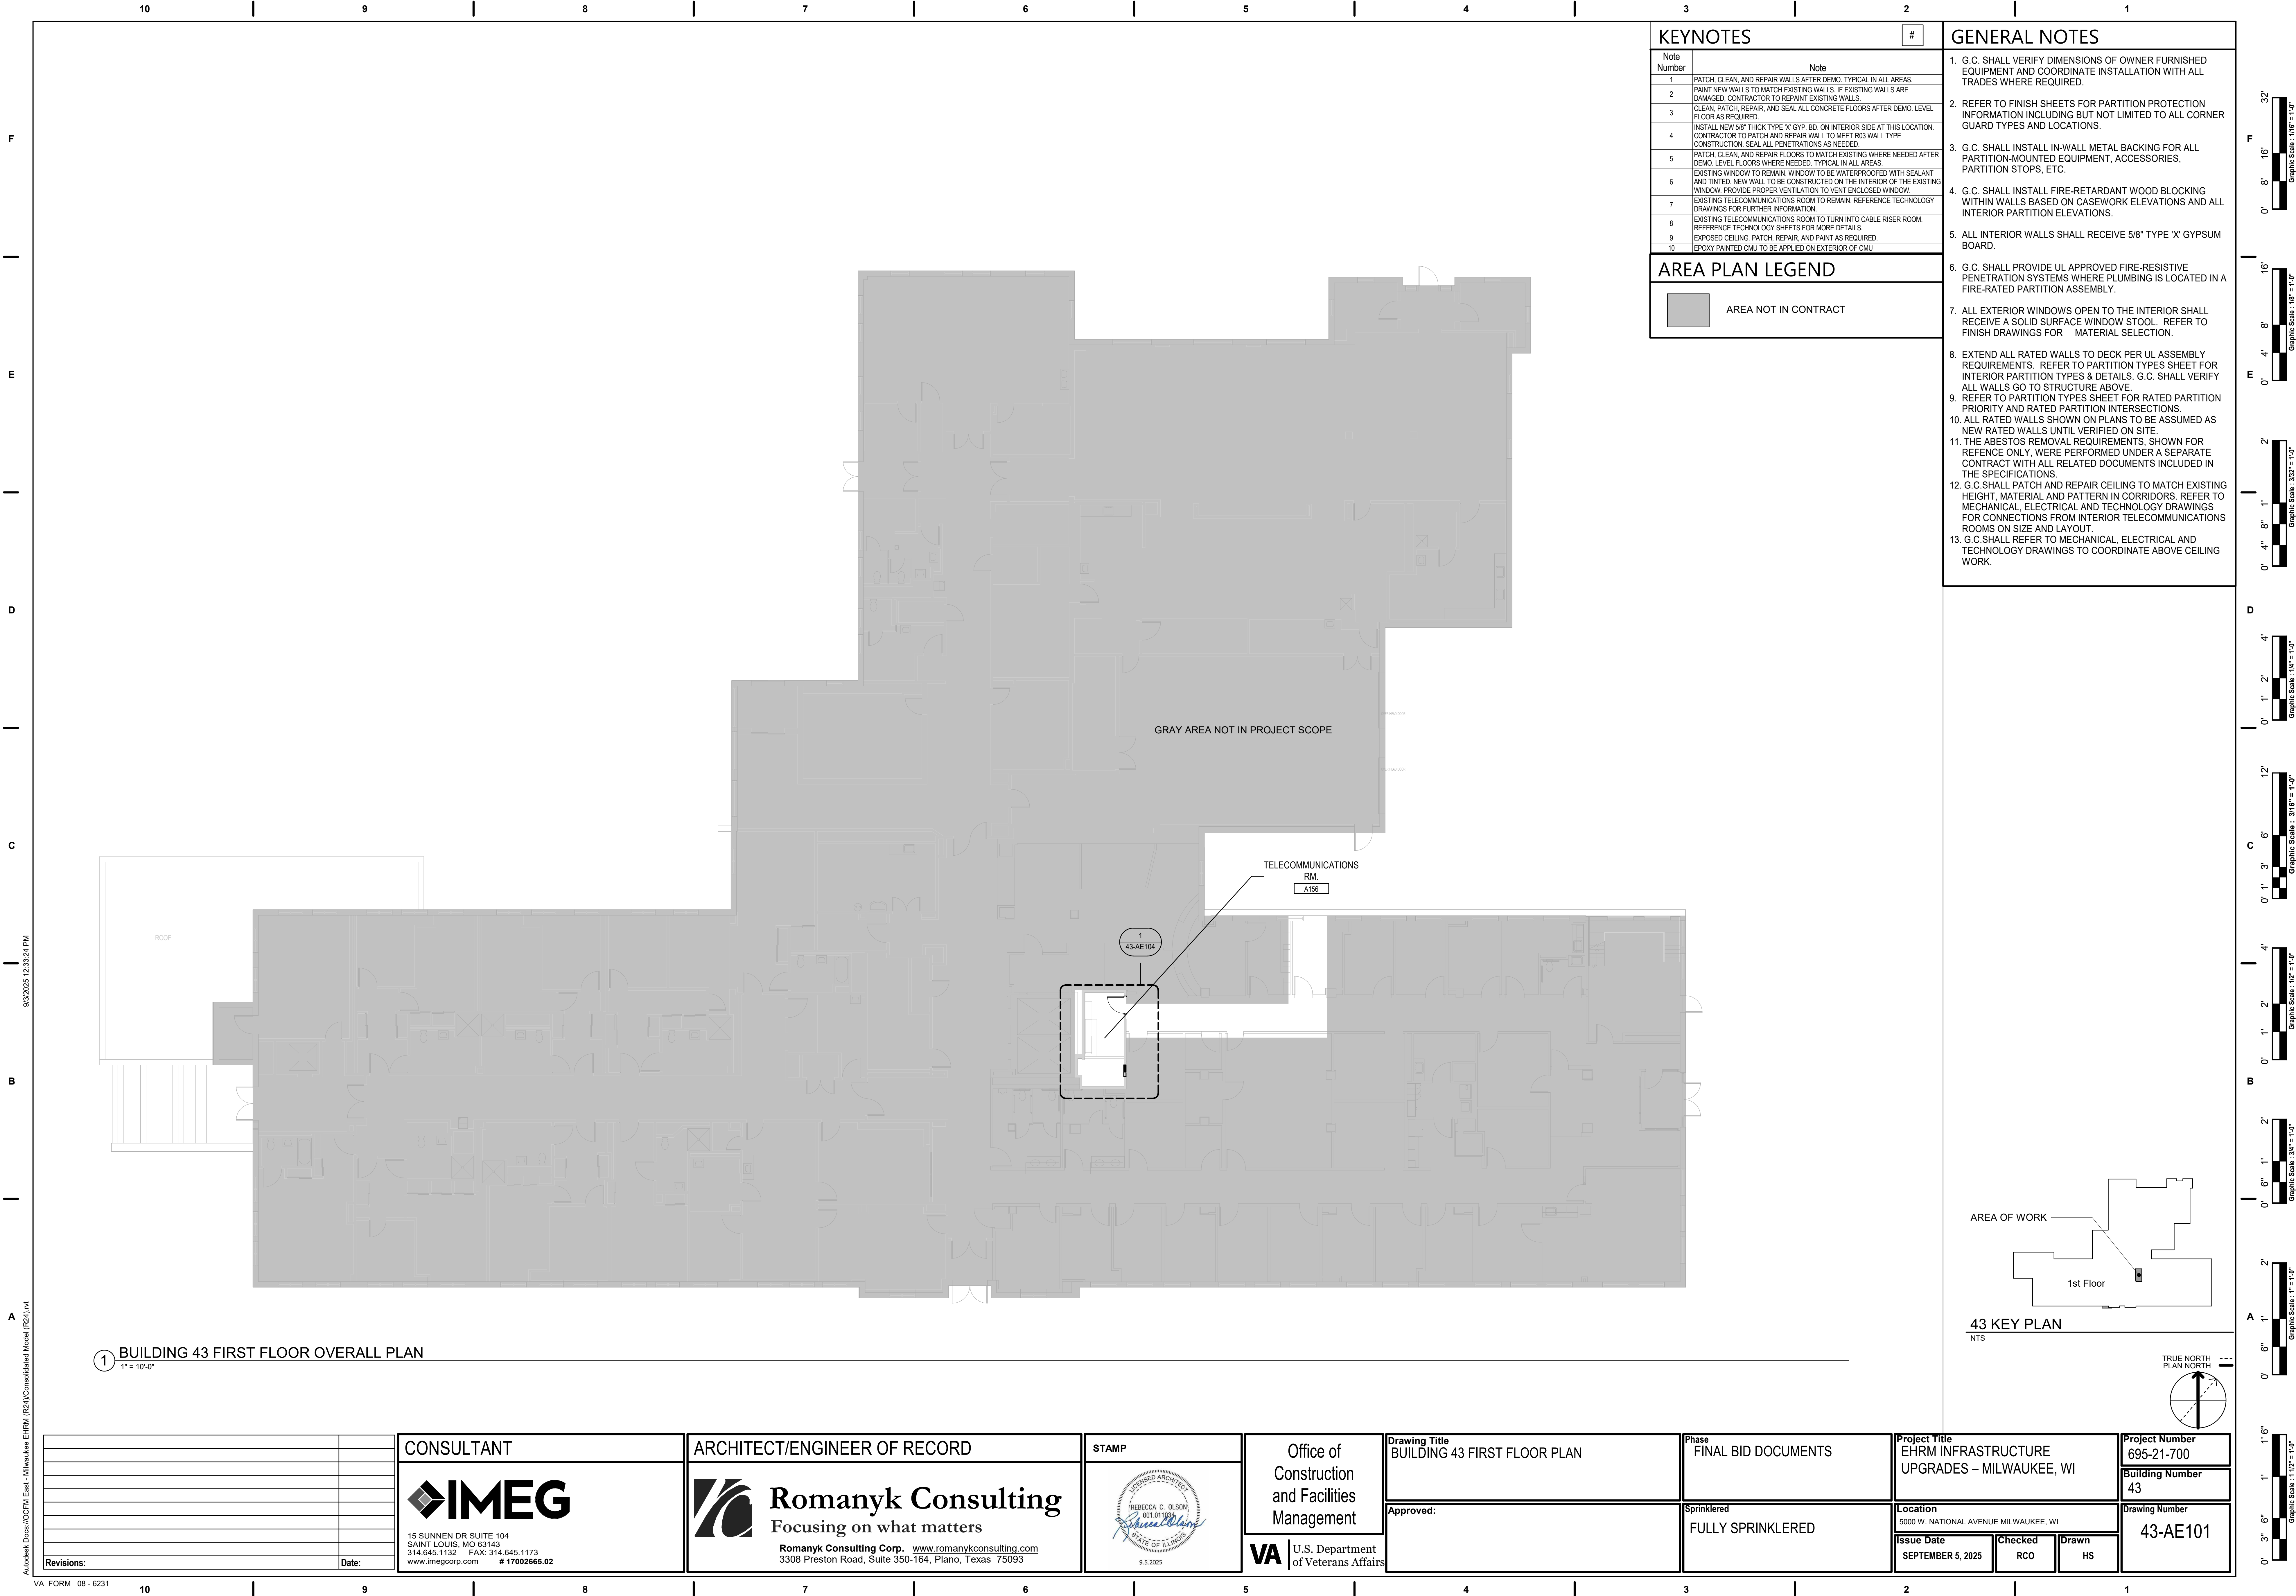

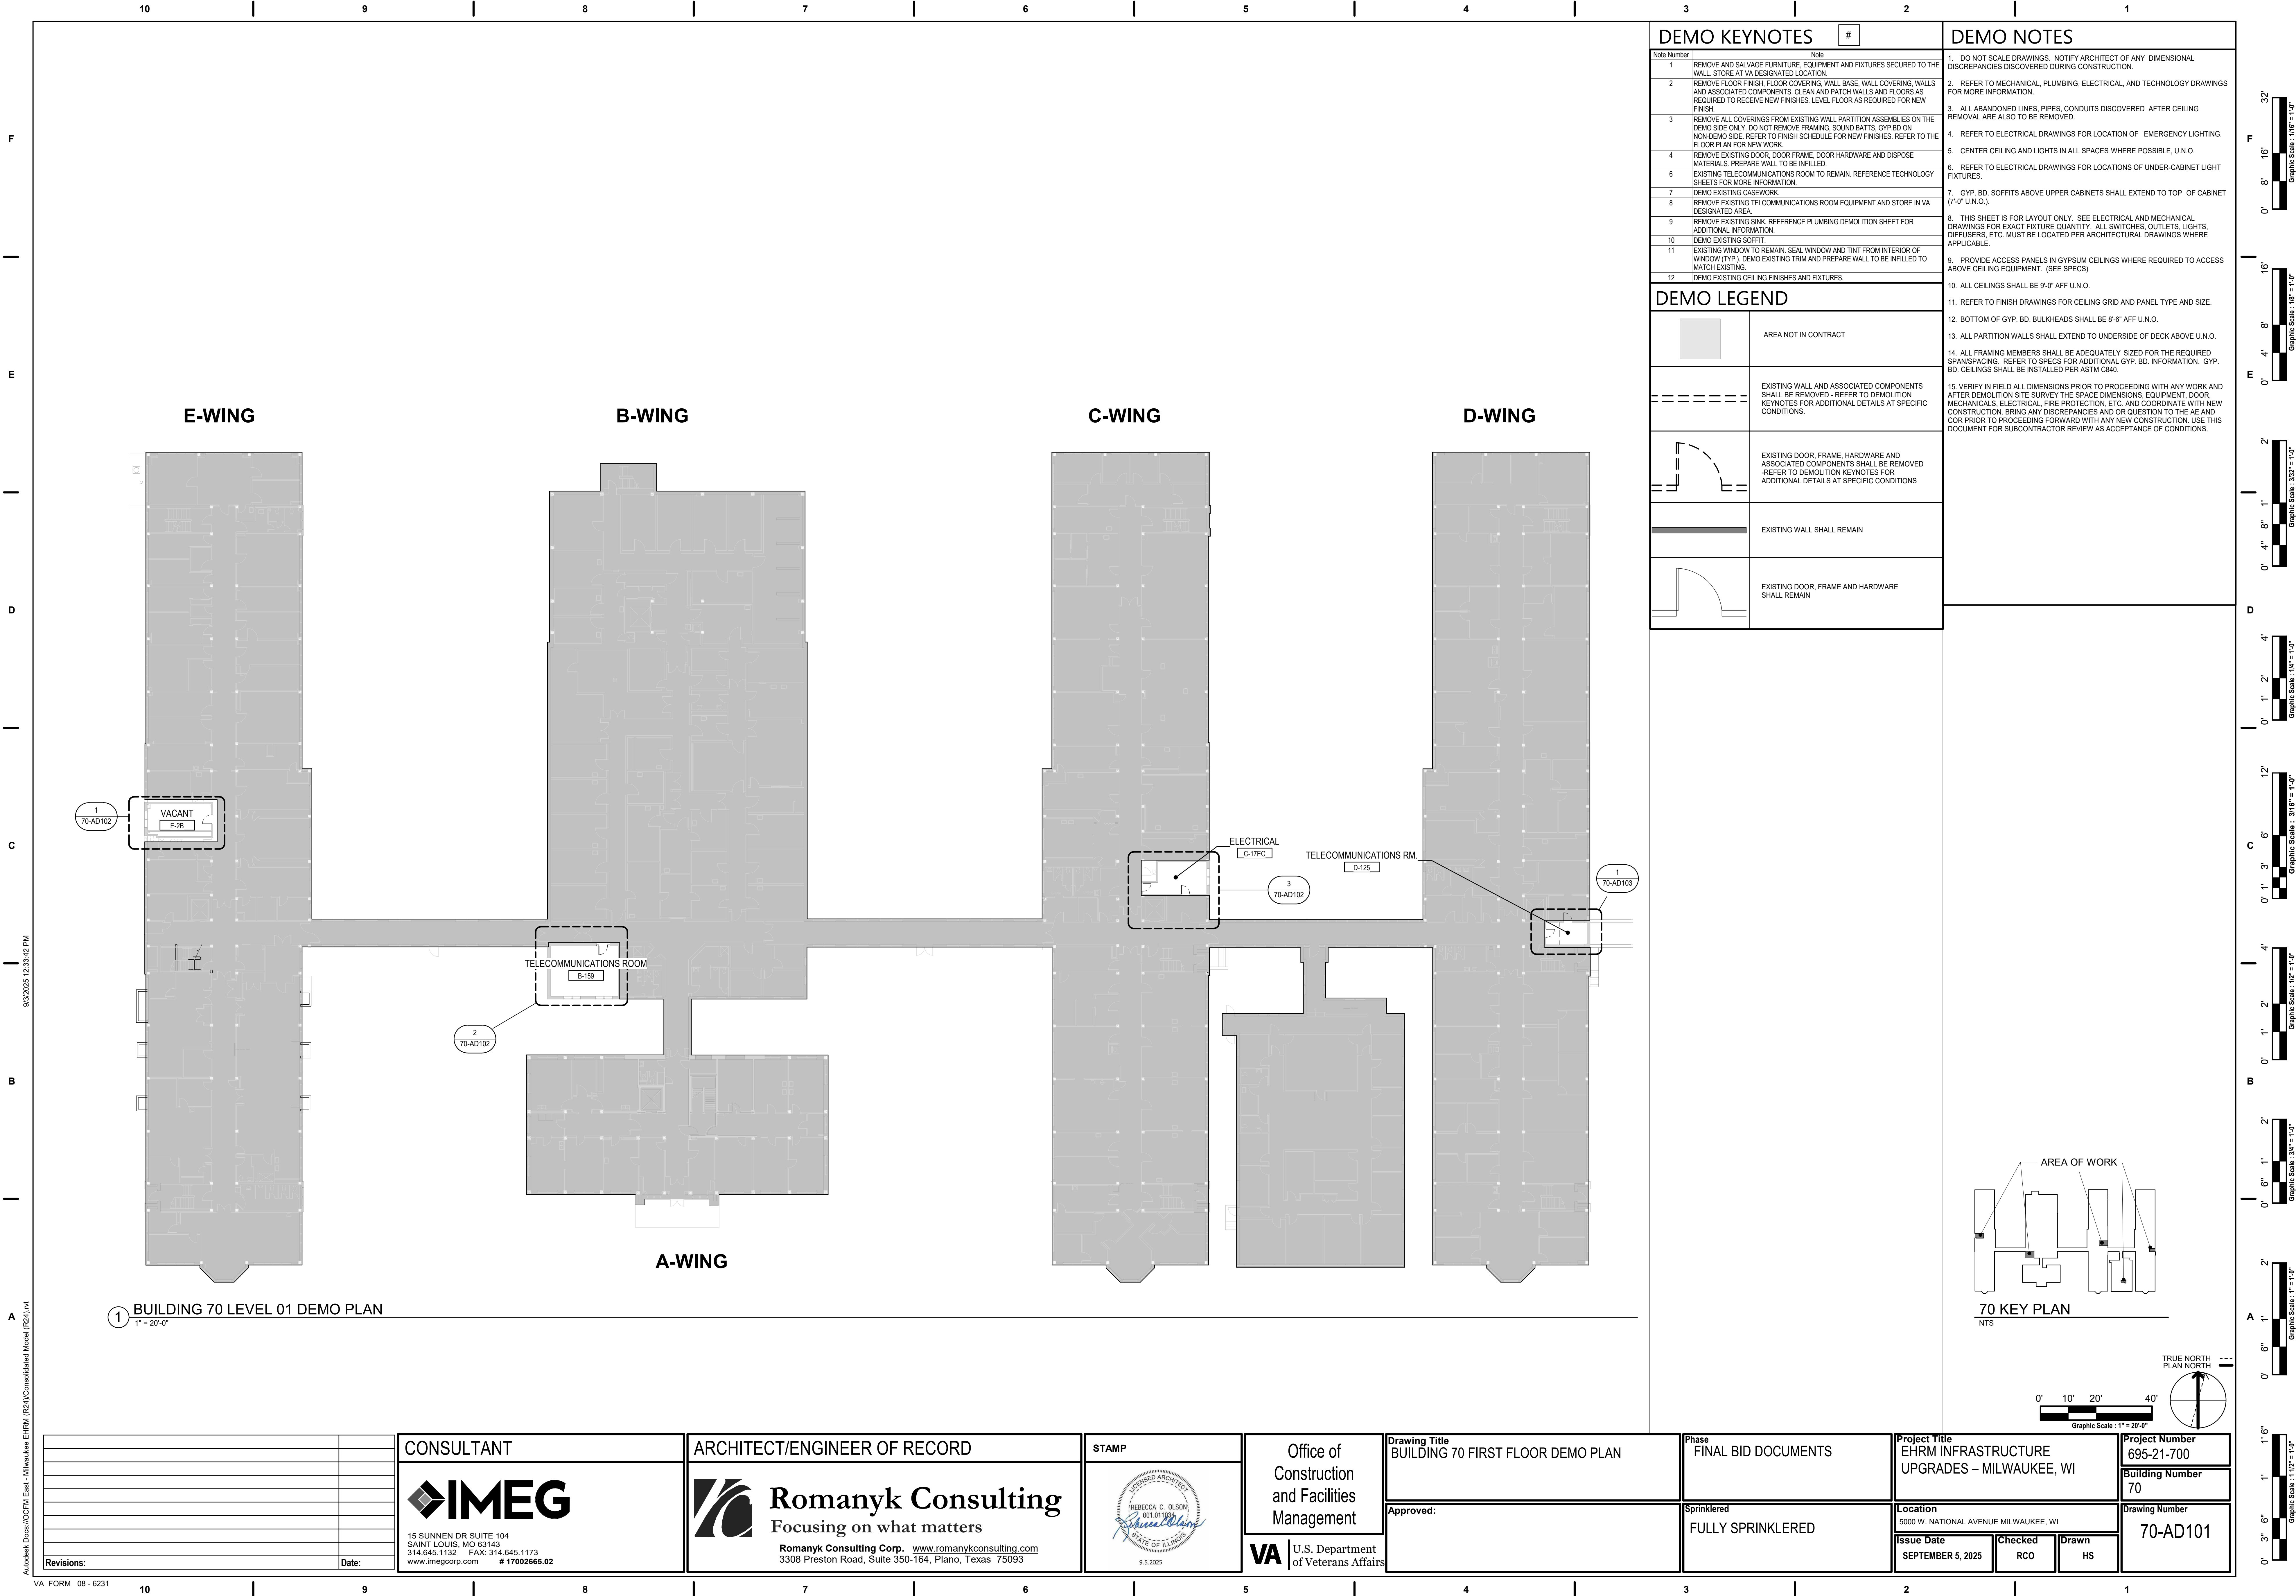

F


E

D


C

B

A

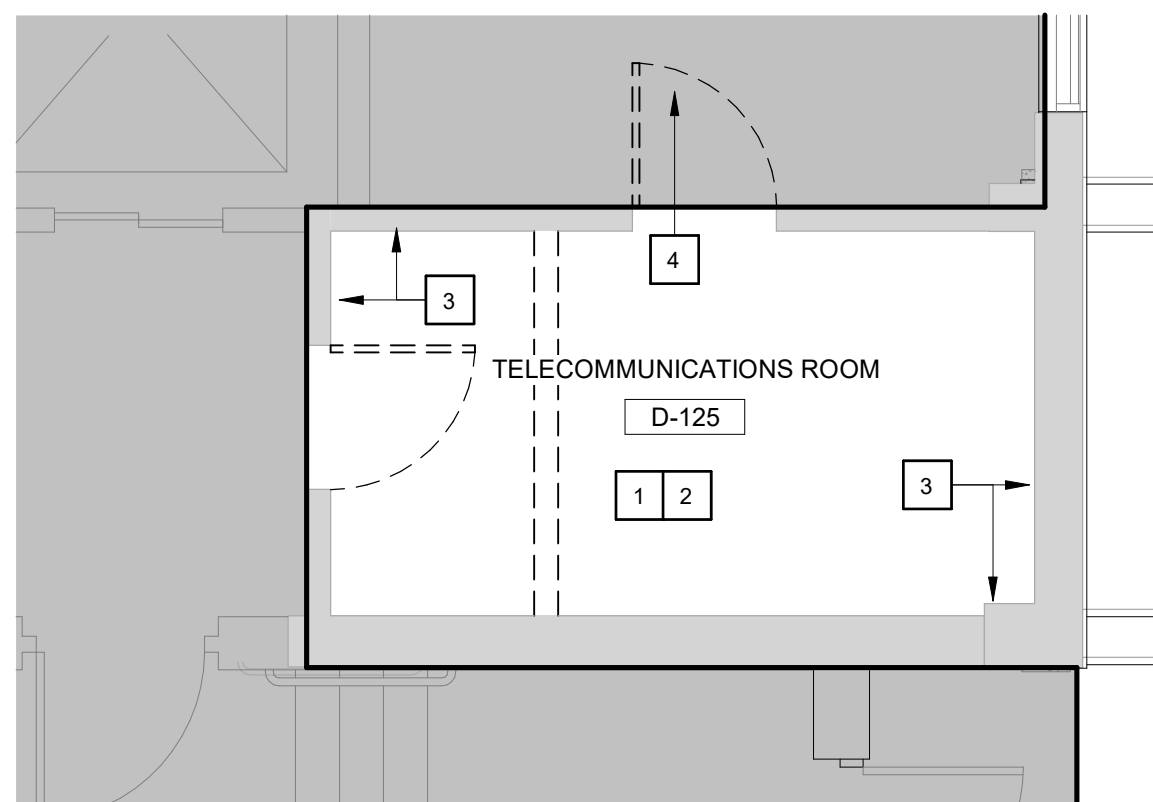

1 BUILDING 70 FIRST FLOOR ENLARGED DEMO - D-125
1/4" = 1'-0"



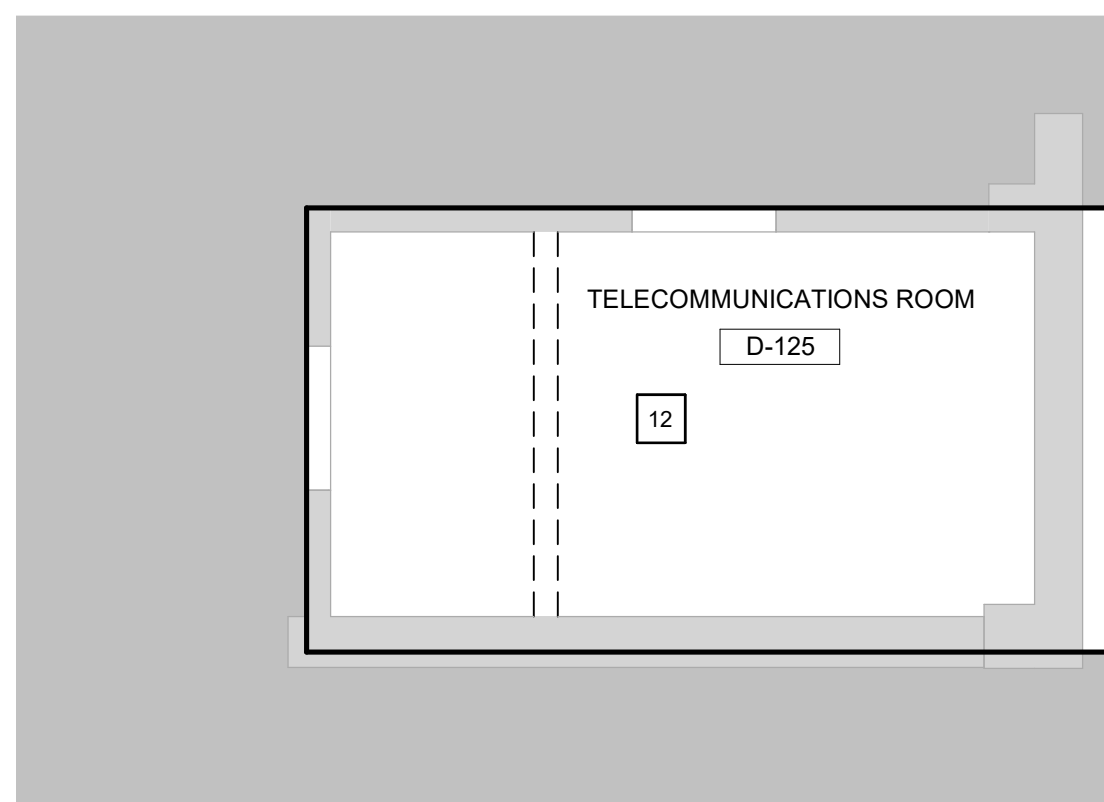


2 BUILDING 70 FIRST FLOOR RCP DEMO PLANS - D 125
1/4" = 1'-0"





DEMO KEYNOTES

Note Number	Note
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL, STORE AT VA DESIGNATED LOCATION.
2	REMOVE FLOOR FINISH FLOOR COVERING, WALL BASE, WALL COVERING, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS & FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTING, GYP BOARD. ON DEMO SIDE, REFER TO FINISH SCHEDULE FOR NEW FINISHES. REFER TO THE FLOOR PLAN FOR NEW WORK.
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE ONWARDS. PREPARE WALL TO BE RE-FLILED.
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.
7	DEMO EXISTING CASEWORK.
8	REMOVE EXISTING TELECOMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.
10	DEMO EXISTING SOFFIT.
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TRIM FROM INTERIOR AND EXTERIOR. DEMO EXISTING TRIM AND PREPARE WALL TO BE RE-FLILED TO MATCH EXISTING.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO LEGEND

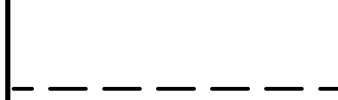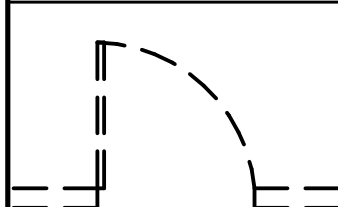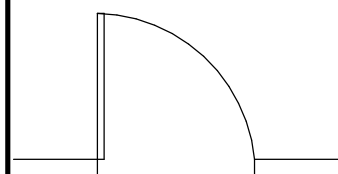	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED -REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN

RCP LEGEND


	EXPPOSED CEILING
	CHANGE HUNG LIGHT FIXTURE
 X-X'	CEILING ELEVATION A.F.F.
	MECHANICAL SUPPLY DIFFUSER
	MECHANICAL RETURN GRILLE
	MECHANICAL EXHAUST GRILLE

RCP KEYNOTES

NOTE NUMBER	NOTE
1	EXPOSED CEILING
2	DEMO EXISTING CEILING FINISHES AND FIXTURES
3	REPLACE CEILING TILES IN AREA OF WORK
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK
5	PATCH AND REPAIR EXISTING CEILING
9	EXPOSED CEILING, PATCH, REPAIR AND PAINT AS REQUIRED.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYP. CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 6'-6" AFF U.N.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPECING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS, EQUIPMENT, DOOR, MECHANICALS, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH PROJECT CONSTRUCTION. BRING ANY DISCREPANCIES AND/OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS SHEET FOR SUBTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

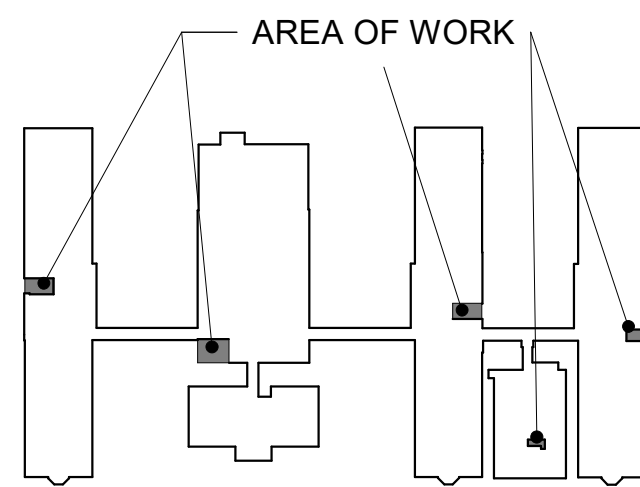


		CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title BUILDING 70 FIRST FLOOR ENLARGED DEMO PLAN		Phase FINAL BID DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		Project Number 695-21-700	
		 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02		 Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093		 9/5/2025		VA U.S. Department of Veterans Affairs		Approved:		Sprinklered FULLY SPRINKLERED		Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		Drawing Number 70-AD103	
Revisions:		Date:										Issue Date SEPTEMBER 5, 2025		Checked RCO		Drawn HS	

GENERAL NOTES

1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
11. THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDING THE SPECIFICATIONS.
12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS TO EXISTING CEILING.
13. G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

 AREA NOT IN CONTRACT

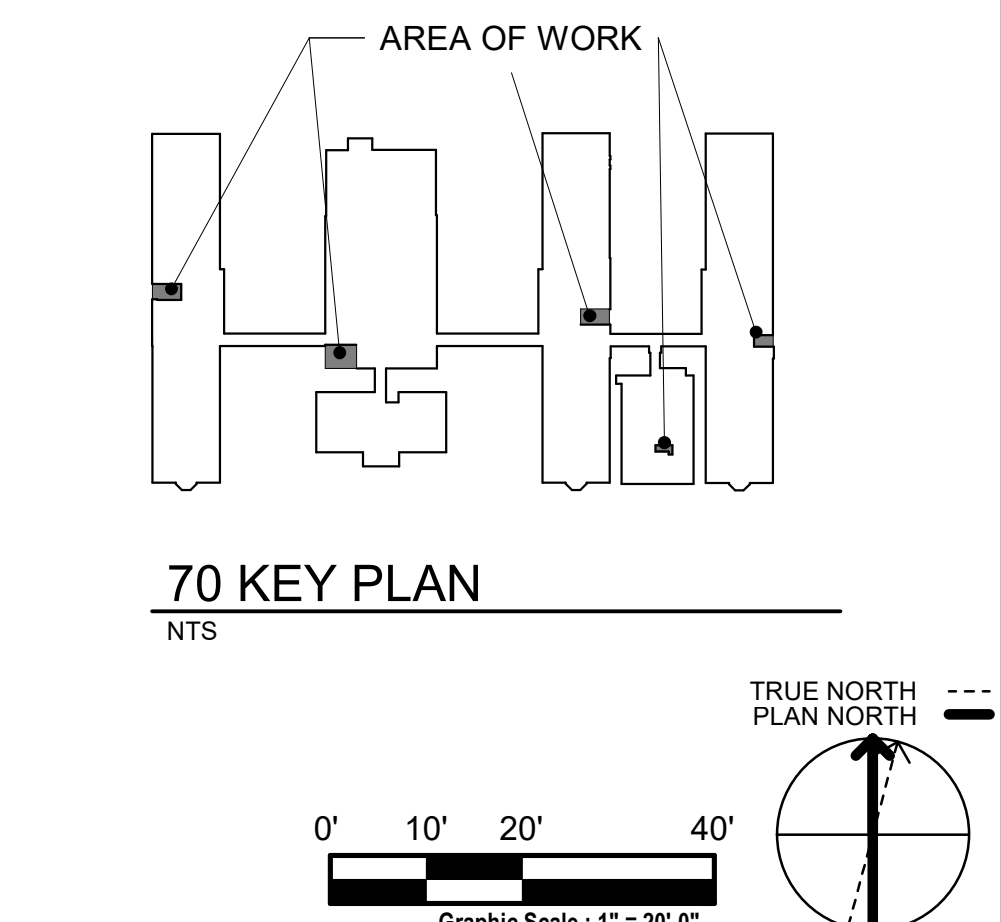

70 KEY PLAN






NTS

[illegible]



GENERAL NOTES

1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
11. THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS, LOBBY AND CORRIDORS.
13. G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

	EXPOSED CEILING
	CHANGE HUNG LIGHT FIXTURE
	CEILING ELEVATION A.F.F.
	MECHANICAL SUPPLY DIFFUSER
	MECHANICAL RETURN GRILLE
	MECHANICAL EXHAUST GRILLE



		CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title BUILDING 70 FIRST FLOOR - ENLARGED PLANS		Phase FINAL BID DOCUMENTS		Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		Project Number 695-21-700	
		 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02		 Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093		 9.5.2025		 U.S. Department of Veterans Affairs		Approved:		Sprinklered FULLY SPRINKLERED		Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		Drawing Number 70-AE102	
Revisions:		Date:										Issue Date SEPTEMBER 5, 2025		Checked RCO		Drawn HS	

F


E

D


C

B

A

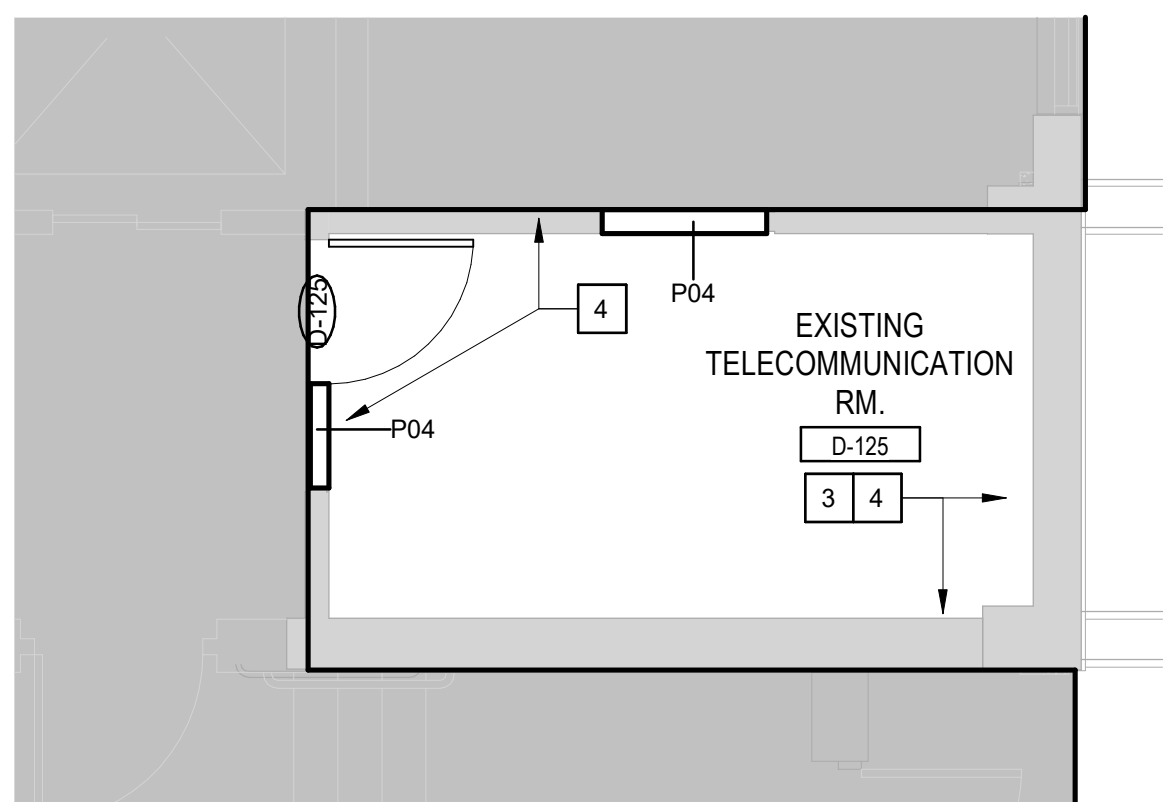

1 BUILDING 70 LEVEL 01 ENLARGED FLOOR PLAN 5
1/4" = 1'-0"

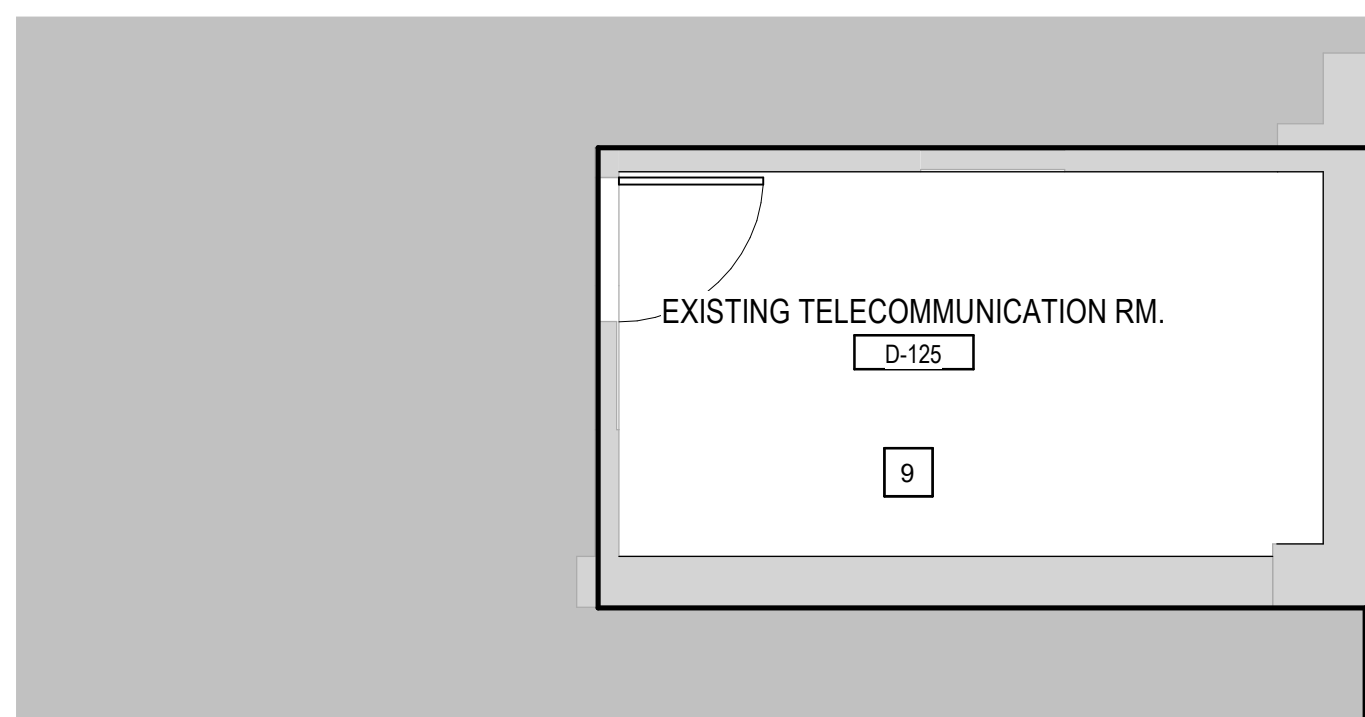





2 BUILDING 70 FIRST FLOOR RCP PLANS-D - 125
1/4" = 1'-0"

KEYNOES		#
Note	Number	Note
1		PATCH, CLEAN, AND REPAIR WALLS AFTER DEMO. TYPICAL IN ALL AREAS.
2		PAINT NEW WALLS TO MATCH EXISTING WALLS. IF EXISTING WALLS ARE DAMAGED BY CONTRACTOR, REPAIR AND PAINT TO MATCH.
3		1. PATCH, CLEAN, REPAIR, AND SEAL ALL CONCRETE FLOORS AFTER DEMO. LEAK FLOORS AS REQUIRED.
4		INSTALL NEW 6" THICK TYPE C GYP. BD. ON INTERIOR SIDE AT THIS LOCATION. CONTRACTOR TO PATCH AND REPAIR WALL TO MEET RSI WALL TYPE CONSTRUCTION. SEAL ALL PENETRATIONS AS NEEDED.
5		PATCH, CLEAN, AND REPAIR FLOORS TO MATCH EXISTING WHERE APPROPRIATE. DEMO. LEAK FLOORS WHERE NEEDED. TYPICAL IN ALL AREAS.
6		REMOVE WINDOW TO REMAIN. WINDING TO BE WATERPROOFED WITH SEALANT AND TINTED. NEW WALL TO BE CONSTRUCTED ON THE INTERIOR OF THE WINDOW. PROVIDE PROPER VENTILATION TO VENT ENCLOSED WINDOW.
7		EXISTING TELECOMMUNICATIONS TO REMAIN. REFERENCE TECHNICAL DRAWINGS FOR FURTHER INFORMATION.
8		EXISTING TELECOMMUNICATIONS ROOM TO TURN INTO CABLE RISES ROOM. REFERENCE TECHNOLOGY SHEETS FOR MORE DETAILS.
9		EXPANDED CEILING, PATCH, REPAIR, AND PAINT AS REQUIRED.
10		EPOXY PAINTED GUN TO BE APPLIED ON EXTERIOR OF CMU.

AREA PLAN LEGEND





RCP LEGEND



RCP KEYNOTES		#
NOTE NUMBER	NOTE	
1	EXPOSED CEILING	
2	DEMO EXISTING CEILING FINISHES AND FIXTURES	
3	REPLACE CEILING TILES IN AREA OF WORK	
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK	
5	PATCH AND REPAIR EXISTING CEILING	
9	EXPOSED CEILING, PATCH, REPAIR AND PAINT AS REQUIRED.	
12	DEMO EXISTING CEILING FINISHES AND FIXTURES	

GENERAL NOTES

1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION. CLADDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
11. THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS ON SIZE AND LAYOUT.
13. G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

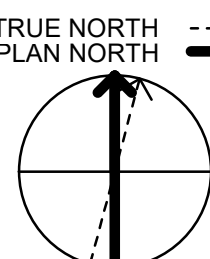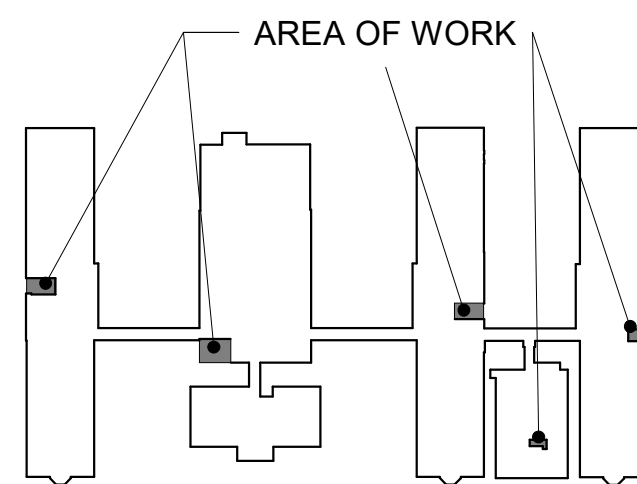[illegible]

F

E

D


C

B

A

9/3/2025 12:34:20 PM

Autodesk Docs/DOCFM Ext - Milwaukee EHRM (R24)/Consultant Model (R24).rvt

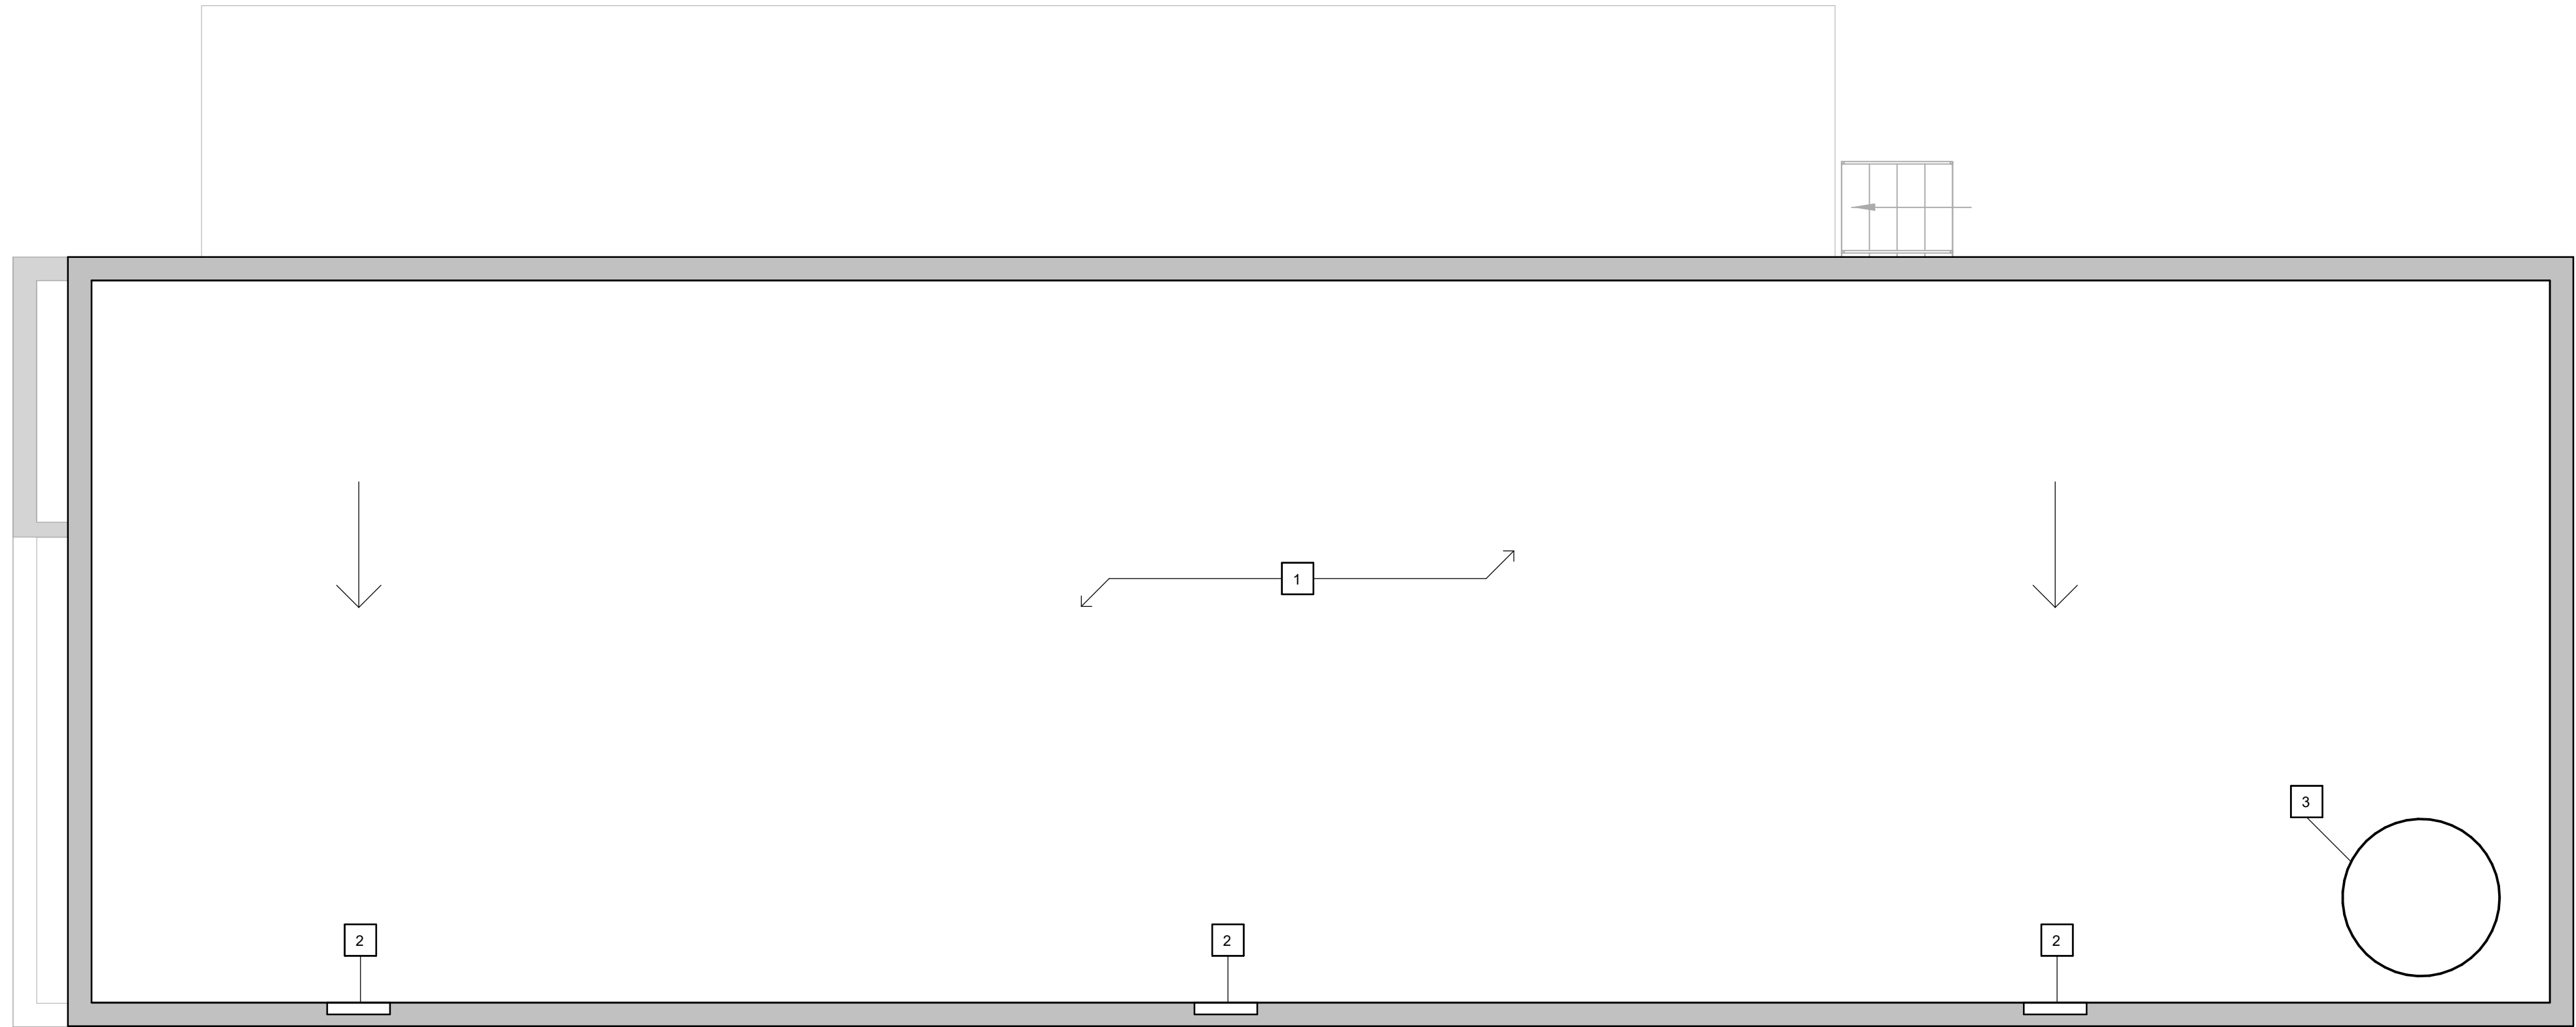








1 BUILDING 97 ROOF PLAN
1/4" = 1'-0"

ROOF DEMO NOTES

- DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
- EXISTING ROOF TO BE DEMOLISHED, PATCH AND REPAIR LEAKS AND PREP FOR NEW ROOFING.


KEYNOTES

Note Number	Note
1	REMOVE EXISTING ROOFING MEMBRANE. PATCH AND REPAIR ROOF DECKING. PROVIDE NEW TPO ROOFING MEMBRANE. ENSURE MATERIAL IS WRAPPED TIGHT TO PARAPET WALL.
2	EXISTING ROOF DRAINS. CLEAN AND REMOVE DEBRIS.
3	EXISTING EXHAUST. CLEAN AND PREP FOR NEW ROOF MEMBRANE.

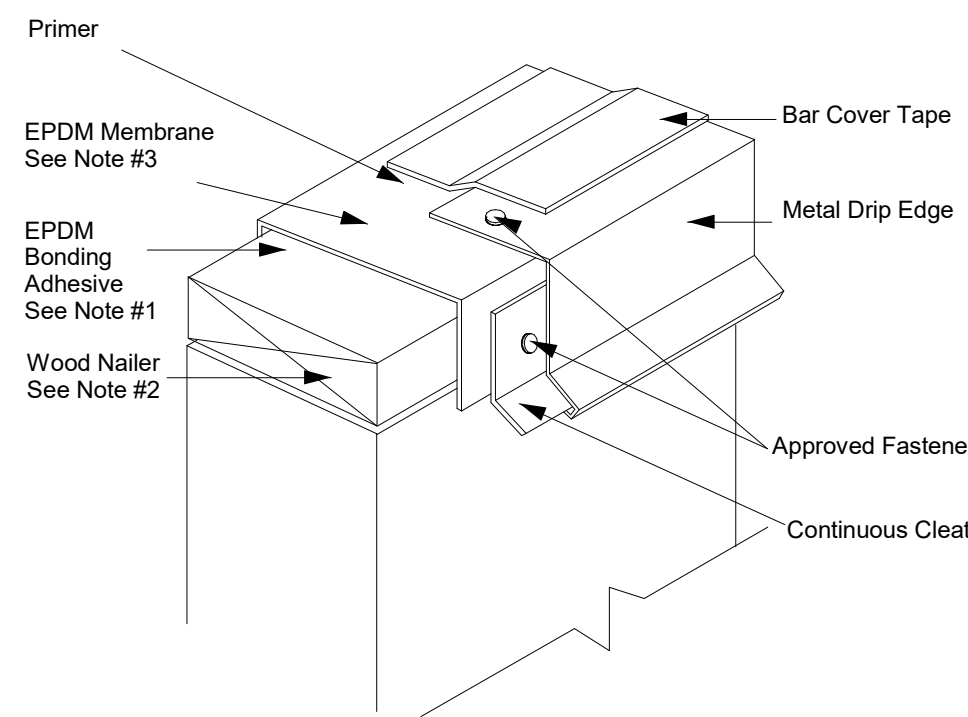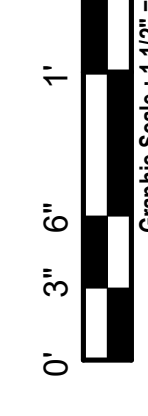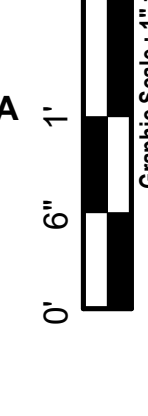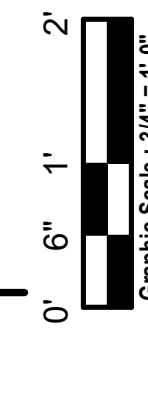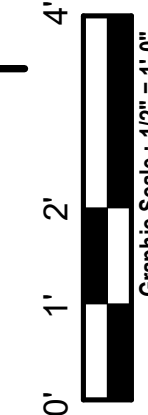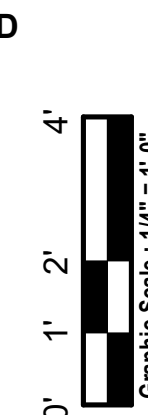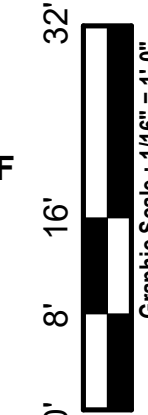

- All parapet walls and roof curbs must be suitable for flashing, e.g. clean, tight, smooth, no cracks, etc.
- All wood nailers to be approved material. Attachment of wood nailer to be accomplished by using fasteners.
- When curved flashing is used on wall or curb flashing, vertical seams must be stripped-in at the base of angle change with a strip of EPDM Flashing.

2 BUILDING 97 ROOF DETAIL - PARAPET DETAIL
6" = 1'-0"

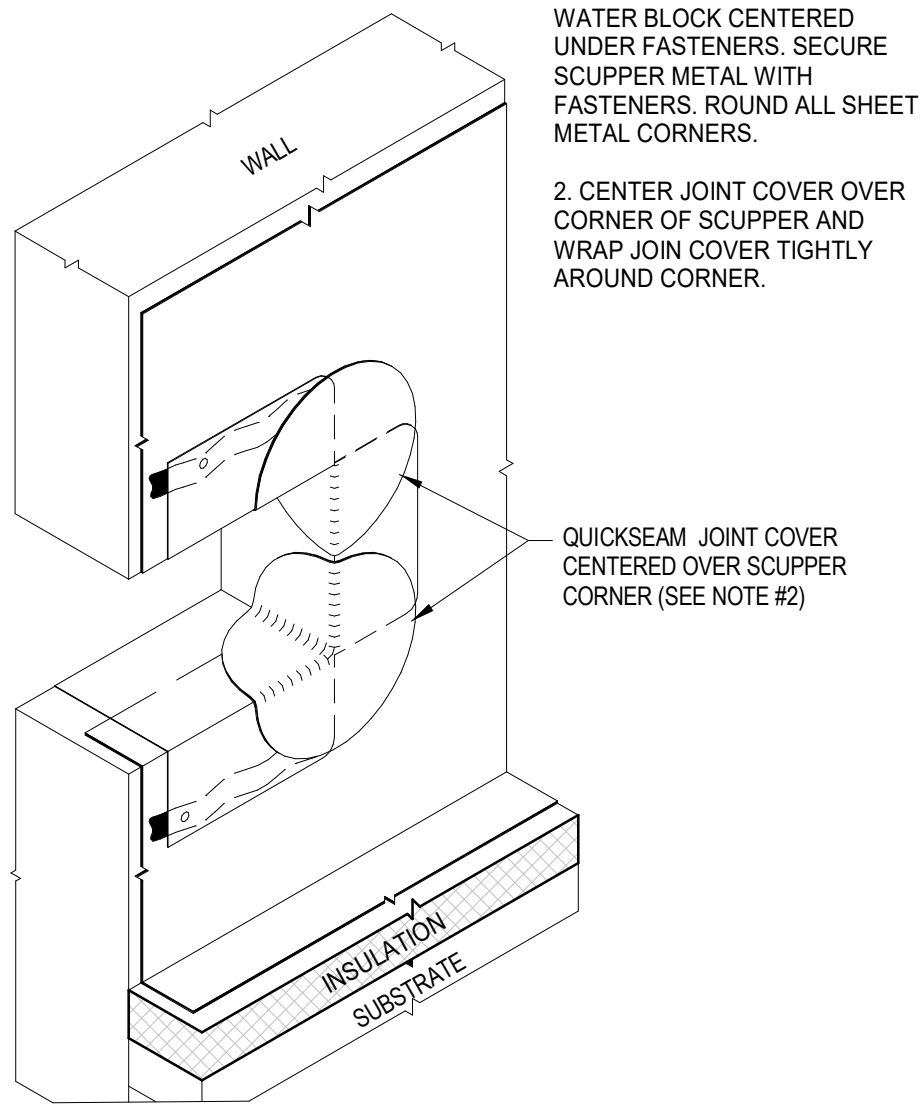

- APPLY CONTINUOUS BEAD OF WATER BLOCK CENTERED UNDER FASTENERS. SECURE SCUPPER METAL WITH FASTENERS. ROUND ALL SHEET METAL CORNERS.
- CENTER JOINT COVER OVER CORNER OF SCUPPER AND WRAP JOINT COVER TIGHTLY AROUND CORNER.

3 BUILDING 97 ROOF DETAIL - OVERFLOW THRU-WALL SCUPPER
6" = 1'-0"



Revisions:	Date:

CONSULTANT

IMEG

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

Romanyk Consulting
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP

REBECCA C. OLSON
001.011033
STATE OF ILLINOIS
9.5.2025

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title
BUILDING 97 ROOF PLAN

Approved:

Phase
FINAL BID DOCUMENTS

Sprinklered
FULLY SPRINKLERED

Project Title
EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI

Location
5000 W. NATIONAL AVENUE MILWAUKEE, WI

Issue Date
SEPTEMBER 5, 2025

Checked
RCO

Drawn
HS

Project Number
695-21-700

Building Number

Drawing Number
97-AE102

F

E

D

C

B

A

9/3/2025 12:34:24 PM

Autodesk Docs://OCFM East - Milwaukee EHRM (R24)/Consolidated Model (R24).rvt






DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHERE REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILINGS SHALL BE 9'-0" AFF U.N.O.
11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 6'-6" AFF U.N.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SUPPORT. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS, EQUIPMENT, DOOR, WINDOW, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH THE CONSTRUCTION. BRING ANY DISCREPANCIES AND OR QUESTION TO THE AE AND ARCHITECT PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS DOCUMENT FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

DEMO KEYNOTES

Note Number	Note
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO WALL, STORE AT VA DESIGNATED LOCATION.
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL BASE, WALL COVERING, WALLS AND RELATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATT, CPD OR NON-DEMO SIDE. REFER TO FLOOR SCHEDULE FOR NEW FINISHES. REFER TO FLOOR PLAN FOR NEW WORK.
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE AWAY. PREPARE WALL AS REQUIRED.
6	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.
7	DEMO EXISTING CASEWORK.
8	REMOVE EXISTING TELECOMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.
9	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.
10	DEMO EXISTING SOFFIT.
11	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TRIM FROM INTERIOR OF WINDOW (TPI). DEMO EXISTING TRIM AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

DEMO LEGEND

	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS.
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED -REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN


TRUE
PLAN


10

Ⓒ BUILDING 102 BASEMENT DEMO PLAN

$1/8" = 1'-0"$

[illegible]

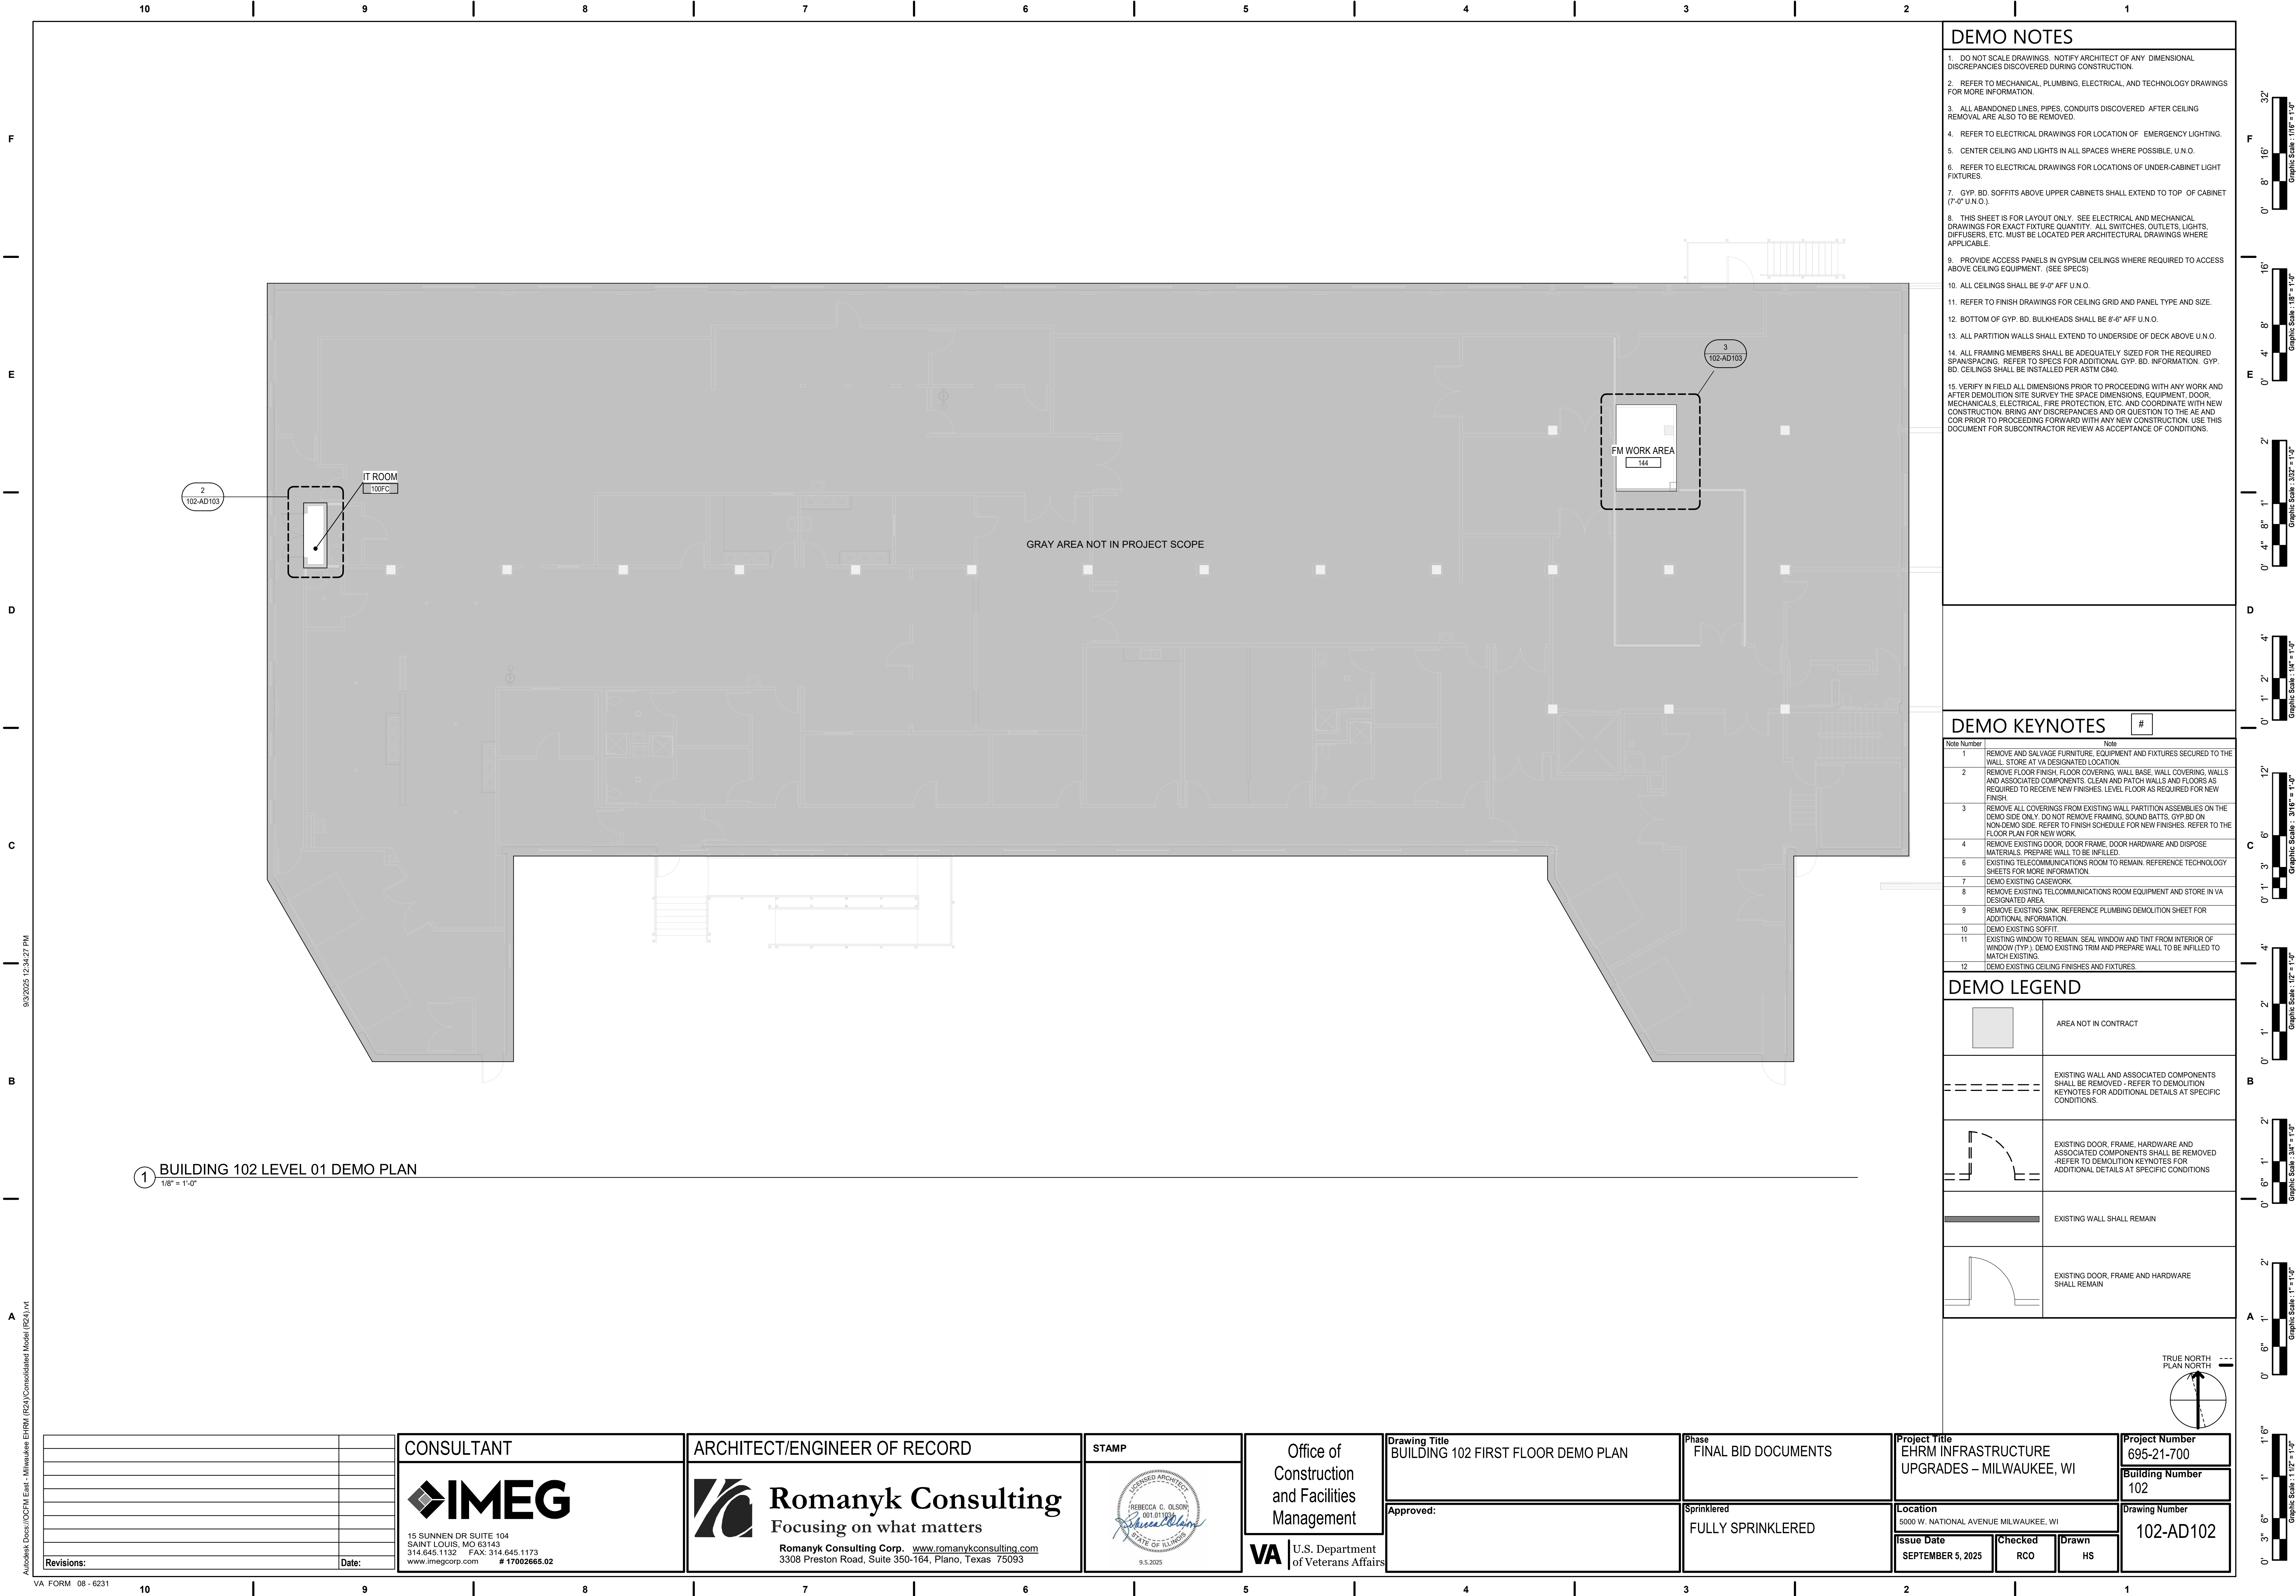

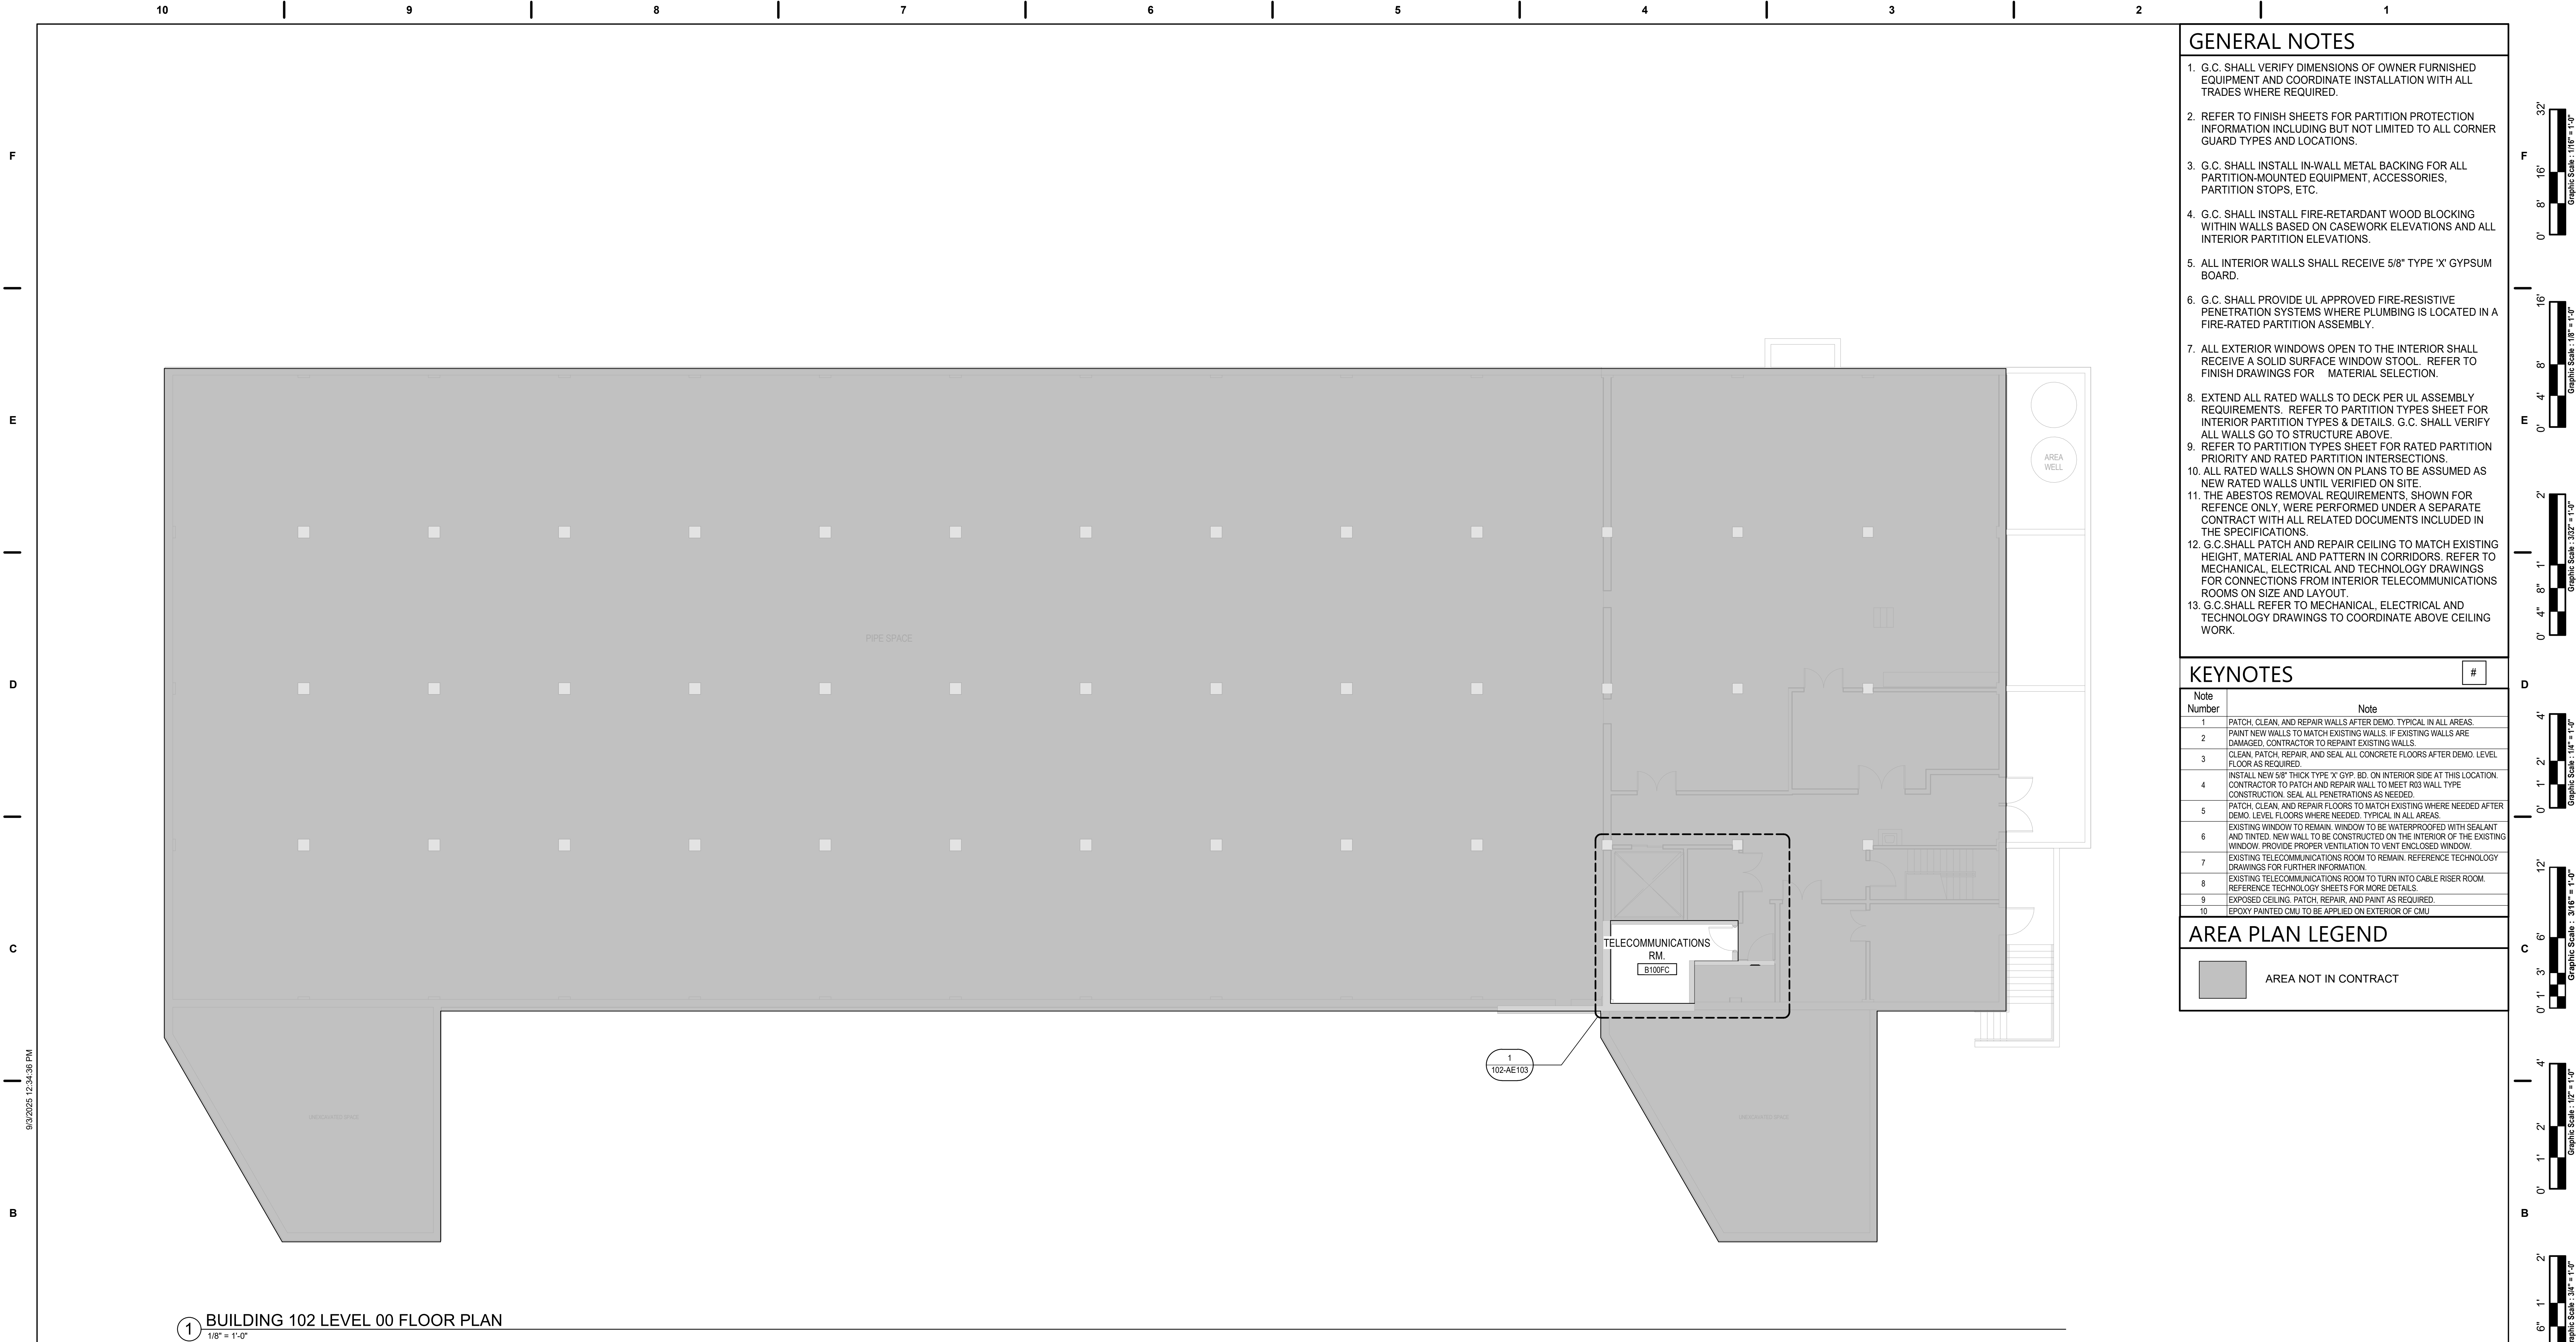

GENERAL NOTES

- G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
- REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
- G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
- G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
- ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
- G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
- ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
- EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
- REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
- ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
- THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
- G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS ON SIZE AND LAYOUT.
- G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

KEYNOTES



Note Number	Note
1	PATCH, CLEAN, AND REPAIR WALLS AFTER DEMO. TYPICAL IN ALL AREAS.
2	PAINT NEW WALLS TO MATCH EXISTING WALLS. IF EXISTING WALLS ARE DAMAGED, CONTRACTOR TO REPAINT EXISTING WALLS.
3	CLEAN, PATCH, REPAIR, AND SEAL ALL CONCRETE FLOORS AFTER DEMO. LEVEL FLOOR AS REQUIRED.
4	INSTALL NEW 5/8" THICK TYPE 'X' GYP. BD. ON INTERIOR SIDE AT THIS LOCATION. CONTRACTOR TO PATCH AND REPAIR WALL TO MEET R03 WALL TYPE CONSTRUCTION. SEAL ALL PENETRATIONS AS NEEDED.
5	PATCH, CLEAN, AND REPAIR FLOORS TO MATCH EXISTING WHERE NEEDED AFTER DEMO. LEVEL FLOORS WHERE NEEDED. TYPICAL IN ALL AREAS.
6	EXISTING WINDOW TO REMAIN. WINDOW TO BE WATERPROOFED WITH SEALANT AND FINISHED. NEW WALL TO BE CONSTRUCTED ON THE INTERIOR OF THE EXISTING WINDOW. PROVIDE PROPER VENTILATION TO VENT ENCLOSED WINDOW.
7	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY DRAWINGS FOR FURTHER INFORMATION.
8	EXISTING TELECOMMUNICATIONS ROOM TO TURN INTO CABLE RISER ROOM. REFERENCE TECHNOLOGY SHEETS FOR MORE DETAILS.
9	EXPOSED CEILING. PATCH, REPAIR, AND PAINT AS REQUIRED.
10	EPOXY PAINTED CMU TO BE APPLIED ON EXTERIOR OF CMU.


AREA PLAN LEGEND

AREA NOT IN CONTRACT

9/3/2025 12:34:38 PM
A
Autodesk Docs\DOCFM East - Milwaukee EHRM (R24)\Consolidated Model (R24).rvt

Revisions:		Date:		CONSULTANT 15 SUNNEN DR SUITE 104 SAINT LOUIS, MO 63143 314.645.1132 FAX: 314.645.1173 www.imegcorp.com # 17002665.02	ARCHITECT/ENGINEER OF RECORD Romanyk Consulting Focusing on what matters Romanyk Consulting Corp. www.romanykconsulting.com 3308 Preston Road, Suite 350-164, Plano, Texas 75093		STAMP 	Office of Construction and Facilities Management U.S. Department of Veterans Affairs	Drawing Title BUILDING 102 BASEMENT FLOOR PLAN Approved:	Phase FINAL BID DOCUMENTS	Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI Issue Date SEPTEMBER 5, 2025	Checkered RCO Drawn HS	Project Number 695-21-700 Building Number 102 Drawing Number 102-AE101
-------------------	--	--------------	--	--	--	--	------------------	--	--	-------------------------------------	--	---	--

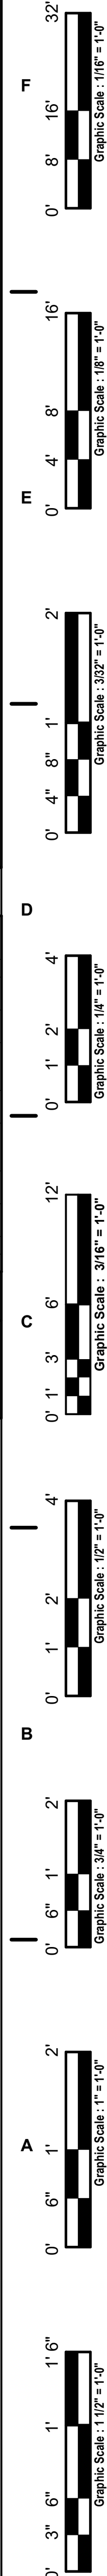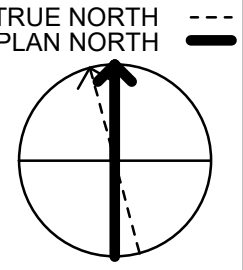



A

VA FORM 08-6231 **10** | **9**

VA FORM 08-6231

VA FORM 08 - 6231 **10** **9** **8** **7** **6**

VA FORM 08 - 6231	10	9	8	7	6
-------------------	----	---	---	---	---

VA FORM 08 - 6231	10	9	8	7	6	5
-------------------	----	---	---	---	---	---


VA FORM 08 - 6231									
10	9	8	7	6	5	4	3	2	1
1. Name of the veteran (Last, first, middle initial): 2. Service number (Last four digits): 3. Date of birth (MM/DD/YYYY): 4. Social Security Number (Last four digits): 5. Date of death (MM/DD/YYYY): 6. Date of burial (MM/DD/YYYY): 7. Name of the cemetery: 8. Name of the burial site: 9. Name of the next of kin: 10. Name of the next of kin (Last, first, middle initial):									


VA FORM 08-6231									
10	9	8	7	6	5	4	3		

- 0' 3" 6" 1' 1 1/2" Graphic Scale: 1/2" = 1" lpi
 0' 6" 1' 2' Graphic Scale: 3/4" = 1" lpi
 0' 1' 2' 4' Graphic Scale: 1/2" = 1" lpi
 0' 1' 3' 6' 12' Graphic Scale: 3/16" = 1" lpi
 0' 1' 2' 4' Graphic Scale: 1/2" = 1" lpi
 0' 1' 2' 4' Graphic Scale: 3/32" = 1" lpi
 0' 4" 8" 1' 2' Graphic Scale: 1/8" = 1" lpi
 0' 8" 16" Graphic Scale: 1/16" = 1" lpi

#

REAS.
ARE
EMO. LE
S LOCAT
E
EEDED A
TH SEAL
THE EX
OW.
ECHNOL
R ROOM

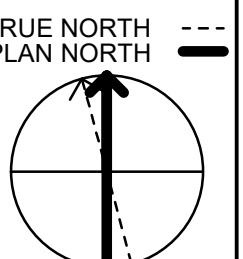

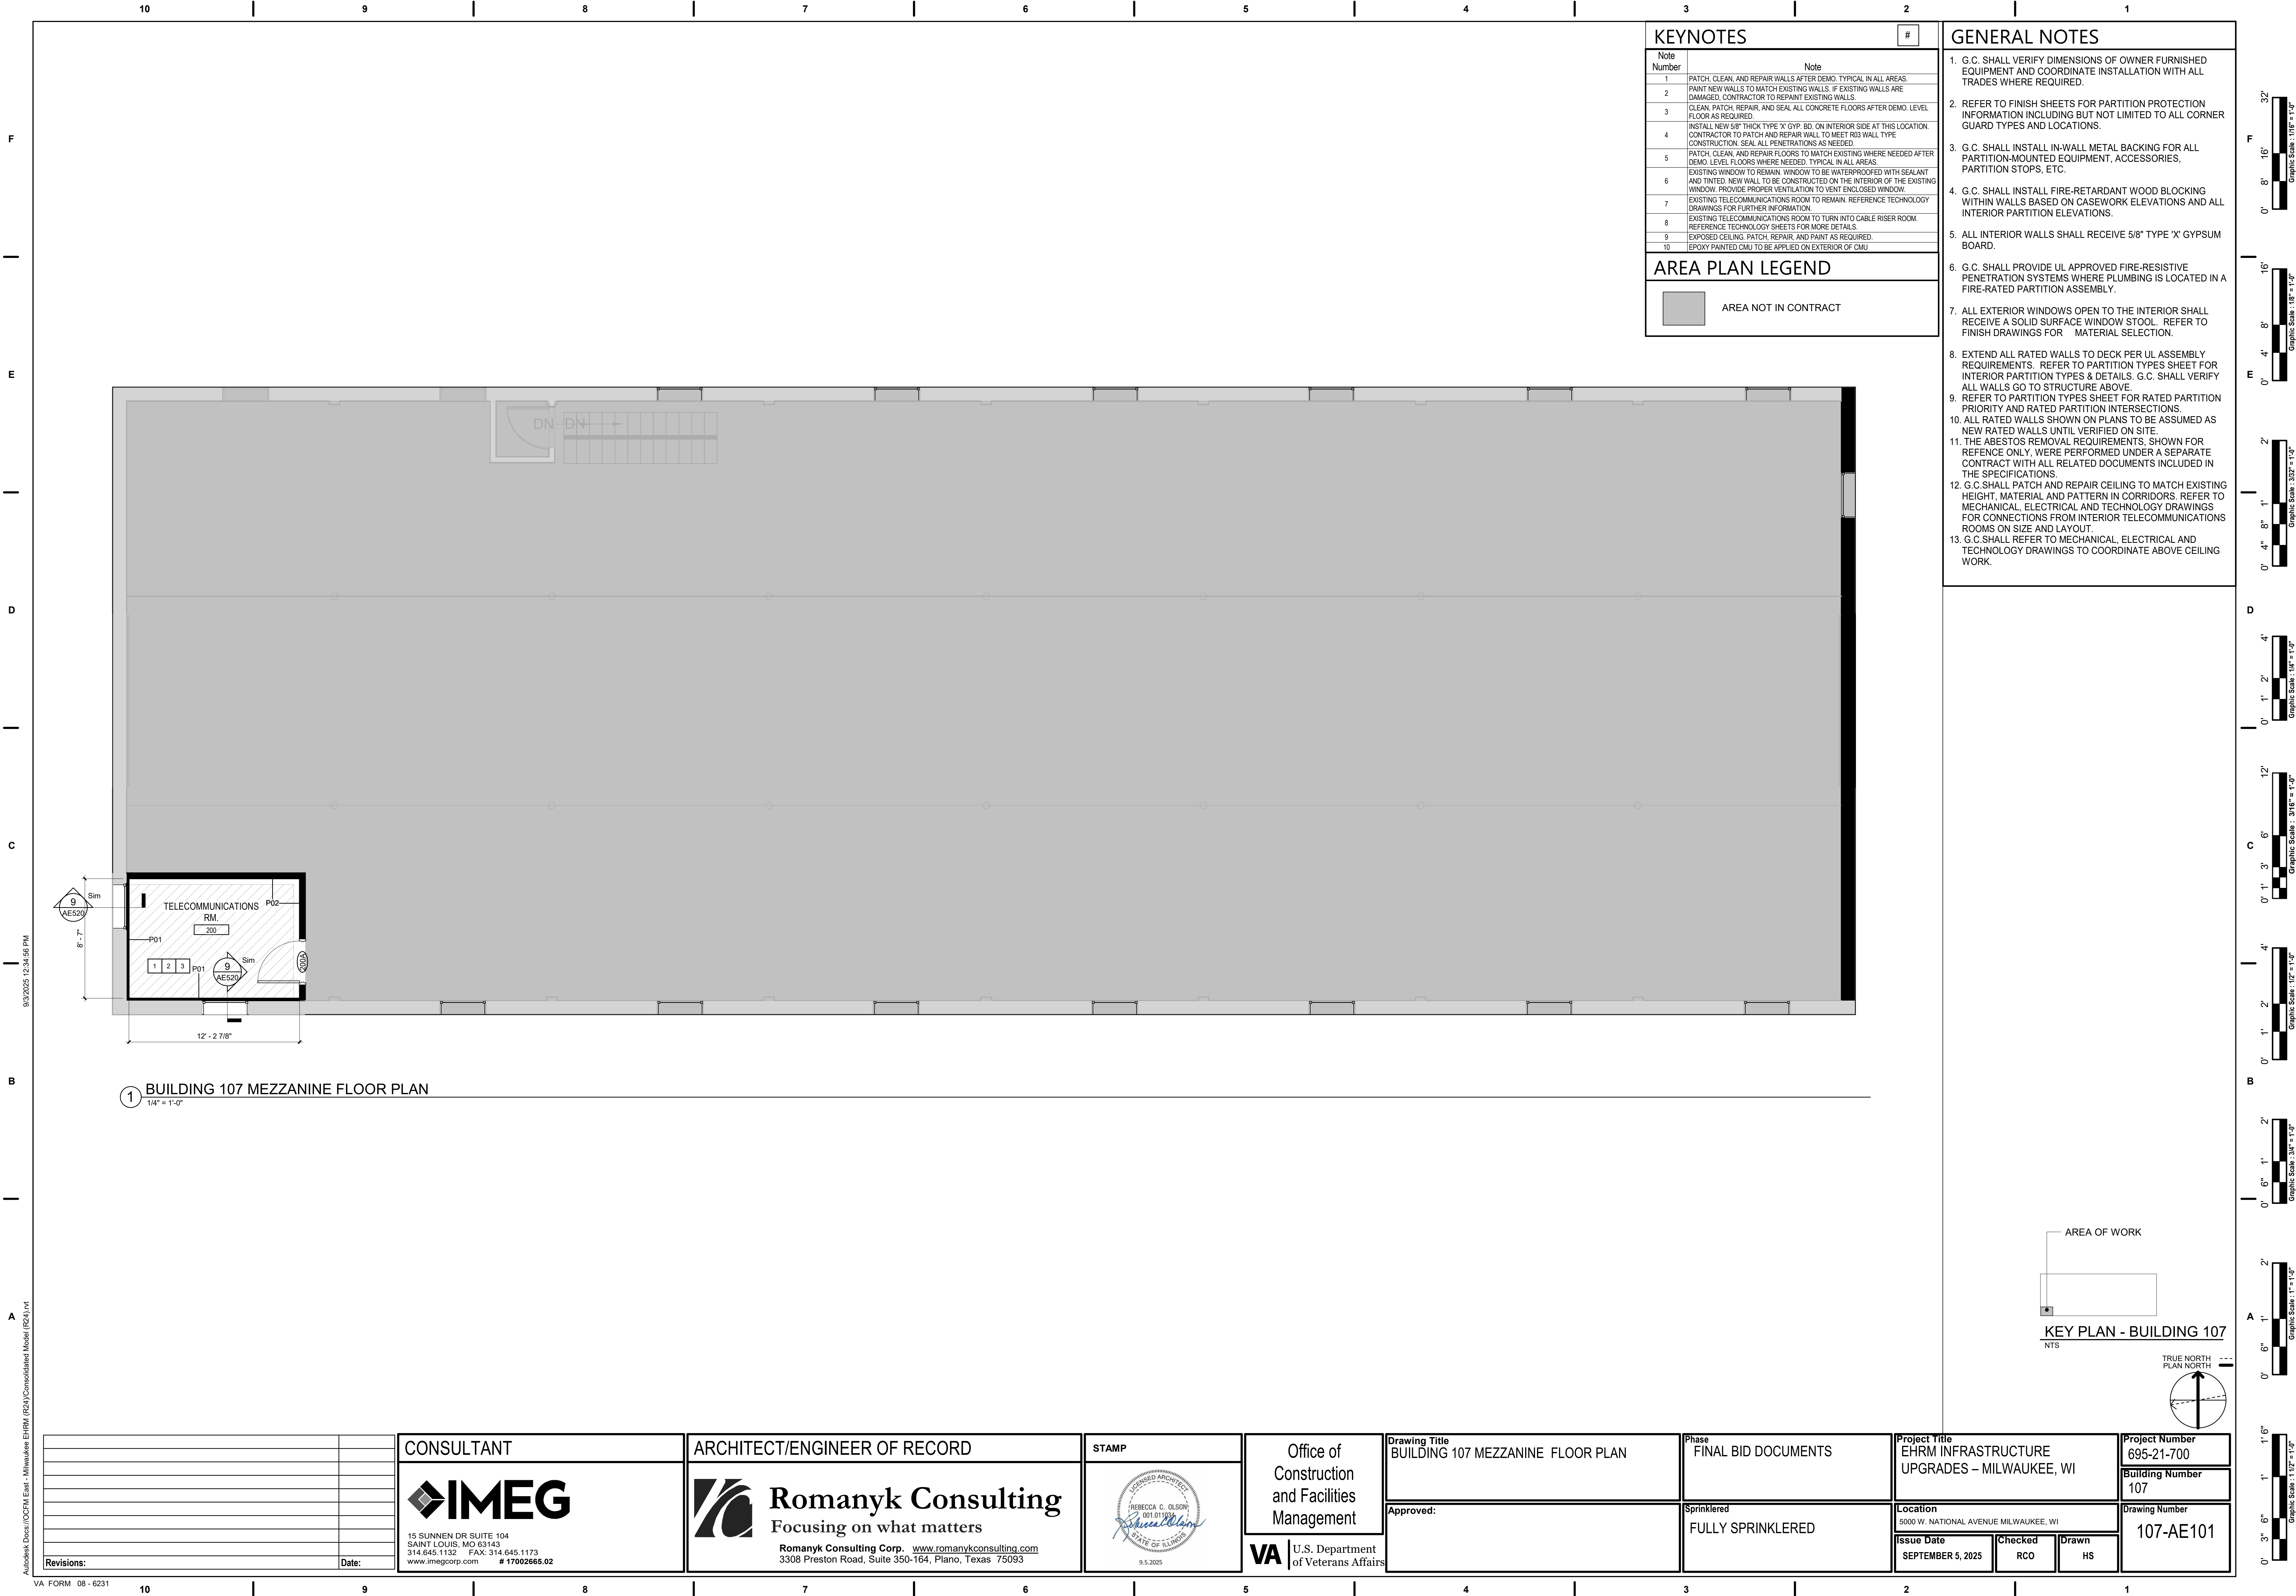

Autodesk Docs://OCFM East - Milwaukee EHRM (R24)/Consolidated Model (R24).rvt

[illegible]

F

E

D

C

B

A

9/3/2025 12:35:09 PM

Autodesk Docs (DCCFM) East - Milwaukee EHRM (R24) (Consolidated Model (R24)) v1

1

BUILDING 108 SECOND FLOOR PLAN

1/4" = 1'-0"

GENERAL NOTES



- G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
- REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
- G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
- G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
- ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
- G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
- ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
- EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
- REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
- ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
- THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
- G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS ON SIZE AND LAYOUT.
- G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

KEYNOTES

Note Number	Note
1	PATCH, CLEAN, AND REPAIR WALLS AFTER DEMO. TYPICAL IN ALL AREAS.
2	PAINT NEW WALLS TO MATCH EXISTING WALLS. IF EXISTING WALLS ARE DAMAGED, CONTRACTOR TO REPAINT EXISTING WALLS.
3	CLEAN, PATCH, REPAIR, AND SEAL ALL CONCRETE FLOORS AFTER DEMO. LEVEL FLOOR AS REQUIRED.
4	INSTALL NEW 5/8" THICK TYPE 'X' GYP. BD. ON INTERIOR SIDE AT THIS LOCATION. CONTRACTOR TO PATCH AND REPAIR WALL TO MEET R03 WALL TYPE CONSTRUCTION. SEAL ALL PENETRATIONS AS NEEDED.
5	PATCH, CLEAN, AND REPAIR FLOORS TO MATCH EXISTING WHERE NEEDED AFTER DEMO. LEVEL FLOORS WHERE NEEDED. TYPICAL IN ALL AREAS.
6	EXISTING WINDOW TO REMAIN. WINDOW TO BE WATERPROOFED WITH SEALANT AND TINTED. NEW WALL TO BE CONSTRUCTED ON THE INTERIOR OF THE EXISTING WINDOW. PROVIDE PROPER VENTILATION TO VENT ENCLOSED WINDOW.
7	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY DRAWINGS FOR FURTHER INFORMATION.
8	EXISTING TELECOMMUNICATIONS ROOM TO TURN INTO CABLE RISER ROOM. REFERENCE TECHNOLOGY SHEETS FOR MORE DETAILS.
9	EXPOSED CEILING. PATCH, REPAIR, AND PAINT AS REQUIRED.
10	EPOXY PAINTED CMU TO BE APPLIED ON EXTERIOR OF CMU.

AREA PLAN LEGEND

AREA NOT IN CONTRACT

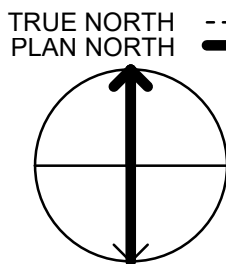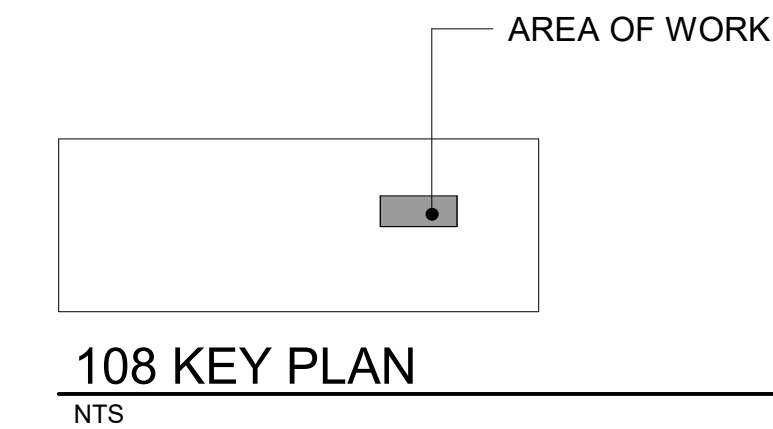

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

F

E

D

C

B

A

9/3/2025 12:35:11 PM

Autodesk Docs://OCFM East - Milwaukee EHRM (R24)/Consolidated Model (R24).rvt





GENERAL NOTES

1. G.C. SHALL VERIFY DIMENSIONS OF OWNER FURNISHED EQUIPMENT AND COORDINATE INSTALLATION WITH ALL TRADES WHERE REQUIRED.
2. REFER TO FINISH SHEETS FOR PARTITION PROTECTION INFORMATION, INCLUDING BUT NOT LIMITED TO ALL CORNER GUARD TYPES AND LOCATIONS.
3. G.C. SHALL INSTALL IN-WALL METAL BACKING FOR ALL PARTITION-MOUNTED EQUIPMENT, ACCESSORIES, PARTITION STOPS, ETC.
4. G.C. SHALL INSTALL FIRE-RETARDANT WOOD BLOCKING WITHIN WALLS BASED ON CASEWORK ELEVATIONS AND ALL INTERIOR PARTITION ELEVATIONS.
5. ALL INTERIOR WALLS SHALL RECEIVE 5/8" TYPE 'X' GYPSUM BOARD.
6. G.C. SHALL PROVIDE UL APPROVED FIRE-RESISTIVE PENETRATION SYSTEMS WHERE PLUMBING IS LOCATED IN A FIRE-RATED PARTITION ASSEMBLY.
7. ALL EXTERIOR WINDOWS OPEN TO THE INTERIOR SHALL RECEIVE A SOLID SURFACE WINDOW STOOL. REFER TO FINISH DRAWINGS FOR MATERIAL SELECTION.
8. EXTEND ALL RATED WALLS TO DECK PER UL ASSEMBLY REQUIREMENTS. REFER TO PARTITION TYPES SHEET FOR INTERIOR PARTITION TYPES & DETAILS. G.C. SHALL VERIFY ALL WALLS GO TO STRUCTURE ABOVE.
9. REFER TO PARTITION TYPES SHEET FOR RATED PARTITION PRIORITY AND RATED PARTITION INTERSECTIONS.
10. ALL RATED WALLS SHOWN ON PLANS TO BE ASSUMED AS NEW RATED WALLS UNTIL VERIFIED ON SITE.
11. THE ABESTOS REMOVAL REQUIREMENTS, SHOWN FOR REFERENCE ONLY, WERE PERFORMED UNDER A SEPARATE CONTRACT WITH ALL RELATED DOCUMENTS INCLUDED IN THE SPECIFICATIONS.
12. G.C. SHALL PATCH AND REPAIR CEILING TO MATCH EXISTING HEIGHT, MATERIAL AND PATTERN IN CORRIDORS. REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS FOR CONNECTIONS FROM INTERIOR TELECOMMUNICATIONS ROOMS ON SIZE AND LAYOUT.
13. G.C. SHALL REFER TO MECHANICAL, ELECTRICAL AND TECHNOLOGY DRAWINGS TO COORDINATE ABOVE CEILING WORK.

RCP KEYNOTES

NOTE NUMBER	NOTE
1	EXPOSED CEILING
2	DEMO EXISTING CEILING FINISHES AND FIXTURES
3	REPLACE CEILING TILES IN AREA OF WORK
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK
5	PATCH AND REPAIR EXISTING CEILING
9	EXPOSED CEILING. PATCH, REPAIR AND PAINT AS REQUIRED.
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.

RCP LEGEND

	EXPPOSED CEILING
	CHAINED HUNG LIGHT FIXTURE
	CEILING ELEVATION A.F.F.
	MECHANICAL SUPPLY DIFFUSER
	MECHANICAL RETURN GRILLE
	MECHANICAL EXHAUST GRILLE

108 KEY PLAN

NTS

— AREA OF WORK

TRUE NORTH
PLAN NORTH



1 BUILDING 108 SECOND FLOOR RCP
1/4" = 1'-0"

1/4" = 1'-0"

[illegible]

F

E

D


C

B


A

9/3/2025 12:35:16 PM

Autodesk Docs://OCFM East - Milwaukee EHRM (R24)/Consolidated Model (R24).rvt


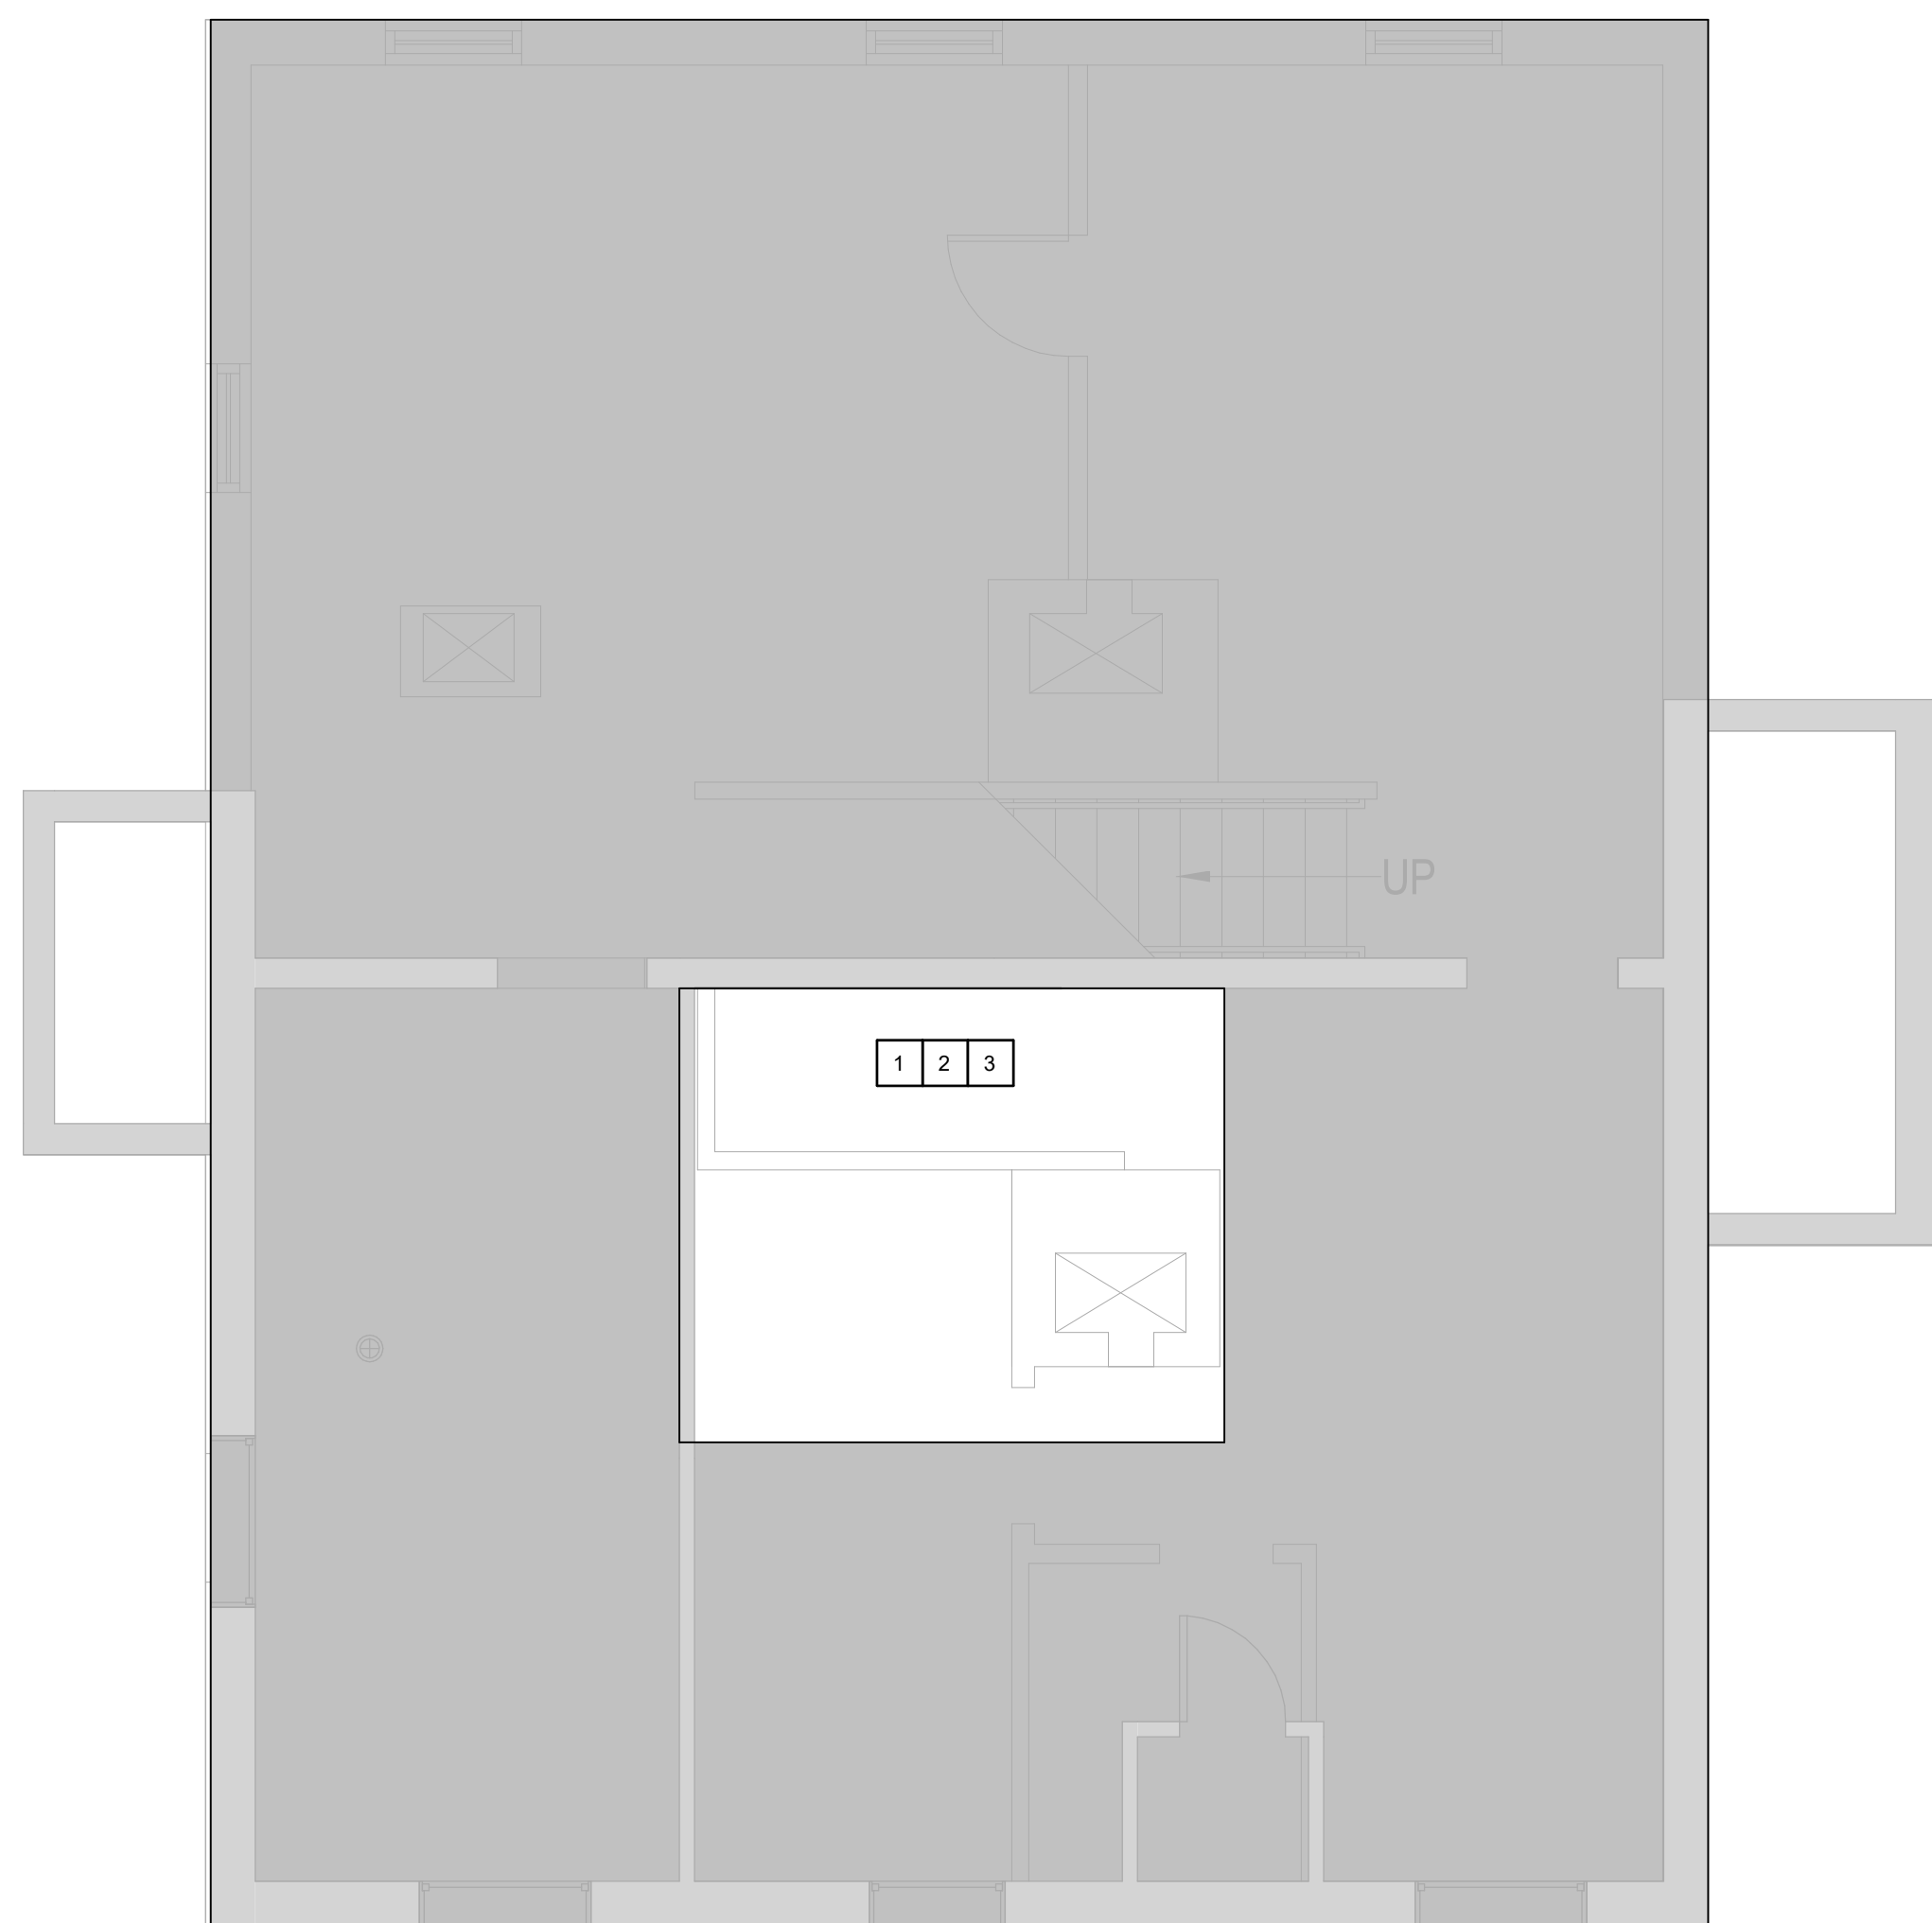


1 BUILDING 109 BASEMENT DEMO FLOOR PLAN
1/4" = 1'-0"

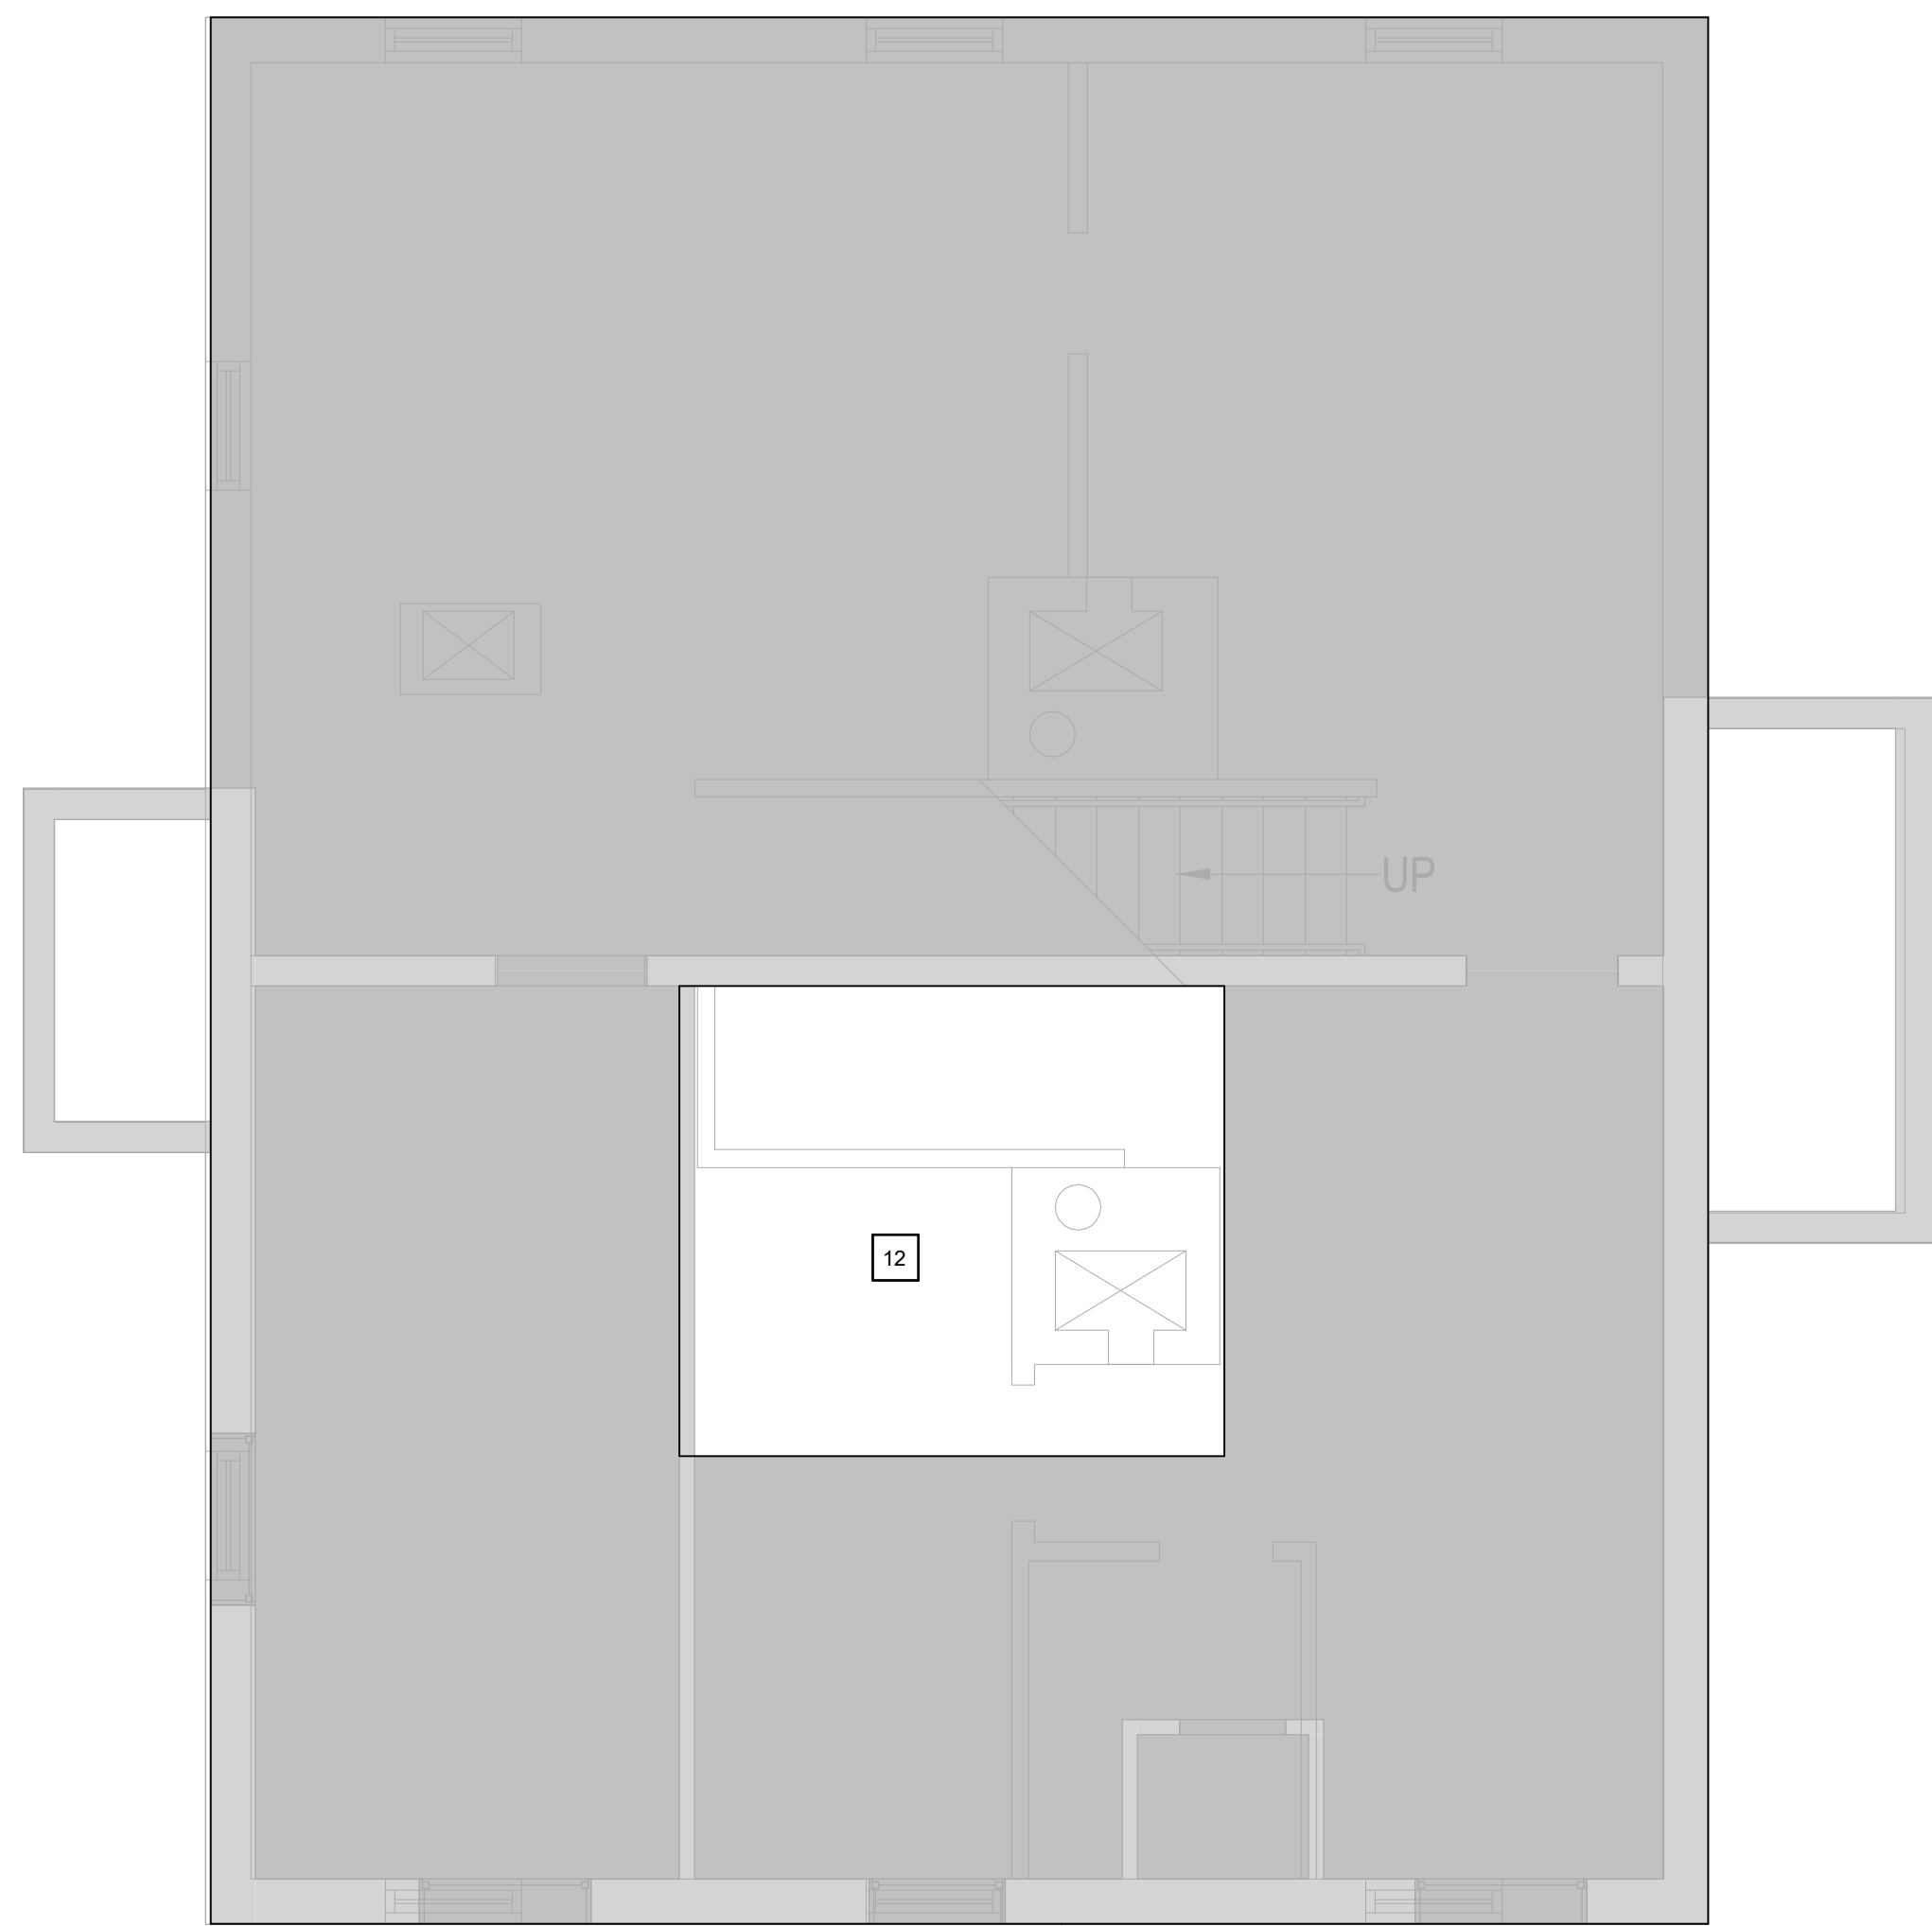

2 BUILDING 109 BASEMENT DEMO RCP
1/4" = 1'-0"


DEMO KEYNOTES		#
Number	Note	
1	REMOVE AND SALVAGE FURNITURE, EQUIPMENT AND FIXTURES SECURED TO THE WALL, STORE AT A DESIGNATED LOCATION.	
2	REMOVE FLOOR FINISH, FLOOR COVERING, WALL PACE, WALL COVERING, WALLS AND ASSOCIATED COMPONENTS. CLEAN AND PATCH WALLS AND FLOORS AS REQUIRED TO RECEIVE NEW FINISHES. LEVEL FLOOR AS REQUIRED FOR NEW FINISH.	
3	REMOVE ALL COVERINGS FROM EXISTING WALL PARTITION ASSEMBLIES ON THE DEMO SIDE ONLY. DO NOT REMOVE FRAMING, SOUND BATTIS, GYP BOARD OR INSULATION. REFER TO THE DEMO SCHEDULE FOR NEW FINISHES. REFER TO THE FLOOR PLAN FOR NEW WORK.	
4	REMOVE EXISTING DOOR, DOOR FRAME, DOOR HARDWARE AND DISPOSE OF SAME. PREPARE WALL TO BE INFILLED.	
5	EXISTING TELECOMMUNICATIONS ROOM TO REMAIN. REFERENCE TECHNOLOGY SHEETS FOR MORE INFORMATION.	
6	REMOVE EXISTING CASEWORK.	
7	REMOVE EXISTING TELE COMMUNICATIONS ROOM EQUIPMENT AND STORE IN VA DESIGNATED AREA.	
8	REMOVE EXISTING SINK. REFERENCE PLUMBING DEMOLITION SHEET FOR ADDITIONAL INFORMATION.	
9	REMOVE EXISTING SMOOT.	
10	EXISTING WINDOW TO REMAIN. SEAL WINDOW AND TINT FROM INTERIOR OF WINDOW (TYP). DO EXISTING TRIM AND PREPARE WALL TO BE INFILLED TO MATCH EXISTING.	
11	REMOVE EXISTING CEILING FINISHES AND FIXTURES.	

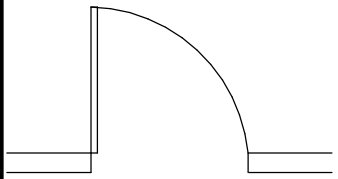DEMO LEGEND	
	AREA NOT IN CONTRACT
	EXISTING WALL AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS.
	EXISTING DOOR, FRAME, HARDWARE AND ASSOCIATED COMPONENTS SHALL BE REMOVED - REFER TO DEMOLITION KEYNOTES FOR ADDITIONAL DETAILS AT SPECIFIC CONDITIONS
	EXISTING WALL SHALL REMAIN
	EXISTING DOOR, FRAME AND HARDWARE SHALL REMAIN


RCP KEYNOTES		#
NOTE NUMBER	NOTE	
1	EXPOSED CEILING	
2	DEMO EXISTING CEILING FINISHES AND FIXTURES	
3	REPLACE CEILING TILES IN AREA OF WORK	
4	REMOVE, SALVAGE, AND REINSTALL CEILING TILES IN AREA OF WORK	
5	PATCH AND REPAIR EXISTING CEILING	
9	EXPOSED CEILING. PATCH, REPAIR AND PAINT AS REQUIRED.	
12	DEMO EXISTING CEILING FINISHES AND FIXTURES.	

DEMO NOTES

1. DO NOT SCALE DRAWINGS. NOTIFY ARCHITECT OF ANY DIMENSIONAL DISCREPANCIES DISCOVERED DURING CONSTRUCTION.
2. REFER TO MECHANICAL, PLUMBING, ELECTRICAL, AND TECHNOLOGY DRAWINGS FOR MORE INFORMATION.
3. ALL ABANDONED LINES, PIPES, CONDUITS DISCOVERED AFTER CEILING REMOVAL ARE ALSO TO BE REMOVED.
4. REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF EMERGENCY LIGHTING.
5. CENTER CEILING AND LIGHTS IN ALL SPACES WHERE POSSIBLE, U.N.O.
6. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS OF UNDER-CABINET LIGHT FIXTURES.
7. GYP. BD. SOFFITS ABOVE UPPER CABINETS SHALL EXTEND TO TOP OF CABINET (7'-0" U.N.O.).
8. THIS SHEET IS FOR LAYOUT ONLY. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT FIXTURE QUANTITY. ALL SWITCHES, OUTLETS, LIGHTS, DIFFUSERS, ETC. MUST BE LOCATED PER ARCHITECTURAL DRAWINGS WHERE APPLICABLE.
9. PROVIDE ACCESS PANELS IN GYPSUM CEILINGS WHEN REQUIRED TO ACCESS ABOVE CEILING EQUIPMENT. (SEE SPECS)
10. ALL CEILINGS SHALL BE 6'-0" AFF U.N.O.
11. REFER TO FINISH DRAWINGS FOR CEILING GRID AND PANEL TYPE AND SIZE.
12. BOTTOM OF GYP. BD. BULKHEADS SHALL BE 8'-6" AFF U.N.O.
13. ALL PARTITION WALLS SHALL EXTEND TO UNDERSIDE OF DECK ABOVE U.N.O.
14. ALL FRAMING MEMBERS SHALL BE ADEQUATELY SIZED FOR THE REQUIRED SPAN/SPACING. REFER TO SPECS FOR ADDITIONAL GYP. BD. INFORMATION. GYP. BD. CEILINGS SHALL BE INSTALLED PER ASTM C840.
15. VERIFY IN FIELD ALL DIMENSIONS PRIOR TO PROCEEDING WITH ANY WORK AND AFTER DEMOLITION SITE SURVEY THE SPACE DIMENSIONS. EQUIPMENT, DOOR, MECHANICAL, ELECTRICAL, FIRE PROTECTION, ETC. AND COORDINATE WITH CONSTRUCTION BRING ANY DISCREPANCIES AND OR QUESTION TO THE AE AND COR PRIOR TO PROCEEDING FORWARD WITH ANY NEW CONSTRUCTION. USE THIS CHECK FOR SUBCONTRACTOR REVIEW AS ACCEPTANCE OF CONDITIONS.

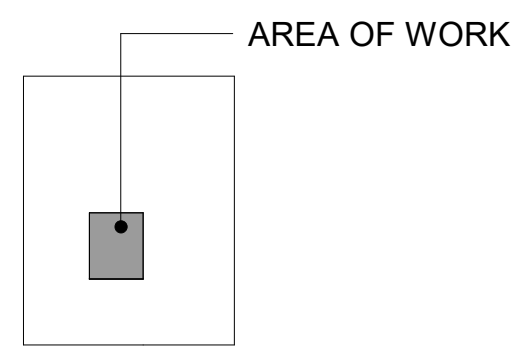

109 KEY PLAN

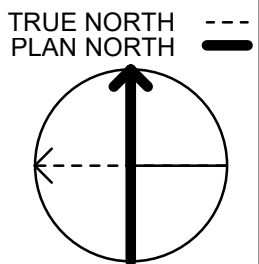[illegible]

CONSULTANT

 **IMEG**

15 SUNNEN DR SUITE 104
SAINT LOUIS, MO 63143
314.645.1132 FAX: 314.645.1173
www.imegcorp.com # 17002665.02

ARCHITECT/ENGINEER OF RECORD

 **Romanyk Consulting**
Focusing on what matters

Romanyk Consulting Corp. www.romanykconsulting.com
3308 Preston Road, Suite 350-164, Plano, Texas 75093

STAMP



REBECCA C. OLSON
001.011033
State of Illinois
9.5.2025

Office of
Construction
and Facilities
Management

VA | U.S. Department
of Veterans Affairs

Drawing Title	
BUILDING 109 BASEMENT FLOOR DEMO PLAN	
Approved:	

Phase	FINAL BID DOCUMENTS
Sprinklered	FULLY SPRINKLERED

Project Title EHRM INFRASTRUCTURE UPGRADES – MILWAUKEE, WI		
Location 5000 W. NATIONAL AVENUE MILWAUKEE, WI		
Issue Date SEPTEMBER 5, 2025	Checked RCO	Drawn HS

Project Number 695-21-700
Building Number 109
Drawing Number 109-AD101