

**US Army Corps  
of Engineers**  
Louisville District

---

# **Solicitation For**

## **Renovate/Add to Aircrew Readiness Facility**

### **Beale AFB, CA**

**P2: 513180/513182**

**Design-Bid-Build**

**Record Drawings- For Information Only  
Certified Final Design**

**29 April 2025**  
**W912QR25BA007-0002**

**ARIMS: 200A**  
**Disposition: Maintain for 15yrs after construction**

# GENERAL NOTES

These drawings are for design layout only. All measurements and conditions are subject to the Contractor's physical inspection and verification. Contracting Officer is to be advised, in writing before bid submissions, of any conditions which do not agree with the Design Drawings.

All changes required during construction, due to the Contractors not complying with the above, will be the sole responsibility of the Contractors, who will bear all added costs incurred. No extensions of time of completion will be assumed unless agreed to, in writing by Contracting Officer.

The Design Drawings are intended to be a guide to manufacturers and fabricators of equipment. For this work it will be the Contractors' sole responsibility to obtain the field measurements to insure that all bid items or equipment fit as indicated on the Design Drawings. Notwithstanding any omissions, it will be the Contractors' responsibility to determine actual construction details and to fabricate all items shown on the Design Drawings in accordance with accepted good practice. Should changes to the design be required or suggested, these changes are to be submitted to Contracting Officer for approval prior to cost or Change Order submission.

Contractors will be responsible for complying with all municipal governing authorities, the Building Management and Government rules and regulations, if applicable.

DO NOT SCALE ANY DESIGN DRAWINGS FOR CONSTRUCTION PURPOSES.

- Contractors will take all measures necessary during construction work to protect other portions of the building and other portions of the work from damages. And, to protect other tenants or users from disruptions and disturbances. In the event of any damages, the Contractor responsible will be liable for repairs to the Contracting Officer's satisfaction.
- If clarification because of field conditions are required, the Contracting Officer is to be notified immediately.
- Contractors will be responsible for all excavation done beyond what is called for in the drawings and shall minimize generation of excess soils.
- Contractors shall clean all debris on a daily basis, remove all debris from site and will protect the work area to prevent the tracking or flying of dust and dirt.
- Large scale details govern over smaller scale details.
- All plan dimensions are given to face of stud unless otherwise noted; and dimensions govern over scaling of drawing measurements.
- Unless noted, all new materials are to match existing adjacent materials and are to meet the requirements of the local Building Codes.
- New gypsum board partitions to be taped, finished with drywall compounds, and sanded smooth.
- Walls to receive wall coverings or paint to be prepared per manufacturer's specifications.
- Walls calling for paint are to be painted to nearest corner unless otherwise noted.
- Samples of all paint or wall covering to be submitted to Contracting Officer for approval.
- Wood finish samples to be submitted for Contracting Officer approval.
- Wood surfaces to be painted are to be properly sanded before finish coats are applied.
- Paint all exposed gypsum board with 1 primer coat and 2 finish coats.
- All slab/wall coring, routing, chopping, etc. to be performed to prevent disturbance to other tenants/users.
- Seal all slab/wall penetrations with approved sealant.
- Provide a portable fire extinguisher with a rating of not less than 2A10BC within 75 foot travel distance to all portions of the tenant space. Minimum size \_\_\_\_\_ 10lbs.
- Every exit door shall be operable from the inside without the use of a key or any special knowledge or effort.
- All exit signs shall have minimum 6" high letters on a contrasting background.
- All penetrations through the exterior of the building shall be sealed/caulked with approved 50 year min. durability materials.
- The Contractor shall guarantee his work to be free from defects in material and workmanship for one year following the Government's acceptance, shall promptly repair or replace any part of the work which malfunctions during that period, and shall restore to new condition without cost to the Government, any damage caused by such malfunctions or repair.
- All equipment construction and installation shall meet ANSI certification. All plumbing, gas lines, and conduits, etc., are to be concealed where possible. Otherwise, they must be a minimum of six inches off the floor and not run across aisle space and to be installed at least 1/2" away from wall to facilitate cleaning.
- The contractor shall implement best management practices to ensure pollutants are not released or discharged to the drainage ditches, vernal pools, and seasonal wetlands in the project area. The contractor shall install and maintain erosion control system(s) such as silt fences, straw bale barriers or erosion control/stabilization blankets, as needed to protect drainage ditches from sedimentation resulting from construction activity. The contractor shall remove the erosion control systems when the soil is revegetated.
- All new roof penetrations are to be kept to a minimum.
- All vegetated areas disturbed by construction shall be revegetated with a 9 CES/CEV approved seed and mulch prescription. All landscaped areas disturbed by construction shall be restored to their original condition or better, e.g., sod trees and shrubs, mulch replaced along with any irrigation systems, natural or man made drainage ways.
- Contractor must comply with Beale AFB Integrated Solid Waste Management Plan, including recycle, reuse or mulch construction and demolition debris when possible. Report amount of construction debris diverted from landfill, such as lumber reused or materials recycled, to 9 CES/CEVP; Report total waste disposed of, and total diverted from landfill, in tons or pounds. Construction debris should be disposed of off Base.
- Contractor must comply with Beale AFB Affirmative Procurement Plan.
- Items with recycled content shall be purchased where possible, and waiver forms submitted to waive mandatory recycled content when required in accordance with that plan.
- Due to the site's proximity to the aircraft parking apron this site has a probability of contamination from fuels or aircraft solvents; therefore, any soils removed from the site must be tested before removal from the site and if found contaminated must be disposed of in accordance with California Law. The contractor should make every effort to balance the excavation on the site to eliminate the need to remove soils from the site. In addition if soil is encountered that the contractor suspects is contaminated due to smell or appearance it must be tested to determine its suitability for use on the site and if found contaminated a change order must be initiated to properly dispose of the soil. If suspect soil is found, the contractor will, as part of this contract, place suspect soil on visqueen at an approved GOV location on concrete or asphalt. Suspect soil will then be covered with visqueen to protect it from the elements until 9CES/CEV tests the soil. (approx 14 days) If contaminated the government will either modify this contract or contract under a separate solicitation to dispose of the soil. If clean, the soil may be used by the contractor on the site or will be removed to a soils storage area on base.
- SITE IS KNOWN AREA FOR UXO (UNEXPLODED ORDNANCE). IF SUSPECT ITEMS ARE FOUND OR BELIEVED TO BE IN THE AREA, NOTIFY 9CE EOD AT 1-530-634-9070.
- If entry into manhole is required, follow proper confined space entry protocols.



## DESIGN/BUILD CES/CECN AERO CLUB ADMIN./TRAINING FACILITY # 1232 CONTRACT No. FA4686-07-R-0015 (BAEY 05-0035) BEALE AIR FORCE BASE, CALIFORNIA

### SCOPE OF WORK

Design and construct a 36'-0" X 50', approximately 1700 S.F., AERO Club Admin/Training Facility with 300 S.F. of covered observations area. The new facility will house: Offices for AERO Club Manager, Chief Flight Instructor and Assistant Manager/ Retail Manager area, Classroom, Flight Planning and Weather Room, FAA CAT's Training Room, Briefing/ Debriefing Rooms, Restrooms, Janitor's Closet, Break Area with Kitchen, Storage and Telecommunications Closet. Provide the building's mechanical room with an exterior entrance only, keyed separately to Base Civil Engineering Standards. The facility shall be steel-framed stucco construction with a gable, standing seam metal roof in conformance with the BAFB Facility Design Standards.



### PROJECT TEAM

**PRIME CONTRACTOR**  
DENNIS SIMAC  
TEPA EC  
9TH & J ST.  
BEALE AFB, CA 95903  
1.530.788.7618 OFFICE  
1.530.788.7784 FAX  
dennis.simac@tepa.com

**CIVIL**  
GREGORY B. HALING  
HALING & ASSOCIATES  
166 EATON ROAD, STE. B  
CHICO, CA 95973  
1.530.342.6958 OFFICE  
1.530.342.2874 FAX  
greg\_haling@haling-associates.com

**ELECTRICAL**  
DARREN W. KORANDA  
RICHAH ELECTRIC CO.  
P.O. BOX 1847  
YUBA CITY, CA 95992  
1.530.673.4682 OFFICE  
1.530.673.4618 FAX  
richall\_1@yahoo.com


**FOUNDATION ENGINEER**  
LYNN KNAPP  
KNAPP & ASSOCIATES, INC.  
408 SOUTH STODDARD AVE.  
SAN BERNARDINO, CA 92401  
1.909.889.0115 OFFICE  
1.909.889.0455 FAX  
knappae@aol.com

**ARCHITECT**  
PHILIP HAWKINS  
PHILIP HAWKINS ARCHITECT, INC. + ASSC.  
735 SUNRISE BLVD. STE. 101  
ROSEVILLE, CA 95661  
1.916.878.5355 OFFICE  
1.916.878.5359 FAX  
philip@pha-inc.biz


**BUILDING CONTRACTOR**  
DEAN WEBB  
FRANK WEBB CONSTRUCTION, INC.  
1758 OAKLEY LANE  
WHEATLAND, CA 95692  
1.530.633.4072 OFFICE  
1.530.633.4007 FAX  
frankdwebb@yahoo.com

**MECHANICAL**  
GREG PETERS  
W.V. ALTON, INC.  
P.O. BOX 129  
211 ELM ST.  
MARYSVILLE, CA 95901  
1.530.742.7119 OFFICE  
1.530.742.9422 FAX  
gtpeters@syix.com

### LOCATION MAP

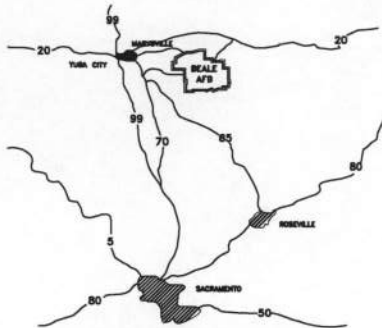

### VICINITY MAP

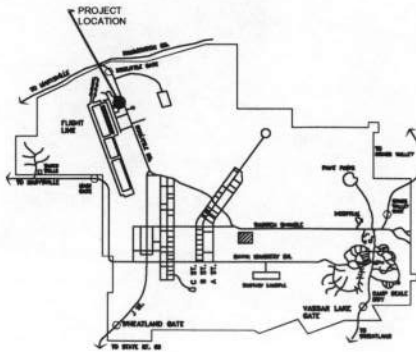

### BASE MAP

# DRAWING LEGEND

|  |                                                         |                                |
|--|---------------------------------------------------------|--------------------------------|
|  | GFCI                                                    | GROUND FAULT INTERRUPT CIRCUIT |
|  | DUPLEX OUTLET AT 15" A.F.F. U.O.N.                      |                                |
|  | 4-PLEX OUTLET AT 15" A.F.F. U.O.N.                      |                                |
|  | DEDICATED CIRCUIT                                       |                                |
|  | WALL SWITCH AT 42" A.F.F. U.O.N.                        |                                |
|  | 3-WAY WALL SWITCH AT 42" A.F.F. U.O.N.                  |                                |
|  | DIMMER SWITCH AT 42" A.F.F. U.O.N.                      |                                |
|  | THERMOSTAT AT 42" A.F.F. U.O.N.                         |                                |
|  | FLUSH MOUNTED CAT. 5 CABLE RECEPTACLE AT 12"            |                                |
|  | FLUSH MOUNTED TELEPHONE RECEPTACLE AT 12" A.F.F. U.O.N. |                                |
|  | DOOR SCHEDULE INDICATION                                |                                |
|  | WINDOW SCHEDULE INDICATION                              |                                |
|  | ADJ.                                                    | ADJACENT                       |
|  | A.F.F.                                                  | ABOVE FINISHED FLOOR           |
|  | A.F.G.                                                  | ABOVE FINISHED GRADE           |
|  | AL/ALUM.                                                | ALUMINUM                       |
|  | BA.                                                     | BATHROOM                       |
|  | BD.                                                     | BOARD                          |
|  | BDR.                                                    | BEDROOM                        |
|  | BRKFST.                                                 | BREAKFAST                      |
|  | CAB.                                                    | CABINET                        |
|  | CALC.'S                                                 | CALCULATIONS                   |
|  | CEM.                                                    | CEMENT                         |
|  | CLG.                                                    | CEILING                        |
|  | CLO.                                                    | CLOSET                         |
|  | CNTR.                                                   | COUNTER                        |
|  | COL.                                                    | COLUMN                         |
|  | CONSTR.                                                 | CONSTRUCTION                   |
|  | CONC.                                                   | CONCRETE                       |
|  | CPT.                                                    | CARPET                         |
|  | D.                                                      | DISHWASHER                     |
|  | DET.                                                    | DETAIL/DETAILS                 |
|  | DIN.                                                    | DINING                         |
|  | DN.                                                     | DOWN                           |
|  | DRWGS.                                                  | DRAWING/DRAWINGS               |
|  | EA.                                                     | EACH                           |
|  | ELEC.                                                   | ELECTRIC/ELECTRICAL            |
|  | ELEV.                                                   | ELEVATION                      |
|  | EXT.                                                    | EXTERIOR                       |
|  | FAM.                                                    | FAMILY                         |
|  | FIN.                                                    | FINISH                         |
|  | F.F.                                                    | FINISHED FLOOR                 |
|  | FLR.                                                    | FLOOR                          |
|  | FLUOR.                                                  | FLUORESCENT                    |
|  | F.O.C.                                                  | FACE OF CONC. CEM.             |
|  | F.O.M.                                                  | FACE OF MASONRY                |
|  | F.O.S.                                                  | FACE OF STUD                   |
|  | F.P.                                                    | FIREPLACE                      |
|  | F.S.                                                    | FINISHED SURFACE               |
|  | FT.                                                     | FOOT/FEET                      |
|  | GRNBD.                                                  | GREEN BOARD                    |
|  | GWB                                                     | GYPSON WALL BOARD              |
|  | GYPBD.                                                  | GYPSON BOARD (SHEETROCK)       |
|  | H.C.                                                    | HOLLOW CORE                    |
|  | H.M.                                                    | HOLLOW METAL                   |
|  | HGT.                                                    | HEIGHT                         |
|  | HTR.                                                    | HEATER                         |
|  | H/W                                                     | HOT WATER HEATER               |
|  | KIT.                                                    | KITCHEN                        |
|  | INCAND.                                                 | INCANDESCENT                   |
|  | INSUL.                                                  | INSULATION                     |
|  | INT.                                                    | INTERIOR                       |
|  | LAUN.                                                   | LAUNDRY                        |
|  | LIN.                                                    | LINEN                          |
|  | LIV.                                                    | LIVING                         |
|  | LL.                                                     | LANDLORD                       |
|  | LOC.                                                    | LOCATION                       |
|  | L.P.                                                    | LIQUID PETROLEUM               |
|  | MANUF.                                                  | MANUFACTURED                   |
|  | MATL.                                                   | MATERIAL                       |
|  | MIN.                                                    | MINIMUM                        |
|  | MTL.                                                    | METAL                          |
|  | NTL.                                                    | NATURAL                        |
|  | N.I.C.                                                  | NOT IN CONTRACT                |
|  | N.T.S.                                                  | NOT TO SCALE                   |
|  | O.C.                                                    | ON CENTER                      |
|  | OCTAG.                                                  | OCTAGONAL                      |
|  | PART.                                                   | PARTITION                      |
|  | PREFAB.                                                 | PREFABRICATED                  |
|  | PTD.                                                    | PAINTED                        |
|  | RECEPT.                                                 | RECEPTACLE                     |
|  | REQ'D                                                   | REQUIRED                       |
|  | REINFORCED                                              | REINFORCE/REINFORCED           |
|  | REV.                                                    | REVERSE/REVERSED               |
|  | RM.                                                     | ROOM                           |
|  | S.C.                                                    | SOLID CORE                     |
|  | SHT.                                                    | SHEET                          |
|  | SPEC.                                                   | SPECIFICATION                  |
|  | STL.                                                    | STEEL                          |
|  | SURF.                                                   | SURFACE                        |
|  | SW.                                                     | SHERWIN WILLIAMS               |
|  | TYP.                                                    | TYPICAL                        |
|  | U.O.N.                                                  | UNLESS OTHERWISE NOTED         |
|  | WD.                                                     | WOOD                           |
|  | WTR.                                                    | WATER                          |
|  | 14T                                                     | 14 TREADS/XXTREADS             |
|  | 15R                                                     | 15 RISERS/XXRISERS             |

### DRAWING INDEX

#### ARCHITECTURAL/CIVIL:

- TITLE SHEET, GENERAL NOTES, VICINITY MAP
- CIVIL SITE PLAN
- CIVIL GRADING & UTILITY PLANS
- CIVIL DESIGN DETAILS
- ARCHITECTURAL SITE PLAN
- FLOOR PLAN & FINISH SCHEDULE
- REFLECTED CEILING PLAN
- ELEVATIONS, EXTERIOR & INTERIOR
- SECTION

#### STRUCTURAL:

- GENERAL NOTES FOUNDATION
- FOUNDATION DESIGN & DETAILS

#### MEP:

- MECHANICAL PLANS/SCHEDULE/SYMBOLS
- PLUMBING WATER SUPPLY & WASTE PLAN
- LIGHTING PLAN/LEGEND/ELECTRICAL NOTES
- ELECTRICAL PLAN/PANEL SCHEDULE

#### FIRE ALARM:

- FIRE ALARM LEGEND, NOTES & SCHEDULE
- FLOOR PLAN, ONE-LINE RISER DIAGRAM & CALC'S
- WHEELLOCK POWER SUPPLY DETAIL
- PERIPHERAL DEVICE DETAILS

### BUILDING CODE INFO.

2003 IBC  
2003 IMC  
2003 IPC  
2005 NEC  
2006 CALIFORNIA ACCESS & FED ADA CODES  
LIFE SAFETY CODE - CURRENT EDITION  
NFPA - CURRENT EDITION  
UFAS - CURRENT EDITION  
BEALE AFB FACILITY DESIGN GUIDE - CURRENT EDITION

AERO CLUB ADMIN/TRAINING FACILITY  
TOTAL S.F. = 1961 S.F.  
BUILDING = 1655 S.F.  
COVERED OBSVN. AREA = 306 S.F.

OCCUPANT LOADING:  
CLASSROOM (X<sub>50</sub>), 591/20 = 30  
OFFICES & OTHER ROOMS (X<sub>100</sub>), 1064/100 = 11  
TOTAL OCC.LOAD = 41  
REQUIRED EXITS = 1  
TOTAL REQ'D. WIDTH = 41x 20" = 82"



## BEALE Air Force Base

| APPROVED     |                         |
|--------------|-------------------------|
| SIGNATURE    | OFFICE                  |
|              | Base Civil Engineer     |
|              | Chief of Engineering    |
|              | Chief of Design         |
|              | Chief of Environmental  |
|              | Contracting             |
|              | User                    |
| COORDINATION |                         |
|              | Air-Field Manager       |
|              | Ground Safety           |
|              | Communications          |
|              | Computers               |
|              | Environmental Engineer  |
|              | Security Police         |
|              | Security Systems        |
|              | Fire Chief              |
|              | Chief of Operations     |
|              | Construction Management |
|              | Roofing Engineer        |
|              | Pavements Engineer      |
|              | Corrosion Engineer      |
|              | Production              |
|              | Coatings Engr.          |

DESIGN FIRM  
**PHILIP  
HAWKINS  
ARCHITECT**  
INC+ASSOCIATES  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
735 SUNRISE AVE. STE. 101  
ROSEVILLE, CALIFORNIA 95661  
916-878-5355



FILE: 05-0035 Beale

|          |    |                 |            |
|----------|----|-----------------|------------|
| Designer | OS | Project Manager | P. HAWKINS |
| Drawn    | OS | Date            | 5/21/08    |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |



SHEET TITLE  
TITLE SHEET, GENERAL  
NOTES, VICINITY MAP

SCALE  
SHEET 1 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number: BAEY 05-0035  
Drawing File Number: 1232-001  
SHEET NUMBER: T-0



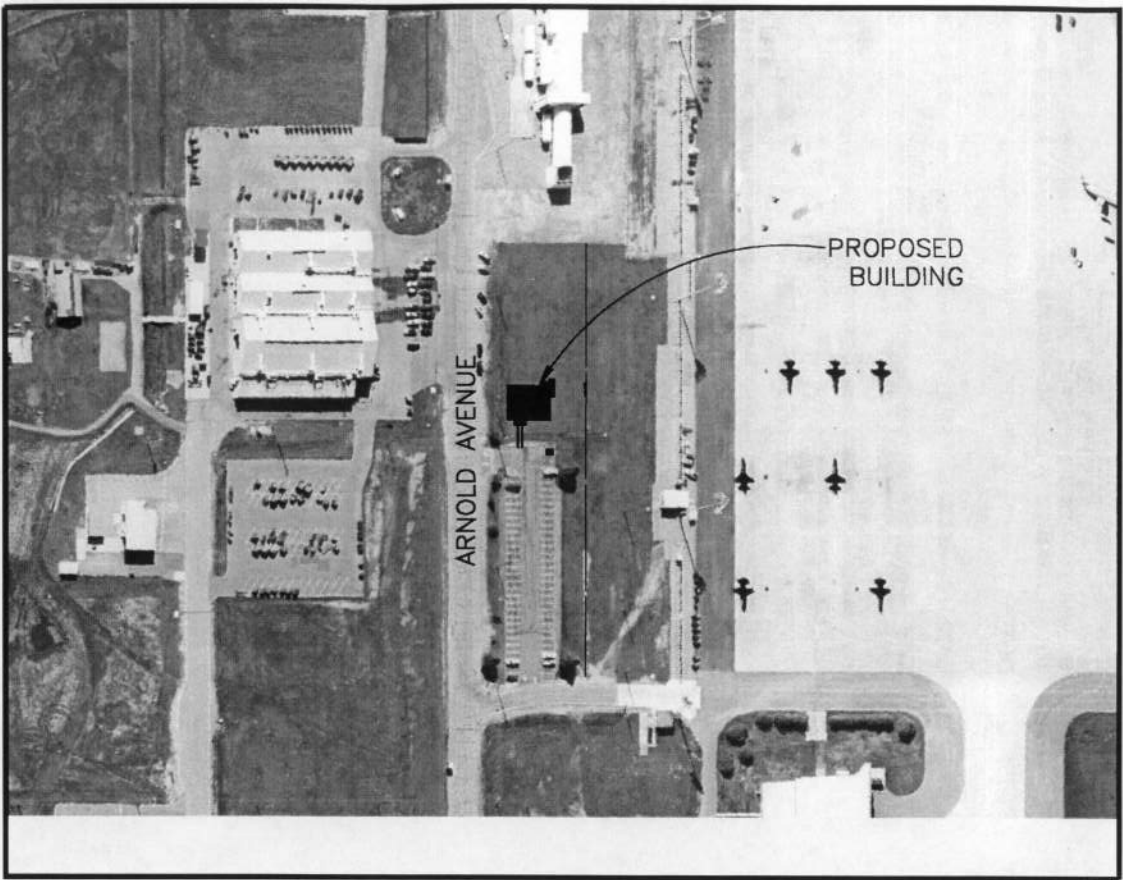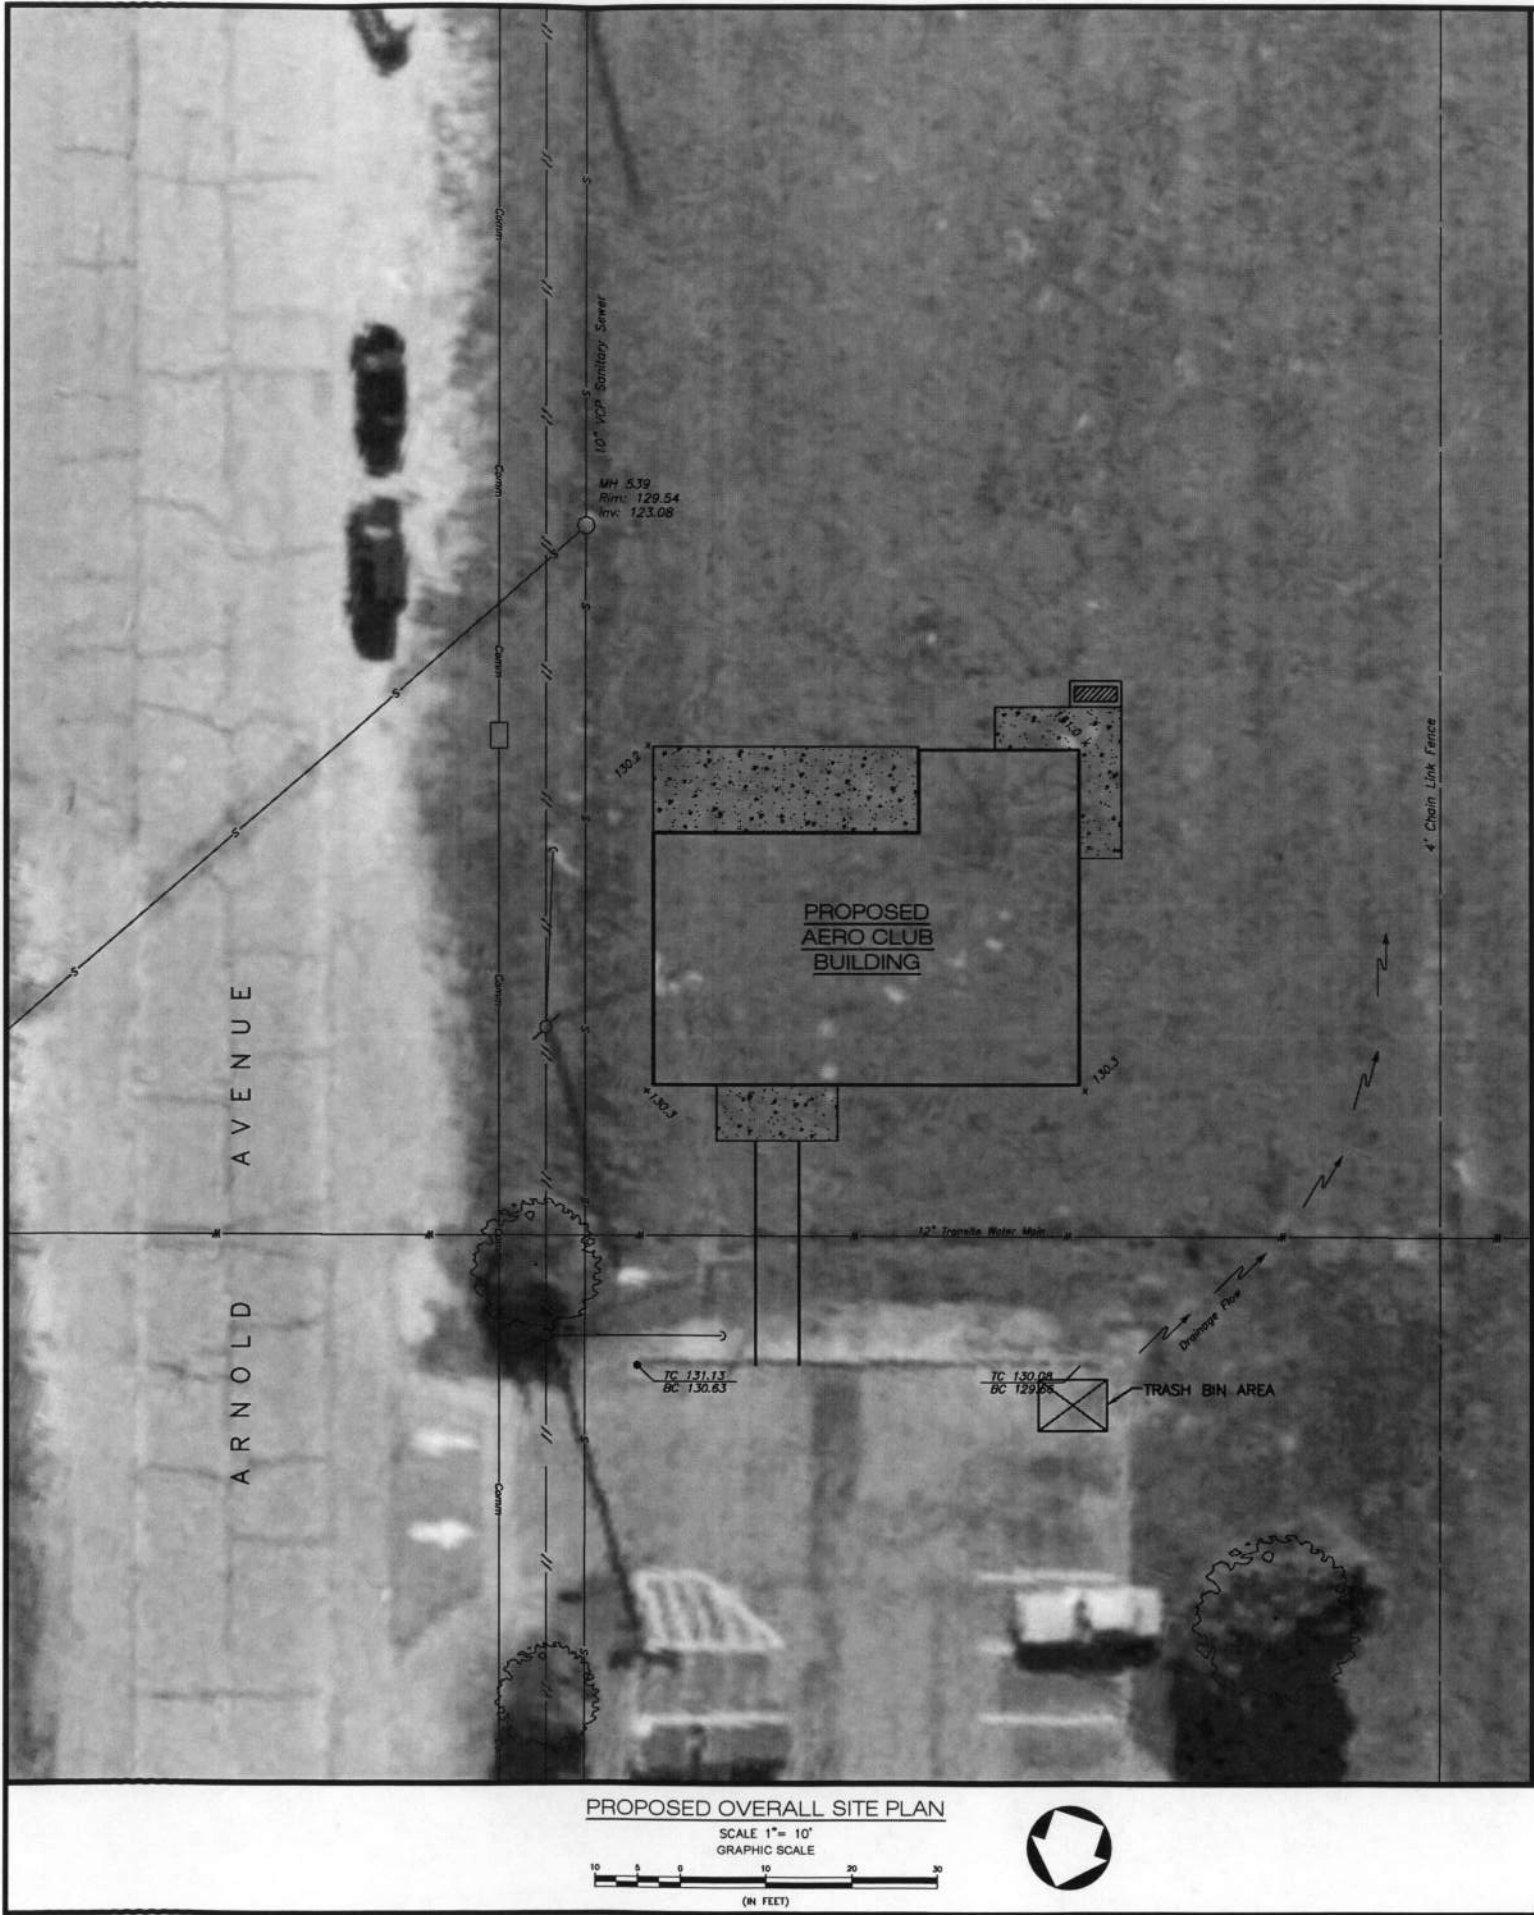

PROJECT VICINITY PLAN

SCALE 1" = 100'  
0 50 100 200  
(IN FEET)



**BEALE**  
Air Force Base

APPROVED  
SIGNATURE

Base Dist. Engineer  
Chief of Engineering  
Chief of Design  
Chief of Environmental Contracting  
User

COORDINATION

Airfield Manager  
Ground Safety  
Communications Computer  
Base Environmental Engineer  
Security Police  
Security Systems  
Fire Chief  
Chief of Operations  
Construction Management  
Roofing Engineer  
Pavements Engineer  
Corrosion Engineer  
Protective Coatings Eng.

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT**  
INC-A S S O C I A T E S  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
755 SUNRISE AVE., STE. 101  
ROSEVILLE, CALIFORNIA 95661  
916-878-5355

CIVIL DESIGN BY  
**H&A** Haling & Associates  
166 EATON ROAD, STE. B  
CHICO, CA 95973  
530.342.6958

FILE: 05-0035 Beale

|          |     |                 |           |
|----------|-----|-----------------|-----------|
| Designer | TRH | Project Manager | G. HALING |
| Checker  | PAH | Date            | 5/21/08   |

REVISION BY/DATE

|                       |             |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | GBH 5/21/08 |
| 95% Design Submittal  | GBH 4/28/08 |
| 65% Design Submittal  | GBH 2/20/08 |
| 35% Design Submittal  | GBH 1/07/08 |

SHEET TITLE  
95% CIVIL DESIGN  
SITE PLAN

SCALE

SHEET 2 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY  
BEALE AFB, CA


Project Number  
BAEY 05-0035

|                     |          |
|---------------------|----------|
| Drawing File Number | 1232-001 |
| SHEET NUMBER        | C-01     |



GRADING PLAN NOTES:

1. EXCESS SOILS STOCKPILED DURING CONSTRUCTION SHALL BE COVERED WITH STABILIZATION BLANKET TO PREVENT EXPOSURE AND MINIMIZE THE POTENTIAL FOR EROSION FROM STORMWATER RUNOFF AND WIND.
2. ALL WORK PERFORMED DURING THE WET SEASON (OCT-APR) SHALL PROCEED AT THE DIRECTION OF 9CES/CEV. CONSTRUCTION SHALL BE TEMPORARILY POSTPONED DURING UNFAVORABLE CONDITIONS WHEN DAMAGE TO THE SOIL OR THE PROTECTIVE COVER MAY OCCUR.

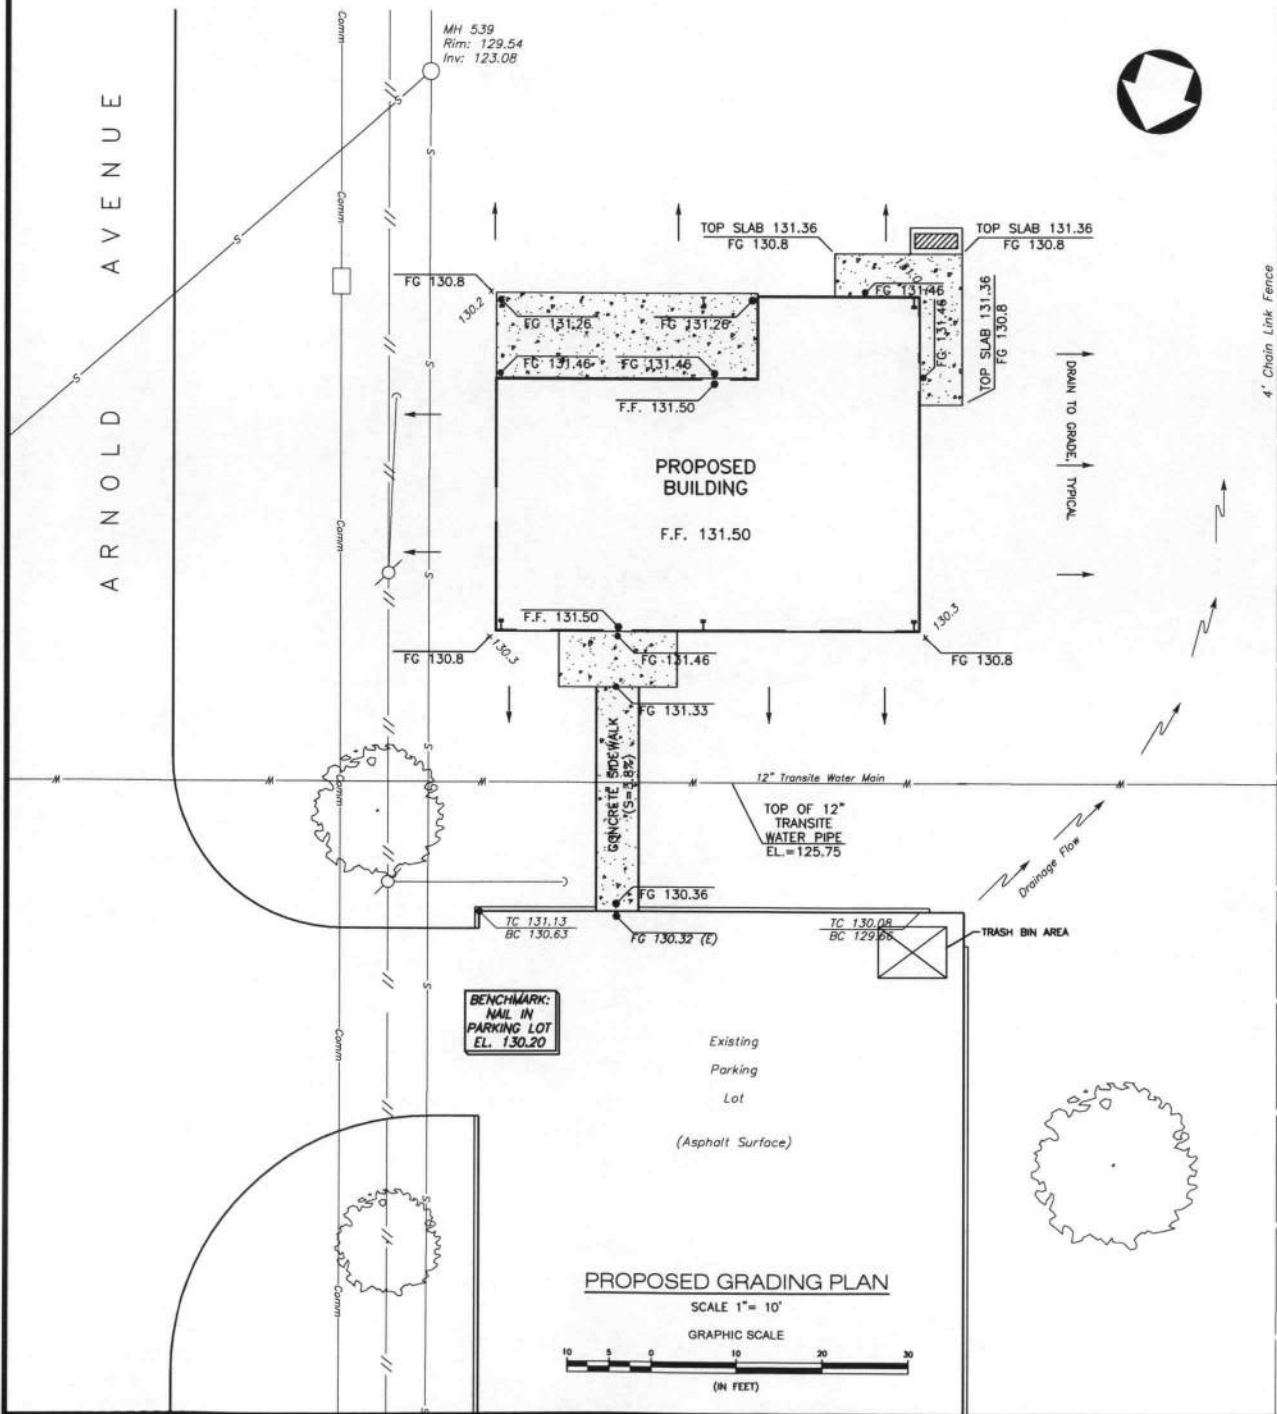


UTILITY PLAN NOTES:

1. BACKFLOW PREVENTER ON WATER SERVICE LINE SHALL BE TESTED AT THE CONTRACTOR'S EXPENSE AT THE TIME OF SERVICE CONNECTIONS WITH THE RESULTS PROVIDED TO THE UTILITY SHOP. ABOVE GRADE WATER PIPING AT THIS ASSEMBLY SHALL BE PROVIDED WITH AN INSULATED BLANKET FOR FREEZE PROTECTION.
2. RISER POLES FOR ELECTRICAL POWER SHALL COMPLY WITH RAPTOR PROTECTION REQUIREMENTS AS OUTLINED IN "SUGGESTED PRACTICES FOR RAPTOR PROTECTION ON POWER LINE POLES: THE STATE OF THE ART IN 2006", AVIAN POWER LINE INTERACTION COMMITTEE.
3. WARNING: EXISTING WATER MAIN IS TRANSITE-ASBESTOS PIPE AND MUST BE HANDLED ACCORDINGLY.
4. SHOULD ENTRY INTO THE EXISTING SANITARY MANHOLE BE REQUIRED, CONFINED SPACE ENTRY PROTOCOL SHALL BE FOLLOWED.

UNDERGROUND UTILITY SCHEDULE

- |   |                   |   |                                                              |
|---|-------------------|---|--------------------------------------------------------------|
| 1 | SANITARY LATERAL  | - | 4" PVC, ASTM D-3034, SDR-35                                  |
| 2 | COMMUNICATIONS    | - | TWO (2) 4" CONDUIT, ONE WITH MAXCELL INNER DUCT (ONE VACANT) |
| 3 | ELECTRICAL        | - | 2" SCHEDULE 40 PVC CONDUIT                                   |
| 4 | WATER SERVICE     | - | 2" HDPE PIPE                                                 |
| 5 | FUTURE IRRIGATION | - | 1" HDPE PIPE                                                 |

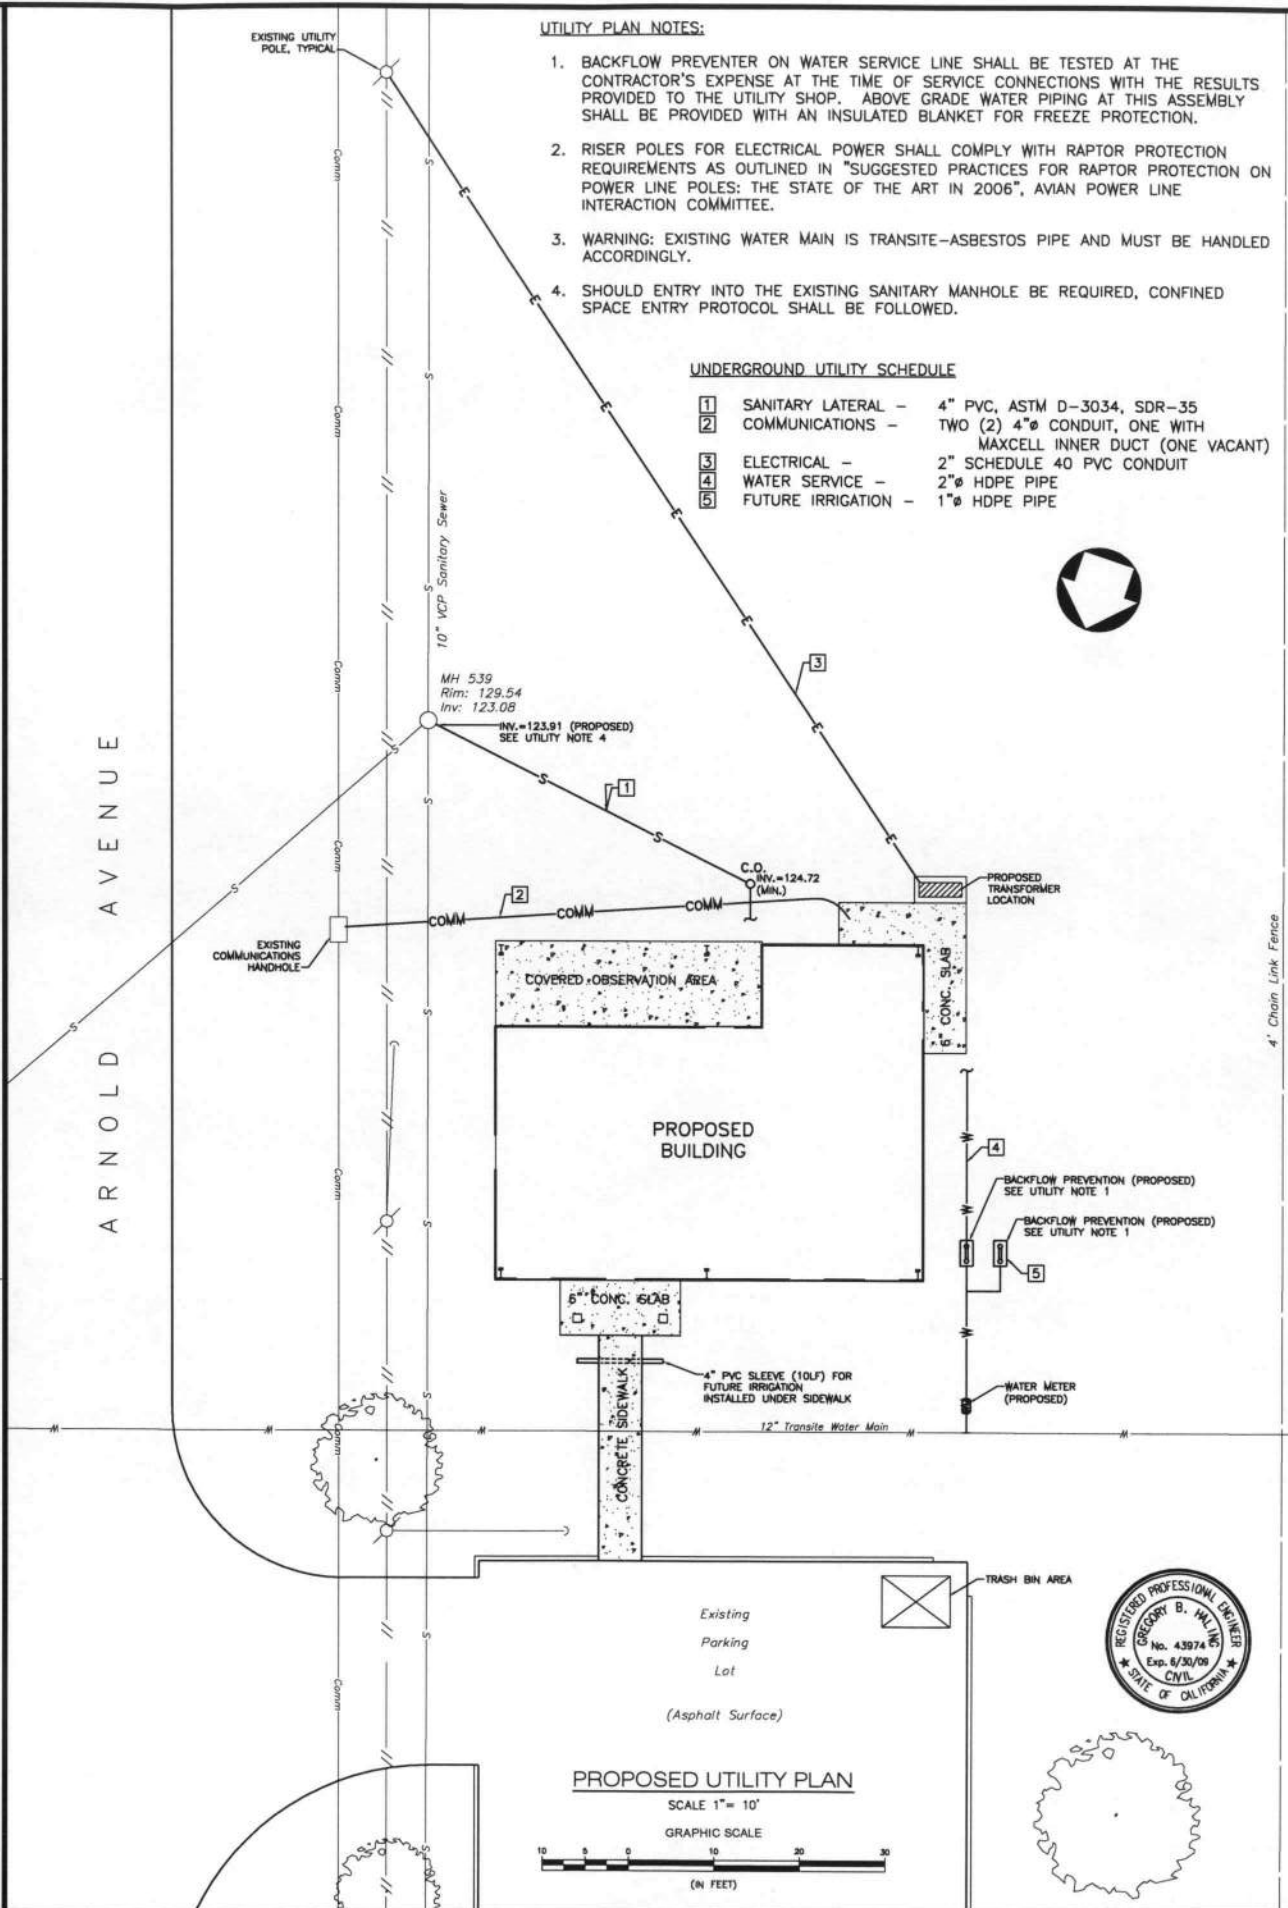

**BEALE**  
Air Force Base

| APPROVED     |                     |
|--------------|---------------------|
| SIGNATURE    | OFFICE              |
|              | Base Dir            |
|              | Engineer            |
|              | Chief of            |
|              | Design              |
|              | Chief of            |
|              | Environmental       |
|              | Contracting         |
|              | User                |
| COORDINATION |                     |
|              | Airfield            |
|              | Manager             |
|              | Ground              |
|              | Safety              |
|              | Communications      |
|              | Computers           |
|              | Board/Environmental |
|              | Engineer            |
|              | Security            |
|              | Police              |
|              | Security            |
|              | System              |
|              | Fire Chief          |
|              | Chief of            |
|              | Operations          |
|              | Construction        |
|              | Management          |
|              | Roofing             |
|              | Engineer            |
|              | Pavements           |
|              | Engineer            |
|              | Corrosion           |
|              | Engineer            |
|              | Protective          |
|              | Coatings Eng        |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT**  
INC-A S S O C I A T E S  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
754 RUSSELL AVE., STE. 101  
ROSELAND, CALIFORNIA 90801  
916-878-5355

CIVIL DESIGN BY  
**H&A** Haling & Associates  
166 EATON ROAD, STE. B  
CHICO, CA 95973  
530.342.6958

|          |                 |
|----------|-----------------|
| Designer | Project Manager |
| TRH      | G. HALING       |
| Drafter  | Date            |
| PAH      | 5/21/08         |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | GBH 5/21/08 |
| 95% Design Submittal  | GBH 4/28/08 |
| 65% Design Submittal  | GBH 2/20/08 |
| 35% Design Submittal  | GBH 1/07/08 |


SHEET TITLE  
95% CIVIL DESIGN  
GRADING PLAN  
UTILITY PLAN

SCALE  
SHEET 3 OF 19


PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY  
BEALE AFB, CA

|                     |              |
|---------------------|--------------|
| Project Number      | BAEY 05-0035 |
| Drawing File Number | 1232-001     |
| SHEET NUMBER        | C-02         |




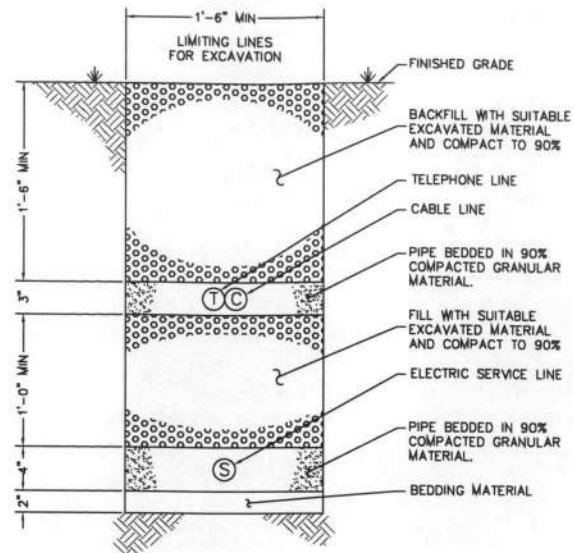


ELECTRIC SERVICE TRENCH SECTION  
NO SCALE

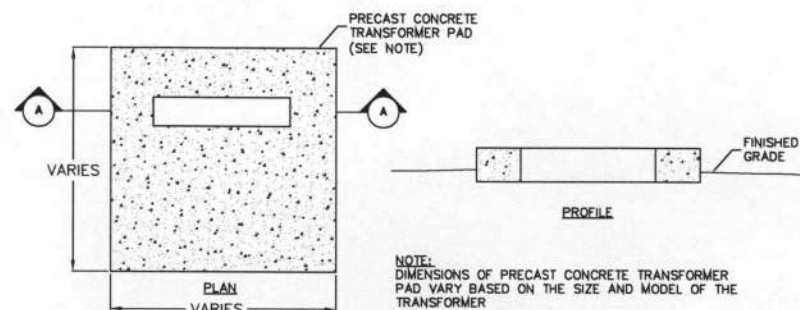


TRANSFORMER PAD DETAIL  
NO SCALE

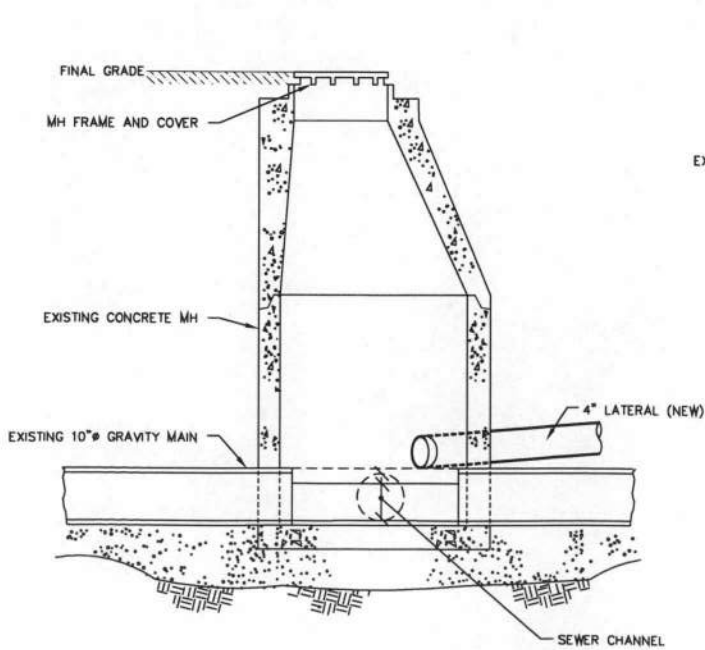

TYPICAL LATERAL TO MANHOLE CONNECTION DETAIL  
NO SCALE

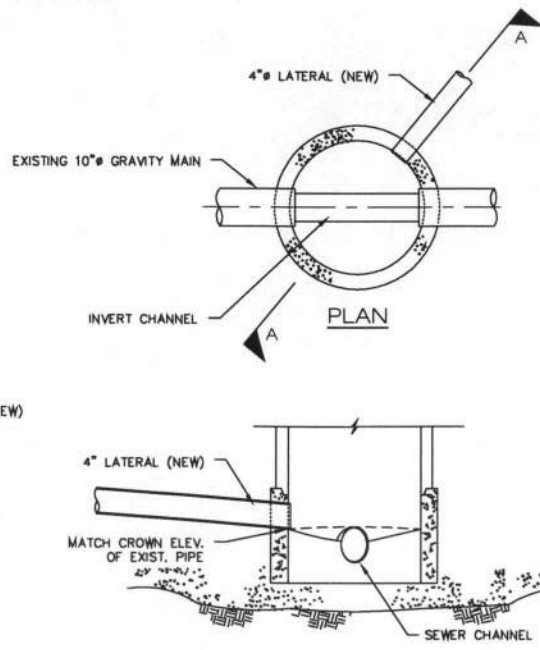


SECTION A-A

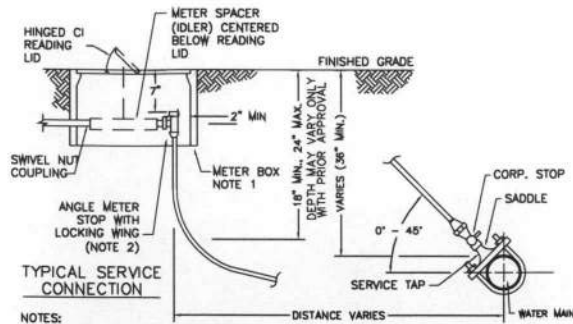


- NOTES:
1. METER BOXES SHALL HAVE CONCRETE LIDS (STEEL TRAFFIC LIDS IN DRIVEWAYS OR AREAS WITH ROLL CURB) WITH HINGED CL. READING LIDS.
  2. ANGLE METER STOP VALVE SHALL BE POSITIONED IN METER BOX SO THAT (F) METER REGISTER WILL BE CENTERED UNDER READING LID.
  3. METER BOXES AND SERVICE PIPING SHALL BE INSTALLED WITH A MINIMUM OF 2 1/2 FT. CLEARANCE FROM ALL ELECTRICAL TRANSFORMERS, LIGHT STANDARDS AND OTHER UTILITY BOXES OR VAULTS.
  4. ONLY SERVICE TAPS FOR 1 1/2" AND 2" MAY BE TAPPED OTHER THAN AT A 45° ANGLE, BUT ONLY WITH PRIOR APPROVAL OF THE GOVERNMENT.

WATER SERVICE CONNECTION  
2" DIAMETER OR SMALLER  
NO SCALE

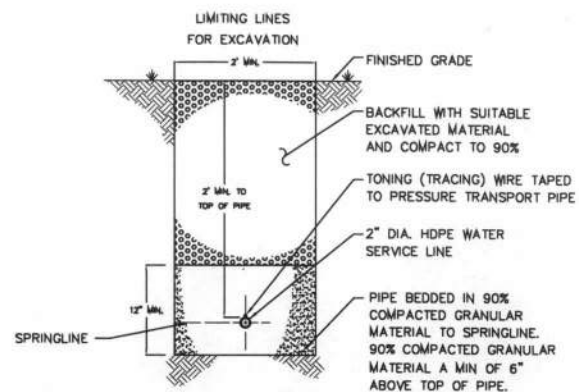

WATER SERVICE TRENCH SECTION  
NO SCALE

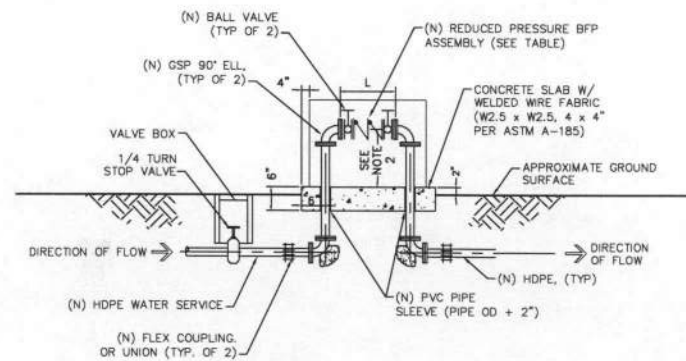


| PIPE DIA. | REDUCED PRESSURE BFP ASSEMBLY LENGTH, L * |
|-----------|-------------------------------------------|
| 1"        | 14 9/16"                                  |
| 2"        | 24"                                       |


- NOTES:
1. THRUST BLOCK NOT REQUIRED FOR 2"
  2. 12" MIN; 36" MAX

\* CONFIRM WITH MANUFACTURER

REDUCED PRESSURE BACKFLOW PREVENTER  
NO SCALE

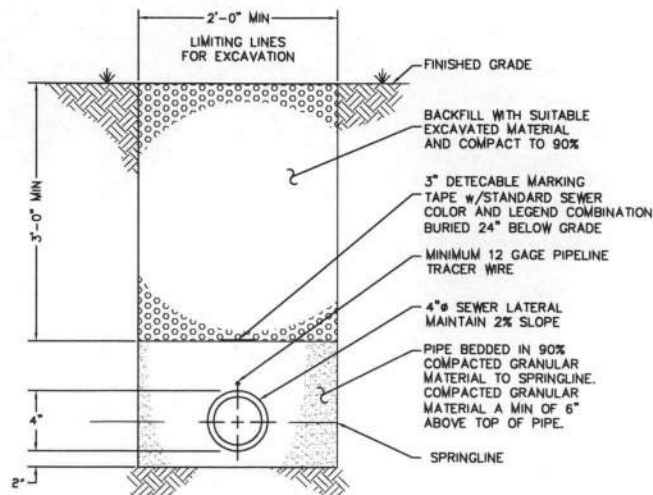

SEWER LATERAL TRENCH SECTION  
NO SCALE

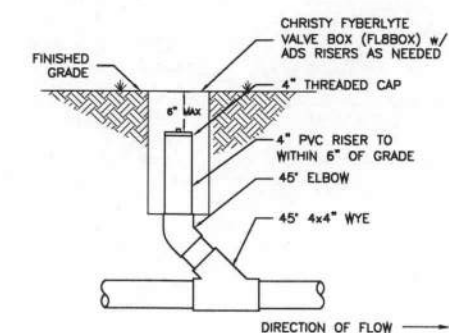

TYPICAL 4" SANITARY CLEANOUT DETAIL  
NO SCALE



BEALE  
Air Force Base

APPROVED  
SIGNATURE

OFFICE  
Base Chief Engineer  
Chief of Engineering  
Chief of Design  
Chief of Environmental Contracting  
User

COORDINATION

Air Force Manager  
Ground Safety  
Communications Computers  
Bioremediation Engineer  
Security Police  
Security Systems  
Fire Chief  
Chief of Operations  
Construction Management  
Roofing Engineer  
Pavements Engineer  
Corrosion Engineer  
Protective Coatings Eng.

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT**  
INC. ASSOCIATES  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
736 BUNROSE AVE., STE. 101  
ROCKVILLE, CALIFORNIA 94581  
916-878-5355

CIVIL DESIGN BY  
**H&A** Haling & Associates  
166 EATON ROAD, STE. B  
CHICO, CA 95973  
530.342.6958

FILE: 05-0035 Beale

| Designer | Project Manager |
|----------|-----------------|
| TRH      | G. HALING       |
| Drafter  | Date            |
| PAH      | 5/21/08         |

REVISION BY/DATE

| As-Built              |             |
|-----------------------|-------------|
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | GBH 5/21/08 |
| 95% Design Submittal  | GBH 4/28/08 |
| 65% Design Submittal  | GBH 2/20/08 |
| 35% Design Submittal  | GBH 1/07/08 |

SHEET TITLE

95% CIVIL DESIGN DETAILS

SCALE

SHEET 4 OF 19

PROJECT TITLE

CES/CECN  
AERO CLUB ADMIN/TRAINING FACILITY  
BEALE AFB, CA

Project Number

BAEY 05-0035

Drawing File Number

1232-001

SHEET NUMBER

C-03



| APPROVED     |                                    |
|--------------|------------------------------------|
| SIGNATURE    | OFFICE                             |
|              | Base Civil Engineer                |
|              | Chief of Engineering               |
|              | Chief of Design                    |
|              | Chief of Environmental Contracting |
|              | User                               |
| COORDINATION |                                    |
|              | Air-Poll Manager                   |
|              | Ground Safety                      |
|              | Communications Computers           |
|              | Bioenvironmental Engineer          |
|              | Security Police                    |
|              | Security Systems                   |
|              | Fire Chief                         |
|              | Chief of Operations                |
|              | Construction Management            |
|              | Roofing Engineer                   |
|              | Pavements Engineer                 |
|              | Corrosion Engineer                 |
|              | Protective Coatings Eng            |



|                |                               |
|----------------|-------------------------------|
| Designer<br>OS | Project Manager<br>P. HAWKINS |
| Drafter<br>OS  | Date<br>5/21/08               |

|                                                                          |              |
|--------------------------------------------------------------------------|--------------|
| SHEET TITLE                                                              |              |
| AERO CLUB<br>SITE PLAN                                                   |              |
| SCALE                                                                    |              |
| SHEET                                                                    | 5 OF 19      |
| PROJECT TITLE                                                            |              |
| CES/CECN<br>AERO CLUB ADMIN/TRAINING<br>FACILITY # 1232<br>BEALE AFB, CA |              |
| Project Number                                                           |              |
| BAEY 05-0035                                                             |              |
| Drawing File Number                                                      | SHEET NUMBER |
| 1232-001                                                                 | A-0          |



## KEYING SCHEDULE

| COREMARK | # CORES | #KEYS | FINISH | CORE TYPE /<br>MISC. INFORMATION                                                   |
|----------|---------|-------|--------|------------------------------------------------------------------------------------|
| GM       |         | 2     |        | GRAND MASTER                                                                       |
| CT       |         | 2     |        | CONTROL KEY                                                                        |
| A        |         | 2     |        | MASTER KEY                                                                         |
| AA       | 12      | 28    |        | 102, 103, 104, 105,<br>108, 110, 111, 112, 113, 114<br>inc. ext. doors except Mech |
| A1       | 3       | 10    |        | Front, Side & Rear Entrance                                                        |
| A2       | 1       | 2     |        | 102                                                                                |
| A3       | 1       | 2     |        | 103                                                                                |
| A4       | 1       | 2     |        | 104                                                                                |
| A5       | 1       | 2     |        | 105                                                                                |
| A6       | 1       | 2     |        | 108                                                                                |
| A7       | 1       | 2     |        | 110                                                                                |
| A8       | 1       | 2     |        | 111/112                                                                            |
| A9       | 2       | 4     |        | Restrm 113, 114                                                                    |
| SKD1     |         |       |        | Mech Room Per Basle<br>Standards                                                   |
|          |         |       |        |                                                                                    |

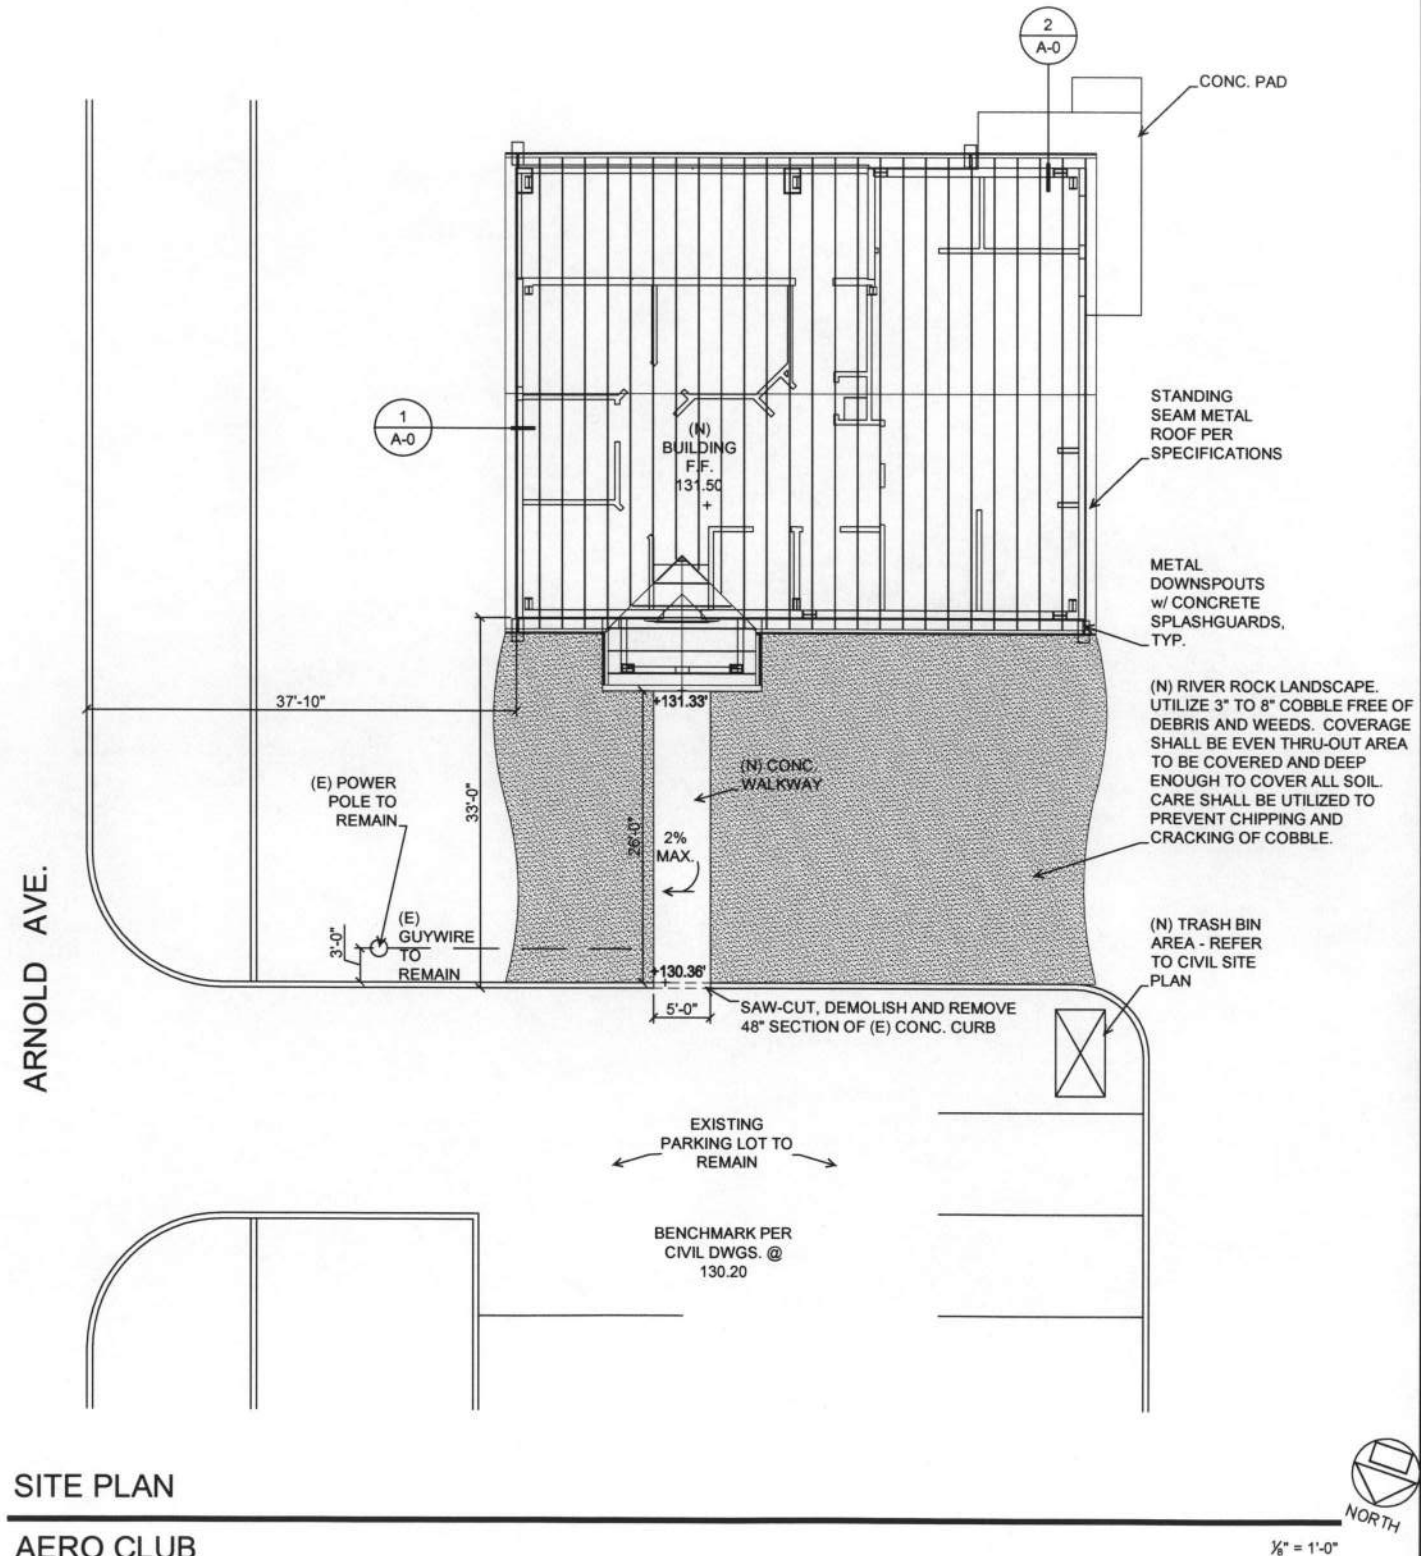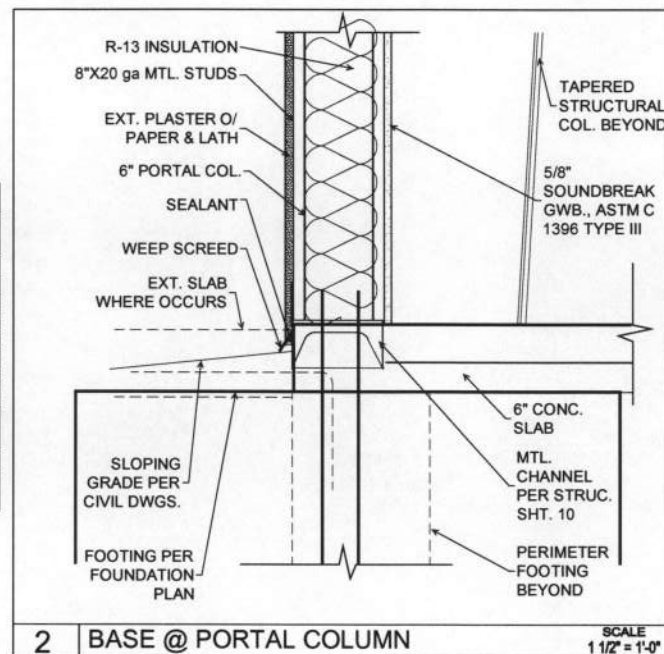


SITE PLAN

---

AERO CLUB



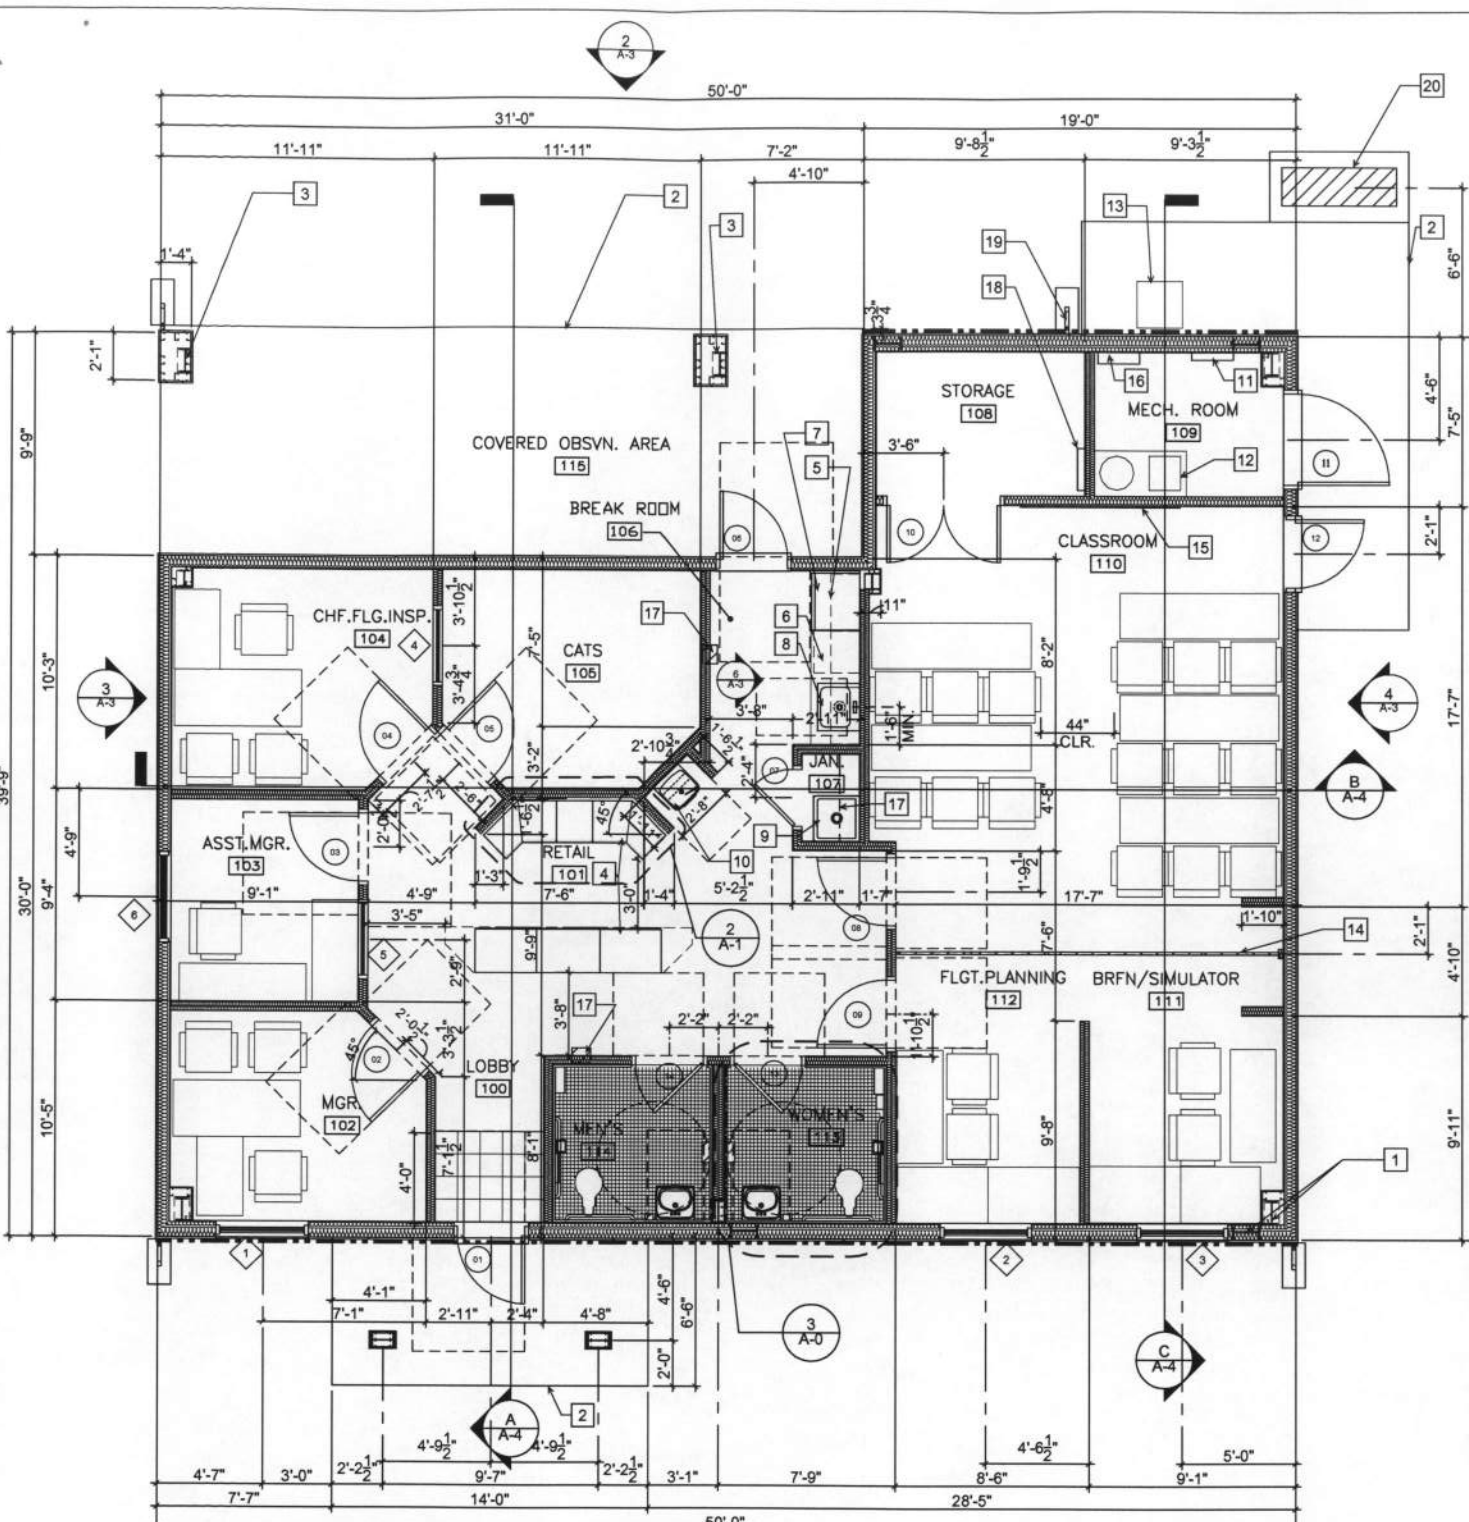

**1 FLOOR PLAN**  
**AERO CLUB**  
\* FURNITURE N.I.C.

| WINDOW SCHEDULE |                |        |          |              |
|-----------------|----------------|--------|----------|--------------|
| MARK            | SIZE           | TYPE   | MATERIAL | NOTES        |
|                 | WIDTH   HEIGHT |        |          |              |
| 1               | 4'-0"   4'-0"  | SLIDER | METAL    | METAL SCREEN |
| 2               | 4'-0"   4'-0"  | SLIDER | METAL    | METAL SCREEN |
| 3               | 4'-0"   4'-0"  | SLIDER | METAL    | METAL SCREEN |
| 4               | 3'-6"   4'-0"  | FIXED  | METAL    | -            |
| 5               | 3'-6"   4'-0"  | FIXED  | METAL    | -            |
| 6               | 4'-0"   4'-0"  | SLIDER | METAL    | METAL SCREEN |

A. Refer to sheet A-4 for window elevations, dimensions and notes.

**WALL LEGEND**

- 6" EXTERIOR METAL FRAMING WALL w/ R-13 INSULATION; EXT: PAINTED STUCCO. INT: PAINTED SOUNDBREAK GYPBD., TYP. U.O.N. DBL. DASHED LINE INDICATES FRAME TO BE 8".
- PLUMBED SOUNDBREAK GYPBD.-FURRED TAPERED STEEL COLUMN
- 4" INTERIOR METAL FRAMING WALL w/ SOUND INSULATION & PAINTED SOUNDBREAK GYPBD., TYP., U.O.N. DASHED LINE INDICATES FRAME TO BE 6".
- EXT. METAL FRAMED-FURRED COLUMN @ FRONT PORCH

**GEN. FLOOR PLAN NOTES**

- EXTERIOR WALL DIMENSIONS ARE FROM FACE OF STUD TO FACE OF STUD, U.O.N.
- INTERIOR WALL DIMENSIONS ARE EITHER FROM FACE OF EXT. STUD TO FACE OF INT. FINISH OR FROM FACE OF INT. FINISH TO FACE OF INT. FINISH, U.O.N.

**ROOM FINISH SCHEDULE**

| Rm # | ROOM NAME           | FLOOR                                                                                                                 | BASE                                                                                             | WALLS                                                                                                                        |                                                                                                                              |                                                                                                                              |                                                                                                                              | CEILING                          |       | NOTES                     |
|------|---------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------|---------------------------|
|      |                     |                                                                                                                       |                                                                                                  | N                                                                                                                            | S                                                                                                                            | E                                                                                                                            | W                                                                                                                            | MATL                             | HGT   |                           |
| 100  | LOBBY               | DaTile Paralelo P551 'Artico' 13"x13" w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout          | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | -                                                                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 101  | RETAIL              | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 6192 Coastal Plain (see plan 2/A-1)                                                                                       | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 102  | MGR.                | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 103  | ASST.MGR.           | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 104  | CHF.FLG.INSP.       | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 105  | CATS                | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 106  | BREAK ROOM          | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | Full Formica Splahbd. 914-58 'Marine Blue' matte finish. Top: SW 7070-Site White                                             | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | Full Formica Splahbd. 914-58 'Marine Blue' matte finish. Top: SW 7070-Site White                                             | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 107  | JAN.                | Sealed Conc. w/ Gloss Fin.                                                                                            | Rubber: Charcoal Gray                                                                            | Gmbd: SW 7070-Site White                                                                                                     | Gmbd: SW 7070-Site White                                                                                                     | Gmbd: SW 7070-Site White                                                                                                     | Gmbd: SW 7070-Site White                                                                                                     | Gypbd: SW 7006-Extra White       | 9'-0" | -                         |
| 108  | STORAGE             | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | Gypbd: SW 7006-Extra White       | 9'-0" | -                         |
| 109  | MECH. ROOM          | Sealed Conc. w/ Satin Fin.                                                                                            | Rubber: Charcoal Gray                                                                            | Gypbd.                                                                                                                       | Gypbd.                                                                                                                       | Gypbd.                                                                                                                       | Gypbd.                                                                                                                       | Gypbd: SW 7006-Extra White       | 9'-0" | -                         |
| 110  | CLASSROOM           | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 6518 Ski Slope                                                                                                            | SW 6522 Sporty Blue                                                                                                          | SW 6522 Ski Slope                                                                                                            | SW 6522 Ski Slope                                                                                                            | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 111  | BRFN/SIMULATOR      | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 112  | FLGT.PLANNING       | Cpt.Bigelow, Mod BC118, 7547 'Moderne Link'                                                                           | Rubber: Charcoal Gray                                                                            | SW 7070-Site White                                                                                                           | -                                                                                                                            | SW 7070-Site White                                                                                                           | SW 7070-Site White                                                                                                           | 2'x4' A.T.Med.-T.xtrd.Pnl        | 9'-0" | -                         |
| 113  | WOMEN'S             | DaTile D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | Coved.DaTile D200 Unglzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | Gmbd: SW 7006-Extra White        | 9'-0" | WAINSCOTT HGT: 48" A.F.F. |
| 114  | MEN'S               | DaTile D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | Coved.DaTile D200 Unglzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | DaTile Wnact. D200 'Desert Gray Speckle' 2" Clr.Glzd. w/ Custom Bldg. Prdct's #165 Delorean Gray 1/8" Polyblend Sanded Grout | Gmbd: SW 7006-Extra White        | 9'-0" | WAINSCOTT HGT: 48" A.F.F. |
| 115  | COVERED OBSVN. AREA | Sealed Conc. w/ Satin Fin.                                                                                            | -                                                                                                | Historic Tan #0049146001                                                                                                     | Historic Tan #0049146001                                                                                                     | Historic Tan #0049146001                                                                                                     | Historic Tan #0049146001                                                                                                     | Stucco: Historic Tan #0049146001 | 9'-0" | -                         |


**DOOR AND FRAME SCHEDULE**

|      |      | DOOR  |       |        |         |                                                                |         |        |       |       |                                                                  |                |        | FRAME |         | HARDWARE         |  |  |  | NOTES |
|------|------|-------|-------|--------|---------|----------------------------------------------------------------|---------|--------|-------|-------|------------------------------------------------------------------|----------------|--------|-------|---------|------------------|--|--|--|-------|
| MARK | Type | SIZE  |       |        | MATL    | FINISH                                                         | GLAZ'G  | LOUVER |       | MATL  | Frame Color                                                      | Keyside Rm No. | CLOSER | STOP  | THRHL'D |                  |  |  |  |       |
|      |      | WD    | HGT   | THK    |         |                                                                |         | WD     | HGT   |       |                                                                  |                |        |       |         |                  |  |  |  |       |
| 1    | A    | 3'-0" | 6'-8" | 1 3/4" | METAL   | FACTORY PRIMED W/ 2 COATS OF BENGAL BROWN, CONTROL #0049146002 | 12"X16" | 0"     | 0"    | METAL | Ext:Bengal Brown, control #0049146002<br>Int:SW 6255-Morning Fog | 100            | YES    | YES   | YES     | 12x16 Glass pane |  |  |  |       |
| 2    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NATURAL VERTICAL WOOD GRAIN      | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 102            | --     | YES   | --      | --               |  |  |  |       |
| 3    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 103            | --     | YES   | --      | --               |  |  |  |       |
| 4    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 104            | --     | YES   | --      | --               |  |  |  |       |
| 5    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 105            | --     | YES   | --      | --               |  |  |  |       |
| 6    | A    | 3'-0" | 6'-8" | 1 3/4" | METAL   | FACTORY PRIMED W/ 2 COATS OF BENGAL BROWN, CONTROL #0049146002 | 12"X16" | 0"     | 0"    | METAL | Ext:Bengal Brown, control #0049146002<br>Int:SW 6255-Morning Fog | 106            | YES    | --    | YES     | 12x16 Glass pane |  |  |  |       |
| 7    | D    | 2'-6" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | --             | --     | --    | YES     | --               |  |  |  |       |
| 8    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 110            | --     | YES   | --      | --               |  |  |  |       |
| 9    | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 111/112        | --     | YES   | --      | --               |  |  |  |       |
| 10   | E    | 5'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 108            | --     | YES   | --      | --               |  |  |  |       |
| 11   | C    | 4'-0" | 6'-8" | 1 3/4" | METAL   | FACTORY PRIMED W/ 2 COATS OF BENGAL BROWN, CONTROL #0049146002 | --      | 1'-4"  | 1'-8" | METAL | Ext:Bengal Brown, control #0049146002<br>Int:SW 6255-Morning Fog | 109            | --     | YES   | --      | --               |  |  |  |       |
| 12   | B    | 3'-0" | 6'-8" | 1 3/4" | METAL   | FACTORY PRIMED W/ 2 COATS OF BENGAL BROWN, CONTROL #0049146002 | --      | 0"     | 0"    | METAL | Ext:Bengal Brown, control #0049146002<br>Int:SW 6255-Morning Fog | 110            | YES    | --    | YES     | --               |  |  |  |       |
| 13   | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 113            | YES    | YES   | YES     | --               |  |  |  |       |
| 14   | D    | 3'-0" | 6'-8" | 1 3/4" | S.C.WD. | CLEAR, SEMI-GLOSS URETHANE O/ NTL.VERT.WD. GRAIN               | --      | 0"     | 0"    | METAL | SW 6255-Morning Fog                                              | 114            | YES    | YES   | YES     | --               |  |  |  |       |

**FLOOR PLAN KEYNOTES**

- STEEL COLUMN PER CBC SHOP DRWGS, TYP.
- 6" CONC. SLAB, TYP.
- STUCCO-WRAPPED TAPERED STEEL COLUMNS PER CBC SHOP DRWGS
- CUSTOM RETAIL CABINETRY/DISPLAY PER SHOP DRAWINGS. COUNTERTOP FORMICA 7219-58 'FOREST TERRA' MATTE FINISH.
- UPPER CABINET
- LOWER CABINET/SPACE
- REFRIGERATOR TO BE PROVIDED BY OWNER
- SINK w/ GARBAGE DISPOSAL
- 24X24 JANITOR SINK
- DRINKING FOUNTAIN PER SPEC'S
- ELECTRICAL METER PANEL
- AIR HANDLING UNIT
- HEAT PUMP UNIT
- DIVIDING PANELS PER SPEC'S
- BUILT-IN SCREEN, N.I.C.
- MONACO ALARM PANEL
- SEMI-RECESSED FIRE EXTINGUISHER CABINET PER SPEC'S
- COMMUNICATIONS PANEL PER SPEC'S

- Door hardware is compatible with Best. All Schlage will be replaced by Best course.
- Refer to sheet A-4 for door type, elevations, dimensions and notes.
- Refer to sheet A-0 for Keying Schedule
- METAL DOWNSPOUTS TO MATCH ROOF w/ CONC. SPLASH GUARDS PER SPEC'S
- TRANSFORMER PER ELECTRICAL SPEC'S

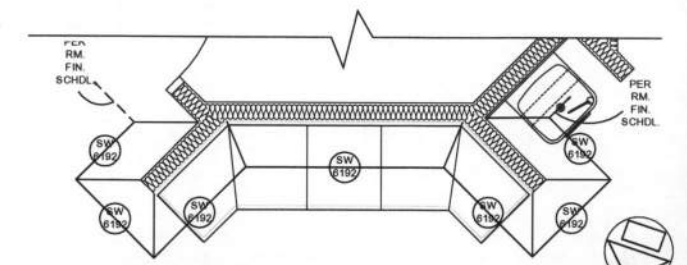

**2 ENLARGED PLAN**  
**WALL FINISH**



**BEALE**  
**Air Force Base**

| APPROVED     |                        |
|--------------|------------------------|
| SIGNATURE    | OFFICE                 |
|              | Base Clerk             |
|              | Engineer               |
|              | Chief of Design        |
|              | Chief of Environmental |
|              | Contracting            |
|              | User                   |
| COORDINATION |                        |
|              | Field Manager          |
|              | Ground Safety          |
|              | Communications         |
|              | Computers              |
|              | Environmental          |
|              | Engineer               |
|              | Security               |
|              | Systems                |
|              | Fire Chief             |
|              | Chief of               |
|              | Inspection             |
|              | Construction           |
|              | Management             |
|              | Roofing                |
|              | Engineer               |
|              | Paints                 |
|              | Engineer               |
|              | Commission             |
|              | Engineer               |
|              | Protective             |
|              | Coatings Eng.          |

**DESIGN FIRM**  
**PHILIP**  
**HAWKINS**  
**ARCHITECT**  
INC+ASSOCIATES  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
208 BUSINESS AVE., STE. 101  
ROSELIE, CALIFORNIA 95061  
916-878-5355



FILE: 05-0035 Beale  
Designer: OS  
Project Manager: P. HAWKINS  
Date: 5/21/08

| REVISION              |     | BY/DATE |
|-----------------------|-----|---------|
| As-Built              |     |         |
| For Construction      |     |         |
| Rev. 2                |     |         |
| 100% Design Submittal | PLH | 5/21/08 |
| 95% Design Submittal  | PLH | 4/28/08 |
| 65% Design Submittal  | PLH | 2/28/08 |
| 35% Design Submittal  | PLH | 1/07/08 |

**SHEET TITLE**  
**AERO CLUB**  
**FLOOR PLAN**

SCALE  
SHEET 6 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number: BAEY 05-0035  
Drawing File Number: 1232-001  
SHEET NUMBER: A-1



BEALE  
Air Force Base

| APPROVED     |                           |
|--------------|---------------------------|
| SIGNATURE    | OFFICE                    |
|              | Base Civil Engineer       |
|              | Chief of Engineering      |
|              | Chief of Design           |
|              | Chief of Environmental    |
|              | Contracting               |
|              | User                      |
| COORDINATION |                           |
|              | Air Field Manager         |
|              | Ground Safety             |
|              | Communications            |
|              | Computers                 |
|              | Environmental Engineer    |
|              | Security Police           |
|              | Security System           |
|              | Fire Chief                |
|              | Chief of Operations       |
|              | Construction Management   |
|              | Roofing Engineer          |
|              | Pavements Engineer        |
|              | Corrosion Engineer        |
|              | Protective Coatings Engr. |

DESIGN FIRM  
**PHILIP  
HAWKINS  
ARCHITECT**  
INC-A S S O C I A T E S  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
755 SUNRISE AVE., STE. 101  
ROSEVILLE, CALIFORNIA 95678  
916-878-5355



|                     |                            |
|---------------------|----------------------------|
| FILE: 05-0035 Beale |                            |
| Designer OS         | Project Manager P. HAWKINS |
| Drafter OS          | Date 5/21/08               |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

SHEET TITLE  
AERO CLUB  
REFLECTED CEILING PLAN

SCALE

SHEET 7 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number  
BAEY 05-0035

|                                 |                     |
|---------------------------------|---------------------|
| Drawing File Number<br>1232-001 | SHEET NUMBER<br>A-2 |
|---------------------------------|---------------------|

GENERAL NOTES


1. CEILING HEIGHT TO BE AT +9'-0" FROM FLOOR FINISH UNLESS OTHERWISE NOTED.
2. NO GYPSUM BOARD AT EXTERIOR CEILING, U.O.N.
3. GYPSUM BOARD AT WALL AND CEILING IN JANITOR'S CLOSET SHALL BE WATER RESISTANT, U.O.N.
4. GYPSUM BOARD AT WALL IN RESTROOMS SHALL BE MOISTURE-RESISTANT, U.O.N.

KEY NOTES

1. 1-FT. ROOF OVERHANG, TYP.
2. METAL DOWNSPOUT
3. METAL GUTTER
4. DIVISIONAL PANELS PER SPEC'S
5. 24"X24" CEILING ACCESS

LEGEND

|  |                                                                                                                |
|--|----------------------------------------------------------------------------------------------------------------|
|  | 2X4 CEILING TILE: USG INTERIORS, INC. RADAR, MEDIUM-TEXTURED PANEL-2'X4'X 5/8", CLASS A, WHITE COLOR, SQ EDGE. |
|  | PAINTED GYPSUM/GREEN BOARD CEILING AT INTERIOR<br>OR<br>PAINTED LATH & STUCCO FINISH CEILING AT EXTERIOR ONLY  |
|  | 2X4 TROFFER PER ELECTRICAL SPEC'S - 3 LAMP                                                                     |
|  | 1X8 FLOURESCENT LIGHT FIXTURE PER ELECTRICAL SPEC'S                                                            |
|  | TRACK LIGHTING FIXTURES PER ELECTRICAL SPEC'S                                                                  |
|  | SURFACE-MOUNTED LIGHT/EXHAUST FAN FIXTURE PER ELECTRICAL SPEC'S                                                |
|  | WALL-MOUNTED LIGHT FLUORESCENT FIXTURE PER ELECTRICAL SPEC'S                                                   |
|  | LOW PROFILE ROUND FLUSH MOUNTING FIXTURE PER ELECTRICAL SPEC'S                                                 |
|  | HIGH-INTENSITY DISCHARGE LIGHT FIXTURE PER ELECTRICAL SPEC'S                                                   |
|  | EXTERIOR FLOOD LIGHT PER ELECTRICAL SPEC'S                                                                     |

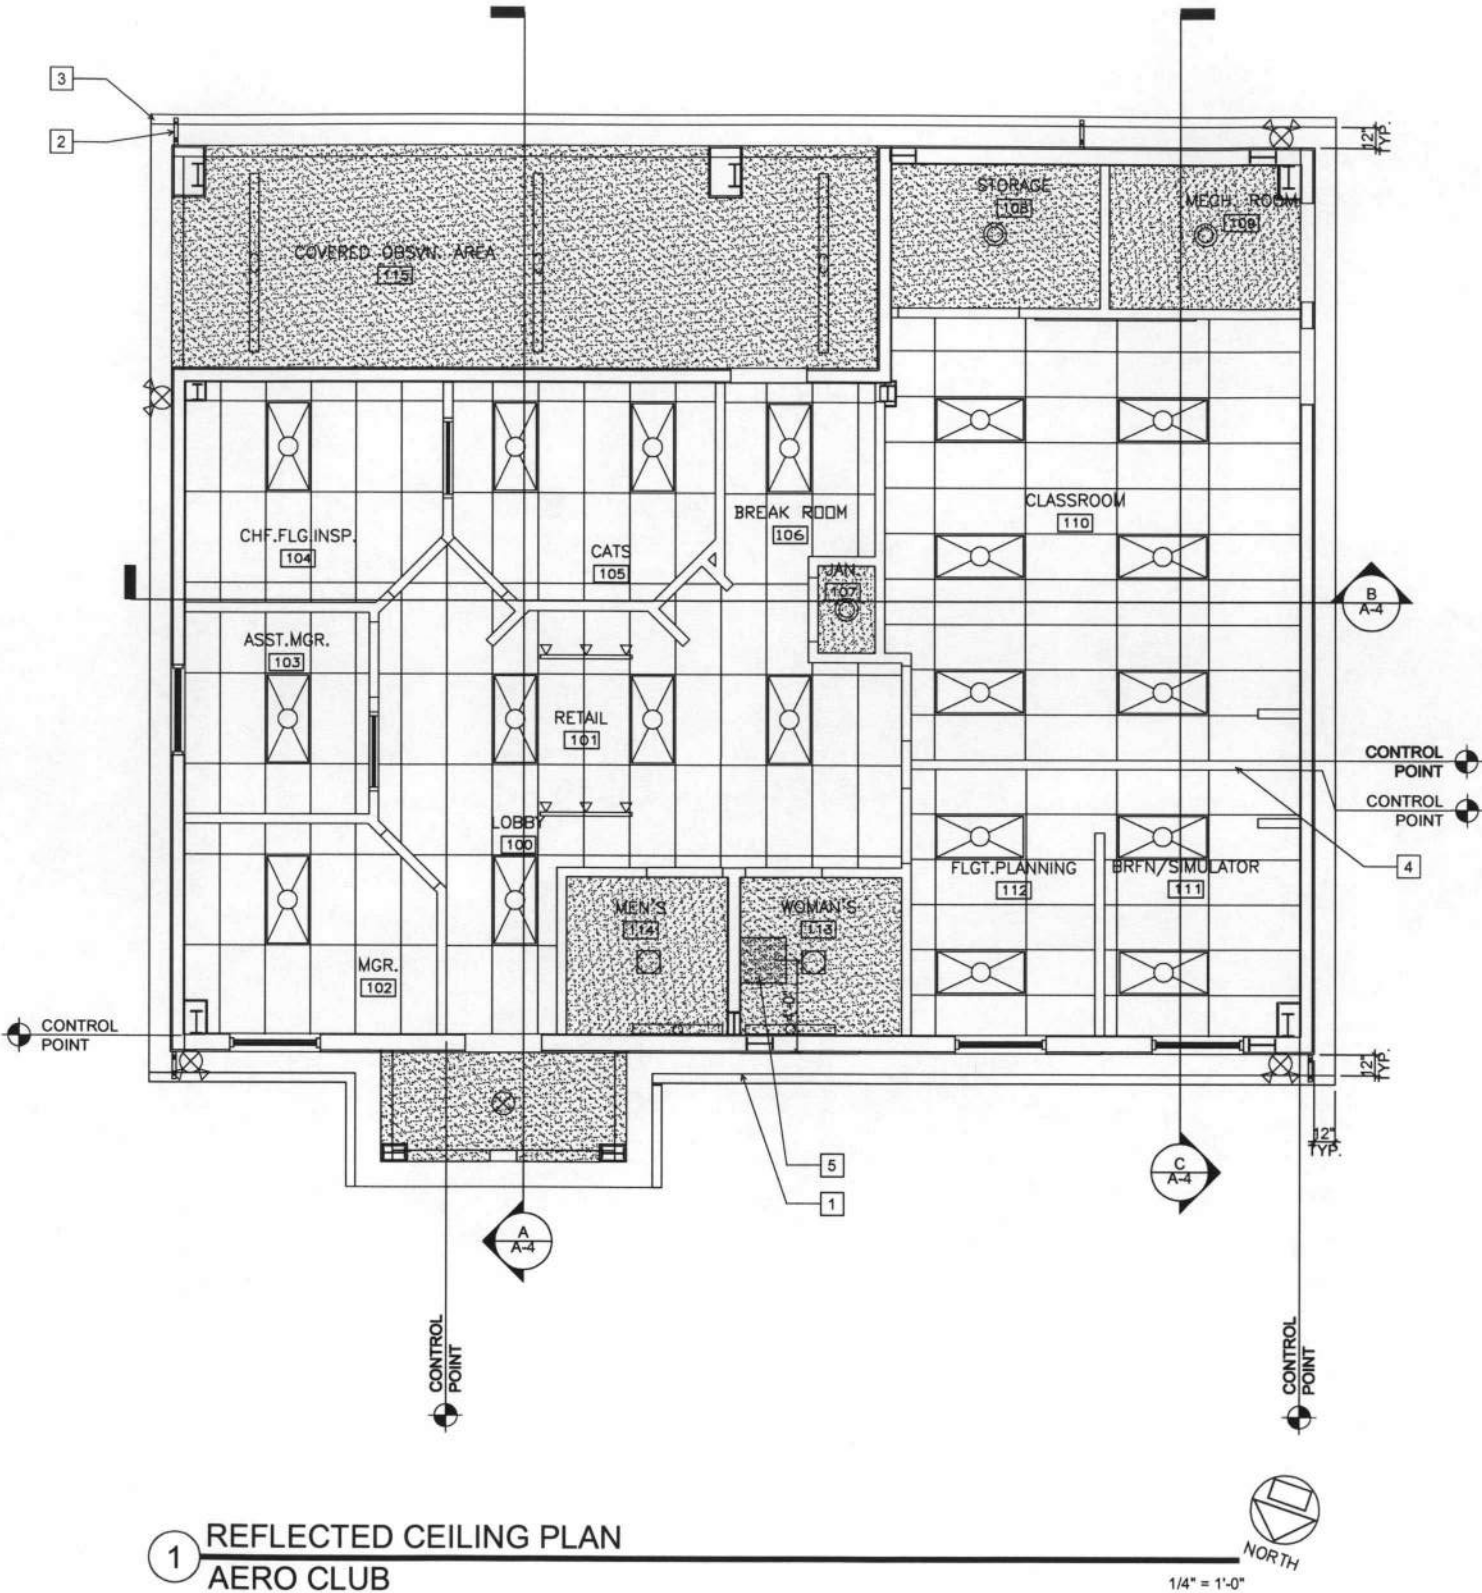

1 REFLECTED CEILING PLAN  
AERO CLUB





# BEALE Air Force Base

| APPROVED     |                         |
|--------------|-------------------------|
| SIGNATURE    | OFFICE                  |
|              | Base Civil Engineer     |
|              | Chief of Engineering    |
|              | Chief of Safety         |
|              | Chief of Design         |
|              | Chief of Environmental  |
|              | Contracting             |
|              | User                    |
| COORDINATION |                         |
|              | Air-Field Manager       |
|              | Ground Safety           |
|              | Communications          |
|              | Computers               |
|              | Environmental Engineer  |
|              | Security Police         |
|              | Security System         |
|              | Fire Chief              |
|              | Chief of Operations     |
|              | Construction Management |
|              | Roofing Engineer        |
|              | Pavements Engineer      |
|              | Corrosion Engineer      |
|              | Productive Costing Engr |


DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC+ ASSOCIATES**  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
725 SUNSHINE AVE. STE. 101  
ROSELLE, CALIFORNIA 94611  
916-878-5355




|               |                             |
|---------------|-----------------------------|
| FILE: 05-0035 | Beale                       |
| Designer: OS  | Project Manager: P. HAWKINS |
| Writer: OS    | Date: 5/21/08               |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |


|                                                                          |              |
|--------------------------------------------------------------------------|--------------|
| SHEET TITLE                                                              |              |
| AERO CLUB<br>EXTERIOR ELEVATIONS                                         |              |
| SCALE                                                                    |              |
| SHEET 8                                                                  | OF 19        |
| PROJECT TITLE                                                            |              |
| CES/CECN<br>AERO CLUB ADMIN/TRAINING<br>FACILITY # 1232<br>BEALE AFB, CA |              |
| Project Number                                                           | BAEY 05-0035 |
| Drawing File Number                                                      | 1232-001     |
| SHEET NUMBER                                                             | A-3          |

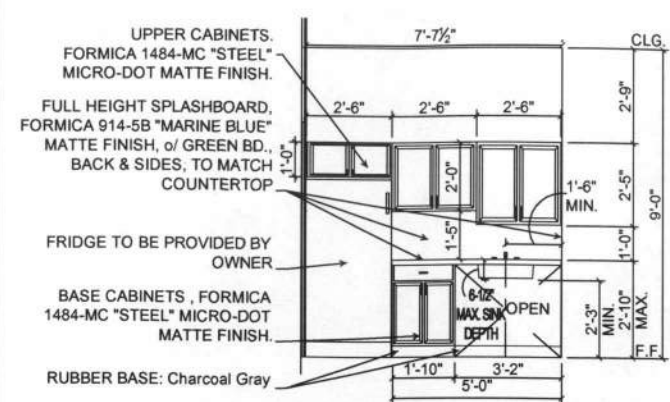


6 INT. ELEVATION - BREAK ROOM  
AERO CLUB  
3/8" = 1'-0"

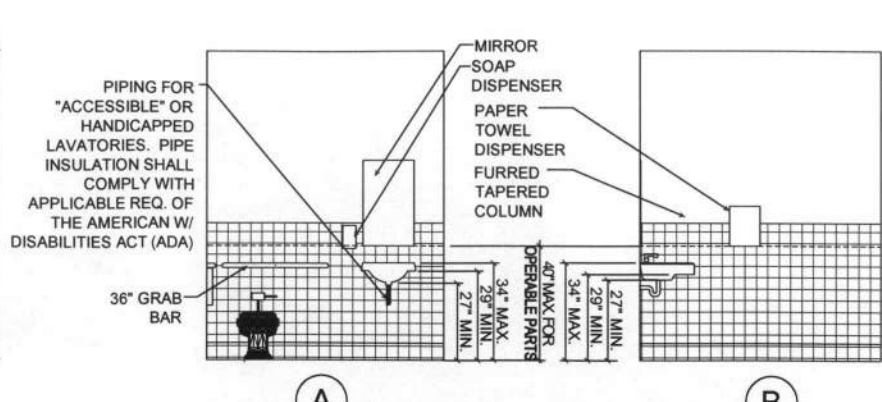


5 INT. ELEVATION - ADA RESTROOM  
AERO CLUB  
3/8" = 1'-0"

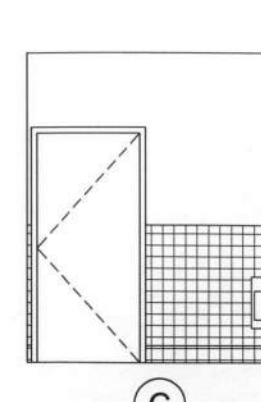


C

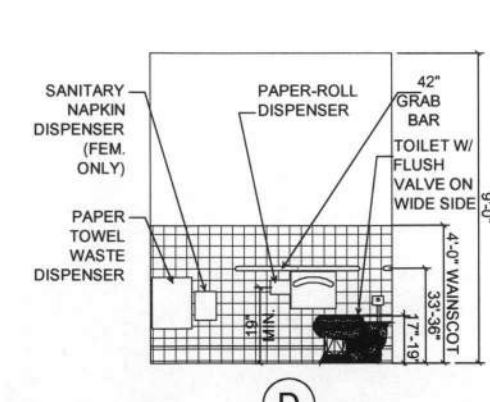


D

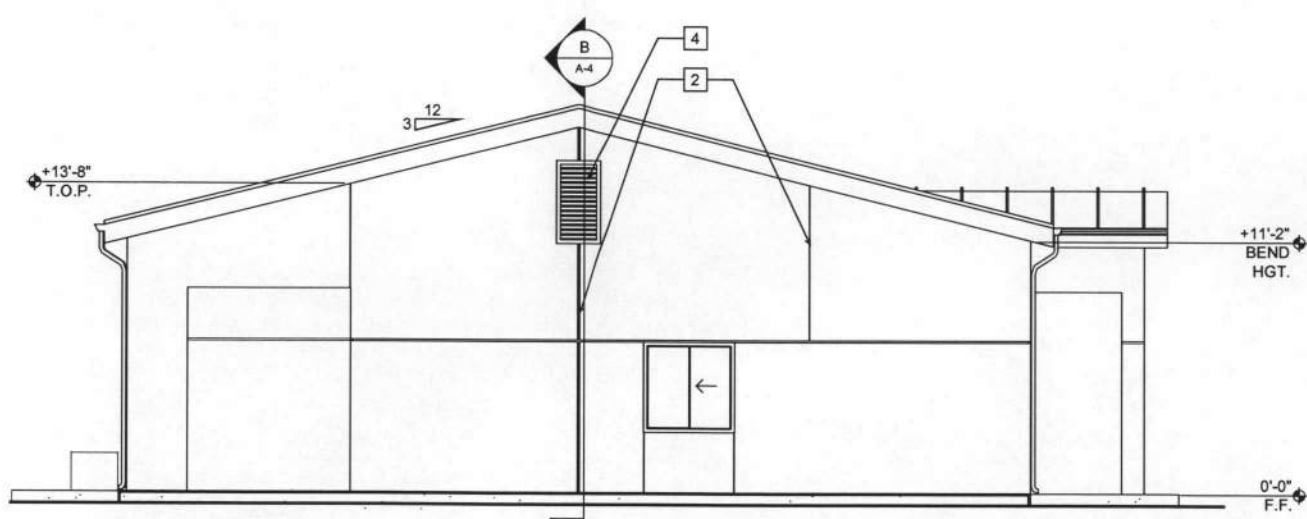


3 EAST ELEVATION  
AERO CLUB  
1/4" = 1'-0"

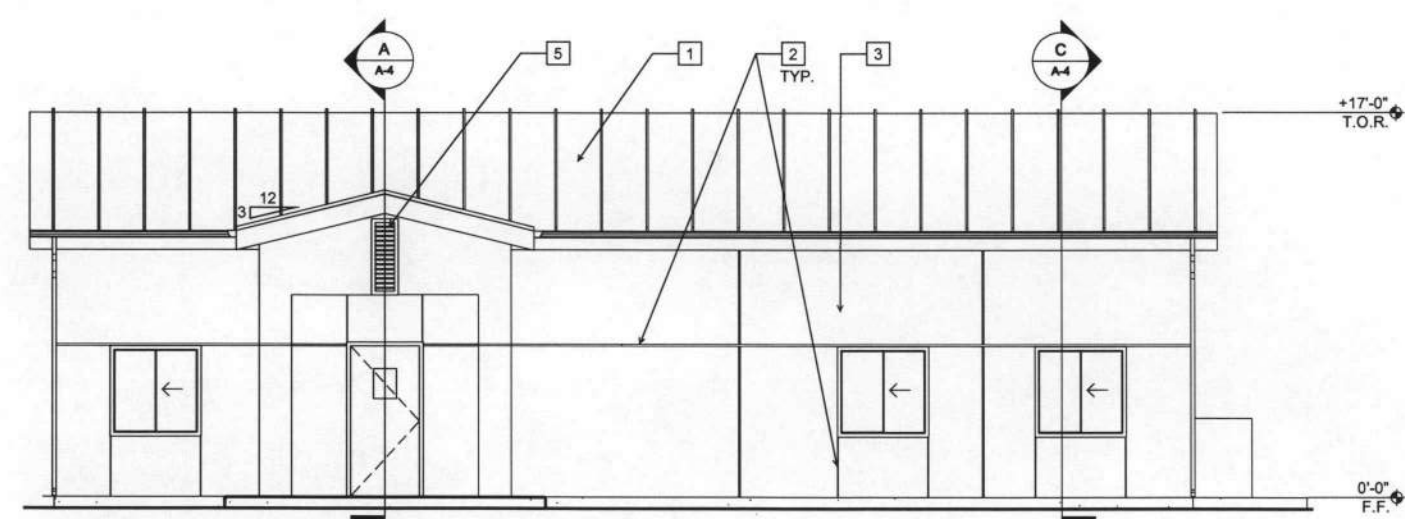






1 NORTH ELEVATION  
AERO CLUB  
1/4" = 1'-0"

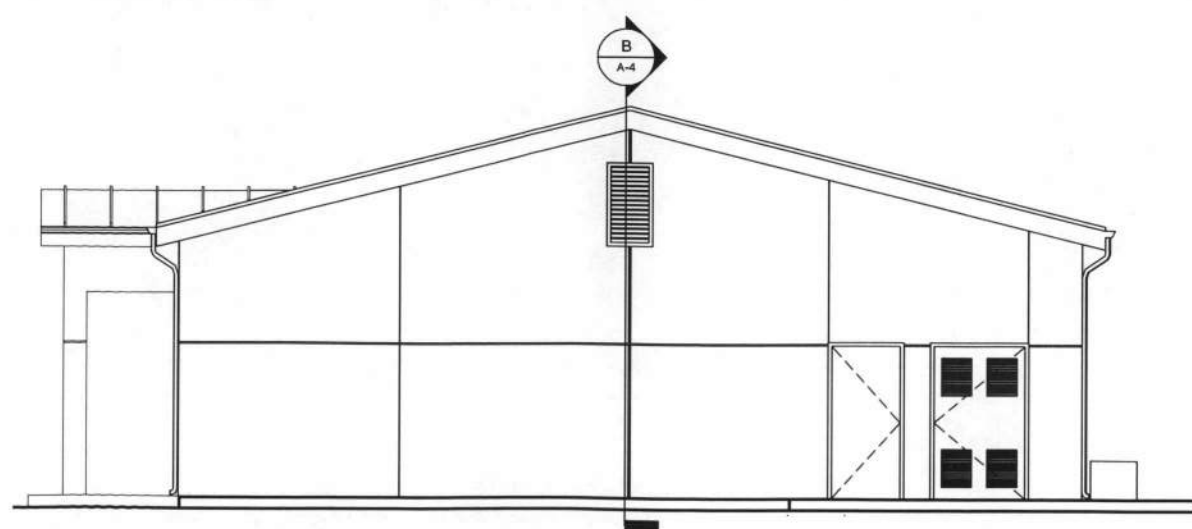


4 WEST ELEVATION  
AERO CLUB  
1/4" = 1'-0"

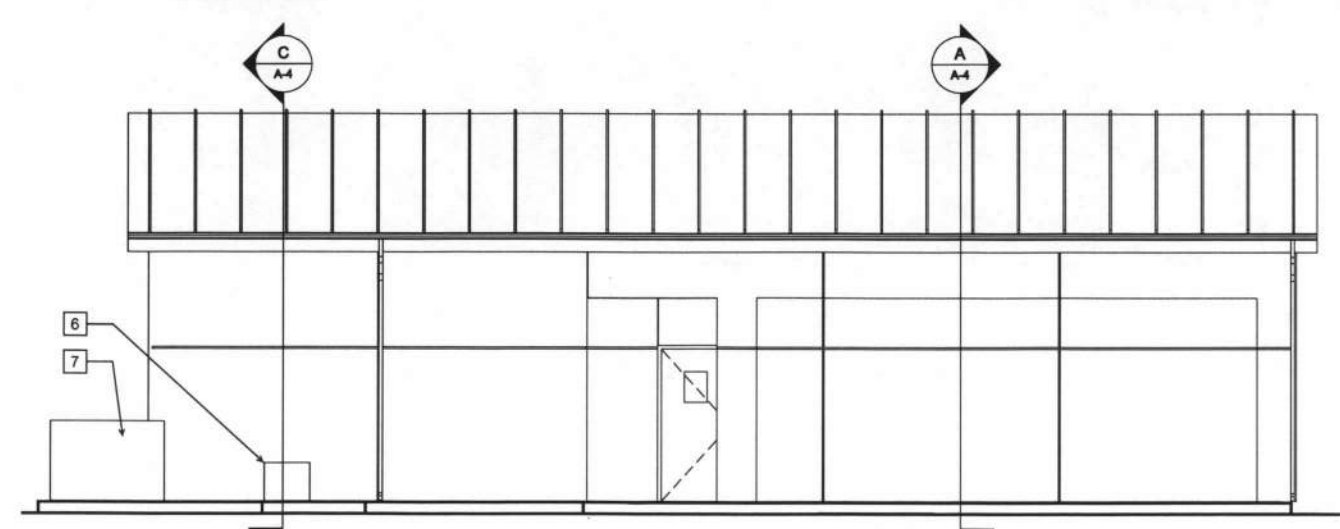


2 SOUTH ELEVATION  
AERO CLUB  
1/4" = 1'-0"

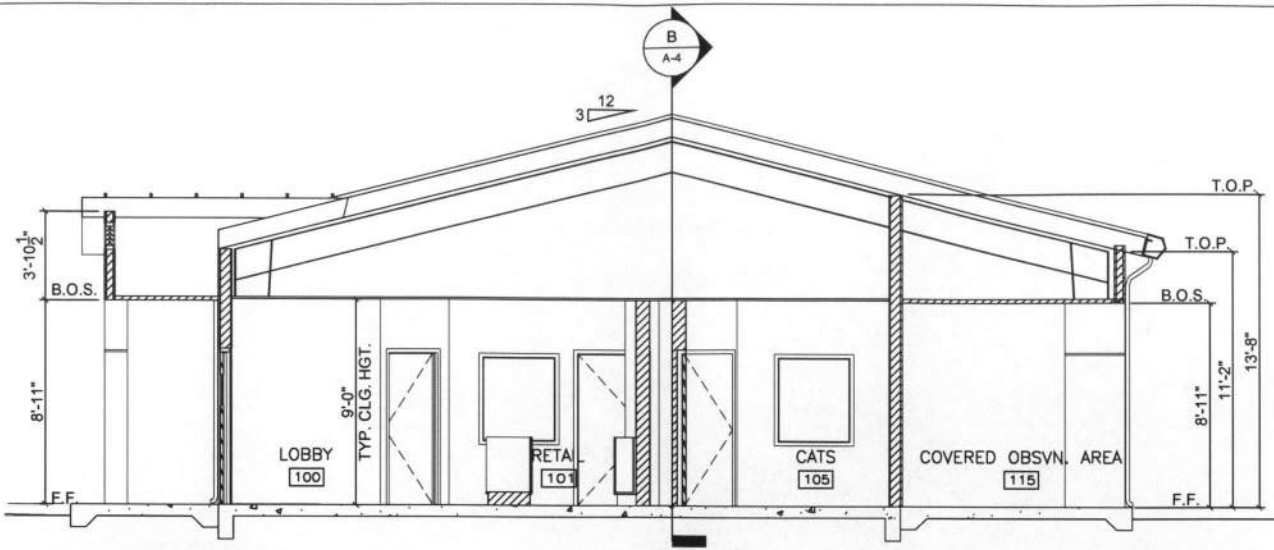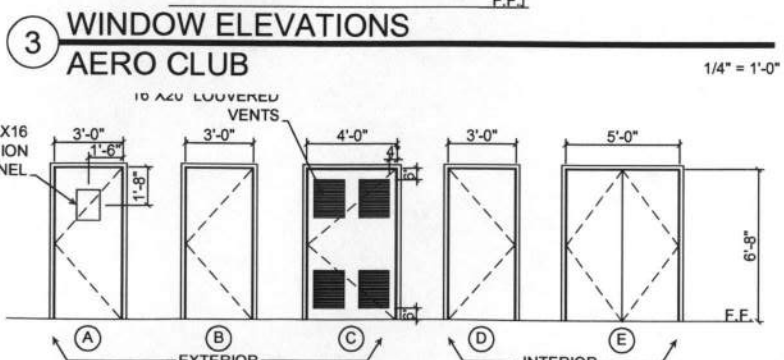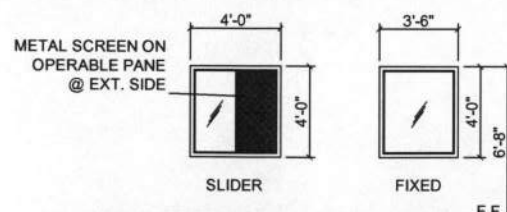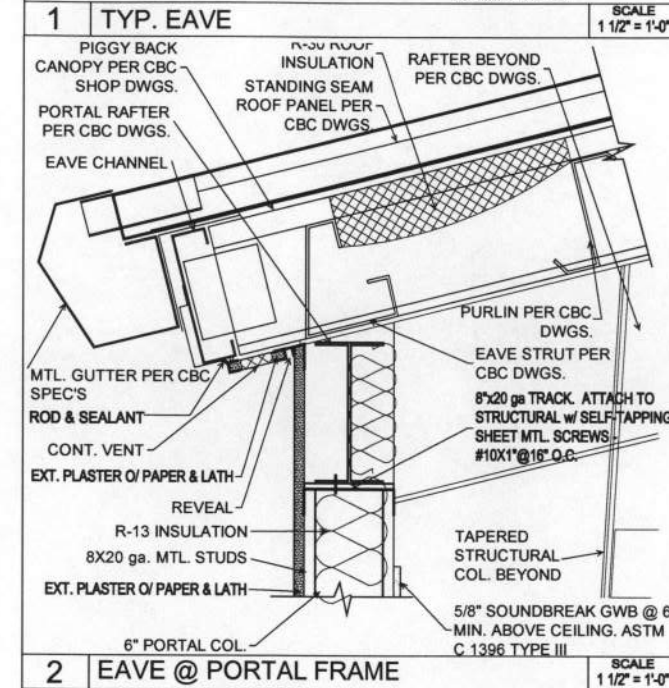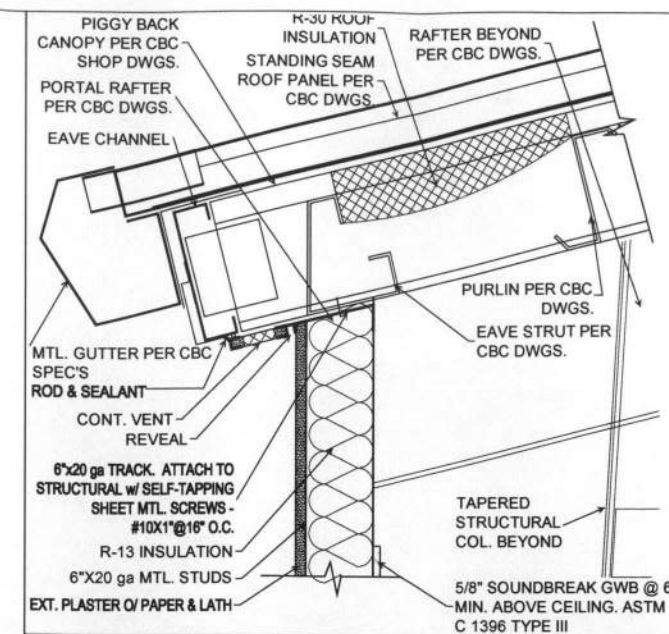

**A SECTION AERO CLUB**

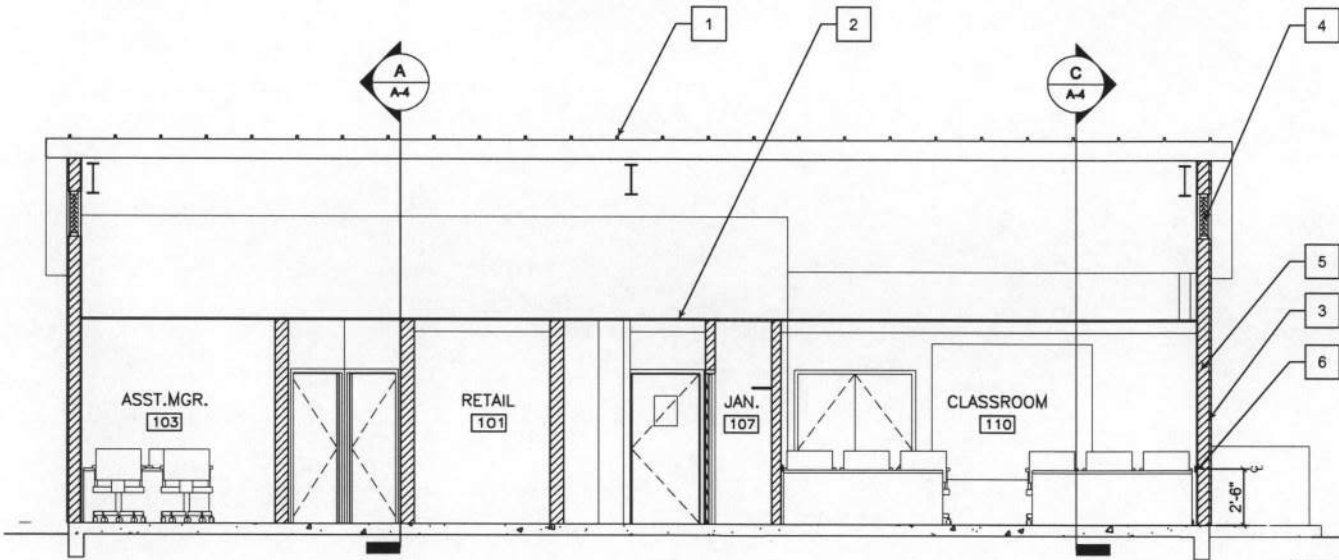

**B SECTION AERO CLUB**

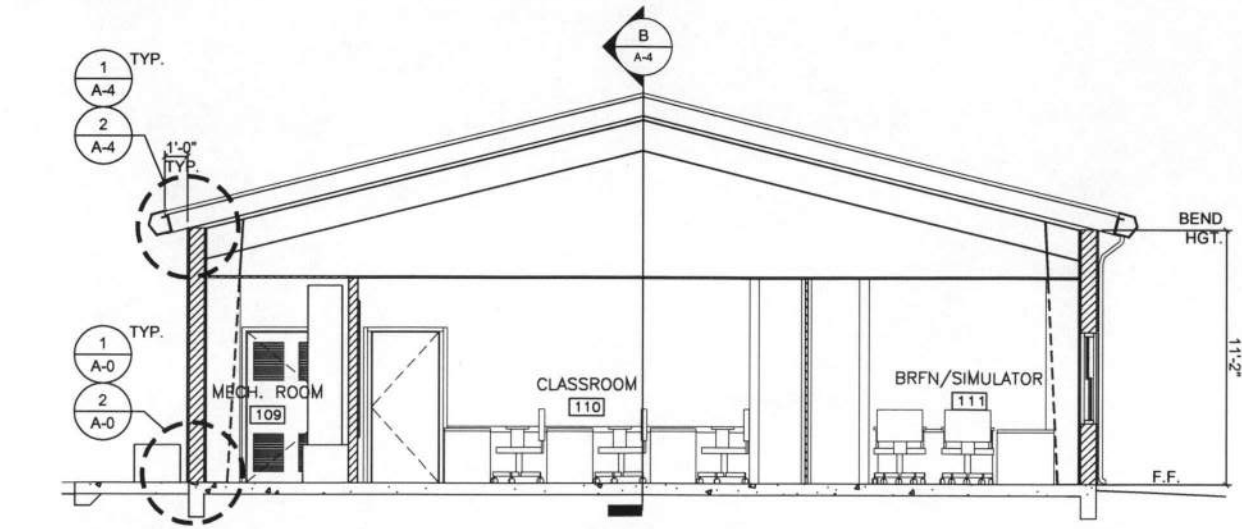

**C SECTION AERO CLUB**

GENERAL NOTES

1. CEILING HEIGHT TO BE AT +9'-0" FROM FLOOR FINISH UNLESS OTHERWISE NOTED.


**LEGEND NOTES**

1. STANDING SEAM METAL ROOF w/ THERMAL/SOUND INSULATION, TYP.
2. CEILING PER REFLECTED CEILING PLAN
3. STUCCO FINISH
4. LOUVERED VENT. REFER TO EXT. ELEV.
5. WALL w/ THERMAL/SOUND INSULATION, TYP.
6. CHAIR RAIL PER SPECIFICATIONS. TYP. IN CLASSROOM. HORIZONTAL WOOD GRAIN TO MATCH DOORS.

**GENERAL REQUIREMENTS  
SANITARY FACILITIES**



NOTE: PICTOGRAMS AND / OR LETTERING ARE NOT REQUIRED ON DOOR-MOUNTED SIGNAGE.

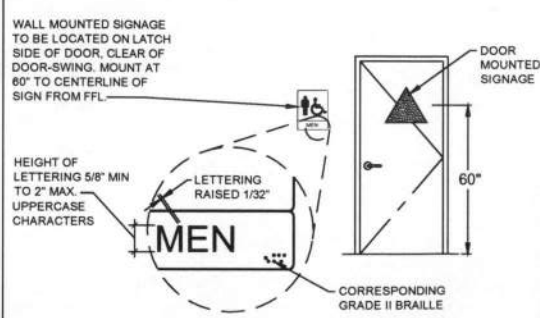

**TOILET ROOM SIGNAGE**



**BEALE**  
Air Force Base

| APPROVED     |                                    |
|--------------|------------------------------------|
| SIGNATURE    | OFFICE                             |
|              | Base Civil Engineer                |
|              | Chief of Engineering               |
|              | Chief of Design                    |
|              | Chief of Environmental Contracting |
|              | User                               |
| COORDINATION |                                    |
|              | Airfield Manager                   |
|              | Ground Safety                      |
|              | Communications                     |
|              | Computers                          |
|              | Environmental Engineer             |
|              | Security Police                    |
|              | Security Systems                   |
|              | Fire Chief                         |
|              | Chief of Operations                |
|              | Construction Management            |
|              | Roofing Engineer                   |
|              | Pavements Engineer                 |
|              | Commission Engineer                |
|              | Protective Coatings Eng.           |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC+ASSOCIATES**  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
705 SUNSHINE AVE., STE. 100  
ROSELILLE, CALIFORNIA 95061  
916-878-5355



FILE: 05-0035 Beale

|           |    |                 |            |
|-----------|----|-----------------|------------|
| Designer  | OS | Project Manager | P. HAWKINS |
| Draftsman | OS | Date            | 5/21/08    |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

**SHEET TITLE**

AERO CLUB BUILDING SECTIONS

SCALE

SHEET 9 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING FACILITY # 1232  
BEALE AFB, CA

Project Number: BA05 05-0035

Drawing File Number: 1232-001  
SHEET NUMBER: A-4







**BEALE**  
Air Force Base

APPROVED

| SIGNATURE | OFFICE                 |
|-----------|------------------------|
|           | Base Civil Engineer    |
|           | Chief of Engineering   |
|           | Chief of Construction  |
|           | Chief of Environmental |
|           | Chief of Contracting   |
|           | User                   |

COORDINATION

|  |                          |
|--|--------------------------|
|  | Airfield Manager         |
|  | Ground Safety            |
|  | Communications           |
|  | Construction             |
|  | Environmental Engineer   |
|  | Police                   |
|  | Security                 |
|  | Systems                  |
|  | Fire Chief               |
|  | Chief of Operations      |
|  | Construction Management  |
|  | Roofing                  |
|  | Plumbing                 |
|  | Electrical               |
|  | Corrosion                |
|  | Engineer                 |
|  | Protective Coatings Eng. |

DESIGN FIRM

**PHILIP HAWKINS**  
**ARCHITECT**  
INC. ASSOCIATES

ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
7700 BURBANK AVE., STE. 101  
ROCKVILLE, CALIFORNIA 94061  
916-478-0550

Consultant



|          |                 |
|----------|-----------------|
| Designer | Project Manager |
| —        | LEN             |
| Checker  | Date            |
| —        | 5/21/08         |

REVISION BY/DATE

|                       |             |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PHL 5/21/08 |
| 95% Design Submittal  | PLH 4/14/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

SHEET TITLE

**AERO CLUB**  
**FOUNDATION PLAN**

SCALE 1/4"=1'-0"

SHEET 11 OF 19

PROJECT TITLE

CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number

BAEY 05-0035

Drawing File Number

1232-001

SHEET NUMBER

S2

FOUNDATION NOTES:


- ALL HEIGHTS SHOWN ON PLAN ARE FROM ELEV. 0'-0" DATUM
- 6" CONC. SLAB W/ #4s @ 12" O.C. EACH WAY AT CENTER OF SLAB UNDER ALL INTERIOR CONCRETE FLOOR SLABS ON GRADE PROVIDE A 2" LAYER OF MOIST SAND OVER A 10 MIL VISQUEEN VAPOR BARRIER OVER PROPERLY GRADED SUBGRADE
- ALL FOOTINGS AND SLAB SHALL REST ON FIRM NATURAL OR APPROVED COMPACTED FILL, AS PER SOIL REPORT RECOMMENDATIONS.
- ALL DIMENSIONS ARE FACE OF CONCRETE LINE TYPICAL, U.N.D.
- RUN ALL GRADE BEAM REINFORCING THRU PAD FOOTING TYP. U.N.D. ON DETAILS.
- REINFORCING SHALL BE IN PLACE AND SUBJECT TO INSPECTION PRIOR TO POURING THE GRADE BM. / SLAB.
- ANCHOR BOLT, HOLDOWN AND POST BASE SIZES AND LOCATIONS SHALL BE PER STRUCTURAL PLANS, THE PLACEMENT OF THESE ITEMS SHALL BE COORDINATED WITH THE FRAMING CONTRACTOR
- ALL ANCHORS SHALL BE SECURELY TIED IN IN PLACE BEFORE POURING OF CONCRETE.
- ANCHOR BOLTS, DOWELS, INSERTS, ETC. SHALL BE SECURELY TIED IN PLACE PRIOR TO POURING CONCRETE.
- ALL COLUMN BASES, COLUMN BOLTING, HOLDOWN STRAPS AND HOLDOWN BOLTS, CRITICAL TO THE STRUCTURAL INTEGRITY OF THIS BUILDING SHALL BE HELD IN PLACE BY MEANS OF TEMPLATE PRIOR TO FOUNDATION INSPECTION
- CONC. CONTRACTOR SHALL PLACE CONTROL JOINTS PER DETAIL 1-58 SO AS TO LIMIT SLAB CRACKING
- PROVIDE CONTROL JOINTS WITH IN FIRST 8 HOURS OF POURING CONCRETE.
- REFER TO ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR MISC. ITEMS TO BE CAST INTO CONCRETE AND FOR LOCATIONS OF FLOOR FINISHES, DEPRESSIONS, FITS, ECT.
- PRIOR TO FOUNDATION INSPECTION
  - REINFORCING FOR SLAB AND FOOTING SHALL BE PROPERLY SET.
  - ALL ANCHORS SHALL BE SECURELY TIED IN PLACE.
  - OVER-EXCAVATION AND COMPACTION SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER.

| MARK                                                                                          | SIZE AND REINFORCING                                                    |
|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| (A)                                                                                           | 3'-0" SQ. x 24" DEEP CONC. PAD FOOTING W/ 4-#5 EACH WAY AT TOP & BOTTOM |
| (B)                                                                                           | 4'-0" SQ. x 24" DEEP CONC. PAD FOOTING W/ 5-#5 EACH WAY AT TOP & BOTTOM |
| (C)                                                                                           | 5'-0" SQ. x 24" DEEP CONC. PAD FOOTING W/ 6-#5 EACH WAY AT TOP & BOTTOM |
| NOTE:<br>ALL PAD FOOTINGS SHALL BE 6" BELOW ADJACENT SLAB UNLESS DETAILED OR NOTED OTHERWISE. |                                                                         |

NOTE:  
SEE SHEET S1 FOR ALL ABBREVIATIONS, STRUCTURAL SYMBOLS / LEGEND.

NOTE:  
EDGE OF FOUNDATION TO EXTEND 1" BEYOND FACE OF STUDS @ BLD'G PERIMETER.

NOTE:  
REFER TO "CBC" STEEL BUILDING COMPANY DRAWING I OF 10 FOR ALL ANCHOR BOLT PLACEMENT LOCATIONS AND BASE PLATE TYPE, AND SEE SHEET I OF 10 FOR BASE PLATE DETAILS FOR ORIENTATION.  
ALL COLUMNS ON THIS PLAN HAVE A "BP" NUMBER WHICH CORRESPONDS TO THE ABOVE REFERENCED STEEL PLANS.

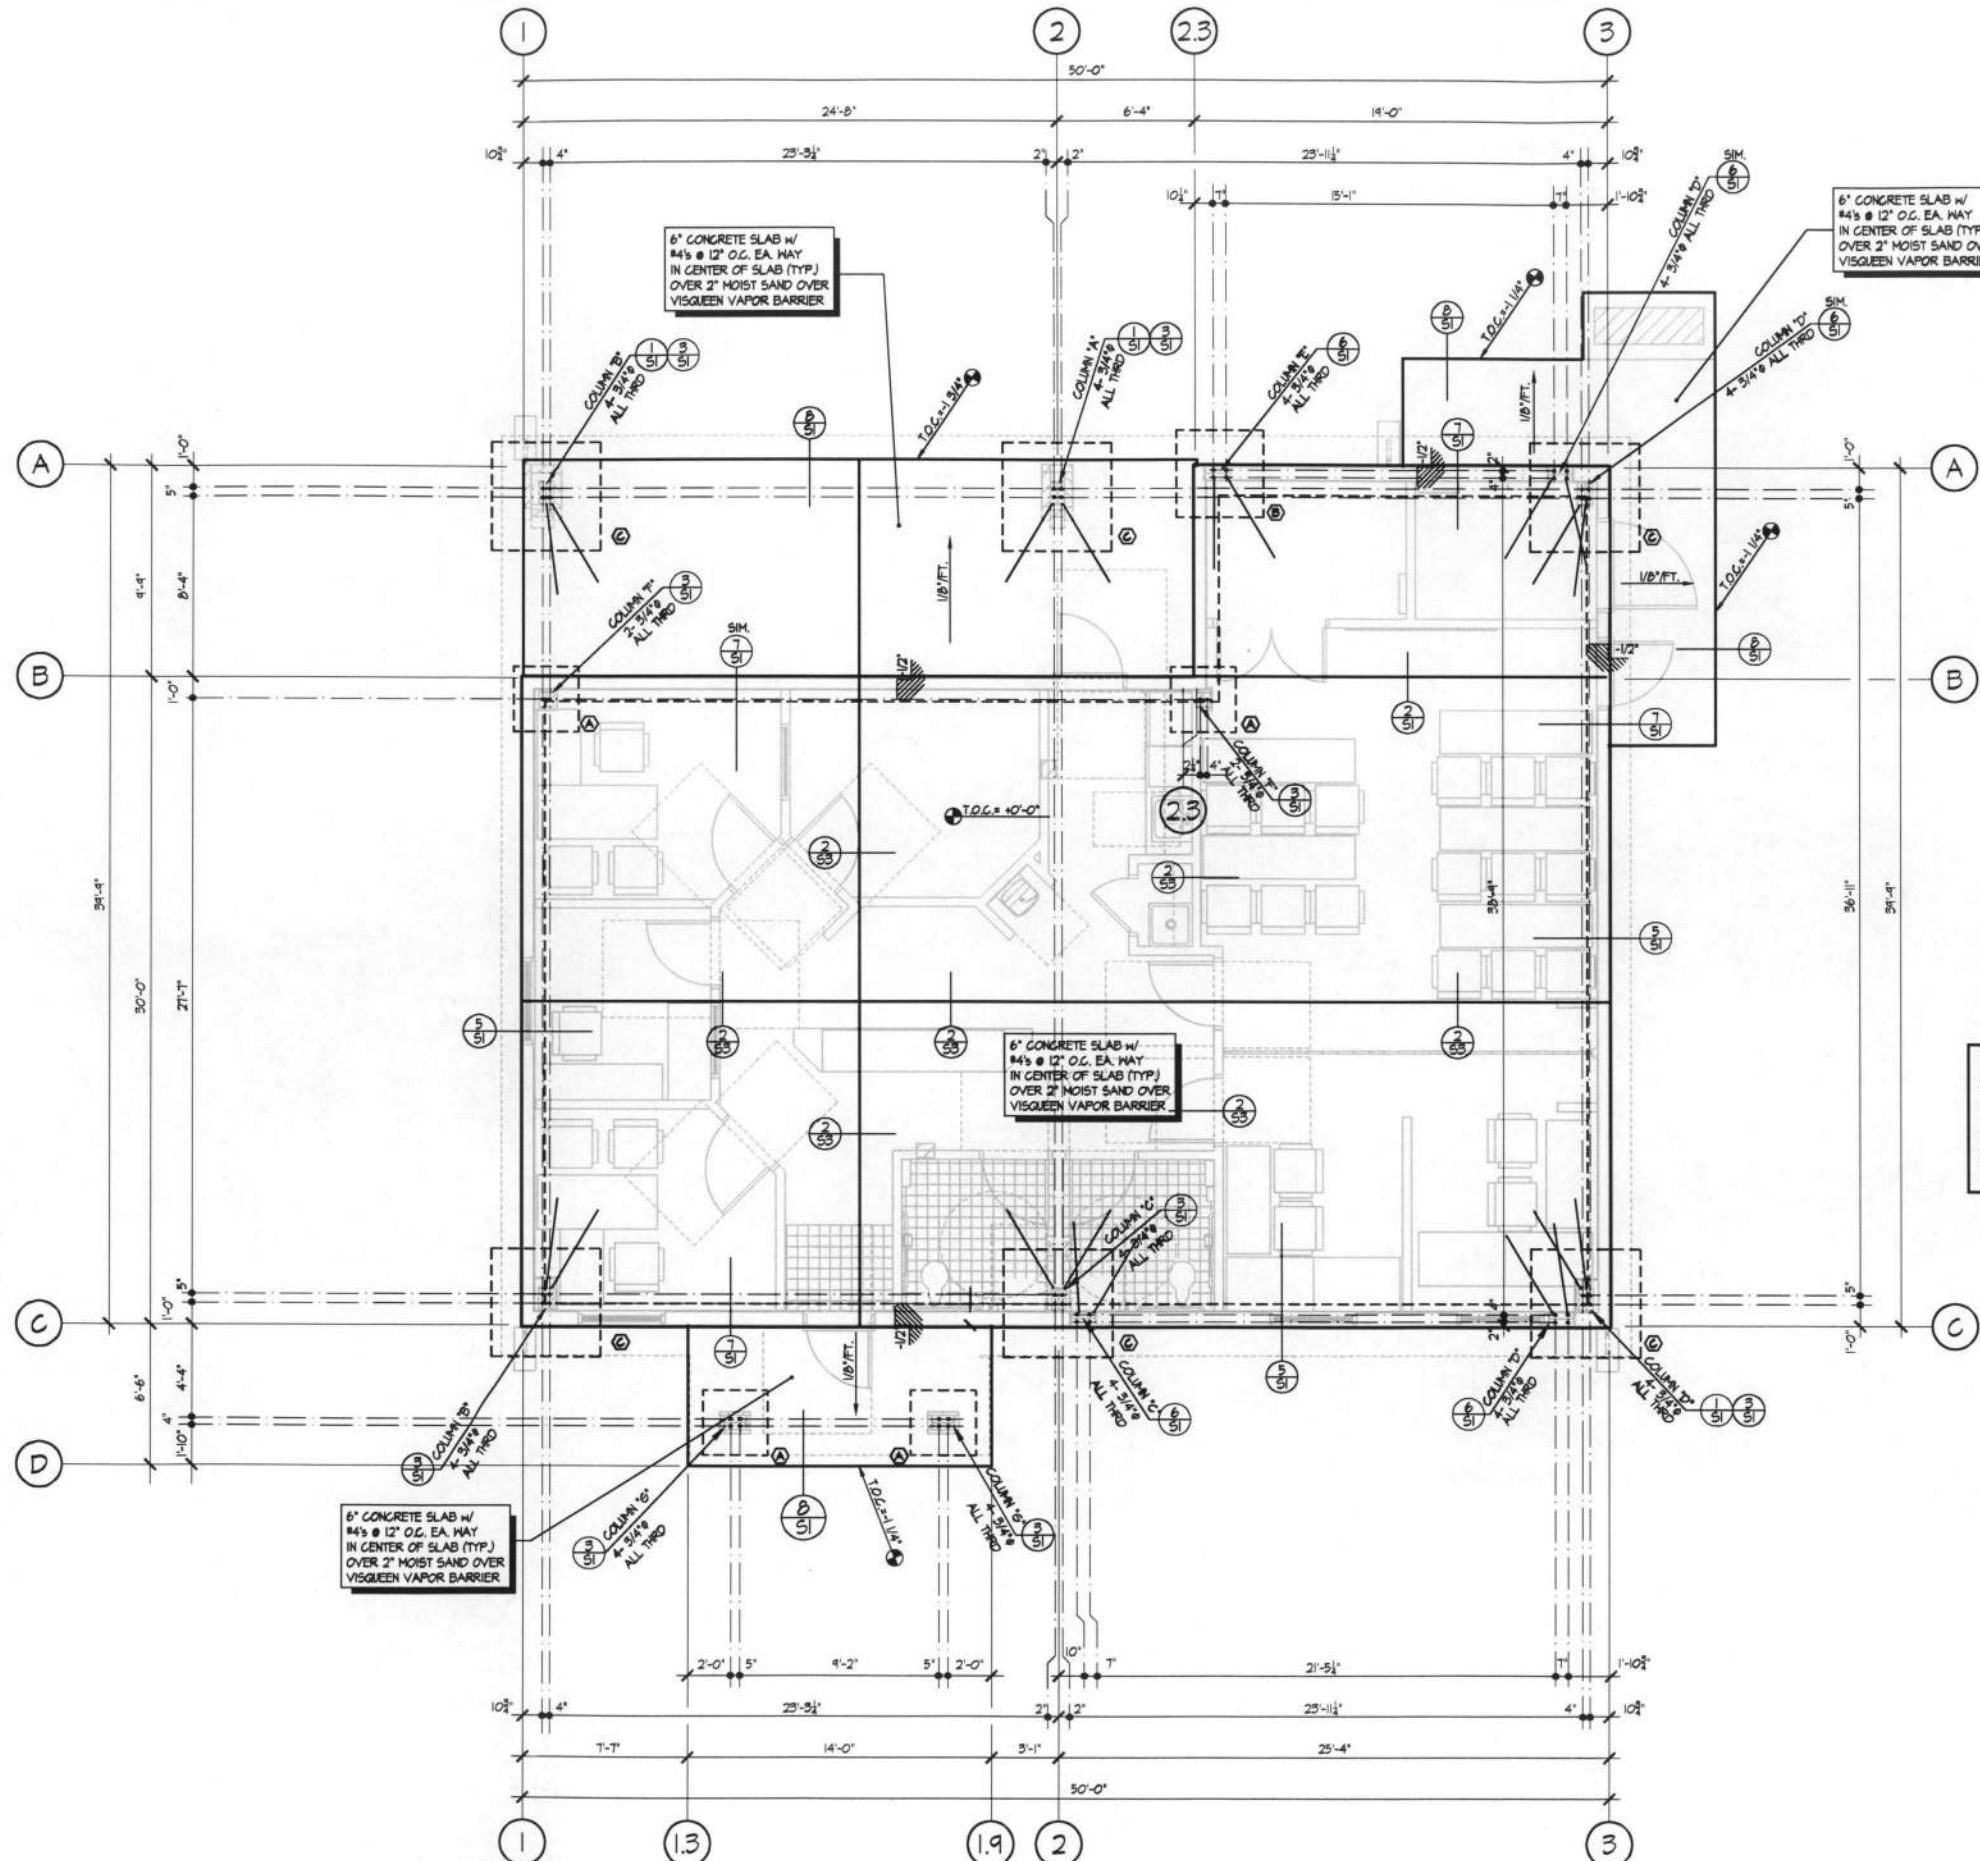



# REGISTER LEGEND

| SYMBOL | TAG | MODEL | SIZE  | USE    | MANUFACTURER |
|--------|-----|-------|-------|--------|--------------|
|        | R1  | 100D  | 6X6   | SUPPLY | SHOE MAKER   |
|        | R2  | 104D  | 6X6   | SUPPLY | SHOE MAKER   |
|        | R3  | 104D  | 8X8   | SUPPLY | SHOE MAKER   |
|        | R4  | 830   | 24X24 | RETURN | SHOE MAKER   |

# FAN LEGEND


| SYMBOL | TAG   | MODEL     | CFM | MANUFACTURER |
|--------|-------|-----------|-----|--------------|
|        | CEF-1 | FV-15VQL4 | 150 | PANASONIC    |

# EQUIPMENT LEGEND

| SYMBOL | TAG  | MODEL     | ITEM        | MANUFACTURER |
|--------|------|-----------|-------------|--------------|
|        | AH-1 | FX4CNB060 | AIR HANDLER | CARRIER      |
|        | HP-1 | 25HCA360  | HEAT PUMP   | CARRIER      |


# SYMBOL LEGEND

|  |                              |
|--|------------------------------|
|  | MANUAL VOLUME DAMPER         |
|  | SUPPLY DUCT (SIZE AS MARKED) |
|  | RETURN DUCT (SIZE AS MARKED) |
|  | THERMOSTAT                   |

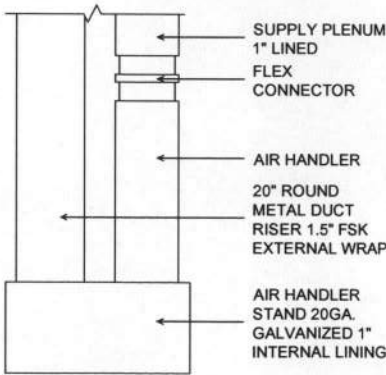

# EQUIPMENT DETAIL AERO CLUB

1/2" = 1'-0"

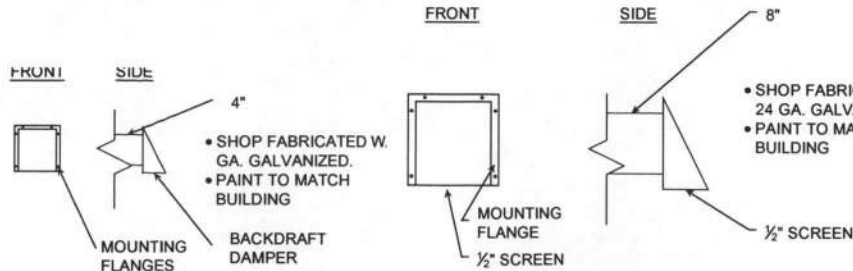

# EXHAUST HOOD DETAIL AERO CLUB


1" = 1'-0"

# INTAKE HOOD DETAIL AERO CLUB

1" = 1'-0"

# GENERAL MECHANICAL NOTES

- ALL DUCTWORK CONSTRUCTION AND INSTALLATION SHALL BE IN STRICT ACCORDANCE WITH CHAPTER 6 OF THE 2007 INTERNATIONAL MECHANICAL CODE.
- JOINTS IN DUCTWORK SHALL BE SEALED WITH A U.L LISTED ADHESIVE. TAPING WHERE REQUIRED SHALL BE ARABOL AND CANVASS.
- ALL DUCT BRANCHES SHALL BE FITTED WITH VOLUME OR SPLITTER DAMPERS IN ORDER TO ACHIEVE THE SUPPLY AND RETURN AIR QUANTITIES SHOWN. CONTROLS SHALL BE ACCESSIBLE AND HAVE LOCKING QUADRANTS.
- FLEXIBLE DUCTS SHALL BE RATED CLASS 1, 250 DEGREE F MAXIMUM TEMPERATURE, U.L APPROVED. FLEXIBLE DUCTS SHALL CONSIST OF AN EXTERIOR REINFORCED LAMINATED VAPOR BARRIER, 1 1/2" THICK FIBER GLASS INSULATION (K = .25 @ 75°F), ENCAPSULATED SPRING STEEL WIRE HELIX AND IMPERVIOUS SMOOTH, NON-PERFORATED INTERIOR VINYL LINER. INDIVIDUAL LENGTHS OF FLEXIBLE DUCTS SHALL CONTAIN FACTORY FABRICATED STEEL CONNECTION COLLARS. FLEXIBLE DUCTS SHALL BE SUPPORTED AT OR NEAR MID-LENGTH WITH 2" WIDE 26 GA. STEEL HANGER COLLAR ATTACHED TO THE STRUCTURE WITH AN APPROVED DUCT HANGER. INSTALLATION SHALL MINIMIZE SHARP RADIUS TURNS OR OFFSETS.
- ALL MITERED ELBOWS SHALL HAVE TURNING VANES.
- ALL DUCTS MUST BE SUPPORTED AND BRACED PER 2007 INTERNATIONAL MECHANICAL CODE AND PER ANCHORAGE APPROVAL FROM THE SMACNA GUIDELINES FOR SEISMIC RESTRAINTS OF MECHANICAL SYSTEMS AND PLUMBING PIPING SYSTEMS.
- PROVIDE COMPLETE, APPROVED TEMPERATURE CONTROL SYSTEMS AS SHOWN ON DRAWINGS. EACH ZONE THERMOSTAT SHALL INCLUDE CAPABILITY OF 2 SETBACK PERIODS PER 24 HOURS AND CAPABILITY OF A MINIMUM SETBACK OF A 10°F AND SHALL BE FURNISHED WITH A LOCKING COVER. INSTALL THERMOSTATS AT +45" FROM FINISHED FLOOR.
- ALL CONTROLS AND CONTROL WIRING NOT SPECIFICALLY SHOWN, BUT NECESSARY TO ACHIEVE AN INTEGRATED, BALANCED, AND PROPERLY WORKING SYSTEM OF ENVIRONMENTAL CONTROL, INCLUDING, BUT NOT LIMITED TO RELAYS, MOTOR STARTERS AND WIRING, INTERCONNECTS SHALL BE SUPPLIED BY THE MECHANICAL CONTRACTOR.
- ALL EQUIPMENT CONDENSATE DRAINS & OVERFLOW DRAINS, OR BLEED DRAIN LINES SHALL BE SUPPLIED AND INSTALLED BY THE MECHANICAL CONTRACTOR.
- AIR QUANTITIES OF EACH OUTLET AND INLET SHALL BE SET WITHIN 5% OF THE QUANTITIES SHOWN ON THE DRAWINGS. NO EXCEPTIONS ALLOWED. DUCT DIMENSIONS SHOWN ARE CLEAR DIMENSIONS. ADDITION OF INTERIOR DUCT LINING SHALL NOT REDUCE THE REQUIRED CLEAR DIMENSIONS OF DUCTWORK.
- ALL DIMENSIONS AND EQUIPMENT LOCATIONS SHALL BE VERIFIED BY THE MECHANICAL CONTRACTOR.
- ALL HVAC EQUIPMENT SHALL BE CERTIFIED PER IBC 2007 AND SHALL HAVE EFFICIENCIES PER IBC 2007. EXHAUST FANS SHALL HAVE DAMPERS PER IBC 2007.
- RIGID GALVANIZED STEEL ROUND DUCTS SHALL BE A MINIMUM 26 GAUGE AND UP TO 14"Ø, 24 GAUGE UP TO 23"Ø, AND 22 GAUGE UP TO 37"Ø. SUPPORTS SHALL BE PROVIDED AT MID-LENGTH, NOT TO EXCEED A MINIMUM OF EVERY 10 FT.
- EACH COOLING OR HEATING SYSTEM SHALL HAVE A SEPARATE CONTROL THERMOSTAT, PROGRAMMABLE SOLID STATE STYLE. EACH SUPPLY AIR FAN SHALL OPERATE CONTINUOUSLY DURING PERIODS OF BUILDING OCCUPANCY. A PURGE CYCLE SHALL BE PROVIDED ONE HOUR PRIOR TO NORMAL BUILDING OCCUPANCY HOURS. NIGHT TIME SETBACK SHALL BE PROVIDED PER CCR T-24. A BYPASS TIMER OF ONE HOUR DURATION SHALL BE PROVIDED FOR EACH SYSTEM FOR PERIODS OF OCCUPANCY OUTSIDE OF NORMAL WORK SCHEDULES.
- REFER TO PLUMBING AND ELECTRICAL PLANS FOR ADDITIONAL INSTALLATION REQUIREMENTS AND DETAILS FOR HVAC SYSTEM. ALL HVAC EQUIPMENT SHALL BE SEISMICALLY BRACED PER SMACNA GUIDELINES AND AS REQUIRED BY THE ARCHITECT AND ALL CODES.

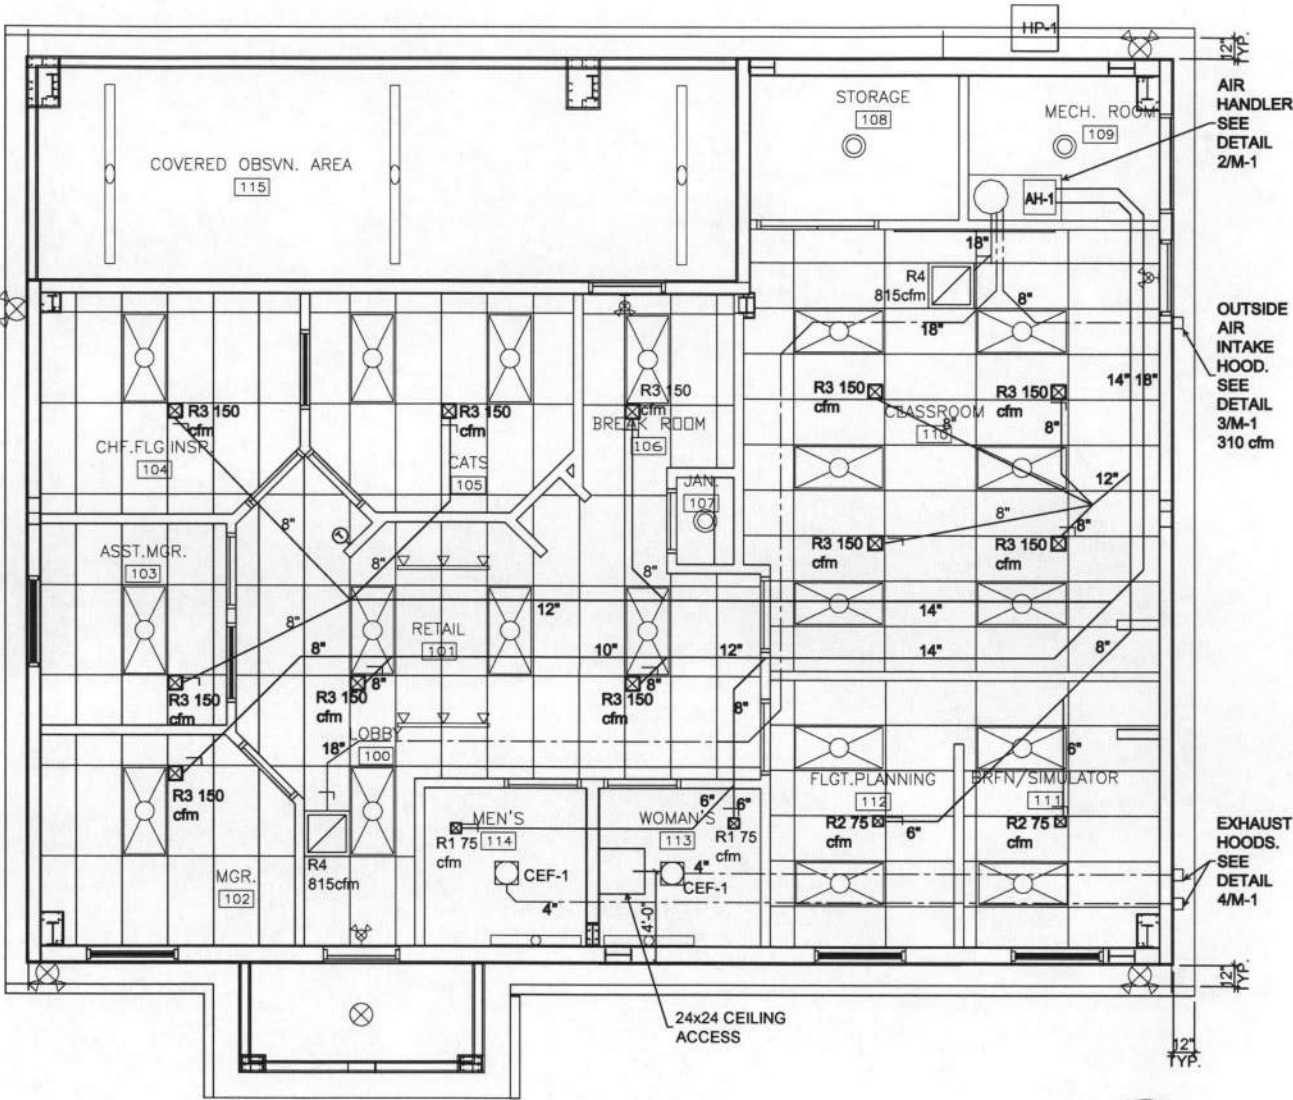

# MECHANICAL PLAN AERO CLUB

1/4" = 1'-0"

AIR HANDLER. SEE DETAIL 2/M-1

OUTSIDE AIR INTAKE HOOD. SEE DETAIL 3/M-1 310 cfm

EXHAUST HOODS. SEE DETAIL 4/M-1



# BEALE Air Force Base

| APPROVED     | OFFICE                   |
|--------------|--------------------------|
| SIGNATURE    | Base Civil Engineer      |
|              | Chief of Engineering     |
|              | Chief of Design          |
|              | Chief of Environmental   |
|              | Contracting              |
|              | User                     |
| COORDINATION |                          |
|              | Air-Field Manager        |
|              | Ground Safety            |
|              | Communications           |
|              | Computers                |
|              | Environmental Engineer   |
|              | Security Police          |
|              | Security Systems         |
|              | Fire Chief               |
|              | Chief of Operations      |
|              | Construction Management  |
|              | Roofing Engineer         |
|              | Pavements Engineer       |
|              | Corrosion Engineer       |
|              | Protective Coatings Eng. |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC+ASSOCIATES**  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
739 SUNRISE AVE., STE. 100  
ROSELILLE, CALIFORNIA 95061  
916-878-5355



|                     |                             |
|---------------------|-----------------------------|
| FILE: 05-0035 Beale |                             |
| Designer: OS        | Project Manager: P. HAWKINS |
| Drafter: OS         | Date: 5/21/08               |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

|                     |                                                                 |
|---------------------|-----------------------------------------------------------------|
| SHEET TITLE         | AERO CLUB MECHANICAL PLAN                                       |
| SCALE               |                                                                 |
| SHEET 12 OF 19      |                                                                 |
| PROJECT TITLE       | CES/CECN AERO CLUB ADMIN/TRAINING FACILITY # 1232 BEALE AFB, CA |
| Project Number      | BAEY 05-0035                                                    |
| Drawing File Number | 1232-001                                                        |
| SHEET NUMBER        | M-1                                                             |

# PLUMBING SYMBOL LIST

W912QR25BA007\_FIO\_RecdDrawings-0002

|        |                                                                            |
|--------|----------------------------------------------------------------------------|
| —      | DOMESTIC HOT WATER PIPING                                                  |
| - - -  | SANITARY SEWER DRAIN LINE                                                  |
| - - -  | SANITARY SEWER VENT PIPING                                                 |
| —X—    | SHUTOFF VALVE                                                              |
| ■      | TANKLESS WATER HEATER PER SPEC'S<br>REFER TO CONTRACTOR FOR EXACT LOCATION |
| → HB   | HOSE BIBB                                                                  |
| U.O.N. | UNLESS OTHERWISE NOTED                                                     |
| VR     | SS VENT RISER                                                              |
| VTR    | SS VENT THROUGH ROOF                                                       |
| C.O.   | CLEANOUT - FLOOR OR WALL                                                   |



**BEALE**  
Air Force Base

| APPROVED     |                                    |
|--------------|------------------------------------|
| SIGNATURE    | OFFICE                             |
|              | Base Civil Engineer                |
|              | Chief of Engineering               |
|              | Chief of Design                    |
|              | Chief of Environmental Contracting |
|              | User                               |
| COORDINATION |                                    |
|              | Airfield Manager                   |
|              | Ground Safety                      |
|              | Communications Computers           |
|              | Biomedical Engineer                |
|              | Security Police                    |
|              | Security Systems                   |
|              | Fire Chief                         |
|              | Chief of Operations                |
|              | Construction Management            |
|              | Roofing Engineer                   |
|              | Payments Engineer                  |
|              | Corrosion Engineer                 |
|              | Protective Coatings Engr           |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC-A S S O C I A T E S**  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
735 SUNRISE AVE. STE. 101  
ROSELILLE, CALIFORNIA 95061  
916-878-5355



FILE: 05-0035 Beale

|          |    |                 |            |
|----------|----|-----------------|------------|
| Designer | OS | Project Manager | P. HAWKINS |
| Drafter  | OS | Date            | 5/21/08    |


| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

SHEET TITLE  
AERO CLUB  
PLUMBING PLANS

SCALE  
SHEET 13 OF 19


PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number: BA05-0035  
Drawing File Number: 1232-001  
SHEET NUMBER: P-1

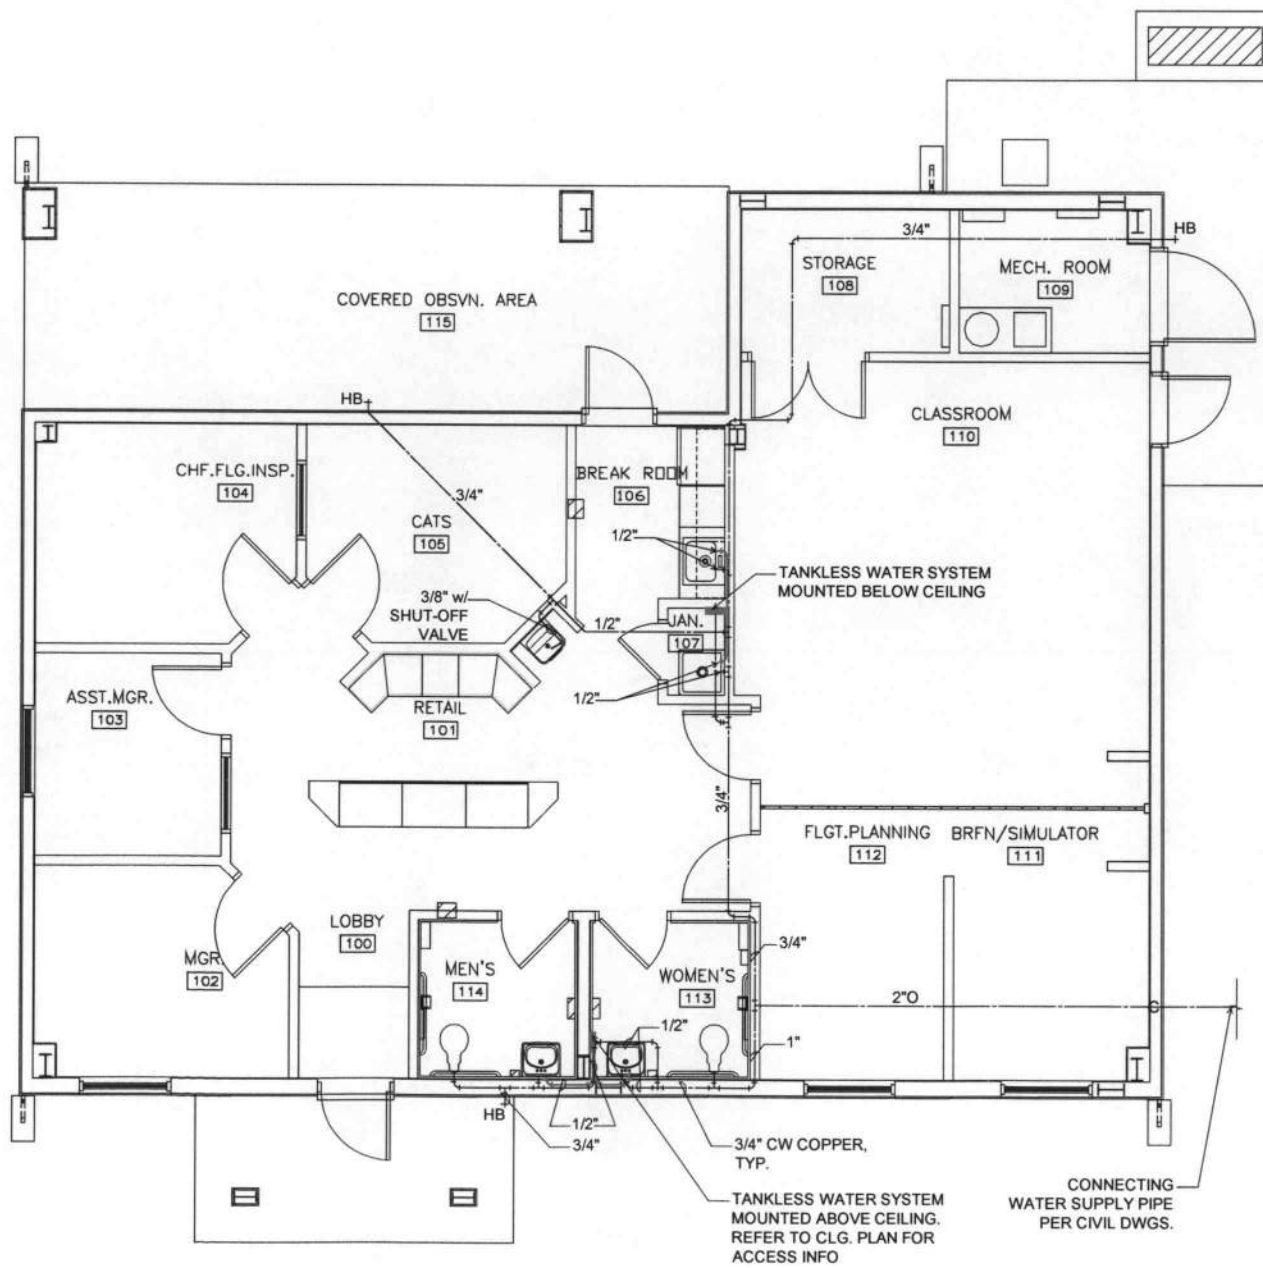

2 PLUMBING FLOOR PLAN - SUPPLY  
AERO CLUB

1/4" = 1'-0"

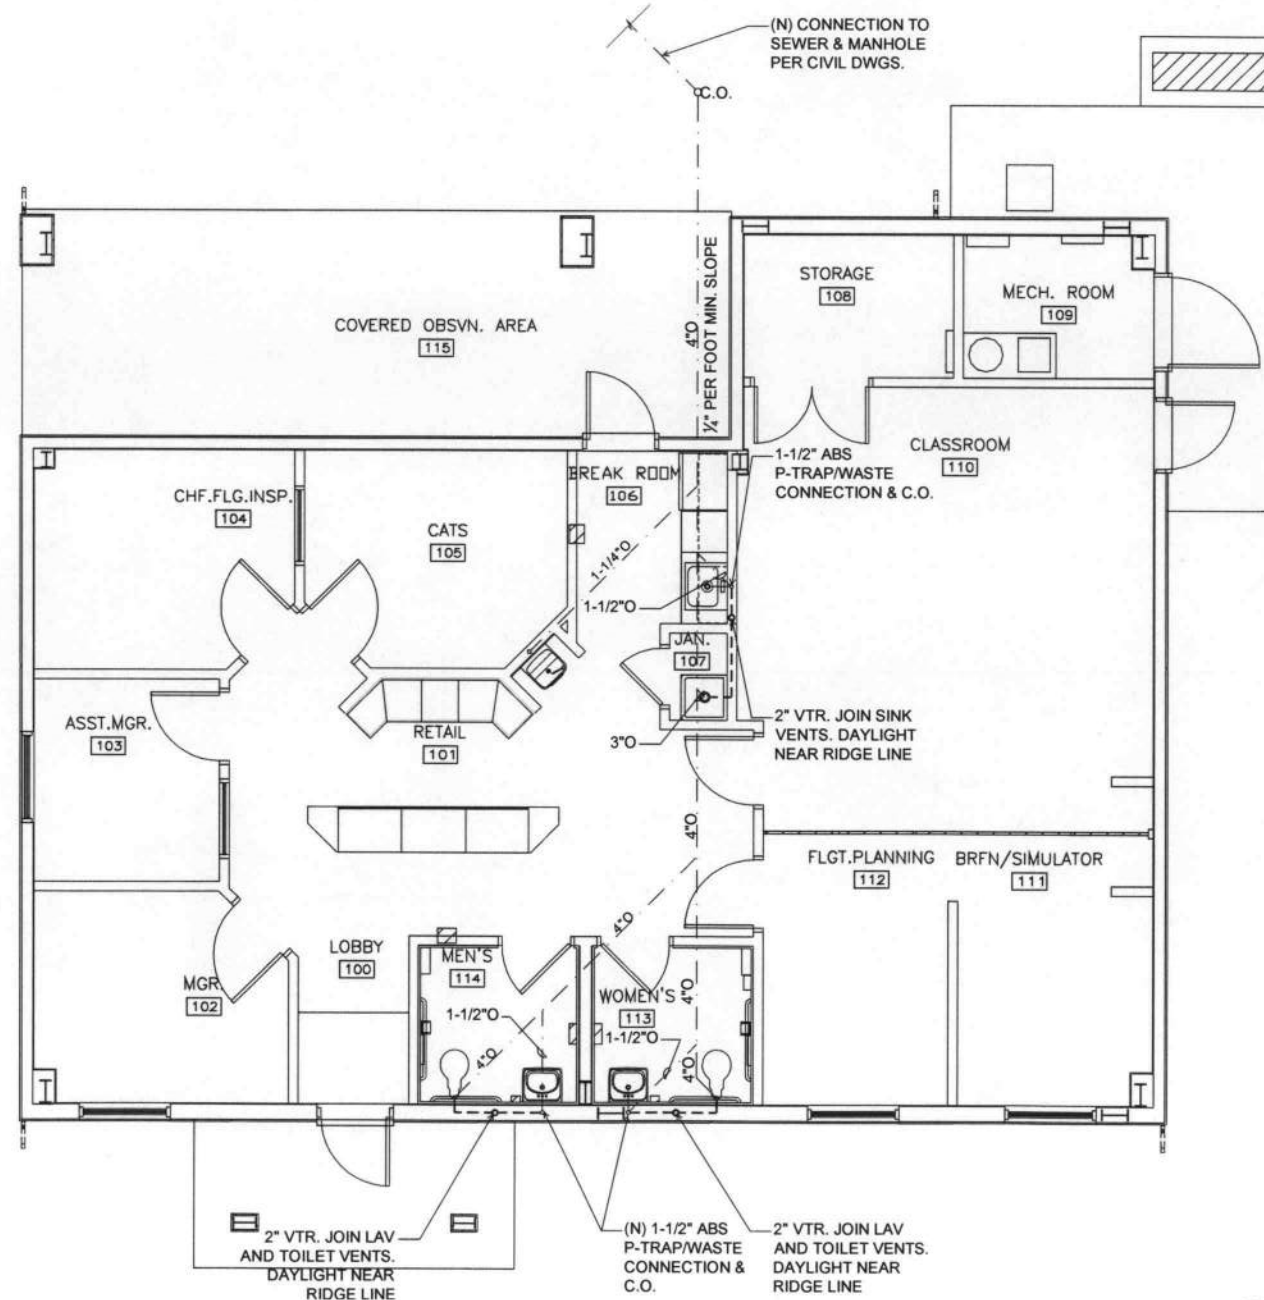

1 PLUMBING FLOOR PLAN - WASTE & VENTS  
AERO CLUB

1" = 1'-0"





| SYMBOL                                                                            |     | DESCRIPTION                                                    | MANUF.                    | SUPPLY | ORDER FROM | NO. | NOTES                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------|-----|----------------------------------------------------------------|---------------------------|--------|------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | 'A' | SINGLE 8' SURFACE MOUNTED LIGHT FIXTURE                        | LITHONIA                  | G.C.   | G.C.       | 3   | STANDARD SURFACE MOUNTED FIXTURE (DM 20R18 120 GE8) WITH (2) 50W T8 LAMPS.                                                                                                                  |
|  | 'B' | 3' SURFACE COMMERCIAL STANDARD WALL BRACKET LIGHT FIXTURE      | LITHONIA                  | G.C.   | G.C.       | 2   | 3' LONG WB STANDARD WALL BRACKET LIGHT FIXTURE (WS125 A12 MVOLT GE108). USE (1) 25W T8 LAMP.                                                                                                |
|  | 'C' | 2X4 T-BAR MOUNTED RECESSED TROFFER                             | LITHONIA                  | G.C.   | G.C.       | 20  | GENERAL PURPOSE T8 TROFFER (20T8332 A12 MVOLT GE108) USE (3) 32W T8 LAMPS.                                                                                                                  |
|  | 'D' | DOWNLIGHT                                                      | LITHONIA (LIGHT CONCEPTS) | G.C.   | G.C.       | 4   | 11" O LOW PROFILE ROUND FLUSH MOUNTING LIGHT FIXTURE (FLMR112 130T7). USE (2) 13W COMPACT FLUORESCENT LAMPS.                                                                                |
|  | 'E' | 4' TRACK LIGHTS                                                | JUNO                      | G.C.   | G.C.       | 2   | TRAC MASTER ONE CIRCUIT TRAC SYSTEM (14W) W/ LIVE END FEEDS (150W) AND T-BAR ATTACHMENT CLP (73F). USE 30-50W PAR20 TRAC MASTER AVANT GARDE FRONT LAMP/9 OPEN BACK SUPPORT LIGHTS (1667WH). |
|  | 'F' | PHOTO CELL ACTIVATED EXTERIOR FLOOD LIGHT PER ELECTRICAL SPECS |                           | G.C.   | G.C.       | 4   | METAL HALIDE EXT. WALL PACK FOR AREA LIGHTING (TWPP175MTB LP1). LAMP IS INCLUDED.                                                                                                           |
|  | 'M' | METAL HALIDE FIXTURE                                           | LITHONIA                  | G.C.   | G.C.       | 1   | HIGH INTENSITY DISCHARGE (LPHB 505 863 <sup>120V</sup> N). USE (1) 50S LAMP AND A 8B3 REFLECTOR.                                                                                            |
|  | 'S' | SURFACE-MOUNTED LIGHTED-HUBST FAN FIXTURE PER MECHANICAL SPECS | PANASONIC                 | G.C.   | G.C.       | 2   | WHISPER LITE VENTILATION FAN (FV-15VQL4), 150 CFM. (2) 18W QUICK START COMPACT FLUORESCENT LAMPS INCLUDED.                                                                                  |
|  | 'X' | EXIT SIGNAGE & EMERGENCY LIGHTS W/ BATTERY                     | LITHONIA                  | G.C.   | G.C.       | 3   | X TYPE THERMOPLASTIC EXIT/UNDO COMBO (LJHM 5 W 1 R <sup>120V</sup> N). LED TYPE. TWO EXTERNAL LAMP HEADS.                                                                                   |

| <u>SWITCHES AND RECEPTACLES</u>                                                      |                                                                                                                                                                     |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | PASS & SEYMOUR COMMERCIAL GRADE SWITCH - (CS20AC1-W) MOUNTED +42" A.F.F. U.O.N.                                                                                     |
|  3    | PASS & SEYMOUR COMMERCIAL GRADE SWITCH - (CS20AC3-W) MOUNTED +42" A.F.F. U.O.N.                                                                                     |
|  D    | COMMERCIAL DIMMER SWITCH - (I) MOUNTED +42" A.F.F. U.O.N.                                                                                                           |
|       | PASS & SEYMOUR COMMERCIAL GRADE DUPLEX RECEPTACLE (CR20-W), 20A, 2 POLE, 3-WIRE, GROUNDED, 125V, WALL MOUNTED AT +18" A.F.F. U.O.N.                                 |
|  GFI  | PASS & SEYMOUR SPECIFICATION GRADE DUPLEX RECEPTACLE WITH GROUND FAULT CIRCUIT INTERRUPTER, 20A, 2 POLE, 3-WIRE, GROUNDED, 125V, WALL MOUNTED AT +42" A.F.F. U.O.N. |
|  W.P. | WEATHER PROOF DUPLEX RECEPTACLE MOUNTED AT +18" A.F.F. U.O.N.                                                                                                       |
|       | CEILING MOUNTED RECEPTACLE, 20A, 2-POLE, 3 WIRE, GROUNDED, 125V.                                                                                                    |


|                                                                                                                                                                         |                                                                                                    |                                                                                     |                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|
|                                                                                        | NON-FUSED DISCONNECT SWITCH                                                                        |  | J-BOX WITH FLEX CONDUIT CONNECTION TO EQUIPMENT. |
|                                                                                        | MOTOR CONNECTION                                                                                   |                                                                                     |                                                  |
|                                                                                        | FUSED DISCONNECT SWITCH                                                                            |                                                                                     |                                                  |
|  OR  | JUNCTION BOX                                                                                       |                                                                                     |                                                  |
|                                                                                        | COOPER B-LINE MTB SERIES PANEL, 200 AMP/10K 3P<br>AIC/240 VOLT SELF-CONTAINED METER MAIN (U227MTB) |                                                                                     |                                                  |

|   |                                                                                                           |
|---|-----------------------------------------------------------------------------------------------------------|
| ▼ | TELEPHONE OUTLET WITH 3/4" C. AND PULLSTRING TO ACCESSIBLE CEILING SPACE, WALL MOUNTED +18" A.F.F. U.O.N. |
| ▽ | DATA OUTLET WITH 3/4" C. AND PULLSTRING TO ACCESSIBLE CEILING SPACE WALL MOUNTED +18" A.F.F. U.O.N.       |

|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | CONDUIT/WIRING CONTINUATION                                                                                                                                                                                                                                                                                                                                                                               |
|  | CONDUIT CONCEALED IN WALL                                                                                                                                                                                                                                                                                                                                                                                 |
|  | CONDUIT ROUTED BELOW FLOOR / GRADE                                                                                                                                                                                                                                                                                                                                                                        |
|  |                                                                                                                                                                                                                                                                                                                                                                                                           |
| #10<br>B-27,29                                                                     | BRANCH CIRCUIT WIRING. ARROW INDICATES HOME RUN TO PANEL WITH CIRCUITS AS NOTED. WIRE SIZE IS #12 AWG MINIMUM UNLESS NOTED OTHERWISE. SHORT TICK MARKS INDICATE PHASE CONDUCTORS. LONG TICK MARKS INDICATE NEUTRAL CONDUCTORS. A SINGLE CURVED TICK MARK INDICATES INSULATED GREEN GROUND CONDUCTOR. SECOND CURVED TICK MARK INDICATES "ISOLATED GROUND" (GREEN INSULATION WITH YELLOW STRIPE) CONDUCTOR. |


|        |                          |     |              |
|--------|--------------------------|-----|--------------|
| AFF    | ABOVE FINISHED FLOOR     | WP  | WEATHERPROOF |
| CU     | COPPER                   | TYP | TYPICAL      |
| (E)    | EXISTING                 |     |              |
| GFI    | GROUND FAULT INTERRUPTER |     |              |
| GND    | GROUND                   |     |              |
| (N)    | NEW                      |     |              |
| U.O.N. | UNLESS OTHERWISE NOTED.  |     |              |

1. ALL CIRCUIT CONDUCTORS SHALL BE THIN WITHIN LIGHT FIXTURES AND IN EXTERIOR CONDUITS ABOVE GRADE. ALL OTHERS SHALL BE THIN OR THIN. U.O.N.
2. ALL BRANCH AND FEEDER CIRCUITS SHALL CONTAIN A GROUNDING CONDUCTOR, GREEN INSULATED COPPER, SIZED PER NOTE 3.
3. ALL SINGLE PHASE 20 AMP BRANCH CIRCUITS SHOWN SHALL BE 1/2" CONDUIT WITH (3) - #12 AWG CU. ALL OTHER CIRCUITS SHALL BE SIZED AS SHOWN OR AS REQUIRED BY CODE. U.O.N.
4. THE CONTRACTOR SHALL CONSIDER THESE DRAWINGS DIAGRAMMATICAL ONLY AND ANY CONFLICTS IN EQUIPMENT LOCATION OR OTHER PROBLEMS DISCOVERED SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT IMMEDIATELY.
5. THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL ELECTRICAL EQUIPMENT PRIOR TO INSTALLATION.
6. THE CONTRACTOR SHALL CLOSELY COORDINATE THE PLACEMENT OF LIGHT FIXTURES WITH THE OWNER.
7. THE CONTRACTOR SHALL INSTALL A GREENLEE #430 OR EQUIVALENT PULL ROPE IN EACH EMPTY CONDUIT.
8. ALL CONDUITS INSTALLED EXPOSED OUTSIDE OF BUILDING SHALL BE RIGID ALUMINUM.
9. ALL CIRCUIT BREAKERS INSTALLED FOR USE IN MOTOR CIRCUITS SHALL BE TYPE HACR. ALL FUSES FOR EQUIPMENT SHALL BE SIZED PER MANUFACTURER'S RECOMMENDATION.
10. ALL CONDUITS INSTALLED IN FLOOR SLABS OR BELOW GRADE SHALL BE 3/4" DIAMETER MINIMUM, AND SHALL BE PVC SCHEDULE 40 U.O.N. INSTALL A GALVANIZED STEEL ELBOW WHERE THESE CONDUITS EMERGE ABOVE GRADE OR SLAB AND WRAP PER SPECIFICATIONS TO RETARD DETERIORATION. VERIFY SIZES OF ALL UNDERGROUND CONDUITS NOT INDICATED.
11. ALL CONDUIT INSTALLED TO CONDENSING UNITS FROM THE FUSED DISCONNECT SWITCH SHALL BE LIQUID TIGHT METAL FLEX CONDUIT.
12. ALL ELECTRICAL GUTTERS, DISCONNECT SWITCHES AND EQUIPMENT INSTALLED OUTDOORS SHALL BE RATED NEMA 3R, GASKETED.
13. ALL DISCONNECT SWITCHES SHALL BE MOTOR RATED HEAVY DUTY, AND SHALL HAVE A MECHANICAL INTERLOCK ON COVER TO PREVENT OPENING WHEN SWITCH IS "ON".
14. ALL EQUIPMENT AND MATERIAL SHALL BE INSTALLED ACCORDING TO THE 2005 NEC AND CALIFORNIA CODES OF REGULATION, ALL APPLICABLE LOCAL CODES, AND ALL PREVAILING CODES.
15. MOUNT GFCI RECEPTACLES IN RESTROOMS AND IN BREAKROOM COUNTER AT +42", U.O.N.
16. INSTALL 3/4" CONDUIT WITH PULL STRING FROM EACH TELEPHONE AND DATA TERMINAL OR JACK TO 6" ABOVE CEILING.
17. ALL LIGHT FIXTURES WITH AN "EL" OPTION NOTED OR THAT CONTAIN BATTERY BACKUP FOR ILLUMINATION POWER SHALL BE WIRED WITH AN UNSWITCHED POWER LEG IN ADDITION TO ANY SWITCH LEG REQUIREMENTS SHOWN ON THE DRAWINGS. THE UNSWITCHED POWER LEG SHALL BE ON THE SAME CIRCUIT NUMBER AS THE ASSOCIATED LIGHT FIXTURE SWITCHED. POWER U.O.N., AND SHALL ONLY CONNECT TO THE LIGHT FIXTURE BATTERY CHARGING CIRCUIT.
18. REFER TO ARCHITECTURAL, PLUMBING AND MECHANICAL PLANS FOR ADDITIONAL INSTALLATION REQUIREMENTS AND DETAILS FOR THE ELECTRICAL SYSTEMS. ALL ELECTRICAL EQUIPMENT, DEVICES AND CONDUIT SHALL BE SEISMICALLY BRACED PER SMACNA GUIDELINES, NEC, UBC, AND AS REQUIRED BY THE ARCHITECT AND ALL PREVAILING CODES.
19. MULTIPLE HOME-RUNS, COMBINE AT PANEL. WIRES SHALL NOT BE "DOUBLE LUGGED INTO CIRCUIT BREAKERS. MAKE APPROVED PIG-TAIL WITH AN APPROVED DEVICE OR METHOD AND LUG A SINGLE WIRE INTO CIRCUIT BREAKER.
20. ALL CIRCUIT BREAKERS IN PANEL ARE RATED (AIC) TO WITHSTAND GREATER THAN THE AMPS SYMMETRICAL AVAILABLE, PER UTILITY COMPANY, 240V MAX., 75°C. MATCH EXISTING BREAKER TYPES.
21. CONTRACTOR SHALL VERIFY THE EXISTING ELECTRICAL SYSTEM VOLTAGE AVAILABLE, AMPERE RATING, AIC RATING, AND LOCATION. VERIFY EXISTING ELECTRICAL SYSTEM HAS ENOUGH CAPACITY FOR THE PROPOSED NEW LOADS. CONTRACTOR SHALL COORDINATE WITH ARCHITECT AND OWNER FOR THE ROUTING OF SERVICE FEEDERS FROM EXISTING ELECTRICAL SERVICE TO THE NEW PANEL.
22. ALL GENERAL LIGHTING AND SIGN BRANCH CIRCUITS SHALL BE ROUTED THROUGH THE LIGHTING CONTROL PANEL. "LOC" EMERGENCY AND EXIT LIGHT CIRCUITS SHALL BE UNSWITCHED AND TERMINATED DIRECTLY TO THE CIRCUIT BREAKER. PROVIDE "LOCK-ON" TYPE CIRCUIT BREAKER FOR EMERGENCY / EXIT LIGHT CKTS.
23. CONTRACTOR SHALL VERIFY NEW TELEPHONE BACKBOARD LOCATION. CONTRACTOR SHALL COORDINATE WITH ARCHITECT AND OWNER FOR THE ROUTING OF TELEPHONE CONDUIT FROM NEW TELEPHONE BOARD TO ACCESSIBLE SPACE ABOVE CEILING SPACE.
24. ALL DEDICATED CIRCUITS SHALL CONTAIN A DEDICATED GROUNDING CONDUCTOR, GREEN INSULATED COPPER, AND A DEDICATED NEUTRAL CONDUCTOR, WHITE INSULATED COPPER, SIZED PER NOTE 3.
25. REFER TO ALARM SYSTEM PLAN FOR LOCATION OF SPEAKERS.
26. PROVIDE EMERGENCY BATTERY BACK UP IN AT LEAST ONE FLUORESCENT FIXTURE PER ROOM, U.O.N. PER SPEC'S.

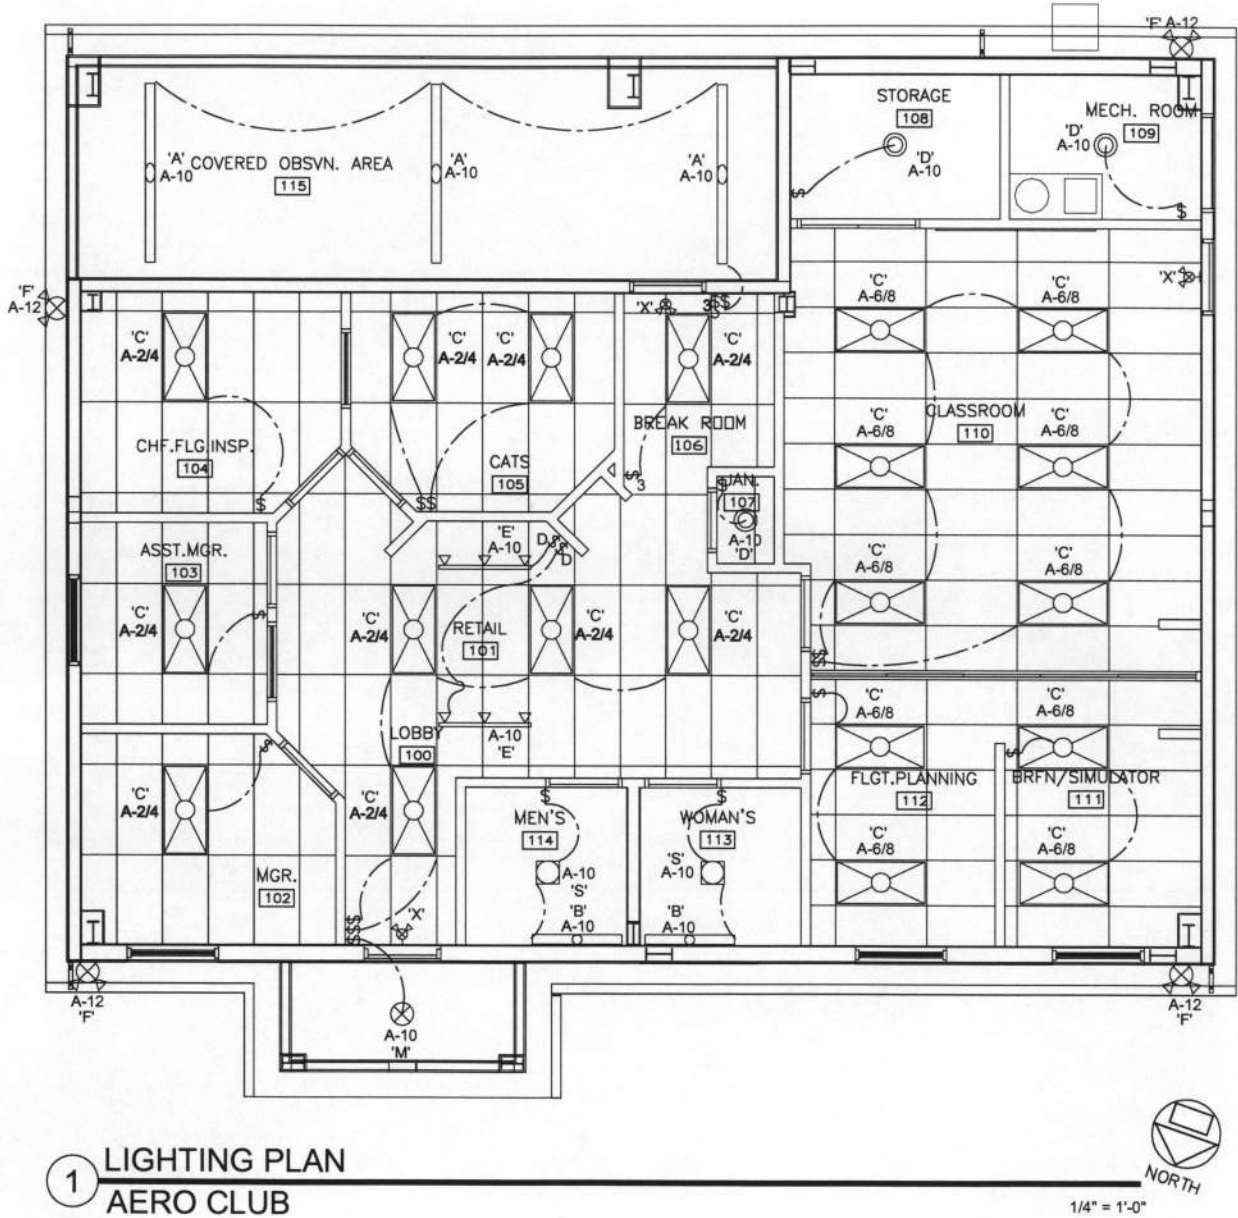

# 1 LIGHTING PLAN

## AERO CLUB

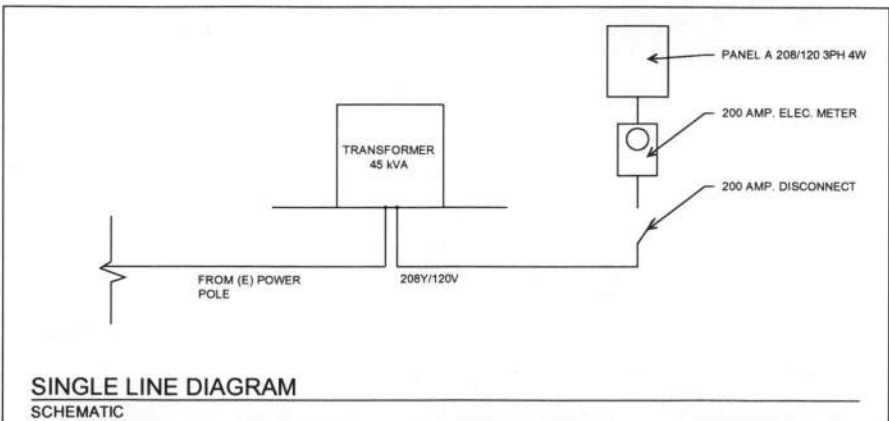

W912QR25BA007\_FIO\_RecdDrawings-0002



BEALE  
Air Force Base

| APPROVED     |                                    |
|--------------|------------------------------------|
| SIGNATURE    | OFFICE                             |
|              | Base Civil Engineer                |
|              | Chief of Engineering               |
|              | Chief of Design                    |
|              | Chief of Environmental Contracting |
|              | User                               |
| COORDINATION |                                    |
|              | Air-Field Manager                  |
|              | Ground Safety                      |
|              | Communications Computers           |
|              | Bioenvironmental Engineer          |
|              | Security Police                    |
|              | Security Systems                   |
|              | Fire Chief                         |
|              | Chief of Operations                |
|              | Construction Management            |
|              | Roofing Engineer                   |
|              | Pavements Engineer                 |
|              | Corrosion Engineer                 |
|              | Protective Coatings Eng            |

DESIGN FIRM

**PHILIP  
HAWKINS  
ARCHITECT**  
INC+ASSOCIATES  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
735 SUNRISE AVE. STE. 101  
ROSEVILLE, CALIFORNIA 95661  
916-878-5355



FILE: 05-0035 Beale

|                |                               |
|----------------|-------------------------------|
| Designer<br>OS | Project Manager<br>P. HAWKINS |
| Drafter<br>OS  | Date<br>5/21/08               |

| REVISION              | BY/DATE        |
|-----------------------|----------------|
| As-Built              |                |
| For Construction      |                |
| Rev. 2                |                |
| 100% Design Submittal | PLH<br>5/21/08 |
| 95% Design Submittal  | PLH<br>4/28/08 |
| 65% Design Submittal  | PLH<br>2/28/08 |
| 35% Design Submittal  | PLH<br>1/07/08 |

SHEET TITLE

## AERO CLUB LIGHTING PLAN

SCALE

|       |    |       |
|-------|----|-------|
| SHEET | 14 | OF 19 |
|-------|----|-------|

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

|                                 |                     |
|---------------------------------|---------------------|
| Project Number<br>BAEY 05-0035  |                     |
| Drawing File Number<br>1232-001 | SHEET NUMBER<br>E-1 |

BEALE  
Air Force Base

APPROVED  
SIGNATURE OFFICE

|  |                                    |
|--|------------------------------------|
|  | Base Civil Engineer                |
|  | Chief of Engineering               |
|  | Chief of Design                    |
|  | Chief of Environmental Contracting |
|  | User                               |

|              |  |
|--------------|--|
| COORDINATION |  |
|--------------|--|

|  |                              |
|--|------------------------------|
|  | Al-Field Manager             |
|  | Ground Safety                |
|  | Communications               |
|  | Computers                    |
|  | Biowork Environment Engineer |
|  | Security Police              |
|  | Security Systems             |
|  | Fire Chief                   |
|  | Chief of Operations          |
|  | Construction Management      |
|  | Roofing Engineer             |
|  | Pavements Engineer           |
|  | Commission Engineer          |
|  | Proactive                    |
|  | Gas traps, Engr              |

DESIGN FIRM

**PHILIP  
HAWKINS  
ARCHITECT  
INC+ASSOCIATES**  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
735 SUNRISE AVE. STE. 101  
ROSEVILLE, CALIFORNIA 95061  
916-878-5355



FILE: 05-0035 Beale

|                |                               |
|----------------|-------------------------------|
| Designer<br>OS | Project Manager<br>P. HAWKINS |
| Drafter<br>OS  | Date<br>5/21/08               |

|          |         |
|----------|---------|
| REVISION | BY/DATE |
|----------|---------|

|                       |                |
|-----------------------|----------------|
| As-Built              |                |
| For Construction      |                |
| Rev. 2                |                |
| 100% Design Submittal | PLH<br>5/21/08 |
| 95% Design Submittal  | PLH<br>4/28/08 |
| 65% Design Submittal  | PLH<br>2/28/08 |
| 35% Design Submittal  | PLH<br>1/07/08 |

**SHEET TITLE**  
AERO CLUB  
ELECTRICAL PLAN/PANEL  
SCHEDULE

SCALE

|       |    |       |
|-------|----|-------|
| SHEET | 15 | OF 19 |
|-------|----|-------|

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number BA05-0035

|                     |              |
|---------------------|--------------|
| Draying File Number | SHEET NUMBER |
| 1232-001            | E-2          |

[illegible]


2 PANEL SCHEDULE  
AERO CLUB

## GENERAL NOTES

(8) PAIR PHONE CABLE TO BE INSTALLED AT ALL COMMERCIAL AND BASE PHONE JACKS.

### LEGEND

- |                                                                                       |                                                                                                                      |
|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
|  | CR20-W PASS & SEYMOUR COMMERCIAL GRADE<br>STRAIGHT BLADE RECEPTACLE PER ELECTRICAL<br>SPEC'S, AT +18" A.F.F., U.O.N. |
|  | 2095-W PASS & SEYMOUR SPECIFICATION GRADE<br>GFCI RECEPTACLE PER ELECTRICAL SPEC'S                                   |
|  | FOURPLEX RECEPTACLE PER ELECTRICAL SPEC'S                                                                            |
|  | WEATHER-PROOF RECEPTACLE PER ELECTRICAL<br>SPEC'S                                                                    |
|  | J-BOX PER ELECTRICAL SPEC'S                                                                                          |
|  | CEILING-MOUNTED RECEPTACLE PER ELECTRICAL<br>SPEC'S                                                                  |
|  | DATA                                                                                                                 |
|  | PHONE                                                                                                                |
|  | COMBO - PHONE AND DATA                                                                                               |
|  | ELECTRIC METER                                                                                                       |

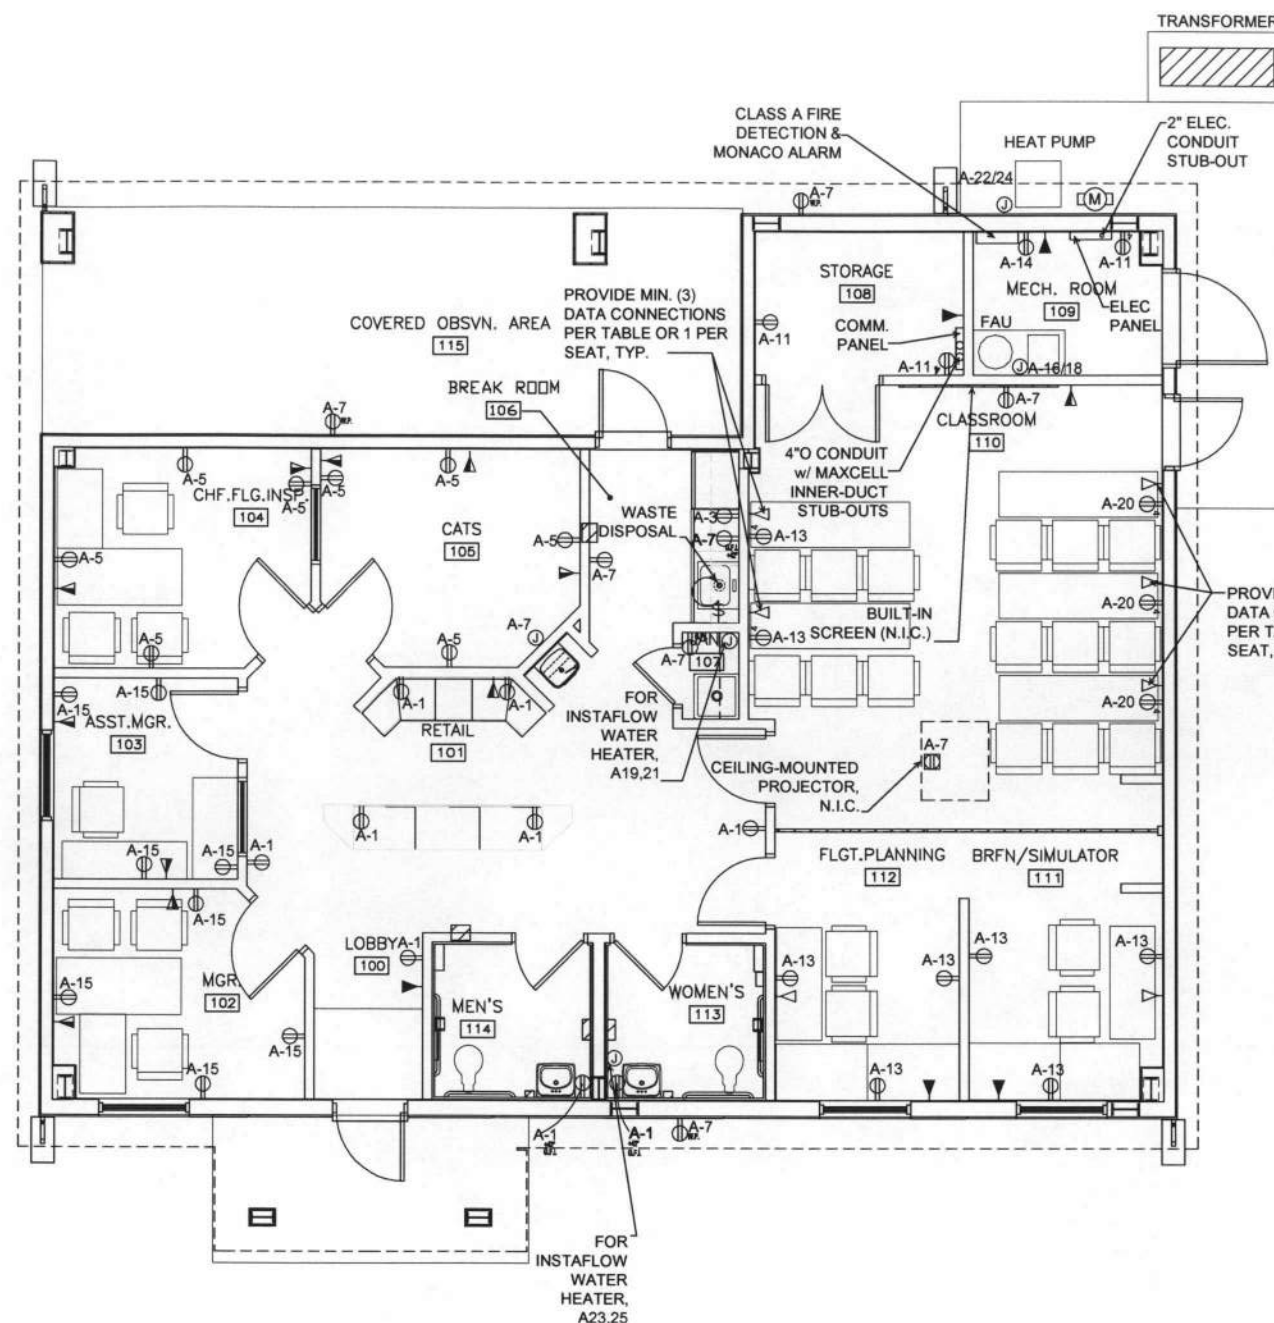


1 ELECTRICAL PLAN  
AERO CLUB

 $1/4" = 1'-0"$ 

|                     |              |
|---------------------|--------------|
| Drawing File Number | SHEET NUMBER |
| 1232-001            | E-2          |






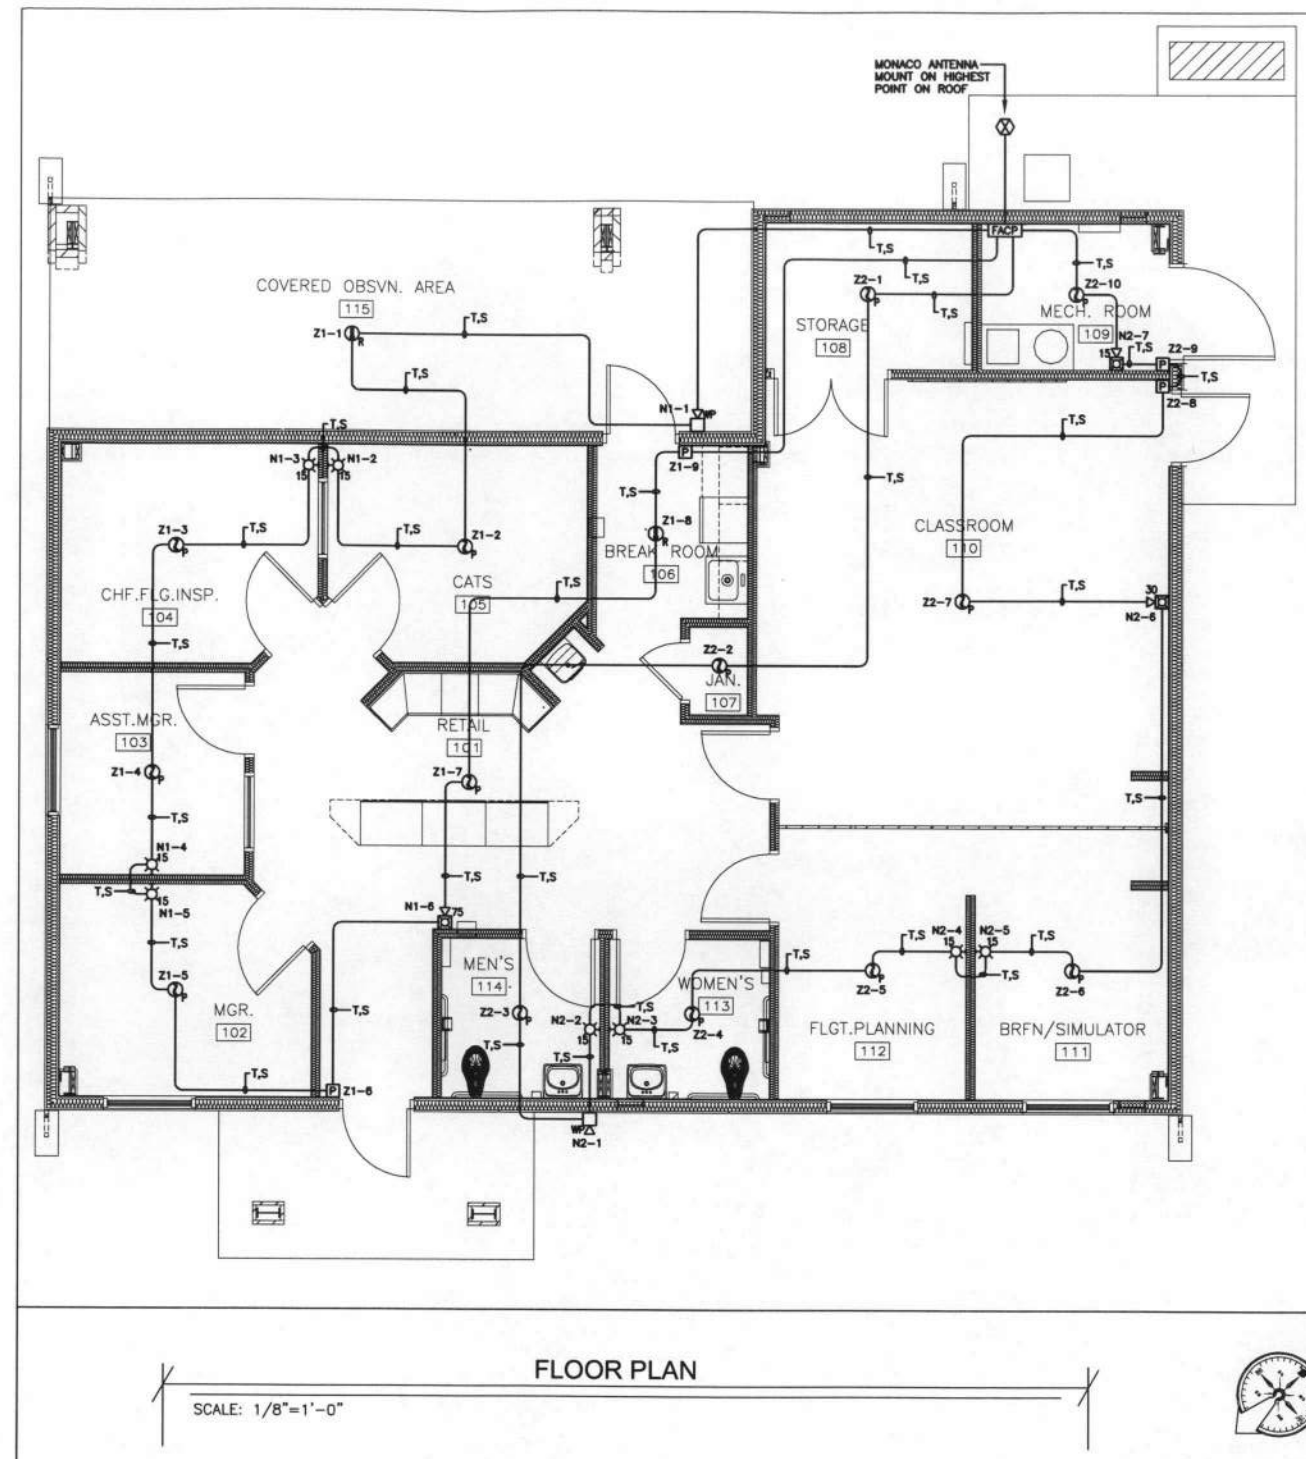

FLOOR PLAN

SCALE: 1/8"=1'-0"

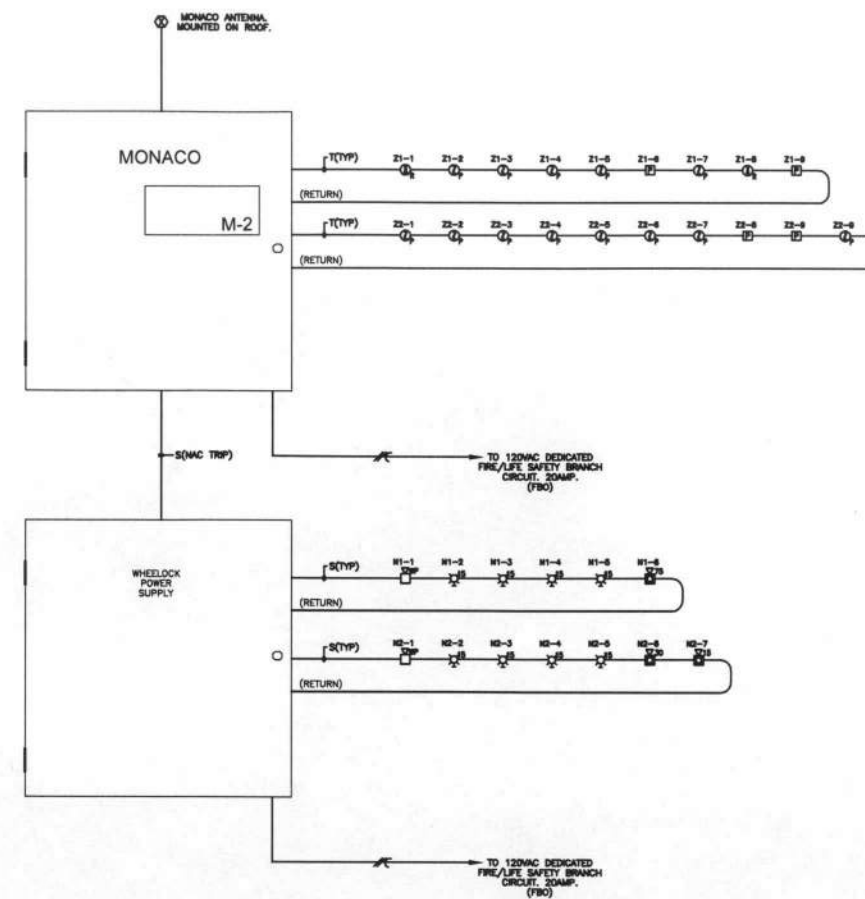

ONE-LINE RISER DIAGRAM

| WHEELLOCK PS-24-8MC POWER SUPPLY - NAC   |                                     |     |                                       |               |               |             |       |
|------------------------------------------|-------------------------------------|-----|---------------------------------------|---------------|---------------|-------------|-------|
| BATTERY CALCULATIONS FOR 24 HOUR STANDBY |                                     |     |                                       |               |               |             |       |
| PART#                                    | DESCRIPTION                         | QTY | STANDBY CURRENT                       | TOTAL STANDBY | ALARM CURRENT | TOTAL ALARM |       |
| PANEL CONTROLLER AND CARDS               |                                     |     |                                       |               |               |             |       |
| PS-24-8MC                                | WHEELLOCK POWER SUPPLY              | 1   | 0.080                                 | 0.080         | 0.240         | 0.240       |       |
|                                          |                                     |     | PANEL TOTALS                          |               | 0.080         |             | 0.240 |
| NOTIFICATION APPLIANCE CIRCUITS          |                                     |     |                                       |               |               |             |       |
| N1                                       | NOTIFICATION APPLIANCE CIRCUIT ~ N1 | 1   | 0.000                                 | 0.000         | 0.467         | 0.467       |       |
| N2                                       | NOTIFICATION APPLIANCE CIRCUIT ~ N2 | 1   | 0.000                                 | 0.000         | 0.464         | 0.464       |       |
| N3                                       | **** SPARE ****                     |     | 0.000                                 | 0.000         | 0.000         | 0.000       |       |
| N4                                       | **** SPARE ****                     |     | 0.000                                 | 0.000         | 0.000         | 0.000       |       |
|                                          |                                     |     | NOTIFICATION APPLIANCE CIRCUIT TOTALS |               | 0.000         |             | 0.931 |
|                                          |                                     |     | OVERALL TOTALS                        |               | 0.080         |             | 1.171 |
|                                          |                                     |     |                                       |               |               |             |       |
| TOTAL ALARM AMPS                         |                                     |     | 1.171                                 | X             | 8             | MINS=       | 0.088 |
| TOTAL STANDBY AMPS                       |                                     |     | 0.080                                 | X             | 24            | HOURS=      | 1.920 |
|                                          |                                     |     | TOTAL AMP HOURS REQUIRED=             |               | 2.016         |             |       |
|                                          |                                     |     | BATTERY SIZE INSTALLED=               |               | 7.000         |             |       |

| NOTIFICATION CIRCUIT - N1- VOLTAGE DROP CALCULATIONS                               |                        |          |                     |          |                     |             |              |          |       |
|------------------------------------------------------------------------------------|------------------------|----------|---------------------|----------|---------------------|-------------|--------------|----------|-------|
| BASED ON POINT-TO-POINT CHMS CALCULATIONS. ACCEPTABLE LIMIT: 10% x 24V = 2.4 (MAX) |                        |          |                     |          |                     |             |              |          |       |
| CHMS = #14 FEET x 5.0171000 + #12 FEET x 1.891000 + #10 FEET x 1.211000 x 2        |                        |          |                     |          |                     |             |              |          |       |
| PART                                                                               | DEVICE                 | TO       | LINEAR              | RES.     | DEVICE              | TOTAL       | VOLTAGE      | ACCUM.   |       |
| #                                                                                  | TYPE                   | DEVICE # | FEET                | OF WIRES | LOAD (OHMS)         | LOAD (AMPS) | DROP (VOLTS) | DROP (V) |       |
| AH-24WP-R                                                                          | HORN WP                | NAC      | 1                   | 30       | 0.116               | 0.043       | 0.043        | 0.005    | 0.005 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 1        | 2                   | 45       | 0.174               | 0.060       | 0.103        | 0.018    | 0.023 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 2        | 3                   | 10       | 0.039               | 0.060       | 0.163        | 0.006    | 0.029 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 3        | 4                   | 45       | 0.174               | 0.060       | 0.223        | 0.039    | 0.068 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 4        | 5                   | 10       | 0.039               | 0.060       | 0.263        | 0.011    | 0.079 |
| AS-24MCW-FR                                                                        | HORN/STROBE SET @ 75CD | 5        | 6                   | 45       | 0.174               | 0.184       | 0.467        | 0.081    | 0.160 |
| TOTAL AMPS: 0.467                                                                  |                        |          | TOTAL % DROP: 0.87% |          | TOTAL V-DROP: 0.160 |             |              |          |       |

| NOTIFICATION CIRCUIT - N2- VOLTAGE DROP CALCULATIONS                               |                        |          |                     |          |                     |             |              |          |       |
|------------------------------------------------------------------------------------|------------------------|----------|---------------------|----------|---------------------|-------------|--------------|----------|-------|
| BASED ON POINT-TO-POINT CHMS CALCULATIONS. ACCEPTABLE LIMIT: 10% x 24V = 2.4 (MAX) |                        |          |                     |          |                     |             |              |          |       |
| CHMS = #14 FEET x 5.0171000 + #12 FEET x 1.891000 + #10 FEET x 1.211000 x 2        |                        |          |                     |          |                     |             |              |          |       |
| PART                                                                               | DEVICE                 | TO       | LINEAR              | RES.     | DEVICE              | TOTAL       | VOLTAGE      | ACCUM.   |       |
| #                                                                                  | TYPE                   | DEVICE # | FEET                | OF WIRES | LOAD (OHMS)         | LOAD (AMPS) | DROP (VOLTS) | DROP (V) |       |
| AH-24WP-R                                                                          | HORN WP                | NAC      | 1                   | 65       | 0.251               | 0.043       | 0.043        | 0.011    | 0.011 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 1        | 2                   | 20       | 0.077               | 0.060       | 0.103        | 0.006    | 0.019 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 2        | 3                   | 10       | 0.039               | 0.060       | 0.163        | 0.006    | 0.025 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 3        | 4                   | 30       | 0.116               | 0.060       | 0.223        | 0.026    | 0.051 |
| ZRS-24MCW-FR                                                                       | STROBE SET @ 15CD      | 4        | 5                   | 10       | 0.039               | 0.060       | 0.263        | 0.011    | 0.062 |
| AS-24MCW-FR                                                                        | HORN/STROBE SET @ 30CD | 5        | 6                   | 40       | 0.154               | 0.107       | 0.390        | 0.040    | 0.122 |
| AS-24MCW-FR                                                                        | HORN/STROBE SET @ 15CD | 6        | 7                   | 40       | 0.154               | 0.074       | 0.464        | 0.072    | 0.194 |
| TOTAL AMPS: 0.464                                                                  |                        |          | TOTAL % DROP: 0.81% |          | TOTAL V-DROP: 0.194 |             |              |          |       |

CALCULATIONS

VOLTAGE SPECIALISTS

5001 FORSTER ROAD  
PARADISE, CALIFORNIA 95969  
PHONE #: 530.624.4814  
FAX #: 530.872.3566



BEALE  
Air Force Base

APPROVED  
SIGNATURE OFFICE  
Base Civil Engineer  
Chief of Engineering  
Chief of Environmental Contracting  
User

COORDINATION  
Airfield Manager  
Ground Safety  
Communications Computers  
Biomedical Engineering  
Security Police  
Security Systems  
Fire Chief  
Chief of Operations  
Construction Management  
Roofing Engineer  
Pavements Engineer  
Commission Engineer  
Protective Coatings Engr

DESIGN FIRM  
PHILIP  
HAWKINS  
ARCHITECT  
INC+ASSOCIATES  
ARCHITECTURAL, PLANNING, INTERIOR DESIGN  
225 SUNRISE AVE., STE. 101  
ROSEVILLE, CALIFORNIA 95661  
916-878-5355



FILE: 05-0035 Beale  
Designer: P. HAWKINS  
Project Manager: P. HAWKINS  
Date: 5/21/08

REVISION BY/DATE  
As-Built  
For Construction  
Rev. 2  
100% Design Submittal PLH 5/21/08  
95% Design Submittal PLH 4/28/08  
65% Design Submittal PLH 2/28/08  
35% Design Submittal PLH 1/07/08

SHEET TITLE  
FLOOR PLAN, ONE-LINE  
RISER DIAGRAM &  
CALC'S

SCALE N.T.S.

SHEET 17 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number: BA05 05-0035  
Drawing File Number: 1232-001  
SHEET NUMBER: FA-02





BEALE  
Air Force Base

| APPROVED     |                                    |
|--------------|------------------------------------|
| SIGNATURE    | OFFICE                             |
|              | Base Civil Engineer                |
|              | Chief of Engineering               |
|              | Chief of Design                    |
|              | Chief of Environmental Contracting |
|              | User                               |
| COORDINATION |                                    |
|              | Airfield Manager                   |
|              | Ground Safety                      |
|              | Communications Computers           |
|              | Biomedical Engineer                |
|              | Security Police                    |
|              | Security Systems                   |
|              | Fire Chief                         |
|              | Chief of Operations                |
|              | Construction Management            |
|              | Roofing Engineer                   |
|              | Pavements Engineer                 |
|              | Corrosion Engineer                 |
|              | Protective Coatings Engr           |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC+ASSOCIATES**  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
735 SUNRISE AVE. STE. 101  
ROSEVILLE, CALIFORNIA 95601  
916-878-5355



|                 |                             |
|-----------------|-----------------------------|
| FILE: 05-0035   | Beale                       |
| Designer: BUNCH | Project Manager: P. HAWKINS |
| Draftsman: OS   | Date: 5/21/08               |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |


SHEET TITLE  
**WHEELLOCK POWER SUPPLY DETAIL**

SCALE N.T.S.

SHEET 18 OF 19


PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

|                     |              |
|---------------------|--------------|
| Project Number      | BAEY 05-0035 |
| Drawing File Number | 1232-001     |
| SHEET NUMBER        | FA-03        |

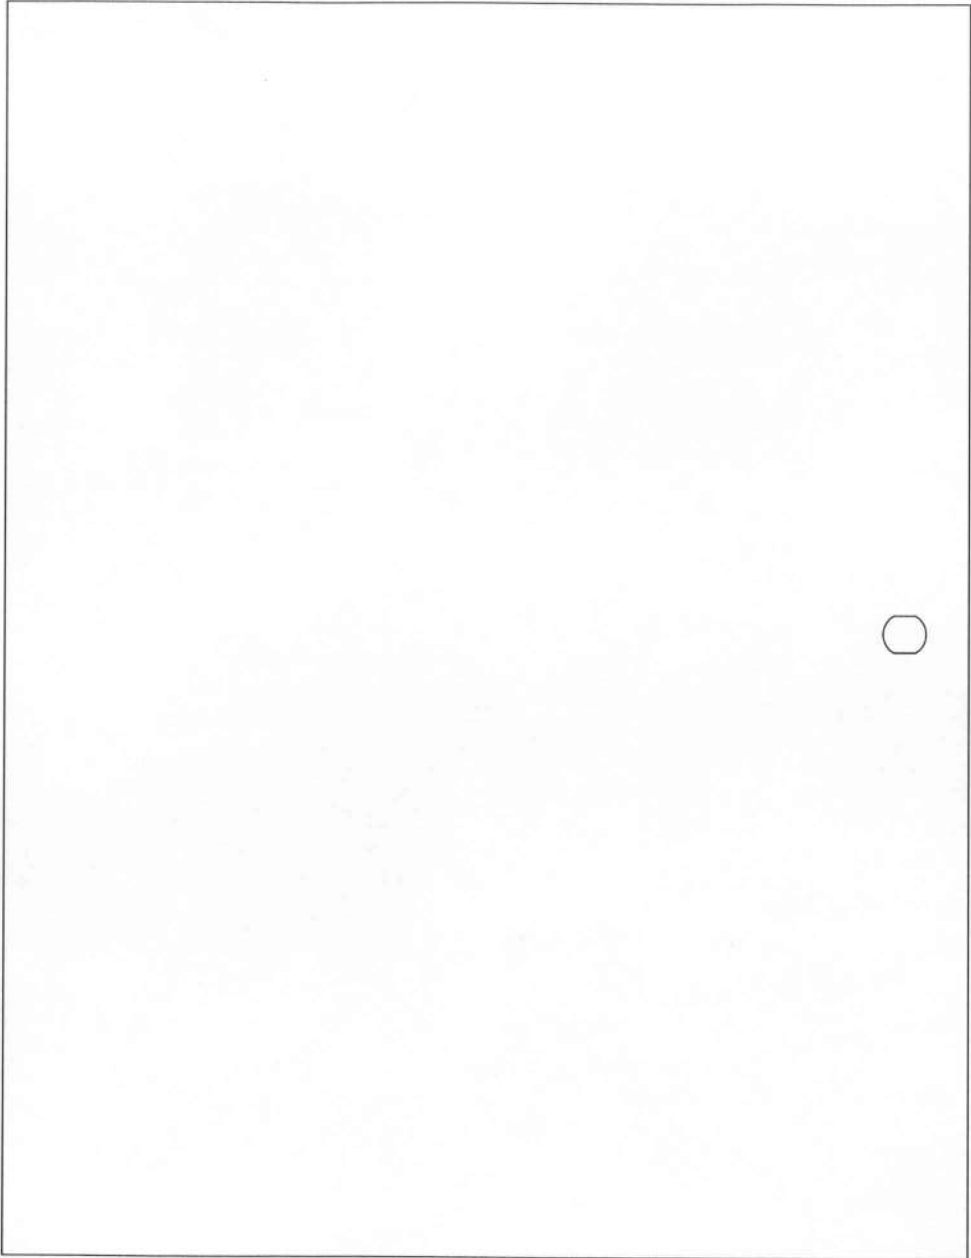

EXTERIOR WHEELLOCK PS-24-8MC

SCALE: N/A

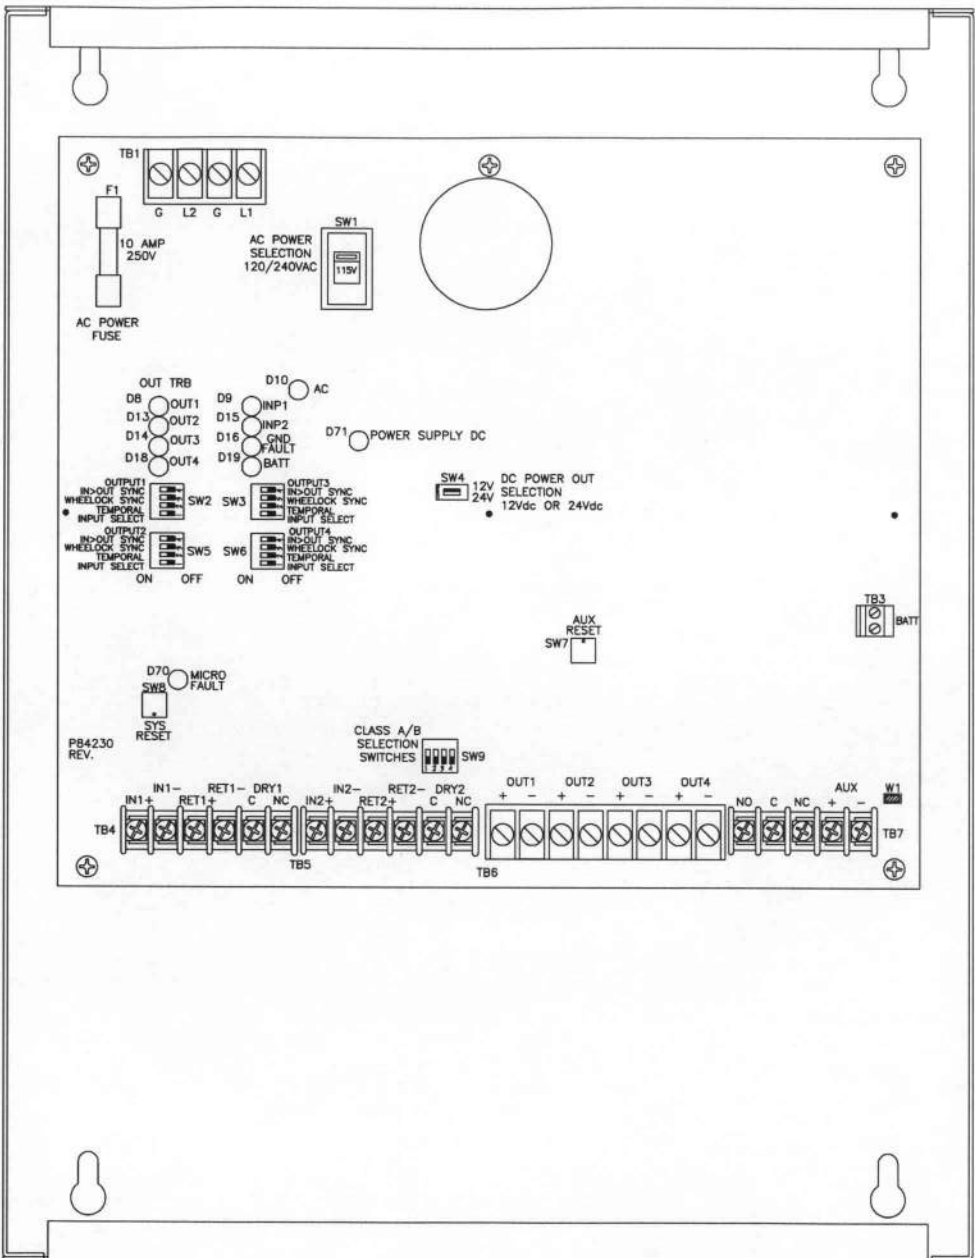

INTERIOR WHEELLOCK PS-24-8MC

SCALE: N/A

VOLTAGE SPECIALISTS

5031 FOSTER ROAD  
PARADISE, CALIFORNIA 95669  
PHONE # 530.824.4514  
FAX # 530.872.3506





BEALE  
Air Force Base

| APPROVED     |                           |
|--------------|---------------------------|
| SIGNATURE    | OFFICE                    |
|              | Base Civil Engineer       |
|              | Chief of Engineering      |
|              | Chief of Design           |
|              | Chief of Environmental    |
|              | Contracting               |
|              | User                      |
| COORDINATION |                           |
|              | Air-Field Manager         |
|              | Ground Safety             |
|              | Communications            |
|              | Computers                 |
|              | Environmental Engineer    |
|              | Security Police           |
|              | Security Systems          |
|              | Fire Chief                |
|              | Chief of Operations       |
|              | Construction Management   |
|              | Roofing Engineer          |
|              | Pavements                 |
|              | Corrosion Engineer        |
|              | Protective Coatings Engr. |

DESIGN FIRM  
**PHILIP HAWKINS ARCHITECT INC+ASSOCIATES**  
ARCHITECTURAL PLANNING, INTERIOR DESIGN  
759 SUNRISE AVE., STE. 101  
ROSEVILLE, CALIFORNIA 95611  
916-878-5355



FILE: 05-0035 Beale

|                    |                             |
|--------------------|-----------------------------|
| Designer: B. BUNCH | Project Manager: P. HAWKINS |
| Drafter: OS        | Date: 5/21/08               |

| REVISION              | BY/DATE     |
|-----------------------|-------------|
| As-Built              |             |
| For Construction      |             |
| Rev. 2                |             |
| 100% Design Submittal | PLH 5/21/08 |
| 95% Design Submittal  | PLH 4/28/08 |
| 65% Design Submittal  | PLH 2/28/08 |
| 35% Design Submittal  | PLH 1/07/08 |

SHEET TITLE  
PERIPHERAL DEVICE DETAILS




SCALE N.T.S.  
SHEET 19 OF 19

PROJECT TITLE  
CES/CECN  
AERO CLUB ADMIN/TRAINING  
FACILITY # 1232  
BEALE AFB, CA

Project Number: BA05-0035

Drawing File Number: 1232-001  
SHEET NUMBER: FA-04





WHEELLOCK AH-24WP-R WEATHERPROOF HORN

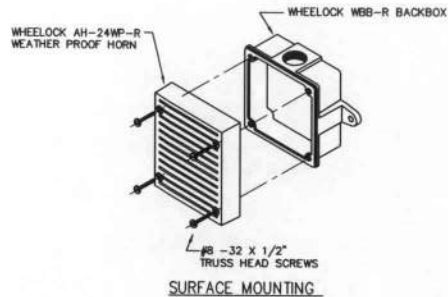

FROM FACP 24VDC NOTIFICATION APPLIANCE CIRCUIT OR FROM FACP 24VDC NON-CODED NOTIFICATION APPLIANCE CIRCUIT WITH WHEELLOCK IN OR OUT SYNC MODE OR PRECEDING DEVICE

TO ADDITIONAL NAC DEVICES OR RETURN TO FIRE ALARM CONTROL PANEL FOR STYLE Z APPLICATION.  
IF LAST DEVICE ON CIRCUIT IN A STYLE Y APPLICATION PLACE A 10K 1/2W END-OF-LINE RESISTOR.





WHEELLOCK AH/AS MCW SERIES AUDIO/VISUAL

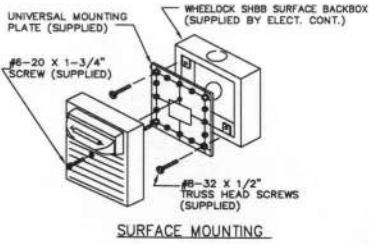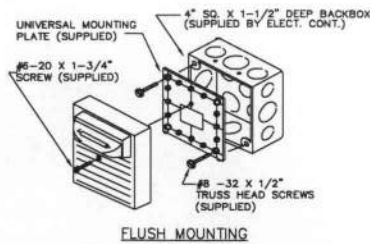

FROM FACP 24VDC NOTIFICATION APPLIANCE CIRCUIT OR FROM FACP 24VDC NON-CODED NOTIFICATION APPLIANCE CIRCUIT WITH WHEELLOCK IN OR OUT SYNC MODE OR PRECEDING DEVICE

TO ADDITIONAL NAC DEVICES OR RETURN TO FIRE ALARM CONTROL PANEL FOR STYLE Z APPLICATION.  
IF LAST DEVICE ON CIRCUIT IN A STYLE Y APPLICATION PLACE A 10K 1/2W END-OF-LINE RESISTOR.

WHEELLOCK MODEL ZRS-24MCW-FR SERIES STROBE

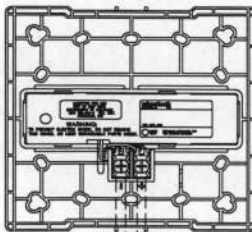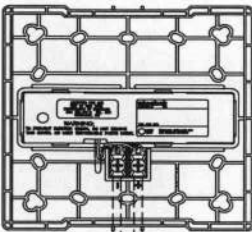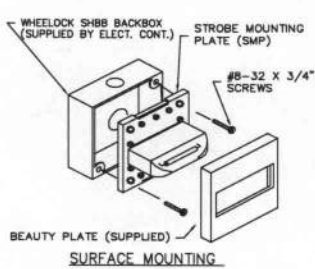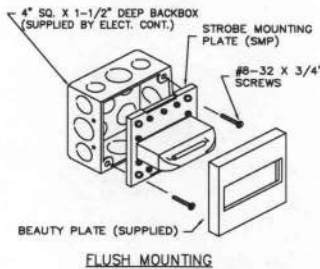

FROM FACP 24VDC NOTIFICATION APPLIANCE CIRCUIT OR FROM FACP 24VDC NON-CODED NOTIFICATION APPLIANCE CIRCUIT WITH WHEELLOCK IN OR OUT SYNC MODE OR PRECEDING DEVICE

TO ADDITIONAL NAC DEVICES OR RETURN TO FIRE ALARM CONTROL PANEL FOR STYLE Z APPLICATION.  
IF LAST DEVICE ON CIRCUIT IN A STYLE Y APPLICATION PLACE A 10K 1/2W END-OF-LINE RESISTOR.

VOLTAGE SPECIALISTS

5031 FORSTER ROAD  
PARADISE, CALIFORNIA 95669  
PHONE # 530.824.4514  
FAX # 530.872.3080

