

Addendum #2

VA Project No.: 553-21-100

Project: Renovate A2 South for Cancer Clinic
John D. Dingell VA Medical Center
Detroit, Michigan

Owner: John D. Dingell VA Medical Center
4646 John R Street
Detroit, MI 48201

Date: May 1, 2026

A/E Firm: Walter Mechanical/MEGA/C2AE

Project Manager: Ali Shiraz/Scott Townsend/Kelly
Homic

The following changes, revisions, modifications, etc. shall be incorporated into
the contract documents, specifications, and plans.

ACKNOWLEDGEMENTS

A2.1 The Bidder shall acknowledge receipt of Addenda #2 by indicating so in the spaces provided on the Bid Form.

SPECIFICATIONS

A2.2 Refer to Section 10 14 00 - Signage (reissued):
Replace section in its entirety. Section revised to match new facility signage standards.

DRAWINGS

- A2.3 Refer to Sheet G-001 (reissued):
Revise Sheet list to add new sheet I-121.
- A2.4 Refer to Sheets A-122.1A, A-122.1B, A-122.1C, A-122.1D, and A-132 (reissued):
- Revise Division 10 Schedule.
 - Revise Division 10 – Notes Legend.
 - Revise all tags identifying corner guards to match schedule.
- A2.5 Refer to Sheet A-131 (reissued):
Revise detail references.
- A2.6 Refer to Sheets A-401, A-402, A-403, A-404, and A-405 (reissued):
- Revise all corner guards in multiple elevations.
 - Add missing corner guard tags.
 - Revise wall protection heights on multiple elevations.
 - Add signage on elevations as shown.

- A2.7 Refer to Sheet A-403 (reissued):
Revise infusion bay casework.
- A2.8 Refer to Sheet A-405 (reissued):
Add side splash to countertops.
- A2.9 Refer to Sheet A-506 (reissued):
Revise detail as shown.
- A2.10 Refer to Sheet A-601 (reissued):
Revise door and frame schedule.
- A2.11 Refer to Sheet I-001 (reissued):
a. Revise wall protection heights and trim.
b. Add corner guards.
- A2.12 Refer to Sheet I-102.1, I-102.1A, I-102.1B, I-102.1C, and I-102.1D (reissued):
Revise legend.
- A2.13 Refer to Sheet I-102.1C (reissued):
a. Revise length of wall protection.
b. Add keynotes for accent flooring.
c. Revise demarcation line notes.
- A2.14 Refer to Sheet I-120 (reissued):
Revise signage
- A2.15 Refer to Sheet I-121 (issued):
a. Add new sheet.
b. Revise signage schedule.
c. Revise signage details.
- A2.16 Refer to Sheet M-401 (reissued):
a. One EG (Exhaust Grille) selection has been changed from EG-1 to EG-2 on the north wall of Room A2055 between column lines 4N and 5N.
b. Return Grille type has been changed from R-1 to R-2 in Room A2053. Supply and Return CFMs have been updated and their associated ductworks have been updated from 8" to 10" round, near column line 4M.
c. Rooms A2055 and A2056: "ADJ" has been added to the exhaust and return grilles' tags, respectively.
d. Supply and return CFMs have been updated in Room A2056.
- A2.17 Refer to Sheet M-402 (reissued):
Revise AHU-2082, the MPS (medium pressure steam) and MPR pipe routings to/from the steam humidifier and steam heating coil (HC) on "ENLARGED MECHANICAL ROOM A2032 PIPING PLAN" and "SECTION - MECHANICAL ROOM A2032".

- A2.18 Refer to Sheet M-503 (reissued):
Revise AHU-2082 plan and HC (heating coil) and HM (Humidifier) have been illustrated more clearly; see “AIR HANDLING UNIT AHU-2082 DETAIL”.
- A2.19 Refer to Sheet M-601 (reissued):
- For AHU-2082, revise the “Air Handling Unit Schedule”.
 - For SF-2082, revise the “Supply Fan Schedule”.
 - PH-2082: add information to the “Steam Heating Coil Schedule”.
 - CC-2082: revise the “Chilled Water Coil Schedule”.
 - For AHU-2082: revise the “Filter Schedule”.
 - SH-2082: revise the “Steam Humidifier Schedule”.
 - Revise the “Air Flow Control Valve Schedule”.
 - Revise the “Exhaust Fan Schedule”, Note 2.
 - Revise the “Air Device Schedule (Exhaust)”.
- A2.20 Refer to Sheet EP102.1D (reissued):
Revise motor starters to VFD in seventh floor mechanical room and revised keyed note R15 to reflect VFD instead of starters.
- A2.21 Refer to Sheets ET102.1B, ET102.1C, and ET102.1D (reissued):
Provide fire extinguisher cabinet monitor at locations indicated on plan and call out with new keyed note T9.

SECTION 10 14 00 - SIGNAGE (ADM2)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. *This section specifies interior signage for room numbers, directional signs, code required signs and temporary signs.*
- B. *Informational and room signage.*
 - 1. *Acrylic panel signs.*
 - 2. *Metal framed acrylic panel signs.*
- C. *Dimensional letters.*
- D. *Vinyl characters.*

1.2 RELATED WORK

- A. *Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.*

1.3 QUALITY ASSURANCE

- A. *Manufacturer's Qualifications: Provide signage, that is the product of one manufacturer, who has provided signage as specified for a minimum of three (3) years. Submit manufacturer's qualifications.*
- B. *Installer's Qualifications: Minimum three (3) years' experience in the installation of signage of the type as specified in this Section. Submit installer's qualifications.*

1.4 SUBMITTALS

- A. *Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.*
- B. *Interior Sign Samples: Sign panels and frames, with letters and symbols, for each sign type.*
 - 1. *Sign Panel, 203 x 254 mm (8 x 10 inches), with letters.*
 - 2. *Color samples of each color, 152 x 152 mm (6 x 6 inches). Show anticipated range of color and texture.*
 - 3. *Frame system, one full size sample including divider bar and sample inserts.*
 - 4. *Sample of typeface, arrow and symbols in a typical full-size layout.*
 - 5. *Dimensional letter: one full size sample of one character in material and color specified*
 - 6. *Vinyl letter: one full size sample of one character in material and color specified*
- C. *Manufacturer's Literature:*
 - 1. *Showing the methods and procedures proposed for the anchorage of the signage system to each surface type.*
 - 2. *Manufacturer's printed specifications and maintenance instructions.*
 - 3. *Compliance with sustainable design VOC requirements as specified.*
 - 4. *Qualifications as required in 1.3 QUALITY ASSURANCE*

- D. *Sign Location Plan, showing location, type and total number of signs required.*
- E. *Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.*
- F. *Signage message schedule: schedule with exact text for each sign to be provided.*
- G. *Installer qualifications as required in 1.3 QUALITY ASSURANCE*

1.5 DELIVERY AND STORAGE

- A. *Deliver materials to the job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.*
- B. *Package to prevent damage or deterioration during shipment, handling, storage, and installation. Maintain protective covering in place and in good repair until removal is necessary.*
- C. *Deliver signs only when the site and mounting services are ready for installation work to proceed.*
- D. *Store products in dry condition inside enclosed facilities.*

1.6 APPLICABLE PUBLICATIONS

- A. *The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.*
- B. *American Architectural Manufacturers Association (AAMA):*
 - 611-14..... *Anodized Architectural Aluminum*
 - 2603-13..... *Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels*
- C. *American National Standards Institute (ANSI):*
 - A117.1-09..... *Accessible and Usable Buildings and Facilities*

D. *ASTM International (ASTM):*

A36/A36M-19	Carbon Structural Steel
A240/A240M-20	Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
A666-15	Annealed or Cold-Worked Austenitic Stainless-Steel Sheet, Strip, Plate and Flat Bar
A1011/A1011M-18a.....	Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength
B36/B36M-18	Brass Plate, Sheet, Strip, and Rolled Bar
B152/B152M-19	Copper Sheet, Strip, Plate, and Rolled Bar
B209-14	Aluminum and Aluminum-Alloy Sheet and Plate
B209M-14.....	Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
B221-14	Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
B221M-13.....	Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
C1036-16	Flat Glass
C1048-18	Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass
C1349-17	Architectural Flat Glass Clad Polycarbonate
D1003-13	Test Method for Haze and Luminous Transmittance of Transparent Plastics
D4802-16	Poly(Methyl Methacrylate) Acrylic Plastic Sheet

E. *Code of Federal Regulation (CFR):*

40 CFR 59.....	Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
----------------	--

F. *Federal Specifications (Fed Spec):*

MIL-PRF-8184F.....	Plastic Sheet, Acrylic, Modified
MIL-P-46144C.....	Plastic Sheet, Polycarbonate

G. *National Fire Protection Association (NFPA):*

70-14.....	National Electrical Code
------------	--------------------------

PART 2 - PRODUCTS

2.1 SIGNAGE GENERAL

- A. *Provide signs of type, size and design shown on the construction documents and to comply with VA Signage Design Guide.*
- B. *Provide signs complete with lettering, framing and related components for a complete installation.*
- C. *Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.*

- D. *Do not scale construction documents for dimensions. Verify dimensions and coordinate with field conditions. Notify Contracting Officer Representative (VA COR) of discrepancies or changes needed to satisfy the requirements of the construction documents.*
- E. *Typography: Comply with VA Signage Design Guide.*
 - 1. *Type Style: Helvetica LT Std Bold, Helvetica LT Std Regular, and Helvetica LT Std Bold Condensed. Title Case or Headline Case is standard, or as indicated in VA Design Guide.*
 - 2. *Arrow: Comply with graphic standards in VA Design Guide.*
 - 3. *Letter spacing: Comply with graphic standards in VA Design Guide.*
 - 4. *Letter height: Comply with graphic standards in VA Design Guide.*
 - 5. *Provide text, arrows, and symbols in size, colors, typefaces and letter spacing shown in VA Design Guide. Text shall be a true, clean, accurate reproduction of typeface(s). Text shown in construction documents is for layout purposes only; final text for signs is to be approved by VA COR.*

2.2 INTERIOR SIGN MATERIALS

- A. *Aluminum:*
 - 1. *Sheet and Plate: ASTM B209M (B209).*
 - 2. *Extrusions and Tubing: ASTM B221M (B221).*
- B. *Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matt finish water white clear acrylic shall not be acceptable.*
- C. *Polycarbonate: MIL-P-46144C; Type I, class 1.*
- D. *Vinyl: Premium grade 0.1 mm (0.004 inch) thick machine cut, having a pressure sensitive adhesive and integral colors.*
- E. *Adhesives:*
 - 1. *Adhesives for Field Application: Mildew-resistant, nonstaining adhesive for use with specific type of panels, sheets, or assemblies; and for substrate application as recommended in writing by signage manufacturer.*
 - 2. *Adhesives to have VOC content of 50 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).*

2.3 INTERIOR SIGN TYPES

A. Component System Signs:

1. *Interchangeable system that allows for changes of graphic components of the installed sign, without changing sign in its entirety.*
 - a. *Basis of design: Creative Sign Systems; Continuum Series.*
 - b. *Provide sign system comprised of the following primary components:*
 - 1) *Flex-fit Frame: Anodized extruded aluminum parts, mechanically fastened together, with spring clips to allow front loading of variable thickness components that will keep media flush to sign surface, mechanically fastened to the wall with hidden fasteners.*
 - a) *If sign is to be mounted to glazing, the use of VHB double sided tape and silicone adhesive is to be used. A blank acrylic back-up is necessary on the opposite side of the glass to cover mounting adhesive. .*
 - 2) *Tactile Copy Panels: P95 frosted acrylic material with subsurface digital print and ADA compliant raised tactile text and Grade II Braille. Tactile sign made from a material that provides for letters, numbers and Braille to be integral with sign.*
 - a) *Numbers, letters and Braille to be raised 0.8 mm (1/32 inches) from the background surface. The draft of the letters, numbers and Braille to be tapered, vertical and clean.*
 - b) *Braille Dots: Conform with ANSI A117.1 for Braille position and layout*
 - 3) *Regulatory Sign: Removeable 1/16" non-glare acrylic lens, over 1/8" white ACM back panel with surface printed text and graphics.*
 - 4) *Changeable Message Insert: Removeable 1/16" non-glare acrylic lens, over 1/8" decorative laminate ACM back panel, and updatable acetate insert with black print.*
 - 5) *Divider Bar: Removable 1/4" aluminum divider bar.*
 - 6) *Slider Unit: anodized aluminum slider unit with 1/16" non-glare acrylic insert panel with subsurface digital print to be CSS white and CSS fire Red #1003 or finish to match.*
 - c. *Provide sign configurations as indicated on construction documents.*

B. Acrylic Panel Signs:

1. *Single sided, surface mounted signs: 2-ply non-glare acrylic with subsurface digital print, mounted with VHB double sided tape and silicone adhesives.*
 - a. *If sign is to be mounted to glazing a blank acrylic back-up is necessary on the opposite side of the glass to cover mounting adhesive.*
2. *Double sided, bracket mounted signs: 3-ply non-glare acrylic, with subsurface digital print. Bracket to be anodized aluminum continuous mounting bracket to mount sign at 90 degrees from the wall.*

C. Vinyl text and graphics:

1. *Provide text and graphics as first surface applied stylus cut vinyl.*
2. *Provide typeface, color, and spacing, with each message or message group on a single quick release backing sheet.*

D. Dimensional Letters:

1. *Provide dimensional letters that are mill or laser cut 1/4" thick brushed aluminum in heights indicated in construction documents.*
2. *Fabricate letters with square corners, such as where a letter stem and bar intersect.*

3. *Stud mounting to be used, unless mounted on glazing, cmu, porcelain or ceramic tile, where tape/glue mounted to be used.*
- E. *Temporary Interior Signs:*
 1. *Fabricated from 50 kg (110 pound) matte finished white paper cut to 101 mm (4 inch) wide by 305 mm (12 inch) long.*
 - a. *Mount with removable tape that will not affect the finished surface it is applied to, but strong enough to keep sign attached to surface.*
 - b. *Reinforce hole on both sides with suitable material that prevents tie from pulling through hole.*
 - c. *Ties: Steel wire 0.3 mm (0.120 inch) thick attached to tag with twist leaving 152 mm (6 inch) long free ends.*
 2. *Mark architectural room number on sign, with broad felt marker in clearly legible numbers or letters that identify room, corridor or space as shown on construction documents.*
 3. *Install temporary signs to rooms that have a room, corridor or space number. Attach to wall adjacent to door frame, or face of door.*
 - a. *Doors that do not require signs are: corridor doors in corridor with same number, folding doors or partitions, toilet doors, bathroom doors within and between rooms, closet doors within rooms, communicating doors in partitions between rooms with corridor entrance doors.*
 4. *Replace missing, damaged or illegible signs.*

2.4 FABRICATION

- A. *Design interior signage components to allow for expansion and contraction for a minimum material temperature range of 38 degrees C (100 degrees F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.*
- B. *Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Provide concealed fasteners wherever possible.*
- C. *Shop fabricate so far as practicable. Fasten joints flush to conceal reinforcement, or weld joints, where thickness or section permits.*
- D. *Level and assemble contract surfaces of connected members so joints shall be tight and practically unnoticeable, without applying filling compound.*
- E. *Signs: Fabricate with fine, even texture to be flat and sound.*
 1. *Maintain lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern.*
 2. *Plane surfaces to be smooth, flat and without oil-canning, free of rack and twist.*
 3. *Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inches). Restore texture to filed or cut areas.*
- F. *Finish extruded members to be free from extrusion marks. Fabricate square turns, sharp corners, and true curves.*
- G. *Finish hollow signs with matching material on all faces, tops, bottoms and ends. Miter edge joints to give appearance of solid material.*

- H. *Do not manufacture signs until final sign message schedule and location review has been completed by the VA COR and forwarded to contractor.*
- I. *Drill holes for bolts and screws. Mill smooth exposed ends and edges with corners slightly rounded.*
- J. *Form joints exposed to weather to exclude water.*
- K. *Movable Parts, Including Hardware: Cleaned and adjusted to operate as designed without binding or deformation of members. Center doors and covers in opening or frame.*
 - 1. *Align contact surfaces fit tight and even without forcing or warping components.*
- L. *Pre-assemble items in shop to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.*
- M. *Prime painted surfaces as required. Apply finish coating of paint for complete coverage with no light or thin applications allowing substrate or primer to show.*
 - 1. *Finish surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter and other imperfections.*

PART 3 - EXECUTION


3.1 INSTALLATION

- A. *Locate signs as shown on the construction documents.*
- B. *Where not otherwise indicated conform to the VA Signage Design Manual for installation requirements.*
- C. *At each sign location there are no utility lines behind each sign location that shall be affected by installation of signs.*
 - 1. *Correct and repair damage done to utilities during installation of signs at no additional cost to Government.*
- D. *Provide inserts and anchoring devices which shall be set in concrete or other material for installation of signs. Submit setting drawings, templates, instructions and directions for installation of anchorage devices, which shall involve other trades.*
- E. *Mount signs in proper alignment, level and plumb according to the Sign Location Plan and the dimensions given on elevation and Sign Location Plans. When exact position, angle, height or location is not clear, contact VA COR for resolution.*
- F. *When signs are installed on glass, provide blank glass back up to be placed on opposite side of glass exactly behind sign being installed. Provide blank glass back that is the same size as sign being installed.*
- G. *Touch up exposed fasteners and connecting hardware to match color and finish of surrounding surface.*
- H. *At completion of sign installation, clean exposed sign surfaces. Clean and repair adjoining or adjacent surfaces that became soiled or damaged as a result of installation of signs.*


END OF SECTION 10 14 00

DEPARTMENT OF VETERANS AFFAIRS - JOHN D. DINGELL VA MEDICAL CENTER
DETROIT, MICHIGAN


RENOVATE A2 SOUTH FOR CANCER
CLINIC
553-21-100
100% BID DOCUMENTS
10-JAN-2025

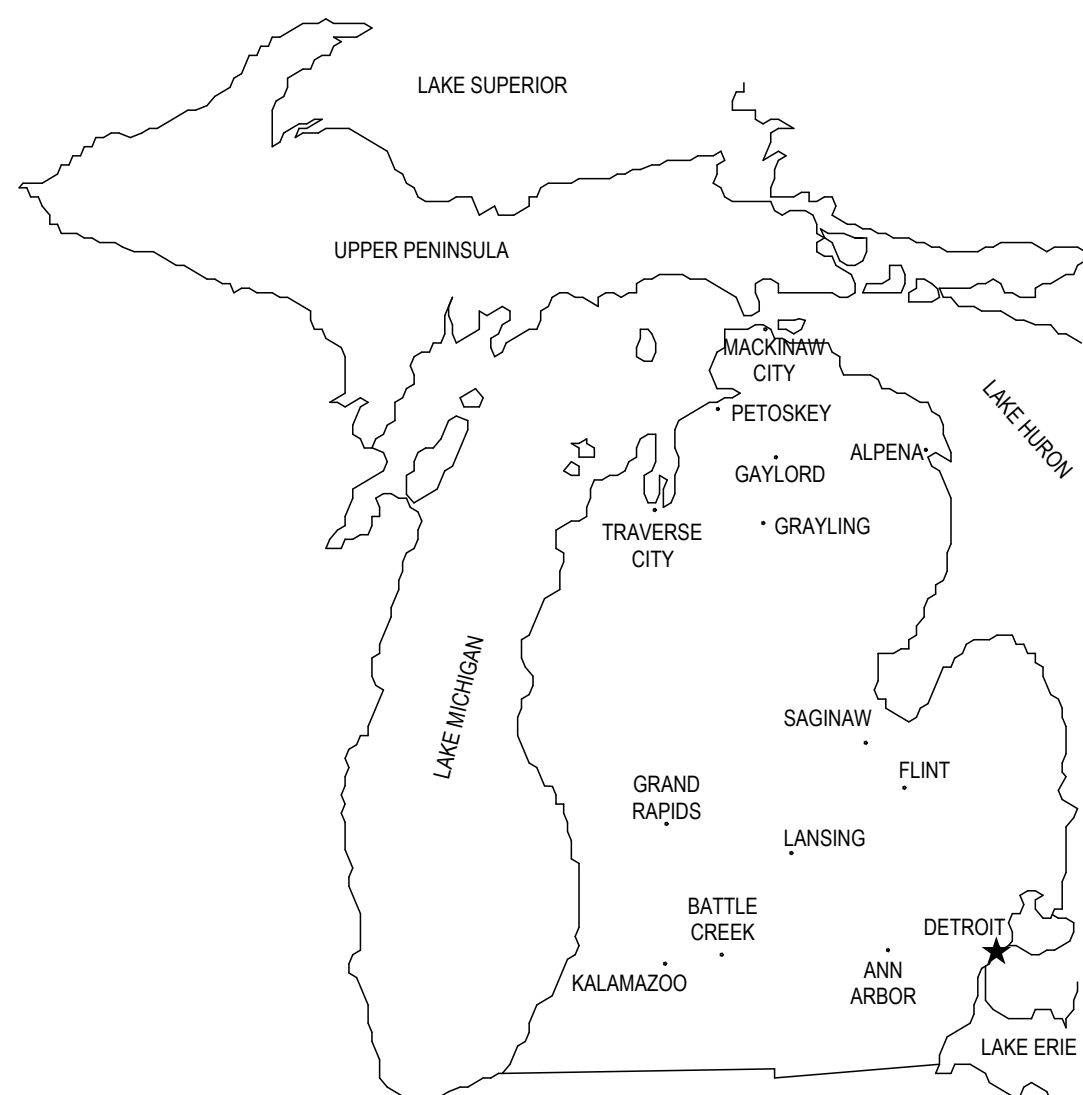

LOCATION MAP
NOT TO SCALE

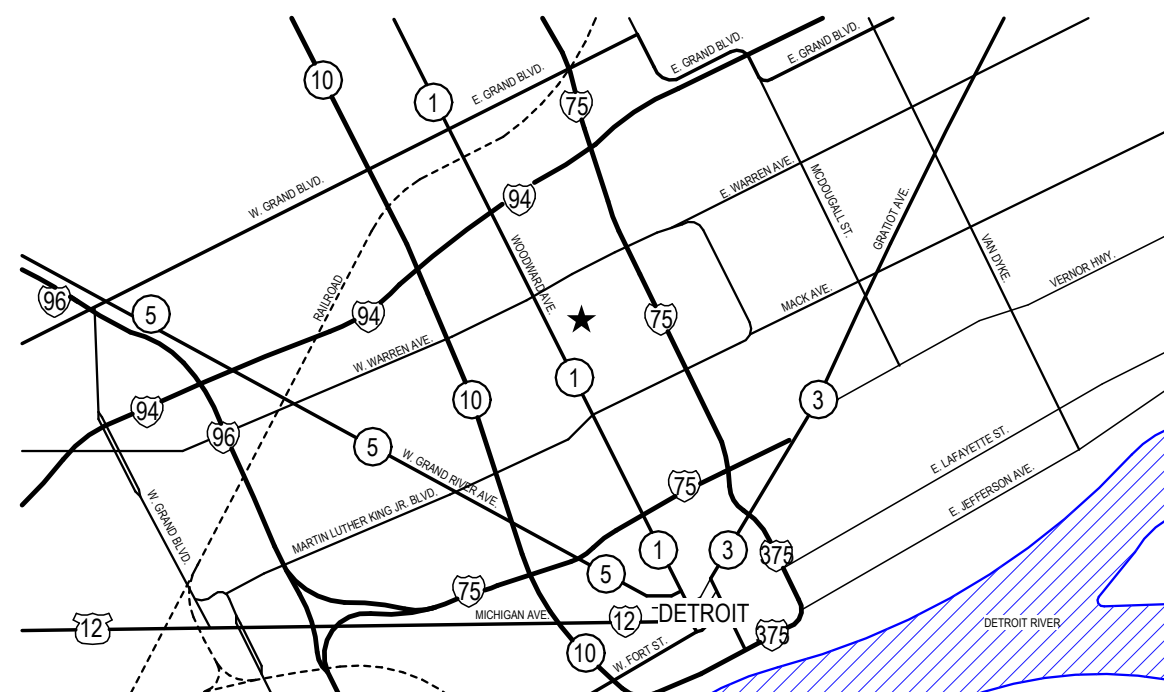

VICINITY MAP
NOT TO SCALE

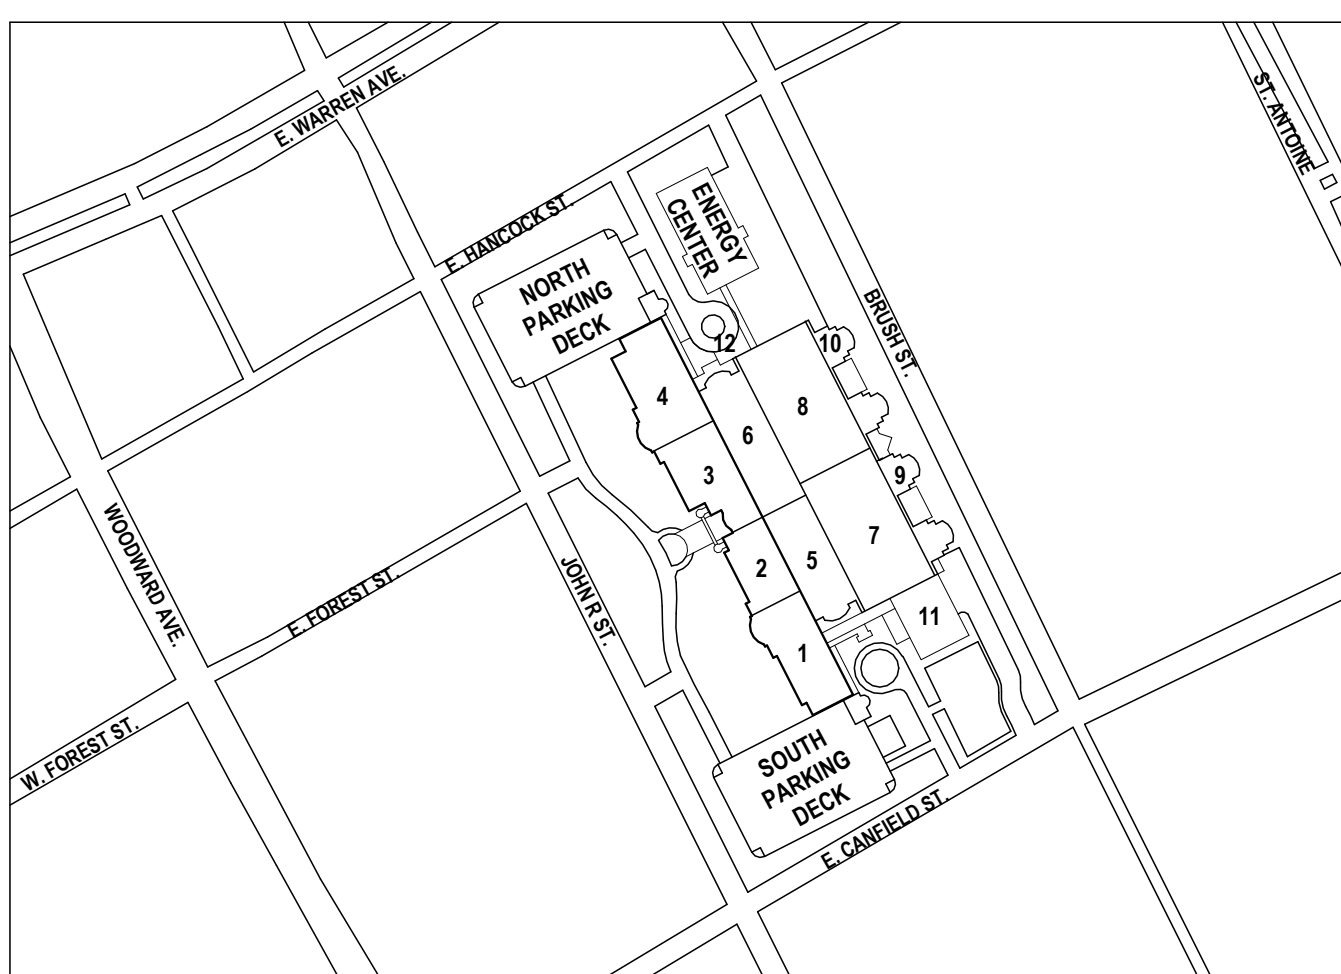

CAMPUS MAP
NOT TO SCALE

GENERAL NOTES:

- ALL REFERENCES TO OWNER IN THESE DOCUMENTS REFER TO THE VA, THE CO AND/OR THE COR.
- ALL REFERENCES TO GOVERNMENT IN THESE DOCUMENTS REFER TO THE VA, THE CO AND/OR THE COR.
- PRODUCTS LISTED HEREIN BY MANUFACTURER'S TRADE NAME AND NUMBERS ARE TO BE USED FOR BASIS OF DESIGN ONLY. U.N.O. PRODUCTS ARE SUBJECT TO COMPLIANCE WITH SALENT CHARACTERISTICS AND REQUIREMENTS IN THE SPECIFICATIONS. PROVIDE PRODUCTS LISTED OR COMPARABLE PRODUCTS BY OTHER MANUFACTURERS.

DEDUCTIVE ALTERNATE LEGEND:

- DEDUCTIVE ALTERNATE #1
 - REMOVE BUILT-IN CASEWORK AND REPLACING WITH FURNITURE PACKAGE IN ROOMS: A2013, A2014, A2020, A2022, A2058 AND A2060.
- DEDUCTIVE ALTERNATE #2
 - EVERYTHING IN DEDUCTIVE ALTERNATE #1.
 - 1. REMOVE BUILT-IN CASEWORK AND REPLACING WITH FURNITURE PACKAGE IN ROOMS: A2013, A2014, A2020, A2022, A2058 AND A2060.
- DEDUCTIVE ALTERNATE #3
 - EVERYTHING IN DEDUCTIVE ALTERNATE #1 AND #2.
 - REMOVE LMC-1 AND LINEAR LIGHT FIXTURES, L22, COVER INFUSION BAYS A2068, A2070, A2072, A2074, A2076, A2078, A2080, A2081, A2082, AND A2083. REPLACE WITH SMC-1 AND 2X2 LIGHTING FIXTURES, L2. LIGHT FIXTURE COUNT TO REMAIN THE SAME.
- DEDUCTIVE ALTERNATE #4
 - EVERYTHING IN DEDUCTIVE ALTERNATE #1, #2, AND #3.
 - REMOVE IN-FLOOR RECESSED SCALE IN ITS ENTIRETY FROM THE SCOPE OF WORK. TO INCLUDE: CONCRETE WORK, IN FLOOR POWER / DATA ASSOCIATED WORK, AND RECESSED SCALE EQUIPMENT IN WEIGHT ALCOVES A2024 AND A2063.

SHEET NO.	SHEET NAME
GENERAL	
G-001	COVER SHEET
G-002	LIFE SAFETY AND ICRA LEGENDS
G-102.1	LIFE SAFETY PLAN - SECOND LEVEL - ZONE 1
GENERAL - ICRA	
G-200	ICRA PLAN - LOWER LEVEL
G-201.11	ICRA PLAN - FIRST LEVEL INTERSTITIAL - ZONE 1
G-202.1	ICRA PLAN - SECOND LEVEL - ZONE 1
G-202.11	ICRA PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
G-203.1	ICRA PLANS - ZONE 1D
STRUCTURAL	
S-001	GENERAL NOTES AND LEGENDS
SD102.1	STRUCT DEMO PLAN - SECOND LEVEL - ZONE 1
SD102.11	STRUCT DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
S-102.1	FRAMING PLAN - SECOND LEVEL - ZONE 1
S-102.11	FRAMING PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
S-103.1	PARTIAL FRAMING PLANS - MECHANICAL ROOMS - ZONE 1
S-104.1	PARTIAL FRAMING PLANS - MECHANICAL ROOMS - ZONE 1
S-401	ENLARGED PLANS
S-601	SECTIONS AND DETAILS
ARCHITECTURAL	
A-001	ARCHITECTURAL LEGENDS, SYMBOLS, AND ABBREVIATIONS
A-002	PARTITION TYPES
A-102.1	DEMOLITION PLAN - SECOND LEVEL - ZONE 1
A-102.11	FLOOR PLAN - SECOND LEVEL - ZONE 1
A-102.1A	FLOOR PLAN - SECOND LEVEL - ZONE 1A
A-102.1B	FLOOR PLAN - SECOND LEVEL - ZONE 1B
A-102.1C	FLOOR PLAN - SECOND LEVEL - ZONE 1C
A-102.1D	FLOOR PLAN - SECOND, THIRD, ROOF LEVELS - ZONE 1D
A-112.1	REFLECTED CEILING PLAN - SECOND LEVEL - ZONE 1
A-112.1A	REFLECTED CEILING PLAN - SECOND LEVEL - ZONE 1A
A-112.1B	REFLECTED CEILING PLAN - SECOND LEVEL - ZONE 1B
A-112.1C	REFLECTED CEILING PLAN - SECOND LEVEL - ZONE 1C
A-112.1D	REFLECTED CEILING PLAN - SECOND LEVEL - ZONE 1D
A-122.1	EQUIPMENT PLAN - SECOND LEVEL - ZONE 1
A-122.1A	EQUIPMENT PLAN - SECOND LEVEL - ZONE 1A
A-122.1B	EQUIPMENT PLAN - SECOND LEVEL - ZONE 1B
A-122.1C	EQUIPMENT PLAN - SECOND LEVEL - ZONE 1C
A-122.1D	EQUIPMENT PLAN - SECOND LEVEL - ZONE 1D
A-131	ENLARGED PLANS
A-132	ENLARGED PLANS - PHARMACY
A-401	INTERIOR ELEVATIONS - ZONE 1A
A-402	INTERIOR ELEVATIONS - ZONE 1B
A-403	INTERIOR ELEVATIONS - ZONE 1C
A-404	INTERIOR ELEVATIONS - ZONE 1D
A-505	INTERIOR ELEVATIONS - ZONE 1C
A-501	DETAILS
A-502	SECTIONS AND DETAILS
A-503	DETAILS AND ELEVATIONS - EXAM CLINIC - CHECK-IN DESK
A-504	DETAILS - NURSE STATION, CHECK-IN AND CHECK-OUT
A-505	DETAILS - HALLWORK
A-506	DETAILS - INFUSION BAYS
A-601	DOOR SCHEDULE AND DETAILS
ELECTRICAL	
E-001	ELECTRICAL GENERAL INFORMATION
E-001	LIGHTING SCHEDULES
ELD102.1	LIGHTING DEMOLITION PLAN-SECOND LEVEL-ZONE 1
EL102.1	POWER DEMOLITION PLAN-SECOND LEVEL-ZONE 1
ETD102.1	TECHNOLOGY DEMOLITION PLAN-SECOND LEVEL-ZONE 1
EL102.1A	LIGHTING PLAN-SECOND LEVEL-ZONE 1A
EL102.1B	LIGHTING PLAN-SECOND LEVEL-ZONE 1B
EL102.1C	LIGHTING PLAN-SECOND LEVEL-ZONE 1C
EL102.1D	LIGHTING PLAN-SECOND LEVEL-ZONE 1D
EP102.1	POWER PLAN-SECOND LEVEL-ZONE 1
EP102.1A	POWER PLAN-SECOND LEVEL-ZONE 1A
EP102.1B	POWER PLAN-SECOND LEVEL-ZONE 1B
EP102.1C	POWER PLAN-SECOND LEVEL-ZONE 1C
EP102.1D	POWER PLAN-SECOND LEVEL-ZONE 1D
ET102.1	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1A
ET102.1A	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1A
ET102.1B	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1B
ET102.1C	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1C
ET102.1D	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1D
E-300	ELECTRICAL ELEVATIONS
E-500	ELECTRICAL DETAILS
E-501	ELECTRICAL DETAILS
E-600	PANEL SCHEDULES
E-702	LOW VOLTAGE RISER DIAGRAM
TOTAL SHEETS: 118	

SHEET NO.	SHEET NAME
I-130	FLOORING SEAM PLAN - SECOND LEVEL - ZONE 1
FIRE PROTECTION	
FD102	FP DEMO PLAN - SECOND LEVEL - ZONE 1
FD102.1	FP DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
FP102	FP PLAN - SECOND LEVEL - ZONE 1
PLUMBING	
PD101.1	DEMO PLAN - FIRST LEVEL INTERSTITIAL - ZONE 1
PD102	DEMO PLAN - SECOND LEVEL - ZONE 1
PD102.1	DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
PD102.11	DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
PW101.1	DWV PLAN - FIRST LEVEL INTERSTITIAL - ZONE 1
PW102.1	DWV PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
P-102	PLUMBING PLAN - SECOND LEVEL - ZONE 1
P-501	PLUMBING DETAILS
P-601	PLUMBING SCHEDULES
MECHANICAL	
M-001	MECHANICAL LEGENDS
MD101.1	DEMO PLAN - FIRST LEVEL INTERSTITIAL - ZONE 1
MD102	DEMO PLAN - SECOND LEVEL - ZONE 1
MD102.1	DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
MD102.11	DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
MD102.2	HVAC DEMO PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
MD401	ENLARGED MECHANICAL DEMO PLANS
MH102	HVAC PLAN - SECOND LEVEL - ZONE 1
MH102.1	HVAC PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
MP101.1	PIPING PLAN - FIRST LEVEL INTERSTITIAL - ZONE 1
MP102	PIPING PLAN - SECOND LEVEL - ZONE 1
MP102.1	PIPING PLAN - SECOND LEVEL INTERSTITIAL - ZONE 1
M-401	ENLARGED MECHANICAL PLANS
M-402	ENLARGED MECHANICAL PLANS
M-403	ENLARGED MECHANICAL PLANS
M-501	MECHANICAL DETAILS
M-502	MECHANICAL DETAILS
M-503	MECHANICAL AHU DETAILS
M-504	MECHANICAL SCHEDULES
M-601	MECHANICAL SCHEDULES
M-701	MECHANICAL DIAGRAMS & SCHEMATICS
M-801	MECHANICAL CONTROLS
M-802	MECHANICAL CONTROLS
ELECTRICAL	
E-001	ELECTRICAL GENERAL INFORMATION
E-001	LIGHTING SCHEDULES
ELD102.1	LIGHTING DEMOLITION PLAN-SECOND LEVEL-ZONE 1
EL102.1	POWER DEMOLITION PLAN-SECOND LEVEL-ZONE 1
ETD102.1	TECHNOLOGY DEMOLITION PLAN-SECOND LEVEL-ZONE 1
EL102.1A	LIGHTING PLAN-SECOND LEVEL-ZONE 1A
EL102.1B	LIGHTING PLAN-SECOND LEVEL-ZONE 1B
EL102.1C	LIGHTING PLAN-SECOND LEVEL-ZONE 1C
EL102.1D	LIGHTING PLAN-SECOND LEVEL-ZONE 1D
EP102.1	POWER PLAN-SECOND LEVEL-ZONE 1
EP102.1A	POWER PLAN-SECOND LEVEL-ZONE 1A
EP102.1B	POWER PLAN-SECOND LEVEL-ZONE 1B
EP102.1C	POWER PLAN-SECOND LEVEL-ZONE 1C
EP102.1D	POWER PLAN-SECOND LEVEL-ZONE 1D
ET102.1	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1A
ET102.1A	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1A
ET102.1B	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1B
ET102.1C	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1C
ET102.1D	TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1D
E-300	ELECTRICAL ELEVATIONS
E-500	ELECTRICAL DETAILS
E-501	ELECTRICAL DETAILS
E-600	PANEL SCHEDULES
E-702	LOW VOLTAGE RISER DIAGRAM
TOTAL SHEETS: 118	

SIGNATURE BLOCK 553-21-100		
POSITION	SIGNATURE	DATE
Director		
Associated Director		
Chief of Staff		
Associate Director for Patient Care Services		
Chief, FMS		
Chief, Engineering Section		
Chief, Environmental Management Section		
Infection Control Officer		

SOLE SOURCE LIST		
DIVISION	ITEM	BRAND
07 81 00	FS-1 FOR FIRESTOPPING	HILTI
08 71 00	LATCH AND LOCK SETS	YALE
08 71 00	PUSH BUTTON COMBINATION LOCKSET	ALARM LOCK TRILOGY DL3500
22 63 00	VACUUM SYSTEMS	CHEMTRON
22 63 00	MEDICAL GASES	CHEMTRON
23 09 23	DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC	SIEMENS
26 22 00	DRY-TYPE TRANSFORMERS	SIEMENS
26 24 11	DISTRIBUTION SWITCHBOARDS	SIEMENS
26 24 16	ELECTRICAL PANELBOARDS	SIEMENS
26 24 19	MOTOR CONTROL CENTERS	SIEMENS
26 29 11	MOTOR STARTERS	SIEMENS
26 29 21	LOW-VOLTAGE DISCONNECT SWITCHES	SIEMENS
26 36 23	AUTOMATIC TRANSFER SWITCHES	EATON
26 43 13	TRANSIENT-VOLTAGE SURGE SUPPRESSION	SIEMENS
27 52 23	NURSE CALL AND CODE BLUE SYSTEMS	RAULAND-BORG
28 31 00	FIRE DETECTION AND ALARM	SIMPLEX
11 73 00	PATIENT LIFT	ARJO, SKI-2
28 23 00	CCTV SYSTEM	SECURITY 2000
28 13 00	ACCESS CONTROL SYSTEM (CARD READERS)	SECURITY 2000
28 26 00	ALARM SYSTEM (COMPUTER, 2 ALT KEYS ON PAD)	LYNX ALARM SYSTEM

RESPONSIBILITY MATRIX				
DESCRIPTION	SPECIFIED BY	AI	REMARK	
TIS - CONDUIT, BOXES AND RACEWAYS	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
TIS - CABLE, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN	
TIS - MONITOR BRACKET/MOUNTS	GOVERNMENT	C C	BLOCKING BY CONTRACTOR	
TIS - EQUIPMENT	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN, POWER, ETC.	
SECURITY SYSTEM - CONDUIT AND BOXES	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
SECURITY SYSTEM - CABLE, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
SECURITY SYSTEM - EQUIPMENT	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN, LOCATION, POWER, ETC.	
NURSE CALL - CONDUIT, BOXES AND RECEWAYS	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
NURSE CALL - CABLE, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	-	
NURSE CALL - EQUIPMENT	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN	
FIRE ALARM - CONDUIT, BOXES AND RECEWAYS	ARCHITECT	C C	-	
FIRE ALARM - CABLE, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	-	
FIRE ALARM - EQUIPMENT	ARCHITECT	C C	-	
PAGING - CONDUIT, BOXES AND RECEWAYS	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
PAGING - CONDUIT, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	-	
PAGING - EQUIPMENT, SPEAKERS	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN	
CCTV - CONDUIT, BOXES AND RACEWAYS	ARCHITECT	C C	COORDINATE W/ SH AND GMI STANDARDS AND STAFF	
CCTV - CABLE, CABLE INSTALLATION, AND TERMINATIONS	ARCHITECT	C C	-	
CCTV - MONITOR BRACKET/MOUNTS	GOVERNMENT	V C	BLOCKING BY CONTRACTOR	
CCTV - EQUIPMENT	ARCHITECT	C C	ARCHITECT COORDINATES W/ DESIGN, BLOCKING BY CONTRACTOR	
COMMISSIONING	GOVERNMENT	V V	-	

ADDENDUM 02	30-APR-2026
ADDENDUM 01	02-APR-2026
100% BID DOCUMENTS	10-JAN-2025
95% CONSTRUCTION DOCUMENTS - REVISED	27-AUG-2024
95% CONSTRUCTION DOCUMENTS	15-APR-2024
65% DESIGN DEVELOPMENT	26-AUG-2023
35% SCHEMATIC DESIGN	02-MAR-2022
Revisions:	Date:

VA STATION	Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center	
4646 John R. Street	
Detroit, MI 48201	

CONSULTANT	C20ae
An AtkinsRéalis Company	
(866) 454-3923 WWW.C20AE.COM	

ENGINEER OF RECORD	WalterMechanical Services Inc.
3419 Pierson Place	
Flushing, Michigan, 48433	
810-230-6202	

STAMP	
Office of Construction and Facilities Management	
VA U.S. Department of Veterans Affairs	


Drawing Title	COVER SHEET
Approved:	

Phase	100% BID DOCUMENTS
Project Title	RENOVATE A2 SOUTH FOR CANCER CLINIC
Project Number	553-21-100
Building Number	

Location	DETROIT, MI
Issue Date	10-JAN-2025
Checked	KJH
Drawn	MRB
Drawing Number	G-001

Issue Date	10-JAN-2025
Checked	KJH
Drawn	MRB
Drawing Number	G-001

Issue Date	10-JAN-2025
Checked	KJH
Drawn	MRB
Drawing Number	G-001

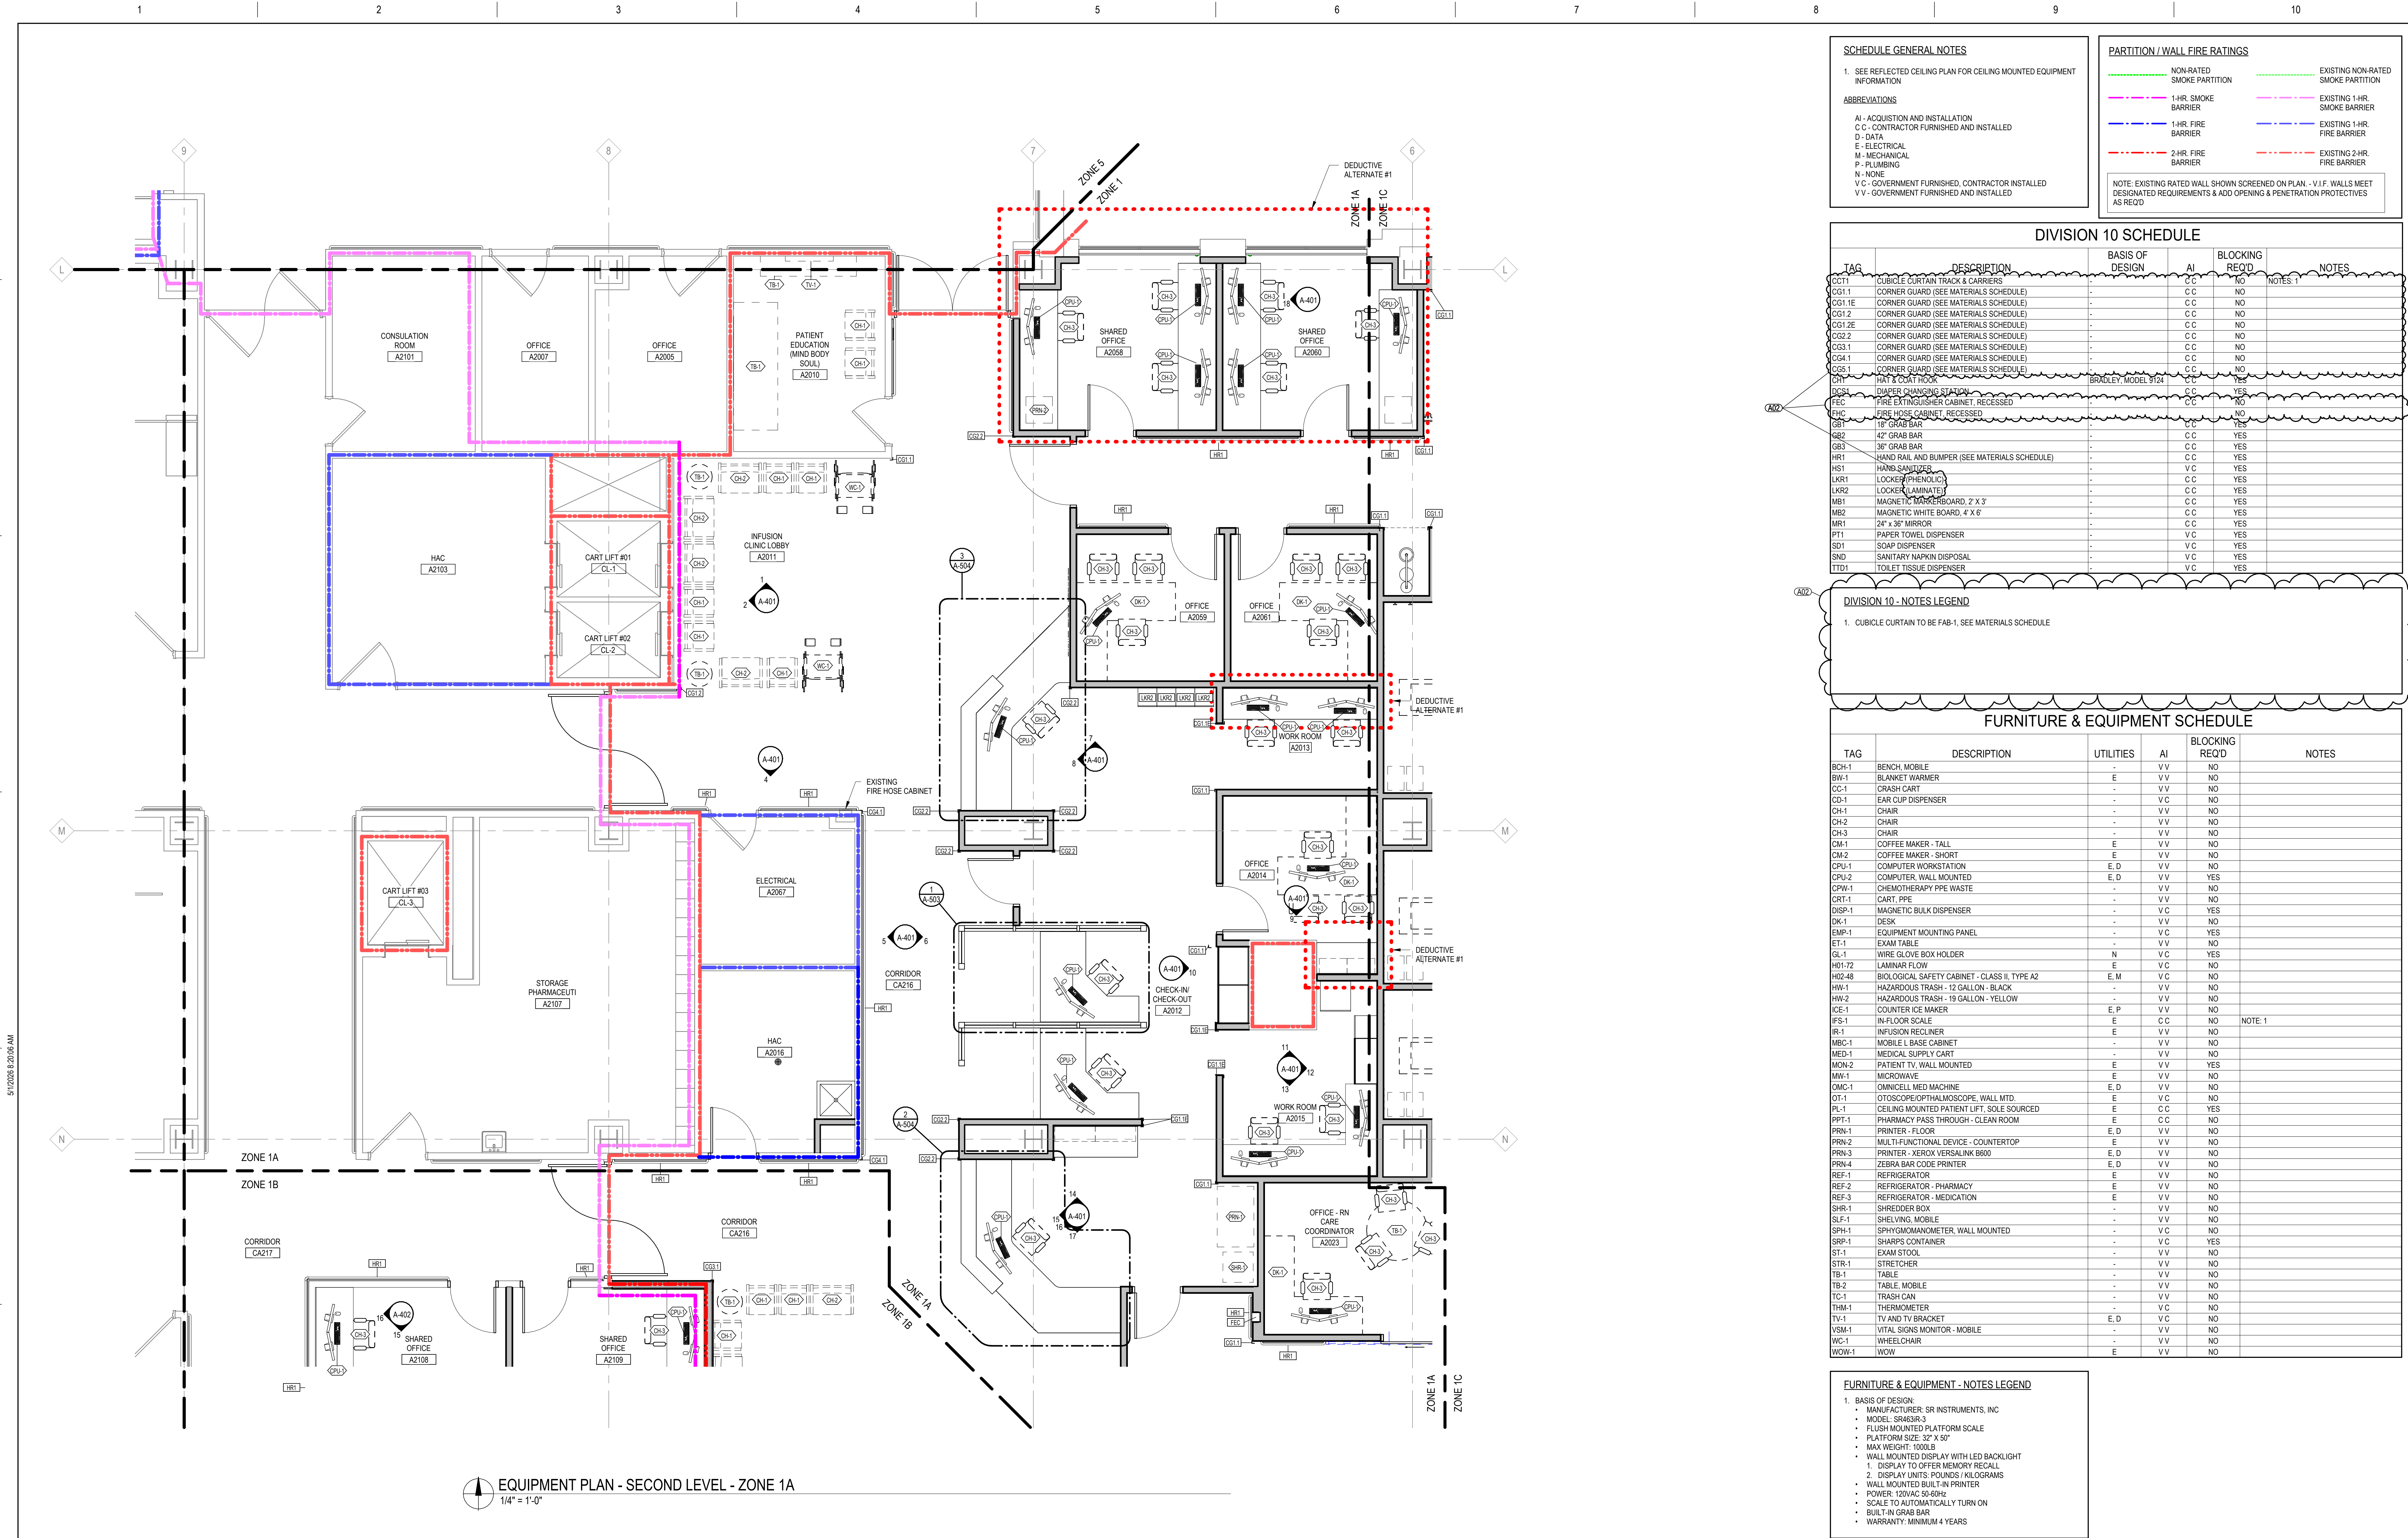

ADDENDUM 02
100% BID DOCUMENTS
95% CONSTRUCTION DOCUMENTS - REVISED
95% CONSTRUCTION DOCUMENTS
65% DESIGN DEVELOPMENT
Revisions:
30-APR-2026
15-JAN-2025
27-AUG-2024
15-APR-2024
29-AUG-2023
Date:

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202


STAMP
Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
EQUIPMENT PLAN - SECOND LEVEL - ZONE 1A
Approved:

Phase
100% BID DOCUMENTS
FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC
Location
DETROIT, MI
Issue Date
10-JAN-2025
Checked
KJH
Drawn
MRB

Project Number
553-21-100
Building Number
A-122.1A

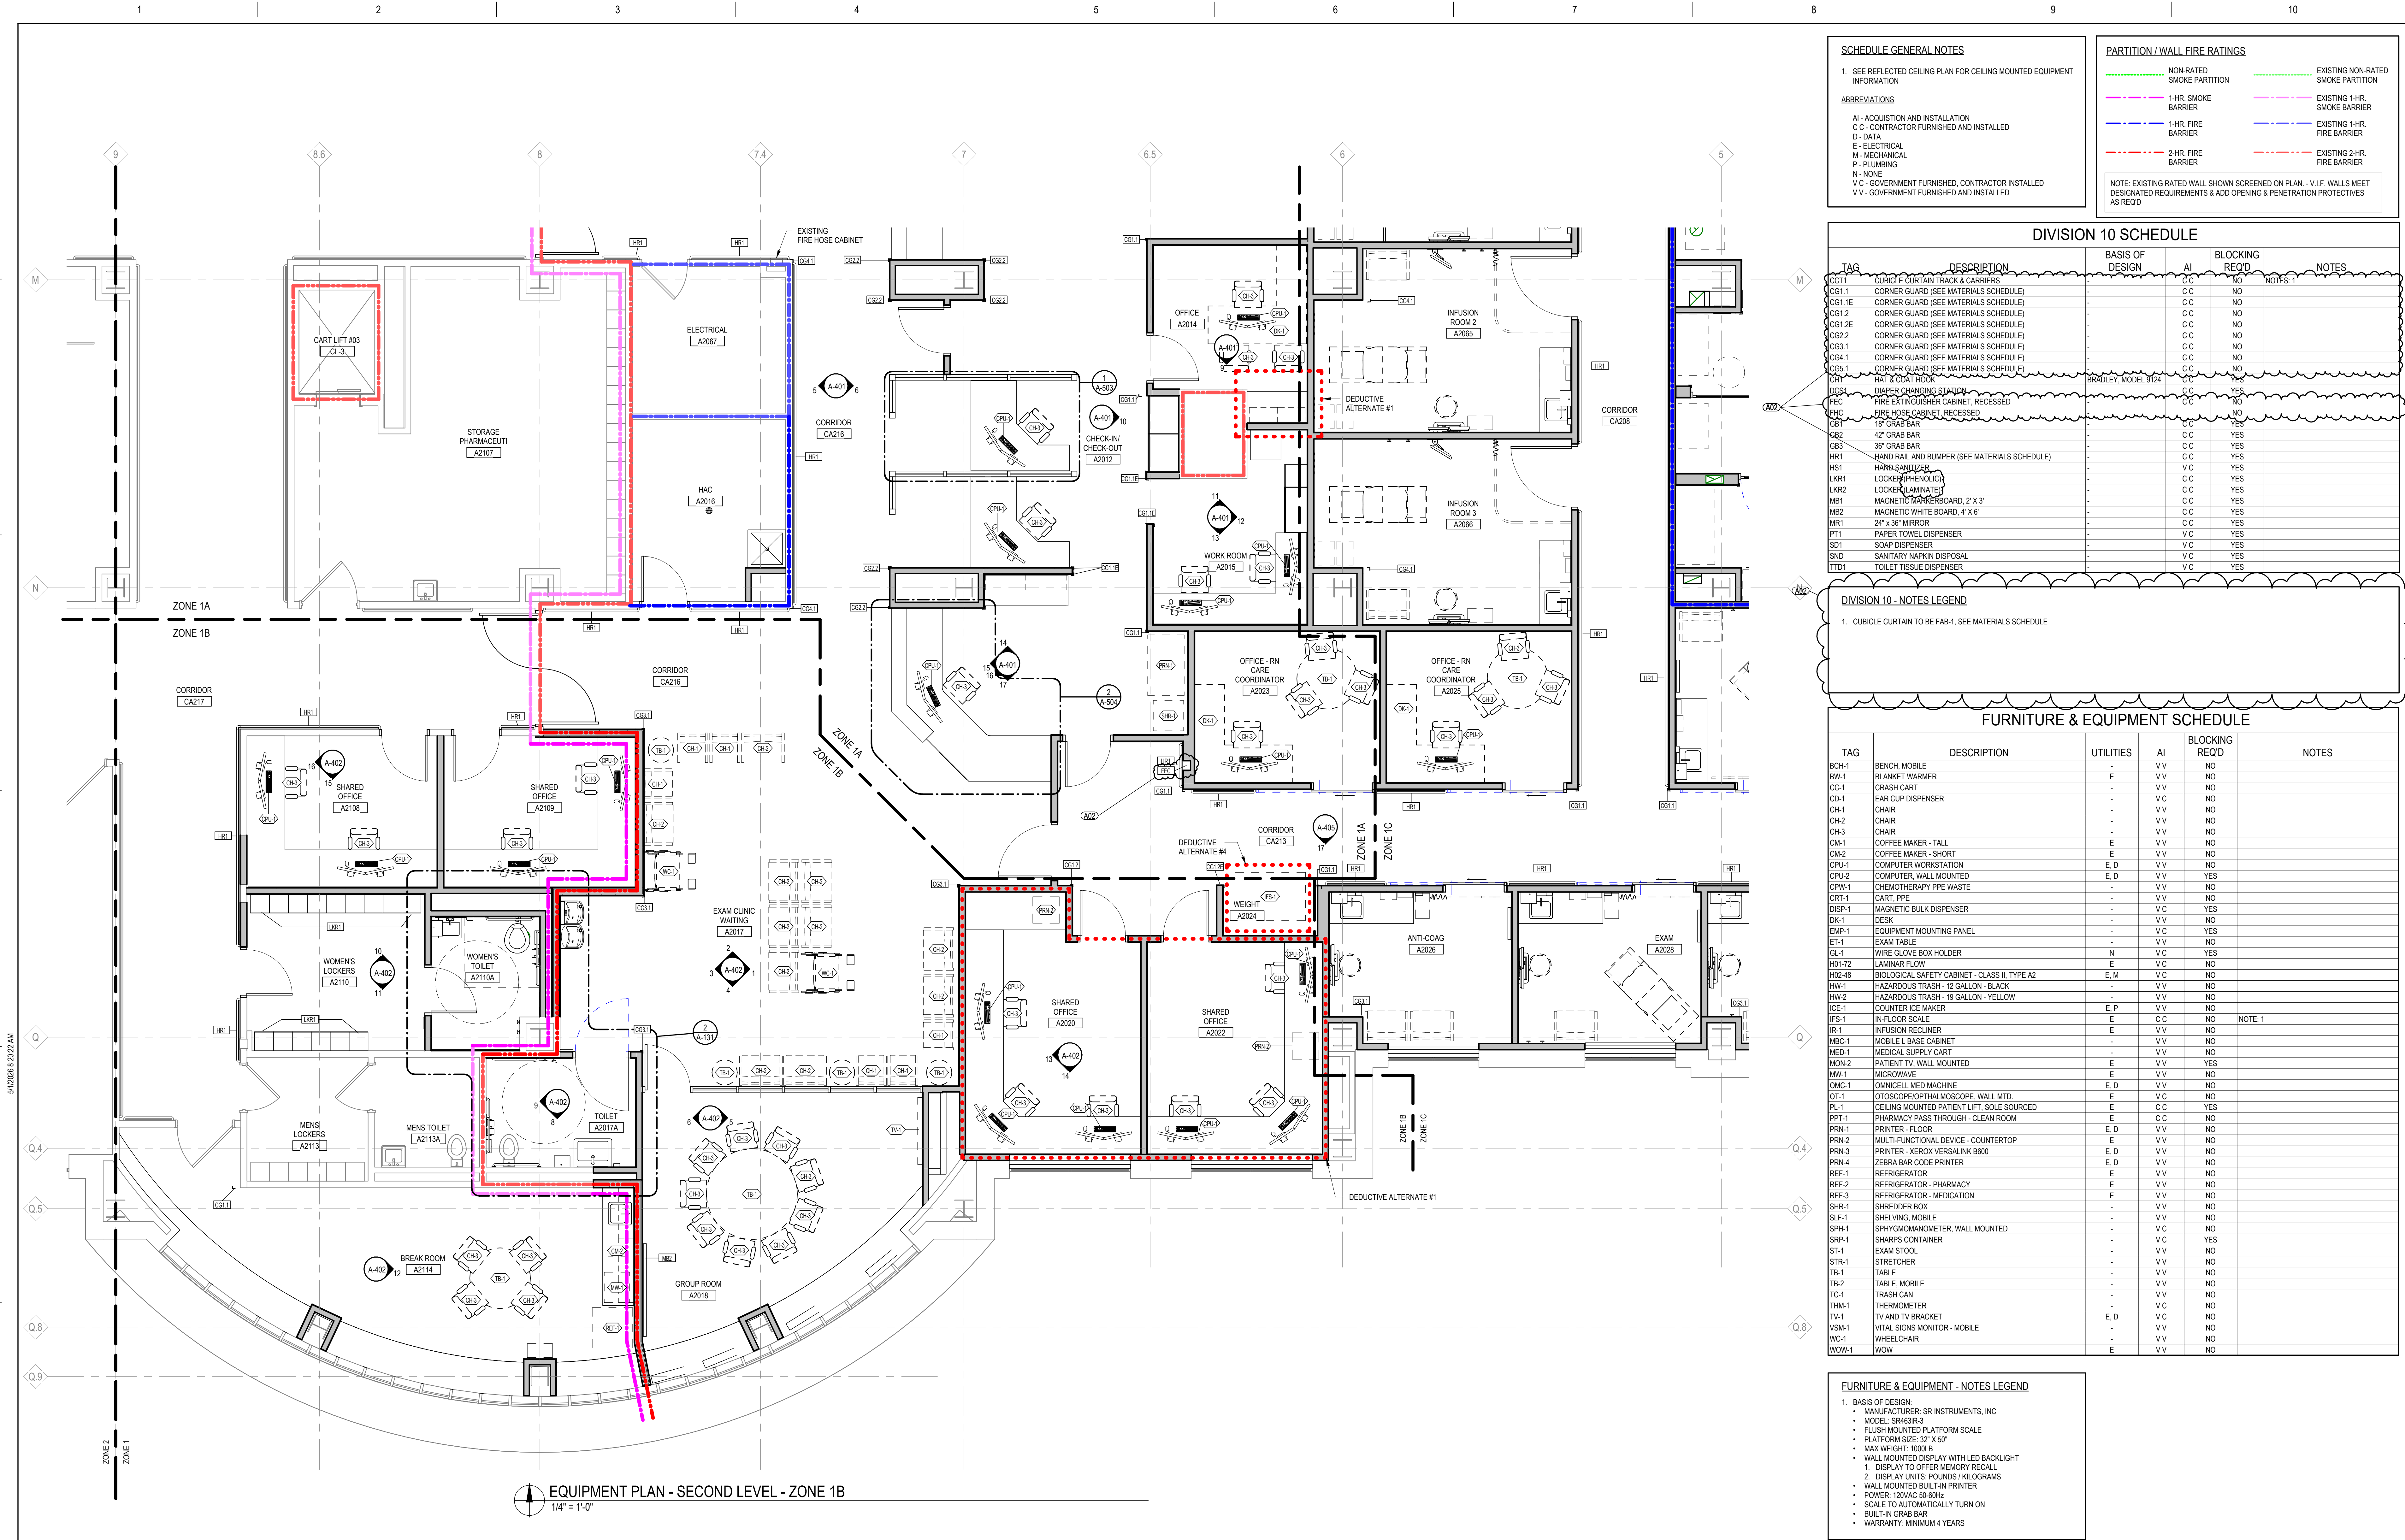

SCHEDULE GENERAL NOTES	
1. SEE REFLECTED CEILING PLAN FOR CEILING MOUNTED EQUIPMENT INFORMATION	
ABBREVIATIONS	
AI - ACQUISITION AND INSTALLATION	
C - CONTRACTOR FURNISHED AND INSTALLED	
D - DATA	
E - ELECTRICAL	
M - MECHANICAL	
P - PLUMBING	
N - NONE	
V - GOVERNMENT FURNISHED, CONTRACTOR INSTALLED	
VV - GOVERNMENT FURNISHED AND INSTALLED	

PARTITION / WALL FIRE RATINGS	
NON-RATED	EXISTING NON-RATED
1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER
2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN. - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

DIVISION 10 SCHEDULE					
TAG	DESCRIPTION	BASIS OF DESIGN	AI	BLOCKING REQ'D	NOTES
CC1.1	CUBICLE CURTAIN TRACK & CARRIERS	-	C	NO	
CG1.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.1E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG2.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG4.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG5.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CH1	HAT & COAT HOOK	-	C	NO	
CH2	DIAPER CHANGING STATION	-	C	YES	
CH3	FIRE EXTINGUISHER CABINET, RECESSED	-	C	NO	
CH4	16" GRAB BAR	-	C	YES	
CH5	42" GRAB BAR	-	C	YES	
CH6	36" GRAB BAR	-	C	YES	
CH7	HAND RAIL AND BUMPER (SEE MATERIALS SCHEDULE)	-	C	YES	
CH8	HAND SANITIZER	-	C	YES	
LKR1	LOCKER (PHEVOLOC)	-	C	YES	
LKR2	LOCKER (LAMINATE)	-	C	YES	
MB1	MAGNETIC MARKERBOARD, 2' X 3'	-	C	YES	
MB2	MAGNETIC WHITE BOARD, 4' X 6'	-	C	YES	
MR1	24" X 36" MIRROR	-	C	YES	
PT1	PAPER TOWEL DISPENSER	-	V	YES	
SD1	SOAP DISPENSER	-	V	YES	
SD2	SANITARY NAPKIN DISPOSAL	-	V	YES	
TD1	TOILET TISSUE DISPENSER	-	V	YES	

DIVISION 10 - NOTES LEGEND	
1. CUBICLE CURTAIN TO BE FAB-1, SEE MATERIALS SCHEDULE	

FURNITURE & EQUIPMENT SCHEDULE					
TAG	DESCRIPTION	UTILITIES	AI	BLOCKING REQ'D	NOTES
BCH-1	BENCH, MOBILE	-	V	NO	
BW-1	BLANKET WARMER	-	V	NO	
CC-1	CRASH CART	-	V	NO	
CH-1	CHAIR	-	V	NO	
CH-2	CHAIR	-	V	NO	
CH-3	CHAIR	-	V	NO	
CM-1	COFFEE MAKER - TALL	-	V	NO	
CM-2	COFFEE MAKER - SHORT	-	V	NO	
CPU-1	COMPUTER WORKSTATION	E, D	V	NO	
CPU-2	COMPUTER, WALL MOUNTED	E, D	V	YES	
CPW-1	CHEMOTHERAPY PPE WASTE	-	V	NO	
CR-1	CART, PPE	-	V	NO	
DSP-1	MAGNETIC BULK DISPENSER	-	V	NO	
DK-1	DESK	-	V	NO	
EMP-1	EQUIPMENT MOUNTING PANEL	-	V	YES	
ET-1	EXAM TABLE	-	V	NO	
GL-1	WIRE GLOVE BOX HOLDER	N	V	YES	
HO-1	HAND FLOW	E	V	NO	
HQ2-48	BIOLOGICAL SAFETY CABINET - CLASS II, TYPE A2	E, M	V	NO	
HW-1	HAZARDOUS TRASH - 12 GALLON - BLACK	-	V	NO	
HW-2	HAZARDOUS TRASH - 19 GALLON - YELLOW	-	V	NO	
ICE-1	COUNTER ICE MAKER	E, P	V	NO	
IF-1	INFUSION SCALE	E	V	NO	
IR-1	INFUSION RECLINER	E	V	NO	
MB-1	MOBILE BASE CABINET	-	V	NO	
MED-1	MEDICAL SUPPLY CART	-	V	NO	
MON-2	PATIENT TV, WALL MOUNTED	E	V	YES	
MW-1	MICROWAVE	E	V	NO	
OWC-1	OMNISCILL MED MACHINE	E, D	V	NO	
OT-1	OTOSCOPE/OPHTHALMOSCOPE, WALL MTD.	E	V	NO	
PL-1	CEILING MOUNTED PATIENT LIFT, SOLE SOURCED	E	C	YES	
PPT-1	PHARMACY PASS THROUGH - CLEAN ROOM	E	C	NO	
PRN-1	PRINTER - FLOOR	E, D	V	NO	
PRN-2	MULTI-FUNCTIONAL DEVICE - COUNTERTOP	E	V	NO	
PRN-3	PRINTER - XEROX VERSALINK B600	E, D	V	NO	
PRN-4	ZEBRA BAR CODE PRINTER	E, D	V	NO	
REF-1	REFRIGERATOR	E	V	NO	
REF-2	REFRIGERATOR - PHARMACY	E	V	NO	
REF-3	REFRIGERATOR - MEDICATION	E	V	NO	
SHR-1	SHREDDER BOX	-	V	NO	
SLF-1	SHELVING, MOBILE	-	V	NO	
SPH-1	SPHYGMOMANOMETER, WALL MOUNTED	-	V	NO	
SPH-2	SHARP CONTAINER	-	V	YES	
ST-1	EXAM STOOL	-	V	NO	
STR-1	STRETCHER	-	V	NO	
TB-1	TABLE	-	V	NO	
TB-2	TABLE, MOBILE	-	V	NO	
TC-1	TRASH CAN	-	V	NO	
THM-1	THERMOMETER	-	V	NO	
TV-1	TV AND TV BRACKET	E, D	V	NO	
VSM-1	VITAL SIGNS MONITOR - MOBILE	-	V	NO	
WC-1	WHEELCHAIR	-	V	NO	
WOW-1	WOW	E	V	NO	

FURNITURE & EQUIPMENT - NOTES LEGEND	
1. BASIS OF DESIGN:	
• MANUFACTURER: SR INSTRUMENTS, INC.	
• MODEL: SRIGSR-3	
• FLUSH MOUNTED PLATFORM SCALE	
• PLATFORM SIZE: 32" X 50"	
• MAX WEIGHT: 1000LB	
• WALL MOUNTED DISPLAY WITH LED BACKLIGHT	
1. DISPLAY TO OFFER MEMORY RECALL	
2. DISPLAY UNITS: POUNDS / KILOGRAMS	
• WALL MOUNTED BUILT-IN PRINTER	
• POWER: 120VAC 50-60Hz	
• SCALE TO AUTOMATICALLY TURN ON	
• BUILT-IN GRAB BAR	
• WARRANTY: MINIMUM 4 YEARS	

ADDENDUM 02
100% BID DOCUMENTS
95% CONSTRUCTION DOCUMENTS - REVISED
95% CONSTRUCTION DOCUMENTS
65% DESIGN DEVELOPMENT
Revisions:
Date:

30-APR-2026
10-JAN-2025
27-AUG-2024
15-APR-2024
29-AUG-2023

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202

STAMP

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
EQUIPMENT PLAN - SECOND LEVEL - ZONE 1B

Approved:

Phase
100% BID DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC

Location
DETROIT, MI

Issue Date
10-JAN-2025

Checked
KJH

Drawn
MRB

Project Number
553-21-100


Building Number

Drawing Number
A-122.1B

VA FORM 08-6231

Page 14 of 41

Addendum #2

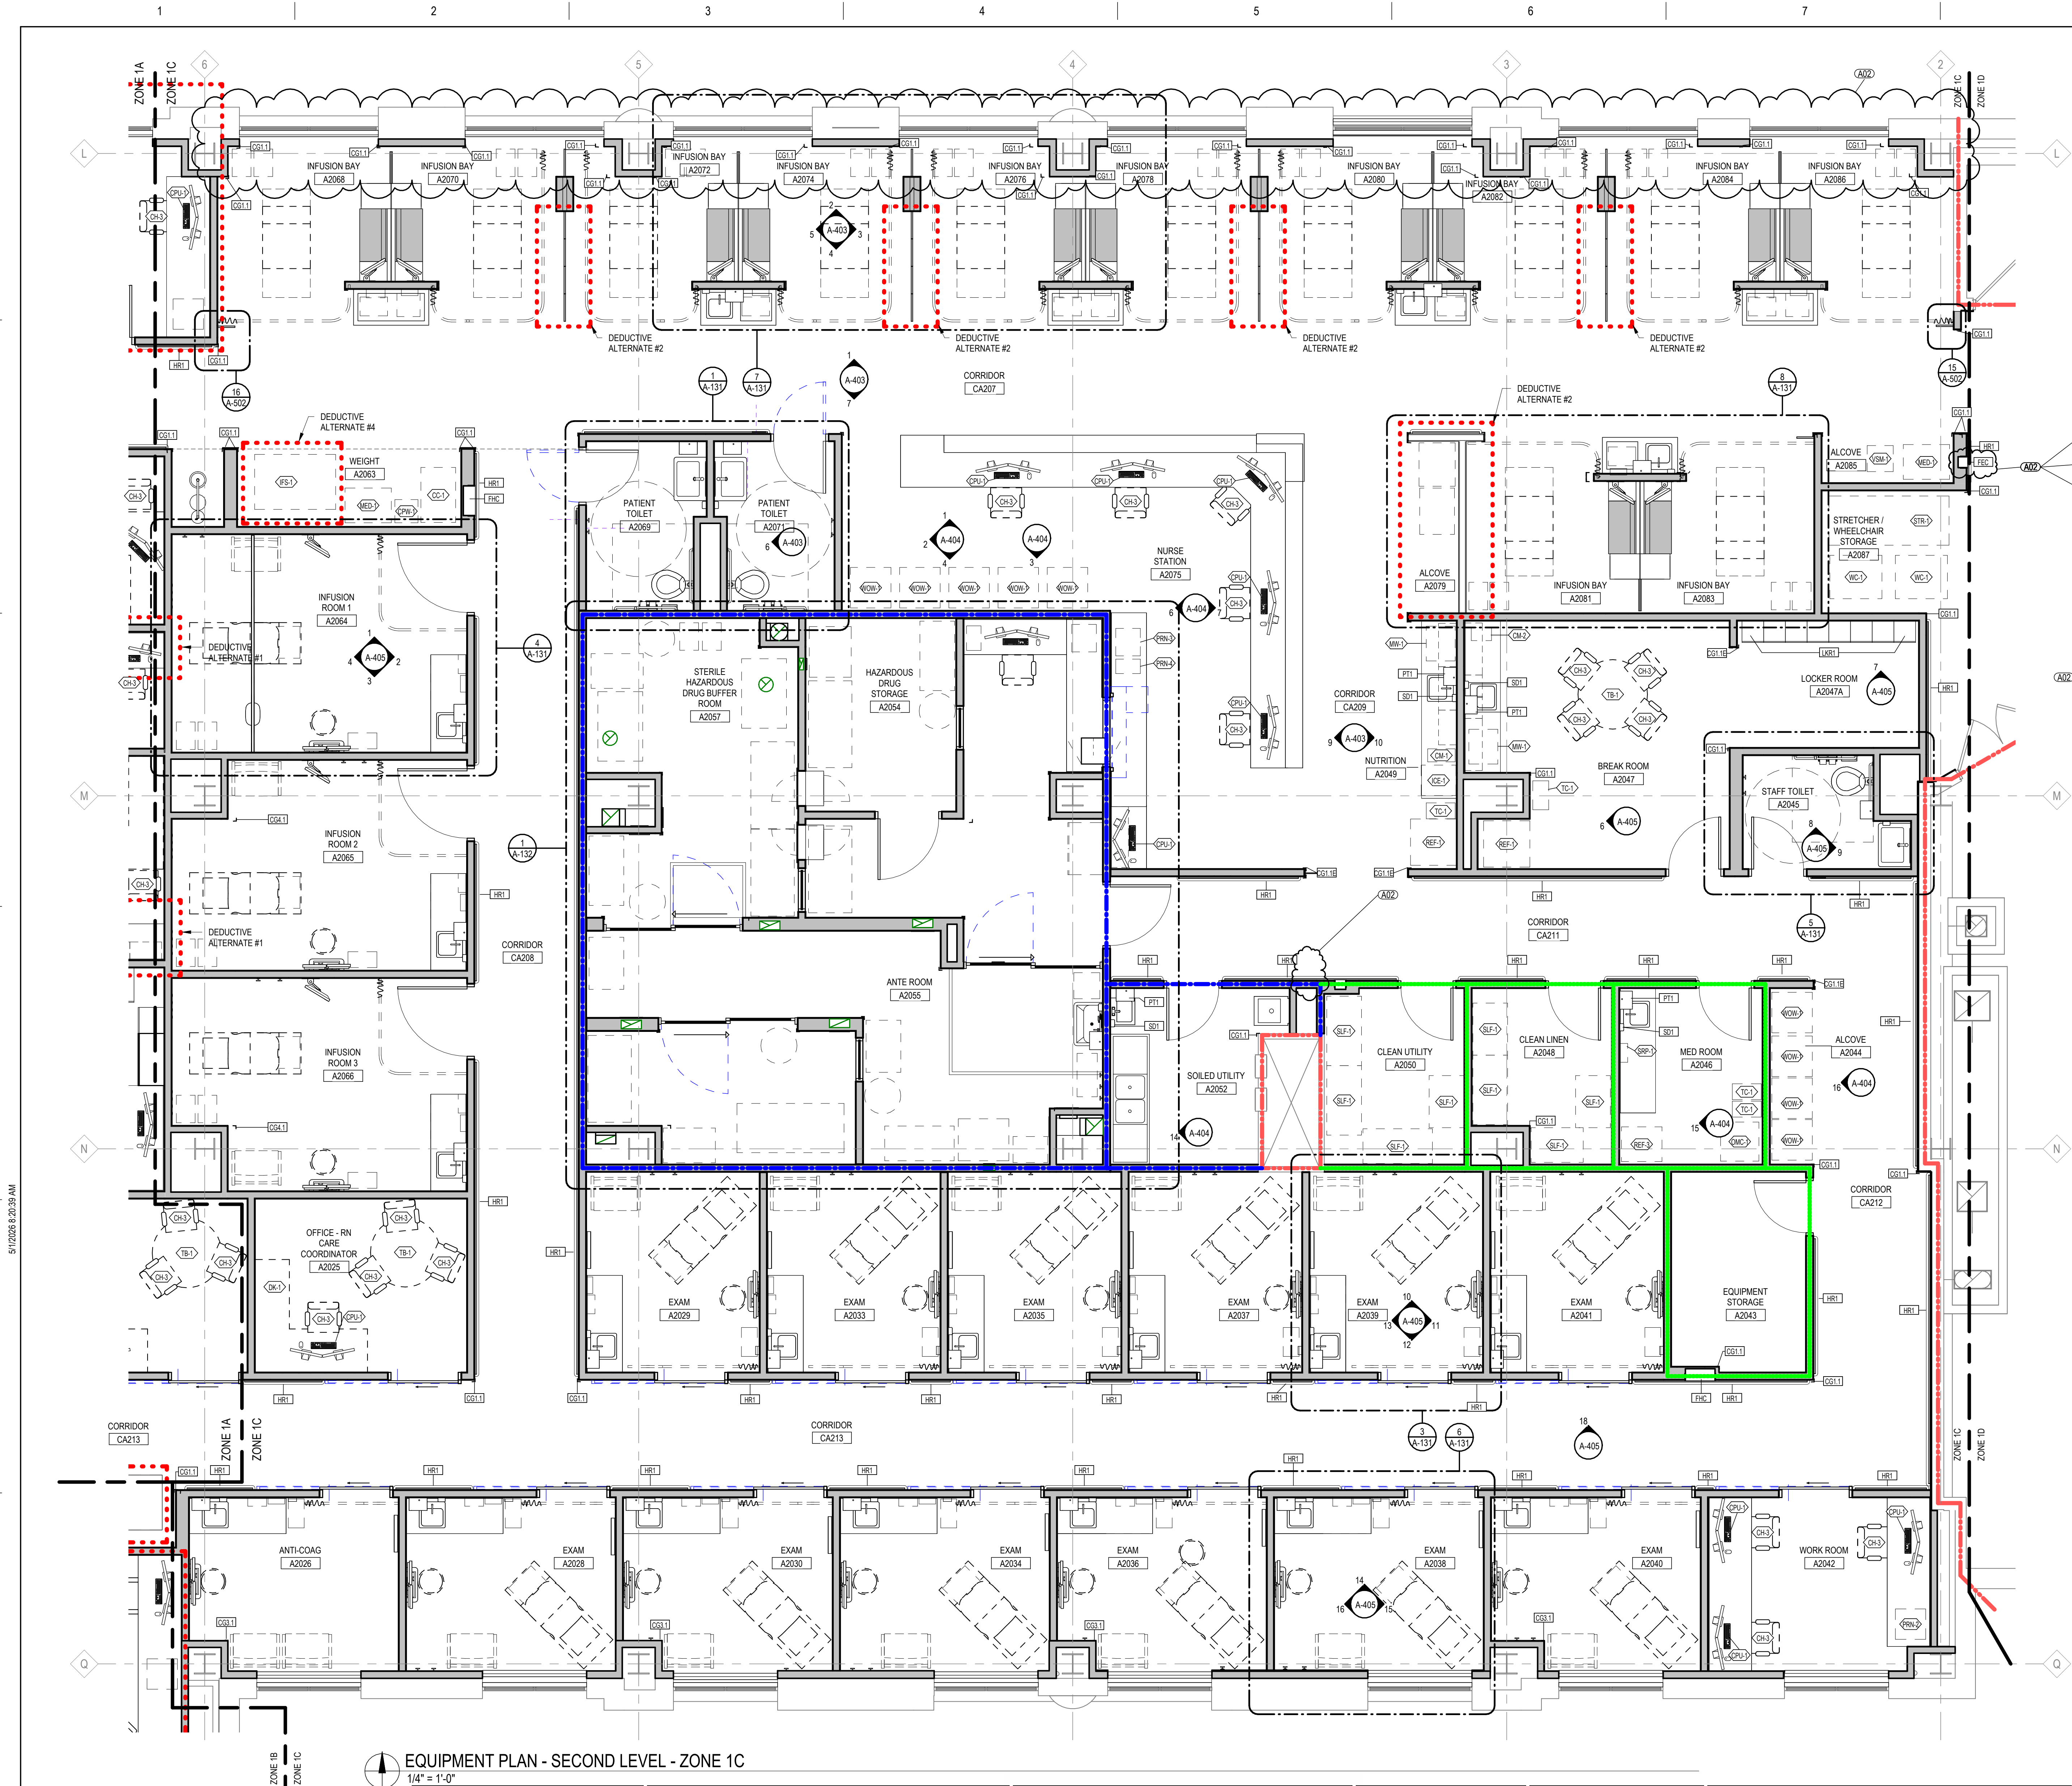

SCHEDULE GENERAL NOTES

1. SEE REFLECTED CEILING PLAN FOR CEILING MOUNTED EQUIPMENT INFORMATION

ABBREVIATIONS

A - ACQUISITION AND INSTALLATION
C - CONTRACTOR FURNISHED AND INSTALLED
D - DATA
E - ELECTRICAL
M - MECHANICAL
P - PLUMBING
N - NONE
V - GOVERNMENT FURNISHED, CONTRACTOR INSTALLED
V - GOVERNMENT FURNISHED AND INSTALLED

PARTITION / WALL FIRE RATINGS

NON-RATED	EXISTING NON-RATED
1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER
2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

DIVISION 10 SCHEDULE

TAG	DESCRIPTION	BASIS OF DESIGN	AI	BLOCKING REQ'D	NOTES
CC1.1	CUBICLE CURTAIN TRACK & CARRIERS	-	C	NO	
CG1.1E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG2.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG4.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG5.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CH	HAT & COAT HOOK	-	C	NO	
DC2	DIAPER CHANGING STATION	-	C	YES	
FEC	FIRE EXTINGUISHER CABINET, RECESSED	-	C	NO	
FS	FIRE HOSE CABINET, RECESSED	-	C	YES	
GB	16" GRAB BAR	-	C	YES	
GB2	42" GRAB BAR	-	C	YES	
GB3	36" GRAB BAR	-	C	YES	
HR1	HAND RAIL AND BUMPER (SEE MATERIALS SCHEDULE)	-	C	YES	
HS1	HAND SANITIZER	-	V	YES	
LKR1	LOCKER (PHEVOLOCK)	-	C	YES	
LKR2	LOCKER (LAMINATE)	-	C	YES	
MB1	MAGNETIC MARKER BOARD, 2' X 3'	-	C	YES	
MB2	MAGNETIC WHITE BOARD, 4' X 6'	-	C	YES	
MR1	24" X 36" MIRROR	-	C	YES	
PT1	PAPER TOWEL DISPENSER	-	V	YES	
SD1	SOAP DISPENSER	-	V	YES	
SD2	SANITARY NAPKIN DISPOSAL	-	V	YES	
TTD1	TOILET TISSUE DISPENSER	-	V	YES	

DIVISION 10 - NOTES LEGEND

1. CUBICLE CURTAIN TO BE FAB-1, SEE MATERIALS SCHEDULE

FURNITURE & EQUIPMENT SCHEDULE

TAG	DESCRIPTION	UTILITIES	AI	BLOCKING REQ'D	NOTES
BCH-1	BENCH, MOBILE	-	V	NO	
BW-1	BLANKET WARMER	-	V	NO	
CC-1	CRASH CART	-	V	NO	
CD-1	EAR CUP DISPENSER	-	V	NO	
CH-1	CHAIR	-	V	NO	
CH-2	CHAIR	-	V	NO	
CH-3	CHAIR	-	V	NO	
CM-1	COFFEE MAKER - TALL	-	V	NO	
CM-2	COFFEE MAKER - SHORT	-	V	NO	
CPU-1	COMPUTER WORKSTATION	-	V	NO	
CPU-2	COMPUTER, WALL MOUNTED	-	V	YES	
CPW-1	CHEMOTHERAPY PPE WASTE	-	V	NO	
CR-1	CART, PPE	-	V	NO	
DISP-1	MAGNETIC BULK DISPENSER	-	V	NO	
DK-1	DESK	-	V	NO	
EMP-1	EQUIPMENT MOUNTING PANEL	-	V	YES	
ET-1	EXAM TABLE	-	V	NO	
GL-1	WIRE GLOVE BOX HOLDER	-	N	YES	
HT-1	HEATING SCALE	-	V	NO	
H02-H48	BIOLOGICAL SAFETY CABINET - CLASS II, TYPE A2	-	E, M	NO	
HW-1	HAZARDOUS TRASH - 12 GALLON - BLACK	-	V	NO	
HW-2	HAZARDOUS TRASH - 19 GALLON - YELLOW	-	V	NO	
ICE-1	COUNTER ICE MAKER	-	E, P	NO	
IF-1	INFUSION FLOW	-	E	NO	
IR-1	INFUSION RECLINER	-	E	NO	
MB-1	MOBILE L BASE CABINET	-	V	NO	
MED-1	MEDICAL SUPPLY CART	-	V	NO	
MON-2	PATIENT TV, WALL MOUNTED	-	E	YES	
MW-1	MICROWAVE	-	V	NO	
OMC-1	OMNISCILL MED MACHINE	-	E, D	NO	
OT-1	OTOSCOPE/OPHTHALMOSCOPE, WALL MTD.	-	E	NO	
PL-1	CEILING MOUNTED PATIENT LIFT, SOLE SOURCED	-	E	YES	
PPT-1	PHARMACY PASS THROUGH - CLEAN ROOM	-	E	NO	
PRN-1	PRINTER - FLOOR	-	E, D	NO	
PRN-2	MULTI-FUNCTIONAL DEVICE - COUNTERTOP	-	E	NO	
PRN-3	PRINTER - XEROX VERSALINK B600	-	E, D	NO	
PRN-4	ZEBRA BAR CODE PRINTER	-	E, D	NO	
REF-1	REFRIGERATOR	-	E	NO	
REF-2	REFRIGERATOR - PHARMACY	-	E	NO	
REF-3	REFRIGERATOR - MEDICATION	-	E	NO	
SHR-1	SHREDDER BOX	-	V	NO	
SLF-1	SHELVING, MOBILE	-	V	NO	
SPH-1	SPHYGMOMANOMETER, WALL MOUNTED	-	V	NO	
SWP-1	SHARP'S CONTAINER	-	V	YES	
ST-1	EXAM STOOL	-	V	NO	
STR-1	STRETCHER	-	V	NO	
TB-1	TABLE	-	V	NO	
TB-2	TABLE, MOBILE	-	V	NO	
TC-1	TRASH CAN	-	V	NO	
THM-1	THERMOMETER	-	V	NO	
TV-1	TV AND TV BRACKET	-	E, D	NO	
VSM-1	VITAL SIGNS MONITOR - MOBILE	-	V	NO	
WC-1	WHEELCHAIR	-	V	NO	
WOW-1	WOW	-	E	NO	

FURNITURE & EQUIPMENT - NOTES LEGEND

1. BASIS OF DESIGN:

- MANUFACTURER: SR INSTRUMENTS, INC.
- MODEL: SR45R-3
- FLUSH MOUNTED PLATFORM SCALE
- PLATFORM SIZE: 32" X 50"
- MAX WEIGHT: 1000LB
- WALL MOUNTED DISPLAY WITH LED BACKLIGHT
- 1. DISPLAY TO OFFER MEMORY RECALL
- 2. DISPLAY UNITS: POUNDS / KILOGRAMS
- WALL MOUNTED BUILT-IN PRINTER
- POWER: 120VAC 50-60Hz
- SCALE TO AUTOMATICALLY TURN ON
- BUILT-IN GRAB BAR
- WARRANTY: MINIMUM 4 YEARS

ADDENDUM 02

100% BID DOCUMENTS

95% CONSTRUCTION DOCUMENTS - REVISED

95% CONSTRUCTION DOCUMENTS

65% DESIGN DEVELOPMENT

Revisions:

30-APR-2026

10-JAN-2025

27-AUG-2024

15-APR-2023

29-AUG-2023

Date:

VA STATION

VA HEALTH CARE

Defining EXCELLENCE in the 21st Century

John D. Dingell VA Medical Center

4646 John R. Street

Detroit, MI 48201

CONSULTANT

C20ae

An AtkinsRéalis Company

(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD

WalterMechanical

Services Inc.

3419 Pierson Place

Flushing, Michigan, 48433

810-230-6202

STAMP

Office of Construction and Facilities Management

VA U.S. Department of Veterans Affairs

Drawing Title

EQUIPMENT PLAN - SECOND LEVEL - ZONE 1C

Approved:

Phase

100% BID DOCUMENTS

FULLY SPRINKLERED

Project Title

RENOVATE A2 SOUTH FOR CANCER CLINIC

Location

DETROIT, MI

Issue Date

10-JAN-2025

Checked

KJH

Drawn

MRB

Project Number

553-21-100

Building Number

Drawing Number


A-122.1C

A
B
C
D
E
F

5/10/2026 8:25:52 AM

m

F

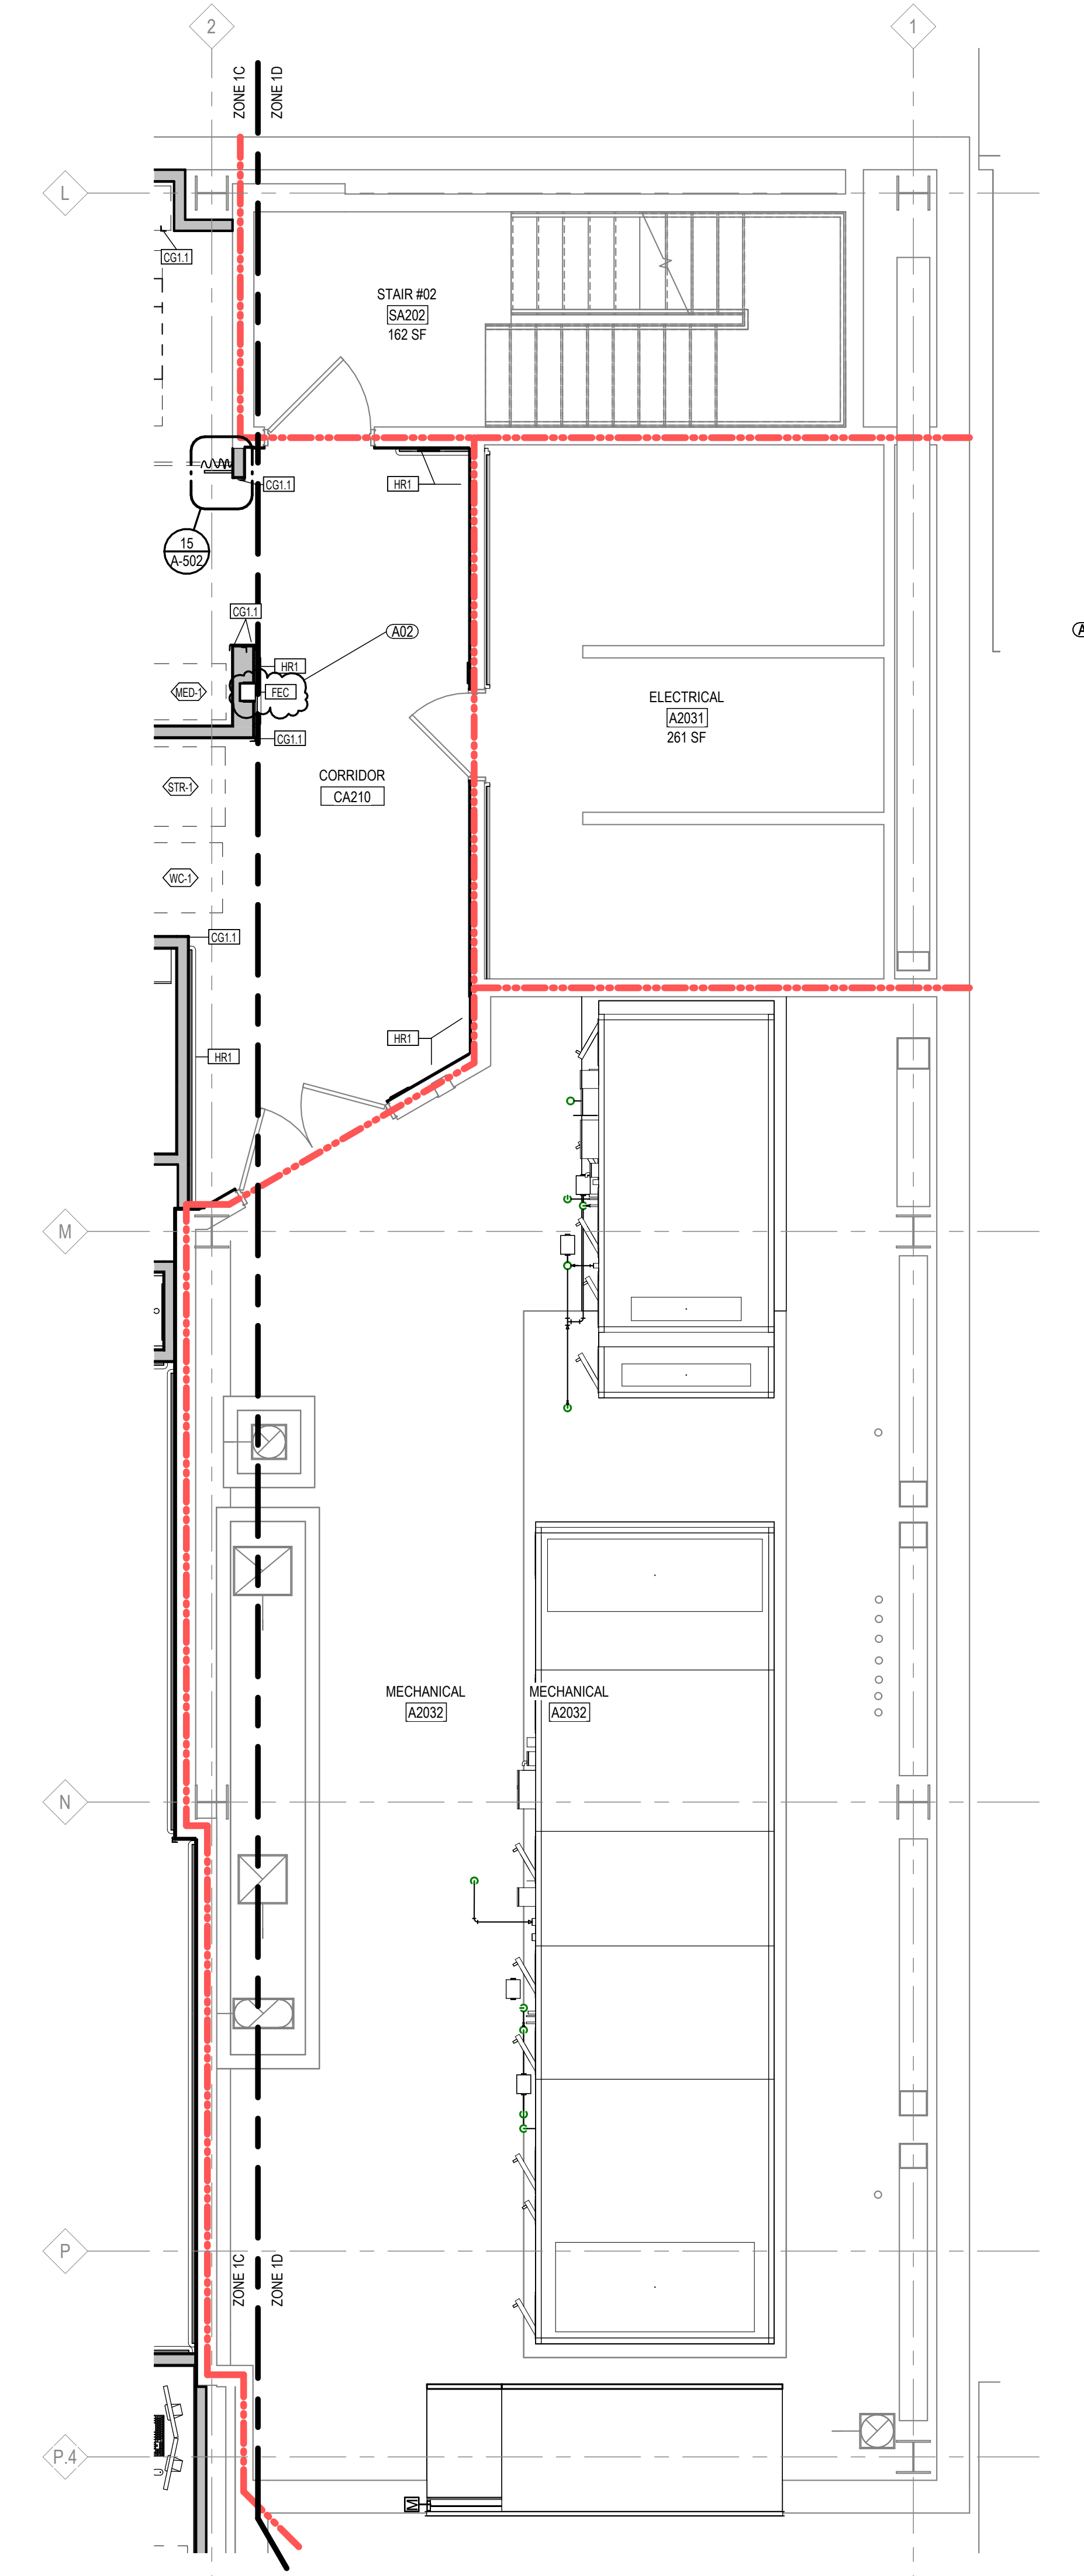

EQUIPMENT PLAN - SECOND LEVEL - ZONE 1D
1/4" = 1'-0"

SCHEDULE GENERAL NOTES

1. SEE REFLECTED CEILING PLAN FOR CEILING MOUNTED EQUIPMENT INFORMATION
- ABBREVIATIONS
- AI - ACQUISITION AND INSTALLATION
C - CONTRACTOR FURNISHED AND INSTALLED
D - DATA
E - ELECTRICAL
M - MECHANICAL
P - PLUMBING
N - NONE
V - GOVERNMENT FURNISHED, CONTRACTOR INSTALLED
V - GOVERNMENT FURNISHED AND INSTALLED

PARTITION / WALL FIRE RATINGS

- NON-RATED
1-HR. SMOKE BARRIER
1-HR. FIRE BARRIER
2-HR. FIRE BARRIER
- EXISTING NON-RATED
EXISTING 1-HR. SMOKE BARRIER
EXISTING 1-HR. FIRE BARRIER
EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN. - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

DIVISION 10 SCHEDULE

TAG	DESCRIPTION	BASIS OF DESIGN	AI	BLOCKING REQ'D	NOTES
CCT1	CUBICLE CURTAIN TRACK & CARRIERS	-	C C	NO	
CG1.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG1.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG2.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG2.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG4.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CG5.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C C	NO	
CH1	HAT & COAT HOOK	-	C C	YES	
CH2	DIAPER CHANGING STATION	-	C C	YES	
CH3	FIRE EXTINGUISHER CABINET, RECESSED	-	C C	NO	
CM1	16" GRAB BAR	-	C C	YES	
CM2	42" GRAB BAR	-	C C	YES	
CM3	36" GRAB BAR	-	C C	YES	
HR1	HAND RAIL AND BUMPER (SEE MATERIALS SCHEDULE)	-	C C	YES	
HR2	HAND SANITIZER	-	C C	YES	
LKR1	LOCKER (PHEVULC)	-	C C	YES	
LKR2	LOCKER (LAMINATE)	-	C C	YES	
MB1	MAGNETIC MARKERBOARD, 2' X 3'	-	C C	YES	
MB2	MAGNETIC WHITE BOARD, 4' X 6'	-	C C	YES	
MR1	24" X 36" MIRROR	-	C C	YES	
PT1	PAPER TOWEL DISPENSER	-	V C	YES	
SD1	SOAP DISPENSER	-	V C	YES	
SD2	SANITARY NAPKIN DISPOSAL	-	V C	YES	
TTD1	TOILET TISSUE DISPENSER	-	V C	YES	

DIVISION 10 - NOTES LEGEND

1. CUBICLE CURTAIN TO BE FAB-1, SEE MATERIALS SCHEDULE


FURNITURE & EQUIPMENT SCHEDULE

TAG	DESCRIPTION	UTILITIES	AI	BLOCKING REQ'D	NOTES
BCH-1	BENCH, MOBILE	-	V V	NO	
BW-1	BLANKET WARMER	-	V V	NO	
CD-1	CRASH CART	-	V V	NO	
CD-1	EAR CUP DISPENSER	-	V C	NO	
CH-1	CHAIR	-	V V	NO	
CH-2	CHAIR	-	V V	NO	
CH-3	CHAIR	-	V V	NO	
CM-1	COFFEE MAKER - TALL	-	V V	NO	
CM-2	COFFEE MAKER - SHORT	-	V V	NO	
CM-1	COMPUTER WORKSTATION	E, D	V V	NO	
CM-2	COMPUTER, WALL MOUNTED	E, D	V V	YES	
CM-1	CHEMOTHERAPY PPE WASTE	-	V V	NO	
CM-1	CART, PPE	-	V V	NO	
CM-1	MAGNETIC BULK DISPENSER	-	V C	YES	
DK-1	DESK	-	V V	NO	
EMP-1	EQUIPMENT MOUNTING PANEL	-	V C	YES	
ET-1	EXAM TABLE	-	V V	NO	
GL-1	WIRE GLOVE BOX HOLDER	-	V C	YES	
GL-1	LAMINAR FLOW	-	V C	NO	
H02-48	BIOLOGICAL SAFETY CABINET - CLASS II, TYPE A2	E, M	V C	NO	
HW-1	HAZARDOUS TRASH - 12 GALLON - BLACK	-	V V	NO	
HW-2	HAZARDOUS TRASH - 19 GALLON - YELLOW	-	V V	NO	
ICE-1	COUNTER ICE MAKER	E, P	V V	NO	
IFS-1	IN-FLOOR SCALE	-	C C	NO	NOTE: 1
IR-1	INFUSION RECLINER	-	V V	NO	
MBC-1	MOBILE L BASE CABINET	-	V V	NO	
MED-1	MEDICAL SUPPLY CART	-	V V	NO	
MON-2	PATIENT TV, WALL MOUNTED	-	V V	YES	
MW-1	MICROWAVE	-	V V	NO	
OMC-1	OMNISCAN MED MACHINE	E, D	V V	NO	
OT-1	OTOSCOPE/OPHTHALMOSCOPE, WALL MTD.	-	V C	NO	
PL-1	CEILING MOUNTED PATIENT LIFT, SOLE SOURCED	-	C C	YES	
PRN-1	PHARMACY PASS THROUGH - CLEAN ROOM	-	C C	NO	
PRN-1	PRINTER - FLOOR	E, D	V V	NO	
PRN-2	MULTI-FUNCTIONAL DEVICE - COUNTERTOP	-	V V	NO	
PRN-3	PRINTER - XEROX VERSALINK B600	E, D	V V	NO	
PRN-4	ZEBRA BAR CODE PRINTER	E, D	V V	NO	
REF-1	REFRIGERATOR	-	V V	NO	
REF-2	REFRIGERATOR - PHARMACY	-	V V	NO	
REF-3	REFRIGERATOR - MEDICATION	-	V V	NO	
SHR-1	SHREDDER BOX	-	V V	NO	
SLL-1	SHELVING, MOBILE	-	V V	NO	
SPN-1	SPHYGMOMANOMETER, WALL MOUNTED	-	V C	NO	
SRP-1	SHARPS CONTAINER	-	V C	YES	
ST-1	EXAM STOOL	-	V V	NO	
STR-1	STRETCHER	-	V V	NO	
TB-1	TABLE	-	V V	NO	
TB-2	TABLE, MOBILE	-	V V	NO	
TC-1	TRASH CAN	-	V V	NO	
THM-1	THERMOMETER	-	V C	NO	
TV-1	TV AND TV BRACKET	E, D	V C	NO	
VSM-1	VITAL SIGNS MONITOR - MOBILE	-	V V	NO	
WC-1	WHEELCHAIR	-	V V	NO	
WOW-1	WOW	-	V V	NO	

FURNITURE & EQUIPMENT - NOTES LEGEND


1. BASIS OF DESIGN
- MANUFACTURER: SR INSTRUMENTS, INC.
 - MODEL: SR48R3
 - FLUSH MOUNTED PLATFORM SCALE
 - PLATFORM SIZE: 32" X 50"
 - MAX WEIGHT: 1000LB
 - WALL MOUNTED DISPLAY WITH LED BACKLIGHT
 - 1. DISPLAY TO OFFER MEMORY RECALL
 - 2. DISPLAY UNITS: POUNDS / KILOGRAMS
 - WALL MOUNTED BUILT-IN PRINTER
 - POWER: 120VAC 50-60Hz
 - SCALE TO AUTOMATICALLY TURN ON
 - BUILT-IN GRAB BAR
 - WARRANTY: MINIMUM 4 YEARS

ADDENDUM 02 100% BID DOCUMENTS Revisions: Date:	VA STATION VA HEALTH CARE John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title EQUIPMENT PLAN - SECOND LEVEL - ZONE 1D Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn MRB	Project Number 553-21-100 Building Number Drawing Number A-122.1D
--	---	--	--	-------	--	---	--	--	---

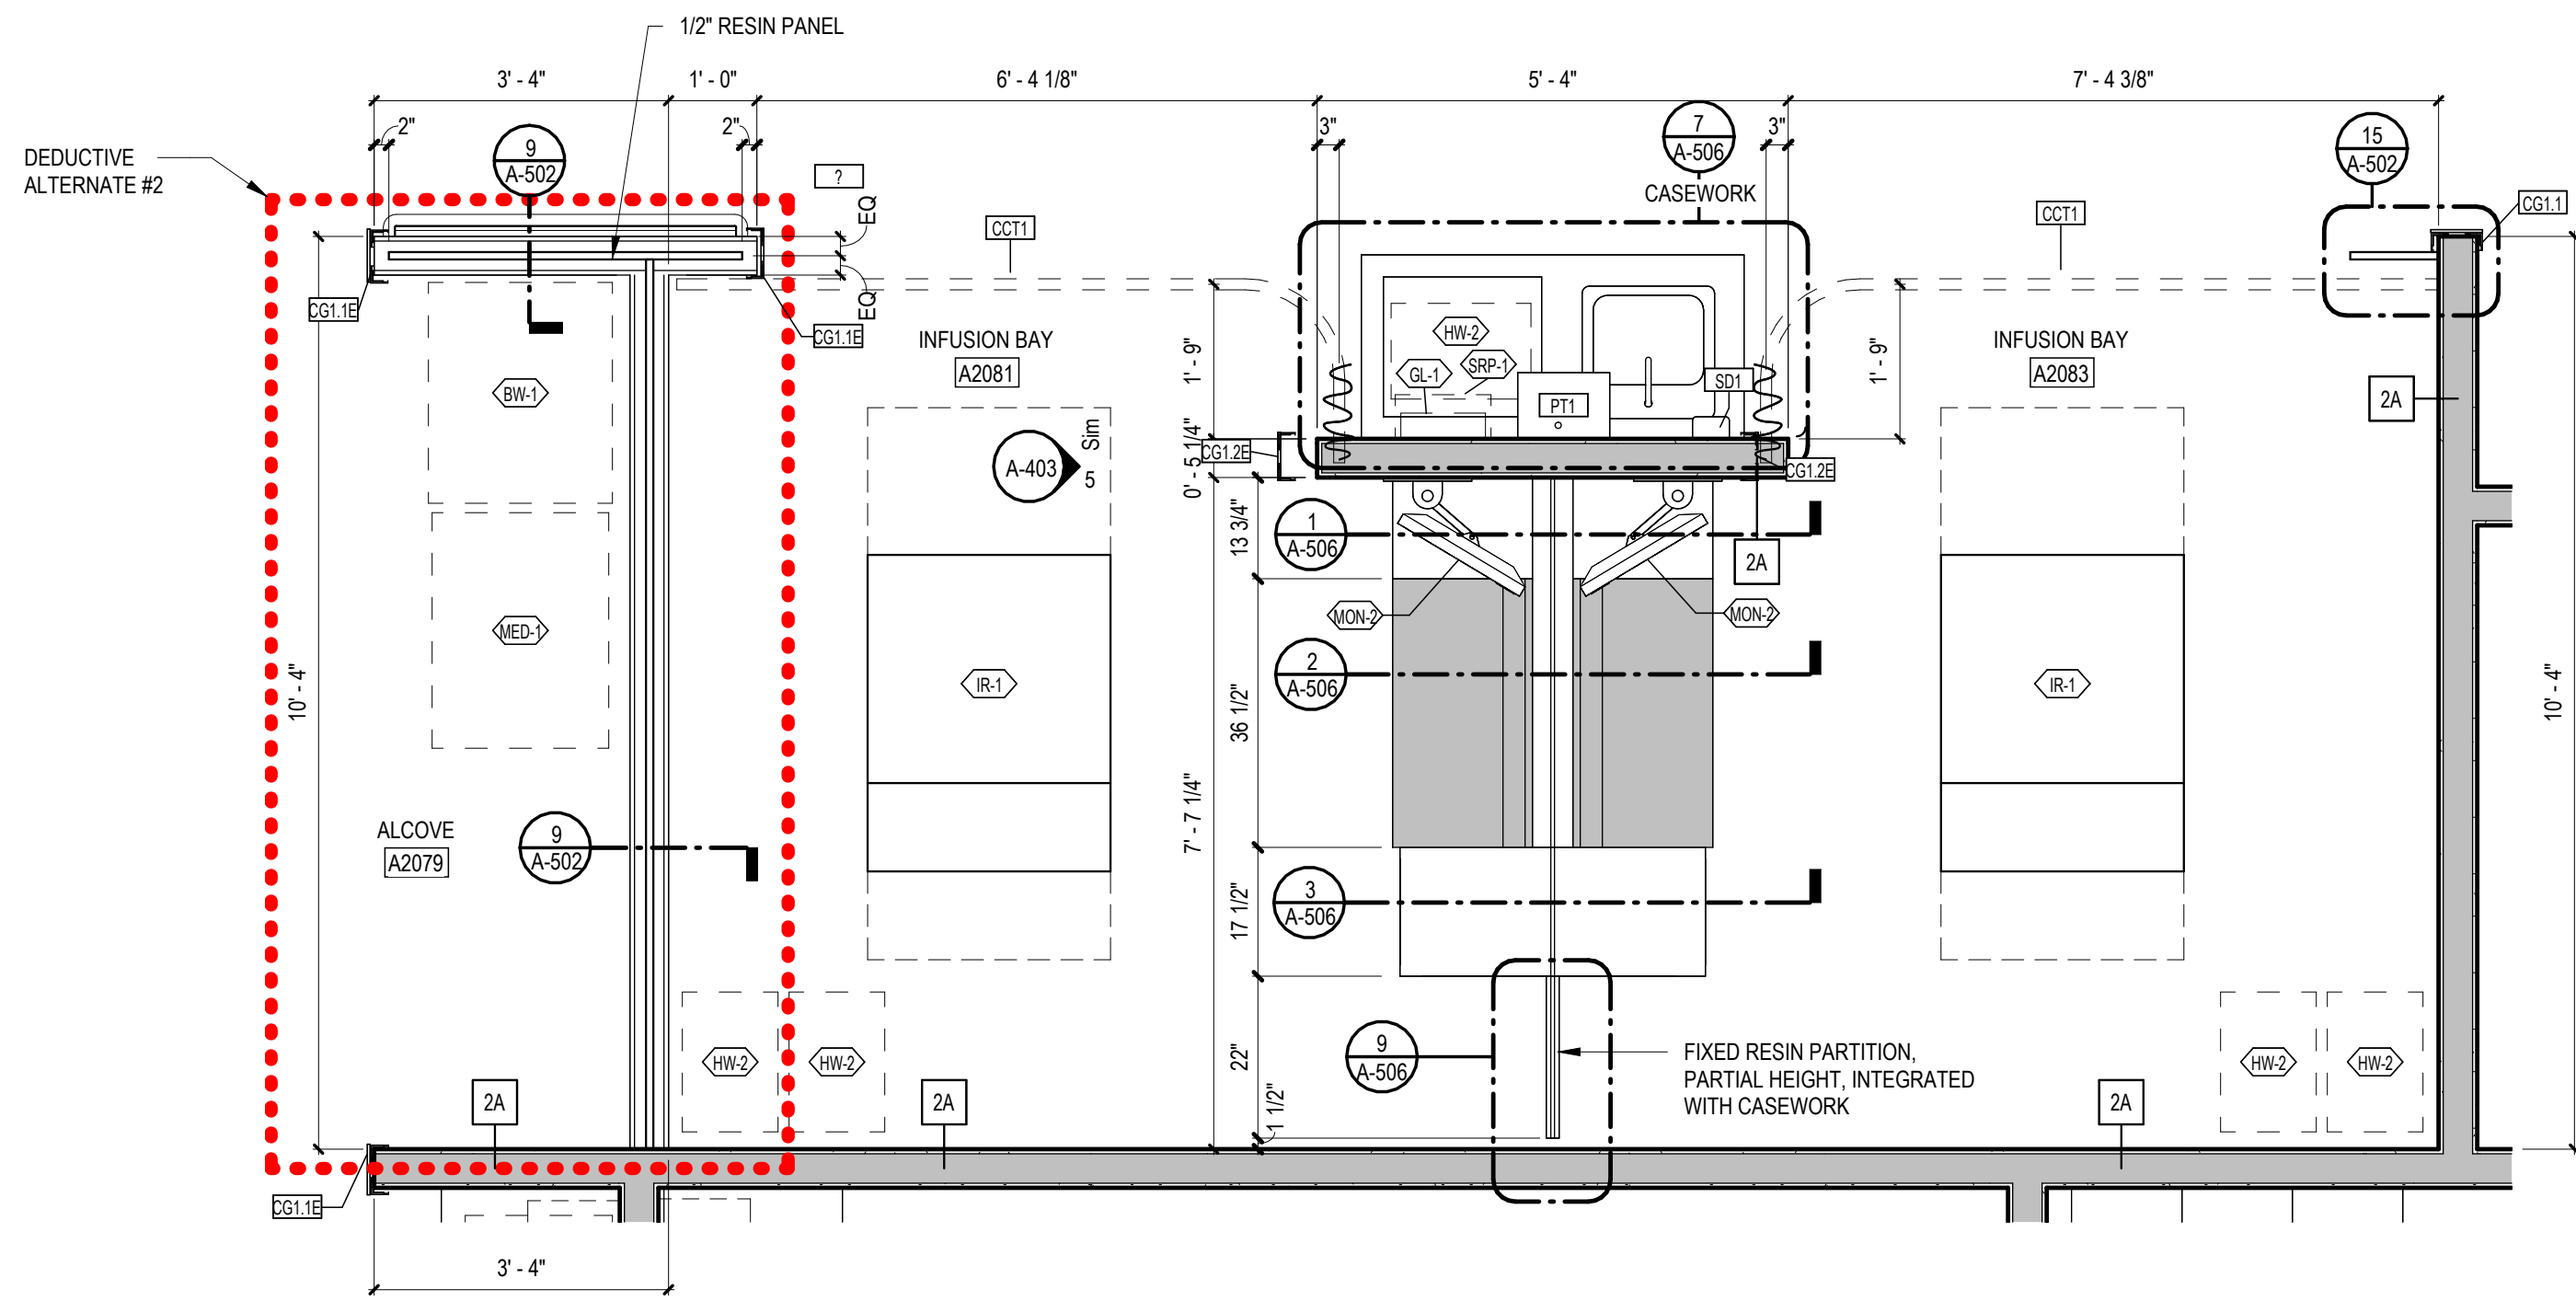

8 INFUSION BAY - A2081 A2083

1/2" = 1'-0"

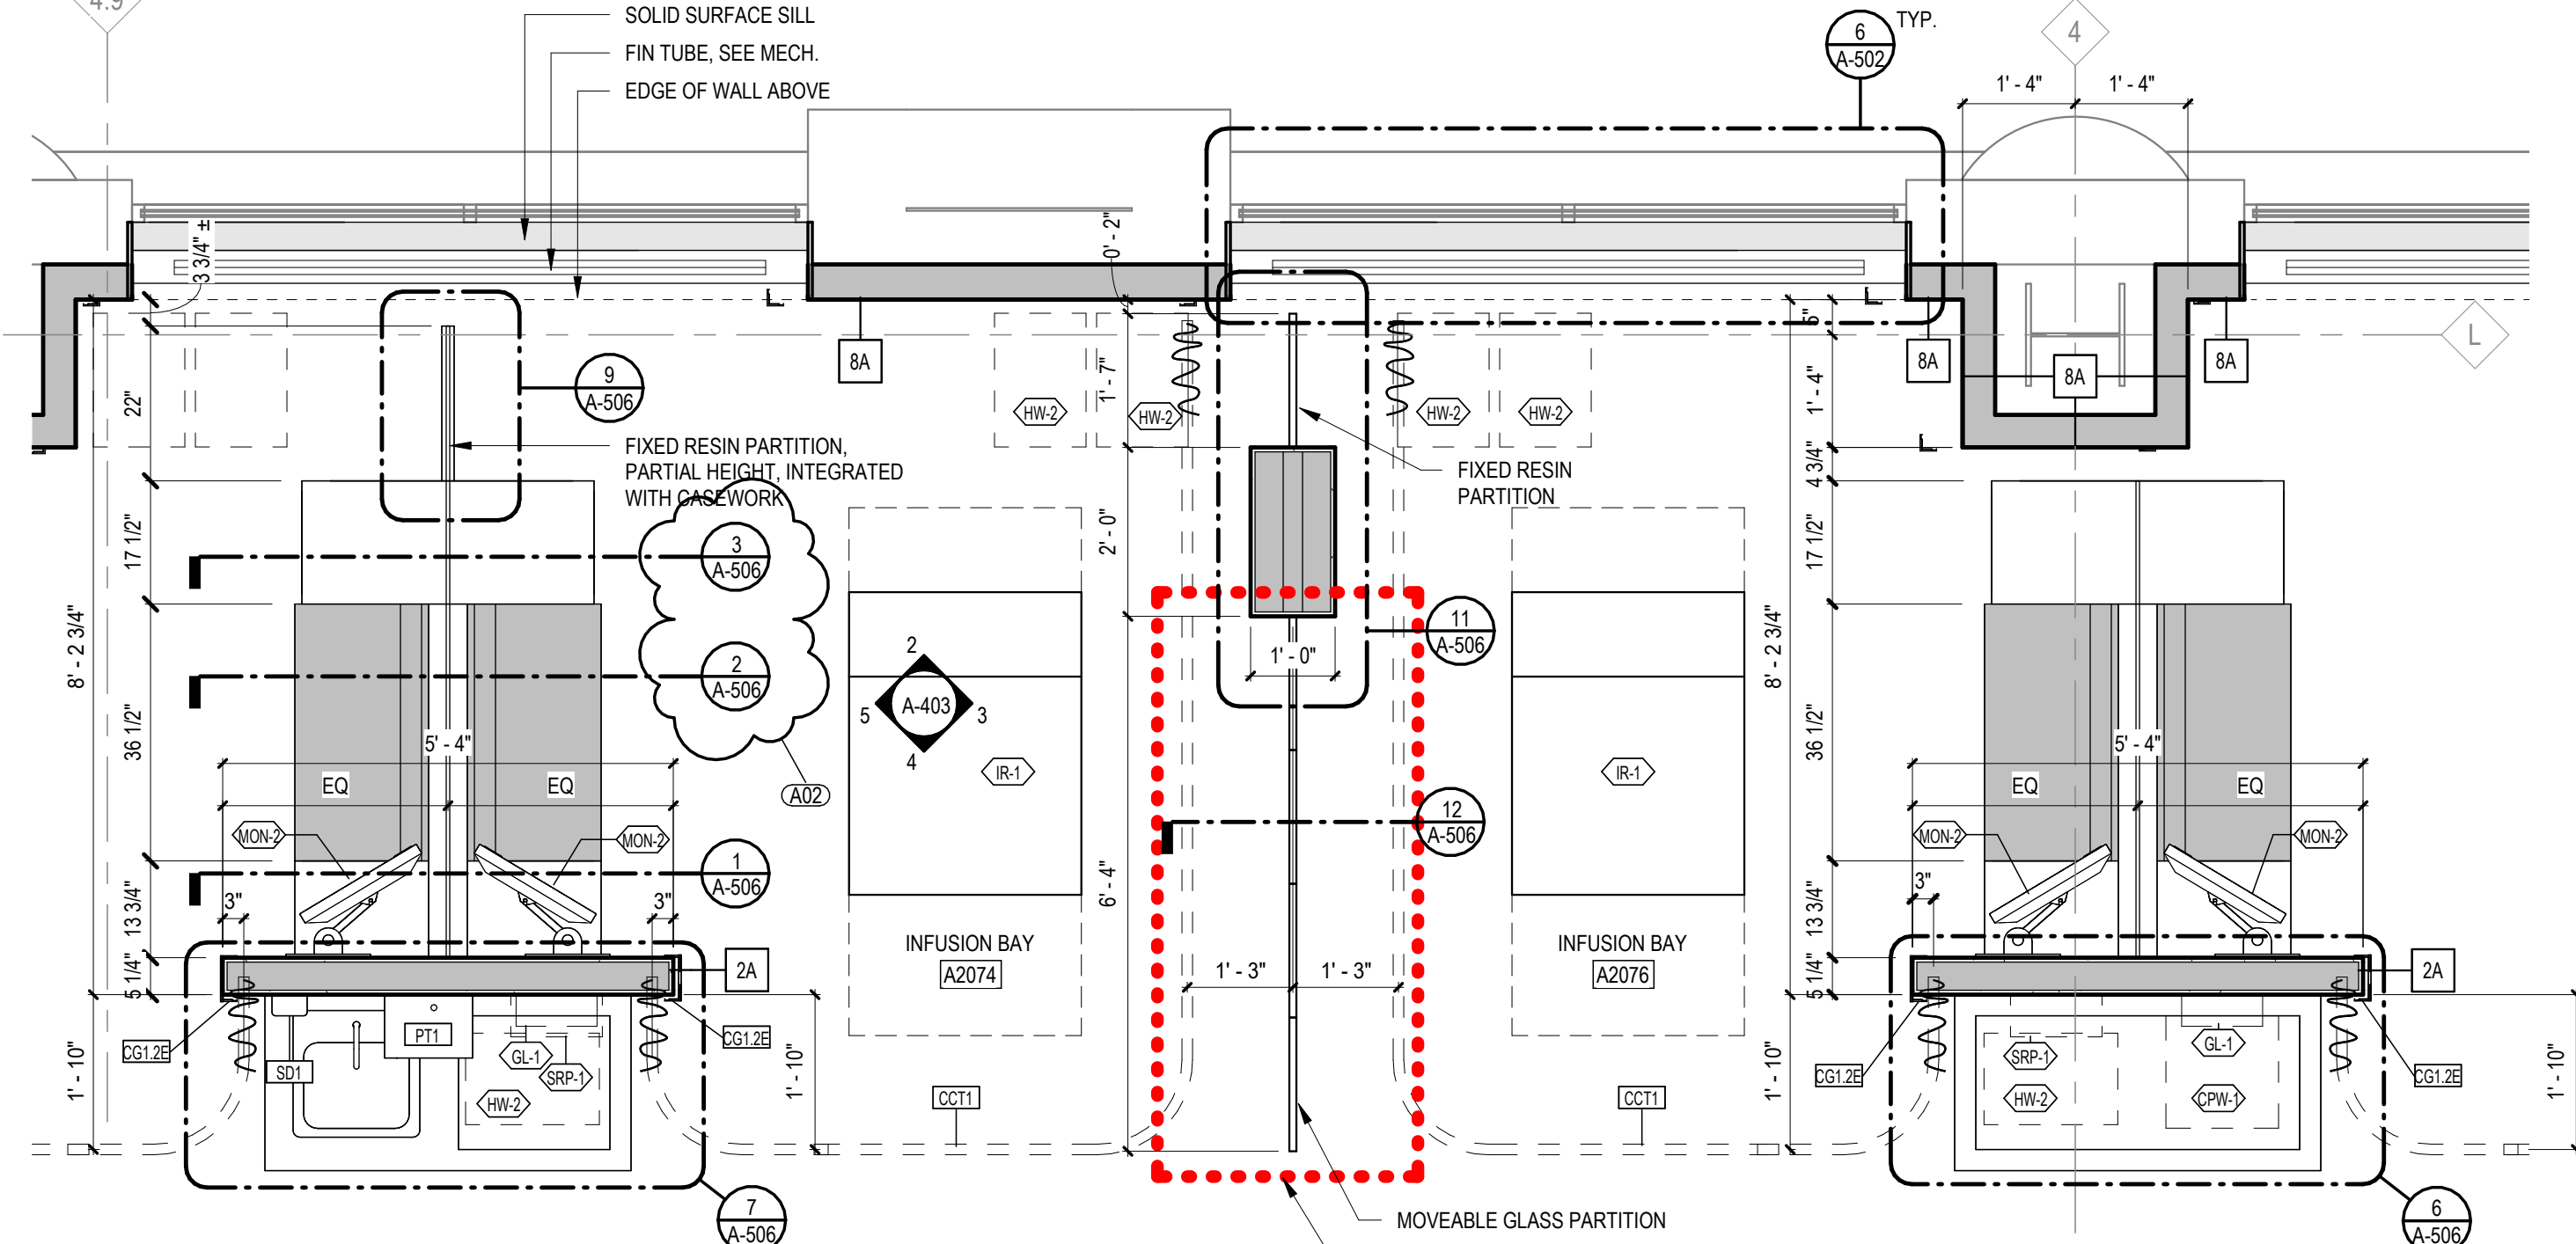


7 INFUSION BAY - A2074 & A2076

1/2" = 1'-0"


PARTITION / WALL FIRE RATINGS			
---	NON-RATED	---	EXISTING NON-RATED
---	SMOKE PARTITION	---	SMOKE PARTITION
---	1-HR. SMOKE BARRIER	---	EXISTING 1-HR. SMOKE BARRIER
---	1-HR. FIRE BARRIER	---	EXISTING 1-HR. FIRE BARRIER
---	2-HR. FIRE BARRIER	---	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

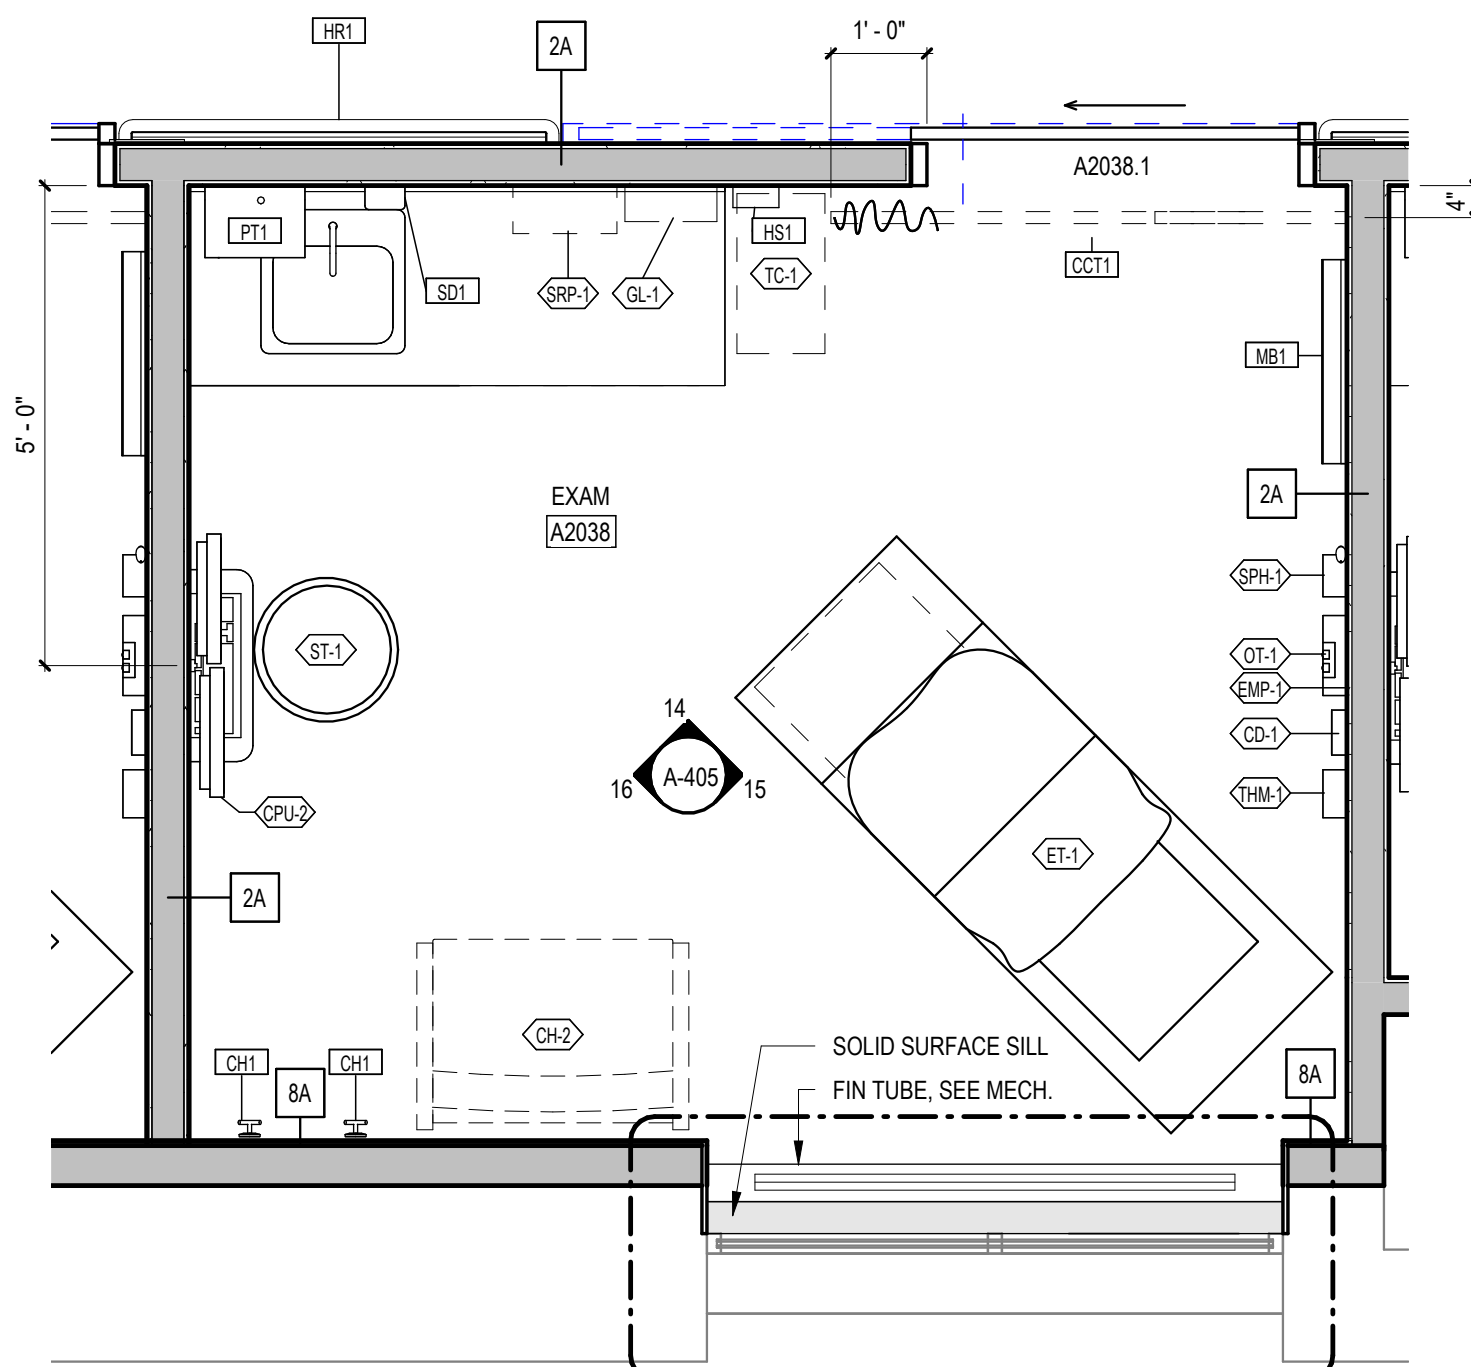


6 EXAM ROOM - A2036

1/2" = 1'-0"

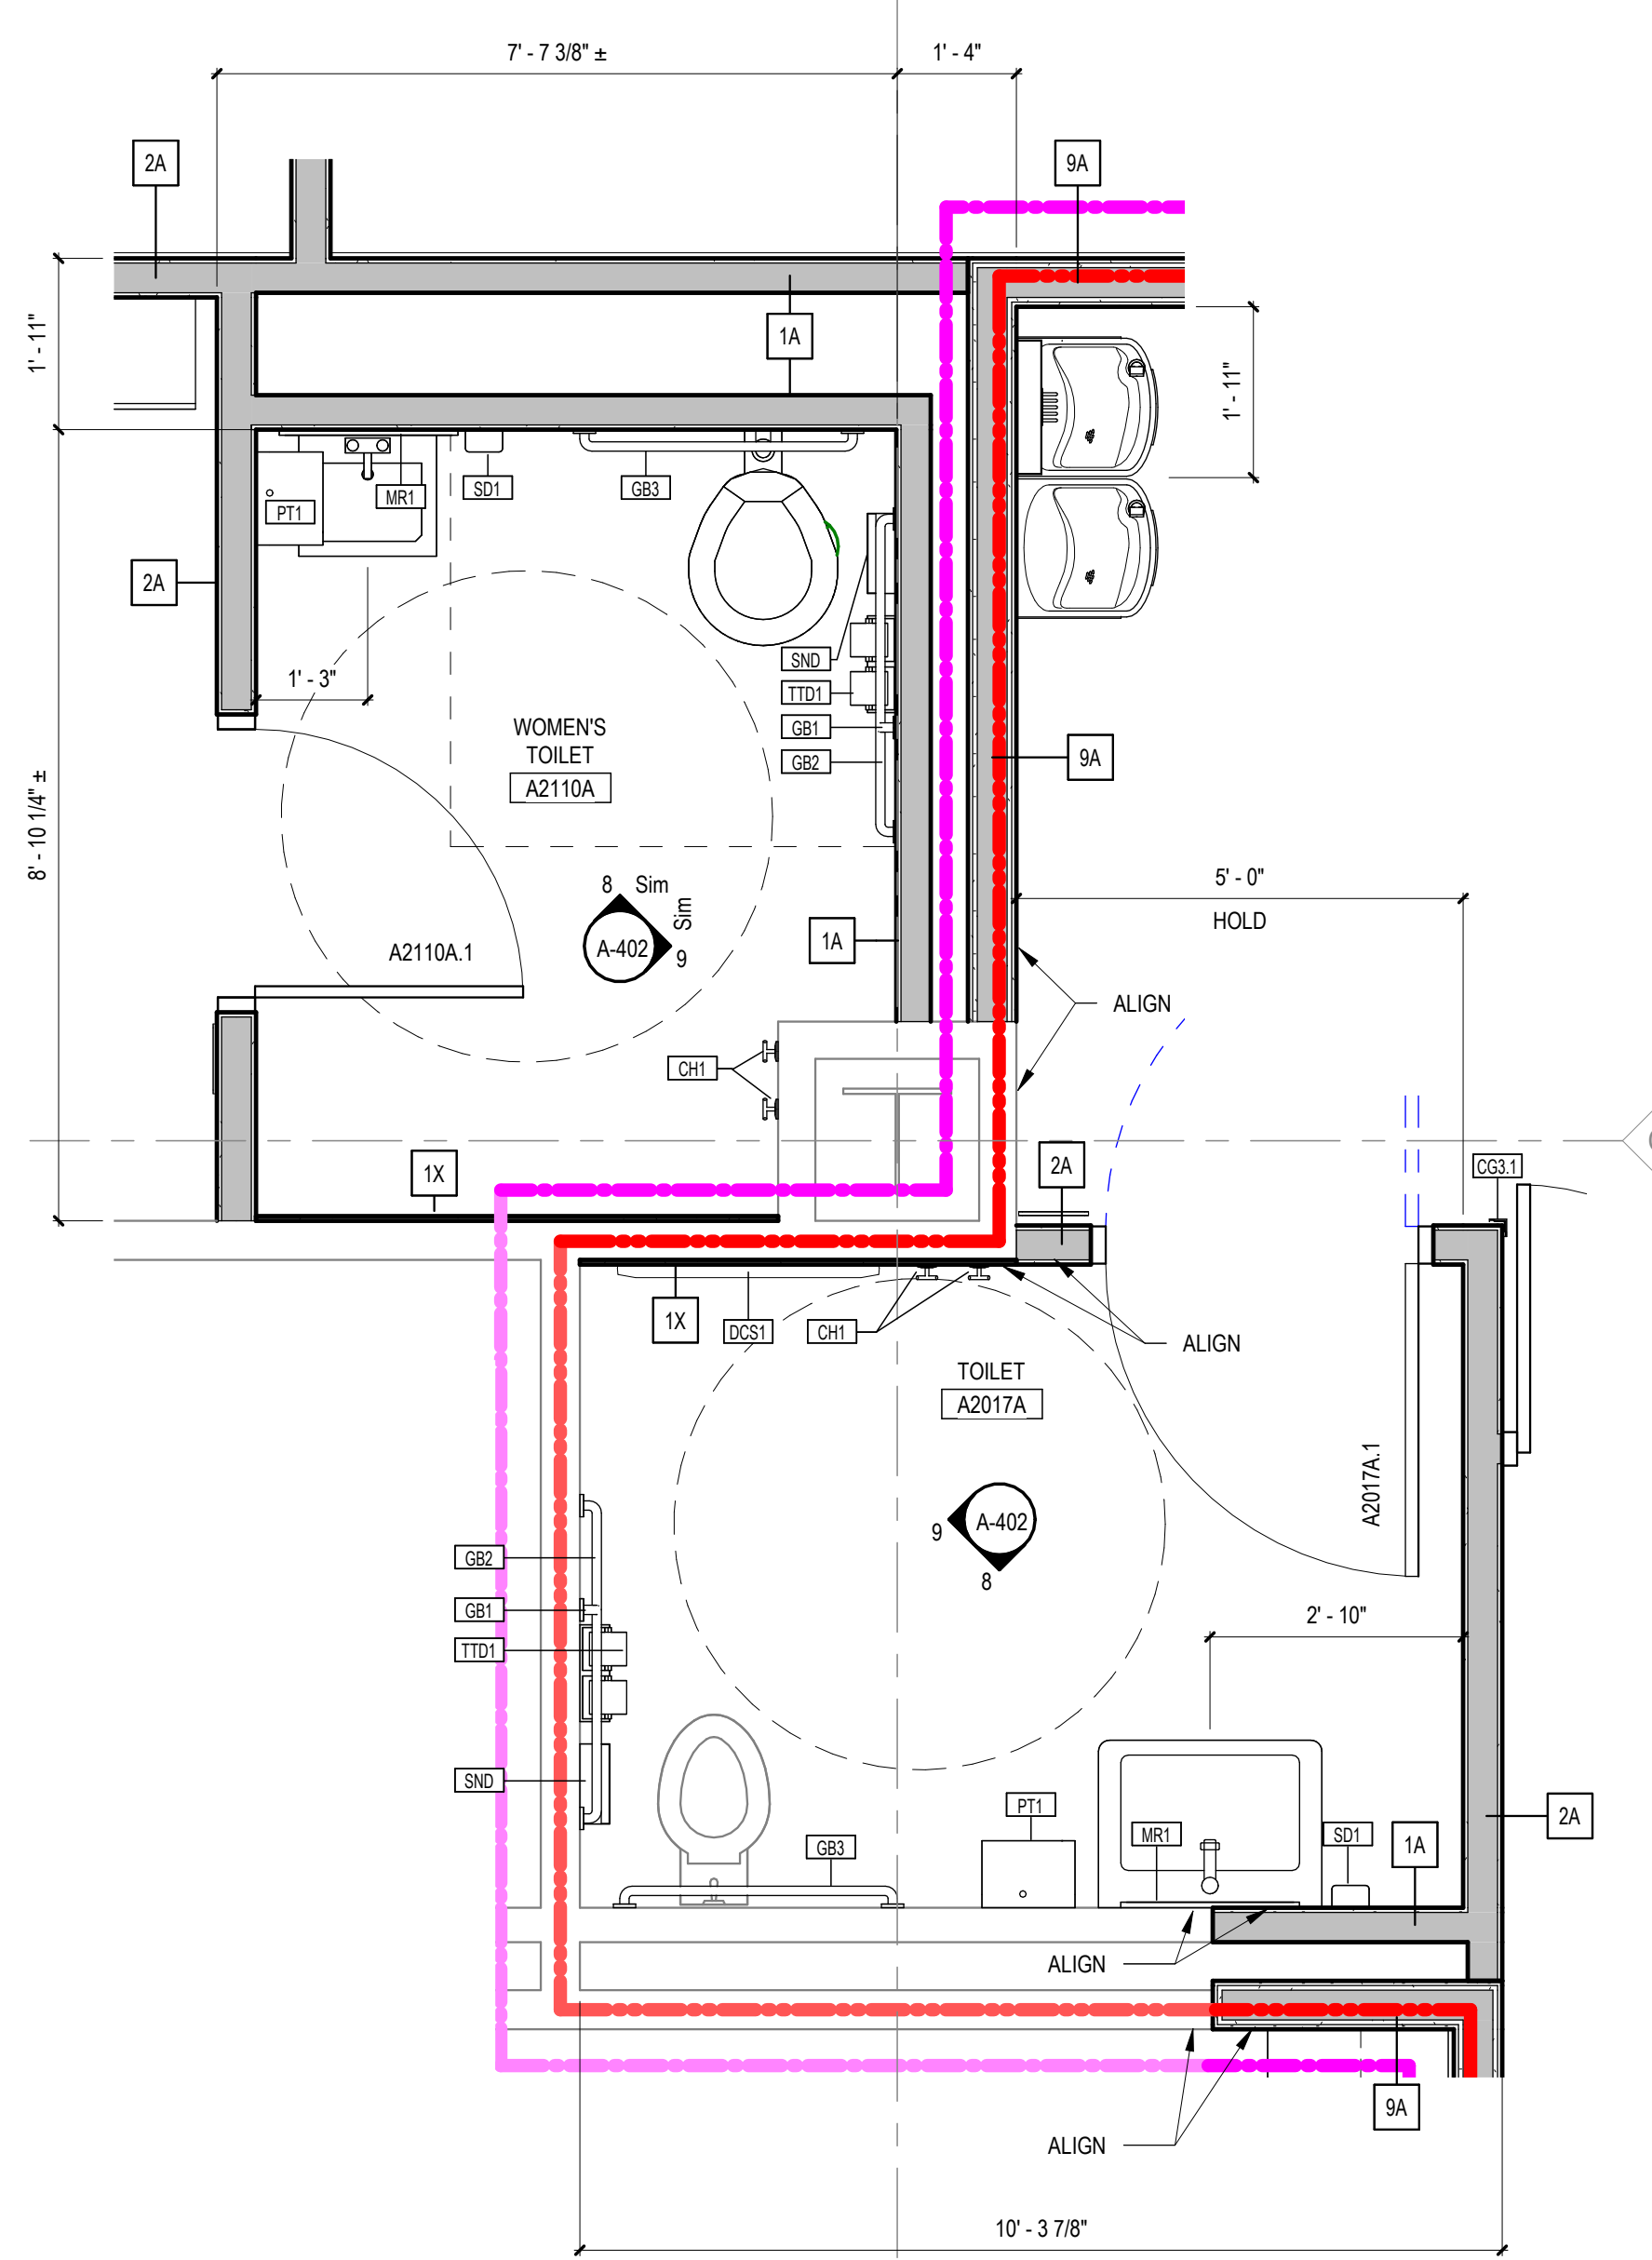


2 TOILET ROOMS - A2110A & A2017A

1/2" = 1'-0"

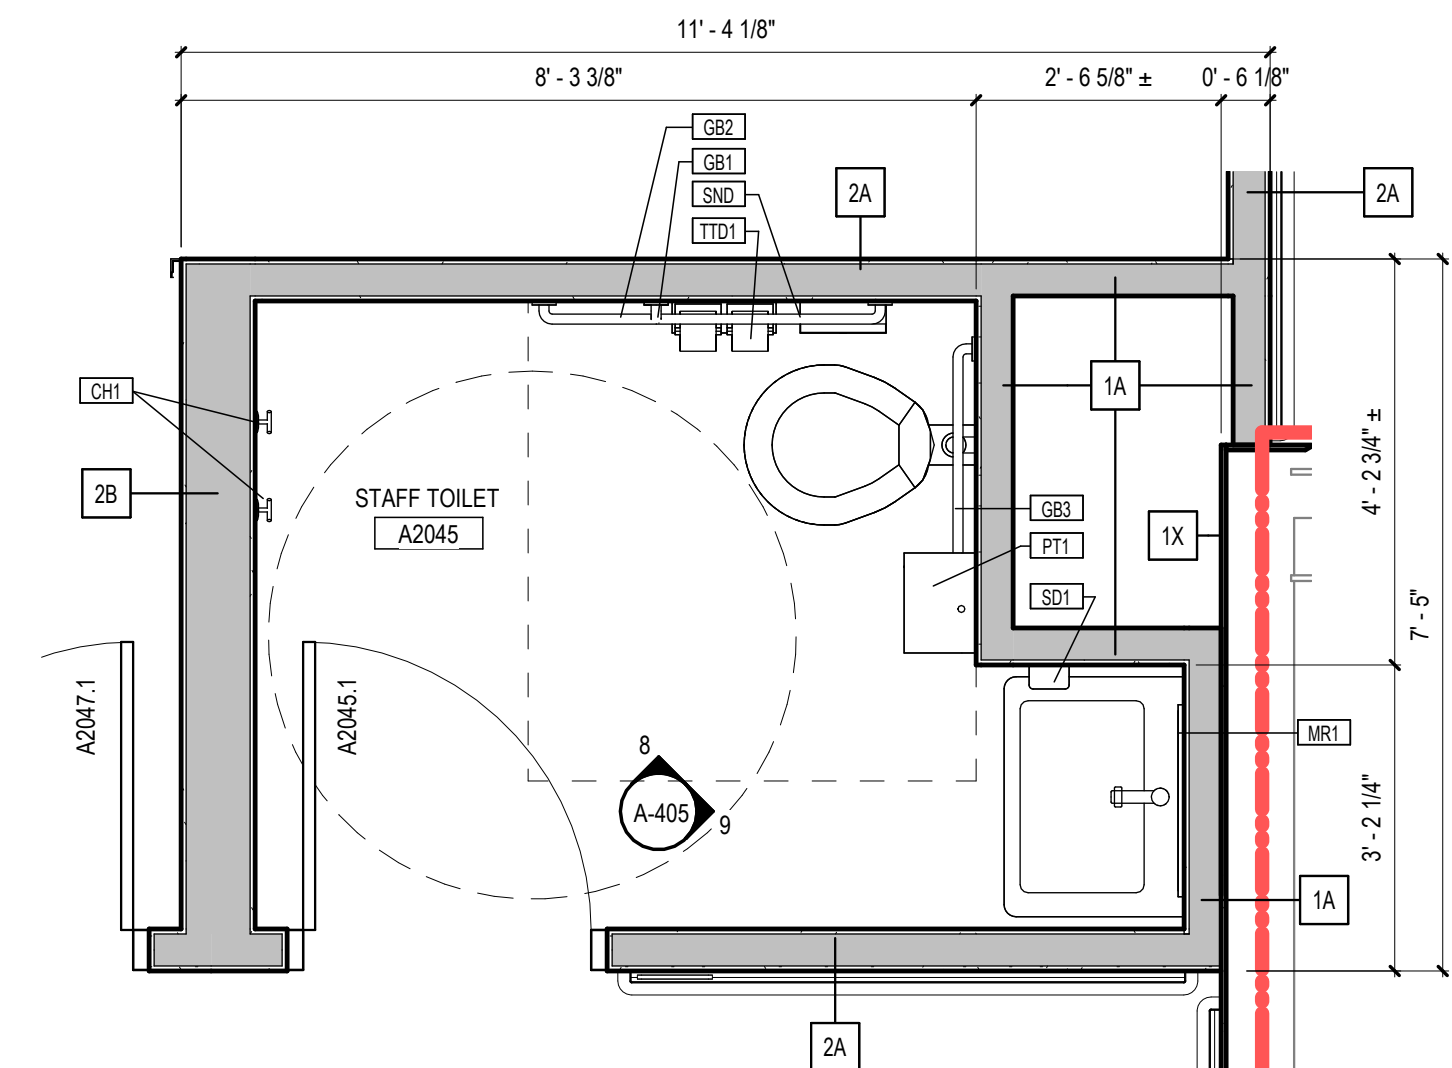


5 STAFF TOILET - A2045

1/2" = 1'-0"

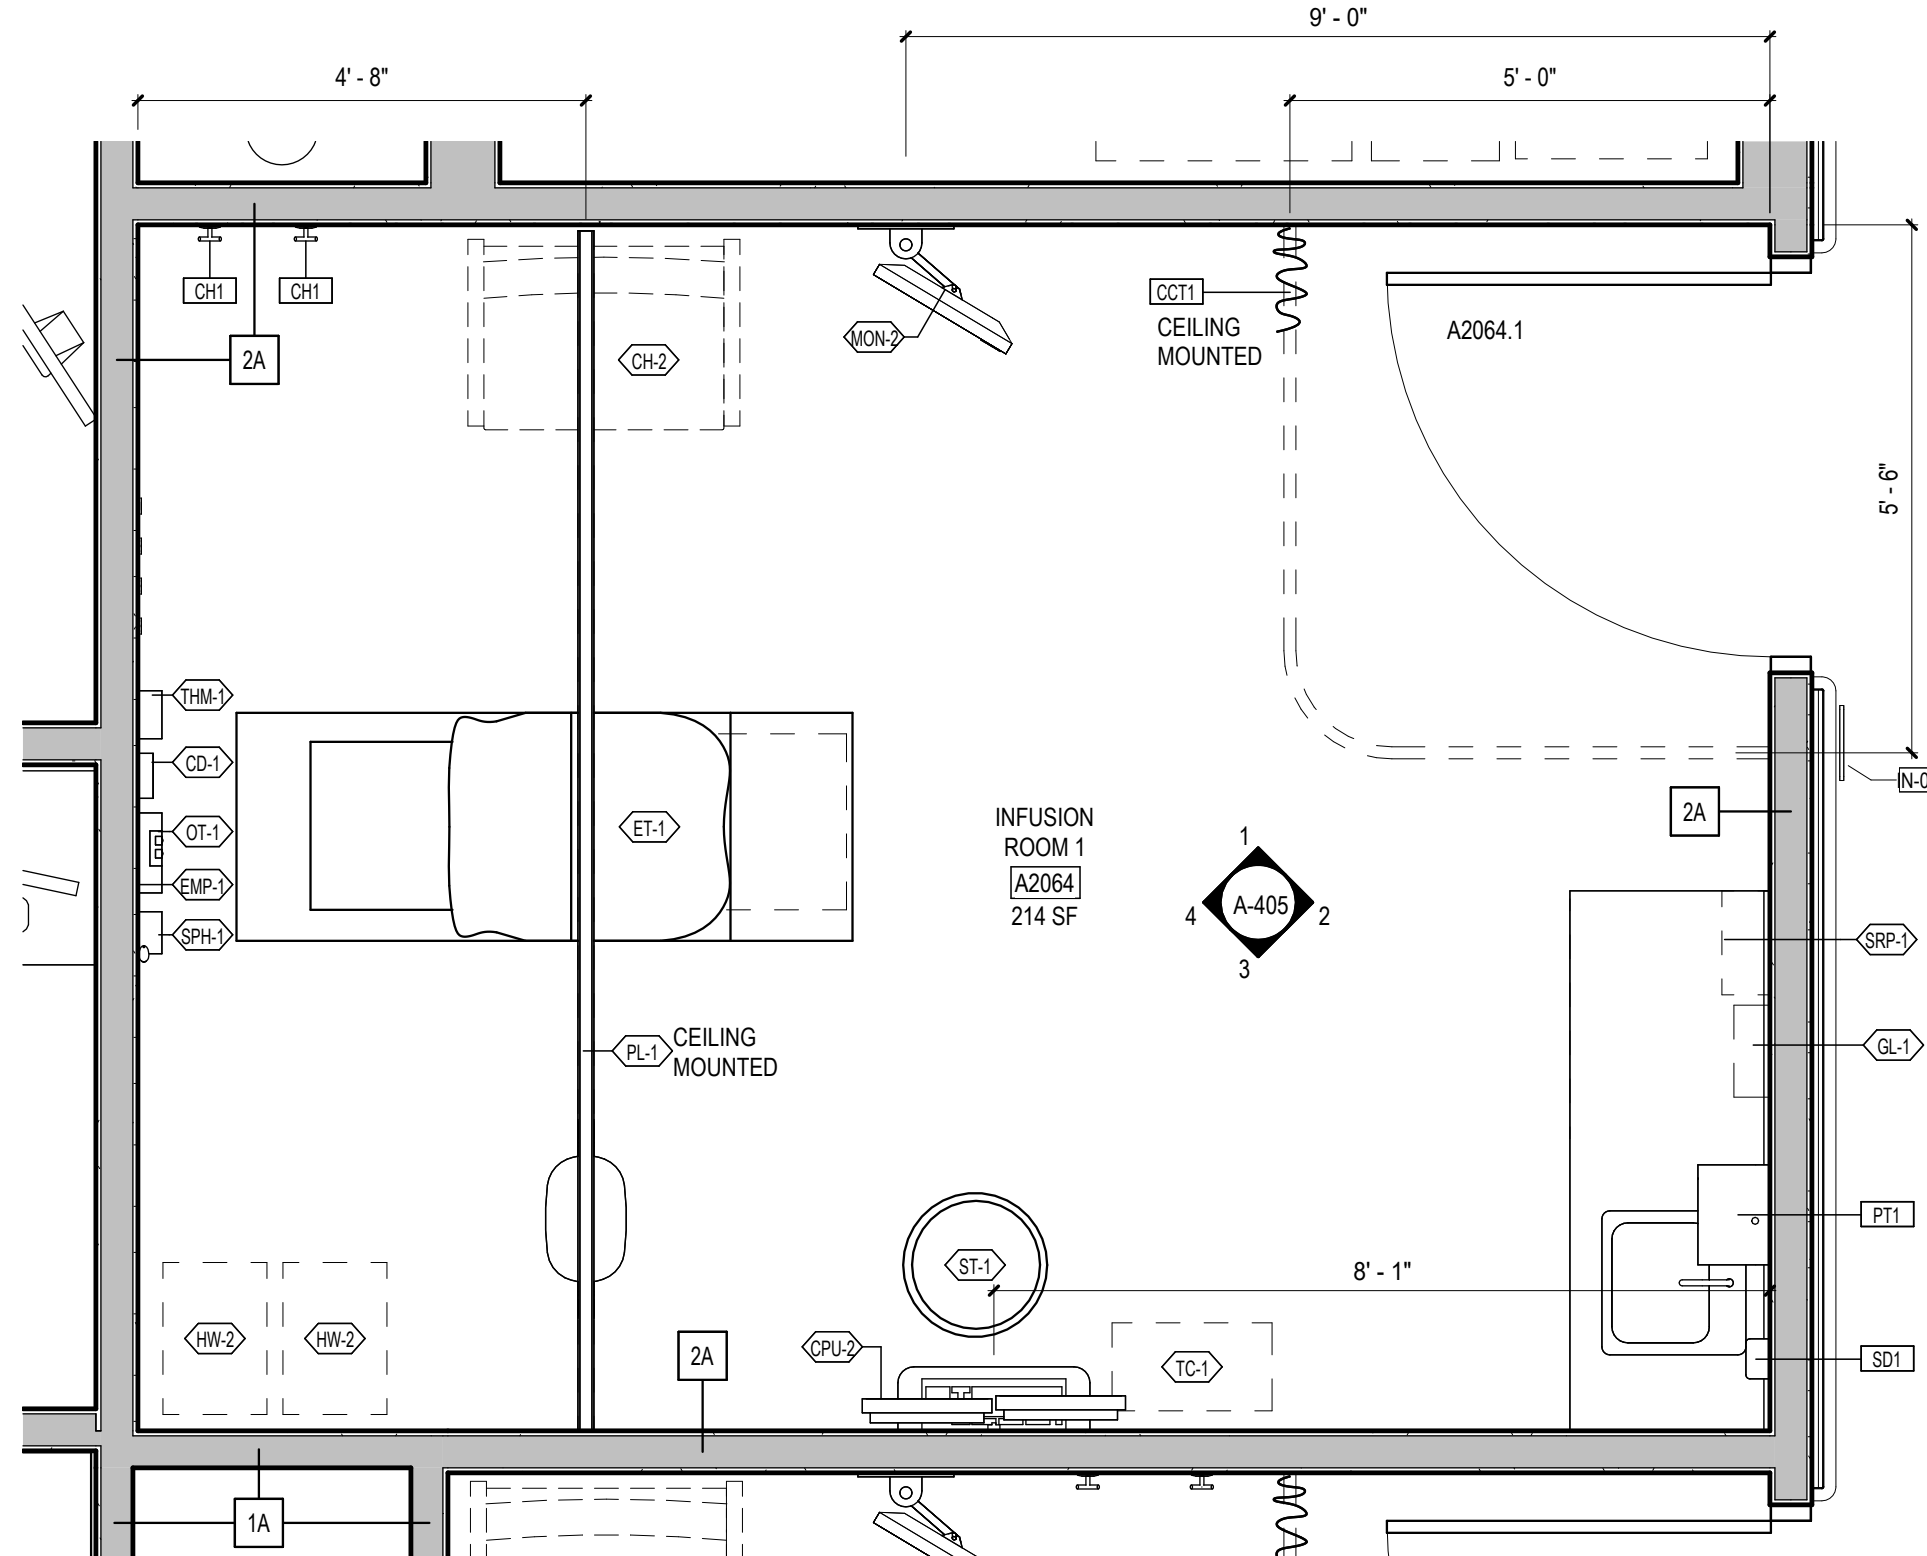


4 INFUSION ROOM 1 - A2064

1/2" = 1'-0"

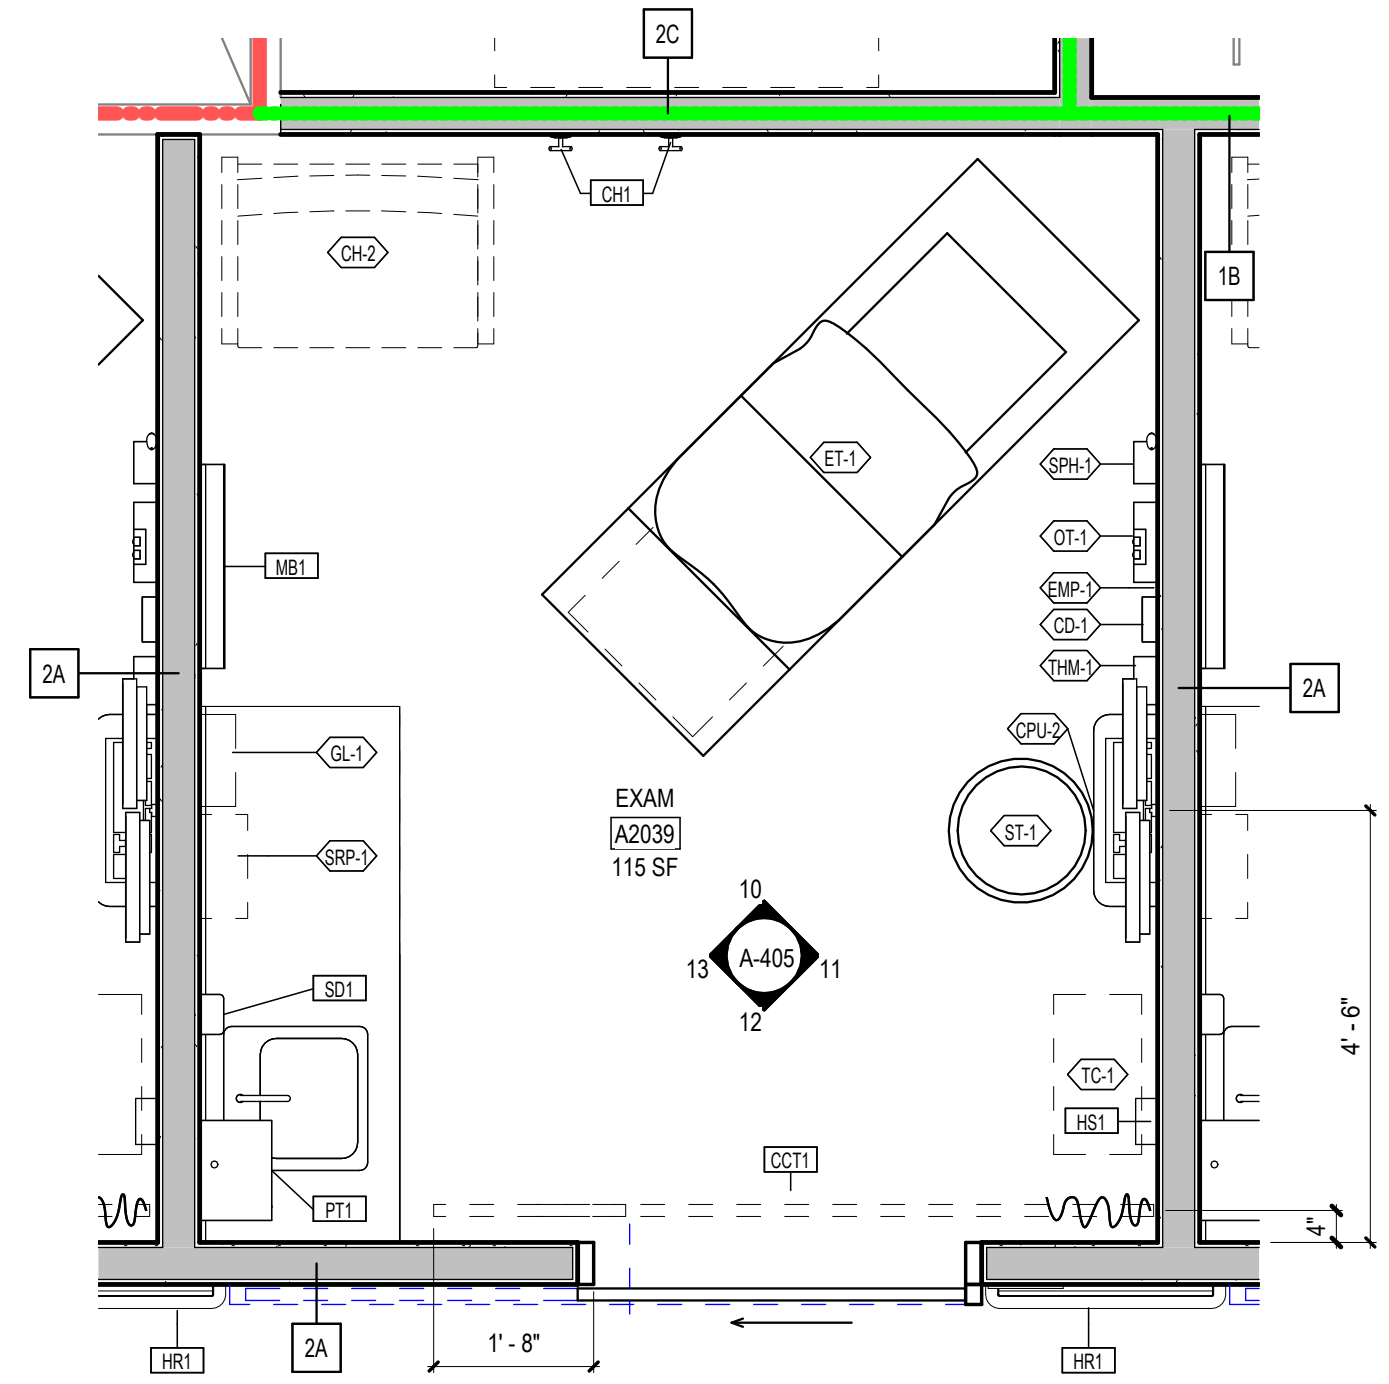

3 EXAM - A2039

1/2" = 1'-0"

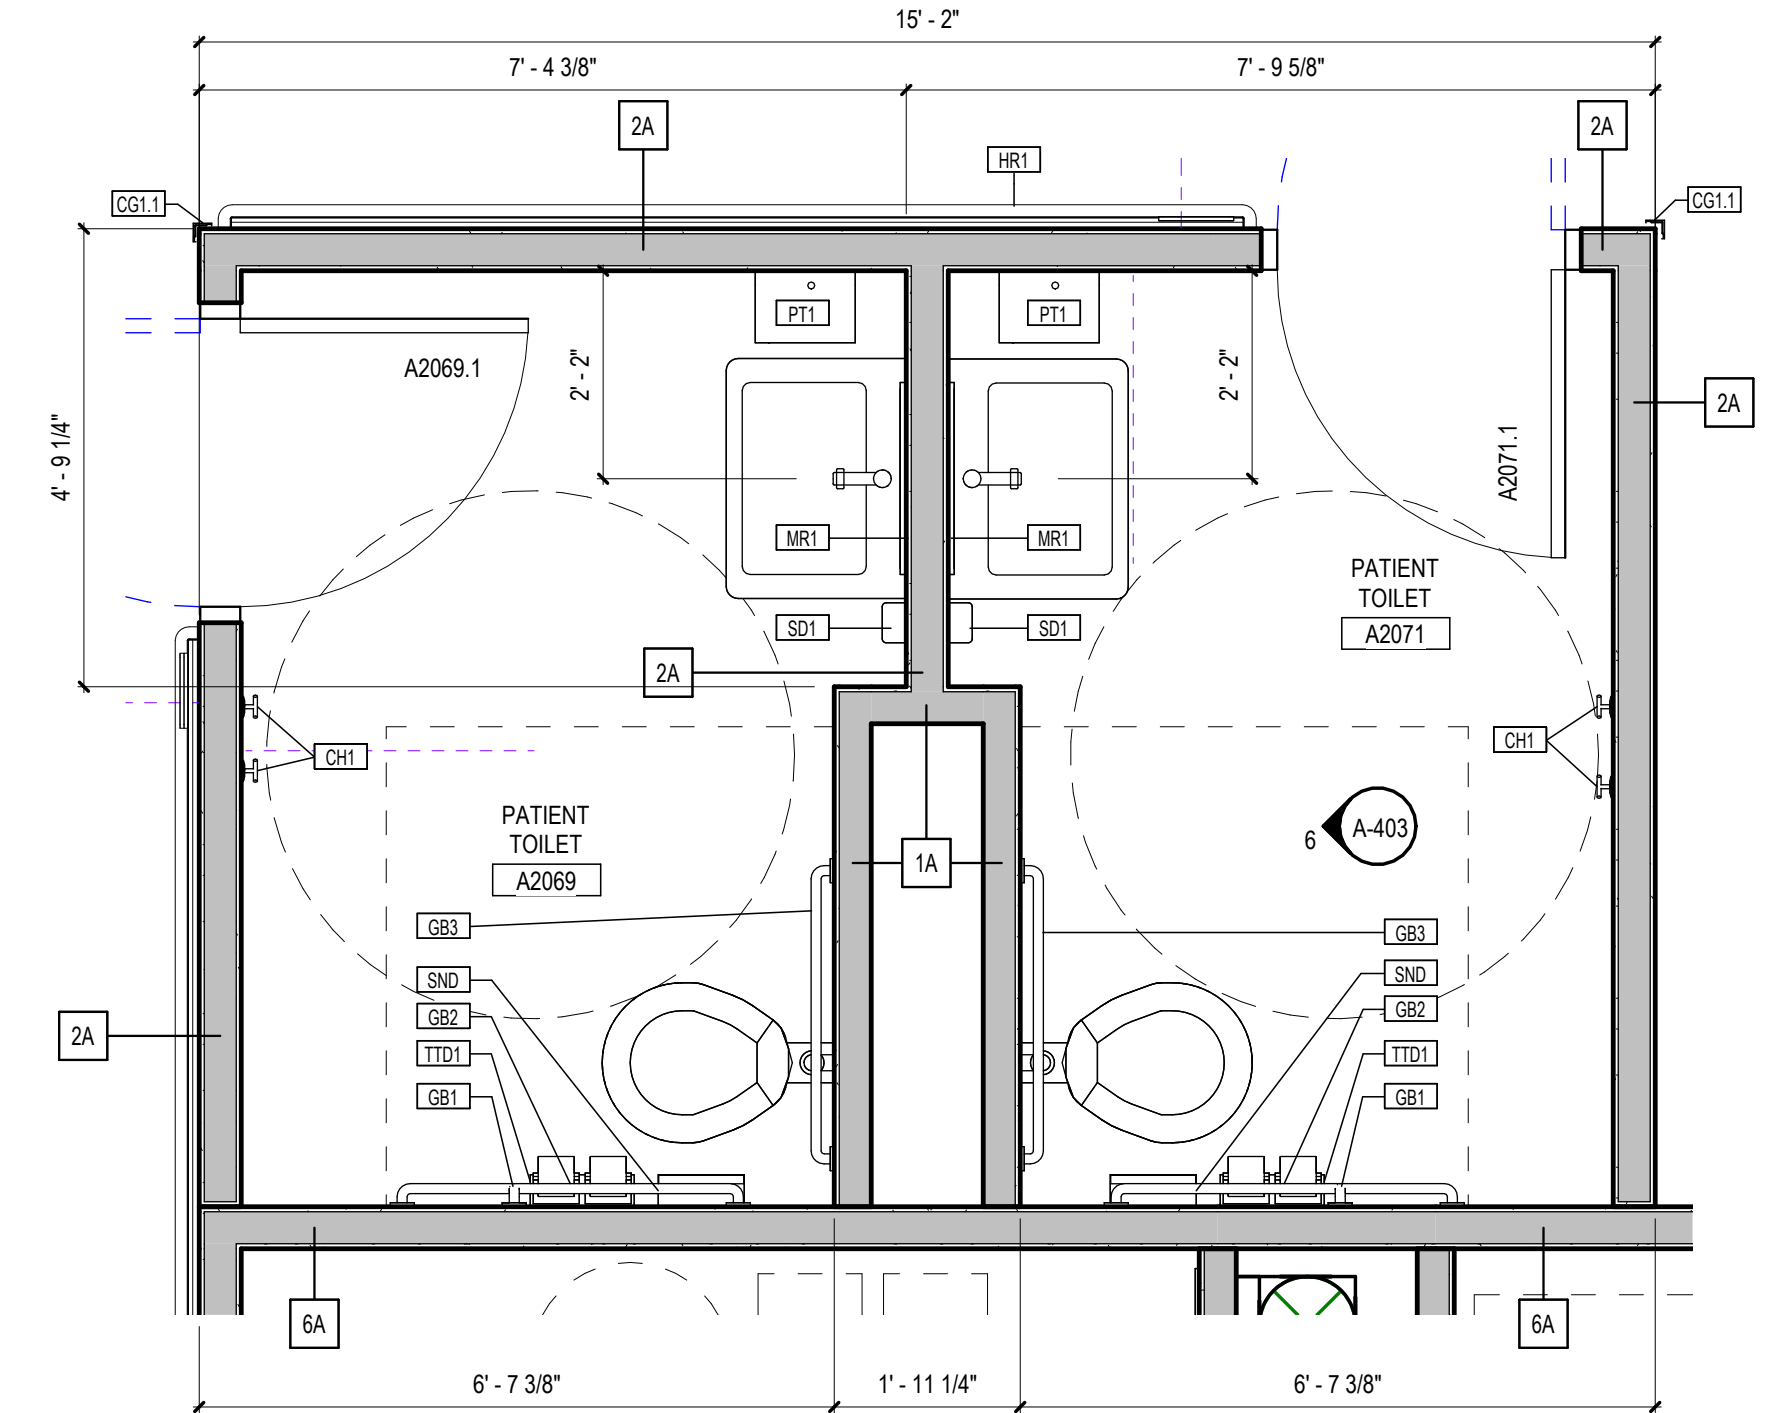

1 PATIENT TOILET - A2069 & A2071

1/2" = 1'-0"

Autodesk Docs/VA MI/2025/210291/Arch

ADDENDUM 02	30-APR-2026
100% BID DOCUMENTS	10-JAN-2025
95% CONSTRUCTION DOCUMENTS - REVISED	27-AUG-2024
95% CONSTRUCTION DOCUMENTS	15-APR-2024
65% DESIGN DEVELOPMENT	29-APR-2023
Revisions:	Date:

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202

STAMP

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs


Drawing Title
ENLARGED PLANS
Approved:

Phase
100% BID DOCUMENTS
FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC
Location
DETROIT, MI
Issue Date
10-JAN-2025
Checked
KJH
Drawn
MRB

Project Number
553-21-100
Building Number
Drawing Number
A-131

A
B
C
D
E
F

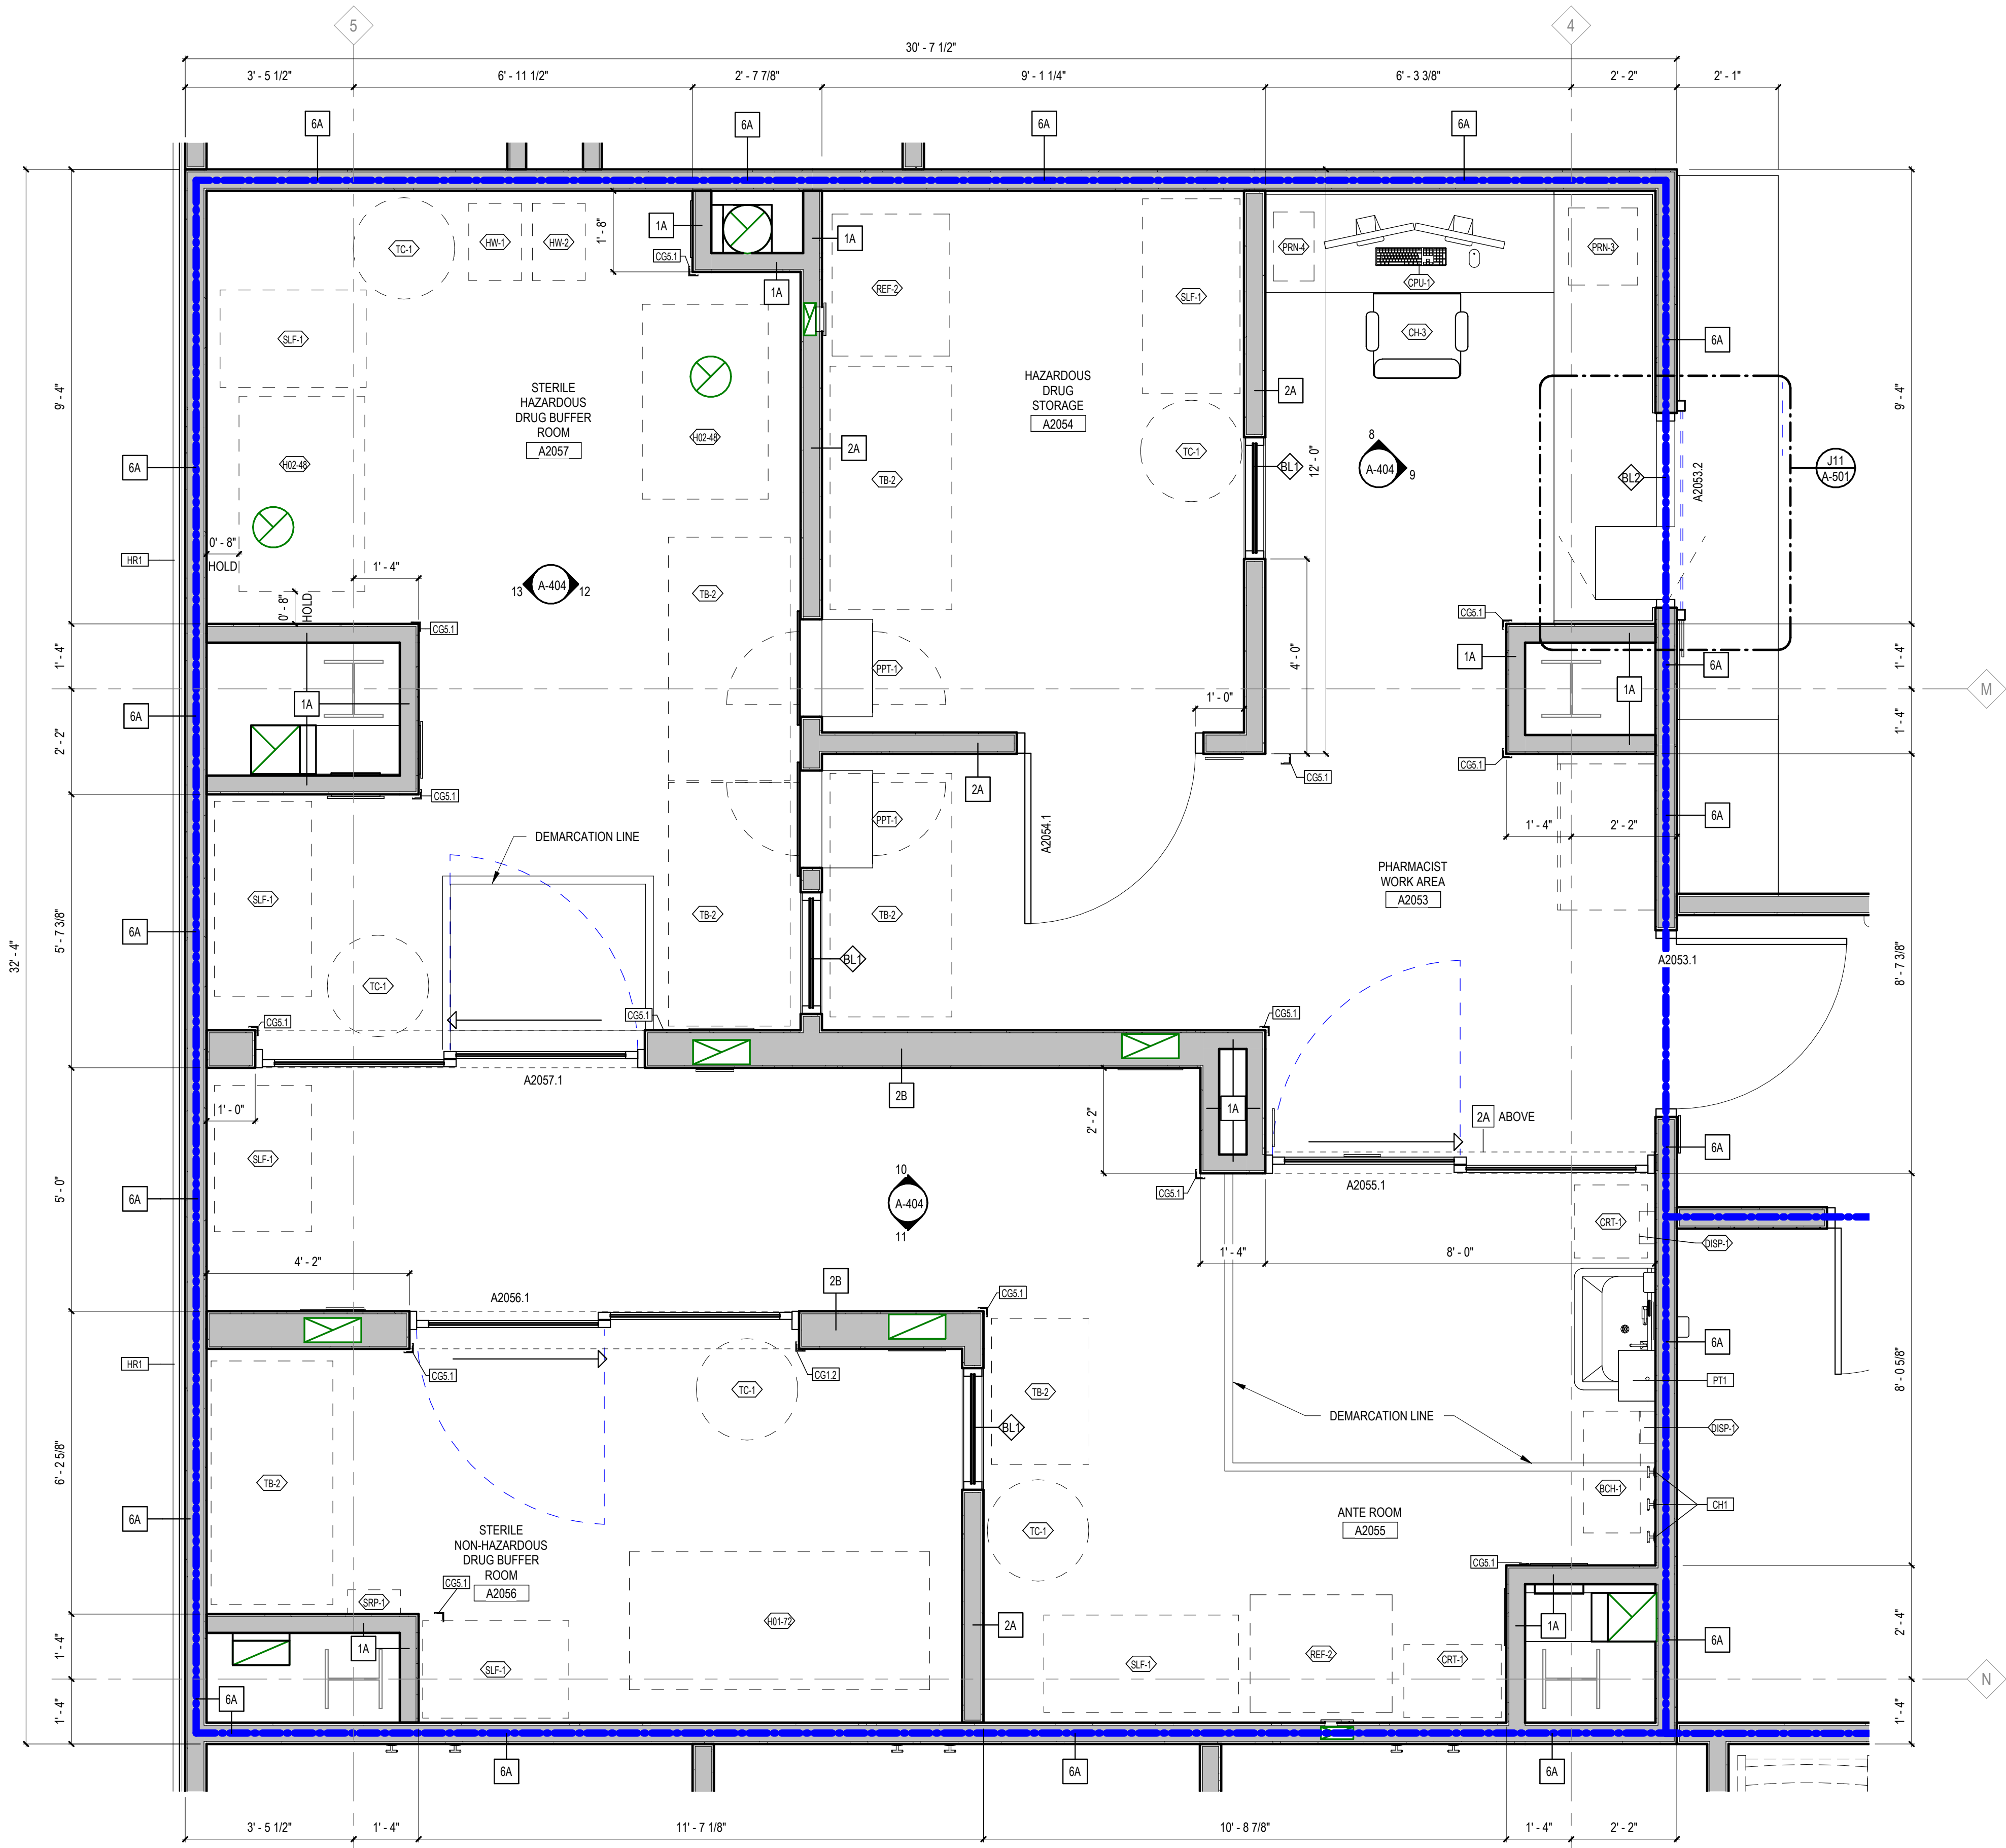

1 ENLARGED PLAN - SATELLITE PHARMACY
1/2" = 1'-0"

SCHEDULE GENERAL NOTES	
1. SEE REFLECTED CEILING PLAN FOR CEILING MOUNTED EQUIPMENT INFORMATION	
ABBREVIATIONS	
AI - ACQUISITION AND INSTALLATION C - CONTRACTOR FURNISHED AND INSTALLED D - DATA E - ELECTRICAL M - MECHANICAL P - PLUMBING N - NONE V - GOVERNMENT FURNISHED, CONTRACTOR INSTALLED V - GOVERNMENT FURNISHED AND INSTALLED	

PARTITION / WALL FIRE RATINGS			
---	NON-RATED	---	EXISTING NON-RATED
---	SMOKE PARTITION	---	SMOKE PARTITION
---	1-HR. SMOKE BARRIER	---	EXISTING 1-HR. SMOKE BARRIER
---	1-HR. FIRE BARRIER	---	EXISTING 1-HR. FIRE BARRIER
---	2-HR. FIRE BARRIER	---	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN. - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

DIVISION 10 SCHEDULE					
TAG	DESCRIPTION	BASIS OF DESIGN	AI	BLOCKING REQ'D	NOTES
CCT1	CUBICLE CURTAIN TRACK & CARRIERS	-	C	NO	
CG1.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.1E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG1.2E	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG2.2	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CG3.1	CORNER GUARD (SEE MATERIALS SCHEDULE)	-	C	NO	
CH1	HAT & COAT HOOK	-	C	YES	
DCS1	DIAPER CHANGING STATION	-	C	YES	
ELC	ELC EXHAUST FAN CABINET, RECESSED	-	C	NO	
GB1	18" GRAB BAR	-	C	YES	
GB2	42" GRAB BAR	-	C	YES	
GB3	36" GRAB BAR	-	C	YES	
HR1	HAND RAIL AND BUMPER (SEE MATERIALS SCHEDULE)	-	C	YES	
HS1	HAND SANITIZER	-	C	YES	
LKR1	LOCKER (PHEVOLOCK)	-	C	YES	
LKR2	LOCKER (LAMINATE)	-	C	YES	
MB1	MAGNETIC MARKER BOARD, 2' X 3'	-	C	YES	
MB2	MAGNETIC WHITE BOARD, 4' X 6'	-	C	YES	
MR1	24" X 36" MIRROR	-	C	YES	
PT1	PAPER TOWEL DISPENSER	-	V	YES	
SD1	SOAP DISPENSER	-	V	YES	
SND	SANITARY NAPKIN DISPOSAL	-	V	YES	
TTD1	TOILET TISSUE DISPENSER	-	V	YES	

DIVISION 10 - NOTES LEGEND	
1. CUBICLE CURTAIN TO BE FAB-1, SEE MATERIALS SCHEDULE	

FURNITURE & EQUIPMENT SCHEDULE					
TAG	DESCRIPTION	UTILITIES	AI	BLOCKING REQ'D	NOTES
BCH-1	BENCH, MOBILE	-	V	NO	
BW-1	BLANKET WARMER	E	V	NO	
CC-1	CRASH CART	-	V	NO	
CD-1	EAR CUP DISPENSER	-	V	NO	
CH-1	CHAIR	-	V	NO	
CH-2	CHAIR	-	V	NO	
CH-3	CHAIR	-	V	NO	
CM-1	COFFEE MAKER - TALL	E	V	NO	
CM-2	COFFEE MAKER - SHORT	E	V	NO	
CPU-1	COMPUTER WORKSTATION	E, D	V	NO	
CPU-2	COMPUTER, WALL MOUNTED	E, D	V	YES	
CPW-1	CHEMOTHERAPY PPE WASTE	-	V	NO	
CRT-1	CART, PPE	-	V	NO	
DISP-1	MAGNETIC BULK DISPENSER	-	V	YES	
DK-1	DESK	-	V	NO	
EMP-1	EQUIPMENT MOUNTING PANEL	-	V	YES	
ET-1	EXAM TABLE	-	V	NO	
GL-1	WIRE GLOVE BOX HOLDER	N	V	YES	
H01-72	LAMINAR FLOW	E	V	NO	
H02-48	BIOLOGICAL SAFETY CABINET - CLASS II, TYPE A2	E, M	V	NO	
HW-1	HAZARDOUS TRASH - 12 GALLON - BLACK	-	V	NO	
HW-2	HAZARDOUS TRASH - 19 GALLON - YELLOW	-	V	NO	
ICE-1	COUNTER ICE MAKER	E, P	V	NO	
FS-1	IN-FLOOR SCALE	E	C	NO	NOTE: 1
IR-1	INFUSION RECLINER	E	V	NO	
MB-1	MOBILE L BASE CABINET	-	V	NO	
MED-1	MEDICAL SUPPLY CART	-	V	NO	
MON-2	PATIENT TV, WALL MOUNTED	E	V	YES	
MW-1	MICROWAVE	E	V	NO	
OMC-1	OMNICELL MED MACHINE	E, D	V	NO	
OT-1	OTOSCOPE/OPHTHALMOSCOPE, WALL MTD.	E	V	NO	
PL-1	CEILING MOUNTED PATIENT LIFT, SOLE SOURCED	E	C	YES	
PP-1	PHARMACY PASS THROUGH - CLEAN ROOM	E	C	NO	
PRN-1	PRINTER - FLOOR	E, D	V	NO	
PRN-2	MULTI-FUNCTIONAL DEVICE - COUNTERTOP	E	V	NO	
PRN-3	PRINTER - XEROX VERSALINK B600	E, D	V	NO	
PRN-4	ZEBRA BAR CODE PRINTER	E, D	V	NO	
REF-1	REFRIGERATOR	E	V	NO	
REF-2	REFRIGERATOR - PHARMACY	E	V	NO	
REF-3	REFRIGERATOR - MEDICATION	E	V	NO	
SHR-1	SHREDDER BOX	-	V	NO	
SLF-1	SHELVING, MOBILE	-	V	NO	
SPM-1	SPHYGMOMANOMETER, WALL MOUNTED	-	V	NO	
SRP-1	SHARPS CONTAINER	-	V	YES	
ST-1	EXAM STOOL	-	V	NO	
STR-1	STRETCHER	-	V	NO	
TB-1	TABLE	-	V	NO	
TB-2	TABLE, MOBILE	-	V	NO	
TC-1	TRASH CAN	-	V	NO	
THM-1	THERMOMETER	-	V	NO	
TV-1	TV AND TV BRACKET	E, D	V	NO	
VSM-1	VITAL SIGNS MONITOR - MOBILE	-	V	NO	
WC-1	WHEELCHAIR	-	V	NO	
WOW-1	WOW	E	V	NO	

FURNITURE & EQUIPMENT - NOTES LEGEND	
1. BASIS OF DESIGN: - MANUFACTURER: SR INSTRUMENTS, INC. - MODEL: SR49R-3 - FLUSH MOUNTED PLATFORM SCALE - PLATFORM SIZE: 32" X 50" - MAX WEIGHT: 100LB - WALL MOUNTED DISPLAY WITH LED BACKLIGHT 1. DISPLAY TO OFFER MEMORY RECALL 2. DISPLAY UNITS: POUNDS / KILOGRAMS - WALL MOUNTED BUILT-IN PRINTER - POWER: 120VAC 50-60HZ - SCALE TO AUTOMATICALLY TURN ON - BUILT-IN GRAB BAR - WARRANTY: MINIMUM 4 YEARS	

ADDENDUM 02
100% BID DOCUMENTS
95% CONSTRUCTION DOCUMENTS - REVISED
95% CONSTRUCTION DOCUMENTS
65% DESIGN DEVELOPMENT
Revisions:
Date:

30-APR-2026
10-JAN-2025
27-AUG-2024
15-APR-2024
29-AUG-2023

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202

STAMP

Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
ENLARGED PLANS - PHARMACY
Approved:

Phase
100% BID DOCUMENTS

FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC

Location
DETROIT, MI

Issue Date
10-JAN-2025

Checked
KJH






Drawn
MRB


Project Number
553-21-100

Building Number

Drawing Number
A-132

VA FORM 08-6231 1 2 3 4 5 6 7 8 9 10 Page 18 of 41 Addendum #2

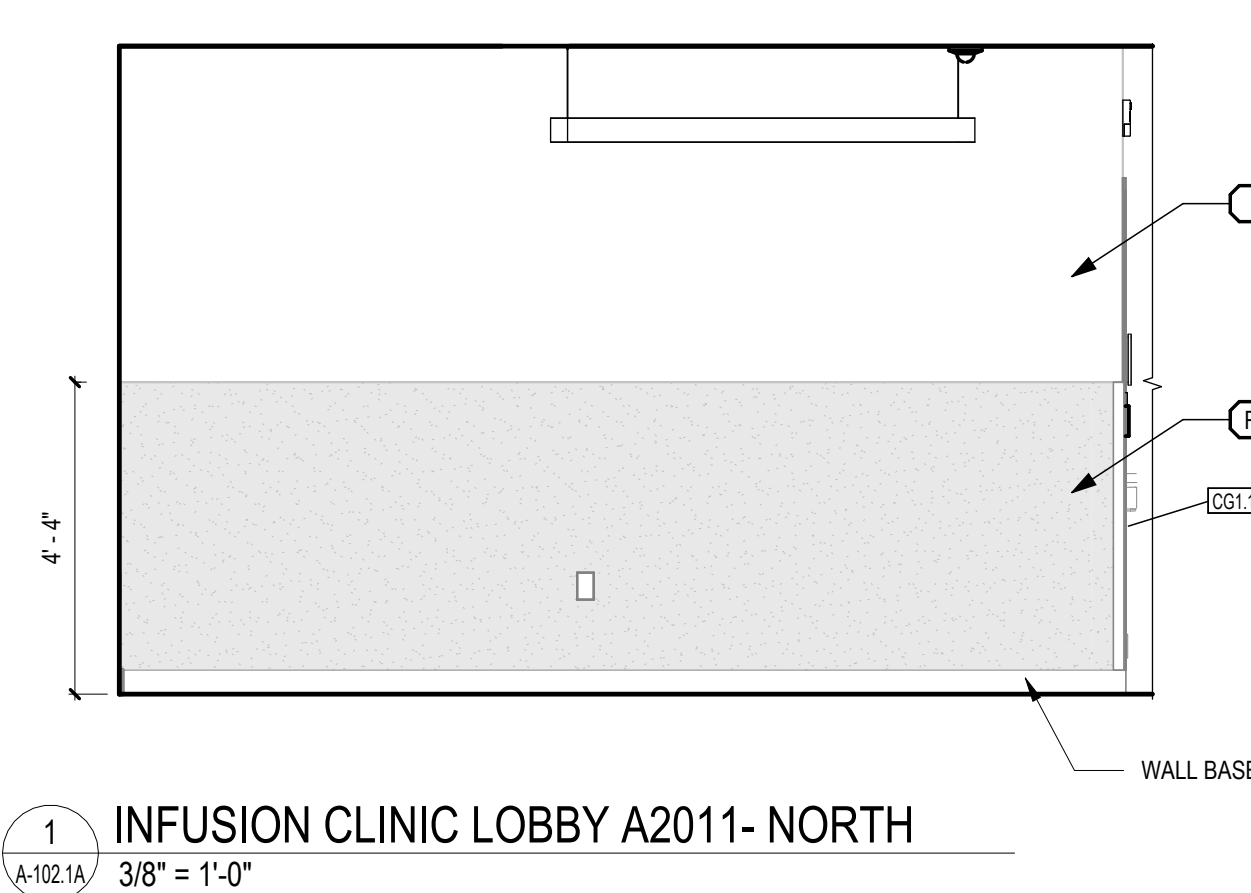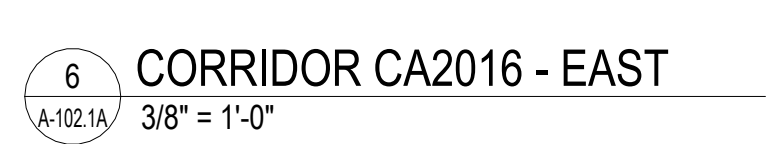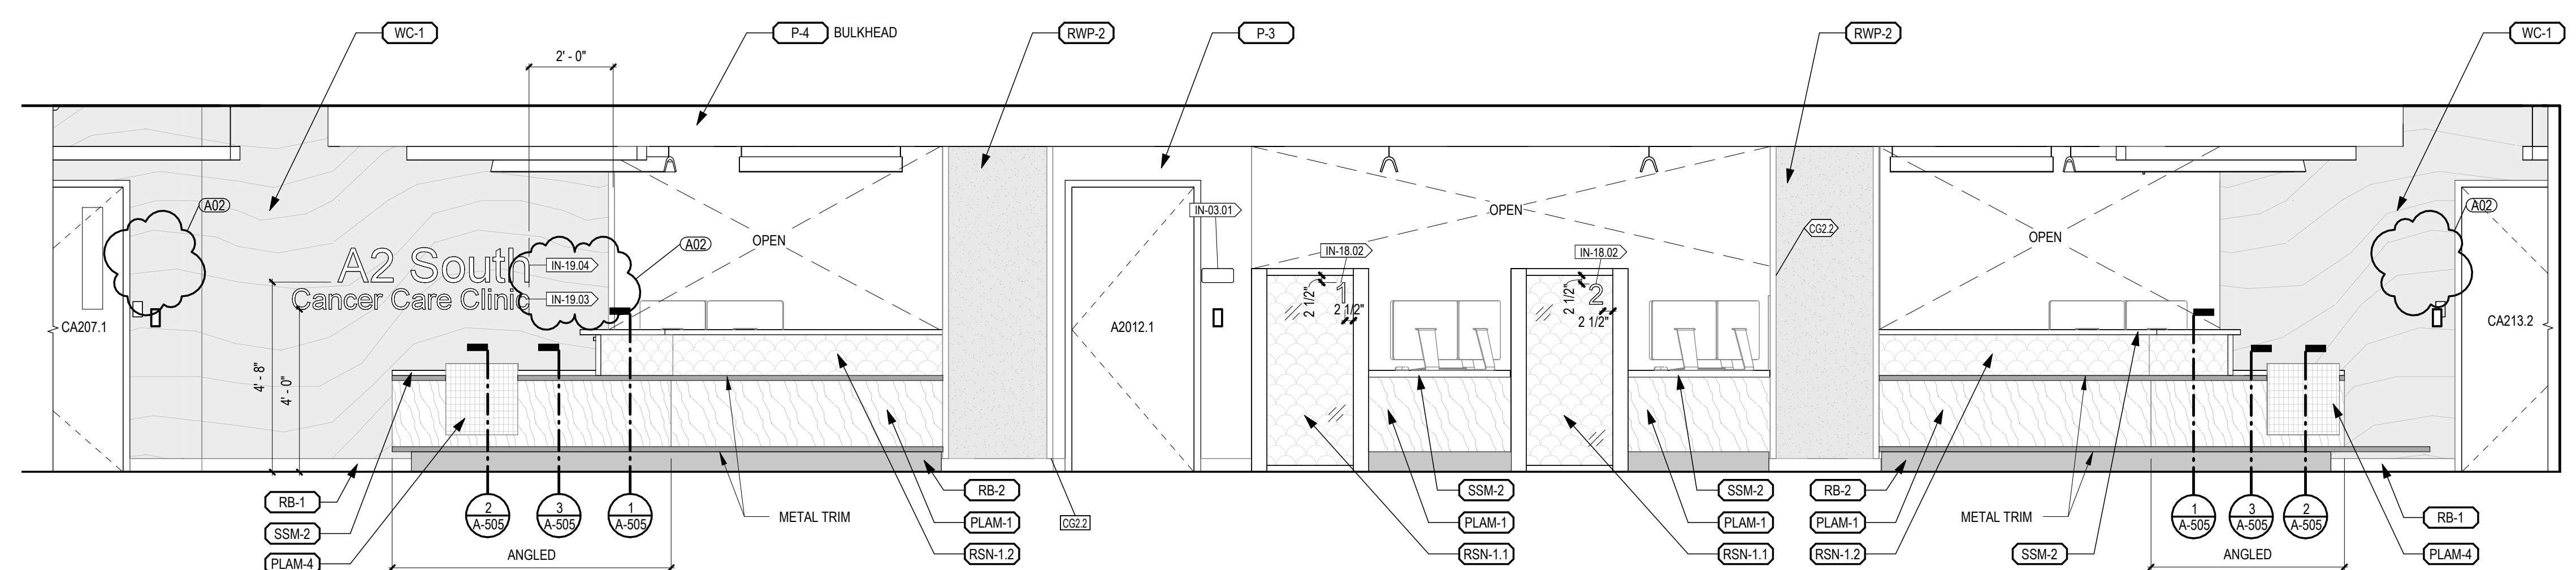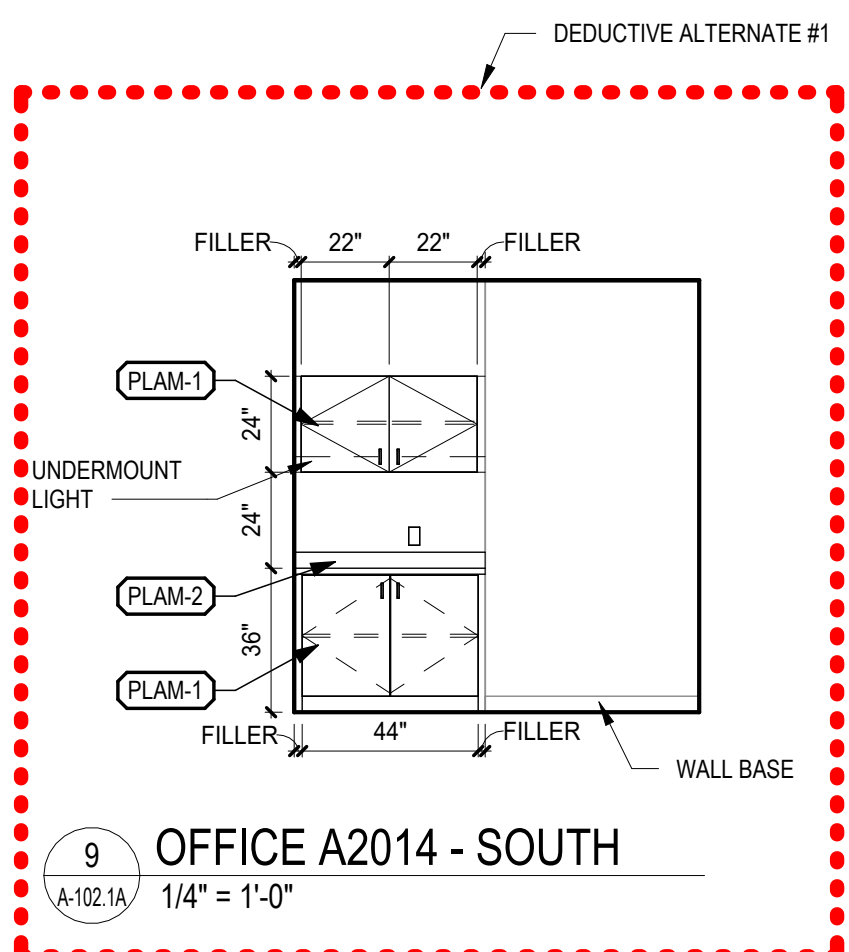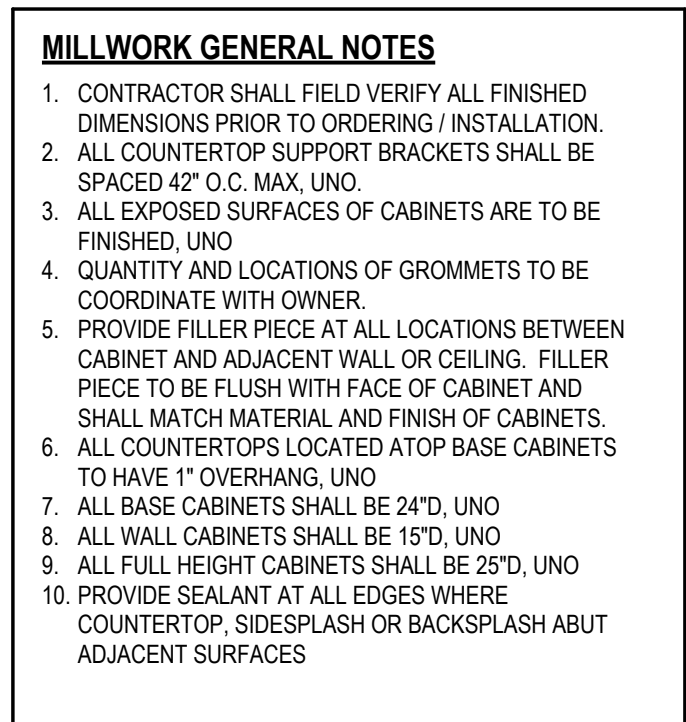

	VA STATION	CONSULTANT	ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title INTERIOR ELEVATIONS - ZONE 1A	Phase 100% BID DOCUMENTS	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC	Project Number 553-21-100
	VA HEALTH CARE Defining EXCELLENCE in the 21st Century	C2ae  Mount Engineering Group Associates, Inc.				Approved:		Location DETROIT, MI	Building Number
	John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	An AtkinsRéalisis Company (866) 454-3923 WWW.C2AE.COM	3419 Pierson Place Flushing, Michigan, 48433 810-230-6202		VA U.S. Department of Veterans Affairs	FULLY SPRINKLERED		Issue Date 10-JAN-2025	Checked KJH
	Date:							Drawn CJA / MRB	Drawing Number A-401

A

B

C

D

E

F

A

B

C


D

E

F

5/10/2025 8:22:41 AM

Autodesk Docs\VA MI Clinic\210291.dwg

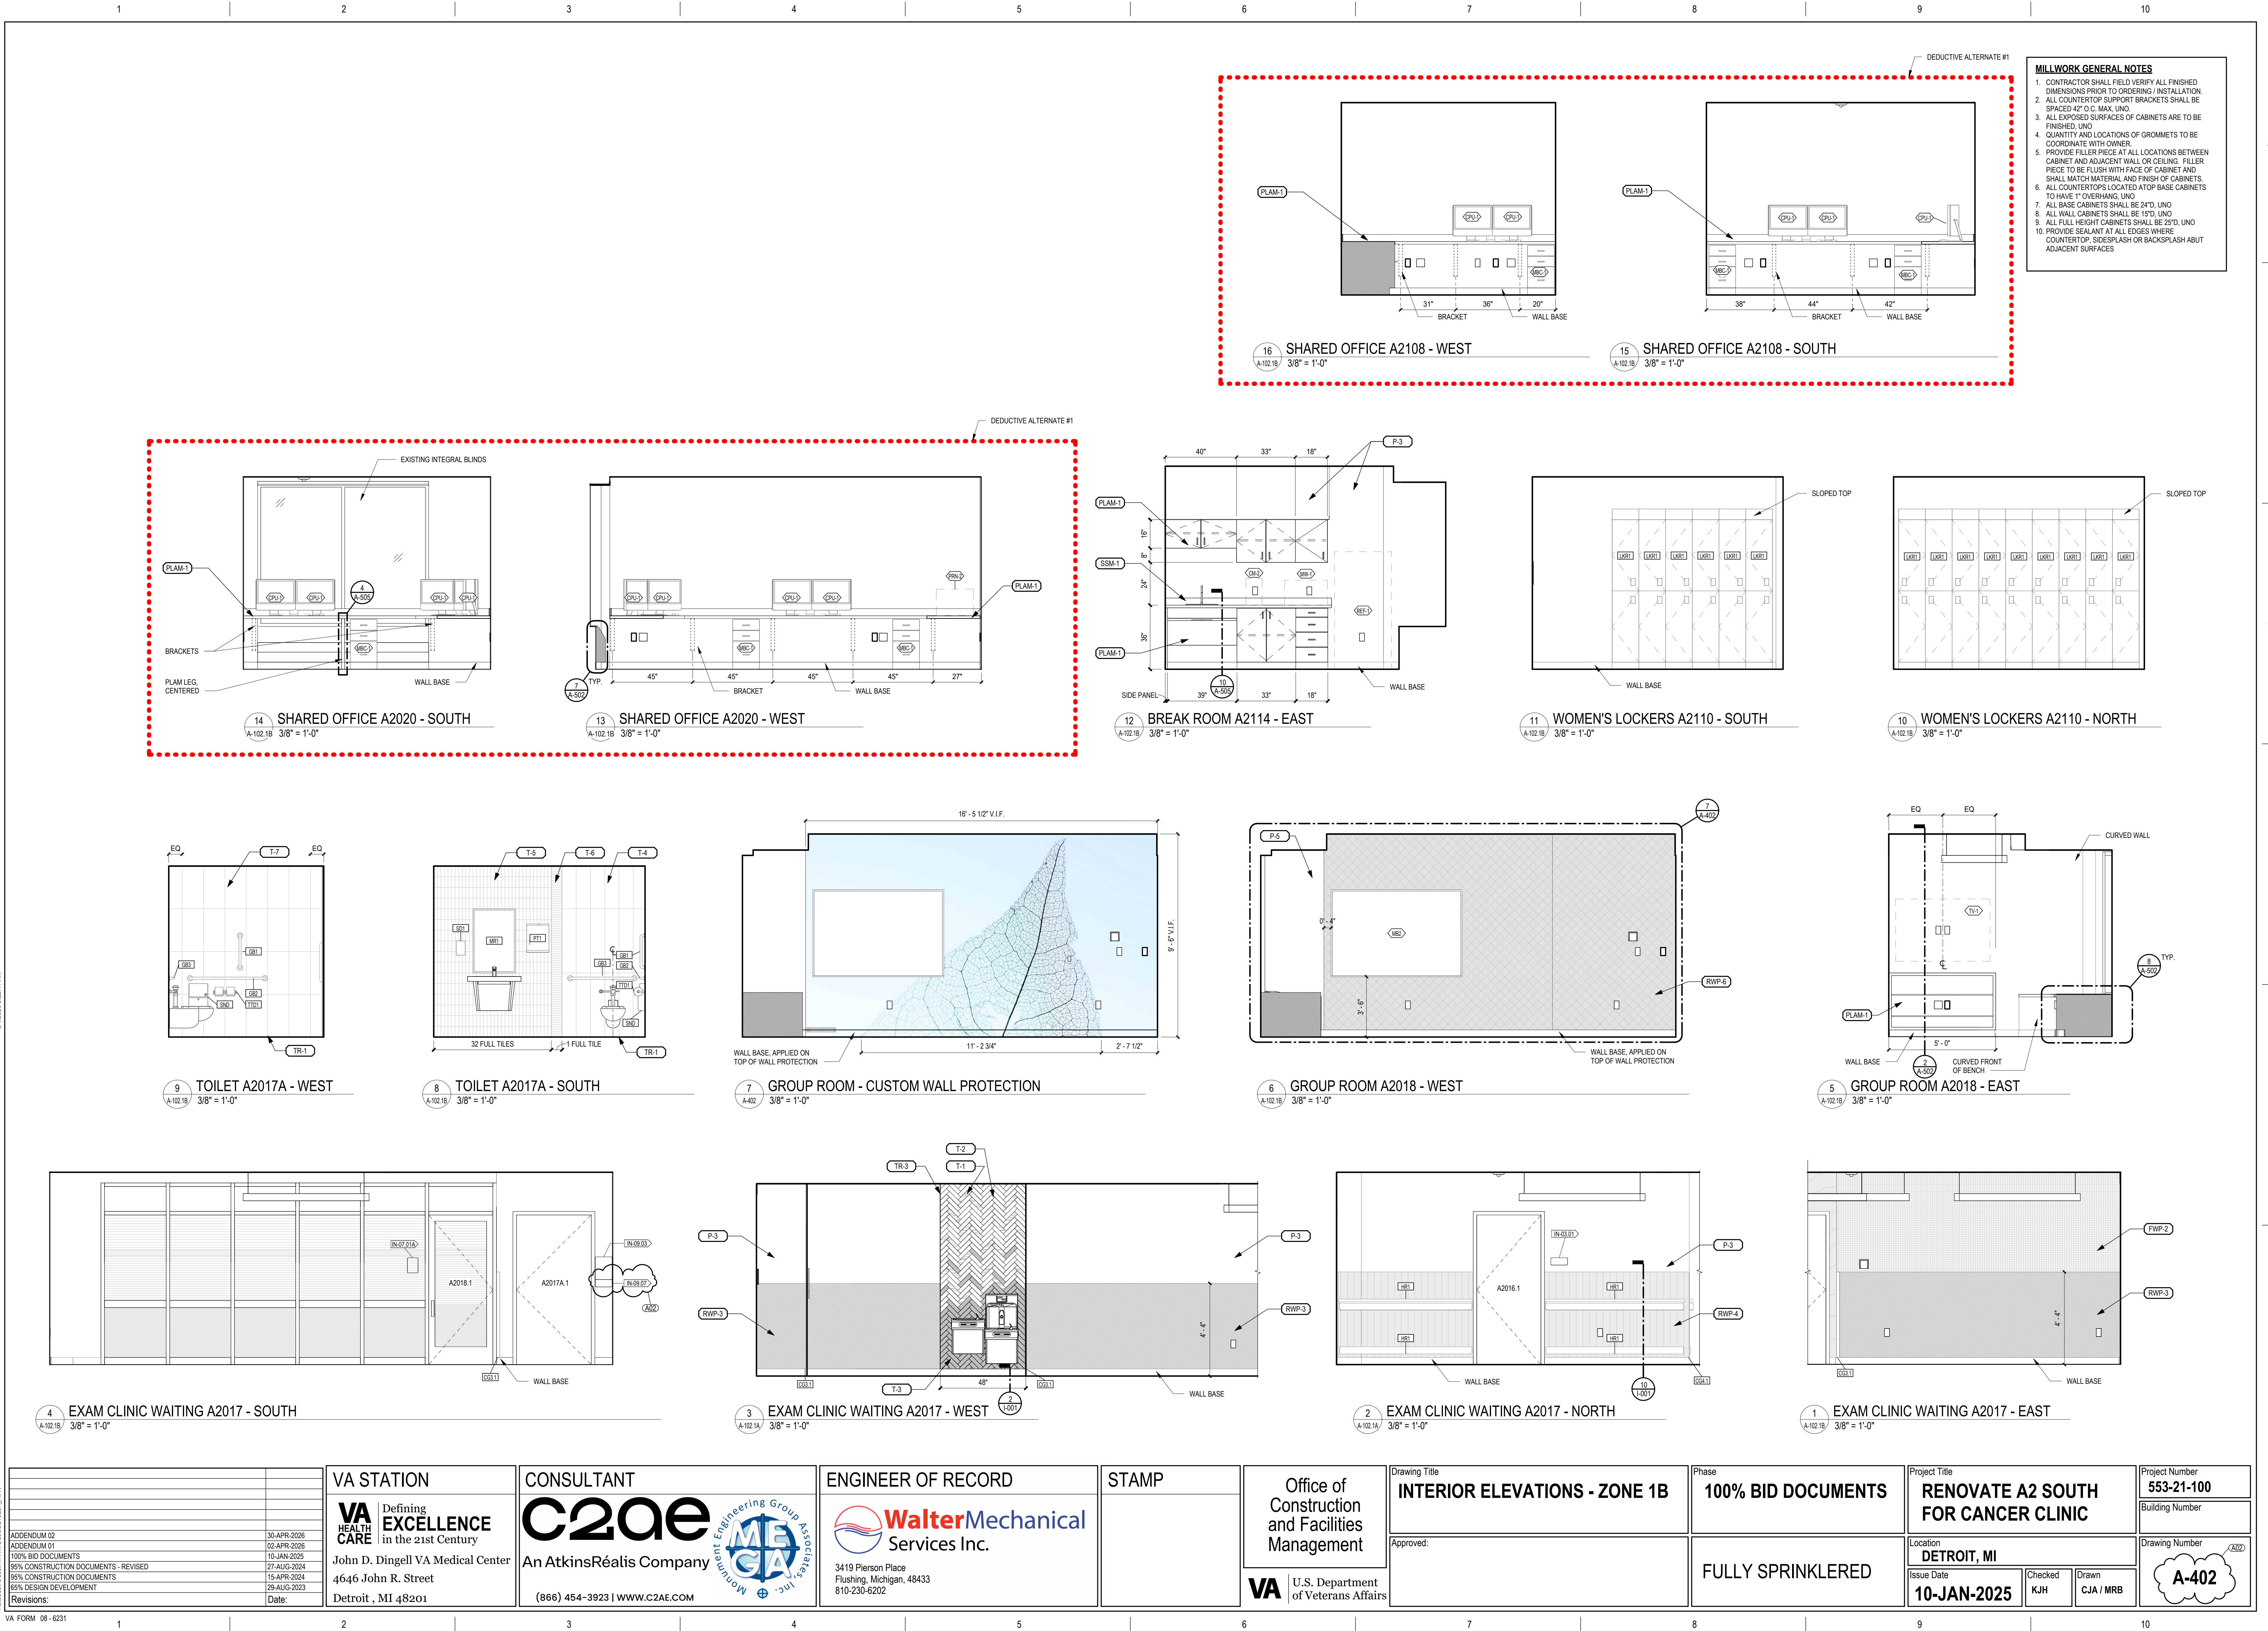

ADDENDUM 02	30-APR-2025
ADDENDUM 01	02-APR-2025
100% BID DOCUMENTS	10-JAN-2025
95% CONSTRUCTION DOCUMENTS - REVISED	27-AUG-2024
95% CONSTRUCTION DOCUMENTS	15-APR-2024
65% DESIGN DEVELOPMENT	29-AUG-2023
Revisions:	Date:

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202

STAMP




Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
INTERIOR ELEVATIONS - ZONE 1B
Approved:


Phase
100% BID DOCUMENTS
FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC
Location
DETROIT, MI
Issue Date
10-JAN-2025
Checked
KJH
Drawn
CJA / MRB


Project Number
553-21-100
Building Number
A-402

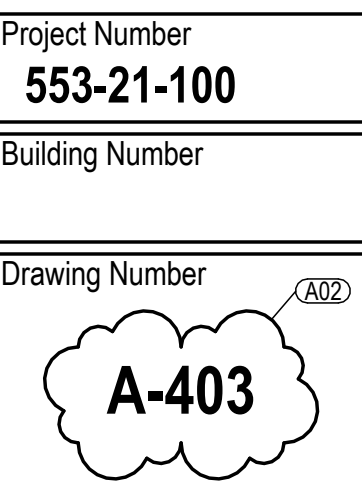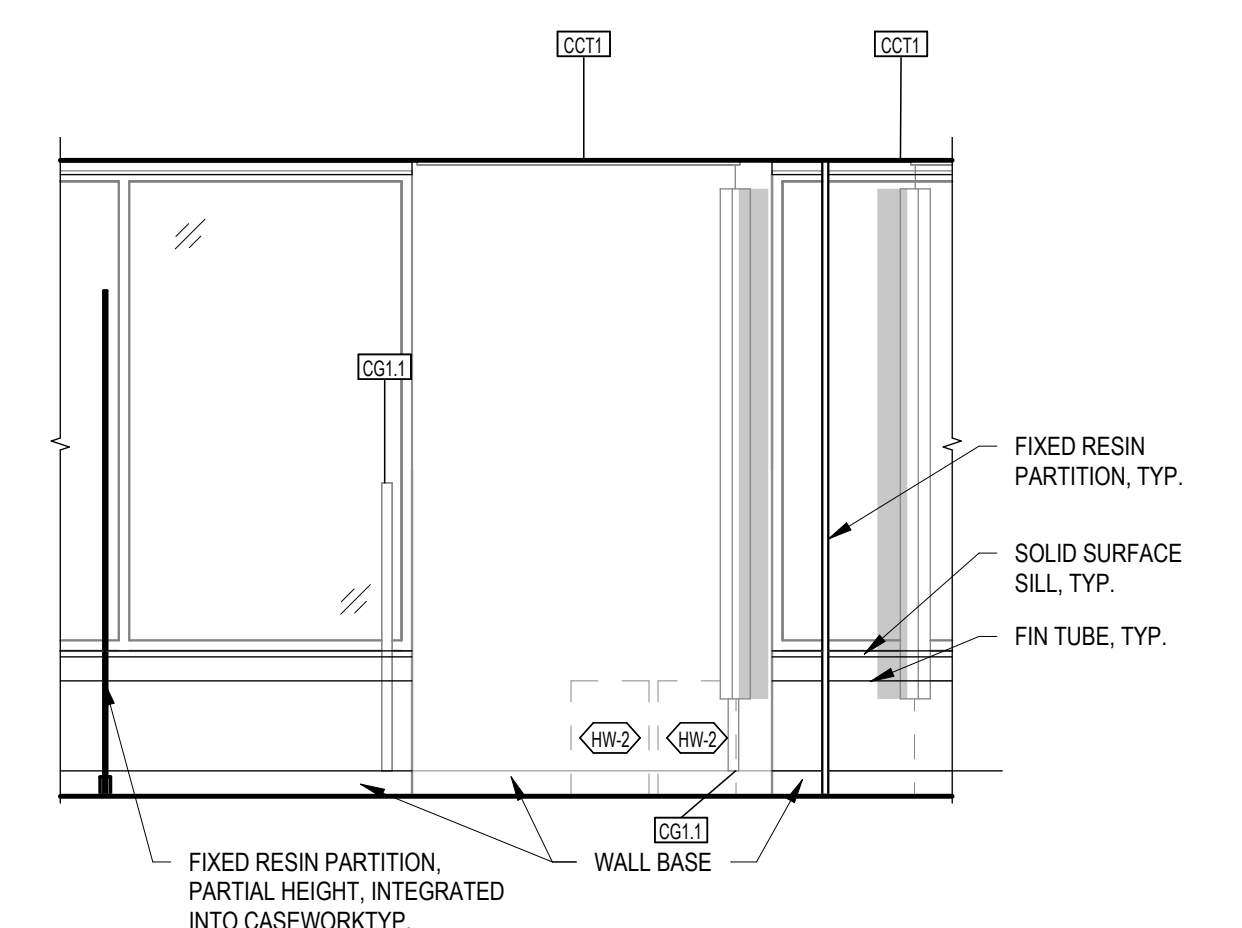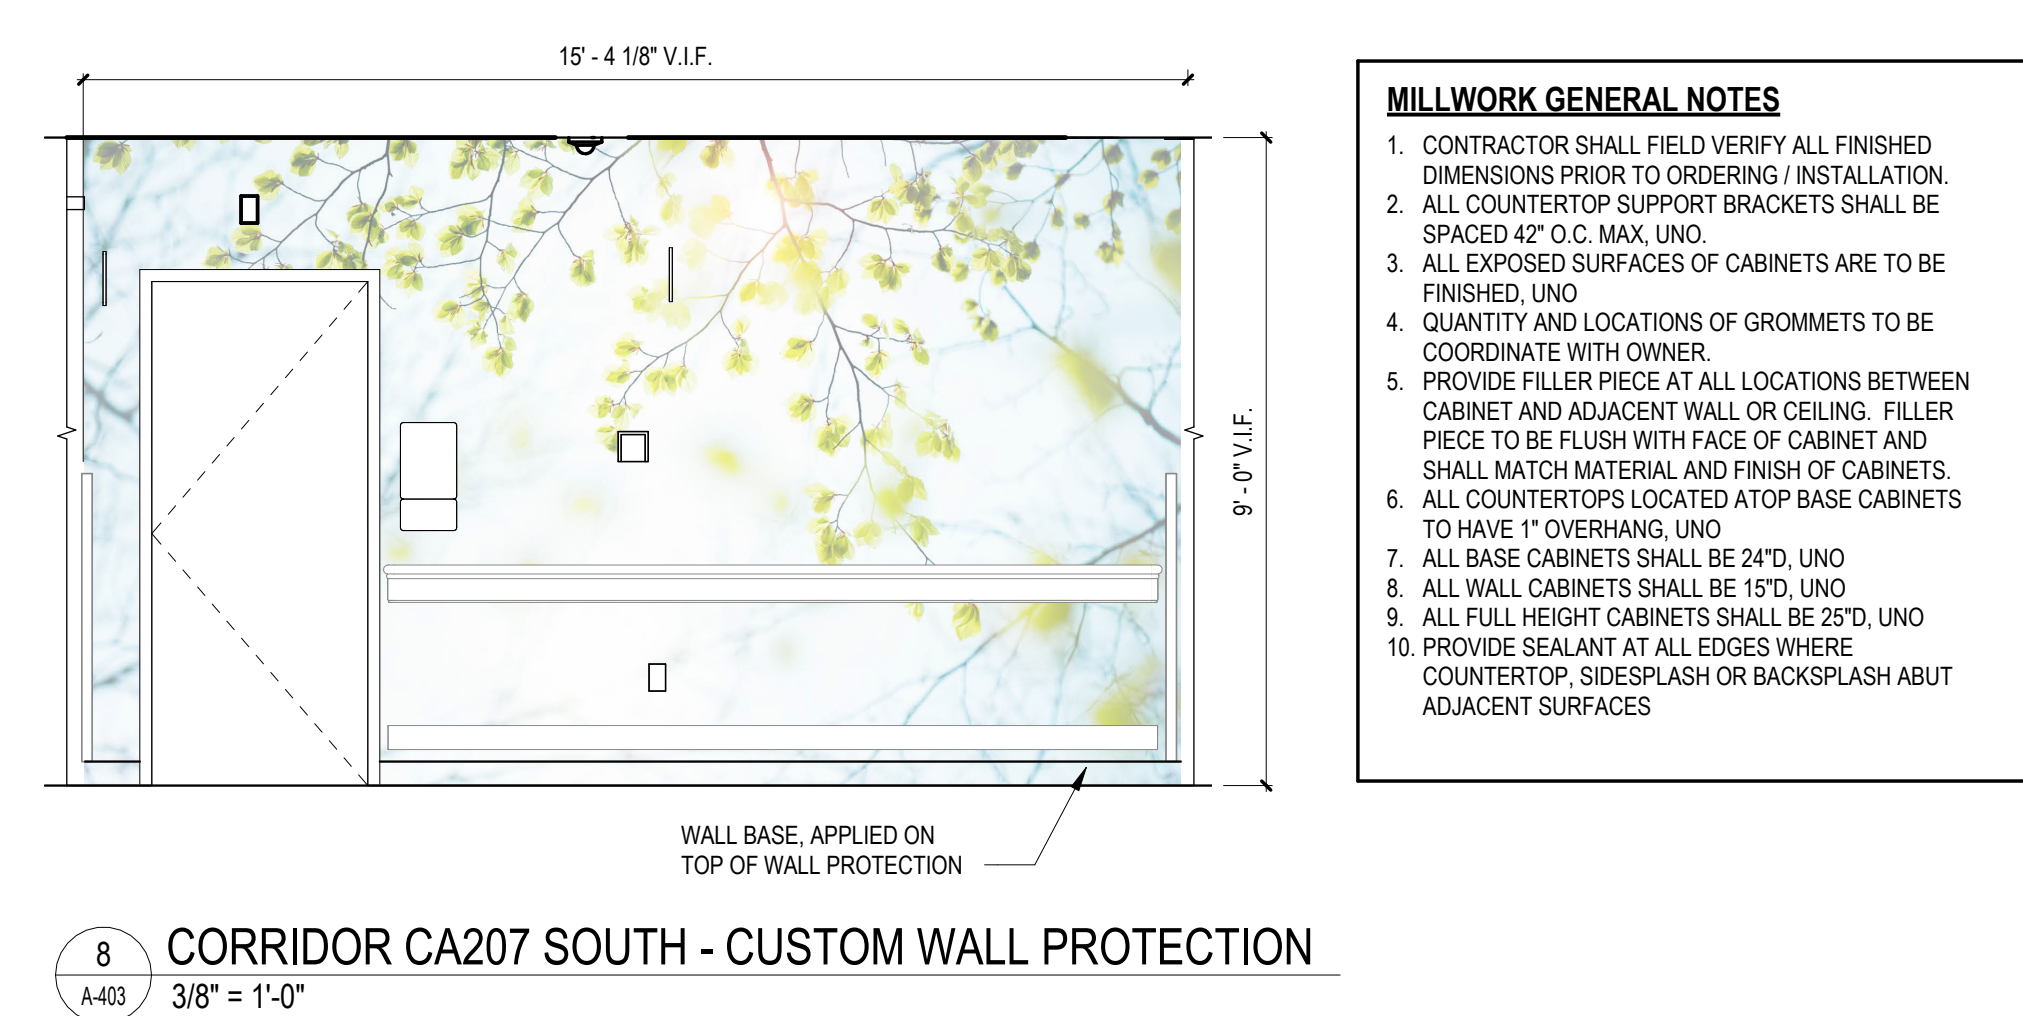


- MILLWORK GENERAL NOTES**
1. CONTRACTOR SHALL FIELD VERIFY ALL FINISHED DIMENSIONS PRIOR TO ORDERING / INSTALLATION.
 2. ALL COUNTERTOP SUPPORT BRACKETS SHALL BE SPACED 42" O.C. MAX. UNO.
 3. ALL EXPOSED SURFACES OF CABINETS ARE TO BE FINISHED, UNO.
 4. QUANTITY AND LOCATIONS OF GROMMETS TO BE COORDINATE WITH OWNER.
 5. PROVIDE FILLER PIECE AT ALL LOCATIONS BETWEEN CABINET AND ADJACENT WALL OR CEILING. FILLER PIECE TO BE FLUSH WITH FACE OF CABINET AND SHALL MATCH MATERIAL AND FINISH OF CABINETS.
 6. ALL COUNTERTOPS LOCATED ATOP BASE CABINETS TO HAVE 1" OVERHANG, UNO.
 7. ALL BASE CABINETS SHALL BE 24"O. UNO.
 8. ALL WALL CABINETS SHALL BE 15"O. UNO.
 9. ALL FULL HEIGHT CABINETS SHALL BE 25"O. UNO.
 10. PROVIDE SEALANT AT ALL EDGES WHERE COUNTERTOP, SIDESPLASH OR BACKSPLASH ABUT ADJACENT SURFACES

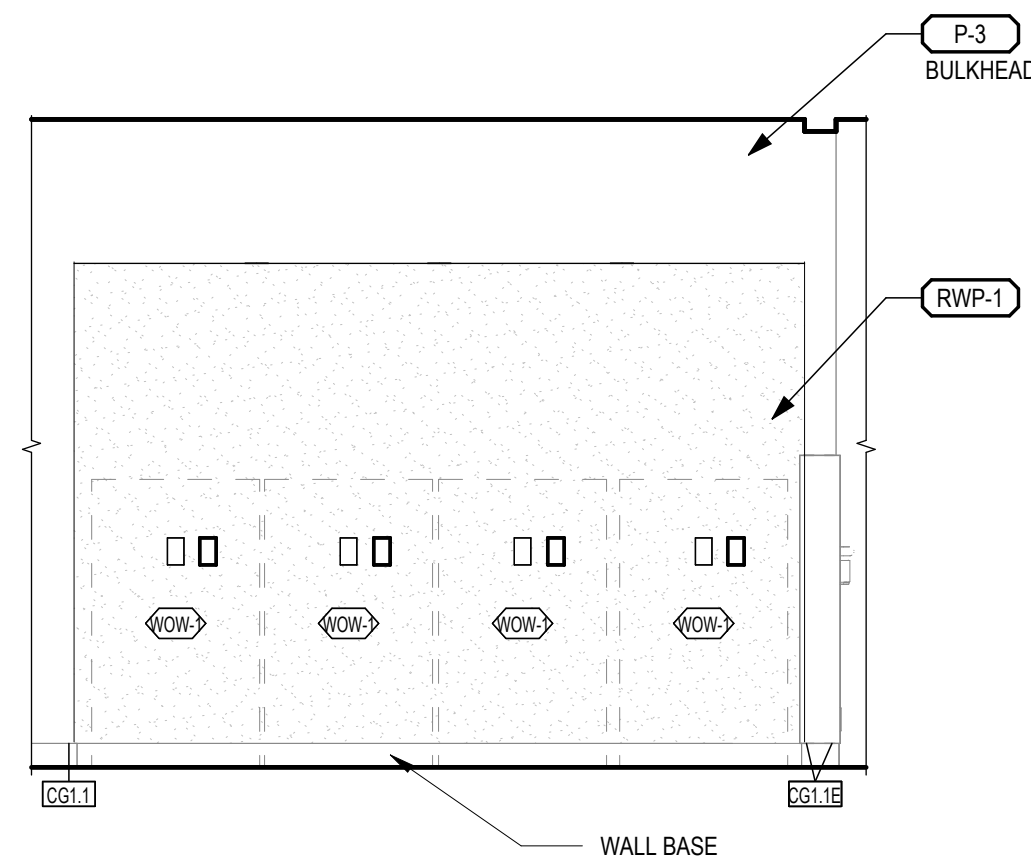


16 ALCOVE A2044 - WEST
A-102.1C 3/8" = 1'-0"

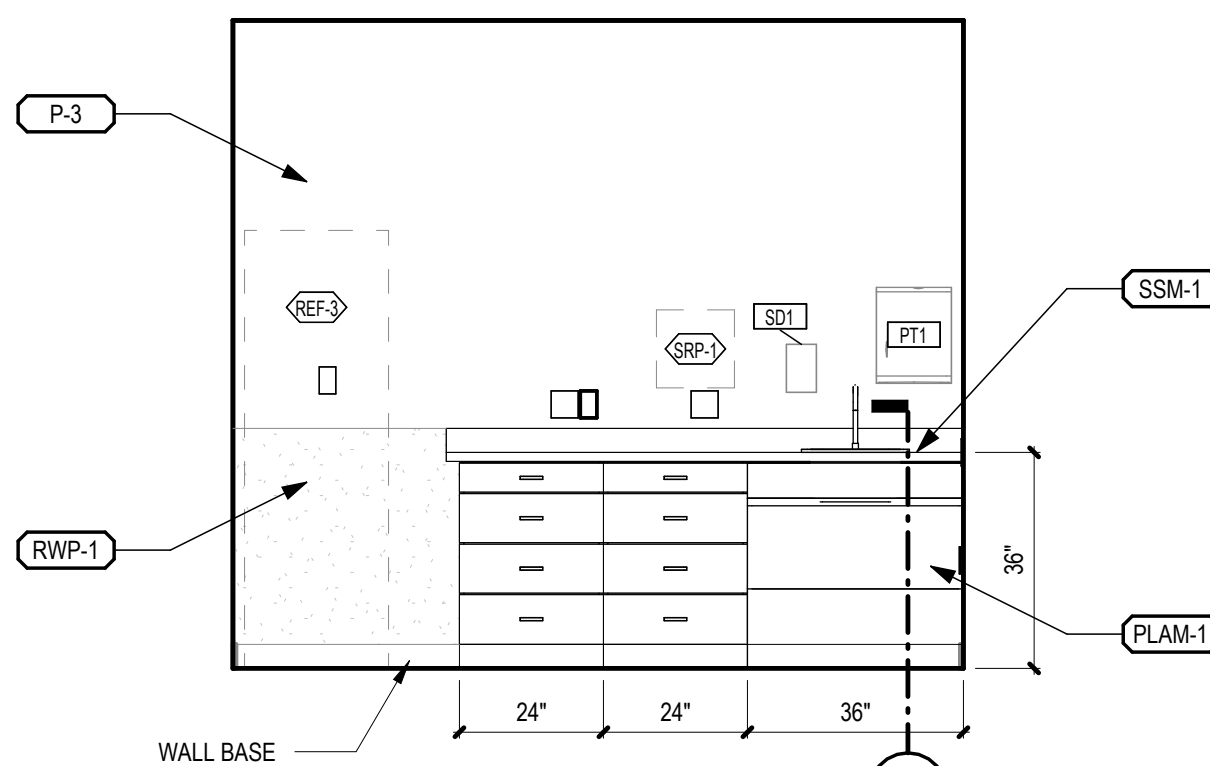


15 MED ROOM A2046 - WEST
A-102.1C 3/8" = 1'-0"

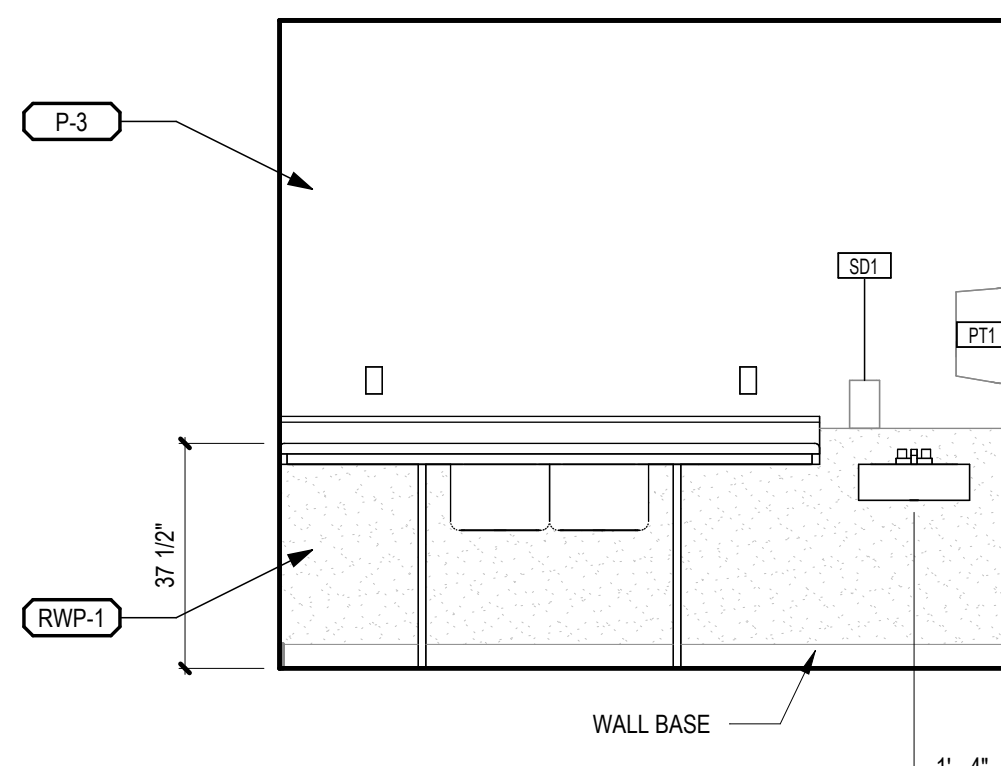


14 SOILED UTILITY A2052 - WEST
A-102.1C 3/8" = 1'-0"

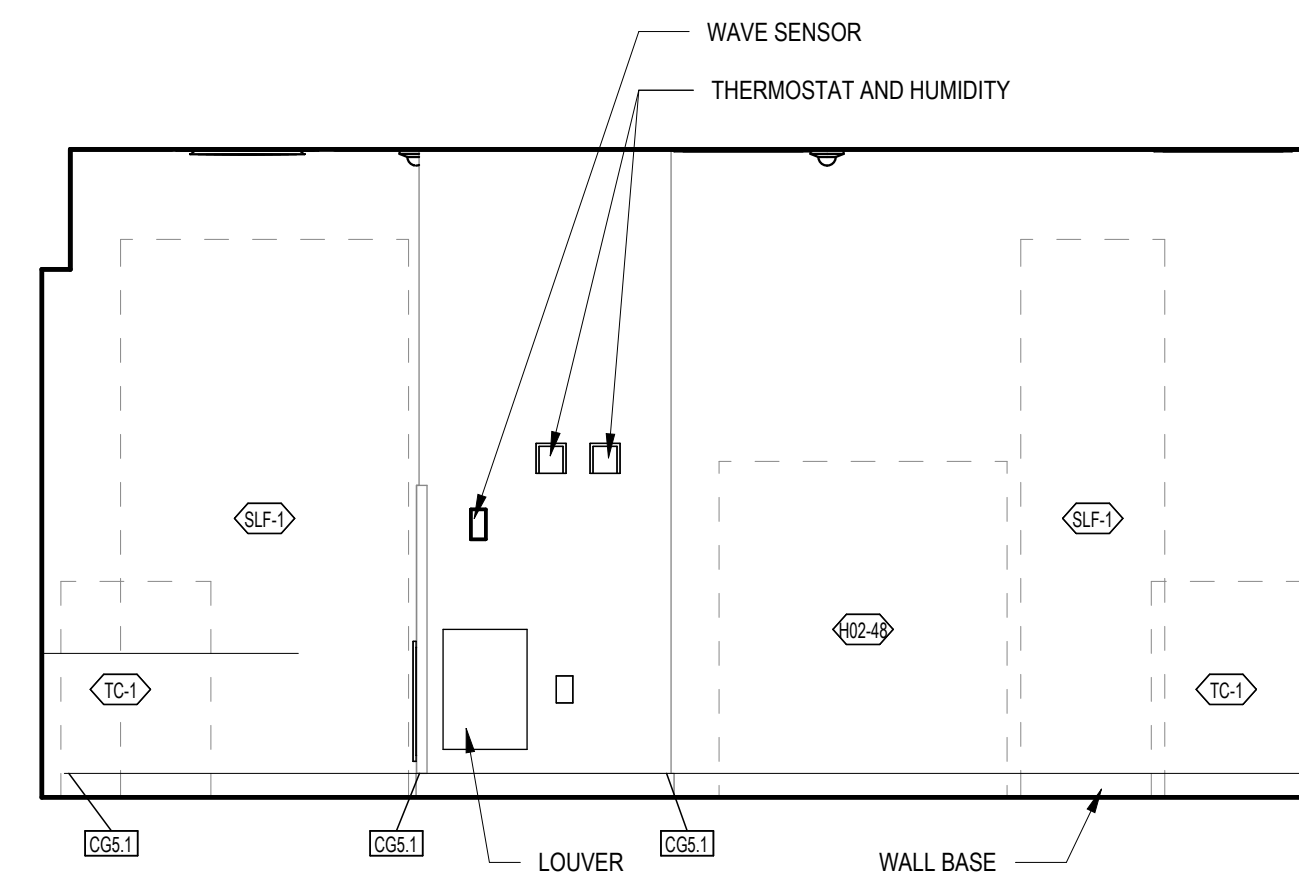


13 STERILE HAZARDOUS DRUG BUFFER ROOM A2057 - WEST
A-132 3/8" = 1'-0"

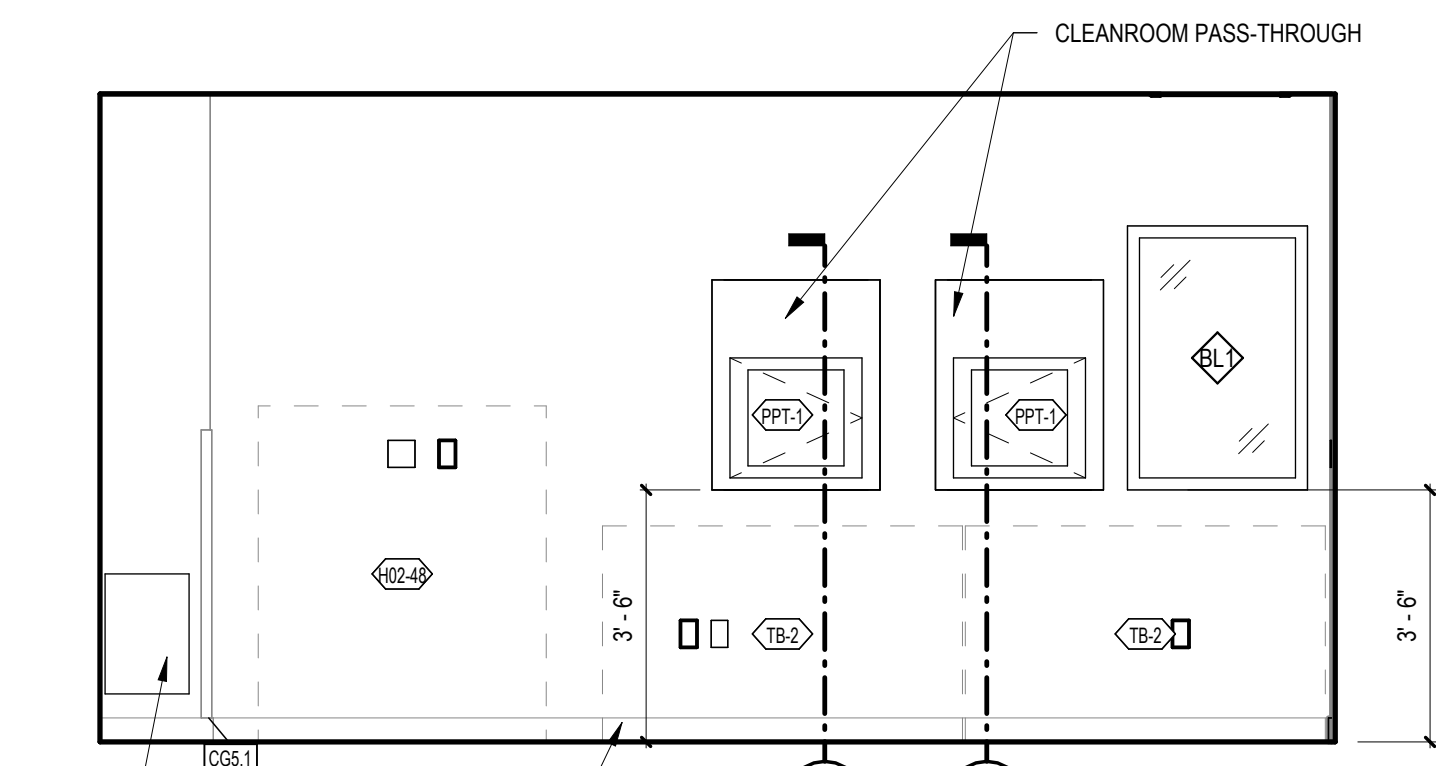


12 STERILE HAZARDOUS DRUG BUFFER ROOM A2057 - EAST
A-132 3/8" = 1'-0"

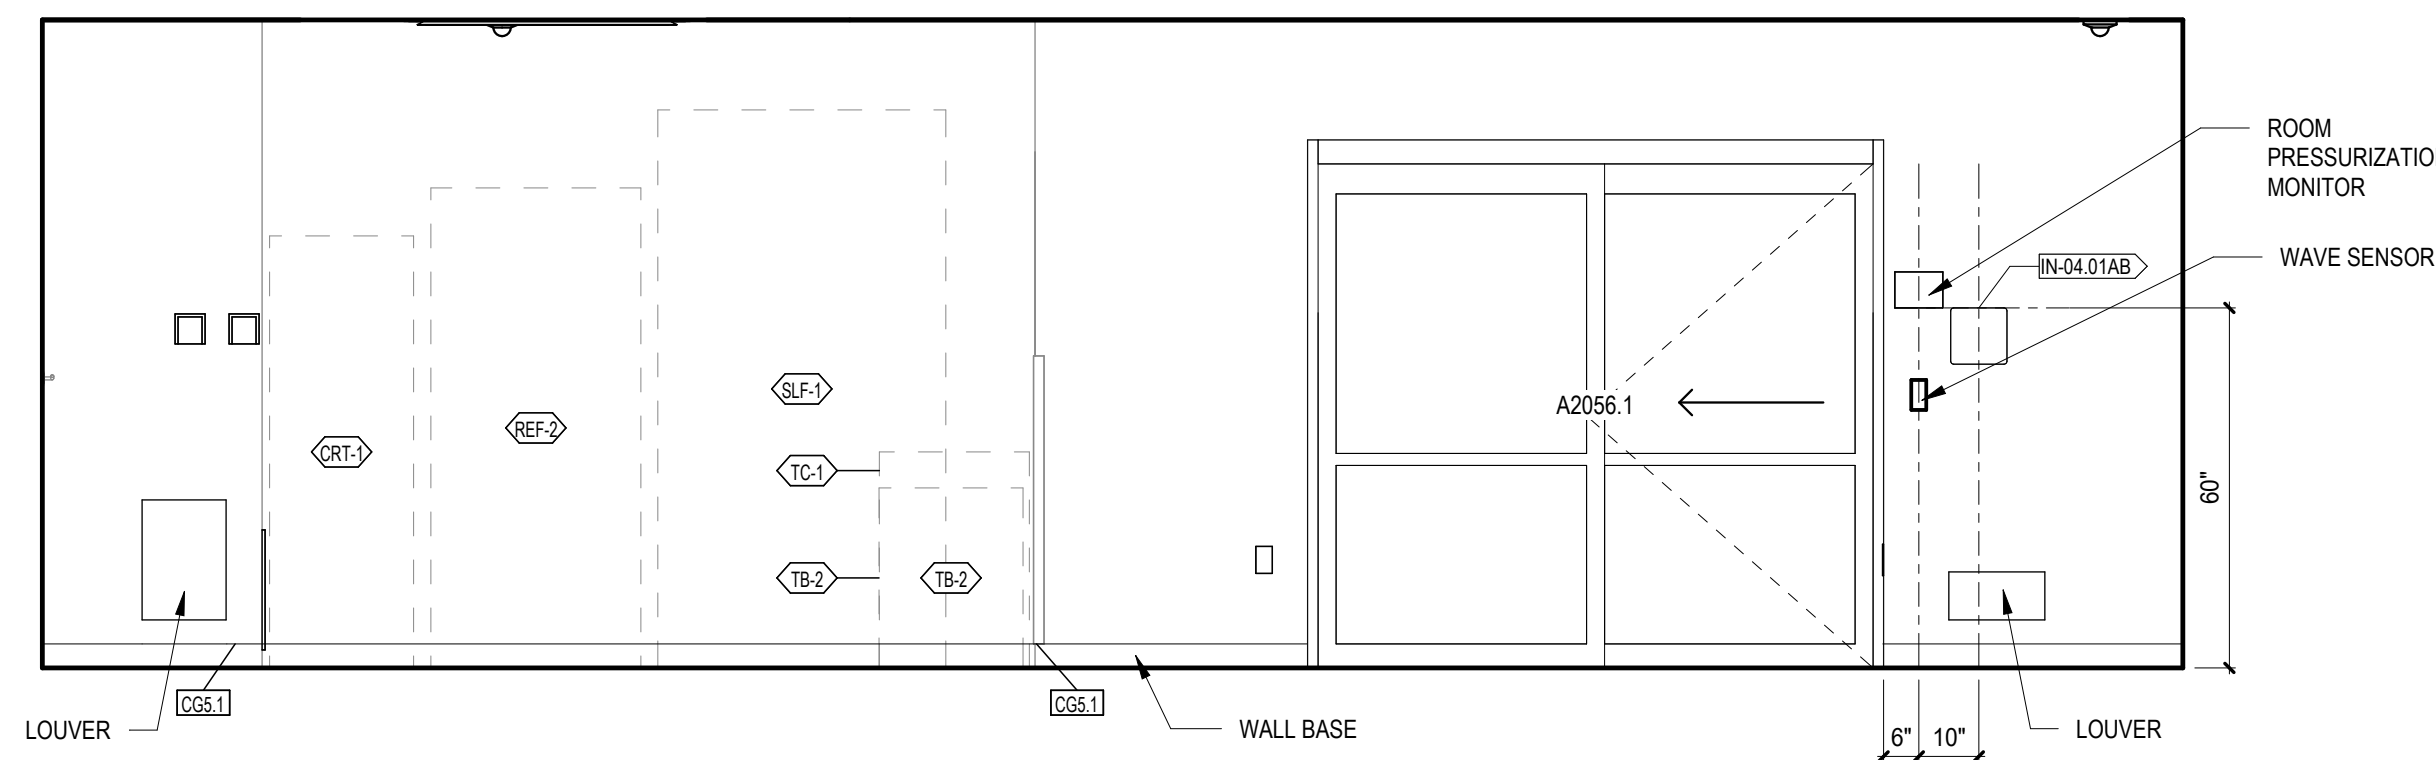


11 ANTE ROOM A2055 - SOUTH
A-132 3/8" = 1'-0"

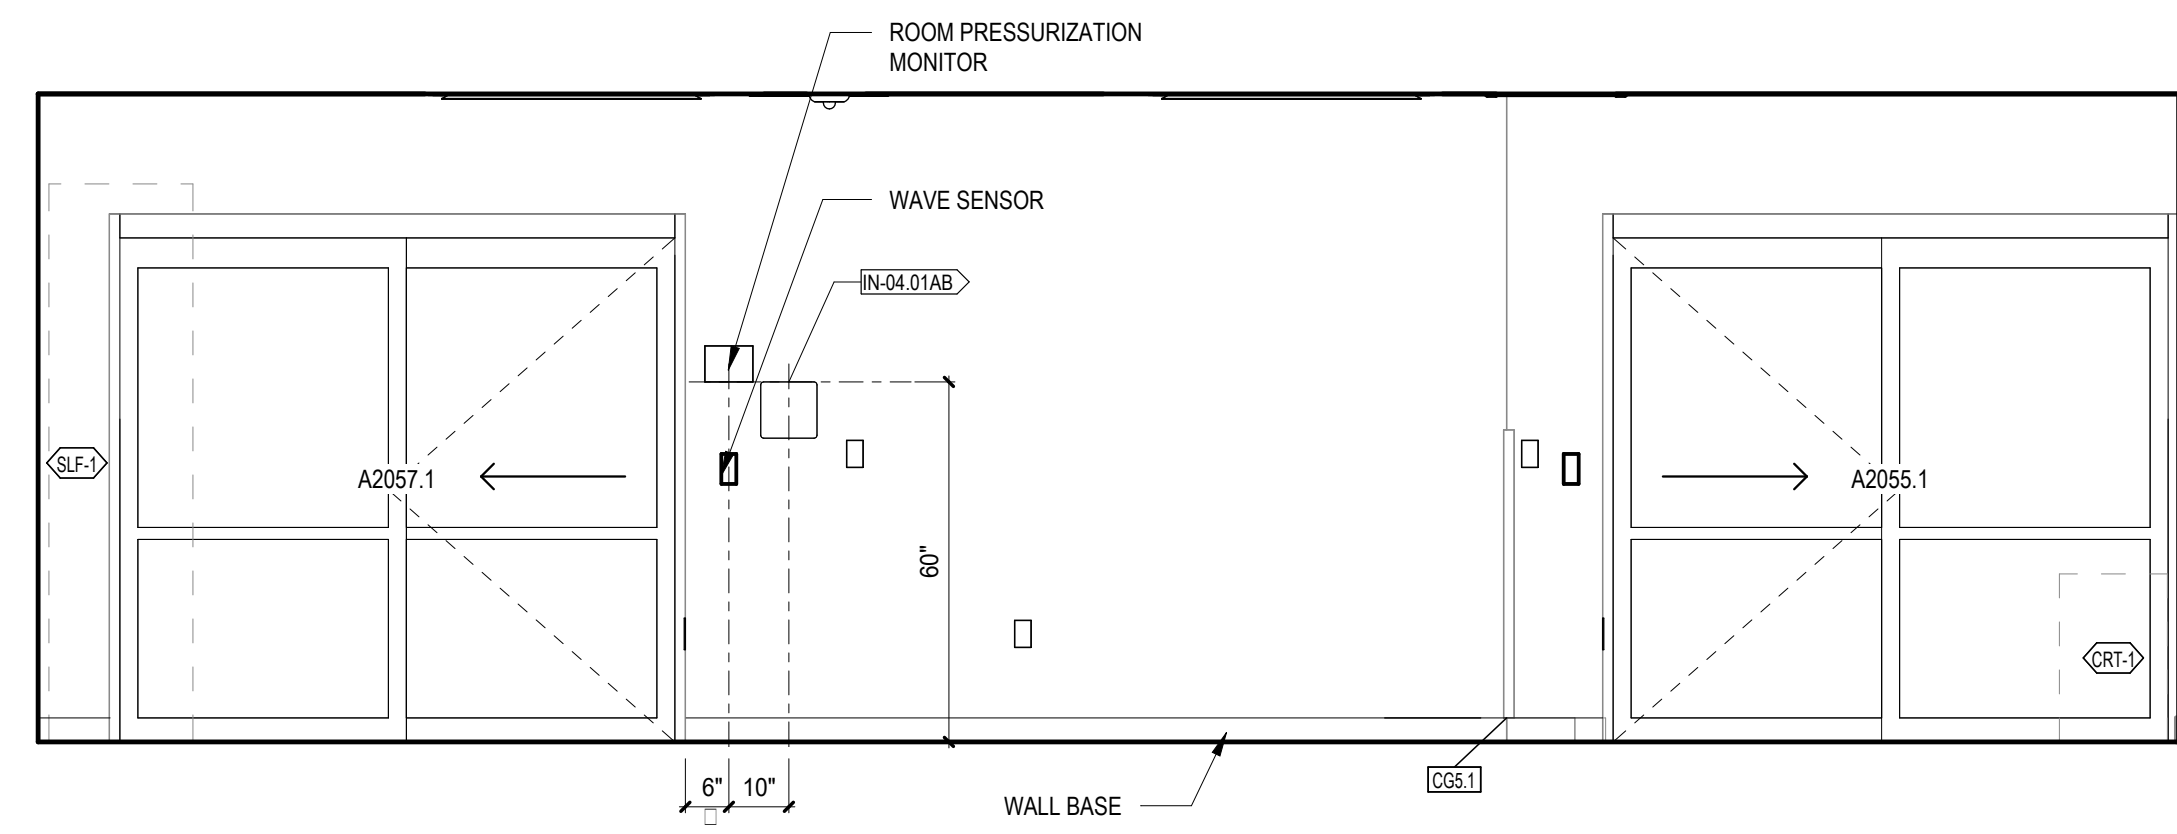


10 ANTE ROOM A2055 - NORTH
A-132 3/8" = 1'-0"

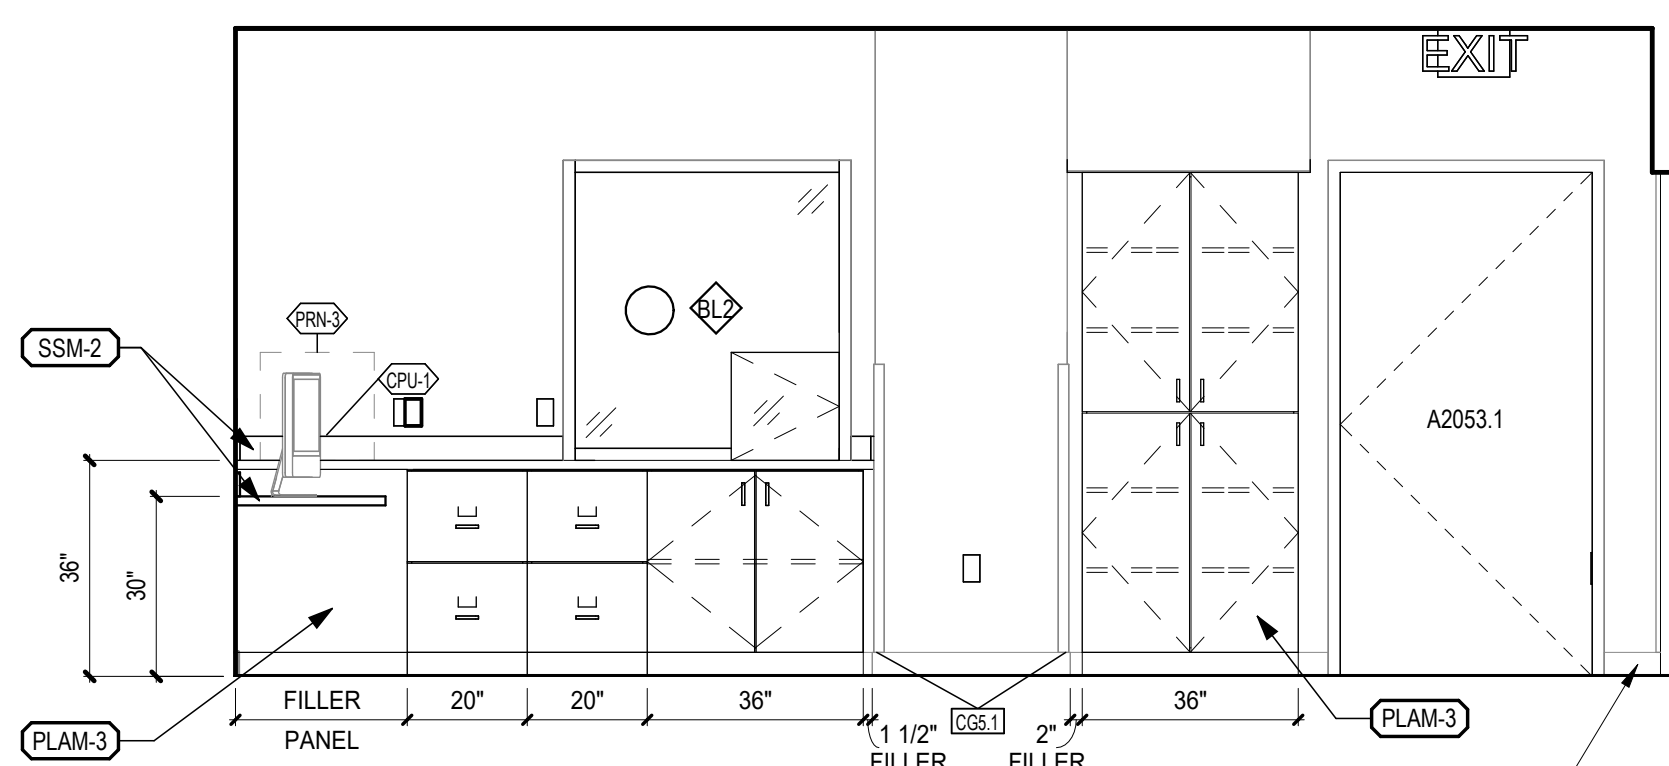


9 PHARMACIST WORK AREA A2053 - EAST
A-132 3/8" = 1'-0"

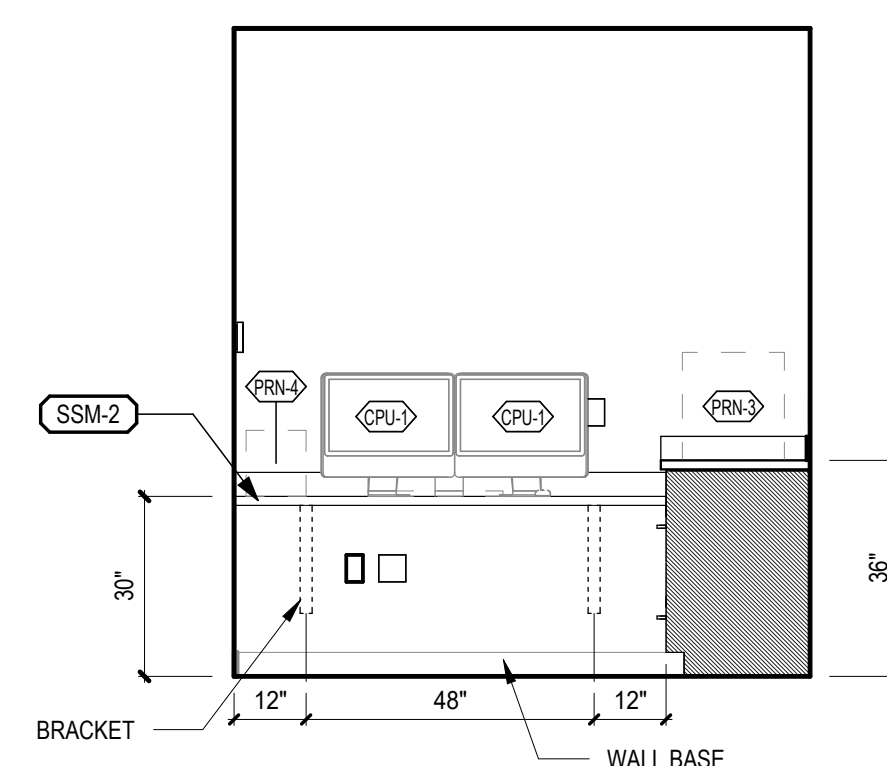


8 PHARMACIST WORK AREA A2053 - NORTH
A-132 3/8" = 1'-0"

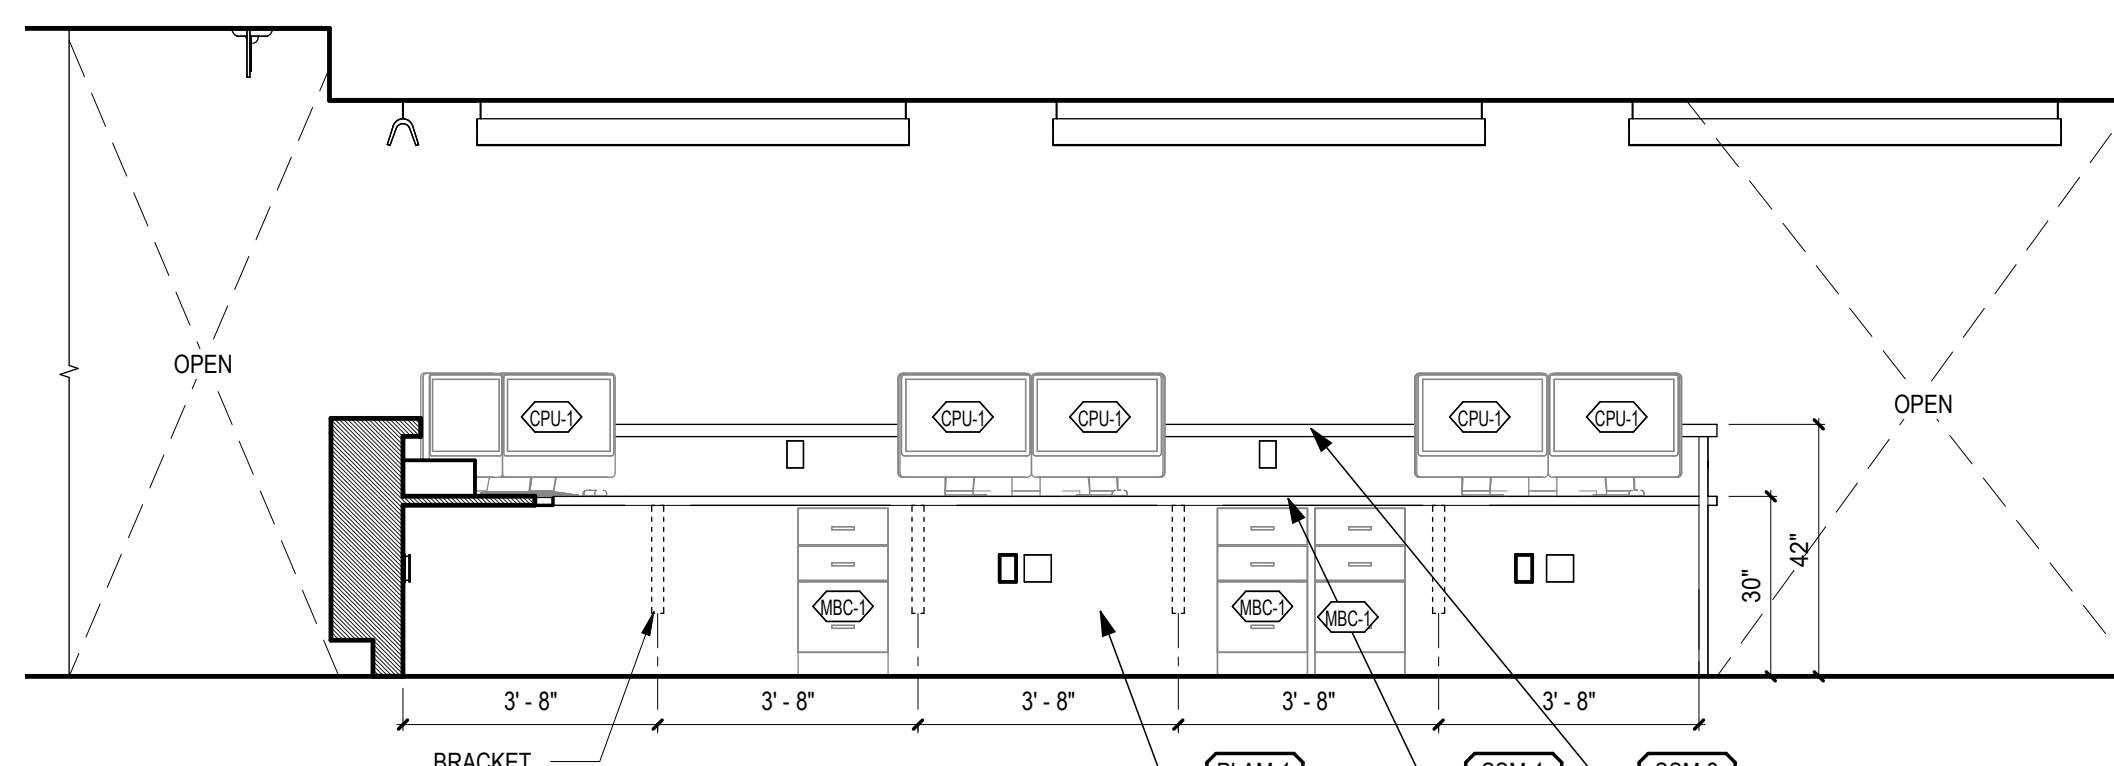


7 NURSE STATION INTERIOR A2075 - EAST
A-102.1C 3/8" = 1'-0"

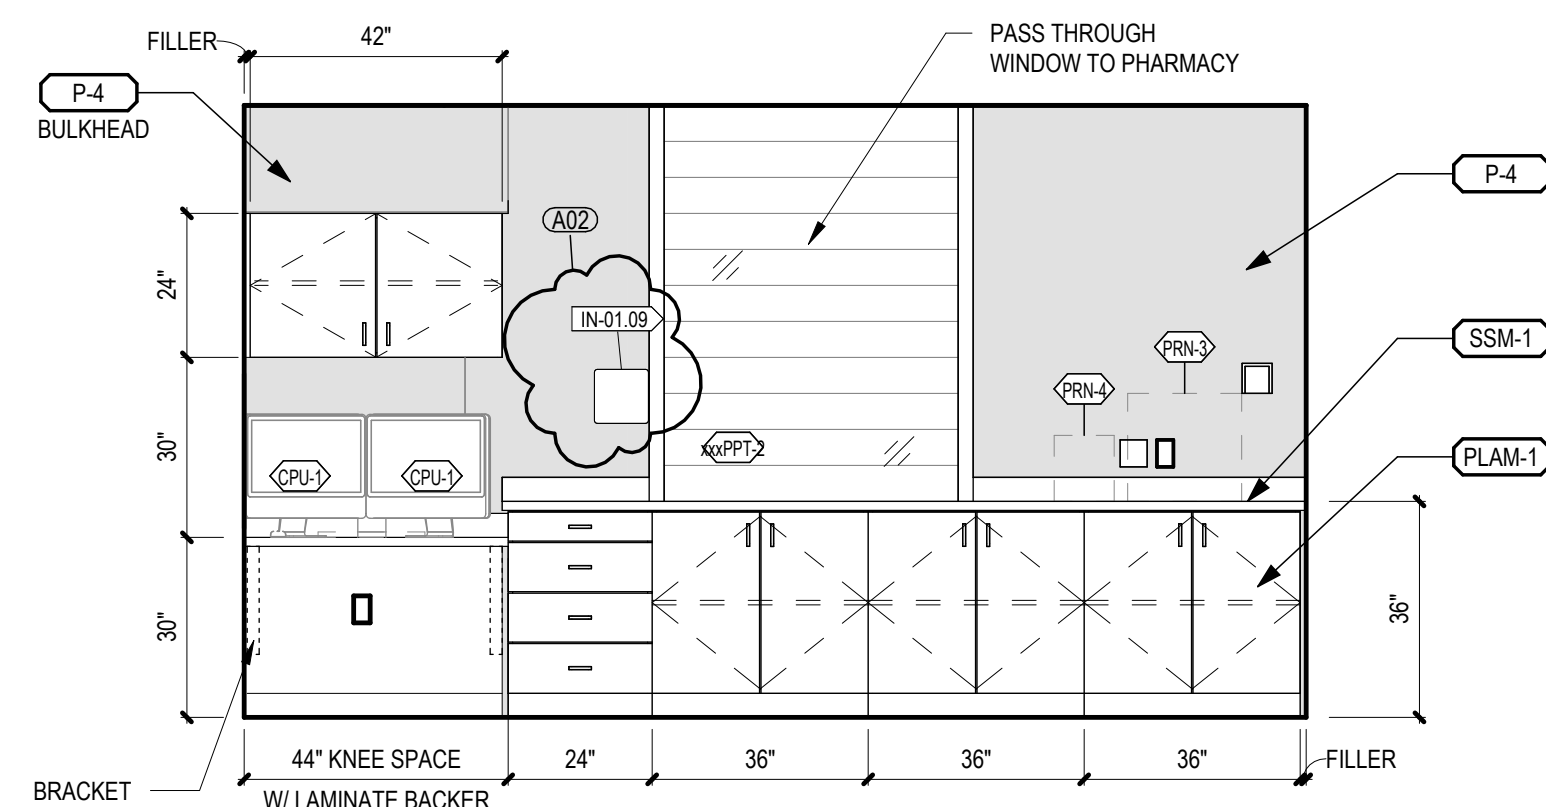


6 NURSE STATION INTERIOR A2075 - WEST 2
A-102.1C 3/8" = 1'-0"

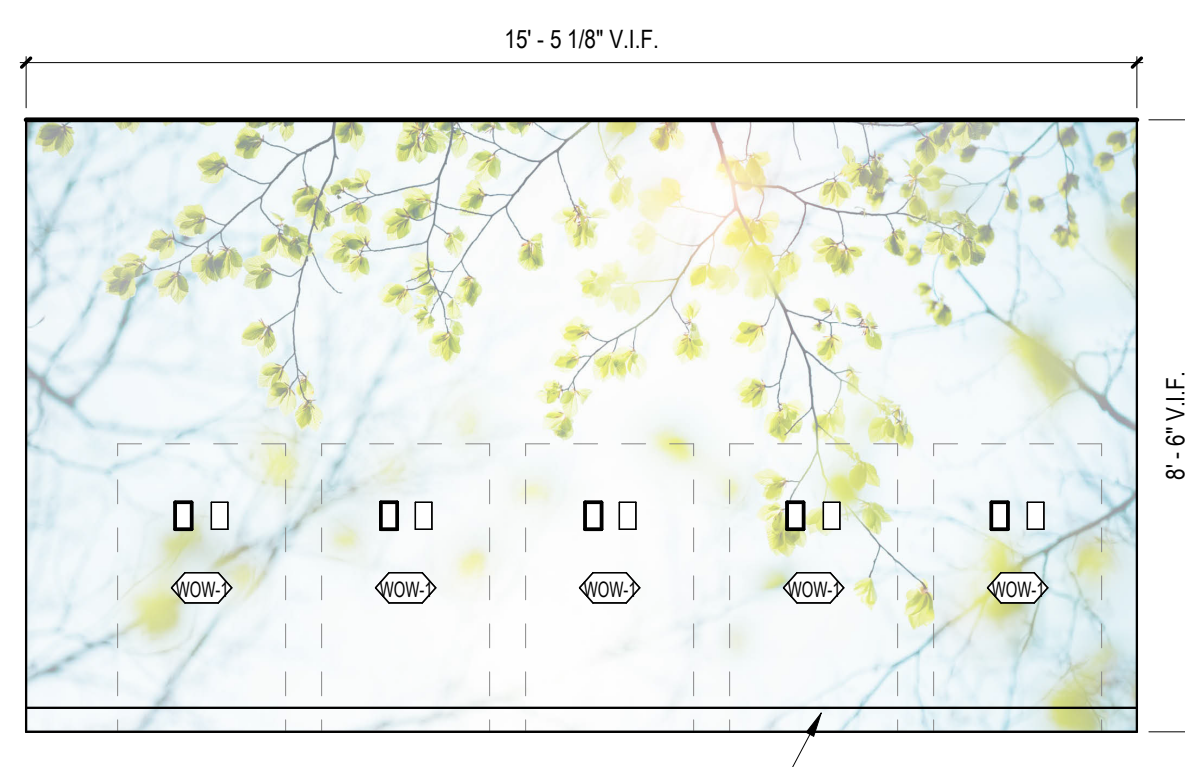


3 NURSE STATION INTERIOR A2075 SOUTH - CUSTOM WALL PROTECTION
A-102.1C 3/8" = 1'-0"

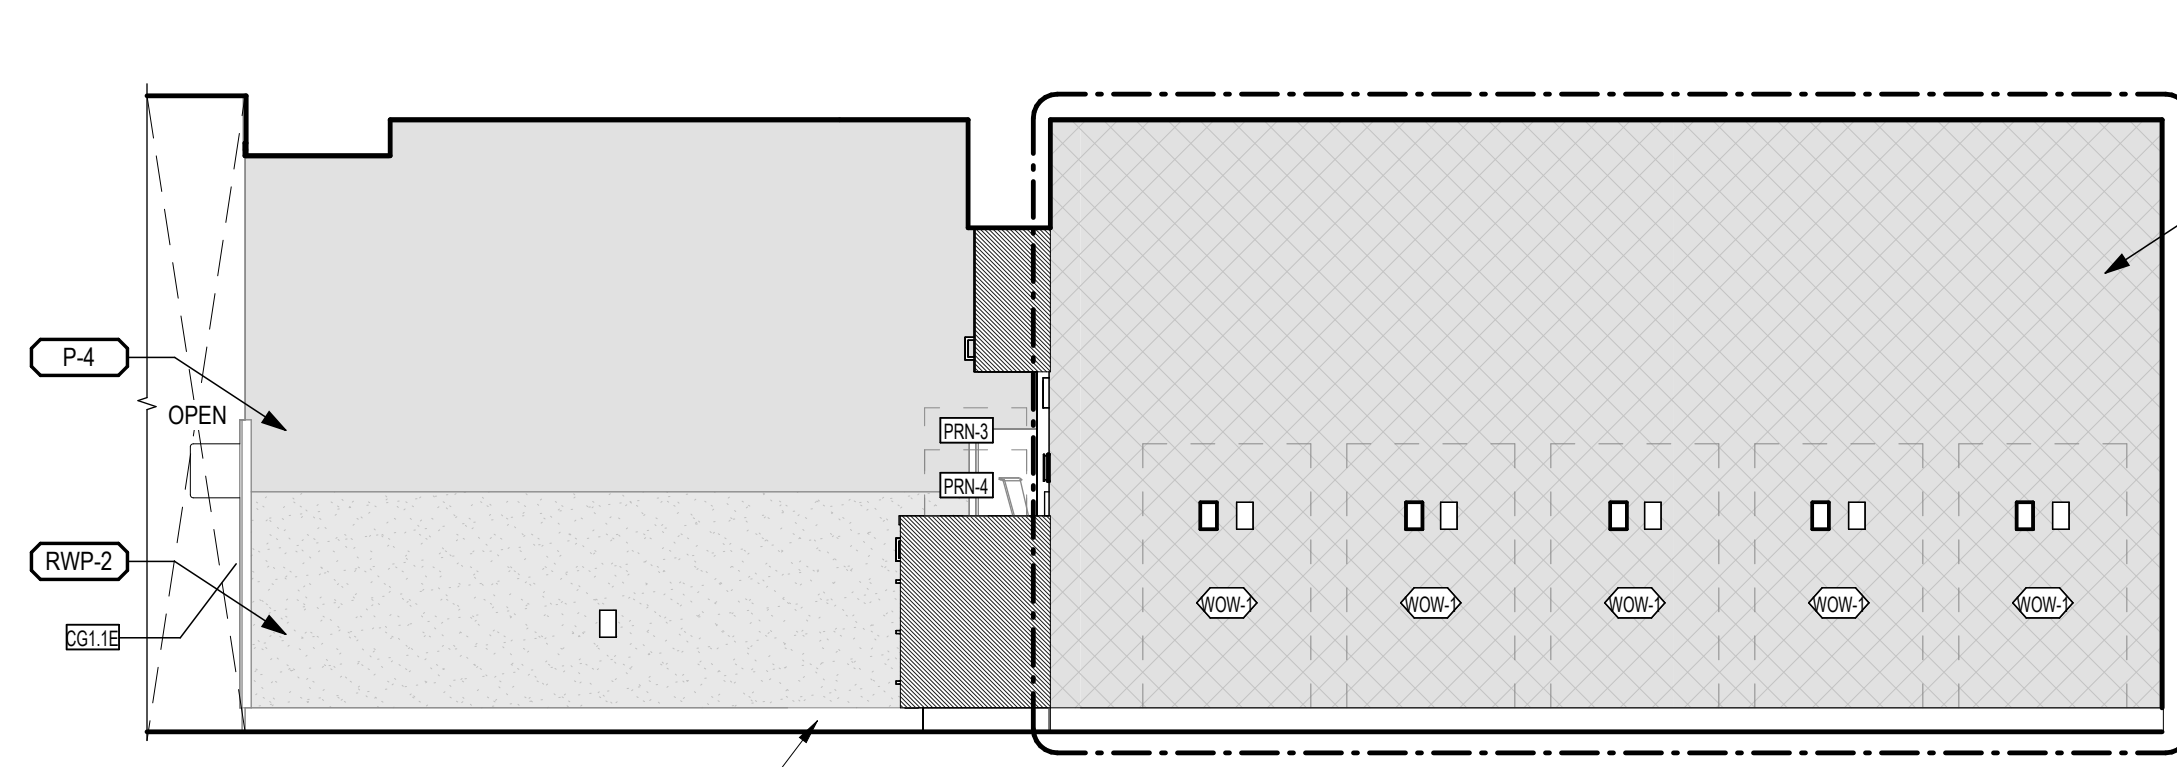

4 NURSE STATION INTERIOR A2075 - SOUTH
A-102.1C 3/8" = 1'-0"

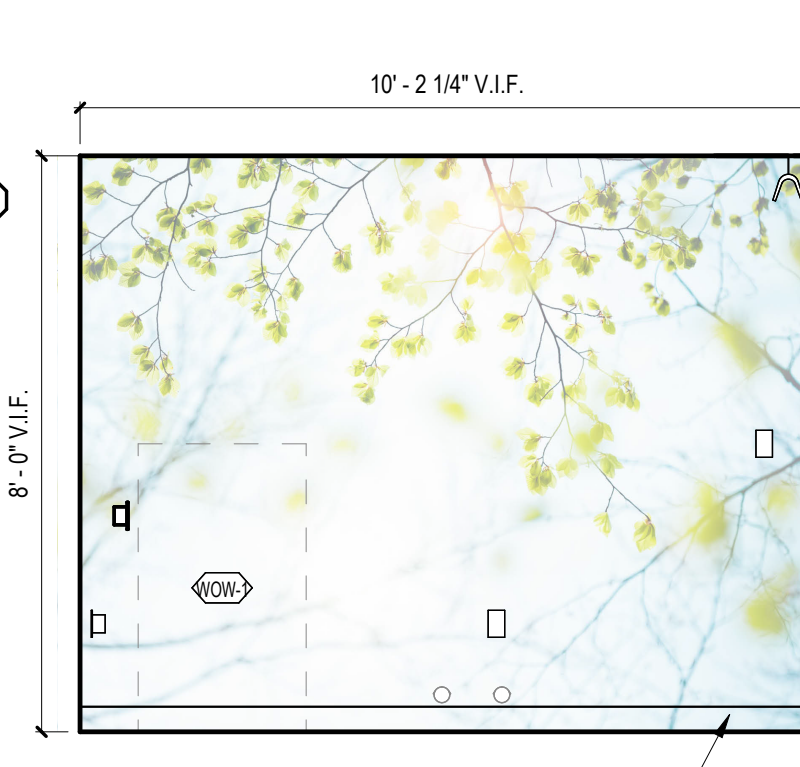

2 NURSE STATION INTERIOR A2075 - WEST 1
A-102.1C 3/8" = 1'-0"

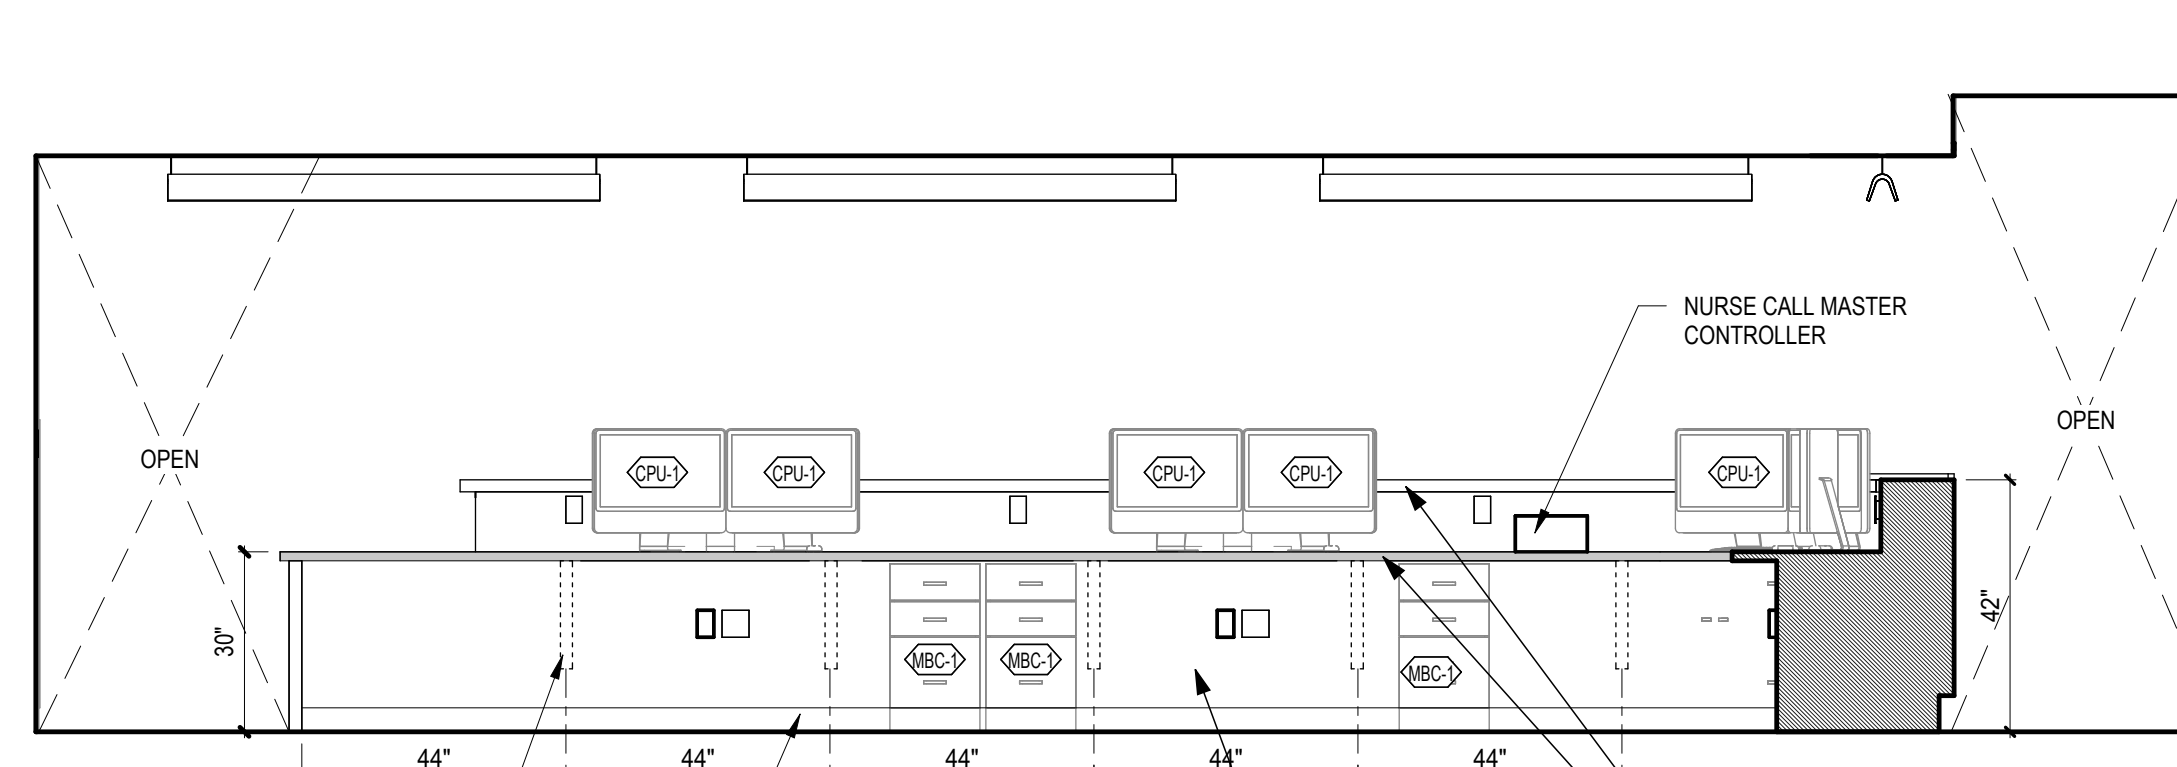

1 NURSE STATION INTERIOR A2075 - NORTH
A-102.1C 3/8" = 1'-0"

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions:		30-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title INTERIOR ELEVATIONS - ZONE 1C Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA / MRB	Project Number 553-21-100 Building Number	Drawing Number A-404
--	--	---	--	--	--	--------------	--	---	--	--	---	---

A

B

C

D

E

F

5/10/2028 8:24:15 AM

Autodesk Docs\VA MI Clinical\210287_A.rvt

VA FORM 08 - 6231

ADDENDUM 02	30-APR-2026
100% BID DOCUMENTS	10-JAN-2025
95% CONSTRUCTION DOCUMENTS - REVISED	27-AUG-2024
95% CONSTRUCTION DOCUMENTS	15-APR-2024
65% DESIGN DEVELOPMENT	29-AUG-2023
Revisions:	Date:

VA STATION
VA HEALTH CARE
Defining EXCELLENCE in the 21st Century
John D. Dingell VA Medical Center
4646 John R. Street
Detroit, MI 48201

CONSULTANT
C20ae
An AtkinsRéalis Company
(866) 454-3923 | WWW.C20AE.COM

ENGINEER OF RECORD
WalterMechanical
Services Inc.
3419 Pierson Place
Flushing, Michigan, 48433
810-230-6202

STAMP


Office of Construction and Facilities Management
VA U.S. Department of Veterans Affairs

Drawing Title
INTERIOR ELEVATIONS - ZONE 1C
Approved:


Phase
100% BID DOCUMENTS
FULLY SPRINKLERED

Project Title
RENOVATE A2 SOUTH FOR CANCER CLINIC
Location
DETROIT, MI
Issue Date
10-JAN-2025

Project Number
553-21-100
Building Number
Drawing Number
A-405

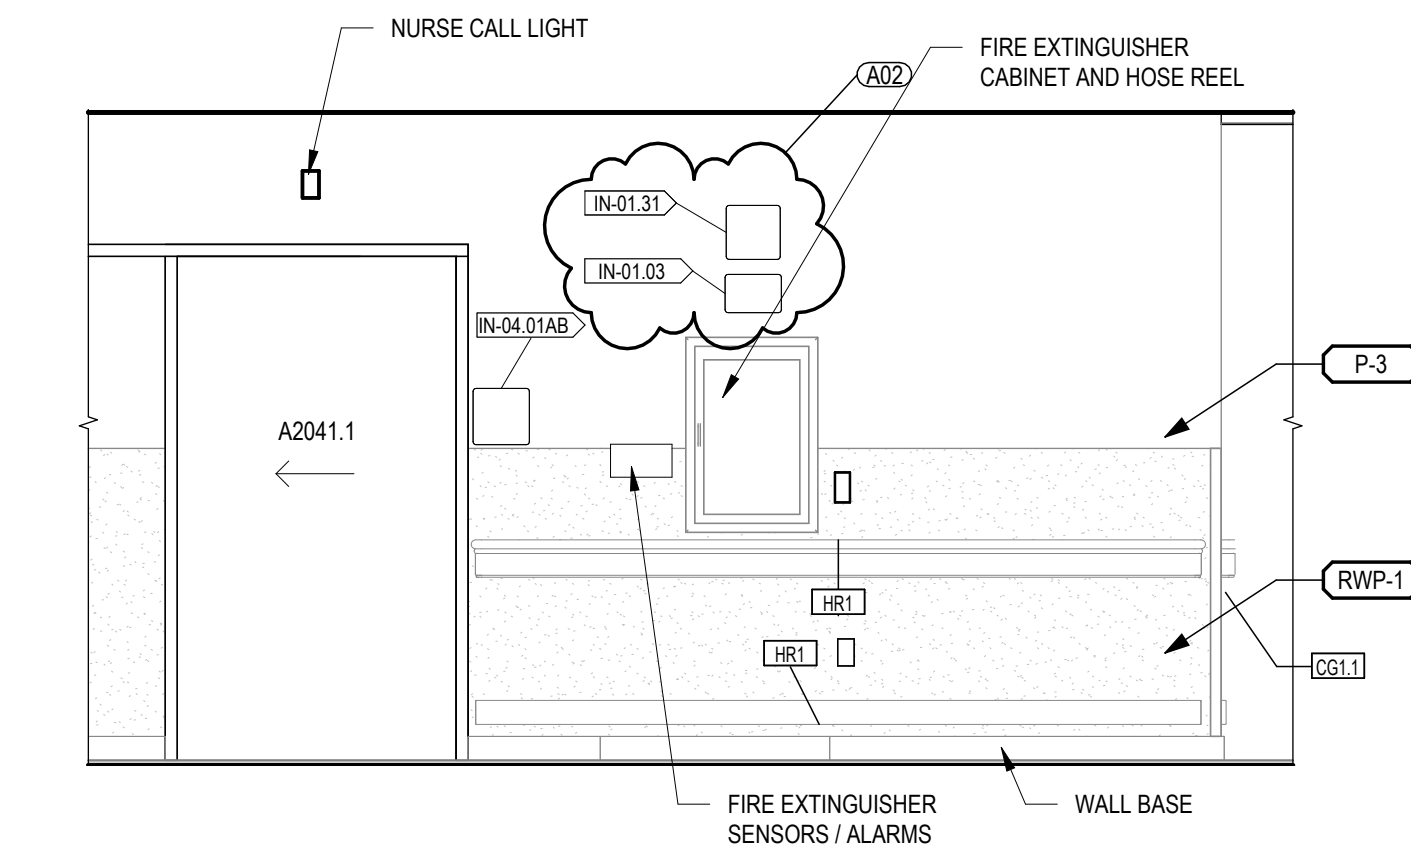


18 CORRIDOR CA213 - NORTH 2
A-102.1C 3/8" = 1'-0"

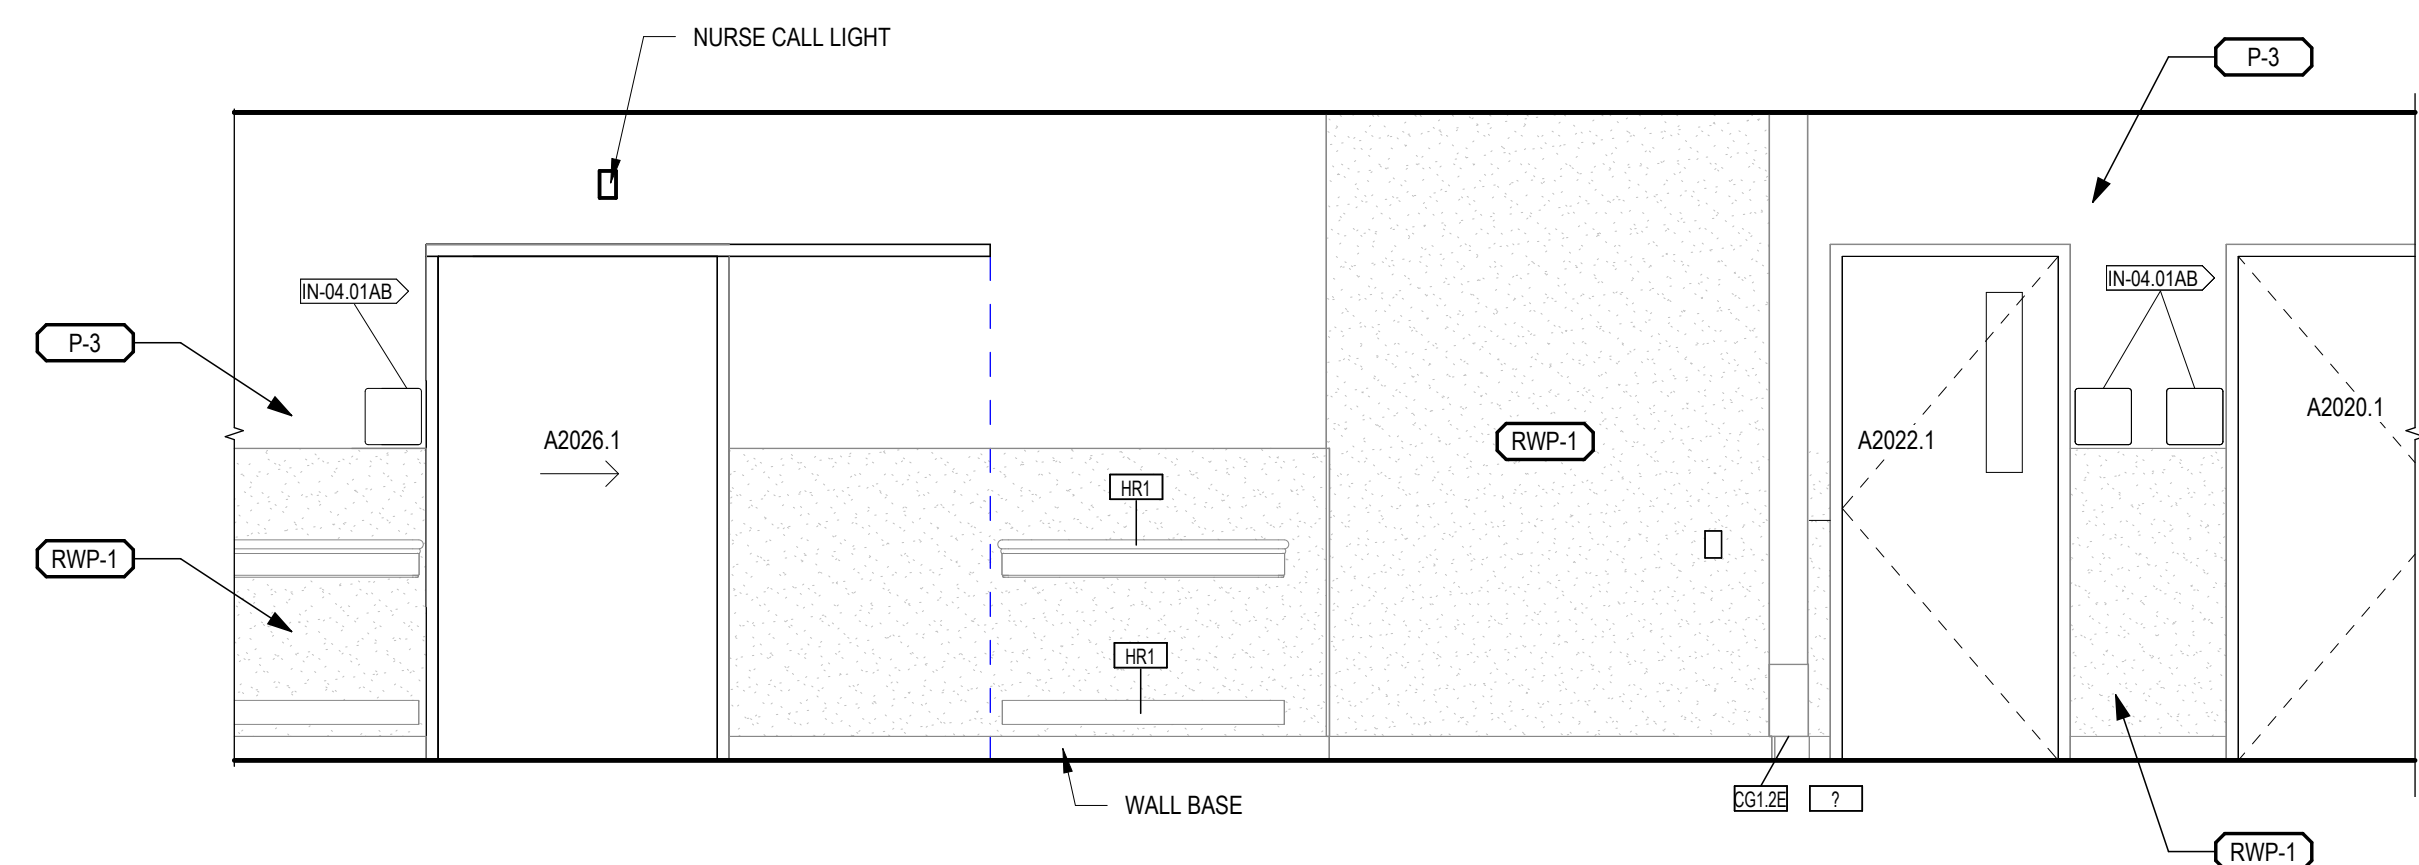


17 CORRIDOR CA213 - SOUTH
A-102.1B 3/8" = 1'-0"


- MILLWORK GENERAL NOTES**
1. CONTRACTOR SHALL FIELD VERIFY ALL FINISHED DIMENSIONS PRIOR TO ORDERING / INSTALLATION.
 2. ALL COUNTERTOP SUPPORT BRACKETS SHALL BE SPACED 42" O.C. MAX. UNO.
 3. ALL EXPOSED SURFACES OF CABINETS ARE TO BE FINISHED. UNO.
 4. QUANTITY AND LOCATIONS OF GROMMETS TO BE COORDINATE WITH OWNER.
 5. PROVIDE FILLER PIECE AT ALL LOCATIONS BETWEEN CABINET AND ADJACENT WALL OR CEILING. FILLER PIECE TO BE FLUSH WITH FACE OF CABINET AND SHALL MATCH MATERIAL AND FINISH OF CABINETS.
 6. ALL COUNTERTOPS LOCATED AT TOP OF BASE CABINETS TO HAVE 1" OVERHANG. UNO.
 7. ALL BASE CABINETS SHALL BE 24" D. UNO.
 8. ALL WALL CABINETS SHALL BE 15" D. UNO.
 9. ALL FULL HEIGHT CABINETS SHALL BE 25" D. UNO.
 10. PROVIDE SEALANT AT ALL EDGES WHERE COUNTERTOP, SIDESPLASH OR BACKSPLASH ADJUT ADJACENT SURFACES

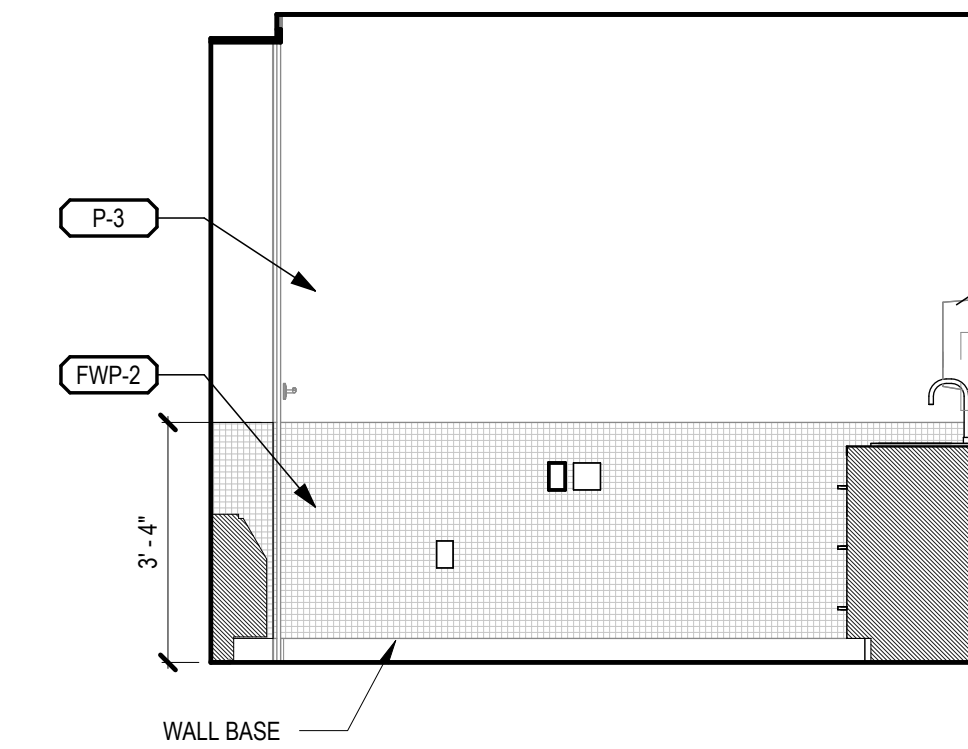


16 EXAM A2038 - WEST
A-102.1A 3/8" = 1'-0"

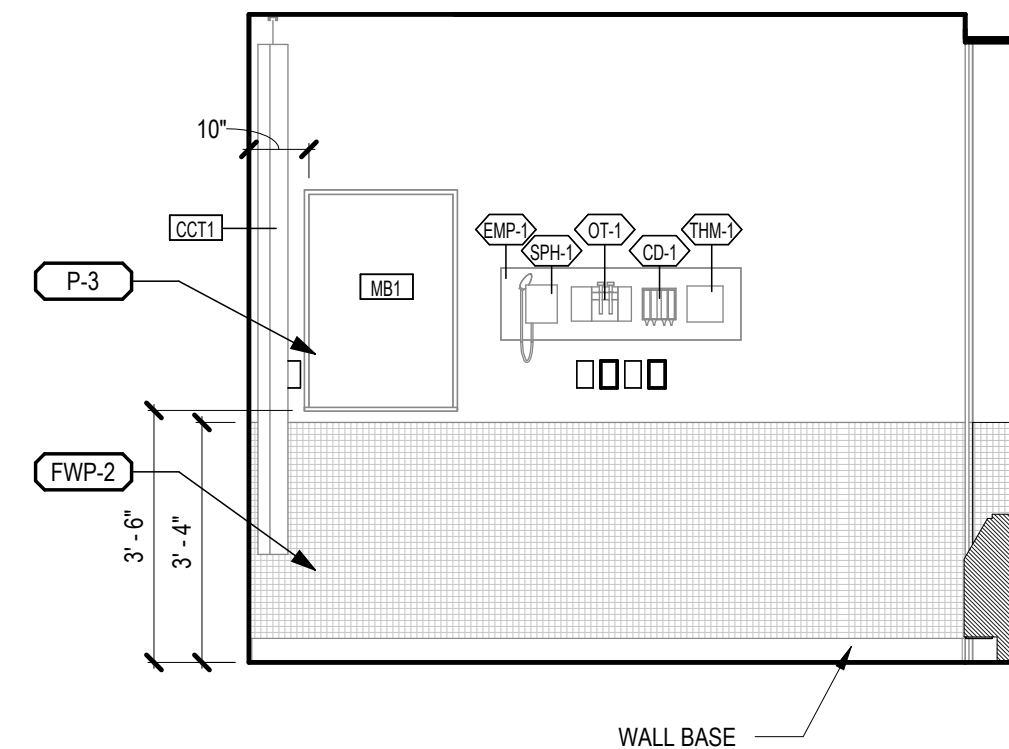


15 EXAM A2038 - EAST
A-102.1A 3/8" = 1'-0"

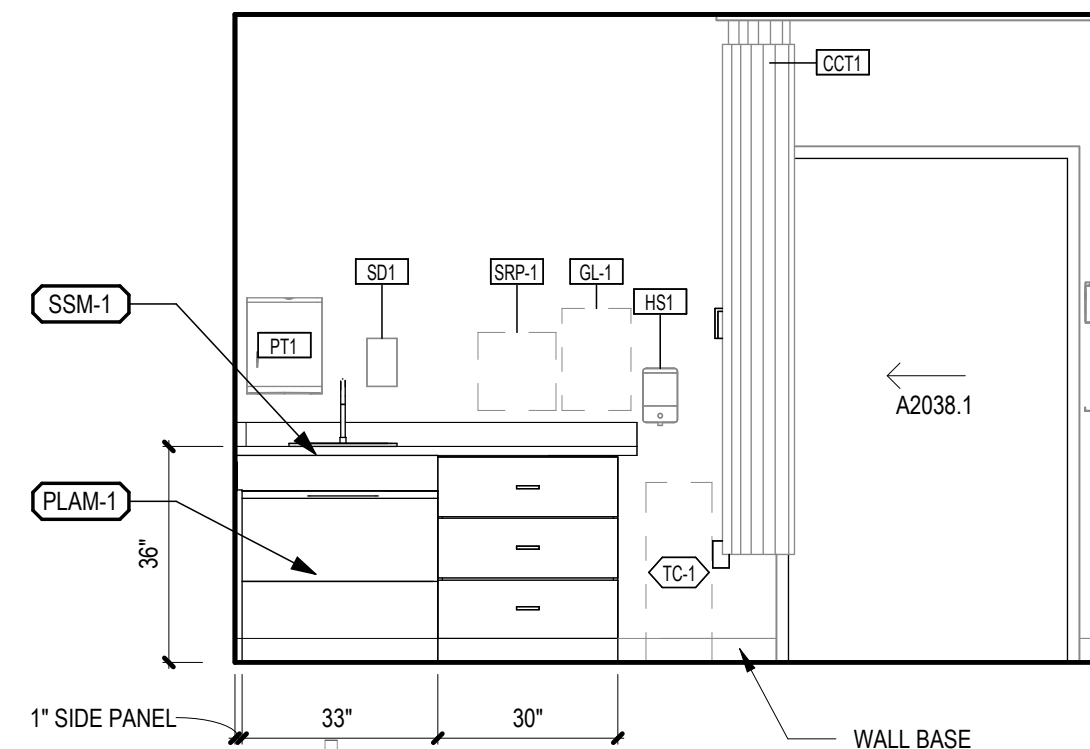


14 EXAM A2038 - NORTH
A-102.1A 3/8" = 1'-0"

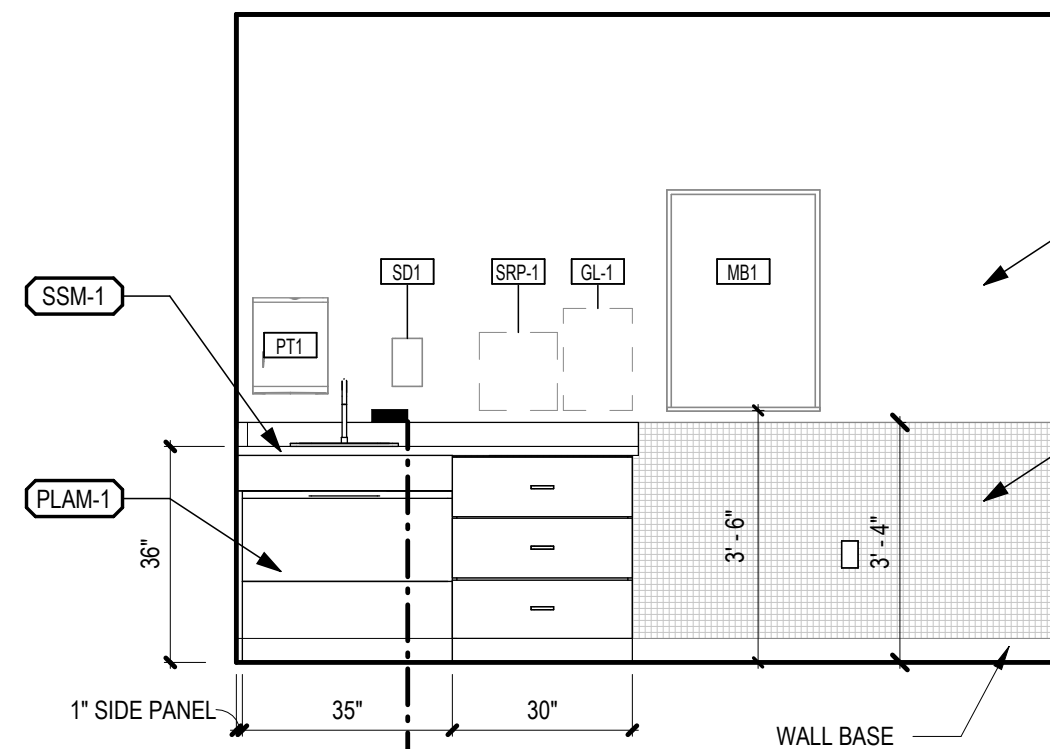


13 EXAM A2039 - WEST
A-102.1A 3/8" = 1'-0"

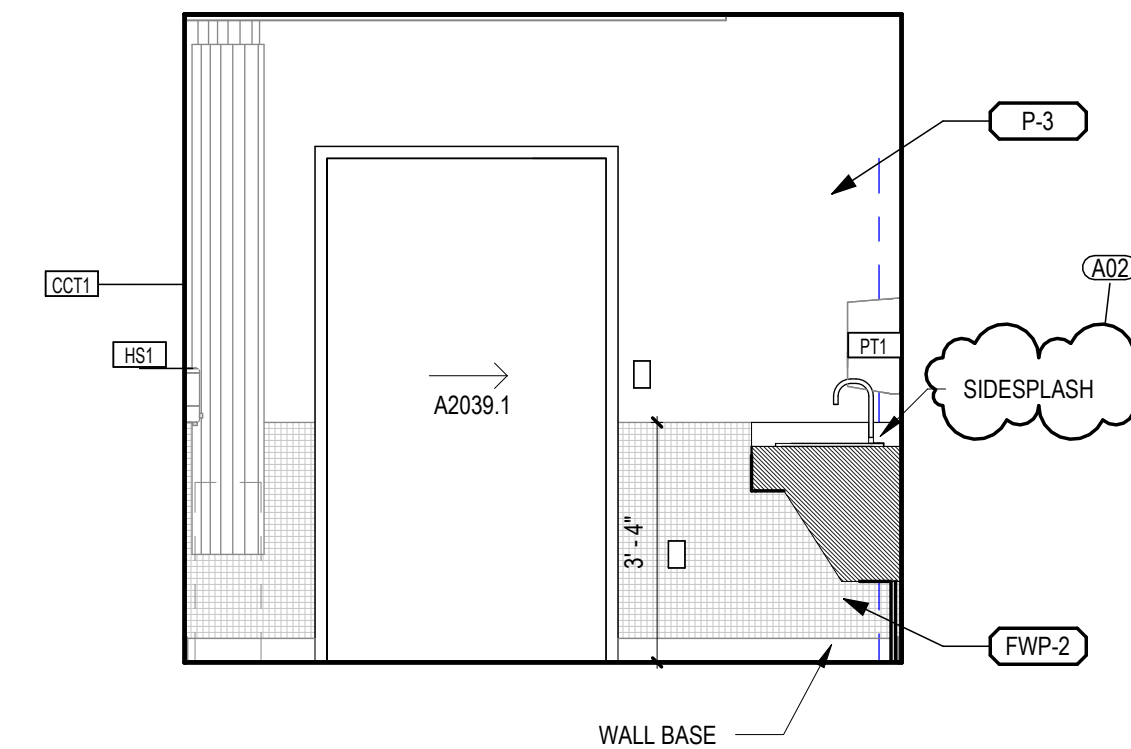


12 EXAM A2039 - SOUTH
A-102.1A 3/8" = 1'-0"

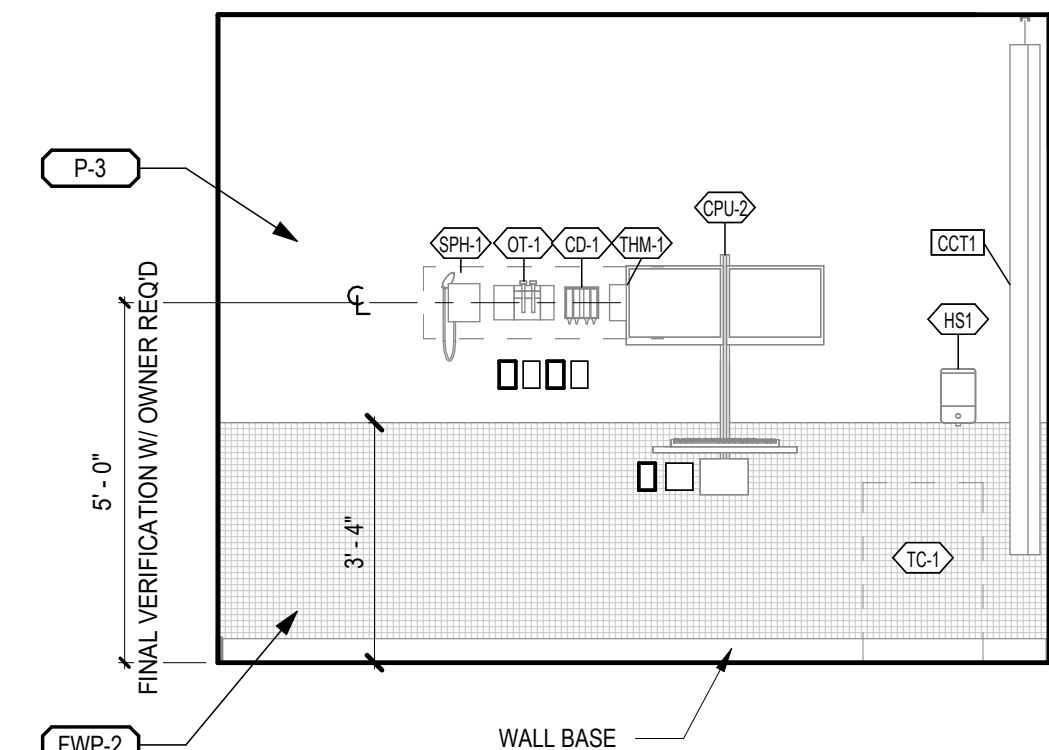


11 EXAM A2039 - EAST
A-102.1A 3/8" = 1'-0"

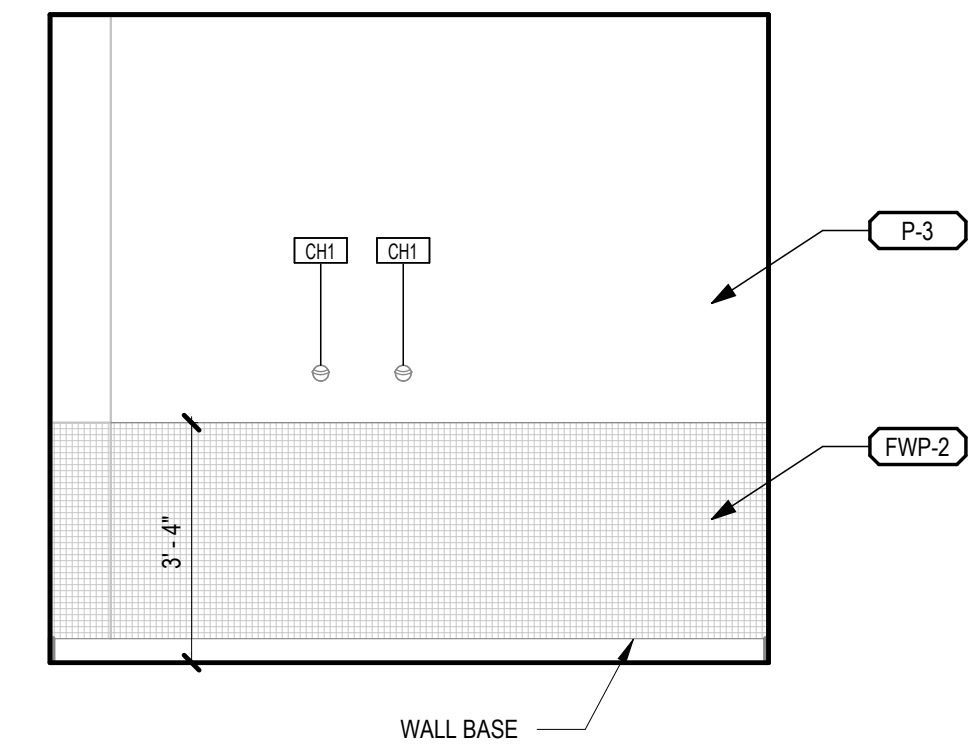


10 EXAM A2039 - NORTH
A-102.1A 3/8" = 1'-0"

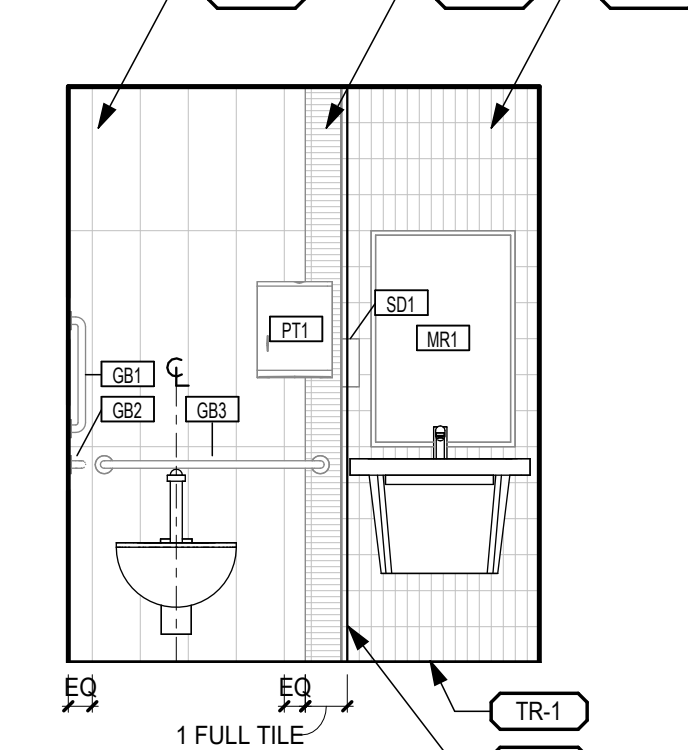


9 STAFF TOILET A2045 - EAST
A-102.1C 3/8" = 1'-0"

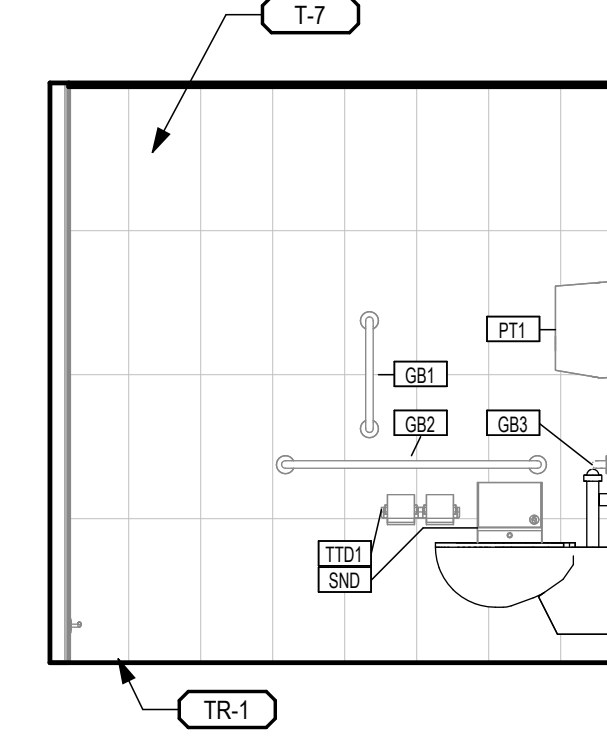


8 STAFF TOILET A2045 - NORTH
A-102.1C 3/8" = 1'-0"

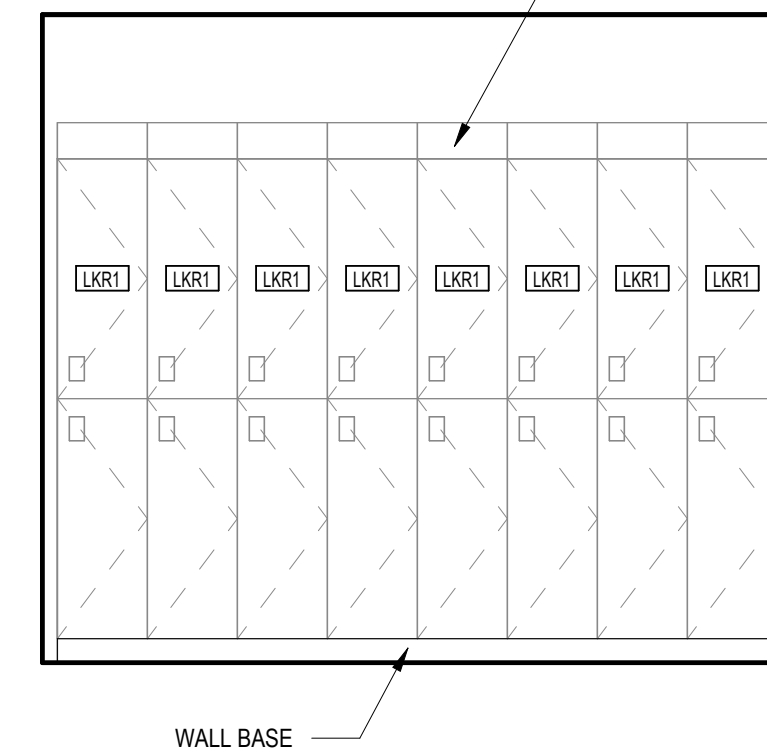


7 LOCKER ROOM A2047A - NORTH
A-102.1C 3/8" = 1'-0"

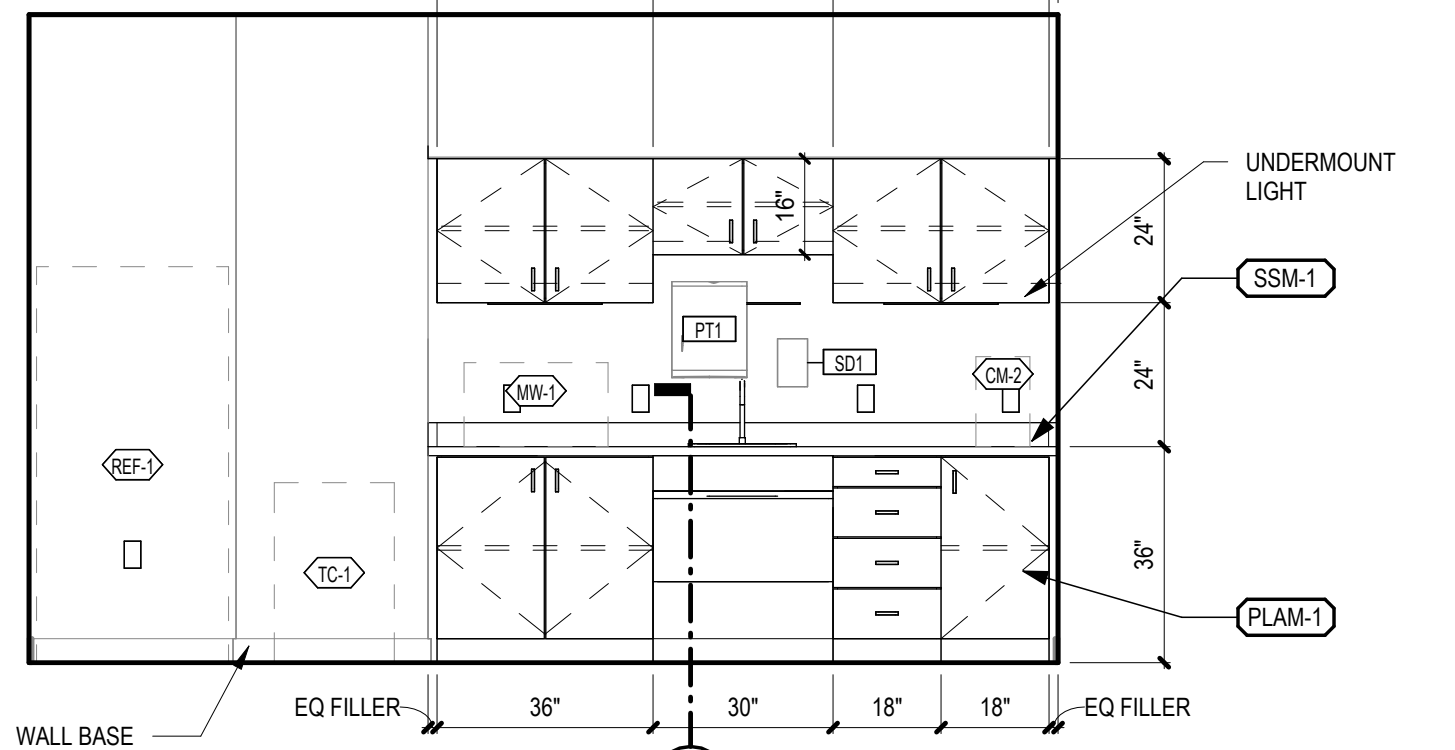


6 BREAK ROOM A2047 - WEST
A-102.1C 3/8" = 1'-0"

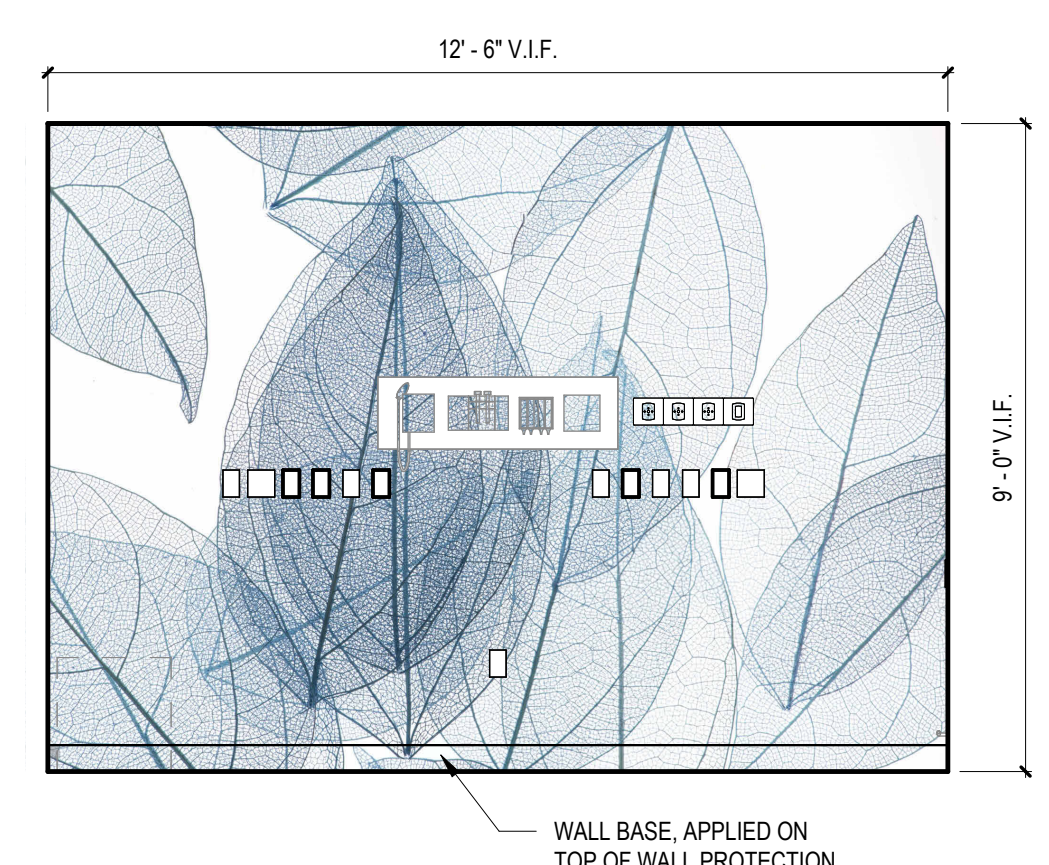


5 INFUSION ROOM - CUSTOM WALL PROTECTION
A-405 3/8" = 1'-0"

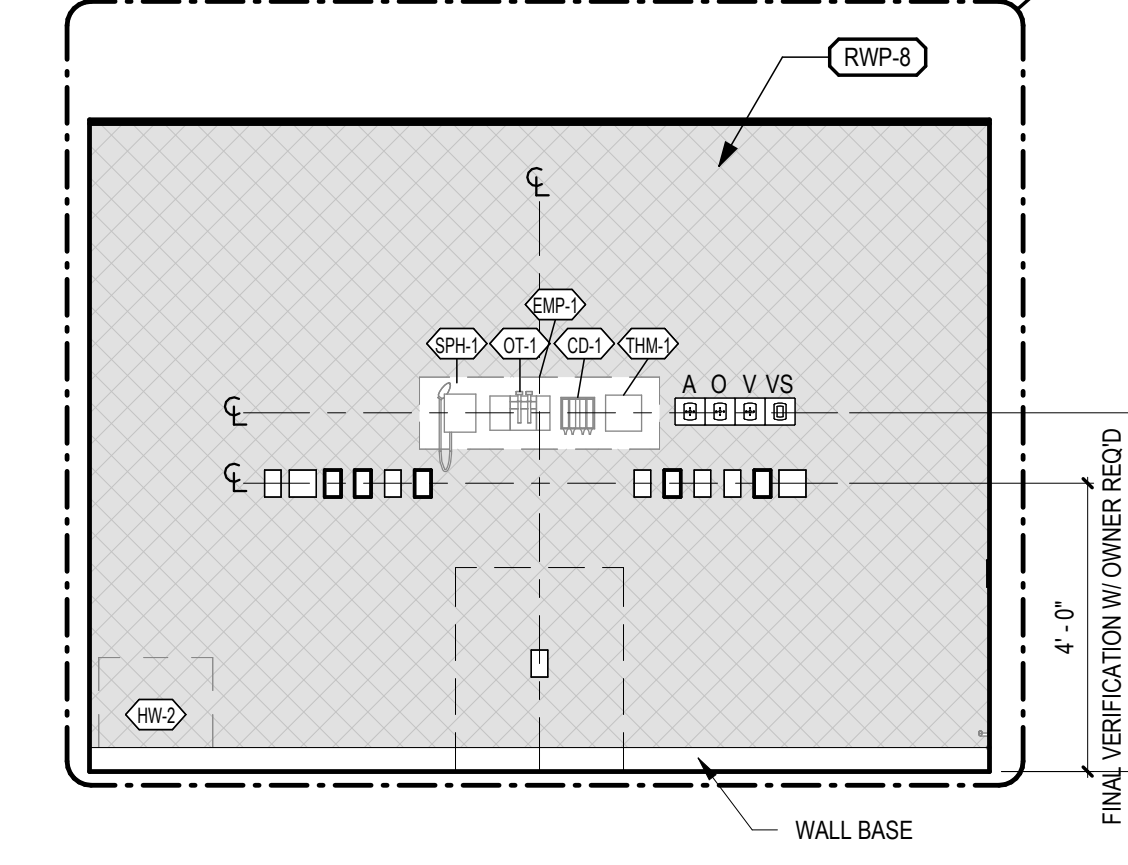


4 INFUSION ROOM A2064 - WEST
A-102.1A 3/8" = 1'-0"

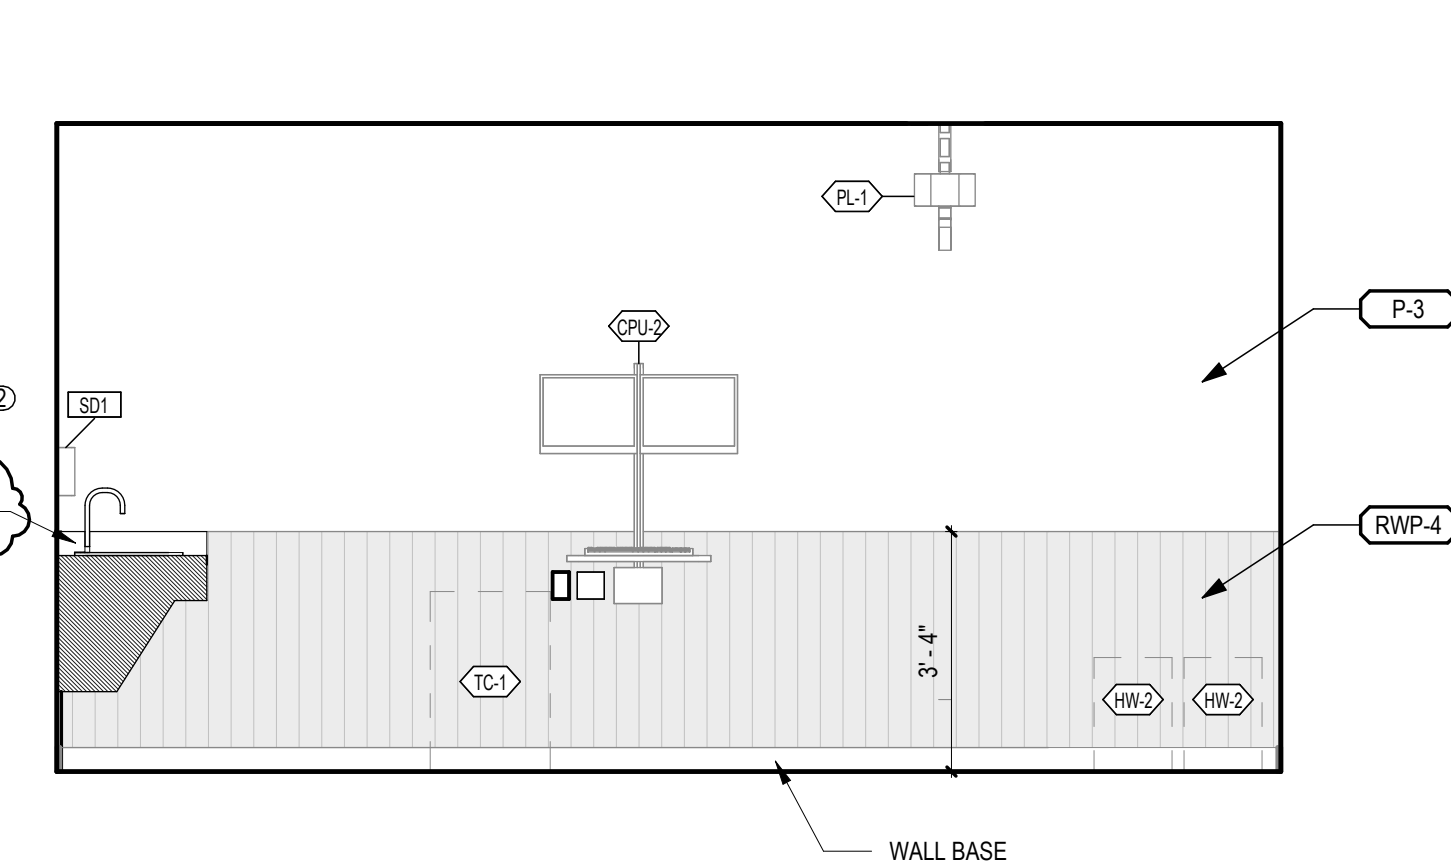

3 INFUSION ROOM A2064 - SOUTH
A-102.1A 3/8" = 1'-0"

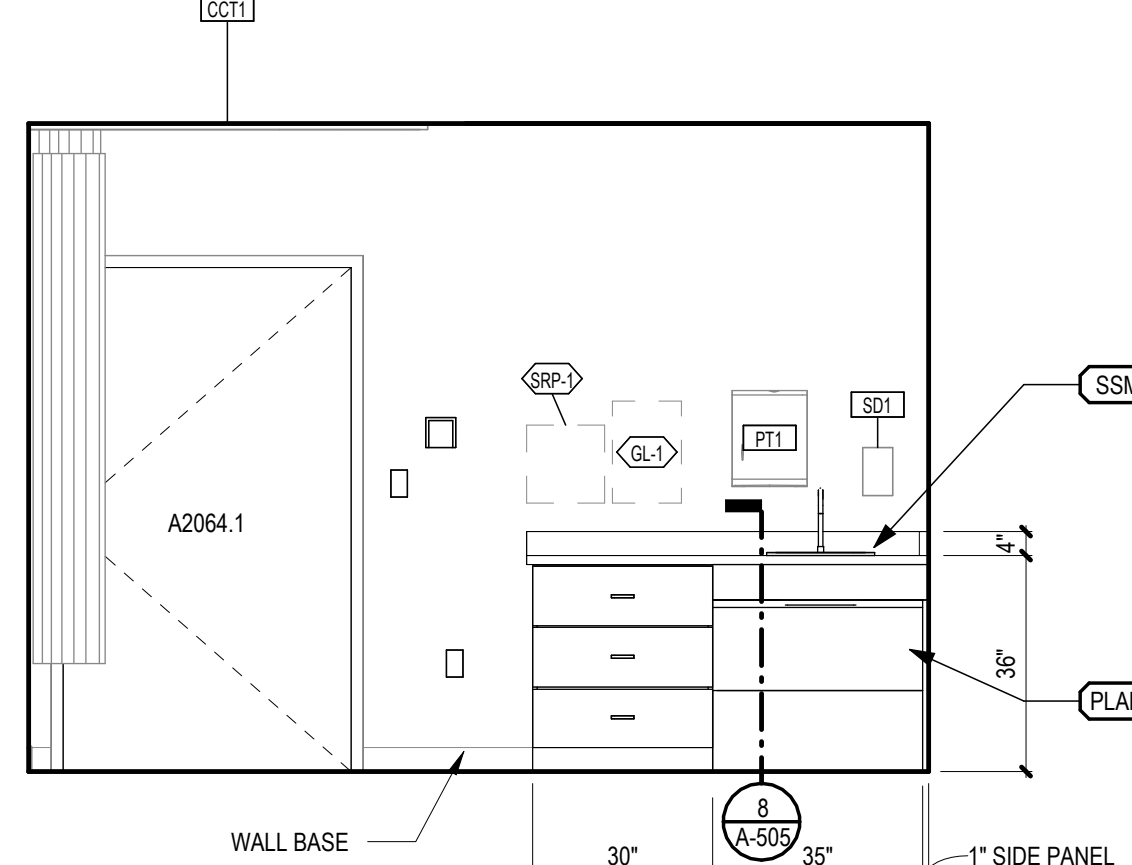

2 INFUSION ROOM A2064 - EAST
A-102.1A 3/8" = 1'-0"

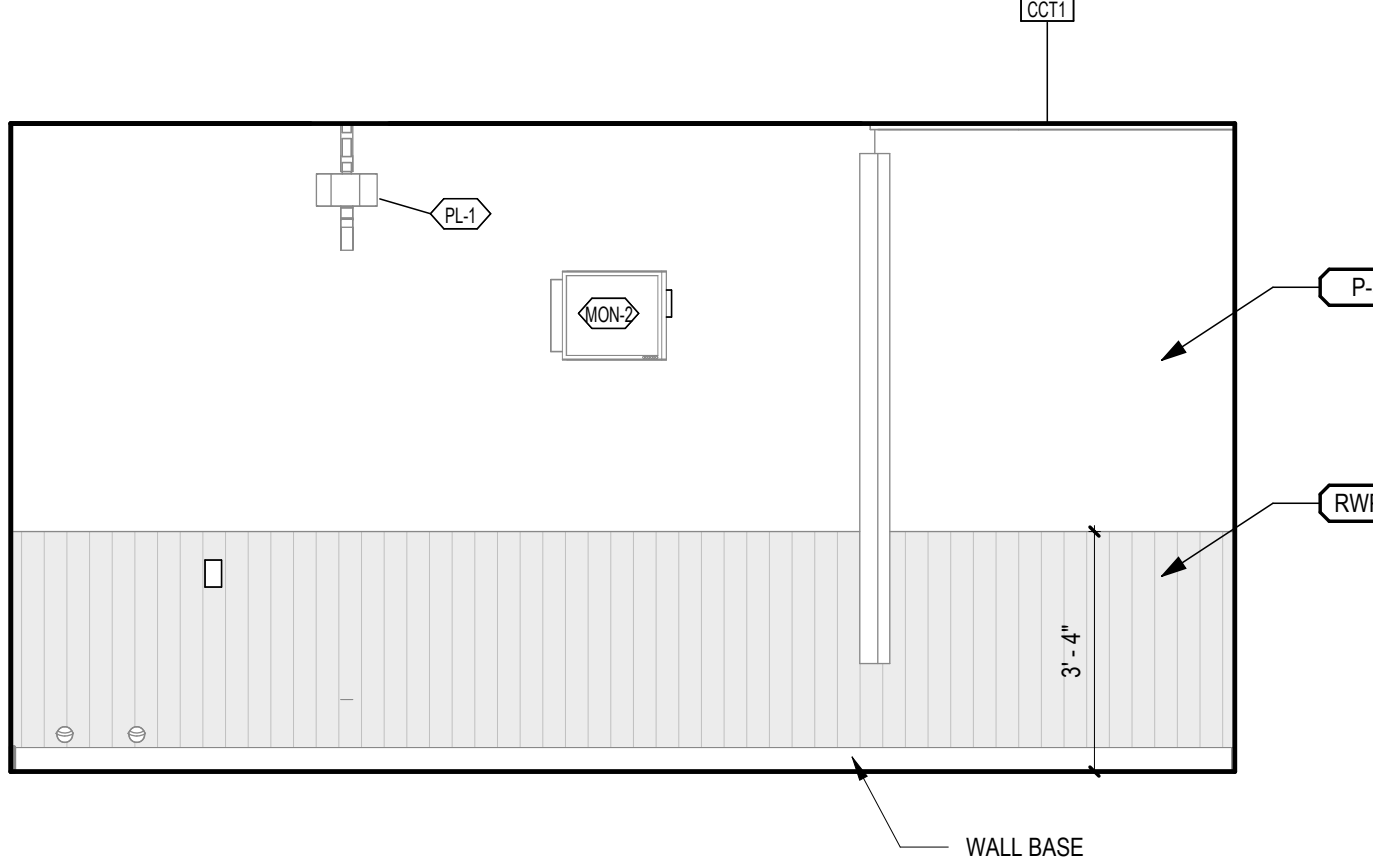

1 INFUSION ROOM A2064 - NORTH
A-102.1A 3/8" = 1'-0"

A

B

C











D

E

F

5/10/2025 8:42:21 AM

Autodesk DocuVA MI Detail210291.rvt

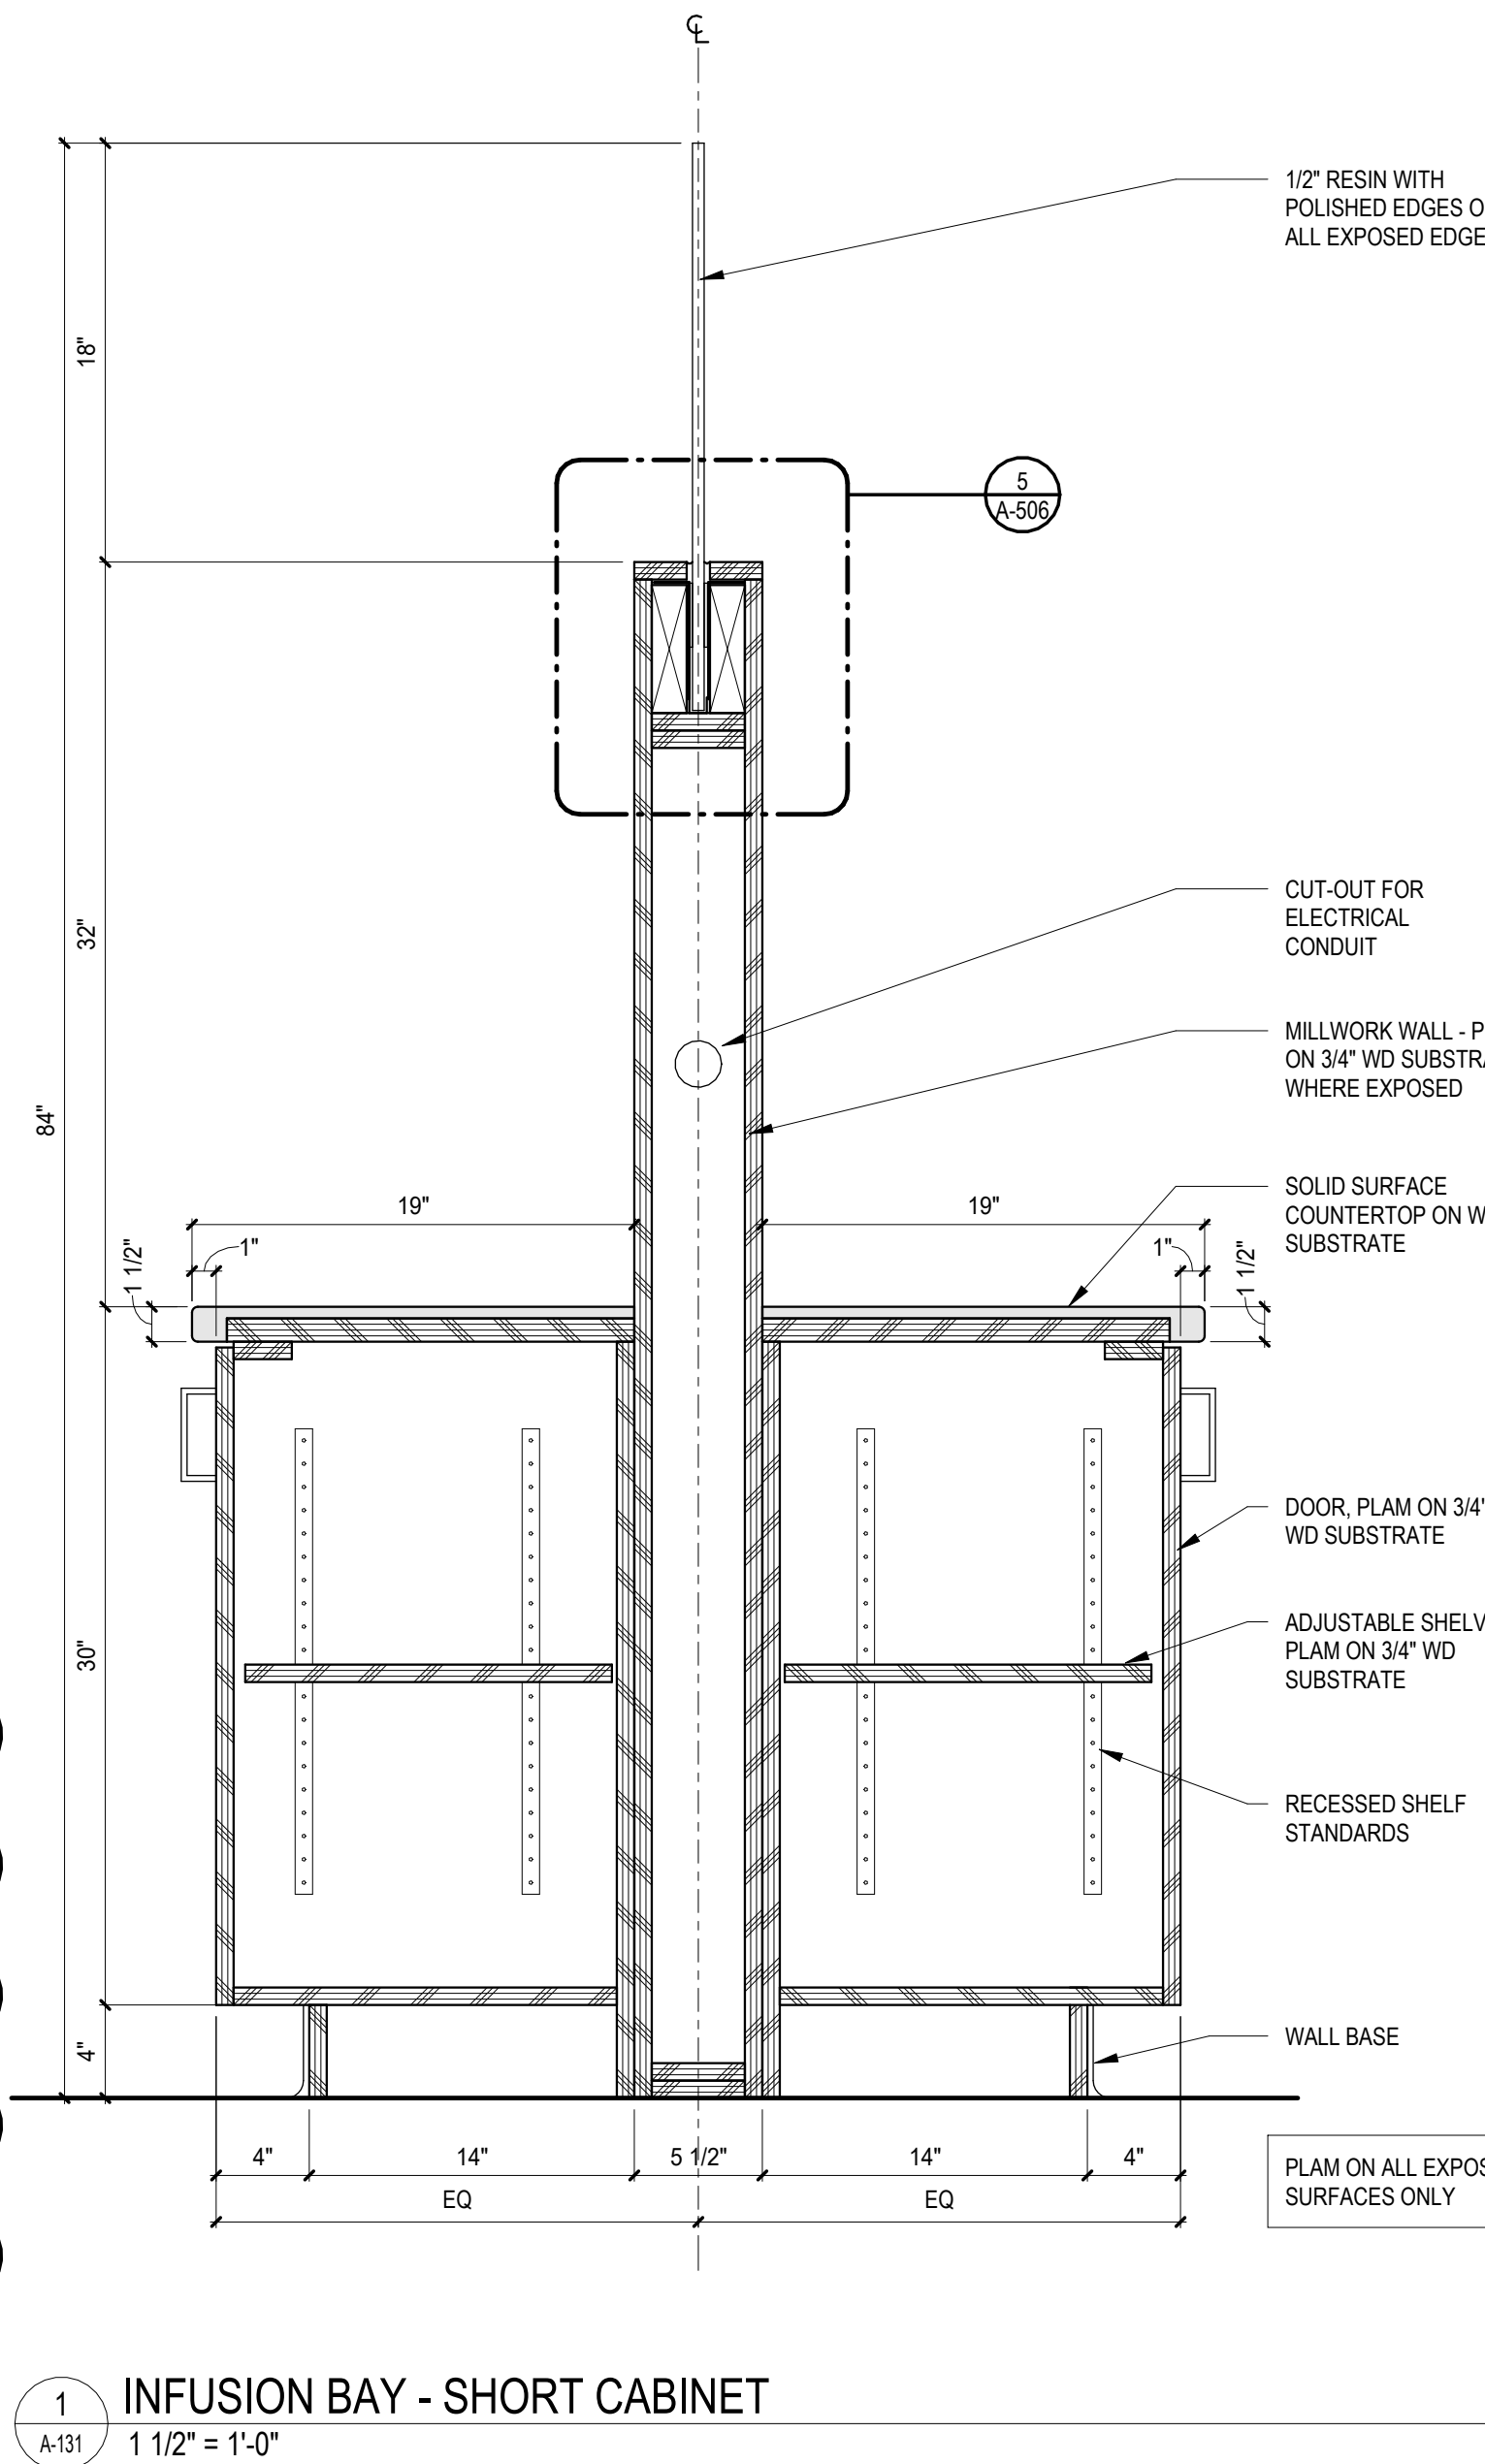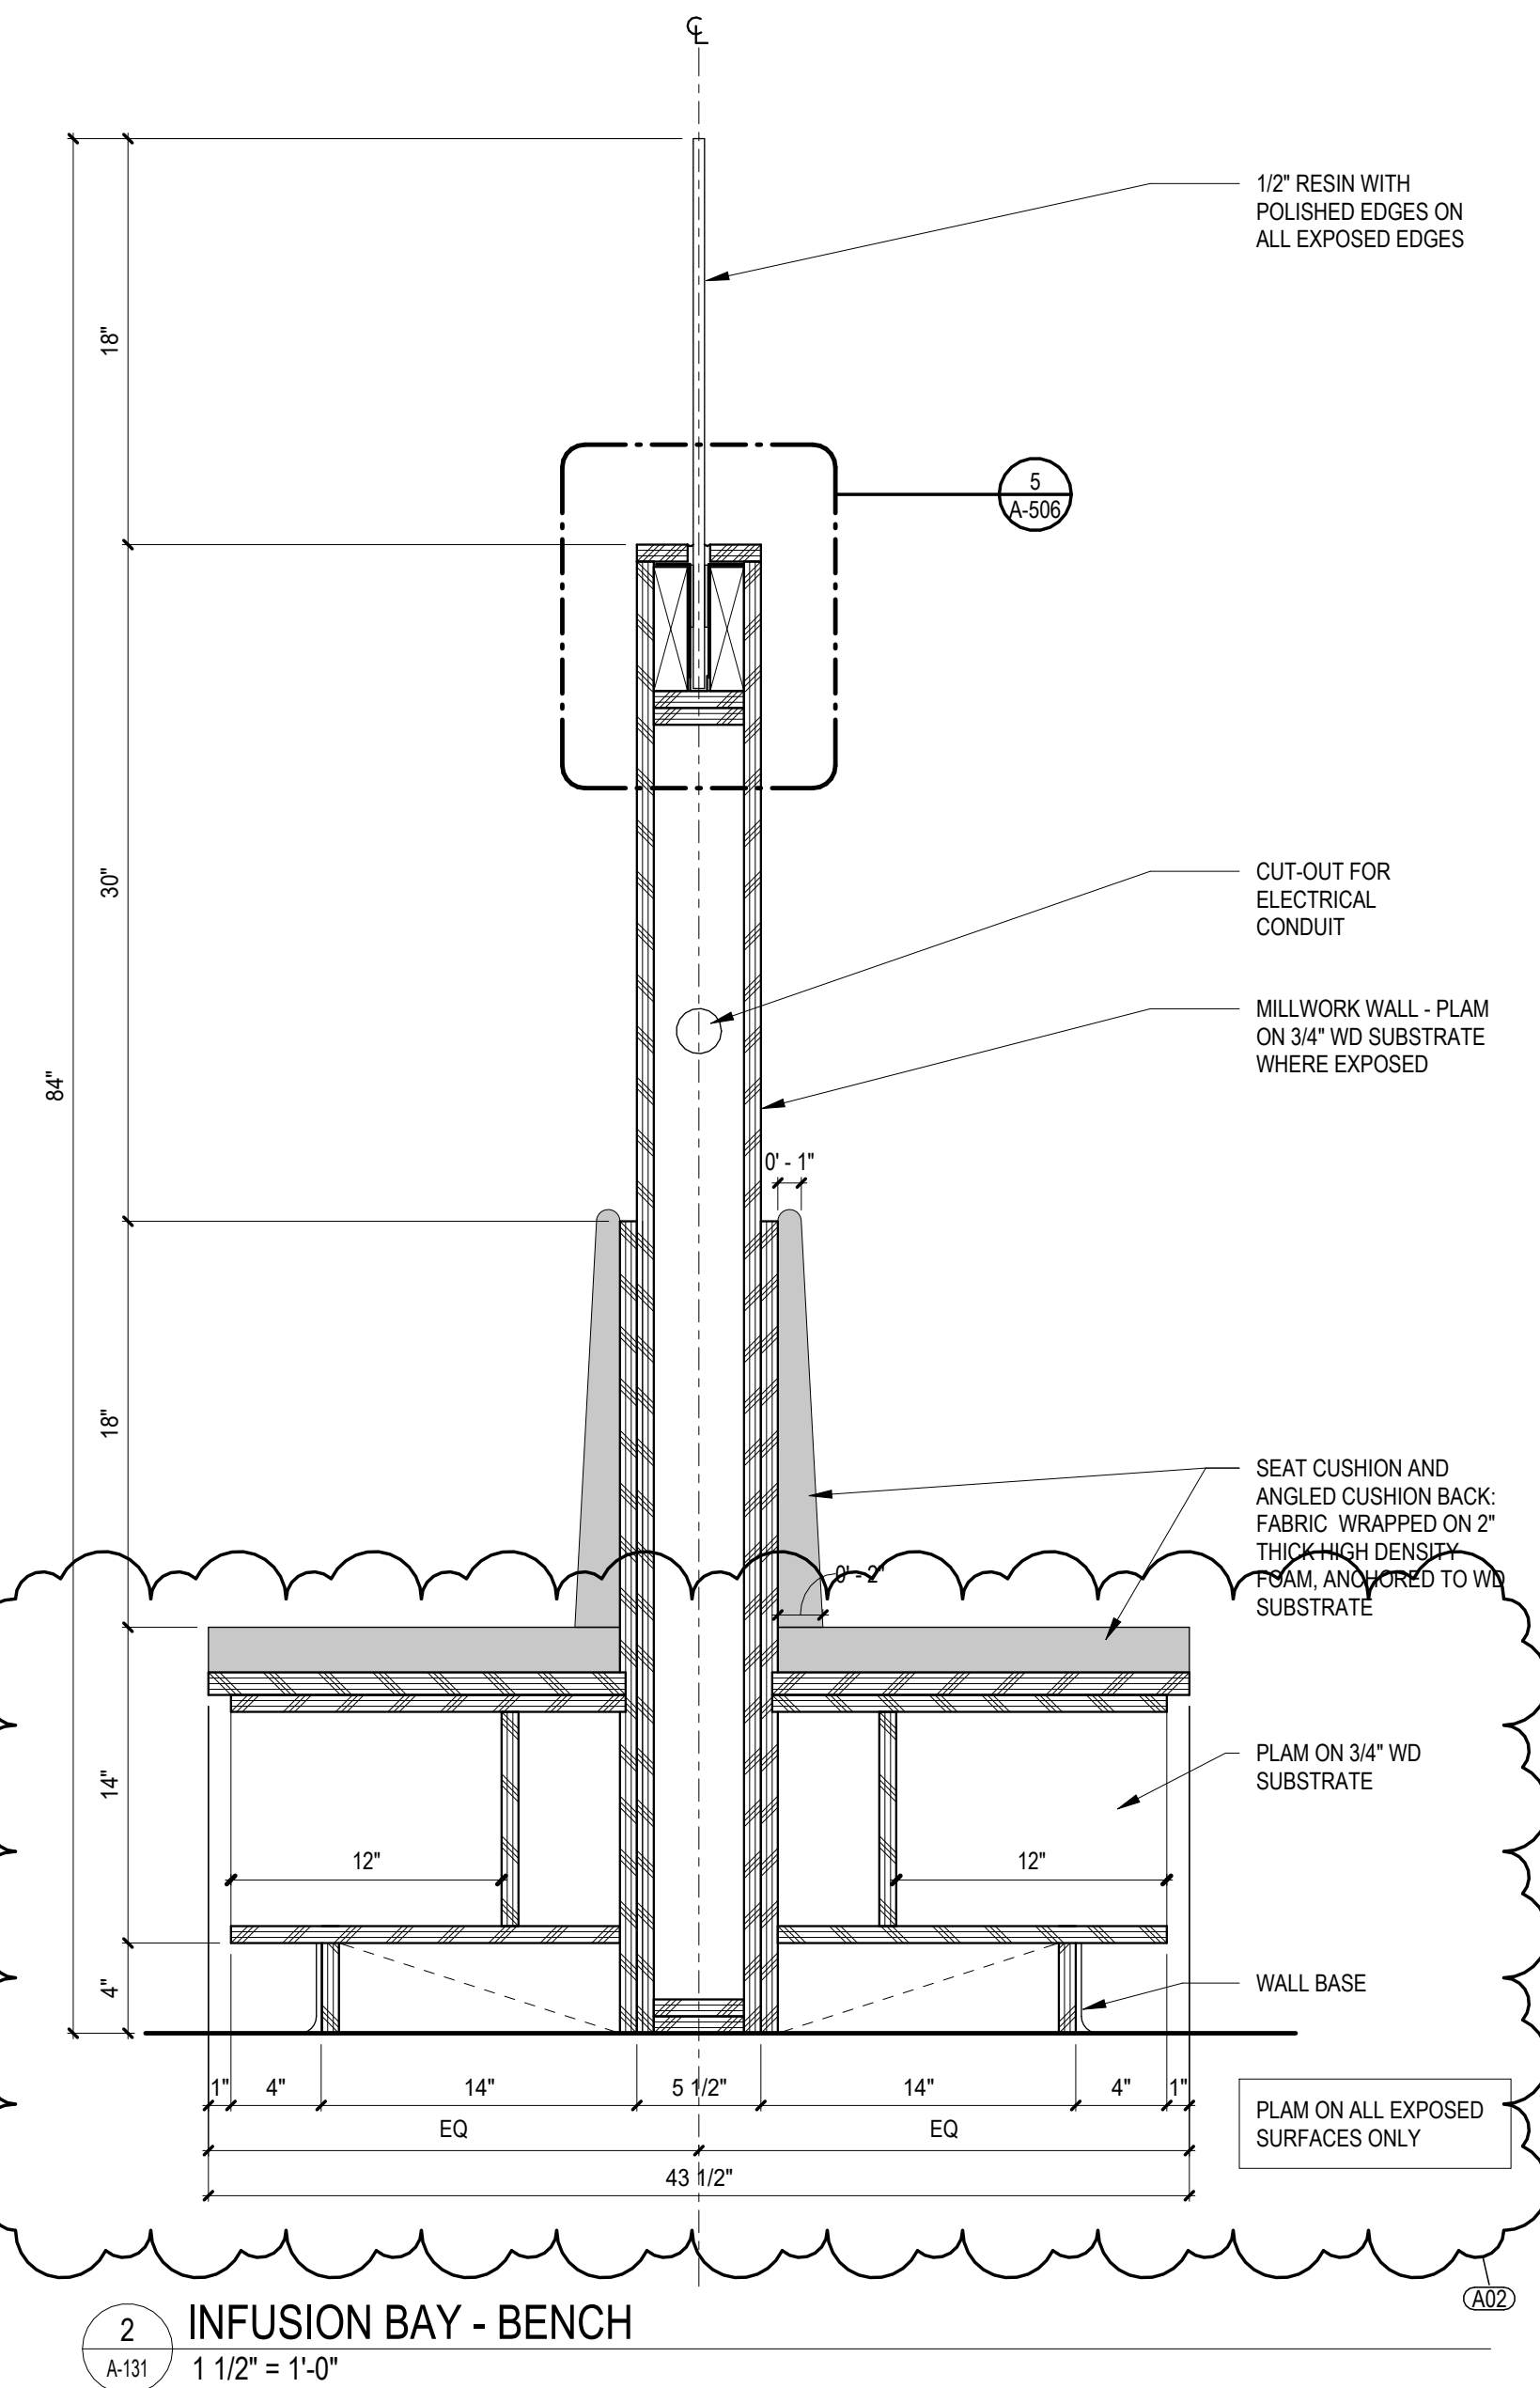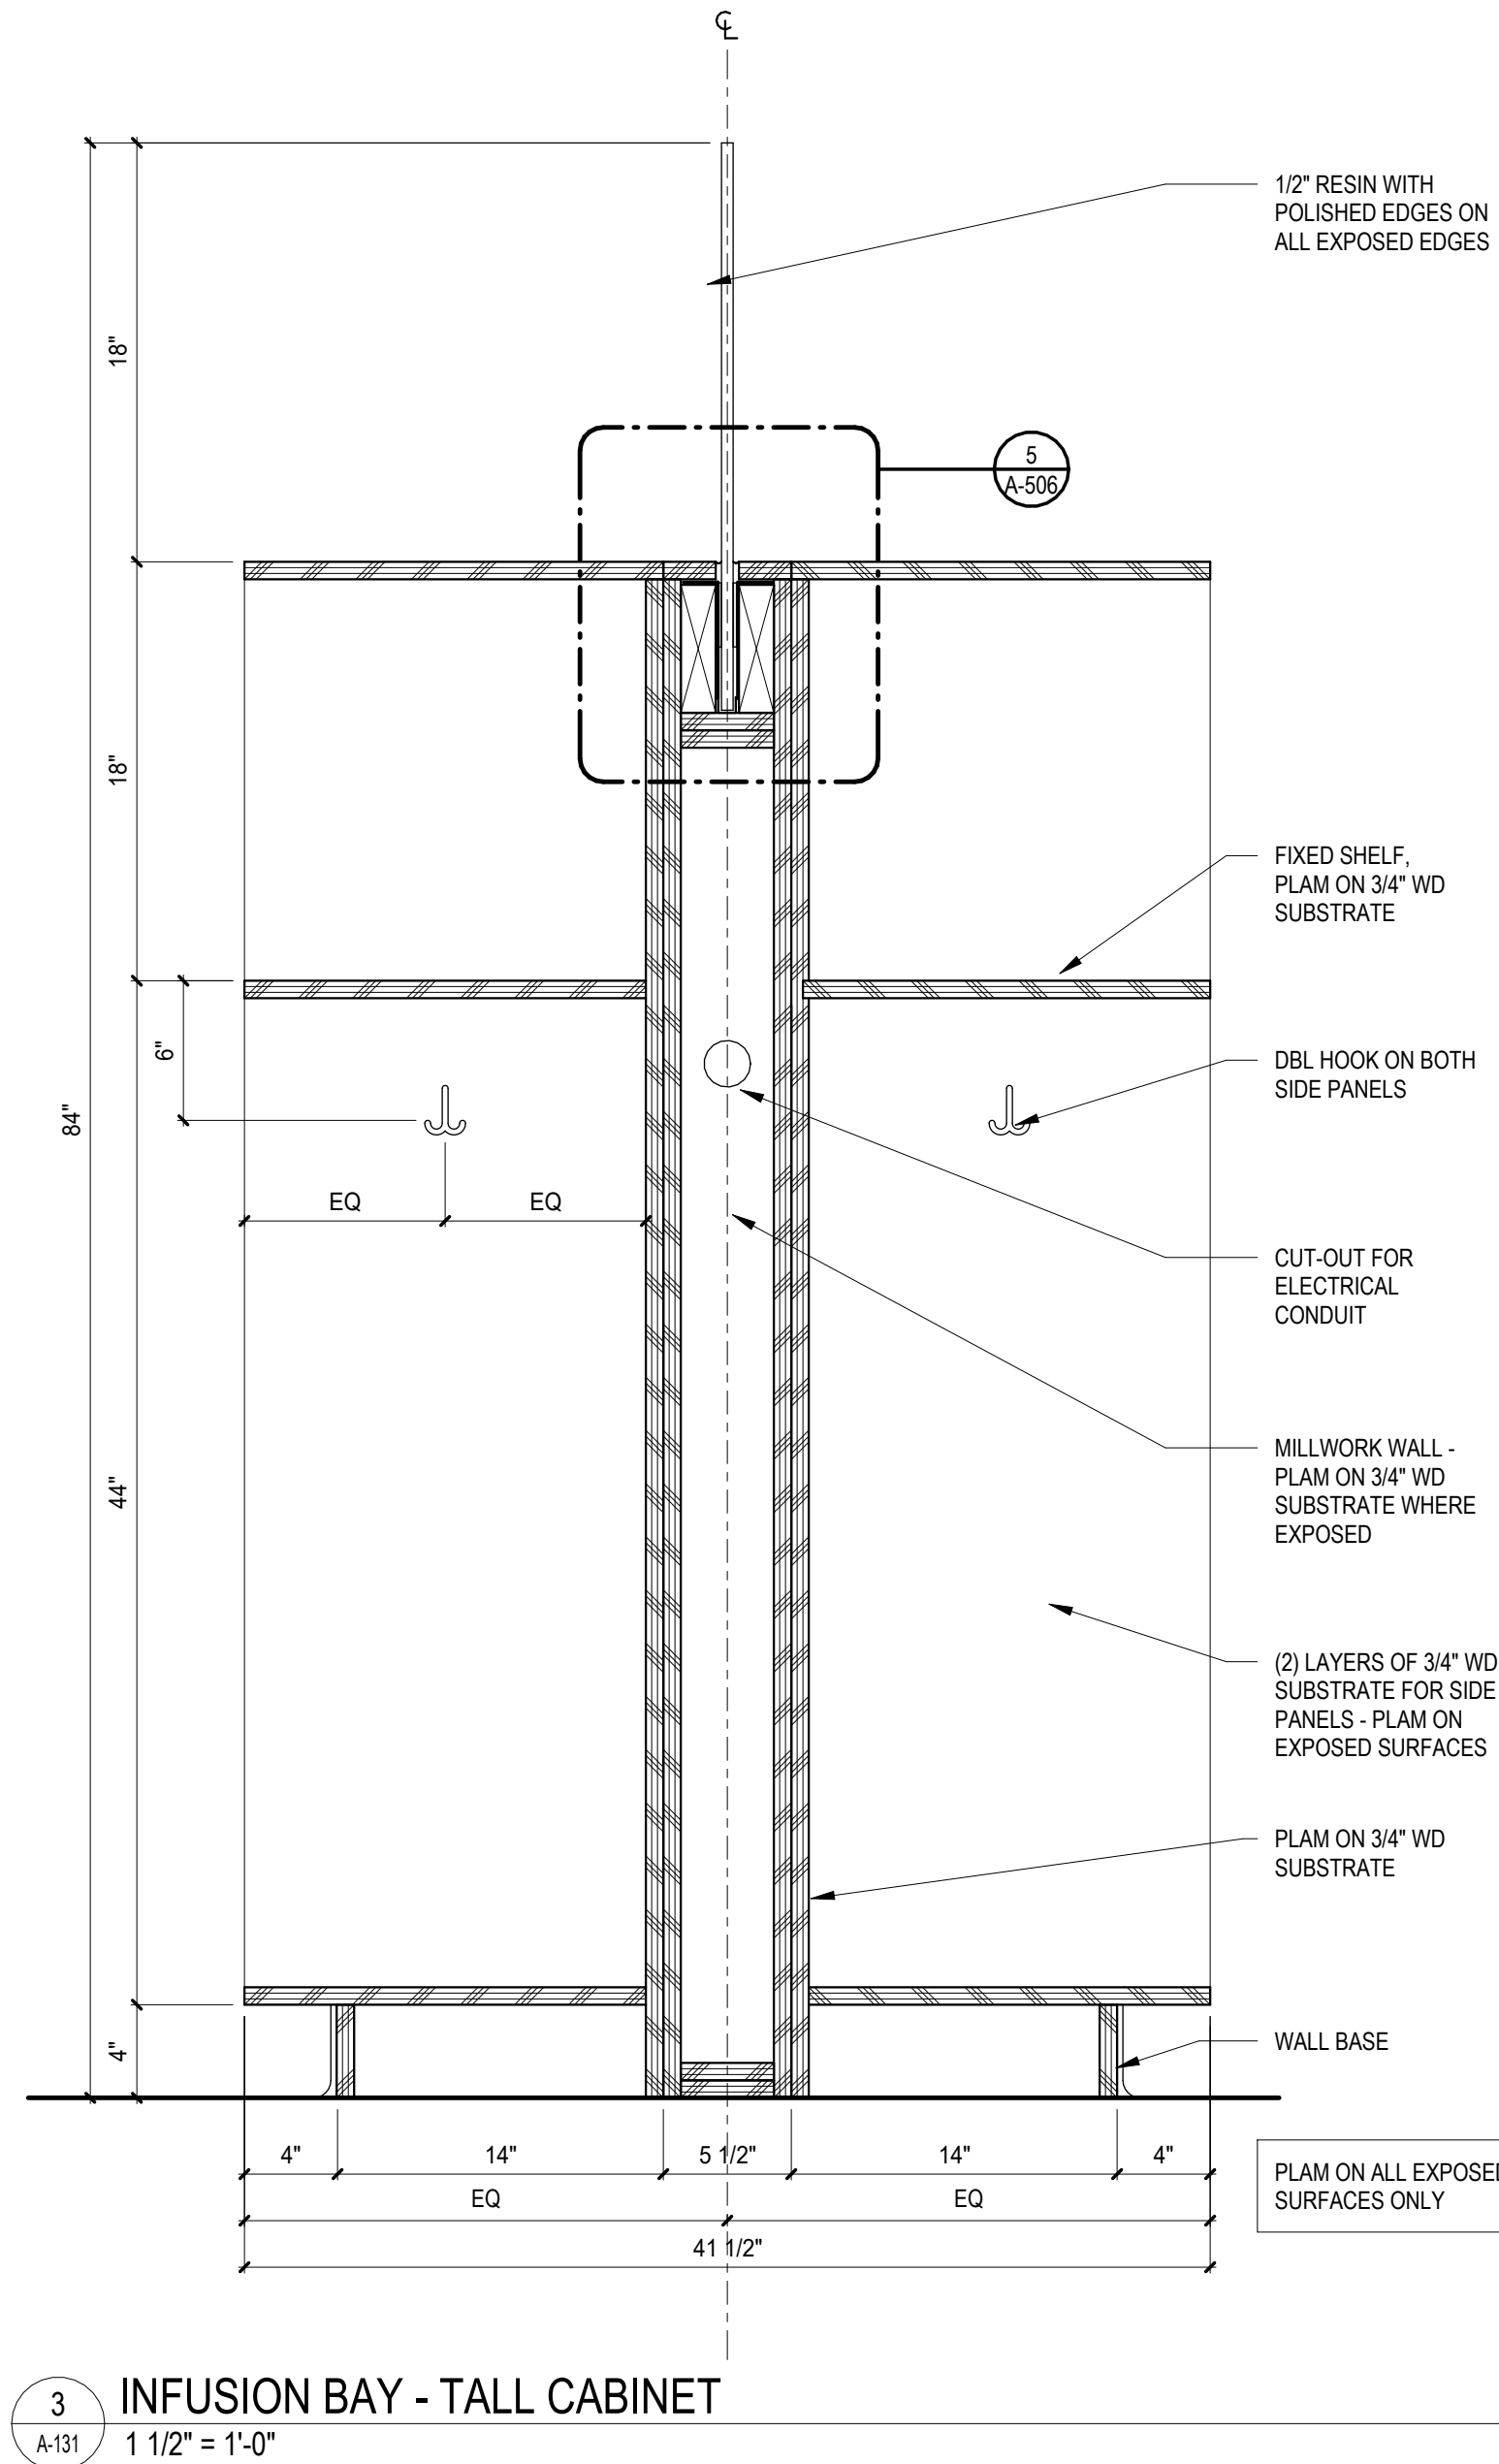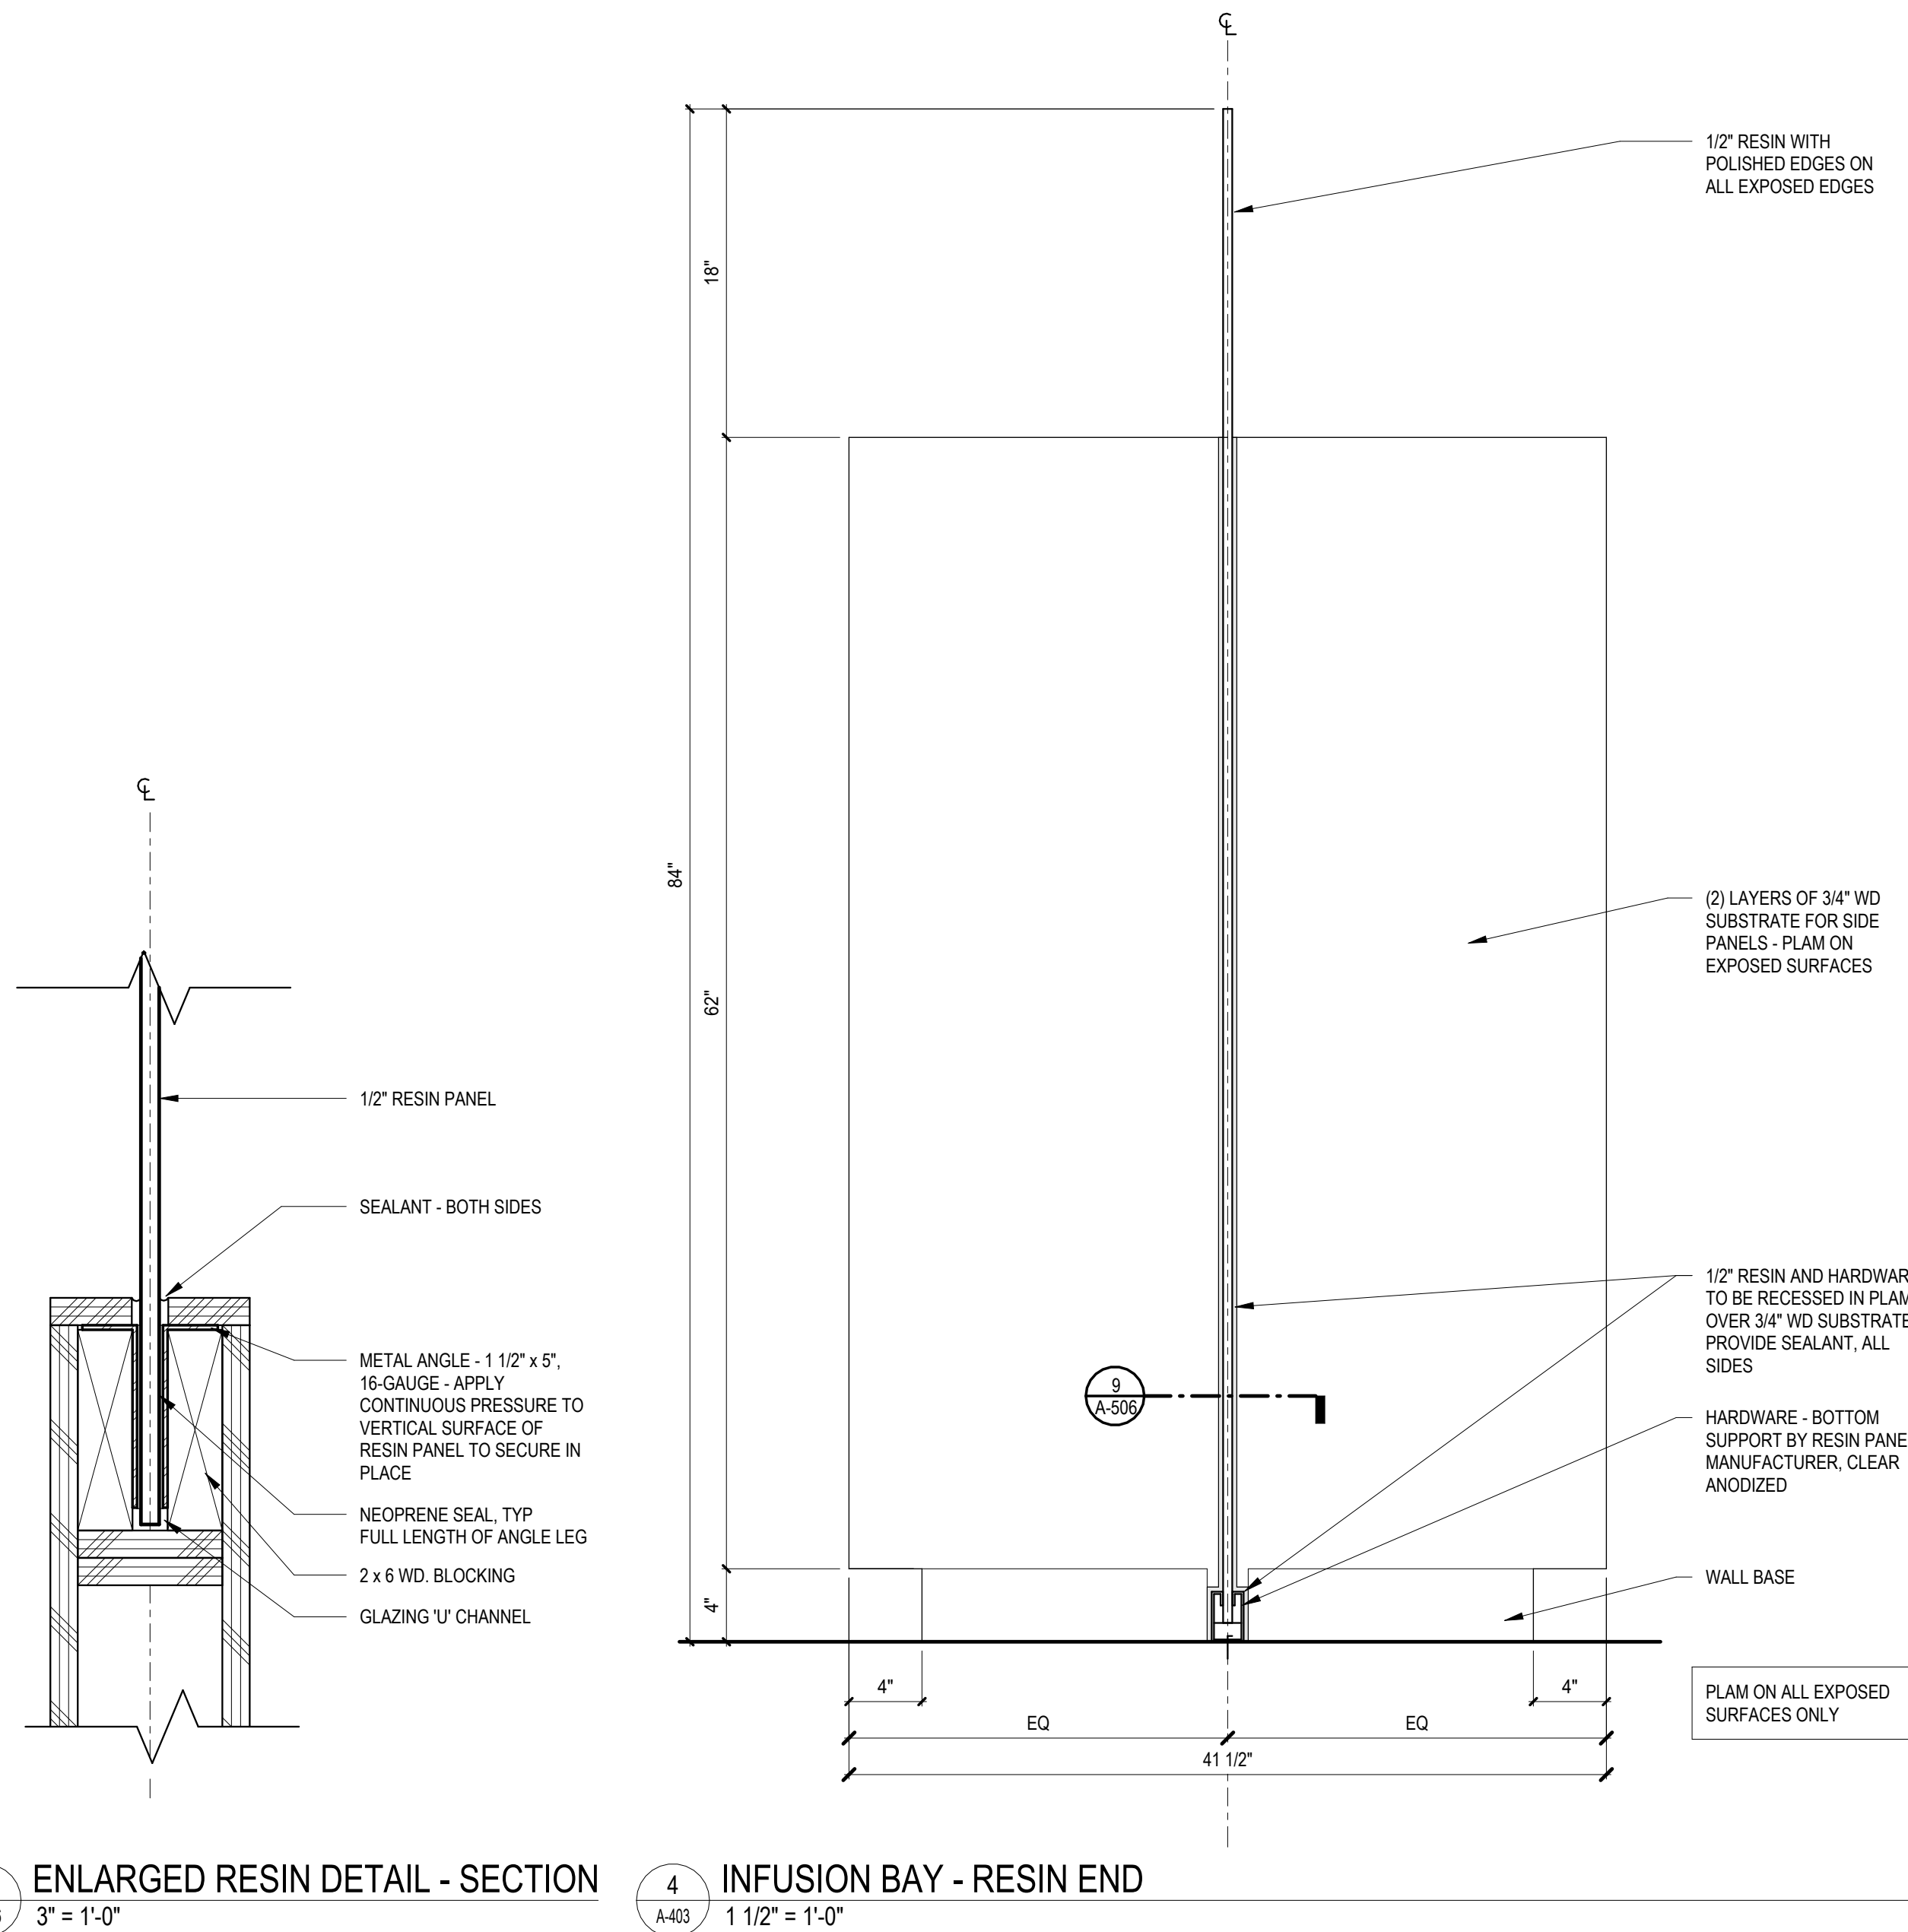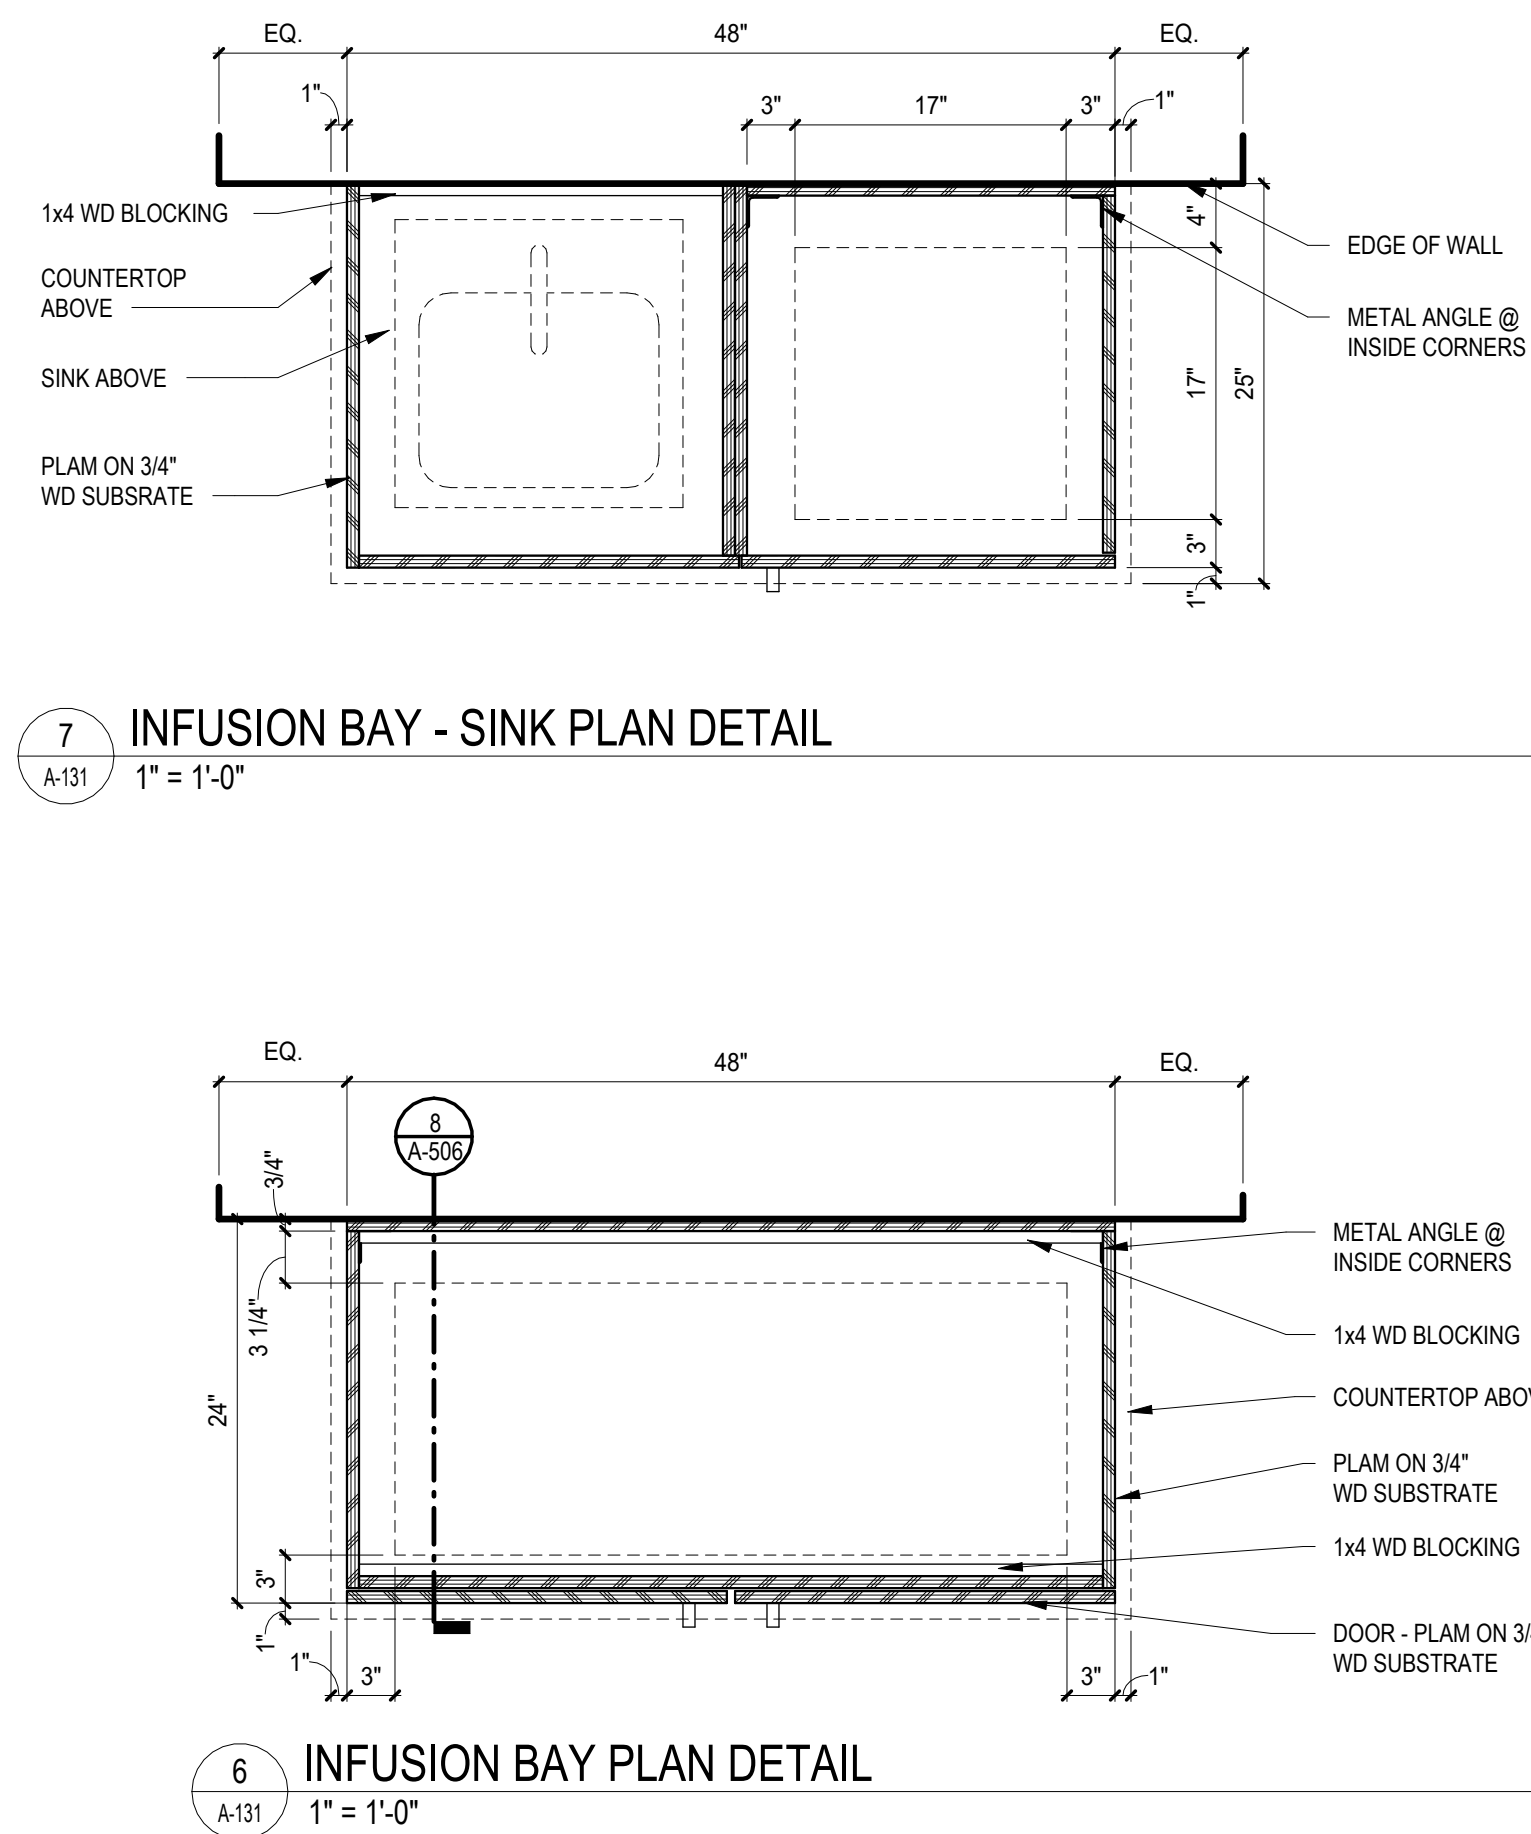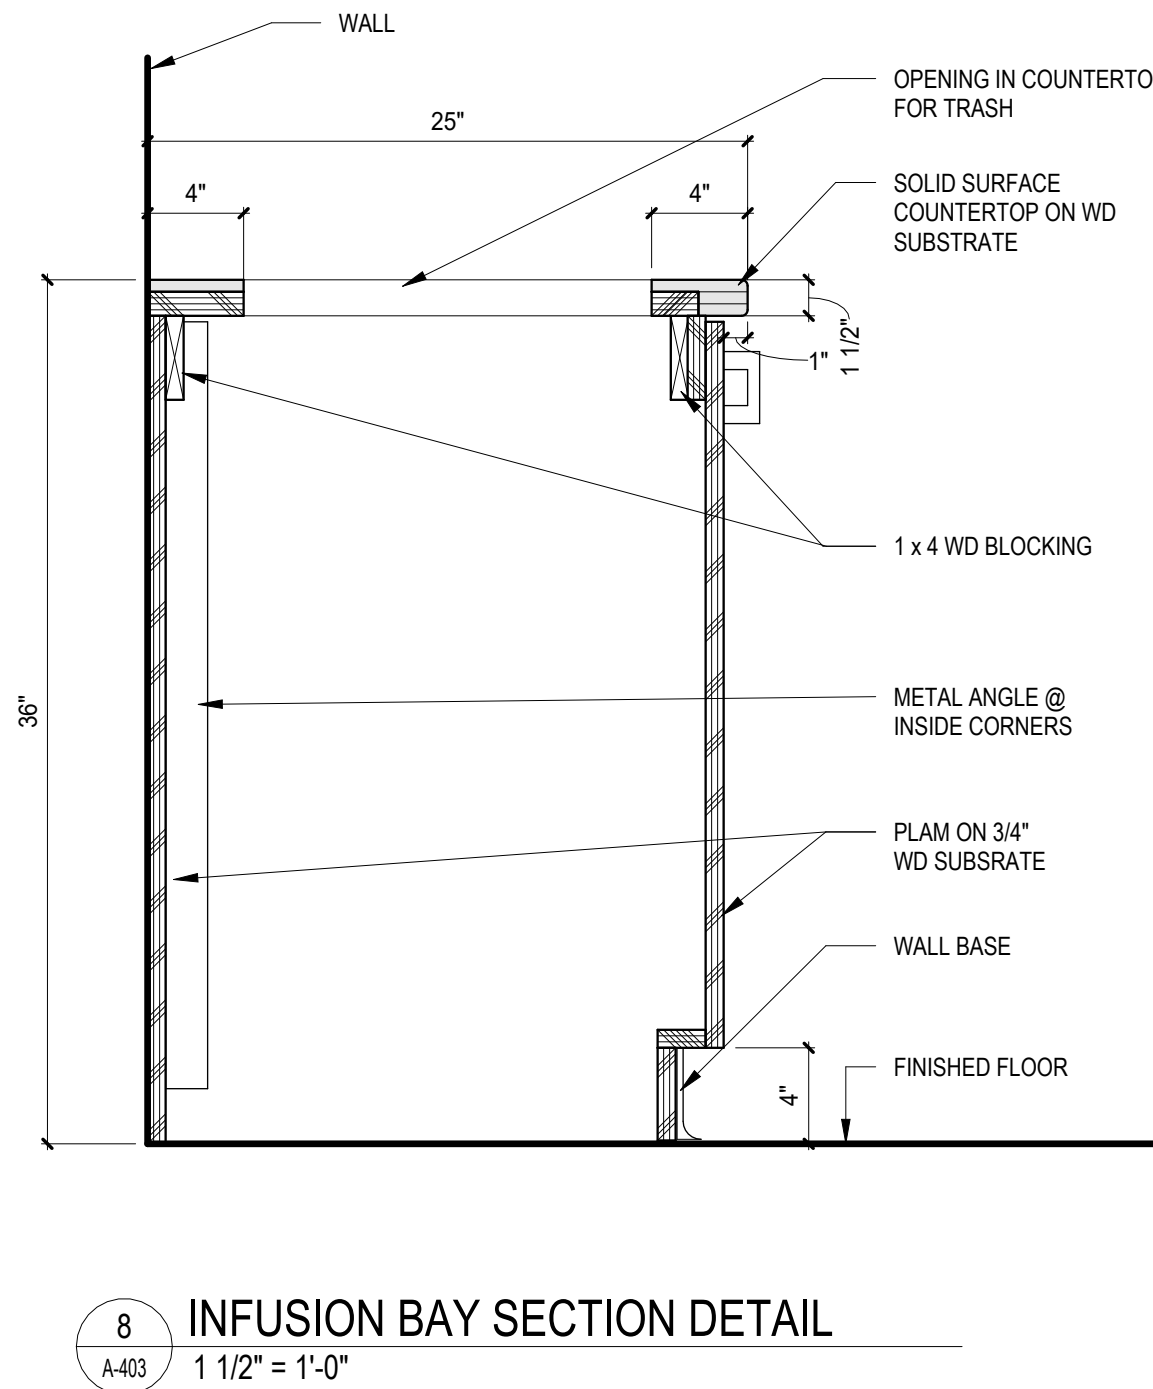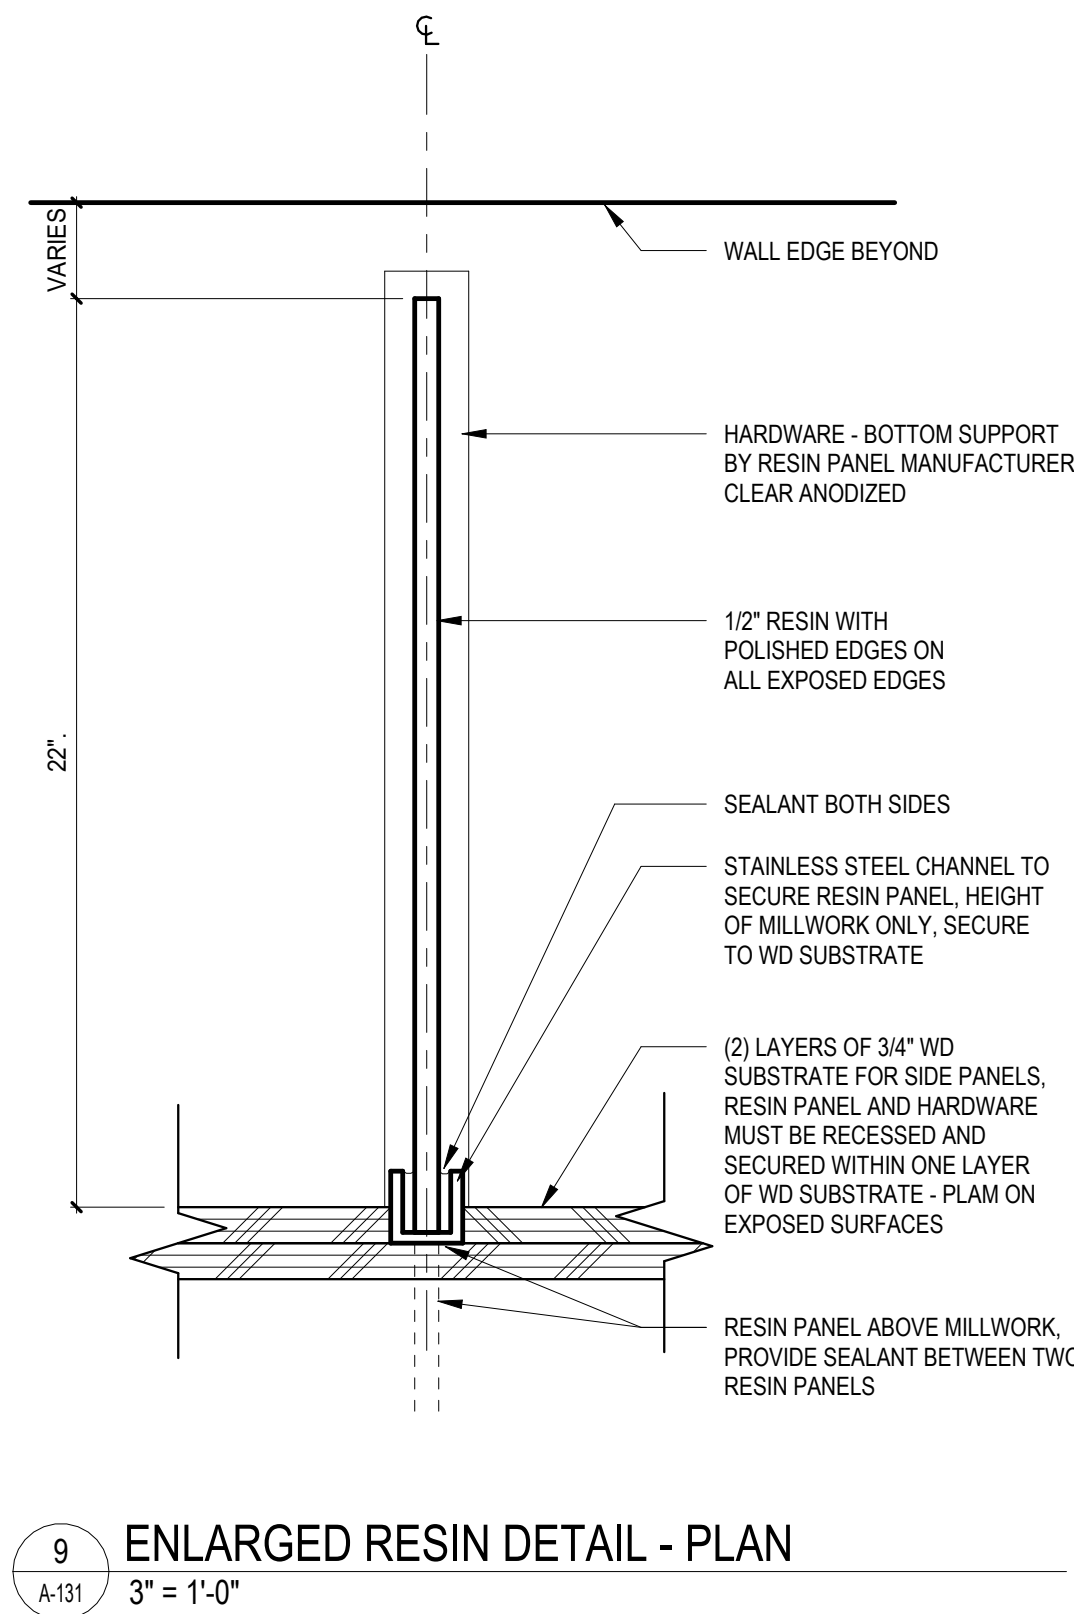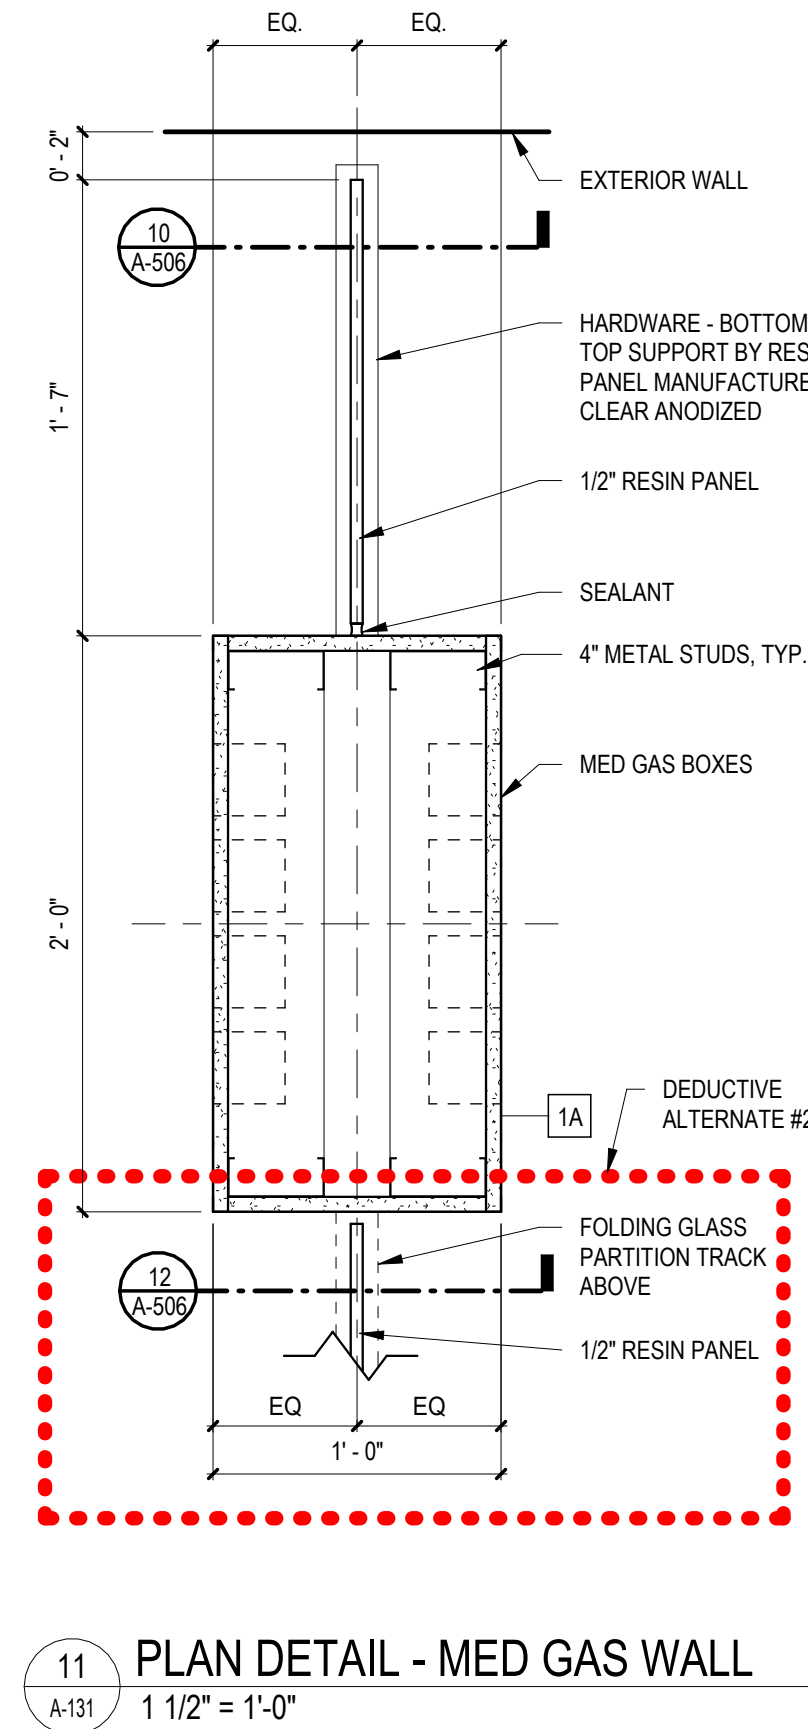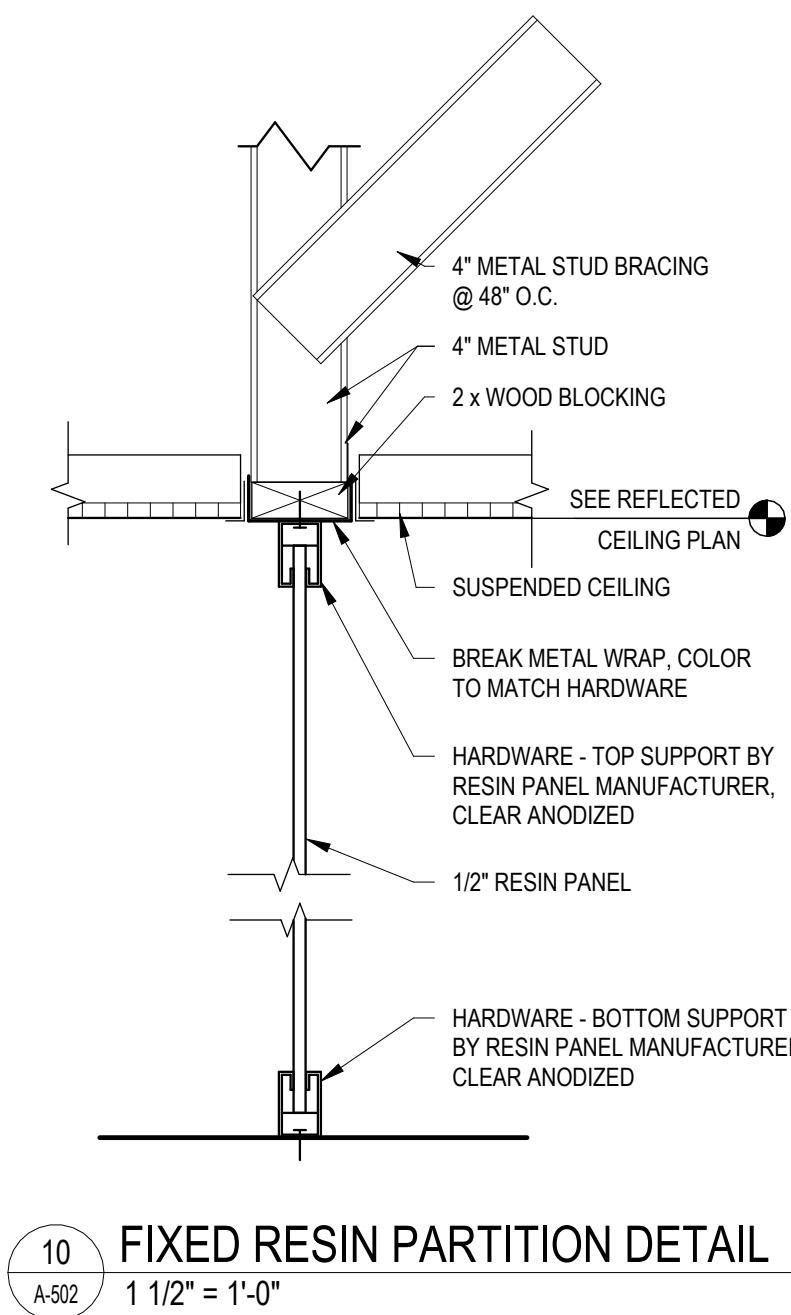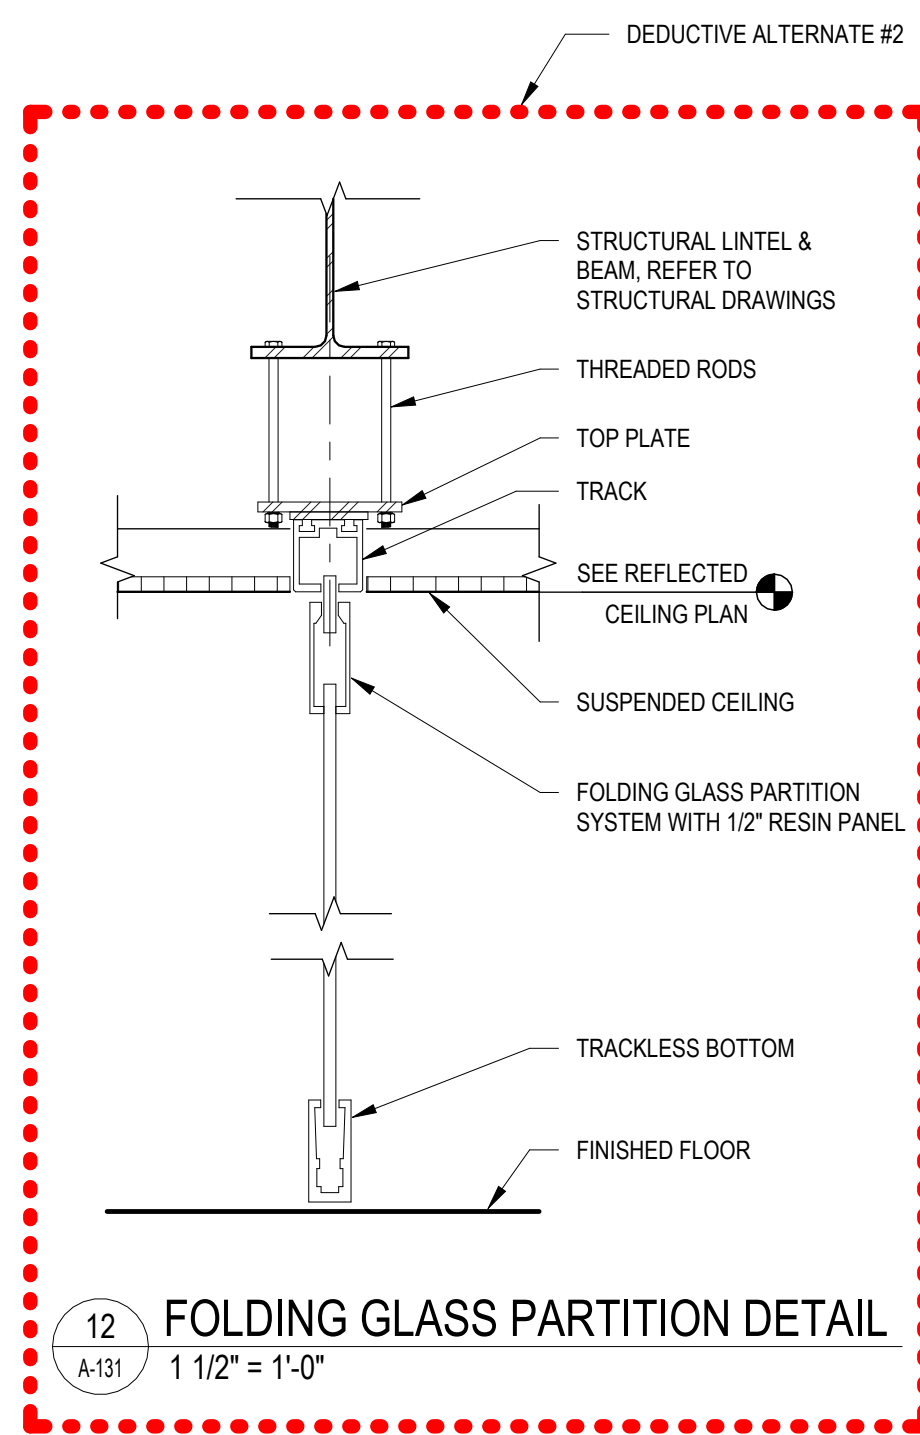

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS Revisions:		VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae McGraw Hill Construction An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title DETAILS - INFUSION BAYS Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location: DETROIT, MI Issue Date: 10-JAN-2025 Checked: KJH Drawn: CJA / MRB	Project Number 553-21-100 Building Number Drawing Number A-506
--	--	---	--	---	------------------	--	---	--	--	---

A

B


C

D

E


F

5/10/2026 8:42:27 AM Autodesk Docs\VA MI\Drawing210291.dwg

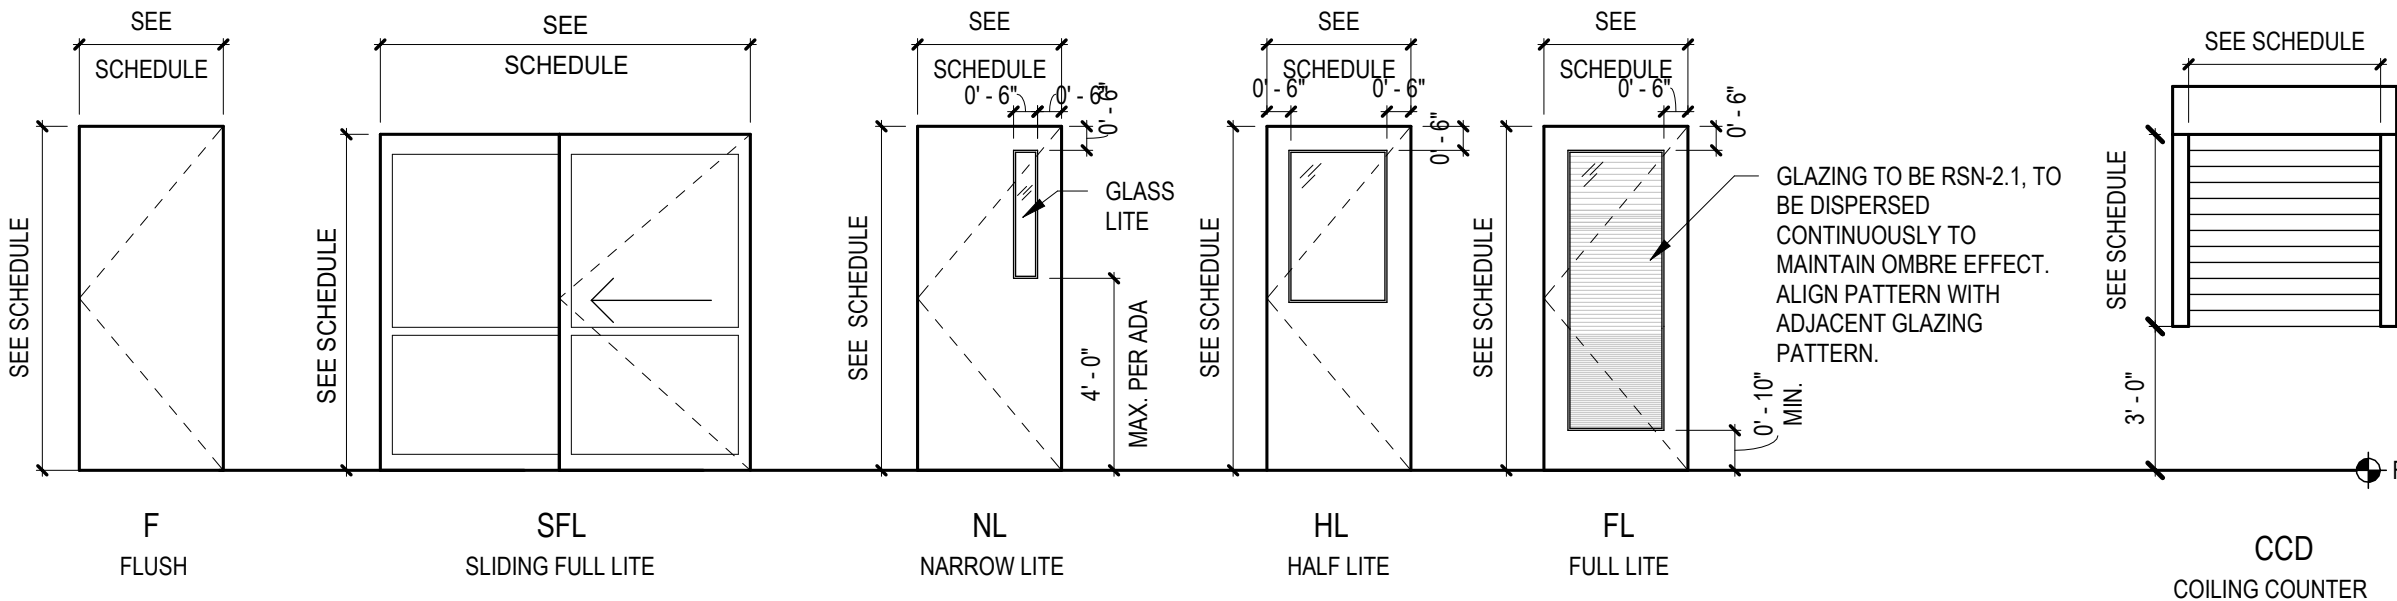


DOOR TYPES

1/4" = 1'-0"

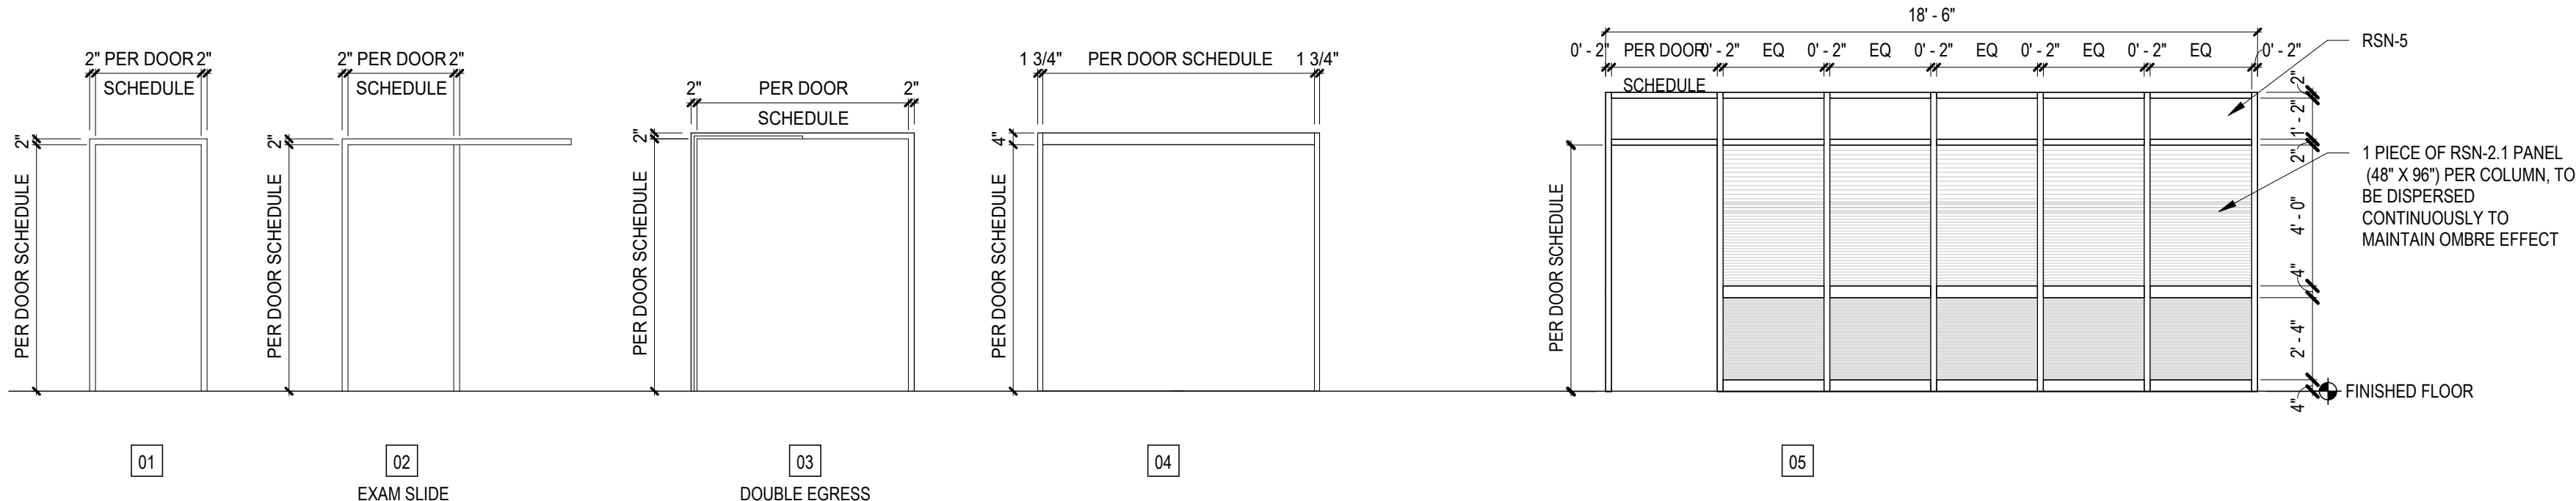

FRAME TYPES

1/4" = 1'-0"

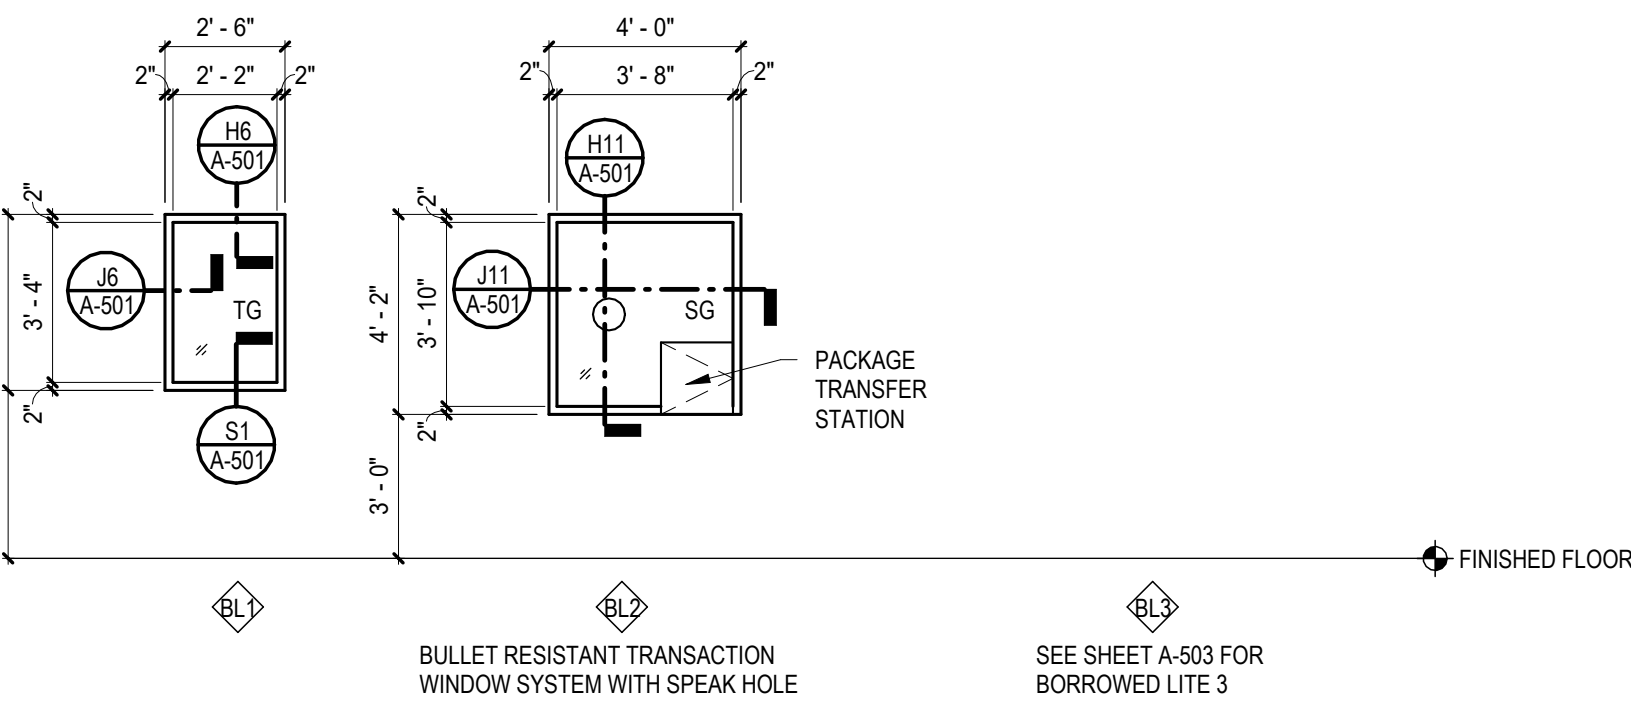

BORROWED LITE TYPES

1/4" = 1'-0"

DOOR & FRAME GENERAL NOTES

1. ALL DOOR AND WINDOW FRAMES SHALL HAVE SEALANT & BACKER ROD AT ENTIRE PERIMETER (BOTH SIDES), U.N.O.
2. REFER TO SPECIFICATIONS FOR HARDWARE SETS.
3. ALL OUTSIDE DIMENSIONS OF FRAME TYPES ARE ROUGH OPENING SIZES.
4. MAINTAIN 4" MIN BETWEEN EDGE OF DOOR JAMB (HINGE SIDE) AND NEAREST PERPENDICULAR SURFACE.
5. STYLES & DIMENSIONS FOR DOOR TYPES & LITES ARE REFLECTING DESIGN INTENT. DOOR MANUFACTURER TO SUBMIT THEIR STANDARD TYPES, U.N.O., PER SPECIFICATIONS.
6. VERIFY EXISTING DOORS AND FRAMES SCHEDULED FOR USE IN RATED WALLS ARE RATED FOR SUCH USE. PROVIDE NEW WHERE REQUIRED.

DOOR & FRAME ABBREVIATIONS

IBG: INTEGRAL BLIND GLAZING
FR20: FIRE-RATED GLAZING - 20 MIN
FR45: FIRE-RATED GLAZING - 45 MIN
FR90: FIRE-RATED GLAZING - 90 MIN
TG: TEMPERED GLAZING
SG: SECURITY GLAZING
RSN: RESIN
HM: HOLLOW METAL
WD: WOOD
AL: ALUMINUM
RO: ROUGH OPENING
BR: BALLISTIC RATING
FG: FROSTED GLASS ETCHING ON ENTIRE INSIDE OF GLAZING TO OBSCURE SIGHT
ST: SMOKE-TIGHT PER CODE TO RESIST THE PASSAGE OF SMOKE.

DOOR AND FRAME SCHEDULE

DOOR			DOOR							FRAME			DETAIL			FIRE RATING	HARDWARE SET NO.	NOTES
DOOR NO.	ROOM NO.	ROOM NAME	WD.	HGT	MATL	TYPE	GLAZING	MATL	TYPE	HEAD	JAMB	SILL						
BA - LEVEL 2																		
A2012.1	A2012	CHECK-IN CHECK-OUT	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	10				
A2012.2	A2012	CHECK-IN CHECK-OUT	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	10				
A2014.1	A2012	CHECK-IN CHECK-OUT	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	06				
A2016.1	A2016	HAC	3'-0"	7'-0"	WD	F	HM	01	H2	J2	-	-	-	45 MIN.	19			
A2017A.1	A2017	EXAM CLINIC WAITING	3'-6"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	15				
A2018.1	A2018	GROUP ROOM	3'-0"	7'-0"	AL	FL	RSN-2.1	AL	05	H1	J1	-	-	09				
A2020.1	A2020	SHARED OFFICE	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	13				
A2022.1	A2022	SHARED OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	13				
A2023.1	A2023	OFFICE - RN CARE COORDINATOR	3'-6"	7'-0"	WD	NL	TG	AL	02	H5	J5	-	-	07				
A2025.1	A2025	OFFICE - RN CARE COORDINATOR	3'-6"	7'-0"	WD	NL	TG	AL	02	H5	J5	-	-	07				
A2026.1	A2026	ANTI-COAG	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2028.1	A2028	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2029.1	A2029	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2030.1	A2030	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2033.1	A2033	EXAM	3'-6"	7'-0"	WD	F	AL	02	H5	J5	-	-	-	11				
A2034.1	A2034	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2035.1	A2035	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2036.1	A2036	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2037.1	A2037	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2038.1	A2038	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2039.1	A2039	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2040.1	A2040	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2041.1	A2041	EXAM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2042.1	A2042	WORK ROOM	3'-6"	7'-0"	WD	F	-	AL	02	H5	J5	-	-	11				
A2043.1	A2043	EQUIPMENT STORAGE	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	20 MIN.	04			
A2045.1	A2045	STAFF TOILET	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	17				
A2046.1	A2046	MED ROOM	3'-0"	7'-0"	WD	NL	FR20	HM	01	H2	J2	-	-	20 MIN.	04			
A2047.1	A2047	BREAK ROOM	3'-0"	7'-0"	WD	HL	TG	HM	01	H2	J2	-	-	13				
A2048.1	A2048	CLEAN LINEN	3'-0"	7'-0"	WD	F	HM	01	H6	J6	-	-	-	20 MIN.	04			
A2050.1	A2050	CLEAN UTILITY	3'-0"	7'-0"	WD	NL	FR20	HM	01	H6	J6	-	-	20 MIN.	04			
A2052.1	A2052	SOILED UTILITY	3'-0"	7'-0"	WD	NL	FR45	HM	01	H2	J2	-	-	45 MIN.	05			
A2053.1	A2053	PHARMACIST WORK AREA	3'-6"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	45 MIN.	03			
A2053.2	A2053	PHARMACIST WORK AREA	4'-6"	6'-0"	SS	CCD	-	SS	-	H11	J11	H11	-	45 MIN.	20			
A2054.1	A2054	HAZARDOUS DRUG STORAGE	3'-6"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	14				
A2055.1	A2055	ANTE ROOM	8'-0"	7'-0"	AL	SFL	TG	AL	04				-	18				
A2056.1	A2056	STERILE NON-HAZARDOUS DRUG BUFFER ROOM	8'-0"	7'-0"	AL	SFL	TG	AL	04				-	18				
A2057.1	A2057	STERILE HAZARDOUS DRUG BUFFER ROOM	8'-0"	7'-0"	AL	SFL	TG	AL	04				-	18				
A2058.1	A2058	SHARED OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	14				
A2059.1	A2059	OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	06				
A2060.1	A2060	SHARED OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	14				
A2061.1	A2061	OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	06				
A2064.1	A2064	INFUSION ROOM 1	4'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	12				
A2065.1	A2065	INFUSION ROOM 2	4'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	12				
A2066.1	A2066	INFUSION ROOM 3	4'-0"	7'-0"	WD	F	HM	01	H2	J2	-	-	-	12				
A2069.1	A2069	PATIENT TOILET	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	15				
A2071.1	A2071	PATIENT TOILET	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	15				
A2108.1	A2108	SHARED OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	06				
A2109.1	A2109	SHARED OFFICE	3'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	06				
A2110.1	A2110	WOMEN'S LOCKERS	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	14				
A2110A.1	A2110	WOMEN'S LOCKERS	3'-0"	7'-0"	WD	F	-	HM	01	H2	J2	-	-	16				
CA207.1	CA216	CORRIDOR	4'-0"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	08				
CA213.2	CA216	CORRIDOR	3'-6"	7'-0"	WD	NL	TG	HM	01	H2	J2	-	-	08				
CA216.1	CA216	CORRIDOR	7'-4"	7'-0"	WD	F	-	HM	03	H3	F	J3	-	90 MIN.	02			
CA216.2	CA219	CORRIDOR	7'-4"	7'-0"	WD	NL	FR90	HM	03	H4	F	J4	-	90 MIN.	01			
CA216.3	CA217	CORRIDOR	7'-4"	7'-0"	WD	NL	FR90	HM	03	H4	F	J4	-	90 MIN.	01			

ADDENDUM 02 ADDENDUM 01 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions:	30-APR-2026 02-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit , MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C2AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title DOOR SCHEDULE AND DETAILS Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn MRB	Project Number 553-21-100 Building Number Drawing Number A-601
---	--	--	--	---	------------------	---	--	---	---	---



INTERIOR MATERIAL SCHEDULE									
CODE	USE	MANUFACTURER	STYLE	PATTERN & COLOR	SIZE	INSTALLATION PATTERN	NOTES		
ACOUSTICAL CEILINGS									
ACP-1	ACOUSTICAL CEILING PANEL	ARMSTRONG	ULTIMA HEALTH ZONE, BEVELED TEGULAR, 1447	WHITE PANEL, WHITE GRID	24" x 24" x 3/4", 15 1/8" GRID	--	NRC OF 0.8, CAC OF 35		
LMC-1	WOOD LOOK LINEAR METAL CEILING	ARMSTRONG	METALWORKS LINEAR - SYNCHRO CEILING PLANKS, 8223W06	EFFECTS SESAME (FXSE), M1 UNPERFORATED	6" PLANK, 6" X 96" X 1"	--			
SMC-1	WOOD LOOK SQUARE METAL PAN CEILING	ARMSTRONG	METALWORKS TORSION SPRING	EFFECTS SESAME (FXSE), M1 UNPERFORATED	24" x 24" x 1-1/2"	--			
BASE									
B-1	INTEGRAL BASE TO MATCH EF-1	STONHARD	--	--	4" H	--			
RB-1	COVE BASE	ROFFE	PINNACLE RUBBER BASE, STANDARD TOE	178 PEWTER	4" H, CONTINUOUS RUNS	--			
RB-2	COVE BASE FOR PLUM-1 DESKS	TARKETT	PINNACLE RUBBER BASE, STANDARD TOE	679 SEPIA	6" H, CONTINUOUS RUNS	--			
RB-3	COVE BASE FOR PLUM-2 DESKS	TARKETT	PINNACLE RUBBER BASE, STANDARD TOE	671 SOMBER	6" H, CONTINUOUS RUNS	--			
CONCRETE									
SC-1	SEALED CONCRETE	--	--	--	--	--			
CARPET									
CPT-1	FIELD CARPET TILE	SHAW CONTRACT	COMPLIATION ST515	ALLUSION 75400	18" X 36"	ASHLAR	--		
CPT-2	FIELD CARPET TILE	SHAW CONTRACT	COMPLIATION ST515	ALLUSION 75400	18" X 36"	HERRINGBONE	--		
CPT-3	OFFICE CARPET TILE	SHAW CONTRACT	DIFFUSE COLOR ECOWORX TILE ST478	COOL BLUE 78521	24" X 24"	MONOLITHIC	--		
RESILIENT									
EF-1	RESINOUS EPOXY FOR PHARMACY - FIELD	STONHARD	STONCLAD GS MORTAR WITH STONESEAL P7 SEALER	SILVER GRAY	--	--			
EF-2	RESINOUS EPOXY FOR PHARMACY - ACCENT	STONHARD	STONCLAD GS MORTAR WITH STONESEAL P7 SEALER	PEWTER	--	--			
EF-3	RESINOUS EPOXY FOR PHARMACY - DEMARCATION	STONHARD	STONCLAD GS MORTAR WITH STONESEAL P7 SEALER	BRICK RED	--	--			
RF-1	FIELD RESILIENT FLOORING	MANNINGTON	BLOOM	MEANDER, RENEWAL B201	REFER TO SEAMING PLAN	--	WELDED SEAM, COLOR: 842357 GRAY		
RF-2	ACCENT RESILIENT FLOORING	MANNINGTON	BLOOM	WILDFLOWER, SHADE B103	REFER TO SEAMING PLAN	--	WELDED SEAM, COLOR: 842357 GRAY		
PAINT									
P-1	GYPSOBOARD CEILINGS, EPOXY	PPG	EPOXY, FLAT	CEILING WHITE	--	--	PAINT TO BE PPG REGARDLESS OF COLOR MATCH		
P-2	HOLLOW METAL DOOR AND WINDOW FRAME	PPG	SEMI-GLOSS	SW 6141 SOFTER TAN, PPG R012-169	--	--	PAINT TO BE PPG REGARDLESS OF COLOR MATCH		
P-3	FIELD NEUTRAL	PPG	EGGSHELL	SW 6141 SOFTER TAN, PPG R012-169	--	--	PAINT TO BE PPG REGARDLESS OF COLOR MATCH		
P-4	ACCENT BLUE	PPG	EGGSHELL AT WALLS, FLAT AT CEILINGS	PROVINCE BLUE 2135-40, PPG SF11-549	--	--	PAINT TO BE PPG REGARDLESS OF COLOR MATCH		
P-5	BLUE TO MATCH WALL PROTECTION	PPG	EGGSHELL	COLOR TO MATCH RWP-6	--	--	PAINT TO BE PPG REGARDLESS OF COLOR MATCH		
WALL PROTECTION AND ACCESSORIES									
CG-1	NEUTRAL CORNER GUARD	INPRO, PALLADIUM	150 HIGH IMPACT CORNER GUARD	OATMEAL 0239	4" H	--			
CG-1.1E	NEUTRAL CORNER GUARD	INPRO, PALLADIUM	150D HIGH IMPACT END WALL PROTECTOR	OATMEAL 0239	4" H	--			
CG-1.2	NEUTRAL CORNER GUARD	INPRO, PALLADIUM	150 HIGH IMPACT CORNER GUARD	OATMEAL 0239	FULL HEIGHT TO CEILING	--			
CG-1.2E	NEUTRAL CORNER GUARD	INPRO, PALLADIUM	150D HIGH IMPACT END WALL PROTECTOR	OATMEAL 0239	FULL HEIGHT TO CEILING	--			
CG-2.1	BLUE CORNER GUARD	CS GROUP, ACRYVYN	SM-20 CORNER GUARD	ASPEN 488	4" H	--			
CG-2.2	BLUE CORNER GUARD	CS GROUP, ACRYVYN	SM-20 CORNER GUARD	ASPEN 488	FULL HEIGHT TO CEILING	--			
CG-3.1	GREEN CORNER GUARD	CS GROUP, ACRYVYN	SM-20 CORNER GUARD	DARK MOSS 1113	4" H	--			
CG-4.1	BLUE PATTERNED CORNER GUARD	INPRO, PALLADIUM	150 HIGH IMPACT CORNER GUARD	STERLING 0293	4" H	--			
CG-5.1	STAINLESS STEEL CORNER GUARD	CS GROUP	STAINLESS STEEL, SATIN FINISH	WHITE	4" H	--			
EWP-1	EPOXY WALL PROTECTION	STONHARD	STONGLAZE VSD	WHITE	4" H	--			
FWP-1	FLEXIBLE WALL PROTECTION - BLUE	INPRO	P31EC	EXHALE SEA BREEZE P31-50342	1/4" THICK	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
FWP-2	FLEXIBLE WALL PROTECTION - GREEN	INPRO	R100CHET	CLARITY, SUCCULENT RC-CLA-R817	1/4" THICK	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-1	RIGID WALL PROTECTION - NEUTRAL	INPRO	PALLADIUM	OATMEAL 0239	6" H THICK, 4" X 8"	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-2	RIGID WALL PROTECTION - BLUE	CS GROUP	ACRYVYN	ASPEN 488	6" H THICK	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-3	RIGID WALL PROTECTION - GREEN	CS GROUP	ACRYVYN	DARK MOSS 1113	6" H THICK	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-4	RIGID WALL PROTECTION - BLUE PATTERNED	INPRO	PALLADIUM PATTERNS	THINSTRIP, STONE THN-03	6" H THICK, 4" X 8", HEIGHT VARIES	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-5	RIGID WALL PROTECTION - CUSTOM FOR LOBBY	CS GROUP	ACRYVYN	IMAGE: ISTOCK BY GETTY IMAGES, STOCK PHOTO ID 1149047492	CONTRACTOR TO V.I.F.	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-6	RIGID WALL PROTECTION - CUSTOM FOR GROUP	CS GROUP	ACRYVYN	IMAGE: GETTY IMAGES, CREATIVE ID 94451866	CONTRACTOR TO V.I.F.	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-7	RIGID WALL PROTECTION - CUSTOM FOR NURSE	CS GROUP	ACRYVYN	IMAGE: ISTOCK BY GETTY IMAGES, STOCK PHOTO ID 506478149	CONTRACTOR TO V.I.F.	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
RWP-8	RIGID WALL PROTECTION - CUSTOM FOR INFUSION	CS GROUP	ACRYVYN	IMAGE: GETTY IMAGES, CREATIVE ID 178104203	CONTRACTOR TO V.I.F.	--	PROVIDE SEALANT AND TIGHT JOINTS BETWEEN MATERIALS		
WALLCOVERING									
WC-1	ACCENT WALLCOVERING	WOLF GORDON	RIDGELINE	AEGEAN, RGL 5416	52" WIDE	--			
CASEWORK									
PLAM-1	DARK WOOD LAMINATE	WILSONART	38 FINE VELVET TEXTURE FINISH	BRAZILWOOD 7946-38	--	--			
PLAM-2	CROSSHATCH LAMINATE	WILSONART	38 FINE VELVET TEXTURE FINISH	HANDSPUN CHESTNUT 5036-38	--	--			
PLAM-3	PHARMACY LAMINATE	WILSONART	60 MATTE FINISH	WALLABY D439-60	--	--			
PLAM-4	TEAL LAMINATE	WILSONART	60 MATTE FINISH	INK SOUP Y0357	--	--			
PLAM-5	LIGHT WOOD LAMINATE	WILSONART	38 FINE VELVET TEXTURE FINISH	NEW AGE OAK 7938-38	--	--			
SS-1	STAINLESS STEEL	--	--	--	--	--			
SSM-1	FIELD SOLID SURFACE	CORIAN	WILLOW	--	--	--			
SSM-2	ACCENT SOLID SURFACE	CORIAN	RAIN CLOUD	--	--	--			
SSM-3	WINDOW SILL SOLID SURFACE	CORIAN	WILLOW	--	--	--			
TRIM									
TR-1	TILE COVE TRIM	SCHLUTER	DILEX-AHK	SATIN ANODIZED ALUMINUM	--	--	TILE COVE TRIM		
TR-2	TILE OUTSIDE CORNER TRIM	SCHLUTER	RONDEC	SATIN ANODIZED ALUMINUM	--	--	TILE OUTSIDE CORNER TRIM		
TR-3	TILE EXPOSED EDGE TRIM	SCHLUTER	JOLLY	SATIN ANODIZED ALUMINUM	--	--	TILE EXPOSED EDGE TRIM		
GROUT									
GT-1	GRAY GROUT	LATICRETE	UNSANDED	24 NATURAL GREY	--	--			
GT-2	TAN GROUT	LATICRETE	UNSANDED	56 DESERT KHAKI	--	--			
GT-3	CREAM GROUT	LATICRETE	UNSANDED	94 WALNUT	--	--			
TILE									
T-1	ACCENT TILE	WOW USA (VIRGINIA TILE)	POTTERY, COSMIC	NATURAL	2" x 6"	HERRINGBONE	1/8" GROUT JOINT, GT-1		
T-2	ACCENT TILE	WOW USA (VIRGINIA TILE)	POTTERY	NATURAL	2" x 6"	HERRINGBONE	1/8" GROUT JOINT, GT-1		
T-3	ACCENT TILE	WOW USA (VIRGINIA TILE)	POTTERY	GREY	2" x 6"	HERRINGBONE	1/8" GROUT JOINT, GT-1		
T-4	RESTROOM FLORAL TILE	MARAZZI (VIRGINIA TILE)	RICE, DECO BLOSSOM	BIANCO	2" x 6"	VERTICAL STACK	1/8" GROUT JOINT, GT-2		
T-5	RESTROOM WOOD TILE	CROSSVILLE (VIRGINIA TILE)	NEST	BLISSFUL OLIVE	6" X 36"	VERTICAL STACK	1/16" GROUT JOINT, GT-2		
T-6	RESTROOM MOSAIC WOOD TILE	CROSSVILLE (VIRGINIA TILE)	NEST	BLISSFUL MOSAIC	1" X 6" MOSAIC	VERTICAL STACK	GROUT JOINT TO MATCH MOSAIC SPACING OF APPROX. 7/8"; GT-2		
T-7	FIELD WALL TILE	ATLAS CONCORDE USA (GENESSEE TILE)	FRAY	WHITE	12" x 24"	VERTICAL STACK	1/16" GROUT JOINT, GT-3		
T-8	FIELD FLOOR TILE	ATLAS CONCORDE USA (GENESSEE TILE)	FRAY	SAND	24" x 48"	MONOLITHIC	1/16" GROUT JOINT, GT-1		
RESIN									
RSN-1.1	FERN RESIN - GLAZING	3FORM	SANDSTONE F01	IVORY FLORA, MOUNTAIN FERN	1/4" GAUGE	--			
RSN-1.2	FERN RESIN - MILLWORK	3FORM	SANDSTONE F01	IVORY FLORA, MOUNTAIN FERN W/ POWDER	1/4" GAUGE	--	LID# 1063714		
RSN-2.1	OMBRE RESIN - GLAZING	3FORM	SANDSTONE F01	INTERLAYERS, HORIZON DAY	1/4" GAUGE	--	LID# 1074466		
RSN-2.2	OMBRE RESIN - DOORS	3FORM	SANDSTONE F01	INTERLAYERS, HORIZON DAY (PRINTED)	1/2" GAUGE	--	LID# 1034636		
RSN-3	BLUE RESIN - INFUSION BAYS	3FORM	SANDSTONE F01	INTERLAYERS, VITA ORBIT	1/2" GAUGE	PATTERN INSTALL TO BE CONSISTENT	LID# 1074495		
RSN-4	LEAF RESIN - MILLWORK	3FORM	SANDSTONE F01	INTERLAYERS, FOSSIL LEAF ICEBERG W/ POWDER	1/4" GAUGE	--	LID# 1020271		
RSN-5	LEAF RESIN - GLAZING	3FORM	SANDSTONE F01	VARIA, CLEAR	1/4" GAUGE	--			
WOOD									
WD-1	WOOD DOORS	MASONITE	ASPIRO SERIES	RED OAK, PLAIN SLICED, CLEAR	--	--	VA PROVIDED, CONTRACTOR INSTALLED		
FABRIC									
FAB-1	VEHICLE CURTAIN FABRIC	ARC-COM	AQUIFER X, AC-33405X	CARIBBEAN #6	72" W	RAILROAD INSTALL			
FAB-2	BUILT IN BENCH FABRIC	CF STINSON	LUNARIA	LUN1 BERGAMOT	54" W	--			

INTERIORS ABBREVIATIONS	
ABBREVIATION	FULL TEXT
ACP	ACOUSTICAL CEILING PANEL
ACS	ACOUSTICAL CEILING SPRAY
AL	ALUMINUM
BF	BARRIER FREE
BR	BUMP RAIL
CG	CORNER GUARD
CPT	CARPET TILE
CS	CONCRETE SEALER
EFF	EFFICIENCY
EL	ELEVATION
EP	EPOXY PAINT
ES	EXPOSED STRUCTURE
EW	ENTERING WATER TEMPERATURE
F&Y	FLOAT AND THERMOSTATIC
FAB	FABRIC/UPHOLSTERY
FCO	FLOOR CLEANOUT
FPM	FEET PER MINUTE
FRP	FIELD REINFORCED PANEL
FS	FLOW SWITCH
FV	FIELD VERIFY
GL	GLASS
GT	GROUT
GYP, BD	GYPSUM BOARD
HM	HOLLOW METAL
IN	INCHES
NF	NO FINISH
P	PAINT
PLUM	PLASTIC LAMINATE
PLY	PLYWOOD
QT	QUARRY TILE
QTB	QUARTZ TILE BASE
QTZ	QUARTZ
RB	RUBBER BASE
RF	RESILIENT FLOORING
RSN	RESIN
SLR	CONCRETE SEALER
SLS	SOLID SURFACE
STL	STEEL
STN	STAIN
TP	TOILET PARTITION
TR	TRANSITION TRIM
TYP	TYPICAL
WCVR	WALL COVERING
WS	WINDOW SHADE

MANUFACTURER REPRESENTATIVES	
ARMSTRONG: JEFF BUCKALLEW; JBUCKALLEW@ARMSTRONGCEILINGS.COM; 231-357-1499	
MOMENTUM: BRANDI WEISS; BWEISS@MOMTEX.COM; 313-720-2871	
CS GROUP / EISEN GROUP: MATT MILLER; MATTM@EISENGROUP.COM; 248-804-7505	
WOLF GORDON: ANDREA LUPO; ANDREA.LUPO@WOLFGORDON.COM; 616-745-7496	
WILSONART: JON RAUCH JR.; JONRAUCH@LUMBERMENS-INC.COM; 616-291-1430	
VIRGINIA TILE: LISA MCLEAN; LISAMCLEAN@VIRGINIATILE.COM; 616-262-1102	
GENESSEE TILE: BRITTANY JOHNSON; BRITTANY.JOHNSON@GCTILE.COM; 616-780-7733	
CORIAN / OLDENKAMP: HILLARY EDWARDS; HEDWARDS@OLDENKAMP.COM; 616-613-0319	
3FORM: REBECCA BLACK; REBECCA.BLACK@3-FORM.COM; 313-500-9710	

A
B
C
D
E
F

5/10/2025 8:24:35 AM
Autodesk Docs\VA MI Design\210297_A.rvt
VA FORM 08-6231

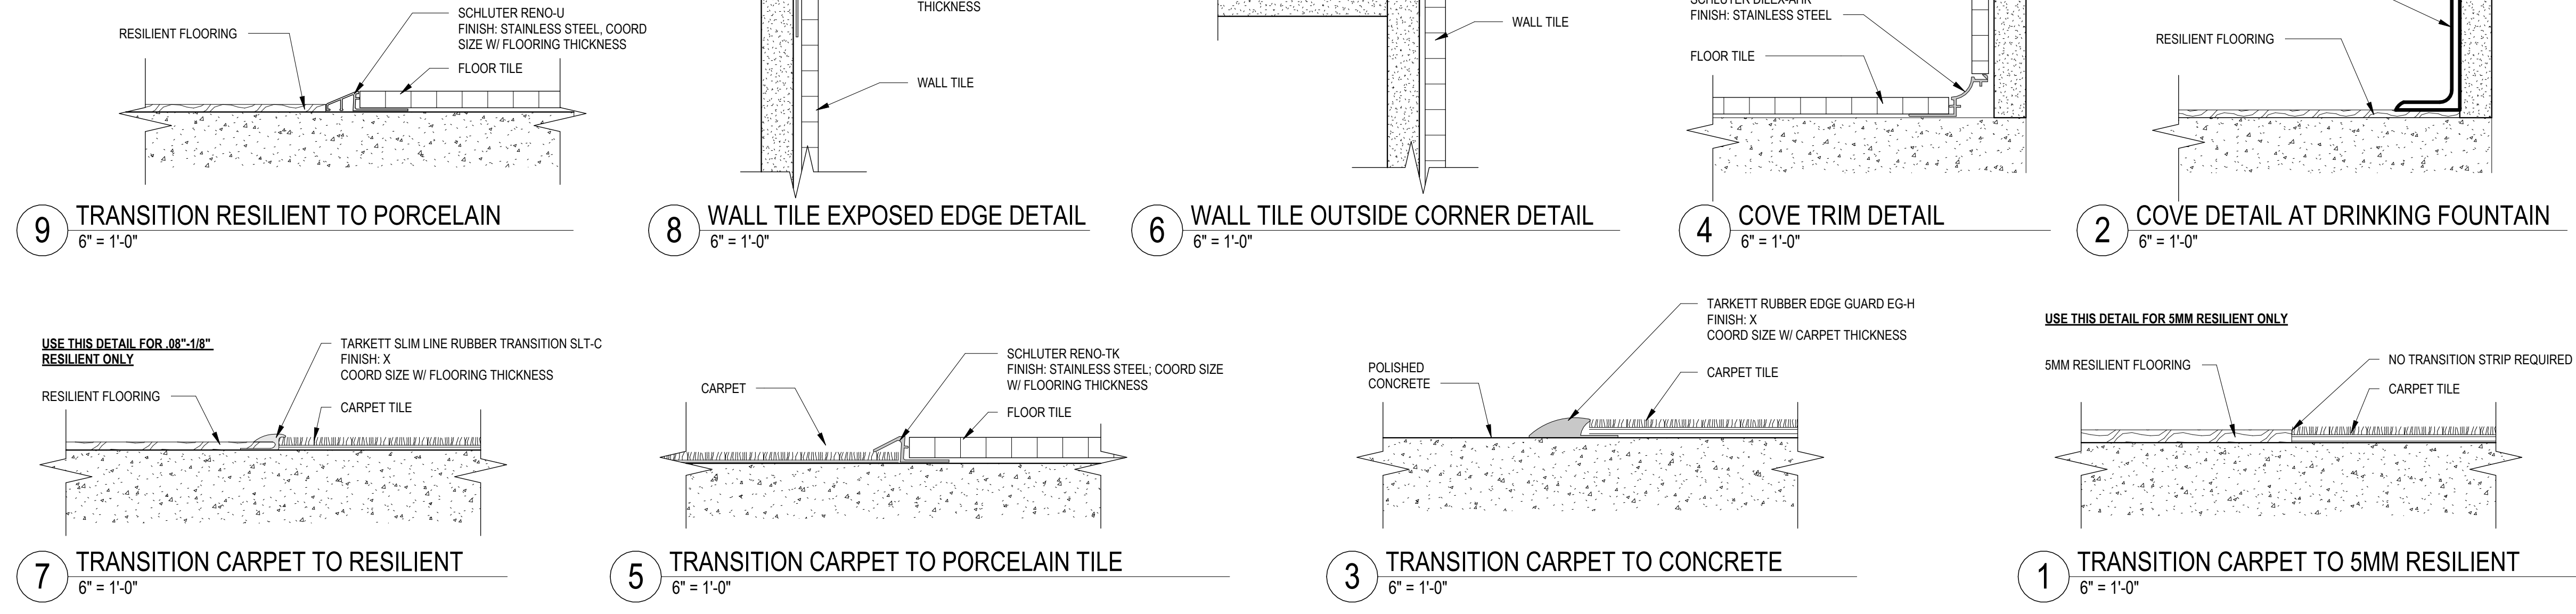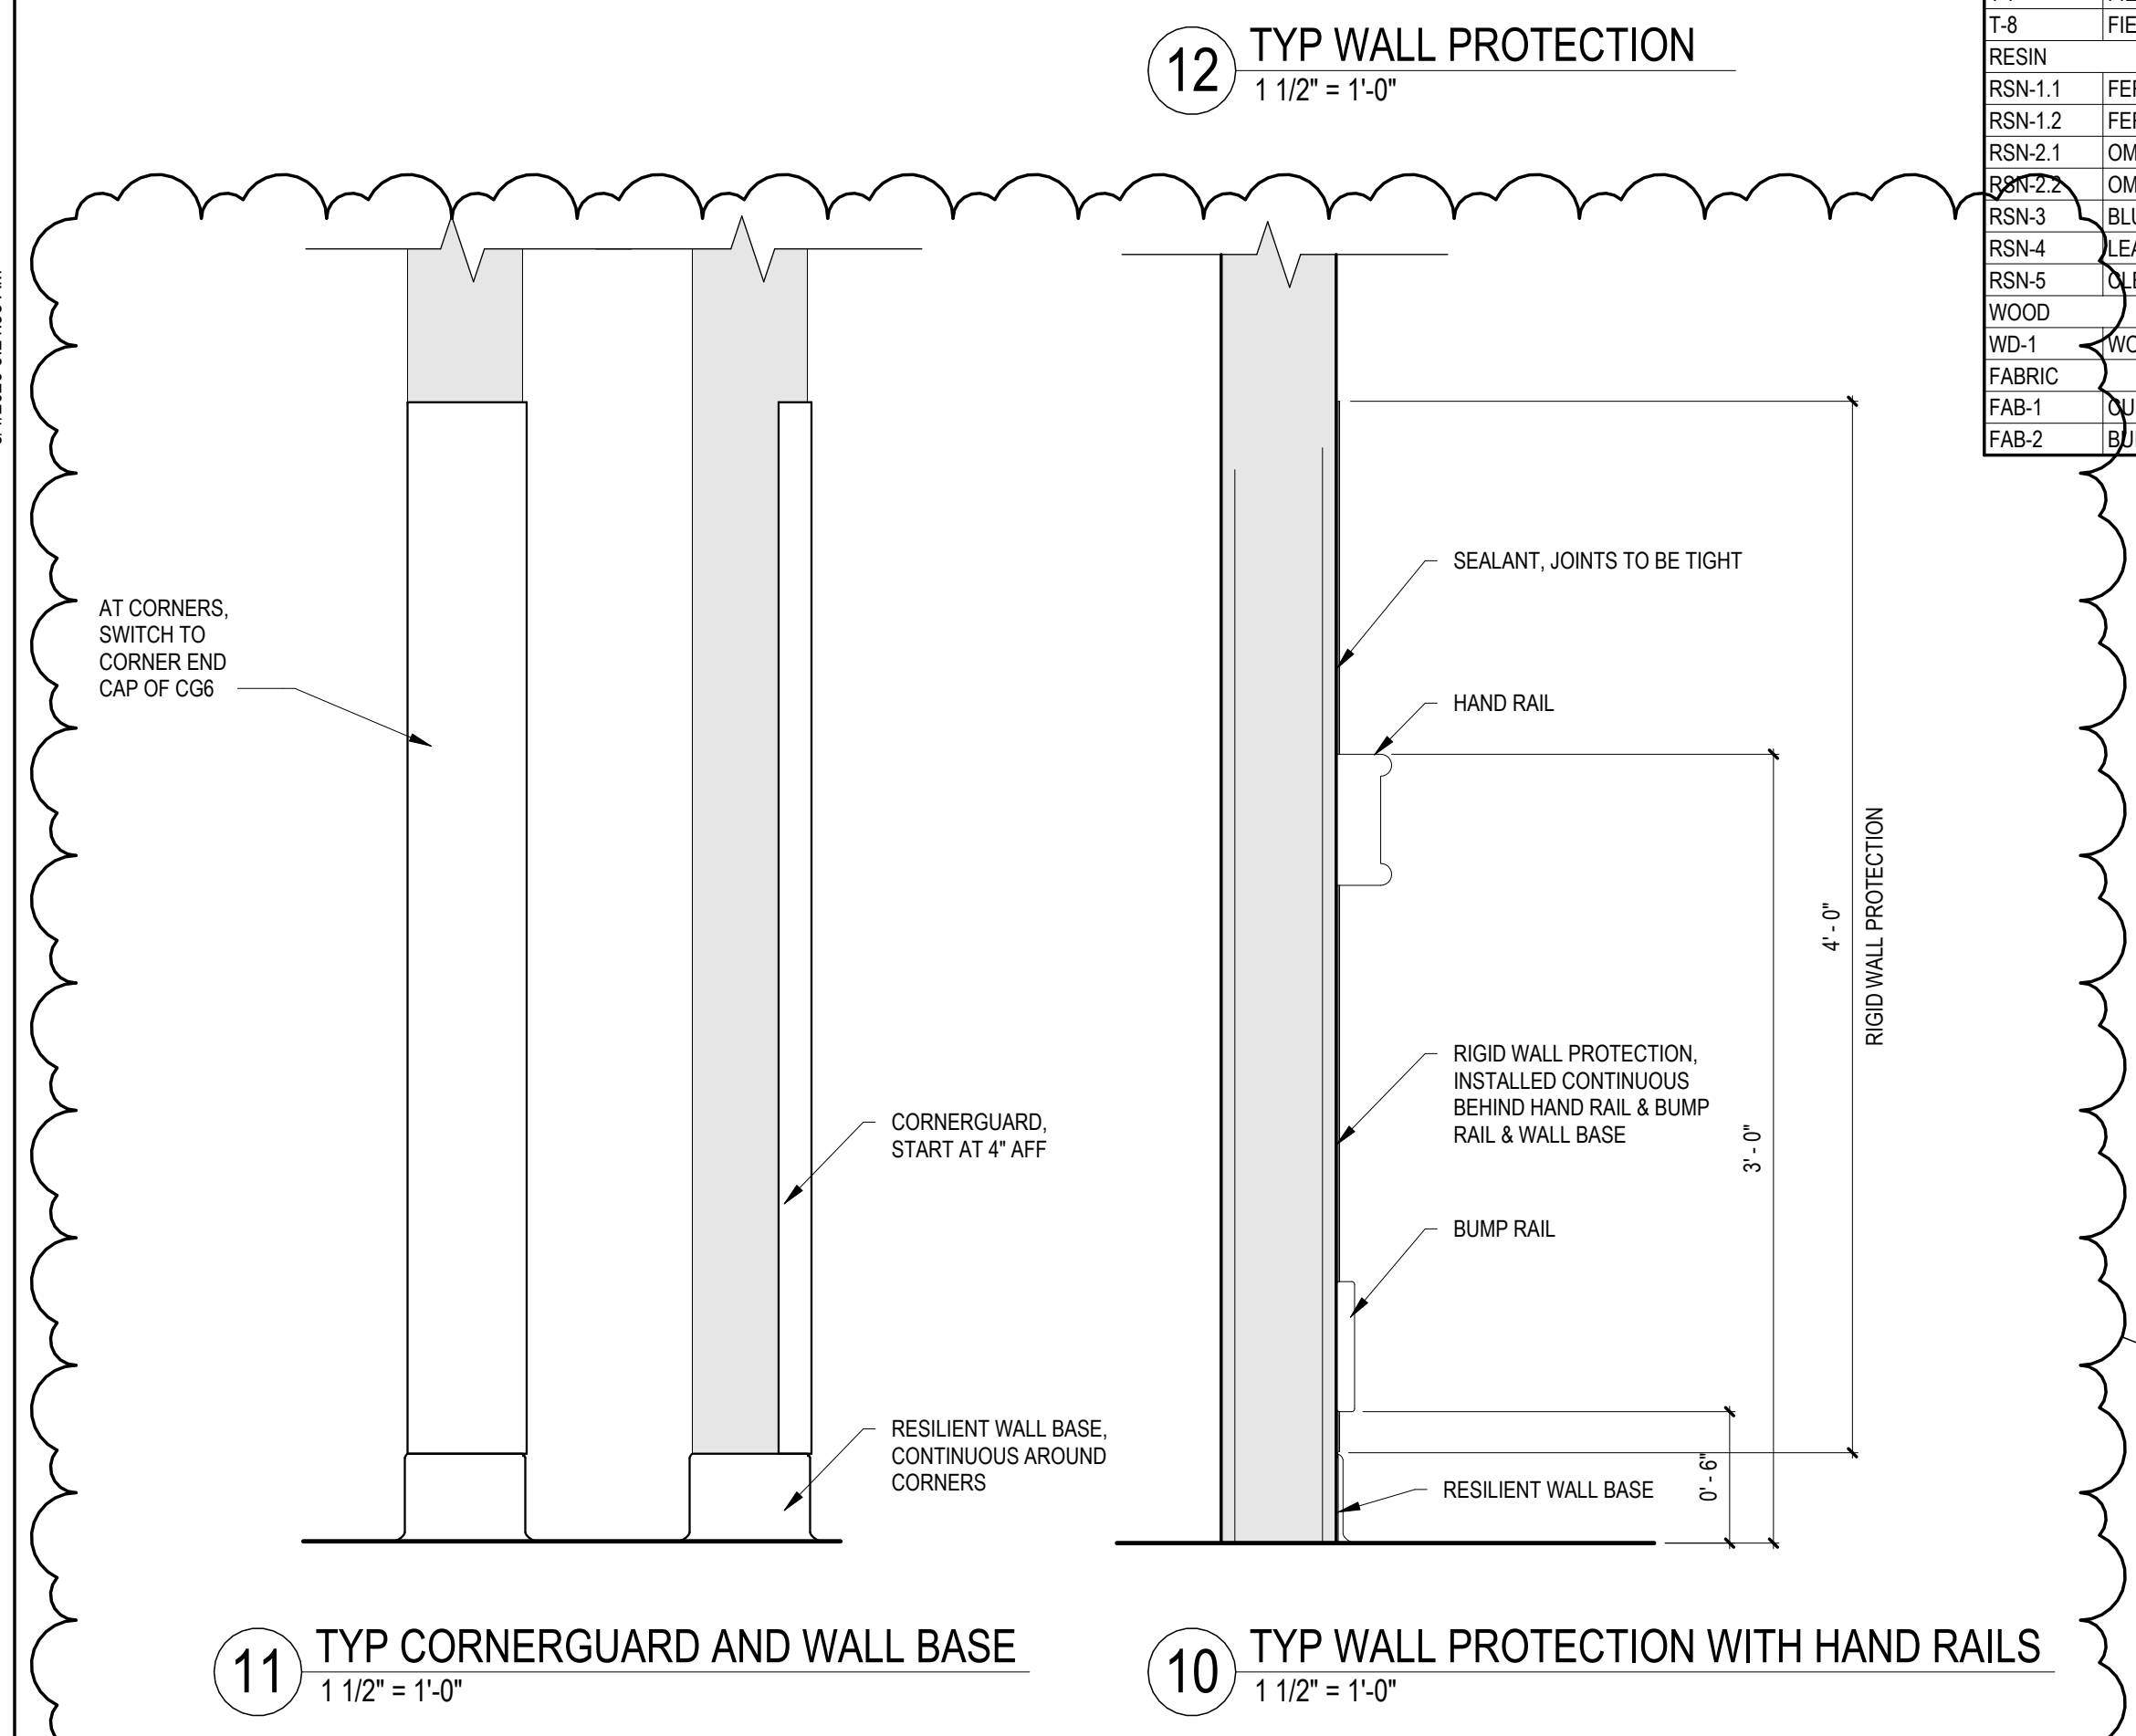

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions: 30-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title INTERIORS GENERAL NOTES AND LEGENDS Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location: DETROIT, MI Issue Date: 10-JAN-2025 Checked: KJH Drawn: CJA	Project Number 553-21-100 Building Number Drawing Number I-001
--	--	--	--	---	---	--	--	---

PARTITION / WALL FIRE RATINGS		
NON-RATED	EXISTING NON-RATED	
1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER	
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER	
2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER	

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN. - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

- ROOM FINISH GENERAL NOTES**
- DOOR FRAME COLOR CHANGES SHALL OCCUR ON STOP AS IF DOOR IS IN CLOSED POSITION WITH THE DOOR AND FRAME SHOWING AS ONE COLOR.
 - FLOORING TRANSITIONS SHALL BE CENTERED UNDER DOOR WHILE IN CLOSED POSITION. PROVIDE TRANSITION STRIP BETWEEN ALL FLOORING MATERIAL TRANSITIONS.
 - ALL AREAS EXPOSED TO VIEW ABOVE THE CEILINGS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - ALL EXPOSED STRUCTURAL, PLUMBING, MECHANICAL & ELECTRICAL ELEMENTS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - RIGID WALL PROTECTION TO BE INSTALLED AFTER CASEWORK.


INTERIOR FINISH LEGEND

	RF-1
	RF-2
	EF-1
	EF-2
	EF-3
	CPT-1
	CPT-2
	CPT-3
	T-8


INTERIOR FINISH TAG

FIELD WALL FINISH
FIELD BASE FINISH
FIELD FLOOR FINISH


INDICATES EXTENT OF ACCENT WALL FINISH

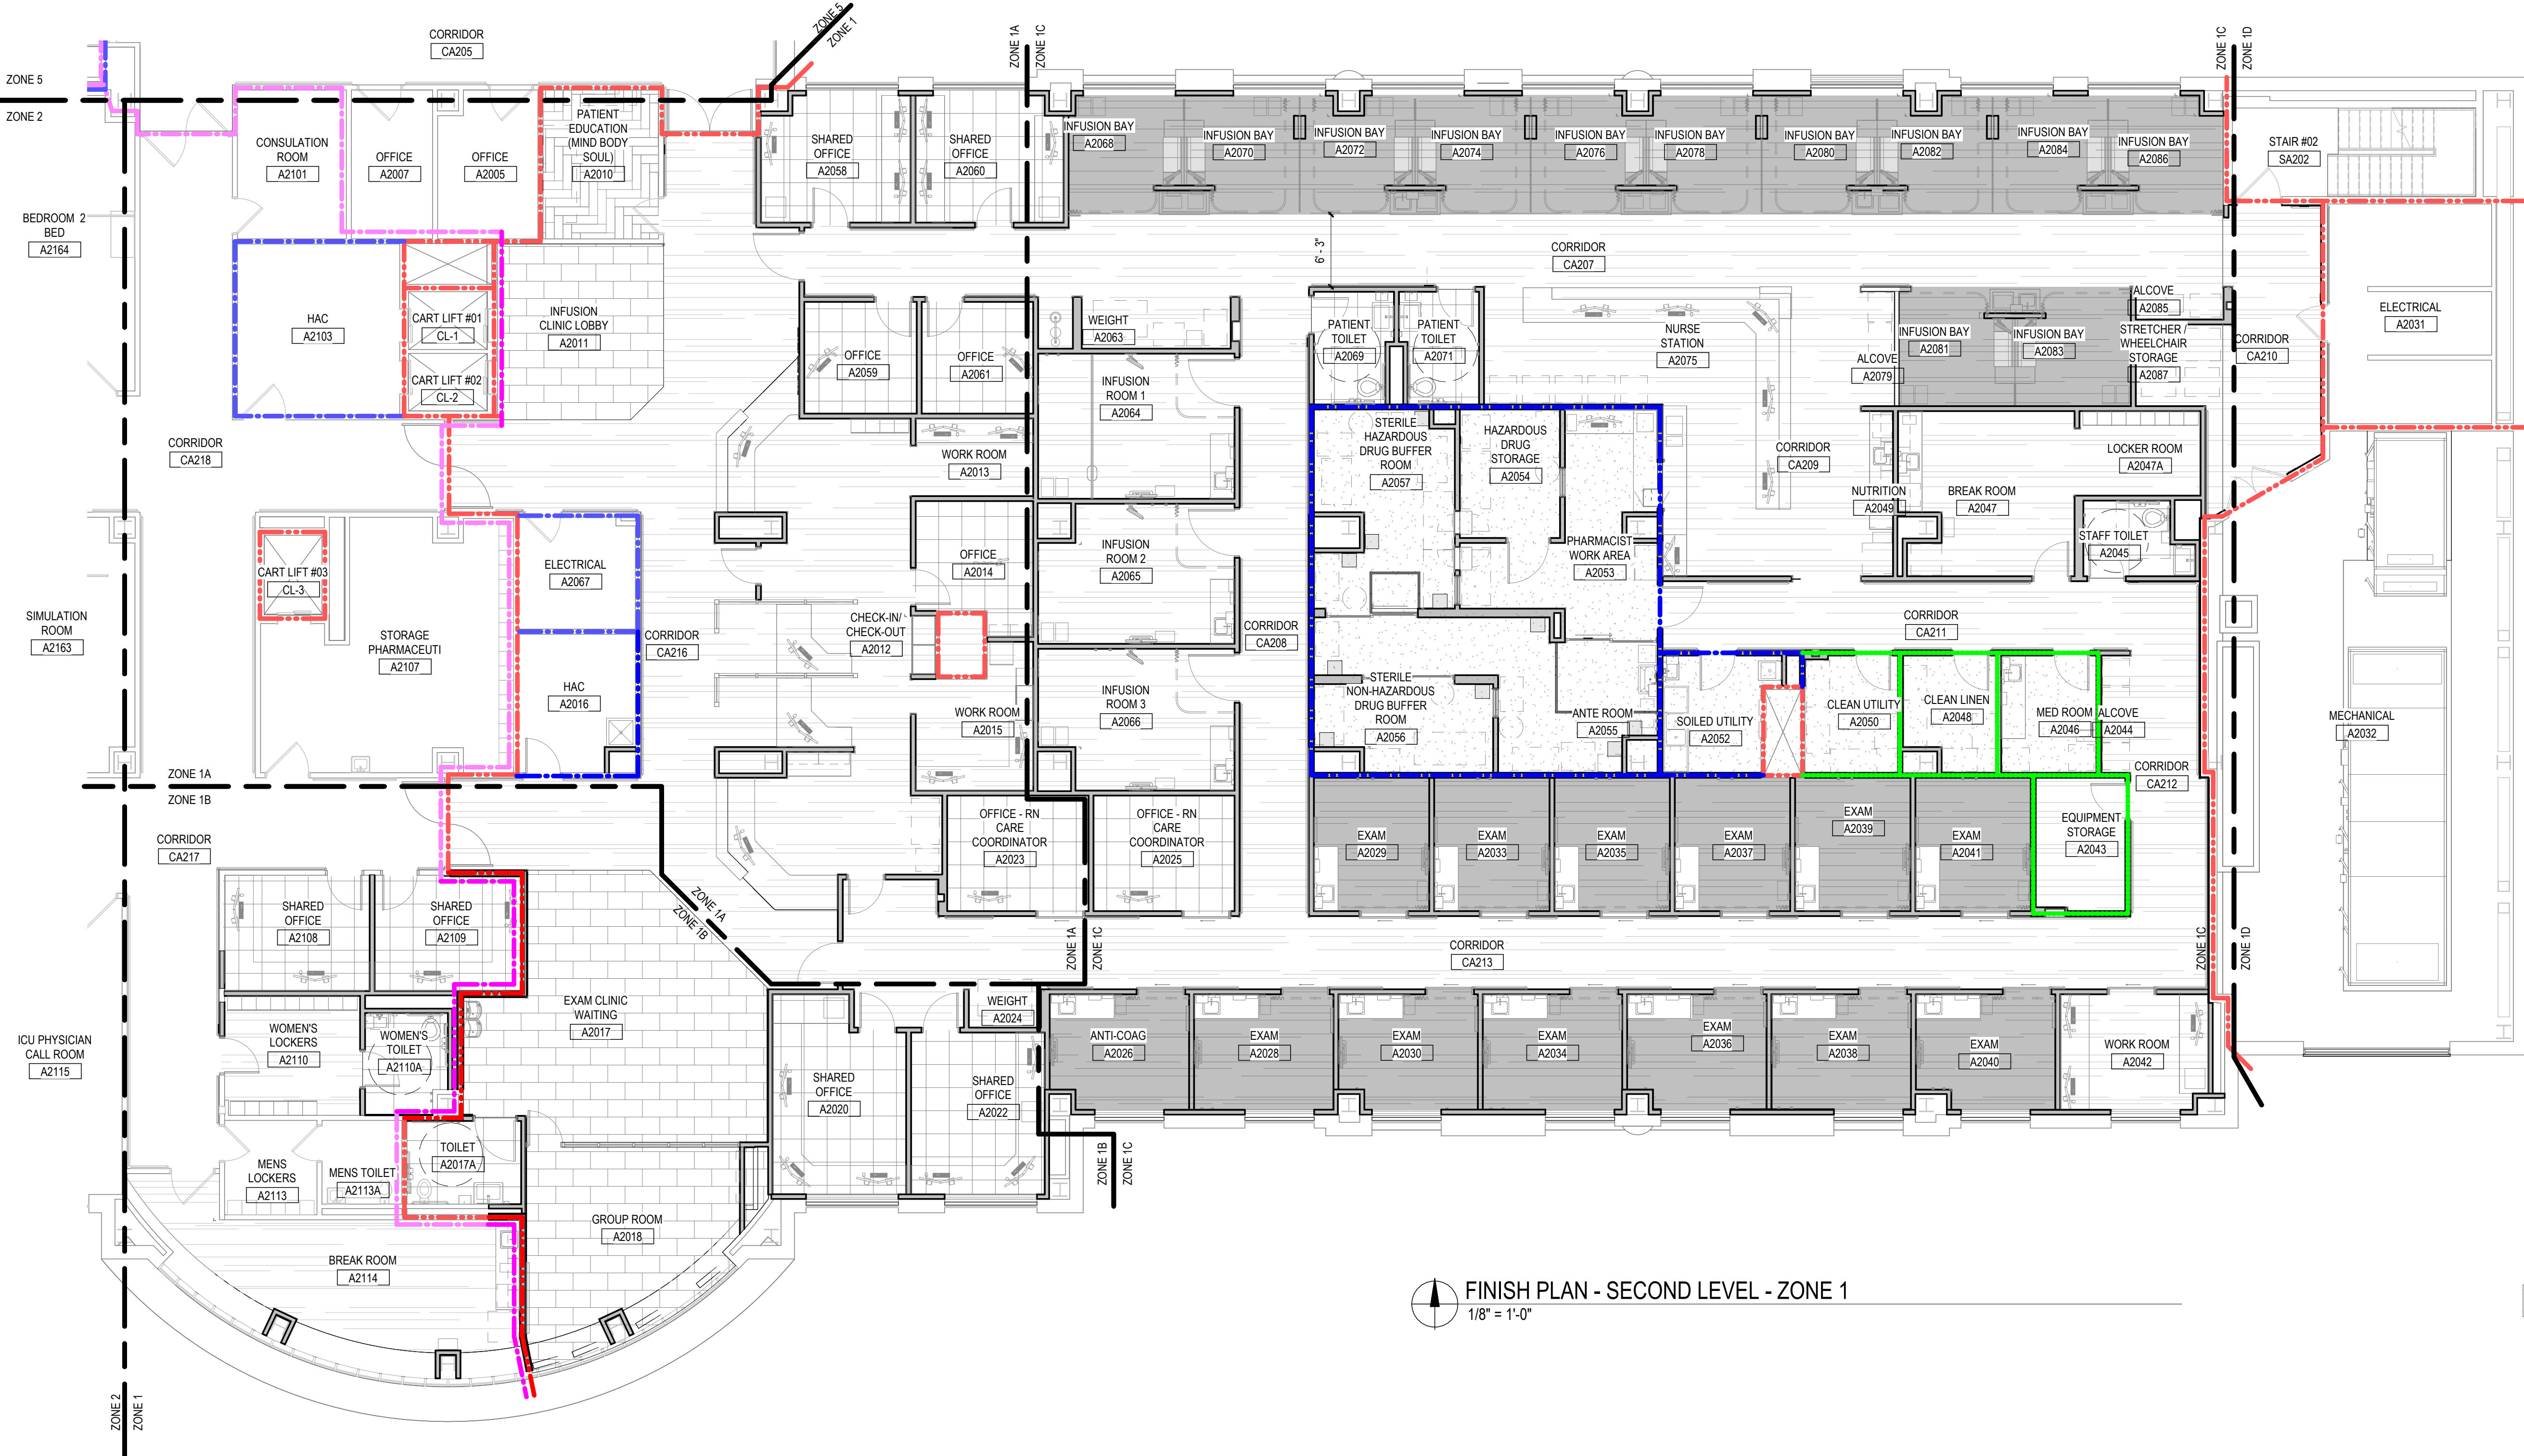

FINISH PLAN - SECOND LEVEL - ZONE 1
1/8" = 1'-0"

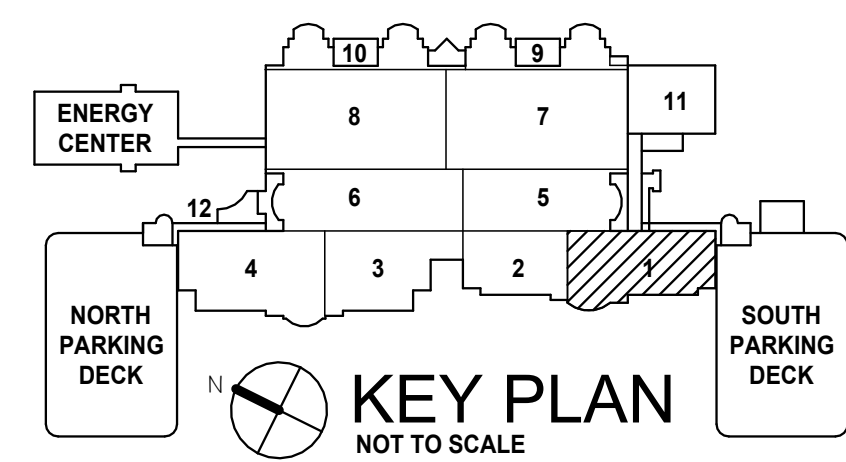


VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201		CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM		ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202		STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title FINISH PLAN - SECOND LEVEL - ZONE 1 Approved:		Phase 100% BID DOCUMENTS FULLY SPRINKLERED		Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA		Project Number 553-21-100 Building Number Drawing Number I-102.1	
--	--	--	--	--	--	--	--	--	--	---	--	--	--	---	--

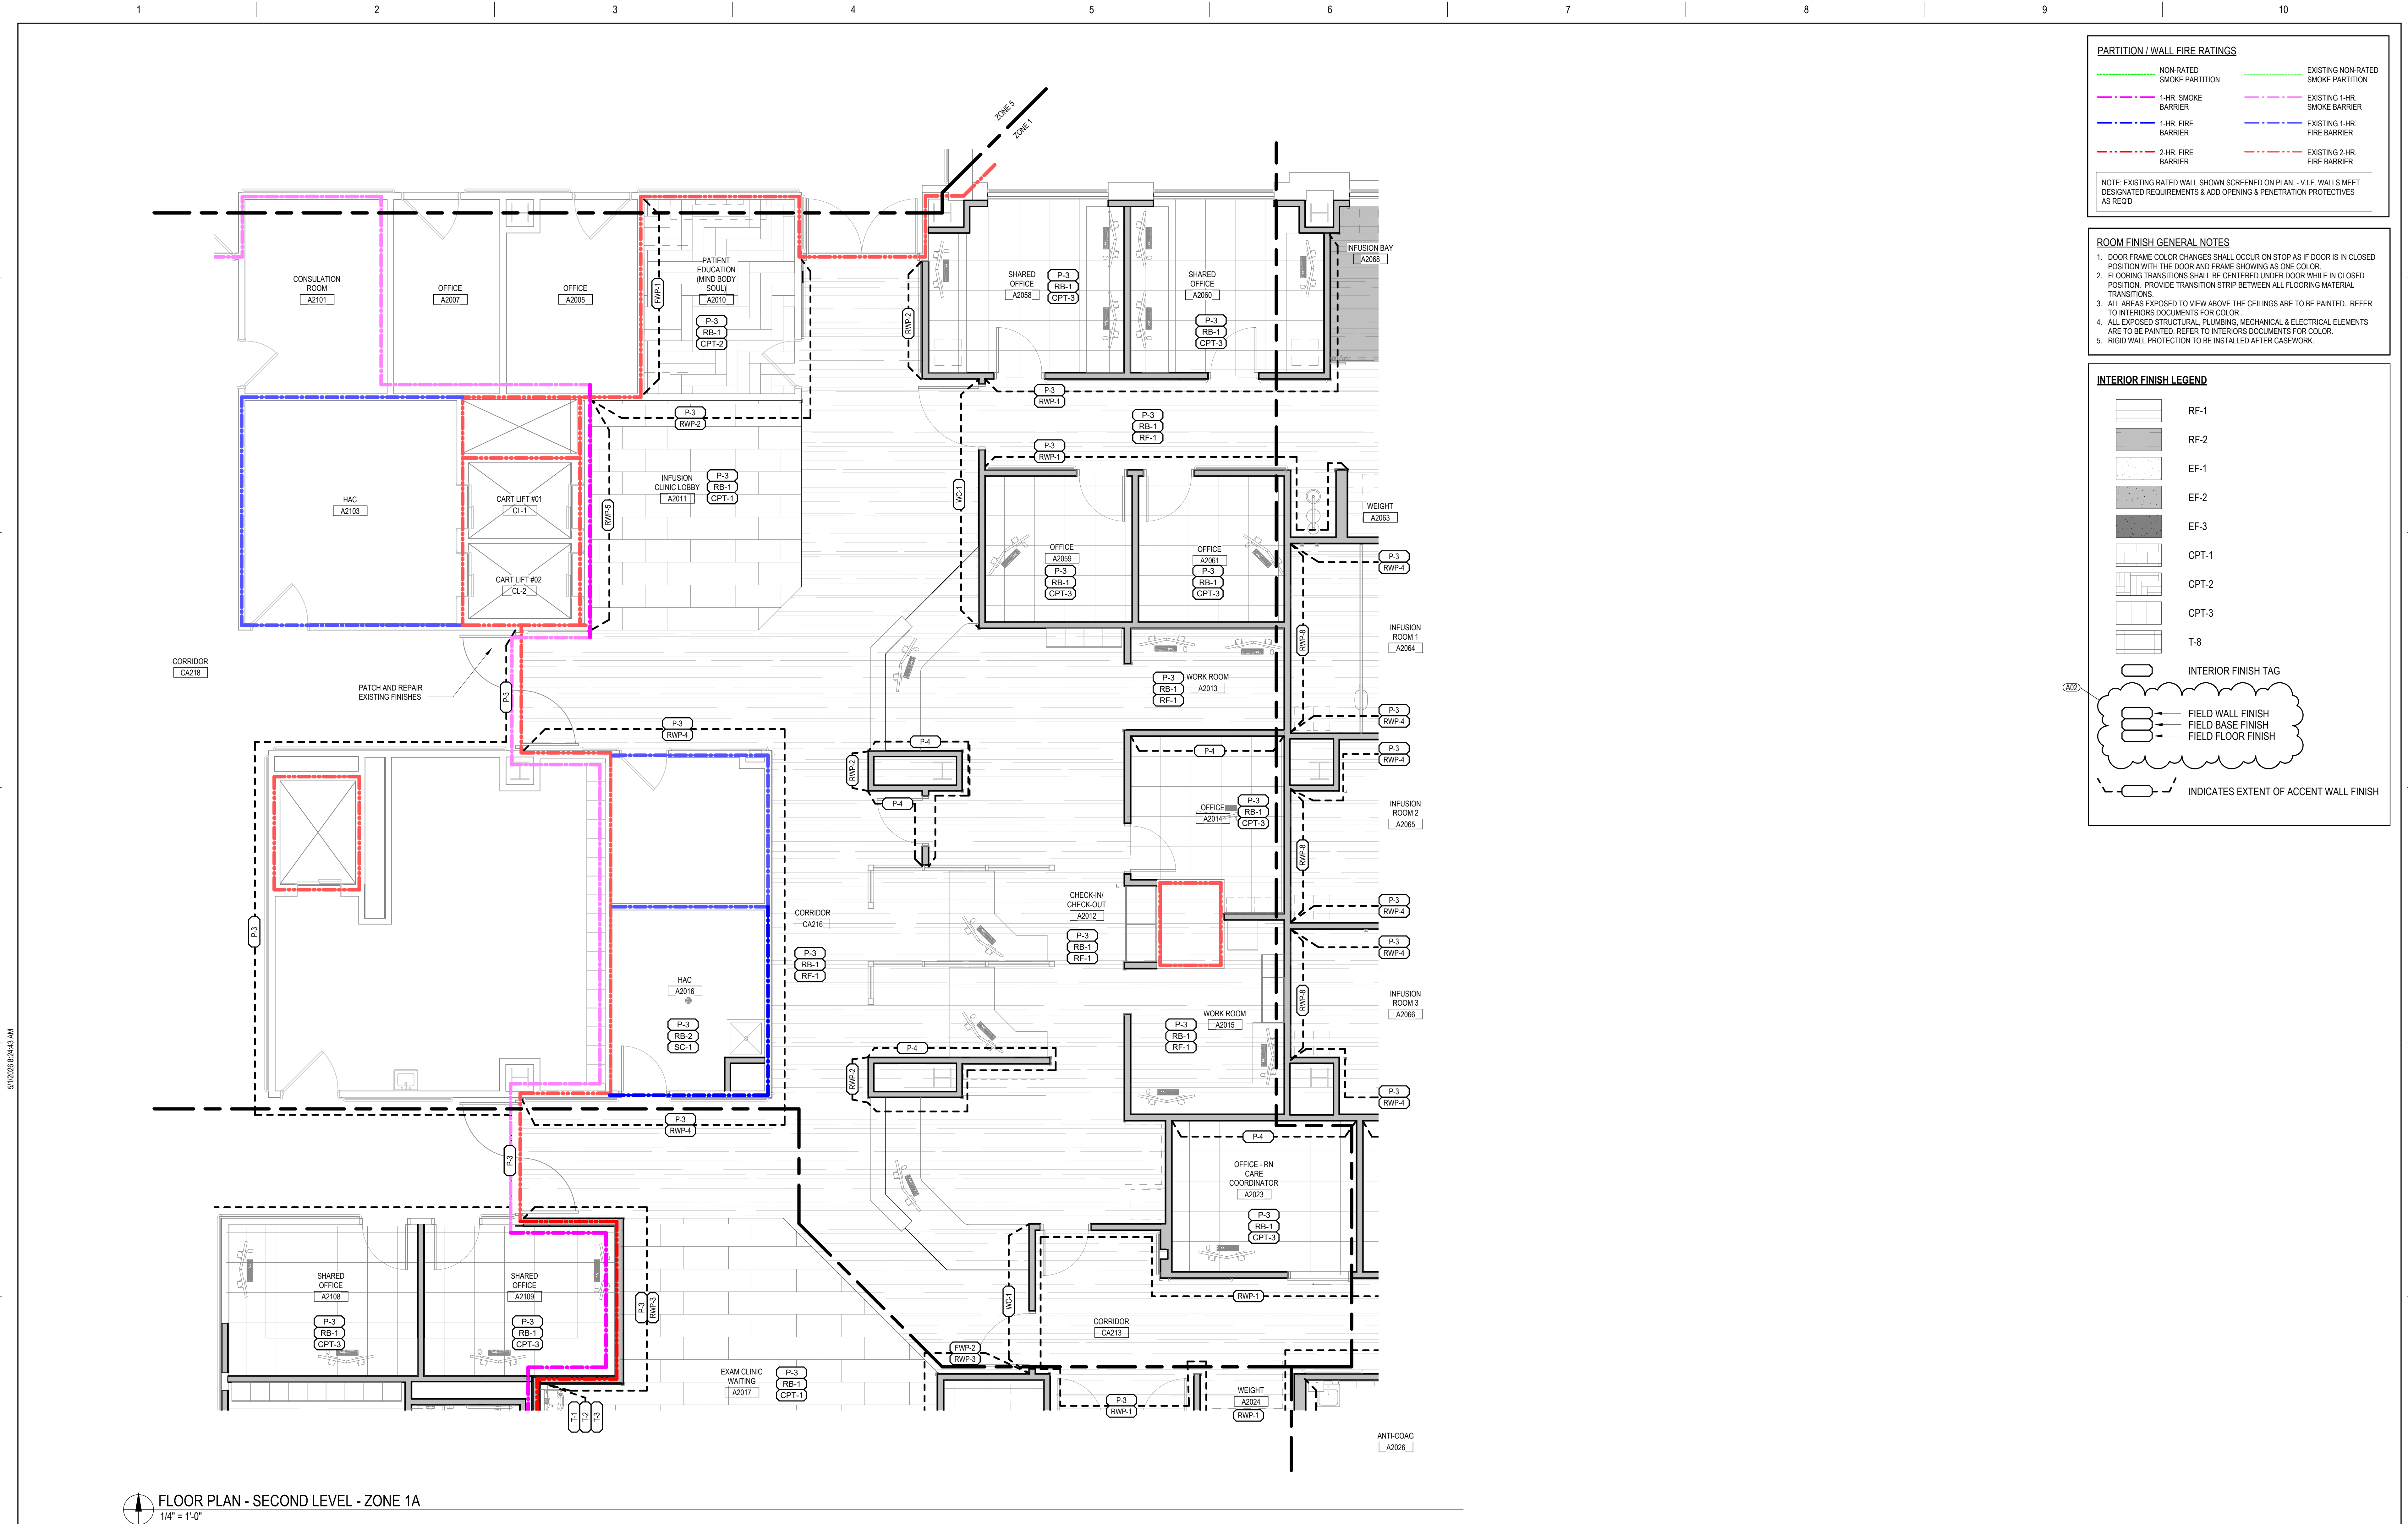

FLOOR PLAN - SECOND LEVEL - ZONE 1A
1/4" = 1'-0"

ADDENDUM 01 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions: 02-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:		VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title FINISH PLAN - SECOND LEVEL - ZONE 1A Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA	Project Number 553-21-100 Building Number Drawing Number I-102.1A
---	--	---	---	---	--	--	--	---	---

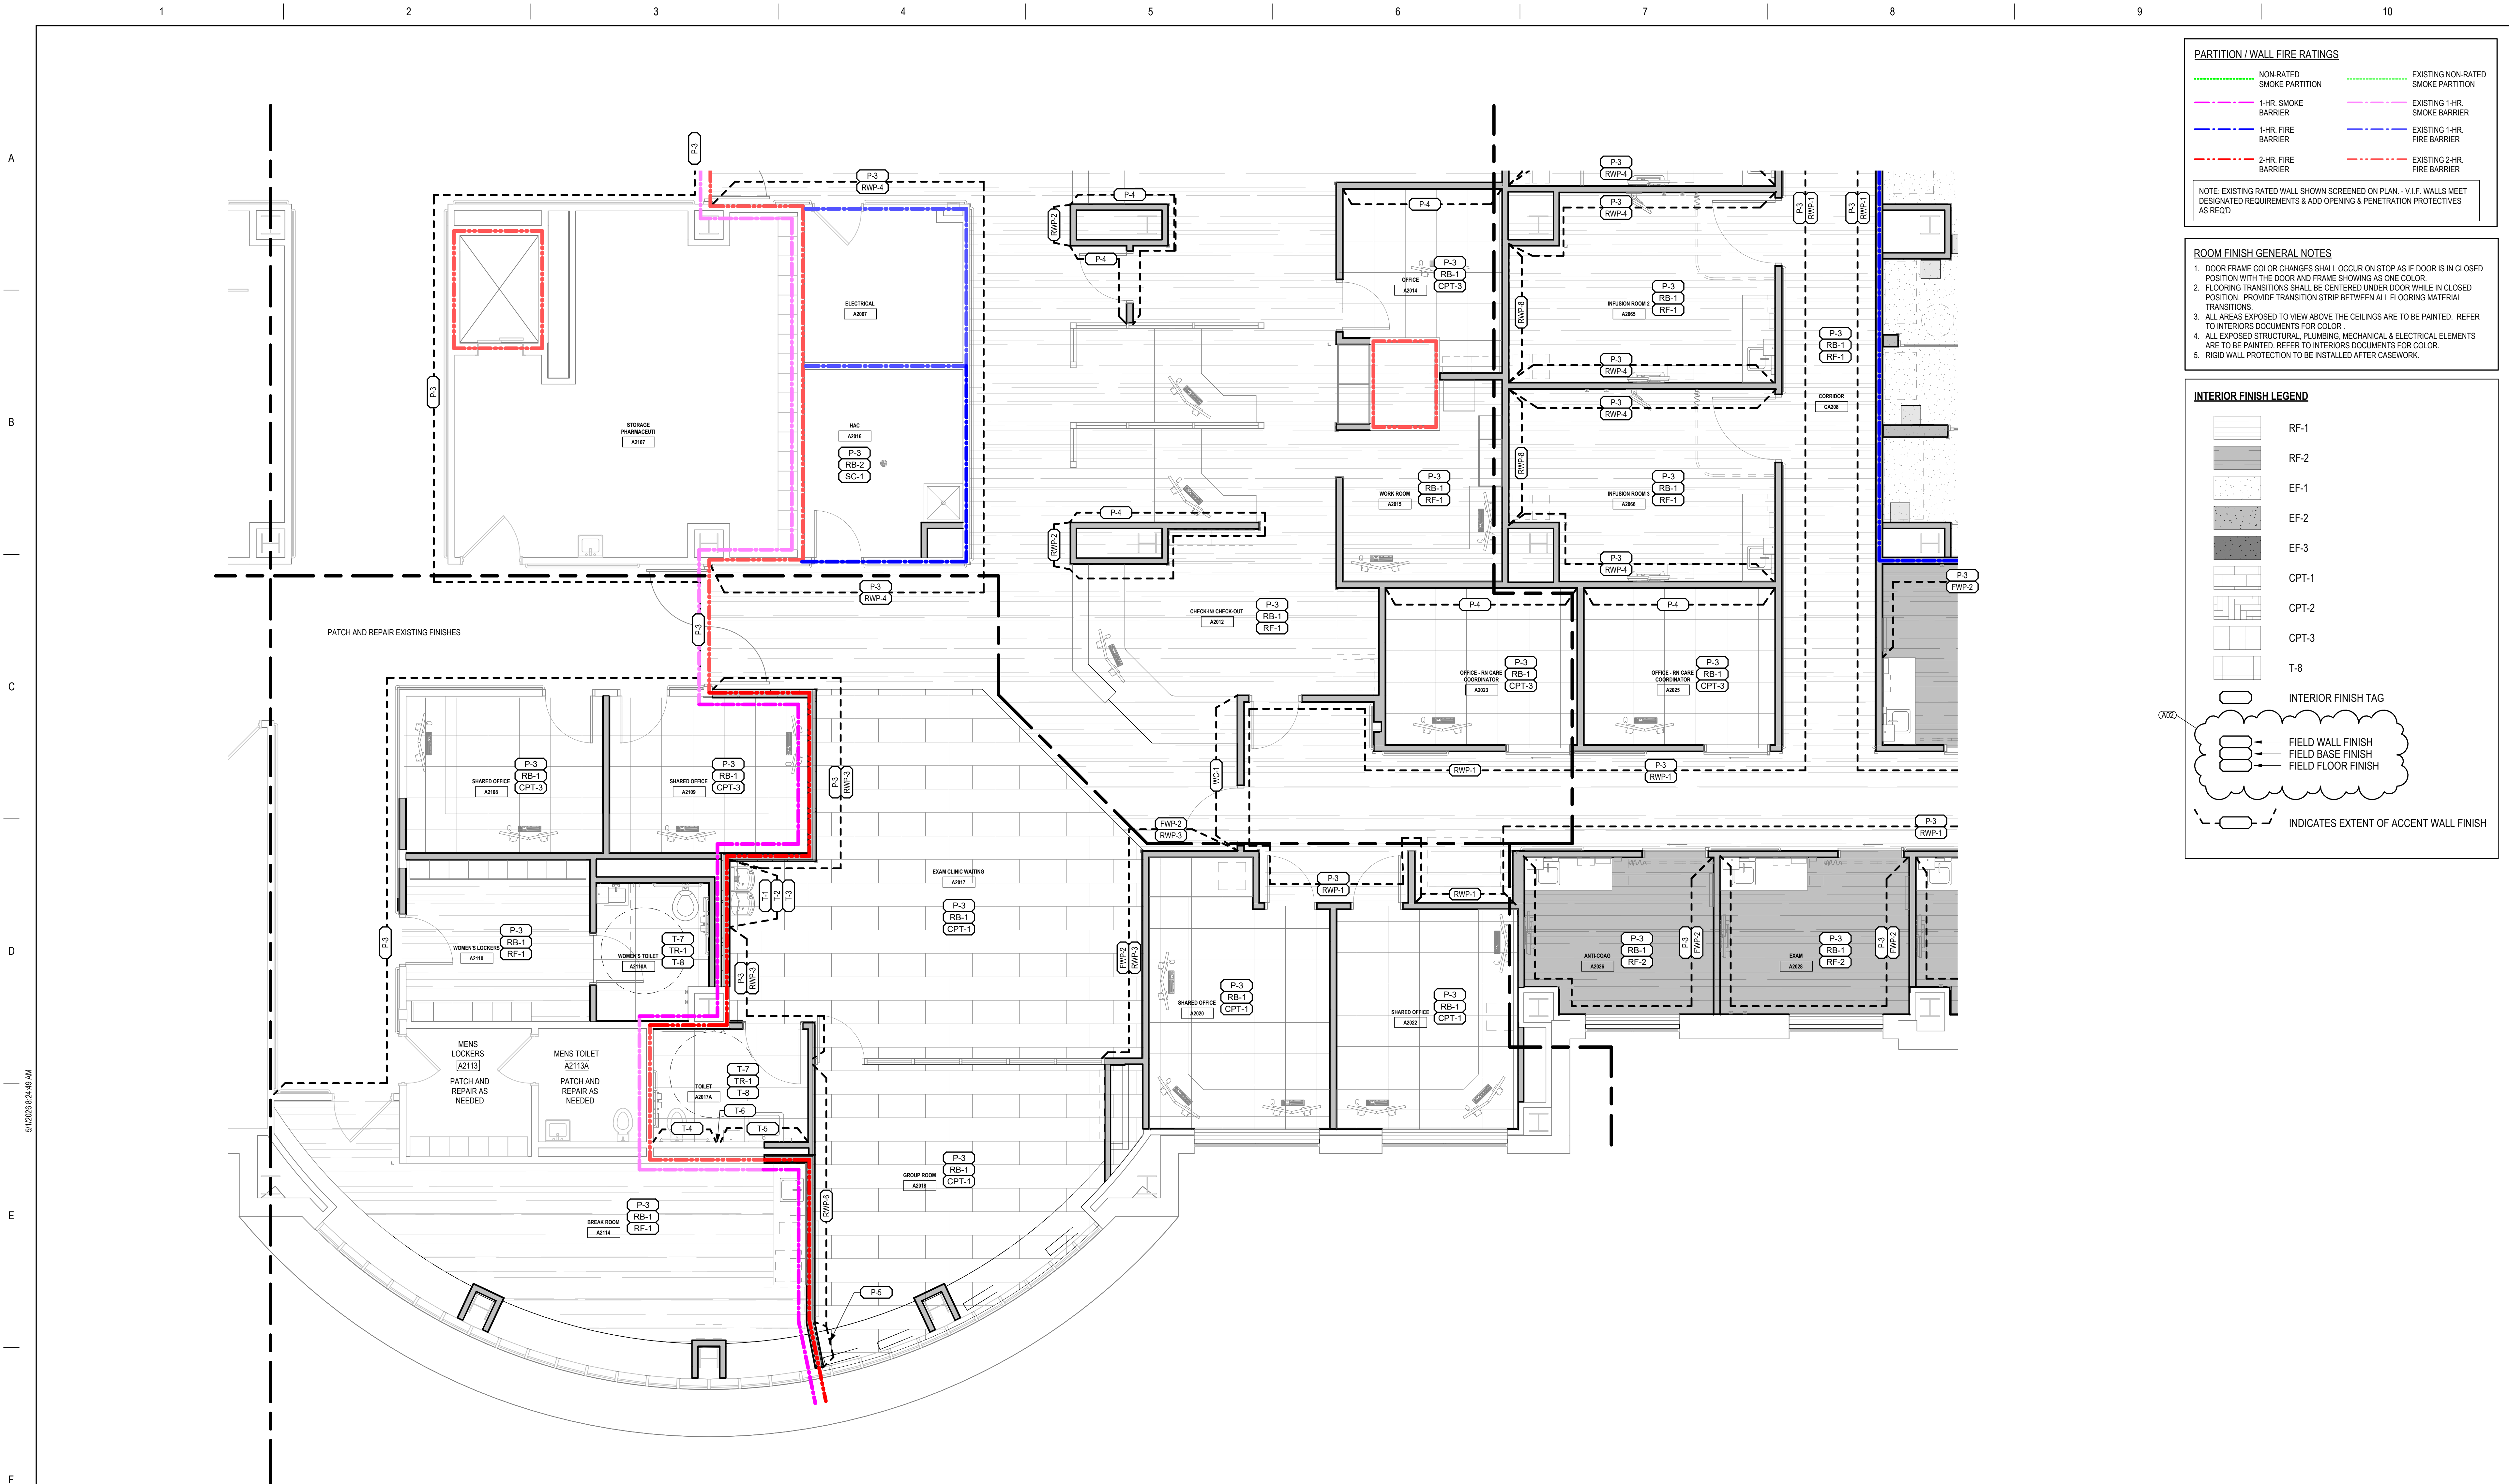

PARTITION / WALL FIRE RATINGS		
NON-RATED	EXISTING NON-RATED	
1-HR. SMOKE	EXISTING 1-HR. SMOKE	
1-HR. FIRE	EXISTING 1-HR. FIRE	
2-HR. FIRE	EXISTING 2-HR. FIRE	

- ROOM FINISH GENERAL NOTES**
- DOOR FRAME COLOR CHANGES SHALL OCCUR ON STOP AS IF DOOR IS IN CLOSED POSITION WITH THE DOOR AND FRAME SHOWING AS ONE COLOR.
 - FLOORING TRANSITIONS SHALL BE CENTERED UNDER DOOR WHILE IN CLOSED POSITION. PROVIDE TRANSITION STRIP BETWEEN ALL FLOORING MATERIAL TRANSITIONS.
 - ALL AREAS EXPOSED TO VIEW ABOVE THE CEILINGS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - ALL EXPOSED STRUCTURAL, PLUMBING, MECHANICAL & ELECTRICAL ELEMENTS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - RIGID WALL PROTECTION TO BE INSTALLED AFTER CASEWORK.

INTERIOR FINISH LEGEND	
RF-1	
RF-2	
EF-1	
EF-2	
EF-3	
CPT-1	
CPT-2	
CPT-3	
T-8	
INTERIOR FINISH TAG	
FIELD WALL FINISH	
FIELD BASE FINISH	
FIELD FLOOR FINISH	
INDICATES EXTENT OF ACCENT WALL FINISH	

FINISH PLAN - SECOND LEVEL - ZONE 1B
1/4" = 1'-0"

VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title FINISH PLAN - SECOND LEVEL - ZONE 1B Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA	Project Number 553-21-100 Building Number Drawing Number I-102.1B
--	--	--	--------------	--	---	---	--	--



PARTITION / WALL FIRE RATINGS			
NON-RATED SMOKE PARTITION	EXISTING NON-RATED SMOKE PARTITION	1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER	2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN. - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

- ROOM FINISH GENERAL NOTES**
- DOOR FRAME COLOR CHANGES SHALL OCCUR ON STOP AS IF DOOR IS IN CLOSED POSITION WITH THE DOOR AND FRAME SHOWING AS ONE COLOR.
 - FLOORING TRANSITIONS SHALL BE CENTERED UNDER DOOR WHILE IN CLOSED POSITION. PROVIDE TRANSITION STRIP BETWEEN ALL FLOORING MATERIAL TRANSITIONS.
 - ALL AREAS EXPOSED TO VIEW ABOVE THE CEILINGS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - ALL EXPOSED STRUCTURAL, PLUMBING, MECHANICAL & ELECTRICAL ELEMENTS ARE TO BE PAINTED. REFER TO INTERIORS DOCUMENTS FOR COLOR.
 - RIGID WALL PROTECTION TO BE INSTALLED AFTER CASEWORK.

INTERIOR FINISH LEGEND	
	RF-1
	RF-2
	EF-1
	EF-2
	EF-3
	CPT-1
	CPT-2
	CPT-3
	T-8

INTERIOR FINISH TAG


FIELD WALL FINISH
FIELD BASE FINISH
FIELD FLOOR FINISH

INDICATES EXTENT OF ACCENT WALL FINISH

INTERIOR PLAN KEYNOTES	
KEY VALUE	KEYNOTE TEXT
11	ACCENT FLOORING TO BE MINIMUM 15'X15'. WIDTH TO MATCH LOW WALL RETURN WIDTH. FINAL DIMENSIONS TO BE COORDINATED WITH MEP. ALIGN TO CENTER OF LOW WALL RETURN.

FLOOR PLAN - SECOND LEVEL - ZONE 1C
1/4" = 1'-0"

VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title FINISH PLAN - SECOND LEVEL - ZONE 1C Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA	Project Number 553-21-100 Building Number Drawing Number I-102.1C
--	--	--	--	---	---	--	--

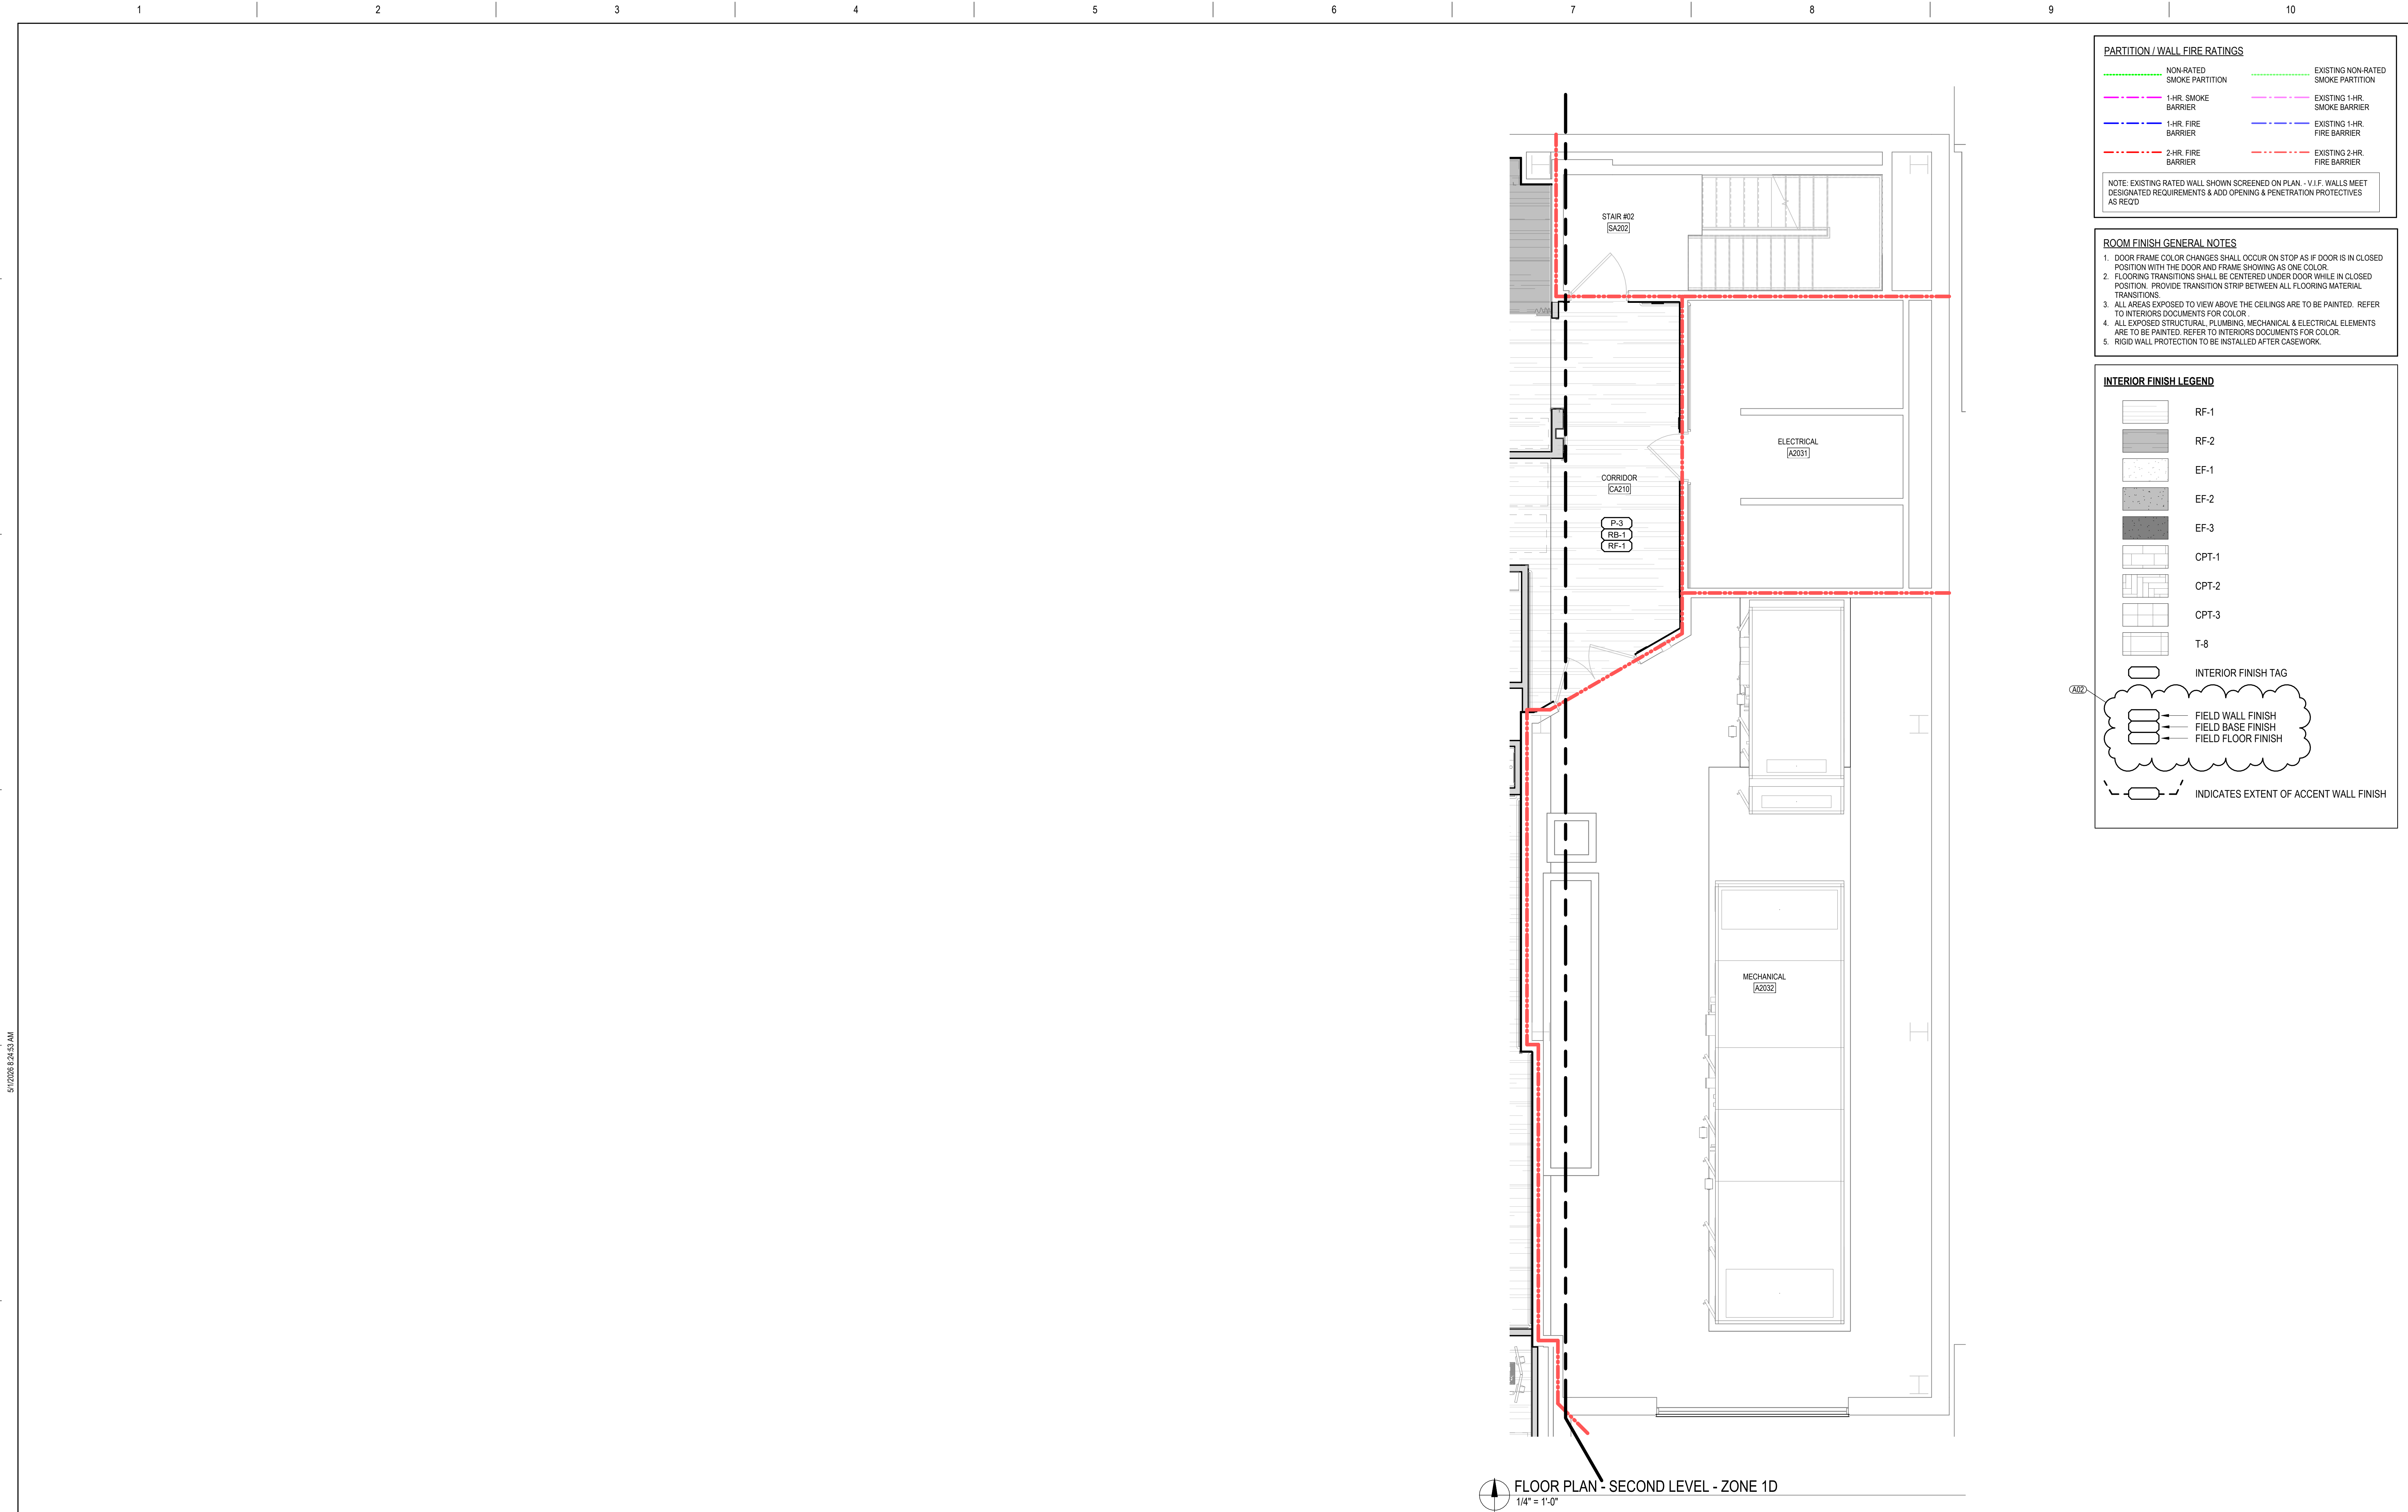


ADDENDUM 01 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS Revisions:		VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit , MI 48201	CONSULTANT C20ae An AtkinsRéalis Company (866) 454-3923 WWW.C2AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VAU.S. Department of Veterans Affairs	Drawing Title FINISH PLAN - SECOND LEVEL - ZONE 1D Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked KJH Drawn CJA	Project Number 553-21-100 Building Number Drawing Number I-102.1D
--	--	--	--	---	------------------	--	---	---	---	--


PARTITION / WALL FIRE RATINGS

NON-RATED	EXISTING NON-RATED
1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER
2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

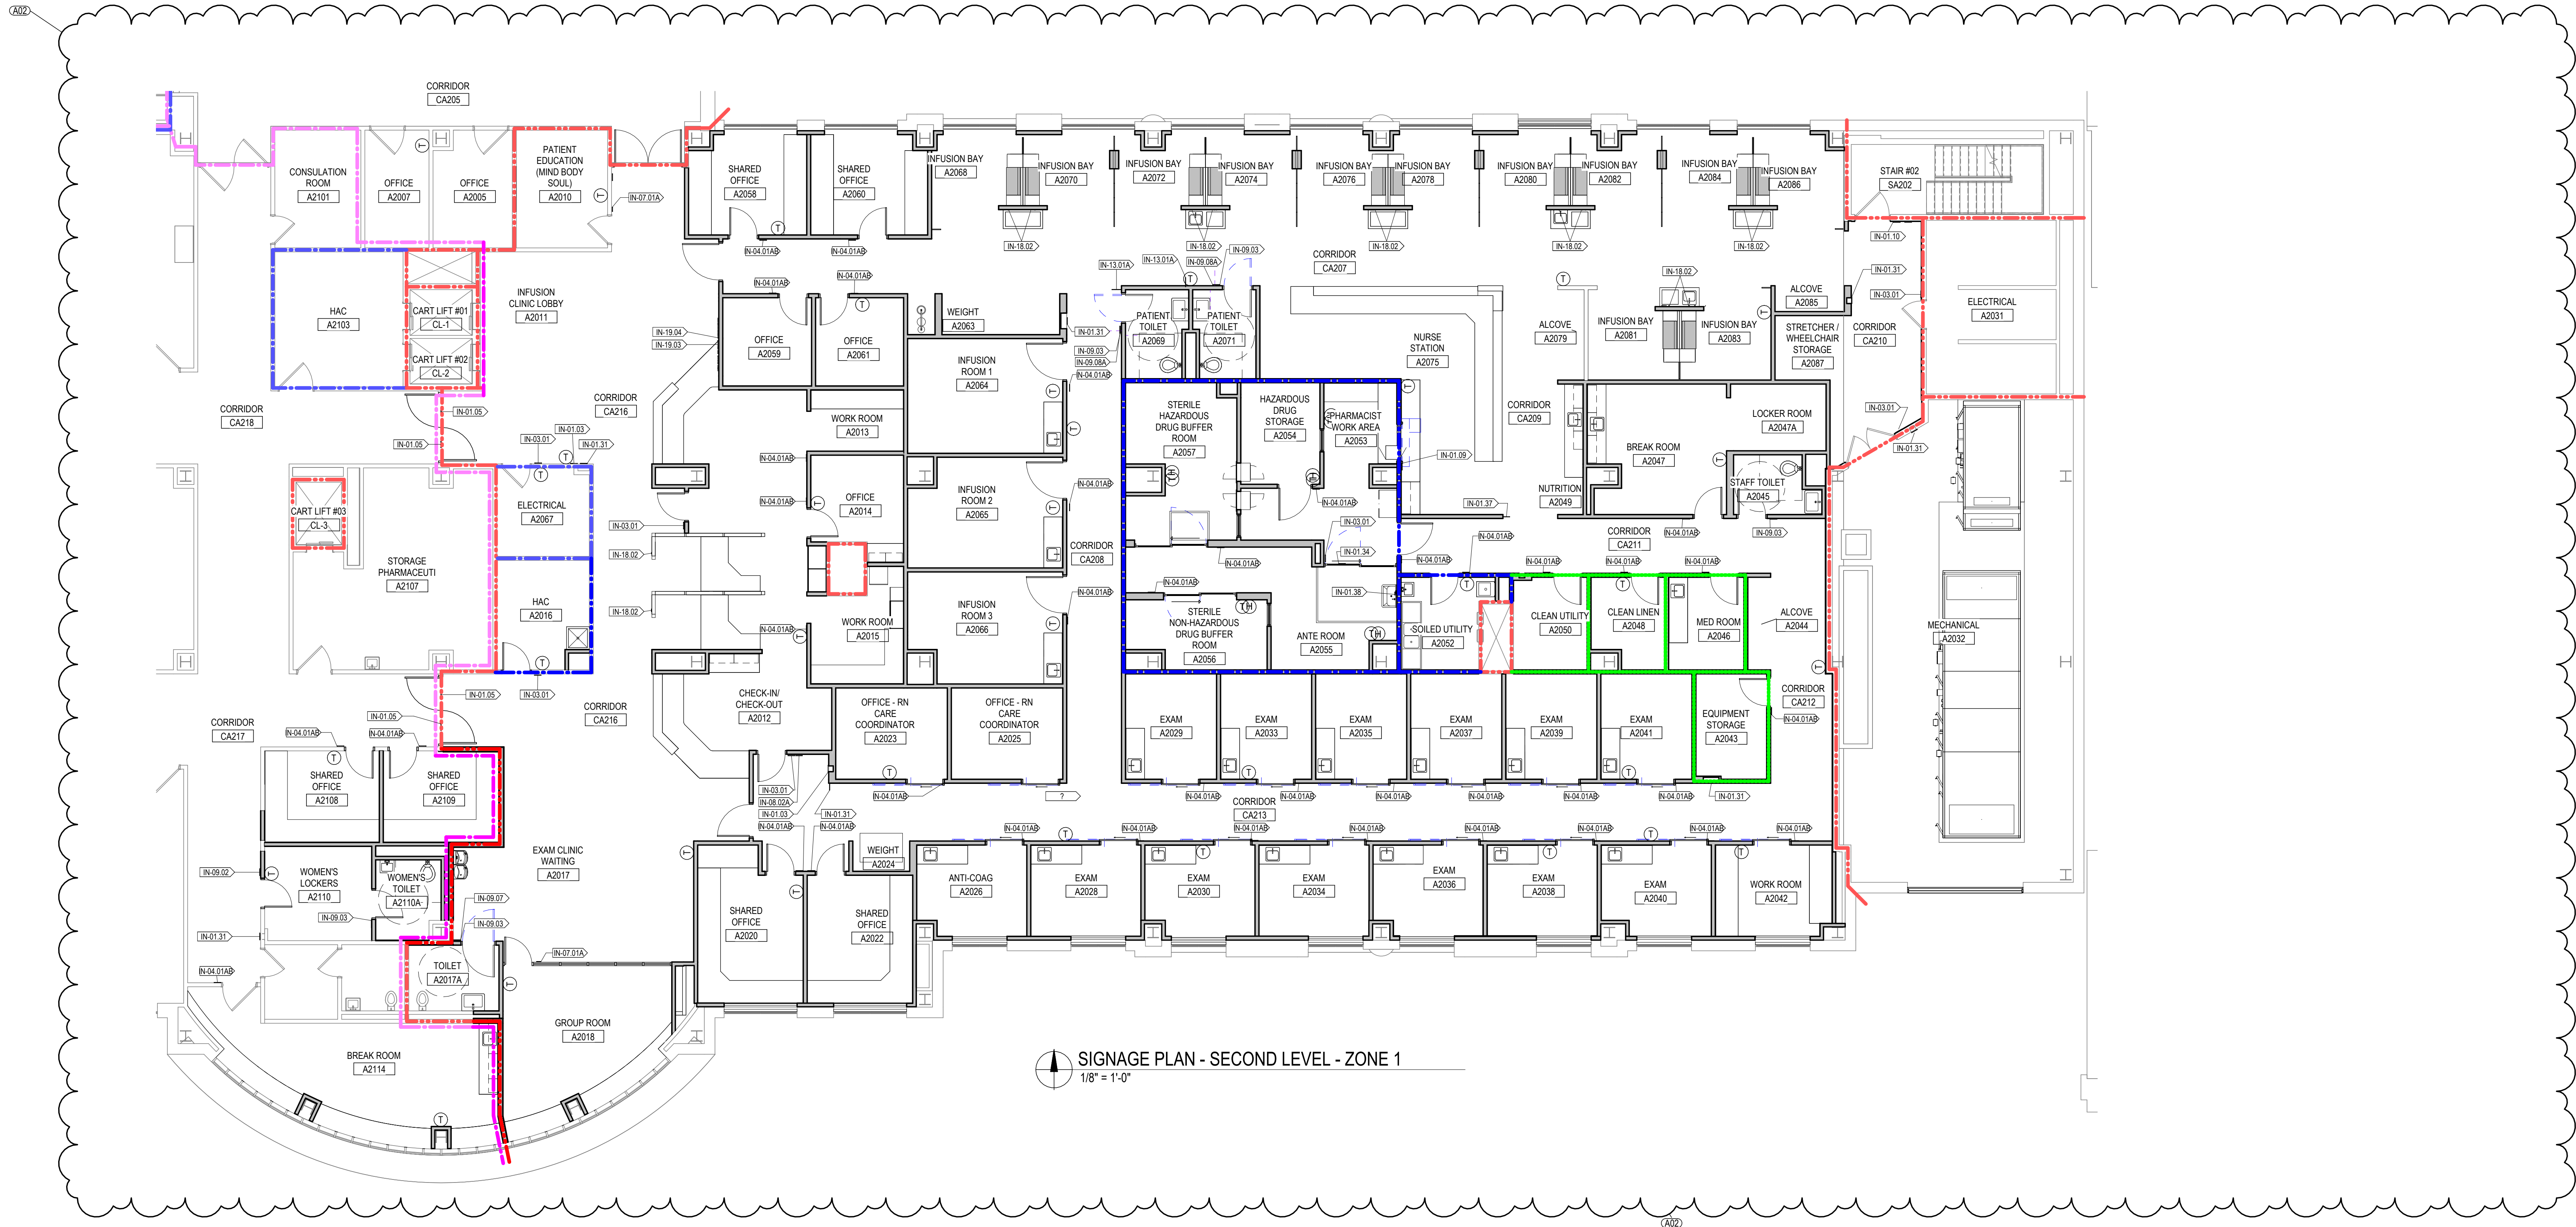

SIGNAGE PLAN - SECOND LEVEL - ZONE 1
1/8" = 1'-0"

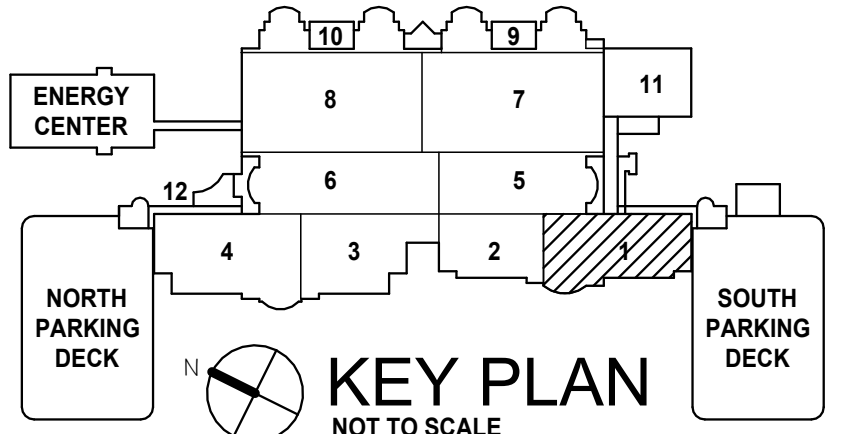

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS - REVISED 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions:		30-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION		CONSULTANT		ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title		Project Title		Project Number	
			VA HEALTH CARE Defining EXCELLENCE in the 21st Century		C20ae		WalterMechanical Services Inc.		SIGNAGE PLAN - SECOND LEVEL - ZONE 1				100% BID DOCUMENTS		RENOVATE A2 SOUTH FOR CANCER CLINIC		553-21-100	
			John D. Dingell VA Medical Center		An AtkinsRéalis Company		3419 Pierson Place Flushing, Michigan, 48433 810-230-6202		Approved:		FULLY SPRINKLERED		Location		Building Number			
			4646 John R. Street		(866) 454-3923 WWW.C2AE.COM						DETROIT, MI		Drawing Number					
Detroit, MI 48201										Issue Date		Checked		Drawn		I-120		
										10-JAN-2025		KJH		CJA				

A

B

C


D

E


F

AutoDesk DocuVA/VA MI 08/2021/0297_A.rvt
5/12/2028 8:25:37 AM


VA FORM 08-6231

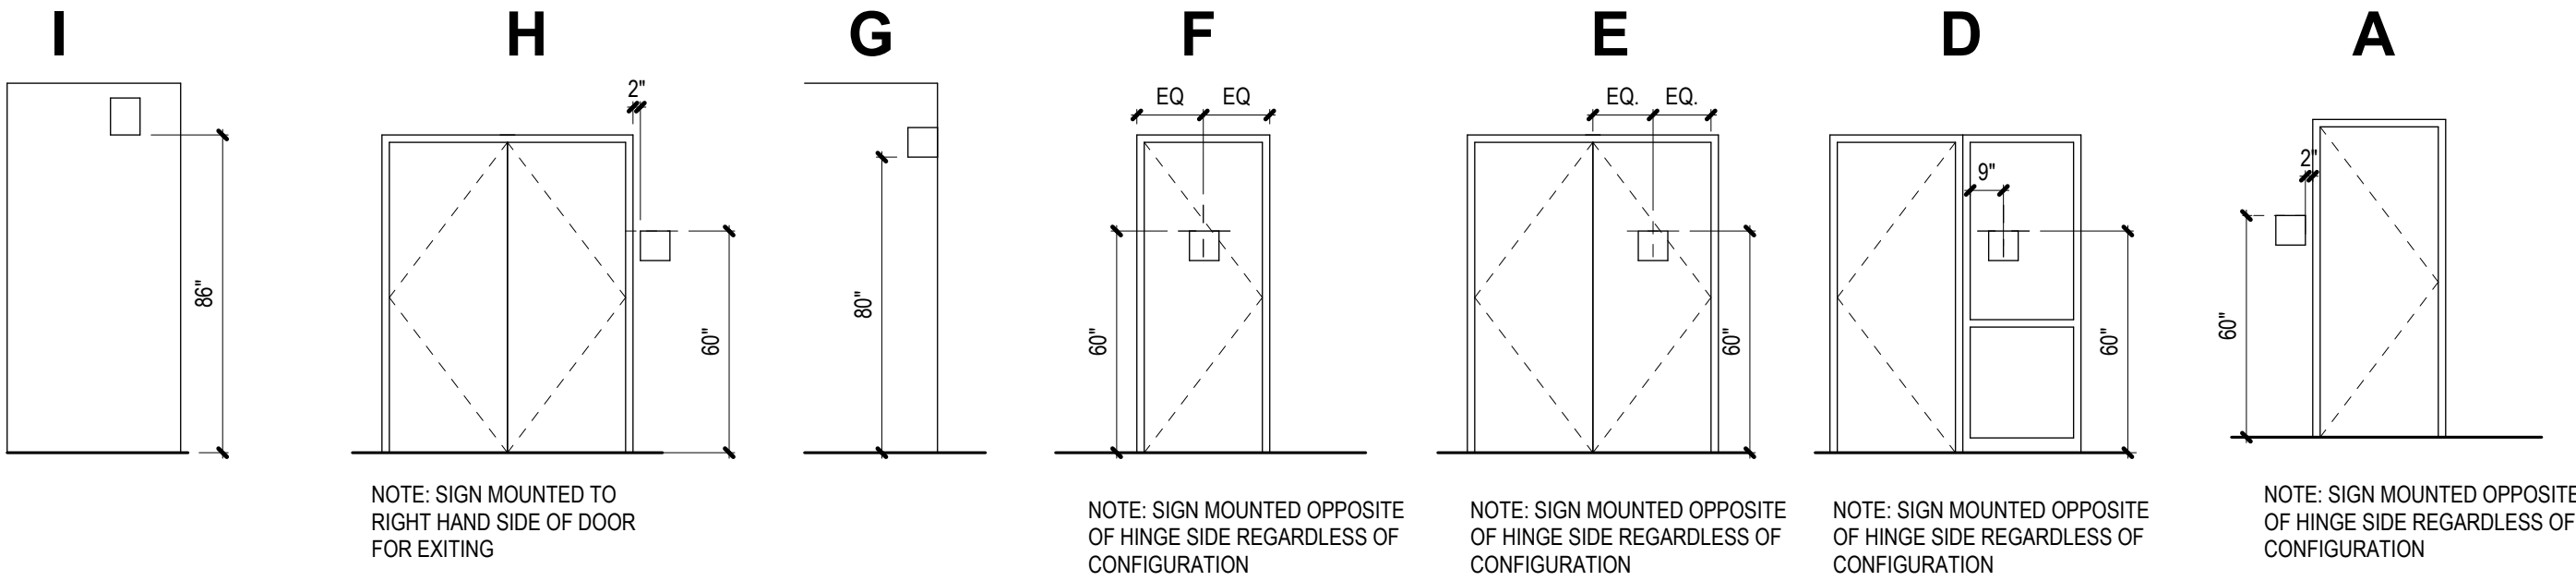


SIGN MOUNTING HEIGHTS
NOT TO SCALE

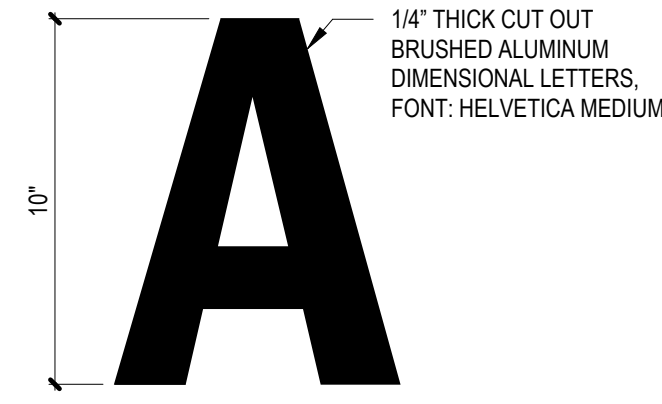

IN-19.04 GRAPHIC TEXT - METAL
NOT TO SCALE

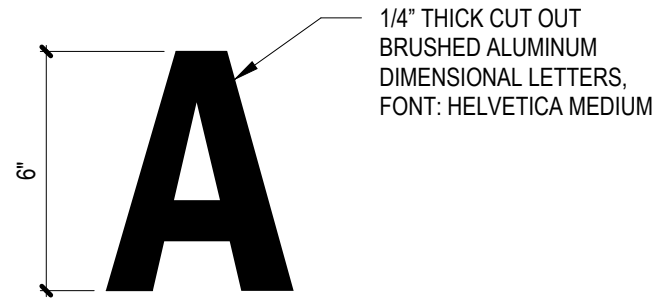


IN-19.03 GRAPHIC TEXT - METAL
NOT TO SCALE

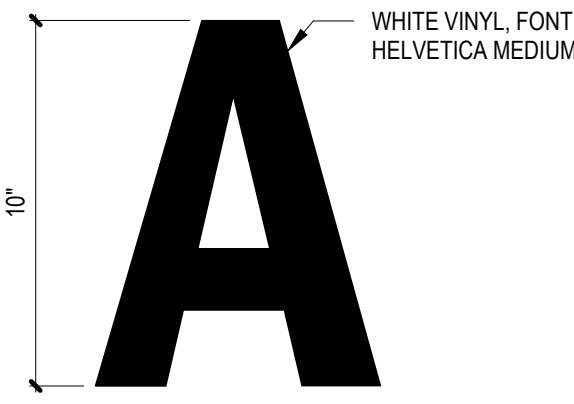


IN-18.02 GRAPHIC TEXT - VINYL
NOT TO SCALE




IN-18.01 GRAPHIC TEXT - VINYL
NOT TO SCALE

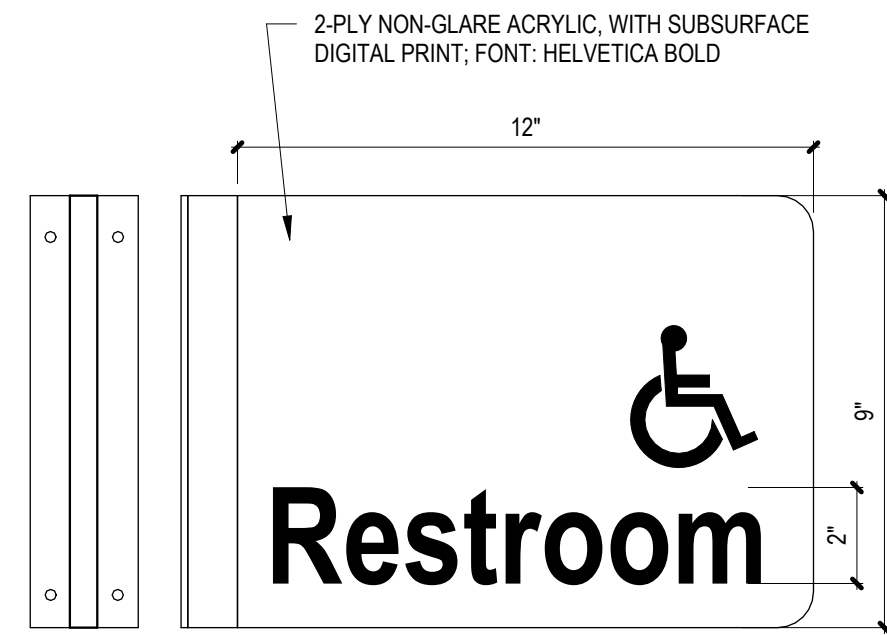


IN-13.01A RESTROOM
NOT TO SCALE

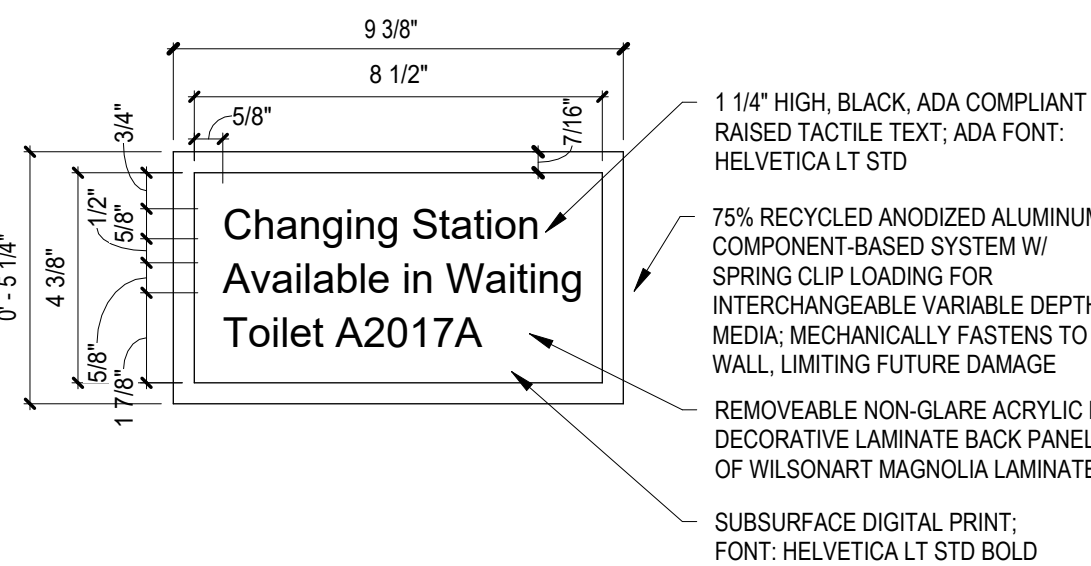


IN-09.08A CHANGING STATION ID
NOT TO SCALE

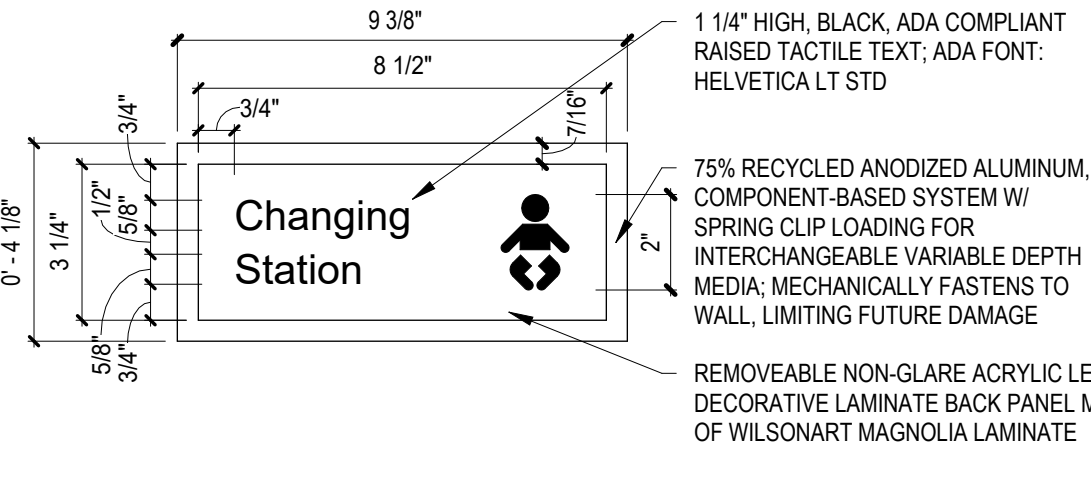


IN-09.07 CHANGING STATION ID
NOT TO SCALE

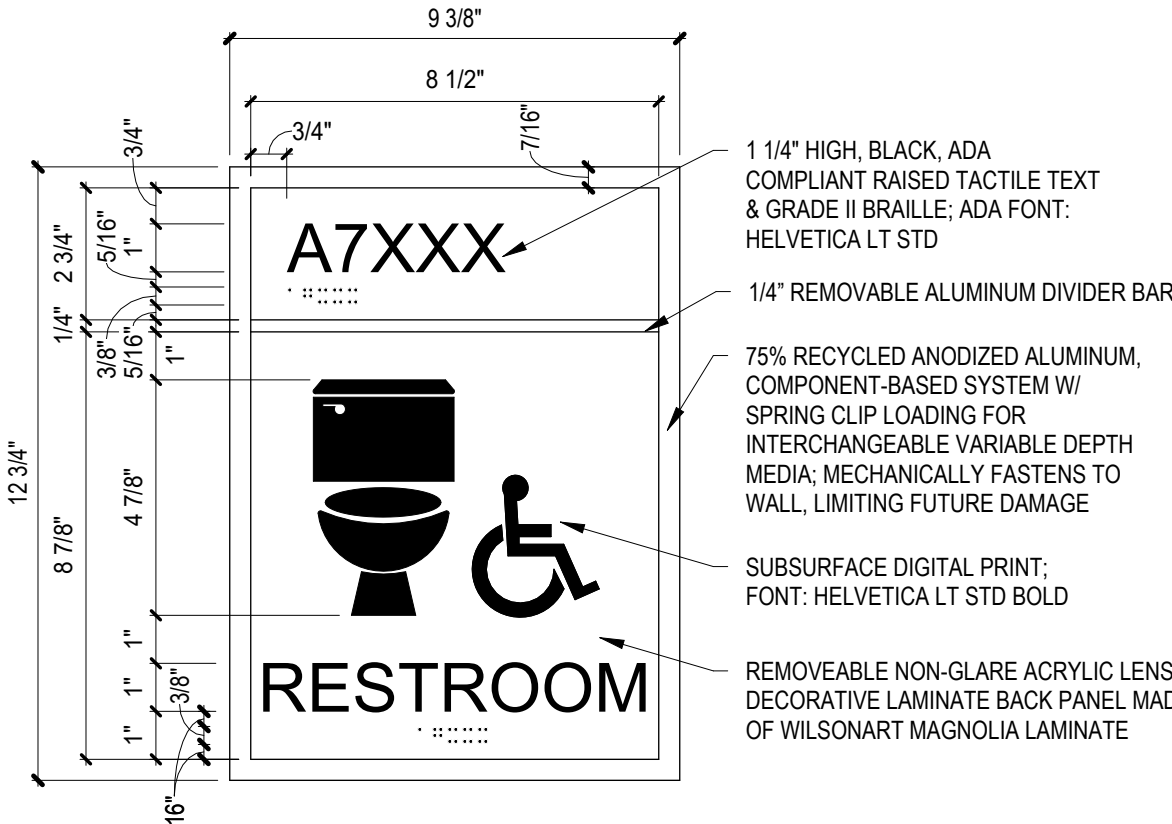


IN-09.03 ADA RESTROOM
NOT TO SCALE

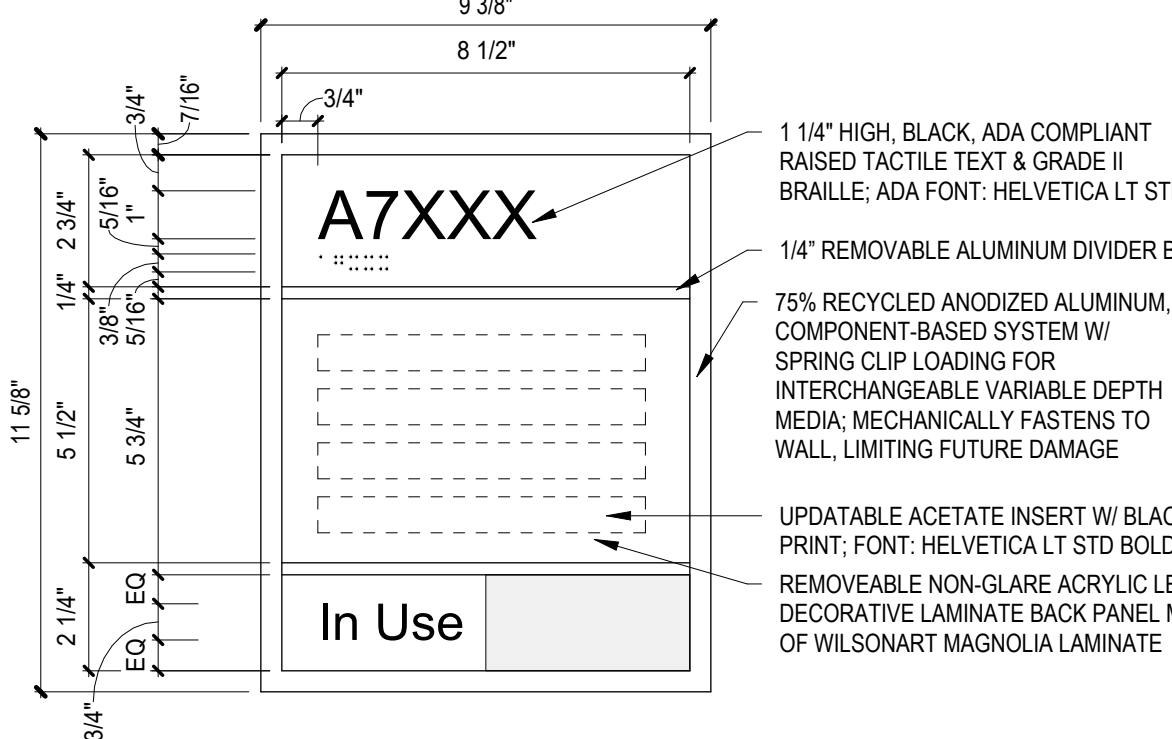


IN-07.01A ADA ROOM ID W/ SLIDER UNIT
NOT TO SCALE

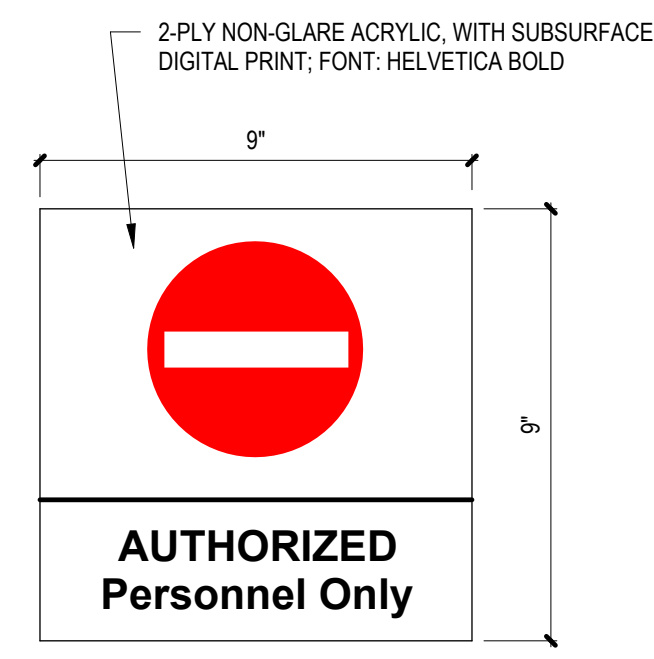


IN-08.02A AUTHORIZED PERSONNEL
NOT TO SCALE

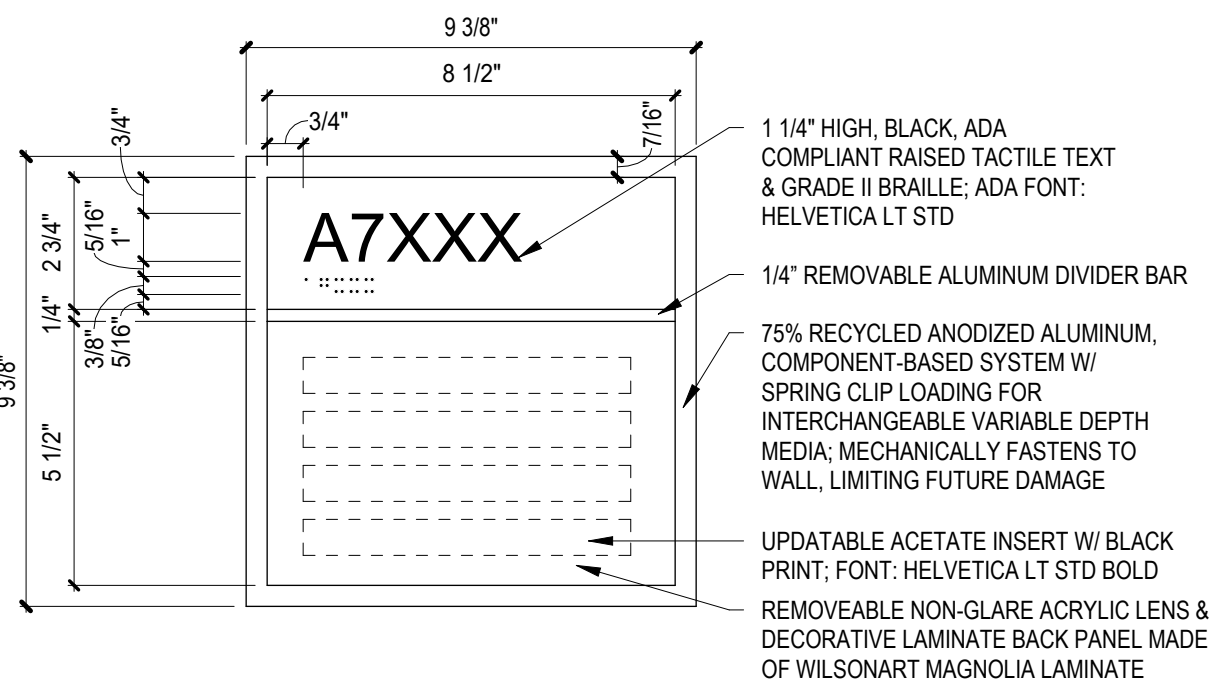


IN-04.01AB ADA ROOM IDENTIFICATION
NOT TO SCALE

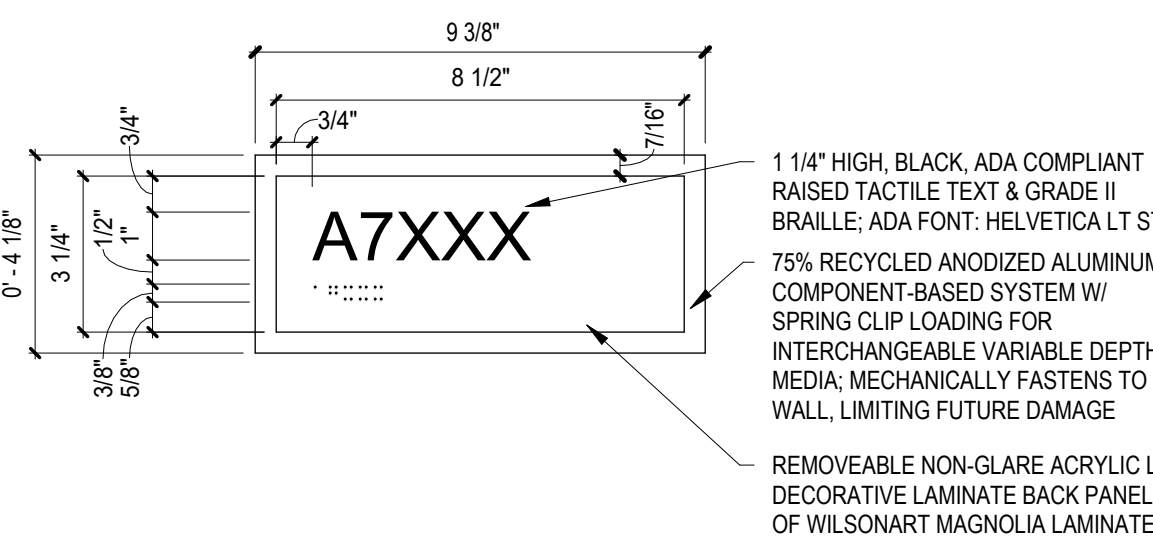


IN-03.01 ADA ROOM NUMBER
NOT TO SCALE

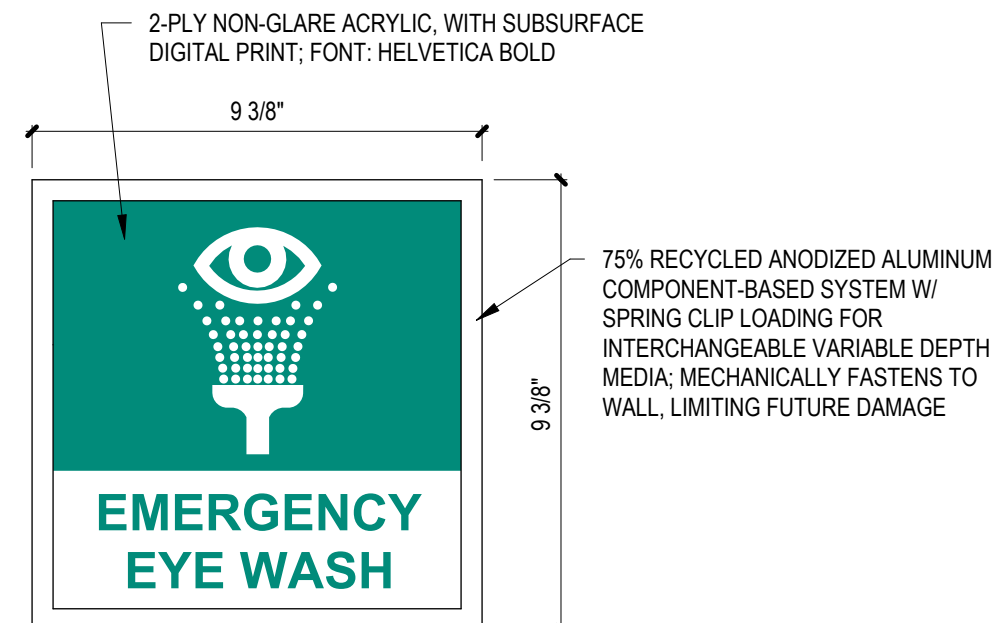


IN-01.38 EMERGENCY EYEWASH
NOT TO SCALE

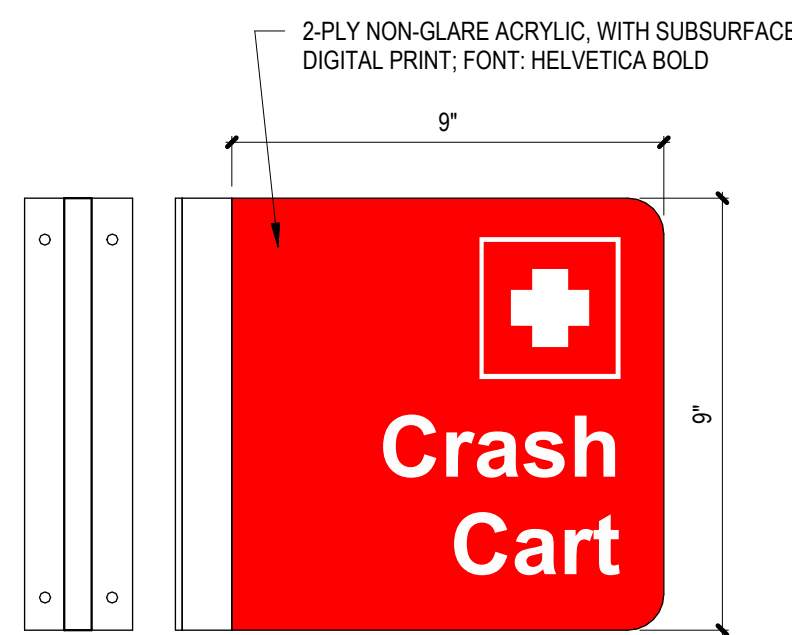


IN-01.37 CRASH CART
NOT TO SCALE

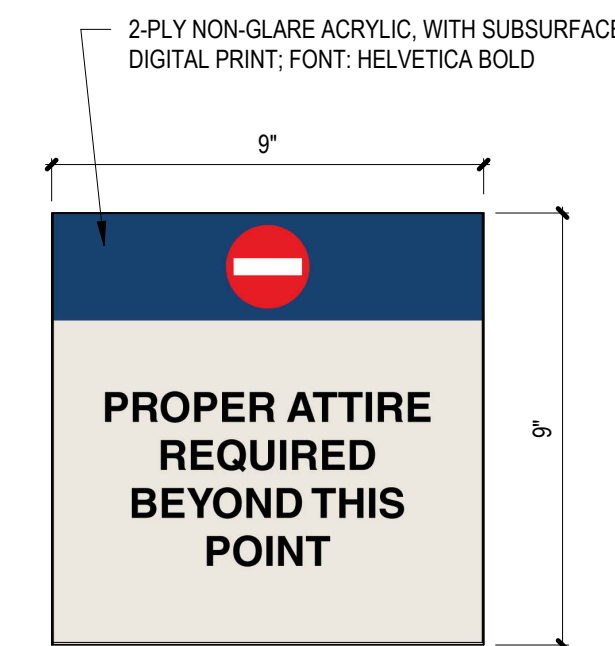


IN-01.34 PROPER ATTIRE
NOT TO SCALE

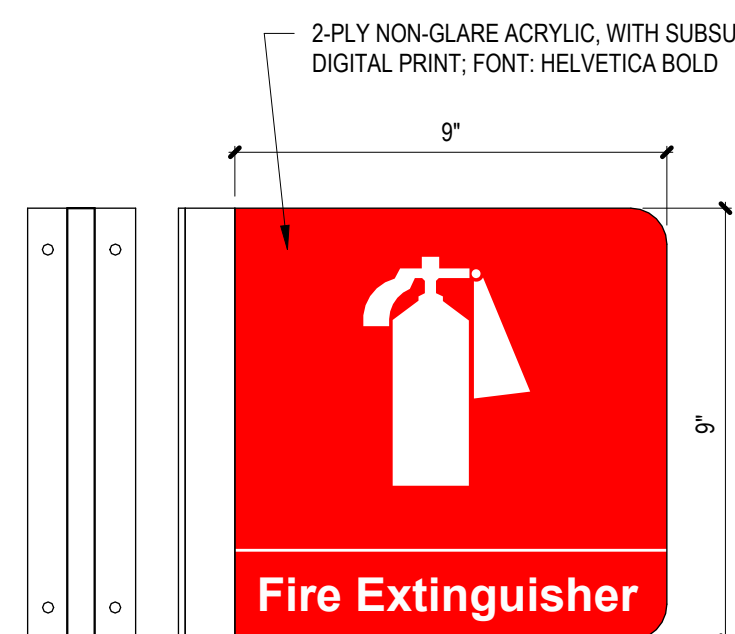


IN-01.31 FIRE EXTINGUISHER
NOT TO SCALE

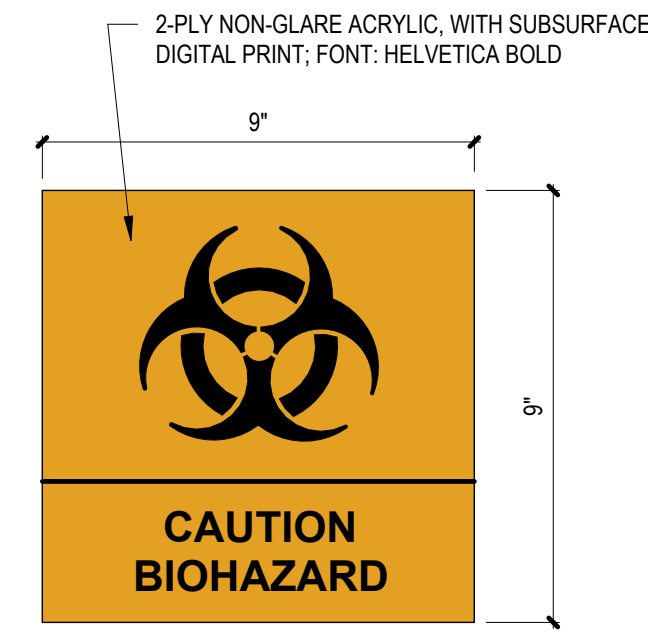

IN-01.22 CAUTION BIOHAZARD
NOT TO SCALE

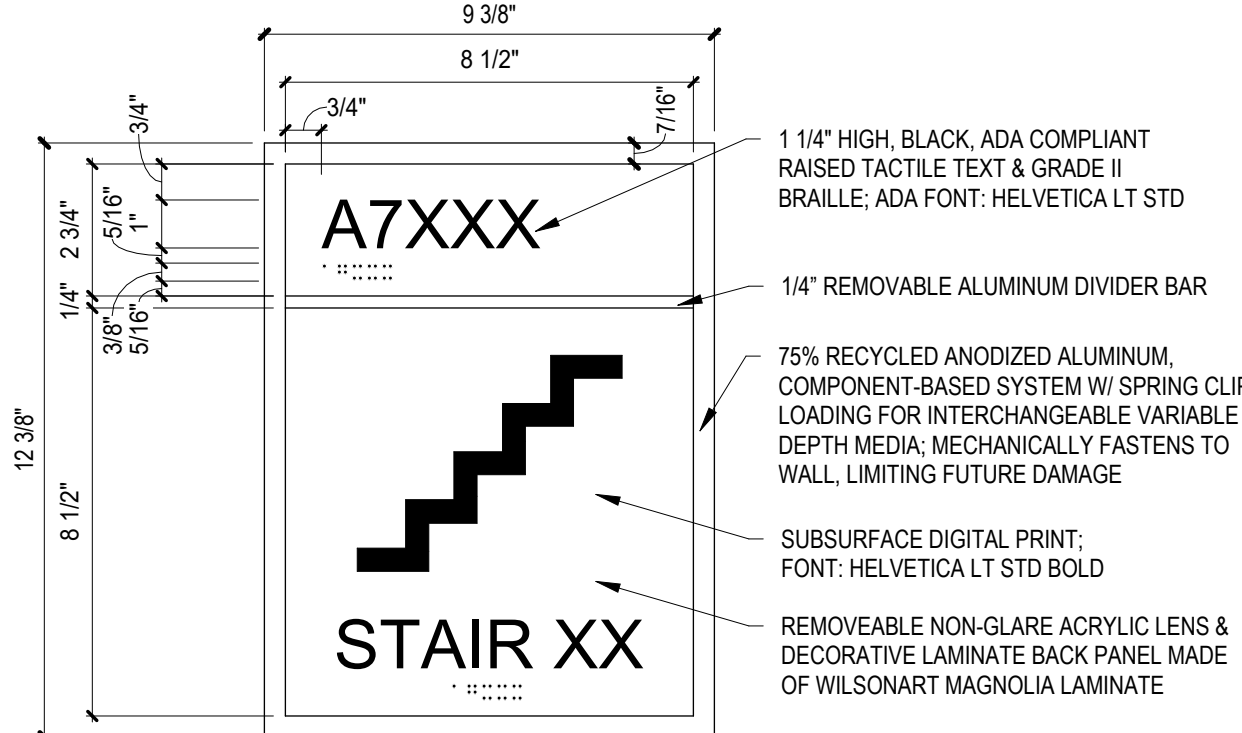


IN-01.10 ADA STAIRWELL
NOT TO SCALE

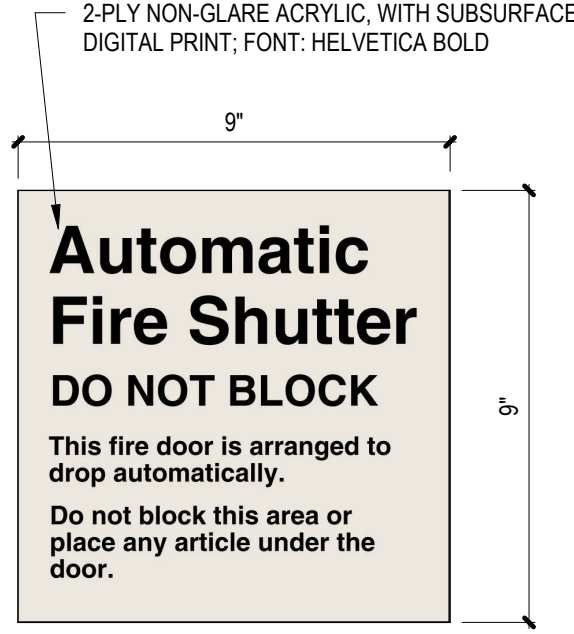

IN-01.09 AUTOMATIC FIRE SHUTTER
NOT TO SCALE



IN-01.05 FIRE DOOR
NOT TO SCALE

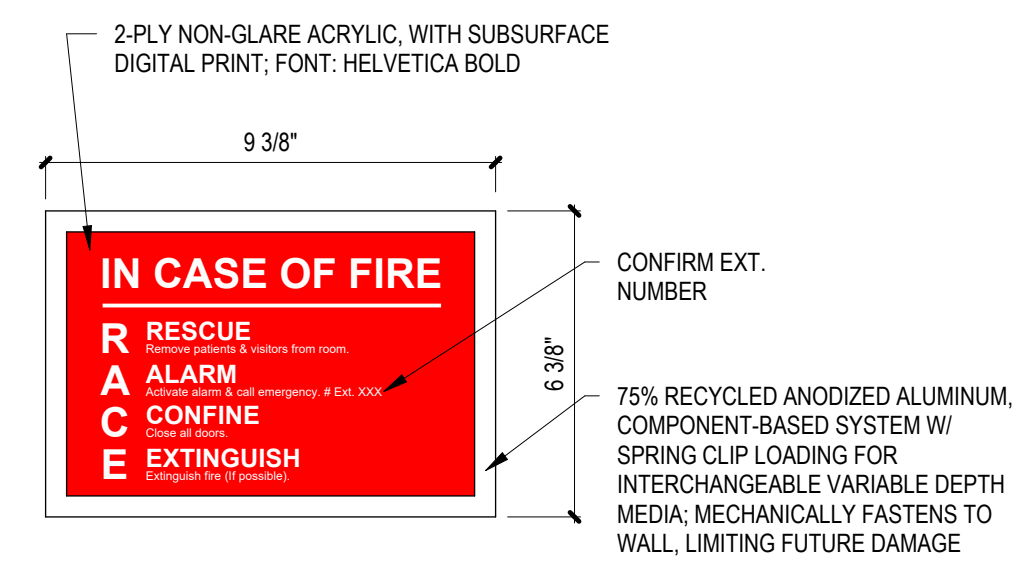

IN-01.03 IN CASE OF FIRE
NOT TO SCALE

TAG	ROOM NAME	ROOM NUMBER	SIGN TEXT	MOUNTING
IN-01.03	EQUIPMENT STORAGE	A2043	--	G
IN-01.03	OFFICE - RN CARE COORDINATOR	A2023	--	G
IN-01.03	WOMEN'S LOCKERS	A2110	--	G
IN-01.03	ELECTRICAL	A2067	--	G
IN-01.03	CORRIDOR	CA210	--	G
IN-01.03	CLEAN UTILITY	A2060	--	A
IN-01.03	PATIENT EDUCATION (MIND BODY SOUL)	A2010	--	A
IN-01.03	STAIR #02	SA202	--	A
IN-01.05	CORRIDOR	CA217	--	E
IN-01.05	CORRIDOR	CA216	--	E
IN-01.05	CORRIDOR	CA218	--	E
IN-01.05	CORRIDOR	CA216	--	E
IN-01.09	NURSE STATION	A2075	--	G
IN-01.10	STAIR #02	SA202	--	A
IN-01.22	PHARMACIST WORK AREA	A2063	--	A
IN-01.31	ELECTRICAL	A2067	--	G
IN-01.31	EQUIPMENT STORAGE	A2043	--	G
IN-01.31	CORRIDOR	CA213	--	G
IN-01.31	MECHANICAL	A2032	--	G
IN-01.31	WOMEN'S LOCKERS	A2110	--	G
IN-01.31	CLEAN UTILITY	A2060	--	G
IN-01.31	CORRIDOR	CA210	--	G
IN-01.31	ALCOVE	A2085	--	G
IN-01.31	WEIGHT	A2063	--	G
IN-01.34	ANTE ROOM	A2055	--	E
IN-01.37	CORRIDOR	CA207	--	G
IN-01.37	CORRIDOR	CA209	--	G
IN-01.38	ANTE ROOM	A2055	--	G
IN-03.01	ELECTRICAL	A2067	--	A
IN-03.01	HAC	A2016	--	A
IN-03.01	CHECK-IN/ CHECK-OUT	A2012	--	A
IN-03.01	CHECK-IN/ CHECK-OUT	A2012	--	A
IN-03.01	ANTE ROOM	A2055	--	A
IN-03.01	ELECTRICAL	A2031	--	A
IN-03.01	MECHANICAL	A2032	--	H
IN-04.01AB	SHARED OFFICE	A2058	--	A
IN-04.01AB	SHARED OFFICE	A2060	--	A
IN-04.01AB	OFFICE	A2061	--	A
IN-04.01AB	OFFICE	A2059	--	A
IN-04.01AB	SHARED OFFICE	A2108	--	A
IN-04.01AB	SHARED OFFICE	A2109	--	A
IN-04.01AB	BREAK ROOM	A2114	--	A
IN-04.01AB	SHARED OFFICE	A2020	--	A
IN-04.01AB	SHARED OFFICE	A2022	--	A
IN-04.01AB	EXAM	A2028	--	A
IN-04.01AB	EXAM	A2030	--	A
IN-04.01AB	EXAM	A2034	--	A
IN-04.01AB	EXAM	A2036	--	A
IN-04.01AB	EXAM	A2038	--	A
IN-04.01AB	EXAM	A2040	--	A
IN-04.01AB	WORK ROOM	A2042	--	A
IN-04.01AB	OFFICE - RN CARE COORDINATOR	A2023	--	A
IN-04.01AB	EXAM	A2029	--	A
IN-04.01AB	EXAM	A2033	--	A
IN-04.01AB	EXAM	A2035	--	A
IN-04.01AB	EXAM	A2037	--	A
IN-04.01AB	EXAM	A2039	--	A
IN-04.01AB	EXAM	A2041	--	A
IN-04.01AB	EQUIPMENT STORAGE	A2043	--	A
IN-04.01AB	MED ROOM	A2046	--	A
IN-04.01AB	CLEAN LINEN	A2048	--	A
IN-04.01AB	CLEAN UTILITY	A2050	--	A
IN-04.01AB	SOILED UTILITY	A2052	--	A
IN-04.01AB	STERILE NON-HAZARDOUS DRUG BUFFER ROOM	A2056	--	A
IN-04.01AB	STERILE HAZARDOUS DRUG BUFFER ROOM	A2057	--	A
IN-04.01AB	HAZARDOUS DRUG STORAGE	A2054	--	A
IN-04.01AB	PHARMACIST WORK AREA	A2063	--	A
IN-04.01AB	BREAK ROOM	A2047	--	A
IN-04.01AB	INFUSION ROOM 3	A2066	--	A
IN-04.01AB	INFUSION ROOM 2	A2065	--	A
IN-04.01AB	INFUSION ROOM 1	A2064	--	A
IN-04.01AB	OFFICE	A2014	--	A
IN-04.01AB	OFFICE	A2014	--	A
IN-04.01AB	WORK ROOM	A2015	--	A
IN-04.01AB	ANTI-COAG	A2026	--	A
IN-04.01AB	OFFICE - RN CARE COORDINATOR	A2025	--	A
IN-07.01A	PATIENT EDUCATION (MIND BODY SOUL)	A2010	--	A
IN-07.01A	GROUP ROOM	A2018	--	D
IN-08.02A	CHECK-IN/ CHECK-OUT	A2012	--	A
IN-09.02	WOMEN'S LOCKERS	A2110	--	A
IN-09.03	TOILET	A2017A	--	A
IN-09.03	WOMEN'S TOILET	A2100A	--	A
IN-09.03	STAFF TOILET	A2045	--	A
IN-09.03	PATIENT TOILET	A2069	--	A
IN-09.03	PATIENT TOILET	A2071	--	A
IN-09.07	TOILET	A2017A	--	A
IN-09.08A	PATIENT TOILET	A2069	--	A
IN-09.08A	PATIENT TOILET	A2071	--	A
IN-13.01A	CORRIDOR	CA207	--	G
IN-13.01A	CORRIDOR	CA207	--	G
IN-18.02	INFUSION BAY	A2068	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2070	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2072	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2074	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2076	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2078	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2082	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2084	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2086	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2080	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2083	CUSTOM, SEE ELEVATION	I
IN-18.02	INFUSION BAY	A2081	CUSTOM, SEE ELEVATION	I
IN-18.02	CORRIDOR	CA216	CUSTOM, SEE ELEVATION	SEE ELEVATION
IN-18.02	CORRIDOR	CA216	CUSTOM, SEE ELEVATION	SEE ELEVATION
IN-19.03	CHECK-IN/ CHECK-OUT	A2081	CUSTOM, SEE ELEVATION	SEE ELEVATION
IN-19.04	CHECK-IN/ CHECK-OUT	A2012	CUSTOM, SEE ELEVATION	SEE ELEVATION

* SIGN TEXT TO MATCH ROOM NAME
NOTE: VA TO CONFIRM EXACT TEXT


ADDENDUM 02 Revisions:		VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century Aleda E. Lutz VA Medical Center 1500 Weiss Street Saginaw , MI 48602	CONSULTANT C20ae Construction Engineering Group Associates, Inc. An AtkinsRéalis Company (866) 454-3923 WWW.C20AE.COM	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title SIGNAGE DETAILS Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location: DETROIT, MI Issue Date: 10-JAN-2025 Checked: ☐ Drawn: ☐ Author: ☐	Project Number 553-21-100 Building Number Drawing Number I-121
--	--	--	---	---	---	---	--	--	---


M18 TYPE B BSCS AIR SERVICE AND BSCS IN LOW AIR FLOW DOWNWARD
VENTILATION

M20 CONTRACTOR SHALL TYPE C BSCS BE PROVIDED FOR LOW AND NONE
OF BSCS IN SERVICE. TOTAL ONCOLOGY ROOM SUPPLY AIR SHALL REMAIN
AT 1000(DAD) CFM. TOTAL ONCOLOGY ROOM EXHAUST AIR SHALL BE
1200(CF) CFM.


M21 CONTRACTOR SHALL INSTALL THE SPACE PRESSURE
DIFFERENTIAL SENSOR AND ALL REQUIRED CONTROLS (SEE M20 FOR
POINTS AND CONTROL NOTES) AND ROOM PRESSURE MONITOR (RPM)
AND INTEGRATE THEM TO THE BSCS. THE BSCS SHALL BE REQUIRED
TO MAINTAIN THE SPACE AIR PRESSURE. RPM SHALL DISPLAY SPACE
TEMPERATURE AND HUMIDITY AS WELL. HUMIDITY SHALL BE READOUT
ONLY.

M21 THE ANTEROOM (A2055) RPM SHALL DISPLAY A READOUT OF THE
TEMPERATURE, HUMIDITY AND PRESSURE FOR ALL CLEAN SPACES.
ANTEROOM (A2055), NON-HIGH BUFFER ROOM (A2056) AND HIGH BUFFER
ROOM (A2057).

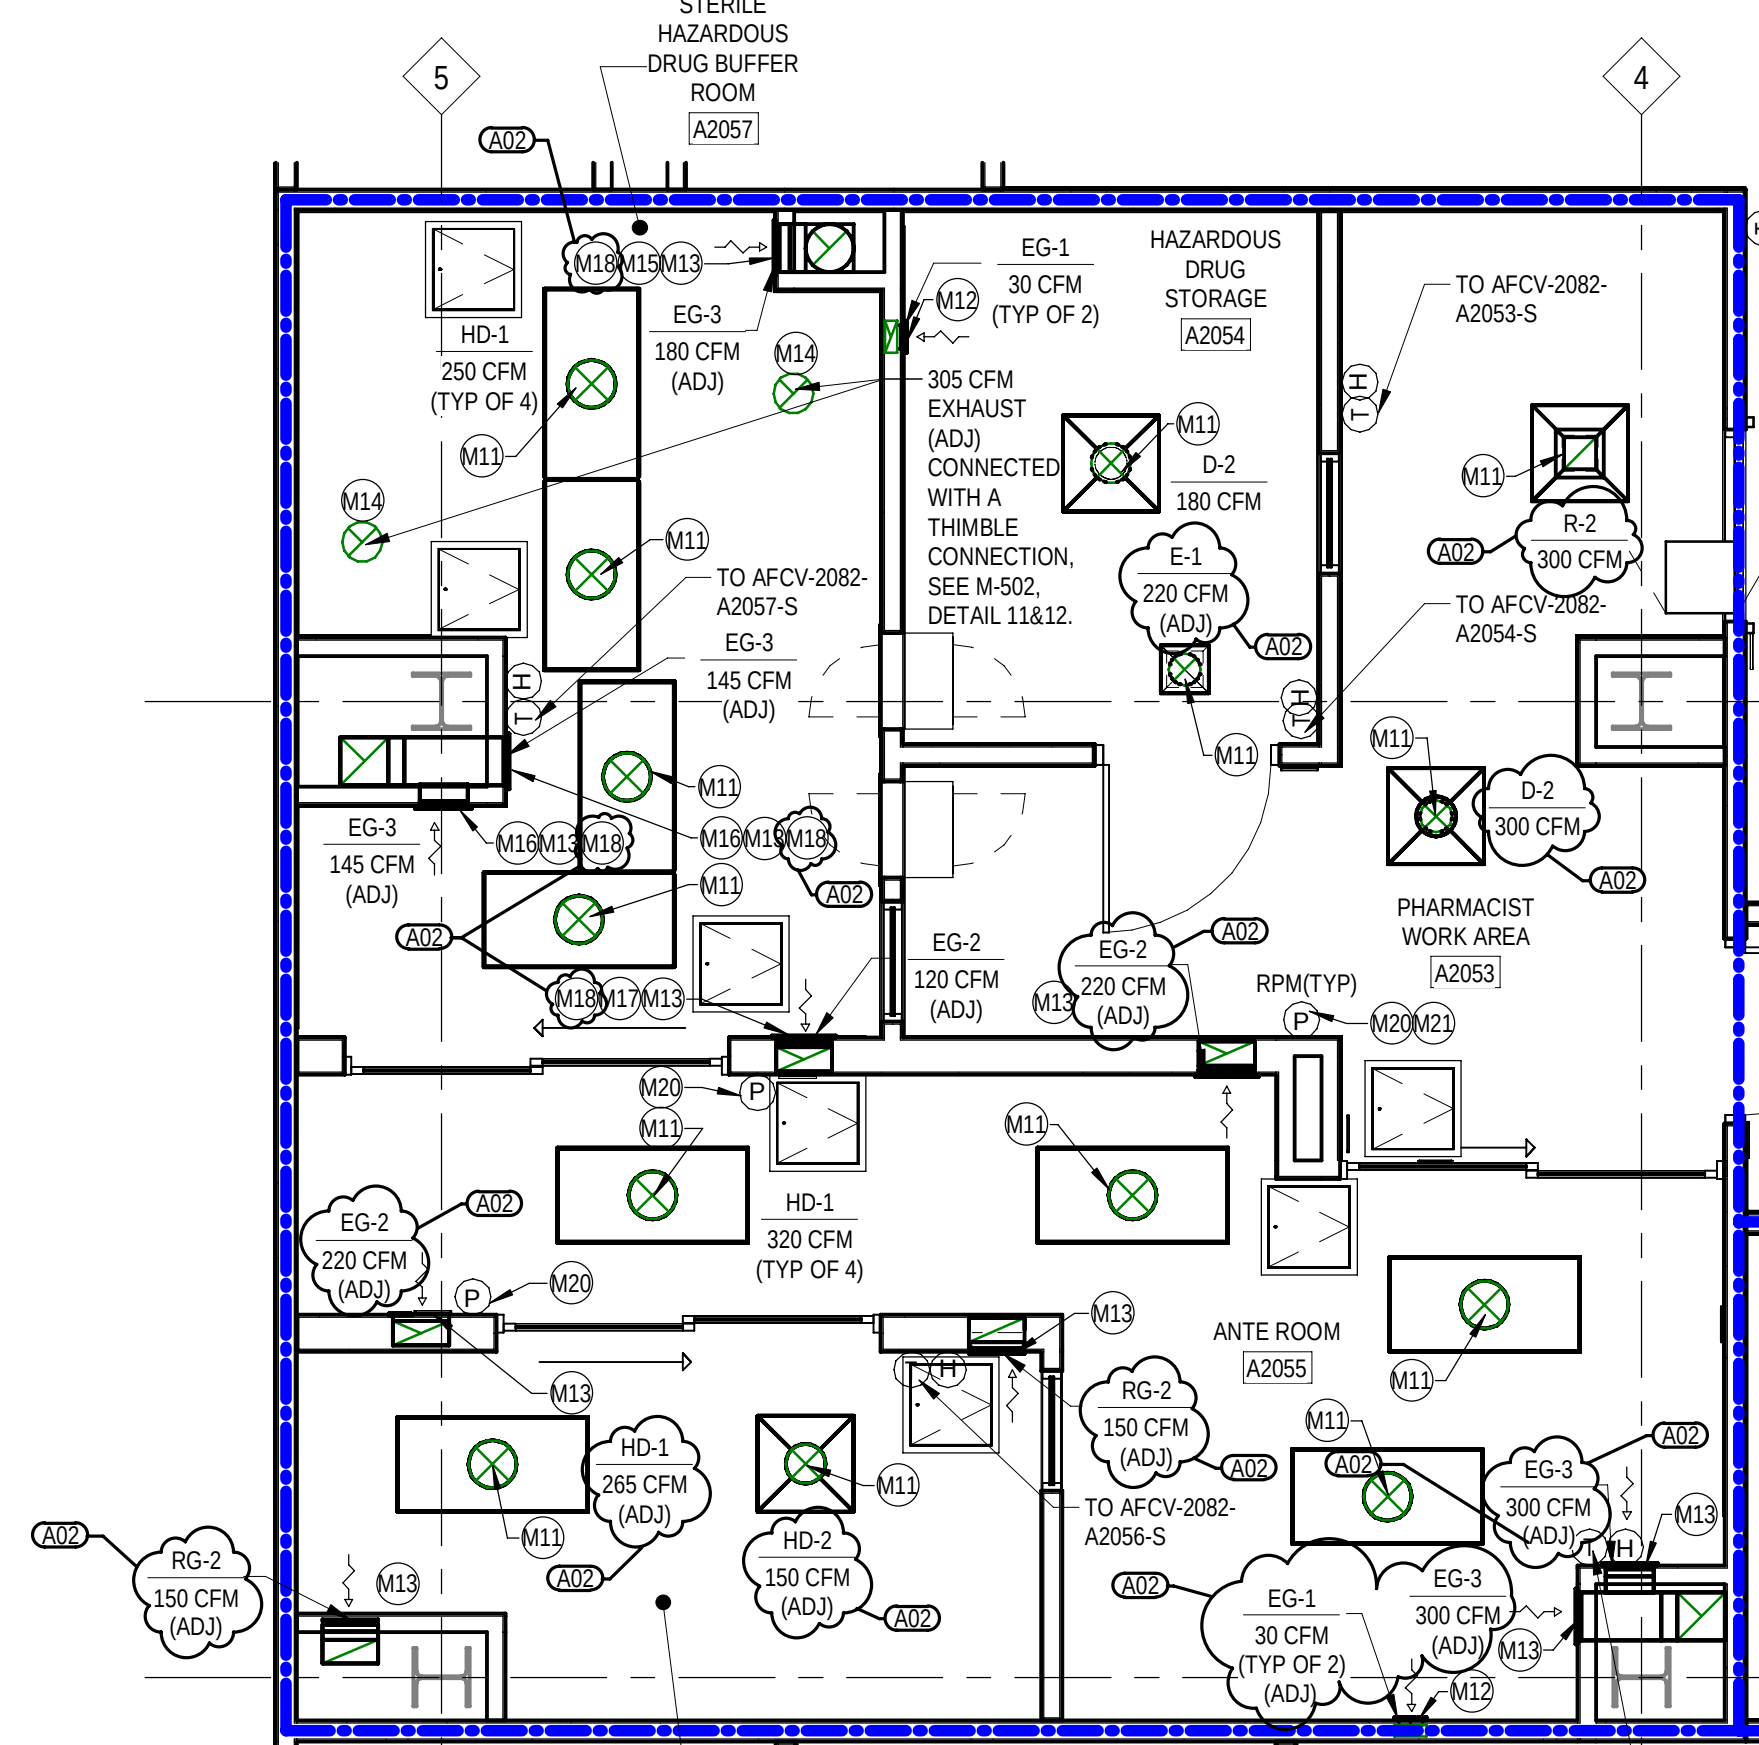
[illegible][illegible]

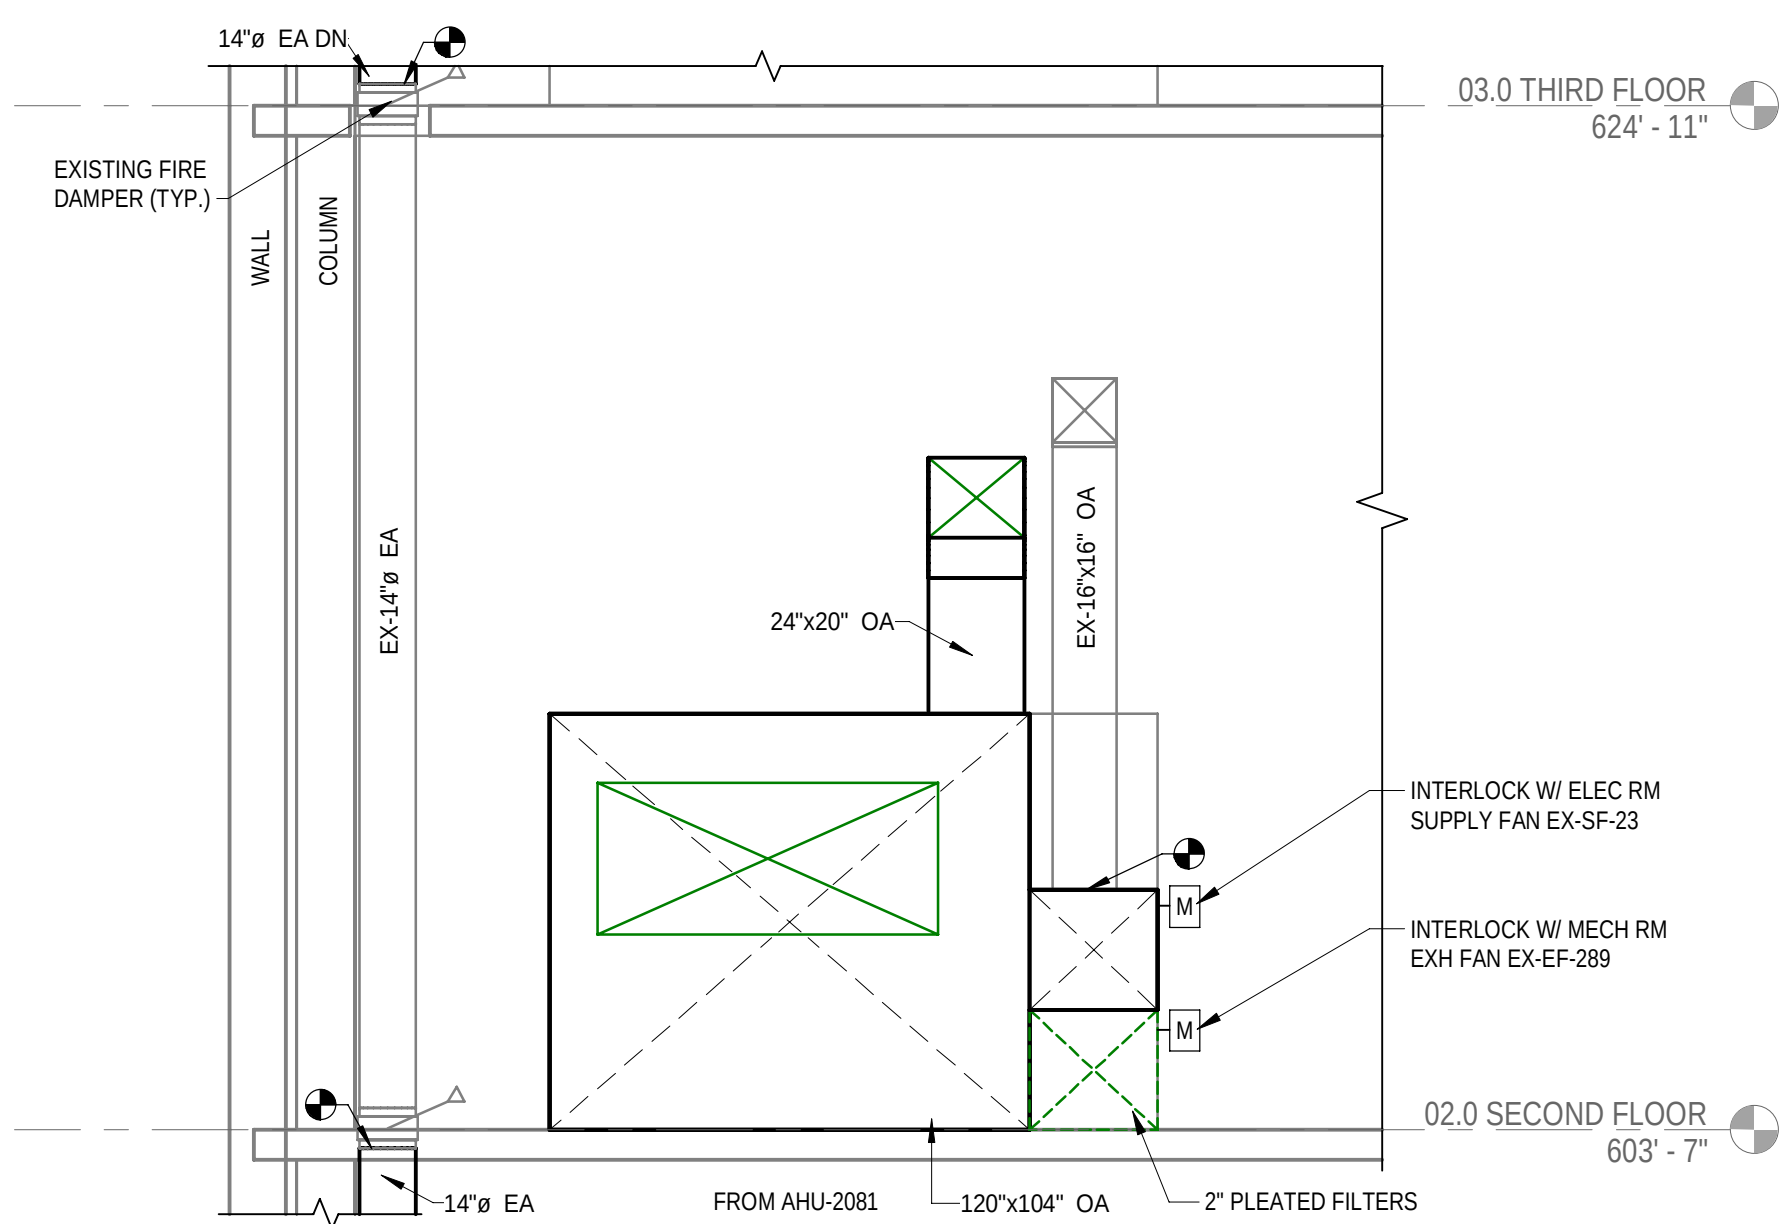


SECTION - AHU-2081 AIR INTAKE
M-402/ 1/4" = 1'-0"

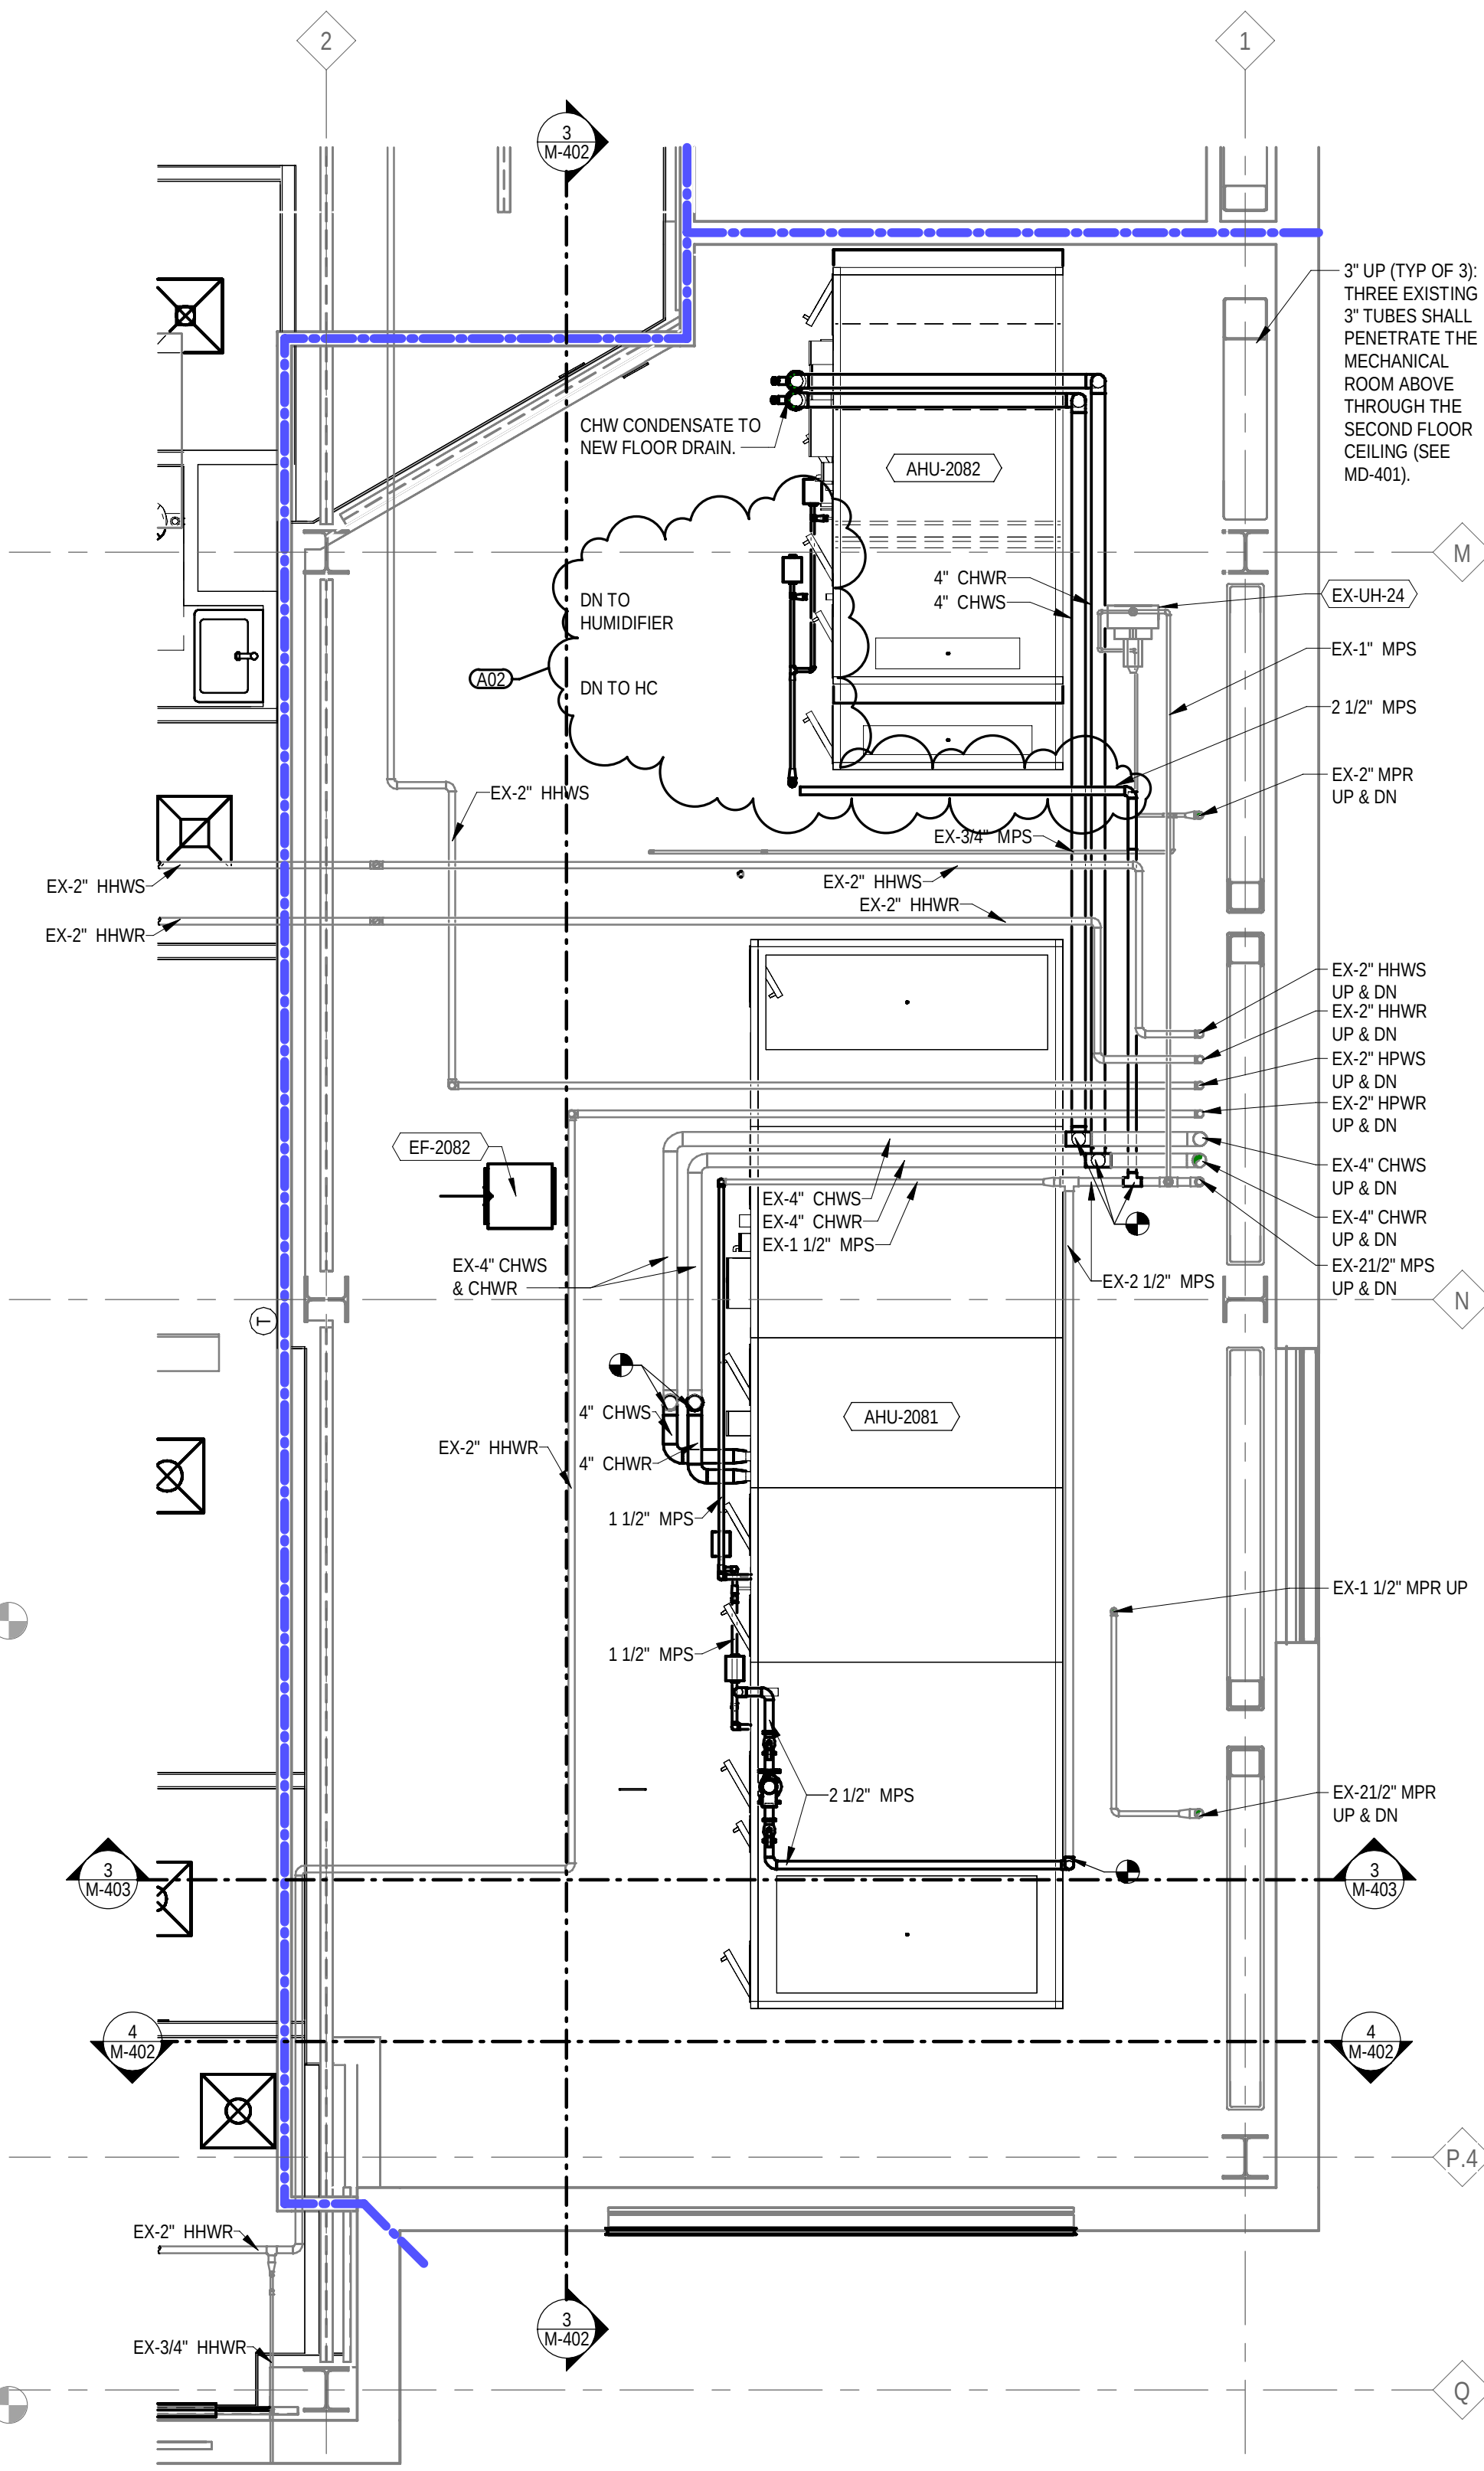

ENLARGED MECHANICAL ROOM A2032 PIPING PLAN
MP102/ 1/4" = 1'-0"

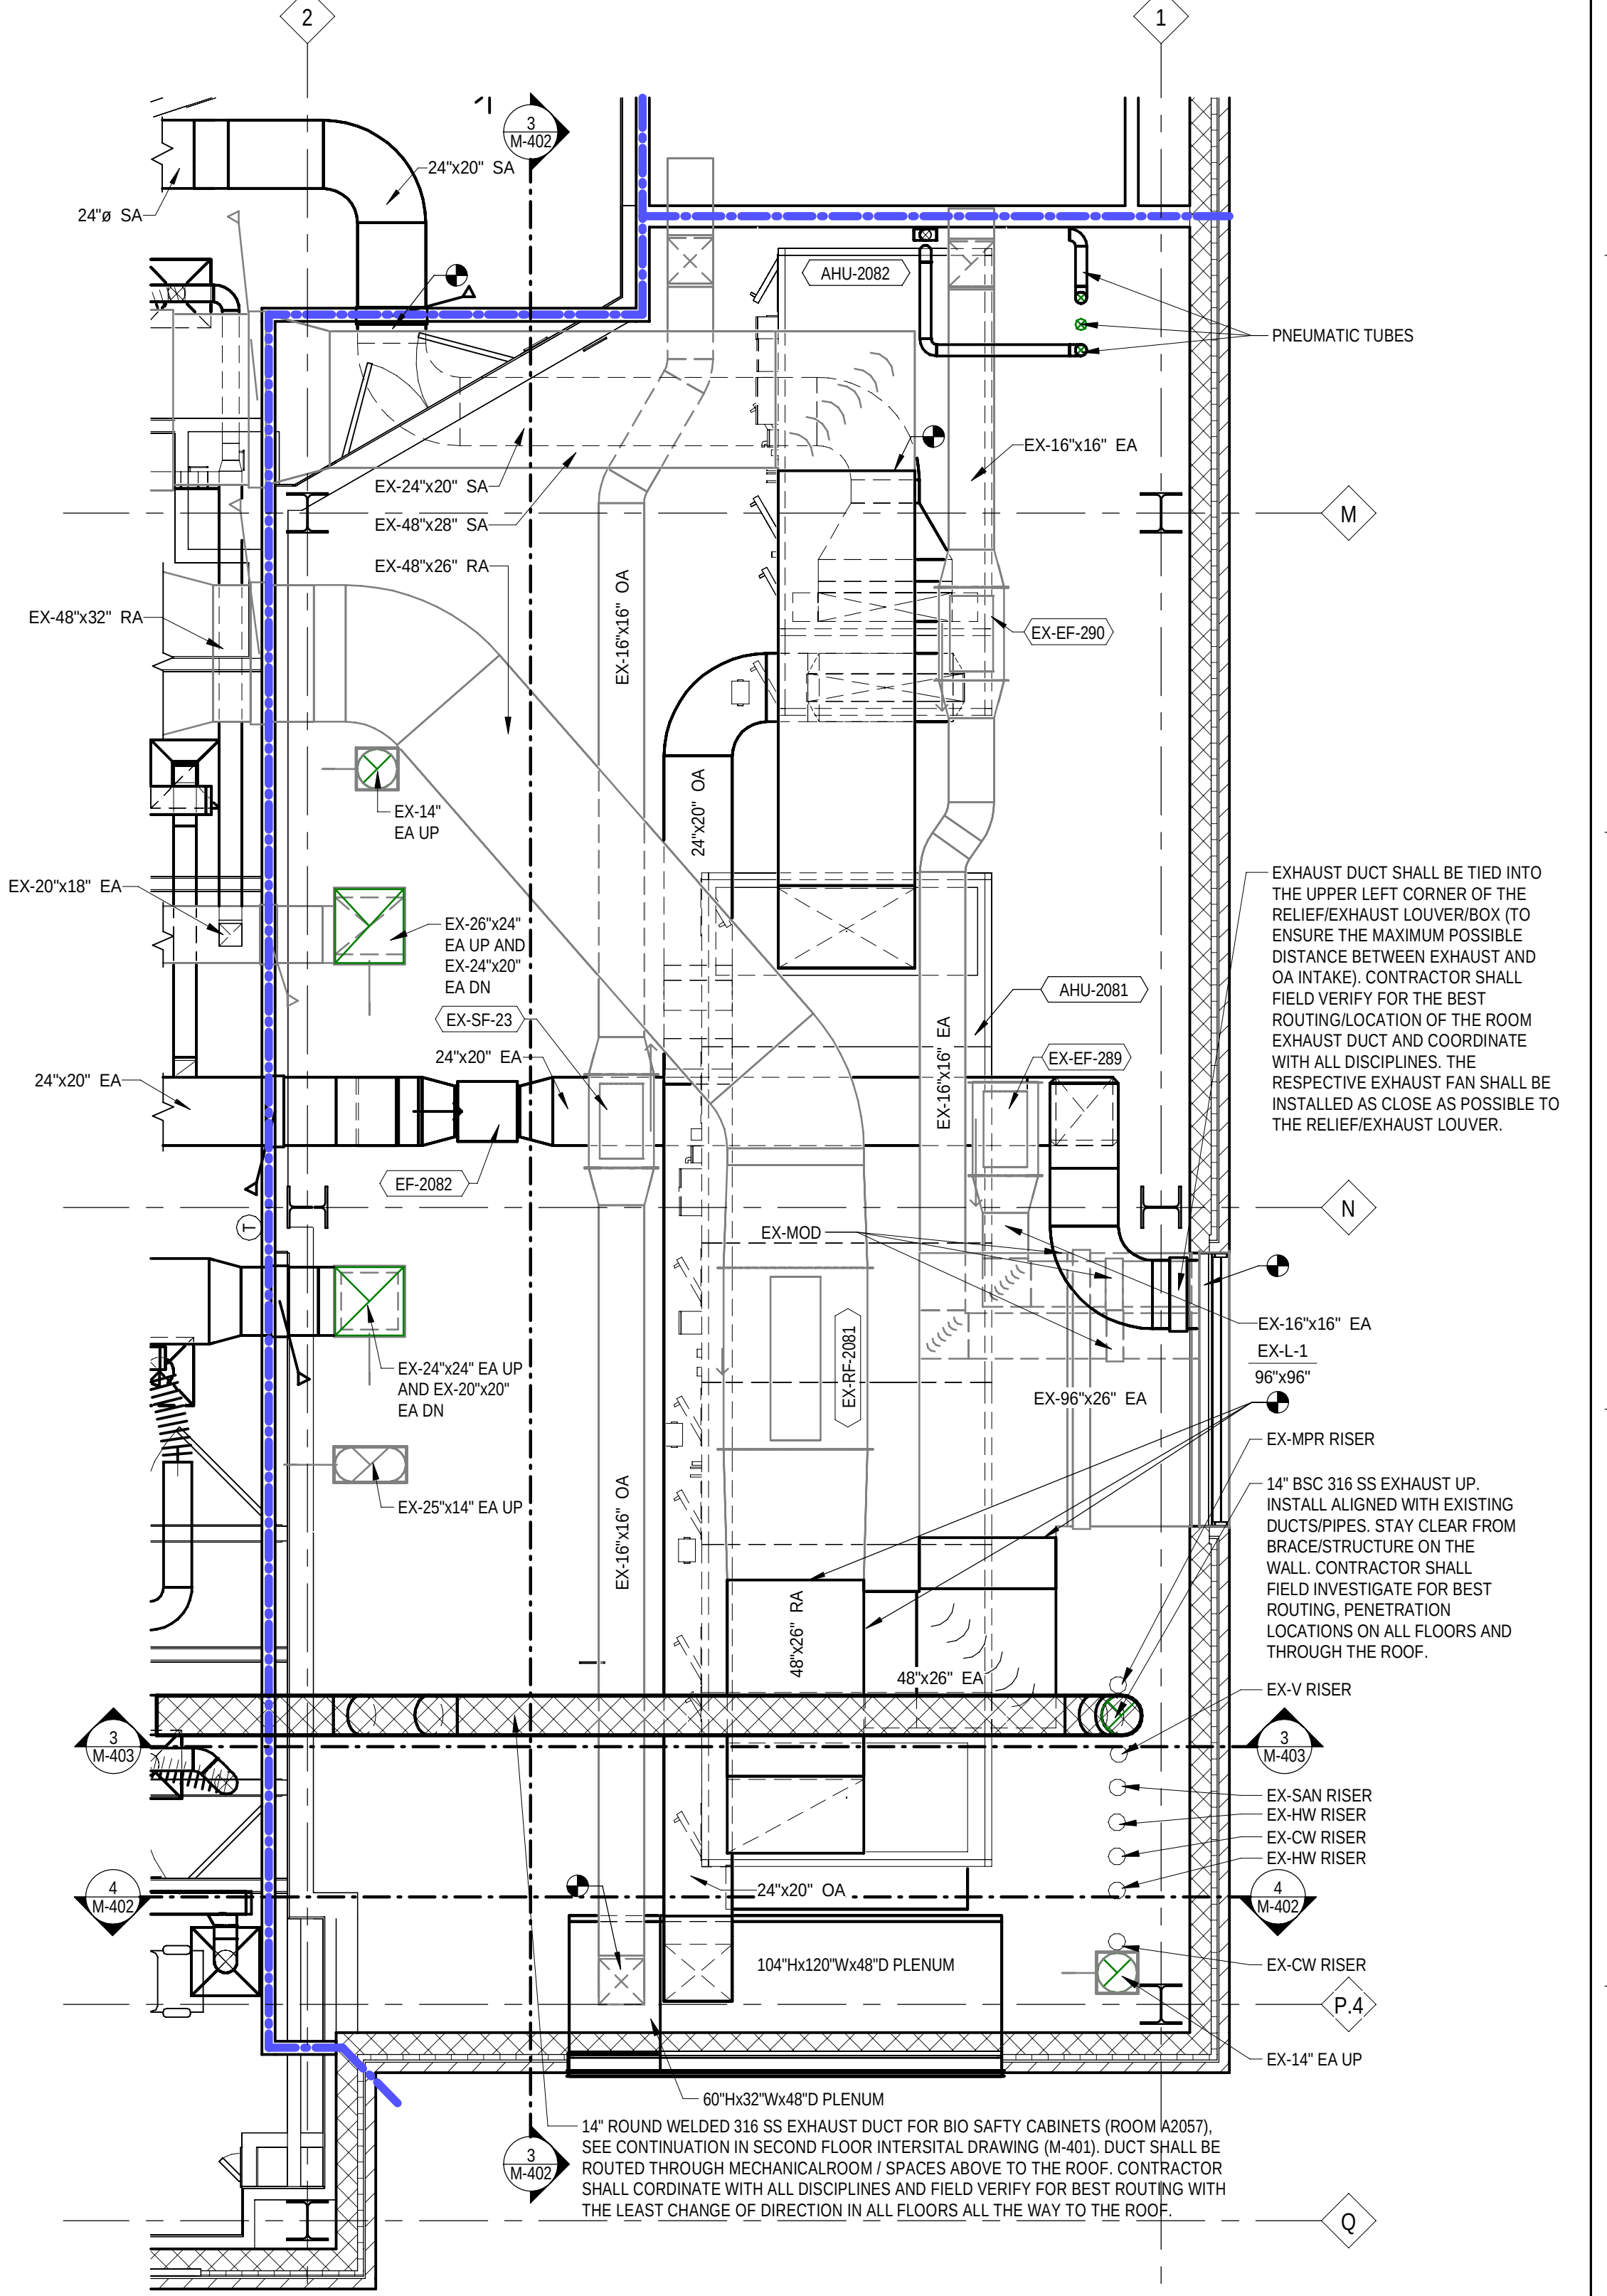

ENLARGED MECHANICAL ROOM A2032 HVAC PLAN
MH102/ 1/4" = 1'-0"

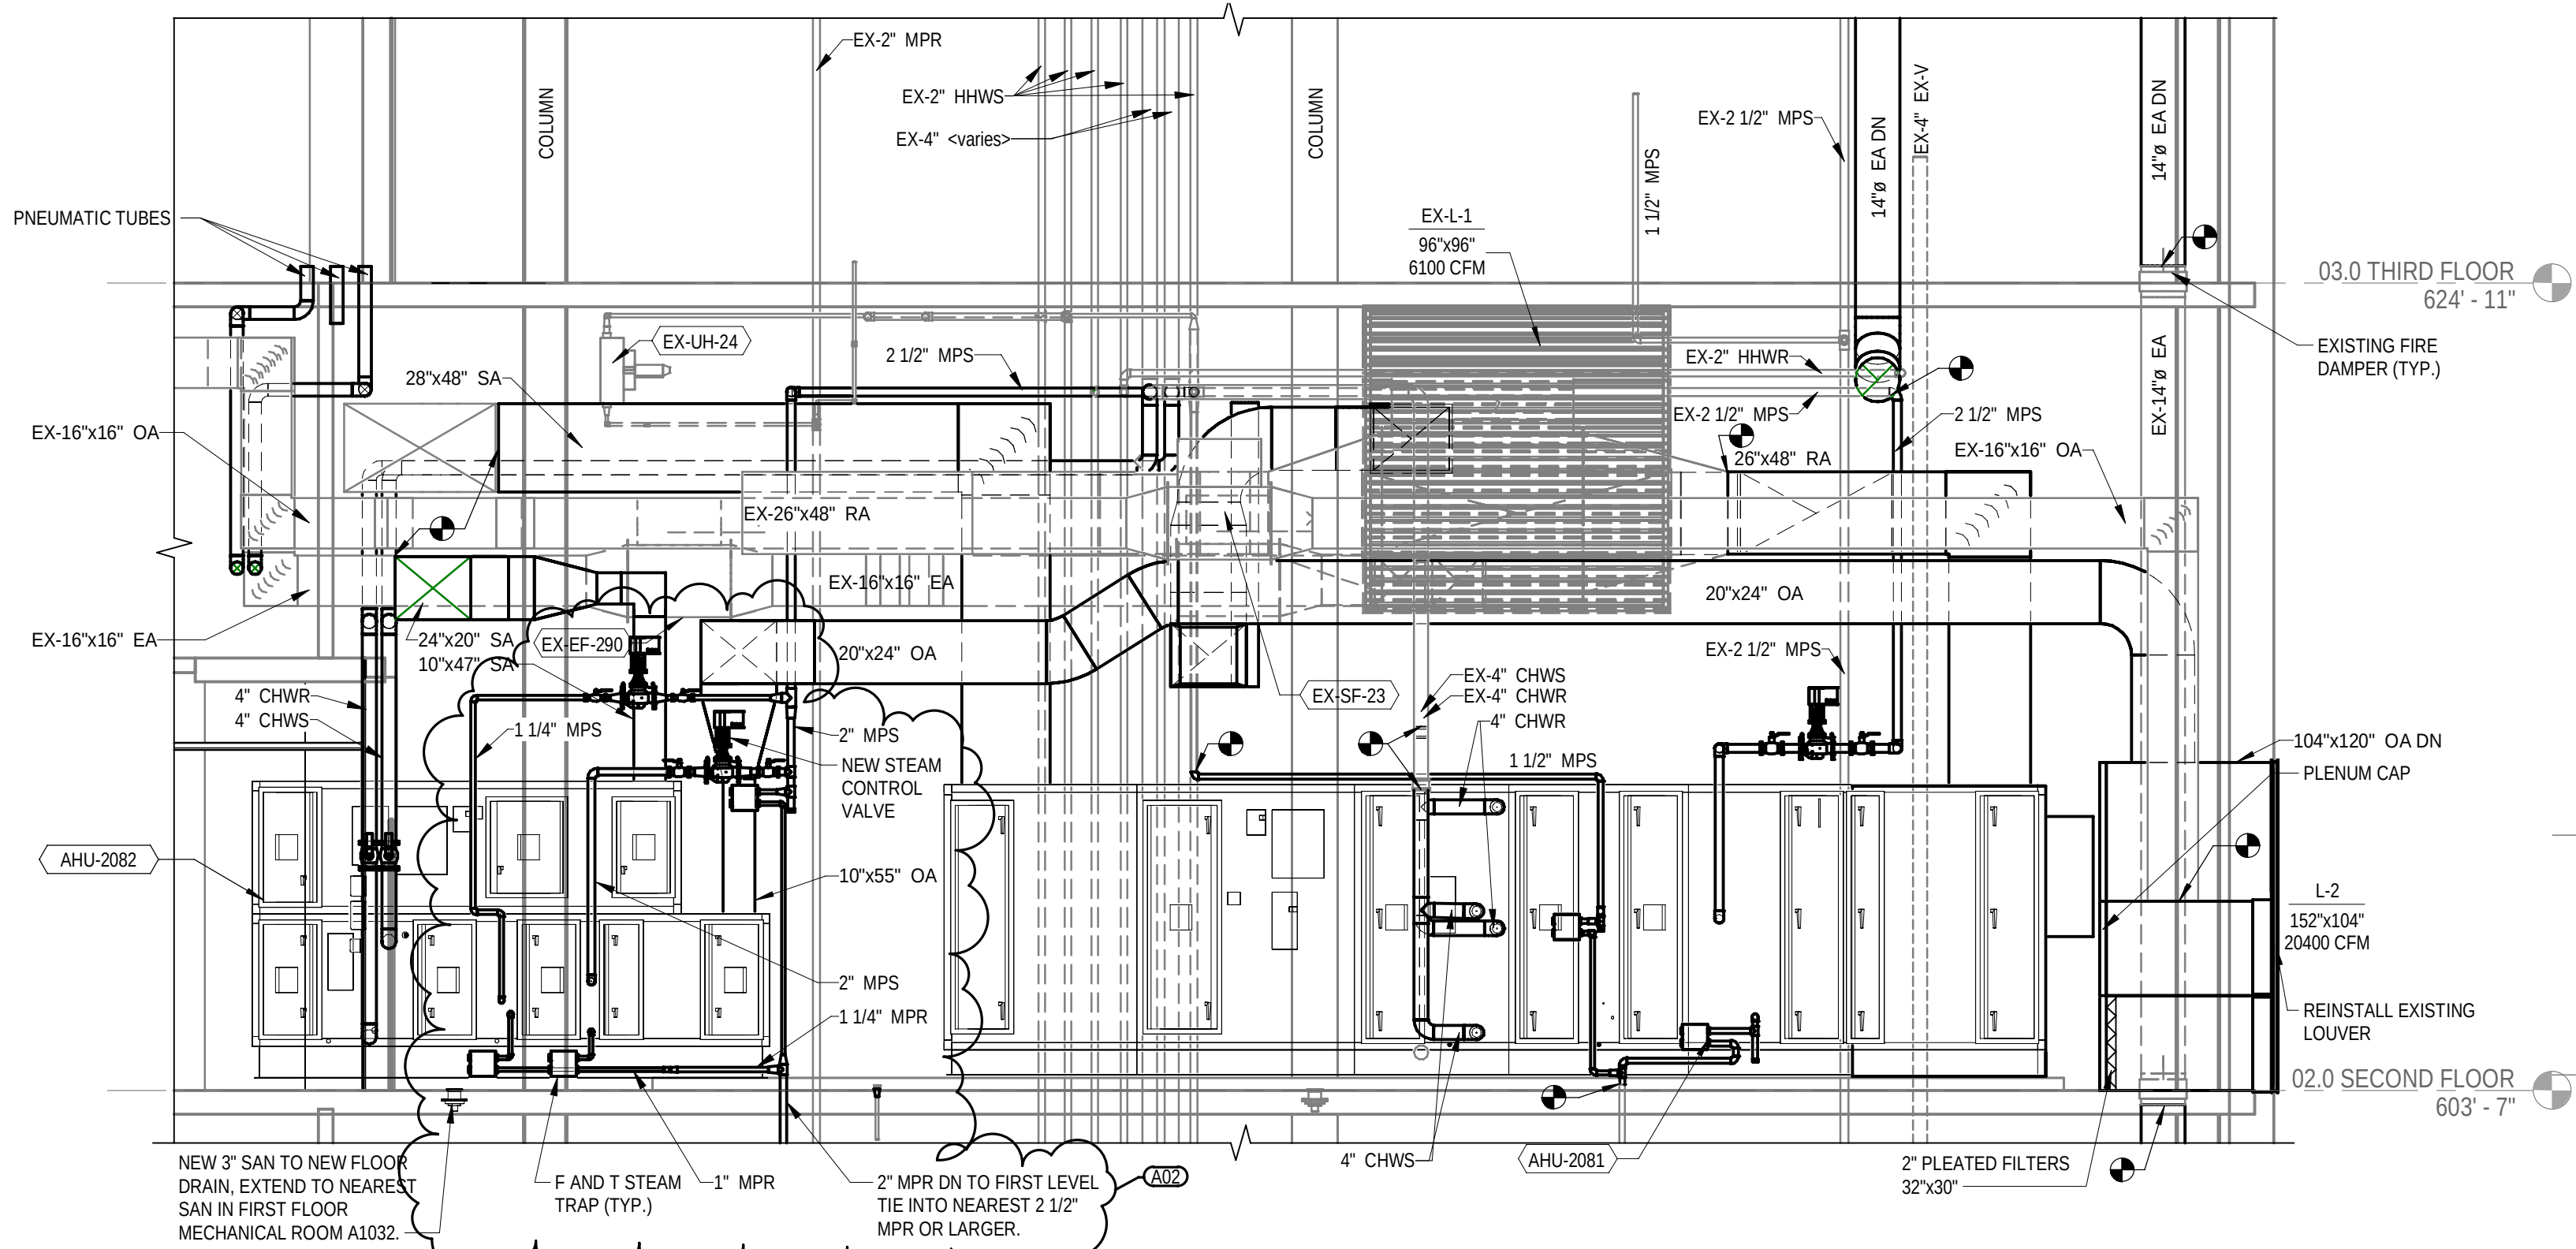

SECTION - MECHANICAL ROOM A2032
M-402/ 1/4" = 1'-0"

		VA STATION		CONSULTANT		ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title		Project Title		Project Number	
		VA HEALTH CARE		C20ae		WalterMechanical Services Inc.						ENLARGED MECHANICAL PLANS		100% BID DOCUMENTS		RENOVATE A2 SOUTH FOR CANCER CLINIC	
		Defining EXCELLENCE in the 21st Century		Engineering Group Associates, Inc.								Approved:		100% BID DOCUMENTS		Building Number	
ADDENDUM 02		30-APR-2026		John D. Dingell VA Medical Center		An AtkinsRéalis Company		3419 Pierson Place		VA U.S. Department of Veterans Affairs		FULLY SPRINKLERED		Location		Drawing Number	
100% BID DOCUMENTS		10-JAN-2025		4646 John R. Street				Flushing, Michigan, 48433									
95% CONSTRUCTION DOCUMENTS - REVISED		27-AUG-2024		Detroit, MI 48201		(866) 454-3923 WWW.C2AE.COM		810-230-6202						DETROIT, MI		M-402	
95% CONSTRUCTION DOCUMENTS		15-APR-2024												Issue Date		Checked	
65% DESIGN DEVELOPMENT		29-AUG-2023												10-JAN-2025		JDL/AS	
Revisions:		Date:														Drawn	
																REF	

A

B

C

D

E

F

A


B

C


D

E

F

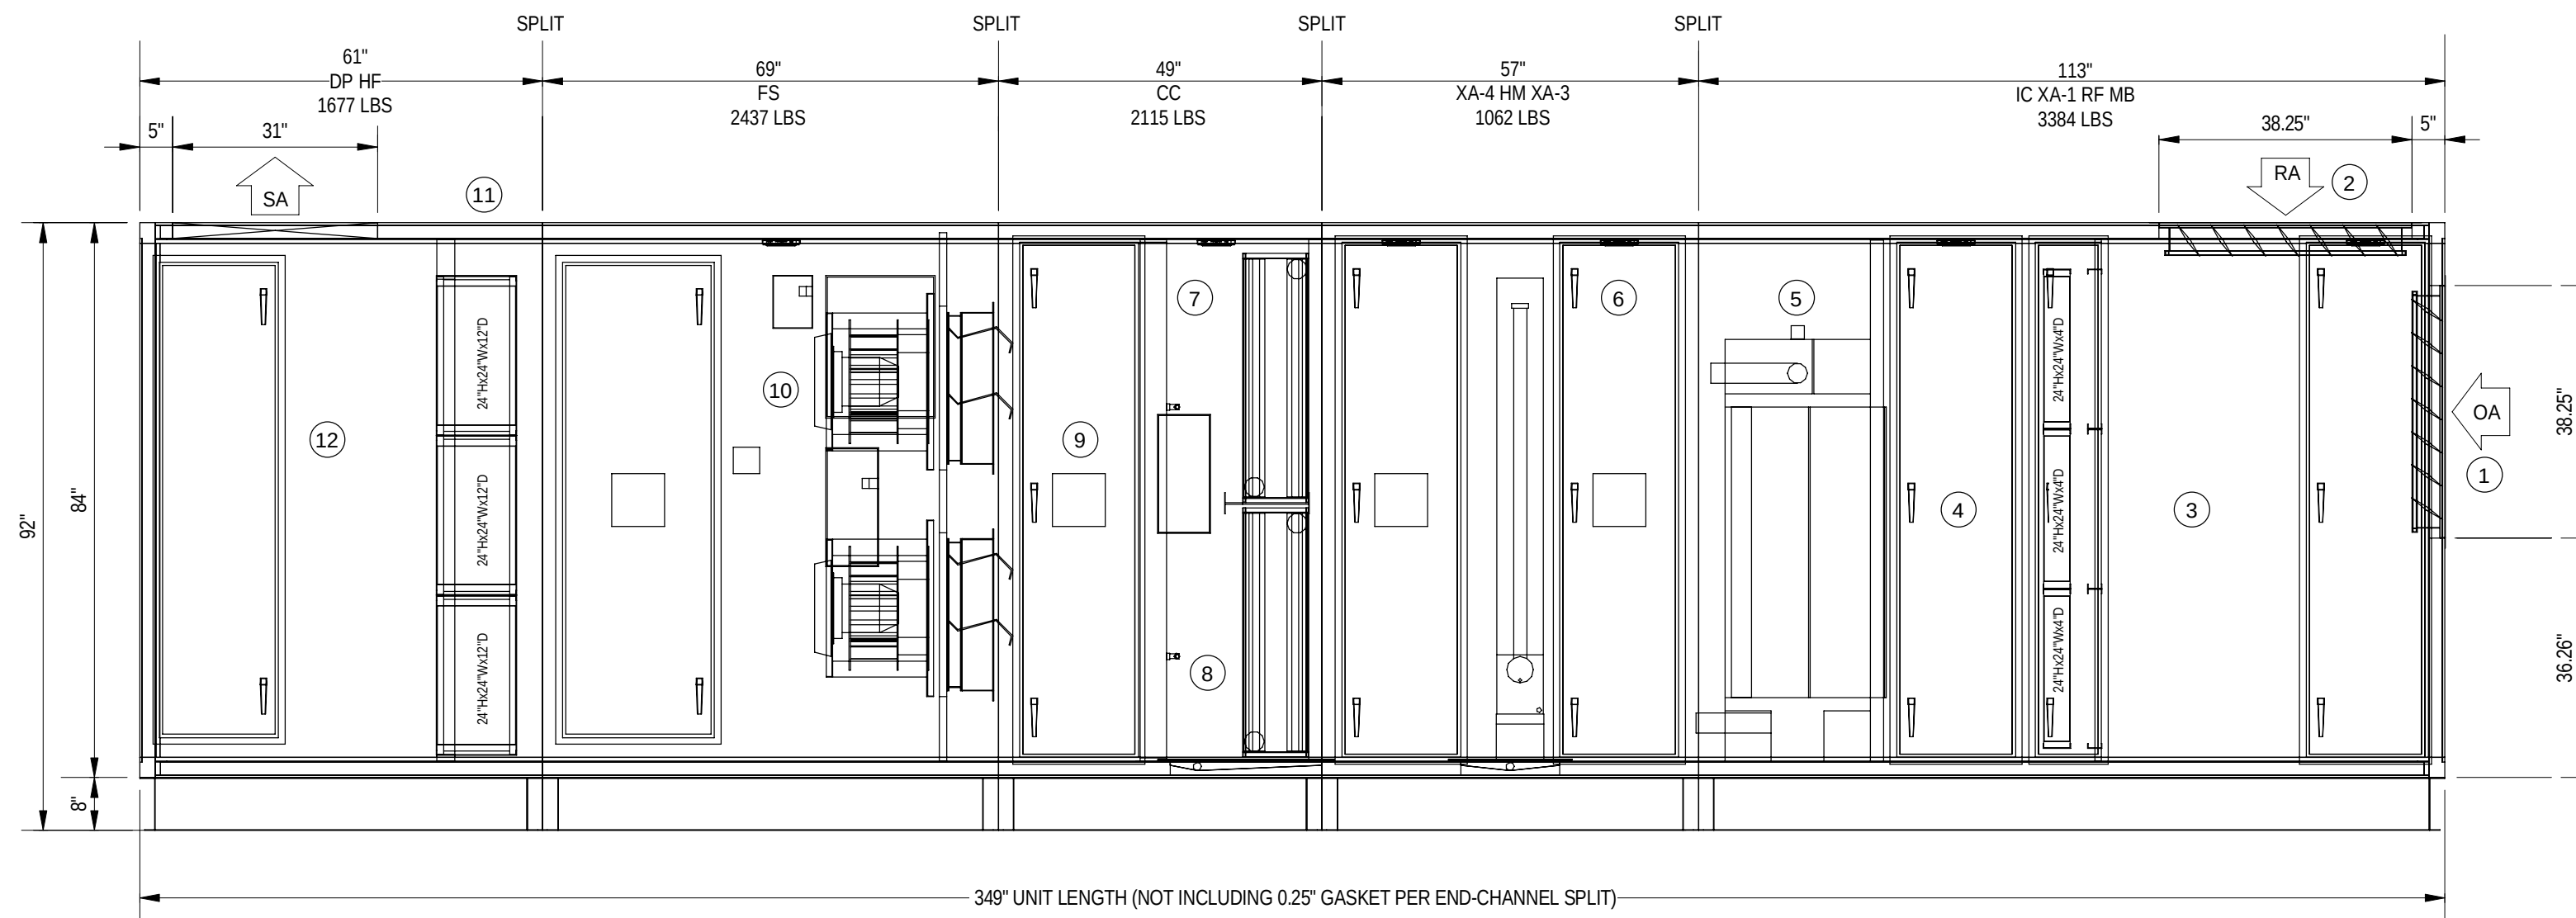

ELEVATION VIEW 1

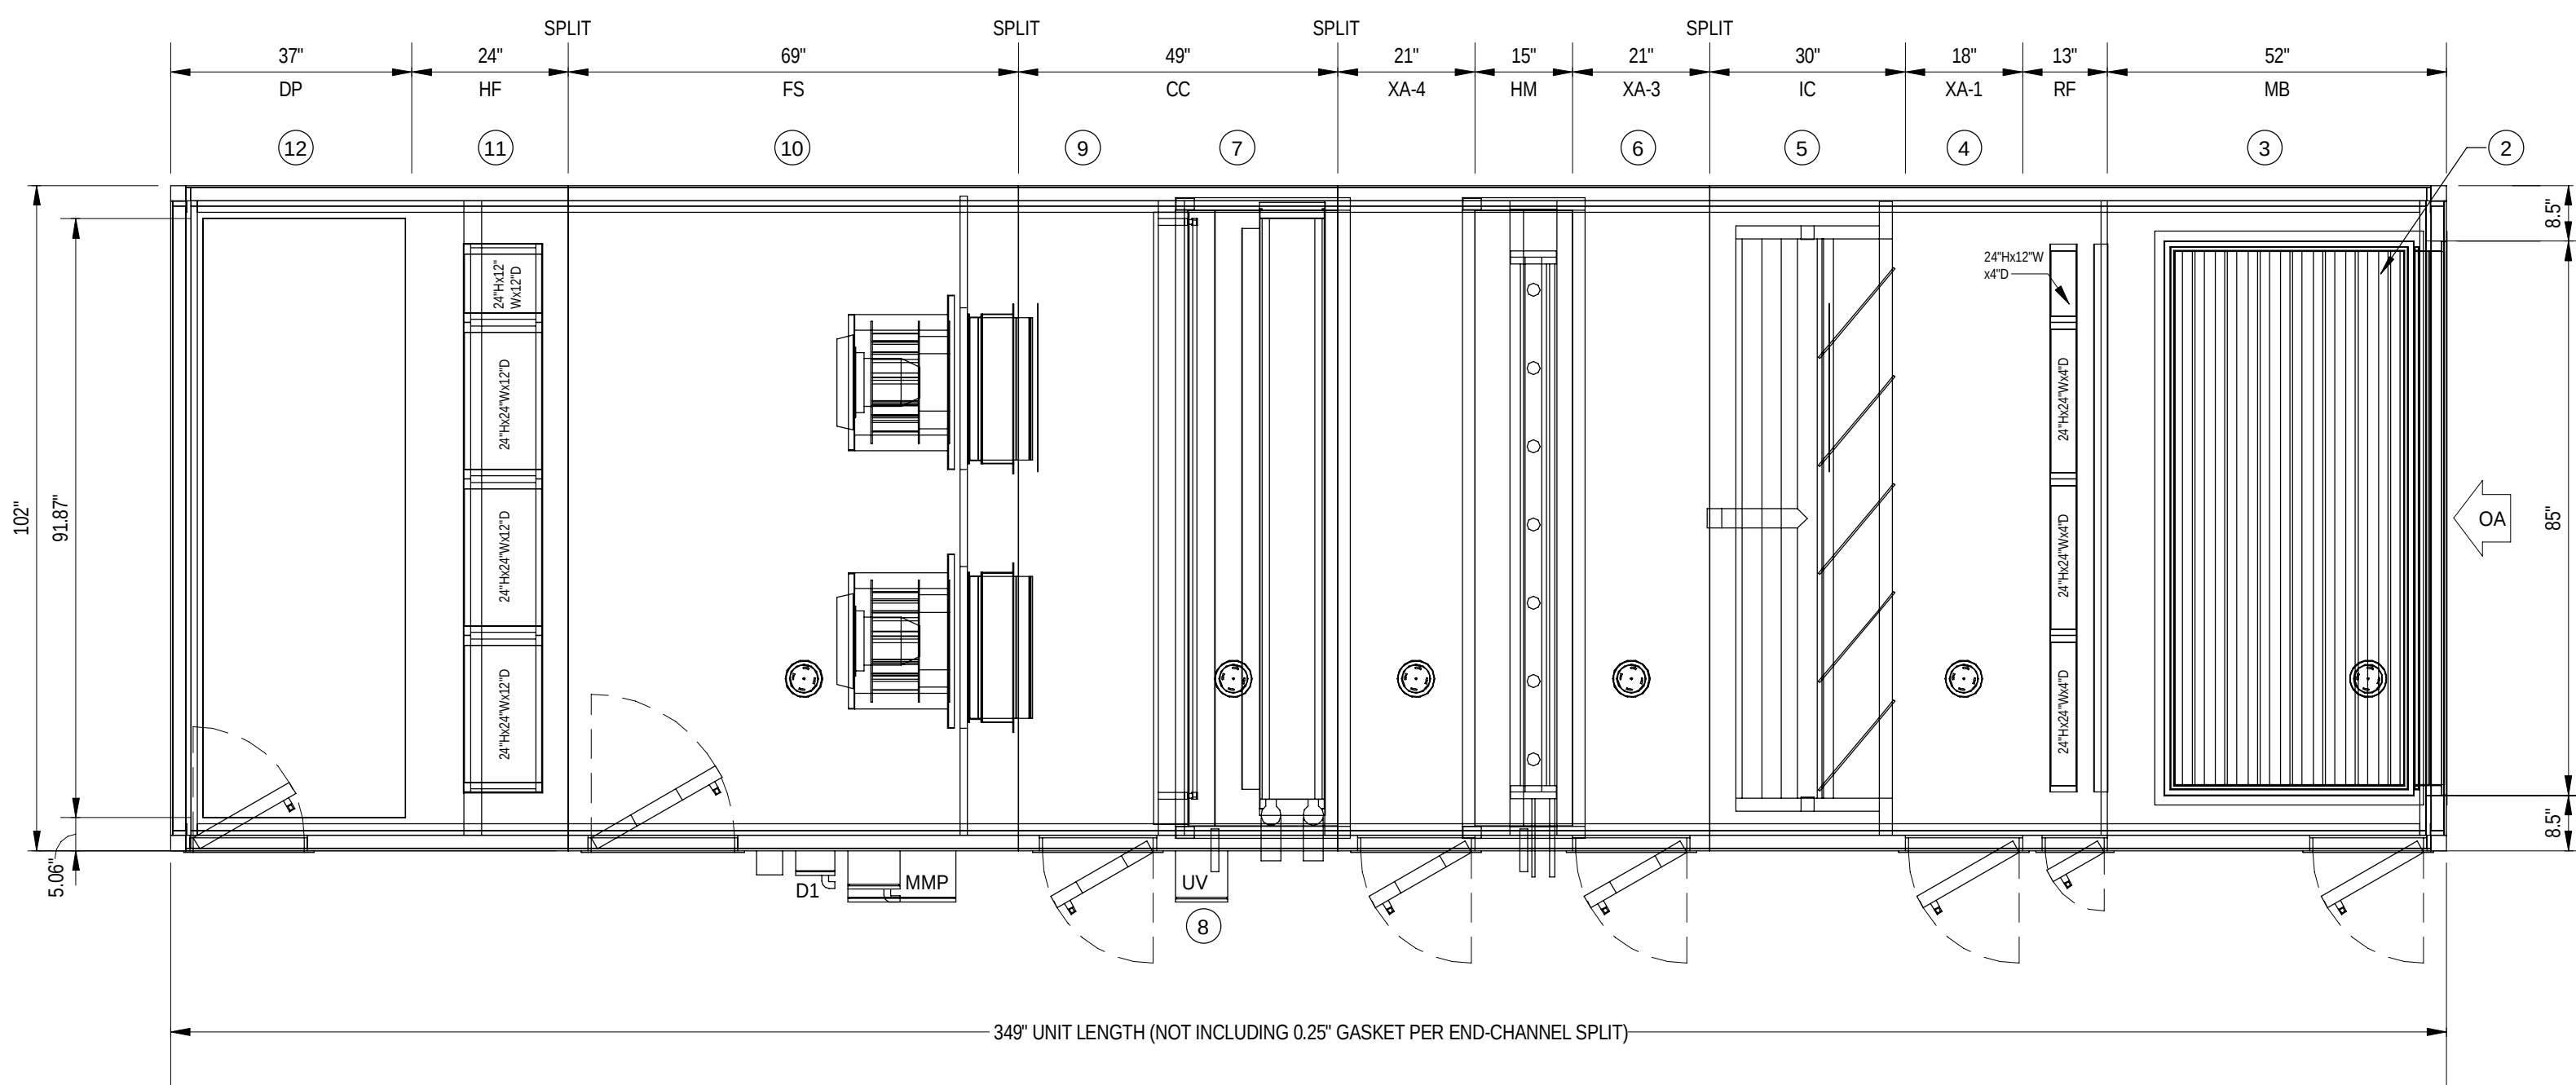

PLAN VIEW 1


2 AIR HANDLING UNIT AHU-2081 DETAIL
1/2" = 1'-0"

LEGEND

- 1 OUTSIDE AIR DAMPER
- 2 RETURN AIR DAMPER
- 3 MIXING BOX
- 4 PRE-FILTERS
- 5 INTEGRAL STEAM COIL WITH FACE & BYPASS DAMPERS
- 6 STEAM HUMIDIFIER
- 7 COOLING COIL
- 8 UV LIGHTS
- 9 ACCESS SECTION
- 10 SUPPLY FANS
- 11 FINAL FILTERS
- 12 DISCHARGE AIR PLENUM

NOTES

- 1 ALL DIMENSIONS ARE APPROXIMATE. SEE THE APPROVED EQUIPMENT SUBMITTALS FOR ACTUAL DIMENSIONS.

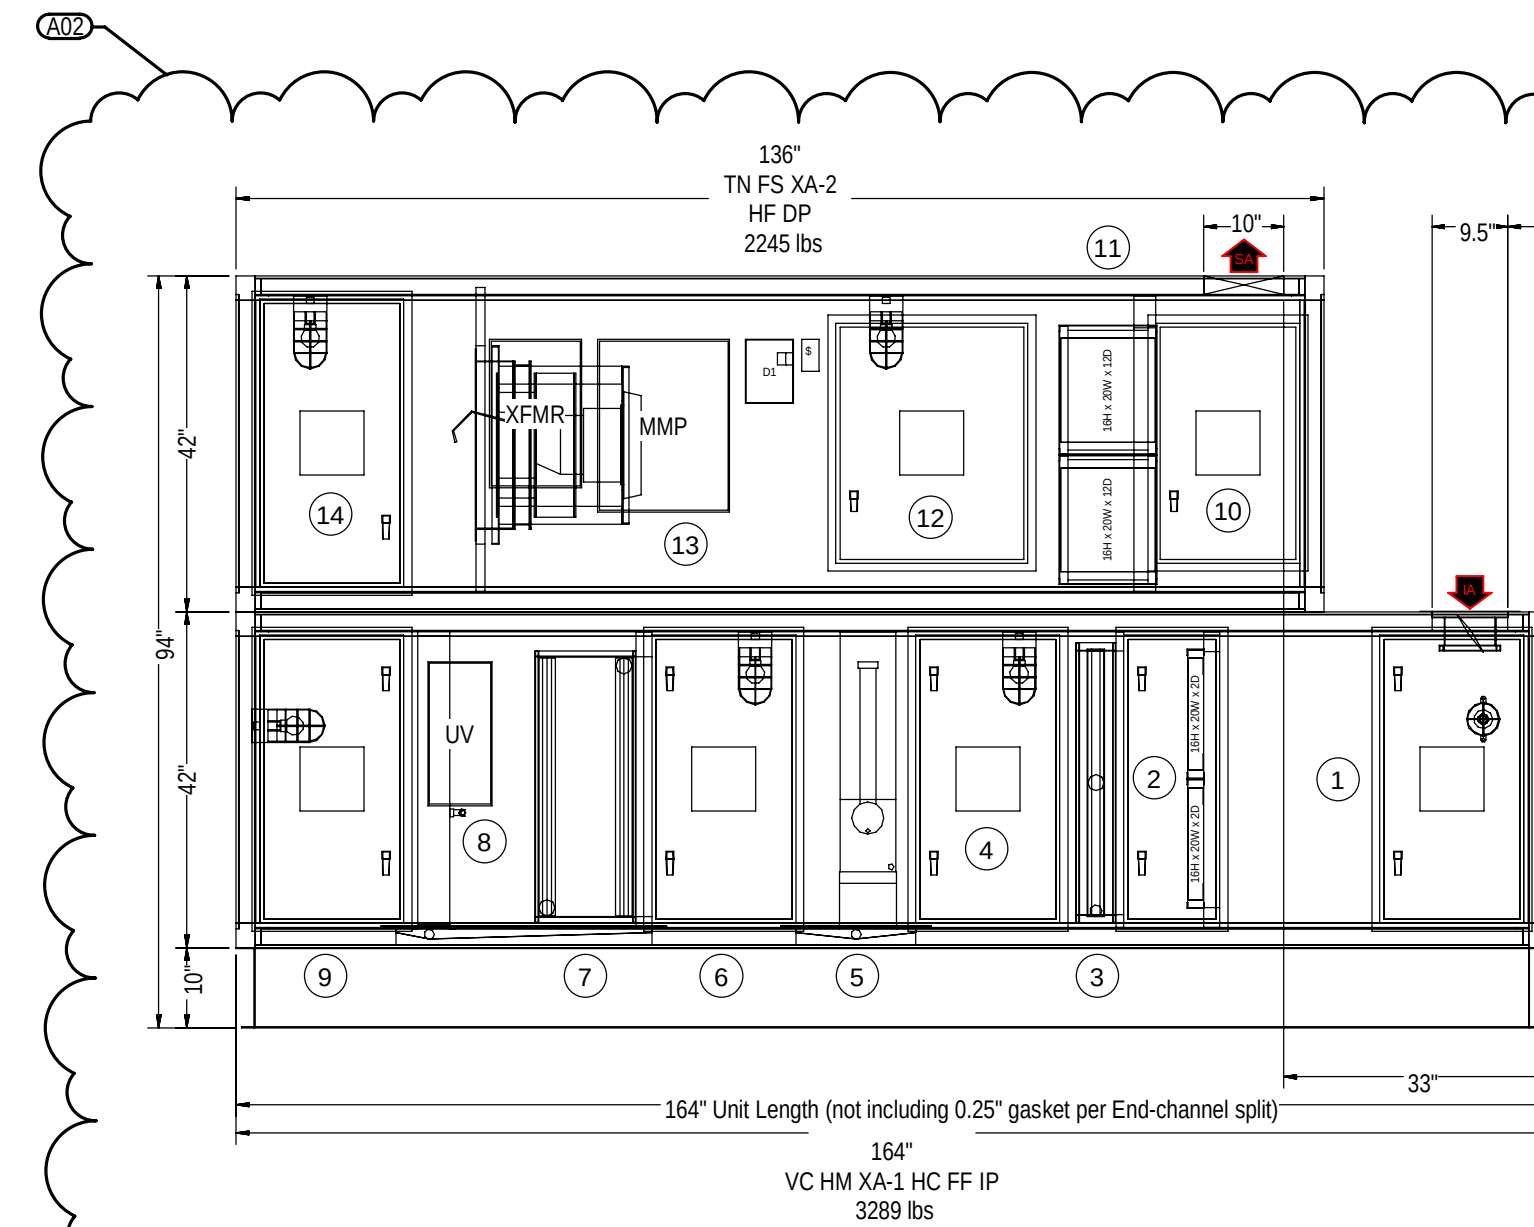


ELEVATION VIEW 1

LEGEND


- 1 INLET PLENUM
- 2 FLAT FILTERS
- 3 STEAM HEATING COIL
- 4 ACCESS
- 5 HUMIDIFIER
- 6 ACCESS
- 7 VERTICAL COOLING COIL
- 8 UV LIGHTS
- 9 ACCESS
- 10 DISCHARGE PLENUM
- 11 HEPA FILTERS
- 12 ACCESS
- 13 SUPPLY FAN
- 14 TURNING

NOTES

- 1 ALL DIMENSIONS ARE APPROXIMATE. SEE THE APPROVED EQUIPMENT SUBMITTALS FOR ACTUAL DIMENSIONS.

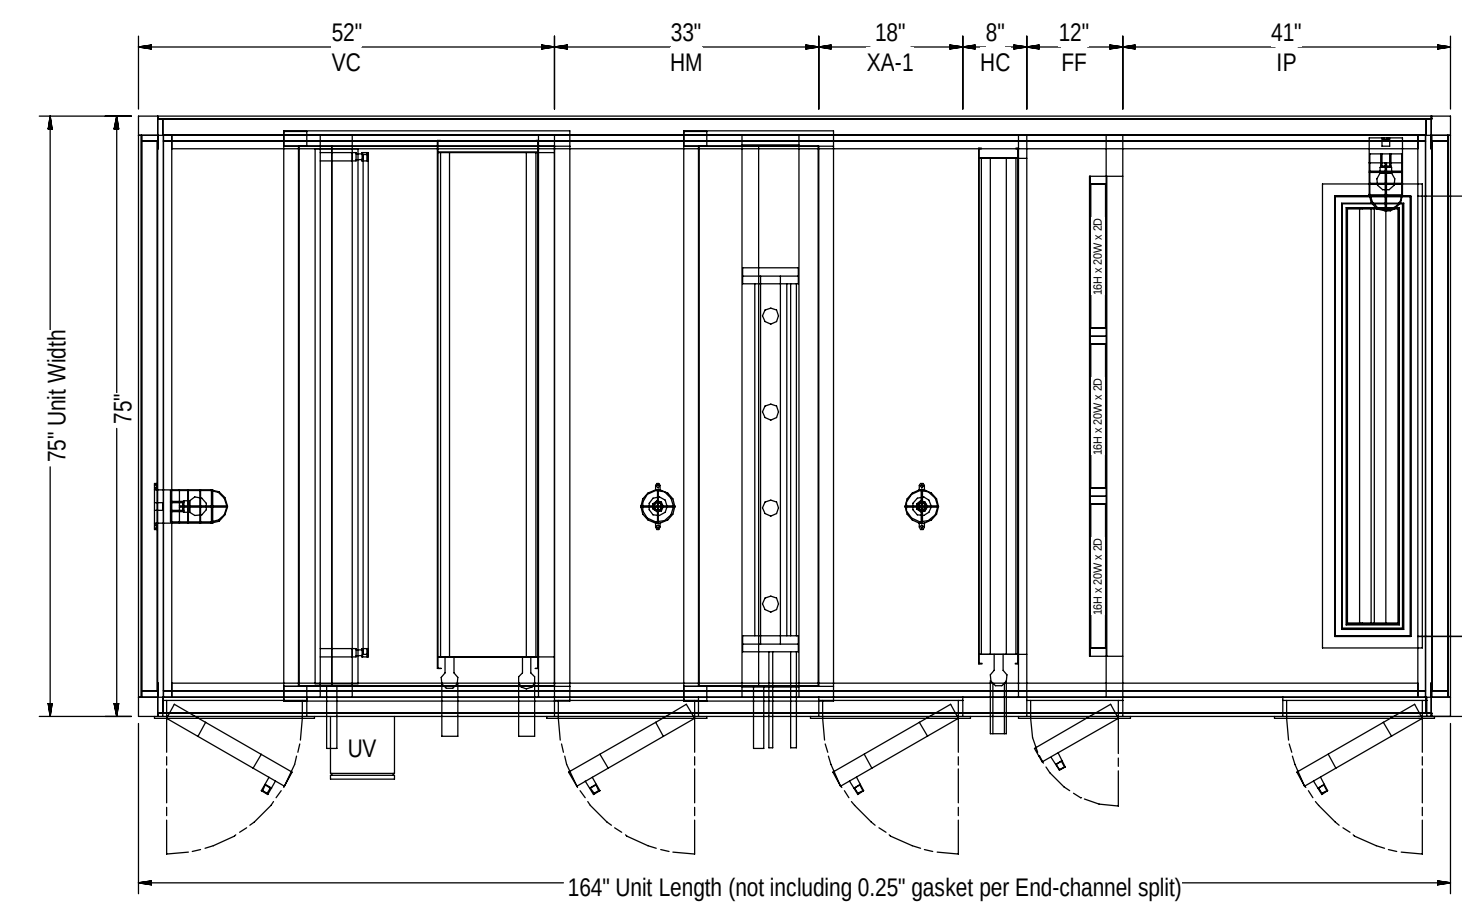

PLAN VIEW - TIER 1 1

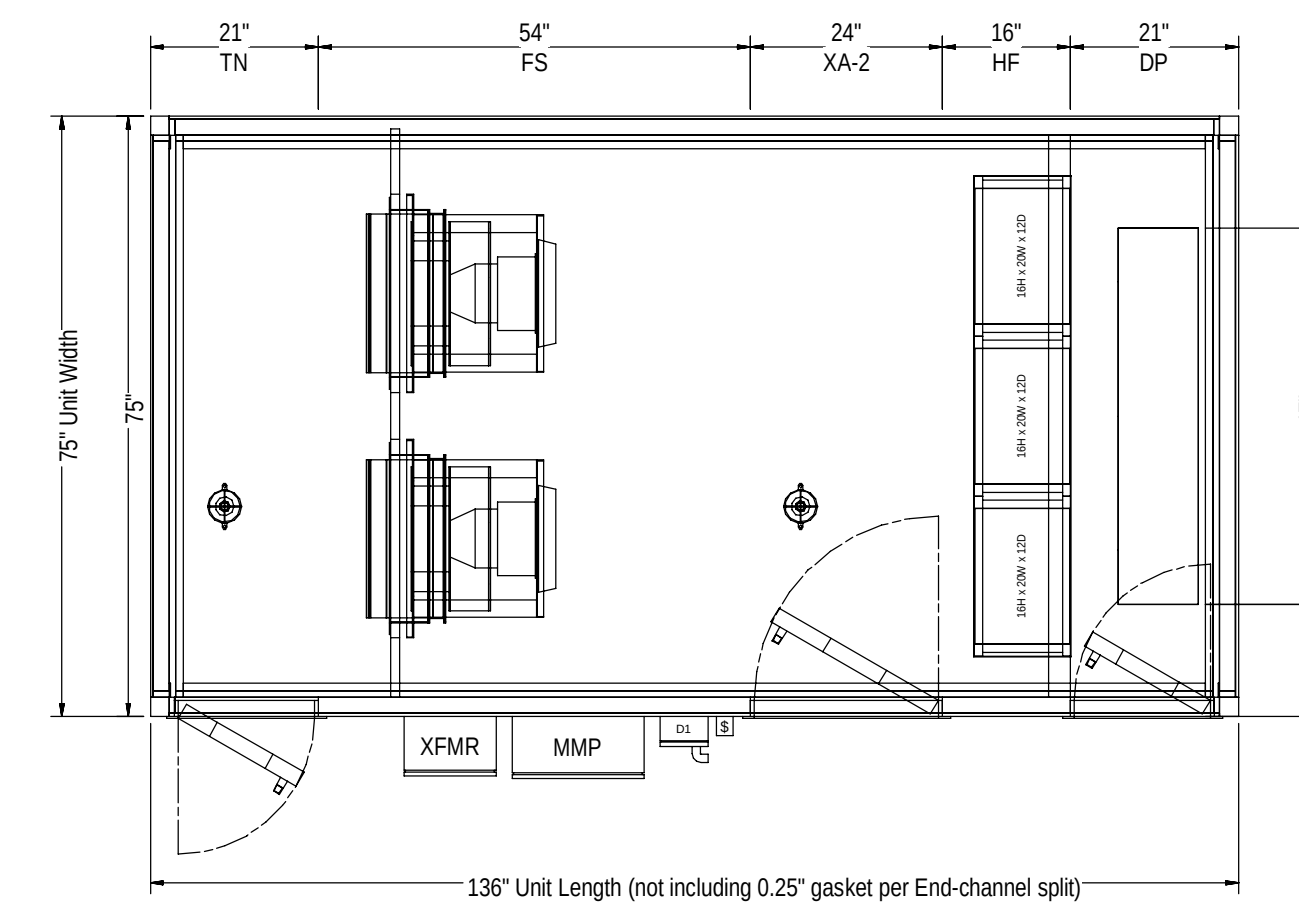

PLAN VIEW - TIER 2 1

1 AIR HANDLING UNIT AHU-2082 DETAIL
NOT TO SCALE

Autodesk Docs/VA/MI/2021/2027_M.dwg

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

AIR HANDLING UNIT SCHEDULE																
MARK	LOCATION	AREA AND/OR BUILDING SERVED	AIRFLOW TYPE	SUPPLY PRESENT CFM	SUPPLY FUTURE CFM	EXHAUST PRESENT CFM	EXHAUST FUTURE CFM	RETURN CFM	SUPPLY FAN MARK	RETURN/EXHAUST FAN MARK	PREFILTER MARK	AFTER FILTER MARK	PREHEAT COIL MARK	COOLING COIL MARK	HUMIDIFIER MARK	REMARKS
AHU-2081	MECH RM A2032	2ND FLOOR - ZONE 1	VAV	17590		6100		1490	SF-2081	RF-2081	PF-2081	AF-2081	PH-2081	CC-2081	SH-2081	-
AHU-2082	MECH RM A2032	2ND FLOOR USP PHARMACY	VAV	2845	3270	1970	3000	300 (ADD)	SF-2082	EF-2082	PF-2082	AF-2082	PH-2082	CC-2082	SH-2082	1.2

1. AHU - 2082 IS A 100% OUTSIDE AIR UNIT AND IS INTERLOCKED WITH EF-2082. HOWEVER, IN THE HD BUFFER ROOM A2057, 610 CFM IS EXHAUSTED THROUGH EF-BSC-1/1 (N+1); THE NON - HD BUFFER ROOM A2056 RETURNS 300 CFM (ADD) TO RF2081.
2. AHU - 2082 HAS EXTRA CAPACITY FOR FUTURE APPLICATIONS/USE.

SUPPLY FAN SCHEDULE																						
MARK	LOCATION	AREA AND/OR BUILDING	SYSTEM AND/OR SERVICE	AIRFLOW		FAN										MOTOR ELECTRICAL					CONTROL TYPE	REMARKS
				PRESENT	FUTURE	TYPE	TSP	WHEEL	CLASS	MANUFAC TURE	MODEL	SIZE	DRIVE	MAX. RPM	POWER BHP	HP	PHASE	VOLTS	SPEED CONTROL			
SF-2081	MECH RM A2032	2ND FLOOR - ZONE 1	AHU-2081	17590 CFM	-	PLUG	5.44 in-wg	SWSI	II	EBM PABST	RADIPAC	450	DIRECT	2440	23.00	25.00	3	460 V	ECM	SHEET M-801	1	
SF-2082	MECH RM A2032	2ND FLOOR USP PHARMACY	AHU-2082	2845 CFM	3270	PLUG	4.90 in-wg	SWSI	II	EBM PABST	RADIPAC	450	DIRECT	2440	11.37	12.00	3	460 V	ECM	SHEET M-802	2	

- NOTES:
1. FAN CONSISTS OF FOUR(4) PLUG FANS. MOTOR ELECTRICAL DATA IS FOR ALL FOUR FANS COMBINED
2. FAN CONSISTS OF TWO(2) PLUG FANS. MOTOR ELECTRICAL DATA IS FOR ALL TWO FANS COMBINED

HVAC DESIGN DATA							
DESIGN CONDITION	SUMMER			WINTER			REMARK
	DB TEMP.	WB TEMP.	% HUMIDITY	DB TEMP.	DEWPOINT T TEMP.	% HUMIDITY	
OUTSIDE	91°F	76°F	50	3°F	3°F	-	1
EXAM ROOMS	75°F	62°F	60	70°F	37°F	30	1
STAFF OFFICE	75°F	62°F	60	70°F	37°F	30	1
STAFF BREAK	75°F	62°F	60	70°F	37°F	30	1
CLEAN UTILITY	-	-	-	-	-	-	2
SOILED UTILITY	-	-	-	-	-	-	2
STORAGE	-	-	-	-	-	-	2
WAITING ROOMS	75°F	62°F	60	70°F	37°F	30	1
TOILET ROOMS	-	-	-	-	-	-	1
CORRIDORS	75	62°F	60	70°F	37°F	30	1

- NOTES:
1. FROM VA HVAC DESIGN MANUAL
2. NO VA REQUIREMENTS FOR THESE ROOMS

AIR FLOW CONTROL VALVE SCHEDULE														
ROOM NO.	ROOM NAME	DEVICE SERVED	TAG NO.	LAB DETAIL NO.	MODEL NUMBER	TERMINAL MIN	TERMINAL MAX	AIRFLOW (CFM) OPERATING MIN CFM	OPERATING MAX CFM	REHEAT COIL EAT (°F)	LAT (°F)	EWT (°F)	GPM	NOTES
A2053	ZONE 1: PHARMACISTS' WORK AREA	RETURN	AFCV-2081-A2053-R	TBD	ACV108MHASOEODP	50	400	300	300	55	95	180	1.1	1
A2053	ZONE 1: PHARMACISTS' WORK AREA	SUPPLY	AFCV-2081-A2053-S	TBD	ACV108MHASOEODP	50	400	300	300	55	95	180	1.1	1
A2054	ZONE 2: HD STORAGE	EXHAUST	AFCV-2082-A2054-E	TBD	ACV108MHASOEODP	50	400	280	280	55	95	180	1.1	1
A2054	ZONE 2: HD STORAGE	SUPPLY	AFCV-2082-A2054-S	TBD	ACV108MHASOEODP	50	400	180	180	55	95	180	0.8	1
A2055	ZONE 3: ANTE ROOM	RETURN	AFCV-2082-A2055-E	TBD	ACV114MHASOEODP	200	2500	1000	1000	55	95	180	3.2	1
A2055	ZONE 3: ANTE ROOM	SUPPLY	AFCV-2082-A2055-S	TBD	ACV114MHASOEODP	200	2500	1280	1280	55	95	180	3.2	1
A2056	ZONE 4: NON-HD BUFFER ROOM	RETURN	AFCV-2081-A2056-R	TBD	ACV110MHASOEODP	40	700	200	200	55	95	180	1.1	1
A2056	ZONE 4: NON-HD BUFFER ROOM	SUPPLY	AFCV-2082-A2056-S	TBD	ACV110MHASOEODP	40	700	330	330	55	95	180	1.1	1
A2057	ZONE 5: HD BUFFER ROOM	EXHAUST	AFCV-2082-A2057-E	TBD	AVV114MHASOEODP	200	2500	600	1200	55	95	180	3.0	1
A2057	ZONE 5: HD BUFFER ROOM	SUPPLY	AFCV-2082-A2057-S	TBD	ACV114MHASOEODP	200	2500	1000	1000	55	95	180	3.0	1
A2057	ZONE 5: HD BUFFER ROOM	EXHAUST	AFCV-BSC-1	TBD	AVV114LHHSOEODP	40	700	0	305	55	95	180	1.2	1
A2057	ZONE 5: HD BUFFER ROOM	EXHAUST	AFCV-BSC-2	TBD	AVV110LHHSOEODP	40	700	0	305	55	95	180	1.2	1

1. PROJECT 553-21-100: SATELLITE PHARMACY/SEMI-VENTURI AIRVALVE MODEL NO.
2. STAINLESS STEEL PREFERRED. *STAINLESS STEEL VENTURI VALVE SPECIFIED. THE "Y" HERESTITE COATED SHALL BE ACCEPTABLE PER THE VA APPROVAL AND DIRECTION.

EXHAUST FAN SCHEDULE												
GENERAL			FAN			ELECTRICAL						NOTES
MARK	MANUFACTURER	MODEL	AIRFLOW (CFM)	ESP (IN-WG)	MOTOR SPEED (RPM)	HP	VOLTAGE	CYCLE (HZ)	PHASE	MCA (A)	MOP	
EF-2082	GREENHECK	SQ-12-VG	1970	1.00	2253	3/4	115	60	1	12.5	15	3.4
EF-BSC-1	GREENHECK	VEKTOR-H12	610	3.00	3142	1 1/2	460	60	3	3	15	2.5
EF-BSC-2	GREENHECK	VEKTOR-H12	610	3.00	3142	1 1/2	460	60	3	3	15	2.5

1. REDUNDANT FAN
2. TOTAL BSC EXHAUST AIR SHALL BE 610 CFM (NORMAL MODE OF OPERATION) WHEN BOTH CLASS II TYPE A2 BSCs ARE IN SERVICE OR WHEN ONLY ONE BSC IS IN SERVICE. OR WHEN NON OF THE BSCs ARE IN SERVICE, RESPECTIVELY. EACH BSC REQUIRE BEING CONSTANTLY EXHAUSTED AT 278 TO 305 CFM (CERTIFIED: BPF-SSRX) THROUGH THEIR RESPECTIVE GERMIFREE THIMBLE CANOPY CONNECTION.
3. INTERLOCK WITH EF-2082 OPERATION
4. PROVIDE MOTORIZED DAMPER POWERED BY FAN CIRCUIT
5. BOTH EF-BSC-1&2 SHALL BE EQUIPPED WITH VFDs (VARIABLE FREQUENCY DRIVE).


AIR DEVICE SCHEDULE (SUPPLY)																
MARK	MANUFACTURER	MODEL	TYPE	AIR FLOW		MAX APD	MOUNTING	PANEL/FRAME SIZE	NECK SIZE	NC	DAMPER	FINISH	MATERIAL	AEROSOL TEST SYSTEM	INSULATION	REMARKS
				MIN	MAX											
D-1	PRICE INDUSTRIES	SCDA	PLAQUE FACE	80 CFM	380 CFM	0.10 in-wg	LAY-IN	12"x12" or 24"x24"	6"-10"	18	NONE	WHITE	STEEL	NO	NO	1-7, 8, 13
D-2	PRICE INDUSTRIES	SCDA	PLAQUE FACE	300 CFM	600 CFM	0.10 in-wg	LAY-IN	24"x24"	10"	23	NONE	WHITE	STEEL	NO	NO	1-7, 8, 13
HD-1	PRICE INDUSTRIES	LFDCCSS	LAMINAR FLOW W/ HEPA FILTER	200 CFM	700 CFM	0.10 in-wg	LAY-IN	24" X 48"	12"		YES		STAINLESS STEEL	YES	YES	1-7
HD-2	PRICE INDUSTRIES	LFDCCSS	LAMINAR FLOW W/ HEPA FILTER	100 CFM	250 CFM	0.10 in-wg	LAY-IN	24"x24"	10"		YES		STAINLESS STEEL	YES	YES	1-7
L-1	PRICE INDUSTRIES	JS	LINEAR	120 CFM	200 CFM	0.13 in-wg	LAY-INSURFACE	1" SLOT - 4" LONG	8"	23	NONE	WHITE	ALUMINUM	NO	YES	1-7
L-2	PRICE INDUSTRIES	JS	LINEAR	210 CFM	320 CFM	0.13 in-wg	LAY-INSURFACE	1" SLOT - 4" LONG	10"	30	NONE	WHITE	ALUMINUM	NO	YES	1-7
L-3	PRICE INDUSTRIES	LFG CORE25C	LINEAR	0 CFM	455 CFM	0.13 in-wg	LAY-INSURFACE	4"x36"	--	23	NONE	WHITE	ALUMINUM	NO	NO	1-7

AIR DEVICE SCHEDULE (RETURN)																
MARK	MANUFACTURER	MODEL	TYPE	AIR FLOW		MAX APD	MOUNTING	PANEL/FRAME SIZE	NECK SIZE	NC	DAMPER	FINISH	MATERIAL	AEROSOL TEST SYSTEM	INSULATION	REMARKS
				MIN	MAX											
R-1	PRICE INDUSTRIES	80	1/2"x1/2" GRID	0 CFM	180 CFM	0.10 in-wg	LAY-IN	24"x24"	6"x6"	20	NONE	WHITE	STEEL	NO	NO	1-7, 13
R-2	PRICE INDUSTRIES	80	1/2" x 1/2" GRID	185 CFM	700 CFM	0.10 in-wg	LAY-IN	24"x24"	6"x6"	20	NONE	WHITE	STEEL	NO	NO	1-7, 13
RG-2	PRICE INDUSTRIES	730FF	12"x12" EXHAUST GRILLE	0 CFM	455 CFM		WALL-MOUNTED	12"x12"	STANDARD	24	NONE		STAINLESS STEEL	NO	NO	1-7, 9, 11, 14

AIR DEVICE SCHEDULE (EXHAUST)																
MARK	MANUFACTURER	MODEL	TYPE	AIR FLOW		MAX APD	MOUNTING	PANEL/FRAME SIZE	NECK SIZE	NC	DAMPER	FINISH	MATERIAL	AEROSOL TEST SYSTEM	INSULATION	REMARKS
				MIN	MAX											
E-1	PRICE INDUSTRIES	80	1/2" x 1/2" GRID	0 CFM	600 CFM	0.06 in-wg	SURFACE	10"x10"	10"x10"	17	NONE	WHITE	STEEL	NO	NO	1-7
E-2	PRICE INDUSTRIES	80	1/2" x 1/2" GRID	0 CFM	2600 CFM	0.08 in-wg	CAN-IN	24"x24"	18"x18"	15	NONE	WHITE	STEEL	NO	NO	1-7
EG-1	PRICE INDUSTRIES	730FF	6"x6" EXHAUST GRILLE	0 CFM	90 CFM		WALL-MOUNTED	6"x6"	STANDARD	19	YES/OBD		STAINLESS STEEL	NO	NO	1-7, 9, 11, 14
EG-2	PRICE INDUSTRIES	730FF	12"x12" EXHAUST GRILLE	0 CFM	455 CFM		WALL-MOUNTED	12"x12"	STANDARD	24	NONE		STAINLESS STEEL	NO	NO	1-7, 9, 11, 14
EG-3	PRICE INDUSTRIES	730FF	18"x12" EXHAUST GRILLE	0 CFM	670 CFM		WALL-MOUNTED	18"x12"	STANDARD	27	NONE		STAINLESS STEEL	NO	NO	1-7, 9, 11, 14, 14

- AIR DEVICE GENERAL NOTES
1. ALL DIFFUSERS, REGISTERS, AND GRILLES TO HAVE REMOVABLE CENTERS TO ALLOW ACCESS FOR CLEANING.
2. PROVIDE ALL SPECIALTIES, FRAMES, AND BORDERS REQUIRED FOR INSTALLATION IN CEILING TYPE INDICATED IN ARCHITECTURAL DOCUMENTS.
3. PROVIDE DUCT-MOUNTED, ROUND OR RECTANGULAR, BALANCING DAMPER FOR EACH DUCTED SUPPLY, RETURN, OR EXHAUST AIR DEVICE.
4. DO NOT PROVIDE BALANCING DAMPER INTEGRAL WITH AIR DEVICE UNLESS SPECIFICALLY INDICATED WITH THE AIR DEVICE.
5. FOR AIR DEVICES WITH ROUND CONNECTIONS, PROVIDE WRAPPED CONICAL SPIN-IN FITTING WITH BALANCING DAMPER AT MAIN DUCT.
6. PROVIDE BLACK COLORED INSULATED PLenums FOR ALL AIR DIFFUSERS AND GRILLES.
7. PROVIDE PROPER SUPPORT FROM THE STRUCTURE.
8. ADJUSTABLE PATTERN CONTROLLERS.
9. HOSPITAL GRADE LOUVERED EXHAUST GRILLE.
10. OBD AT EACH REFRIGERATOR COMPRESSOR AND CONDENSATE TRAY LEVEL.
11. 3/4 IN BLADE SPACING.
12. INSTALL SUCH THAT LONG DIMENSION BE VERTICAL, LOUVERS PARALLEL TO SHORT DIMENSION.
13. SELECT BORDER TO MATCH ROOM FINISH SCHEDULE.
14. ALL 730FF LOUVERS, SS WITH FACE FILTER.

SINGLE DUCT AIR TERMINAL UNIT SCHEDULE																
MARK	LOCATION	SERVING ROOM NUMBER	SYSTEM AIR HANDLING	MIN. INLET SIZE	AIRFLOW			CONTROL TYPE	HEATING CFM	REHEAT COIL				CAPACITY	PERIMETER SUPPLEMENTAL HEAT LINK	REMARKS
					MAX. CFM	MIN. CFM	MAX. (IN WG)			EAT	LAT	EWT	GPM			
TU-2081-1	2ND FLOOR INTERSTITIAL SPACE	ZNS CORR	AHU-2081	8"	400	120	0.4	VAV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-2	2ND FLOOR INTERSTITIAL SPACE	ZNS WATING	AHU-2081	10"	1150	1150	0.4	CV	1150	55 °F	95 °F	180 °F	3.4	50600.0 Btu/h	NO	
TU-2081-3	2ND FLOOR INTERSTITIAL SPACE	ZNS CORR	AHU-2081	10"	1000	300	0.4	VAV	500	55 °F	95 °F	180 °F	2.2	22000.0 Btu/h	NO	
TU-2081-4	2ND FLOOR INTERSTITIAL SPACE	ZNS RESTROOMS	AHU-2081	6"	140	140	0.4	CV	140	55 °F	95 °F	180 °F	0.7	6200.0 Btu/h	NO	
TU-2081-5	2ND FLOOR INTERSTITIAL SPACE	A2005/2010	AHU-2081	6"	150	75	0.4	VAV	150	55 °F	95 °F	180 °F	0.7	6600.0 Btu/h	NO	
TU-2081-6	2ND FLOOR INTERSTITIAL SPACE	A2007	AHU-2081	6"	100	50	0.4	VAV	100	55 °F	95 °F	180 °F	0.5	4400.0 Btu/h	NO	
TU-2081-7	2ND FLOOR INTERSTITIAL SPACE	A2011	AHU-2081	12"	1200	1200	0.4	CV	1200	55 °F	95 °F	180 °F	3.5	52900.0 Btu/h	NO	
TU-2081-8	2ND FLOOR INTERSTITIAL SPACE	A2067	AHU-2081	6"	100	100	0.4	CV	100	55 °F	95 °F	180 °F	0.5	4400.0 Btu/h	NO	
TU-2081-9	2ND FLOOR INTERSTITIAL SPACE	A2016	AHU-2081	6"	190	190	0.4	CV	190	55 °F	95 °F	180 °F	0.8	8400.0 Btu/h	NO	
TU-2081-10	2ND FLOOR INTERSTITIAL SPACE	A2017	AHU-2081	14"	1700	1700	0.4	CV	1700	55 °F	95 °F	180 °F	5.0	74500.0 Btu/h	NO	
TU-2081-11	2ND FLOOR INTERSTITIAL SPACE	A2109	AHU-2081	6"	100	50	0.4	VAV	100	55 °F	95 °F	180 °F	0.5	4400.0 Btu/h	NO	
TU-2081-12	2ND FLOOR INTERSTITIAL SPACE	A2018	AHU-2081	10"	700	80	0.4	VAV	350	55 °F	95 °F	180 °F	1.5	15400.0 Btu/h	YES	
TU-2081-13	2ND FLOOR INTERSTITIAL SPACE	A2058/2060	AHU-2081	8"	500	75	0.4	VAV	250	55 °F	95 °F	180 °F	1.1	12000.0 Btu/h	YES	
TU-2081-14	2ND FLOOR INTERSTITIAL SPACE	A2059/2061	AHU-2081	6"	200	60	0.4	VAV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-15	2ND FLOOR INTERSTITIAL SPACE	A2014	AHU-2081	8"	420	120	0.4	VAV	250	55 °F	95 °F	180 °F	1.1	11000.0 Btu/h	NO	
TU-2081-16	2ND FLOOR INTERSTITIAL SPACE	A2014/2015	AHU-2081	6"	290	290	0.4	VAV	290	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-17	2ND FLOOR INTERSTITIAL SPACE	A2020/2022	AHU-2081	8"	600	105	0.4	VAV	300	55 °F	95 °F	180 °F	1.3	13200.0 Btu/h	YES	
TU-2081-18	2ND FLOOR INTERSTITIAL SPACE	A2068/2078/20 72/2074/2076	AHU-2081	10"	1120	1120	0.4	CV	1120	55 °F	95 °F	180 °F	3.3	49300.0 Btu/h	YES	
TU-2081-19	2ND FLOOR INTERSTITIAL SPACE	A2064	AHU-2081	6"	200	200	0.4	CV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-20	2ND FLOOR INTERSTITIAL SPACE	A2065	AHU-2081	6"	200	200	0.4	CV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-21	2ND FLOOR INTERSTITIAL SPACE	CA208	AHU-2081	6"	190	190	0.4	CV	190	55 °F	95 °F	180 °F	0.8	8400.0 Btu/h	NO	
TU-2081-22	2ND FLOOR INTERSTITIAL SPACE	A2066	AHU-2081	6"	200	200	0.4	CV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-23	2ND FLOOR INTERSTITIAL SPACE	A2049/2075	AHU-2081	6"	500	150	0.4	VAV	300	55 °F	95 °F	180 °F	1.3	13200.0 Btu/h	YES	
TU-2081-25	2ND FLOOR INTERSTITIAL SPACE	A2029/2033/20 35	AHU-2081	8"	330	110	0.4	VAV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-26	2ND FLOOR INTERSTITIAL SPACE	A2026/2028/20 84/2030/2034	AHU-2081	10"	1100	145	0.4	VAV	600	55 °F	95 °F	180 °F	2.6	26400.0 Btu/h	YES	
TU-2081-27	2ND FLOOR INTERSTITIAL SPACE	A2078/2080/20 84/2086	AHU-2081	10"	1120	1120	0.4	CV	1120	55 °F	95 °F	180 °F	3.3	49300.0 Btu/h	YES	
TU-2081-28	2ND FLOOR INTERSTITIAL SPACE	A2081/2083/CA 210	AHU-2081	8"	480	480	0.4	CV	480	55 °F	95 °F	180 °F	2.1	21100.0 Btu/h	NO	
TU-2081-29	2ND FLOOR INTERSTITIAL SPACE	A2047	AHU-2081	6"	210	210	0.4	CV	210	55 °F	95 °F	180 °F	1.0	9200.0 Btu/h	NO	
TU-2081-30	2ND FLOOR INTERSTITIAL SPACE	A2052	AHU-2081	6"	140	140	0.4	CV	140	55 °F	95 °F	180 °F	0.7	6200.0 Btu/h	NO	
TU-2081-31	2ND FLOOR INTERSTITIAL SPACE	A2046/2050	AHU-2081	6"	280	280	0.4	CV	280	55 °F	95 °F	180 °F	1.2	12300.0 Btu/h	NO	
TU-2081-32	2ND FLOOR INTERSTITIAL SPACE	CA212	AHU-2081	6"	260	260	0.4	CV	260	55 °F	95 °F	180 °F	1.1	11400.0 Btu/h	NO	
TU-2081-33	2ND FLOOR INTERSTITIAL SPACE	CA213	AHU-2081	6"	300	40	0.4	VAV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-34	2ND FLOOR INTERSTITIAL SPACE	A2023/2025	AHU-2081	6"	250	250	0.4	CV	250	55 °F	95 °F	180 °F	1.1	11000.0 Btu/h	NO	
TU-2081-35	2ND FLOOR INTERSTITIAL SPACE	A2037/2039/20 42/2045	AHU-2081	8"	400	120	0.4	VAV	200	55 °F	95 °F	180 °F	1.0	8800.0 Btu/h	NO	
TU-2081-36	2ND FLOOR INTERSTITIAL SPACE	CA213	AHU-2081	6"	250	80	0.4	VAV	150	55 °F	95 °F	180 °F	0.7	6600.0 Btu/h	NO	
TU-2081-37	2ND FLOOR INTERSTITIAL SPACE	A2042	AHU-2081	6"	300	300	0.4	CV	300	55 °F	95 °F	180 °F	1.3	13200.0 Btu/h	NO	
TU-2081-38	2ND FLOOR INTERSTITIAL SPACE	A2036/2038/20 40	AHU-2081	10"	825	105	0.4	VAV	450	55 °F	95 °F	180 °F	2.0	19800.0 Btu/h	YES	

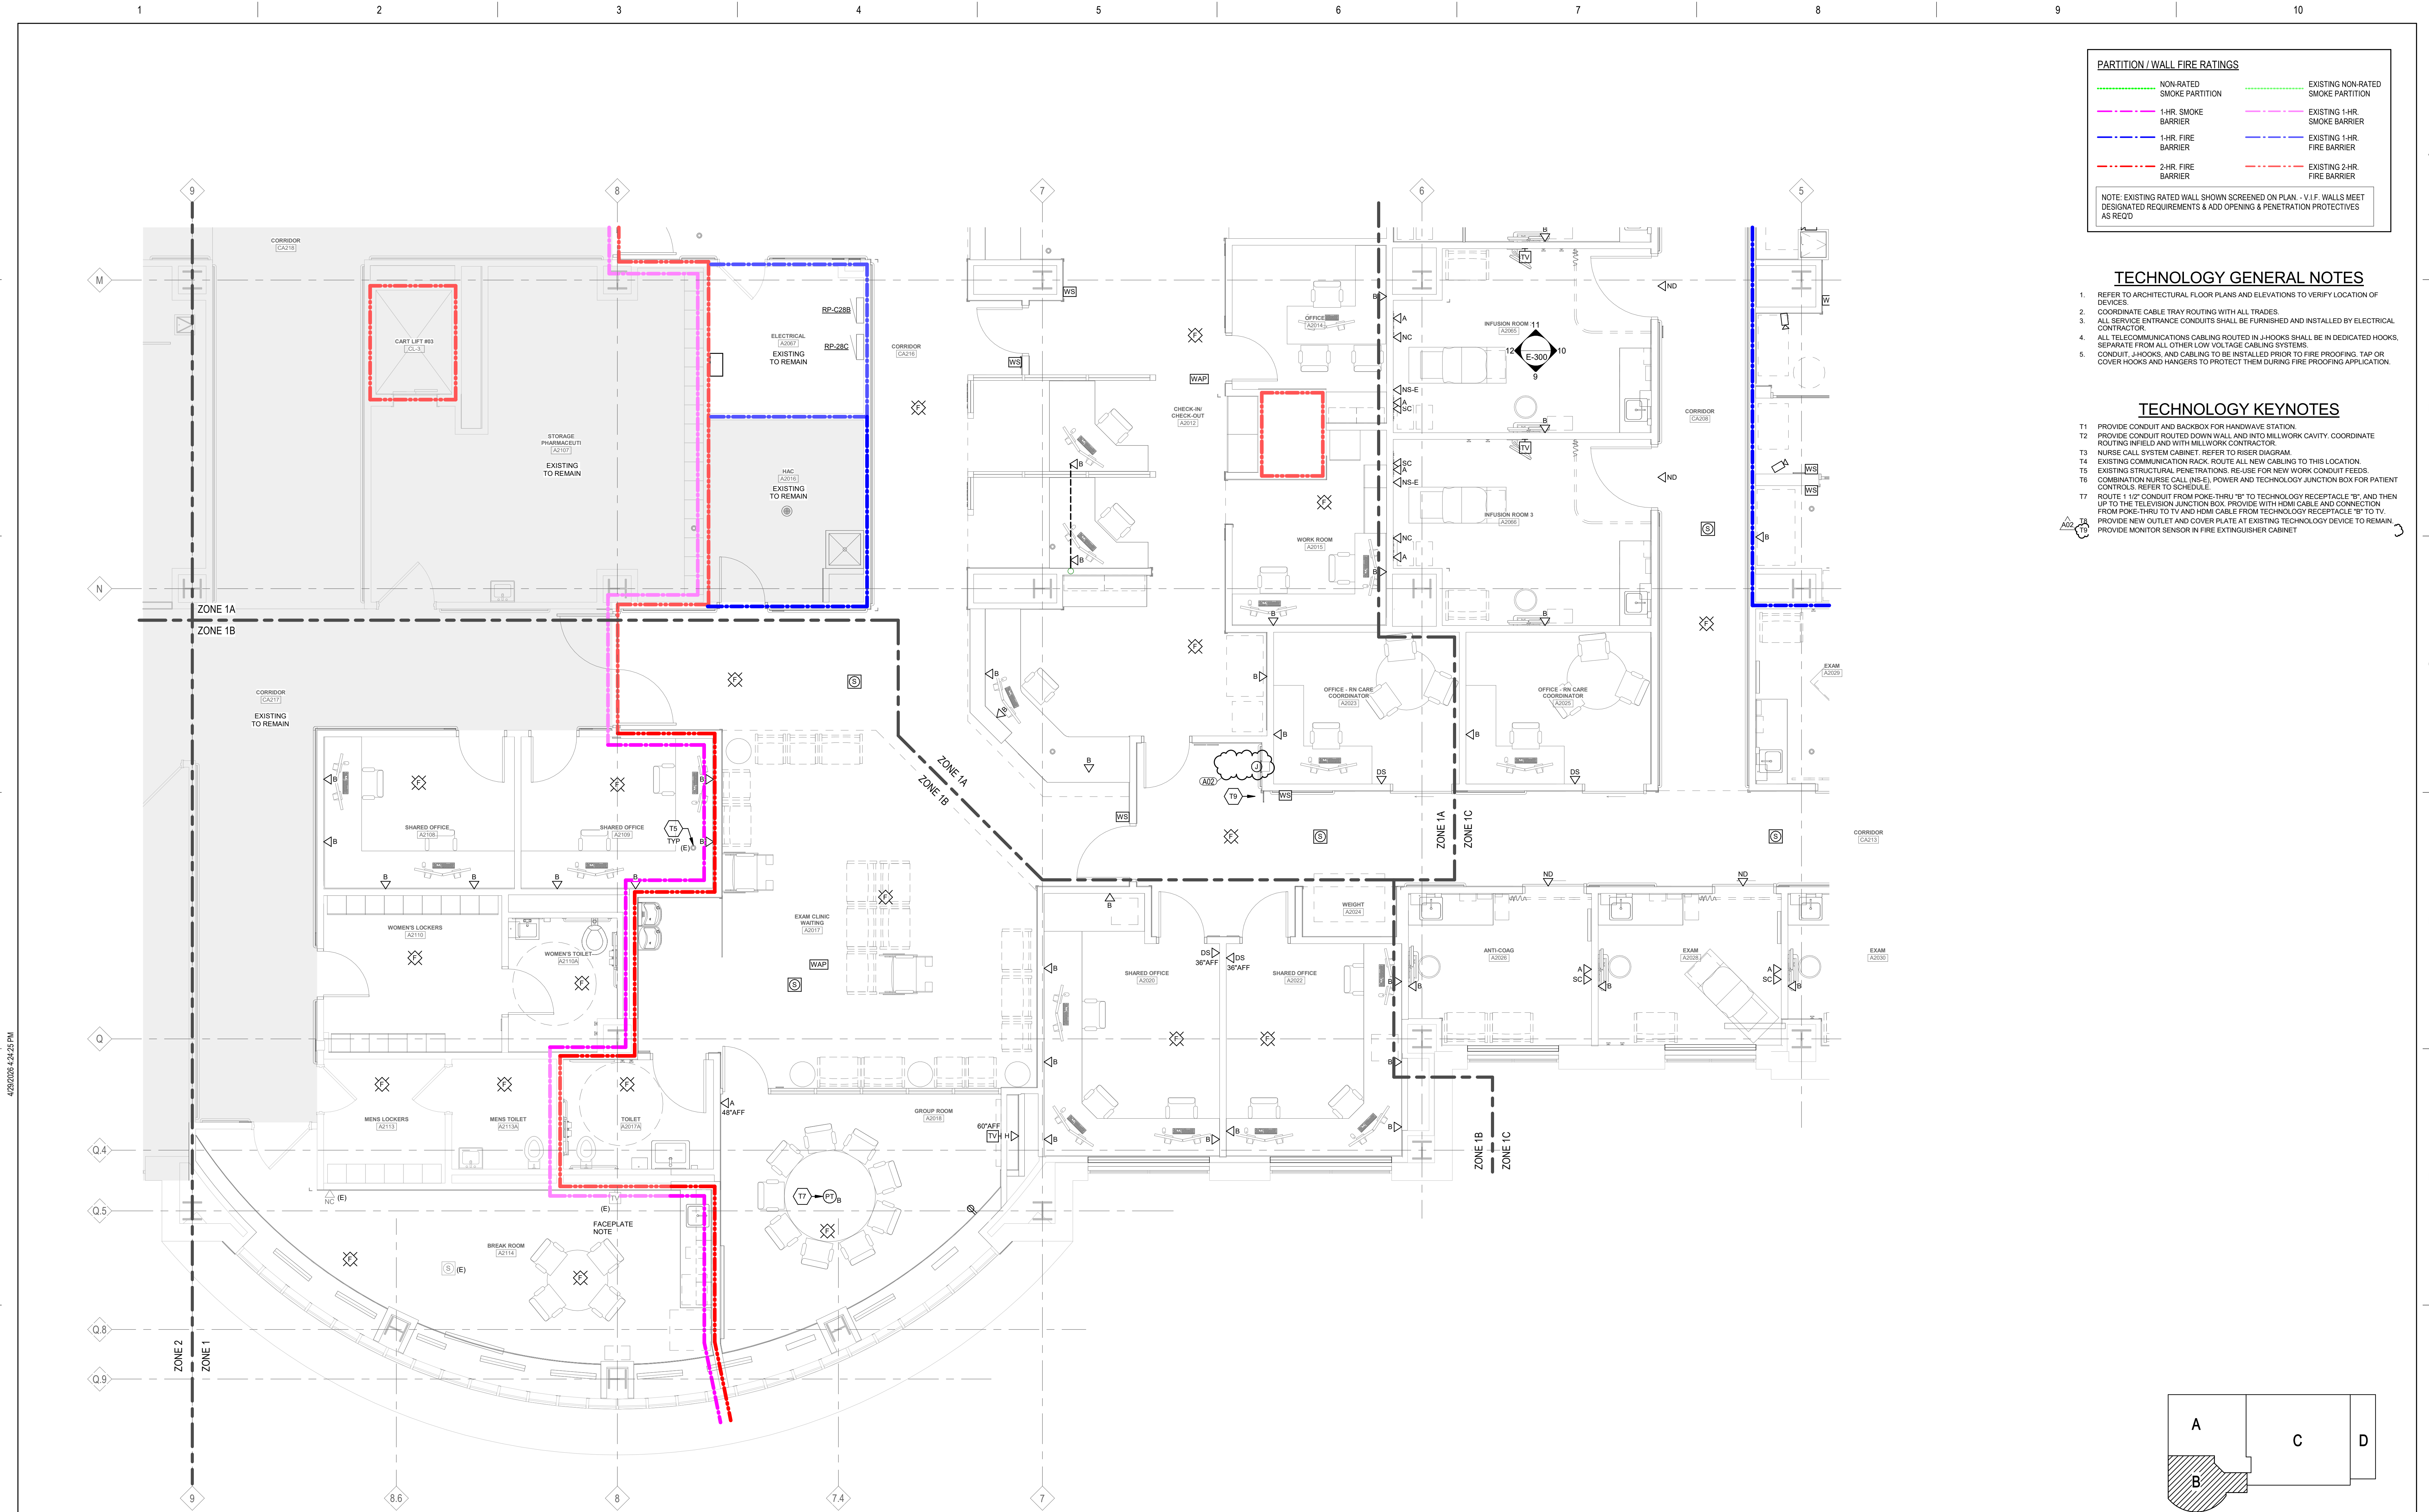

PARTITION / WALL FIRE RATINGS			
NON-RATED	EXISTING NON-RATED	1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER
1-HR. SMOKE BARRIER	EXISTING 1-HR. SMOKE BARRIER	1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER
1-HR. FIRE BARRIER	EXISTING 1-HR. FIRE BARRIER	2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER
2-HR. FIRE BARRIER	EXISTING 2-HR. FIRE BARRIER		


NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D

- ### TECHNOLOGY GENERAL NOTES
- REFER TO ARCHITECTURAL FLOOR PLANS AND ELEVATIONS TO VERIFY LOCATION OF DEVICES.
 - COORDINATE CABLE TRAY ROUTING WITH ALL TRADES.
 - ALL SERVICE ENTRANCE CONDUITS SHALL BE FURNISHED AND INSTALLED BY ELECTRICAL CONTRACTOR.
 - ALL TELECOMMUNICATIONS CABLEING ROUTED IN J-HOOKS SHALL BE IN DEDICATED HOOKS, SEPARATE FROM ALL OTHER LOW VOLTAGE CABLEING SYSTEMS.
 - CONDUIT, J-HOOKS, AND CABLEING TO BE INSTALLED PRIOR TO FIRE PROOFING. TAP OR COVER HOOKS AND HANGERS TO PROTECT THEM DURING FIRE PROOFING APPLICATION.

- ### TECHNOLOGY KEYNOTES
- PROVIDE CONDUIT AND BACKBOX FOR HANDWAVE STATION.
 - PROVIDE CONDUIT ROUTED DOWN WALL AND INTO MILLWORK CAVITY. COORDINATE ROUTING INFIELD AND WITH MILLWORK CONTRACTOR.
 - NURSE CALL SYSTEM CABINET. REFER TO RISER DIAGRAM.
 - EXISTING COMMUNICATION RACK. ROUTE ALL NEW CABLEING TO THIS LOCATION.
 - EXISTING STRUCTURAL PENETRATIONS. REUSE FOR NEW WORK CONDUIT FEEDS.
 - COMBINATION NURSE CALL (INS-E), POWER AND TECHNOLOGY JUNCTION BOX FOR PATIENT CONTROLS. REFER TO SCHEDULE.
 - ROUTE 1 1/2" CONDUIT FROM POKE THRU "B" TO TECHNOLOGY RECEPTACLE "B" AND THEN UP TO THE TELEVISION JUNCTION BOX. PROVIDE WITH HDMI CABLE AND CONNECTION FROM POKE THRU TO TV AND HDMI CABLE FROM TECHNOLOGY RECEPTACLE "B" TO TV. PROVIDE NEW OUTLET AND COVER PLATE AT EXISTING TECHNOLOGY DEVICE TO REMAIN. PROVIDE MONITOR SENSOR IN FIRE EXTINGUISHER CABINET.

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS (REVISED) 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions: 30-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit, MI 48201	CONSULTANT c2ae architecture • engineering 211 E. Water Street, Suite 213L Kalamazoo, MI 49007 269.216.0222	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1B Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked SET Drawn FKU	Project Number 553-21-100 Building Number Drawing Number ET102.1B
---	---	---	---	--	---	--	---	---

4/26/2025 1:24:51 PM
Autodesk Docs\VA\MI\Drawings\102.1B

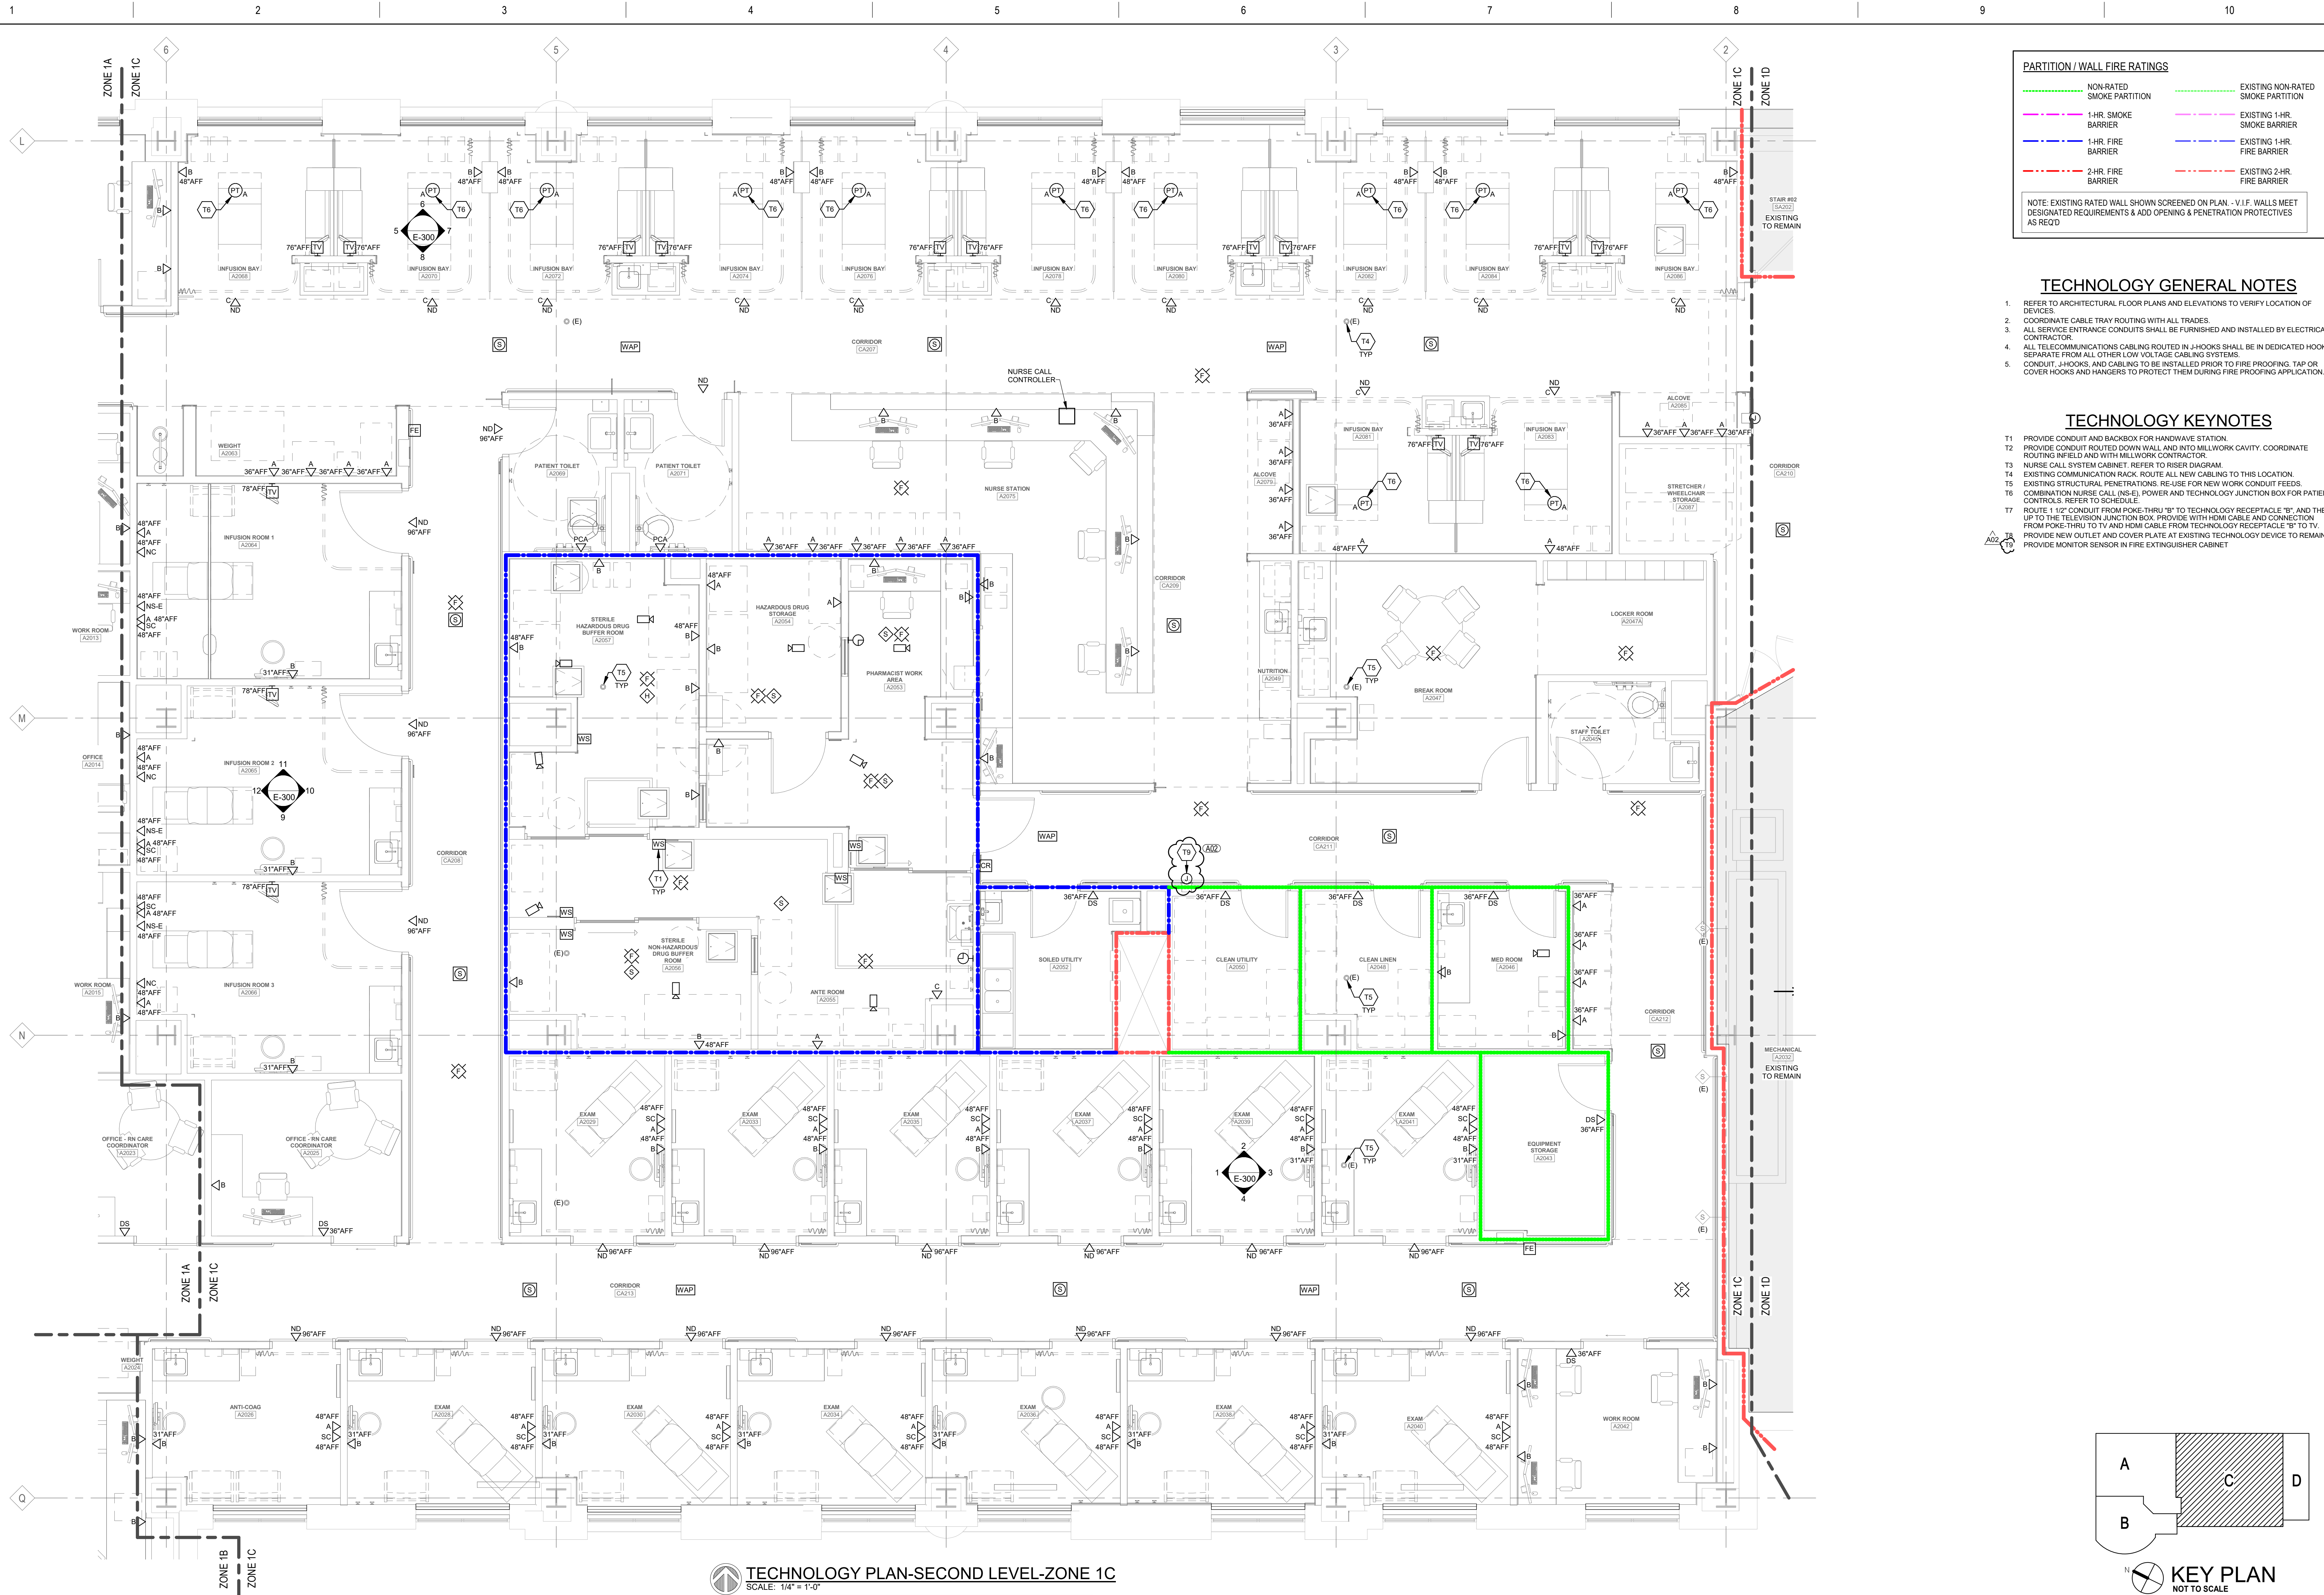


PARTITION / WALL FIRE RATINGS			
NON-RATED	EXISTING NON-RATED	1-HR. SMOKE	EXISTING 1-HR. SMOKE
1-HR. SMOKE	EXISTING 1-HR. SMOKE	1-HR. FIRE	EXISTING 1-HR. FIRE
1-HR. FIRE	EXISTING 1-HR. FIRE	2-HR. FIRE	EXISTING 2-HR. FIRE
2-HR. FIRE	EXISTING 2-HR. FIRE		

NOTE: EXISTING RATED WALL SHOWN SCREENED ON PLAN - V.I.F. WALLS MEET DESIGNATED REQUIREMENTS & ADD OPENING & PENETRATION PROTECTIVES AS REQ'D


- ### TECHNOLOGY GENERAL NOTES
- REFER TO ARCHITECTURAL FLOOR PLANS AND ELEVATIONS TO VERIFY LOCATION OF DEVICES.
 - COORDINATE CABLE TRAY ROUTING WITH ALL TRADES.
 - ALL SERVICE ENTRANCE CONDUITS SHALL BE FURNISHED AND INSTALLED BY ELECTRICAL CONTRACTOR.
 - ALL TELECOMMUNICATIONS CABLE ROUTED IN J-HOOKS SHALL BE IN DEDICATED HOOKS, SEPARATE FROM ALL OTHER LOW VOLTAGE CABLEING SYSTEMS.
 - CONDUIT, J-HOOKS, AND CABLEING TO BE INSTALLED PRIOR TO FIRE PROOFING. TAP OR COVER HOOKS AND HANGERS TO PROTECT THEM DURING FIRE PROOFING APPLICATION.

- ### TECHNOLOGY KEYNOTES
- PROVIDE CONDUIT AND BACKBOX FOR HANDWAVE STATION.
 - PROVIDE CONDUIT ROUTED DOWN WALL AND INTO MILLWORK CAVITY. COORDINATE ROUTING INFIELD AND WITH MILLWORK CONTRACTOR.
 - NURSE CALL SYSTEM CABINET. REFER TO RISER DIAGRAM.
 - EXISTING COMMUNICATION RACK. ROUTE ALL NEW CABLEING TO THIS LOCATION.
 - EXISTING STRUCTURAL PENETRATIONS. REUSE FOR NEW WORK CONDUIT FEEDS.
 - COMBINATION NURSE CALL (INS.E). POWER AND TECHNOLOGY JUNCTION BOX FOR PATIENT CONTROLS. REFER TO SCHEDULE.
 - ROUTE 1" CONDUIT FROM POKE THRU "B" TO TECHNOLOGY RECEPTACLE "B", AND THEN UP TO THE TELEVISION JUNCTION BOX. PROVIDE WITH HDMI CABLE AND CONNECTION FROM POKE THRU TO TV AND HDMI CABLE FROM TECHNOLOGY RECEPTACLE "B" TO TV. PROVIDE NEW OUTLET AND COVER PLATE AT EXISTING TECHNOLOGY DEVICE TO REMAIN. PROVIDE MONITOR SENSOR IN FIRE EXTINGUISHER CABINET.

TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1C
SCALE: 1/4" = 1'-0"

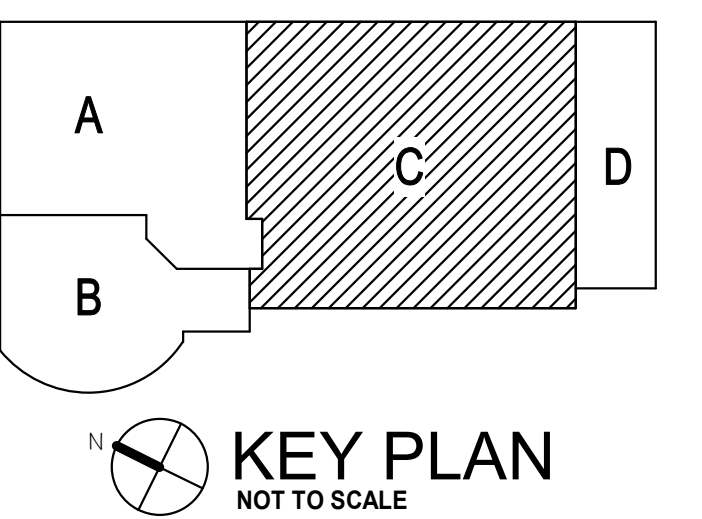

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS (REVISED) 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions:	30-APR-2026 10-JAN-2025 27-JUL-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit , MI 48201		CONSULTANT c2ae architecture • engineering 211 E. Water Street, Suite 213L Kalamazoo, MI 49007 269.216.0222 Engineering Group Associates, Inc. MEGA Monument Builders Inc.		ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202		STAMP Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1C Approved:		Phase 100% BID DOCUMENTS FULLY SPRINKLERED		Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked SET Drawn FKU		Project Number 553-21-100 Building Number Drawing Number ET102.1C	

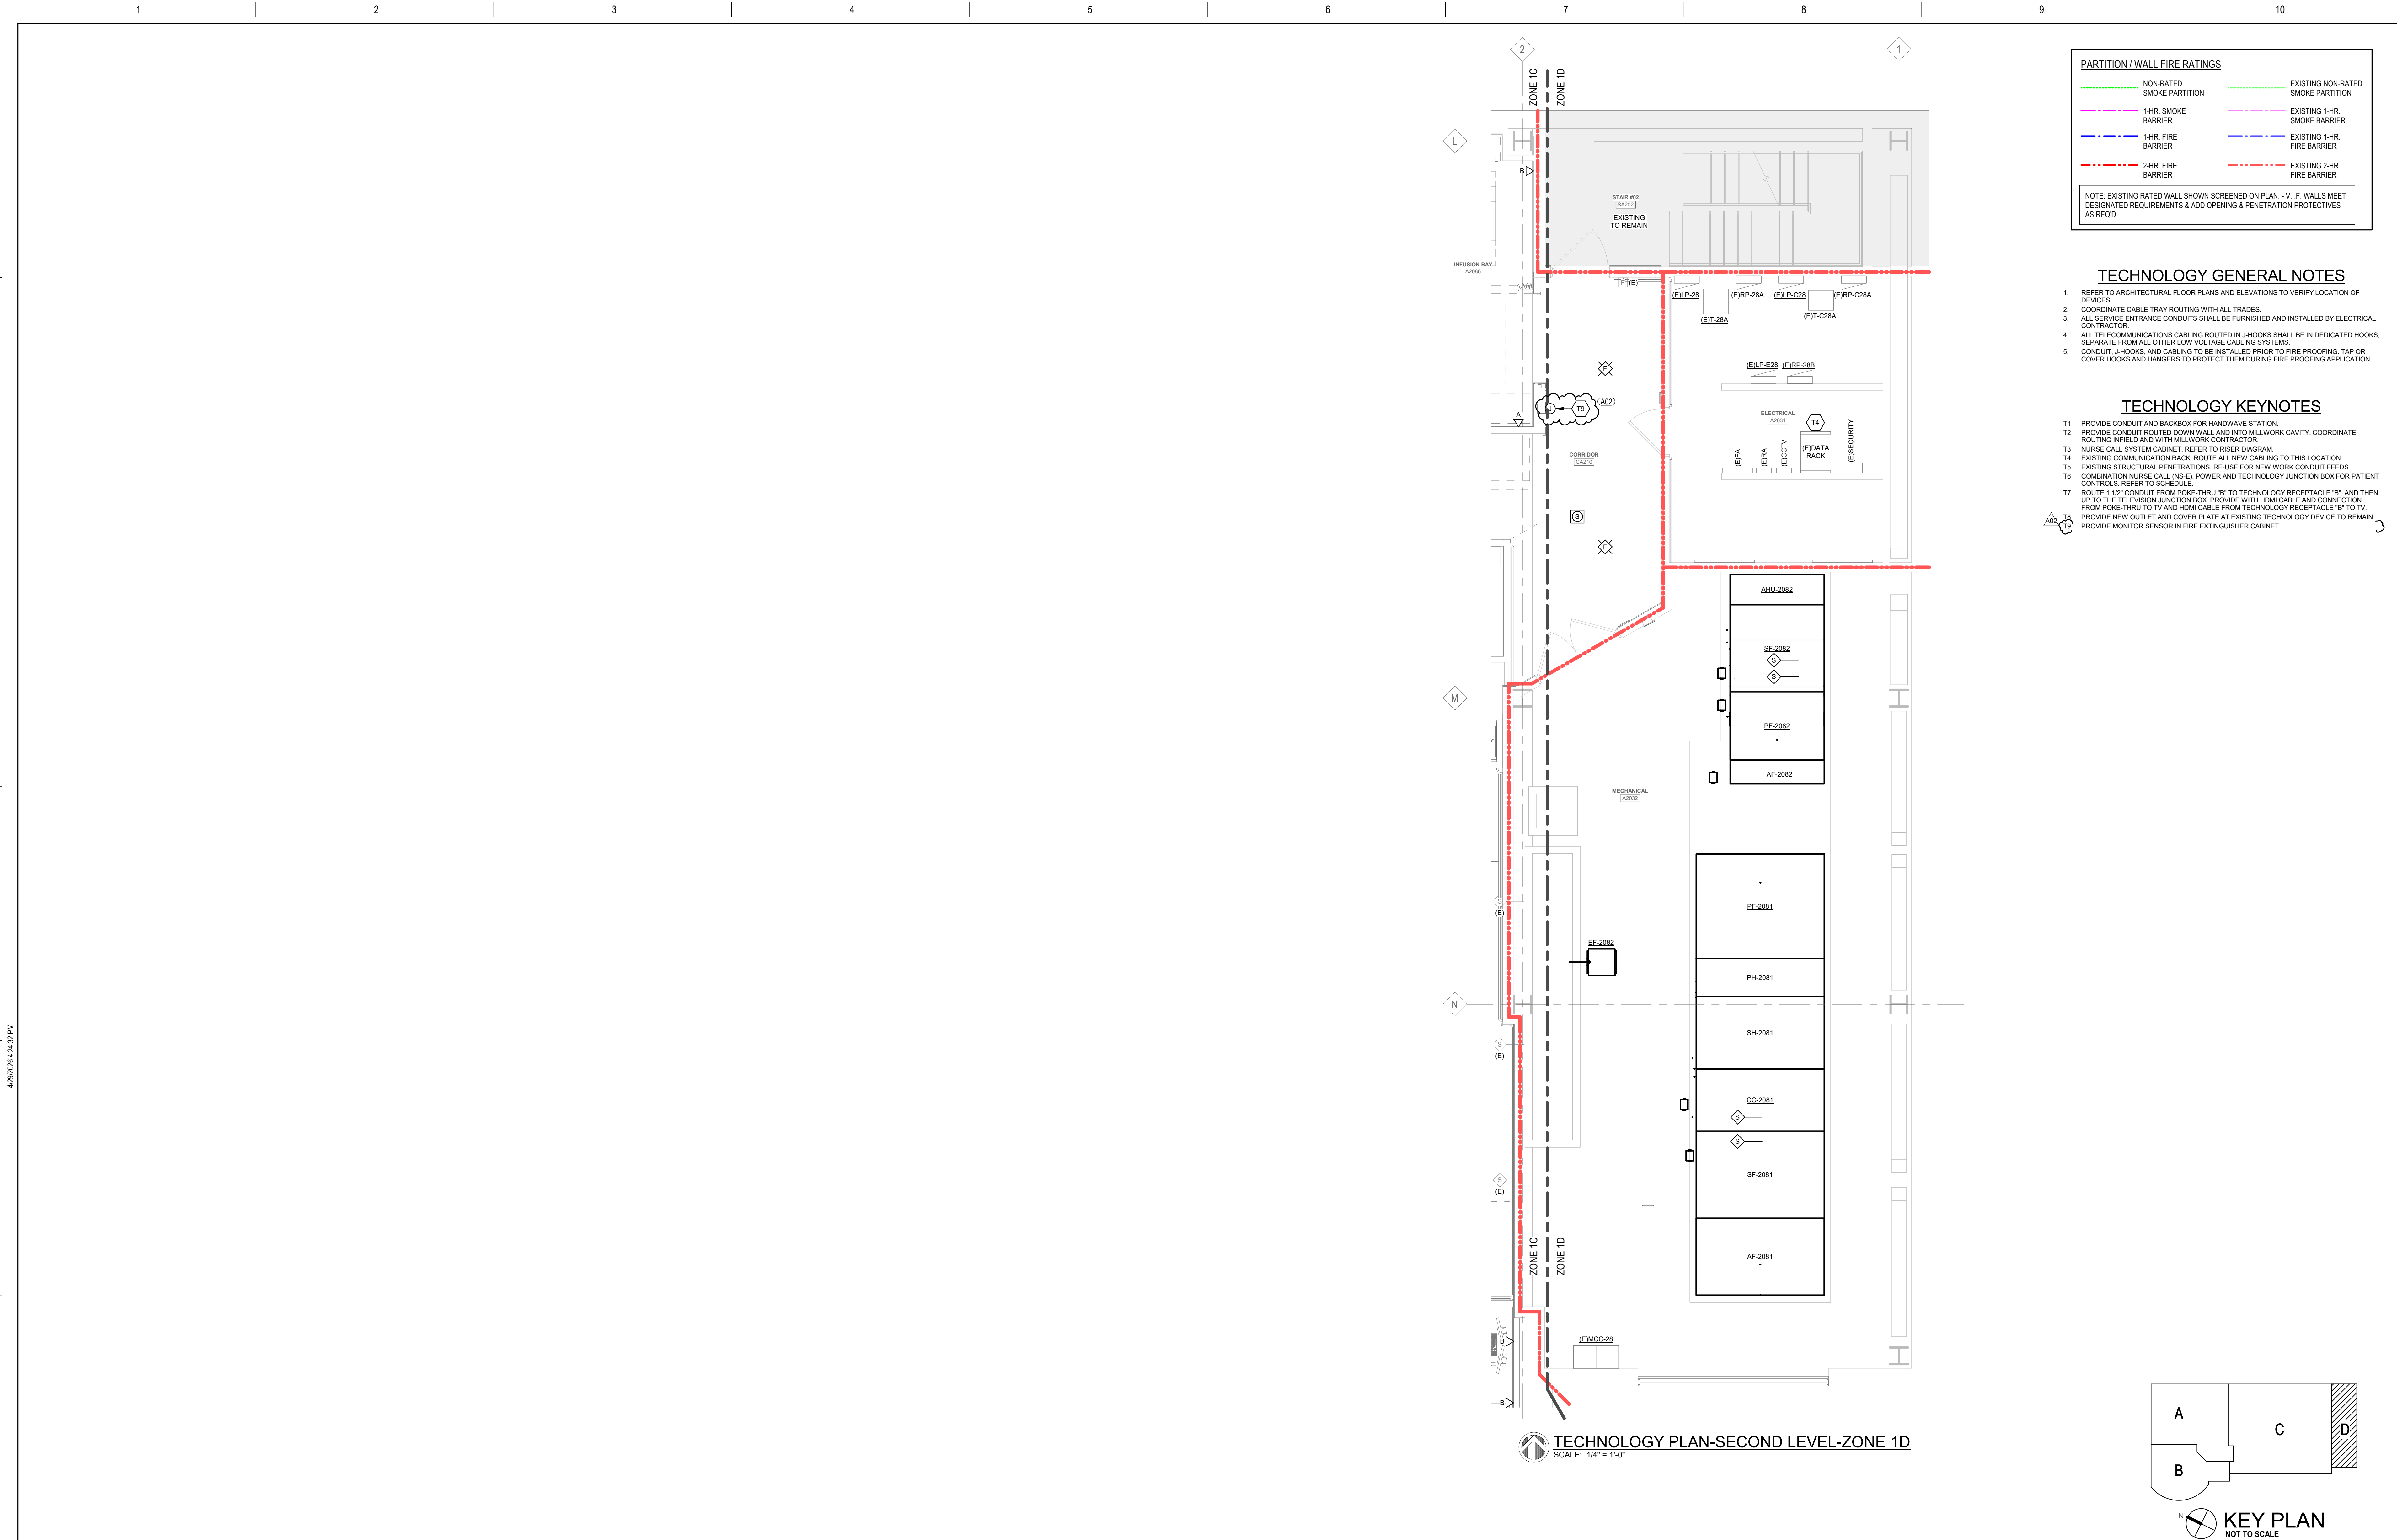

ADDENDUM 02 100% BID DOCUMENTS 95% CONSTRUCTION DOCUMENTS (REVISED) 95% CONSTRUCTION DOCUMENTS 65% DESIGN DEVELOPMENT Revisions:		30-APR-2026 10-JAN-2025 27-AUG-2024 15-APR-2024 29-AUG-2023 Date:	VA STATION VA HEALTH CARE Defining EXCELLENCE in the 21st Century John D. Dingell VA Medical Center 4646 John R. Street Detroit , MI 48201	CONSULTANT c2ae architecture • engineering 211 E. Water Street, Suite 2130 Kalamazoo, MI 49007 269.216.0222 MEGA Mountpoint Engineering Group Associates, Inc.	ENGINEER OF RECORD WalterMechanical Services Inc. 3419 Pierson Place Flushing, Michigan, 48433 810-230-6202	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title TECHNOLOGY PLAN-SECOND LEVEL-ZONE 1D Approved:	Phase 100% BID DOCUMENTS FULLY SPRINKLERED	Project Title RENOVATE A2 SOUTH FOR CANCER CLINIC Location DETROIT, MI Issue Date 10-JAN-2025 Checked SET Drawn FKU	Project Number 553-21-100 Building Number Drawing Number ET102.1D
--	--	---	---	--	---	------------------	--	---	---	---	--