


FILE NAME: Y:\OCONUS\MultipleSheet\2024_1783264_P1360_IAMF\B_Design\DWG\Sheet\13_ELEC\VT1360_1783264_EL502.dwg LAYOUT NAME: EL502 - Luminaire Details PLOTTED: Tuesday, January 20, 2026 - 12:18pm USER: eric.hellon

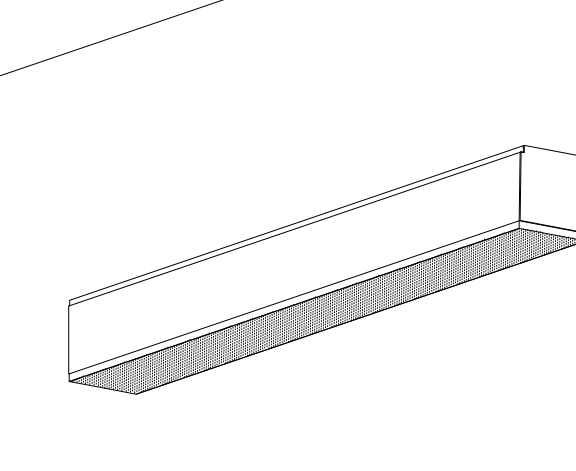


NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:

- HOUSING – COLD ROLLED STEEL, EXTRUDED ALUMINUM, OR DIE CAST ALUMINUM BODY WITH DIE CAST END CAPS AND STAINLESS STEEL HARDWARE. SIZE AS INDICATED IN LUMINAIRE SCHEDULE.
- OPTICS – REFRACTIVE LENS OPTIMIZED FOR ASYMMETRIC DISTRIBUTION.
- LIGHT SOURCE – SOLID STATE LEDS, 3500K CCT UON, MINIMUM 80 CRI UON, AND MINIMUM EFFICACY OF 85 LUMENS/WATT UON. INITIAL LUMEN OUTPUT AS INDICATED IN LUMINAIRE SCHEDULE.
- DRIVER – REPLACEABLE, INTEGRAL, HIGH-EFFICIENCY DIMMABLE DRIVER WITH MINIMUM 0.9 PF, OPERATING VOLTAGE OF 120–277V, THERMAL MANAGEMENT, AND < 20% THD. ON/OFF CONTROL AND FULLY DIMMABLE DOWN TO 10% MINIMUM OR AS INDICATED IN LUMINAIRE SCHEDULE.
- CERTIFICATION – CSA LISTED FOR DRY OR DAMP LOCATION, ROHS COMPLIANT. COMPLIES WITH IES LM79, LM80 AND TM21 TESTING STANDARDS.
- MOUNTING – WALL SURFACE MOUNTED
- OPTIONS – EMERGENCY BATTERY BACK-UP, AND VARIOUS PROFILE DIMENSIONS AND RUN LENGTHS. ALSO AVAILABLE WITH INDIRECT LIGHTING ELEMENT.

DIRECT WALL-MOUNTED LINEAR

REVISD: NOVEMBER 2020LIGHTING PLATE: NL-7

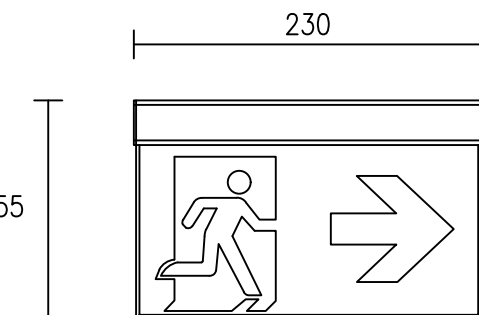


LUMINAIRE REQUIREMENTS:

- HOUSING – DIE-CAST ALUMINUM; SINGLE OR DOUBLE-FACED AS INDICATED.
- FINISH – WHITE TEXTURED POWDER COAT FINISH.
- LETTERS/CHEVRONS – MINIMUM 150mm HIGH WITH 19mm STROKE. RED OR GREEN LETTERS. PROVIDE CHEVRONS AS INDICATED EITHER LEFT, RIGHT OR BOTH DIRECTIONS AS INDICATED.
- EMERGENCY PACK – SOLID-STATE, CONSTANT-CURRENT TYPE BATTERY CHARGER WITH MAINTENANCE-FREE, NICKEL-CADMIUM BATTERY, AC-ON INDICATOR LAMP AND TEST SWITCH.
- MOUNTING – UNIVERSAL MOUNTING KIT FOR CEILING, WALL OR END-OF-FIXTURE MOUNTING.
- ILLUMINATION – PROVIDED BY RED, GREEN OR WHITE HIGH-OUTPUT LEDS INSIDE OF FIXTURE HOUSING. PROVIDE POLYSTYRENE DIFFUSER IN COLOR INDICATED WITH FREQUENCY-MATCHED SILKSCREEN COATING FOR MAXIMUM LED LIGHT OUTPUT.
- CERTIFICATION – CSA LISTED AND CERTIFIED FOR DAMP LOCATIONS.

LED EXIT SIGN

REVISD: JUNE 2017LIGHTING PLATE: NL-63

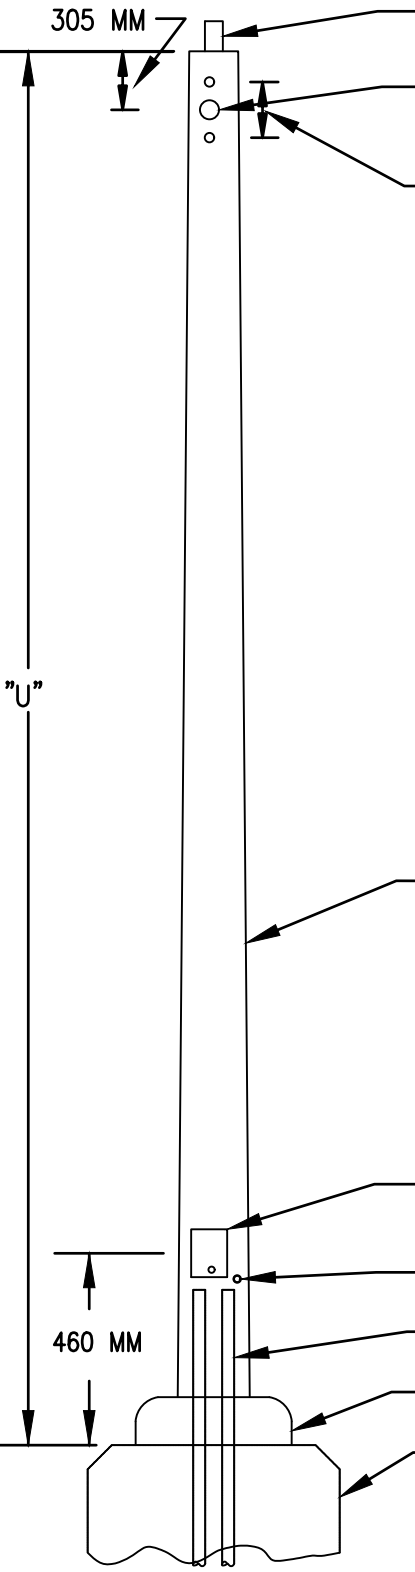

TENON OPTION – 60 MM TENON WITH PROVISION FOR WIRING. COORDINATE WITH LUMINAIRE.

MAST ARM OPTION – COORDINATE WIRING AND BOLT HOLES WITH MAST ARM PROVIDED.

POLE TYPE	DIM "U"
XL-26 A	3.7
XL-26 B	6.1
XL-26 C	7.6
XL-26 D	9.1
XL-26 E	10.7
XL-26 F	12.2
XL-26 G	13.7

TAPERED OR STRAIGHT STEEL OR ALUMINUM POLE. CROSS SECTIONAL SHAPE AND COLOR AS INDICATED.

NOTES:

COORDINATE TOTAL EPA WITH SPECIFICATIONS.

WIRING HANDHOLE MINIMUM 64 MM X 125 MM CLEAR OPENING WITH COVER AND STAINLESS STEEL SCREWS.

INTERNAL GROUNDING LUG.


TERMINATE CONDUITS INTERNALLY, ADJACENT TO HANDHOLE.

FULL BASE COVER – TWO PIECE GALVANIZED STEEL.

CONCRETE FOUNDATION – SEE PLATE XL-21.

ANCHOR BASE STEEL/ALUMINUM POLE

REVISD: NOVEMBER 2020LUMINAIRE PLATE: XL-19

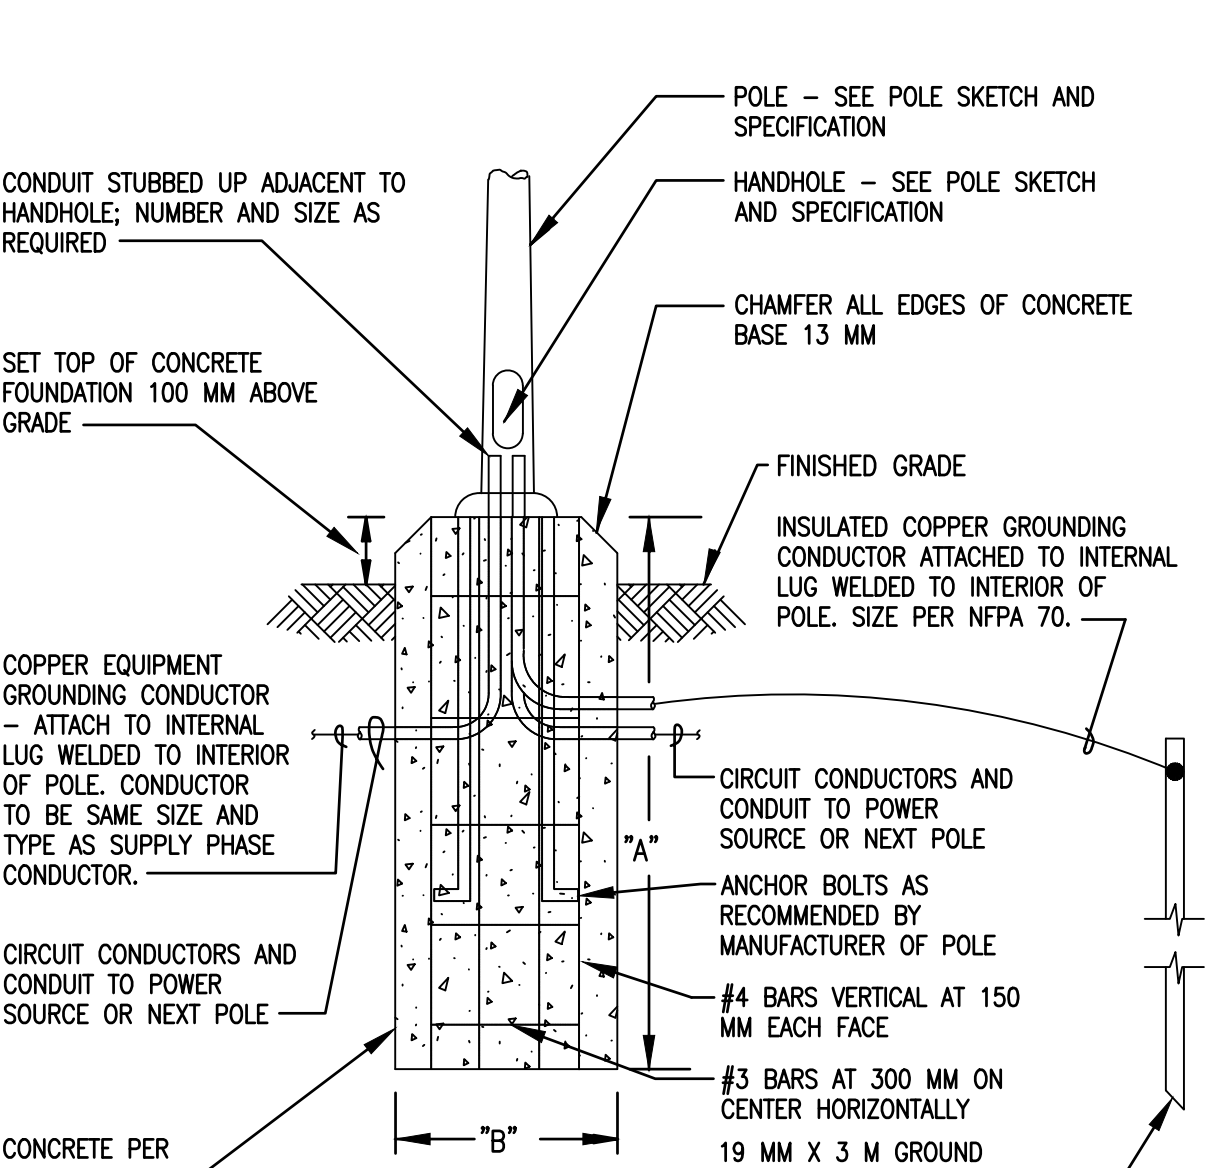

CONDUIT STUBBED UP ADJACENT TO HANDHOLE; NUMBER AND SIZE AS REQUIRED

POLE – SEE POLE SKETCH AND SPECIFICATION

HANDHOLE – SEE POLE SKETCH AND SPECIFICATION

CHAMFER ALL EDGES OF CONCRETE BASE 13 MM

FINISHED GRADE

INSULATED COPPER GROUNDING CONDUCTOR ATTACHED TO INTERNAL LUG WELDED TO INTERIOR OF POLE. SIZE PER NFPA 70.

CIRCUIT CONDUCTORS AND CONDUIT TO POWER SOURCE OR NEXT POLE

ANCHOR BOLTS AS RECOMMENDED BY MANUFACTURER OF POLE

#4 BARS VERTICAL AT 150 MM EACH FACE

#3 BARS AT 300 MM ON CENTER HORIZONTALLY

19 MM X 3 M GROUND ROD

POLE HEIGHT	A	B
2.4–3.7 M	.9 M	.3 M
3.9–6.1 M	1 M	.4 M
6.4–9.1 M	1.8 M	.6 M
9.5–12.2 M	2 M	.7 M


COPPER EQUIPMENT GROUNDING CONDUCTOR – ATTACH TO INTERNAL LUG WELDED TO INTERIOR OF POLE. CONDUCTOR TO BE SAME SIZE AND TYPE AS SUPPLY PHASE CONDUCTOR.

CIRCUIT CONDUCTORS AND CONDUIT TO POWER SOURCE OR NEXT POLE

CONCRETE PER SPECIFICATION

ANCHOR BASE POLE FOUNDATION

REVISD: NOVEMBER 2020LUMINAIRE PLATE: XL-21

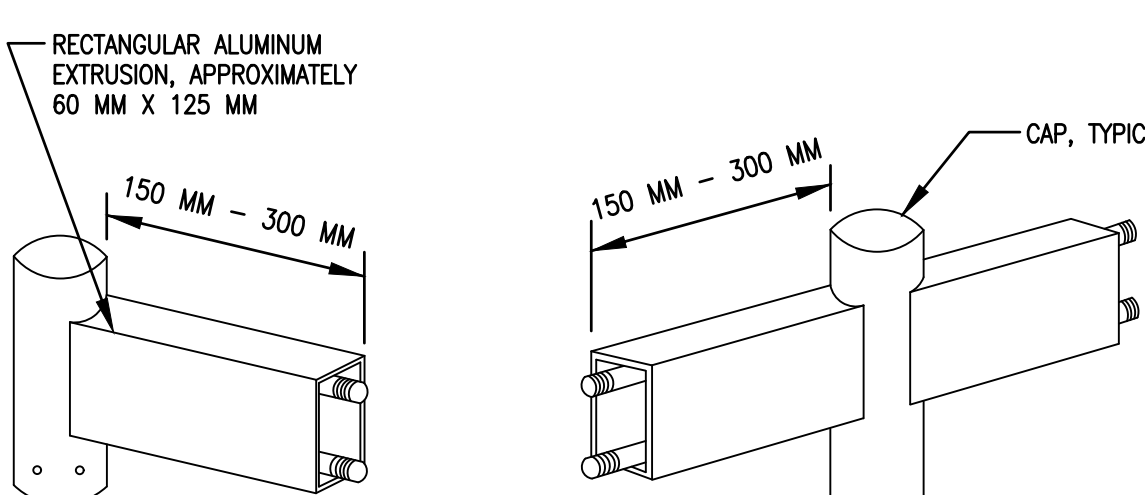

RECTANGULAR ALUMINUM EXTRUSION, APPROXIMATELY 60 MM X 125 MM

150 MM – 300 MM

CAP, TYPICAL

150 MM – 300 MM

SINGLE ARM MOUNTING "A" (TENON MOUNT SHOWN)

DOUBLE ARM MOUNTING "B" (MAST ARM MOUNT SHOWN)


ROUND POLE APPLICATION

NOTES:

- ALL FASTENERS SHALL BE CONCEALED.
- ALL ARMS ARE AVAILABLE IN TENON OR MAST ARM MOUNTING; SPECIFY TYPE DESIRED.

LUMINAIRE MOUNTING ARM DETAILS

REVISD: NOVEMBER 2020LUMINAIRE PLATE: XL-23

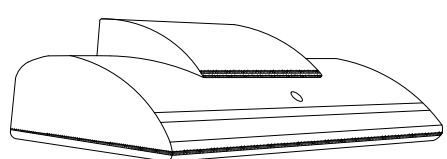


NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:

- HOUSING – DIE-CAST OR EXTRUDED ALUMINUM WITH INTEGRAL PASSIVE COOLING MECHANISM. HEAT SINK INCORPORATED DIRECTLY INTO HOUSING OR DRIVER COMPARTMENT.
- OPTICS – PRECISION MOLDED ACRYLIC LENS WITH TYPE II, III, OR IV DISTRIBUTIONS. BUG UPLIGHT RATING OF U0, WITH GLARE RATING AS DETERMINED BY LIGHTING ZONE INSTALLED.
- LIGHT SOURCE – SOLID STATE LEDS, 3000K CCT UON, MINIMUM 70 CRI UON, AND MINIMUM EFFICACY OF 80 LUMENS/WATT UON. INITIAL LUMEN OUTPUT AS INDICATED IN LUMINAIRE SCHEDULE.
- DRIVER – REPLACEABLE, INTEGRAL, HIGH-EFFICIENCY DIMMABLE DRIVER WITH MINIMUM 0.9 PF, OPERATING VOLTAGE OF 120–277V, THERMAL MANAGEMENT, AND < 20% THD. ON-OFF CONTROL AND FULLY DIMMABLE DOWN TO 10% MINIMUM OR AS INDICATED IN LUMINAIRE SCHEDULE.
- CERTIFICATION – CSA LISTED FOR WET LOCATION, ROHS COMPLIANT. COMPLIES WITH IES LM79, LM80 AND TM21 TESTING STANDARDS.
- MOUNTING – SURFACE MOUNTED WITH STAINLESS STEEL MOUNTING HARDWARE.
- OPTIONS – VARIOUS LIGHT DISTRIBUTIONS. INTEGRAL MOTION SENSOR, PHOTOCCELL, BATTERY BACK-UP.

LED WALL PACK

REVISD: NOVEMBER 2020LUMINAIRE PLATE: XL-10

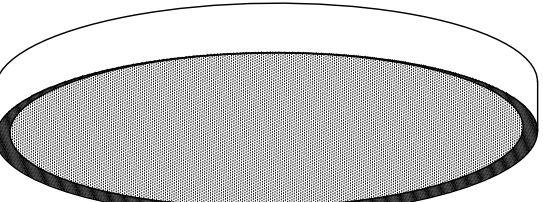


NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:

- HOUSING – ALUMINUM OR STAINLESS STEEL HOUSING. SIZE AS INDICATED IN LUMINAIRE SCHEDULE.
- OPTICS – MATTE ACRYLIC OR POLYCARBONATE DIFFUSER.
- LIGHT SOURCE – SOLID STATE LEDS, 3500K CCT UON, MINIMUM 80 CRI UON, AND MINIMUM EFFICACY OF 55 LUMENS/WATT UON. INITIAL LUMEN OUTPUT AS INDICATED IN LUMINAIRE SCHEDULE.
- DRIVER – REPLACEABLE, INTEGRAL, HIGH-EFFICIENCY DRIVER WITH MINIMUM 0.9 PF, OPERATING VOLTAGE OF 120–277V, THERMAL MANAGEMENT, AND < 20% THD. ON/OFF CONTROL AND FULLY DIMMABLE DOWN TO 10% MINIMUM OR AS INDICATED IN LUMINAIRE SCHEDULE.
- CERTIFICATION – CSA LISTED FOR DRY OR DAMP LOCATION, ROHS COMPLIANT. COMPLIES WITH IES LM79, LM80 AND TM21 TESTING STANDARDS.
- MOUNTING – SURFACE MOUNTED WITH STAINLESS STEEL MOUNTING HARDWARE.
- OPTIONS – SIZE, SHAPE, AND LUMEN OUTPUT.

LED ROUND CEILING SURFACE MOUNT

REVISD: NOVEMBER 2020LIGHTING PLATE: NL-16

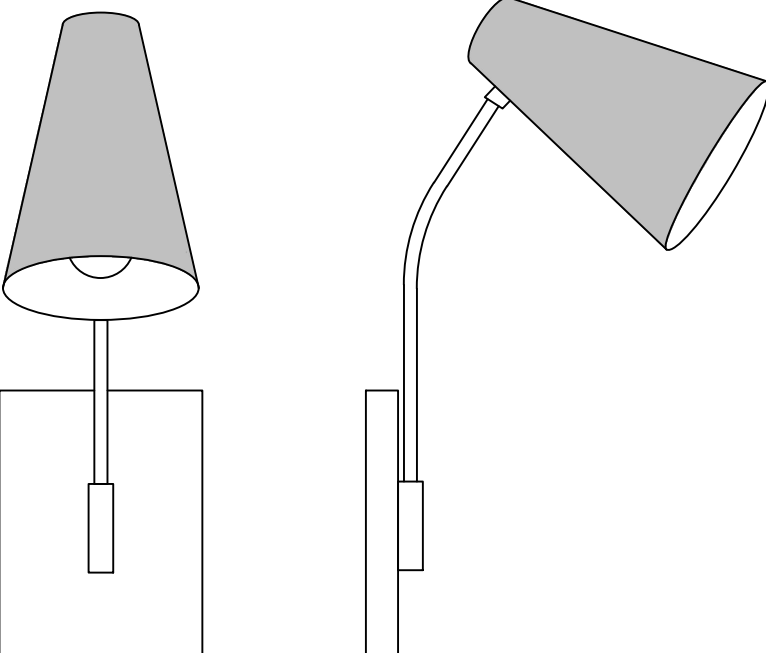

NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:

- HOUSING – STAMPED OR ROLLED STEEL WITH BLACK PAINTED FINISH.
- 120 VOLTS, APPROXIMATELY 10 WATTS.
- LIGHT SOURCE – DIMMABLE LED. 2700K CCT UON, MINIMUM 80 CRI UON, AND MINIMUM EFFICACY OF 50 LUMENS/WATT UON. UTILIZES REPLACEABLE LED LAMP.
- LAMP SHADE – CONICAL, MOUNTED ON FLEXIBLE ARM. INTERIOR GLOSS PAINTED WHITE.
- CERTIFICATION – CSA PRODUCT SAFETY STANDARD.
- MOUNTING – SURFACE MOUNTED ON INTERIOR WALL.
- OPTIONS – HARD WIRED TO RECESSED OUTLET BOX.

DECORATIVE WALL SCONCE


REVISD: NOVEMBER 2020LIGHTING PLATE: NL-64

APPR

DATE

DESCRIPTION

SYN



APPROVED

Digitally signed by signature

Win 8 forbes

Date: 2026.01.28

16:59:55-05'00'

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES CMB DRW CMB CHK SEK

PM/DM MJD/ATP

BRANCH MANAGER SEK

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION

VARIOUS LOCATIONS

VARIOUS LOCATIONS

JOINT MARITIME FACILITY

LUMINAIRE DETAILS

SCALE: NONE

APPROVED NO. 1838720

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 14157206

SHEET 144 OF 170

EL502

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018


LIGHTING CONTROL TABLE			
ROOM NO. - NAME	LIGHTING CONTROL SCHEME	TARGET ILLUMINANCE (LUX)	CALCULATED ILLUMINANCE (LUX)
100 - SECURE VESTIBULE	AUTOMATIC ON/OFF WITH MOTION SENSOR	150	150
101 - OPEN OFFICE	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE); FULL RANGE DIMMING	300	350
102 - UNSECURE CORRIDOR	AUTOMATIC ON/OFF WITH MOTION SENSOR	150	135
103 - SHOWER	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	150	195
104 - TOILET	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	150	135
105 - BREAK	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	250	232
106 - JANITOR	AUTOMATIC ON/OFF WITH MOTION SENSOR	100	114
107 - BUNK	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	50	88
108 - BUNK	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	50	88
109 - STAGING AREA	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	250	250
110 - COMMERCIAL TELECOM	MANUAL ON/OFF SWITCH	500	461
111 - CORRIDOR	AUTOMATIC ON/OFF WITH MOTION SENSOR	150	150
112 - MECHANICAL	MANUAL ON/OFF SWITCH	200	220
113 - FIRE PUMP	MANUAL ON/OFF SWITCH	250	260
114 - GENERATOR FUEL ROOM	MANUAL ON/OFF SWITCH	200	170
115 - GENERATOR ROOM	MANUAL ON/OFF SWITCH	200	215
116 - OPS EQUIPMENT	MANUAL ON WITH WALL SWITCH; AUTOMATIC OFF WITH MOTION SENSOR (VACANCY MODE)	500	500
117 - UPS A	MANUAL ON/OFF SWITCH	200	240
118 - ELECTRICAL	MANUAL ON/OFF SWITCH	200	270
119 - UPS B	MANUAL ON/OFF SWITCH	200	260
BUILDING EXTERIOR	ON PER PHOTOCELL, OFF BY ASTRONOMICAL TIMESWITCH	50	45
EXTERIOR PERIMETER FENCE	ON PER PHOTOCELL, OFF BY ASTRONOMICAL TIMESWITCH	50	45

LIGHTING CONTROL TABLE NOTES

1. TARGET AND CALCULATED ILLUMINANCE VALUES IN LUX ARE AVERAGE VALUES.

[illegible]

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_JAMFAB_Design\DWG\Sheet\13_ELEC\VT1360_1783264_EP101.dwg LAYOUT NAME: EP101 - Electrical Power Plan PLOTTED: Tuesday, January 20, 2026 - 12:16pm USER: erichenlon

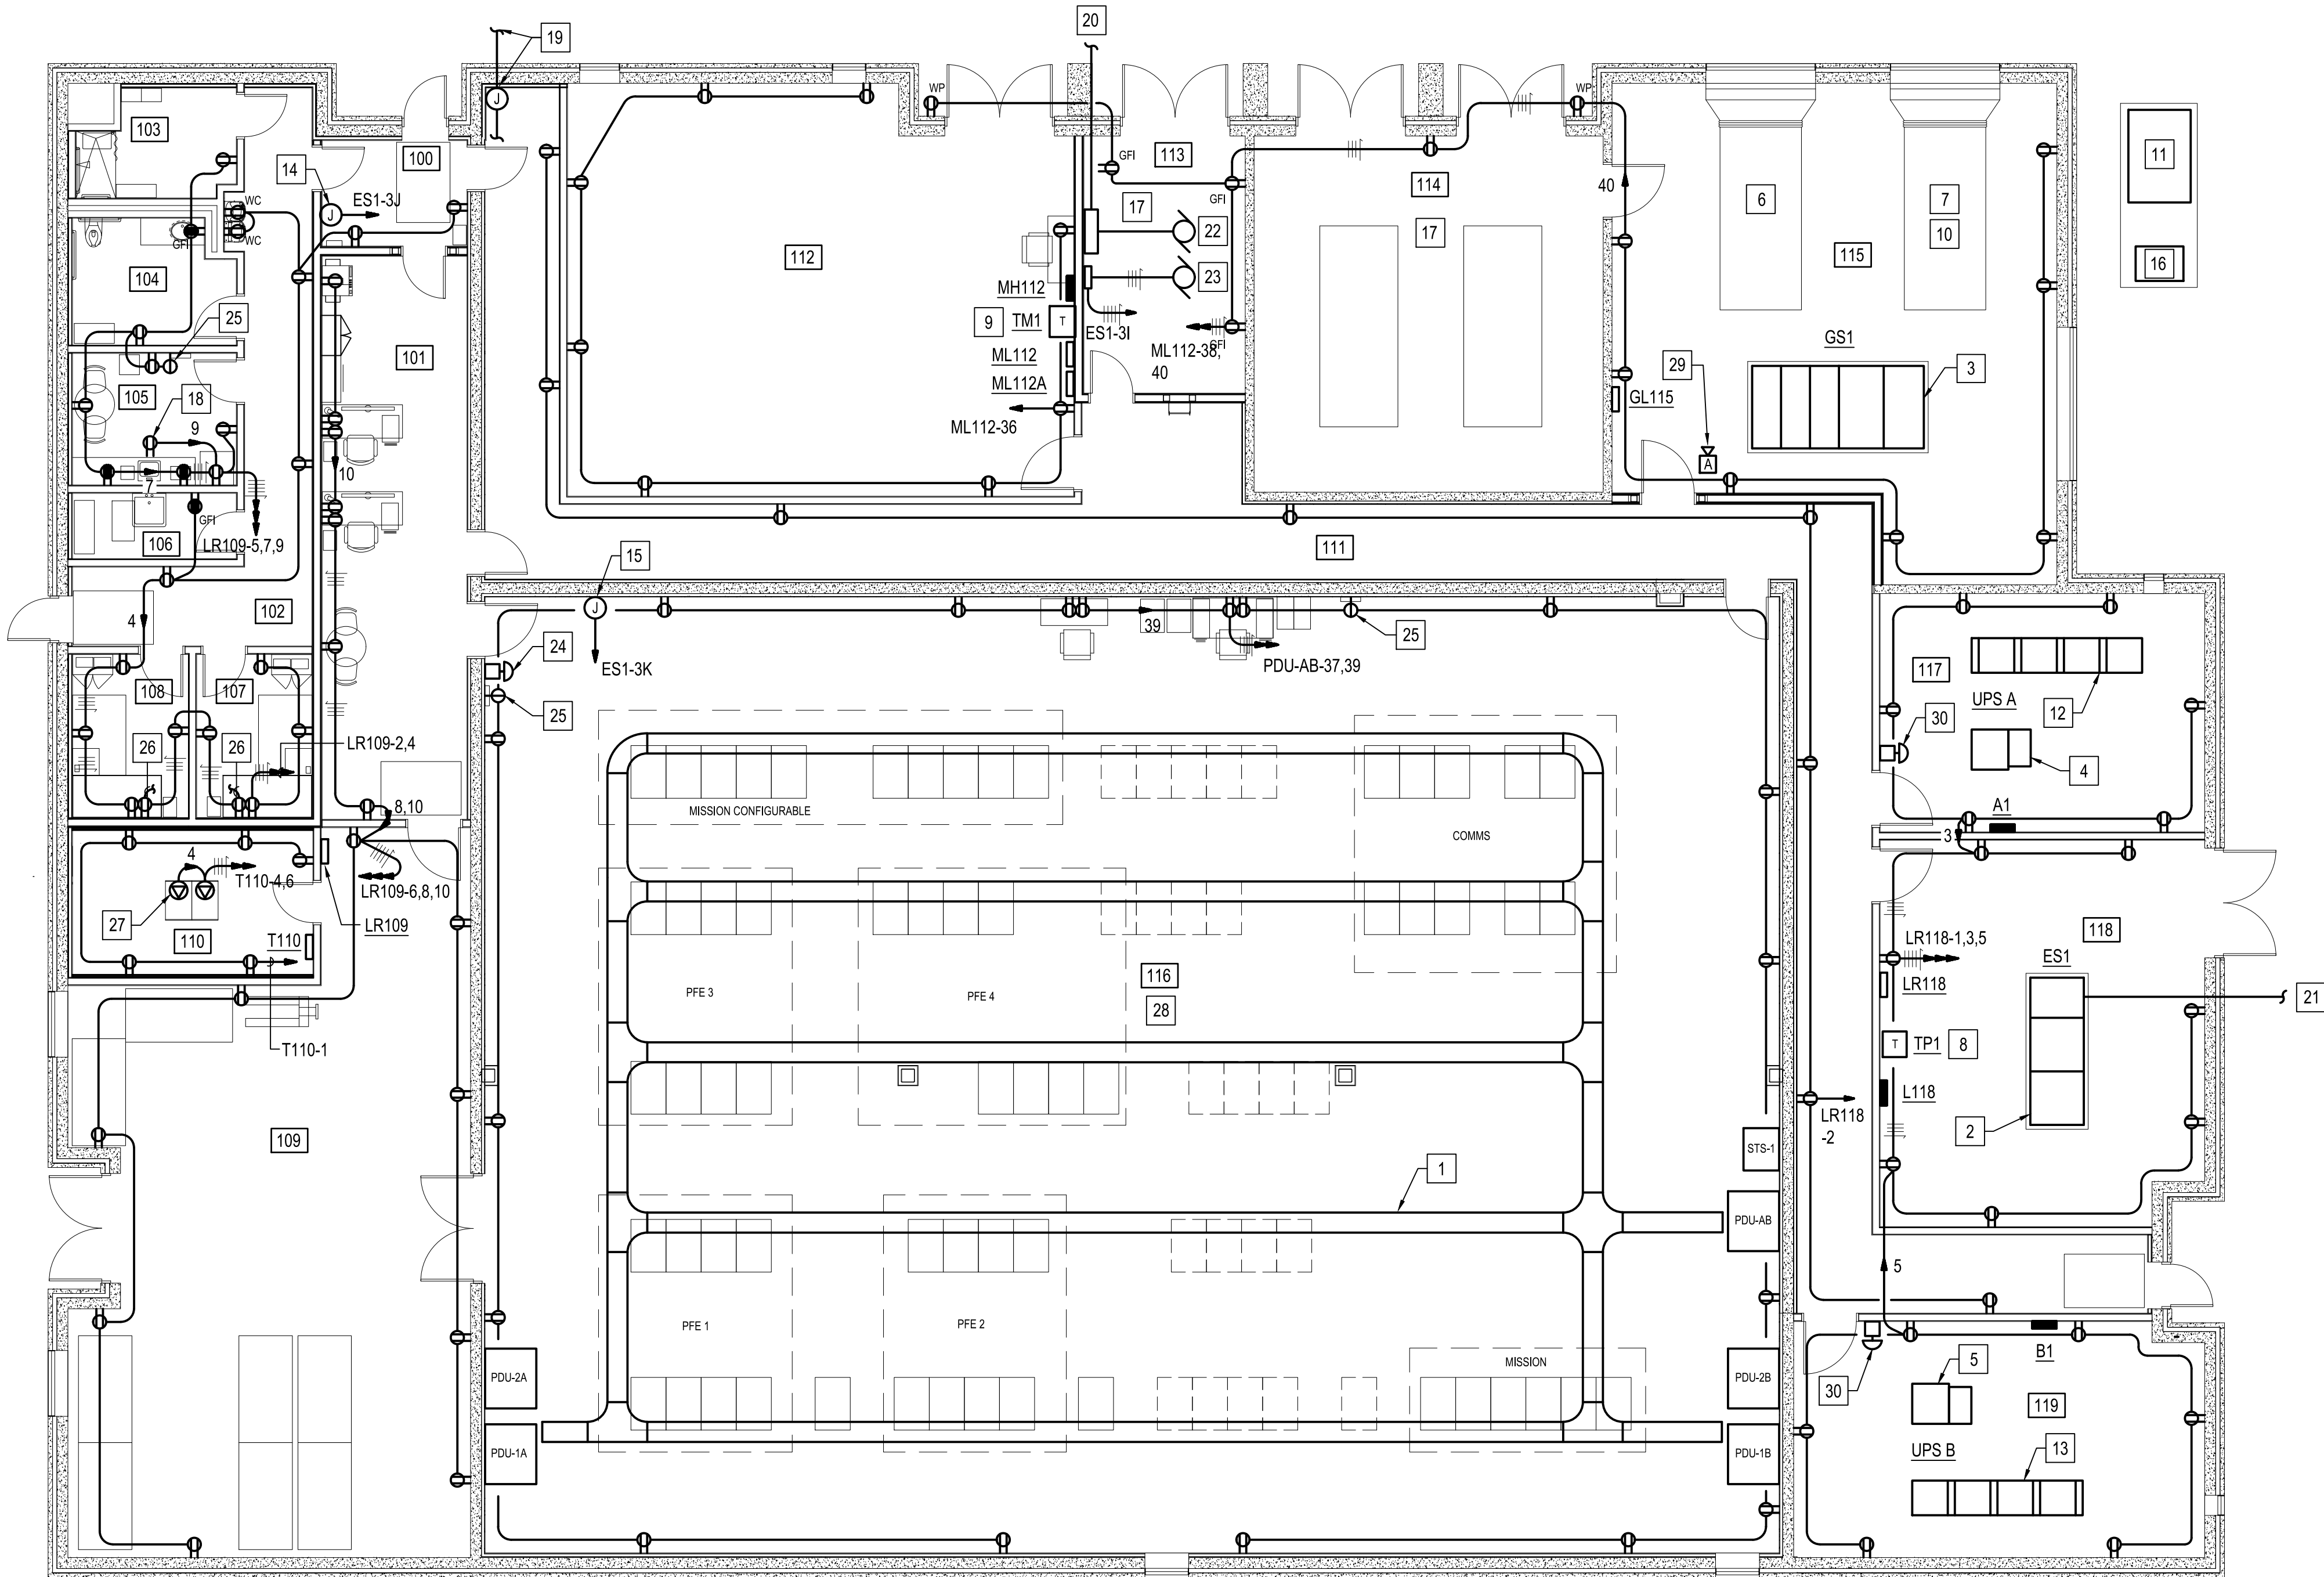

ELECTRICAL POWER PLAN

SCALE: 1:100



GENERAL SHEET NOTES

- PROVIDE ALL ELECTRICAL INSTALLATIONS IN ACCORDANCE WITH THE CANADIAN ELECTRICAL CODE (CAN/CSA-C22.3).
- SEE SHEET EP102 FOR POWER CONNECTIONS TO HVAC/MECHANICAL EQUIPMENT.


SHEET KEYNOTES

- 457W x 100H UNDERFLOOR CABLE TRAY FOR POWER CABLING. INSTALL FLUSH WITH LOWER STRUCTURAL CONCRETE FLOOR BELOW.
- ELECTRICAL SWITCHBOARD "ES1" - 1600A, 480Y/277V, 3 PHASE, 4 WIRE, 65 KAIC. PROVIDE CONCRETE HOUSEKEEPING PAD.
- ELECTRICAL SWITCHBOARD "GS1" - 1600A, 480Y/277V, 3 PHASE, 4 WIRE, 65 KAIC.
- UNINTERRUPTIBLE POWER SYSTEM "UPS A" - 400 kW, 480V, 3PH.
- UNINTERRUPTIBLE POWER SYSTEM "UPS B" - 400 kW, 480V, 3PH.
- STANDBY-RATED EMERGENCY DIESEL GENERATOR "A" - 750 kW, 480Y/277V, 3 PHASE, 4 WIRE.
- STANDBY-RATED EMERGENCY DIESEL GENERATOR "B" - 750 kW, 480Y/277V, 3 PHASE, 4 WIRE.
- DRY-TYPE TRANSFORMER "TP1" - 45 kVA, 480V - 208Y/120V, 3 PHASE, 4 WIRE.
- DRY-TYPE TRANSFORMER "TM1" - 75 kVA, 480V - 208Y/120V, 3 PHASE, 4 WIRE.
- PROVIDE ONLY UNDER ADDITIVE BID OPTION NO. 1.
- GENERATOR RESISTIVE LOAD BANK - 750 Kw, 480V, 3PH.
- VRLA TYPE BATTERY CABINET FOR "UPS-A".
- VRLA TYPE BATTERY CABINET FOR "UPS-B".
- FIRE ALARM CONTROL PANEL - 120V.
- FIRE SUPPRESSION CONTROL PANEL - 120V.
- PORTABLE GENERATOR QUICK CONNECT ENCLOSURE - 1200A, 480V, 3P, 100% NEUTRAL.
- EMT INSTALLATION IS PROHIBITED IN THIS ROOM. UTILIZE IMC OR GRS TYPE CONDUIT.
- MOUNTED UNDER SINK FOR GARBAGE DISPOSAL.
- PROVIDE JUNCTION BOX TO TRANSITION SECONDARY CIRCUIT FROM SWITCHBOARD SE1 TO UNDERGROUND CIRCUIT TO GUARD SHACK. SEE ELECTRICAL SITE PLAN ON SHEET ES102.
- PRIMARY AND SECONDARY ELECTRICAL FEEDERS TO FIRE PUMP CONTROLLER. SEE ELECTRICAL SITE PLAN ON SHEET ES102 AND ONE-LINE DIAGRAM ON SHEET EP601.
- ELECTRICAL SERVICE ENTRANCE FROM PAD-MOUNTED TRANSFORMER. SEE ELECTRICAL SITE PLAN ON SHEET ES102 AND ONE-LINE DIAGRAM ON SHEET EP601.
- FIRE WATER PUMP WITH FREE-STANDING CONTROLLER - 31 HP, 480V, 3 PH.
- FIRE WATER PRESSURE MAINTENANCE (JOCKEY) PUMP WITH WALL-MOUNTED CONTROLLER - 1.5 HP, 480V, 3PH.
- WALL-MOUNTED EMERGENCY PUSHBUTTON. ACTIVATION TRIPS MAIN CIRCUIT BREAKER FOR UPS PANELS A1 AND B1, SERVING ALL TECHNICAL POWER IN OPS RM 116.
- SINGLE RECEPTACLE FOR WALL-MOUNTED DIGITAL CLOCK AT 2200 AFF.
- CONNECT RECEPTACLE BRANCH CIRCUIT TO WALL-MOUNTED LUMINAIRE TYPE L. SEE SHEET EL101.
- MOUNT RECEPTACLES FOR POWER TO DATA EQUIPMENT RACKS OVERHEAD AT 2500 AFF. BRACE SECURELY WITH U-SHAPED CHANNEL OR OTHER SUFFICIENT STRUCTURAL SUPPORT.
- RAISED STRUCTURAL FLOOR THIS AREA 1200 ABOVE CONCRETE FLOOR. SEE A-105.
- GENERATOR AUDIBLE ALARM SIGNAL DEVICE.
- UPS EMERGENCY PUSHBUTTON. ACTIVATION SHUTS DOWN CORRESPONDING UPS UNIT.

GRAPHIC SCALE

1:100 0 1000 5000 10000mm

APPR	DATE	DESCRIPTION	SYN
APPROVED: Digitally signed by signature Date: 2026.01.28 16:59:55-05'00' FOR COMMANDER NAVFAC			
ACTIVITY: D. EVANS VIA EMAIL			
SATISFACTORY TO:	DATE: 01/15/2026		
DES: CAB	DRW: CAB	CHK: MUD/ATP	SEK
PM/DM:			
BRANCH MANAGER:	SEK		
DES PROD DIR:	WBF		
FIRE PROTECTION ENGINEER:	DSN		
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC PLANNING, DESIGN AND CONSTRUCTION VARIOUS LOCATIONS			
VARIOUS LOCATIONS			
JOINT MARITIME FACILITY			
ELECTRICAL POWER PLAN			
SCALE: AS NOTED			
APPROVED NO.: 1838720			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO.: 14157208			
SHEET 146 OF 170			
EP101			

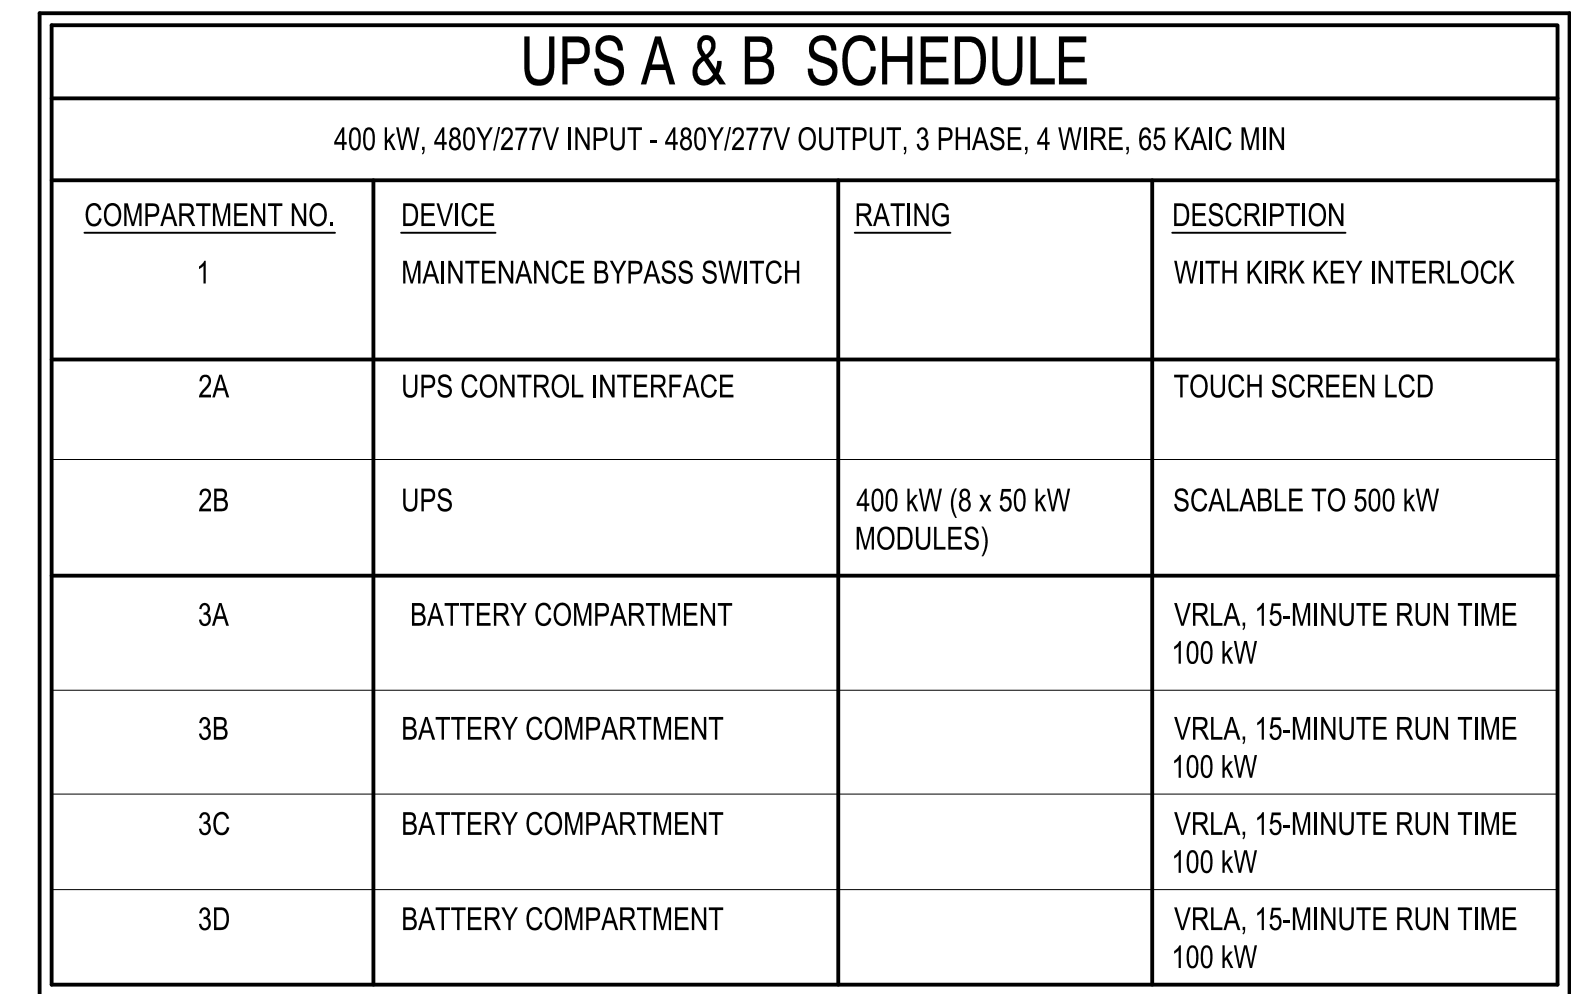

ELEVATIONS PROVIDED DEPICTS DIMENSIONS FROM MANUFACTURER USED AS BASIS OF DESIGN FOR EQUIPMENT. FINAL EQUIPMENT SELECTION WILL BE PER APPROVED SHOP DRAWING.


The elevation drawing shows a control panel with a total width of 2324 and a total height of 2224. The panel is divided into three vertical sections with widths of 914, 1219, and 1219. The left section contains a NEXUS 1272 AMI METER (M) and three horizontal slots labeled 1A, 1B, and 1C. The middle section contains two horizontal slots labeled 2A and 2B. The right section contains three horizontal slots labeled 3A, 3B, and 3C, and three horizontal slots labeled 3D, 3E, and 3F. To the right of these are three vertical columns of slots labeled 3G, 3H, 3I, 3J, 3K, 3L, and 3M. A callout points to slots 3J and 3K, stating: "PROVIDE LOCK-ON MECHANISM AND RED NAMEPLATE INDICATING 'FIRE ALARM - DO NOT TURN OFF' FOR CIRCUIT BREAKERS 3J AND 3K." Another callout points to the bottom of the panel, stating: "100 HIGH HOUSEKEEPING PAD WITH PERIMETER CHAMFER".

ELEVATION PROVIDED DEPICTS DIMENSIONS FROM MANUFACTURER USED AS BASIS OF DESIGN FOR EQUIPMENT. FINAL EQUIPMENT SELECTION WILL BE PER APPROVED SHOP DRAWING.


NOTE: EQUIPMENT DEPTH DIMENSION = 1220

SWITCHBOARD ES1 SCHEDULE			
2000A MAIN BUS, 480Y/277V, 3 PHASE, 4 WIRE, 100 KAIC MIN, NEMA 1, UL 891			
COMPARTMENT NO.	DEVICE	RATING	DESCRIPTION
1A	SURGE PROTECTION DEVICE	240 kA	PROVIDE WITH SURGE COUNTER
1B	MOLDED CASE CIRCUIT BREAKER	1600A FRAME 1200A TRIP	MAIN UTILITY SERVICE DISCONNECT
1C	INCOMING TERMINATIONS		CABLING AND LUGS FROM SERVICE XFMR
2A	INCOMING TERMINATIONS MIMIC BUS DIAGRAM		CABLING AND LUGS FROM SWITCHBOARD GS1
2B	AUTOMATIC TRANSFER SWITCH	1600A	OPEN TRANSITION TYPE, WITH CONTROLS
3A	MOLDED CASE CIRCUIT BREAKER	600A FRAME 600A TRIP	PANEL MH112
3B	MOLDED CASE CIRCUIT BREAKER	600A FRAME 600A TRIP	UPS A
3C	MOLDED CASE CIRCUIT BREAKER	600A FRAME 600A TRIP	UPS A BYPASS
3D	MOLDED CASE CIRCUIT BREAKER	600A FRAME 600A TRIP	UPS B
3E	MOLDED CASE CIRCUIT BREAKER	600A FRAME 600A TRIP	UPS B BYPASS
3F	-	600A FRAME	SPACE ONLY
3G	MOLDED CASE CIRCUIT BREAKER	100A FRAME 80A TRIP	PANEL LR118 VIA XFMR TP1
3H	MOLDED CASE CIRCUIT BREAKER	100A FRAME 60A TRIP	PANEL L118
3I	MOLDED CASE CIRCUIT BREAKER	100A FRAME 20A TRIP	JOCKEY PUMP
3J	MOLDED CASE CIRCUIT BREAKER	100A FRAME 20A TRIP	FIRE ALARM CONTROL PANEL
3K	MOLDED CASE CIRCUIT BREAKER	100A FRAME 20A TRIP	FIRE SUPPRESSION CONTROL PANEL
3L	MOLDED CASE CIRCUIT BREAKER	100A FRAME 60A TRIP	EXTERIOR GUARD SHACK
3M	-	100A FRAME	SPACE ONLY

FILE NAME: Y:\OCONUS\~Multiple\Sites\2026_1783264\P1 360_MJMP\B. Design (DWG)\Sheet\13_ELEC\P1 360_1783264_EP202.dwg
LAYOUT NAME: EP202 - Electrical Switchboard ES1 Elevation and Schedule
PLOTTED: Tuesday, January 20, 2026 - 12:16pm
USER: eric.herfand



FILE NAME: Y:\OCONUS\MultipleSheet\2026_1783264_P1360_IAMFB_B_Design\DWG\Sheet\13_ELEC\PT1360_1783264_EP602.dwg LAYOUT NAME: EP602 - Electrical Panelboard Schedules PLOTTED: Tuesday, January 20, 2026 - 12:16pm USER: erickson

PANELBOARD LR118 SCHEDULE																
150A MCB, 208Y/120V, 3 PHASE, 4 WIRE, 14 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT	PHASE			CKT	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED
	A	B	C				TRIP	SIZE	NO.				A	B	C	
RECEPTACLES RM 118	9			20	12	1				2	12	20	10			RECEPTACLES CORR 111
RECEPTACLES RM 117		9		20	12	3				4		20		0		SPARE
RECEPTACLES RM 119			9	20	12	5				6		20			0	SPARE
SPARE	0			20		7				8		20	0			SPARE
SPARE		0		20		9				10		20		0		SPARE
SPARE			0	20		11				12		20			0	SPARE
SPARE	0			20		13				14		20	0			SPARE
SPARE		0		20		15				16		20		0		SPARE
SPARE			0	20		17				18		20			0	SPARE
SPACE ONLY	0			-		19				20	6	60	10			PANEL GL115
SPACE ONLY		0		-		21								10		SPACE ONLY
SPACE ONLY			0	-		23									10	SPACE ONLY
PANEL T110	22			60	6	25				26	6	60	22			PANEL LR109
		8												29		
			16												18	
TOTAL	31	17	25										32	29	18	TOTAL
TOTAL CONNECTED AMPS A:73 B:46 C:53																

PANELBOARD L118 SCHEDULE																
60A MCB, 480Y/277, 3 PHASE, 4 WIRE, 22 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT	PHASE			CKT	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED
	A	B	C				TRIP	SIZE	NO.				A	B	C	
LIGHTS - RMS 117,118,119	5			20	12	1				2	12	20	5			LIGHTS - RM 116
LIGHTS - RMS 112,113,114,115		4		20	12	3				4	12	20		5		LIGHTS - RM 116
LIGHTS - EXTERIOR WALL			3	20	12	5				6	12	20			5	LIGHTS - RM 116
LIGHTS - EXTERIOR WALL EAST	3			20	12	7				8	12	20	3			LIGHTS - RM 111
LIGHTS - RMS 1001,101		2		20	12	9				10		20		0		SPARE
LIGHTS - RMS 102,3,4,5,6,7,8			4	20	12	11				12		20			0	SPARE
LIGHTS - RMS 109, 110	4			20	12	13				14		20	0			SPARE
SPARE		0		20		15				16		20		0		SPARE
SPARE			0	20		17				18		20			0	SPARE
SPACE ONLY	0			-		19				20		-	0			SPACE ONLY
SPACE ONLY		0		-		21				22		-		0		SPACE ONLY
SPACE ONLY			0	-		23				24		-			0	SPACE ONLY
TOTAL	12	6	7										8	5	5	TOTAL
TOTAL CONNECTED AMPS A: 20 B: 11 C: 12																

UPS PANELBOARD A SCHEDULE																	
600A MCB, 480Y/277V, 3 PHASE, 4 WIRE, 14 KAIC MINIMUM, SURFACE MOUNTED															1	2	
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT	PHASE			CKT	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED	
	A	B	C				TRIP	SIZE	NO.				A	B	C		NO.
PDU-1A	271			350	500	1				2	4/0	250	181			PDU-2A	
		271												181			
			271														181
PDU-AB	90			125	2	7				8			0			SPACE ONLY	
		90												0			
			90														0
SPACE ONLY	0			-		13				14		-	0			SPACE ONLY	
SPACE ONLY		0		-		15				16		-		0		SPACE ONLY	
SPACE ONLY			0	-		17				18		-			0	SPACE ONLY	
TOTAL	361	361	361										181	181	181	TOTAL	
TOTAL CONNECTED AMPS A: 542 B: 542 C: 542																	

PANELBOARD NOTES:

- 1
- PROVIDE SHUNT TRIP CONTROL VIA ACTIVATION FROM EPO PUSHBUTTON IN OPS RM 116.
- 2
- POWER TO ONLY FLOW THROUGH ONE UPS PANEL AT A TIME, NOT BOTH.

PANELBOARD T110 SCHEDULE																
60A MCB, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT	PHASE			CKT	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED
	A	B	C				TRIP	SIZE	NO.				A	B	C	
RECEPTACLES RM 110	6			20	12	1				2		20				SPARE
SPARE		0		20		3				4	12	20		8		COMM CABINET 2
HVAC SPLIT SYSTEM			8	20	12	5				6	12	20			8	COMM CABINET 3
	8									8		20	0			SPARE
SPARE		0		20		9				10		20		0		SPARE
SPARE			0	20		11				12		20			0	SPARE
SPACE ONLY	0			-		13				14		-	0			SPACE ONLY
SPACE ONLY		0		-		15				16		-		0		SPACE ONLY
SPACE ONLY			0	-		17				18		-			0	SPACE ONLY
TOTAL	14	0	8										0	8	8	TOTAL
TOTAL CONNECTED AMPS A: 14 B: 8 C: 16																

PANELBOARD LR109 SCHEDULE																	
60A MCB, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																	
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT	PHASE			CKT	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED	
	A	B	C				TRIP	SIZE	NO.				A	B	C		NO.
SPARE	0			20		1				2	12	20	8				RECEPTACLES RM 107,8
SPARE		0		20		3				4	12	20		12			RECEPTACLES RM 100,2
RECEPTACLES RM 105			6	20	12	5				6	12	20			12		RECEPTACLES RM 109
RECEPTACLES RMS 103,4,5	6			20	12	7				8	12	20	8				RECEPTACLES RM 101
RECEPTACLES RM 105		9		20	12	9				10	12	20		8			RECEPTACLES RM 101
SPARE			0	20		11				12		20			0		SPARE
SPARE	0			20		13				14		20	0				SPARE
SPARE		0		20		15				16		20		0			SPARE
SPARE			0	20		17				18		20			0		SPARE
SPACE ONLY	0			-		19				20		-	0				SPACE ONLY
SPACE ONLY		0		-		21				22		-		0			SPACE ONLY
SPACE ONLY			0	-		23				24		-			0		SPACE ONLY
SPACE ONLY	0			-		25				26		-	0				SPACE ONLY
SPACE ONLY		0		-		27				28		-		0			SPACE ONLY
SPACE ONLY			0	-		29				30		-			0		SPACE ONLY
TOTAL	6	9	6										16	20	12	TOTAL	
TOTAL CONNECTED AMPS A: 22 B: 29 C: 18																	

UPS PANELBOARD B SCHEDULE																	
600A MCB, 480Y/277V, 3 PHASE, 4 WIRE, 14 KAIC MINIMUM, SURFACE MOUNTED															1	2	
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE	BRKR	LOAD (AMPS)			LOAD SERVED	
	A	B	C				A	B	C				A	B	C		
PDU-1B	271			350	500	1				2	4/0	250	181			PDU-2B	
		271												181			
			271												181		
PDU-AB	90			125	2	7				8			0			SPARE	
		90												0			
			90												0		
SPACE ONLY	0			-		13				14		-	0			SPACE ONLY	
SPACE ONLY		0		-		15				16		-		0		SPACE ONLY	
SPACE ONLY			0	-		17				18		-			0	SPACE ONLY	
TOTAL	361	361	361										181	181	181	TOTAL	
TOTAL CONNECTED AMPS A: 542 B: 542 C: 542																	