



%PRODUCTION DATA 1%

A1




SCALE: NTS



SHEET ID
G-003

CERTIFIED FIN

GAS LINE	— G —
SANITARY SEWER LINE	— SAN —
STORM DRAINAGE LINE	— SD —
WATERLINE	— W —
ELECTRIC OVERHEAD	— E —
ELECTRIC UNDERGROUND	- - - ES - - -
COMMUNICATION LINE	- - - COMM - - -
FIBER OPTIC LINE	— FO —
BENCHMARK/SOIL BORING	
CONTOUR	— 560 —
SPOT ELEVATION	× 562
PROPERTY LINE	- - - —
CONTRACTOR WORK LIMITS	— • • —
EDGE OF PAVEMENT	— — — — —
EDGE OF WATER	- · - · - · - · - · - · - · - · -
DITCH	— o o o —
FLAGGER	
FLOW/TRAFFIC DIRECTION	— —
SIGN	
CONSTRUCTION DRUMS	
HANDRAIL/GUARDRAIL	— □ — □ — □ — □ —
GATE	— ○ — ○ —
SILT FENCE	— SF —
CATCH BASIN	
TEMP GRAVEL CONSTRUCTION EASEMENT	
CHAIN LINK FENCE	— ○ — × — ○ —
MANHOLE	
PIEZOMETER	
SHEET PILE WALL	
RIP RAP	— — — — —
NEW HEADWALL	
NEW INLET	
STONE SILT CHECK	
BASKET INLET PROTECTION	
STONE INLET PROTECTION	
TREE LINE	— — — — —
TREE	
LIGHT	— ○ —
FIRE HYDRANT	
CONTROL POINT/MONUMENT	
ROCK CHECK DAM	
SILT FENCE - OR - FIBER ROLL	— SF —

[illegible]

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY:	ISSUE DATE:
	DRAWN BY:	SOLICITATION NO.:
	CHECKED BY:	CONTRACT NO.:
	SUBMITTED BY:	
	S. DURR	
ANSL'D		

LEFT AND RIGHT ABUTMENT GUTTER REPLACEMENT
PATOKA LAKE DAM
SOUTH DUBOIS, DUBOIS COUNTY, INDIANA
P2: 514528; F: 2025

SITE PHOTOGRAPHY

SHEET ID
G-005






A1

AERIAL PHOTOGRAPH, CONTRACTOR WORK LIMITS, STAGING, AND ACCESS ROUTE

SCALE: 1"=300'



GENERAL SHEET NOTES


1. CONTRACTOR MUST COORDINATE STAGING/LAYDOWN AND DISPOSAL AREA WITH THE CONTRACTING OFFICERS REPRESENTATIVE (COR).
2. CONSTRUCTION EQUIPMENT IS PROHIBITED OVER FINGER DRAINS. REFER TO SHEETS CS101 AND CS102.
3. ONLY TRACKED EQUIPMENT IS ALLOWED ON THE FACE OF THE DAM.
4. CONTRACTOR MUST AVOID RUNNING OVER DAM INSTRUMENTATION. CONTRACTOR IS RESPONSIBLE TO REPAIR/REPLACE ANY DAMAGES TO INSTRUMENTATION AT NO COST TO THE GOVERNMENT. REFER TO SHEET RF902 FOR EXISTING INSTRUMENTATION PLAN.
5. TOP OF DAM ACCESS ROAD IS ASPHALT. REFER TO SHEET RF901 FOR TYPICAL PAVEMENT SECTION. CONTRACTOR TO REPAIR ANY DAMAGE TO ROADWAY AT NO COST TO THE GOVERNMENT.
6. MAXIMUM ALLOWABLE LOAD ON DAM ACCESS ROAD IS 45 TONS.
7. EROSION PREVENTION AND SEDIMENT CONTROL BMPS FOR THE ABUTMENT WORK AREAS ARE SHOWN ON SHEETS CS101, CS102, AND CS502. TOTAL LAND DISTURBANCE = 1.25 ACRES. REFER TO GENERAL SHEET NOTES 2 AND 3.

SHEET KEYNOTES

1. PAVED CONTRACTOR ACCESS TO LEFT AND RIGHT ABUTMENT.
2. AVAILABLE CONTRACTOR STAGING AREA LOCATED IN A FLAT, LAWN AREA. NO GRADING OR OTHER GROUND DISTURBANCE IS ANTICIPATED. AFTER CONSTRUCTION COMPLETION, REMOVE ANY AND ALL TEMPORARY MATERIALS, EQUIPMENT AND DEBRIS. RESTORE ANY DAMAGED GRASSED SURFACE TO PRE-CONSTRUCTION CONDITION OR BETTER. SEED AND STABILIZE.
3. CONTRACTOR MATERIAL DISPOSAL AREA. THIS EXISTING AREA IS MANAGED BY THE USACE PATOKA LAKE OPERATIONS FOR STORAGE OF GRAVEL AND RUBBLIZED CONCRETE MATERIALS ONLY TO BE REUSED FOR ROUTINE MAINTENANCE ACTIVITIES WITHIN USACE PROPERTY BOUNDARIES. NO GROUND DISTURBANCE OR SOIL EXPOSURE WILL OCCUR. ANY RUBBLIZED CONCRETE MATERIALS FROM DEMOLITION OF EXISTING GUTTERS WILL BE PLACED SO AS NOT TO EXPAND THE FOOTPRINT OF THE EXISTING GRAVEL STORAGE AREA.
4. GRAVEL CONTRACTOR ACCESS TO DISPOSAL AREA.
5. AS DIRECTED, TEMPORARILY CLOSE DAM ACCESS ROAD TO PUBLIC TRAFFIC DURING CONSTRUCTION. COORDINATE WITH THE COR AND LAKE MANAGEMENT FOR EXACT LOCATION OF CLOSURE.

LEGEND

- • — CONTRACTOR WORK LIMITS
- — — CONTRACTOR ACCESS ROUTE
- CONTRACTOR STAGING AREA



US Army Corps of Engineers®

MARK	DESCRIPTION	DATE


DESIGNED BY: I. WELLS	ISSUE DATE: MAY 2025
DRAWN BY: B. DORSCH	SOLICITATION NO.:
CHECKED BY: S. DURR	CONTRACT NO.:
SUBMITTED BY:	
SIZE:	ANSI D
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	

LEFT AND RIGHT ABUTMENT GUTTER REPLACEMENT
PATOKA LAKE DAM
LOUISVILLE DISTRICT
SOUTH DUBOIS, DUBOIS COUNTY, INDIANA
P2: 514528; FY2025

AERIAL PHOTOGRAPH,
CONTRACTOR WORK LIMITS,
STAGING, AND ACCESS ROUTE

SHEET ID

VA101

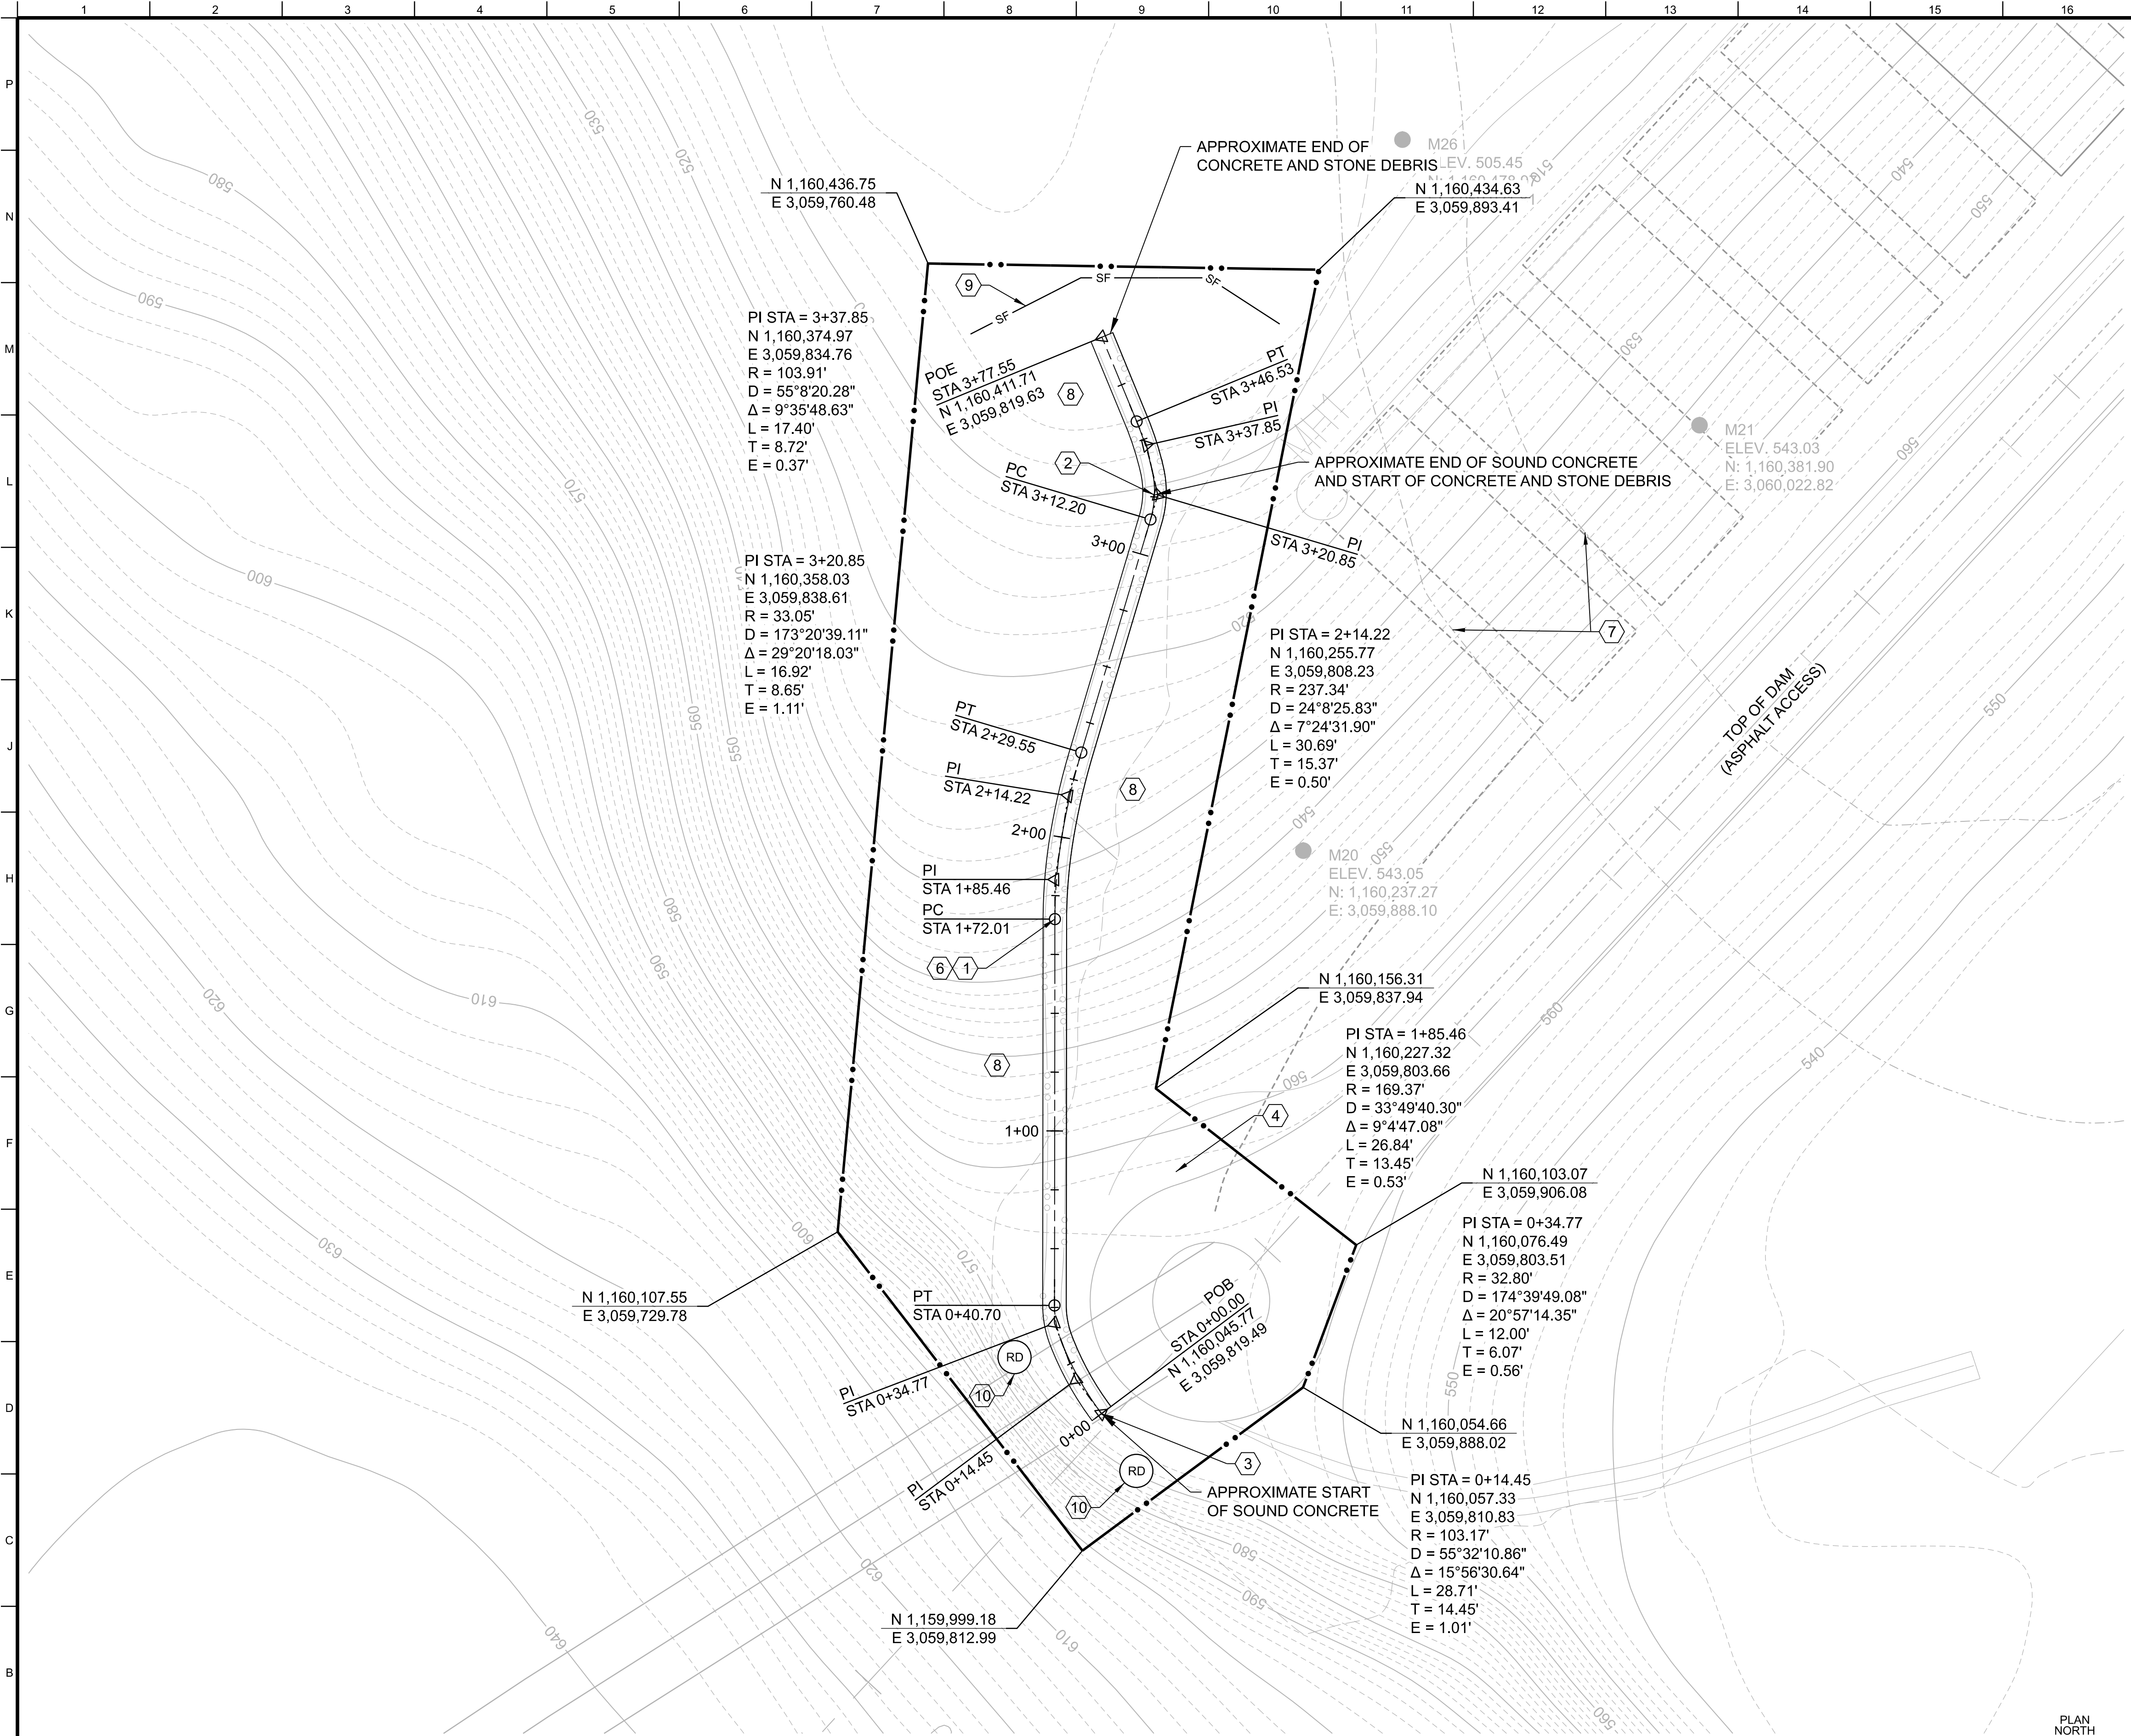

GENERAL SHEET NOTES

1. A TOPOGRAPHIC SURVEY WAS NOT COMPLETED. THE PROVIDED HORIZONTAL ALIGNMENT AND PROFILE ARE APPROXIMATE AND SHOWN TO PROVIDE PROJECT INTENT.
2. CONTOURS SHOWN ARE FROM LIDAR DATA, AND SHALL NOT BE CONSIDERED ACCURATE.
3. EROSION PREVENTION AND SEDIMENT CONTROL MEASURES ARE SHOWN ON SHEETS VA101, CS101, CS102, AND CS502. A STORMWATER POLLUTION PREVENTION PLAN (SWPPP) HAS BEEN DEVELOPED AND ATTACHED TO SPECIFICATION SECTION 01 57 19.00 06. CONTRACTOR MUST IMPLEMENT AND MAINTAIN THE SWPPP.
4. HORIZONTAL ALIGNMENT SHOWN IS APPROXIMATE TO MIMIC EXISTING GUTTER ALIGNMENT.
5. ALL DISTURBED AREAS MUST BE SEEDED AND FERTILIZED.
6. BIODEGRADABLE EROSION CONTROL BLANKET MUST BE INSTALLED ON ALL DISTURBED SOIL AREAS.
7. SURVEY CONTROL POINTS M20, M21, AND M26 ARE FOR CONTRACTOR'S USE. CONTRACTOR IS RESPONSIBLE FOR PROTECTING & REPLACING IF DAMAGED, AT NO COST TO THE GOVERNMENT.
HORIZ. DATUM: NAD83 WEST SPCS (1302)
VERT. DATUM: USACE
8. PREVENT ANY SEDIMENT LADEN RUNOFF FROM ENTERING THE TAILWATER.
9. ONLY TRACKED EQUIPMENT ALLOWED ON THE FACE OF THE DAM.
10. THE CONTRACTOR SHALL LIMIT THE SIZE OF THE MACHINERY OR EQUIPMENT CROSSING THE DAM CREST TO LESS THAN 45 TONS. EQUIPMENT AND HEAVY MACHINERY SHALL KEEP 20 FEET OFF THE TOE OF THE DAM. CONTRACTOR IS RESPONSIBLE TO REPAIR/REPLACE ANY DAMAGE TO PAVEMENT, AT NO COST TO THE GOVERNMENT.

SHEET KEYNOTES

1. REMOVE EXISTING CONCRETE GUTTER DITCH AND INSTALL NEW ARTICULATED CONCRETE VEGETATED MATTRESS (ACVM) GUTTER; SEE DETAILS, SHEET CS501.
2. REMOVE EXISTING CONCRETE AND STONE DEBRIS AND A INSTALL NEW ARTICULATED CONCRETE VEGETATED MATTRESS (ACVM) GUTTER; SEE DETAILS, SHEET CS501
3. CONTRACTOR SHALL EXCAVATE WITH CAUTION AT TOP OF DAM AND ALONG ROAD SO AS TO NOT DISTURB EXISTING UTILITIES, UTILITY BOXES AND INSTRUMENTATION. CONTRACTOR IS RESPONSIBLE TO REPAIR ANY DAMAGES AT NO COST TO THE GOVERNMENT.
4. TEMPORARY GUARDRAIL REMOVAL MAY BE NECESSARY. CONTRACTOR MUST NOT DAMAGE GUARDRAIL DURING REMOVAL OR REINSTALLATION OR WILL OTHERWISE BE REQUIRED TO REPLACE GUARDRAIL WITH NEW RAIL, IN KIND. GUARDRAIL MUST BE REINSTALLED UPON COMPLETION OF CONSTRUCTION IN THIS AREA. COORDINATE WITH COR.
5. APPROXIMATE LOCATION OF EXISTING STORM DRAIN INLET. PROTECT WITH TEMPORARY GRAVEL RING; SEE SHEET CS502, DETAIL J1.
6. EXISTING GUTTER WIDTH IS APPROX. 8' WIDE OVERALL. NEW MATTRESS GUTTER WIDTH MUST MATCH EXISTING. SEE DETAIL A13, SHEET CS501.
7. AVOID EXISTING FINGER DRAINS. CONTRACTOR IS RESPONSIBLE TO REPAIR ANY DAMAGES AT NO COST TO THE GOVERNMENT.
8. PERMANENTLY SEED, FERTILIZE, AND COVER WITH BIODEGRADABLE EROSION CONTROL BLANKET ON ALL DISTURBED AND EXPOSED SOIL SURFACES.
9. INSTALL TEMPORARY FIBER ROLL PER SHEET CS502 DETAIL A12, OR SILT FENCE PER INDOT STD. DWG. NO. E 205-TECP-02.
10. INSTALL TEMPORARY CHECK DAM; SEE SHEET CS502, DETAIL J11.

LEGEND

- CONTRACTOR WORK LIMITS
- GUTTER CENTERLINE



US Army Corps of Engineers®

DATE	DESCRIPTION	MARK

ISSUE DATE: MAY 2025	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: L. WELLS	DRAWN BY: B. DORSCH	CHECKED BY: S. DURR
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	SIZE: ANSI D	

LEFT AND RIGHT ABUTMENT GUTTER REPLACEMENT PATOKA LAKE DAM SOUTH DUBOIS, DUBOIS COUNTY, INDIANA P2: 514528; FY2025	CIVIL SITE PLAN LEFT ABUTMENT GUTTER
---	---


SHEET ID

CS101

A1

CIVIL SITE PLAN LEFT ABUTMENT GUTTER


SCALE: 1"=30'






1. THE MANUFACTURES REPRESENTATIVE SHALL BE ONSITE FOR THE START OF THE INSTALLATION.
2. GRADE THE SITES SO THAT WATER WILL NOT FLOW ABOVE, BELOW, OR AROUND THE OUTSIDE OF THE AREA PROTECTED WITH ARTICULATED CONCRETE VEGETATED MATTRESS (ACVM). ALL SUBGRADE SURFACES PREPARED FOR PLACEMENT OF MATS SHALL BE SMOOTH AND FREE OF ALL ROCKS, STICKS, ROOTS, OTHER PROTRUSIONS, OR DEBRIS OF ANY KIND.
3. INSTALL AND SECURE ACVM ROLLS PER APPROVED MANUFACTURER'S INSTRUCTIONS. DETAILS ABOVE ARE TYPICAL INSTALLATION DIAGRAMS.
4. APPLY SITE SPECIFIC SEED, INCLUDING NATIVE GRASSES DIRECTLY TO THE PREPARED SOIL PRIOR TO ACVM INSTALLATION.
 - A. ACVM ROLLS ARE AVAILABLE IN WIDTHS OF 4', 5.5', 8', 10', 12', & 16'. IT IS THE MANUFACTURERS RECOMMENDATION TO UTILIZE THE WIDEST MATS POSSIBLE TO REDUCE AN ABUNDANCE OF SEAMS OR OVERLAPS.
 - B. TO ACHIEVE WIDER WIDTHS, INSTALL MATS ADJACENT TO ONE ANOTHER. INSTALL ADDITIONAL UNDERLAYMENT UNDER ALL ADJOINING MATS. A MINIMUM OF 12" OF UNDERLAYMENT SHALL EXTEND UNDER EACH SIDE OF THE MAT AND DIRECTLY AGAINST THE SUBGRADE.

5. INSTALL 18" #3 REBAR U-ANCHORS AND STAINLESS STEEL ZIP TIES IN 3' INCREMENTS THE LENGTH OF THE LONGITUDINAL SEAM.
6. AT THE BEGINNING OF THE ACVM, TRANSITION THE INITIAL LEADING EDGE PROPERLY WITH EROSION MATTING OR SOD. EMBED 18" VERTICALLY INTO THE SUB GRADE TO SERVE AS AN ANCHOR TRENCH. THE TRENCH SHALL BE FILLED AND COMPACTED WITH SUITABLE FILL OR OTHER (AS SPECIFIED BY DOR).
7. FOR ADDITIONAL SECTIONS OF MAT, OVERLAP THE DOWNSTREAM SECTION 18" WITH UPSTREAM SECTION OF MAT. PRIOR TO INSTALLING OVERLAP, FLIP UPSTREAM MAT BACK 24". EXCAVATE 2.25" OF SOIL 18" FROM END OF UPSTREAM MAT. DOWNSTREAM SECTION IS LAID IN THE SHALLOW TRENCH. LIGHTLY SPREAD TOPSOIL, SEED AND FERTILIZER OVER INITIAL EDGE, FLIP END OF UPSTREAM MAT OVER THE SOIL COVERED INITIAL LEADING EDGE OF DOWNSTREAM MAT.
8. INSTALL 18" U-ANCHORS IN 3' INCREMENTS ACROSS THE OVERLAP. INSTALL ANCHORS DIRECTLY BEHIND BLOCKS. "U" ANCHORS CONSIST OF #3 REBAR "U" ANCHOR WITH 18" LEGS.
9. AT THE END OF THE ARMORED CHANNEL, EMBED THE MAT 24" IN A TERMINATION TRENCH. FILL AND COMPACT TERMINATION TRENCH WITH SOIL.

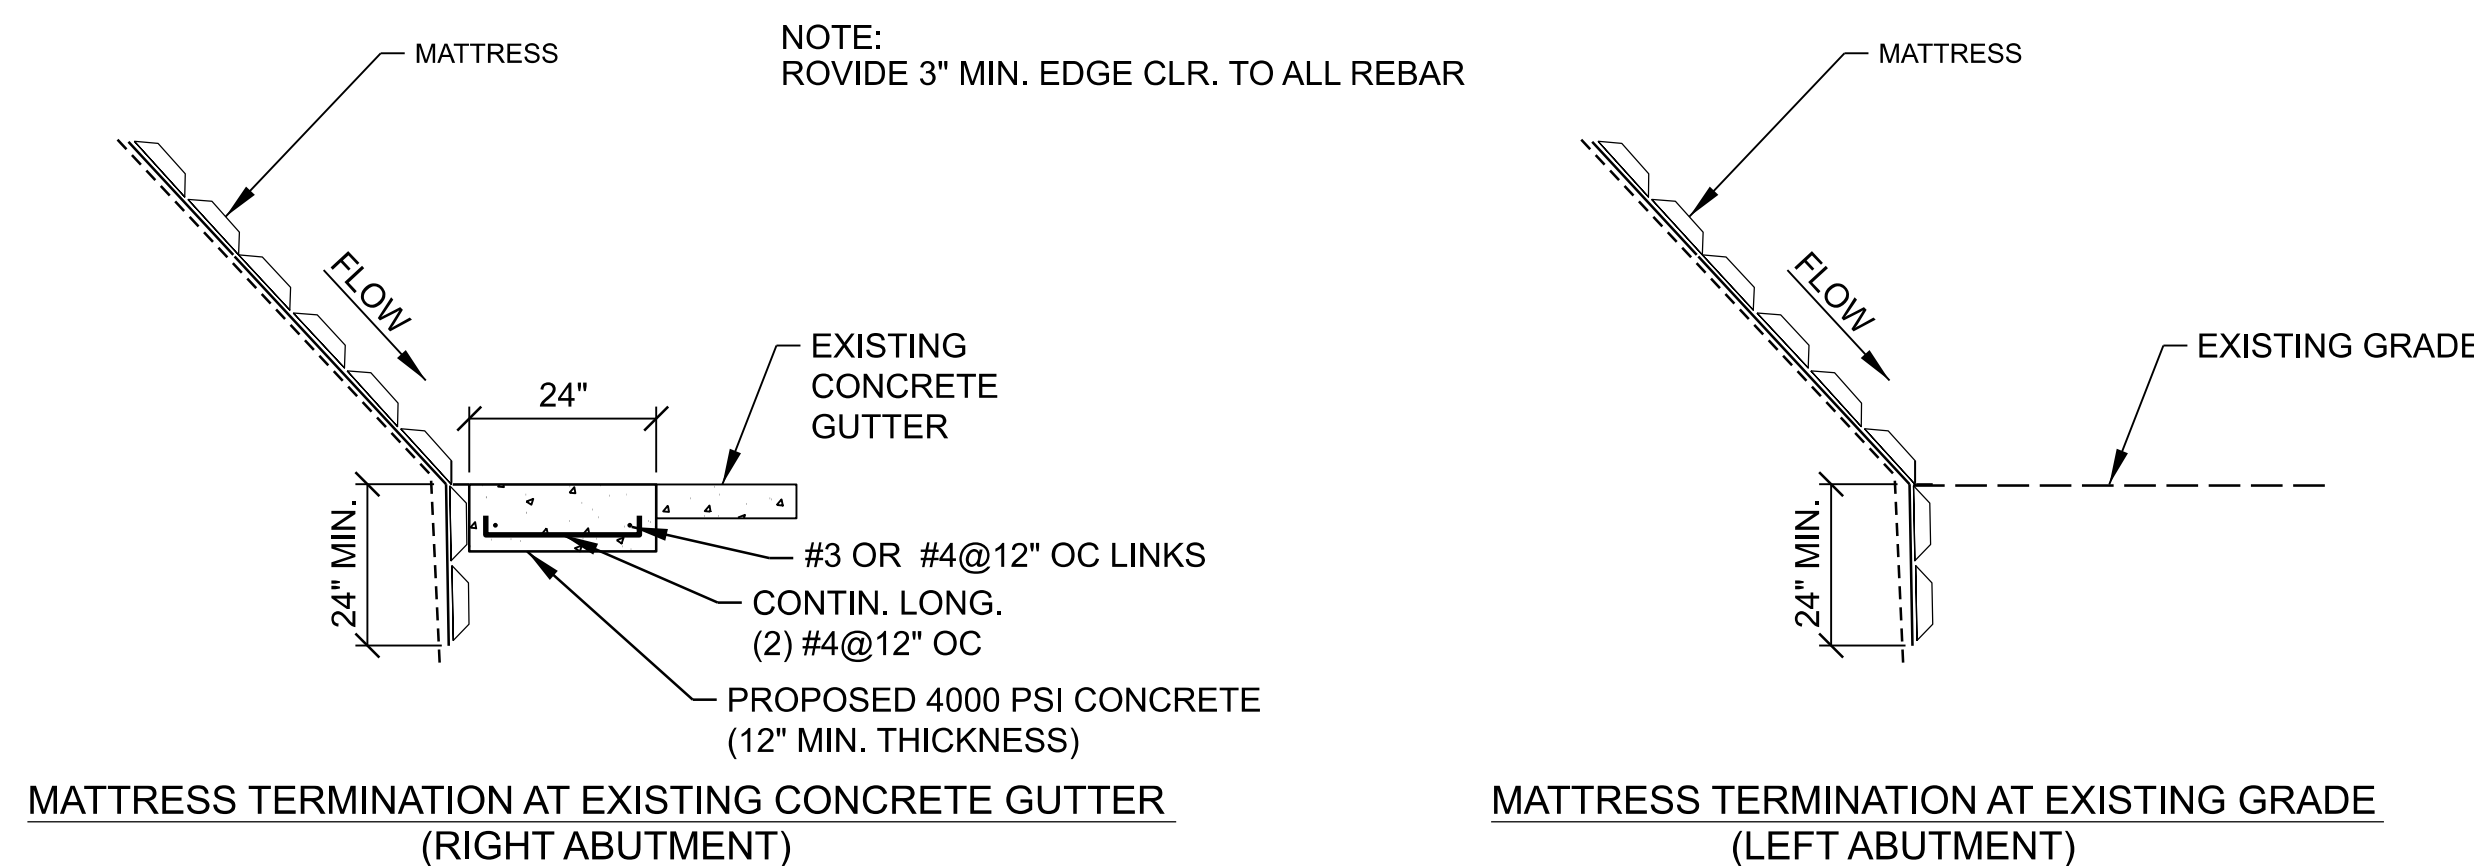

H13 MATTRESS TERMINATION DETAILS
SCALE: NTS


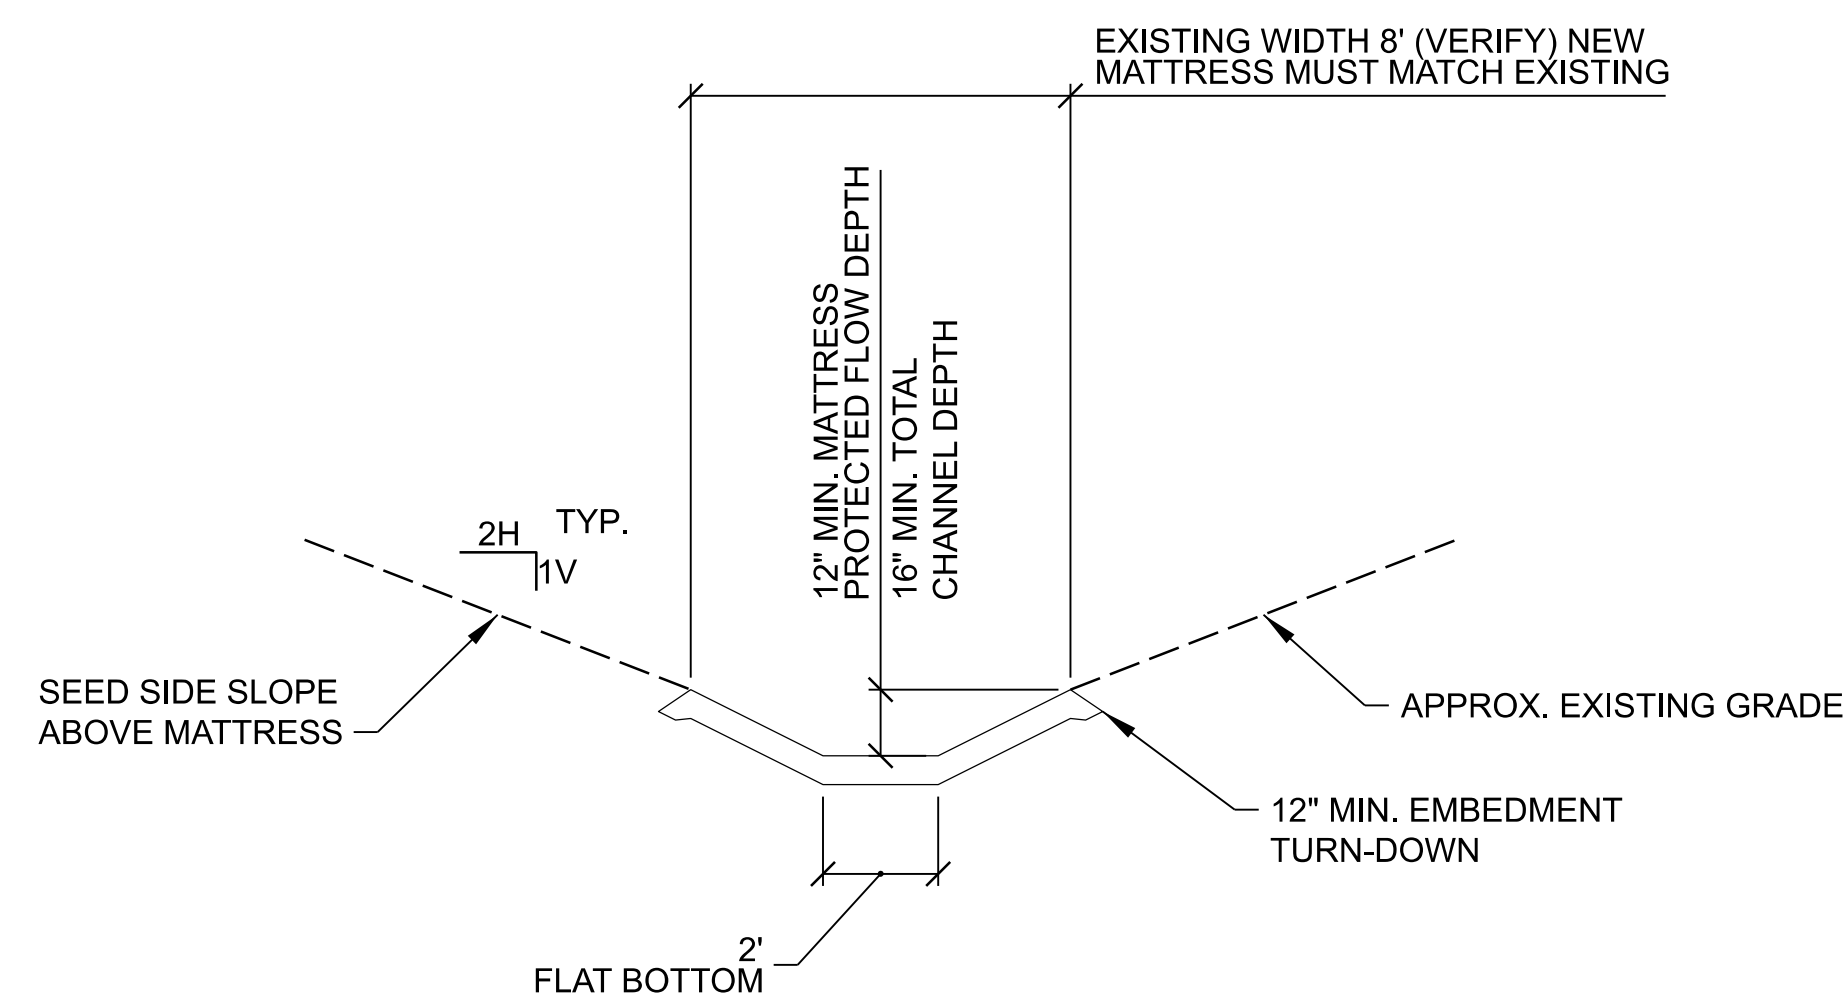


A13 TYPICAL SECTION
SCALE: NTS


[illegible]

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY:	ISSUE DATE:
	DRAWN BY:	MAY 2025
	CHECKED BY:	SOLICITATION NO.:
	APPROVED BY:	CONTRACT NO.:
	DATE:	

LEFT AND RIGHT ABUTMENT GUTTER REPLACEMENT
PATOKA LAKE DAM
SOUTH DUBOIS, DUBOIS COUNTY, INDIANA
P2: 514528; F2025

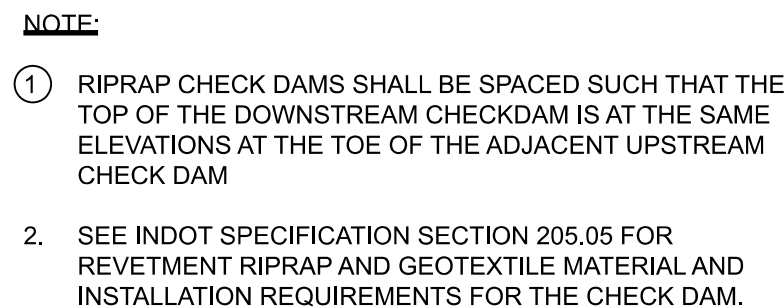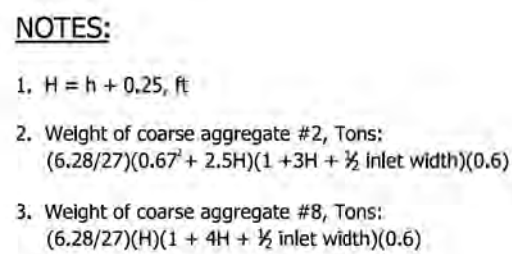

SCALE: NTS




1. PREPARE SOIL BEFORE INSTALLING ROLLED EROSION CONTROL PRODUCTS (RECPs), INCLUDING ANY NECESSARY APPLICATION OF LIME, FERTILIZER, AND SEED. GROUND SURFACE MUST BE FREE OF DEBRIS, ROCKS, CLAY CLODS ANDRAKED SMOOTH SUFFICIENT TO ALLOW INTIMATE CONTACT OF THE RECP WITH THE SOIL OVER THE ENTIRETY OF THE INSTALLATION.
2. BEGIN AT THE TOP OF THE CHANNEL BY ANCHORING THE RECPs IN A 6" (15 CM) DEEP X 6" (15 CM) WIDE TRENCH WITH APPROXIMATELY 12" (30 CM) OF RECPs EXTENDED BEYOND THE UP-SLOPE PORTION OF THE TRENCH. USE SHOREMAX MAT AT THE CHANNEL/CULVERT OUTLET AS SUPPLEMENTAL SCOUR PROTECTION AS NEEDED. ANCHOR THE RECPs WITH A ROW OF STAPLES/STAKES/PINS APPROXIMATELY 12" (30 CM) APART IN THE BOTTOM OF THE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING. APPLY SEED TO THE COMPACTED SOIL AND FOLD THE REMAINING 12" (30 CM) PORTION OF RECPs BACK OVER THE SEED AND COMPACTED SOIL. SECURE RECPs OVER COMPACTED SOIL WITH A ROW OF STAPLES/STAKES/PINS SPACED APPROXIMATELY 12" (30 CM) APART ACROSS THE WIDTH OF THE RECPs.
3. ROLL CENTER RECPs IN DIRECTION OF WATER FLOW IN BOTTOM OF CHANNEL. RECPs WILL UNROLL WITH APPROPRIATE SIDE AGAINST THE SOIL SURFACE. ALL RECPs MUST BE SECURELY FASTENED TO SOIL SURFACE BY PLACING STAPLES/STAKES/PINS IN APPROPRIATE LOCATIONS AS SHOWN IN THE STAPLE PATTERN GUIDE.
4. PLACE CONSECUTIVE RECPs END-OVER-END (SHINGLE STYLE) WITH A 4" - 6" (10 - 15 CM) OVERLAP. USE A DOUBLE ROW OF STAPLES STAGGERED 4" APART AND 4" ON CENTER TO SECURE RECPs.
5. FULL LENGTH EDGE OF RECPs AT TOP OF SIDE SLOPES MUST BE ANCHORED WITH A ROW OF STAPLES/STAKES/PINS SPACED AT S, APART IN A 6" (15 CM) DEEP X 6"(15 CM) WIDE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING.
6. ADJACENT RECPs MUST BE OVERLAPPED APPROXIMATELY 4" - 6" (10 - 15 CM) AND SECURED WITH STAPLES/STAKES/PINS AT ST.
7. IN HIGH FLOW CHANNEL APPLICATIONS A STAPLE CHECK SLOT IS RECOMMENDED AT 30 TO 40 FOOT (9 -12M) INTERVALS. USE A DOUBLE ROW OF STAPLES STAGGERED 6" (15 CM) APART AND 12" (30 CM) ON CENTER OVER ENTIRE WIDTH OF THE CHANNEL.
8. THE TERMINAL END OF THE RECPs MUST BE ANCHORED WITH A ROW OF STAPLES/STAKES/PINS SPACED AT S, APART IN A 6" (15 CM) DEEP X 6" (15 CM) WIDE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING.
9. FASTENERS SHOULD PROVIDE A MINIMUM OF TWENTY POUNDS OF PULLOUT RESISTANCE. SIX-INCH (10 CM) X ONE-INCH (2.5 CM) ELEVEN GAUGE STAPLES ARE TYPICALLY ADEQUATE. IN LOOSE SOILS, LONGER STAPLES MAY BE NECESSARY. TWIST PINS CAN PROVIDE THE GREATEST PULLOUT RESISTANCE. IN HARD OR ROCKY SOILS, STRAIGHT PINS MAY BY USED WHERE STAPLES OR TWIST PINS ARE REFUSED, PROVIDED THE MINIMUM PULLOUT REQUIREMENTS ARE MET. BIO-DEGRADABLE FASTENERS SHALL NOT BE USED WITH VMAX (TRM) OR TMAX (HPTRM) MATERIALS.
1. PREPARE SOIL BEFORE INSTALLING ROLLED EROSION CONTROL PRODUCTS (RECPs), INCLUDING ANY NECESSARY APPLICATION OF LIME, FERTILIZER, AND SEED. GROUND SURFACE MUST BE FREE OF DEBRIS, ROCKS, CLAY CLODS AND RAKED SMOOTH SUFFICIENT TO ALLOW INTIMATE CONTACT OF THE RECP WITH THE SOIL OVER THE ENTIRETY OF THE INSTALLATION.
2. BEGIN AT THE TOP OF THE SLOPE BY ANCHORING THE RECPs IN A 6" (15 CM) DEEP X 6" (15 CM) WIDE TRENCH. ANCHOR THE RECPs WITH A ROW OF STAPLES/STAKES/PINS SPACED AT S, APART IN THE BOTTOM OF THE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING AND FOLD THE ROLL OVER DOWNSLOPE. SECURE RECPs OVER COMPACTED SOIL WITH A ROW OF STAPLES/STAKES/PINS SPACED AT S, APART ACROSS THE WIDTH OF THE RECPs.
3. ROLL THE RECPs (A) DOWN OR (B) HORIZONTALLY ACROSS THE SLOPE. RECPs WILL UNROLL WITH APPROPRIATE SIDE AGAINST THE SOIL SURFACE. ALL RECPs MUST BE SECURELY FASTENED TO SOIL SURFACE BY PLACING STAPLES/STAKES/PINS IN APPROPRIATE LOCATIONS AS SHOWN IN THE STAPLE PATTERN GUIDE. ROLLMAX RECPs AND ECBs SHOULD UTILIZE STAPLE PATTERN C, TRMS AND VMAX MATERIALS SHOULD UTILIZE STAPLE PATTERN D.
4. THE EDGES OF PARALLEL RECPs MUST BE STAPLED WITH APPROXIMATELY 4" - 6" (10 - 15 CM) OVERLAP.
5. CONSECUTIVE RECPs SPLICED DOWN THE SLOPE MUST OVERLAPPED WITH THE UPSTREAM MAT ATOP THE DOWNSTREAM MAT (SHINGLE STYLE). THE OVERLAP SHOULD BE 4" - 6" (10 - 15 CM).
6. AT THE TERMINAL END, SECURE EACH MAT ACROSS THE WIDTH WITH A ROW OF STAPLES/STAKES/PINS SPACED AT S. IF EXPOSED TO FLOW, FOOT TRAFFIC, WIND UPLIFT OR OTHER DISRUPTION, TRENCH THE TERMINAL END IN AS SHOWN IN DETAIL.
7. FASTENERS SHOULD PROVIDE A MINIMUM OF TWENTY POUNDS OF PULLOUT RESISTANCE. SIX-INCH (10 CM) X ONE-INCH (2.5 CM) ELEVEN GAUGE STAPLES ARE TYPICALLY ADEQUATE. IN LOOSE SOILS, LONGER STAPLES MAY BE NECESSARY. TWIST PINS CAN PROVIDE THE GREATEST PULLOUT RESISTANCE. IN HARD OR ROCKY SOILS, STRAIGHT PINS MAY BY USED WHERE STAPLES OR TWIST PINS ARE REFUSED, PROVIDED THE MINIMUM PULLOUT REQUIREMENTS ARE MET.

SCALE: NTS

SCALE: NTS

SCALE: NTS

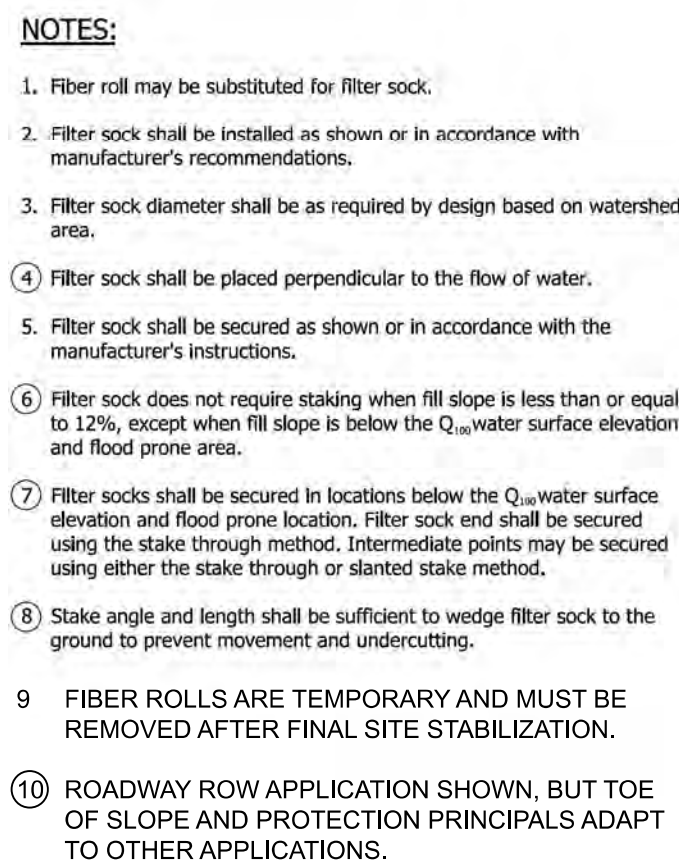

SCALE: NTS


[illegible]

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY:	ISSUE DATE:
	DRAWN BY:	DATE:
	CHECKED BY:	SOLICITATION NO.:
	SUBMITTED BY:	CONTRACT NO.:
	SIZE:	ANSI D

LEFT AND RIGHT ABUTMENT GUTTER REPLACEMENT
PATOKA LAKE DAM
SOUTH DUBOIS, DUBOIS COUNTY, INDIANA
P2: 514528; F: 2025

EROSION PREVENTION AND
SOIL CONTROL DETAILS

SHEET ID
CS502

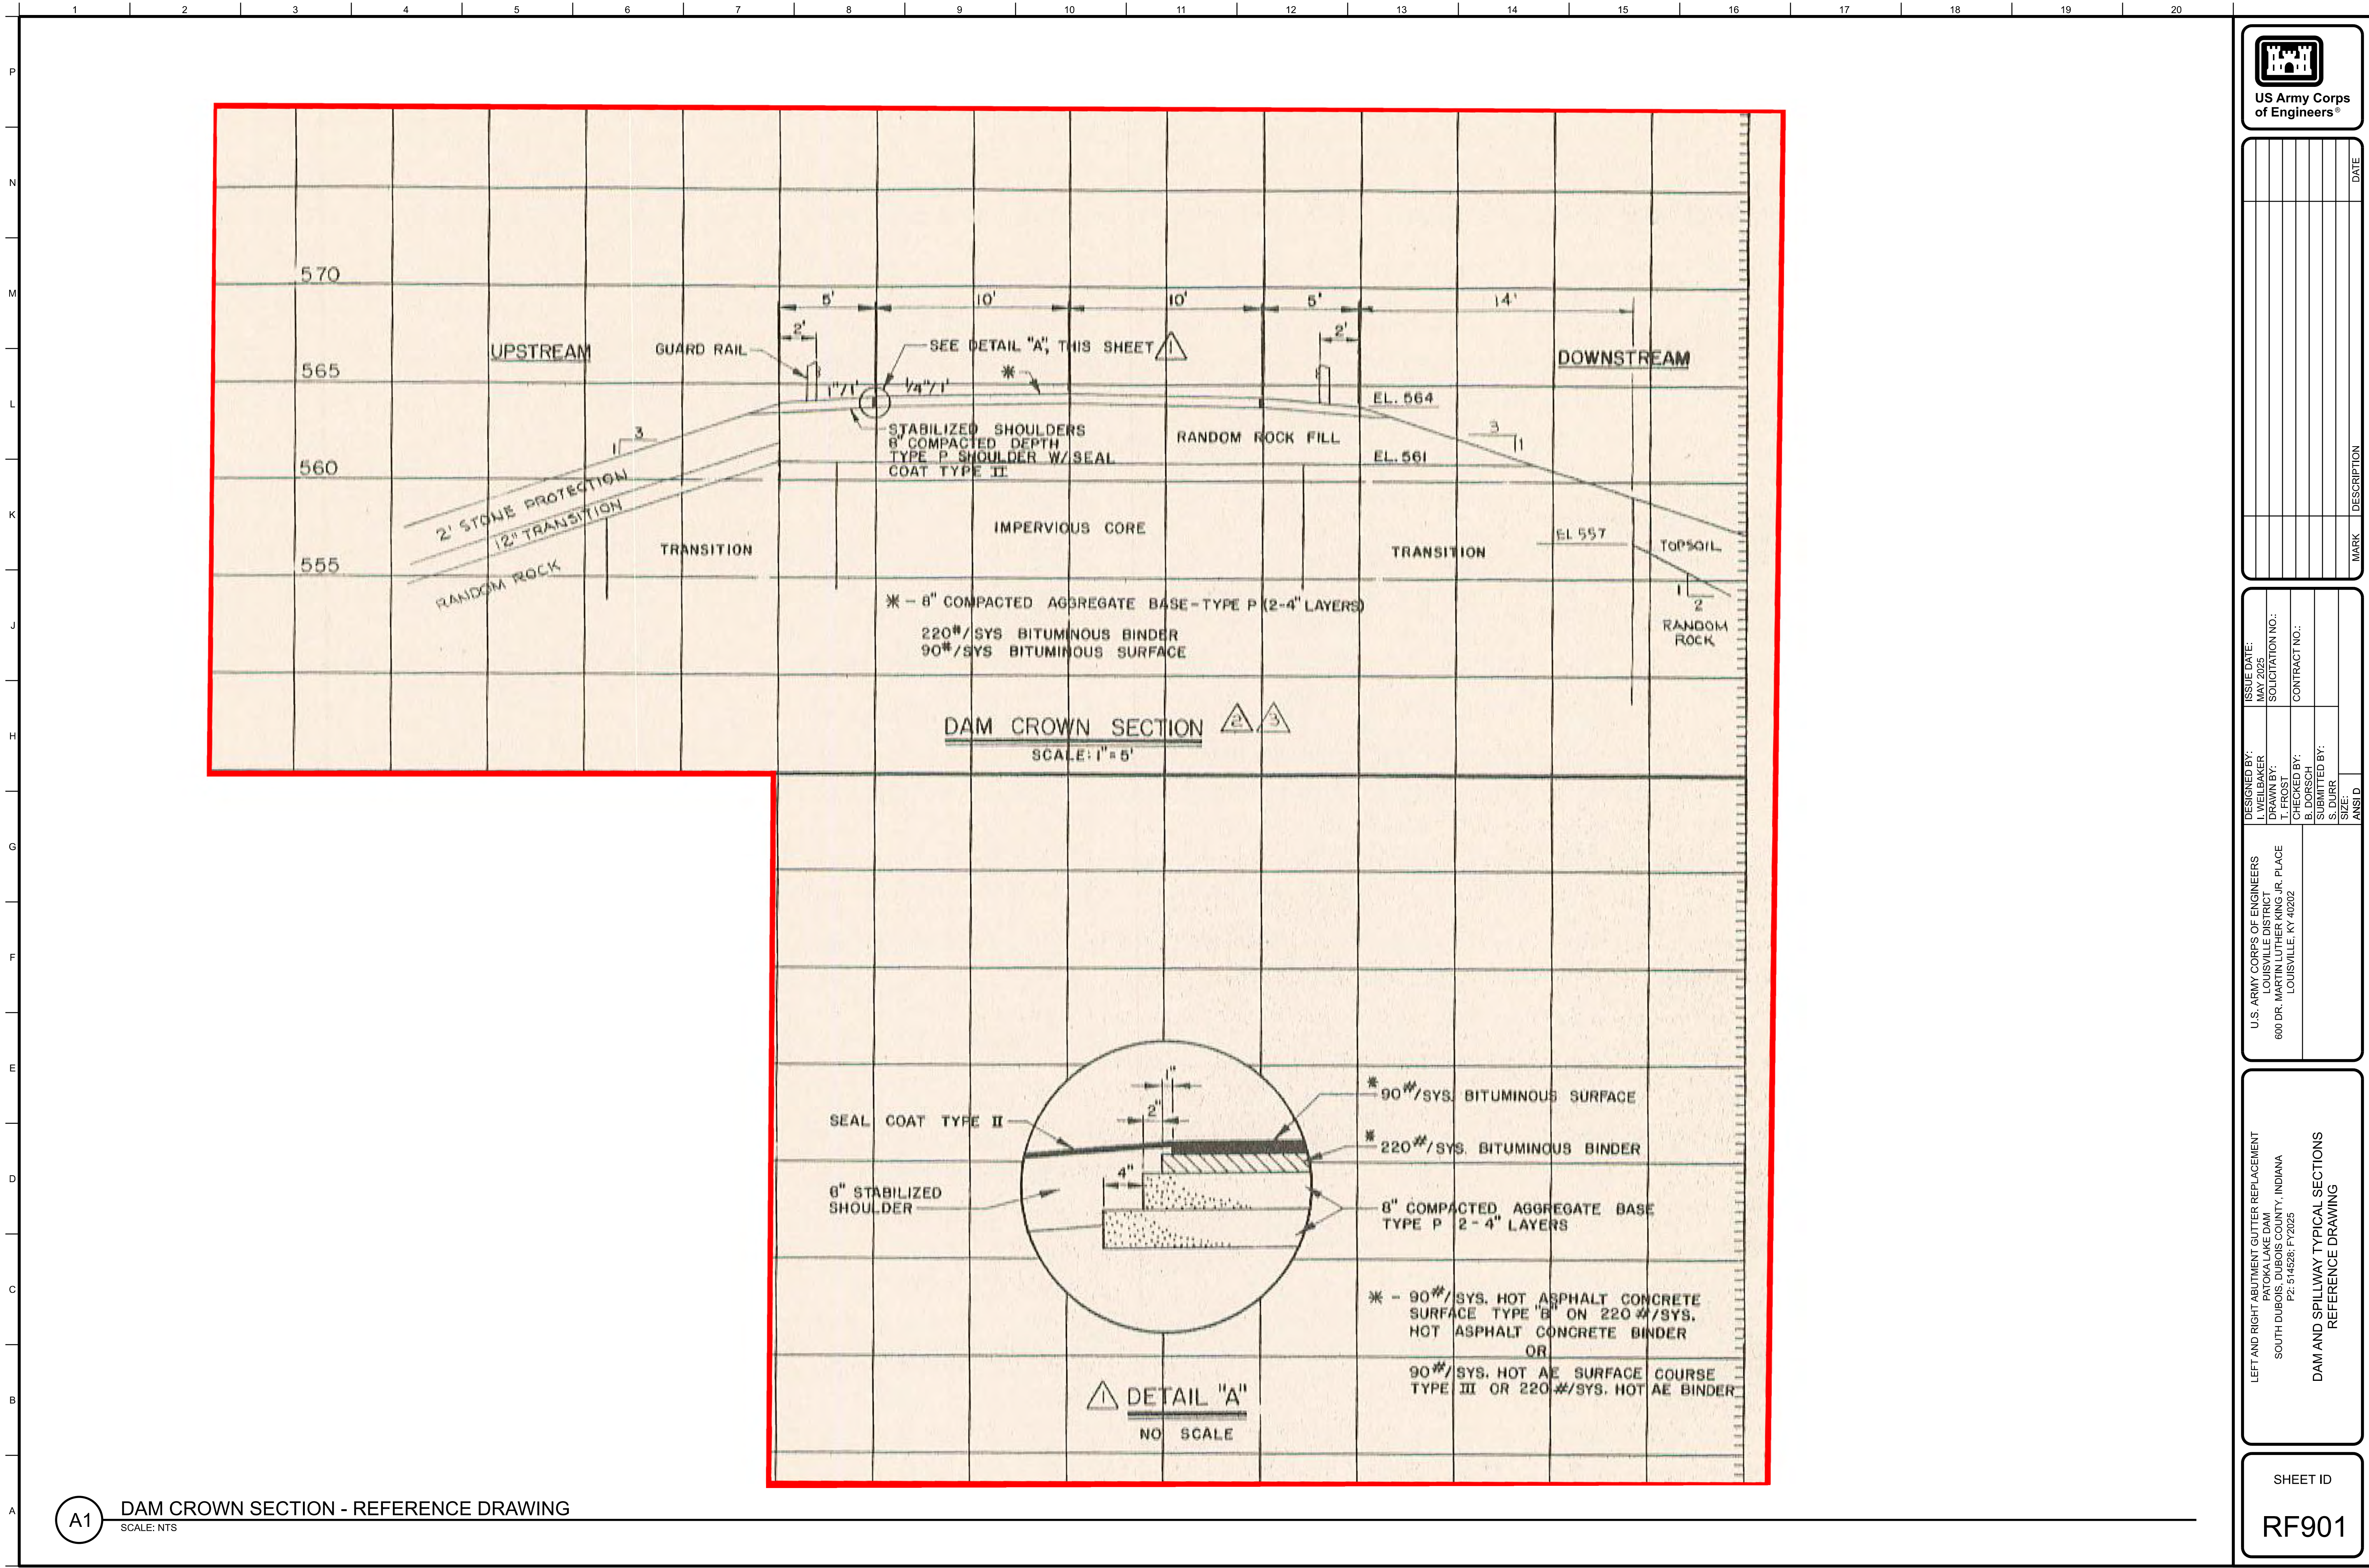

A1 DAM CROWN SECTION - REFERENCE DRAWING

SCALE: NTS

