

1/29/2025 4:01:42 PM

C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural\Local_chbroyd.rvt

FRANCIS MARION AND SUMTER NATIONAL FORESTS
USDA FOREST SERVICE

4931 BROAD RIVER ROAD, COLUMBIA, SC 29063



BUCK HALL RECREATION AREA
RECONSTRUCTION

1099 BUCK HALL LANDING RD., McCLELLANVILLE, SOUTH CAROLINA 29458



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

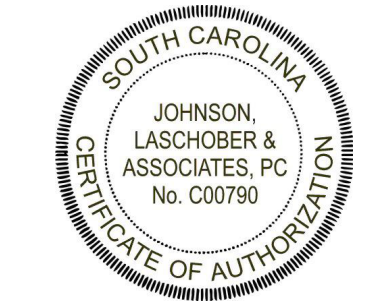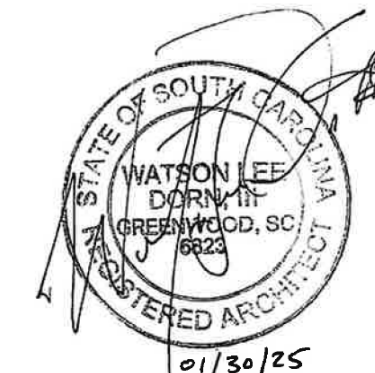

GENERAL NOTES:

THE GENERAL CONTRACTOR AND HIS SUB-CONTRACTORS SHALL BE REQUIRED TO VISIT THE PREMISES TO INSPECT EXISTING CONDITIONS, BECOME FAMILIAR WITH LOCAL CONDITIONS UNDER WHICH THE WORK IS TO BE PERFORMED AND CORRELATE PERSONAL OBSERVATIONS WITH REQUIREMENTS OF THE DRAWINGS.

ALL WORK PERFORMED SHALL BE IN STRICT COMPLIANCE WITH COUNTY REGULATIONS AND CODES, O.S.H.A. STANDARDS, THE CODE STANDARDS LISTED, EXECUTED IN ACCORDANCE WITH ACCEPTED INDUSTRY STANDARDS, AND CONFORM TO SPECIFIC REGULATIONS AS MANDATED BY THE OWNER AND THE ARCHITECT.

IT SHALL BE THE GENERAL CONTRACTOR'S RESPONSIBILITY TO INSURE THE PROCUREMENT OF ALL REQUIRED AND NECESSARY PERMITS. ALL CONTRACTORS SHALL OBTAIN NECESSARY AND APPLICABLE, CITY/COUNTY PERMITS, INSPECTIONS AND APPROVAL PRIOR TO THE COMMENCEMENT OF ANY WORK AND CERTIFICATE OF OCCUPANCY UPON COMPLETION OF PROJECT. CONTRACTOR SHALL FURNISH COPIES OF PERMITS, INSPECTIONS AND CERTIFICATES TO OWNER UPON REQUEST.

CONTRACTOR SHALL BE REQUIRED TO COORDINATE WORK SCHEDULE TO MINIMIZE DISRUPTION OF NORMAL ACTIVITIES AND TO AVOID INTERFERENCE WITH ADJACENT OPERATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TAKING ADEQUATE PRECAUTIONS TO PROTECT SURROUNDINGS, MATERIALS AND EXISTING FINISHES THROUGHOUT ALL PHASES OF CONSTRUCTION AREAS AND OCCUPIED OR PUBLIC AREAS TO BE MAINTAINED BY CONTRACTOR. DAMAGE TO EXISTING-TO-REMAIN CONSTRUCTION, MATERIALS OR EQUIPMENT TO BE RESTORED TO ORIGINAL CONDITION.

CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF TRASH AND DEBRIS FROM JOB SITE ON A DAILY BASIS. FINAL CLEAN-UP WITHIN SCOPE OF WORK.

GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF ALL RELATED TRADES AND VENDORS NECESSARY TO THE COMPLETION OF THE JOB ON A TIMELY BASIS.

DO NOT SCALE DRAWINGS. USE WRITTEN DIMENSIONS ONLY. SUBMIT TO ARCHITECT ANY DISCREPANCIES FOR CLARIFICATION

ALL WORK SHALL BE IN COMPLIANCE WITH THE INTERNATIONAL BUILDING CODE, GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, CURRENT EDITION OF NATIONAL ELECTRIC CODE, INTERNATIONAL PLUMBING, AND MECHANICAL CODE, RECOGNIZED INDUSTRY STANDARDS, CRAFTSMANSHIP STANDARDS IN THE AREA, ALL MANUFACTURERS RECOMMENDATIONS, AND ALL OTHER APPLICABLE CODES.

THE DESIGN PROFESSIONAL DOES NOT GUARANTEE THE PERFORMANCE OF THE PROJECT IN ANY RESPECT OTHER THAN THAT OUR PROFESSIONAL WORK AND JUDGEMENT RENDERED MEET THE STANDARDS OF CARE OF OUR PROFESSION.

THE LOCATION OF THE EXISTING UTILITIES AND STRUCTURES SHOWN HEREON ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE AND ACTUAL LOCATION OF SUCH, WHETHER SHOWN HEREON OR NOT, PRIOR TO ANY EXCAVATION ANY DAMAGES SHALL BE REPAIRED AT THE EXPENSE OF THE CONTRACTOR.

THE FLOOR ON BOTH SIDES OF A DOOR SHALL BE LEVEL AND SHALL HAVE THE SAME ELEVATION ON BOTH SIDES OF THE DOOR, FOR A DISTANCE ON EACH SIDE EQUAL TO THE WIDTH OF THE WIDEST SINGLE DOOR.

FIRE EXTINGUISHERS SHALL BE LOCATED PER THE REQUIREMENTS OF NFPA 10. THE SIZE SHALL BE A MINIMUM OF 2A-10BC AND SHALL BE INSTALLED AT A MAXIMUM OF 48" A.F.F. TO THE TOP OF THE HANDLE.

PROVIDE CONT. SOLID BLOCKING, AS REQUIRED, IN WALLS TO RECEIVE ACCESSORY ITEMS INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

HANDRAILS
TOILET ROOM ACCESSORIES
GRAB BARS
FIRE EXTINGUISHER CABINETS & BRACKETS
CABINETS AND SHELVES


CLEAN WALLS, DOORS, DOOR FRAMES, HANDRAILS, GUARDRAILS, ETC. PER MANUFACTURERS RECOMMENDATIONS PRIOR TO SEALING AND PAINTING.

REFER TO THE STRUCTURAL DRAWINGS FOR INFORMATION ON CONSTRUCTION AND CONTROL JOINTS IN CONCRETE SLABS AND CONCRETE AND MASONRY WALLS. SLAB JOINTS ARE SPECIFIED AND LOCATED ON THE STRUCTURAL DRAWINGS.


TEMPORARY SIGNS: PROVIDE SIGNS AS REQUIRED TO INFORM PUBLIC AND INDIVIDUALS SEEKING ENTRANCE TO PROJECT.
PROVIDE TEMPORARY, DIRECTIONAL SIGNS FOR CONSTRUCTION PERSONNEL AND VISITORS. MAINTAIN AND TOUCH UP SIGNS SO THEY ARE LEGIBLE AT ALL TIMES.

PHASING: THIS PROJECT IS BROKEN INTO TWO (2) PHASES.
PHASE ONE CONSISTS OF THE FOLLOWING BUILDINGS: BUILDING 100 - DAY USE RESTROOM BUILDING, BUILDING 200 - WELL HOUSE, BUILDING 300 - CAMPGROUND BATH HOUSE, BUILDING 400 - STORAGE BUILDING, BUILDING 500 - PICNIC PAVILION, AND BUILDING 700 - WELL HOUSE.
PHASE TWO CONSISTS OF THE FOLLOWING BUILDING: BUILDING 600 - CAMPGROUND BATH HOUSE.

PROJECT LOCATION MAP

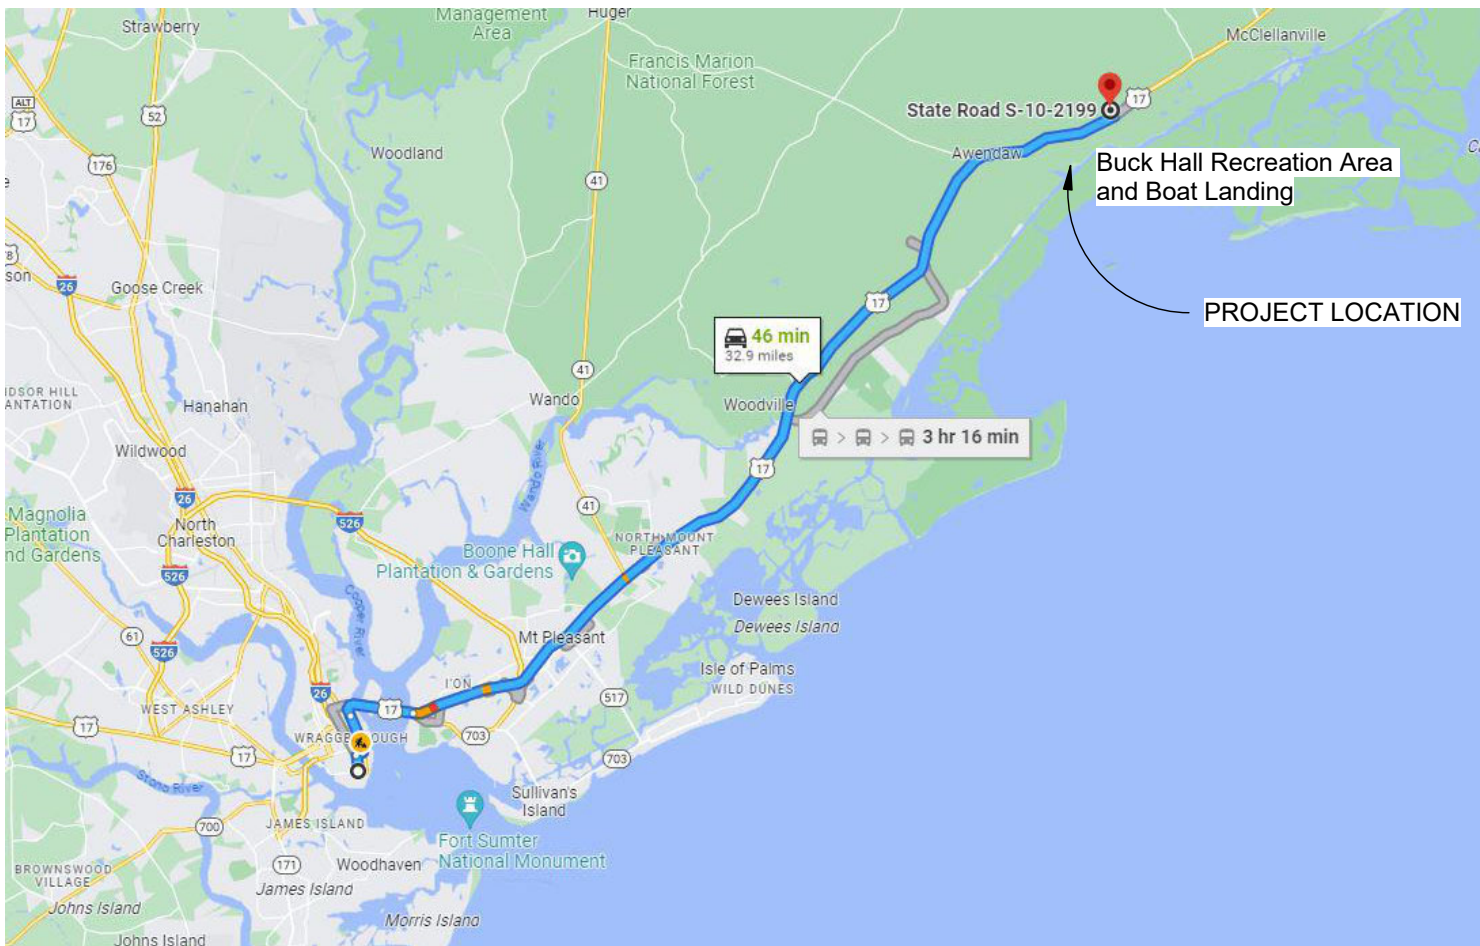

JOBSITE SIGN

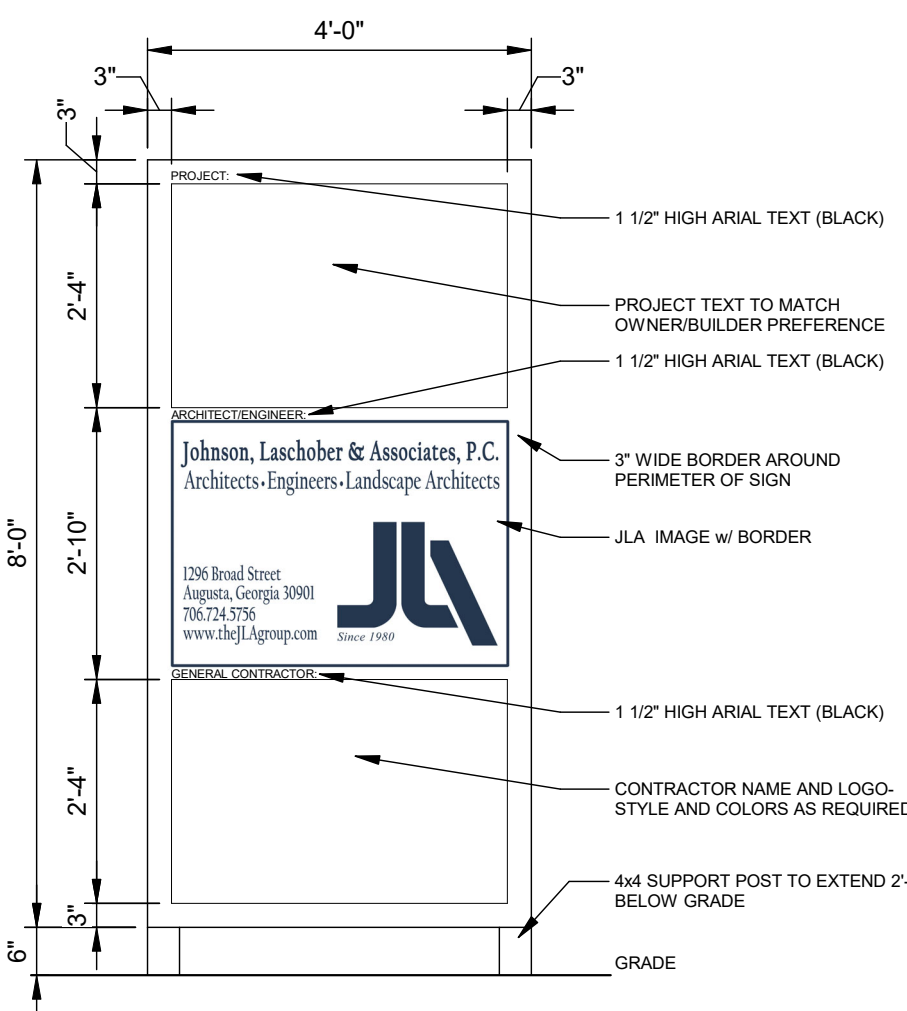

PROJECT TEAM

OWNER

USDA FOREST SERVICE
ANDREW HOLLIDAY, FOREST LANDSCAPE ARCHITECT
4931 BROAD RIVER ROAD
COLUMBIA, SC 29063
PHONE: 839-228-0239
EMAIL: andrew.holliday@usda.gov

OWNER'S REP/ 24 HOUR CONTACT

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
HERB GILLIAM, P.E.
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: hgilliam@theJLAgroup.com

ARCHITECT

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
WATSON LEE DORN III, NCARB, AIA
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: ldorn@theJLAgroup.com

CIVIL ENGINEER

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
WILL BUCHANAN, P.E.
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: wbuchanan@theJLAgroup.com

STRUCTURAL ENGINEER

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
MARK LORAH, P.E.
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: mlorah@theJLAgroup.com


MECHANICAL ENGINEER

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
MICHAEL N. BOOKER, P.E.
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: mbooker@theJLAgroup.com

ELECTRICAL ENGINEER

JOHNSON, LASCOBER AND ASSOCIATES, P.C.
HOWARD WAYT, P.E.
1296 BROAD STREET
AUGUSTA, GEORGIA 30901
PHONE: 706-724-5756
EMAIL: hwayt@theJLAgroup.com

GRAPHIC SYMBOLS

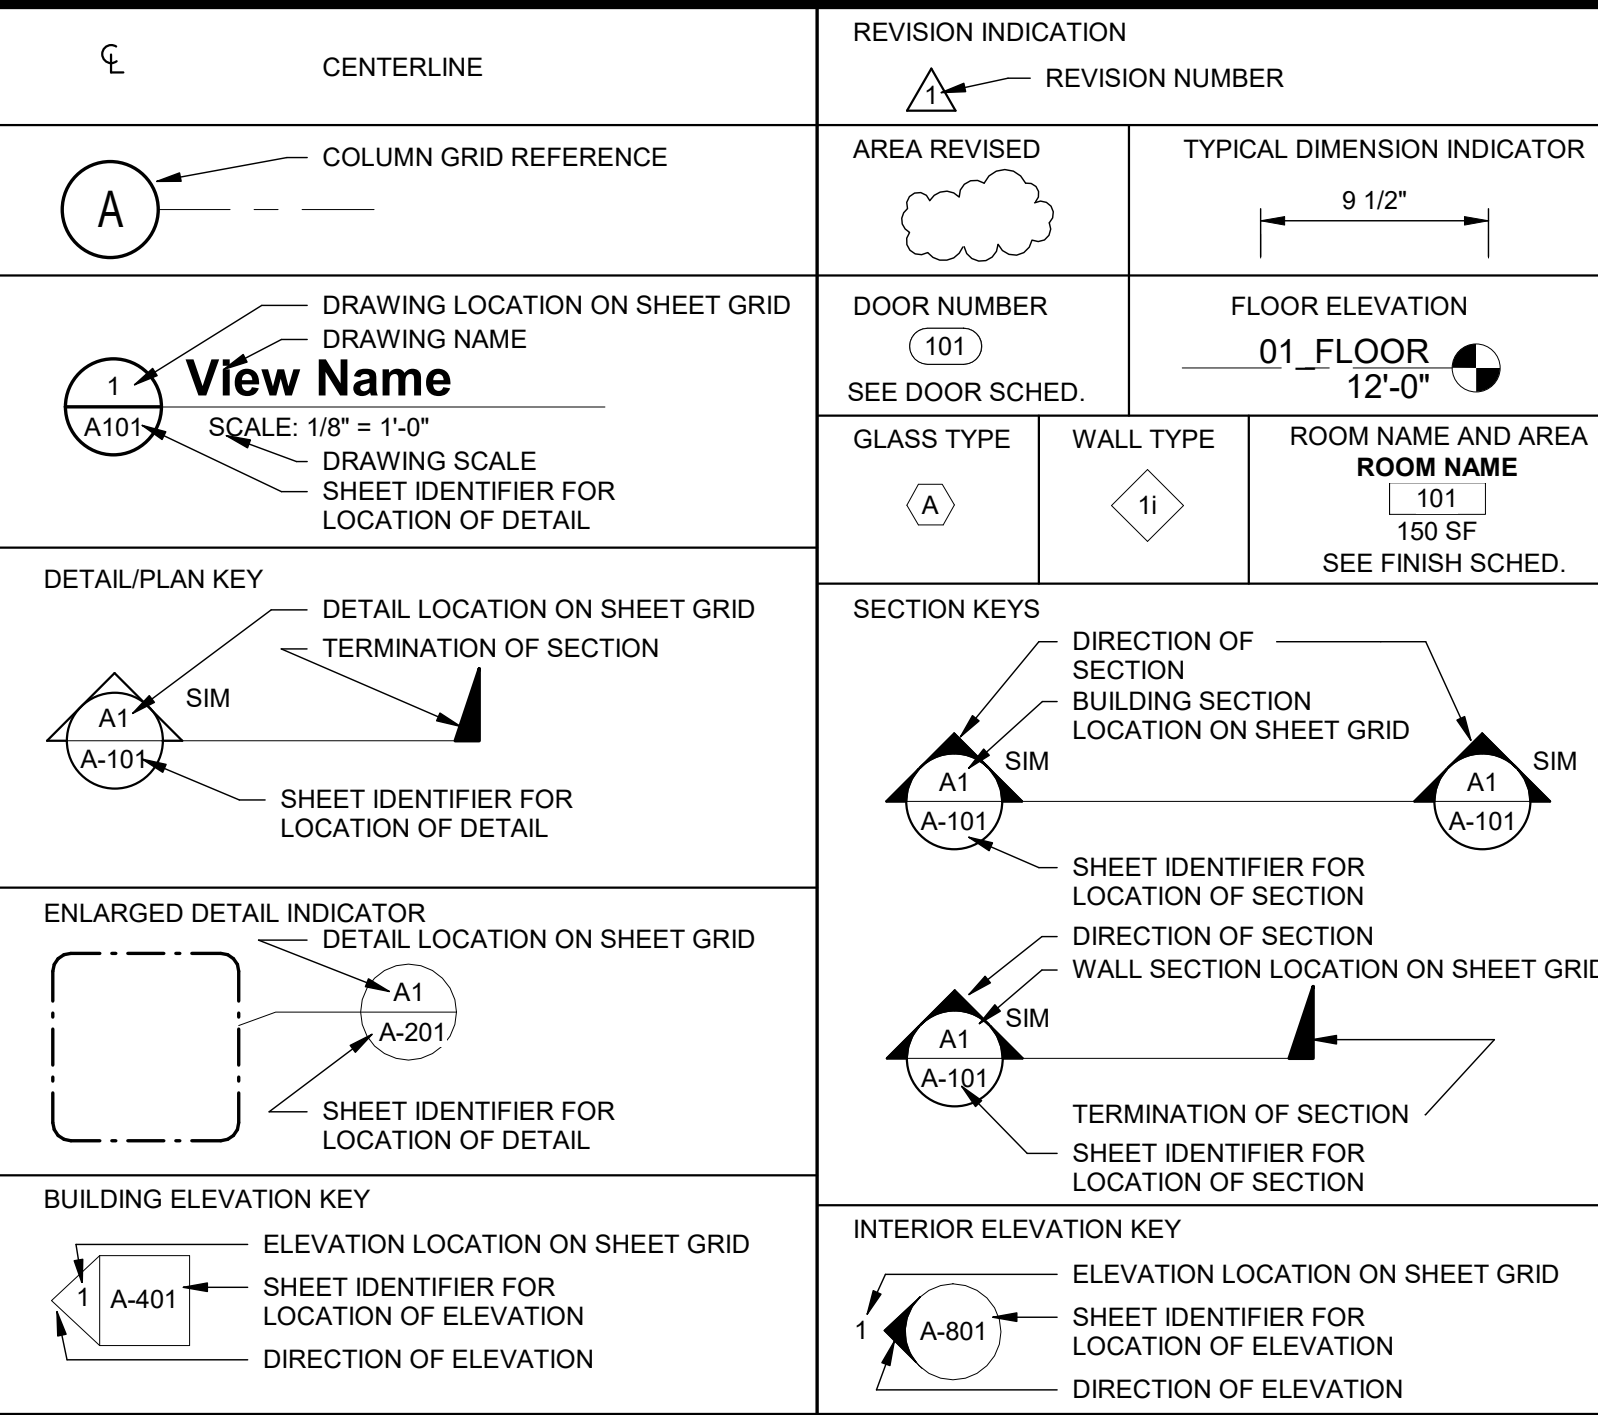

INDEX OF DRAWINGS

1	G-001	COVER SHEET
2	G-002	BUILDING INFORMATION / CODE ANALYSIS
3	A-101	ARCHITECTURAL
4	A-102	BUILDING 100 - DAY USE RESTROOM BUILDING - FLOOR PLAN, REFLECTED CEILING PLAN & ROOF PLAN
5	A-103	BUILDING 100 - DAY USE RESTROOM BUILDING - EXTERIOR ELEVATIONS
6	A-201	BUILDING 100 - DAY USE RESTROOM BUILDING - BUILDING SECTIONS
7	A-301	BUILDINGS 200/700 - WELL HOUSE - FLOOR PLAN, REFLECTED CEILING PLAN, SECTION & ELEVATIONS
8	A-302	BUILDINGS 300/600 - CAMPGROUND BATH HOUSE - FLOOR PLAN & REFLECTED CEILING PLAN
9	A-303	BUILDINGS 300/600 - CAMPGROUND BATH HOUSE - EXTERIOR ELEVATIONS
10	A-304	BUILDINGS 300/600 - CAMPGROUND BATH HOUSE - BUILDING SECTIONS
11	A-401	BUILDINGS 300/600 - ROOF PLAN
12	A-501	BUILDING 400 - STORAGE BUILDING - FLOOR PLAN, REFLECTED CEILING PLAN, SECTION & ELEVATIONS
13	A-901	BUILDING 500 - PICNIC PAVILION - FLOOR PLAN, RCP, ELEVATIONS & BUILDING SECTION
14	A-902	DOOR, WINDOW SCHEDULE, DETAILS
15	A-903	INTERIOR FINISH PLAN, SCHEDULE, NOTES, SPECIFICATIONS
16	A-904	TOILET ACCESSORIES, TOILET FIXTURES AND MOUNTING HEIGHTS
17	A-905	WALL SECTIONS
18	S-001	ROOF DETAILS
19	S-101	STRUCTURAL
20	S-201	GENERAL NOTES
21	S-301	BUILDING 100 - DAY USE RESTROOM BUILDING - FOUNDATION, SLAB AND FRAMING PLANS
22	S-401	BUILDINGS 200/700 - WELL HOUSE - FOUNDATION, SLAB AND FRAMING PLANS
23	S-501	BUILDINGS 300/600 - CAMPGROUND BATH HOUSE - FOUNDATION, SLAB AND FRAMING PLANS
24	S-601	BUILDING 400 - STORAGE BUILDING - FOUNDATION, SLAB AND FRAMING PLANS
25	S-701	BUILDING 500 - PICNIC PAVILION - FOUNDATION, SLAB AND FRAMING PLANS
26	S-801	CONCRETE SECTIONS AND DETAILS
27	S-901	SITE SIGNAGE CONCRETE SECTIONS AND DETAILS
28	P-001	MASONRY SECTIONS AND DETAILS
29	P-101	WOOD SECTIONS AND DETAILS
30	P-201	PLUMBING
31	P-301	PLUMBING GENERAL NOTES & LEGEND
32	P-601	BUILDING 100 - DAY USE RESTROOM BUILDING - PLUMBING PLANS
33	P-701	BUILDING 300/600 - CAMPGROUND BATH HOUSE - PLUMBING PLANS
34	M-001	PLUMBING SCHEDULES
35	M-101	PLUMBING DETAILS
36	M-201	PLUMBING RISER DIAGRAMS
37	M-301	HVAC GENERAL NOTES & LEGEND
38	M-501	BUILDING 100 - DAY USE RESTROOM BUILDING - HVAC PLAN
39	M-601	BUILDING 200/700 - WELL HOUSE - HVAC PLAN
40	E-001	BUILDING 300/600 - CAMPGROUND BATH HOUSE - HVAC PLAN
41	E-002	HVAC SCHEDULES
42	E-003	HVAC DETAILS
43	E-004	ELECTRICAL
44	E-005	ELECTRICAL NOTES AND SYMBOLS
45	E-101	ELECTRICAL SITE PLAN
46	E-201	ELECTRICAL SITE PLAN
47	E-301	ELECTRICAL SITE PLAN
48	E-401	ELECTRICAL SITE PLAN
49	E-501	ELECTRICAL SITE PLAN
50	E-601	BUILDING 100 - DAY USE RESTROOM BUILDING - POWER AND LIGHTING PLAN
51	E-701	BUILDING 200/700 - WELL HOUSE - POWER AND LIGHTING PLAN
52	E-801	BUILDING 300 - CAMPGROUND BATH HOUSE - POWER AND LIGHTING PLAN
53	E-901	BUILDING 400 - STORAGE BUILDING - POWER AND LIGHTING PLAN
		BUILDING 500 - PICNIC PAVILION - POWER AND LIGHTING PLAN
		ELECTRICAL SCHEDULES AND DETAILS
		ELECTRICAL SCHEDULES

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**


**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:
JLA
JOHNSON, LASCOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
COVER SHEET


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. G-001
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 1 OF 53

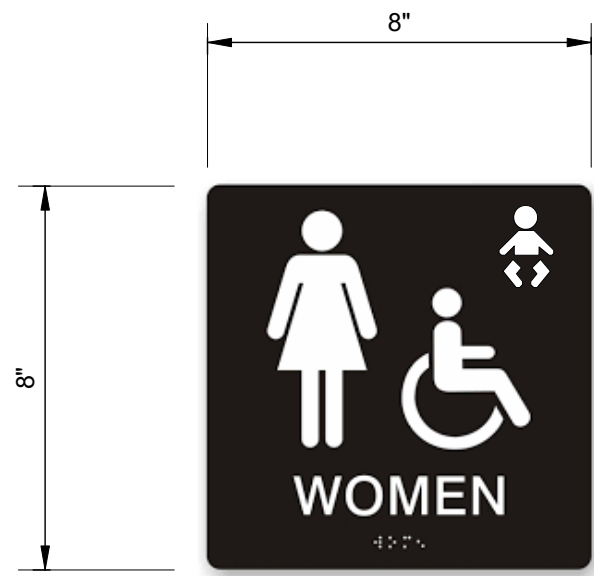


1 WOMEN W/ HANDICAP SYMBOL
G-002 SCALE: 3" = 1'-0"

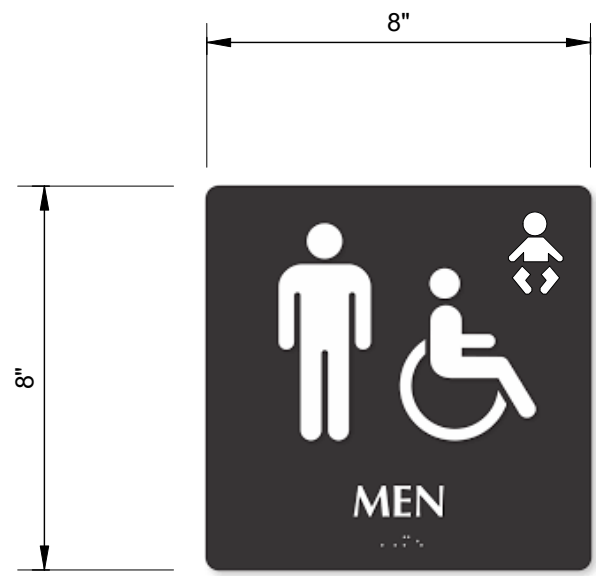


2 MEN W/ HANDICAP SYMBOL
G-002 SCALE: 3" = 1'-0"

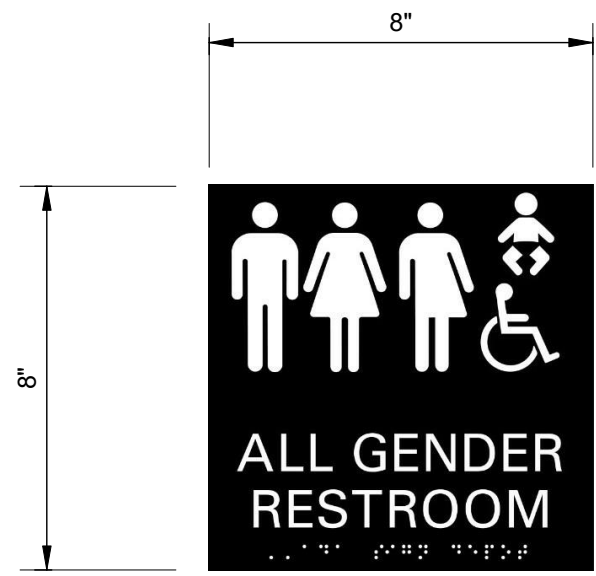

3 ALL GENDER RESTROOM SIGN
G-002 SCALE: 3" = 1'-0"

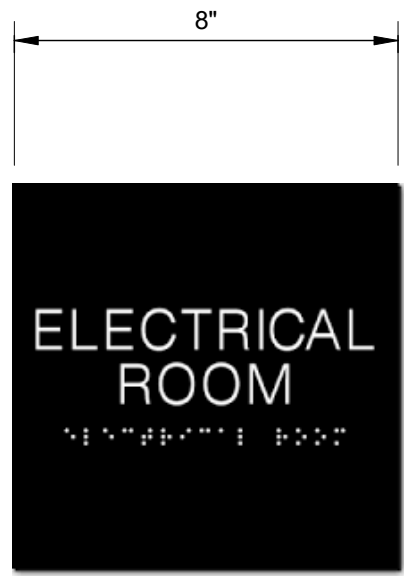

4 ELECTRICAL ROOM SIGN
G-002 SCALE: 3" = 1'-0"

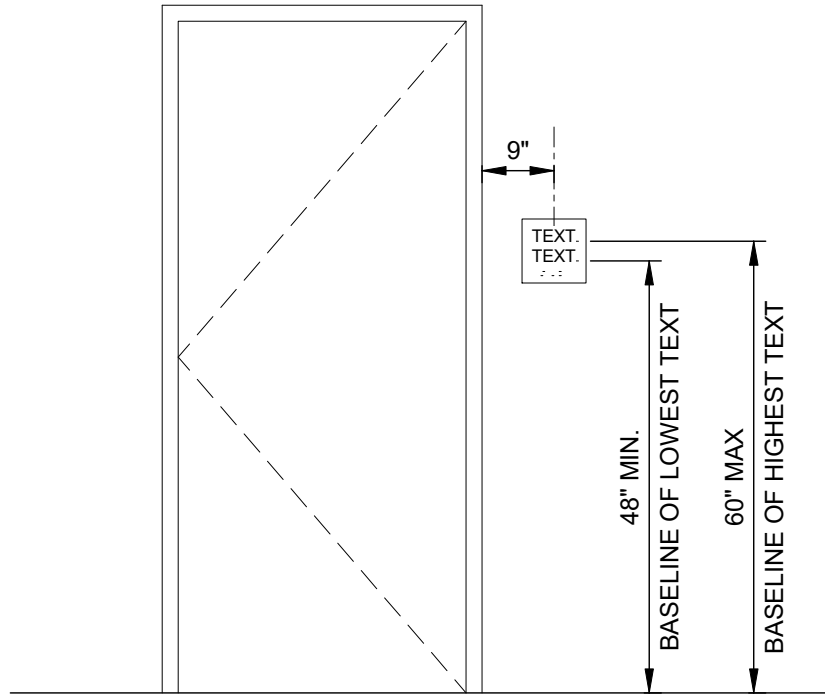

5 SIGN LOCATION DETAIL
G-002 SCALE: 1/2" = 1'-0"

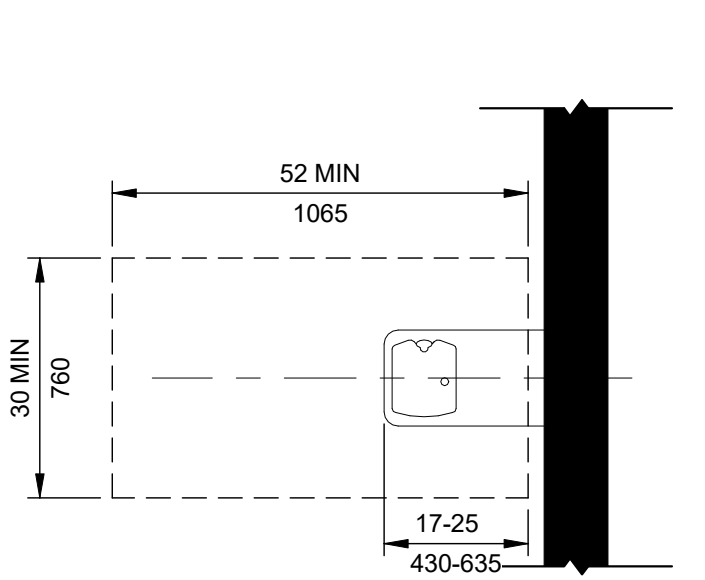


FIGURE 602.2.1(A)
CLEAR FLOOR SPACE AT WHEELCHAIR DRINKING FOUNTAINS

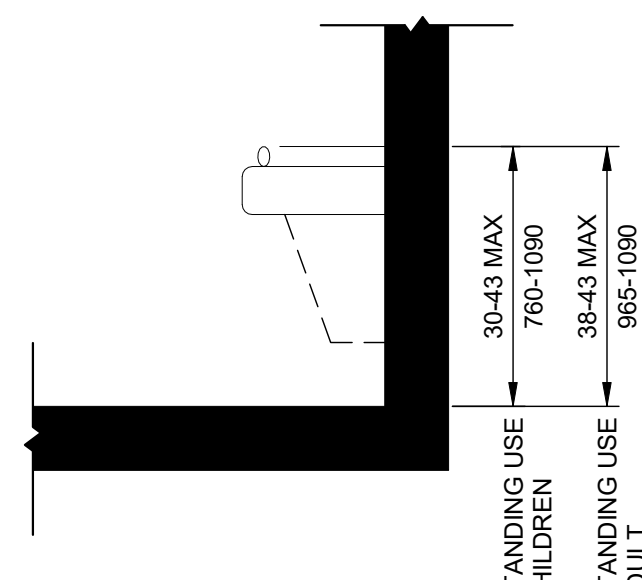


FIGURE 602.3.2
STANDING USE DRINKING FOUNTAIN SPOUT HEIGHT AND LOCATION


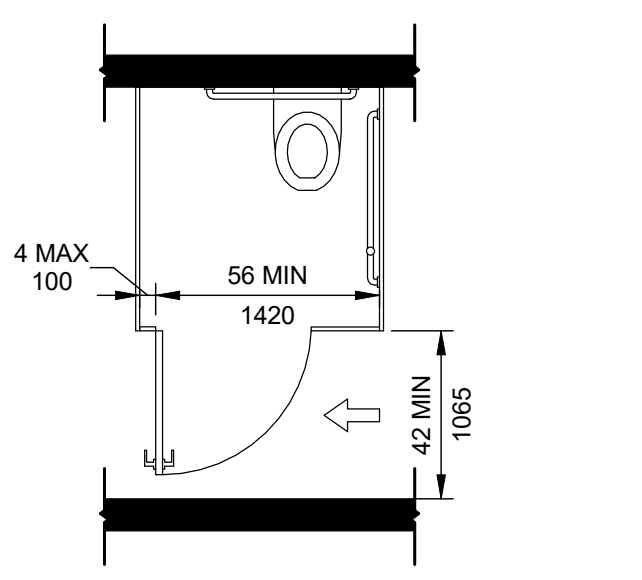


FIGURE 604.9.3.1(A)
WHEELCHAIR TOILET COMPARTMENT DOOR OPENING LOCATION - DOOR SWINGING IN ON FRONT WALL OF PARTITION

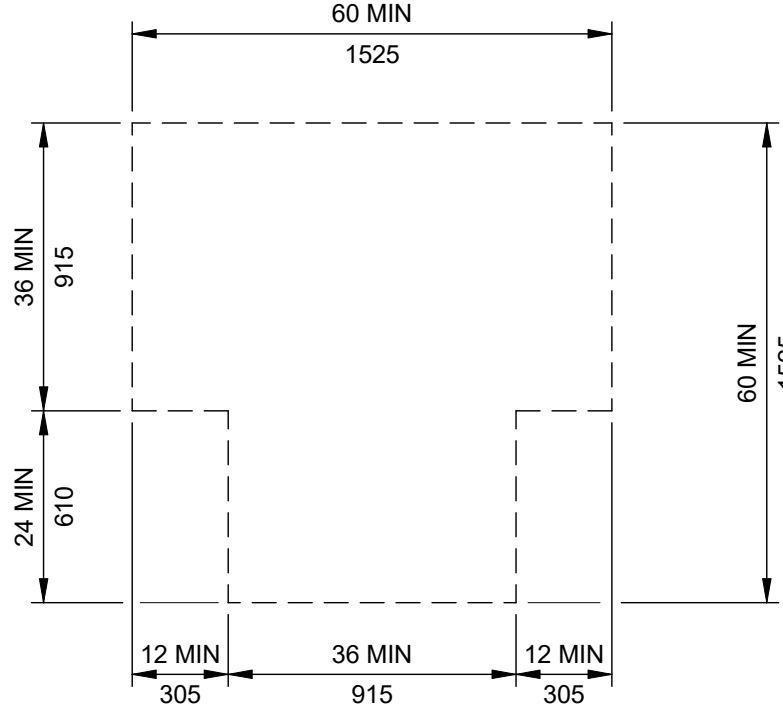

T-TURN OPTION

ABBREVIATIONS

<	ANGLE	BBD	BULLETIN BOARD	D	DRAIN	FS	FOREST SERVICE	MO	MASONRY OPENING	RD	ROOF DRAIN	TLB	TOWEL BAR
Cc	CENTERLINE	CAB	CABINET	DT	DRAIN TILE	BO	FURNISHED BY OTHERS	MAT	MATERIAL (S)	RDC	ROOF DRAIN CONDUCTOR	TLT	TOILET
Ch	CHANNEL	CPT	CARPET (ED)	DWR	DRAWER	FUR	FURRED (ING)	MAX	MAXIMUM	RFG	ROOFING	TME	TO MATCH EXISTING
d	PENNY	CB	CATCH BASIN	DWG	DRAWING	GA	GAGE, GAUGE	MECH	MECHANIC (AL)	RM	ROOM	TYP	TYPICAL
D	PERPENDICULAR	CK	CALK (ING) CAULK (ING)	DF	DRINKING FOUNTAIN	GALV	GALVANIZED	MED	MEDIUM	SFGL	ROUGH OPENING	UNF	UNFINISHED
Ø	DIAMETER	CLG	CERAMIC TILE	EXF	EXHAUST FAN	GC	GENERAL CONTRACTOR	MFL	(WALL)	SCH	SAFETY GLASS	UR	UNLESS NOTED OTHERWISE
ABV	ABOVE	CHBD	CHALKBOARD	ELEC	ELECTRIC (AL)	GLA	GLASS, GLAZING	MTL	METAL	SNT	SCHEDULE	UR	UNFINISHED
AFF	ABOVE FINISH FLOOR	CIRC	CIRCUMFERENCE	EWC	ELECTRIC WATER COOLER	GLULAM	GLUE LAMINATED WOOD BEAM	MIN	MINIMUM	STG	SEALANT	UR	UNFINISHED
ACC	ACCESS	CO	CLEAN OUT	EL	ELEVATION	GVL	GRAVEL	MIR	MIRROR	STG	SEATING	UIS	UNDERSIDE
AP	ACCESS PANEL	CLR	CLEAR (ANCE)	ELEV	ELEVATOR	MISC	MISCELLANEOUS	MR	MOP RECEPTOR	SEC	SECTION	VPB	VAPOR BARRIER
ACOUS	ACOUSTICAL	CMU	CONCRETE MASONRY UNIT	EMER	EMERGENCY	GYP. BD.	GYP. BOARD	MULL	MULLION	SSK	SERVICE SINK	VERT	VERTICAL
ACT	ACOUSTICAL TILE	CNR. BD.	CORNER BEAD	EQ	EQUAL	HDW	HARDWARE	HP	HIGH POINT	SHTH	SHEATHING	VIF	VERIFY IN FIELD
ADD	ADDENDUM	CFSSF	COLD FORMED STRUCTURAL	EQUIP	EQUIPMENT	HT	HIGH POINT	NRC	NOISE REDUCTION COEFFICIENT	SHT	SHEET	VIN	VINYL
ADH	ADHESIVE	CFSSM	COLD FORMED STRUCTURAL	EST	ESTIMATE	HC	HOLLOW CORE	NOM	NOMINAL	SIM	SIMILAR	VCT	VINYL COMPOSITION TILE
ADJ.	ADJACENT	EXH	EXHAUST	EXPD	EXPANDED	HM	HOLLOW METAL	NTS	NOT IN CONTRACT	SD	SOLID CORE	VB	VINYL BASE
ADJT	ADJUSTABLE	EB	EXPANSION BOLT	EXT	EXTERIOR	HK	HOOK (S)	OFD	OVERFLOW DRAIN	SPK	SPEAKER	VT	VINYL TILE
A/C	AIR CONDITIONING	EJ	EXPANSION JOINT	EXIST	EXISTING	HO	HORIZONTAL	OPNG	OPENING	SPEC	SPECIFICATION (S)	VWF	VINYL WALL FABRIC
ALT	ALTERNATE	EXPD	EXPANDED	EQ	EQUAL	INCL	INCLUDE (D) (ING)	OD	OUTSIDE DIAMETER	SQ	SQUARE	WSC	WAINSCOT
AL	ALUMINUM	EXH	EXHAUST	EQ	EQUAL	INSUL	INSULATE (D) (ION)	OP	OPPOSITE	SST	STAINLESS STEEL	WC	WATER CLOSET
ALUM	ALUMINUM	EXT	EXTERIOR	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STD	STANDARD	WPF	WATERPROOFING
ANC	ANCHOR, ANCHORAGE	F/CONC	FACE OF CONCRETE	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
AB	ANCHOR BOLT A	CON	CONCRETE	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
ANOD	ANODIZED	CONTR	CONTRACT (OR)	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
APPROX	APPROXIMATE	CJ	CONTROL JOINT	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
ARCH	ARCHITECT (URAL)	CG	CORNER GUARD	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
ASPH	ASPHALT	COR	CORNER	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BACC	BATH ACCESSORY	COUNTR	COUNTER	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BSMT	BASEMENT	CFL	COUNTERFLASHING	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BM	BEAM	CSC. BD.	CASING BEAD	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BRG	BEARING	CTSK	COUNTERSINK	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BRG PL	BEARING PLATE	DPR	DAMPENING	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BEL	BELOW	DL	DEAD LOAD	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BET	BETWEEN	DEM	DEMOLITION	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BEV	BEVELED	DMT	DEMOUNTABLE	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BIT	BITUMINOUS	BLOCK	BLOCK	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BOT	BOTTOM	BLKG	BLOCKING	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BRK	BRICK	BD	BOARD	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BLDG	BUILDING	BS	BOTH SIDES	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH
BUR	BUILT UP ROOFING	BW	BOTH WAYS	EQ	EQUAL	INT	INTERIOR	OD	OUTSIDE DIAMETER	STA	STATION	WWM	WELDED WIRE MESH

CODE ANALYSIS				
MINIMUM STATE ADOPTED STANDARD CODES				
IBC - INTERNATIONAL BUILDING CODE		2021 EDITION		
IFC - INTERNATIONAL FIRE CODE		2021 EDITION		
IPC - INTERNATIONAL PLUMBING CODE		2021 EDITION		
IMC - INTERNATIONAL MECHANICAL CODE		2021 EDITION		
NATIONAL ELECTRICAL CODE - NFPA 70		2020 EDITION		
IFGC - INTERNATIONAL FUEL GAS CODE		2021 EDITION		
ASHRAE - 90.1		2019 EDITION		
ABAAS ARCHITECTURAL BARRIERS ACT (ABA) STANDARDS		2015 EDITION		
NFPA 101 - LIFE SAFETY CODE		2020 EDITION		
CONSTRUCTION NARRATIVE				
BUCK HALL RECREATION AREA: All architectural construction shall comply with the requirements of the US Forest Service's Southern Region Design and Construction Standards for Southern Region Facilities as the governing document, the International Building Code (IBC) 2021, the International Energy Conservation Code (IECC) 2009, and in accordance with ASCE 24 Flood Resistant Design and Construction. This construction project has been broken into 2 phases. Phase 1 will provide six (6) new vertical structures constructed in the recreation area as follows: Day-Use Bath House (918 SF), Two Well House Buildings (135 SF each), Phase 1 Campground Bath House Building (1760 SF), Storage Building (396 SF), and Picnic Shelter (781 SF). Phase 2 will provide one (1) new vertical structure in the recreation area as follows: Phase 2 Campground Bath House Building (1760 SF). The buildings will be constructed with CMU walls, wood framed roof systems, and standing seam metal roofing.				
REVIEW PER DESIGN				
Day-Use Bath House	Well House (Buildings 200 & 700)	Campground Bath House (Phase 1 & Phase 2)	Storage	Picnic Shelter
OCCUPANCY TYPE (IBC CHAPTER 3)				
IBC <u>U</u>	IBC <u>U</u>	IBC <u>U</u>	IBC <u>S-1 (or U)</u>	IBC <u>A-3</u>
TYPE OF CONSTRUCTION (IBC CHAPTER 6)				
IBC <u>IIB</u>	IBC <u>IIB</u>	IBC <u>IIB</u>	IBC <u>IIB</u>	IBC <u>IIB</u>
BUILDING FLOOR AREA ALLOWED PER FLOOR (IBC TABLE 506.2)				
ALLOWED U: 8,500 SF	ALLOWED U: 8,500 SF	ALLOWED U: 8,500 SF	ALLOWED S-1: 17,500 SF	ALLOWED A-3: 9,500 SF
BY DESIGN: 918 SF	BY DESIGN: 135 SF	BY DESIGN: 1,760 SF	BY DESIGN: 396 SF	BY DESIGN: 781 SF
BUILDING HEIGHT (IBC TABLE 504.3 & 504.4)				
HEIGHT ALLOWED		A-3 = 55'-0" & 2 STORIES		S-1 = 55'-0" & 2 STORIES
HEIGHT BY DESIGN (Max)		20'-10" Top of highest ridge & 1 STORY		
SPRINKLER REQUIRED (IBC CHAPTER 9, SECTION 903.2)				
YES		NO		X LESS THAN 300 OCCUPANTS
SPRINKLER PROVIDED: YES <u> </u> NO <u> X </u>				
OCCUPANT LOAD (IBC SECT. 1004 & TABLE 1004.5)				
GROUP A-3: Unconcentrated Assembly @ 15 net SF/Occ				
GROUP S-1: Accessory storage areas @ 300 gross SF/Occ				
GROUP U: Locker Room @ 50 gross SF/Occ				
Day-Use Bath House	Well House	Campground Bath House	Storage	Picnic Shelter
918 SF/50 = 19 Occ	135 SF/50 = 3 Occ	1,760 SF/50 = 36 Occ	396 SF/300 = 2 Occ	781 SF/15 = 52 Occ
OCCUPANT LOAD (FSORAG):				
Phase 1 DAY-USE AREA:		35 Parking spaces + 30 Trailer spaces = 65 spaces @ 2.5 PAOT/Space = 163 Occupants		
Phase 1 CAMPGROUND:		25 Camp sites @ 5 PAOT = 125 Occupants		
Phase 2 CAMPGROUND:		23 Camp sites @ 5 PAOT = 115 Occupants		
REQUIRED MEANS OF EGRESS				
PER IBC 1005.3.2: Opening Width in Inches divided by 0.2 = Opening capacity				
EGRESS CAPACITY (MINIMUM 34" PROVIDED): 34 / .2 = 170 OCCUPANTS				
PER IBC 1006.2.1, NUMBER OF EXITS REQUIRED = 1				
TRAVEL DISTANCES				
COMMON PATH (IBC TABLE 1006.2.1)	A = 75 FT		S-1 = 100 FT	U = 100 FT
DEAD END (IBC 1020.4)	20 FT			
TRAVEL DISTANCE (IBC 1017.2)	A = 200 FT		S-1 = 200 FT	U = 300 FT
CORRIDOR FIRE-RESISTANCE RATING (IBC TABLE 1020.2)	REQUIRED = 0 HR		PROVIDED = 0 HR	
FIRE RESISTANCE RATING REQUIRED (IBC TABLE 601, 602)				
STRUCTURAL FRAME	IBC <u>0</u> HR			
**including columns, girders and trusses				
BEARING WALLS				
EXTERIORS	IBC <u>0</u> HR			
INTERIORS	IBC <u>0</u> HR			
NONBEARING WALLS & PARTITIONS				
EXTERIORS	IBC <u>0</u> HR			
INTERIORS	IBC <u>0</u> HR			
FLOOR CONSTRUCTION				
**including supporting beams & joists		IBC <u>0</u> HR		
ROOF CONSTRUCTION				
**including supporting beams & joists		IBC <u>0</u> HR		
<u>PLUMBING FIXTURES</u>				
TOILETS:				
FOREST SERVICE HANDBOOK - Recreation Site Handbook - Planning & Design of Developed Recreation Sites & Facilities				
(Per FSH 2309.13 Chapter 10 13.1.5) 1 toilet per 35 PAOT* (* = recommended rule)				
PHASE 1 Day-Use @ 163 PAOT / 35 = 5 required*		Provided 4 All-Gender restrooms		
(* = directed to provide 4 All-Gender restrooms)				
PHASE 1 25 Sites - Campground Bath House @ 125 PAOT / 2 = 63 male & 63 female = 4 required*		Provided 3 male 3 female & 2 All-Gender Restrooms		
(* = directed to provide 6 in multi-occupant restrooms & 2 All-Gender Restrooms)				
PHASE 2 23 Sites - Campground Bath House @ 115 PAOT / 2 = 58 male & 58 female = 4 required*		Provided 3 male 3 female & 2 All-Gender Restrooms		
(* = directed to provide 6 in multi-occupant restrooms & 2 All-Gender Restrooms)				
LAVATORIES:				
(Per IBC 2902.1 for Assembly - Museum, Lecture Hall, Libraries,...) 1 per 125 Male & 1 per 65 Female				
PHASE 1 Day-Use @ 163 PAOT / 2 = 82 Male & 82 Female = 1 male required & 2 female required		Provided 4 All-Gender restrooms		
PHASE 1 Campground Bath House @ 125 PAOT / 2 = 63 Male & 63 Female = 1 male required & 1 female required		Provided 3 male 3 female & 2 All-Gender Restrooms		
All-Gender Restrooms				
PHASE 2 Campground Bath House @ 115 PAOT / 2 = 58 Male & 58 Female = 1 male required & 1 female required		Provided 3 male 3 female & 2 All-Gender Restrooms		
All-Gender Restrooms				
DRINKING FOUNTAIN:				
(Per IBC 2902.1 for Assembly - Museum, Lecture Hall, Libraries,...) 1 per 500				
PHASE 1 Day-Use @ 163 PAOT / 500 = 1 required		2 Provided		
PHASE 1 Campground Bath House @ 125 PAOT / 500 = 1 required		2 Provided		
PHASE 2 Campground Bath House @ 115 PAOT / 500 = 1 required		2 Provided		
SERVICE SINKS:				
(Per IBC 2902.1 for Assembly - Museum, Lecture Hall, Libraries,...) 1 per occupied building				
PHASE 1 Day-Use = 1 required		1 Provided		
PHASE 1 Campground Bath House = 1 required		1 Provided		
PHASE 2 Campground Bath House = 1 required		1 Provided		



R-08 Southern Region

STAMPS, LOGOS, AND SEALS

STATE OF SOUTH CAROLINA
WATSON LEE
DRYVILL
(GREENWOOD, SC)
REGISTERED ARCHITECT
01/30/25

SOUTH CAROLINA
JOHNSON, LASCHNER & ASSOCIATES, P.C.
No. C00790
CERTIFICATE OF AUTHORIZATION

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME

BUCK HALL RECREATION AREA RECONSTRUCTION

FRANCIS MARION NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 1244522F0051

PREPARED BY:

JLA

JOHNSON, LASCHNER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

BUILDING INFORMATION / CODE ANALYSIS


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. G-002
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 2 OF 53



1. PERSONNEL DOORS SHALL HAVE A 3'-4 1/2" W X 9'-4 3/8" H M.O.
2. STOREFRONT WINDOWS SHALL HAVE A 3'-4 1/2" W X 2'-8 3/8" M.O. w/BOT @ 6'-8" AFF.
3. FLOOD VENTS w/ MASONRY TRIM AND SLEEVE KIT 16'-1 1/2" W X 3'-8 3/8" M.O. w/BOT @ 8" AFF. SEE ELEVATIONS FOR EXTERIOR WALL
4. 10000 BTU (4 INT) 10000 BTU (8 EXT) (R)
5. SEE E-DRAWINGS FOR LIGHTING FIXTURES. MOUNT EXTERIOR FIXTURES w/BOT @ 9'-0" AFF AND INTERIOR FIXTURES w/BOT @ 10'-0" AFF.
6. SEE A-903 FOR TOILET ACCESSORIES & FIXTURES.
7. VENT THROUGH ROOF (VTR) - INSTALL VTR AFTER STANDING SEAM METAL ROOF. COORDINATE EXACT ROOF PENETRATION LOCATION TO CENTER BETWEEN STANDING SEAMS. SEE 2/A-905.
8. 10" LLOUVER (IN GABLE) 2" x 150 w/BOT @ 14'-4" AFF CENTERED ON WALL. SEE M-DWGS.
9. SEE CIVIL DRAWINGS FOR EXACT FINISH FLOOR ELEVATION.
9. OCCUPANCY SENSORS WALL MOUNTED @ 9'-0" AFF. SEE E-DRAWINGS.
10. 6x6 EXHAUST GRILLE (4 EA.) (BOTTOM @ 12'-8" AFF. SEE 2/A-103 FOR LOCATION ABOVE TOILETS)
11. INSTALL SEALANT AT ALL WALL PENETRATIONS.
12. PHOTOCCELL & Wi-Fi MOUNTED @ 9'-0" AFF. SEE E-DWGS.
13. DRINKING FOUNTAIN. SEE P-DWGS



- EXTERIOR DIMENSIONS ARE FROM EDGE OF SLAB / FACE OF CMU WALL TO EDGE OF SLAB / FACE OF CMU WALL.
- INTERIOR DIMENSIONS ARE FROM FACE OF CMU WALL TO FACE OF CMU WALL


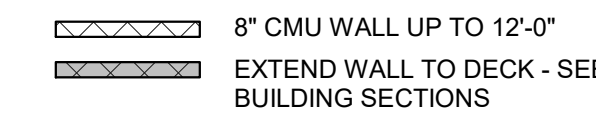


	ROOM NAME ← ROOM NAME & NUMBER - SEE FINISH SCHEDULE ON A-902
	TAG/TYPE ←
	FIRE EXTINGUISHER WITH BRACKET ←
	WALL TYPE - SEE A-904 ←
	STOREFRONT/WINDOW TYPE - SEE A-901 ←
	DOOR NUMBER - SEE DOOR SCHEDULE ON A-901 ←
	FD - FLOOR DRAIN SEE P-DWGS ←
	FC - FLOOR CLEANOUT SEE P-DWGS ←

	HARD CEILING 1x6 T&G WESTERN RED CEDAR
	CEMENT BOARD CEILING/ SOFFIT
	INDOOR LIGHT FIXTURE
	EXTERIOR LIGHT FIXTURE
	OCCUPANCY SENSOR

CEILING NOTES:

- A. CEILING HEIGHT IS NOTED ON RCP AND ROOM FINISH SCHEDULE.
- B. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT SIZES AND SPECIFICATIONS OF FIXTURES AND EQUIPMENT.
- C. ALL EXPOSED STRUCTURE AND ELECTRICAL CONDUITS TO BE PAINTED.

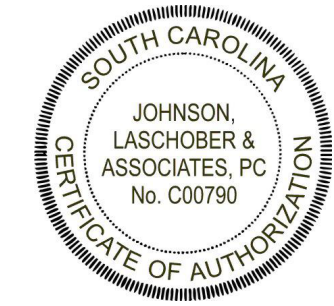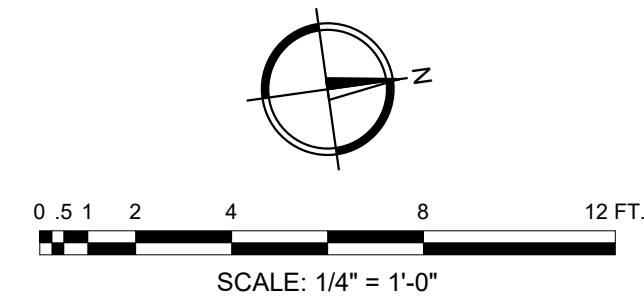

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051



JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAGroup.com


DRAWING TITLE

BUILDING 100 - DAY USE
RESTROOM BUILDING -
FLOOR PLAN, REFLECTED
CEILING PLAN & ROOF
PLAN


DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER EH	DRAWING SHEET NO.	
DRAWN CTH	A-101	
CHECKED WLD		
PROJECT NO. 3094.2201	SHEET	3 OF 53

1/29/2025 4:03:20 PM


C:\Revit\Local Projects\3094\2201_Buck Hall\3094\2201_Architectural-Local_cbrodyd.rvt

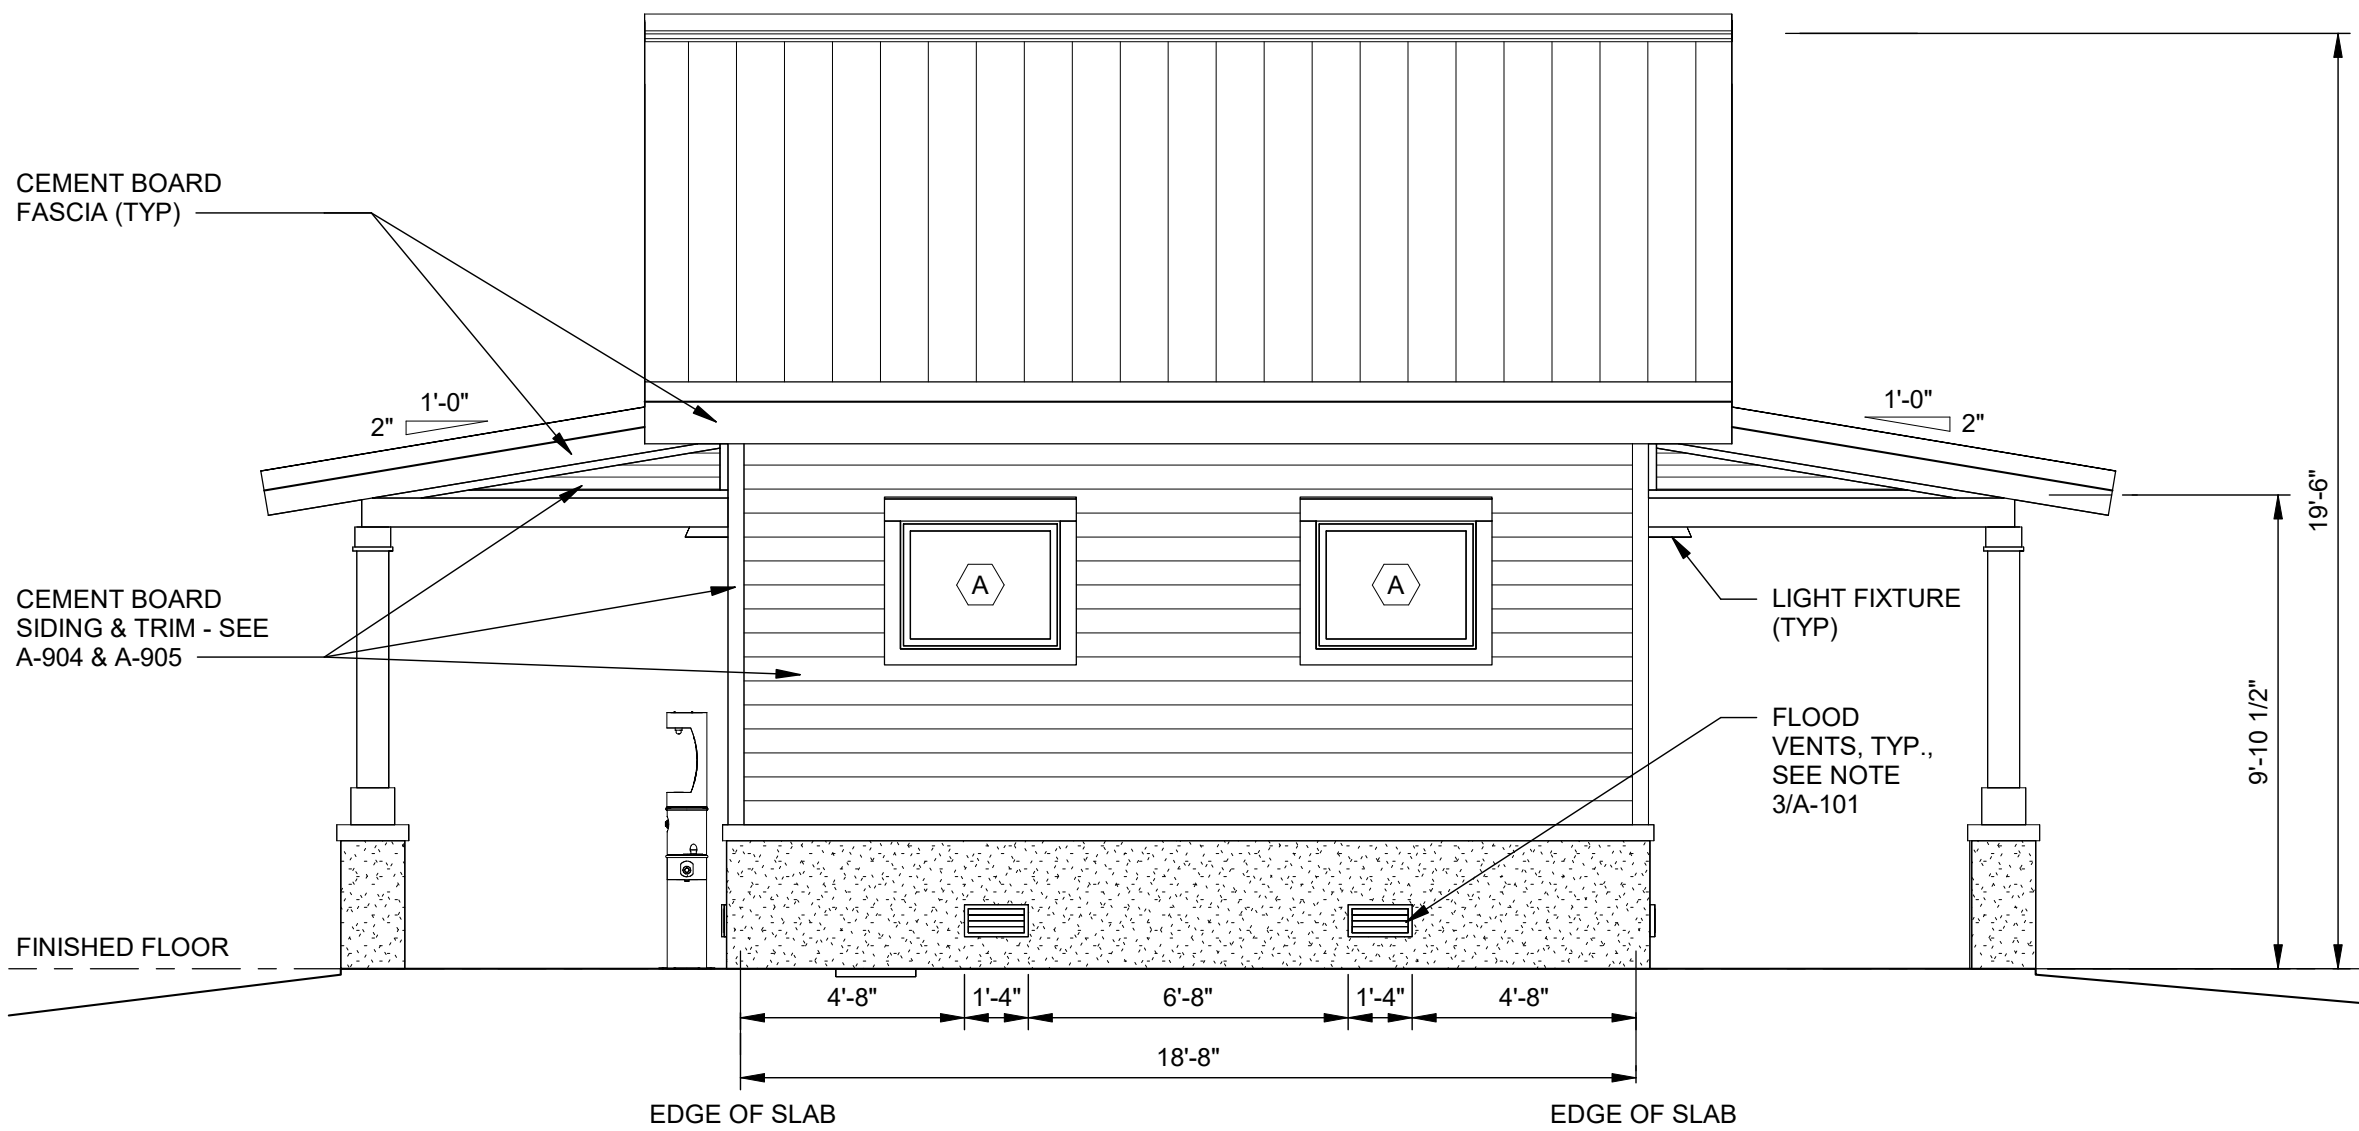


1
A-102
BUILDING 100 - WEST ELEVATION
SCALE: 1/4" = 1'-0"

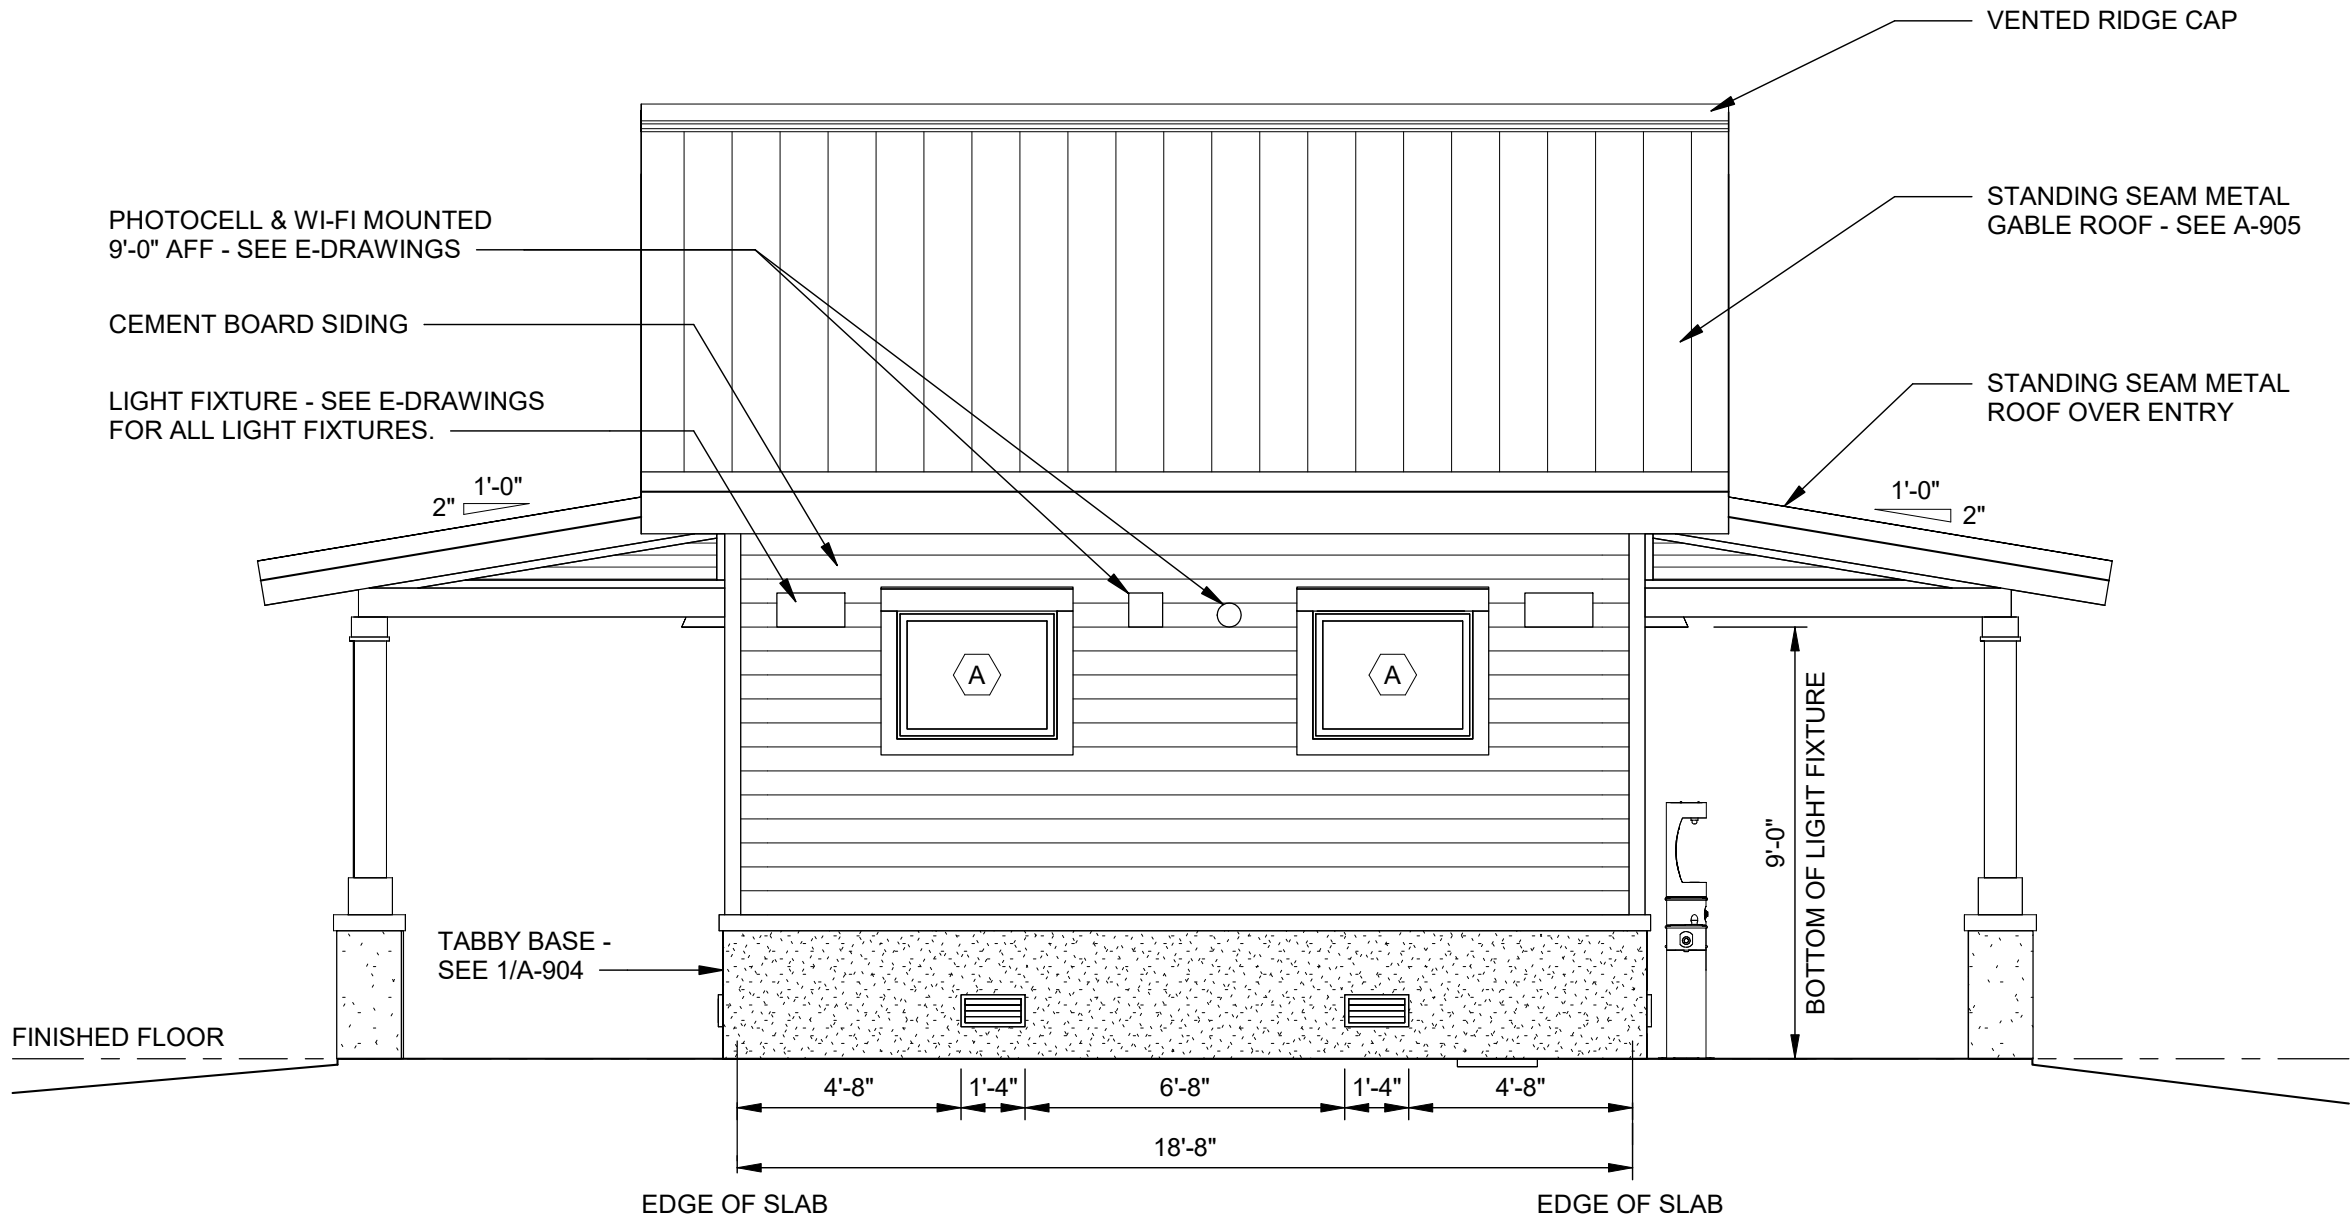

2
A-102
BUILDING 100 - EAST ELEVATION
SCALE: 1/4" = 1'-0"

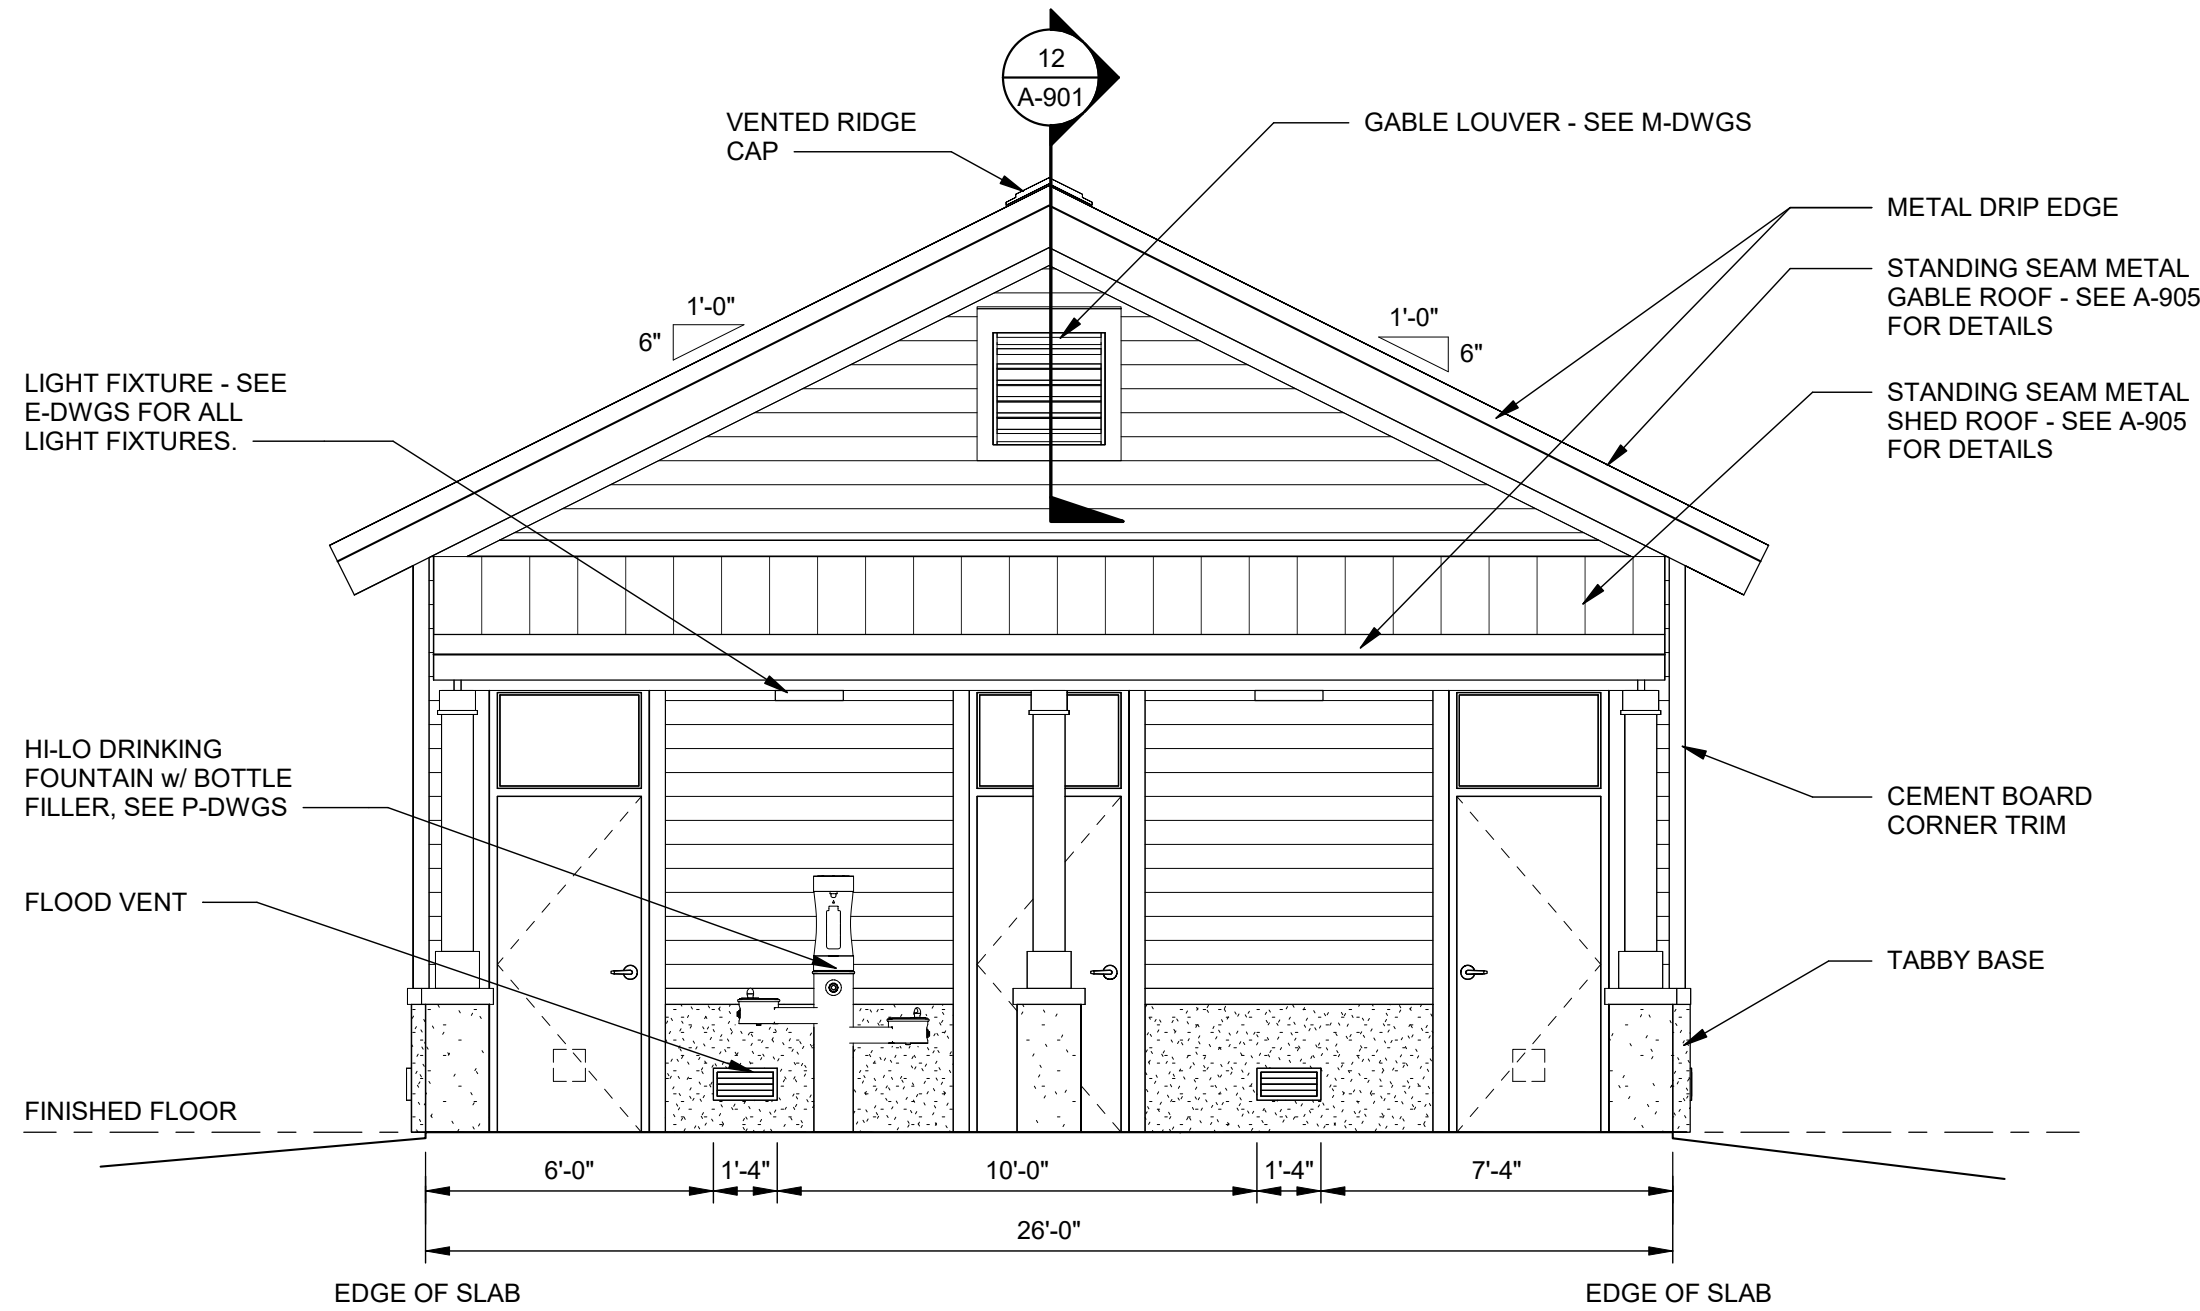

3
A-102
BUILDING 100 - NORTH ELEVATION
SCALE: 1/4" = 1'-0"

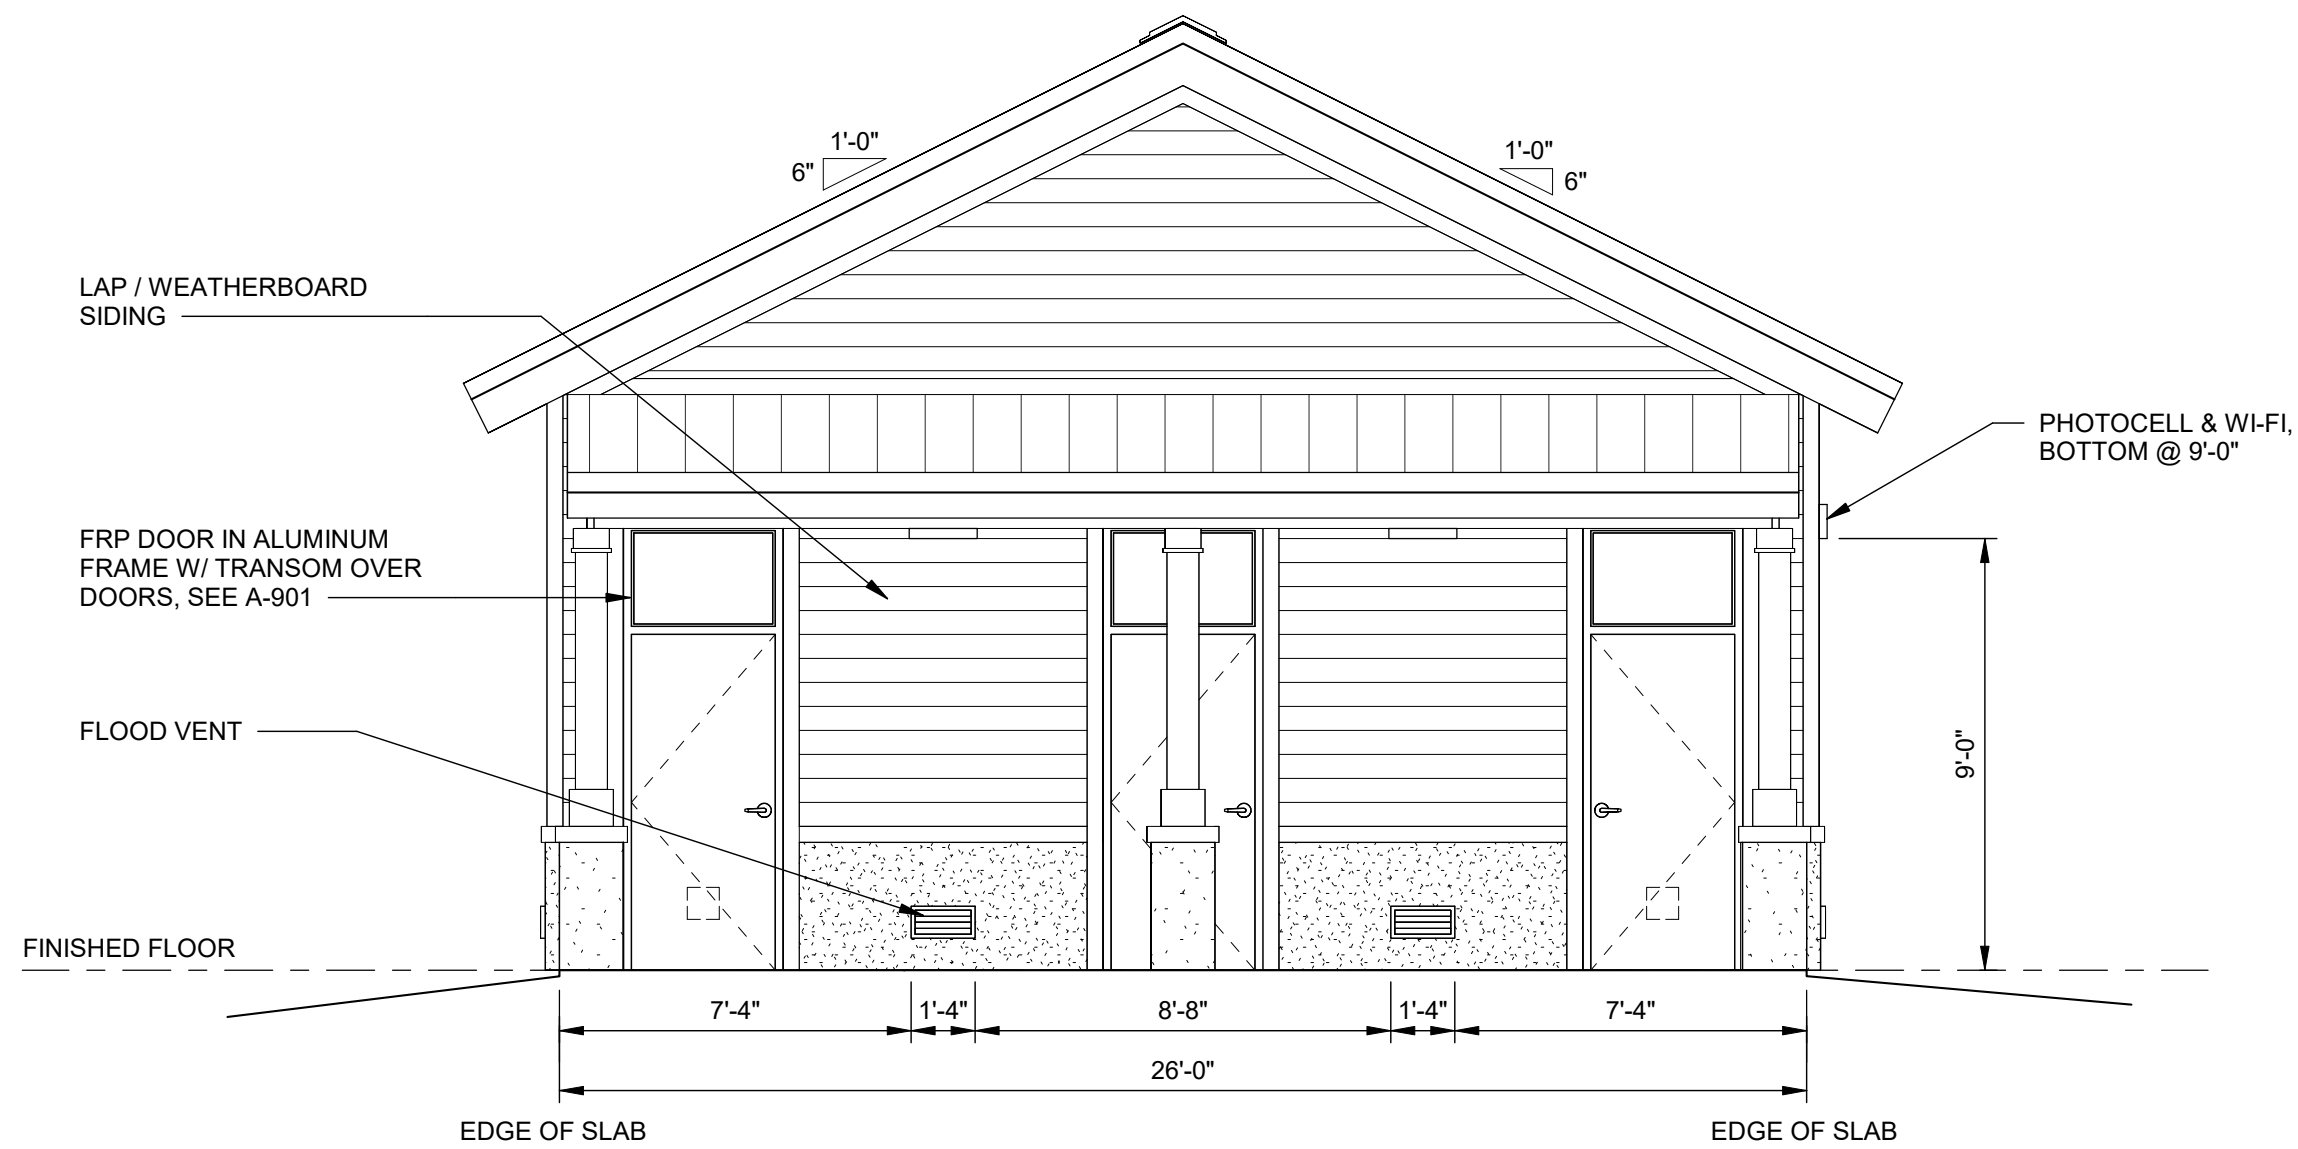

4
A-102
BUILDING 100 - SOUTH ELEVATION
SCALE: 1/4" = 1'-0"

- NOTES
1. PAINT ALL CEMENT BOARD SHALL BE PAINTED PER SPECIFICATION 099130. COLOR TO BE SELECTED BY ARCHITECT/ENGINEER.
 2. INSTALL SEALANT AT TOP AND SIDES OF ALL EXTERIOR SURFACE MOUNTED ITEMS AND AROUND EXTERIOR PERIMETER OF ALL WALL PENETRATIONS.



R-08
Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLENNVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 100 - DAY USE
RESTROOM BUILDING -
EXTERIOR ELEVATIONS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-102
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 4 OF 53





DRAWING TITLE




BUILDING 100 - DAY USE
RESTROOM BUILDING -
BUILDING SECTIONS

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER EH	DRAWING SHEET NO. A-103	
DRAWN CTH		
CHECKED WLD	SHEET 5 OF 53	
PROJECT NO. 3094.2201		



CEILING LEGEND			
	HARD CEILING 1x6 T&G CYPRESS OR CEDAR		INDOOR LIGHT FIXTURE
	CEMENT BOARD CEILING/ SOFFIT	CEILING NOTES: A. CEILING HEIGHT IS NOTED ON RCP AND ROOM FINISH SCHEDULE. B. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT SIZES AND SPECIFICATIONS OF FIXTURES AND EQUIPMENT. C. ALL EXPOSED STRUCTURE AND ELECTRICAL CONDUITS TO BE PAINTED.	
	CEILING MOUNTED HEATER - SEE M-DRAWINGS		

- NOTES**
- PERSONNEL DOORS SHALL HAVE A 6'-0 1/2"W x 7'-4 3/8"H M.O.
 - FLOOD VENTS W/ MASONRY TRIM AND SLEEVE KIT- 16"W x 8"H M.O. w/BOT @ 8" A.F.F. SEE ELEVATIONS FOR EXTERIOR WALL LOCATIONS. (8 EXTERIOR)
 - LIGHT FIXTURES MOUNTED @ 9'-0" AFF - SEE E-DRAWINGS.
 - SEE - P-DRAWINGS FOR ADDITIONAL REQUIREMENTS.
 - PROVIDE PIGMENTED CMU WITH INTEGRAL WATER REPELLENT - SEE SPECIFICATION 04200.
 - INSTALL SEALANT AT TOP AND SIDES OF ALL EXTERIOR SURFACE MOUNTED ITEMS AND AROUND EXTERIOR PERIMETER OF ALL WALL PENETRATIONS.

LEGEND	
	ROOM NAME → ROOM NAME & NUMBER - SEE FINISH SCHEDULE ON A-902
	(F.E.-1) → TAG/TYPE
	→ FIRE EXTINGUISHER WITH BRACKET
	11 → WALL TYPE - SEE A-904
	101 → DOOR NUMBER - SEE DOOR SCHEDULE ON A-901



R-08
Southern Region

STAMPS, LOGOS, AND SEALS		
		
		
4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION AREA RECONSTRUCTION

FRANCIS MARION NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:

JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

BUILDINGS 200/700 - WELL HOUSE - FLOOR PLAN, REFLECTED CEILING PLAN, SECTION & ELEVATIONS

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-201
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 6 OF 53

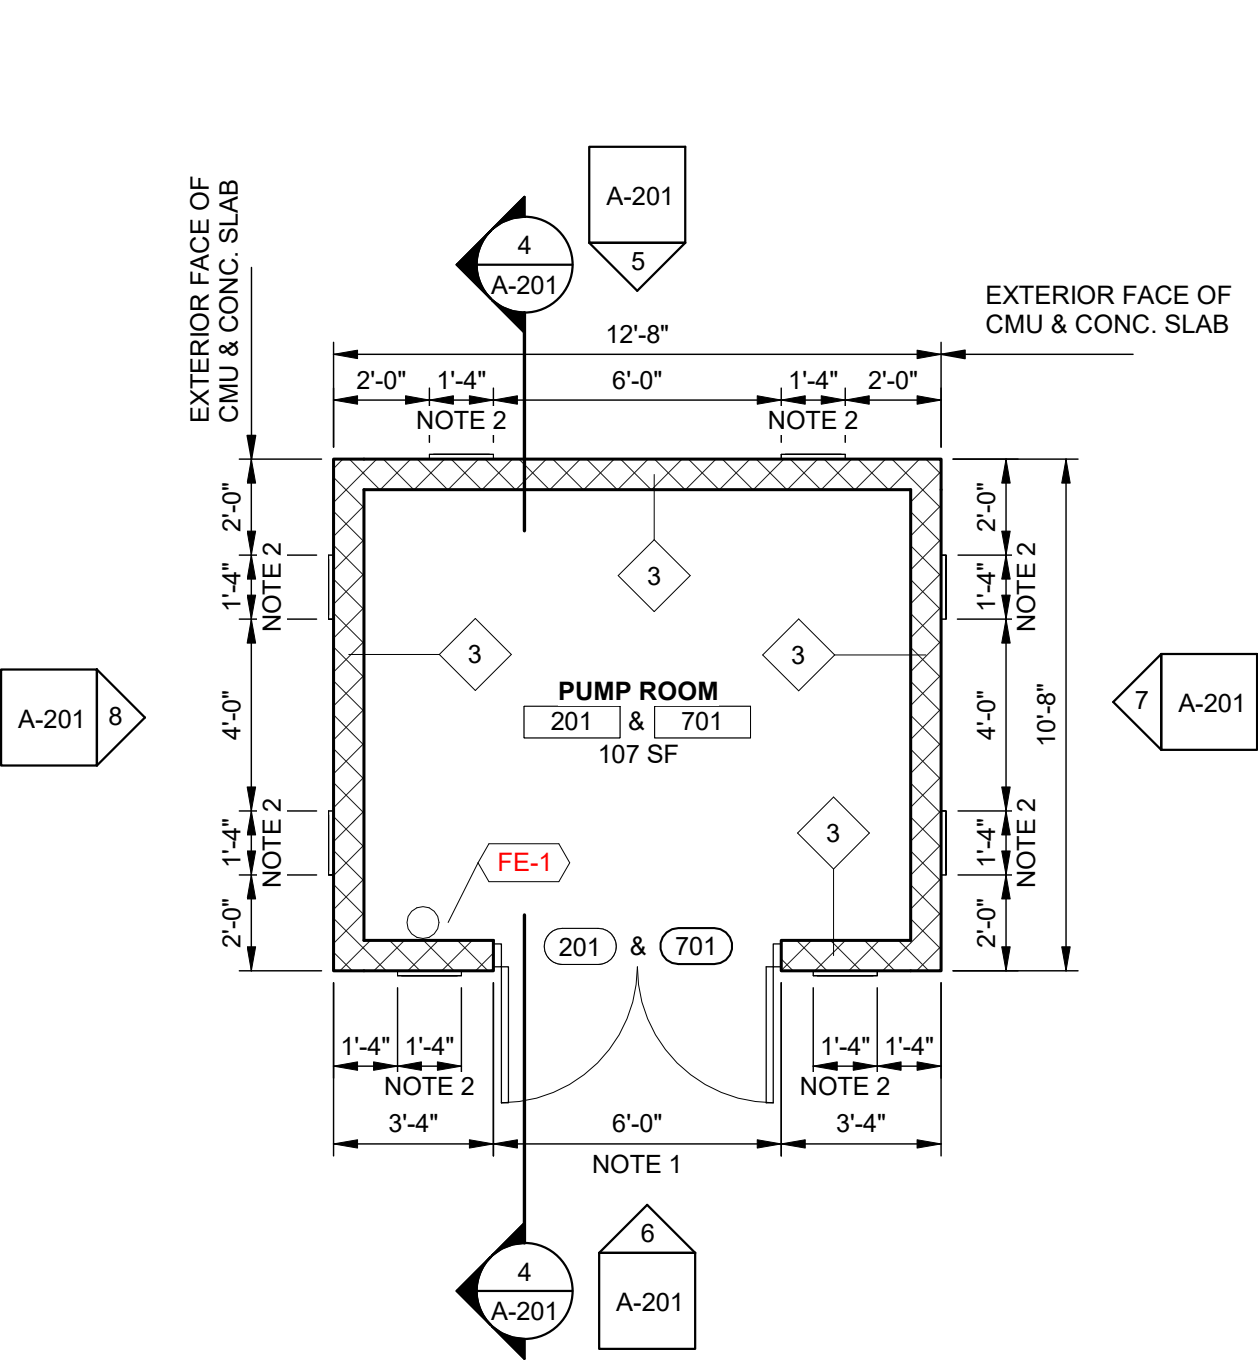

C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural\Local_chdroyd.rvt 1/29/2025 4:05:04 PM

- NOTES**
1. PERSONNEL DOORS SHALL HAVE A 3'-4 1/2"W x 9'-4 3/8"H M.O.
 2. STOREFRONT WINDOWS SHALL HAVE A 3'-4 1/2"W x 2'-8 3/8"H M.O. w/BOT @ 8'-8"AFF.
 3. FLOOD VENTS W/ MASONRY TRIM AND SLEEVE KIT- 16 1/2"W x 8 3/8"H M.O. w/BOT @ 8" A.F.F. SEE ELEVATIONS FOR EXTERIOR WALL LOCATIONS. (6 INTERIOR & 14 EXTERIOR)
 4. SEE E-DRAWINGS FOR LIGHTING FIXTURES. MOUNT EXTERIOR FIXTURES w/BOT @ 9'-0" AFF AND INTERIOR FIXTURES w/BOT @ 10'-0" AFF.
 5. SEE A-903 FOR TOILET ACCESSORIES & FIXTURES.
 6. PHOTOCELL & WI-FI MOUNTED @ 9'-0" AFF. SEE E-DWGS.
 7. WALL LOUVER (IN GABLE) - 2'-4"SQ w/BOT @ 15'-4"AFF CENTERED ON WALL. SEE M-DWGS.
 8. SEE CIVIL DRAWINGS FOR EXACT FINISH FLOOR ELEVATION.
 9. OCCUPANCY SENSORS WALL MOUNTED @ 9'-0" AFF. SEE E-DRAWINGS.
 10. 6x6 EXHAUST GRILLE (4 EA.) (BOTTOM @ 12'-8") (SEE 1/A-303 FOR LOCATION ABOVE TOILETS)
 11. INSTALL SEALANT AT ALL WALL PENETRATIONS.

DIMENSION NOTES

- EXTERIOR DIMENSIONS ARE FROM EDGE OF SLAB / FACE OF CMU WALL TO EDGE OF SLAB / FACE OF CMU WALL.
- INTERIOR DIMENSIONS ARE FROM FACE OF CMU WALL TO FACE OF CMU WALL

WALL LEGEND

- 8" CMU WALL UP TO 12'-0"
- EXTEND WALL TO DECK - SEE BUILDING SECTIONS

LEGEND


- ROOM NAME** → ROOM NAME & NUMBER - SEE FINISH SCHEDULE ON A-902
- F.E.-1** → TAG/TYPE
- FIRE EXTINGUISHER WITH BRACKET
- 11** → WALL TYPE - SEE A-904
- A** → STOREFRONT/WINDOW TYPE - SEE A-901
- 101** → DOOR NUMBER - SEE DOOR SCHEDULE ON A-901
- FD - FLOOR DRAIN SEE P-DWGS
- FC - FLOOR CLEANOUT SEE P-DWGS

CEILING LEGEND

- HARD CEILING**
1x6 T&G WESTERN RED CEDAR
- CEMENT BOARD CEILING/ SOFFIT**
- INDOOR LIGHT FIXTURE**
- EXTERIOR LIGHT FIXTURE**
- OCCUPANCY SENSOR**

- CEILING NOTES:**
- A. CEILING HEIGHT IS NOTED ON RCP AND ROOM FINISH SCHEDULE.
 - B. SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR EXACT SIZES AND SPECIFICATIONS OF FIXTURES AND EQUIPMENT.
 - C. ALL EXPOSED STRUCTURE AND ELECTRICAL CONDUITS TO BE PAINTED.

NOTE:
SEE CIVIL DRAWINGS C-102 & C-108 FOR TRUE NORTH

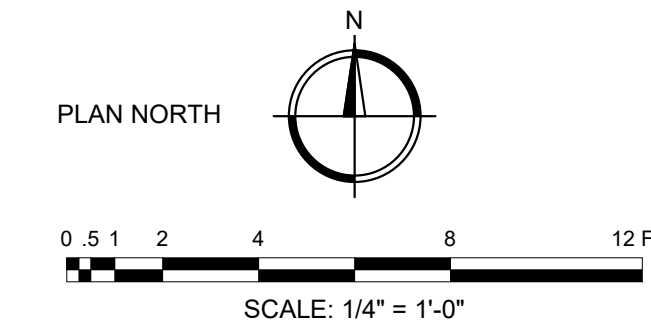

R-08
Southern Region

STAMPS, LOGOS, AND SEALS		
4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION AREA RECONSTRUCTION

FRANCIS MARION NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:

JLA
JOHNSON, LASCHOB, & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com


DRAWING TITLE

**BUILDINGS 300/600 -
CAMPGROUND BATH
HOUSE - FLOOR PLAN &
REFLECTED CEILING PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-301
DRAWN CTH	CHECKED WLD
PROJECT NO. 3094.2201	SHEET 7 OF 53

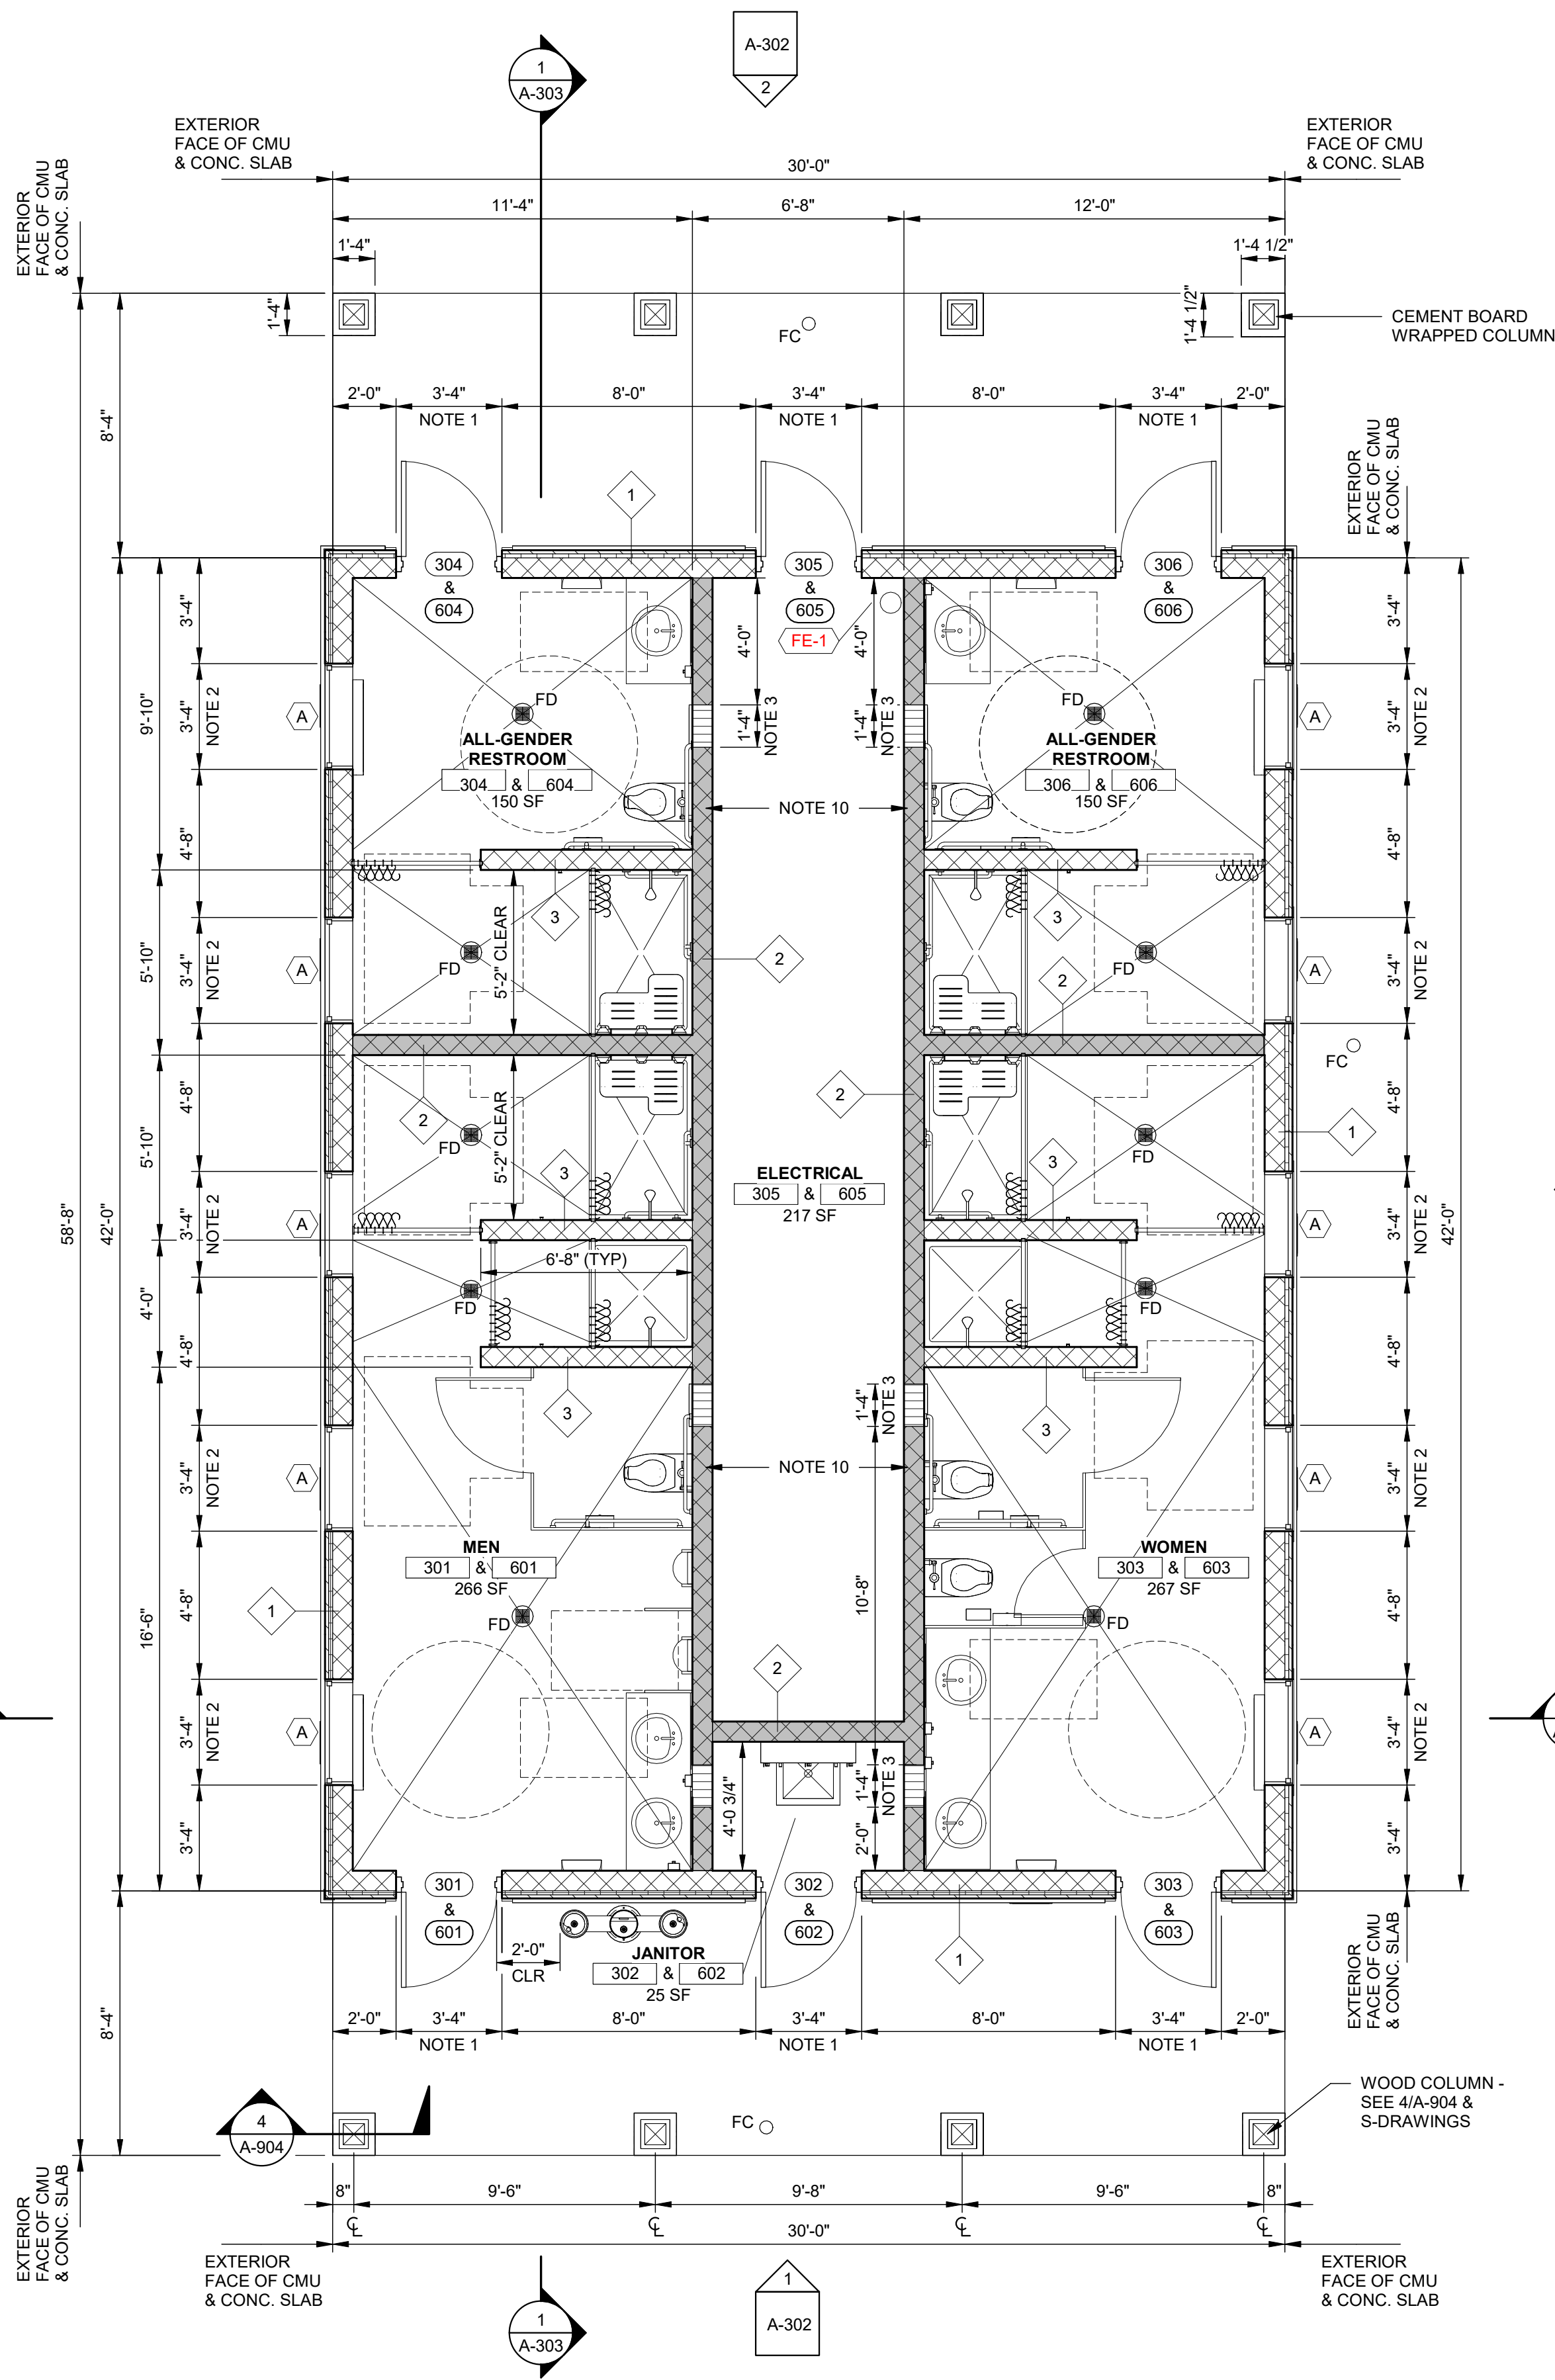


1 BUILDINGS 300/600 - FLOOR PLAN
SCALE: 1/4" = 1'-0"

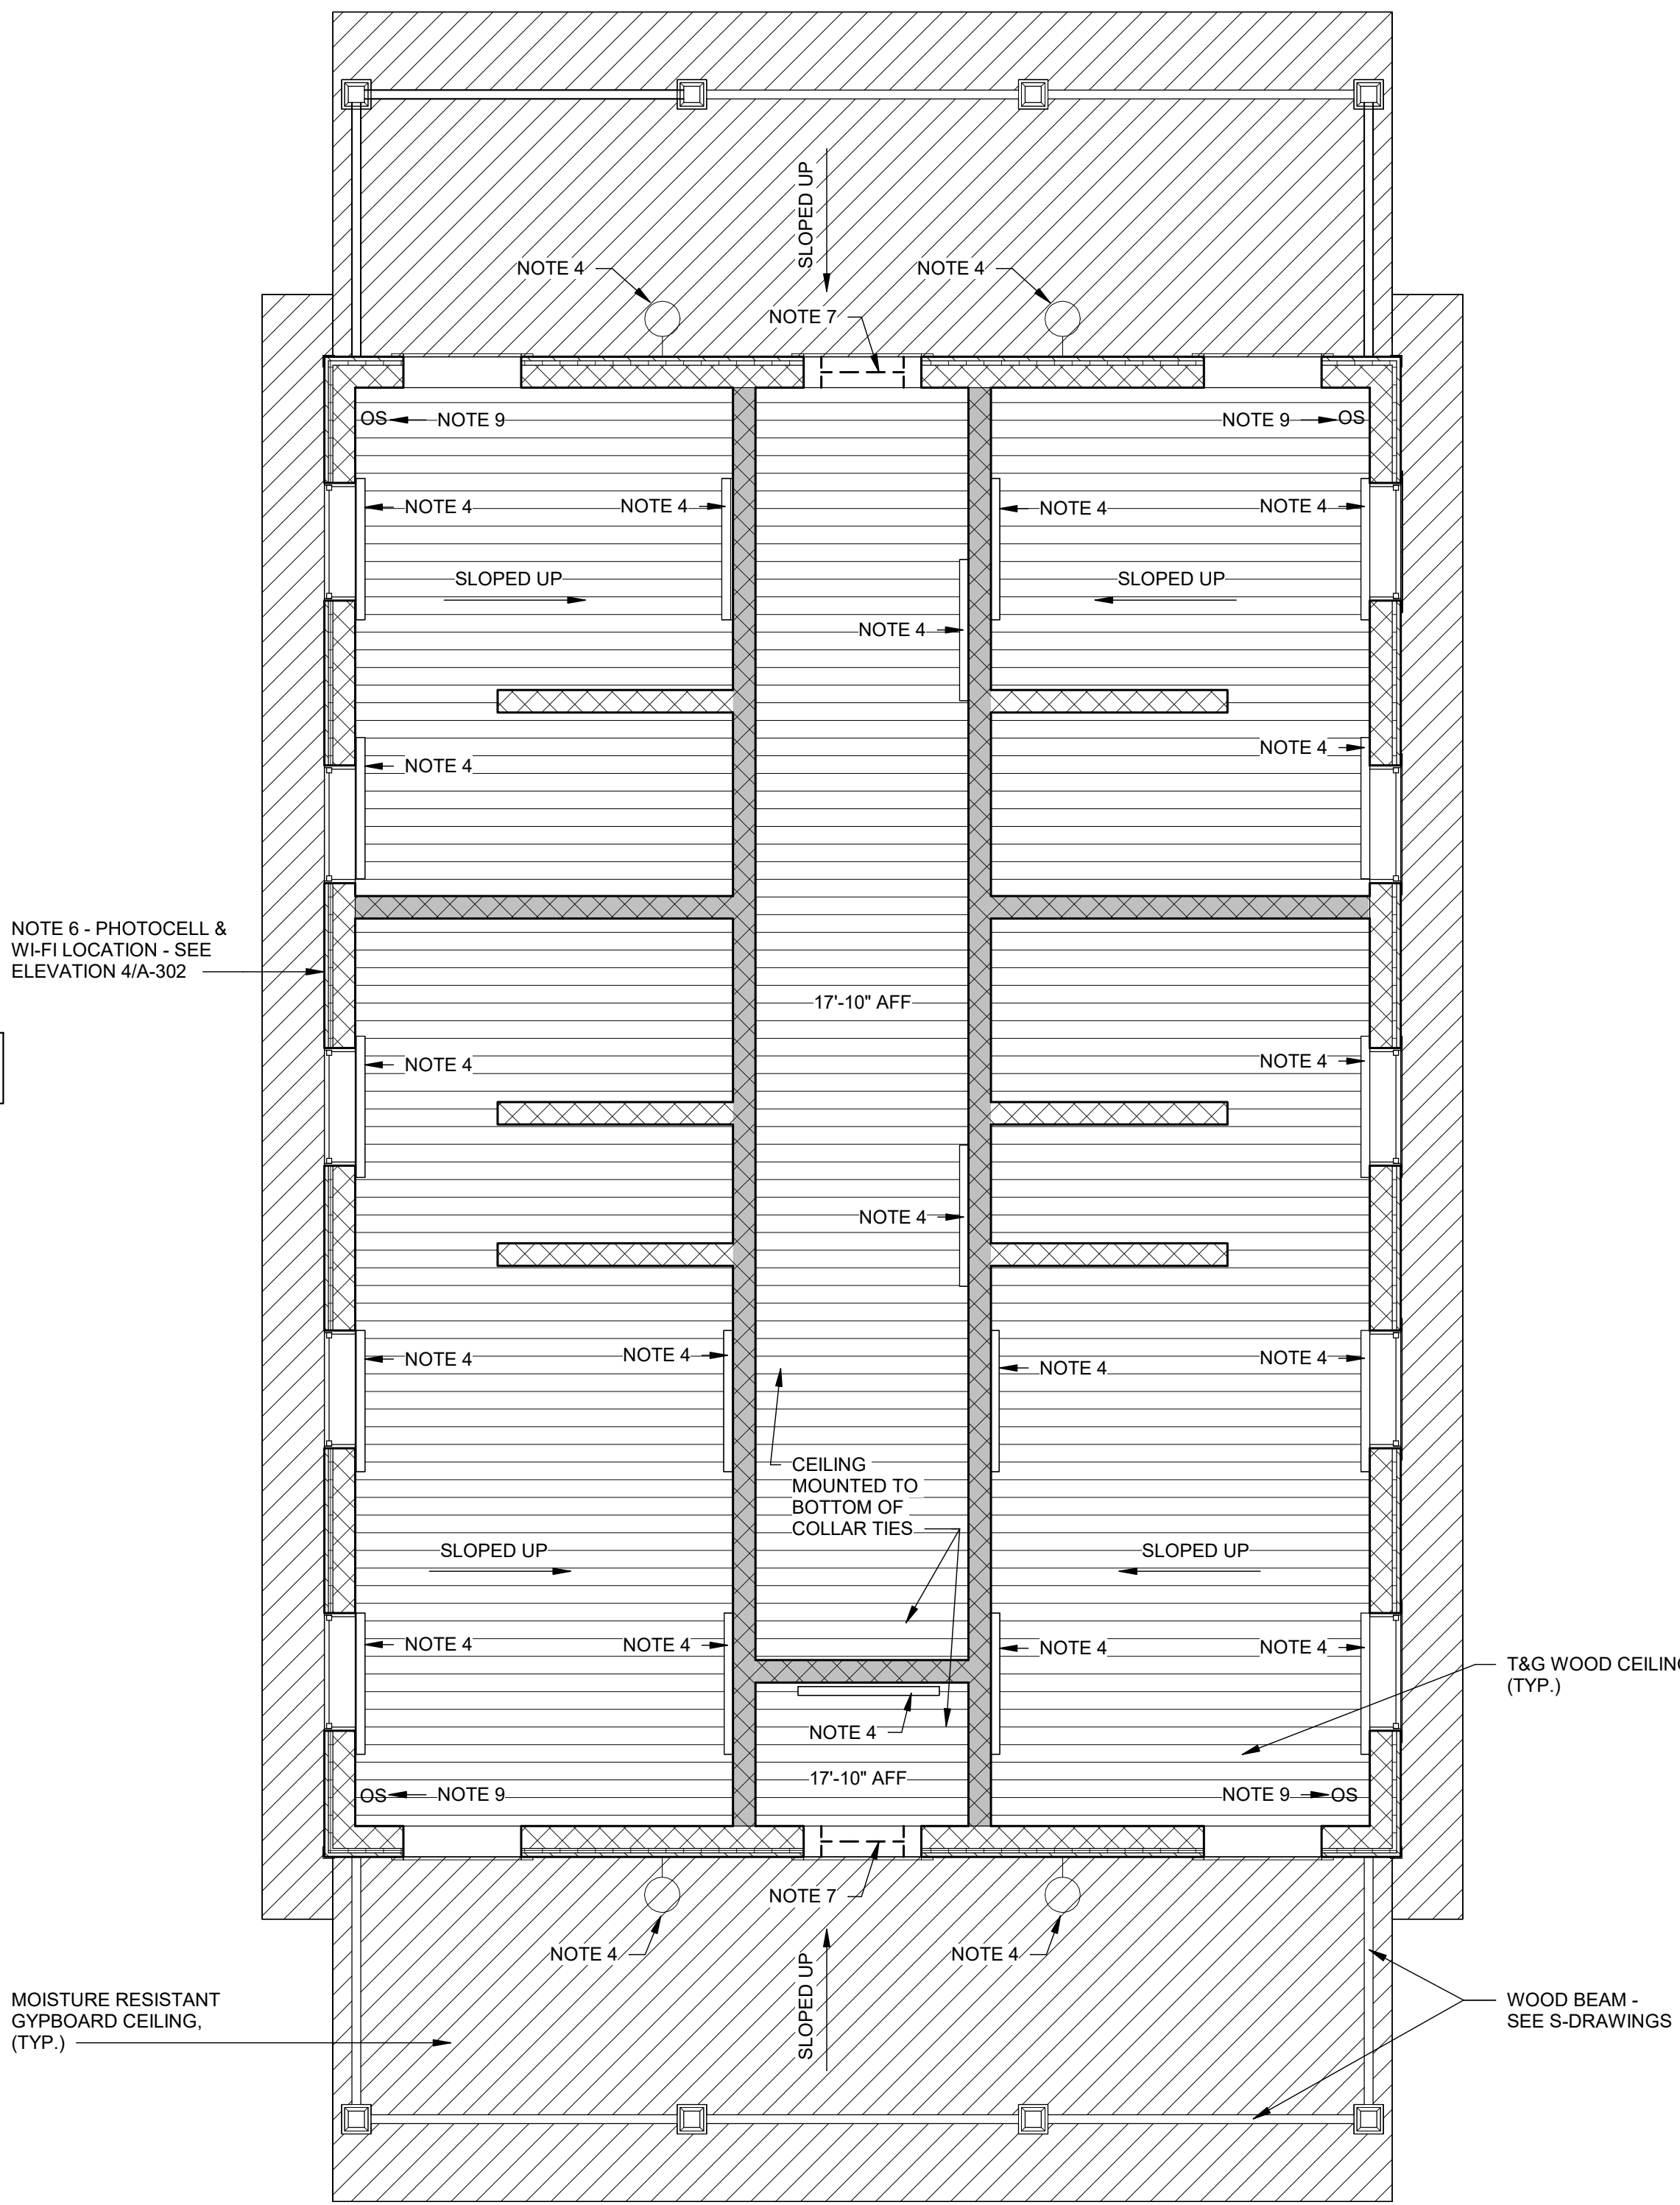


2 BUILDINGS 300/600 - REFLECTED CEILING PLAN
SCALE: 1/4" = 1'-0"


C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural-Local_cbtroyd.rvt 1/29/2025 4:05:37 PM

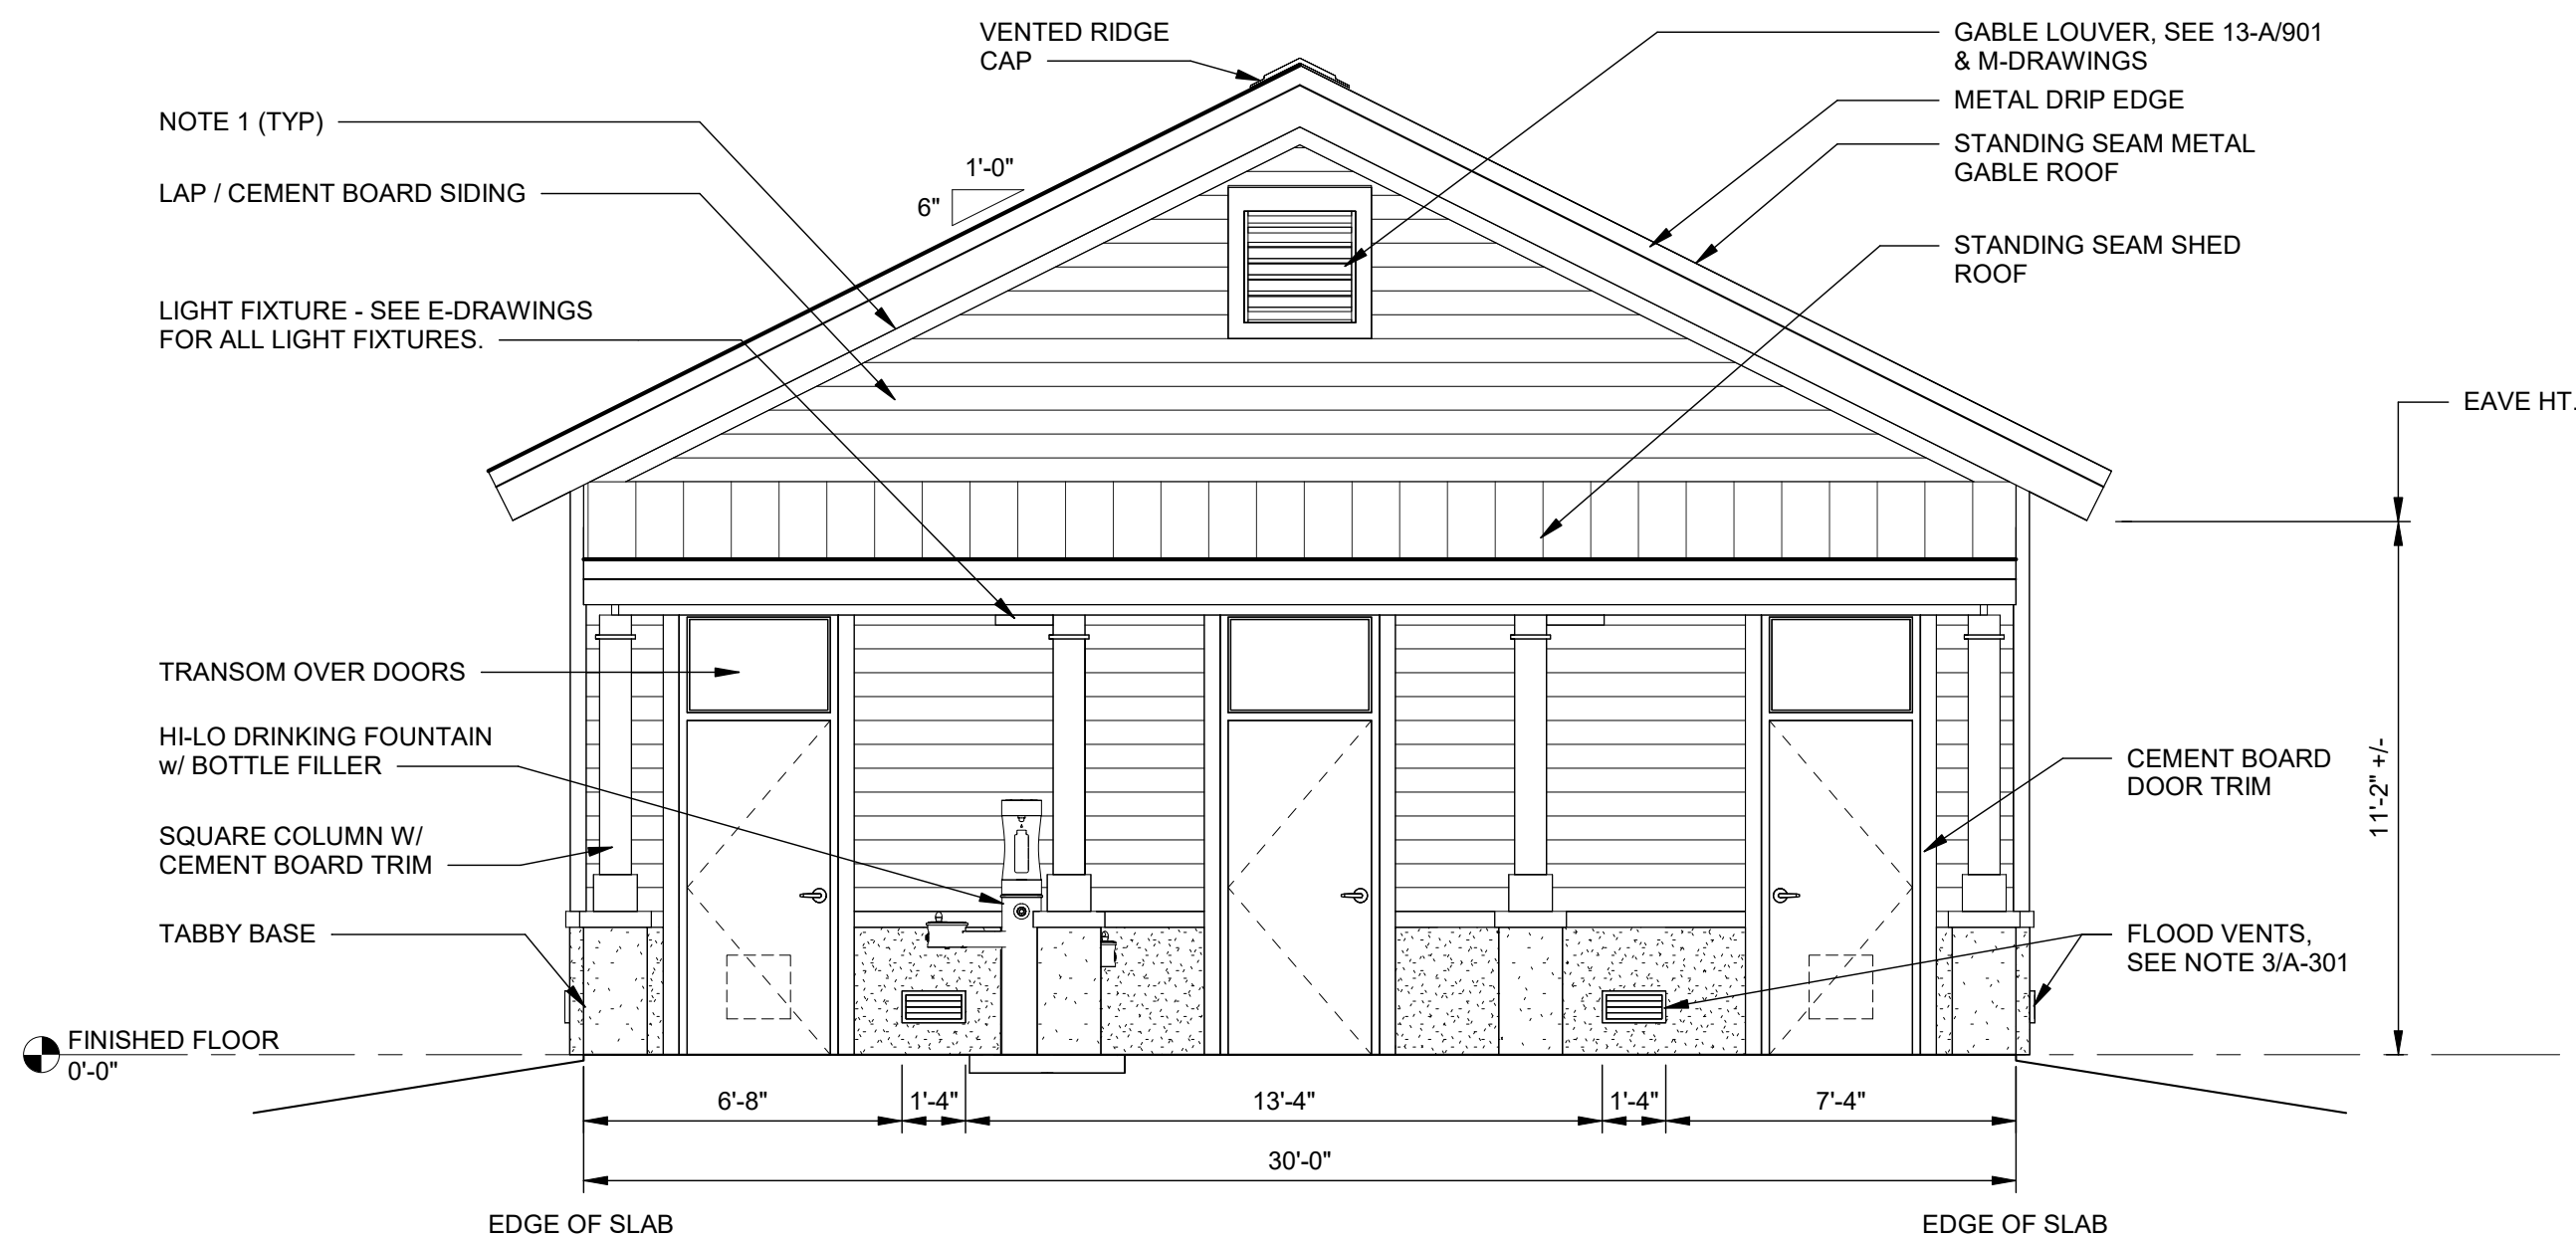


1 BUILDINGS 300/600 ELEVATION
A-302 SCALE: 1/4" = 1'-0"

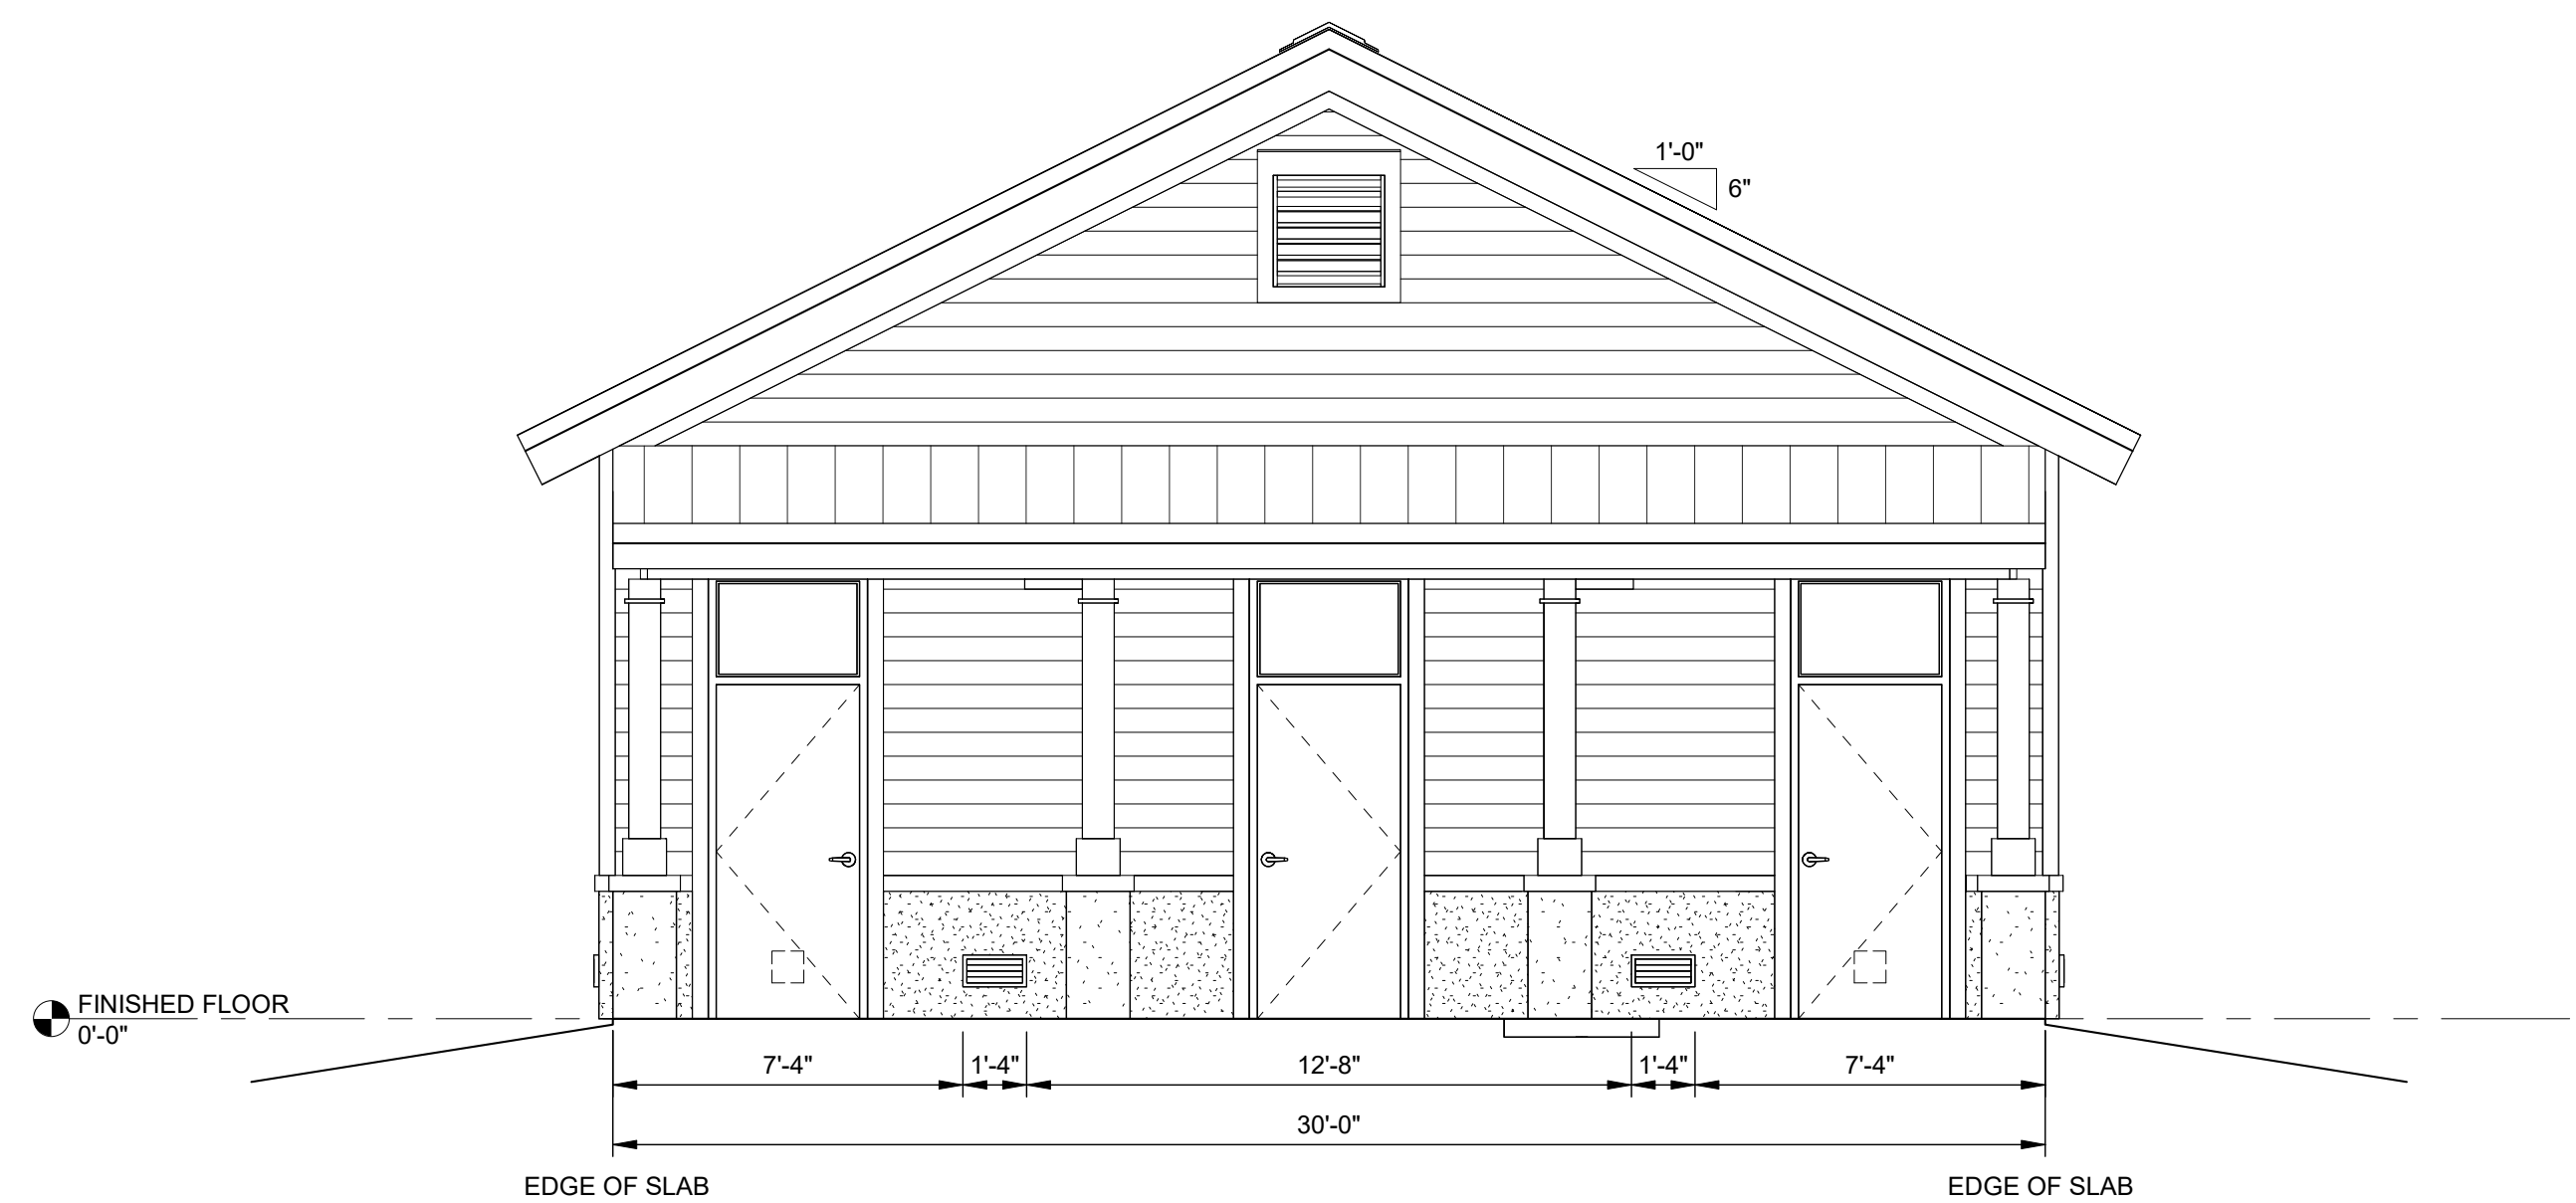

2 BUILDINGS 300/600 ELEVATION
A-302 SCALE: 1/4" = 1'-0"

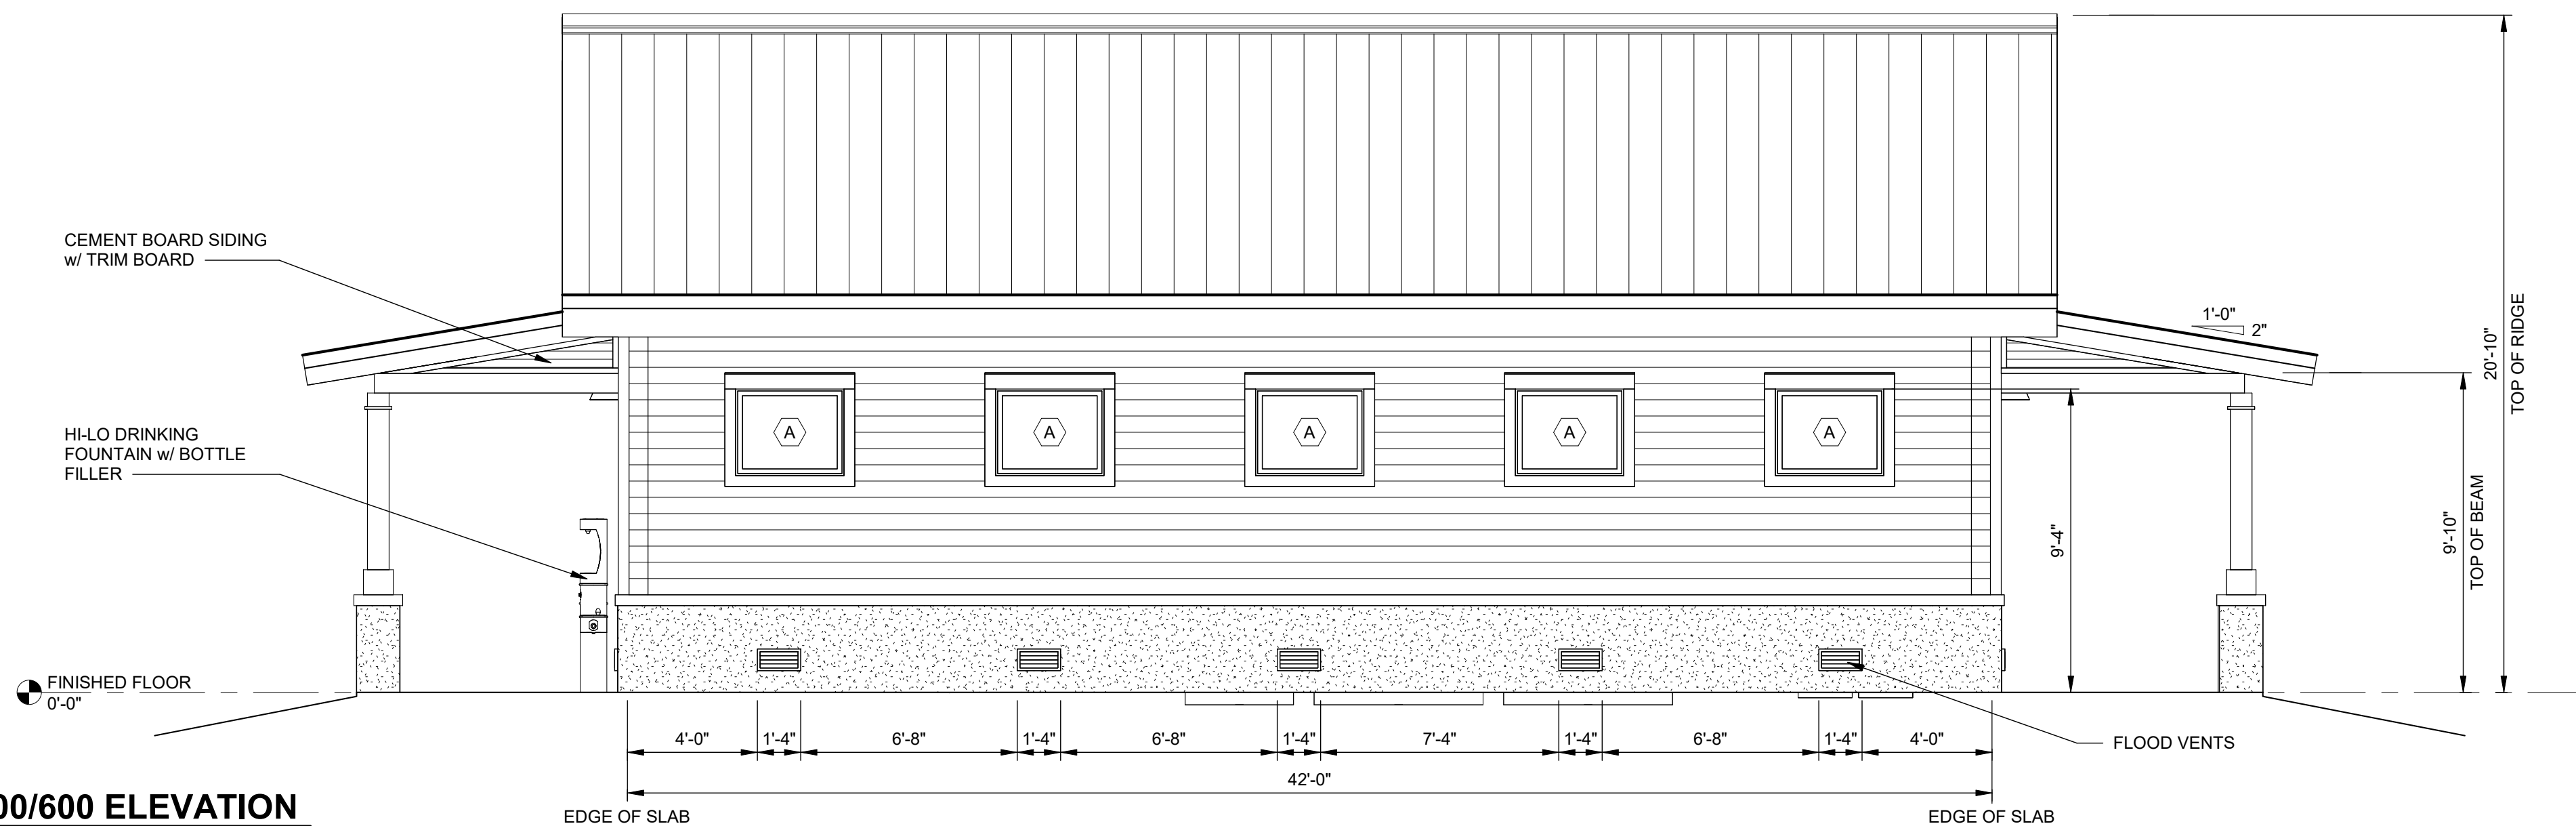

3 BUILDINGS 300/600 ELEVATION
A-302 SCALE: 1/4" = 1'-0"

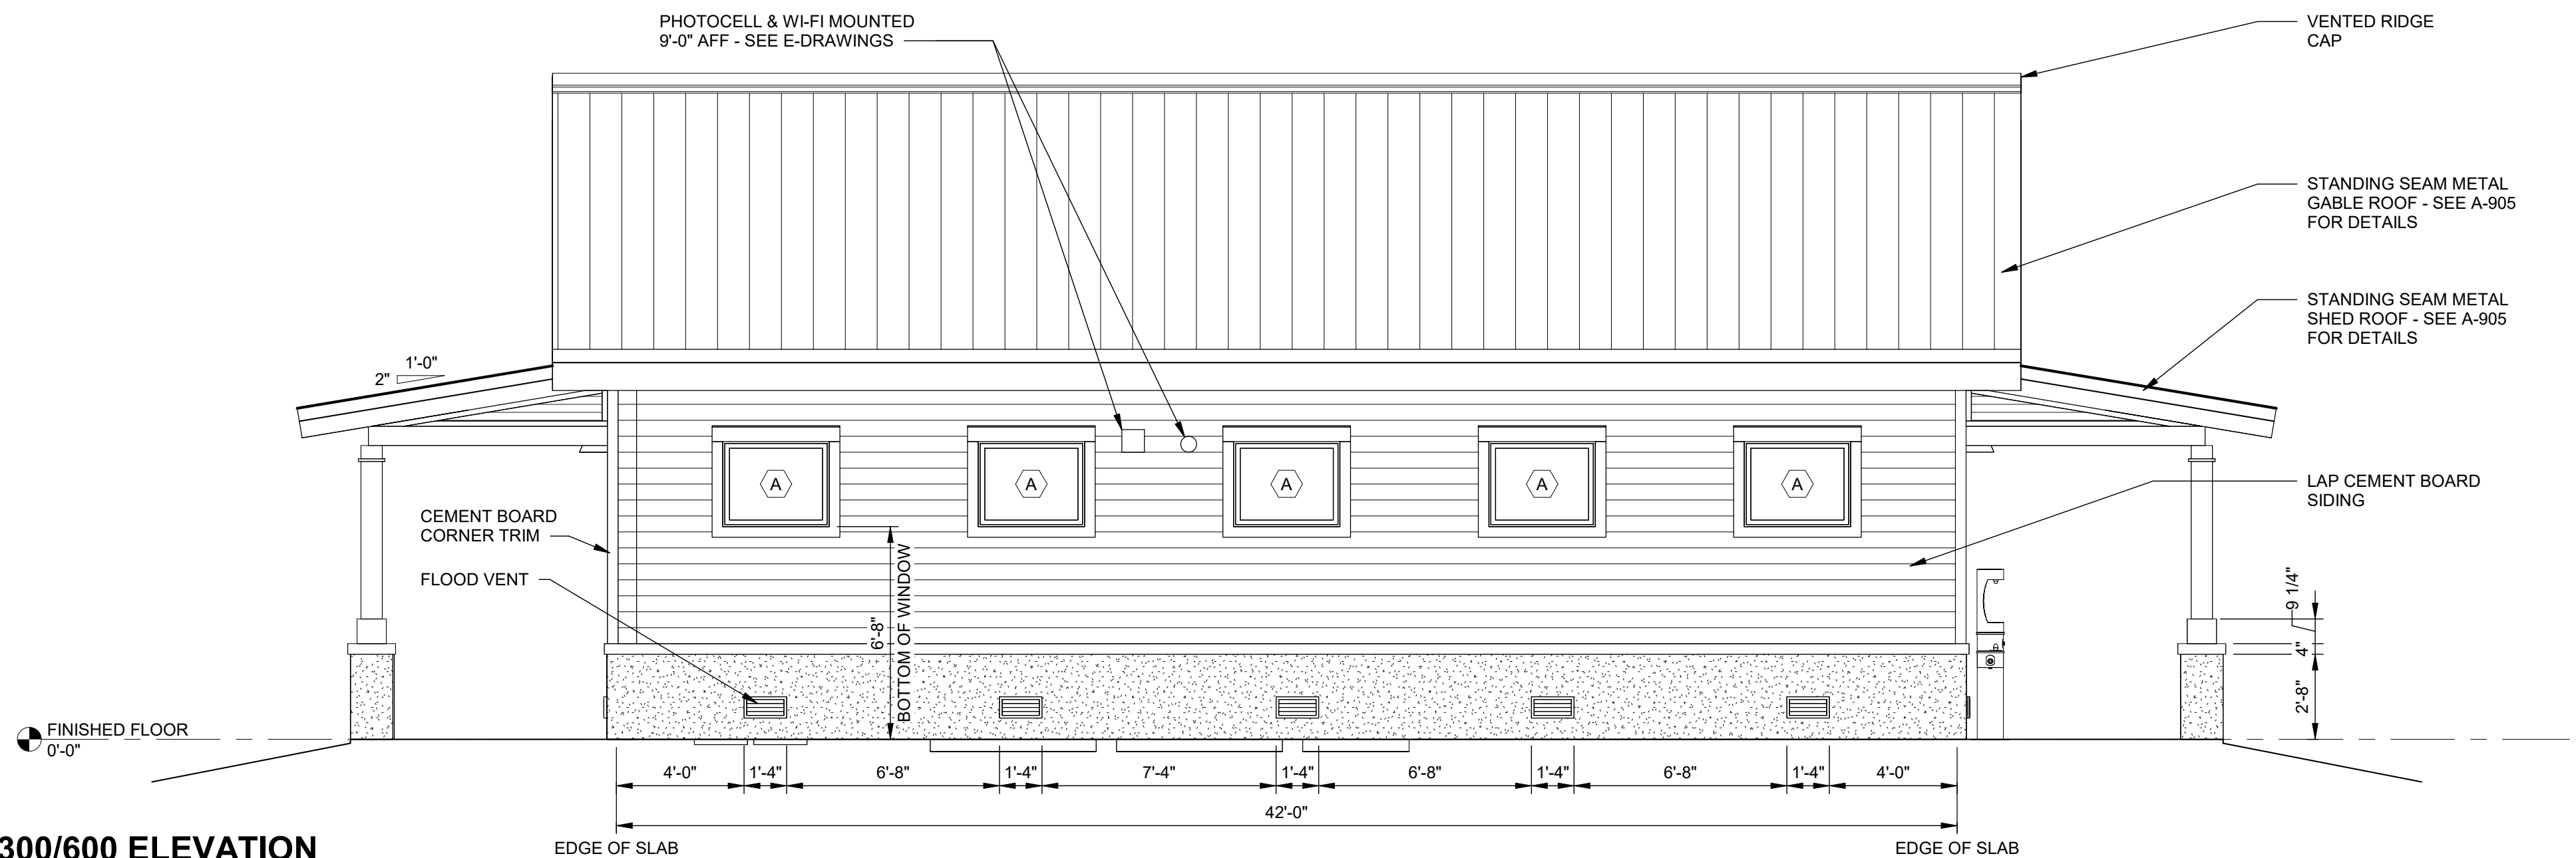

4 BUILDINGS 300/600 ELEVATION
A-302 SCALE: 1/4" = 1'-0"

NOTES

1. PAINT ALL CEMENT BOARD SHALL BE PAINTED PER SPECIFICATION 099130. COLOR TO BE SELECTED BY ARCHITECT/ENGINEER.
2. INSTALL SEALANT AT TOP AND SIDES OF ALL EXTERIOR SURFACE MOUNTED ITEMS AND AROUND EXTERIOR PERIMETER OF ALL WALL PENETRATIONS.

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:
JLA
JOHNSON, LASCHNER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDINGS 300/600 -
CAMPGROUND BATH
HOUSE - EXTERIOR
ELEVATIONS**


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-302
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 8 OF 53

1/29/2025 4:06:36 PM

C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural-Local_cbrodyd.rvt

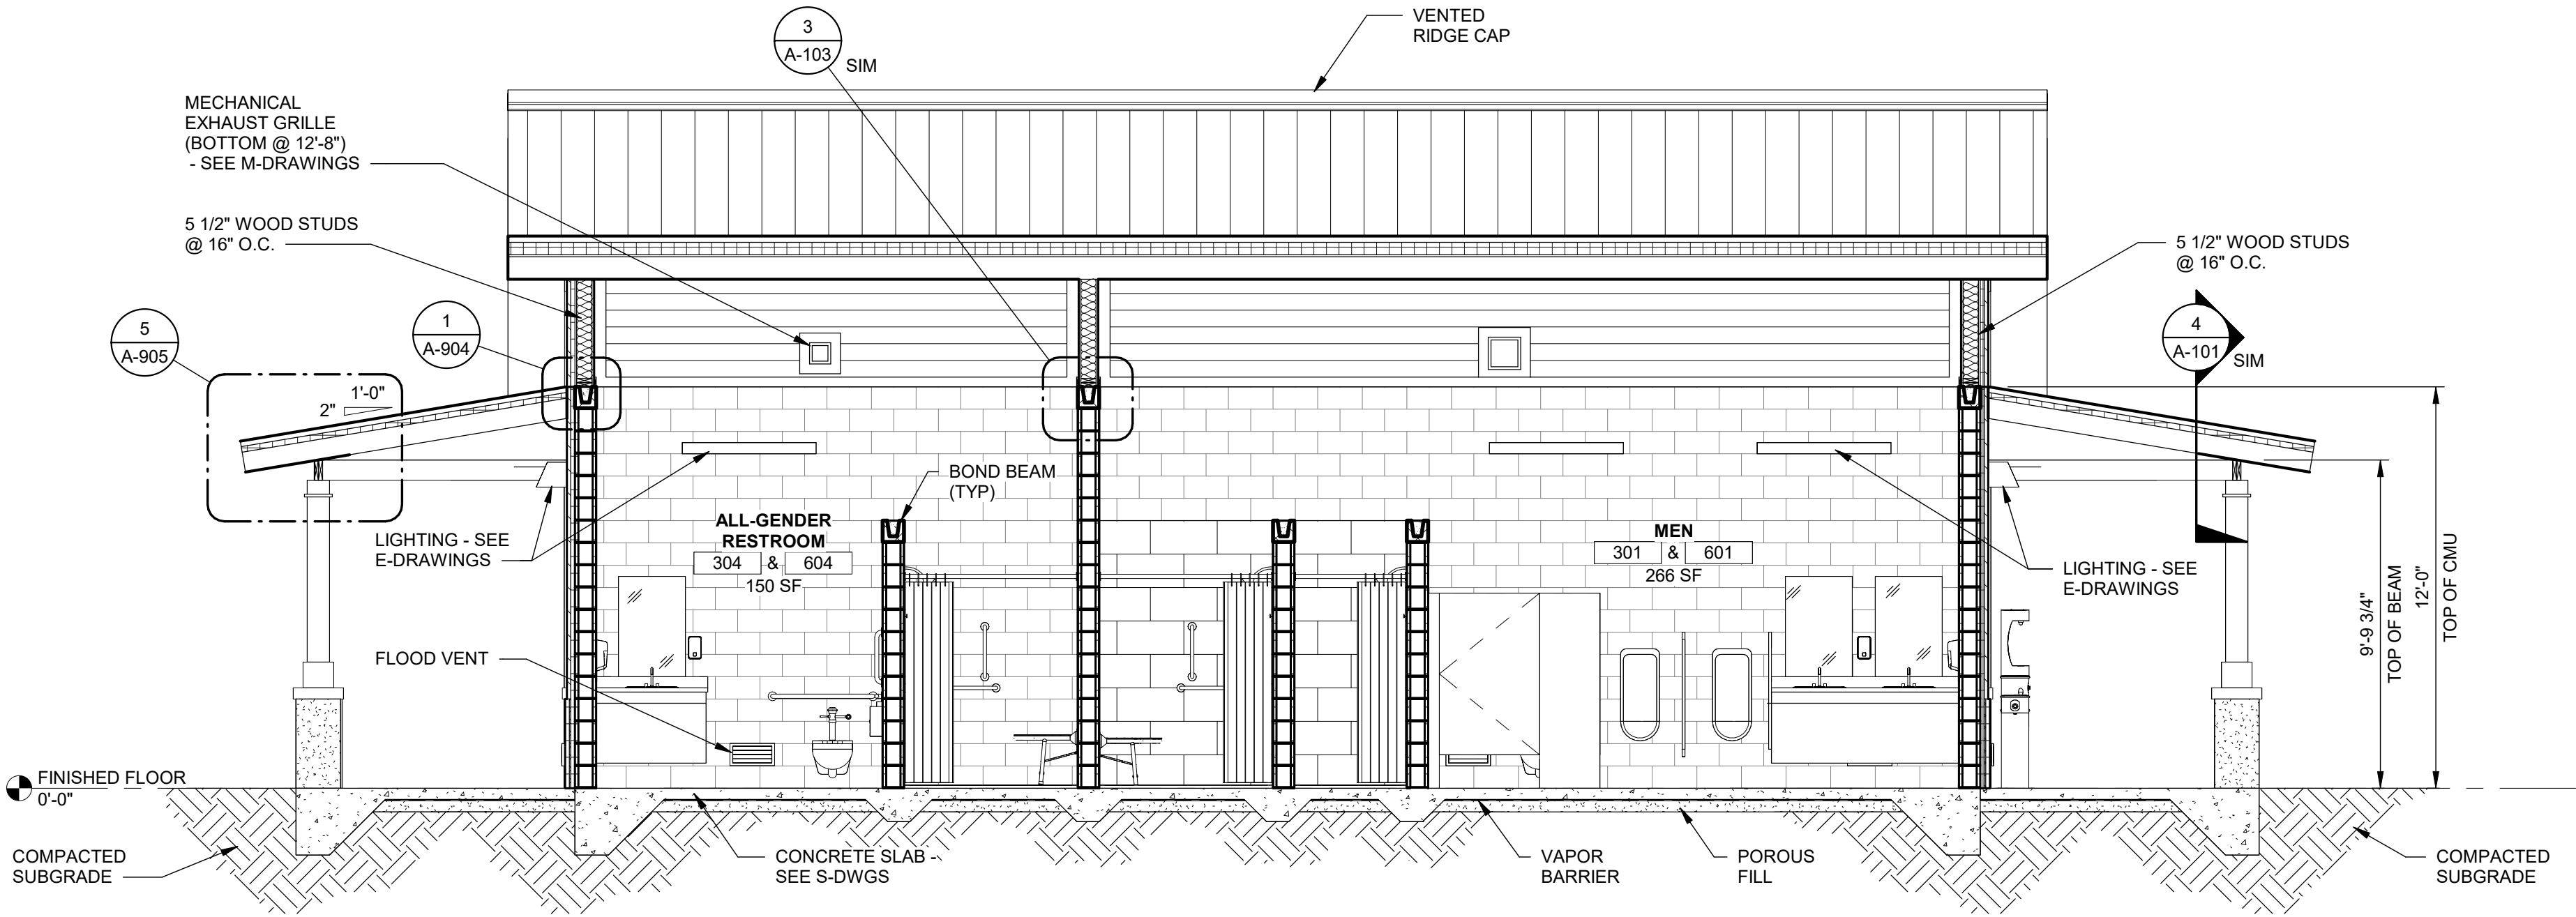

1 BUILDINGS 300/600 - LONGITUDINAL SECTION
A-303 SCALE: 1/4" = 1'-0"

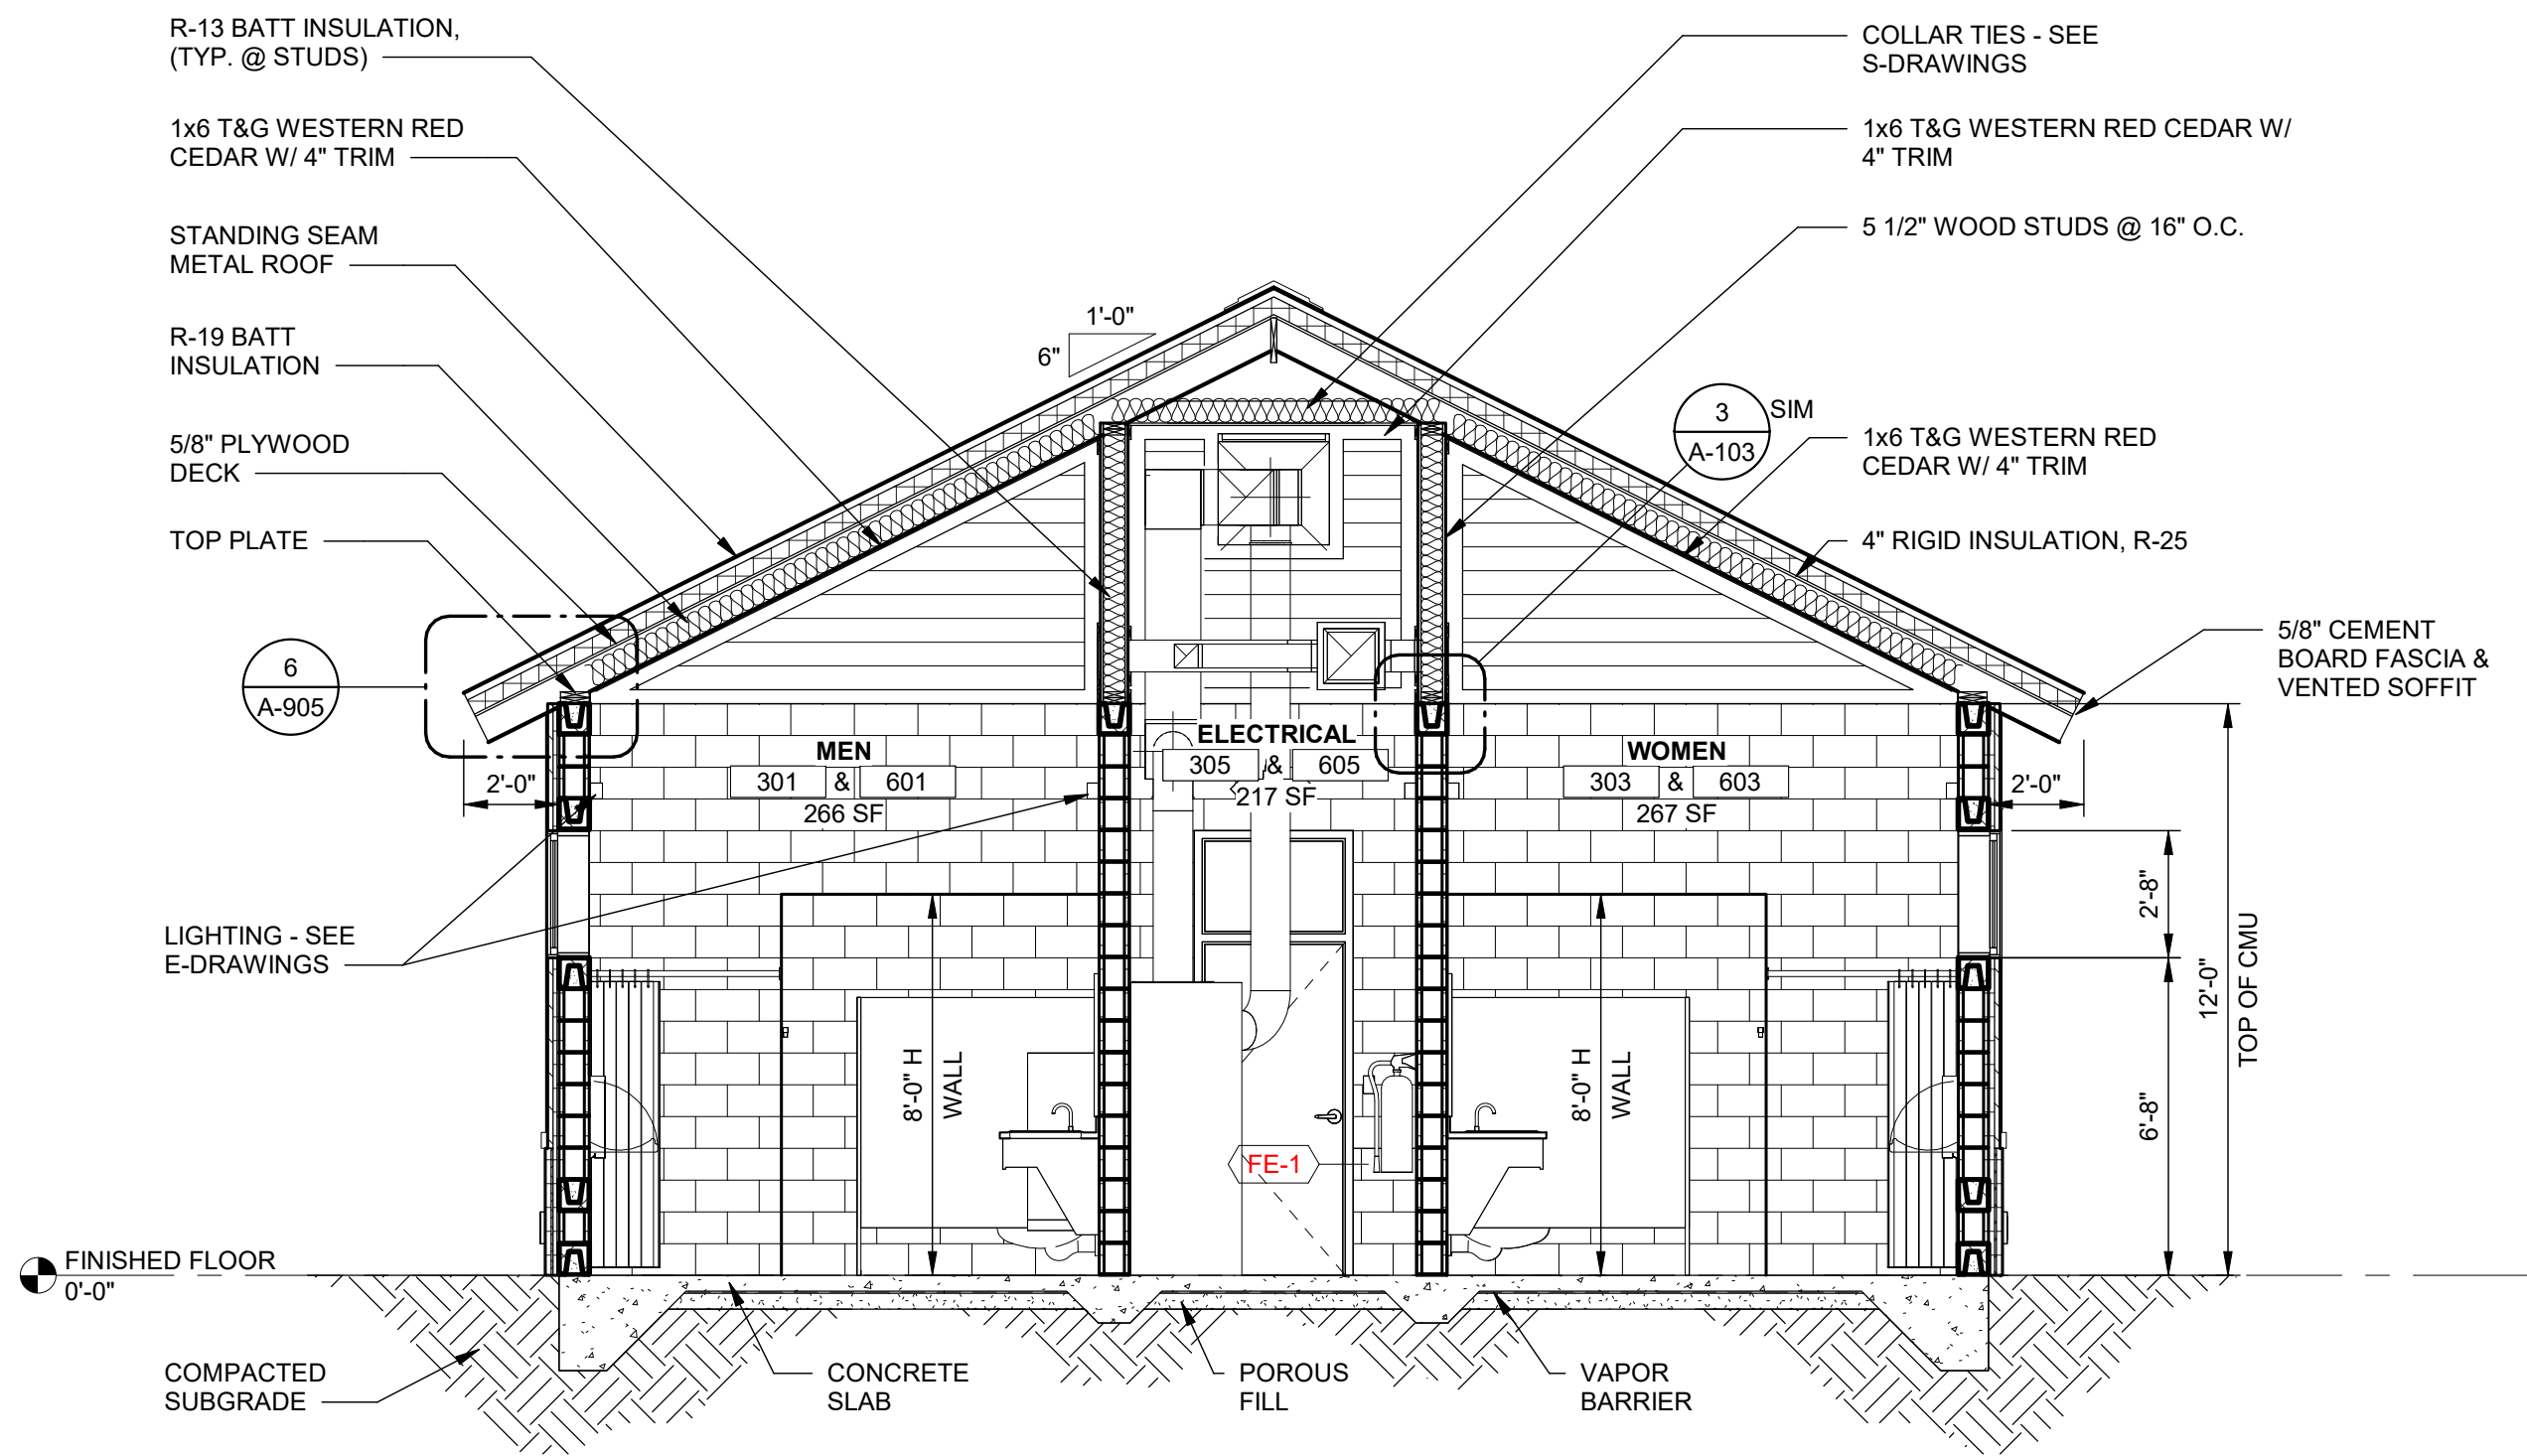

2 BUILDINGS 300/600 - TRANSVERSE SECTION
A-303 SCALE: 1/4" = 1'-0"



R-08

Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDINGS 300/600 -
CAMPGROUND BATH
HOUSE - BUILDING
SECTIONS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO.
DRAWN CTH	A-303
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 9 OF 53

1/29/2025 4:07:19 PM

C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural\Local_cbdroyd.rvt

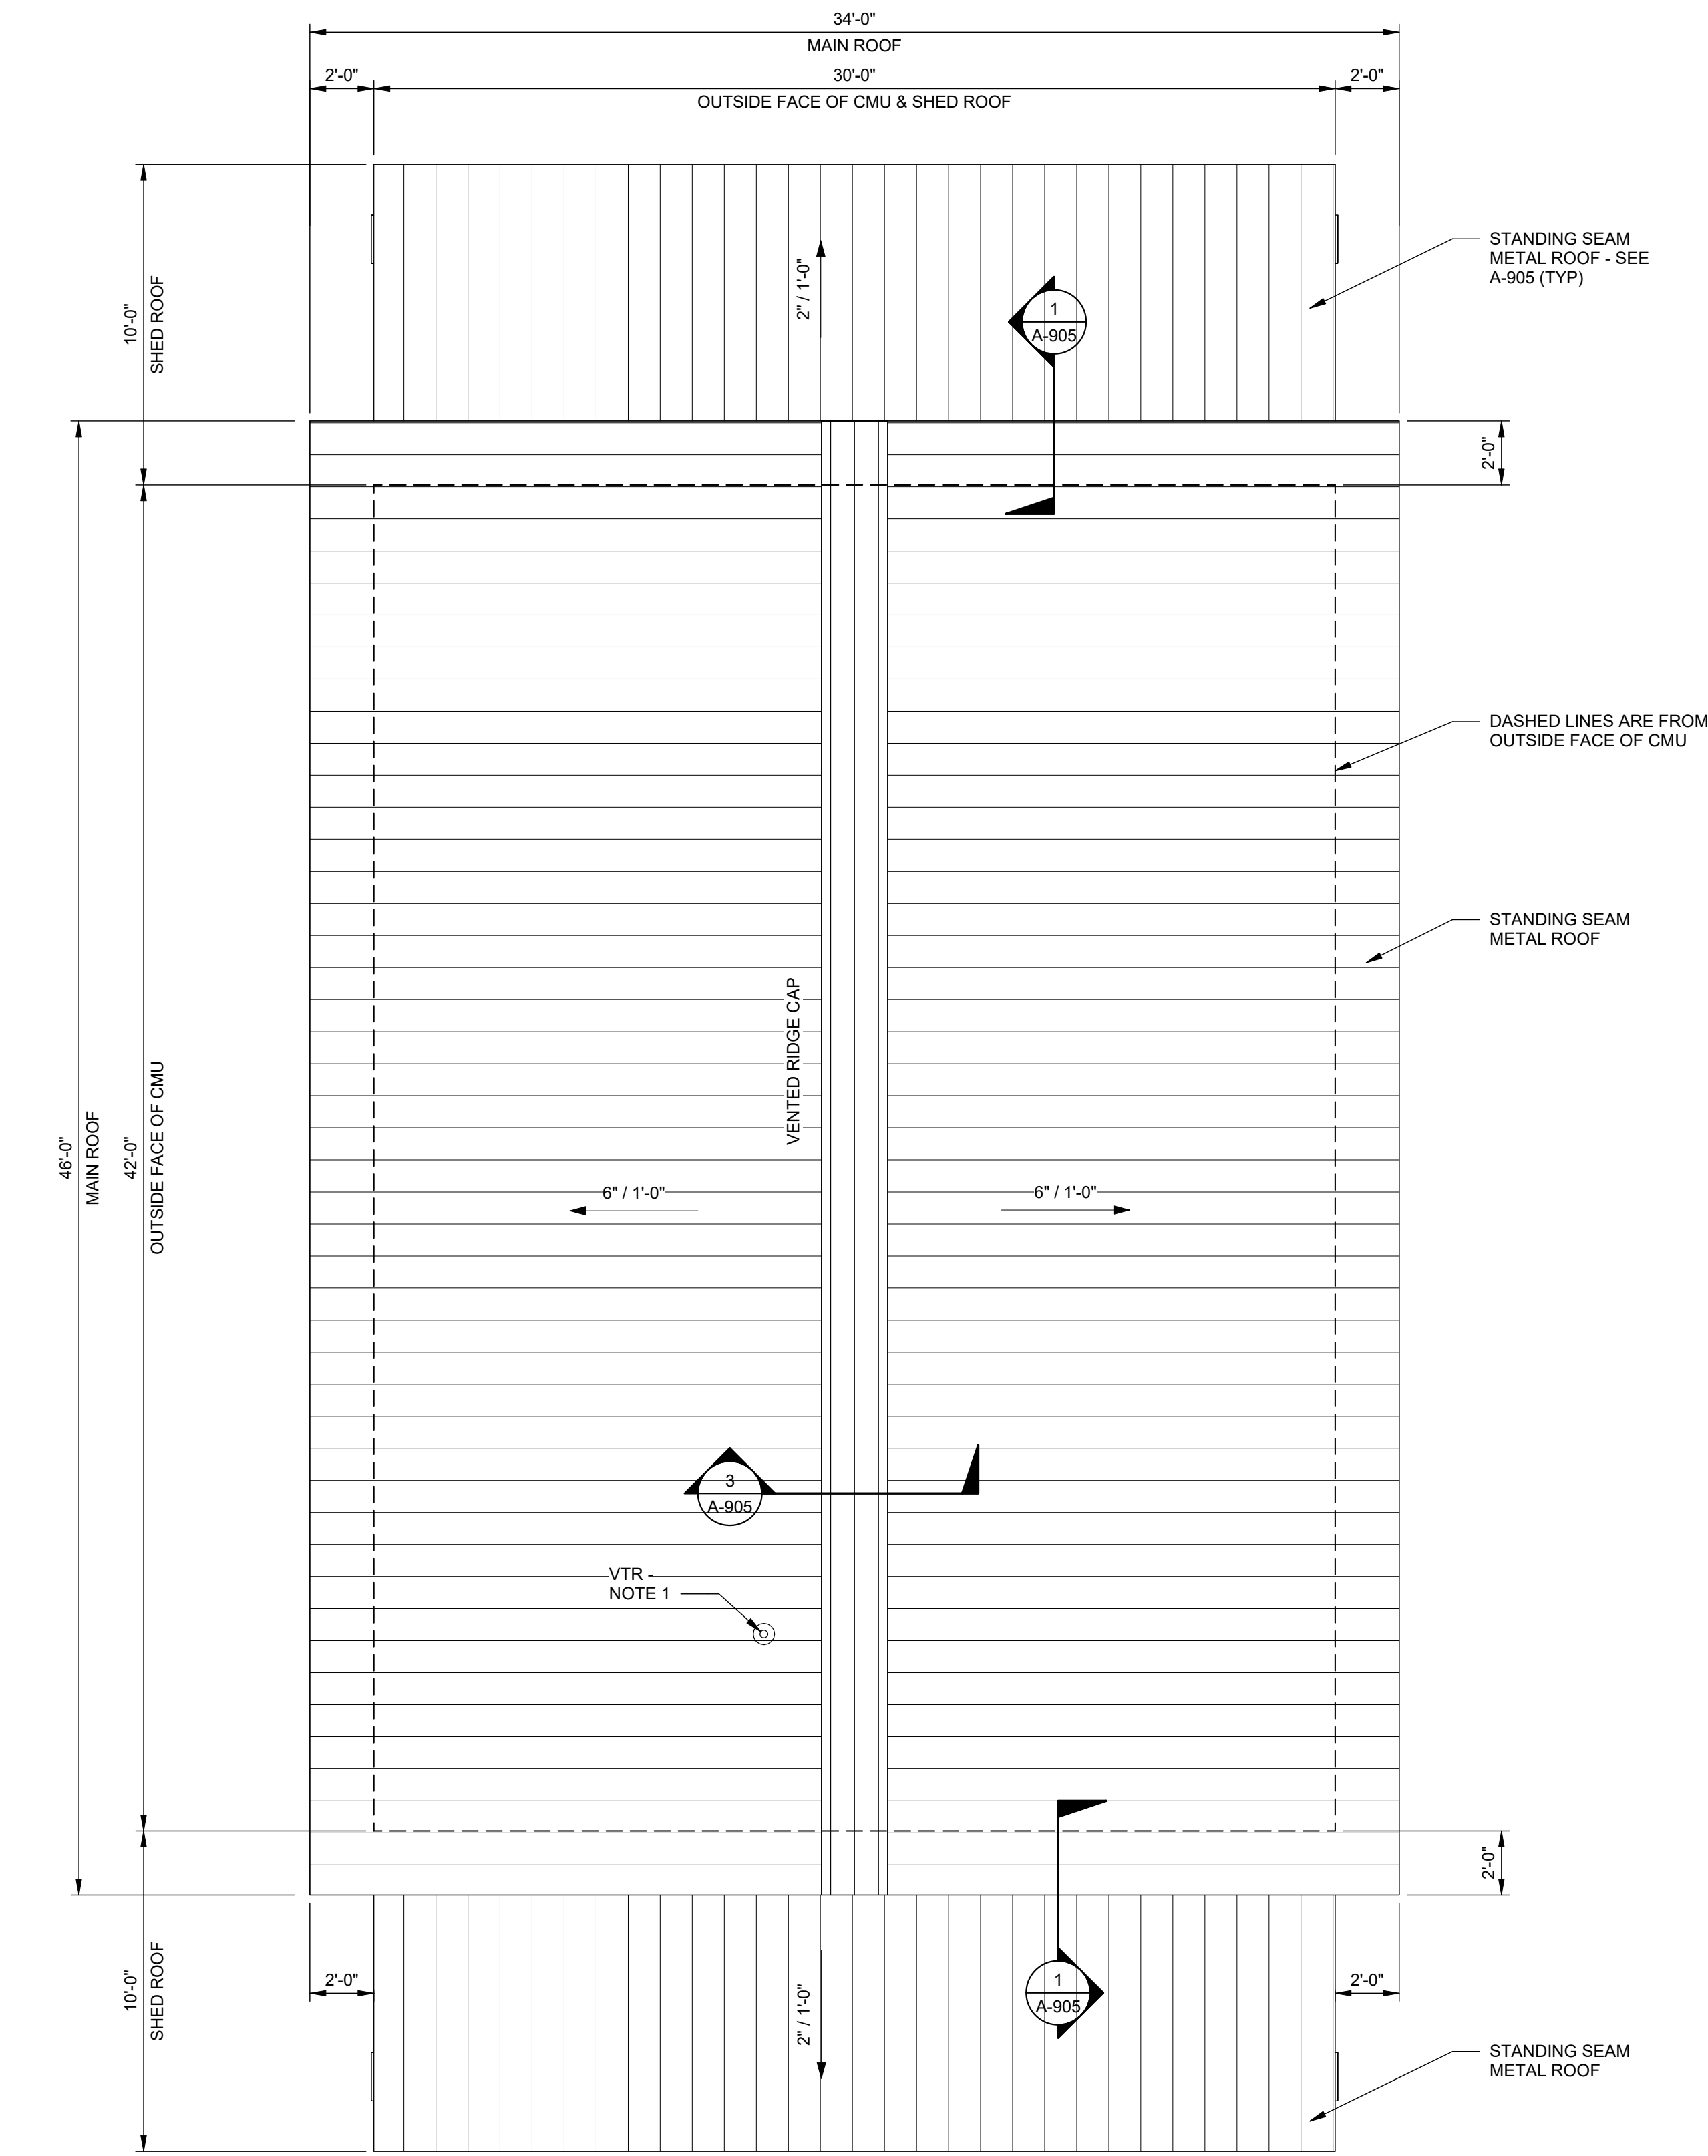

BUILDINGS 300/600 - ROOF PLAN
SCALE: 1/4" = 1'-0"

- NOTES**
1. VENT THROUGH ROOF (VTR) - INSTALL VTR AFTER STANDING SEAM METAL ROOF. COORDINATE EXACT ROOF PENETRATION LOCATION TO CENTER BETWEEN STANDING SEAMS. SEE 2/A-905

NOTE:
SEE CIVIL DRAWINGS FOR TRUE NORTH

PLAN NORTH

SCALE: 1/4" = 1'-0"



United States Department of Agriculture
Forest Service

R-08

Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME

**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE


**BUILDINGS 300/600 - ROOF
PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-304
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 10 OF 53


1/29/2025 4:07:47 PM
C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural-Local_cbdroyd.rvt

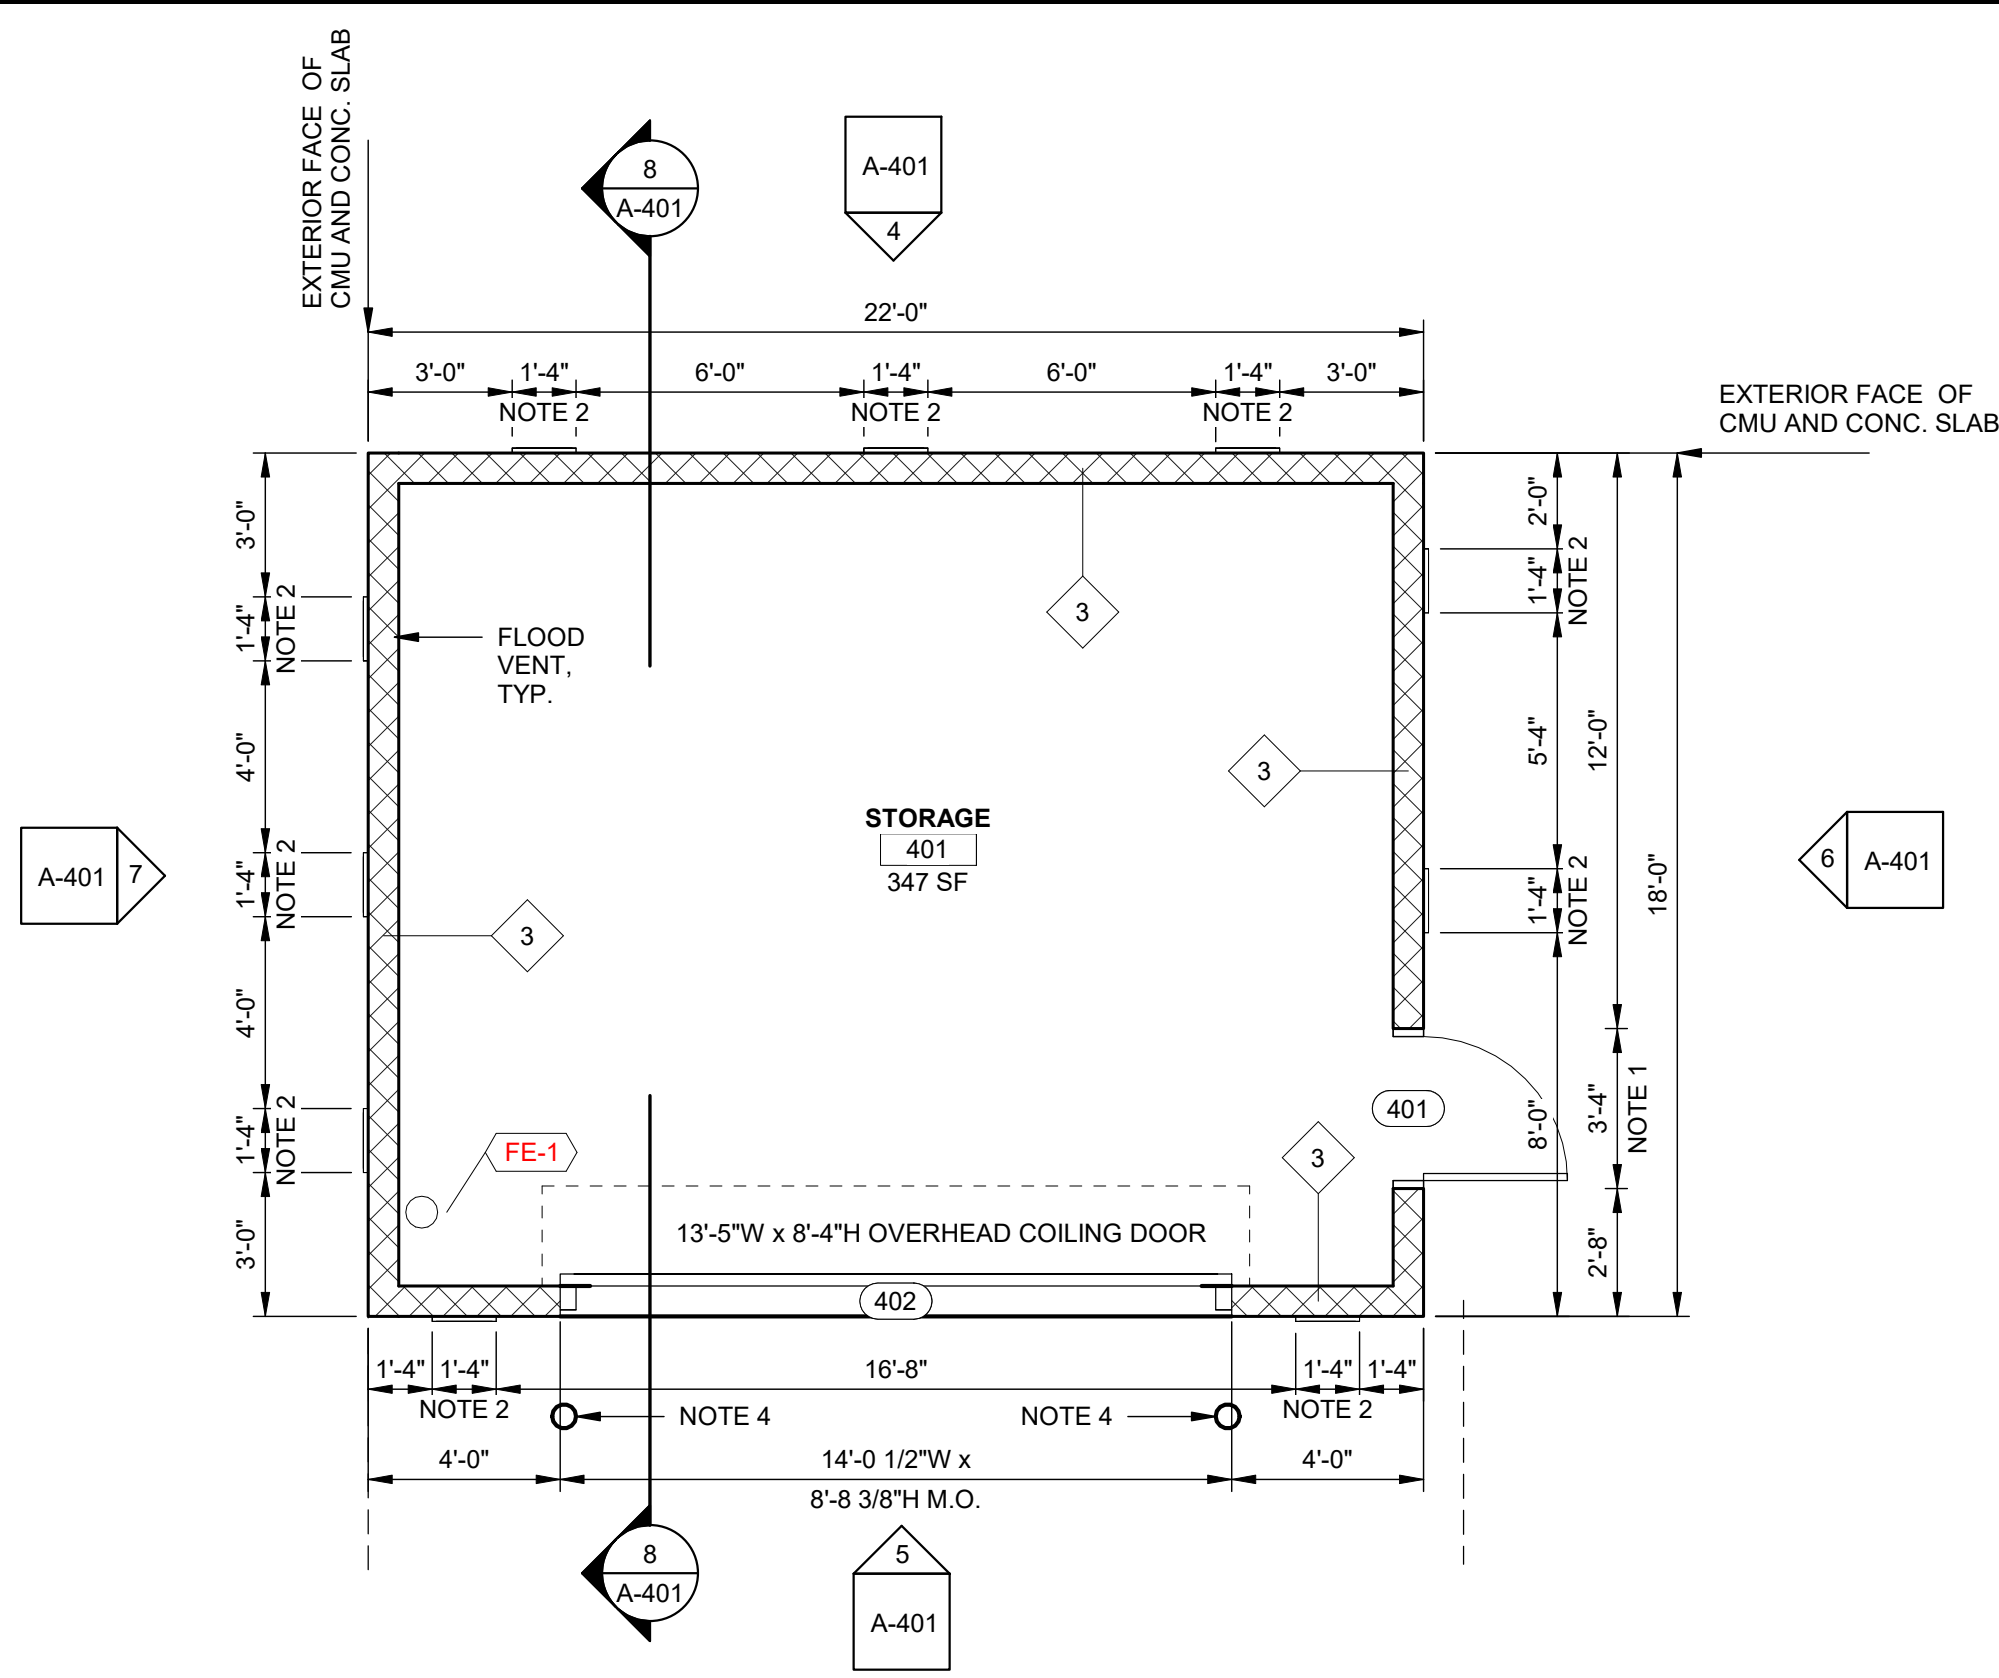


1 **BUILDING 400 - FLOOR PLAN**
SCALE: 1/4" = 1'-0"

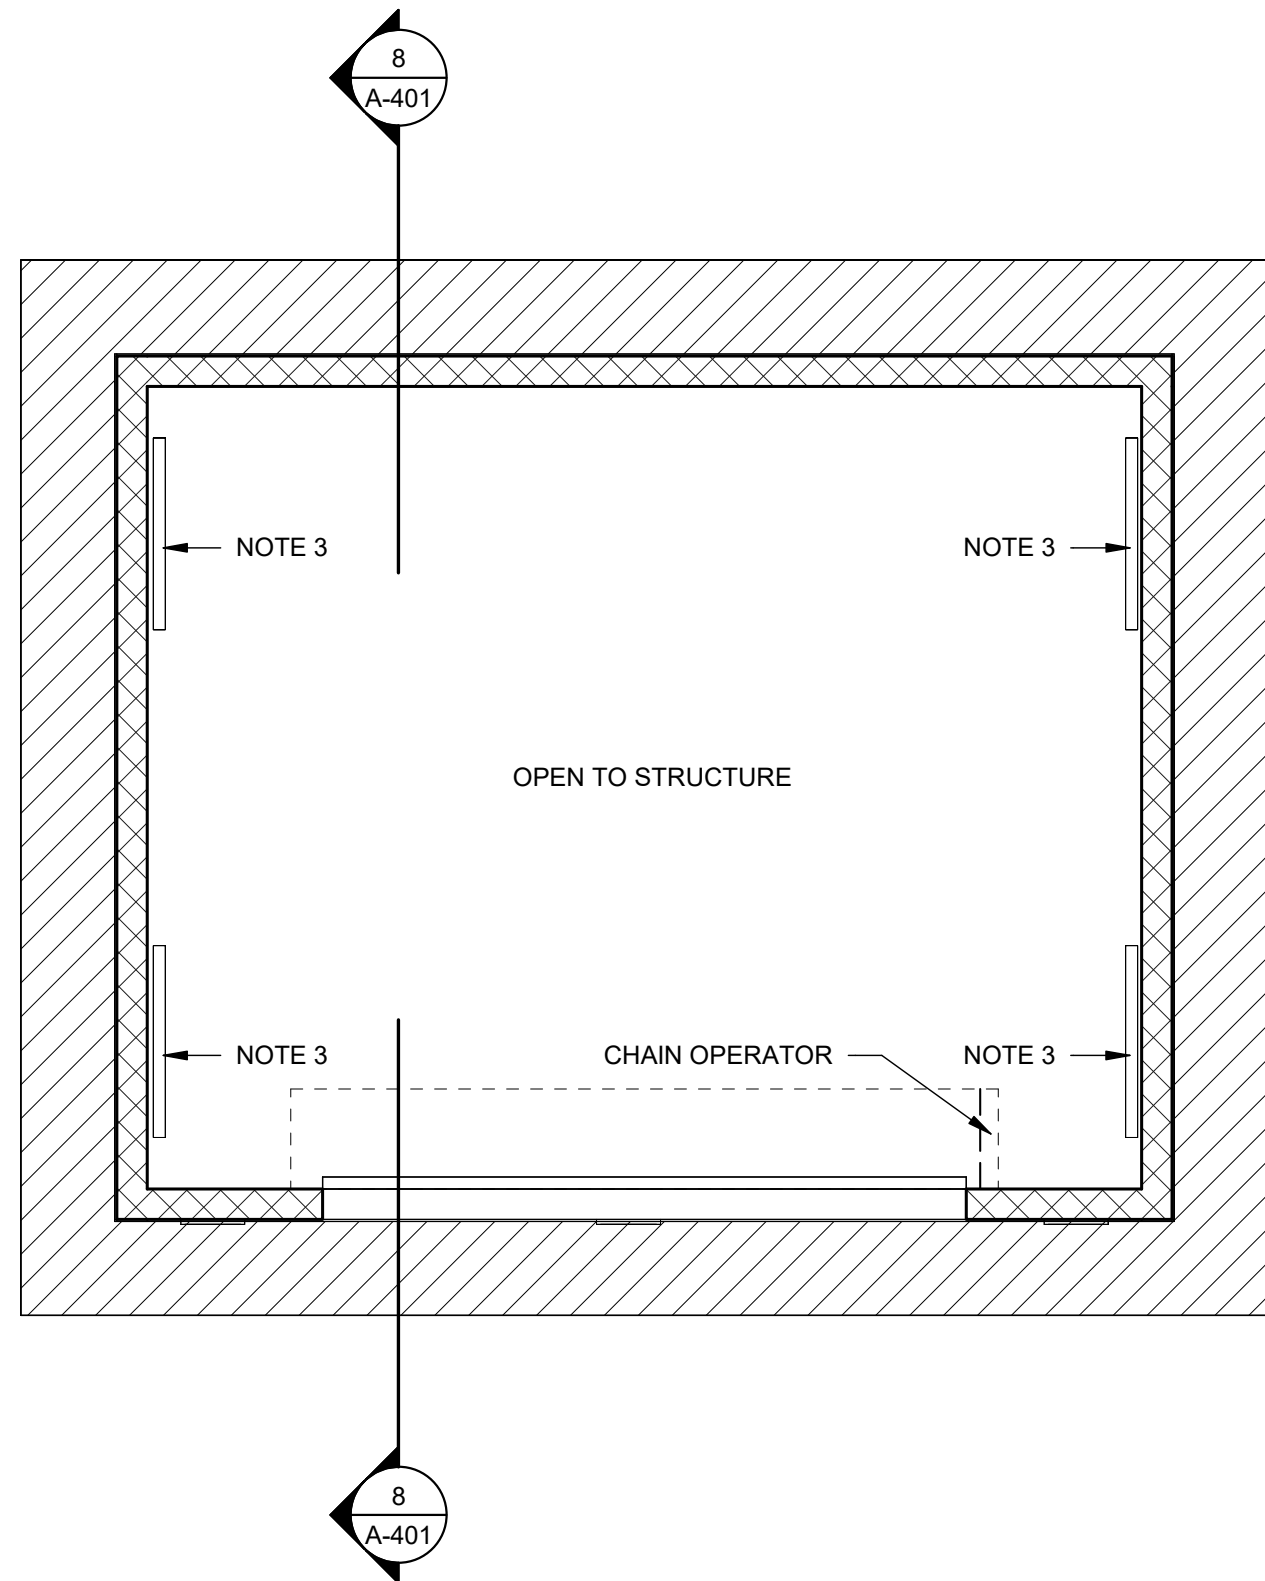


2 **BUILDING 400 - REFLECTED CEILING PLAN**
SCALE: 1/4" = 1'-0"

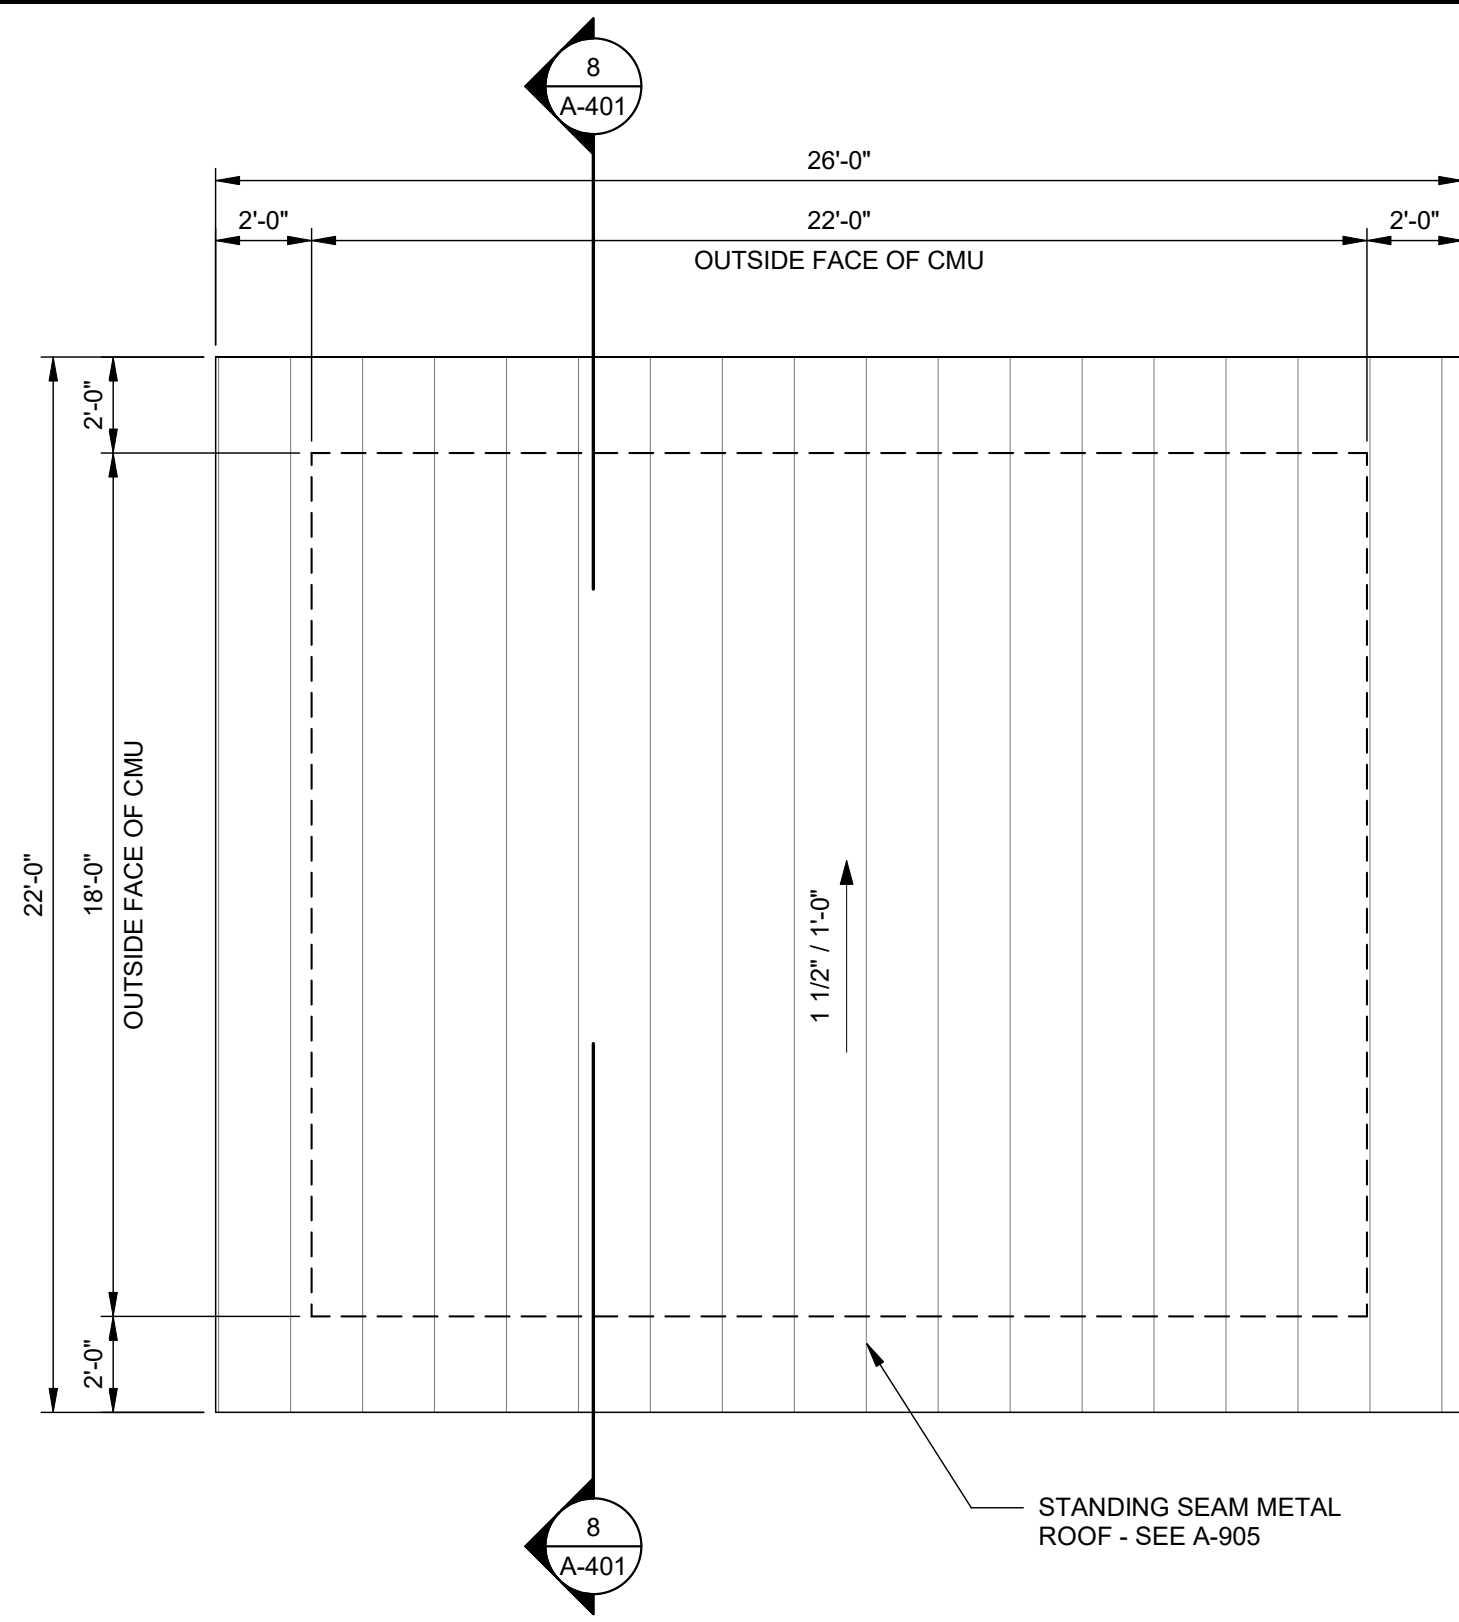


3 **BUILDING 400 - ROOF PLAN**
SCALE: 1/4" = 1'-0"

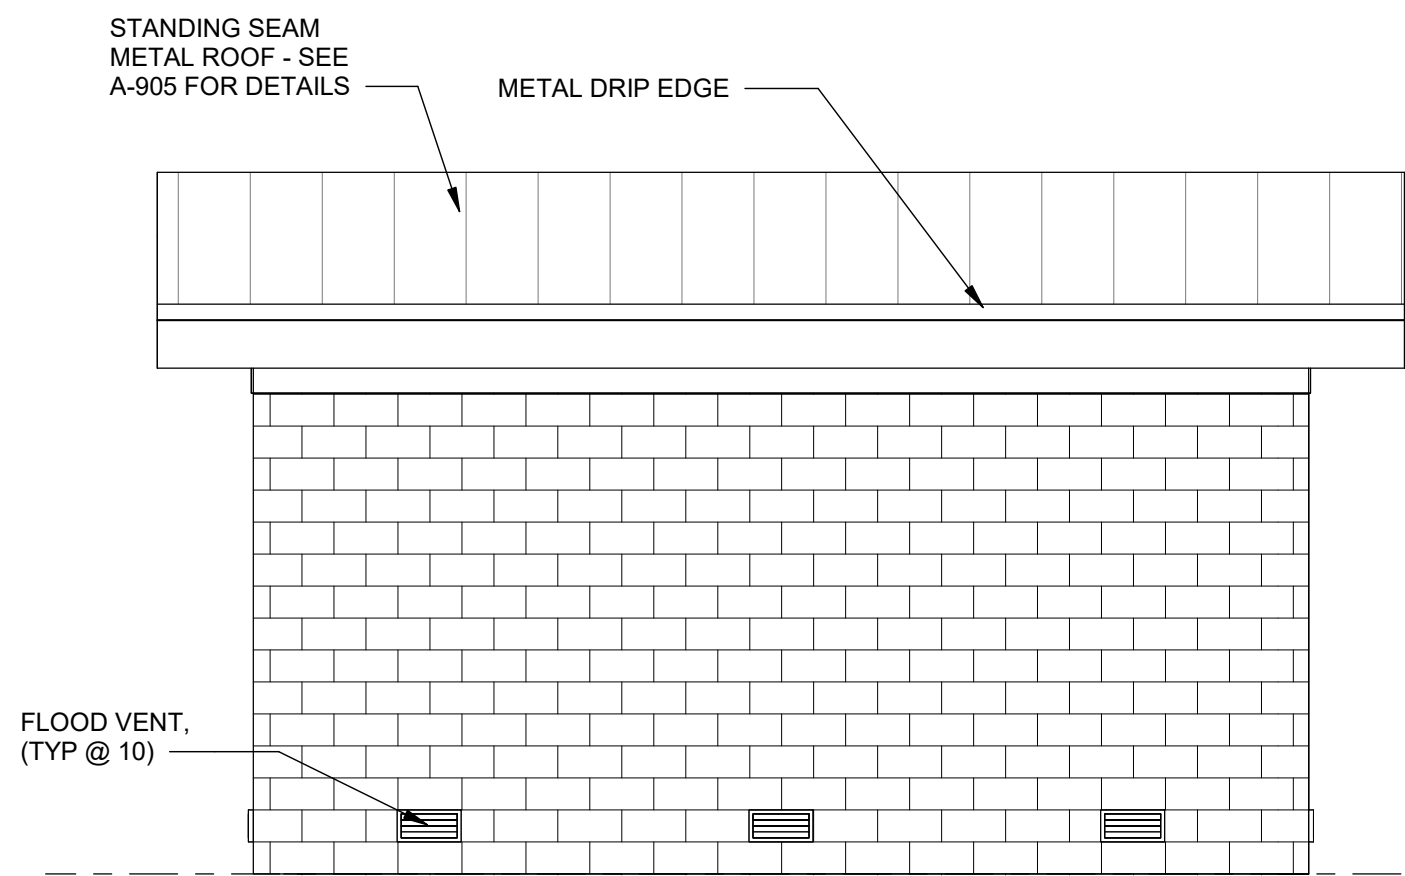


4 **BUILDING 400 - WEST ELEVATION**
SCALE: 1/4" = 1'-0"

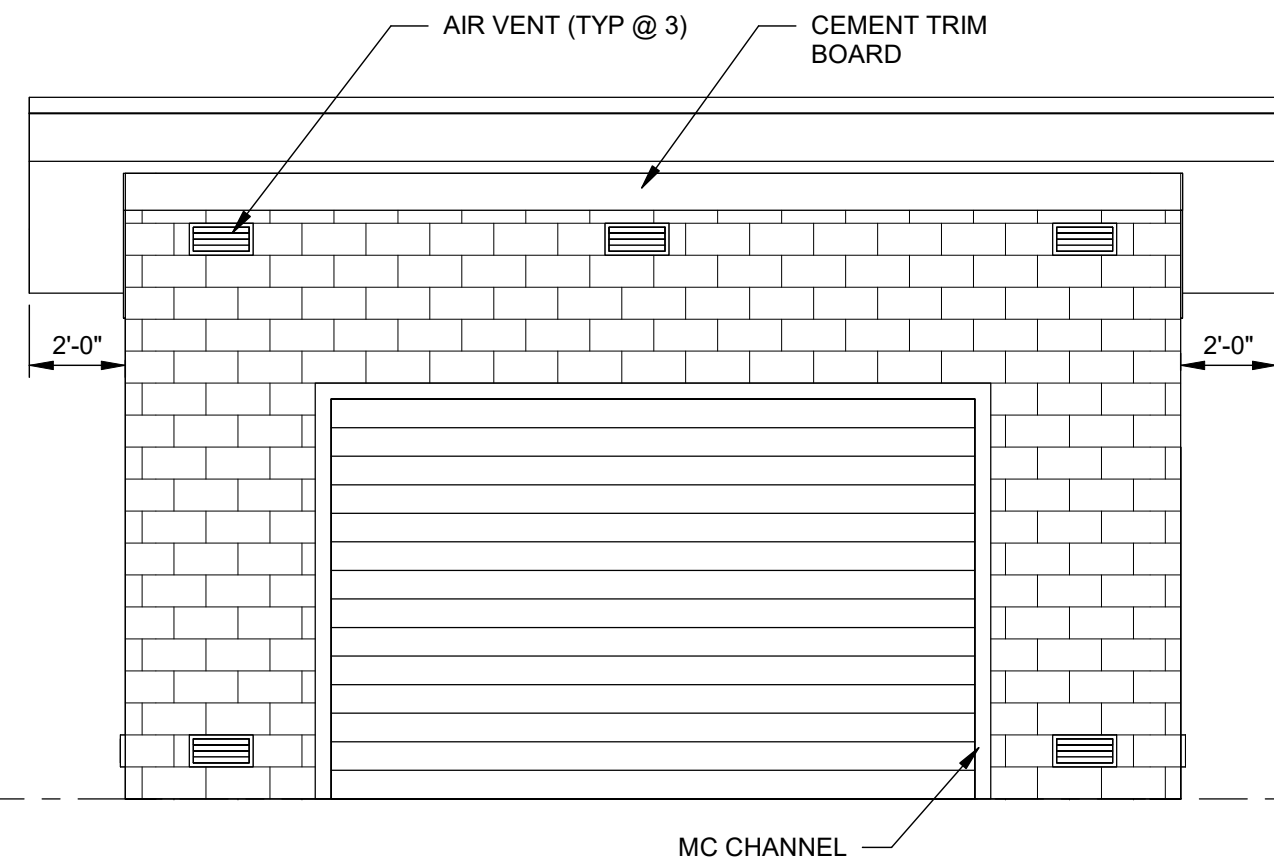


5 **BUILDING 400 - EAST ELEVATION**
SCALE: 1/4" = 1'-0"

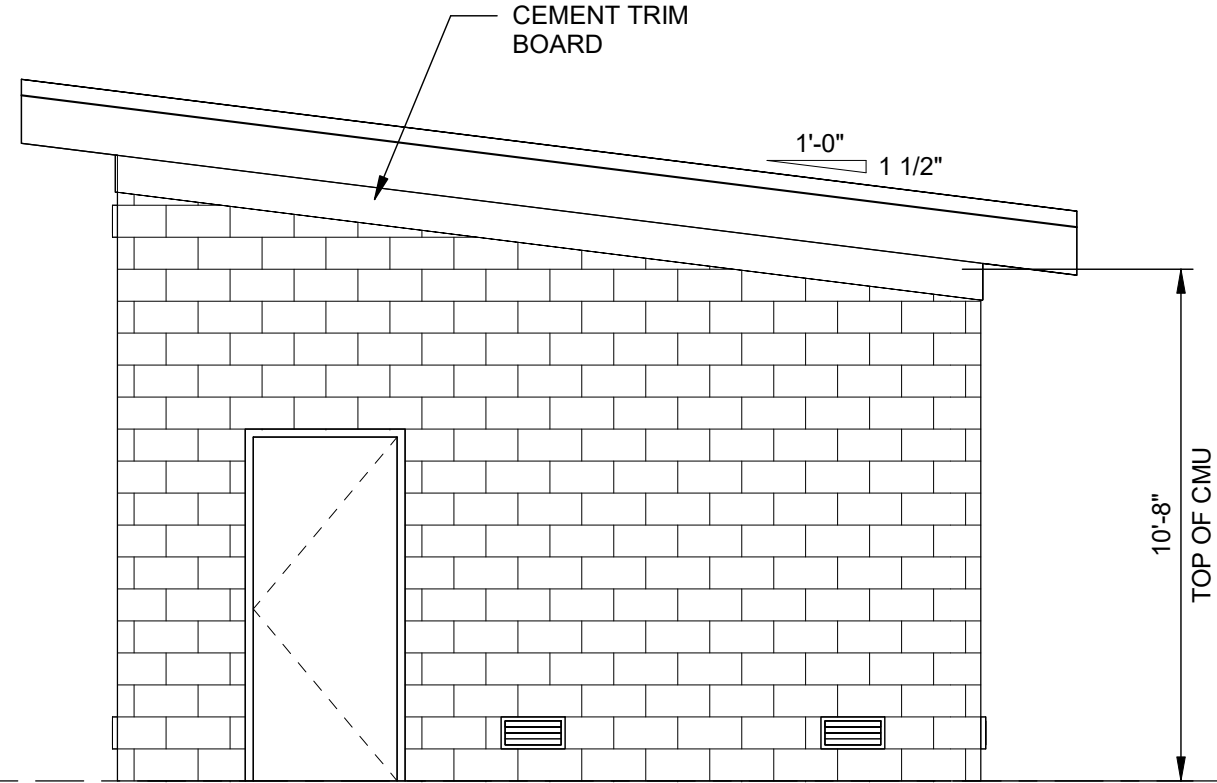

6 **BUILDING 400 - NORTH ELEVATION**
SCALE: 1/4" = 1'-0"

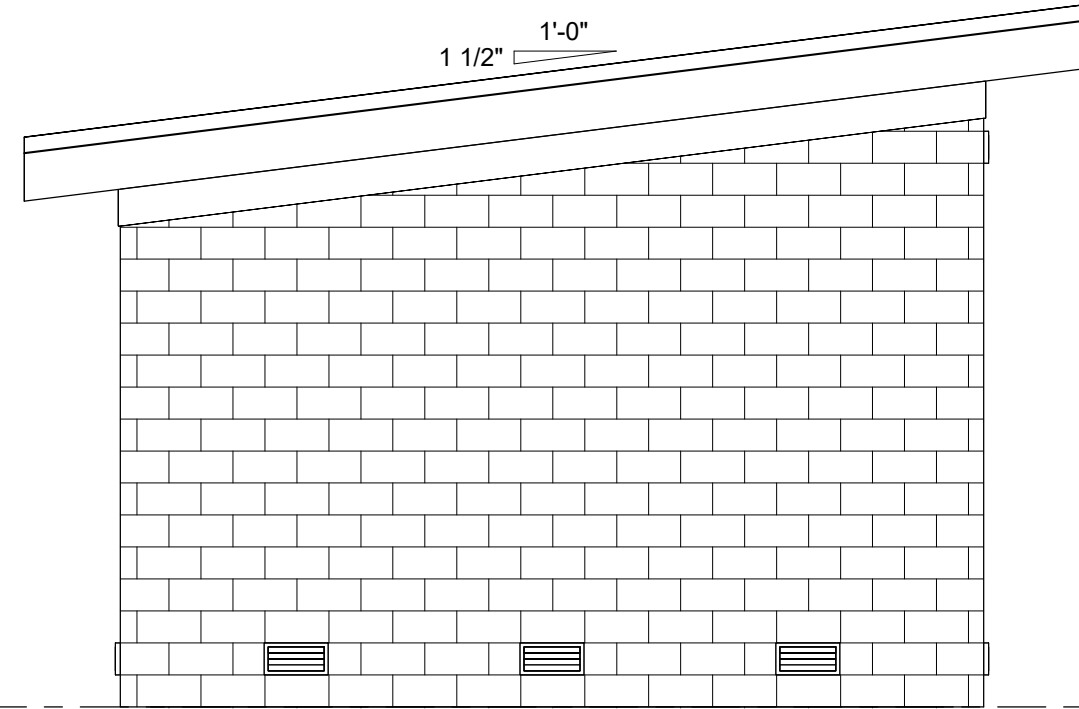

7 **BUILDING 400 - SOUTH ELEVATION**
SCALE: 1/4" = 1'-0"

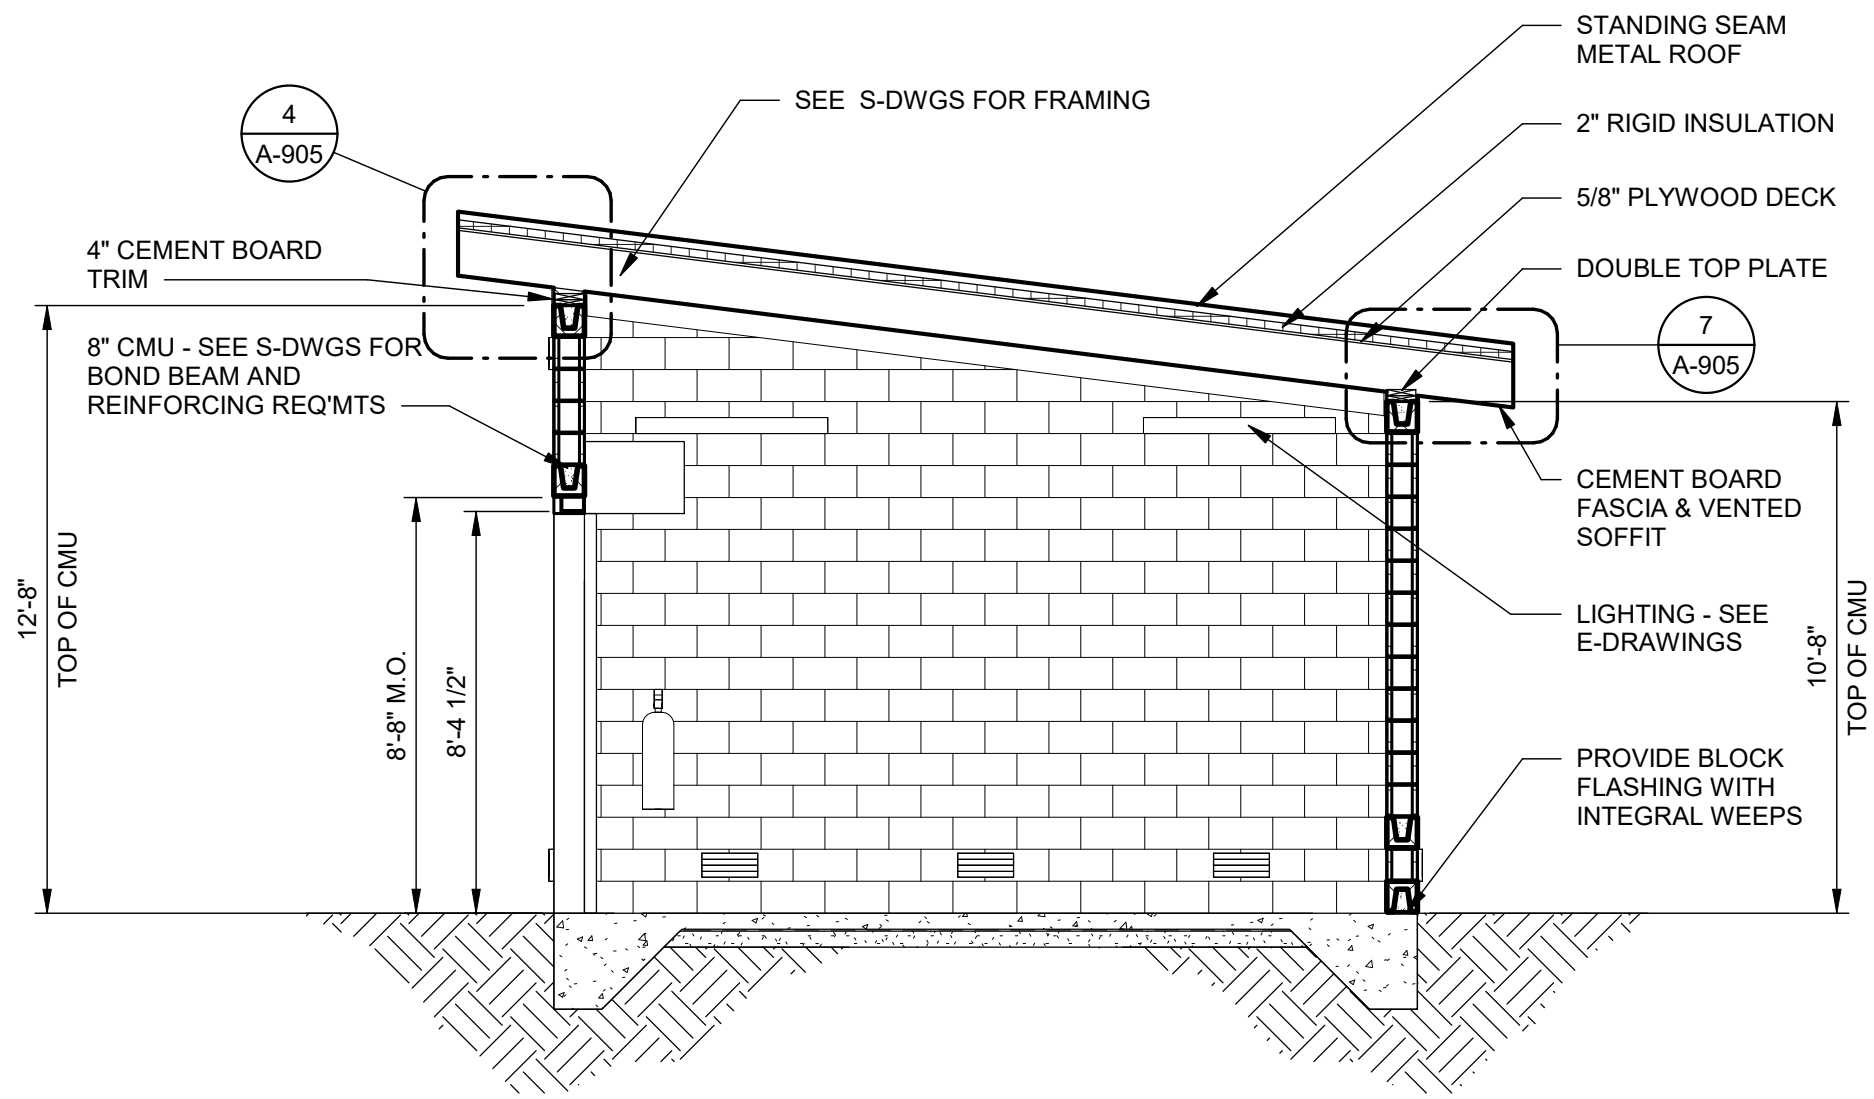


8 **BUILDING 400 - SECTION**
SCALE: 1/4" = 1'-0"

NOTES

- PERSONNEL DOORS SHALL HAVE A 3'-4 1/2"W x 7'-4 3/8"H M.O. w/BOT @ 8" A.F.F.
- FLOOD VENTS W/ MASONRY TRIM AND SLEEVE KIT - 16"W x 8"H M.O. w/BOT @ 8" A.F.F.
- SEE ELEVATIONS FOR EXTERIOR WALL LOCATIONS. (10 EXTERIOR)
- SEE E-DRAWINGS FOR LIGHTING FIXTURES. MOUNT INTERIOR LIGHT FIXTURES AT 10'-0" AFF.
- BOLLARD - LOCATE BOLLARD 2'-0" AWAY FROM FACE OF CMU AND SO THAT EDGE OF INSIDE FACE/BOLLARD = INSIDE FACE/JAMB CHANNEL - SEE 5/C-602.
- PROVIDE PIGMENTED CMU WITH INTEGRAL WATER REPELLENT - SEE SPECIFICATION 04200.
- INSTALL SEALANT AT TOP AND SIDES OF ALL EXTERIOR SURFACE MOUNTED ITEMS AND AROUND EXTERIOR PERIMETER OF ALL WALL PENETRATIONS.


LEGEND	
ROOM NAME	ROOM NAME & NUMBER - SEE FINISH SCHEDULE ON A-902
101	150 SF
FE-1	TAG/TYPE
○	FIRE EXTINGUISHER WITH BRACKET
11	WALL TYPE - SEE A-904
101	DOOR NUMBER - SEE DOOR SCHEDULE ON A-901

CEILING LEGEND	
CEMENT BOARD SOFFIT	

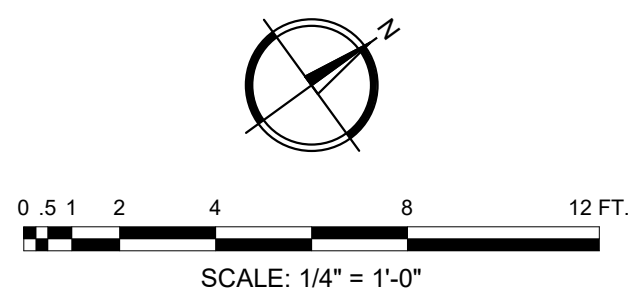

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

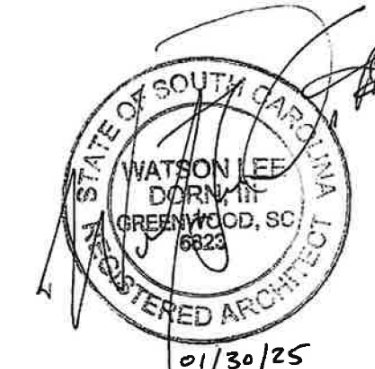

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051






PREPARED BY:
JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
BUILDING 400 - STORAGE
BUILDING - FLOOR PLAN,
REFLECTED CEILING PLAN,
SECTION & ELEVATIONS

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-401
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 11 OF 53

1/29/2025 4:08:47 PM



C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural-Local_chbroyd.rvt

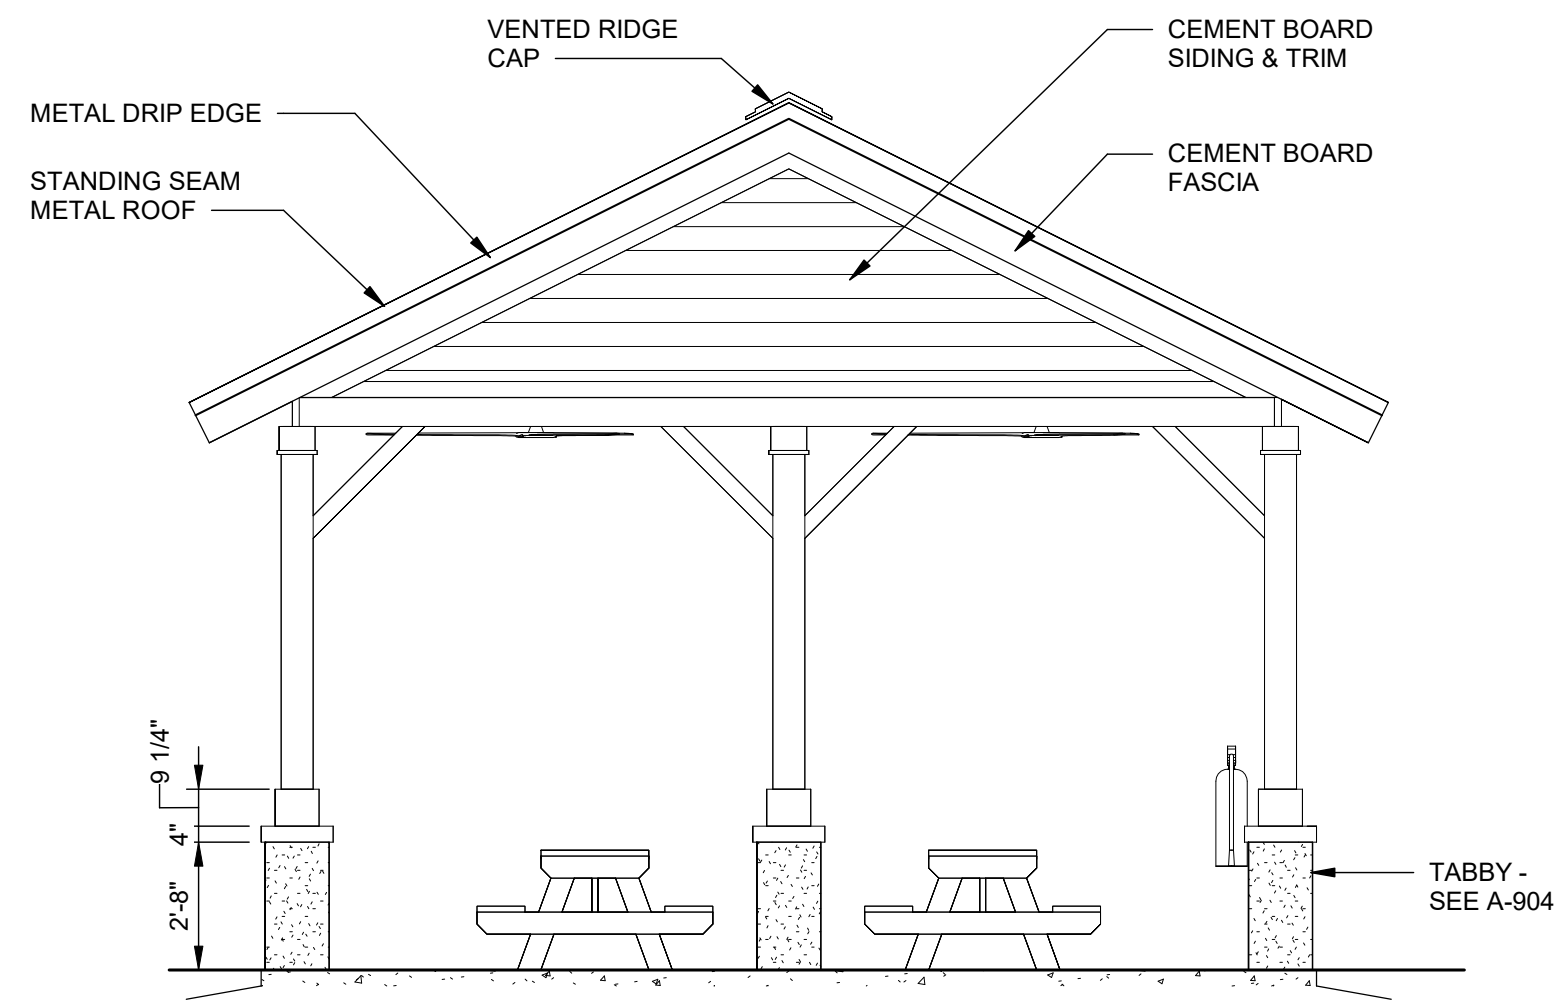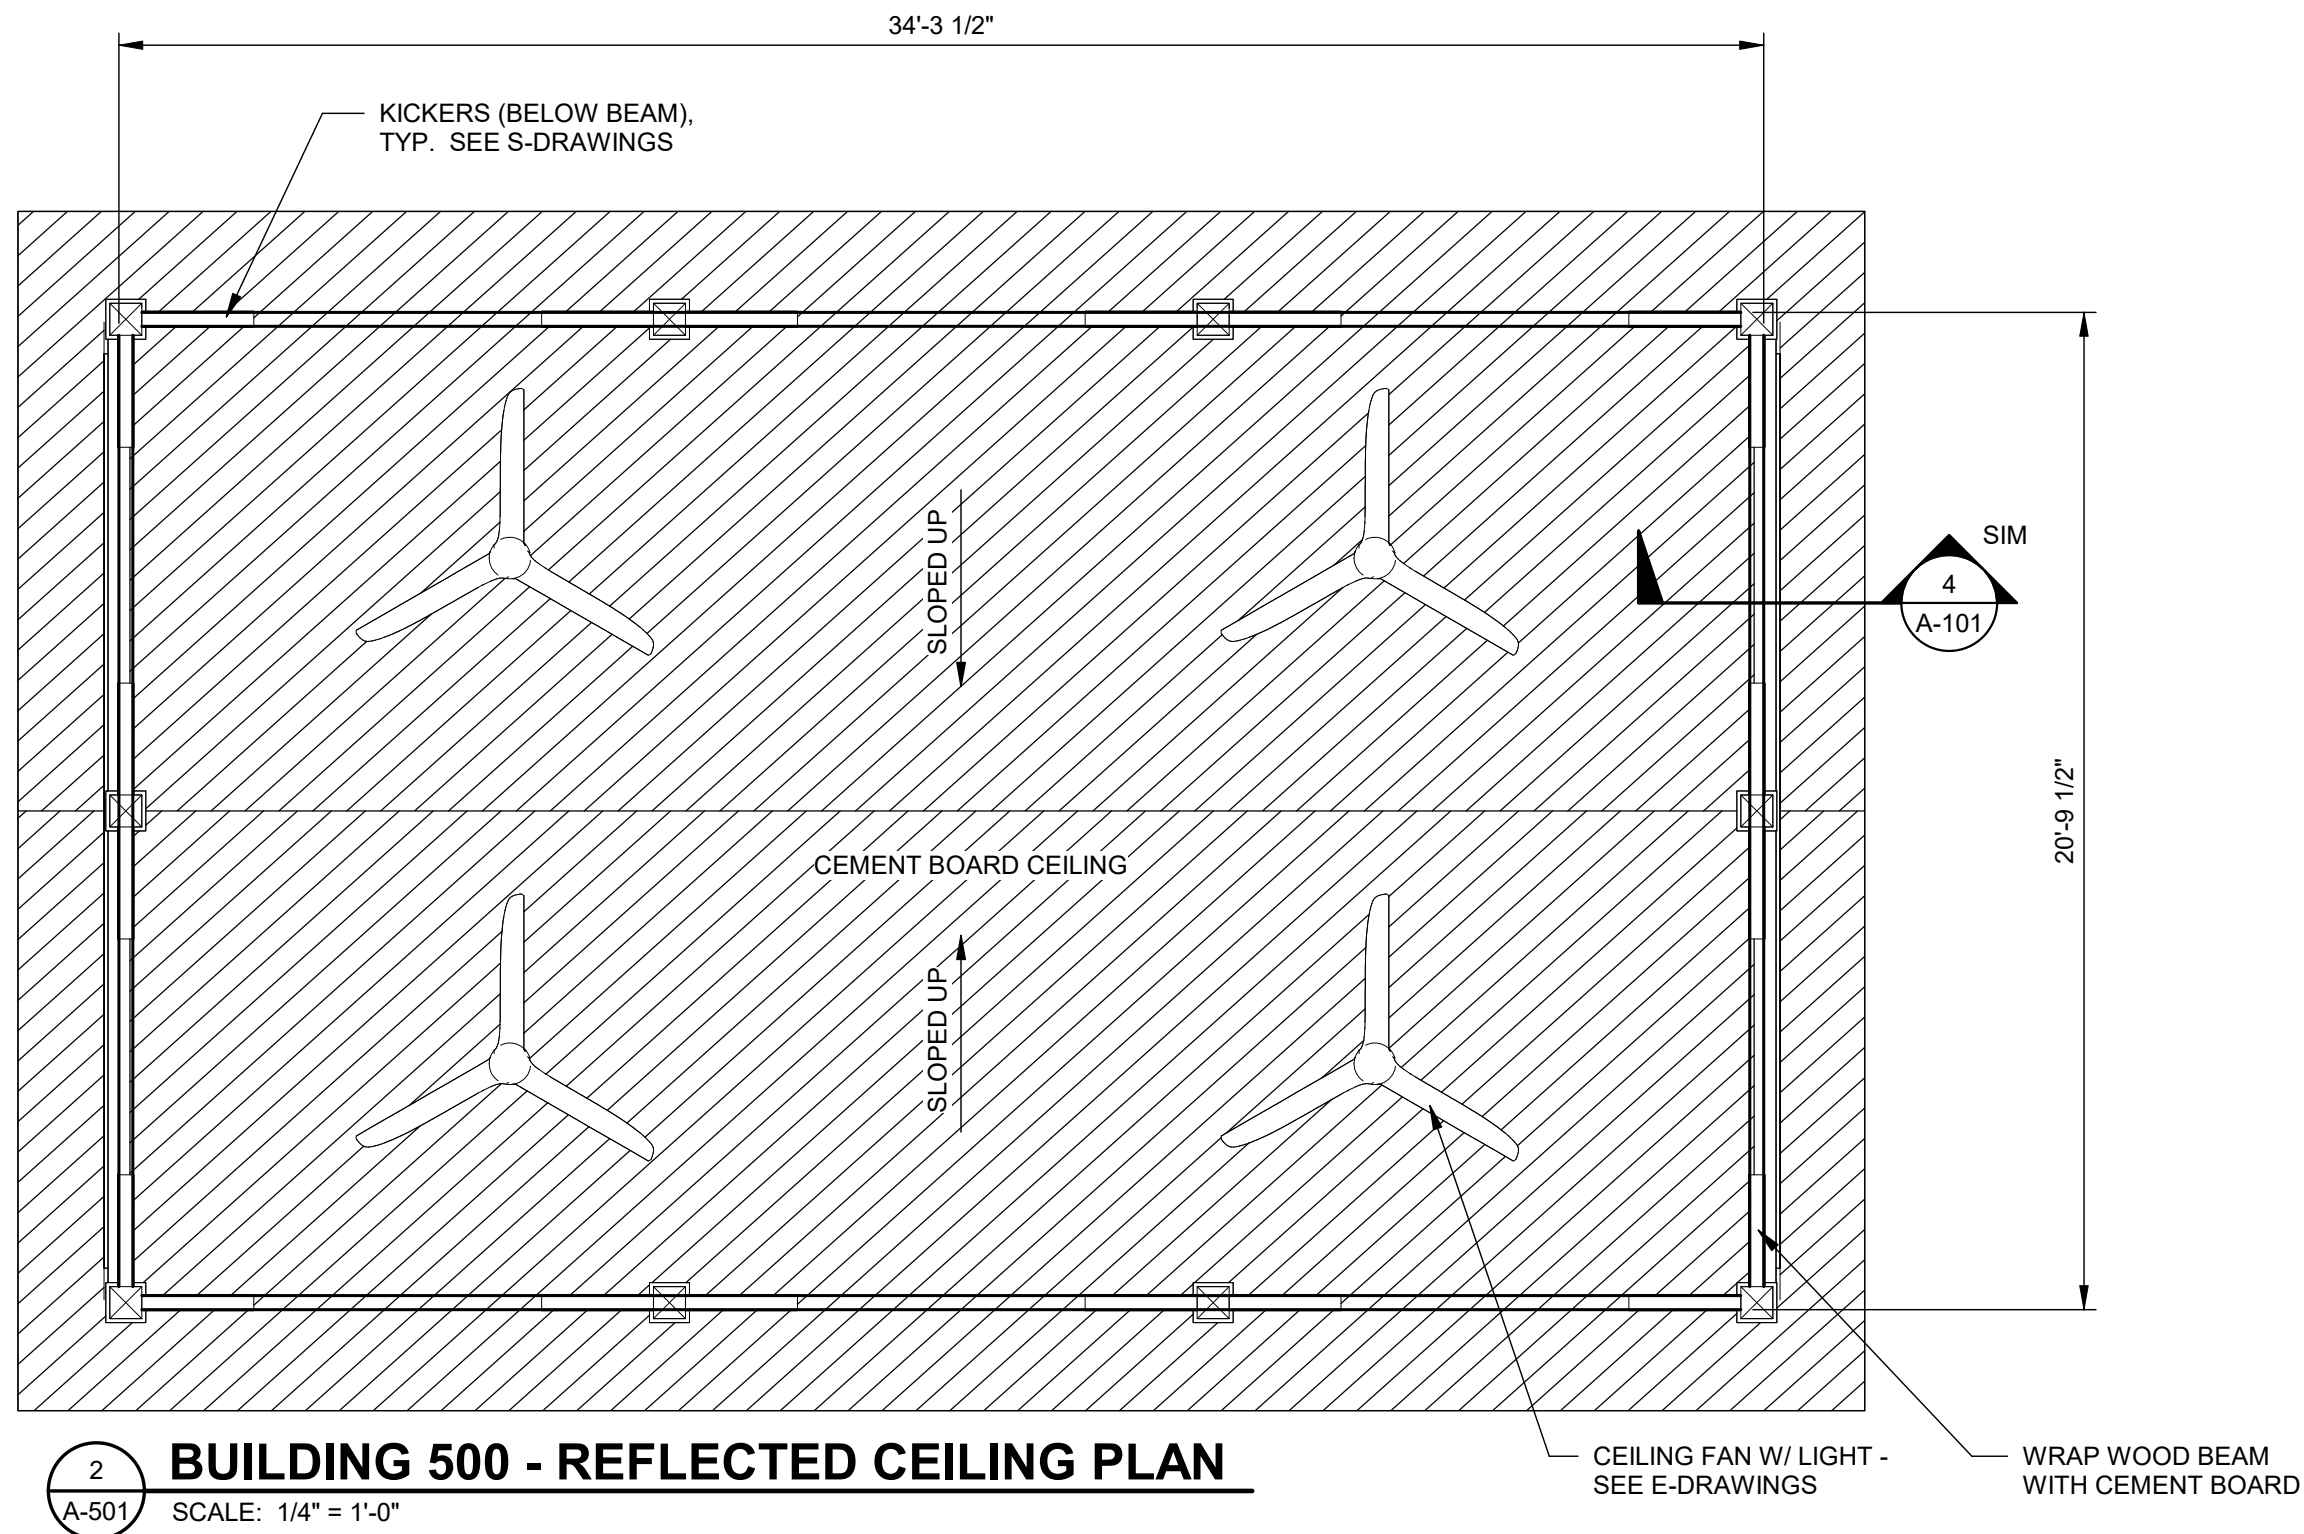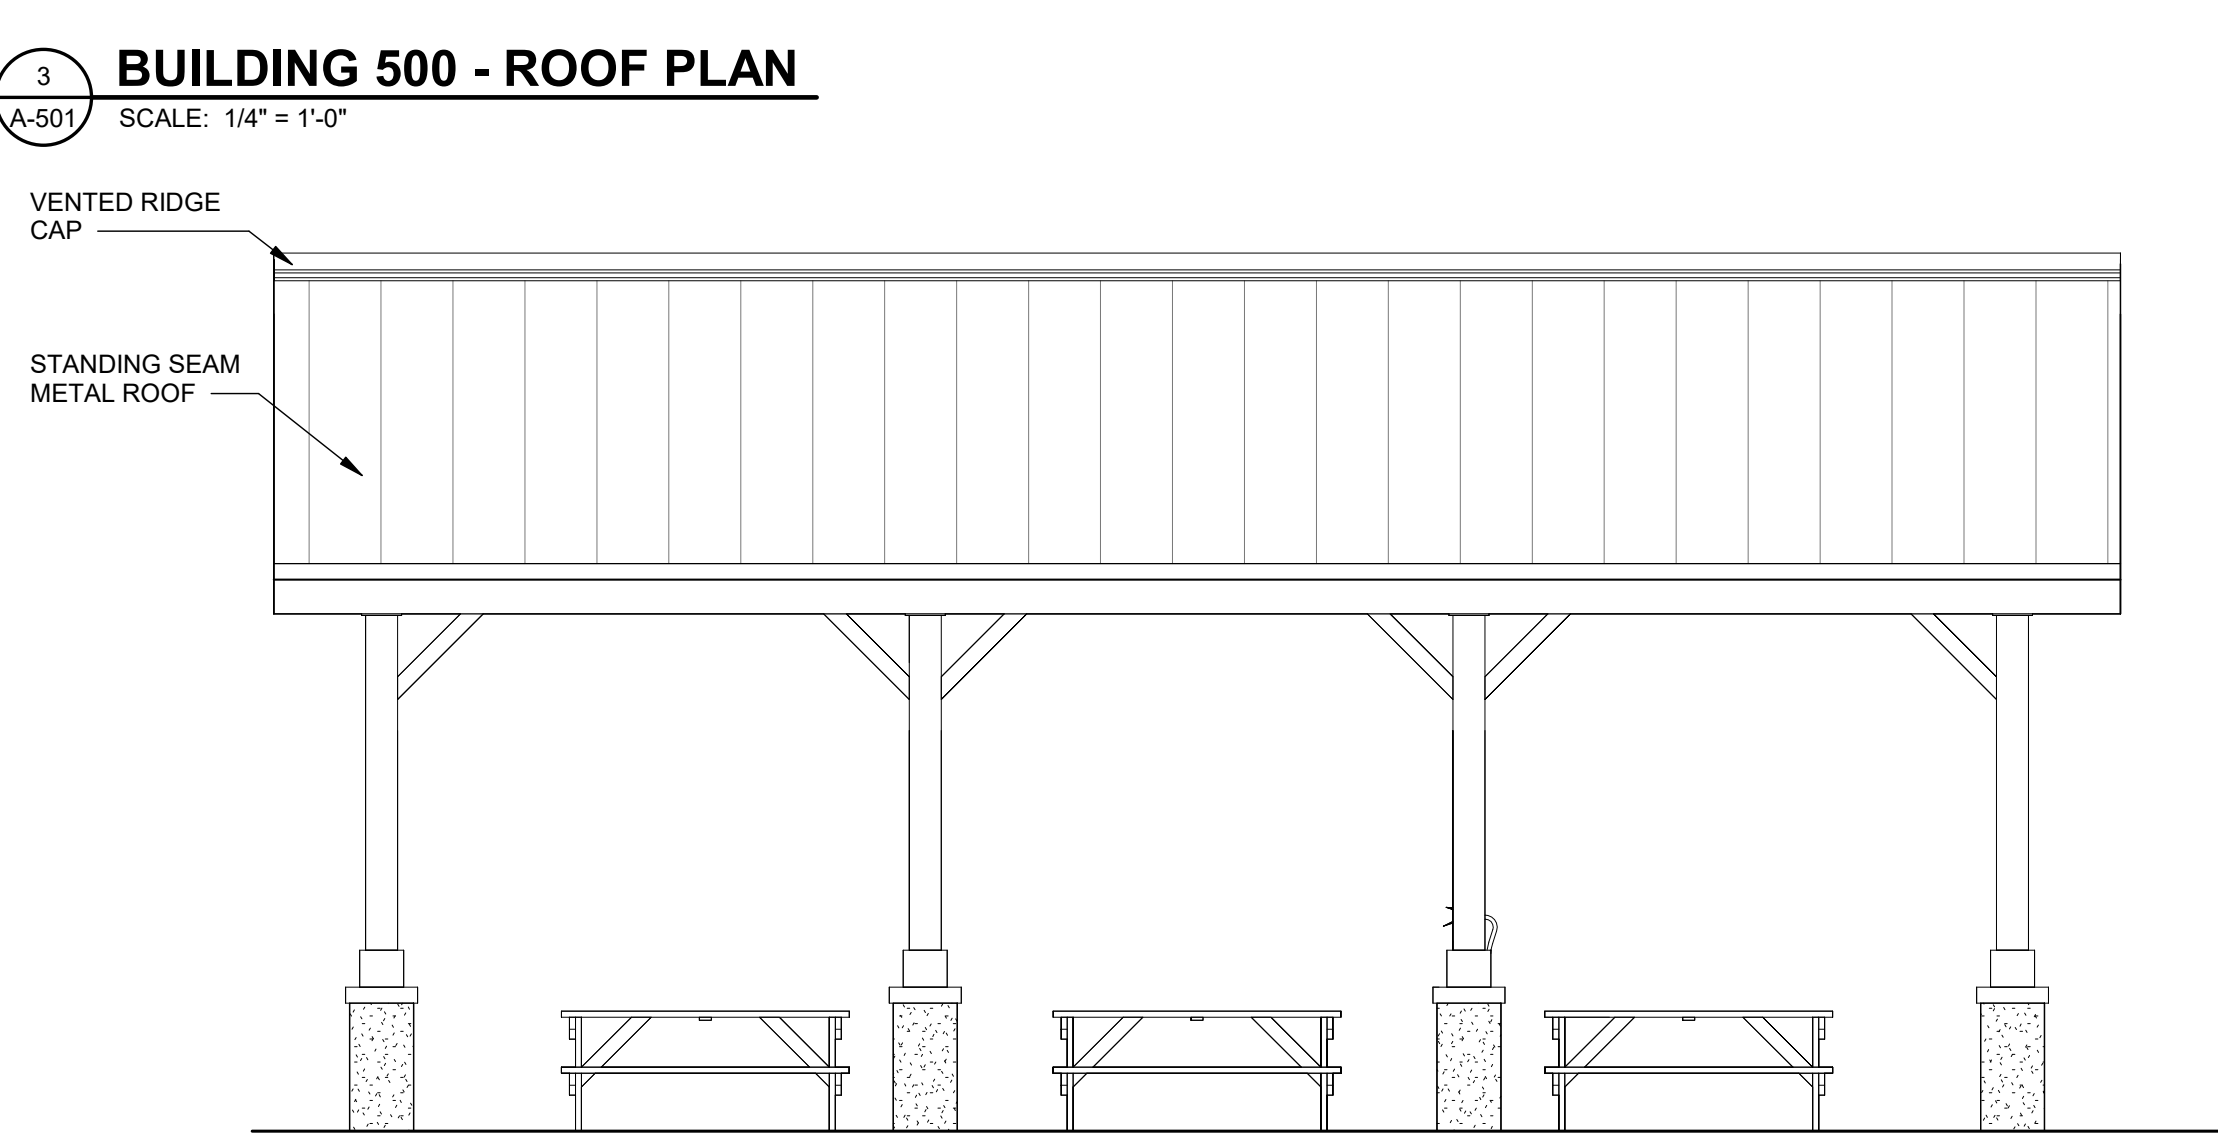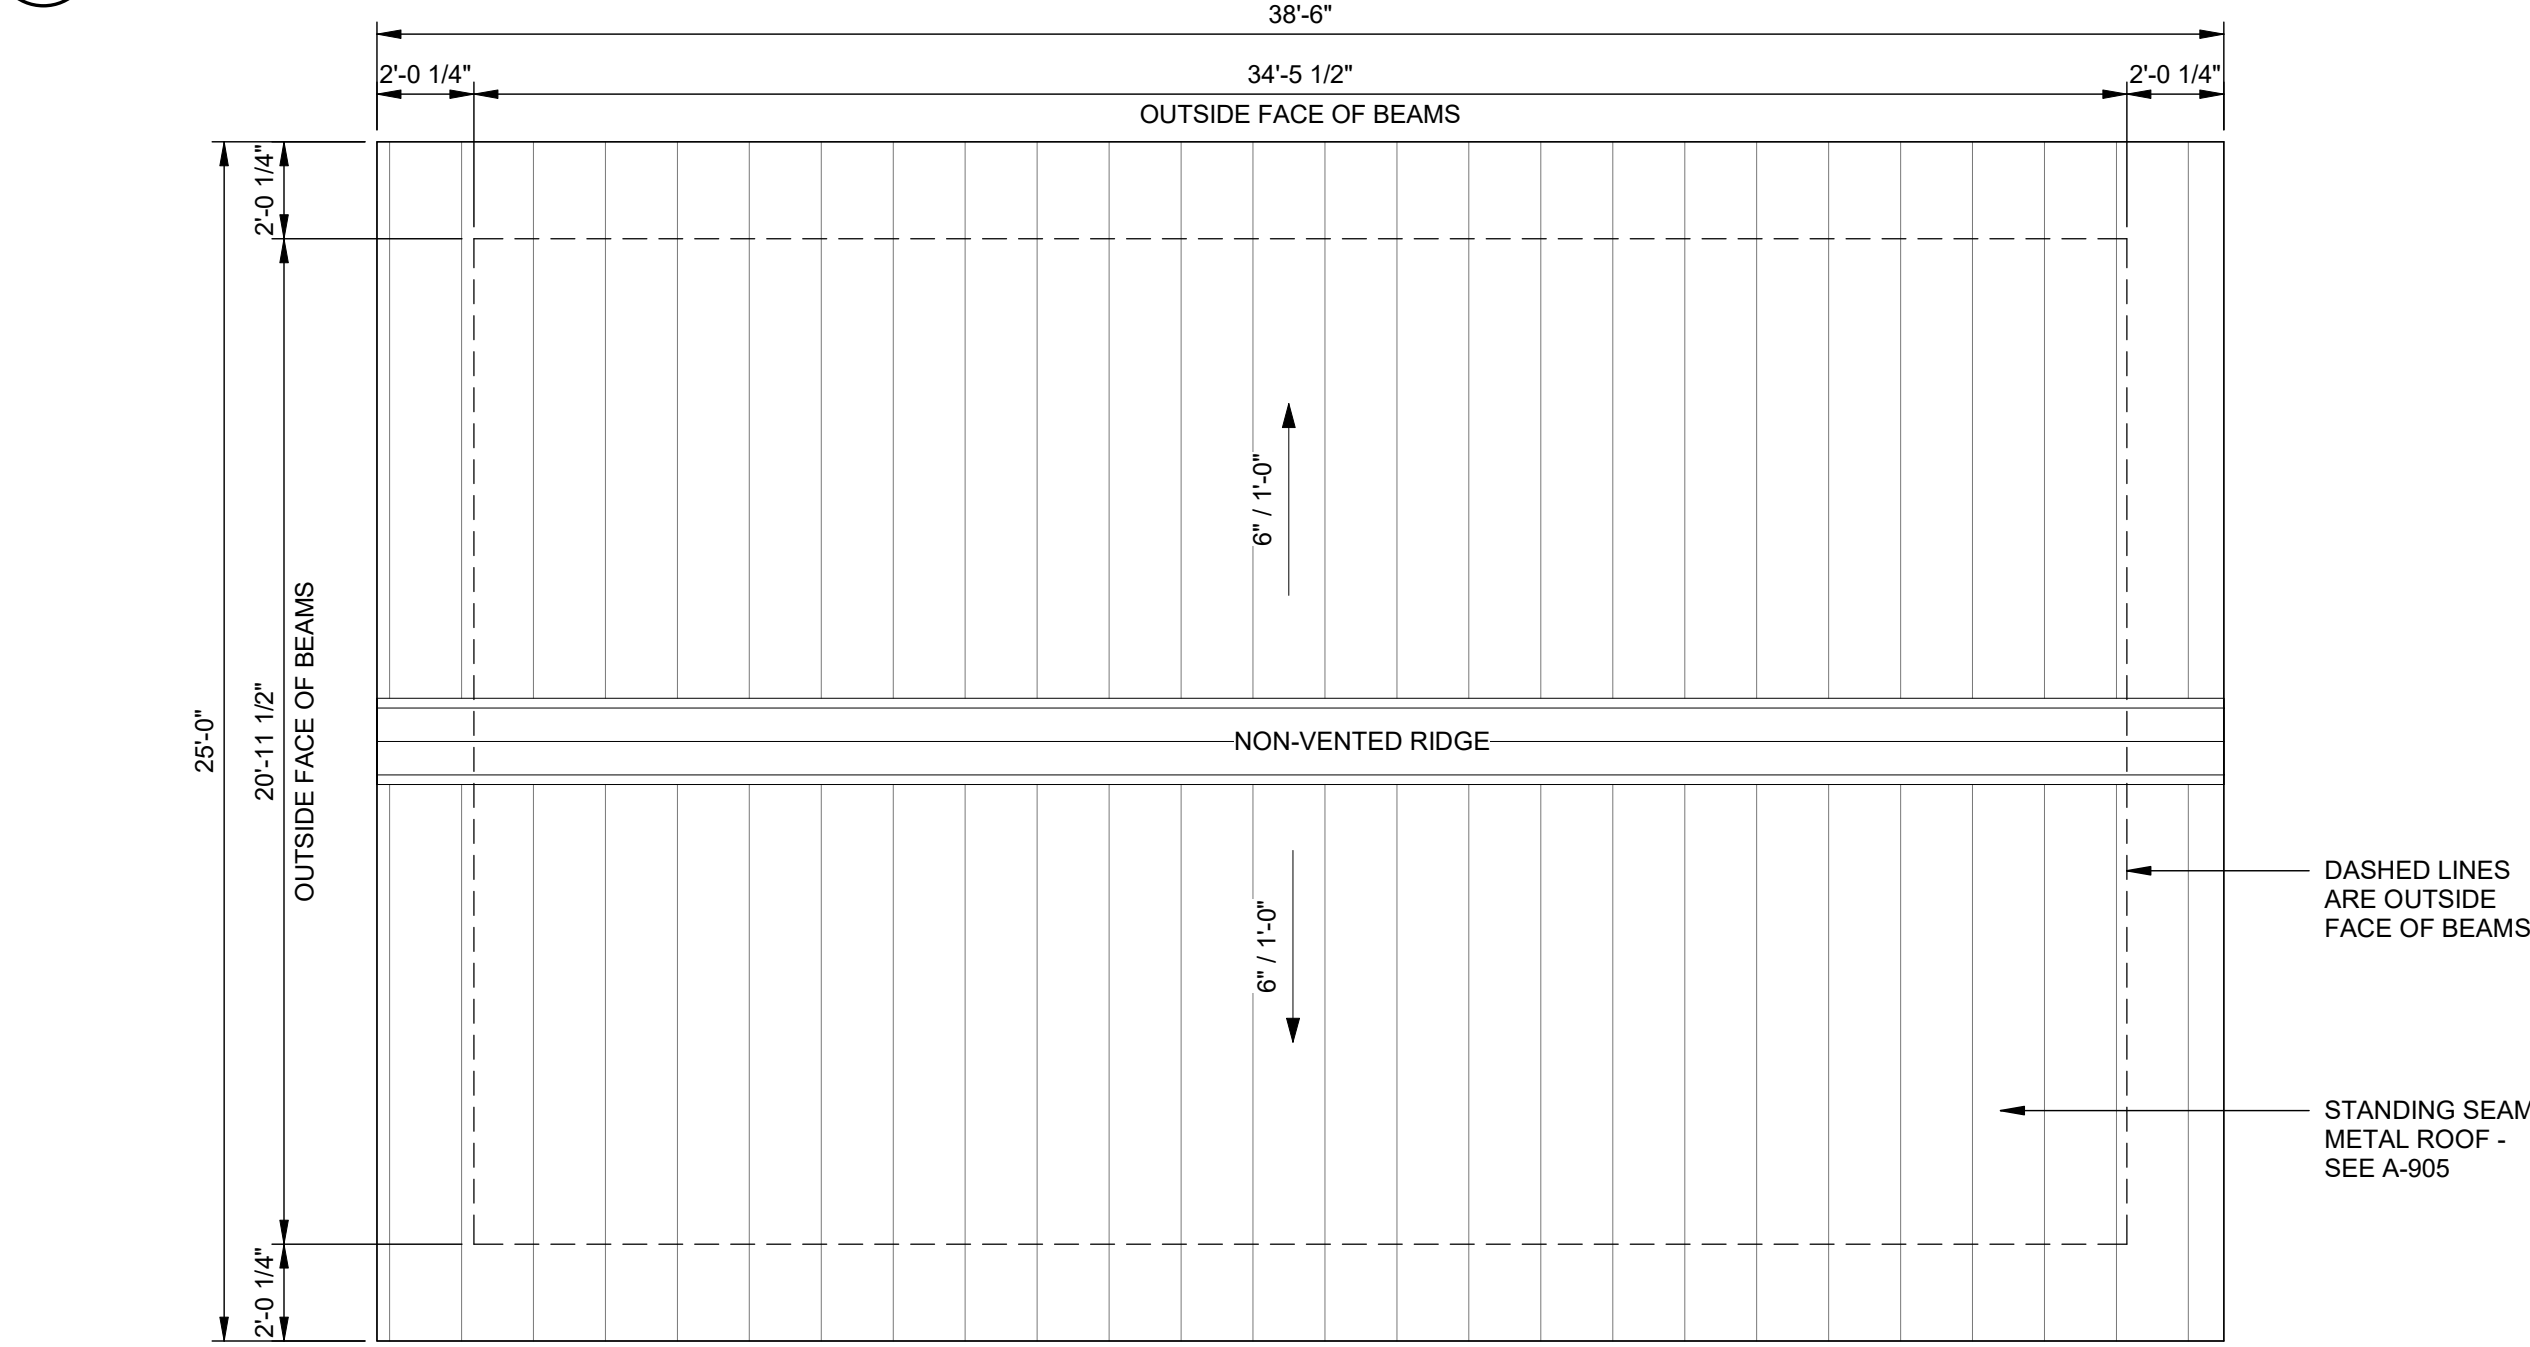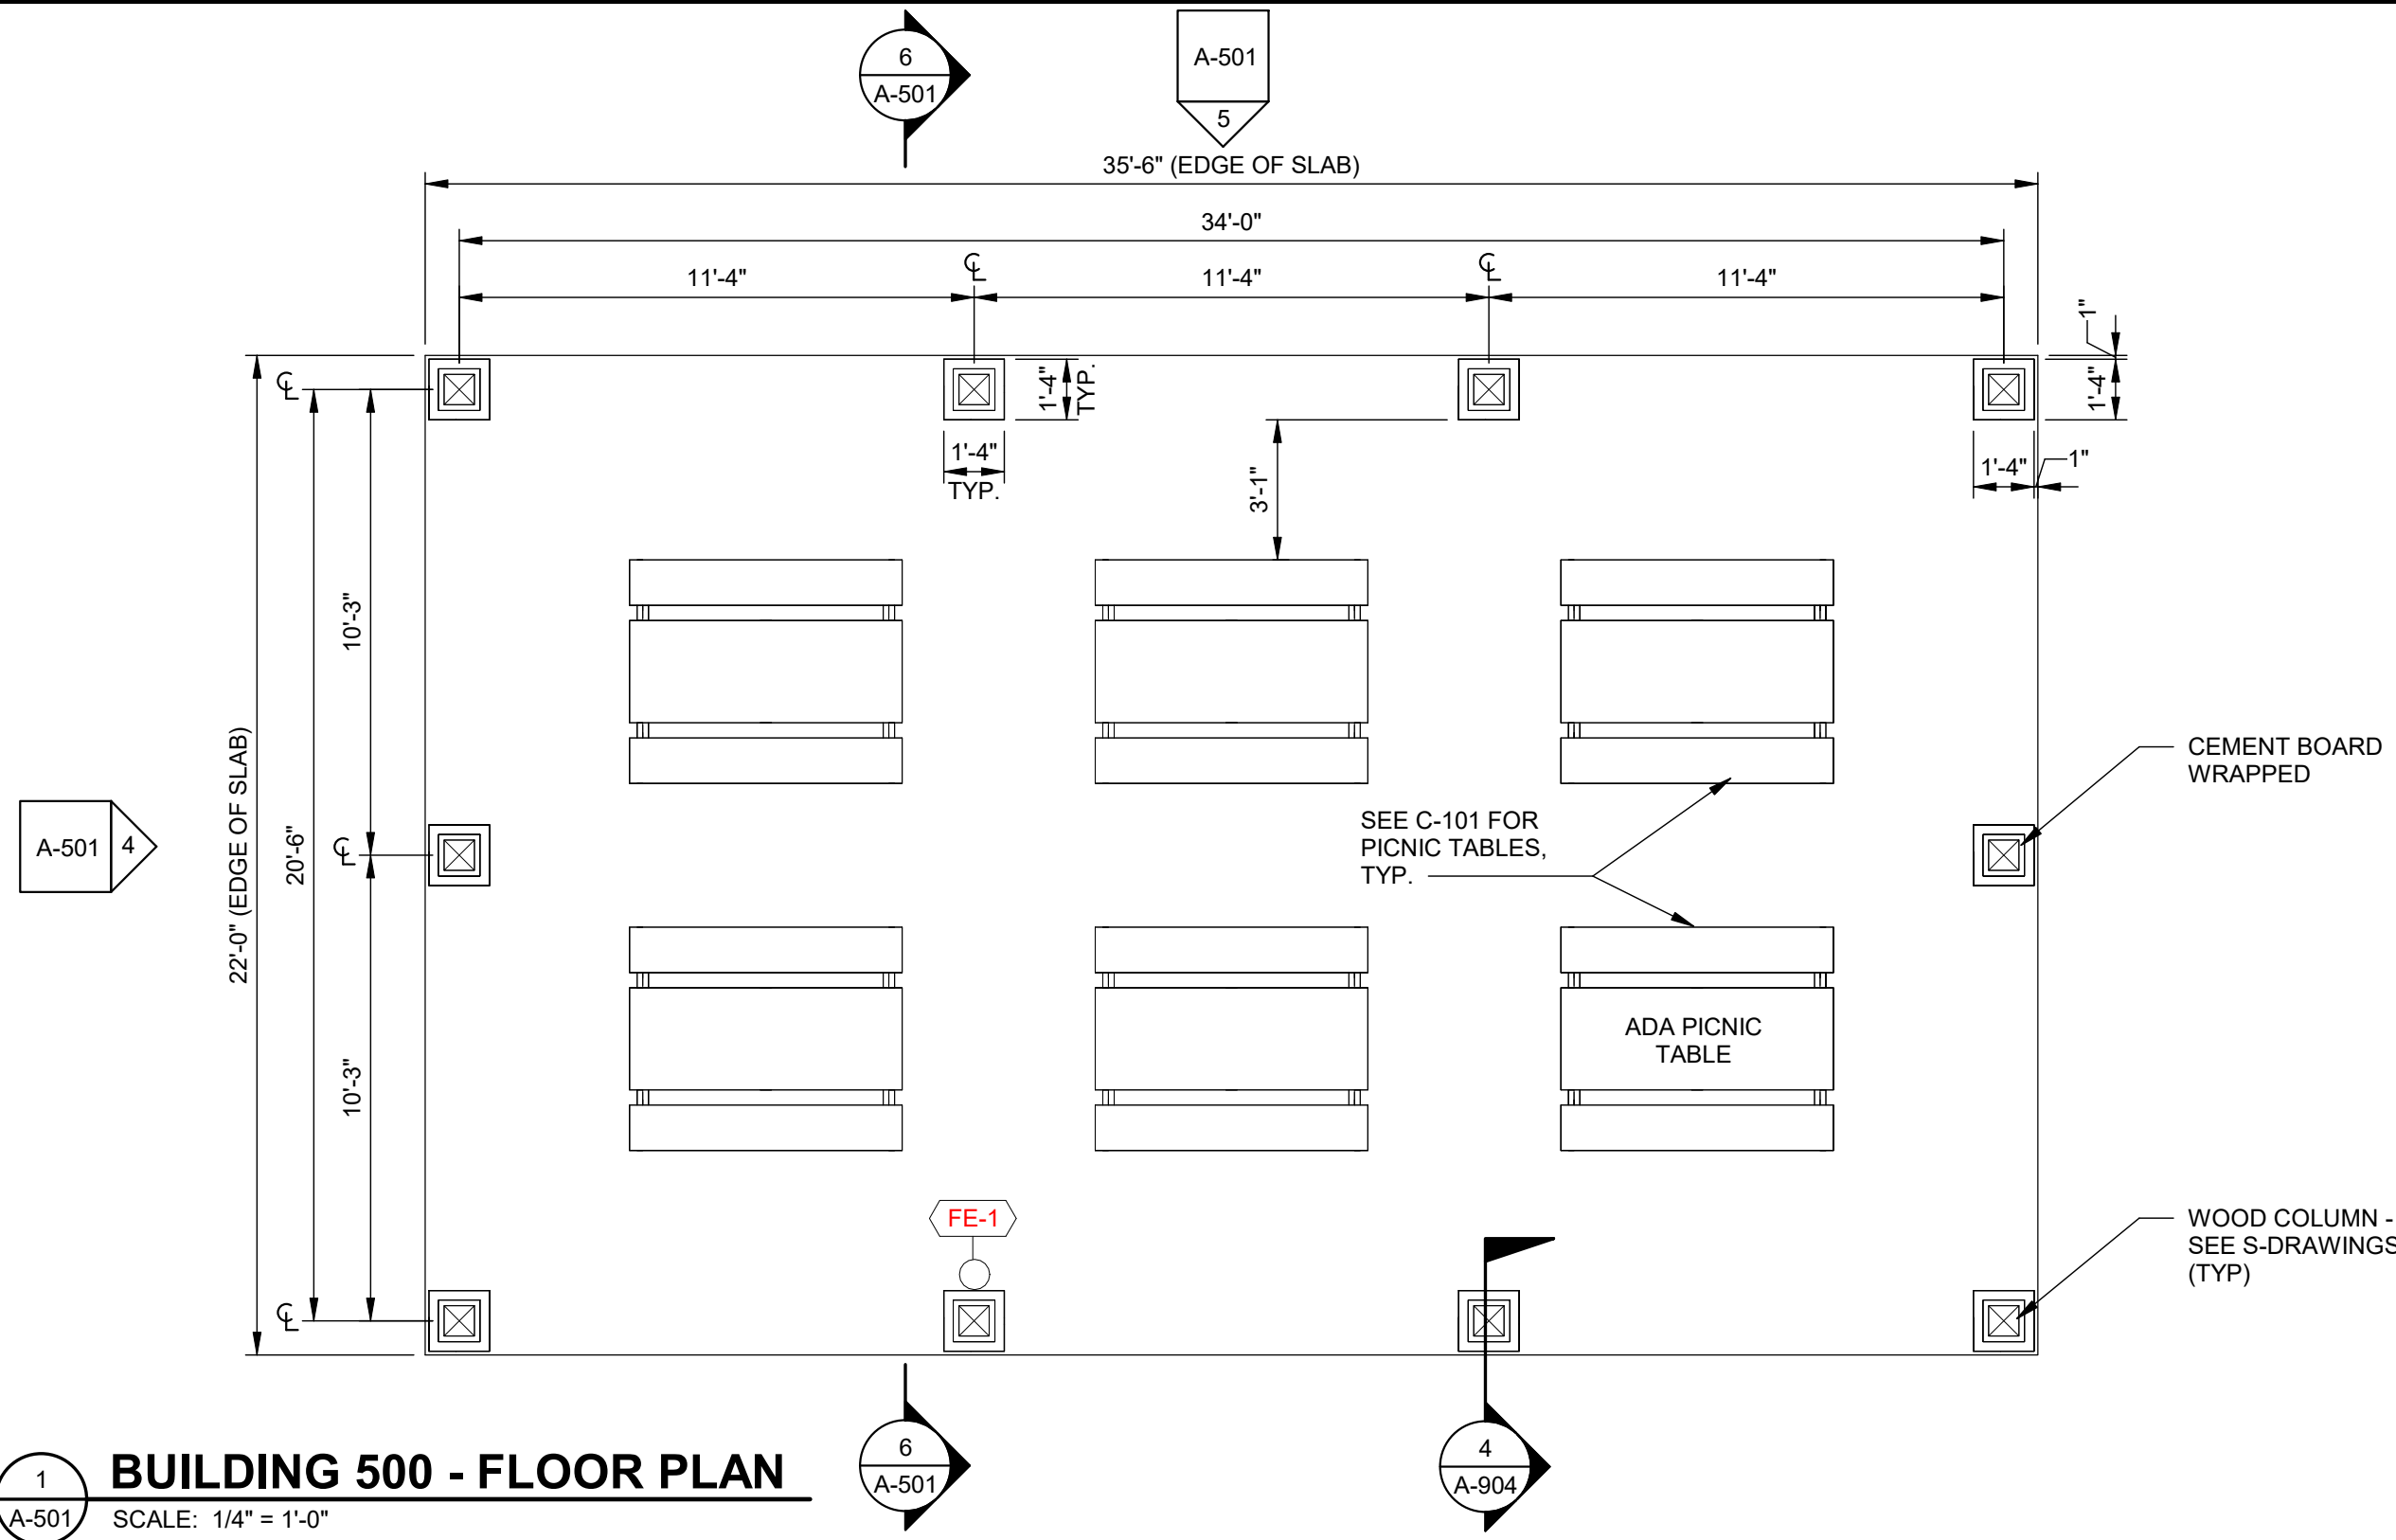

- NOTES**
- ALL CEMENT BOARD SHALL BE PAINTED PER SPECIFICATION 099130. COLOR TO BE SELECTED BY ARCHITECT/ENGINEER.
 - INSTALL SEALANT AT TOP AND SIDES OF ALL EXTERIOR SURFACE MOUNTED ITEMS AND AROUND EXTERIOR PERIMETER OF ALL WALL PENETRATIONS.


LEGEND

- FE-1 TAG/TYPE
FIRE EXTINGUISHER WITH BRACKET
CEMENT BOARD CEILING/ SOFFIT

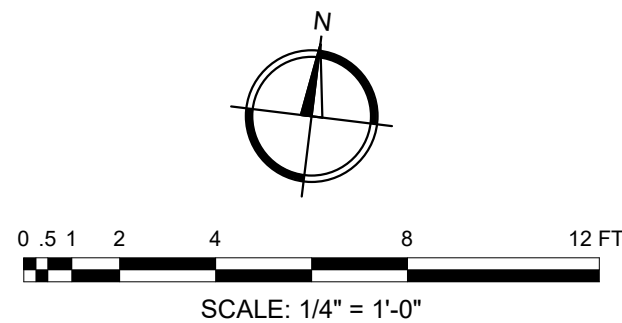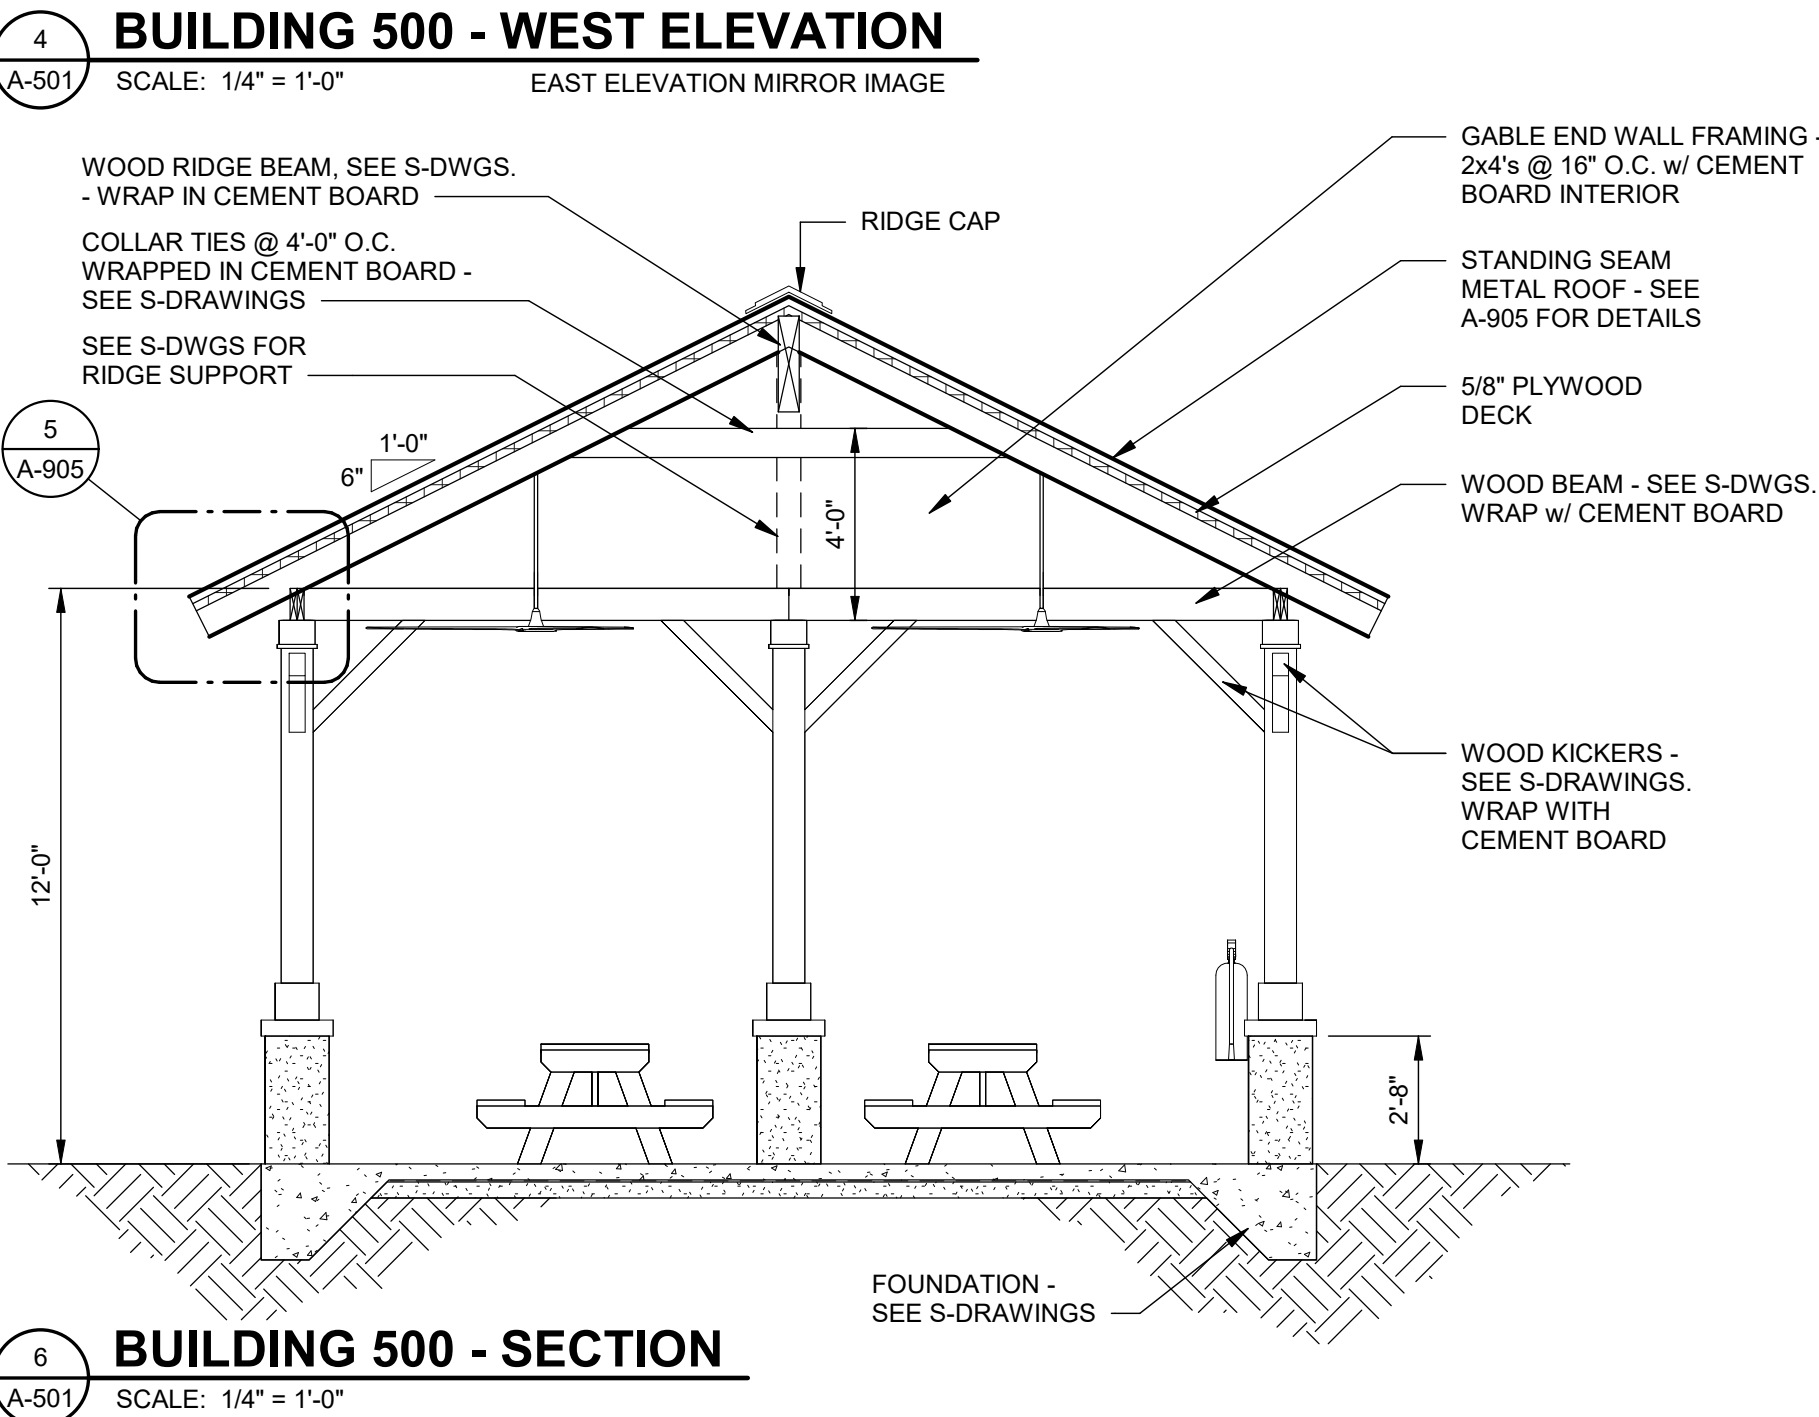

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

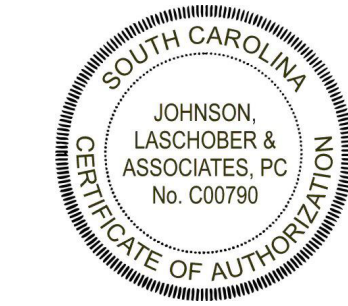

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com


DRAWING TITLE
**BUILDING 500 - PICNIC
PAVILION - FLOOR PLAN,
RCP, ELEVATIONS &
BUILDING SECTION**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-501
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 12 OF 53

1/29/2025 4:09:29 PM
C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural\Local_chbroyd.rvt

STOREFRONT SCHEDULE

TYPE MARK	R.O.		TYPE	MANUFACTURER	MODEL	MATERIAL	FINISH	HEAD	JAMB	SILL	GLAZING		HEAD HEIGHT	COMMENTS
	WIDTH	HEIGHT									THICKNESS	TYPE		
A	3'-4"	2'-8"	Fixed			ALUM	FF	1/A-901	6/A-901	8/A-901	1"	TEMPERED	9'-4"	
Grand total: 24														

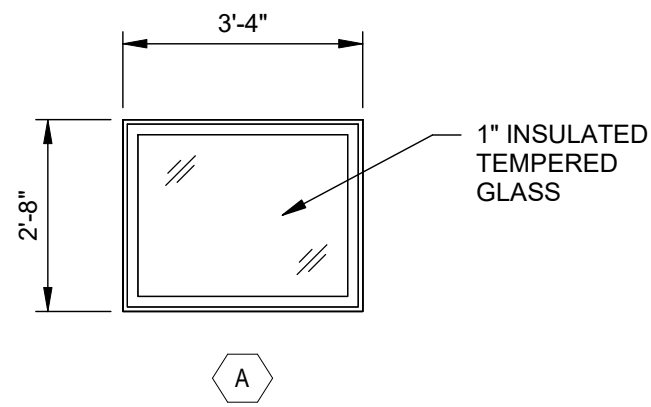

STOREFRONT


SCALE: 3/8" = 1'-0"

DOOR LEGEND

ALUM:	ALUMINUM	HM:	HOLLOW METAL
CO:	CASED OPENING	ID:	INSULATED
EXIST/EX:	EXISTING	PT:	PAINT
FF:	FACTORY FINISH/ STANDARD COLORS	SCW:	SOLID CORE WOOD
FRP:	FIBER REINFORCED POLYMER	ST:	PREFINISHED/ STAINED
FS:	FLUSH STEEL	WD:	WOOD
GL:	GLASS		


DOOR SCHEDULE

DOOR NUMBER	TYPE	DOOR					FINISH	HARDWARE	FRAME			COMMENTS	
		WIDTH	HEIGHT	THICKNESS	MATERIAL	MATERIAL			FINISH	HEAD	JAMB		SILL
101	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
102	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 2	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
103	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
104	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
105	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 2	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
106	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	8"x8" DOOR GRILLE
201	DF	2'-10"PR	7'-2"	0'-1 3/4"	FRP	FF	SET 3	ALUM	FF	7/A-901	8/A-901	9/A-901	
301	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 4	ALUM	FF	4/A-901	5/A-901	6/A-901	16"x16" DOOR GRILLE
302	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 2	ALUM	FF	4/A-901	5/A-901	6/A-901	
303	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 4	ALUM	FF	4/A-901	5/A-901	6/A-901	16"x16" DOOR GRILLE
304	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	10"x10" DOOR GRILLE
305	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 5	ALUM	FF	4/A-901	5/A-901	6/A-901	
306	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	10"x10" DOOR GRILLE
401	F	3'-0"	7'-2"	0'-1 3/4"	FRP	FF	SET 2	ALUM	FF	7/A-901	8/A-901	9/A-901	
402	RD	13'-5"	8'-4"	0'-1 3/4"	ST	FF	--	STL	FF	10/A-901	11/A-901		
601	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 4	ALUM	FF	4/A-901	5/A-901	6/A-901	16"x16" DOOR GRILLE
602	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 2	ALUM	FF	4/A-901	5/A-901	6/A-901	
603	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 4	ALUM	FF	4/A-901	5/A-901	6/A-901	16"x16" DOOR GRILLE
604	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	10"x10" DOOR GRILLE
605	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 5	ALUM	FF	4/A-901	5/A-901	6/A-901	
606	FT	3'-0"	7'-0"	0'-1 3/4"	FRP	FF	SET 1	ALUM	FF	4/A-901	5/A-901	6/A-901	10"x10" DOOR GRILLE
701	DF	2'-10"PR	7'-2"	0'-1 3/4"	FRP	FF	SET 3	ALUM	FF	7/A-901	8/A-901	9/A-901	

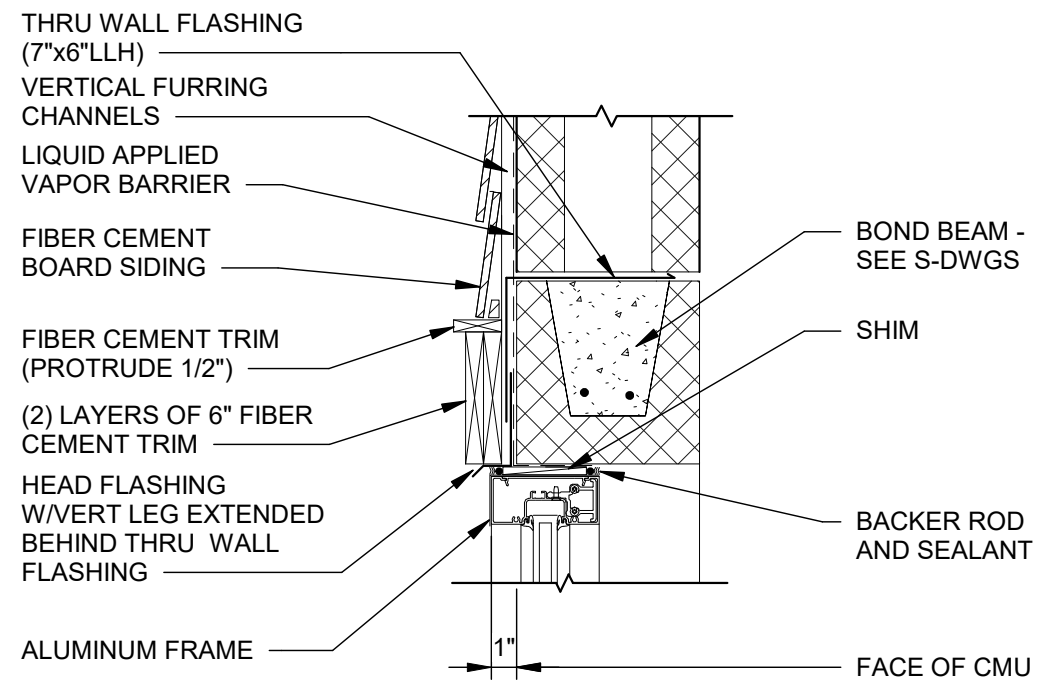


STOREFRONT HEAD DETAIL

SCALE: 1 1/2" = 1'-0"

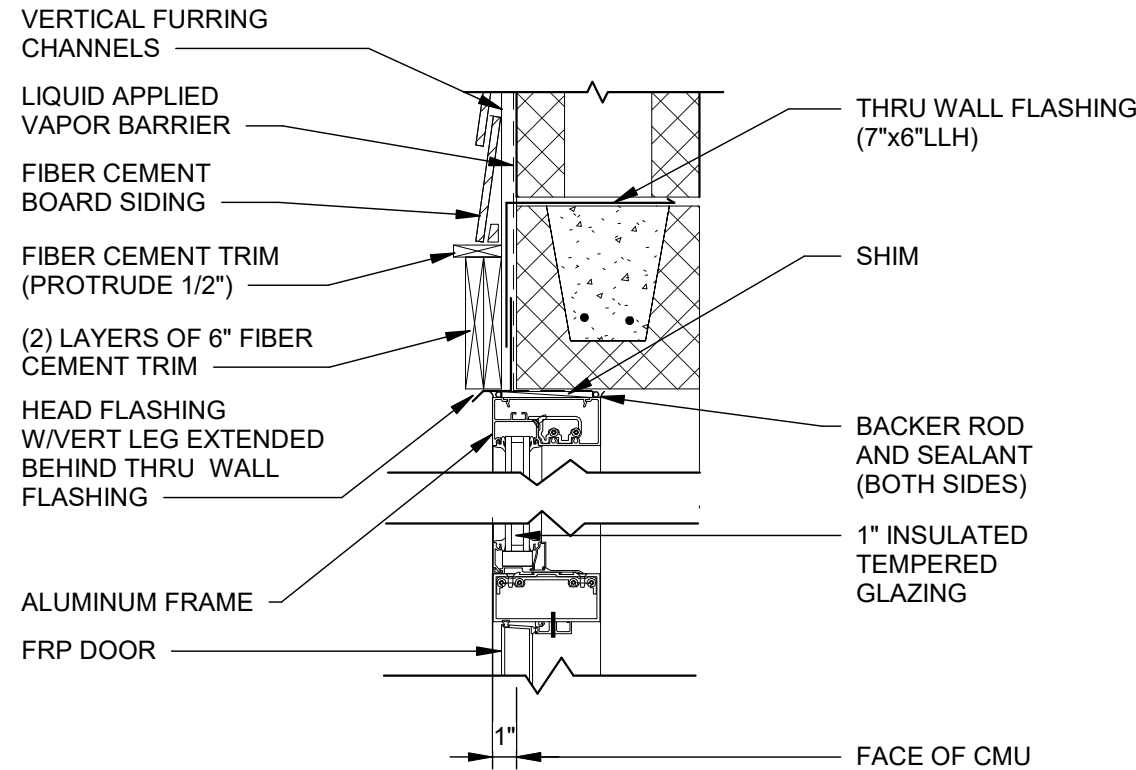


DOOR HEAD DETAIL

SCALE: 1 1/2" = 1'-0"

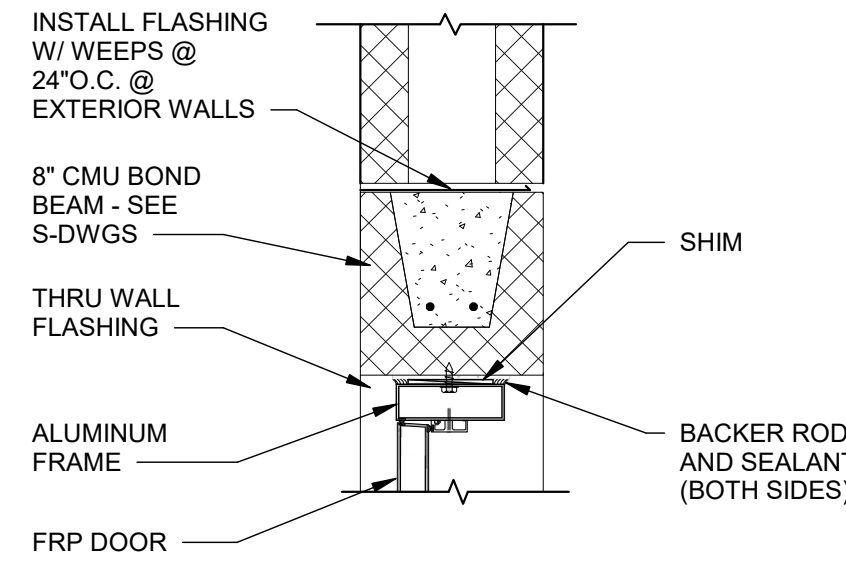


DOOR HEAD DETAIL

SCALE: 1 1/2" = 1'-0"

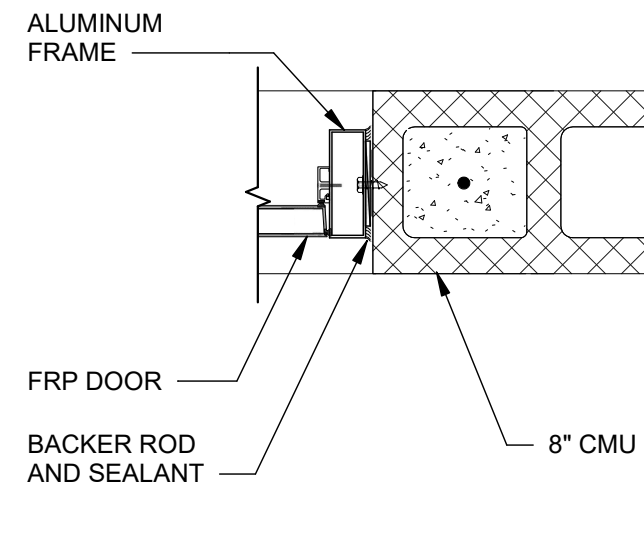


DOOR JAMB DETAIL

SCALE: 1 1/2" = 1'-0"

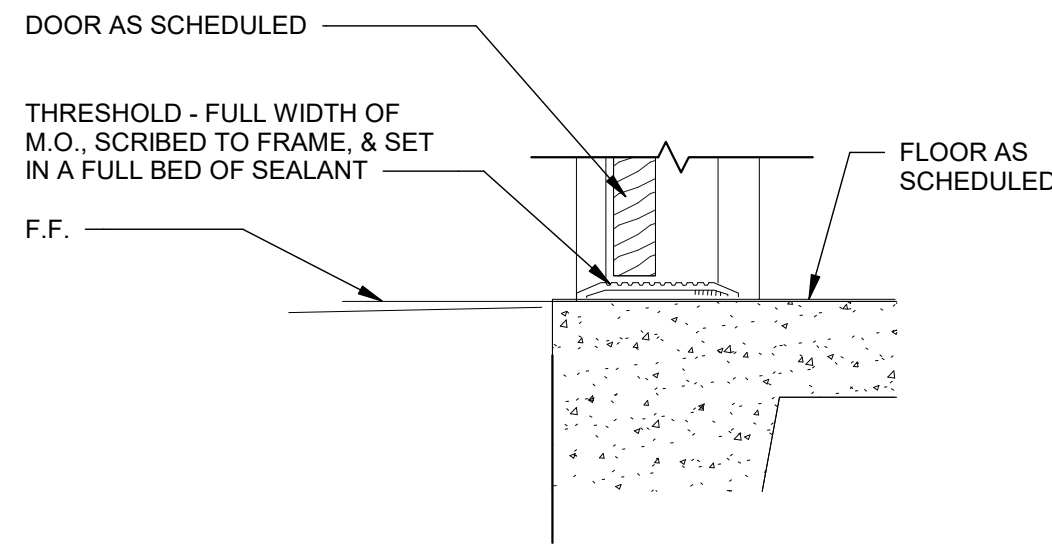


DOOR SILL DETAIL

SCALE: 1 1/2" = 1'-0"

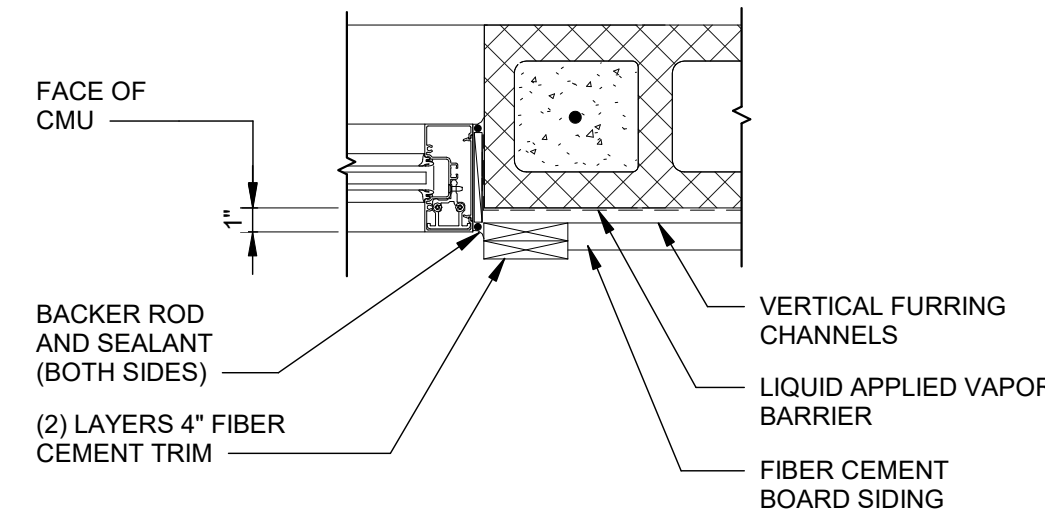


STOREFRONT JAMB DETAIL


SCALE: 1 1/2" = 1'-0"

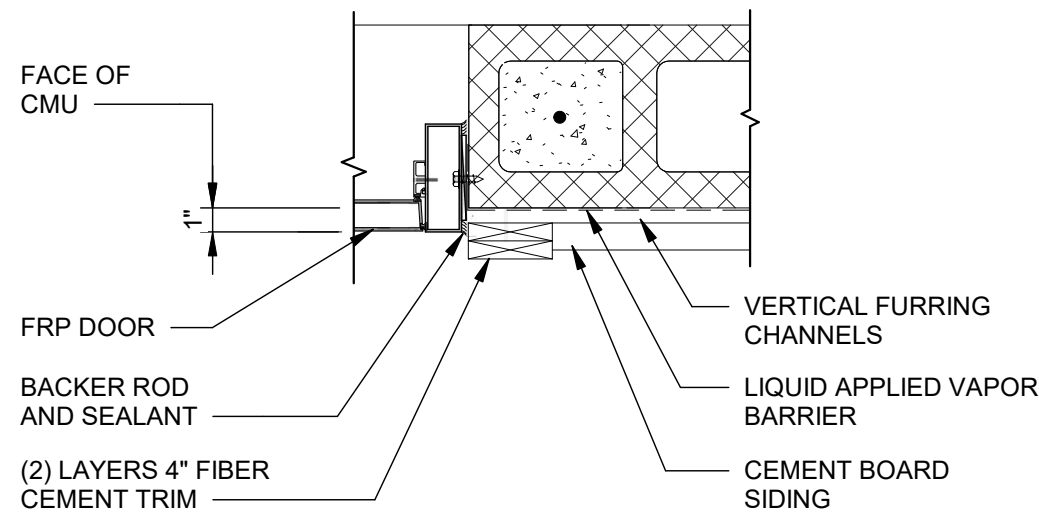

UPPER JAMB DETAIL

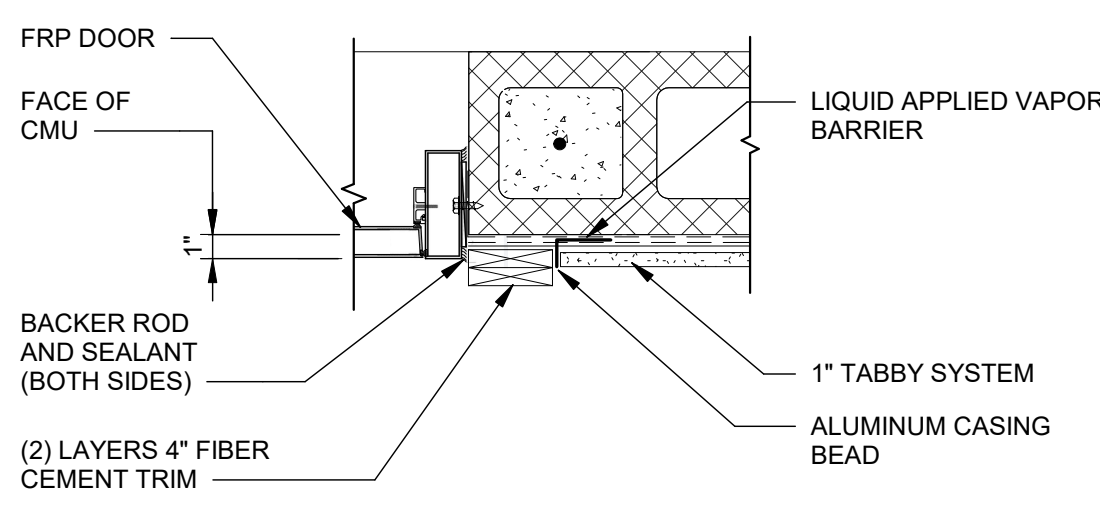

LOWER JAMB DETAIL

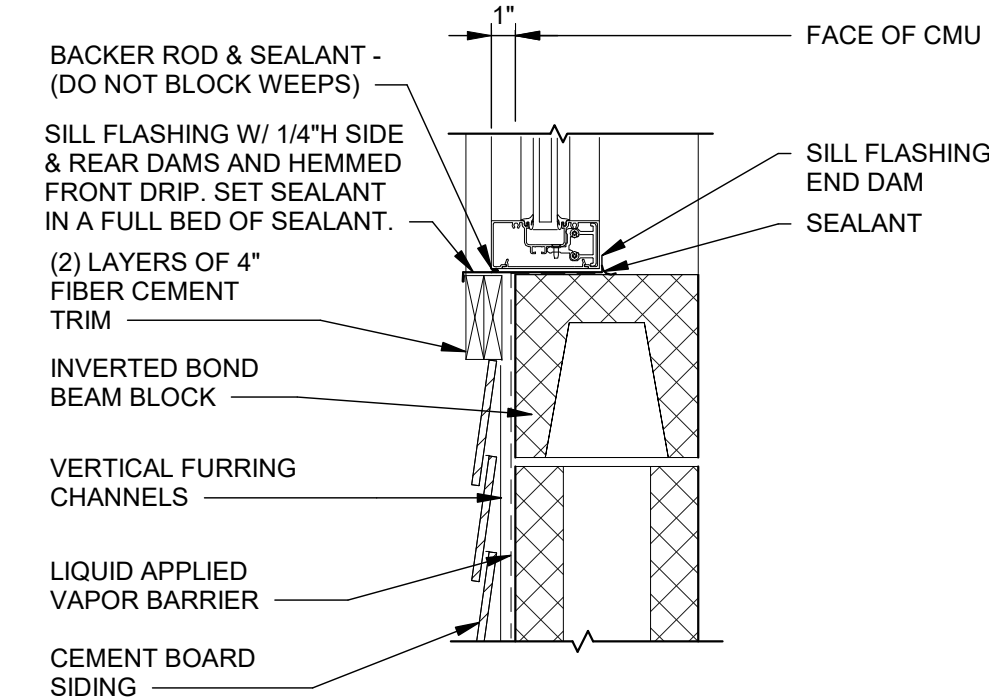


STOREFRONT SILL DETAIL

SCALE: 1 1/2" = 1'-0"


DOOR JAMB DETAIL

SCALE: 1 1/2" = 1'-0"

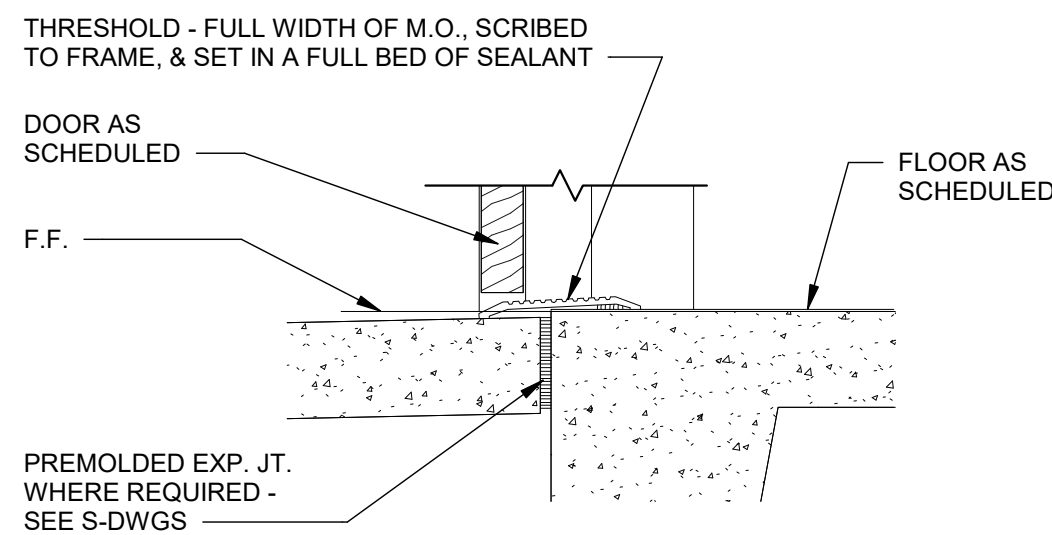


DOOR SILL DETAIL

SCALE: 1 1/2" = 1'-0"

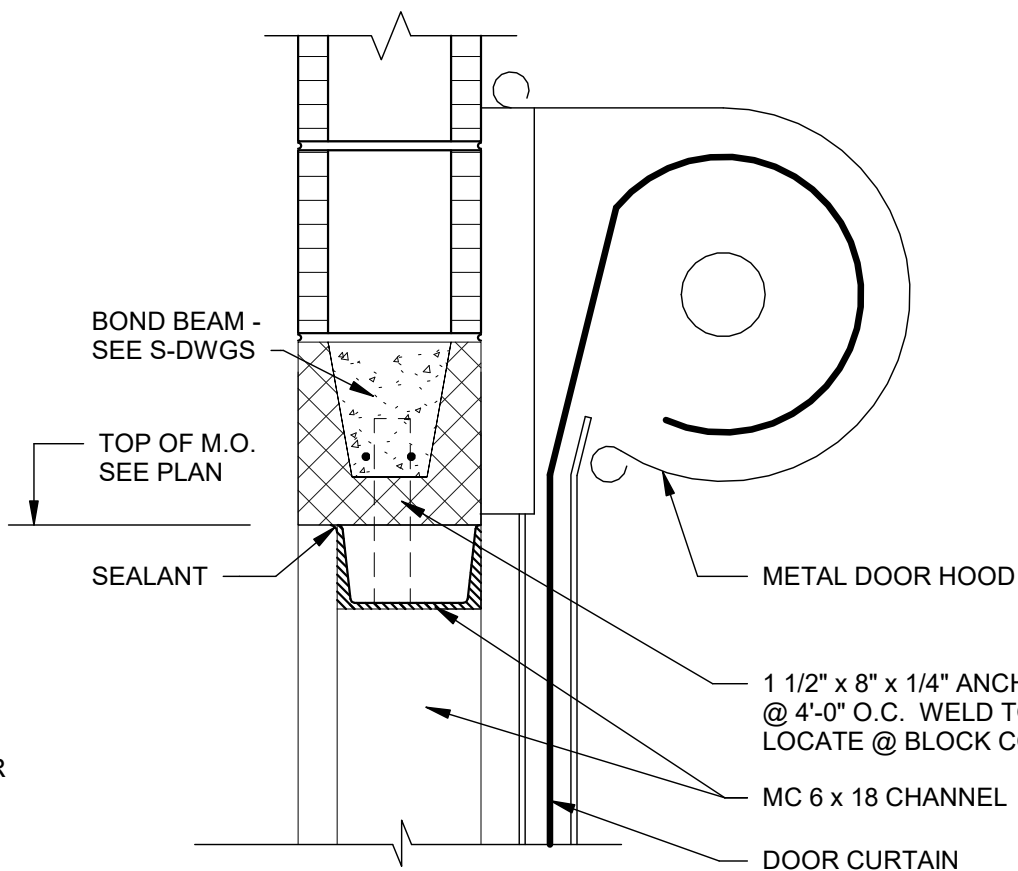


OVERHEAD DOOR HEAD

SCALE: 1 1/2" = 1'-0"

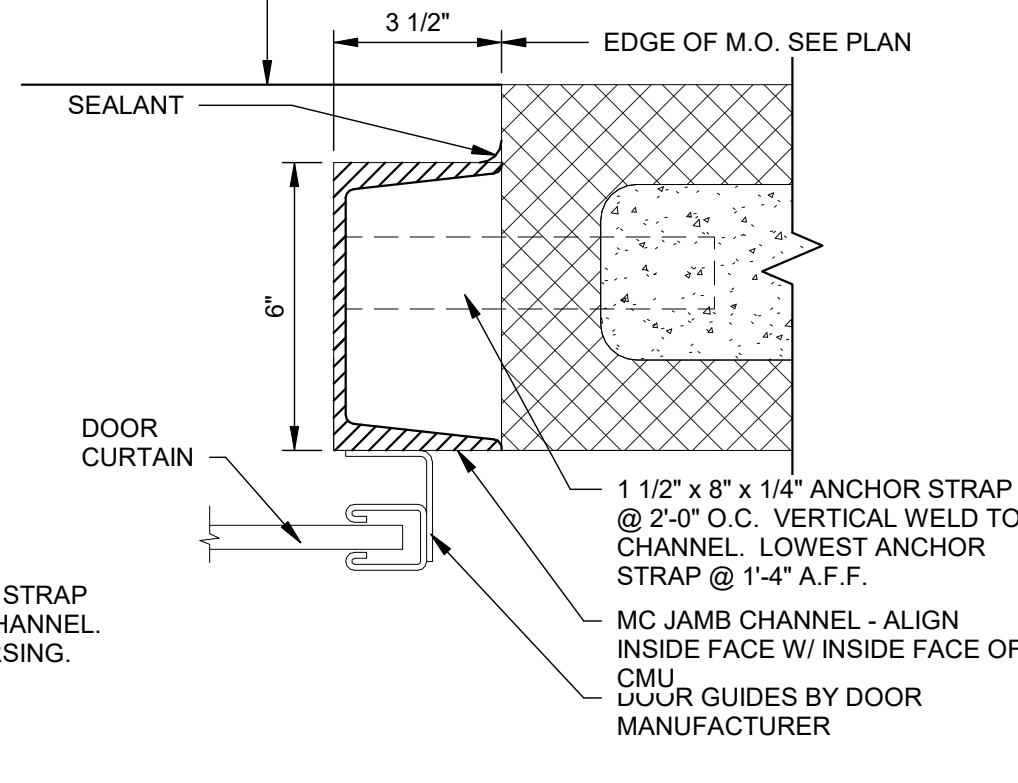


OVERHEAD DOOR JAMB

SCALE: 3" = 1'-0"

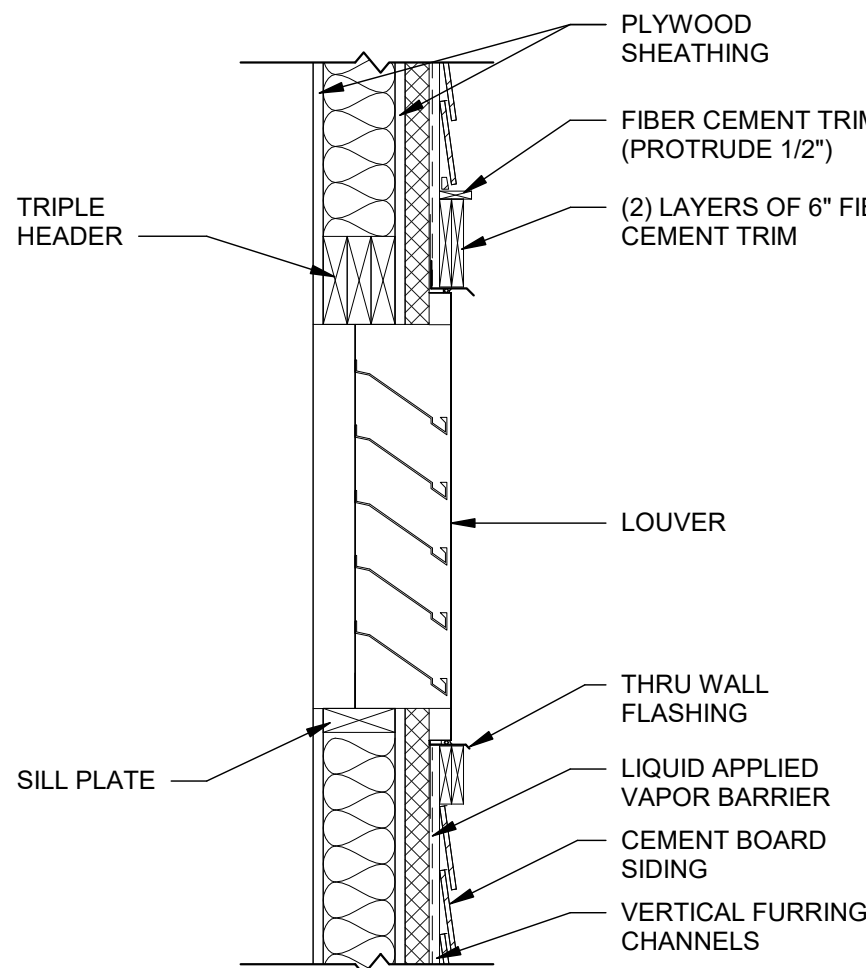

LOUVER SECTION (TYP)

SCALE: 1" = 1'-0"

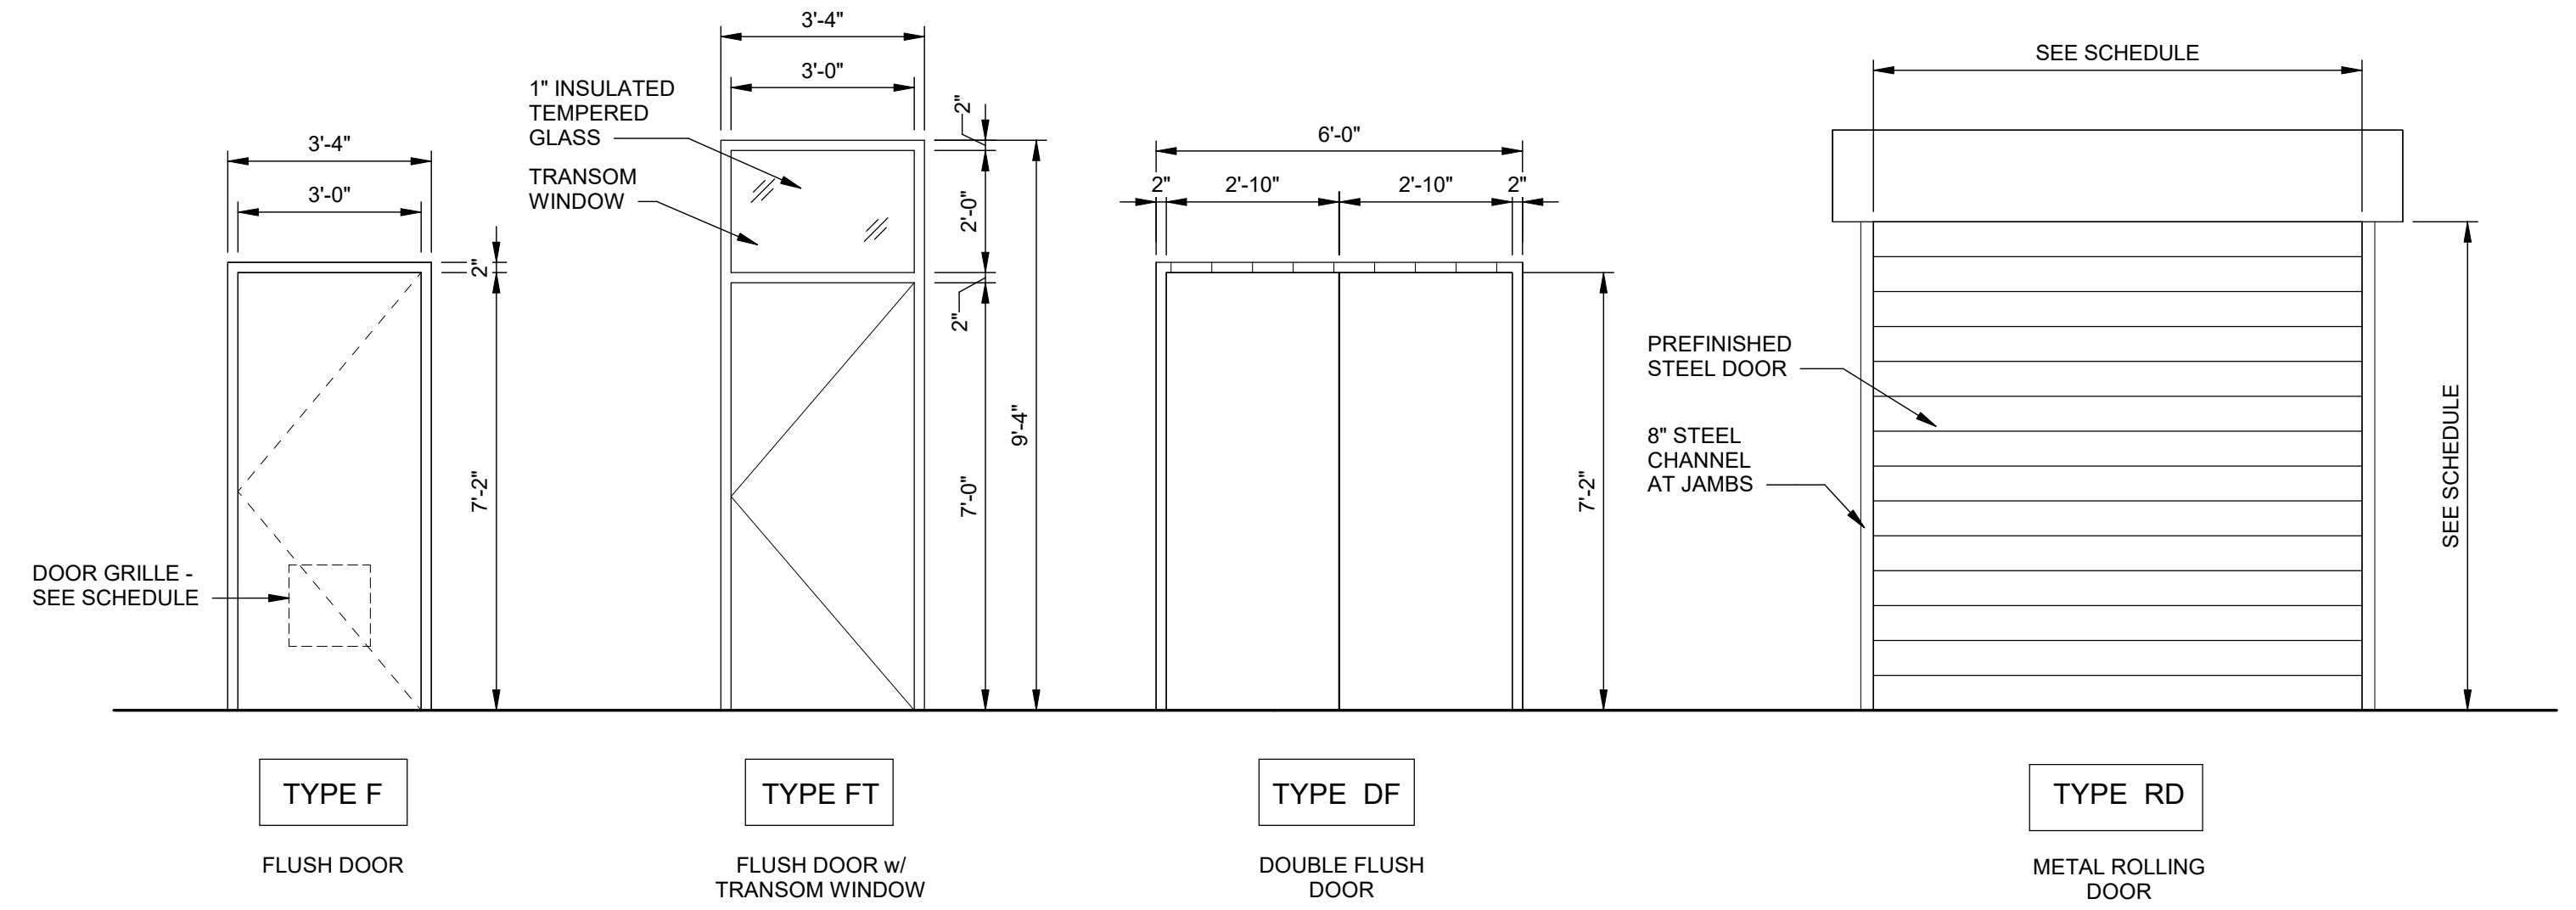



DOOR TYPES & FRAME ELEVATIONS

SCALE: 3/8" = 1'-0"



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

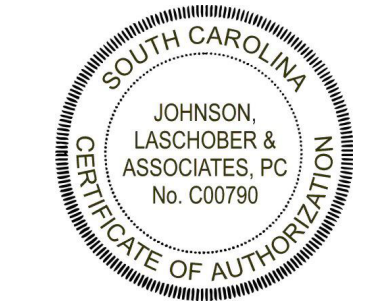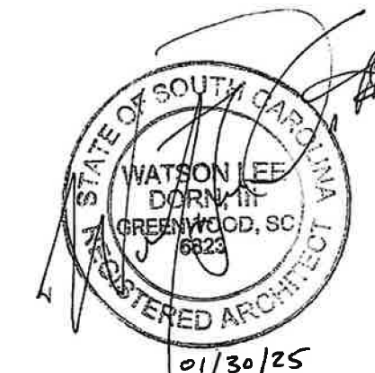

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**


**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**DOOR, WINDOW
SCHEDULE, DETAILS**


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO.
DRAWN CTH	A-901
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 13 OF 53

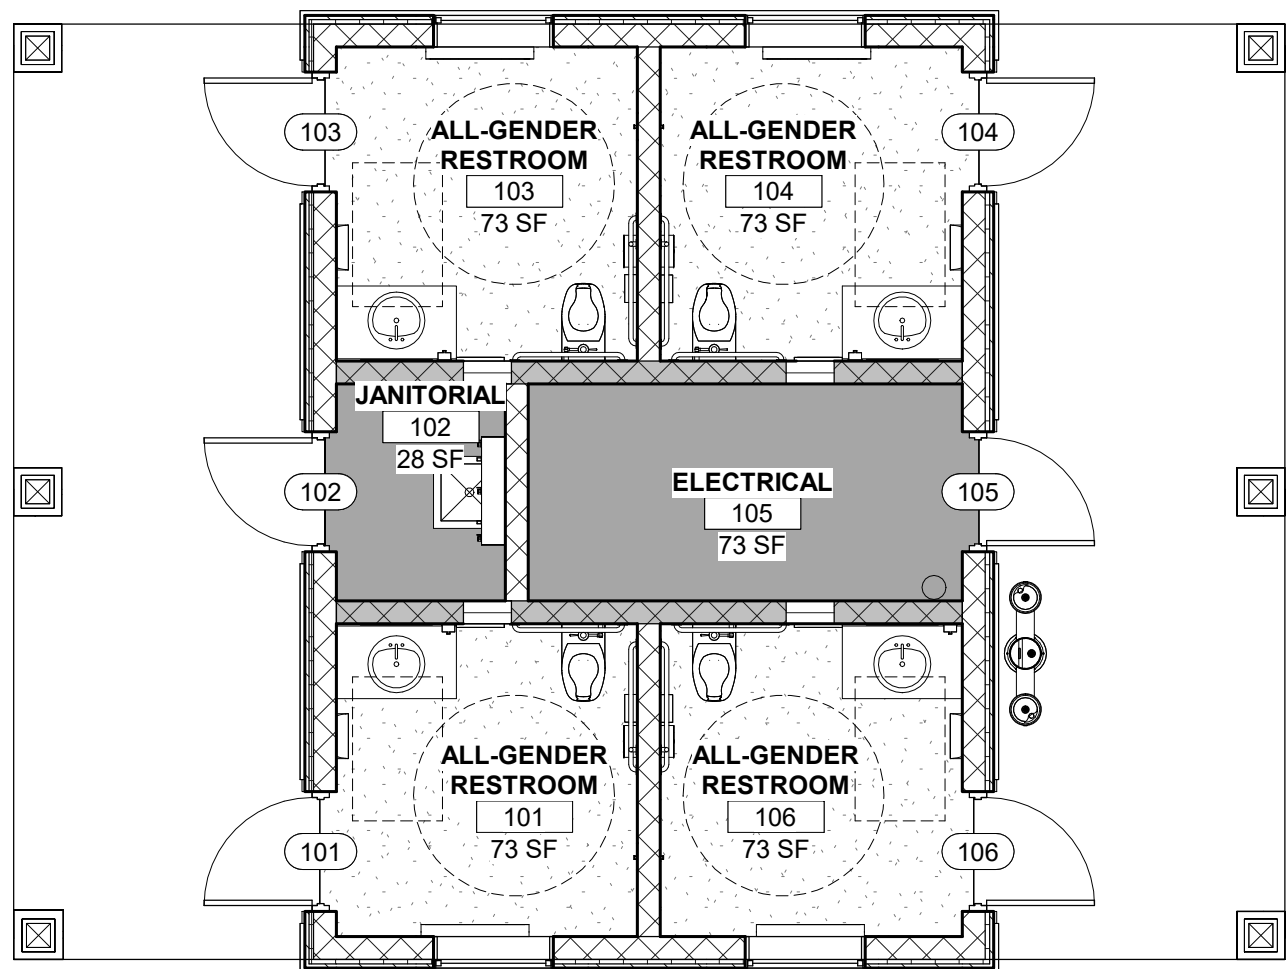


1 BUILDING 100 - FINISH PLAN
A-902 SCALE: 3/16" = 1'-0"

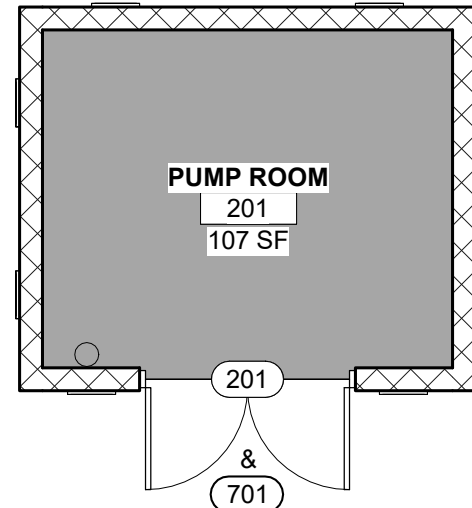


2 BUILDINGS 200/700 - FINISH PLAN
A-902 SCALE: 3/16" = 1'-0"

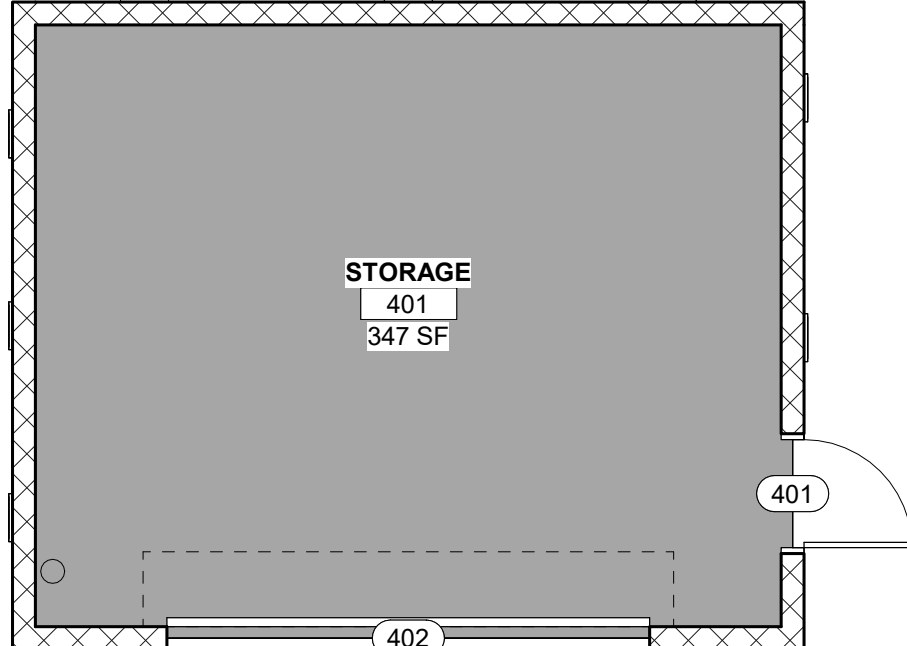


3 BUILDING 400 - FINISH PLAN
A-902 SCALE: 3/16" = 1'-0"

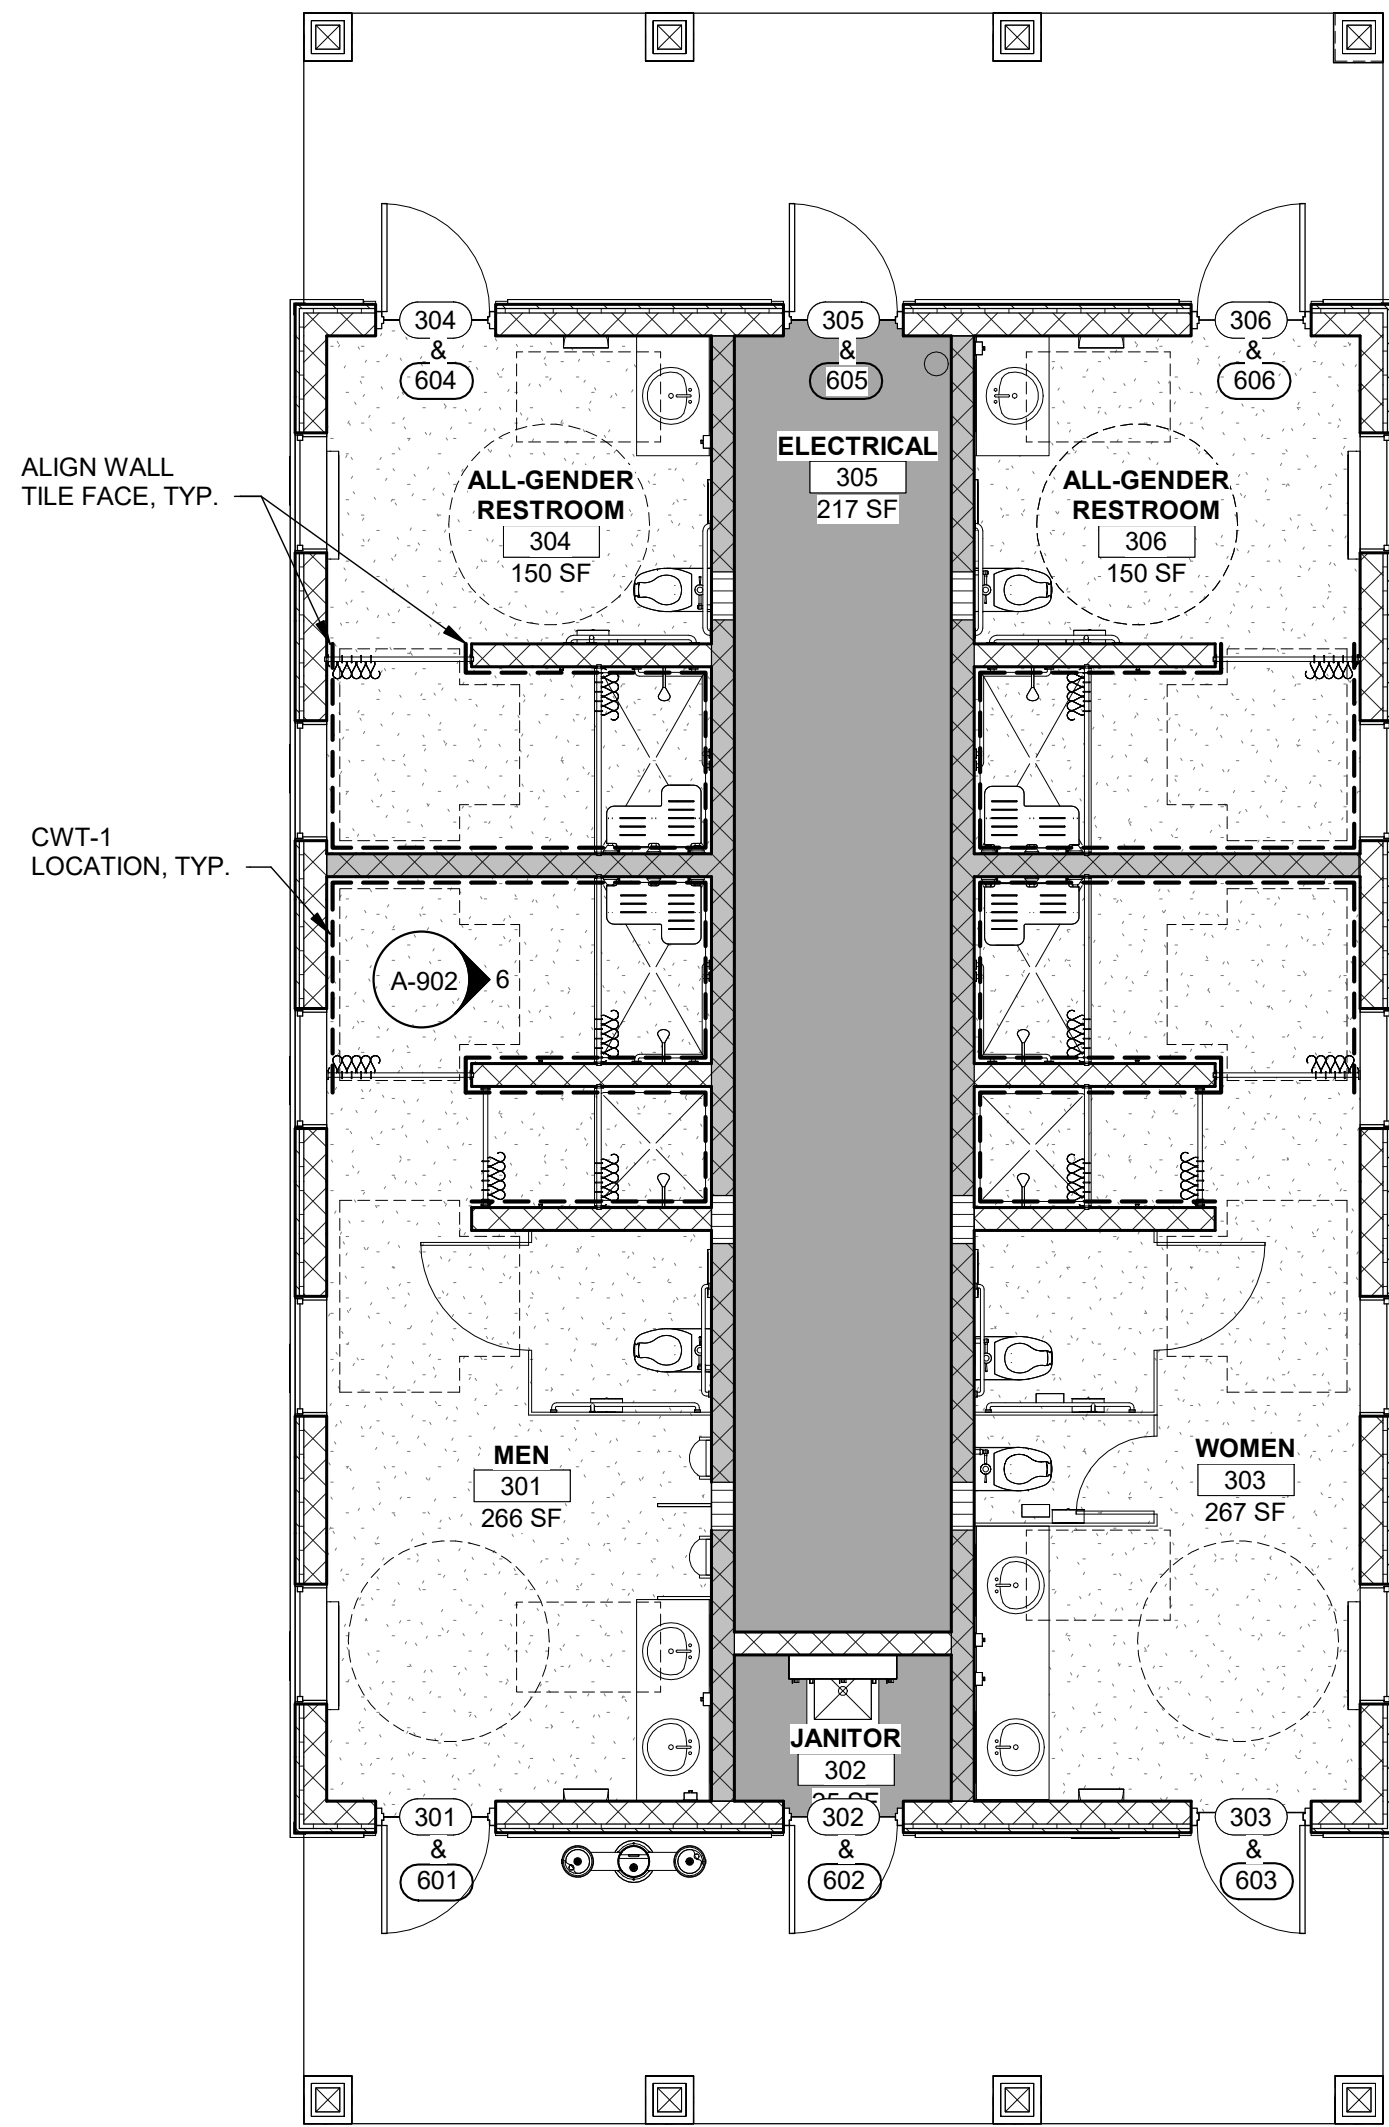

4 BUILDINGS 300/600 - FINISH PLAN
A-902 SCALE: 3/16" = 1'-0"

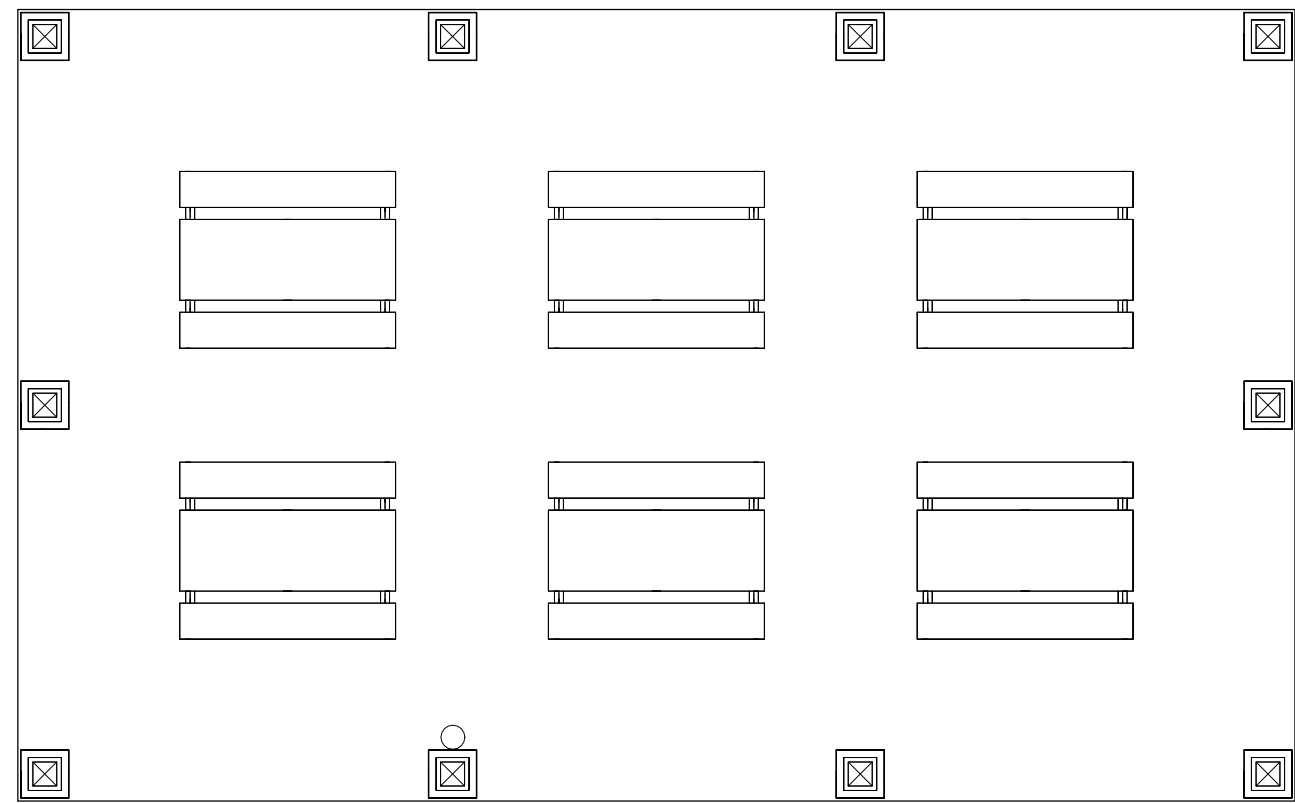

5 BUILDING 500 - FINISH PLAN
A-902 SCALE: 3/16" = 1'-0"

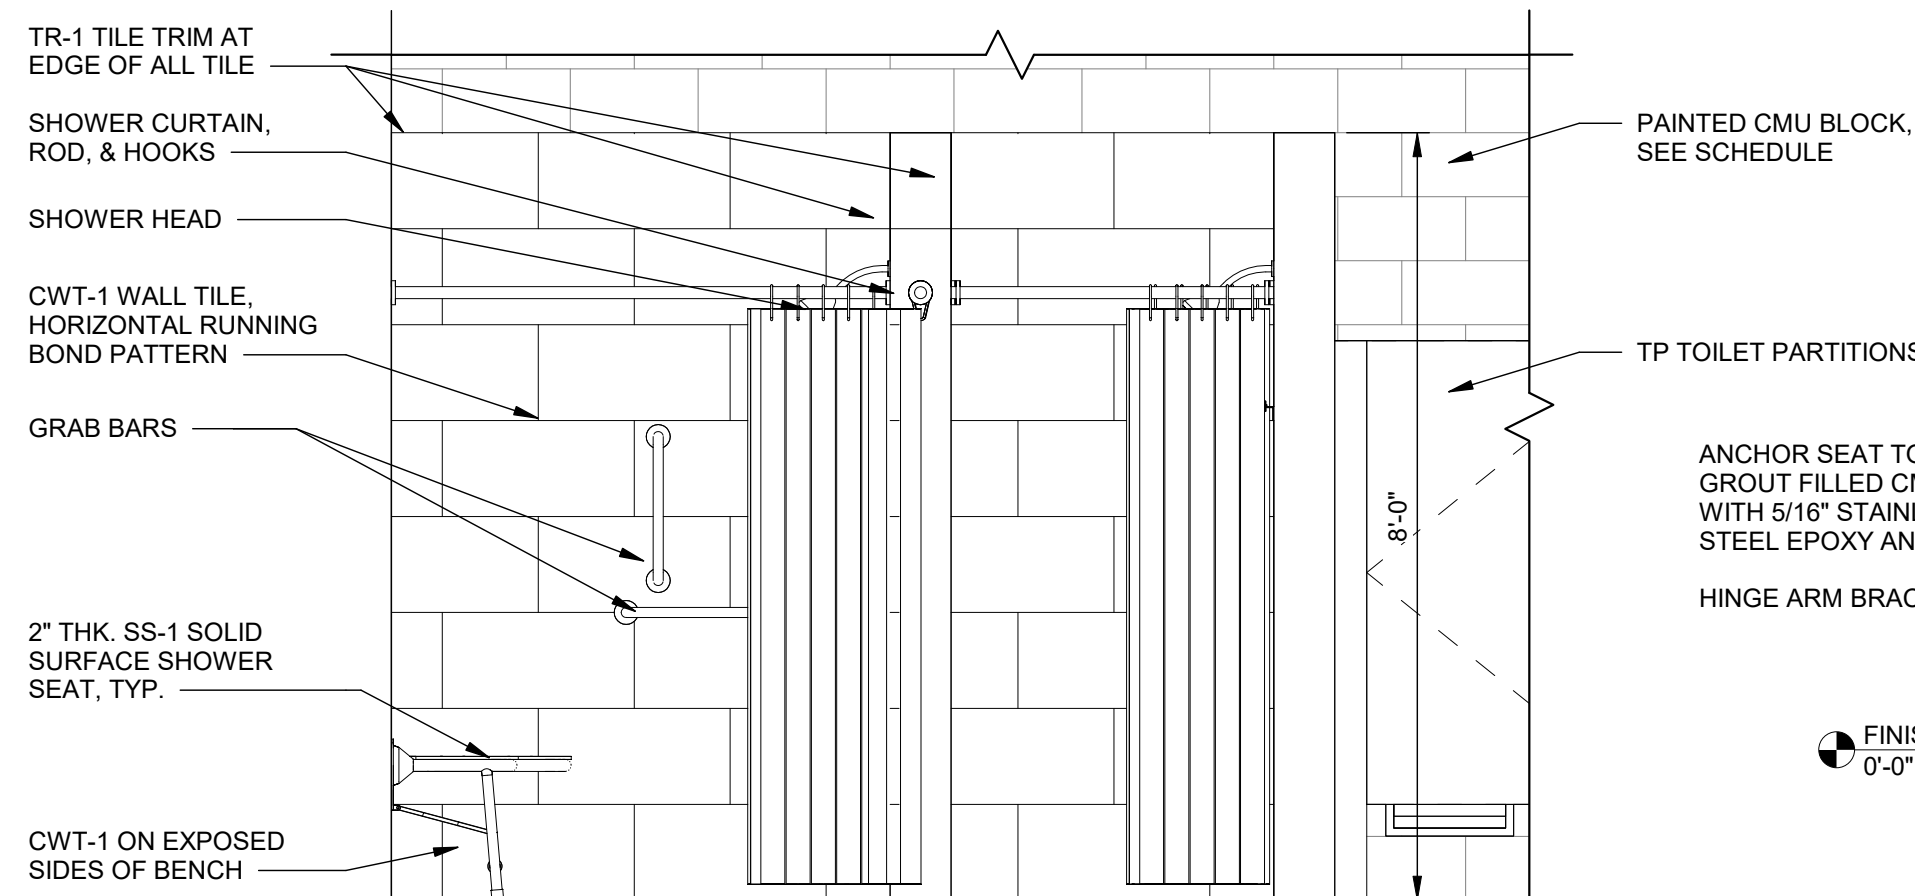

6 ELEVATION - SHOWERS
A-902 SCALE: 1/2" = 1'-0"

FINISH SCHEDULE

NUMBER	NAME	FLOOR FINISH	BASE	WALL FINISH	CEILING FINISH	CEILING HEIGHT	COMMENTS
101	ALL-GENDER RESTROOM	EPX	EPX	EPP-1	ST	SEE RCP	
102	JANITORIAL	SC	NONE	EPP-1	ST	SEE RCP	
103	ALL-GENDER RESTROOM	EPX	EPX	EPP-1	ST	SEE RCP	
104	ALL-GENDER RESTROOM	EPX	EPX	EPP-1	ST	SEE RCP	
105	ELECTRICAL	SC	NONE	EPP-1	ST	SEE RCP	
106	ALL-GENDER RESTROOM	EPX	EPX	EPP-1	ST	SEE RCP	
201	PUMP ROOM	SC	NONE	EPP-1	ST	SEE RCP	
301	MEN	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
302	JANITOR	SC	NONE	EPP-1	ST	SEE RCP	
303	WOMEN	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
304	ALL-GENDER RESTROOM	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
305	ELECTRICAL	SC	NONE	EPP-1	ST	SEE RCP	
306	ALL-GENDER RESTROOM	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
401	STORAGE	SC	NONE	EPP-1	EPP-1	SEE RCP	
601	MEN	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
602	JANITOR	SC	NONE	EPP-1	ST	SEE RCP	
603	WOMEN	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
604	ALL-GENDER RESTROOM	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
605	ELECTRICAL	SC	NONE	EPP-1	ST	SEE RCP	
606	ALL-GENDER RESTROOM	EPX	EPX	EPP-1 / CWT	ST	SEE RCP	CWT ON SHOWER WALLS ONLY
701	PUMP ROOM	SC	NONE	EPP-1	ST	SEE RCP	

INTERIOR FINISH ABBREVIATIONS

ACT: ACOUSTICAL CEILING TILE	LVT: LUXURY VINYL TILE	SC: SEALED CONCRETE
CG: CORNER GUARD	MTL: METAL	SPF: SPORTS FLOORING
CONC: CONCRETE	OFOI: OWNER FURNISHED, CONTRACTOR INSTALLED	SS: SOLID SURFACE
CPT: CARPET	OFOI: OWNER FURNISHED, OWNER INSTALLED	ST: STAIN
CT: CERAMIC TILE	PC: POLISHED CONCRETE	STC: STAMPED CONCRETE
CTB: CERAMIC TILE BASE	PL: PLASTIC LAMINATE	SV: SHEET VINYL
CTF: CERAMIC TILE FLOORING	PLW: PLYWOOD	TBD: TO BE DETERMINED
CWT: CERAMIC WALL TILE	PT: PAINT	TR: TRANSITION STRIP
EPX: EPOXY FLOORING	PTB: PORCELAIN TILE BASE	WC: WALL COVERING
EPC: EPOXY COATING	PTF: PORCELAIN TILE FLOORING	WDB: WOOD BASE
EPP: EPOXY PAINT	PWT: PORCELAIN WALL TILE	WDF: WOOD FLOORING
ETR: EXISTING TO REMAIN	RB: RUBBER / VINYL BASE	WAF: WOOD ATHLETIC FLOORING
EXP: EXPOSED STRUCTURE	RF: RUBBER FLOOR	VCT: VINYL COMPOSITION TILE
FRP: FIBER REINFORCED PANEL	RN: RUBBER NOSING	VRB: VENTED RUBBER BASE
GB: GYPSUM BOARD	RT: RUBBER TILE	
GT: GROUT	RSTR: RUBBER STAIR TREAD/RISER	

INTERIOR FINISH NOTES


- INSTALLERS OF EACH FINISH MATERIAL SHALL INSPECT BOTH THE SUBSTRATE AND CONDITIONS UNDER WHICH WORK IS TO BE PERFORMED. INSTALLER SHALL NOT PROCEED UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED IN AN ACCEPTABLE MANNER TO ALL PARTIES AND MEET ALL MANUFACTURERS REQUIREMENTS.
- SEE FINISH PLAN FOR TILE (CWT-1) LOCATIONS. WALL TILE HEIGHT TO 8'-0" A.F.F.
- EPP-1 ON ALL INTERIOR WALLS NOT INDICATED ON INTERIOR FINISH SCHEDULE.
- EPP-1 ON ALL EXPOSED CEILINGS, UNLESS NOTED OTHERWISE.
- PRIME AND PAINT ALL EXPOSED STRUCTURE, FRAMING, BRACING, DUCTWORK AND CONDUIT, TO MATCH ADJACENT SURFACE.
- ALL FLOOR FINISH CHANGES SHALL OCCUR AT THE CENTER LINE OF CLOSED DOOR OR CASIED OPENING.
- CONSULT ARCHITECT OR DESIGNER REGARDING ANY FINISHES NOT INDICATED OR OMITTED FROM FINISH PLAN, SPECIFICATION LIST, OR ELEVATIONS.
- ALL UNFINISHED WALL TILE EDGES TO RECEIVE TR-1 FINISH TRIM PROFILE.

FLOORING LEGEND


SEALED CONCRETE
EPOXY FLOORING
CONCRETE SLAB

INTERIOR FINISH SPECIFICATIONS, BASIS OF DESIGN


ADA SIGNAGE BACKGROUND COLOR	EPP-1 - EPOXY PAINT	GT - EPOXY GROUT	ST - WOOD STAIN
COLOR: TBD	MANUFACTURER: SHERWIN-WILLIAMS SPEC: INTERIOR, EPOXY COLOR: TBD	MANUFACTURER: LATICRETE SPEC: EPOXY GROUT COLOR: TBD	MANUFACTURER: SHERWIN-WILLIAMS SPEC: MINWAX STAIN ON RED CEDAR COLOR: TBD
CWT-1 - PORCELAIN WALL TILE	EPX - EPOXY FLOORING	SC - SEALED CONCRETE	TP - TOILET PARTITIONS
MANUFACTURER: TEC-ART SPEC: INDUSTRY SIZE: 12"x24", HORIZ. RUNNING BOND COLOR: TBD	MANUFACTURER: SHERWIN-WILLIAMS SPEC: RESUFLO DECOR QUARTZ COLOR: TBD	GRIND & ADD DUST-PROOF SEALER TO SEAL NATURAL COLOR OF EXISTING CONCRETE	MANUFACTURER: ASI SPEC: PHENOLIC, FLOOR MOUNTED-OVERHEAD BRACED COLOR: TBD
ELECTRICAL PLATE COVER COLOR	FRP - FIBERGL. REINFRCD PANEL DOOR	SS-1 - SOLID SURFACE	TR-1 - TRIM FOR TILE EDGE
COLOR: STAINLESS	MANUFACTURER: SPECIAL-LITE SPEC: SL-17 IN SMOOTH FINISH COLOR: TBD	MANUFACTURER: WILSONART SPEC: GROUP 3 MINIMUM FOR PRICING; WITH INTEGRAL BOWL COLOR: TBD	MANUFACTURER: SCHLUTER SPEC: SCHLUTER-JOLLY ALUMINUM PROFILE COLOR: SATIN ANODIZED SIZE: 6MM FOR VERTICAL TILE EDGE, 8MM TO ACCEPT HORIZONTAL CEMENT BOARD EDGE

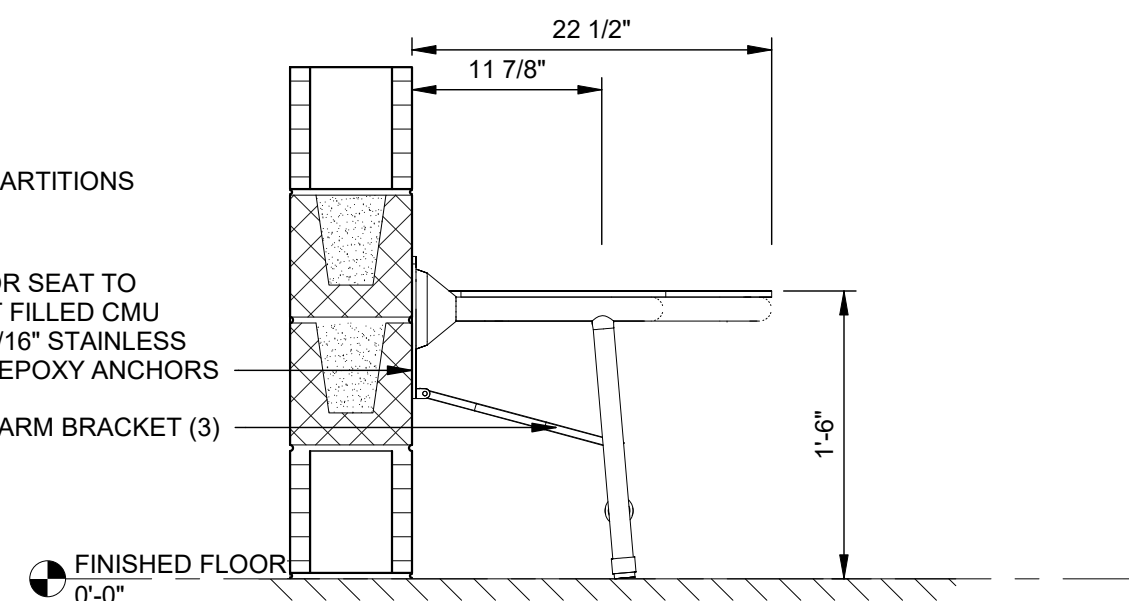

7 FOLDING SHOWER SEAT W/ LEGS
A-902 SCALE: 1" = 1'-0"

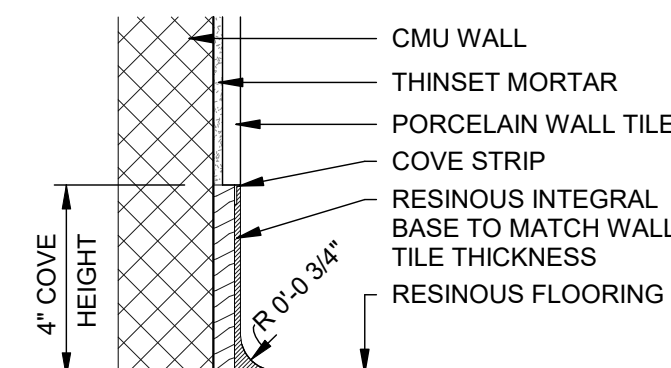

8 WALL BASE DETAIL @ WALL TILE
A-902 SCALE: 3" = 1'-0"

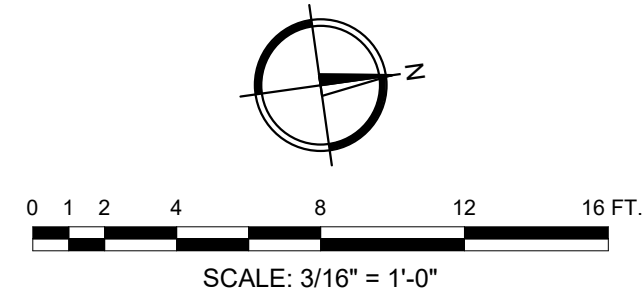

R-08
Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**



**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**INTERIOR FINISH PLAN,
SCHEDULE, NOTES,
SPECIFICATIONS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-902
DRAWN CTH/JPT	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 14 OF 53

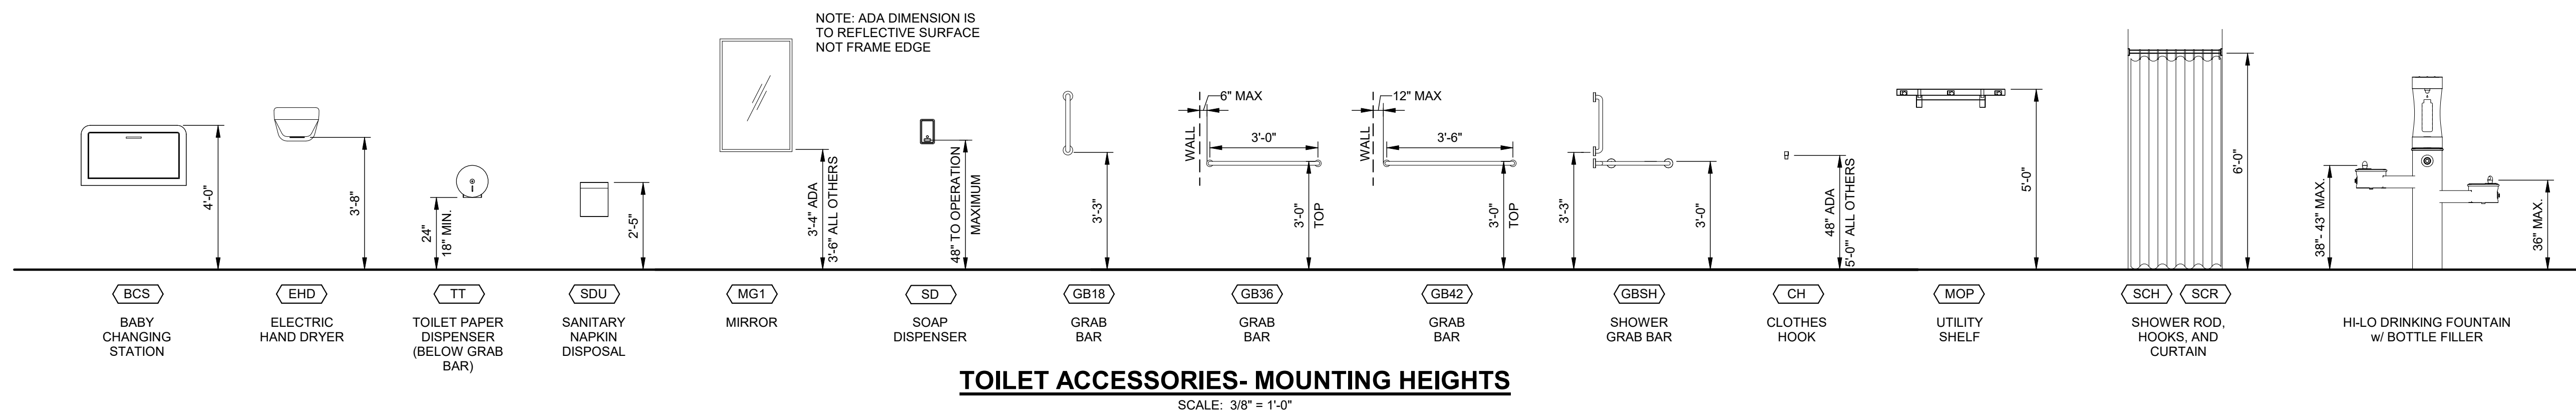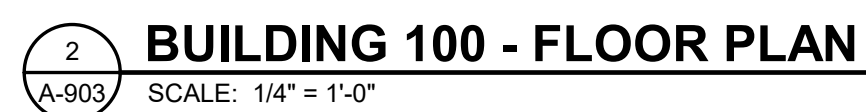

NOTE
- SEE P-DRAWINGS FOR PLUMBING FIXTURES



PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLENNANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


JOHNSON, LASCHOVER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

TOILET ACCESSORIES, TOILET FIXTURES AND MOUNTING HEIGHTS


DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER EH	DRAWING SHEET NO. A-903	
DRAWN CTH		
CHECKED WLD	SHEET 15 OF 53	
PROJECT NO. 3094.2201		

1/29/2025 4:12:30 PM


C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural\Local_cbor\ryd.rvt

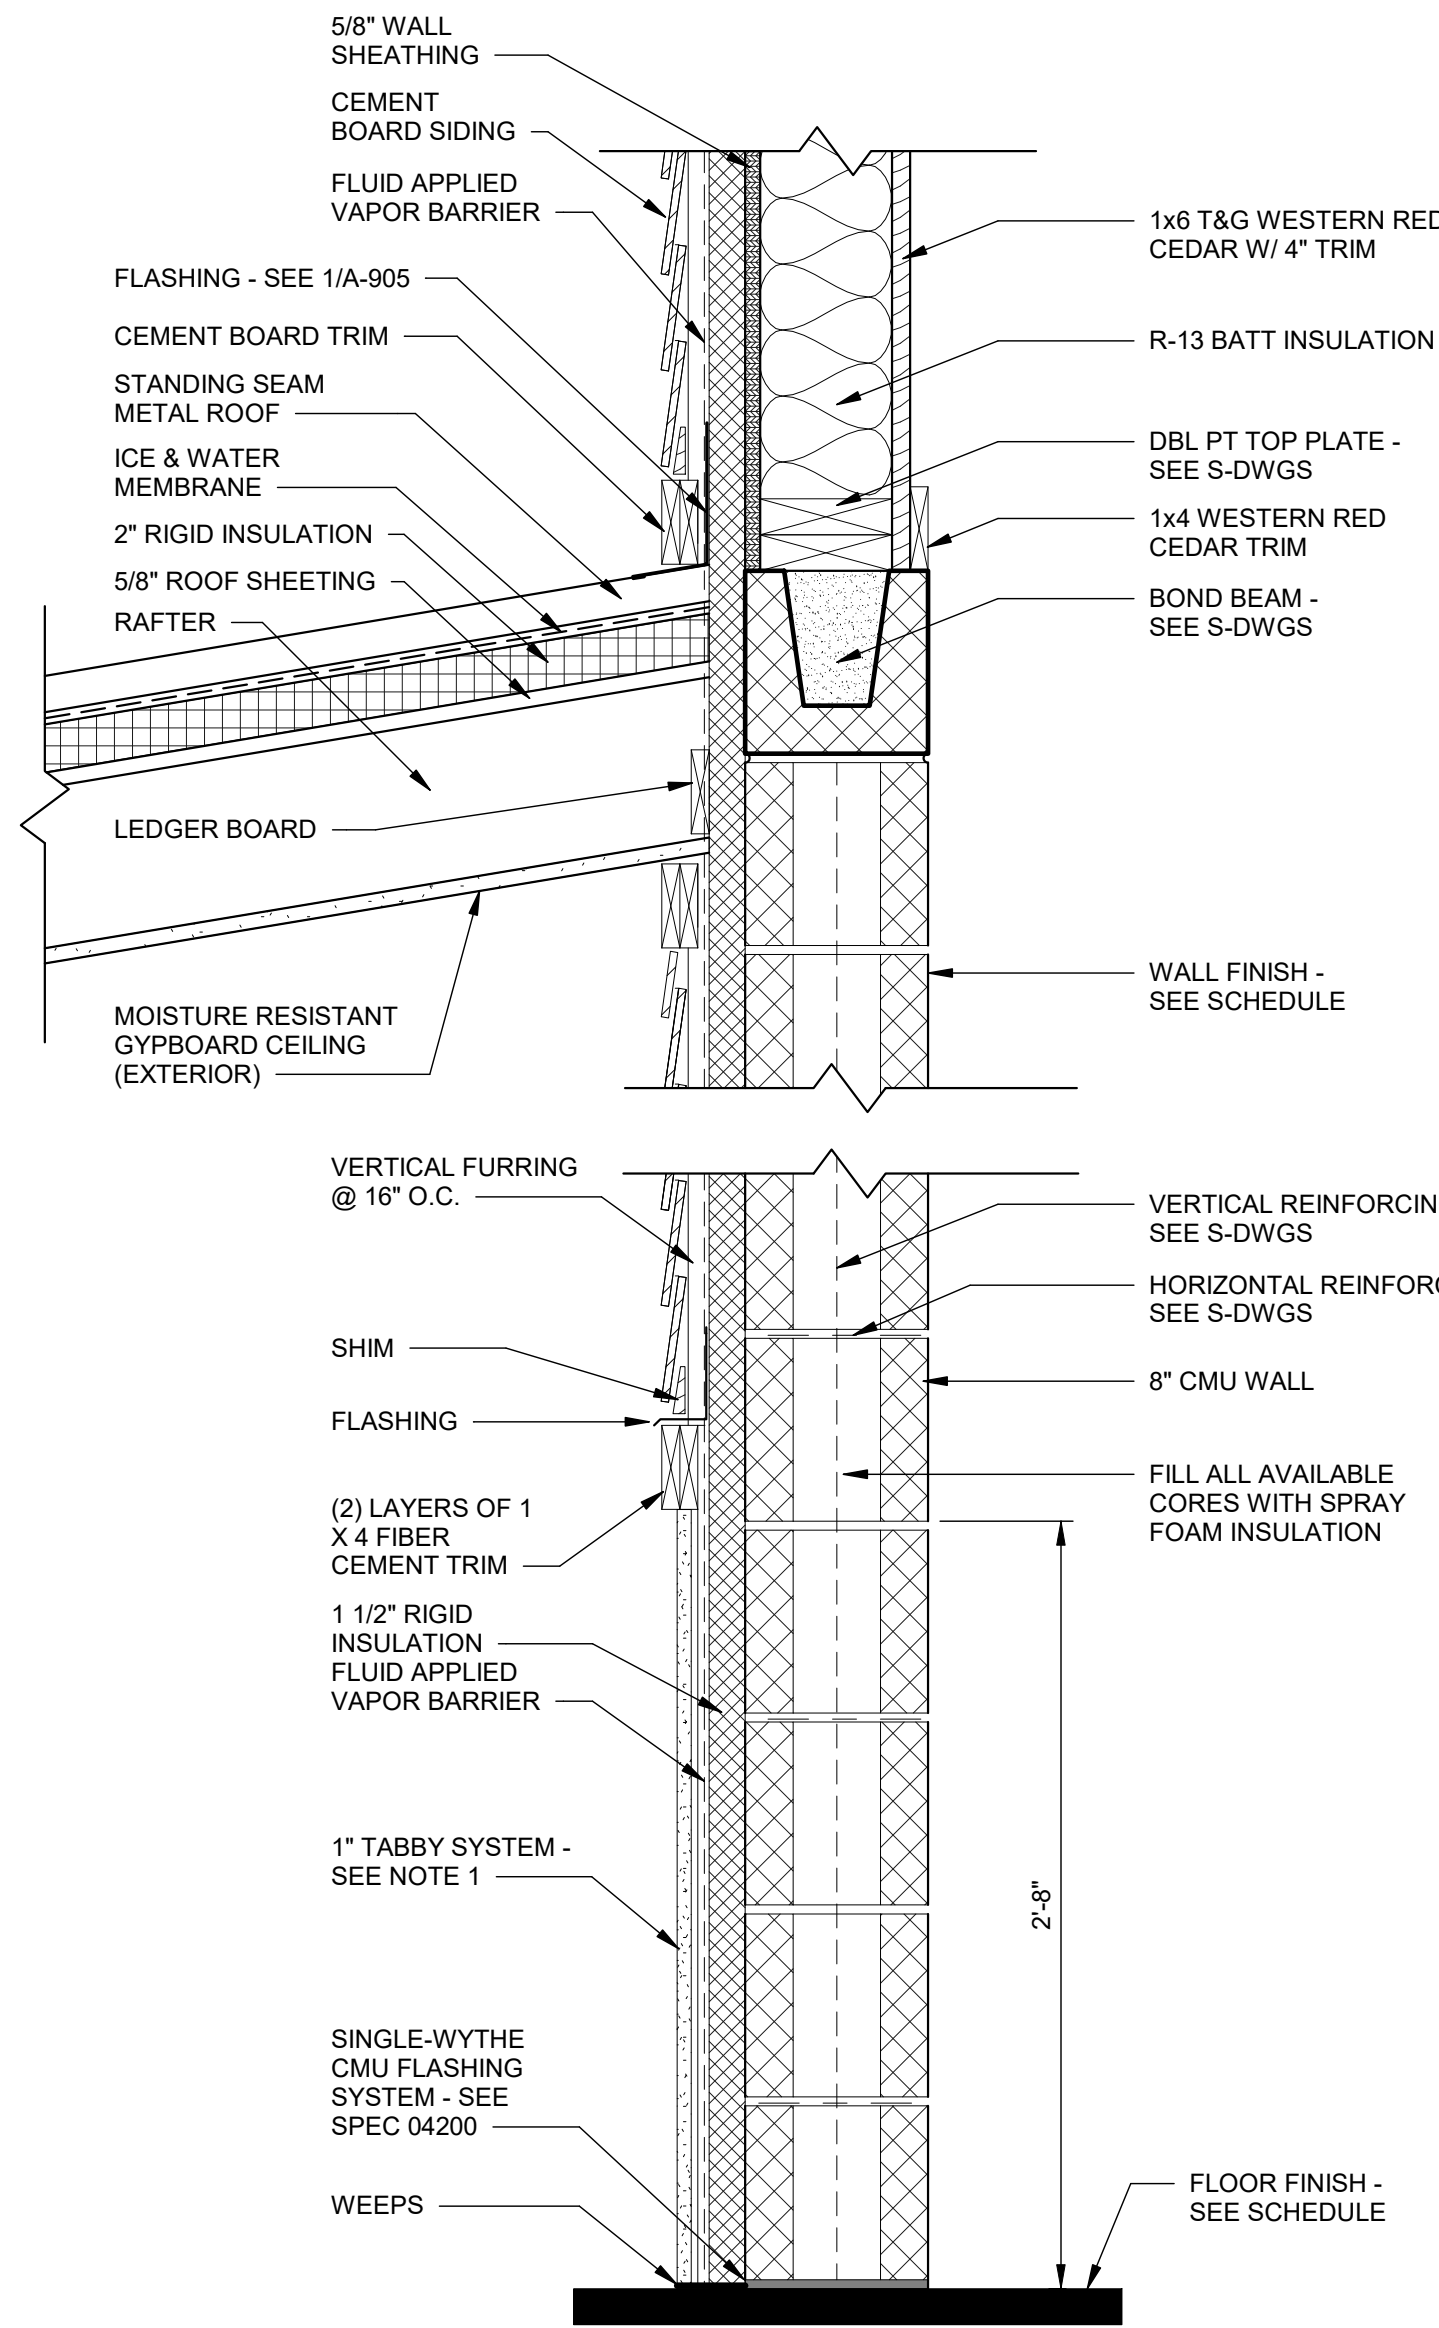


1 WALL TYPE 1
A-904 SCALE: 1 1/2" = 1'-0"

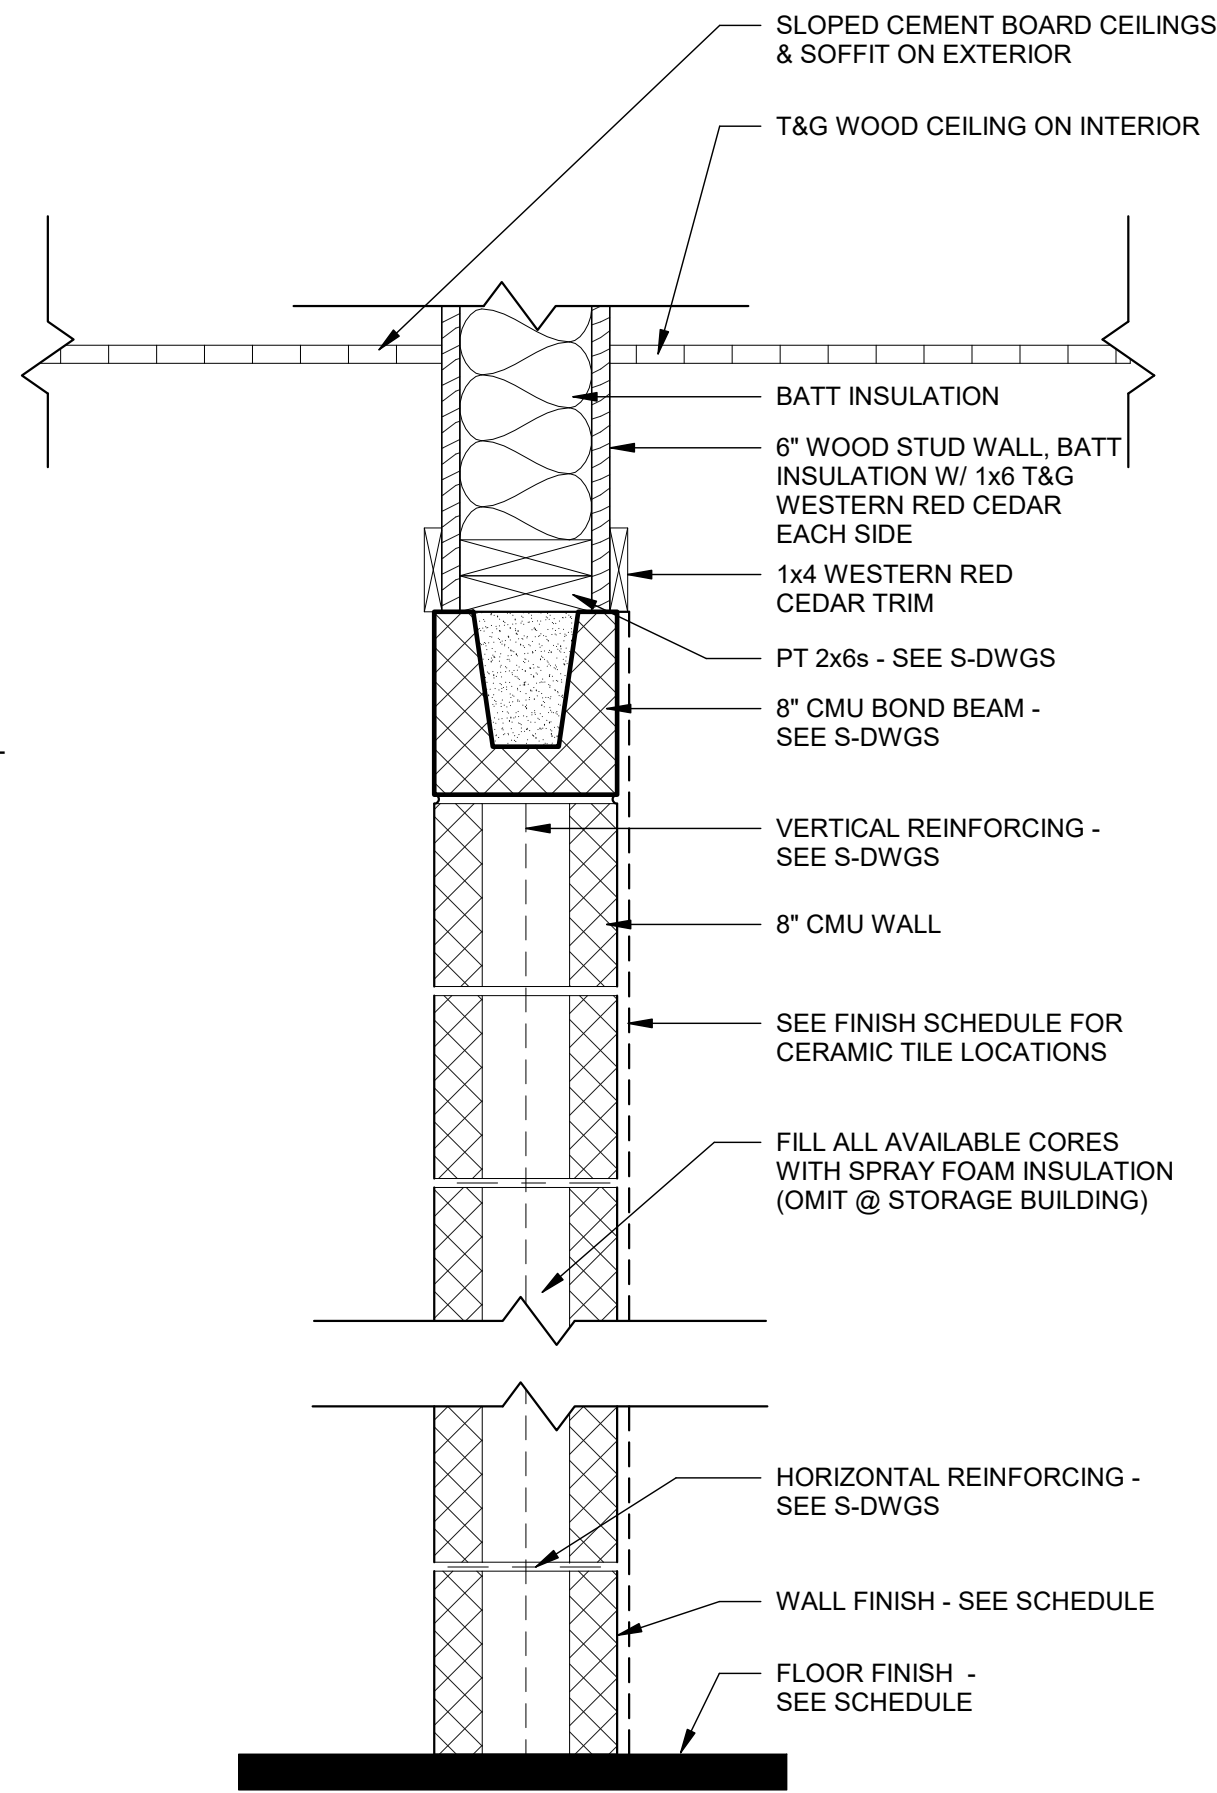


2 WALL TYPE 2
A-904 SCALE: 1 1/2" = 1'-0"

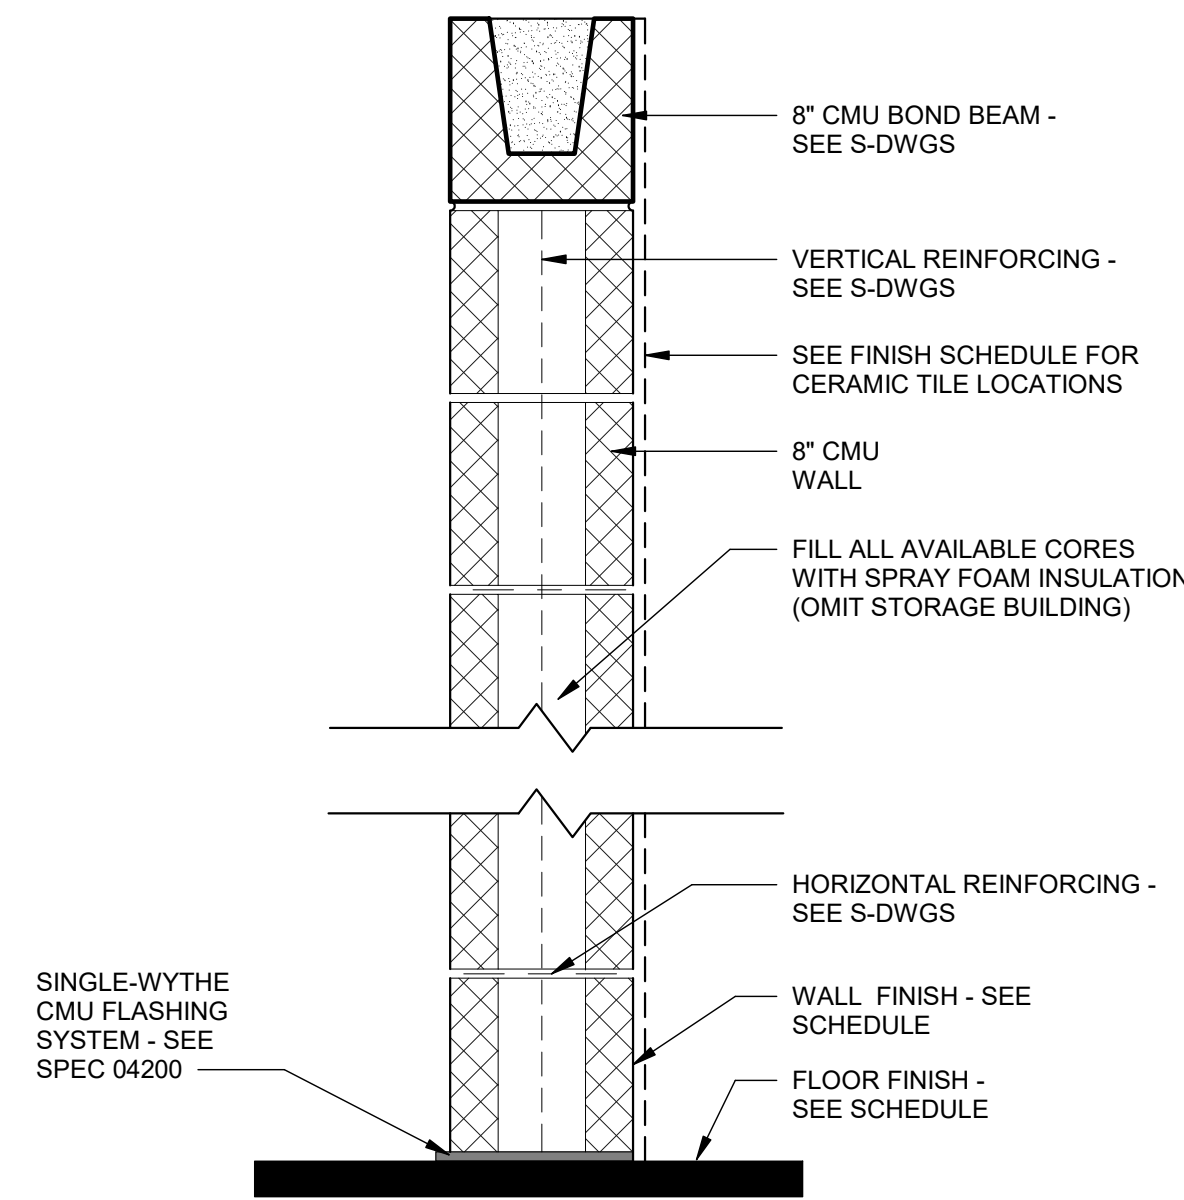


3 WALL TYPE 3
A-904 SCALE: 1 1/2" = 1'-0"

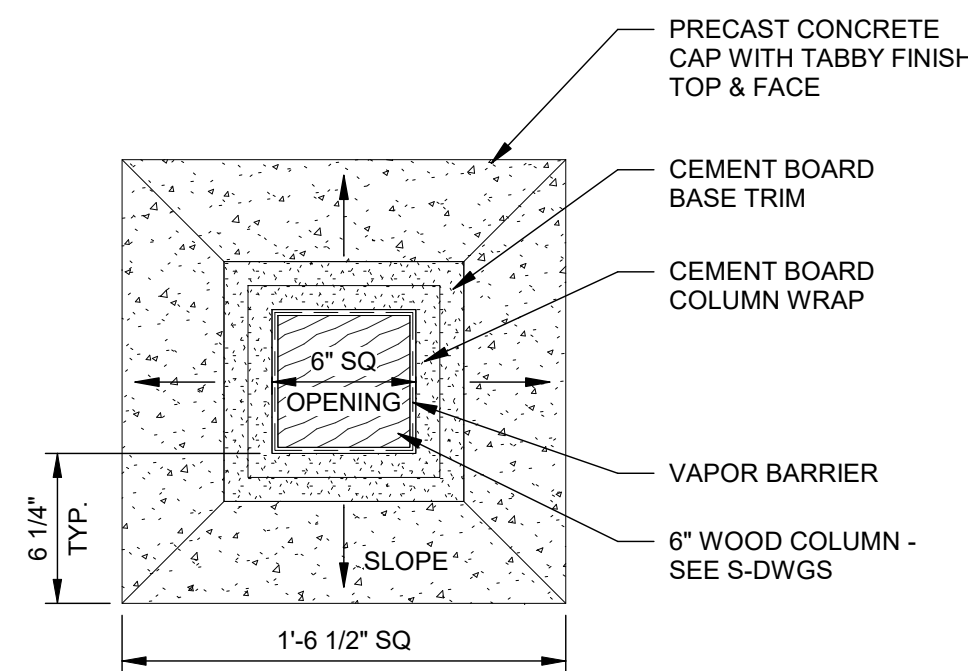

5 COLUMN @ PRECAST CAP
A-904 SCALE: 1 1/2" = 1'-0"

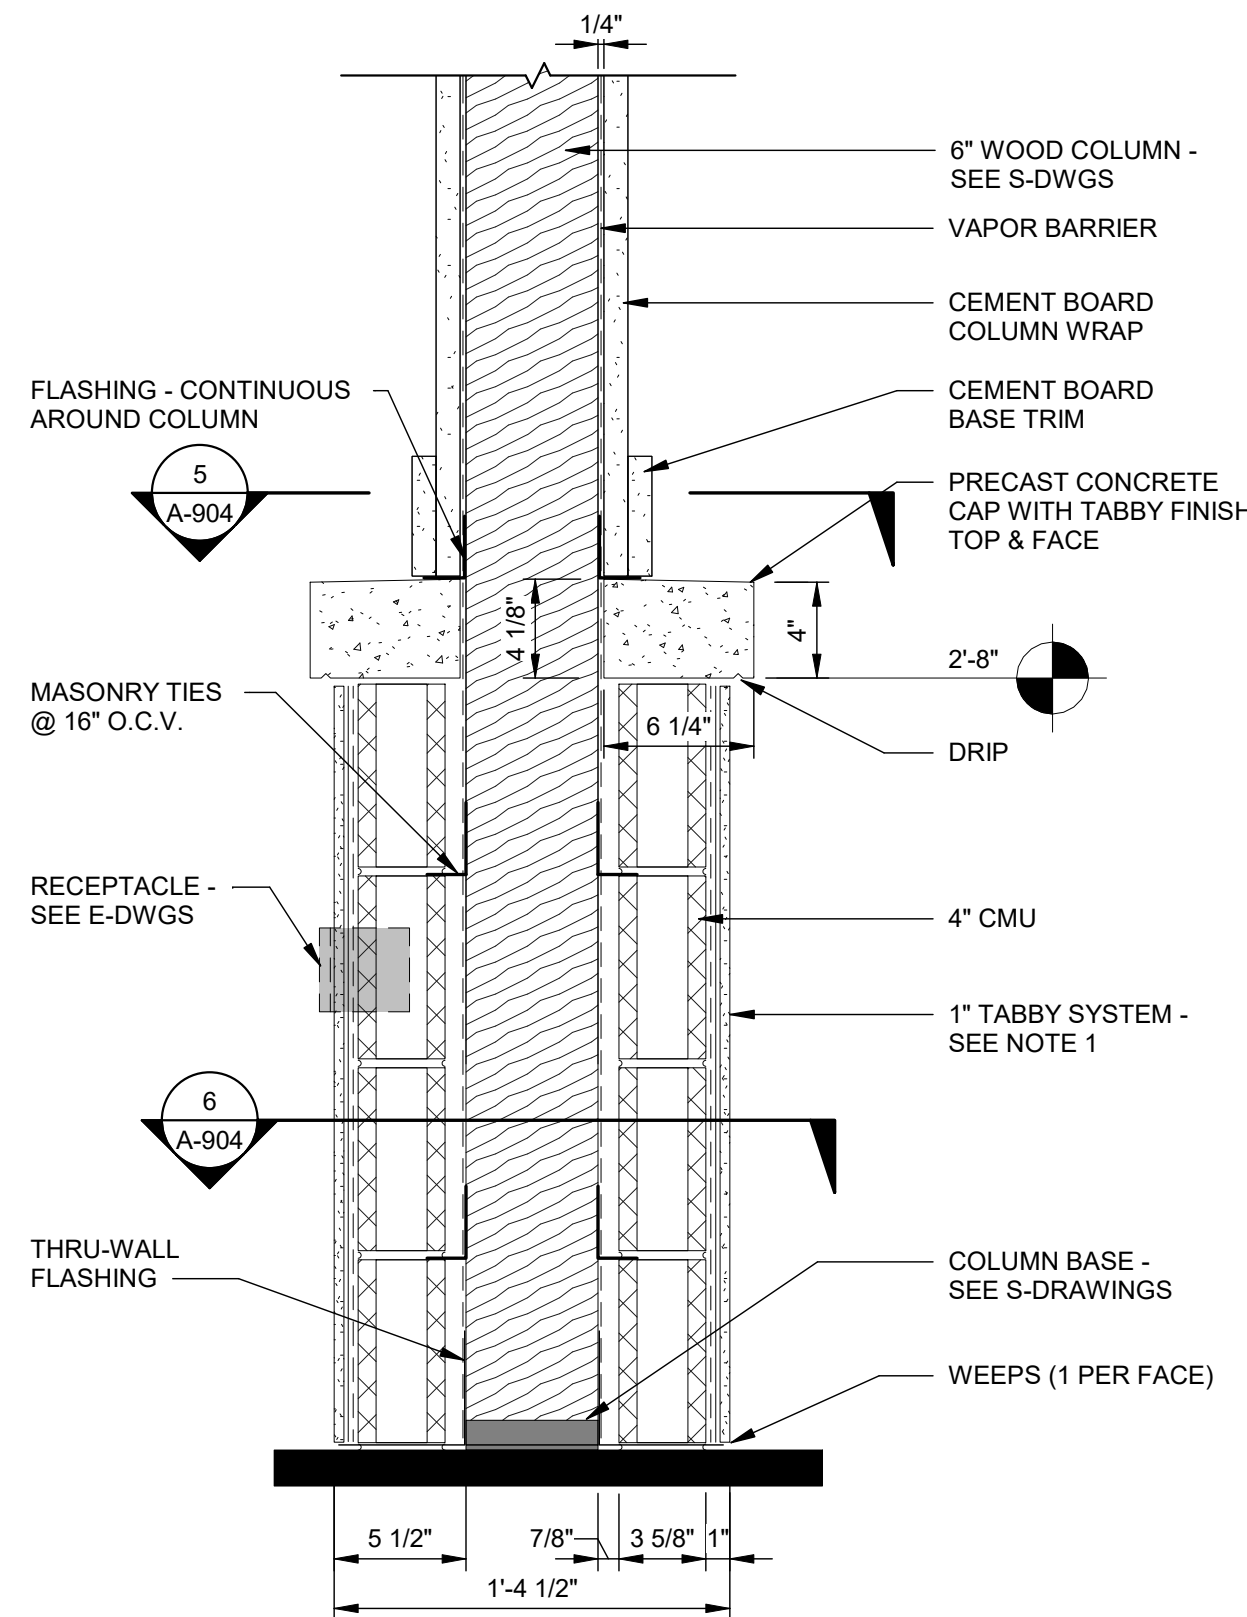

4 COLUMN SECTION
A-904 SCALE: 1 1/2" = 1'-0"

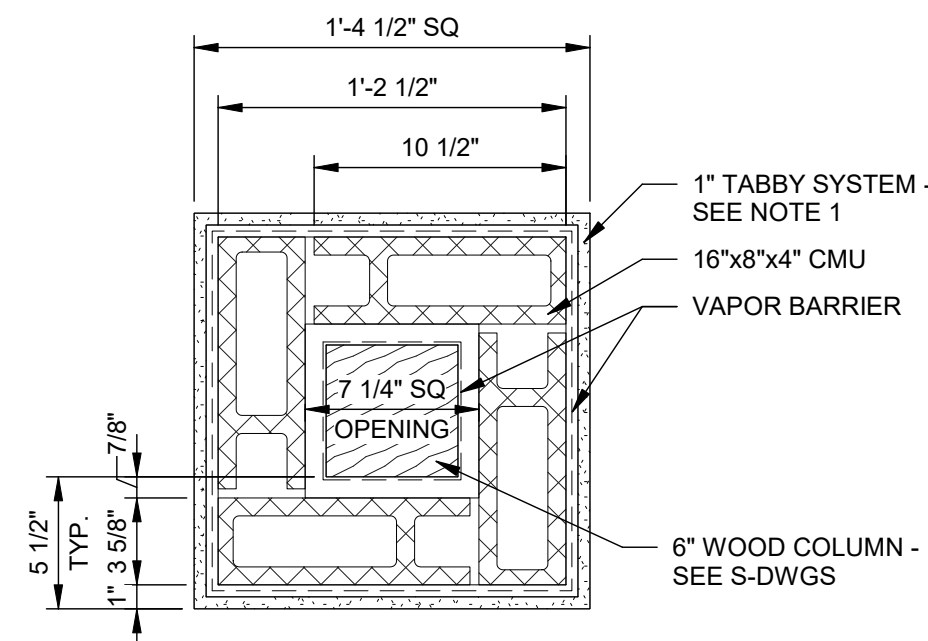

6 COLUMN BASE
A-904 SCALE: 1 1/2" = 1'-0"


NOTES

1. " THICK TABBY STUCCO SYSTEM - APPLY 3 COAT PORTLAND CEMENT PLASTER (STUCCO) SYSTEM ON 1/2" GLASS MAT GYPSUM SHEATHING, LATH, AND STUCCO CRACK REDUCTION SYSTEM ALL ANCHORED DIRECTLY TO CMU/CONCRETE WALL. GLASS MAT GYPSUM SHEATHING SHALL BE IN ACCORDANCE WITH "ASTM C1177". PROVIDE BASE COAT, SCRATCH COAT, AND OYSTER SHELLS IN THE TOPCOAT CONSISTENTLY DISTRIBUTED IN THE STUCCO FINISH. FINISHED TEXTURE SHALL BE "SAND FINISH" AND COLOR SHALL BE SELECTED BY THE ENGINEER. STUCCO SYSTEM SHALL BE PROVIDED IN STRICT ACCORDANCE WITH THE STUCCO MANUFACTURER'S ASSOCIATION RECOMMENDATIONS. SUBMIT PRODUCT DATA FOR APPROVAL. PROVIDE 12" SQ SAMPLES WITH VARIOUS SHELL SIZES FOR SELECTION BY ENGINEER.



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

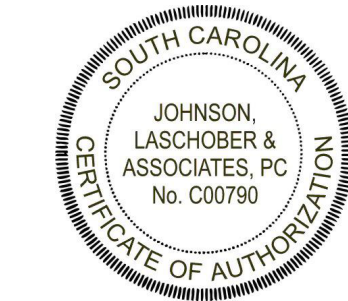

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:



JOHNSON, LASCHOBBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroupp.com


DRAWING TITLE

WALL SECTIONS


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO.
DRAWN CTH	A-904
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 16 OF 53

1/29/2025 4:13:17 PM

C:\Revit\Local Projects\30942201_Buck Hall\30942201_Architectural-Local_cbrotyd.rvt

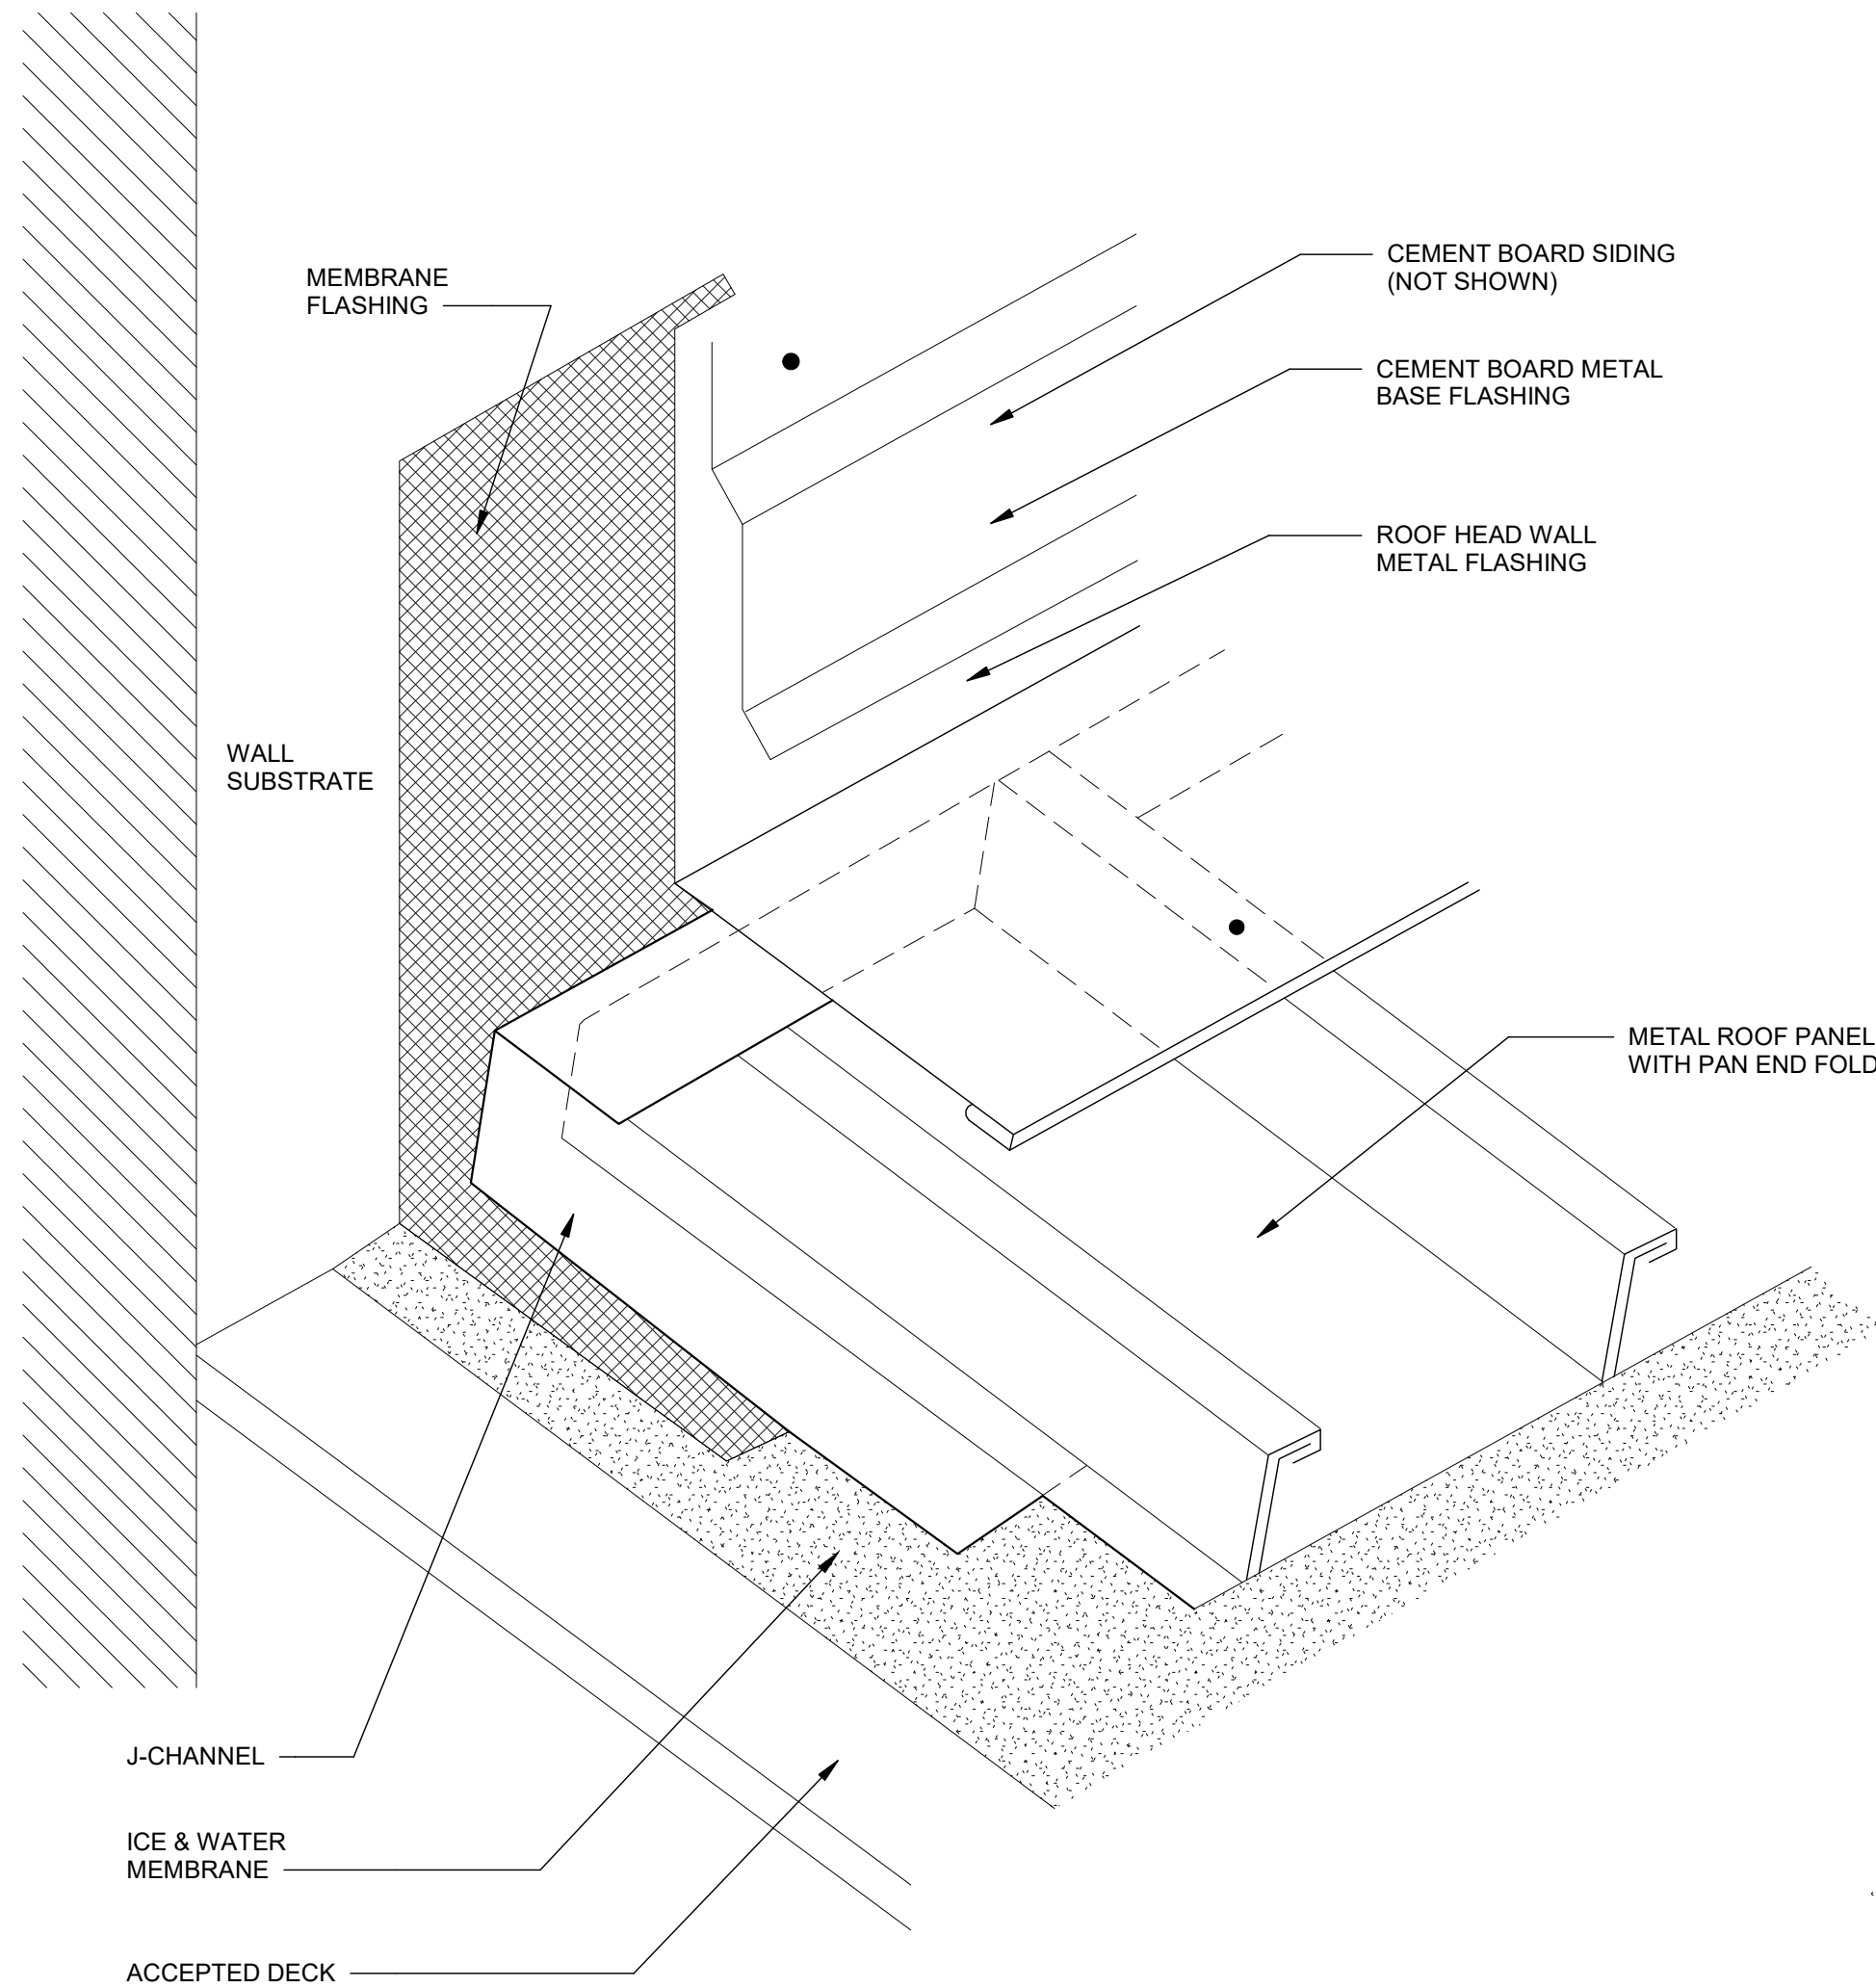


1 HEADWALL DETAIL
A-905 SCALE: 3" = 1'-0"

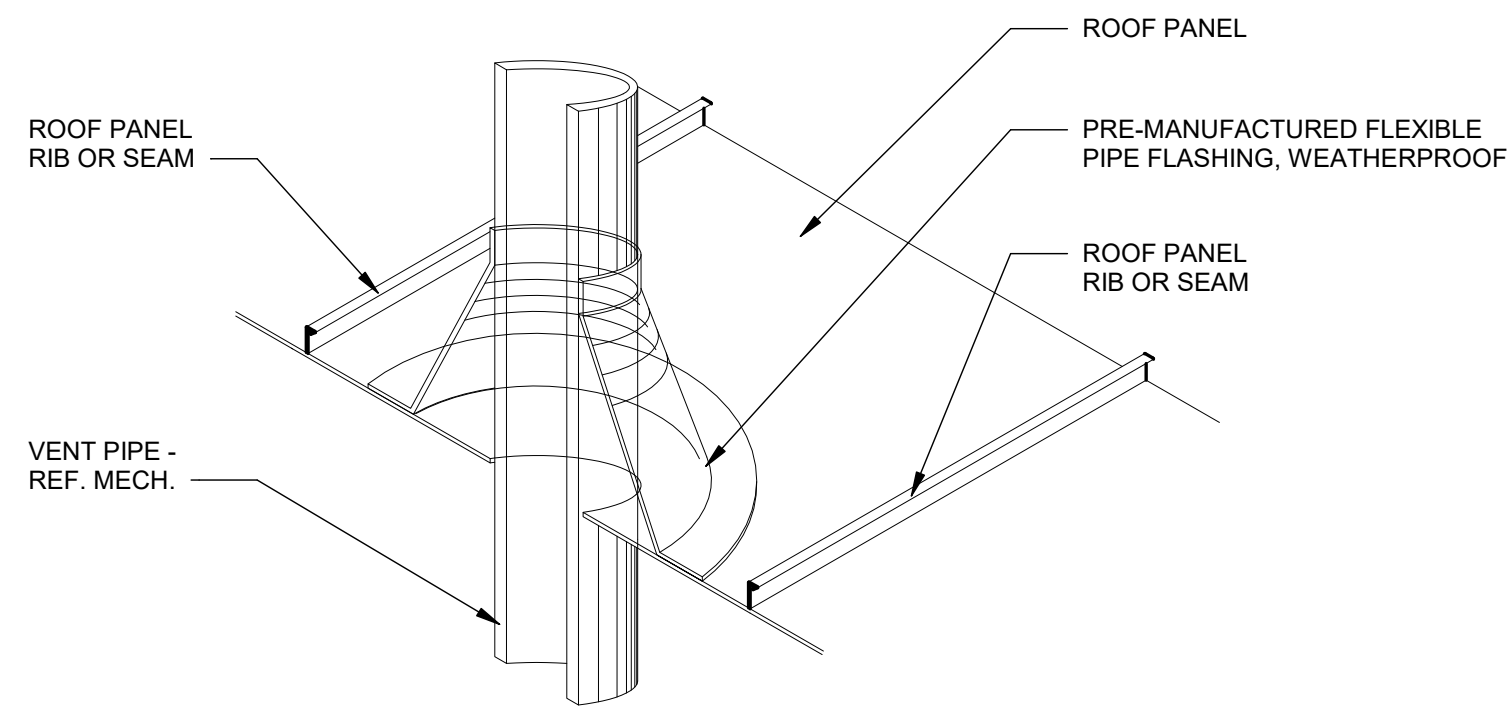


RECOMMENDED SMALL PIPE PENETRATION INSTALLATION
INSTALL PIPE IN CENTER OF PANEL.


2 VTR PIPE PENETRATION
A-905 SCALE: 1 1/2" = 1'-0"

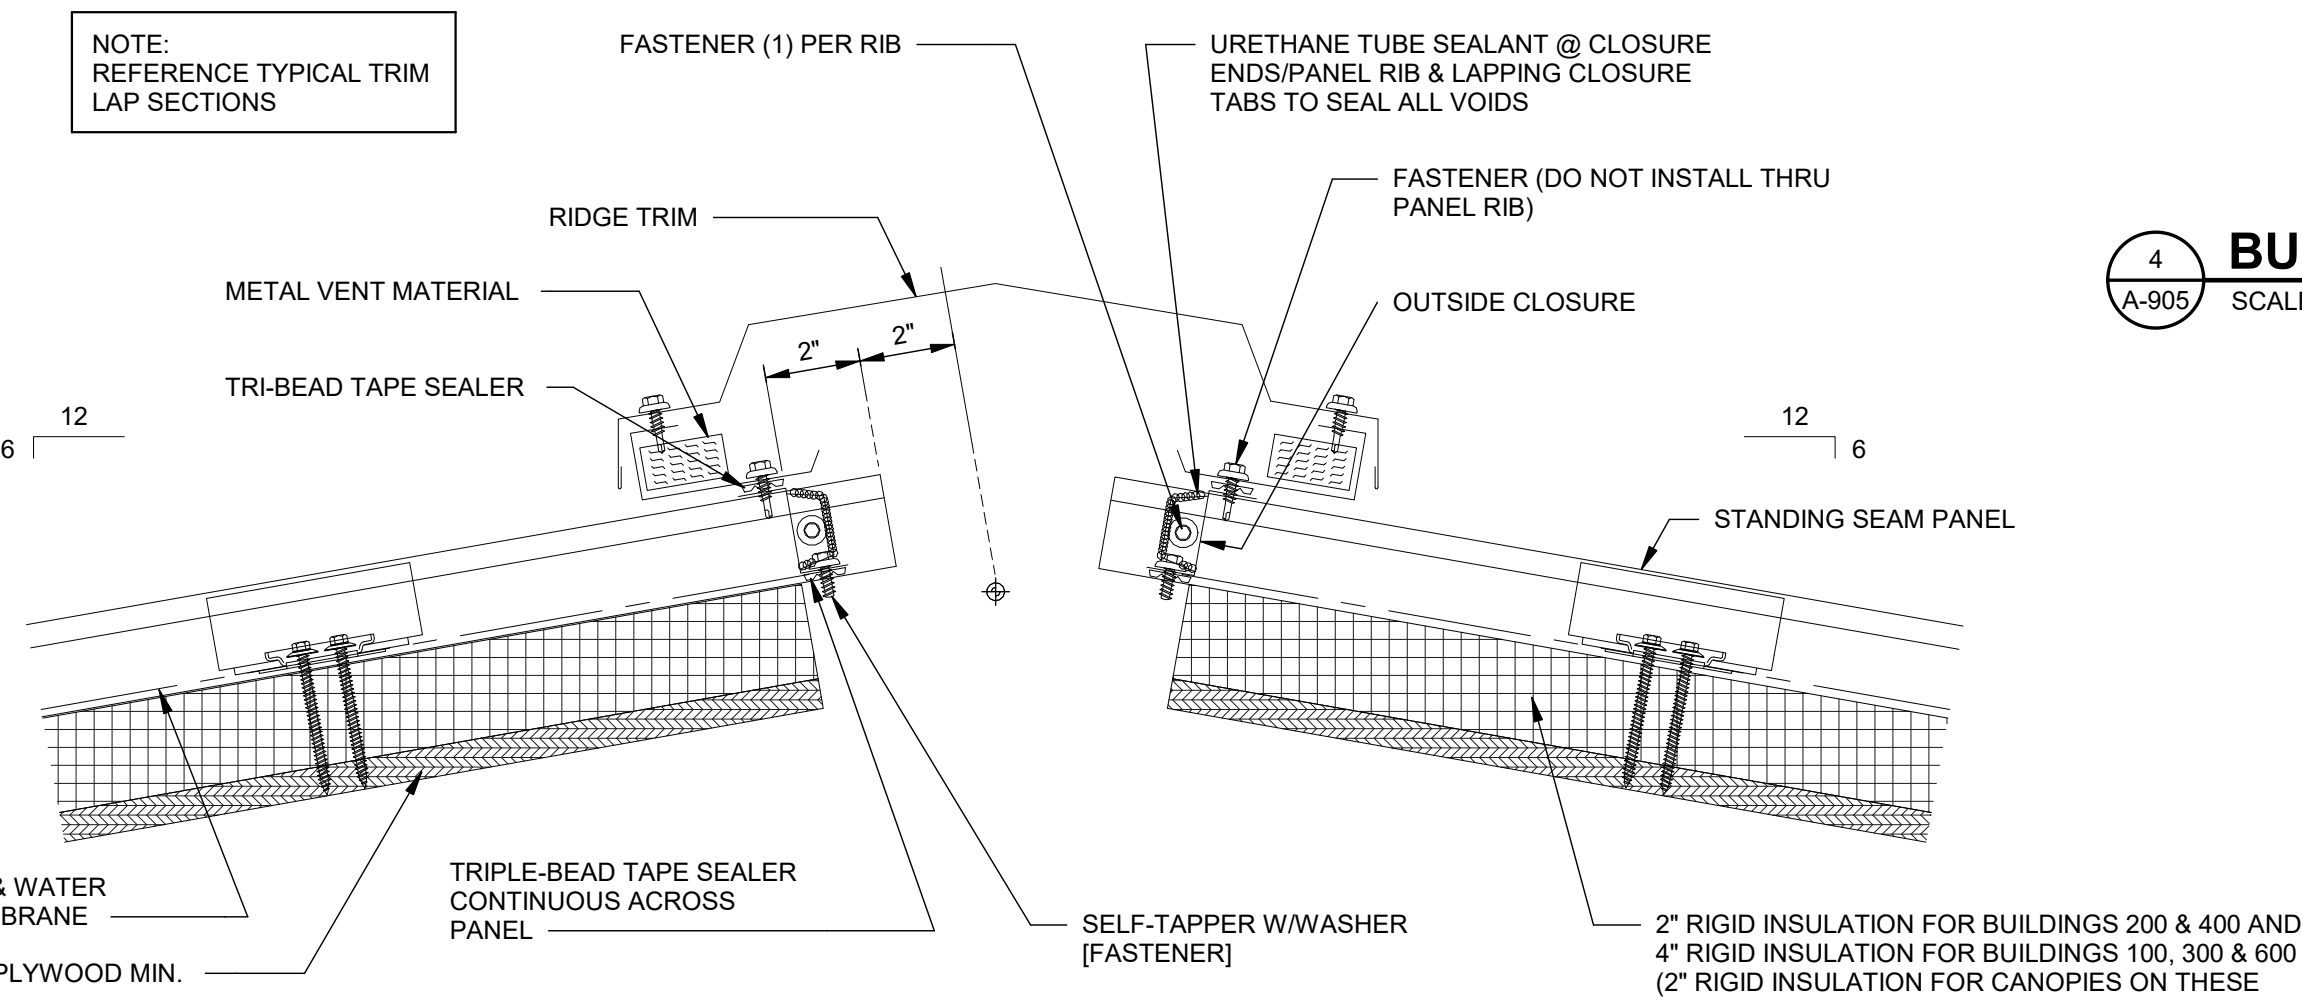


3 LOW FLOATING RIDGE
A-905 SCALE: 3" = 1'-0"

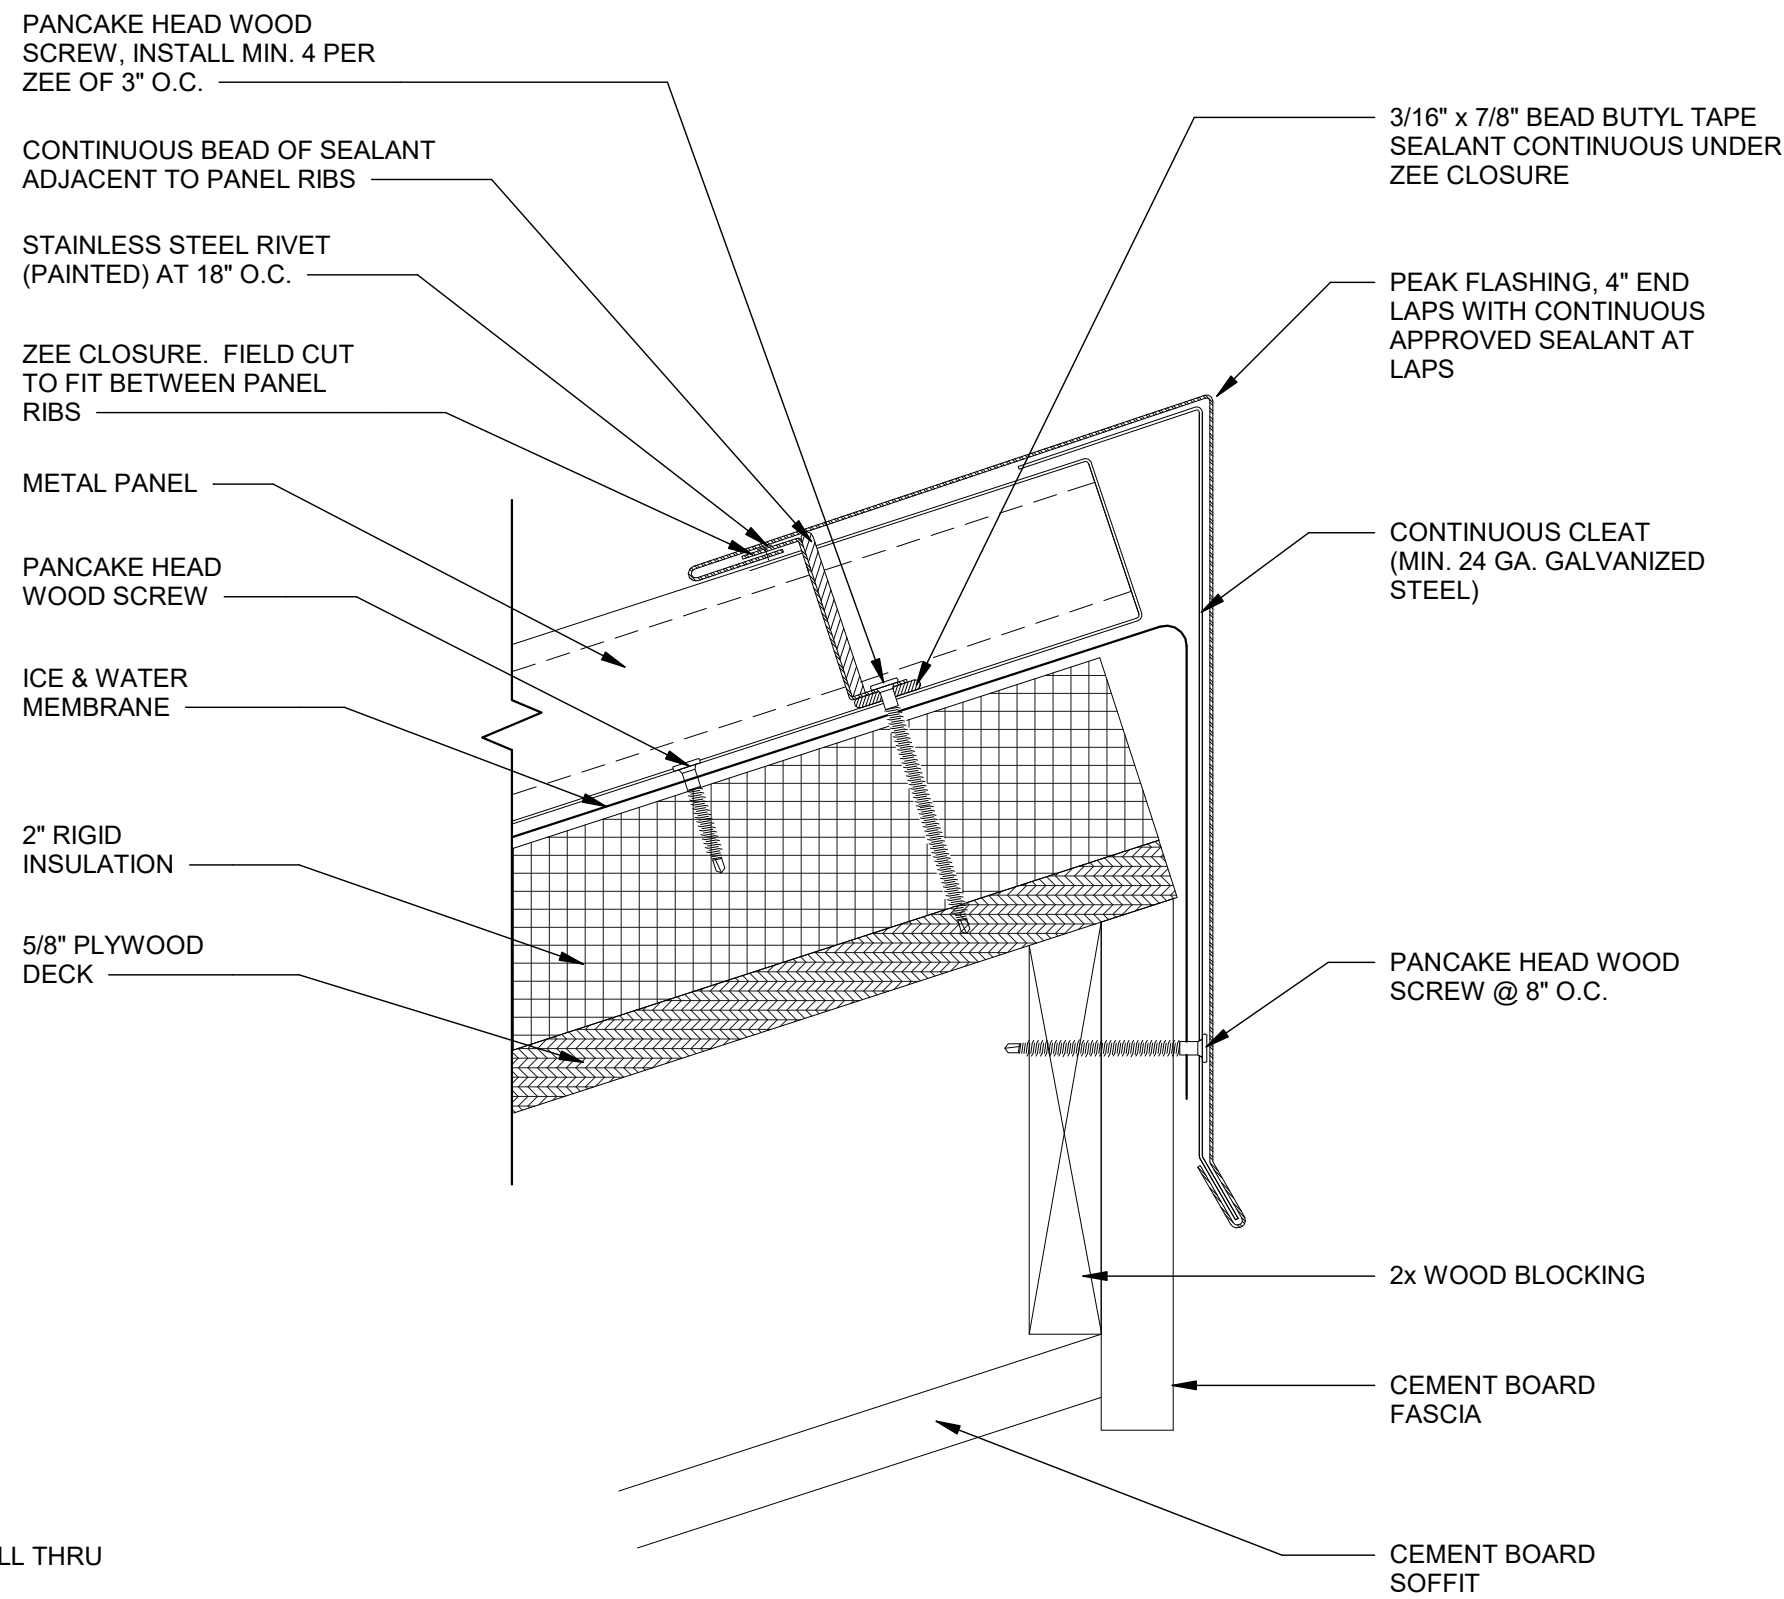


4 BUILDINGS 200, 400 & 700 - HIGH EAVE
A-905 SCALE: 6" = 1'-0"

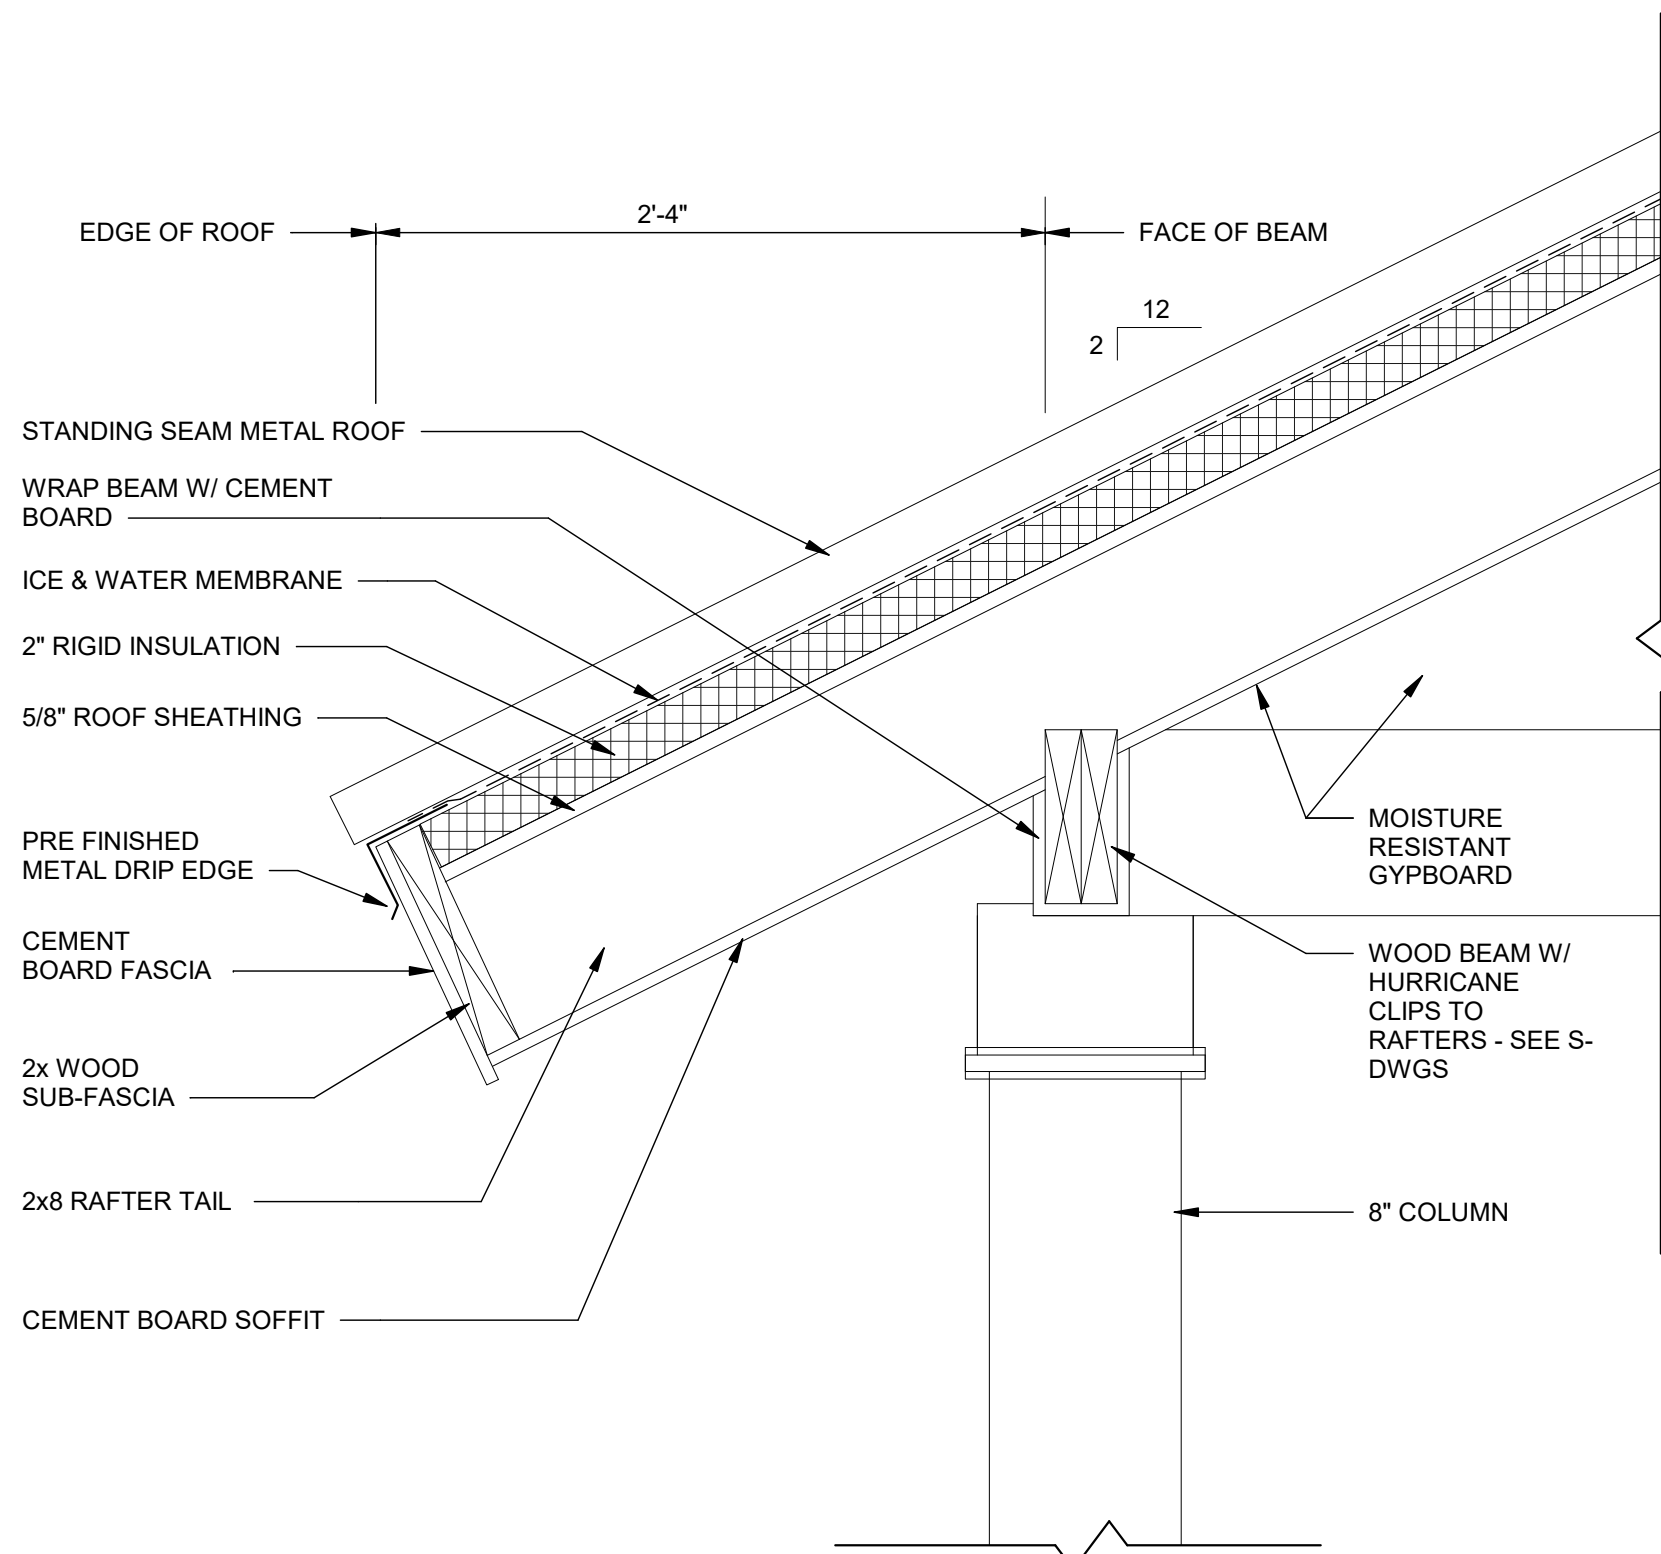

5 BUILDINGS 100, 300, 500 & 600 - EAVE DETAIL @ PORCH
A-905 SCALE: 1 1/2" = 1'-0"

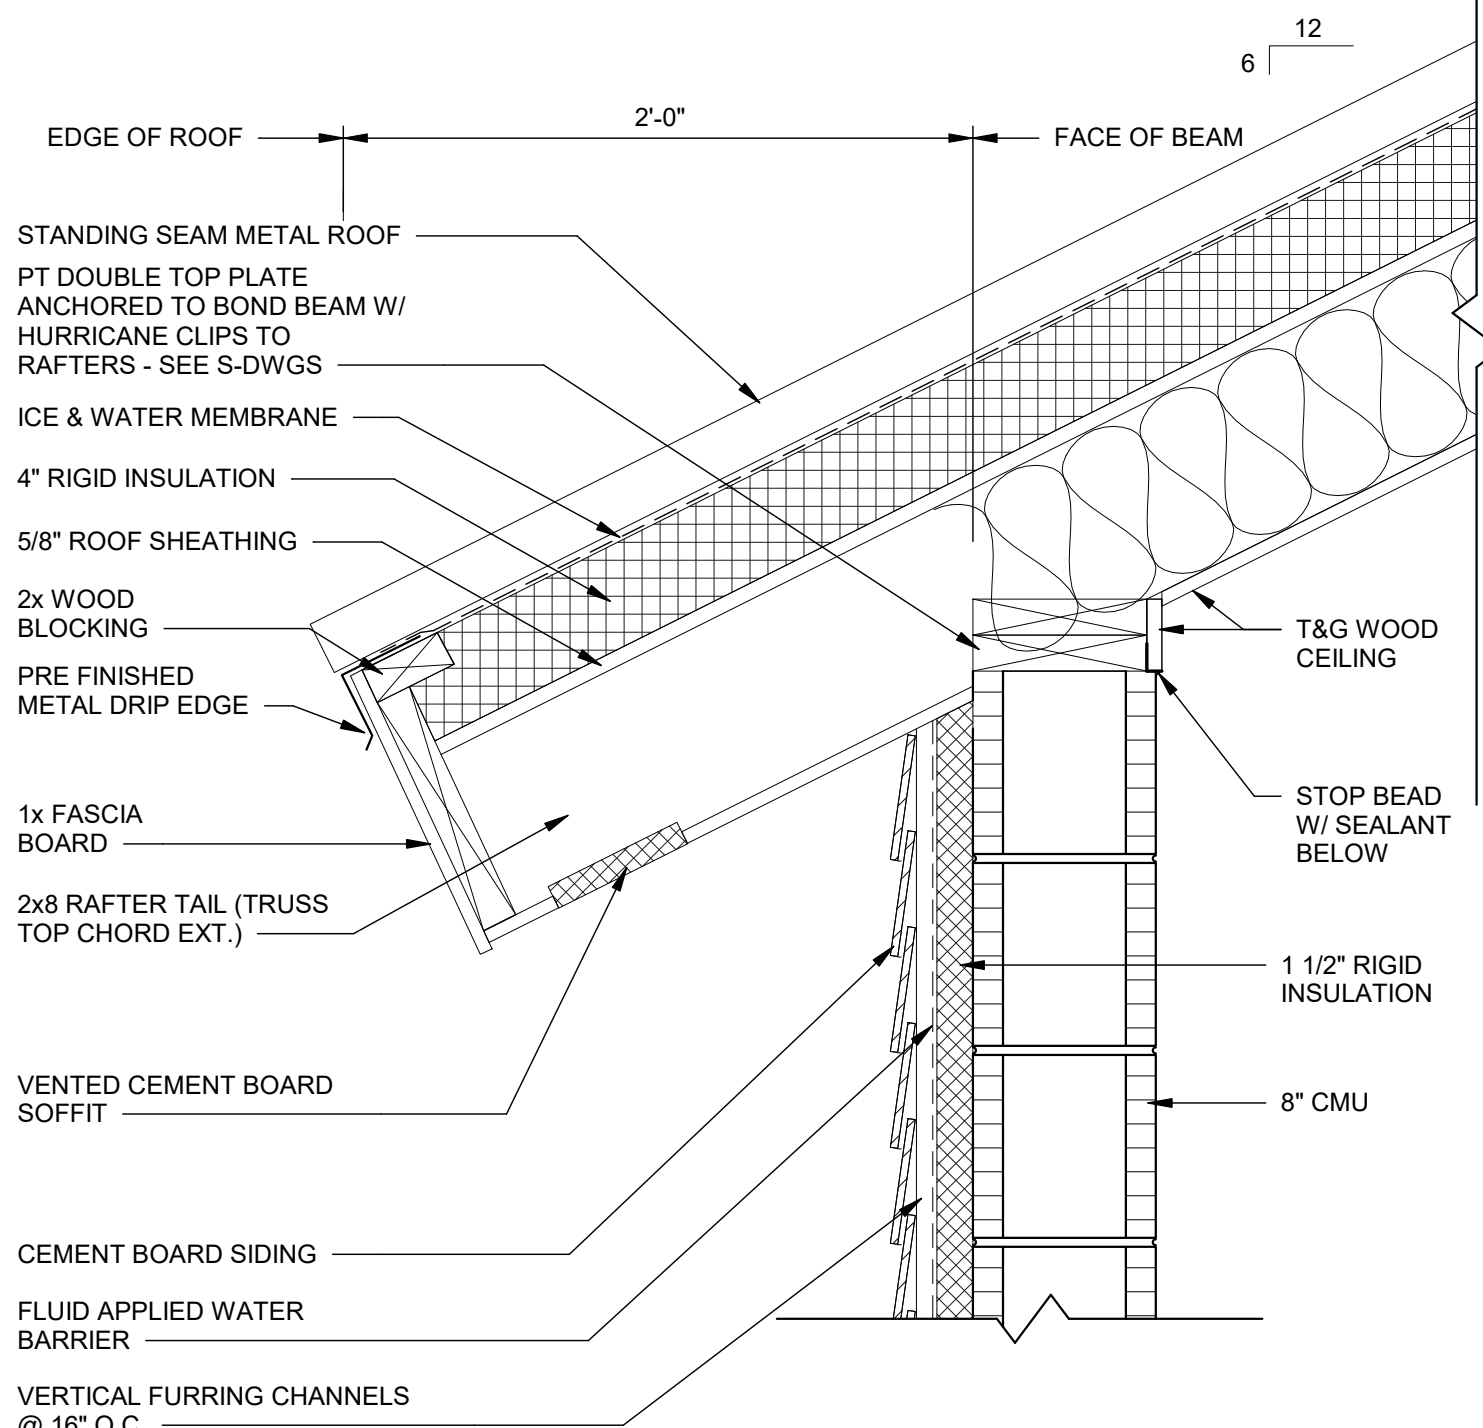

6 BUILDINGS 100, 300 & 600 - EAVE DETAIL
A-905 SCALE: 1 1/2" = 1'-0"

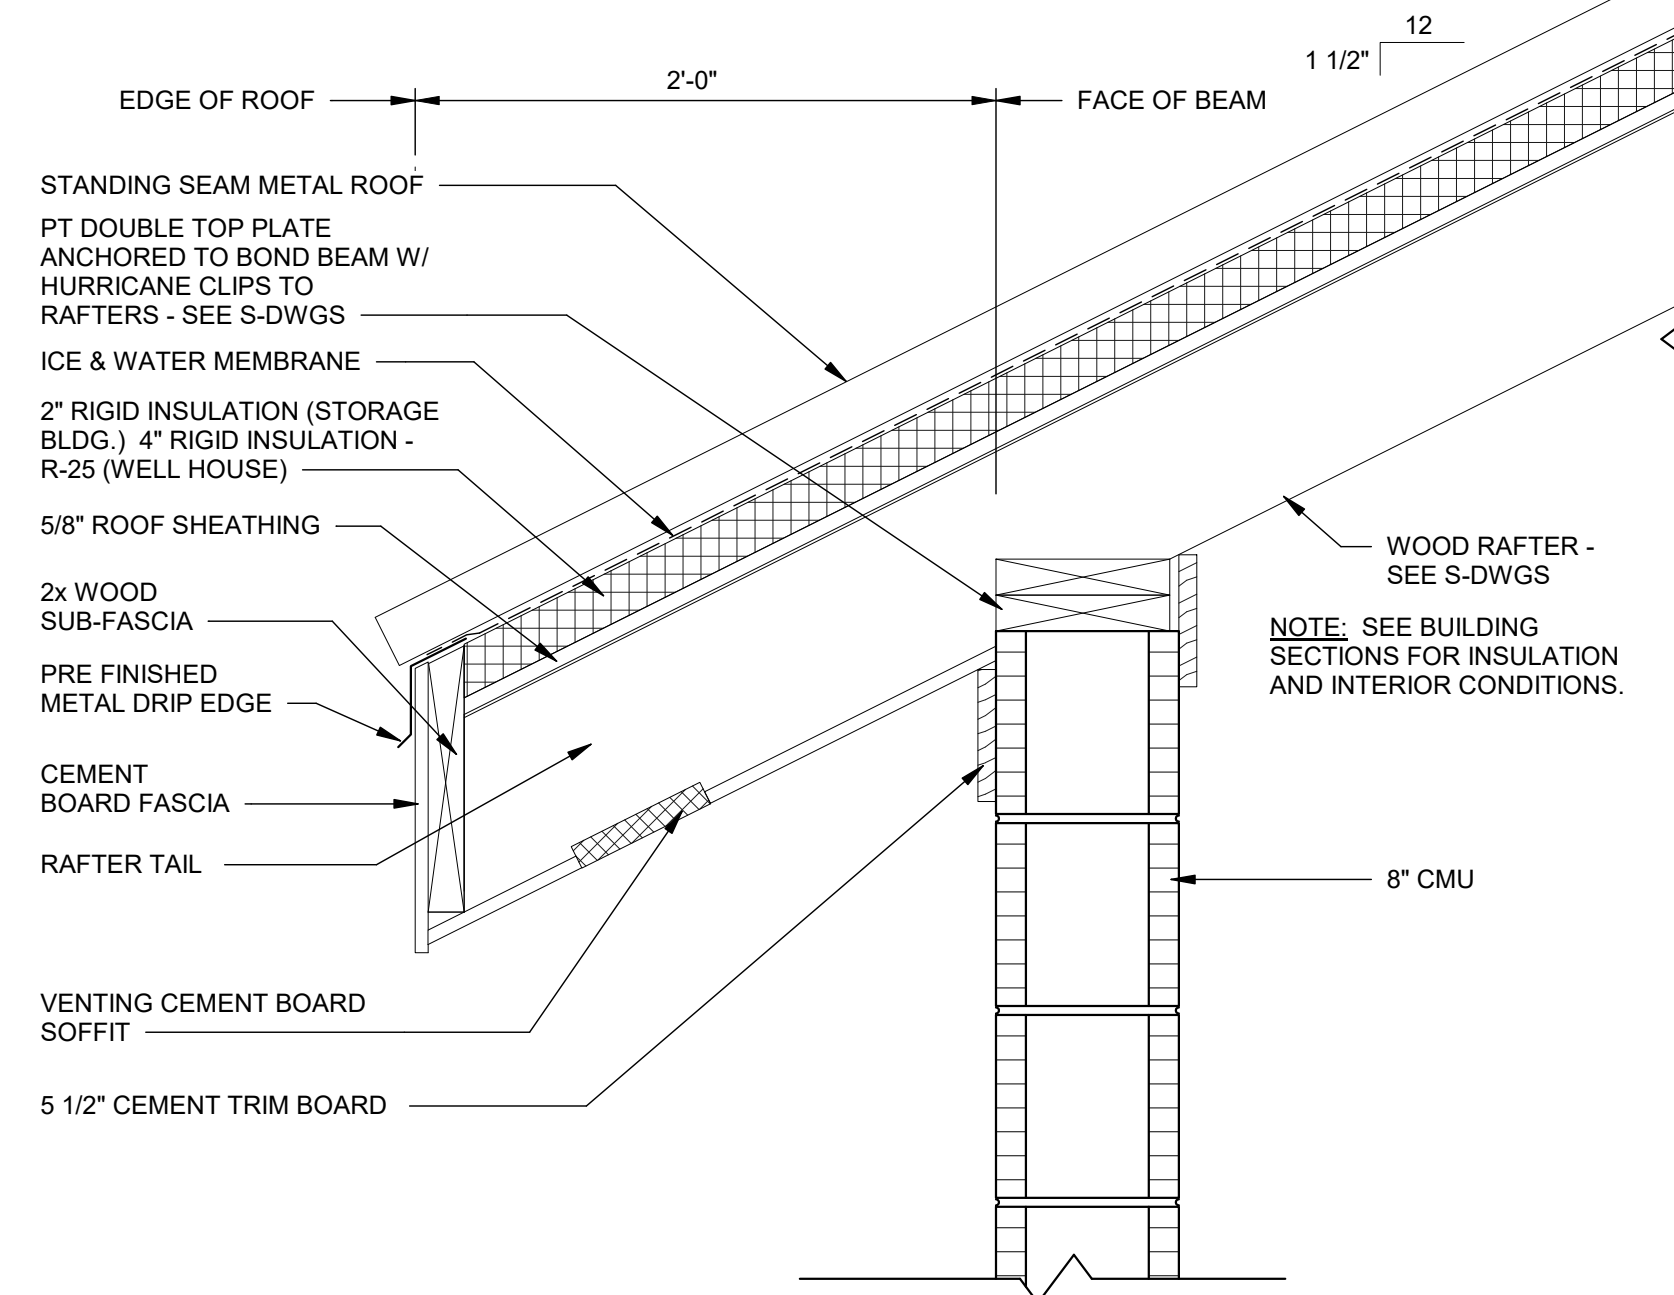


7 BUILDINGS 200, 400 & 700 - EAVE DETAIL
A-905 SCALE: 1 1/2" = 1'-0"



R-08 Southern Region

STAMPS, LOGOS, AND SEALS

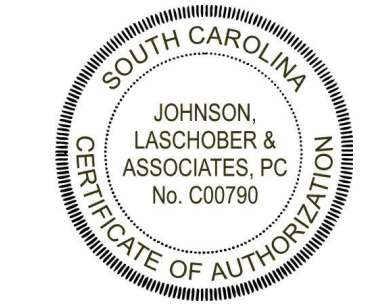

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

ROOF DETAILS

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER EH	DRAWING SHEET NO. A-905
DRAWN CTH	
CHECKED WLD	
PROJECT NO. 3094.2201	SHEET 17 OF 53

GENERAL NOTES:

GENERAL

1. THESE GENERAL NOTES PRESENT AND/OR SUMMARIZE KEY PROJECT INFORMATION FOR THE PLAN READER'S CONVENIENCE. SEE PLANS AND SPECIFICATIONS FOR FURTHER REQUIREMENTS.
2. ALL REFERENCES TO STANDARDS HEREIN ARE TO MOST RECENT ISSUE IN EFFECT AS OF THE DATE OF THESE DOCUMENTS, UNLESS NOTED OTHERWISE IN PROJECT SPECIFICATIONS.
3. DESIGN BASIS: 2021 INTERNATIONAL BUILDING CODE (IBC) WITH SC AMENDMENTS
- A. GENERAL
- a. RISK CATEGORY = I
- b. WIND:
- ULTIMATE DESIGN WIND SPEED = 134 MPH
- WIND EXPOSURE CATEGORY = D
- INTERNAL PRESSURE COEFFICIENT = 0.18 ± (ENCLOSED BUILDING) (CAMPGROUND RESTROOM, STORAGE BUILDING, WELL HOUSE) 0.18 ± (PARTIALLY OPEN BUILDING) (DAY USE PICNIC SHELTER)
- COMPONENT & CLADDING DESIGN PRESSURE - SEE DIAGRAMS
- c. SEISMIC:
- SEISMIC IMPORTANCE FACTOR $I_e = 1.0$
- MAPPED SPECTRAL RESPONSE ACCEL. (SHORT PERIODS) $S_s = 0.77$
- MAPPED SPECTRAL RESPONSE ACCEL. (1 SECOND PERIOD) $S_1 = 0.24$
- * SITE CLASS = F (RISK OF LIQUEFACTION)
- SPECTRAL RESPONSE COEFFICIENT (SHORT PERIODS) $SDS = 0.61$
- SPECTRAL RESPONSE COEFFICIENT (1 SECOND PERIOD) $SD_1 = 0.18$
- SEISMIC DESIGN CATEGORY = D
- ANALYSIS PROCEDURE: EQUIVALENT LATERAL FORCE PROCEDURE
- * NOTE:
- SITE RESPONSE ANALYSES NOT REQUIRED BASED ON EXCEPTION FOR BUILDINGS w/ FUNDAMENTAL PERIOD ≤ 0.5
- BASIC SEISMIC FORCE RESISTING SYSTEM - SPECIAL REINFORCED MASONRY SHEAR WALLS
- RESPONSE MODIFICATION FACTOR $R = 5.0$
- SEISMIC RESPONSE COEFFICIENT $C_s = 0.12$
- DESIGN BASE SHEAR = 23K (CAMPGROUND RESTROOMS), 16K (DAY USE PICNIC SHELTER), 7K (STORAGE BUILDING), 4K (WELL HOUSE)
- d. LIVE LOADS:
- ROOF: 20 psf
- e. SNOW LOAD
- GROUND: 5 psf
4. ABBREVIATIONS:

AB	ANCHOR BOLT	FIN	FINISH/FINISHED	PL	PLATE
ALUM	ALUMINUM	FLG	FLANGE	PLCS	PLACES
B	BOTTOM (BAR)	FLR	FLOOR	PROJ	PROJECTION
B/*	BOTTOM OF *	FS	FAR SIDE	REINF	REINFORCING
BP	BASE PLATE	FTG	FOOTING	REQD	REQUIRED
BRG	BEARING	GA	GAGE/GAUGE	SCHD	SCHEDULE
CJ	CONTROL JOINT	HORIZ	HORIZONTAL	SPCS	SPACES
CLR	CLEAR	HR	HANDRAIL	STD	STANDARD
CO	CLEAN OUT	INT	INTERIOR	STL	STEEL
COL	COLUMN	JST	JOIST	SQ	SQUARE
CONC	CONCRETE	LG	LONG	T	TOP (BAR)
CONT	CONTINUOUS	LG	LIGHT GAGE	T/*	TOP OF *
CSJ	CONSTRUCTION JOINT	LLV	LONG LEG VERTICAL	THK	THICK/THICKNESS
DIA	DIAMETER	MANUF	MANUFACTURER	THRD	THREADED
(E)	EXISTING	MAX	MAXIMUM	TRS	TRUSS
EA	EACH	MIN	MINIMUM	TYP	TYPICAL
EF	EACH FACE	NS	NEAR SIDE	UNO	UNLESS NOTED
EJ	EXPANSION JOINT	OC	ON CENTER		OTHERWISE
EL	ELEVATION	OD	OUTSIDE DIAMETER	VERT	VERTICAL
EQ	EQUAL	OPNG	OPENING	W/*	WITH *
BW	EACH WAY	OPP	OPPOSITE	WD	WOOD
EX	EXISTING	PEMB	PRE-ENGINEERED	WP	WORK POINT
EXT	EXTERIOR		METAL BUILDING	WWF	WELDED WIRE FABRIC

5. UNLESS OTHERWISE NOTED, REQUIREMENTS GIVEN FOR ONE LOCATION ALSO APPLY AT OTHER LOCATIONS AT WHICH CONDITIONS ARE SIMILAR. THE REQUIREMENTS GIVEN SHALL BE ADAPTED TO CONDITIONS AT SIMILAR LOCATIONS.
6. COORDINATE WORK OF OTHER TRADES SHOWN ON DRAWINGS OR INDICATED IN SPECIFICATIONS WITH STRUCTURAL WORK.
7. SHOP DRAWINGS FOR ANY PART OF THE STRUCTURAL WORK SHALL SHOW THE INTERFACE WITH OTHER RELATED TRADES. THE CONTRACTOR SHALL VERIFY DIMENSIONS, LOCATIONS, MATERIALS, ETC. OF RELATED TRADES BY CERTIFIED MANUFACTURER'S DRAWINGS AND SO INDICATE BEFORE SUBMITTING SHOP DRAWINGS FOR ARCHITECT/ENGINEER'S APPROVAL.
8. THE DESIGN OF THE STRUCTURE SHOWN IS BASED ON INTERACTION OF VARIOUS CONNECTED PARTS AND THE DESIGN LOADS NOTED ABOVE. THE STRENGTH AND STABILITY OF CONSTRUCTION UNDERWAY MAY REQUIRE SUPPLEMENTAL TEMPORARY SUPPORTS, BRACING OR OTHER MEASURES. THE CONTRACTOR SHALL DETERMINE THE NEED OF SUCH TEMPORARY SUPPORT DURING CONSTRUCTION AND PROVIDE ALL SUCH MEASURES.

EARTHWORK/FOUNDATION

1. FOUNDATION DESIGN BASIS:
- REPORT OF GEOTECHNICAL INVESTIGATION S&ME PROJECT # 22130193.
- ALLOWABLE BEARING CAPACITY IS 2,500 PSF, MAXIMUM.
2. NO BLASTING WILL BE ALLOWED.
3. CONTROL OF GROUND WATER, IF REQUIRED, SHALL BE ACCOMPLISHED IN A MANNER THAT WILL PRESERVE THE STRENGTH OF THE FOUNDATION SOILS, WILL NOT CAUSE INSTABILITY OF THE EXCAVATION SLOPES, AND WILL NOT RESULT IN DAMAGE TO EXISTING STRUCTURES.
4. COORDINATE FOUNDATION WORK WITH ALL OTHER TRADES.
5. PIPES AND OTHER WORK WHICH REQUIRE EXCAVATING OR TRENCHING ADJACENT TO COLUMN FOOTINGS OR PARALLEL TO WALL FOOTINGS, SHALL NOT BE LOCATED BELOW LINES EXTENDING DOWNWARD FROM THE BOTTOM EDGE OF THE FOOTING AT A 45 DEGREE ANGLE FROM HORIZONTAL.
6. EXCAVATIONS FOR FOOTINGS, GRADE BEAMS, MATS AND OTHER FOUNDATIONS BUILT NEXT TO OR AROUND EXISTING FOUNDATIONS, SHALL NOT EXTEND BELOW THE BOTTOM SURFACE OF THE EXISTING FOOTING UNLESS SPECIFICALLY NOTED OTHERWISE ON THE DESIGN DRAWINGS. HOLES ADJACENT TO EXISTING FOOTINGS (CLOSER TO THE FOOTING EDGE THAN THE HOLE DEPTH) CAN NOT BE OVER-EXCAVATED AND FILLED TO ACCOUNT FOR BAD SOIL UNLESS SPECIFICALLY APPROVED BY THE ENGINEER OF RECORD.
7. ANY DEVIATIONS FROM THE CONTRACT DOCUMENTS INCLUDING ELEVATION, SIZE AND THICKNESS OF FOUNDATIONS SHALL BE INDICATED BY THE GENERAL CONTRACTOR ON THE REINFORCING SHOP DRAWINGS. SUCH PROPOSED DEVIATIONS SHALL BE CIRCLED AND NOTED "ENGINEER VERIFY".
8. STRUCTURAL FILL SHALL BE PLACED IN LIFTS NO MORE THAN 8" THICK WITH A COMPACTION OF 95% STANDARD PROCTOR (PER ASTM D-698) MAXIMUM DRY DENSITY.

CONCRETE

1. ALL CONCRETE WORK SHALL BE IN ACCORDANCE WITH ACI 318-14, DIVISION 3 OF THE SPECIFICATIONS, AND THE FOLLOWING:
- A. CONCRETE STRENGTHS AND MIXES SHALL BE AS FOLLOWS:
- | STRENGTH(PSI) | AIR(%) | CEMENT | W/C RATIO | SLUMP | AGGREGATE(MAX.) | LOCATION |
|---------------|--------|----------|-----------|-----------|-----------------|-------------------------------------|
| 4,000 | ** | TYPE III | 0.48 | 4" +/- 1" | 3/4" | SLAB ON GRADE AND FOOTINGS |
| 2,500*** | ** | TYPE III | - | 8" | - | COARSE GROUT FOR MASONRY BLOCK FILL |
- ** USE 4% TO 6% ENTRAINED AIR UNDER FREEZE/THAW CONDITION.
- B. FLY ASH PER ASTM C618, TYPE C OR F WILL BE PERMITTED PROVIDED THE FOLLOWING LIMITS ARE MET:
1. THE QUANTITY OF CEMENT REPLACED SHALL BE NO MORE THAN 20%.
2. CEMENT SHALL BE REPLACED BY FLY ASH AT THE RATE OF 1.25 LBS. OF FLY ASH TO 1.0 LBS OF CEMENT.
- C. ALL CONCRETE DELIVERED TO THE SITE SHALL HAVE A COMPUTER BATCH WEIGHT TICKET. THE BATCH TICKET SHALL SHOW WEIGHTS OF ALL MATERIALS, VOLUME OF CONCRETE AND TIME BATCHED. THE BATCH WEIGHT TICKET SHALL BE GIVEN TO A DESIGNATED OWNER'S REPRESENTATIVE ON SITE AT THE TIME OF DELIVERY FOR VERIFICATION OF MIX PROPORTIONS.
- D. CONSOLIDATE ALL CONCRETE IN FORMS AND TRENCHES WITH VIBRATORS. POORLY CONSOLIDATED CONCRETE WILL BE REJECTED AND REPLACED AT CONTRACTOR'S EXPENSE.
2. CONCRETE REINFORCING
- A. ALL REINFORCING SHALL BE PER ASTM A-615, GRADE 60.
- B. WELDING OF REINFORCING STEEL IS NOT PERMITTED.
- C. REINFORCING SHALL NOT BE HEATED TO BEND.
- D. WELDED WIRE FABRIC SHALL BE PER ASTM A-185.
3. SUBMITTALS
- A. CONCRETE MIX DESIGNS: SHOP DRAWINGS FOR CONCRETE REINFORCING, EMBEDDED ITEMS; ACCESSORIES; AND PRODUCT DATA, ETC. AS OUTLINED IN THE SPECIFICATIONS SHALL BE PROVIDED TO THE OWNER'S REPRESENTATIVE AT LEAST 15 DAYS PRIOR TO THE START OF WORK FOR APPROVAL.
- B. ALL DATA SHALL BE SUBMITTED "CONTRACTOR APPROVED".
4. NOTIFICATIONS: THE CONTRACTOR SHALL NOTIFY THE OWNER.
- A. WHEN EXCAVATION TO REQUIRED SUBGRADE ELEVATIONS IS REACHED.
- B. 24 HOURS PRIOR TO ANY SCHEDULED CONCRETE PLACEMENT FOR INSPECTION OF FORMWORK, REINFORCING AND EMBEDDED ITEMS.

WOOD FRAMING

1. ALL WOOD FRAMING SHALL BE DESIGNED AND ERECTED IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE LATEST EDITION OF THE NATIONAL DESIGN SPECIFICATION (NDS) FOR WOOD CONSTRUCTION MANUALS.
2. UNLESS NOTED OTHERWISE, ALL FRAMING SHALL BE #2 SOUTHERN PINE OR BETTER.
3. NO MEMBER STRESS INCREASES DUE TO LOAD DURATION ARE ALLOWED, I.E. DURATION FACTOR EQUALS 1.0.
4. ALL FRAMING, SILL PLATES, TOP PLATES, BRIDGING, BRACING AND ACCESSORIES SHALL MEET THE REQUIREMENT OF THE IBC CODE. AS A MINIMUM 16d FRAMING NAILS SHALL BE USED. UNLESS NOTED OTHERWISE ALL NAIL SIZES AND NAILING PATTERNS SHALL MEET THE REQUIREMENTS OF THE IBC 2018.
5. PROVIDE PERMANENT 2X4 LATERAL BRIDGING (#2 SOUTHERN PINE OR BETTER) BETWEEN EACH FLOOR JOIST OR ROOF RAFTER. BRIDGING IS TO BE SPACED AT NO MORE THAN 8'-0" O.C.
6. MINIMUM SILL PLATE FASTENING TO CONCRETE OR MASONRY SHALL BE 1/2" DIAMETER ANCHOR BOLTS SPACED AT 4'-0" O.C. FOR BEARING WALLS AND SHEAR WALLS. ANCHOR BOLTS MAY BE CAST-IN-PLACE WITH A 7" MINIMUM EMBEDMENT AND AN OVERSIZED WASHER UNDER THE NUT, OR ADHESIVE TYPE ANCHORS.
7. VOIDS BENEATH BOTTOM PLATE SHALL NOT BE PERMITTED. CONTRACTOR SHALL PROVIDE A REASONABLY LEVEL SLAB WITH A TOLERANCE OF 1/8" IN 10 FEET. WHERE UNEVENNESS OF SUPPORTING FLOOR PREVENTS CONTINUOUS SOLID BEARING, PLATE SHALL BE LEVELED BY PLACING MORTAR OR GROUT BENEATH TRACK.
8. ALL WOOD MEMBERS IN CONTACT WITH CONCRETE OR ABOVE THE PLANE OF ROOF SHALL BE PRESSURE TREATED.
9. EXTERIOR WALL SHEATHING SHALL BE FASTENED TO WALL STUDS w/10D NAILS @ 4" O.C. MAXIMUM ON EDGE OF SHEATHING & 6" O.C. OTHER STUDS.
10. WOOD FRAMING SHALL NOT BE NOTCHED FOR UTILITIES.
11. MINIMUM GIRDER TRUSS SUPPORT SHALL BE 3 FULL HEIGHT STUDS CONTINUOUS TO THE FOUNDATION.
12. TOP PLATES OF EXTERIOR WALLS & INTERIOR SHEAR WALLS SHALL BE REINFORCED WHERE NOTCHED w/SIMPSON CTS COMPRESSION & TENSION STRAPS.
13. PLYWOOD AND ORIENTED STRAND BOARD (OSB)
- A. STAGGER END JOINTS OF ROOF SHEATHING AND SHEAR WALLS
- B. H-CLIPS SHALL BE USED FOR ALL ROOF SHEATHING
14. STAGGER END JOINTS OF ADJACENT COURSES OF GYPSUM WALL BOARD USED AS SHEAR WALL SHEATHING. END JOINTS SHALL NOT OCCUR OVER THE SAME VERTICAL STUD.
15. ALL ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM MATERIAL PROPERTIES.
- A. $F_b = 2600\text{psi}$
- B. $F_v = 285\text{psi}$
- C. $E = 1,900,000\text{psi}$
- D. $F_{t\parallel} = 2510\text{psi}$
- E. $F_{t\perp} = 750\text{psi}$
- F. $G = 125,000\text{psi}$
16. ALL METAL WOOD CONNECTIONS SHALL BE FULLY NAILED PER THE REQUIREMENTS OF SIMPSON STRONG PRODUCTS. ALL CONNECTIONS SHALL BE CAPABLE OF RESISTING THE CORROSIVE EFFECTS OF THE EXTERIOR PRESERVATIVE PRESSURE TREATMENT AND SHALL BE INSTALLED PRIOR TO APPLICATION OF LOADS.

MASONRY WALL REINFORCING/JOINTS


1. ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH TMS 402/602-16 AND THE FOLLOWING:
2. THE REINFORCING, JOINTS AND CRITERIA DESCRIBED IN THE FOLLOWING GENERAL NOTES ARE REQUIRED AS A MINIMUM FOR ALL RUNNING BOND MASONRY WALLS. SEE SPECIFIC CRITERIA ON DESIGN DRAWINGS FOR ANY ADDITIONAL REQUIREMENTS AND/OR STACK BOND CRITERIA.
3. VERTICAL REINFORCING (RUNNING BOND):
- A. PROVIDE REINFORCING STEEL IN A CONCRETE FILLED CELL CONTINUOUS FROM FOOTING INTO BOND BEAM AT TOP OF WALL. LAP BARS WITH FOOTING DOWEL AND EXTEND 4" MINIMUM INTO BOND BEAM. BREAK-OUT BOTTOM OF BOND BEAM AT FILLED CELL LOCATIONS AND FILL TOP FOUR COURSES OF WALL WHEN BOND BEAM IS FILLED. PROVIDE AT THE FOLLOWING LOCATIONS:
- AT ALL WALL CORNERS.
 - WITHIN 8" OF ENDS OF ALL WALLS AND AT EACH SIDE OF EXPANSION AND CONTROL JOINTS.
 - AT ALL DOOR AND WINDOW JAMBS AND AT ALL OPENINGS GREATER THAN 16" IN WIDTH.
 - ALONG ENTIRE LENGTH OF ALL WALLS AS NOTED IN THE TABLE BELOW:
- | VERTICAL FOR SEISMIC DESIGN CATEGORY D | | |
|--|------------------------|----------------------|
| WALL WIDTH | NON-LOAD BEARING WALLS | LOAD BEARING WALLS |
| 6" | 1-#4 @ 4'-0" O.C. MAX. | 1-#6 @ 40" O.C. MAX. |
| 8" | 1-#4 @ 4'-0" O.C. MAX. | 1-#6 @ 32" O.C. MAX. |
| 12" | 1-#4 @ 4'-0" O.C. MAX. | 1-#6 @ 24" O.C. MAX. |
- B. VERTICAL BAR SPLICES SHALL HAVE A MINIMUM LAP AS NOTED IN THE TABLE BELOW:
- | MASONRY REINFORCING LAP LENGTHS | | | | | | | |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|
| BAR | #3 | #4 | #5 | #6 | #7 | #8 | #9 |
| LENGTH | 18" | 24" | 30" | 36" | 42" | 48" | 54" |
- $F_y=60,000\text{psi}$, $F_m=1,500\text{psi}$, BARS TO BE CENTERED IN THE WALL
- C. VERTICAL FILLED CELLS SHALL BE FILLED WITH CONCRETE IN 4'-0" MAX. LIFTS.
4. HORIZONTAL REINFORCEMENT (RUNNING BOND):
- A. PROVIDE HORIZONTAL JOINT REINFORCING AS NOTED IN THE TABLE BELOW:

HORIZONTAL FOR SEISMIC DESIGN CATEGORY D		
WALL WIDTH	NON-LOAD BEARING WALLS	LOAD BEARING WALLS
6"	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX.	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX. PLUS 1-#4 @ 10'-0" O.C. MAX. IN CONC FILLED KNOCKOUT WEB BLOCK
8"	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX.	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX. PLUS 1-#5 @ 7'-4" O.C. MAX. IN CONC FILLED KNOCKOUT WEB BLOCK
12"	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX.	2-LONGITUDINAL W1.7 (9 GAGE) WIRES @ 16" O.C. MAX. PLUS 1-#5 @ 4'-0" O.C. MAX. IN CONC FILLED KNOCKOUT WEB BLOCK

- B. PROVIDE CONCRETE FILLED BOND BEAM WITH 2 - #5 REBARS CONTINUOUS WHERE WALLS ARE STRUCTURALLY CONNECTED TO ROOF AND FLOOR LEVELS AND AT THE TOPS OF ALL WALLS.
- C. PROVIDE CONCRETE FILLED COURSE WITH 1 - #4 REBAR AT DOOR AND WINDOW HEADS, AND AT ALL WINDOW SILLS. EXTEND THE GREATER OF 2'-0" OR 40 BAR DIAMETERS BEYOND OPENING.
5. CONTROL JOINTS:
- A. CONTROL JOINTS SHALL BE LOCATED IN ALL WALLS AT THE FOLLOWING LOCATIONS:
- AT A MAXIMUM SPACING OF 3 TIMES THE WALL HEIGHT, BUT NOT GREATER THAN 40'-0" ON CENTER.
 - AT A DISTANCE OF NOT OVER ONE TIME THE WALL HEIGHT FROM BUILDING CORNERS.
 - AT ALL CHANGES IN WALL HEIGHT.
 - AT ALL CHANGES IN WALL THICKNESS, SUCH AS AT PIPE OR DUCT CHASES, AND ADJACENT TO STEEL COLUMNS EMBEDDED IN WALLS AND PILASTERS.
 - ABOVE JOINTS IN FOUNDATIONS AND IN FLOORS.
 - BELOW JOINTS IN FLOORS OR ROOFS THAT BEAR ON THE WALL.
- B. MASONRY WALL CONTROL JOINTS: ALL HORIZONTAL JOINT REINFORCING SHALL TERMINATE AT THE CONTROL JOINT (UNLESS NOTED OTHERWISE ON DRAWINGS). INTERRUPT HORIZONTAL REINFORCING IN INTERMEDIATE BOND BEAMS. ALL BOND BEAM REINFORCING IN BOND BEAMS LOCATED AT OR NEAR THE TOP OF THE WALL SHALL BE CONTINUOUS THROUGH CONTROL JOINTS.
- C. IF CONTROL JOINTS ARE NOT SHOWN ON THE DRAWINGS, COORDINATE WITH THE ARCHITECT AND STRUCTURAL ENGINEER, BEFORE CONSTRUCTION BEGINS, TO DETERMINE JOINT LOCATIONS REQUIRED.
6. ISOLATION JOINTS SHALL BE LOCATED WHERE NON-LOAD BEARING WALLS ABUT LOAD BEARING WALLS OR SHEAR WALLS.
7. WALL BRACING:
- A. ALL NON-LOAD BEARING MASONRY WALLS, (FULL HEIGHT AND PARTIAL HEIGHT) SHALL BE BRACED ALONG ENTIRE LENGTH. BRACE POINTS SHALL OCCUR AT CONCRETE FILLED VERTICAL CELLS AS DEFINED IN NOTE 3.A ABOVE. RESTROOM STALL PARTITION WALLS DO NOT NEED TO MEET THIS REQUIREMENT.

WOOD TRUSS NOTES

1. DESIGN LOADS SHALL BE AS FOLLOWS.

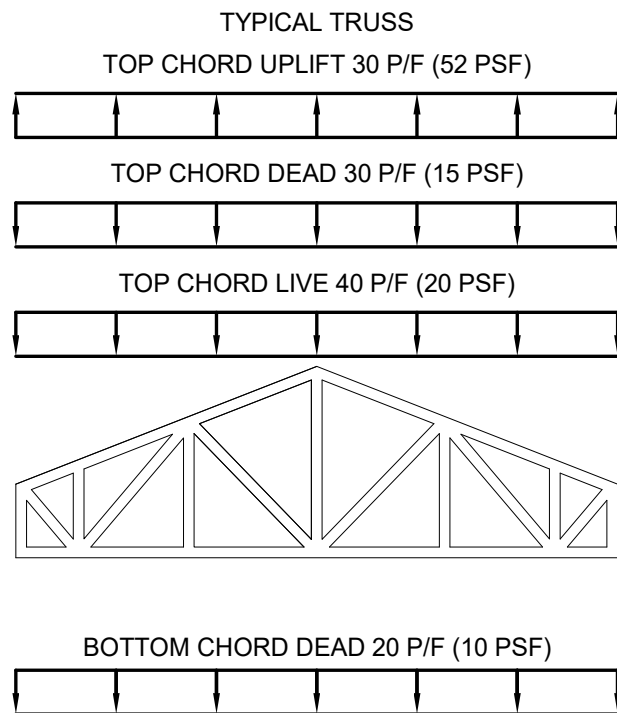

2. ALL WOOD TRUSSES SHALL BE DESIGNED, FABRICATED AND ERECTED IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE LATEST EDITION OF THE NATIONAL DESIGN SPECIFICATIONS (NDS) FOR WOOD CONSTRUCTION MANUALS.
3. DESIGN CALCULATIONS SHALL BE PREPARED BY A REGISTERED, PROFESSIONAL LICENSED ENGINEER IN THE STATE OF THE PROJECT.
4. NO MEMBER STRESS INCREASES DUE TO LOAD DURATION ARE ALLOWED, I.E. DURATION FACTOR EQUAL 1.0.
5. MAXIMUM SPACING OF TRUSSES IS 2'-0" CENTER TO CENTER
6. PROVIDE CONTINUOUS, PERMANENT 2X4 LATERAL BRACING (#2 FIR OR BETTER) AT MID-POINT OF DIAGONAL WEB MEMBERS IN TWO (2) CENTER PANELS OF EACH TRUSS. ANCHOR TO EACH END WALL.
7. PROVIDE PERMANENT 2X4 DIAGONAL BRACING (#2 FIR OR BETTER) IN THE PLANE OF THE DIAGONAL WEB MEMBERS (NOTE 4) AT APPROXIMATELY 45° ANGLE (12'-0" O.C. MAXIMUM).
8. PROVIDE CONTINUOUS, PERMANENT 2X4 (#2 SOUTHERN PINE OR BETTER) BOTTOM CHORD BRACING SPACED 8'-0" O.C. MAXIMUM (LOCATE AT PANEL POINTS).
9. PROVIDE PERMANENT 2X4 (#2 SOUTHERN PINE OR BETTER) DIAGONAL BOTTOM CHORD BRACING AT 20'-0" O.C. MAXIMUM AND AT EACH END WALL.
10. PROVIDE TEMPORARY AND PERMANENT LATERAL BRACING AS REQUIRED BY TRUSS MANUFACTURER TO ASSURE STABILITY DURING CONSTRUCTION. STABILITY OF STRUCTURE IS CONTRACTORS RESPONSIBILITY DURING ERECTION.
11. PROVIDE TRUSS CONNECTORS AT FLAT BOTTOM CHORD TRUSSES AND RAFTERS. (SIMPSON H1 HURRICANE CONNECTORS OR EQUAL).
12. ALL OPENINGS IN ROOF DECK SHALL BE REINFORCED ALONG ALL EDGES WITH 2X4 BLOCKING (MIN).
13. ADD ADDITIONAL WEB REINFORCEMENT AT MECHANICAL EQUIPMENT POINT LOADS. SIMPSON STRONG TIE HRS 12 GAGE STRAPS.
14. SHOP DRAWINGS SHALL BE PREPARED UNDER THE SUPERVISION OF A LICENSED PROFESSIONAL ENGINEER. SUBMIT LAYOUT PLANS, TYPICAL DETAILS, BRACING REQUIREMENTS AND TRUSS DESIGN DETAILS FOR THE ENTIRE PROJECT. DESIGN CALCULATIONS SHALL BE SUBMITTED AND SIGNED AND SEALED BY A PROFESSIONAL ENGINEER IN THE STATE OF THE PROJECT.

COMPONENTS & CLADDING EXTERNAL PRESSURE LOADS (psf)									
EFFECTIVE WIND AREA (SQ FT)		ASCE 7-16, CHAPTER 30 / BWS 134 / SLOPES 27-45 DEGREES							
ROOF	WALLS	(1)	(2a)	(2n)	(2r)	(3a)	(3r)	(4)	(5)
< 10 *	< 10	+45.2 -82.8	+45.2 -82.8	+45.2 -91.1	+45.2 -82.8	+45.2 -141.3	+45.2 -91.1	+49.3 -53.5	+49.3 -66.1
20	20	+40.1 -70.2	+40.1 -70.2	+40.1 -81.5	+40.1 -70.2	+40.1 -111.8	+40.1 -81.5	+47.1 -51.3	+47.1 -61.6
50	50	+33.5 -53.6	+33.5 -53.6	+33.5 -59	+33.5 -53.6	+33.5 -82.2	+33.5 -59	+44.2 -48.4	+44.2 -55.7
> 100 **	> 100	+28.4 -41	+28.4 -41	+28.4 -49.3	+28.4 -41	+28.4 -49.3	+28.4 -49.3	+42 -46.1	+42 -51.3

* - AREA < 2 ft² for region "3e"

** - AREA < 300 ft² for region "3e"

NOTE: INCREASE NEGATIVE PRESSURE BY 33.5 psf AT ROOF OVERHANGS.

NOTES:

1. $a = 3'-0"$

2. POSITIVE PRESSURE VALUES REFER TO FORCES ACTING TOWARDS BUILDING. NEGATIVE PRESSURE VALUES REFER TO FORCES ACTING AWAY FROM BUILDING.

3. EACH COMPONENT MUST BE DESIGNED FOR MAXIMUM POSITIVE AND NEGATIVE FORCES.

4. FOR COMPONENTS HAVING EFFECTIVE AREAS IN BETWEEN TABULATED VALUES, DESIGN LOADS MAY BE INTERPOLATED. OTHERWISE DESIGN LOAD MUST BE TAKEN FROM THE NEXT LOWEST EFFECTIVE AREA.

5. THE FINAL NET DESIGN WIND PRESSURE, INCLUDING ALL PERMITTED REDUCTIONS, SHALL NOT BE LESS THAN 16 psf ACTING IN EITHER DIRECTION.

GABLE ROOF PLAN

WALL ELEVATION

USDA

United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS & ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

4

3

2

1

FINAL CDS

01/30/25

NO. REVISION/ISSUE DATE

PROJECT NAME

**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA

JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS & ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

GENERAL NOTES

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO.
DRAWN WBR	S-001
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 18 OF 53


1/29/2025 1:10:48 PM

C:\REVIT - Local Projects\3094-2201_Buck Hall\30942201_Structural-Local-brucker.rvt


BUILDING 100 TURNDOWN SCHEDULE				
FOOTING MARK	SIZE			REINFORCING
	WIDTH	THICKNESS	LENGTH	
TD1.0x2.0	1'-0"	2'-0"	SEE PLAN	3 - #4's CONT BOT
TD2.0x2.0	2'-0"	2'-0"	SEE PLAN	4 - #4's CONT T&B
TD2.0x1.0	2'-0"	1'-0"	SEE PLAN	3 - #4's CONT T&B
TD2.5x1.0	2'-6"	1'-0"	SEE PLAN	4 - #4's CONT T&B

LEGEND:

- C.J. - CONTROL JOINT
(SEE SECTION 3/S-601)
- E.J. - 1/2" EXPANSION JOINT
(SEE SECTION 4/S-601)
- ### - DENOTES REBAR SIZE & SPACING.
SEE PLAN
- == - (2) #4's x 4'-0" LONG (TYP UNO)

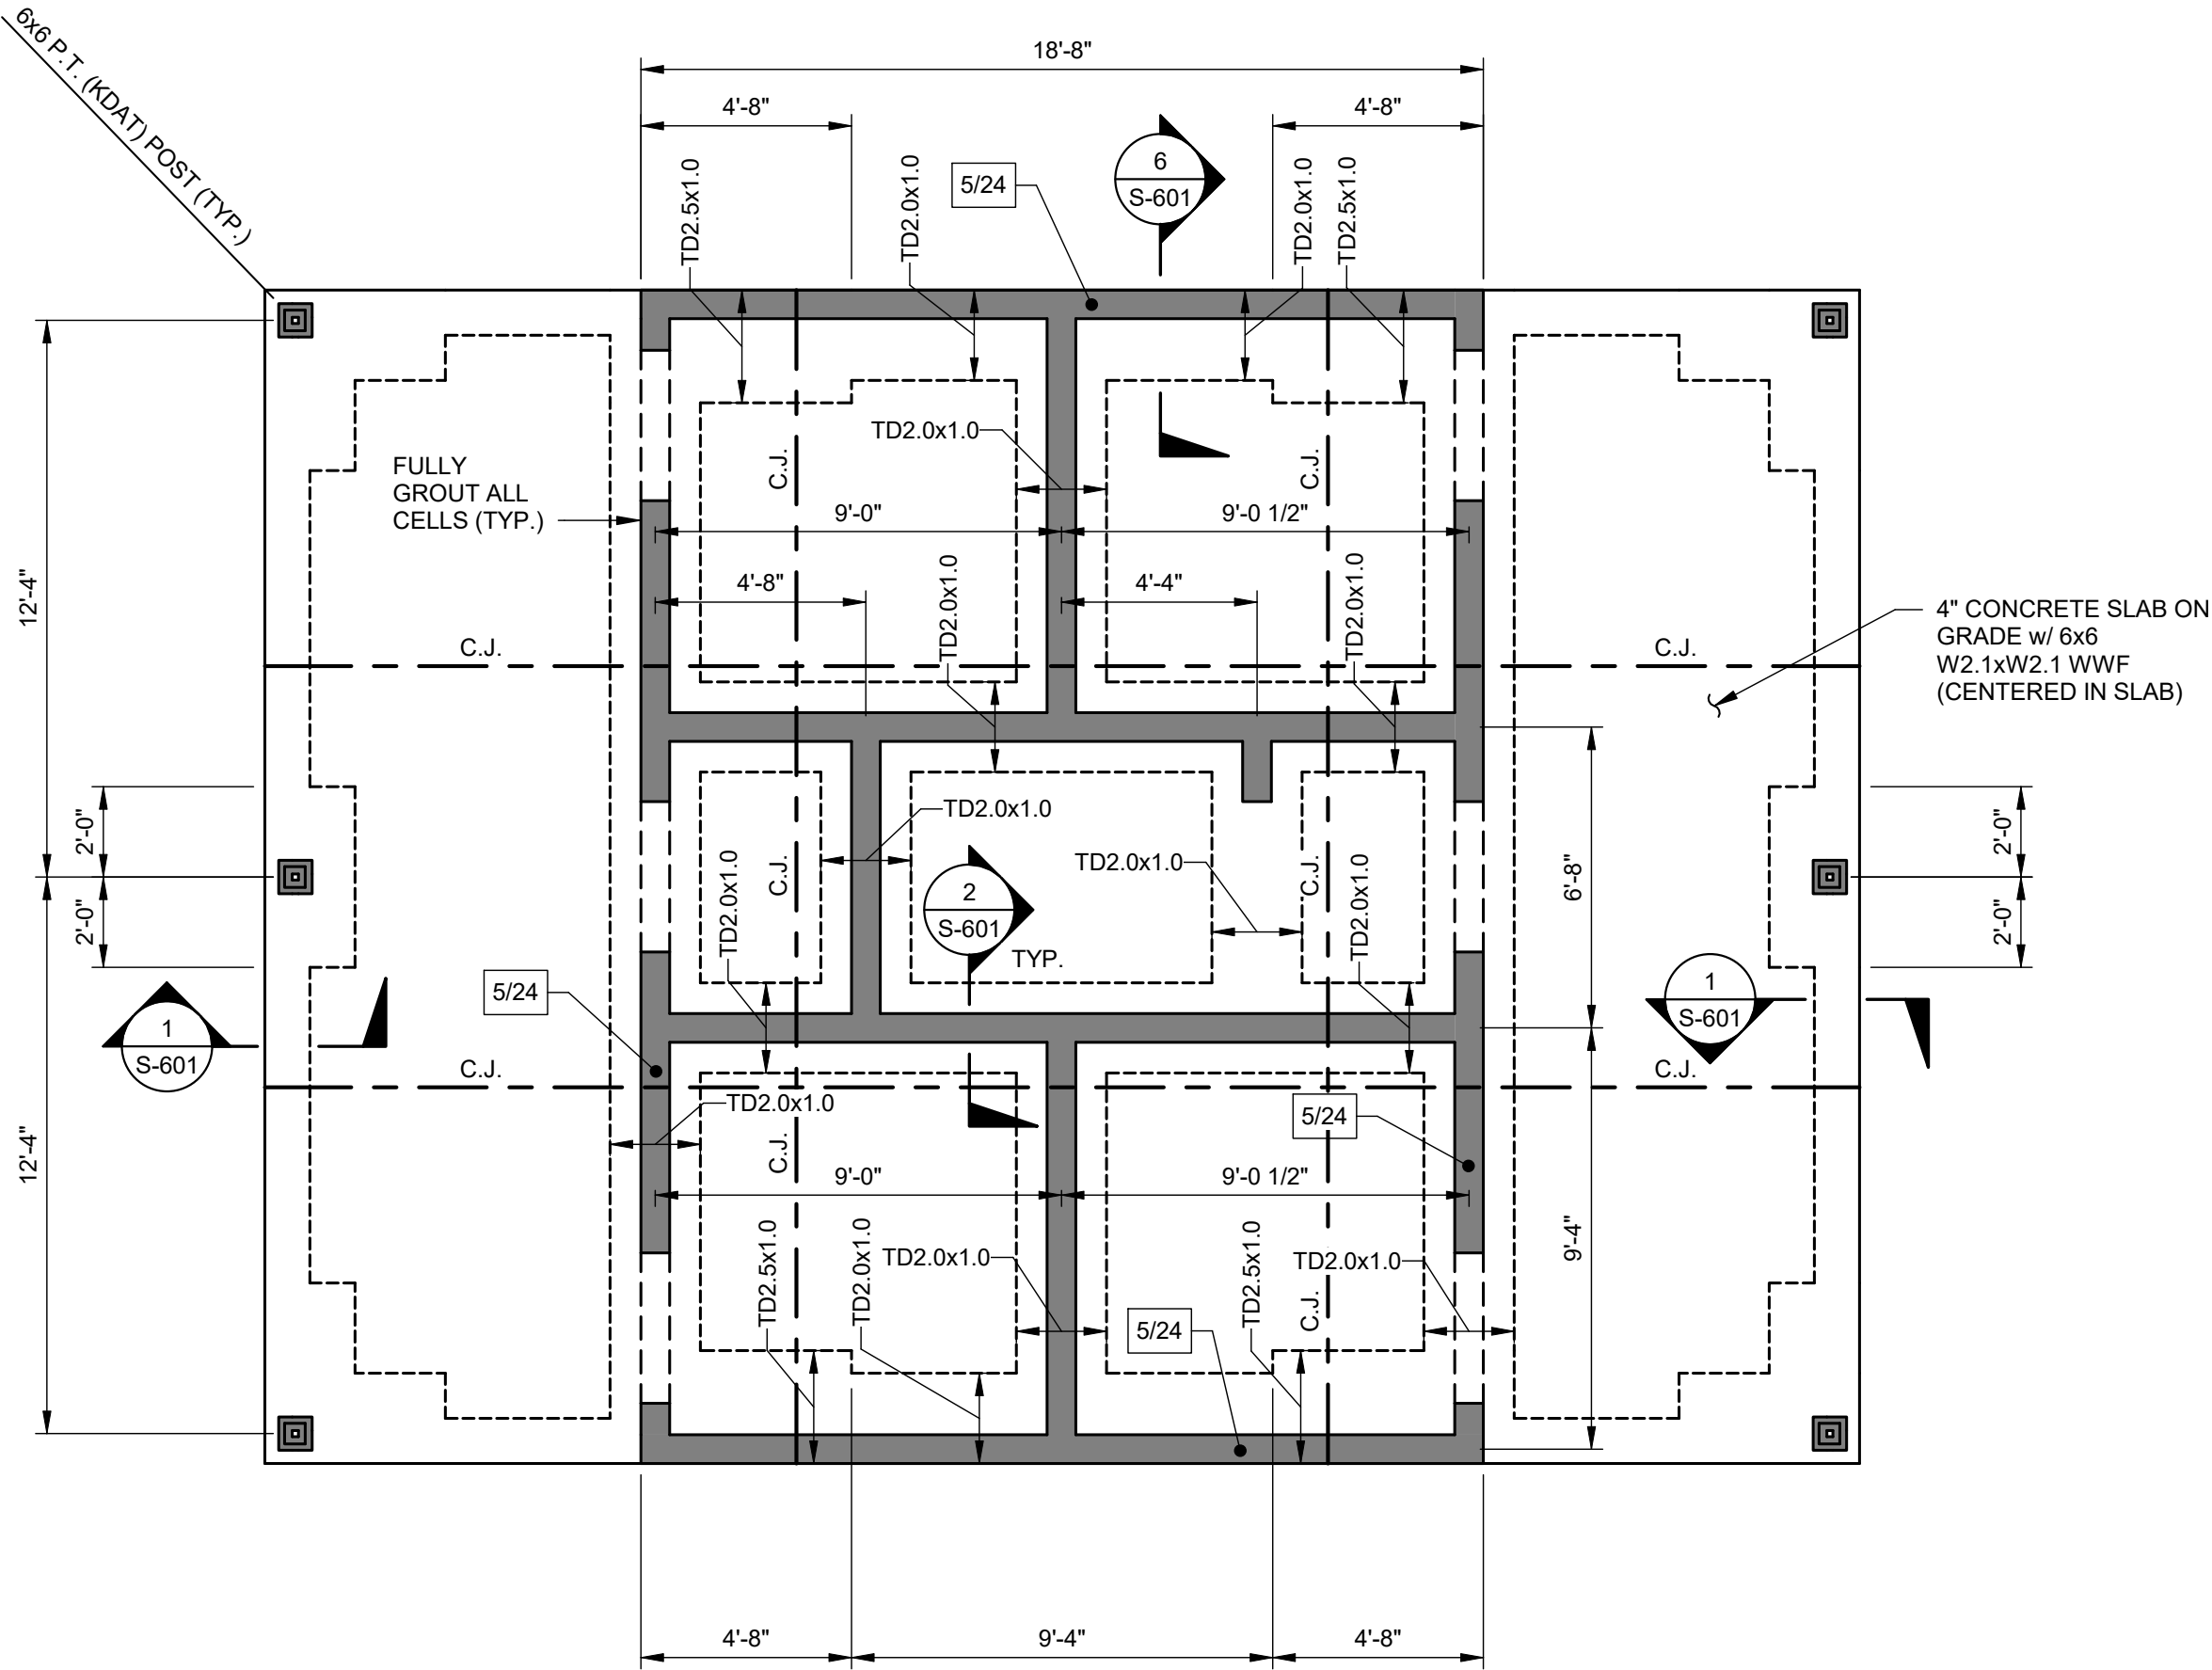

1 BUILDING 100 - FOUNDATION AND SLAB PLAN
SCALE: 1/4" = 1'-0"

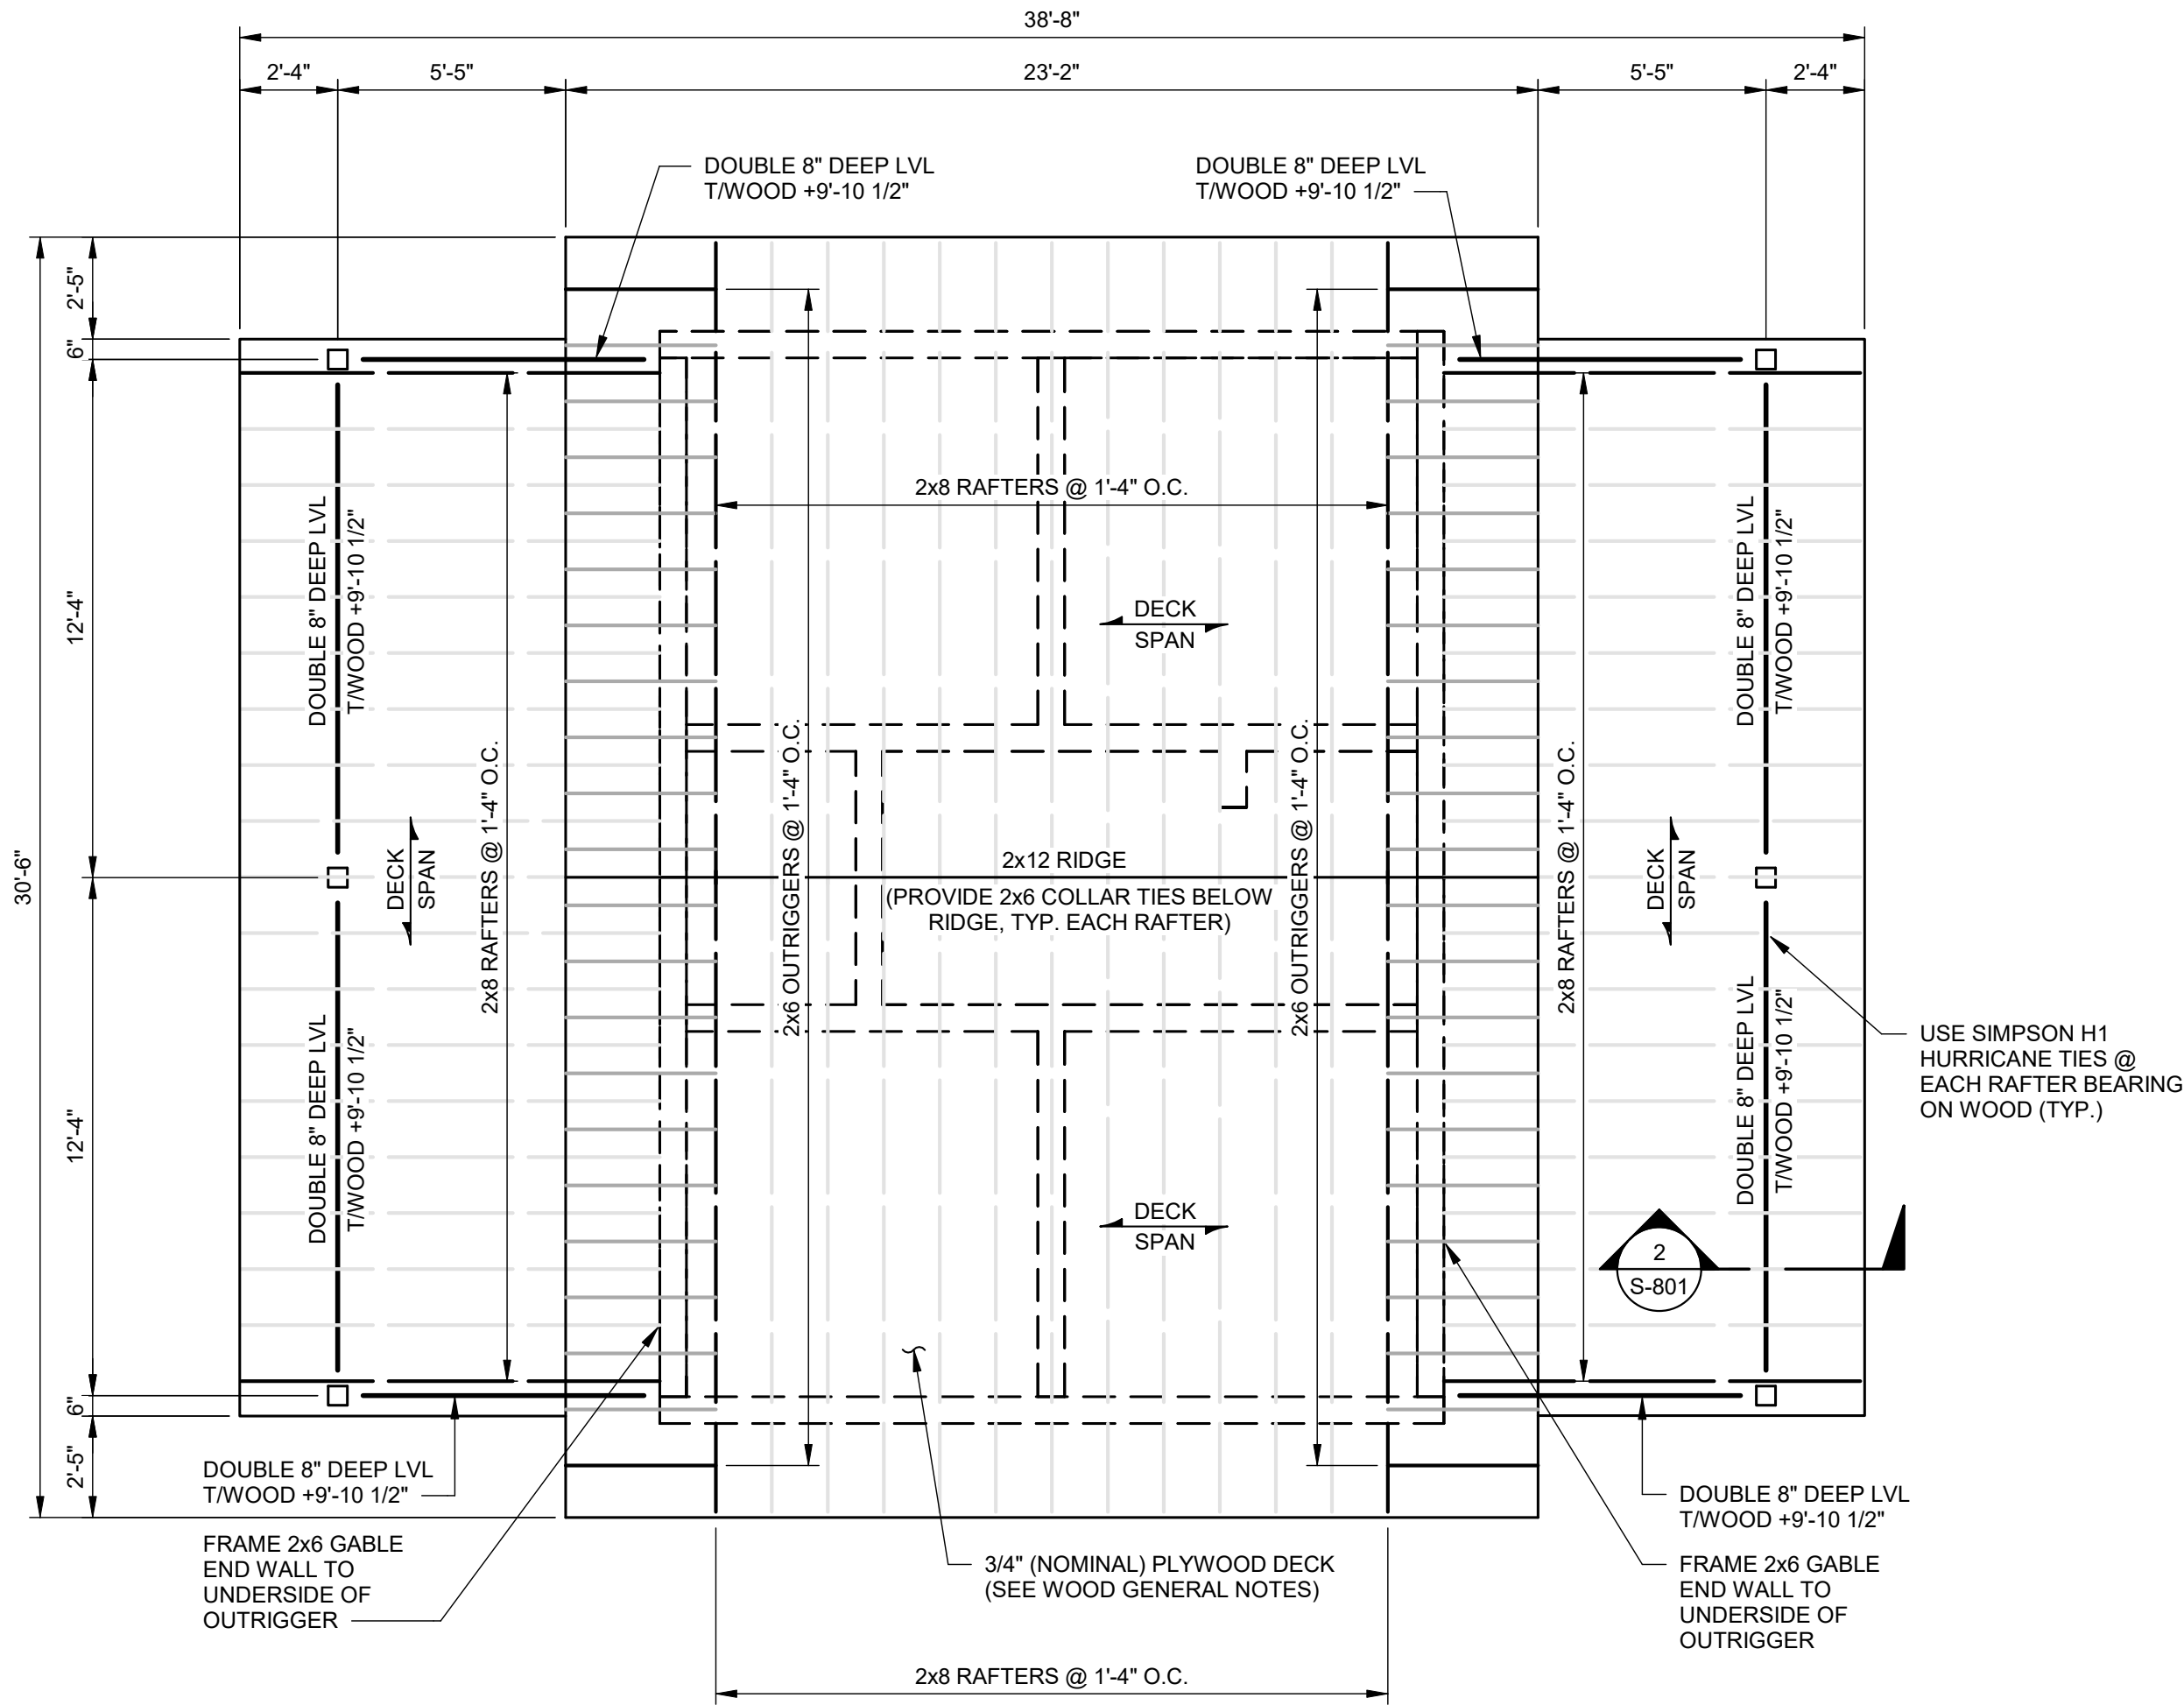


2 BUILDING 100 - FRAMING PLAN
SCALE: 1/4" = 1'-0"



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

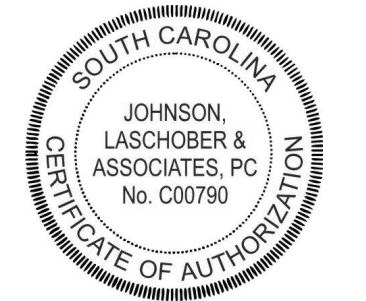

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**


**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLENNVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 100 - DAY USE
RESTROOM BUILDING -
FOUNDATION, SLAB AND
FRAMING PLANS**


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO. S-101
DRAWN WBR	
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 19 OF 53

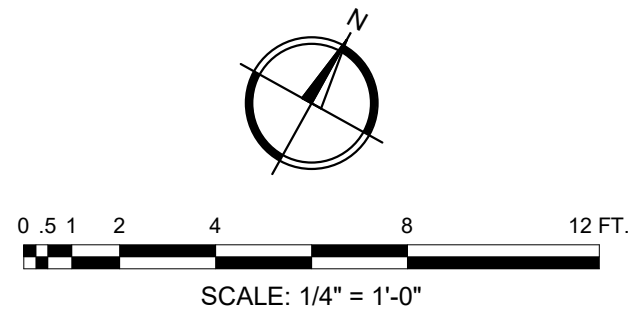


1/29/2025 1:10:52 PM

C:\REVIT - Local Projects\3094-2201_Buck Hall\30942201_Structural-Local-buckner.rvt


BUILDING 200 TURNDOWN SCHEDULE				
FOOTING MARK	SIZE			REINFORCING
	WIDTH	THICKNESS	LENGTH	
TD1.5x2.0	1'-6"	2'-0"	SEE PLAN	4 - #4's CONT T&B

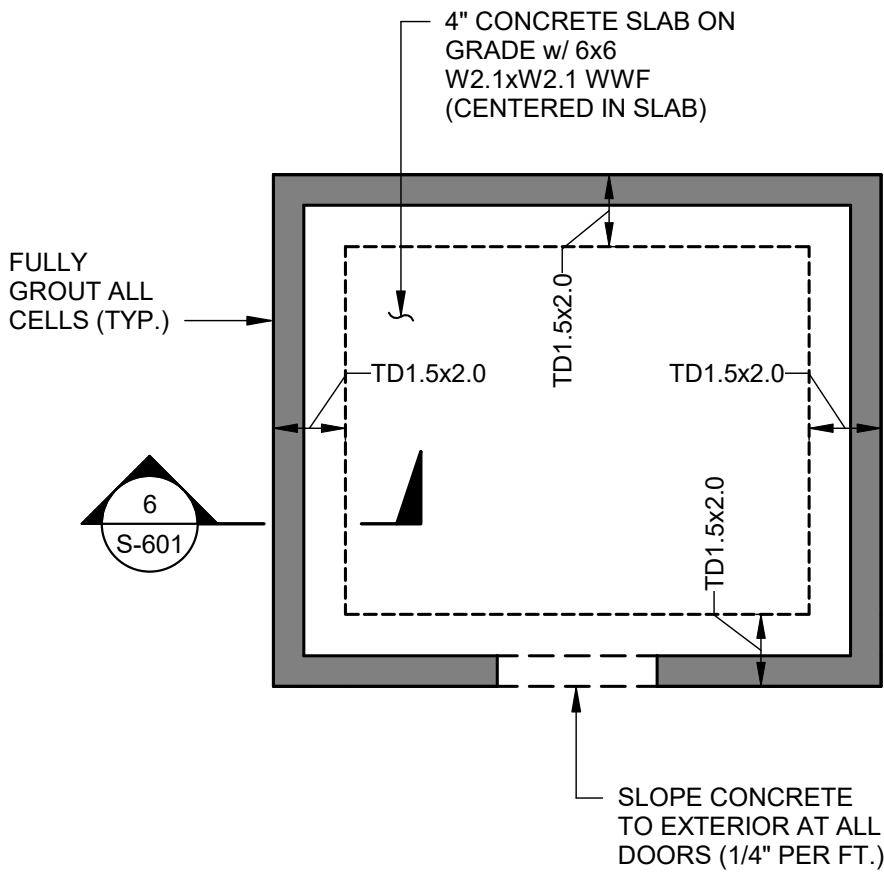

1 BUILDING 200/700 - FOUNDATION AND SLAB PLAN
S-201 SCALE: 1/4" = 1'-0"

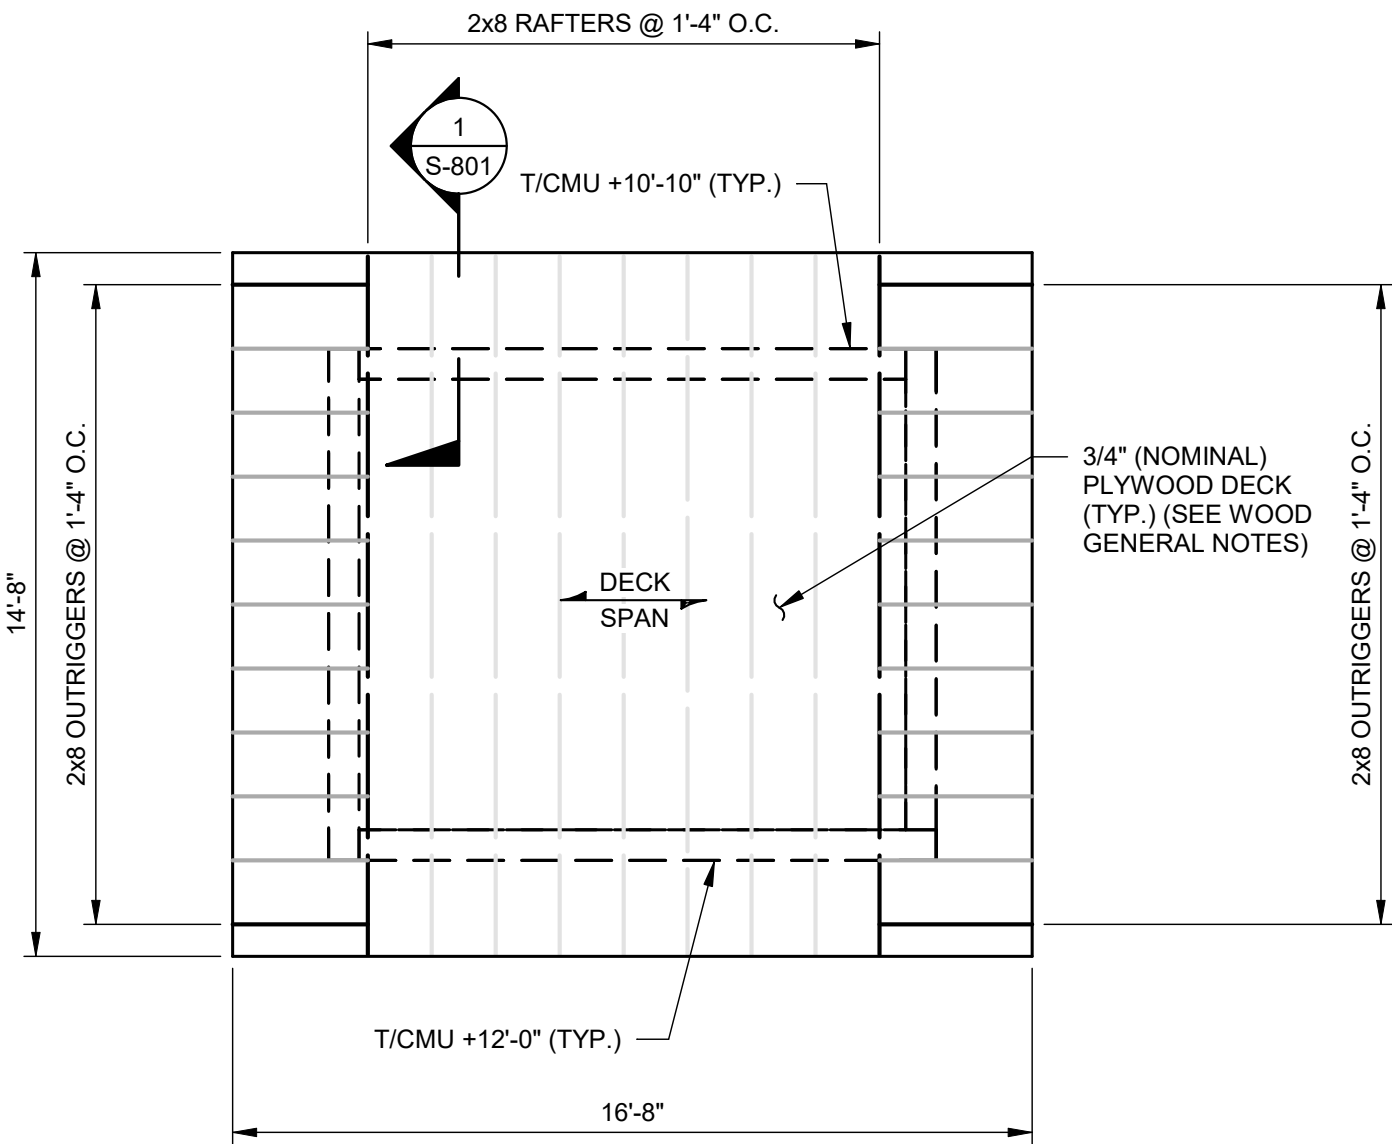

2 BUILDING 200/700 - FRAMING PLAN
S-201 SCALE: 1/4" = 1'-0"

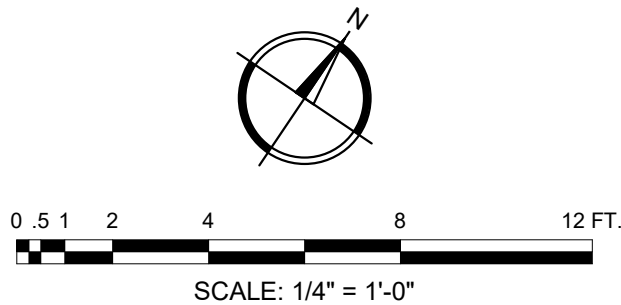




United States Department of Agriculture
Forest Service

R-08

Southern Region

STAMPS, LOGOS, AND SEALS

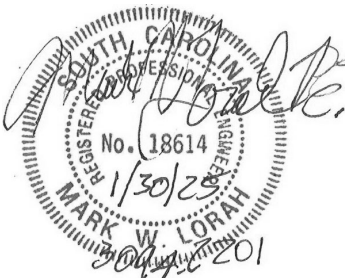

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME

**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:



JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

**BUILDINGS 200/700 - WELL
HOUSE - FOUNDATION,
SLAB AND FRAMING PLANS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO. S-201
DRAWN WBR	
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 20 OF 53


1/29/2025 1:10:56 PM

C:\REVIT - Local Projects\3094-2201_Buck Hall\30942201_Structural-Local-buckner.rvt

BUILDING 400 TURNDOWN SCHEDULE				
FOOTING MARK	SIZE			REINFORCING
	WIDTH	THICKNESS	LENGTH	
TD2.0x2.0	2'-0"	2'-0"	SEE PLAN	4 - #4's CONT T&B

LEGEND:


- C.J. - CONTROL JOINT
(SEE SECTION 3/S-601)
- E.J. - 1/2" EXPANSION JOINT
(SEE SECTION 4/S-601)
- ### - DENOTES REBAR SIZE & SPACING.
SEE PLAN
- (2) #4's x 4'-0" LONG (TYP UNO)

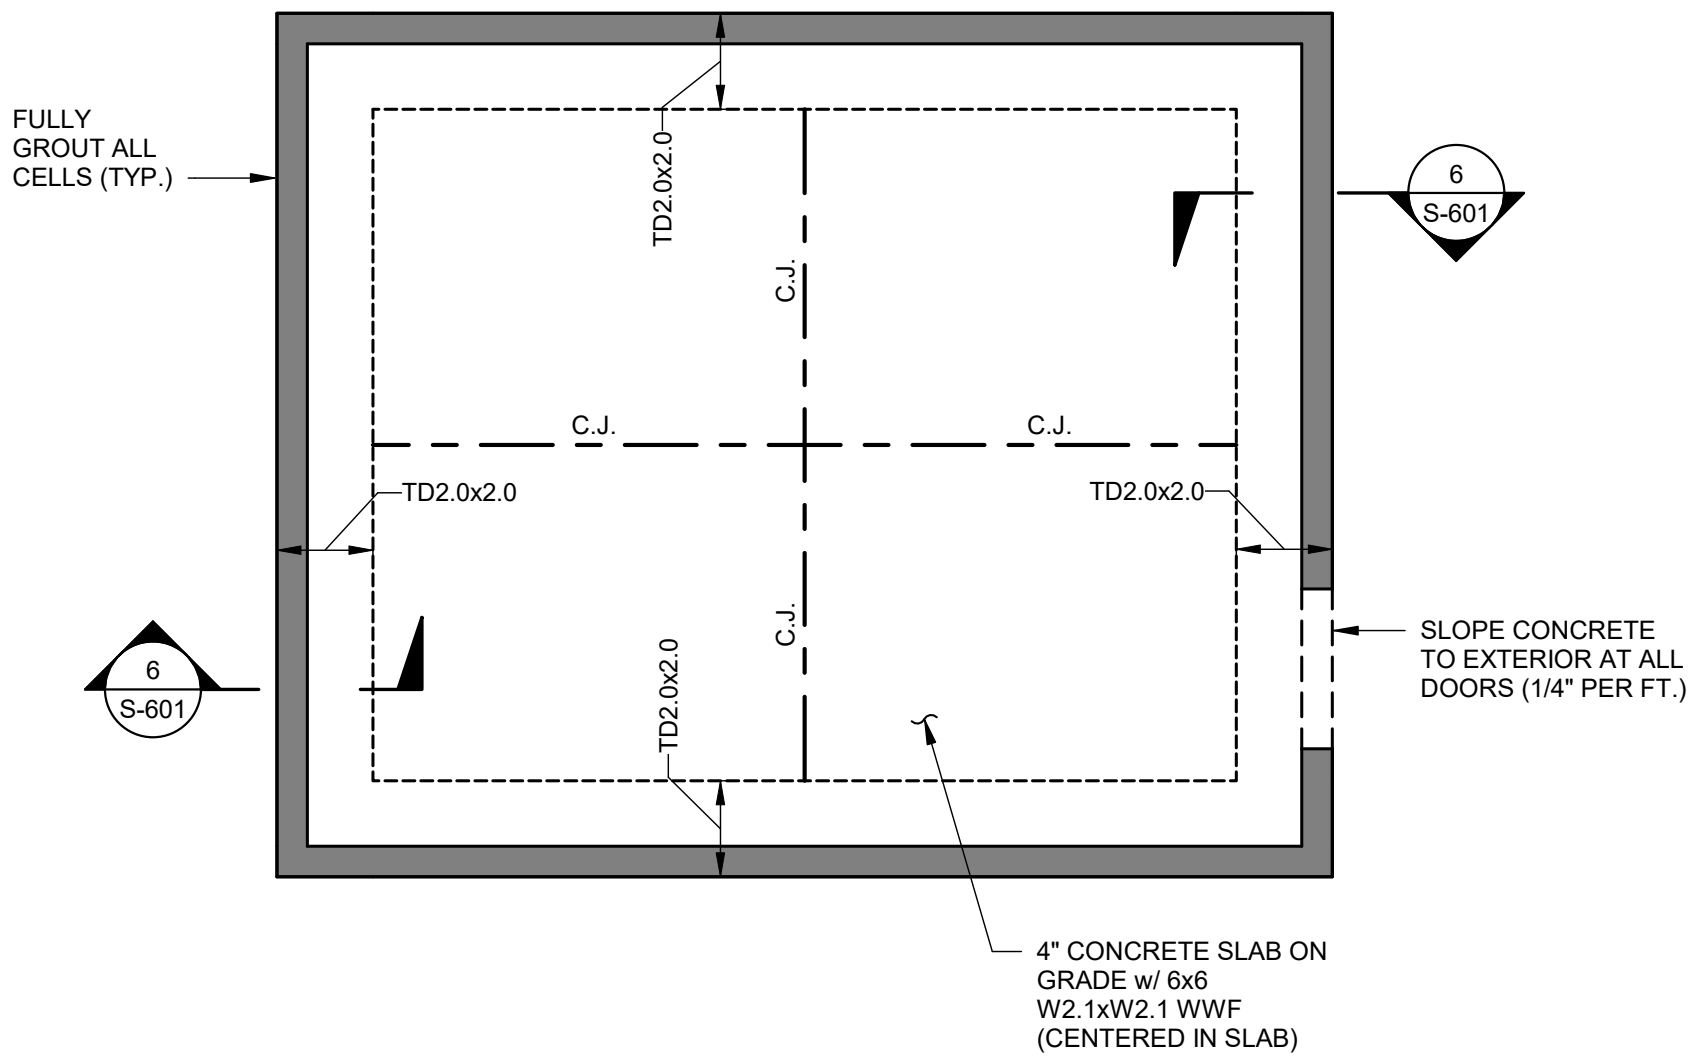

1
S-401

BUILDING 400 - FOUNDATION AND SLAB PLAN


SCALE: 1/4" = 1'-0"

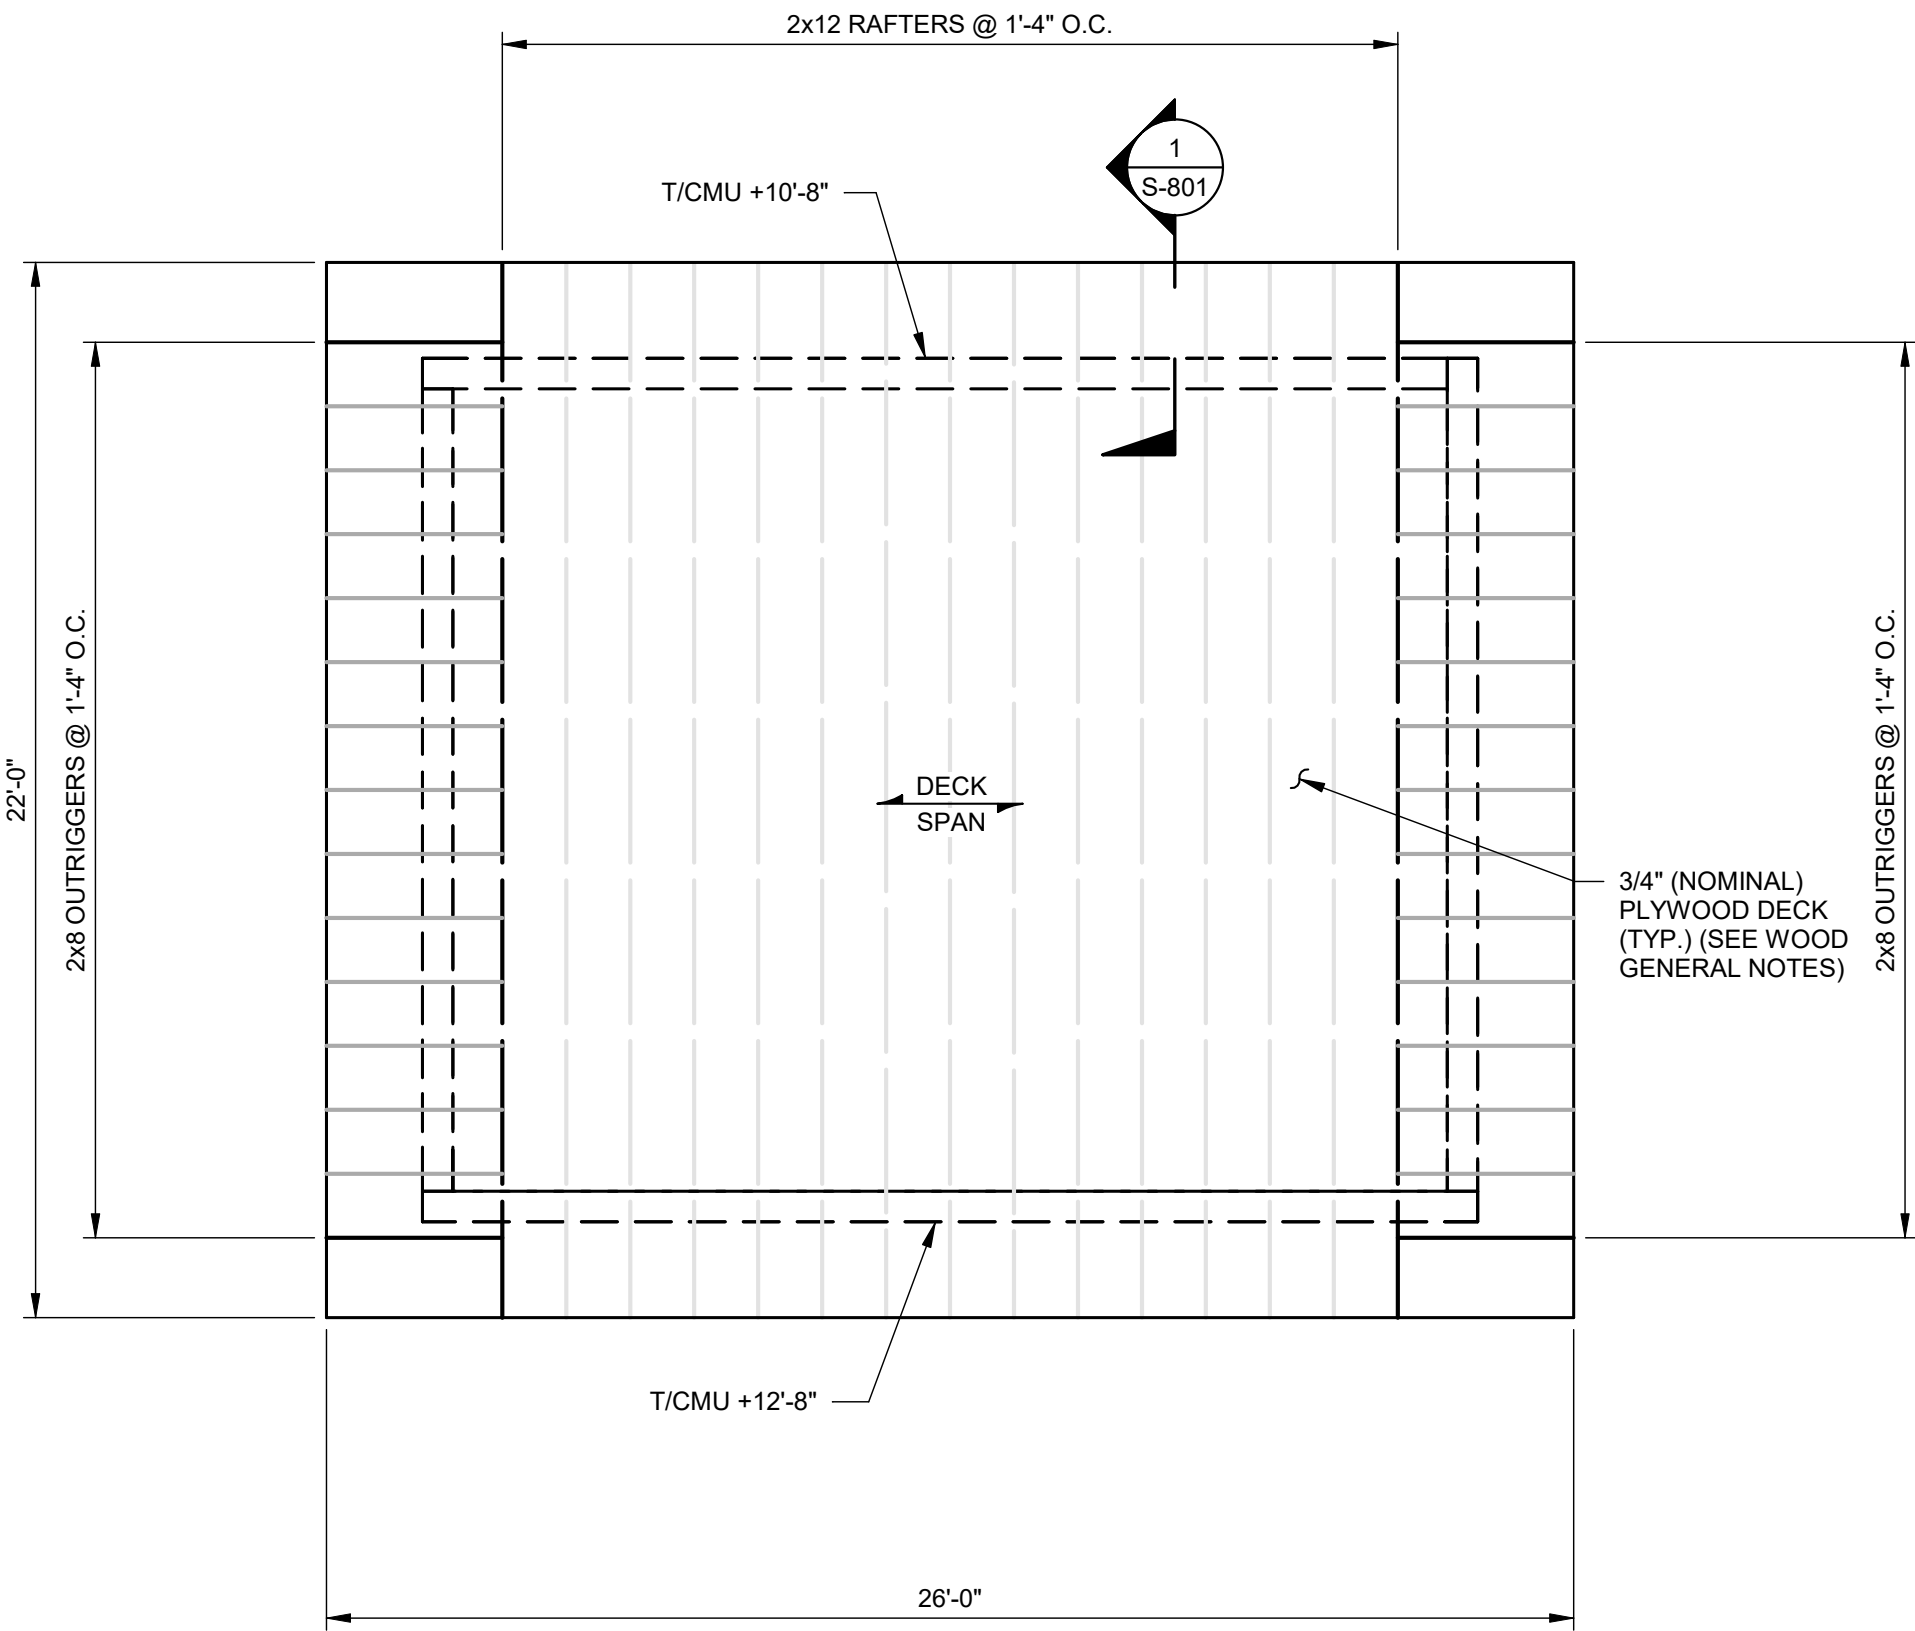

2
S-401

BUILDING 400 - FRAMING PLAN


SCALE: 1/4" = 1'-0"

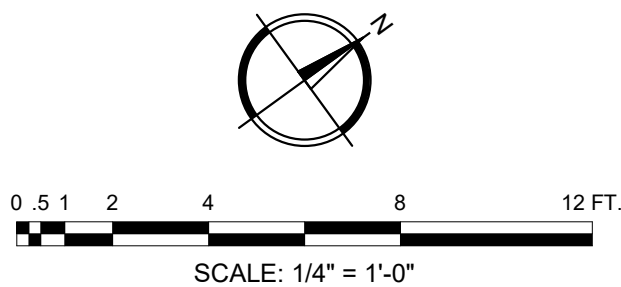

R-08

Southern Region

STAMPS, LOGOS, AND SEALS

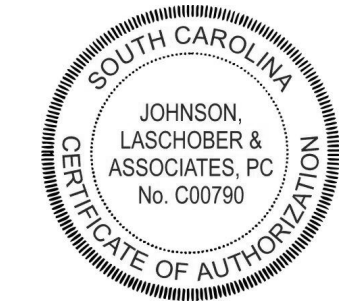

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA

JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

**BUILDING 400 - STORAGE
BUILDING - FOUNDATION,
SLAB AND FRAMING PLANS**


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO. S-401
DRAWN WBR	
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 22 OF 53

1/29/2025 1:10:59 PM

C:\REVIT - Local Projects\3094-2201_Buck Hall\30942201_Structural-Local\brucker.rvt


BUILDING 500 TURNDOWN SCHEDULE				
FOOTING MARK	SIZE			REINFORCING
	WIDTH	THICKNESS	LENGTH	
TD1.0x2.0	1'-0"	2'-0"	SEE PLAN	3 - #4's CONT BOT
TD2.0x2.0	2'-0"	2'-0"	SEE PLAN	4 - #4's CONT T&B

- LEGEND:**
- C.J. - CONTROL JOINT
(SEE SECTION 3/S-601)
- E.J. - 1/2" EXPANSION JOINT
(SEE SECTION 4/S-601)
- ### - DENOTES REBAR SIZE & SPACING.
SEE PLAN
- ==== - (2) #4's x 4'-0" LONG (TYP UNO)

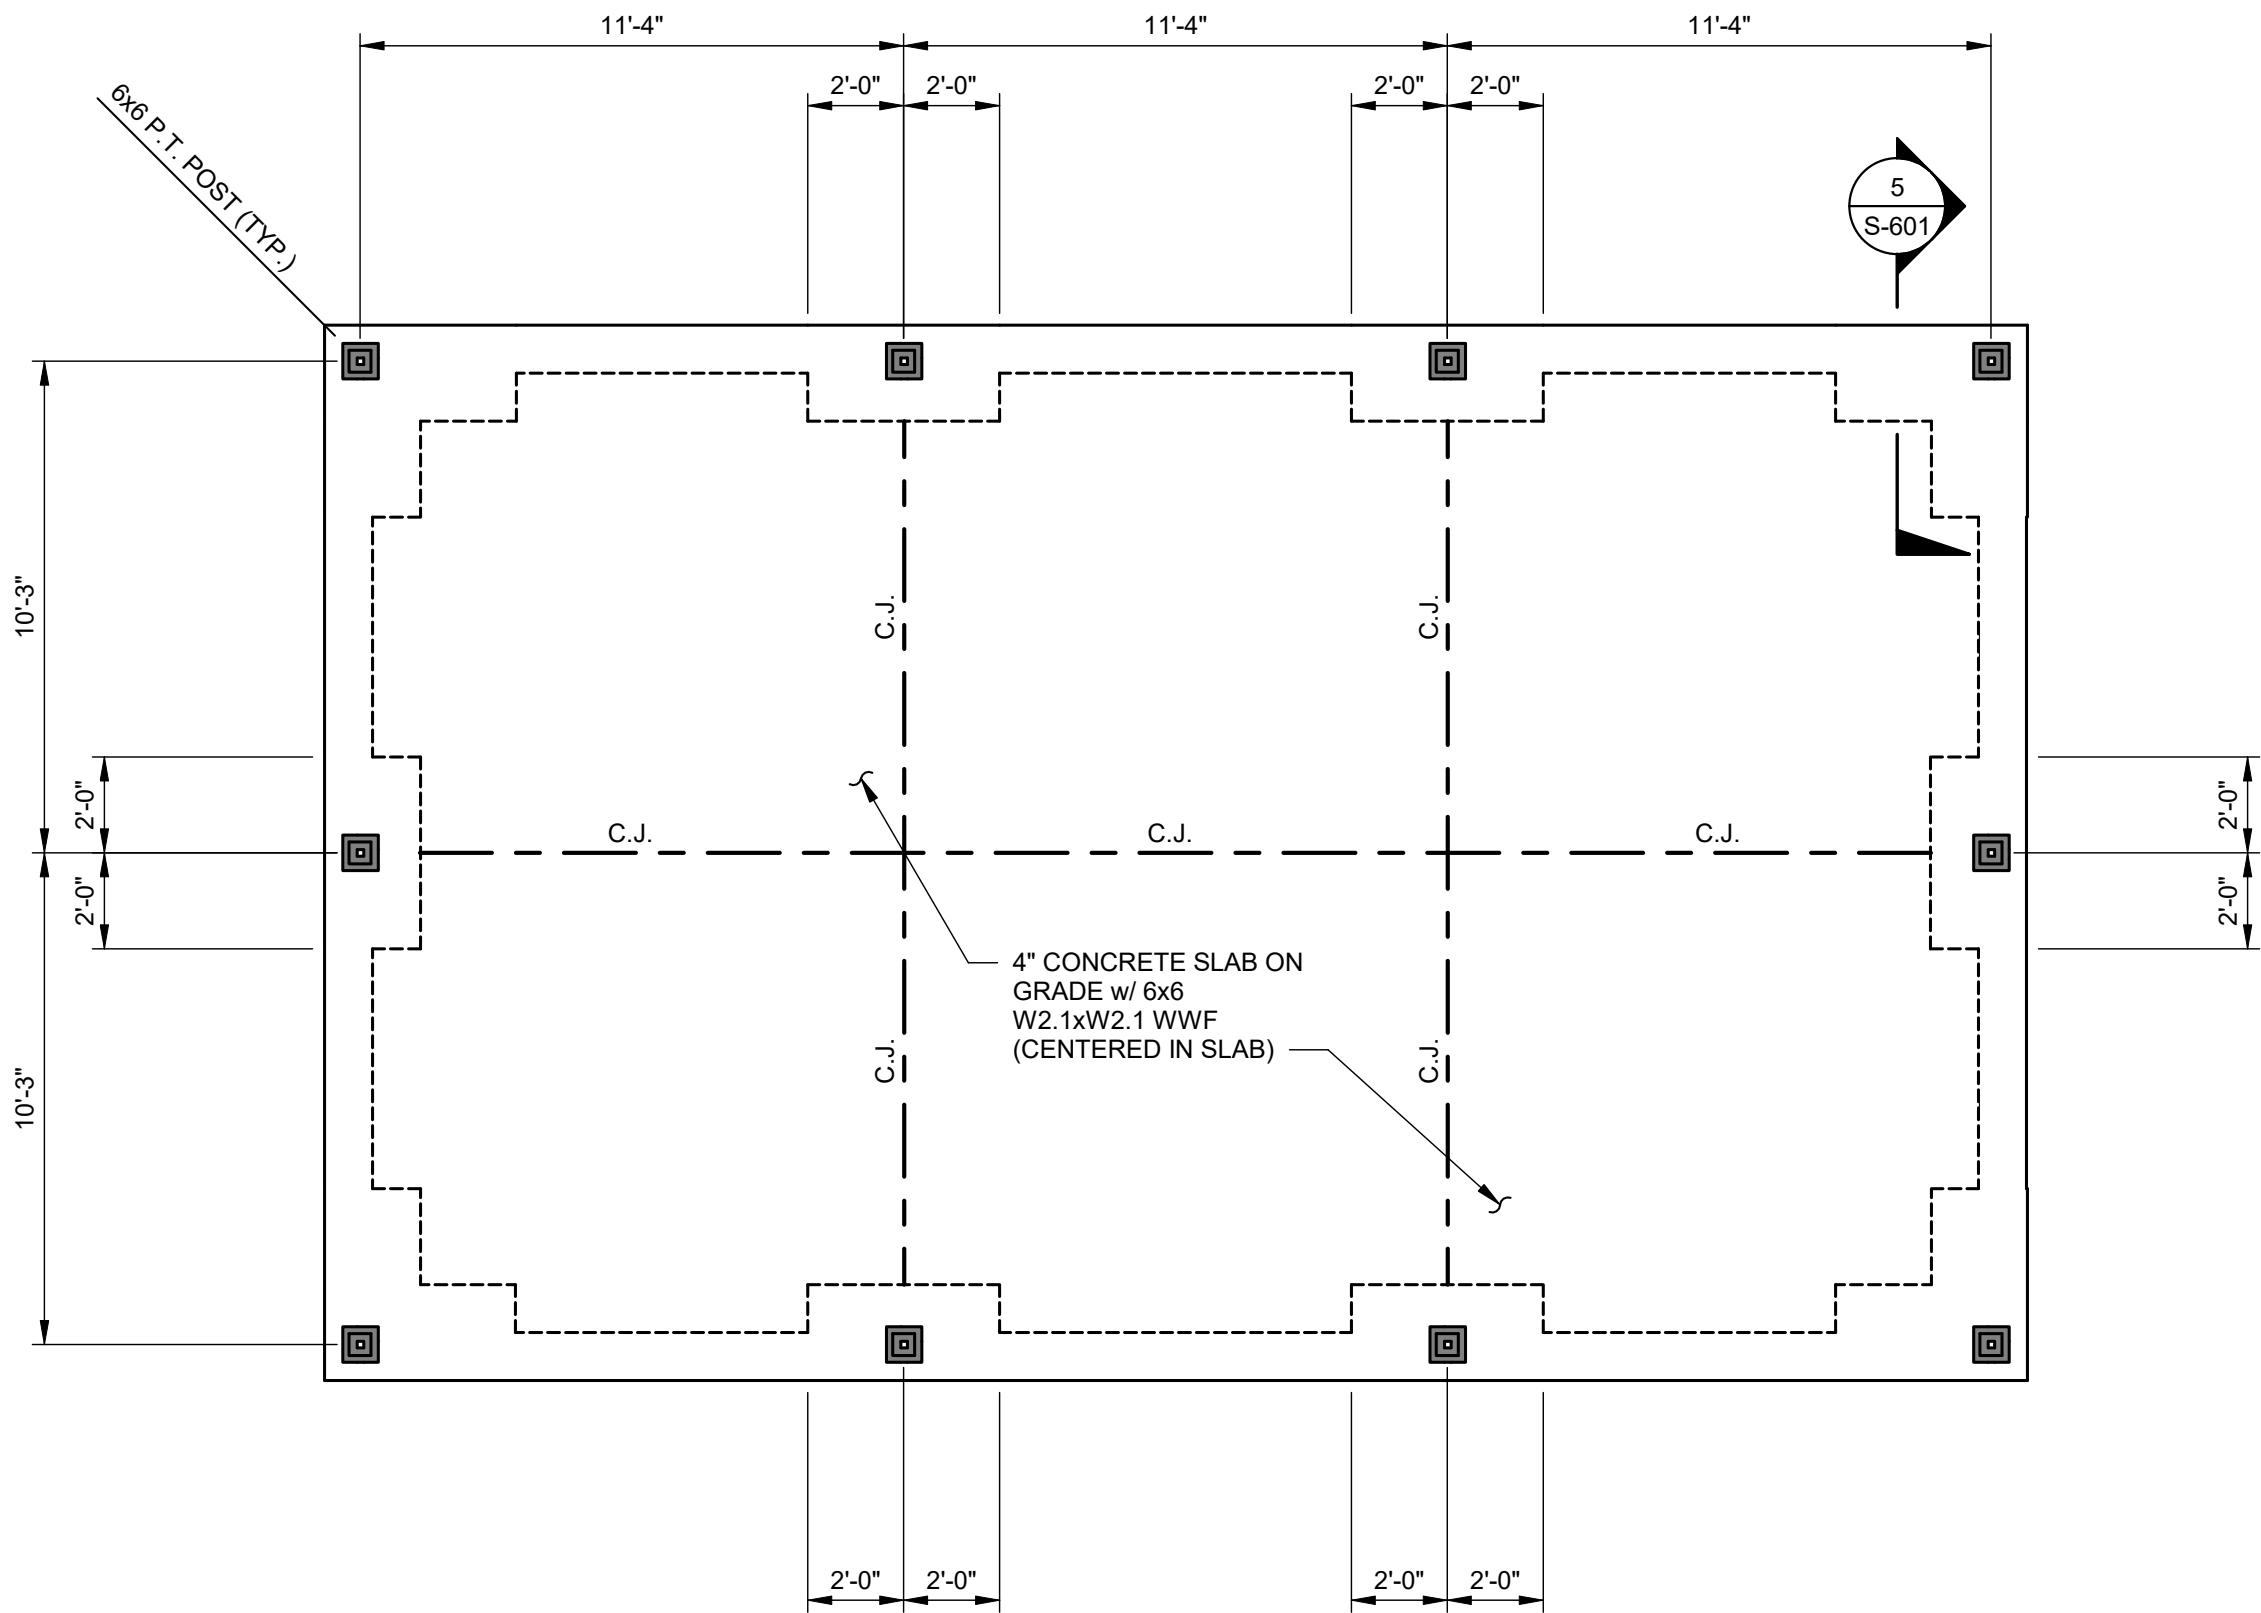


NOTE:
SLOPE CONCRETE TO EXTERIOR
AT ALL DOORS (1/4" PER FT.)

BUILDING 500 - FOUNDATION AND SLAB PLAN
SCALE: 1/4" = 1'-0"

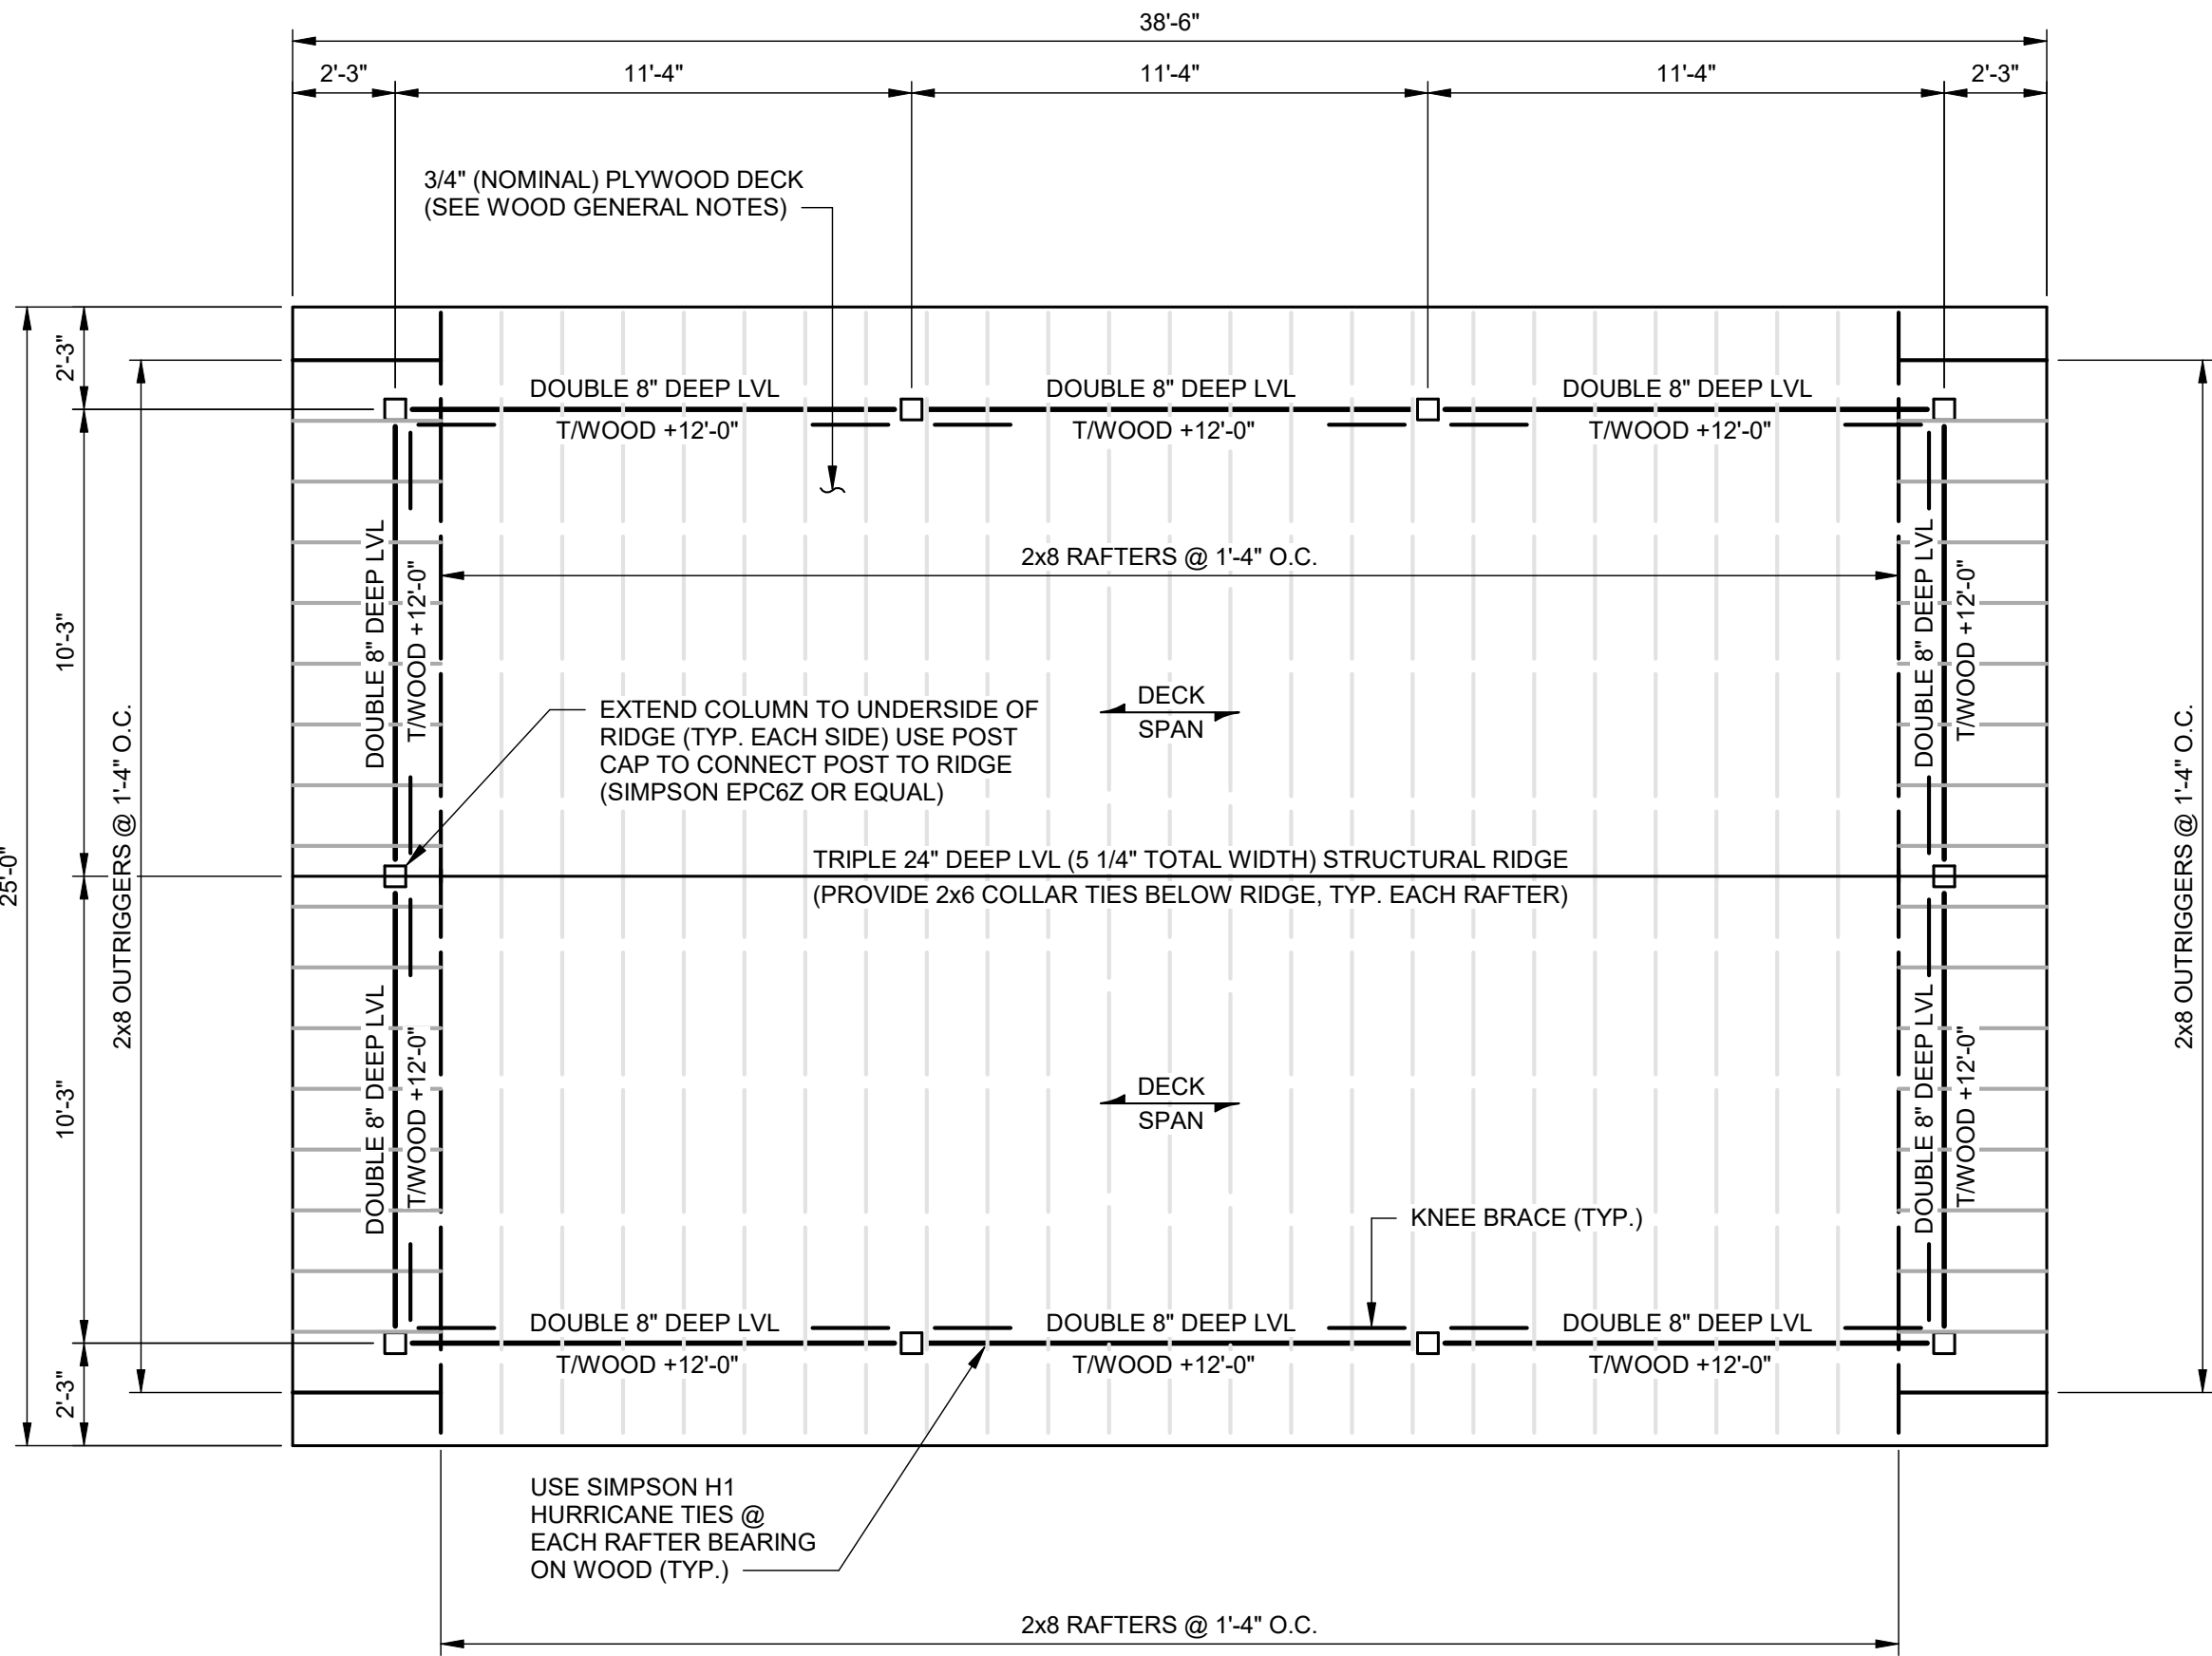


BUILDING 500 - FRAMING PLAN
SCALE: 1/4" = 1'-0"

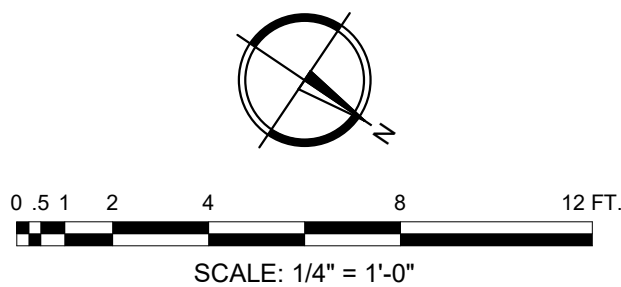

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

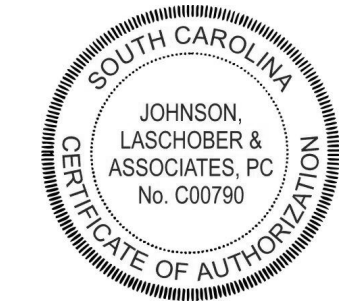

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**


**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1236 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 500 - PICNIC
PAVILION - FOUNDATION,
SLAB AND FRAMING PLANS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO. S-501
DRAWN WBR	
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 23 OF 53



SECTION
SCALE: 1" = 1'-0"



SECTION
SCALE: 3/4" = 1'-0"




(CONTROL JOINT)
SECTION
SCALE: 1 1/2" = 1'-0"




SECTION
SCALE: 1 1/2" = 1'-0"




SECTION
SCALE: 1" = 1'-0"



SECTION
SCALE: 3/4" = 1'-0"



DETAIL
SCALE: 1" = 1'-0"

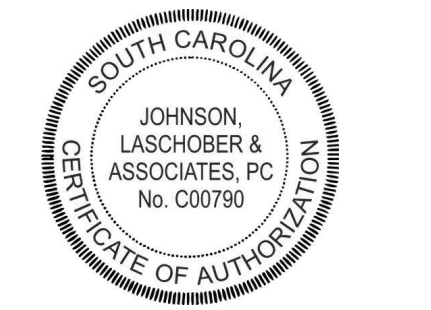

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroun.com

DRAWING TITLE



CONCRETE SECTIONS AND DETAILS

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER MWL	DRAWING SHEET NO. S-601	
DRAWN WBR		
CHECKED MWL		
PROJECT NO. 3094.2201	SHEET 24 OF 53	

SEE C-700 FOR SIGNAGE LAYOUT
AND ANY OTHER REQUIREMENTS

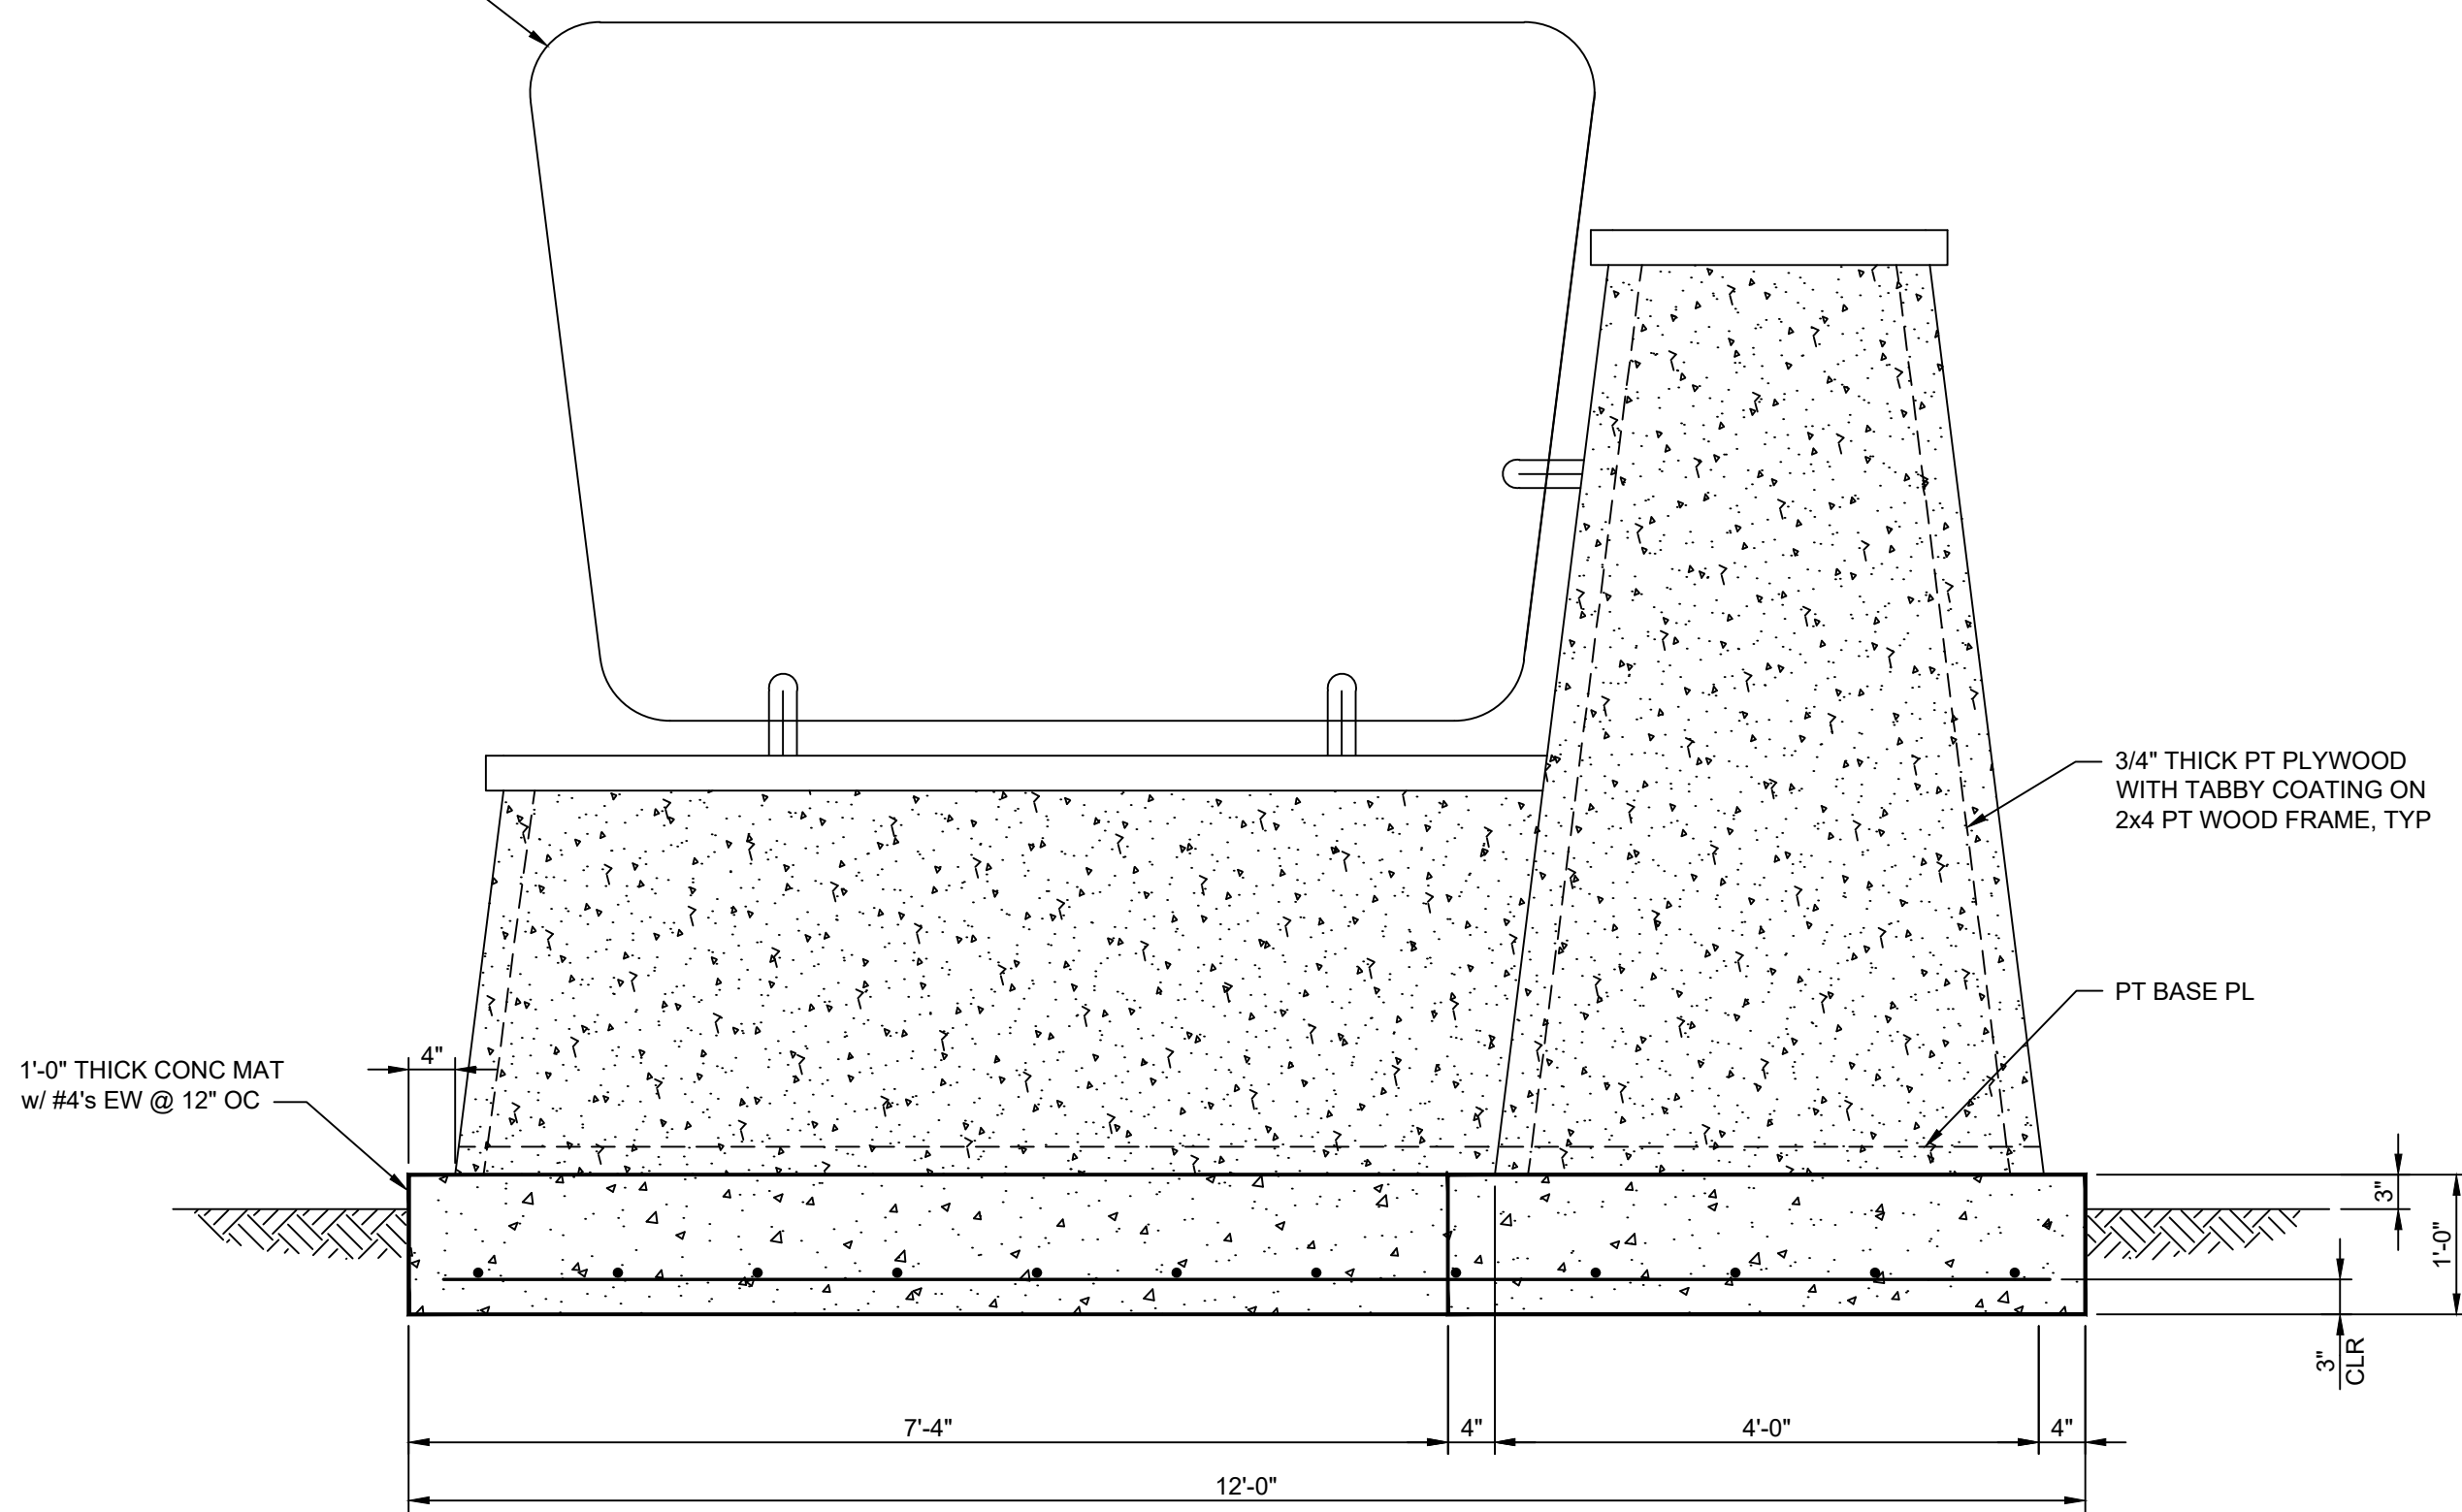

1 SITE SIGN 1
S-602 SCALE: 3/4"=1'-0"

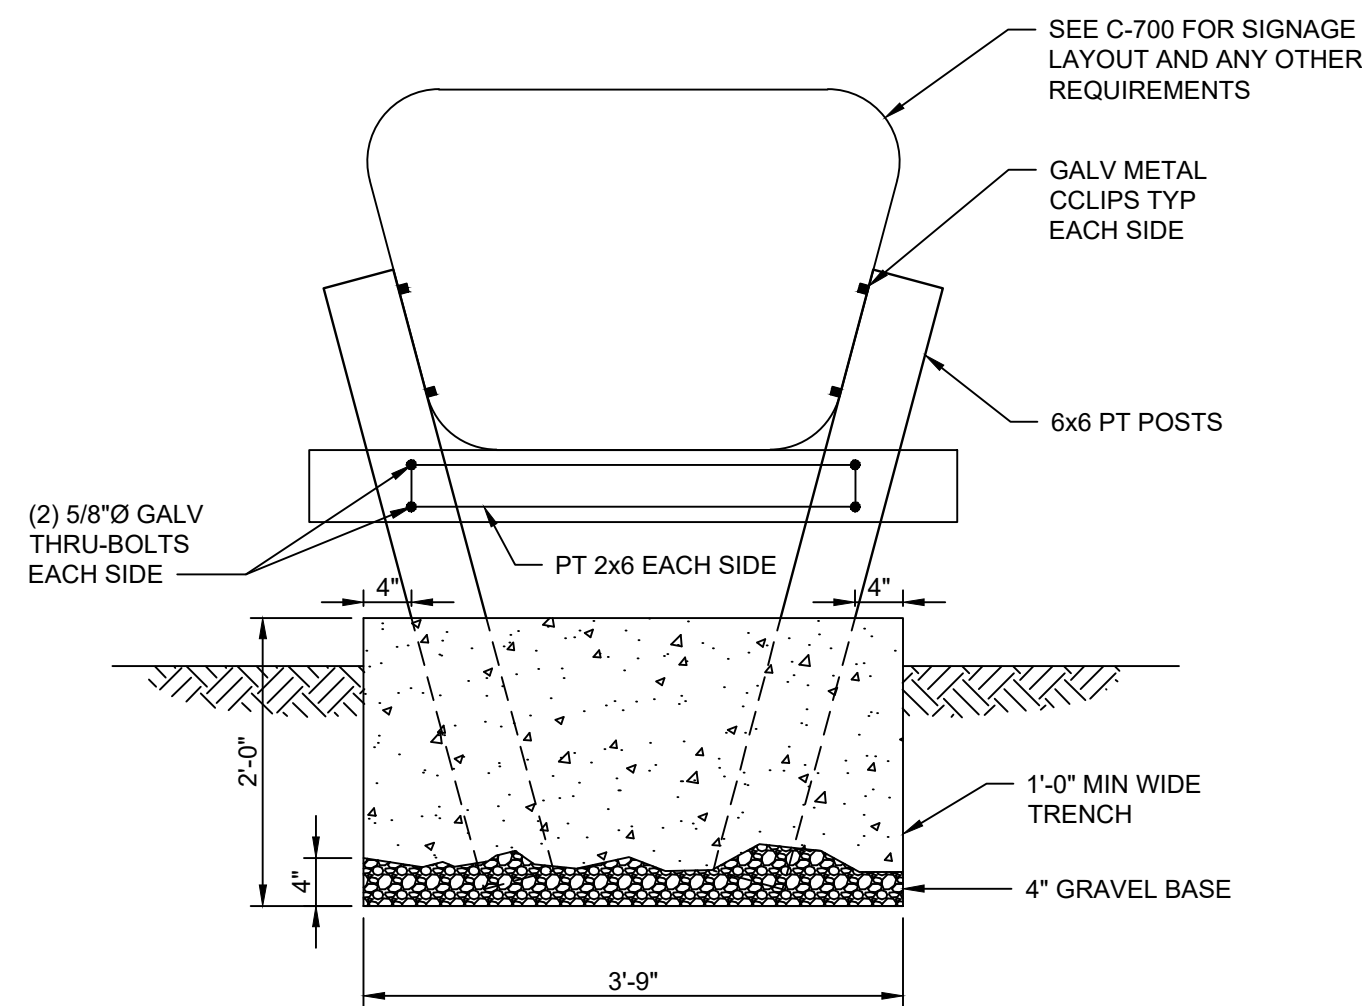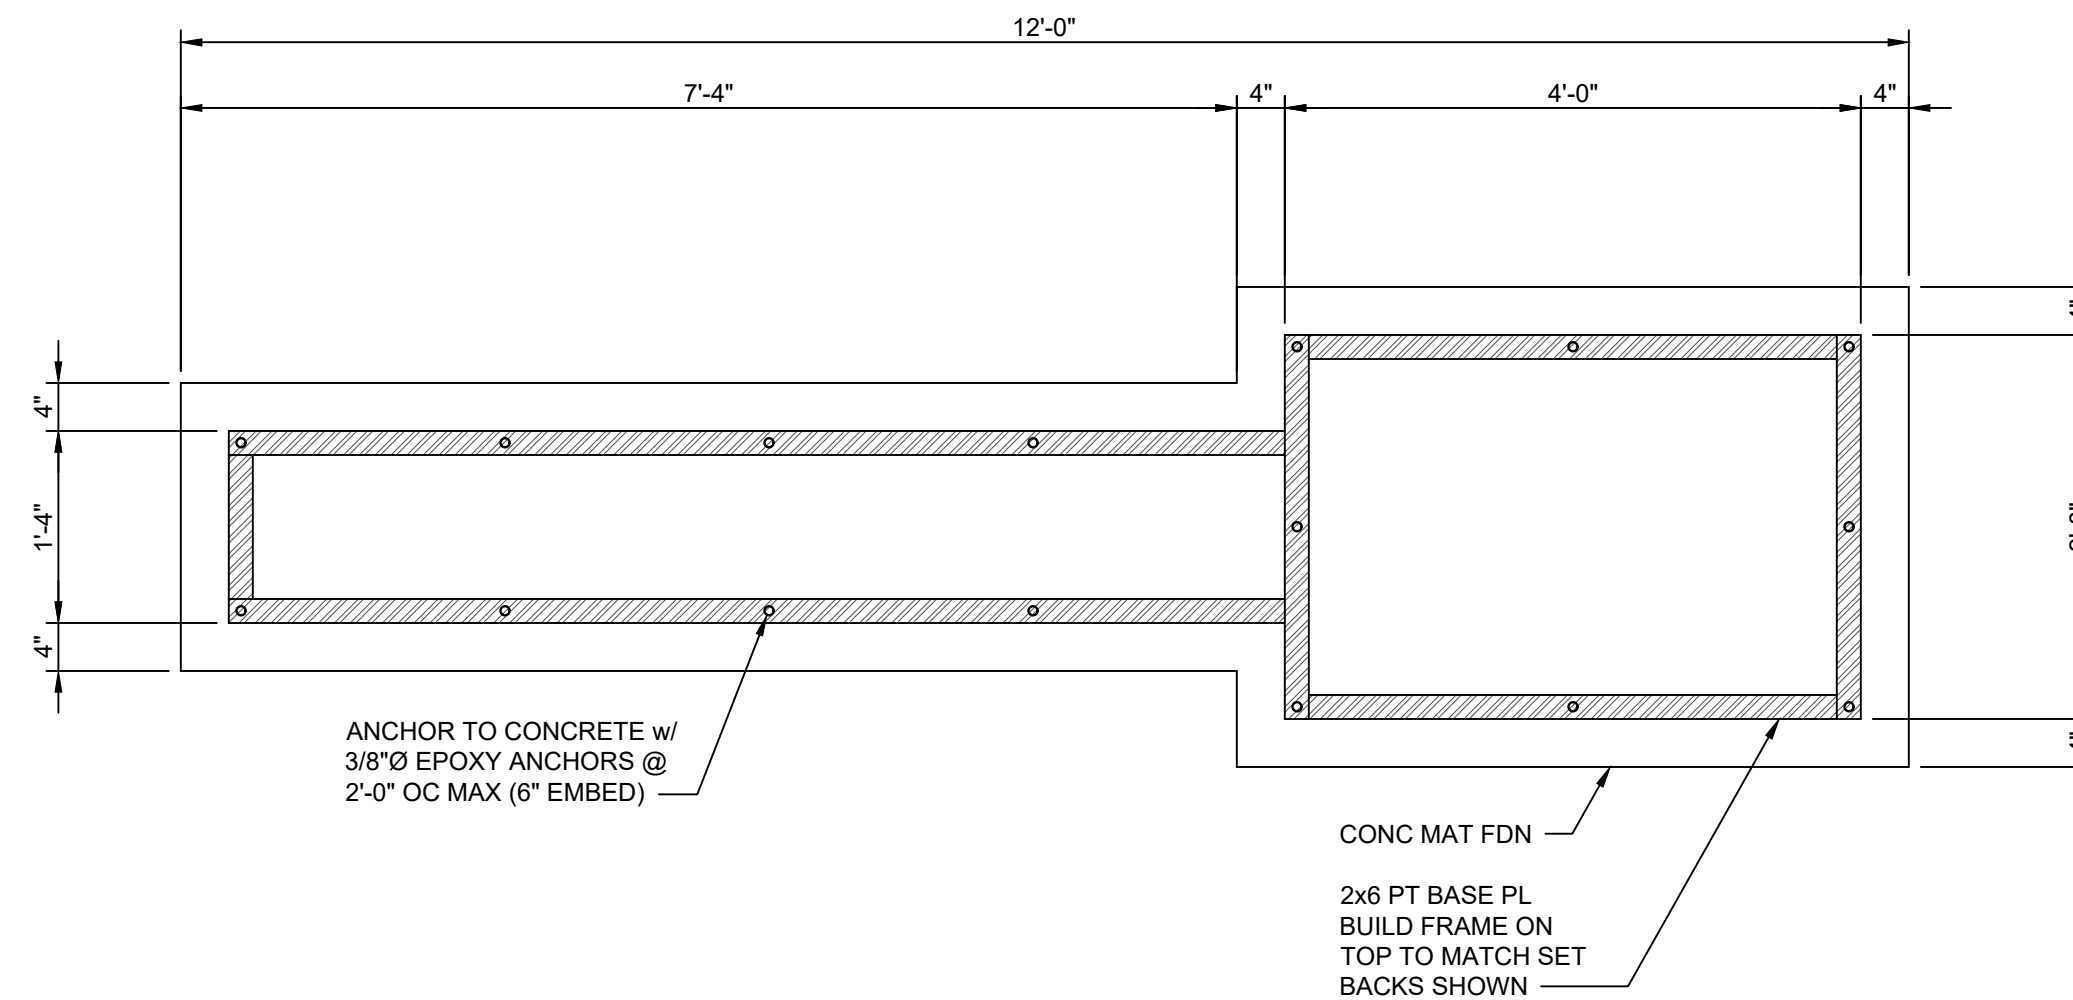


2 SITE SIGN 2
S-602 SCALE: 3/4"=1'-0"



R-08

Southern Region

STAMPS, LOGOS, AND SEALS

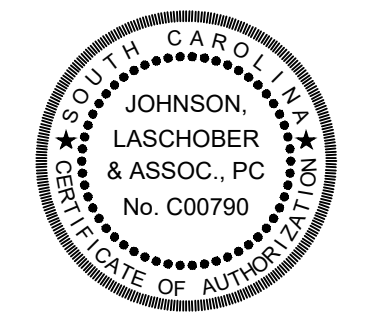

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MC CLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:

JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5786 FAX: (706) 724-3955
WEBSITE: www.jla-group.com

DRAWING TITLE
**SITE SIGNAGE
CONCRETE
SECTIONS
AND DETAILS**


DATE 01/30/2025	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO. S-602
DRAWN BEH	
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 25 OF 138

C:\REVIT - Local Projects\3094-2201_Buck Hall\30942201_Structural-Local-brucker.rvt 1/29/2025 1:11:04 PM

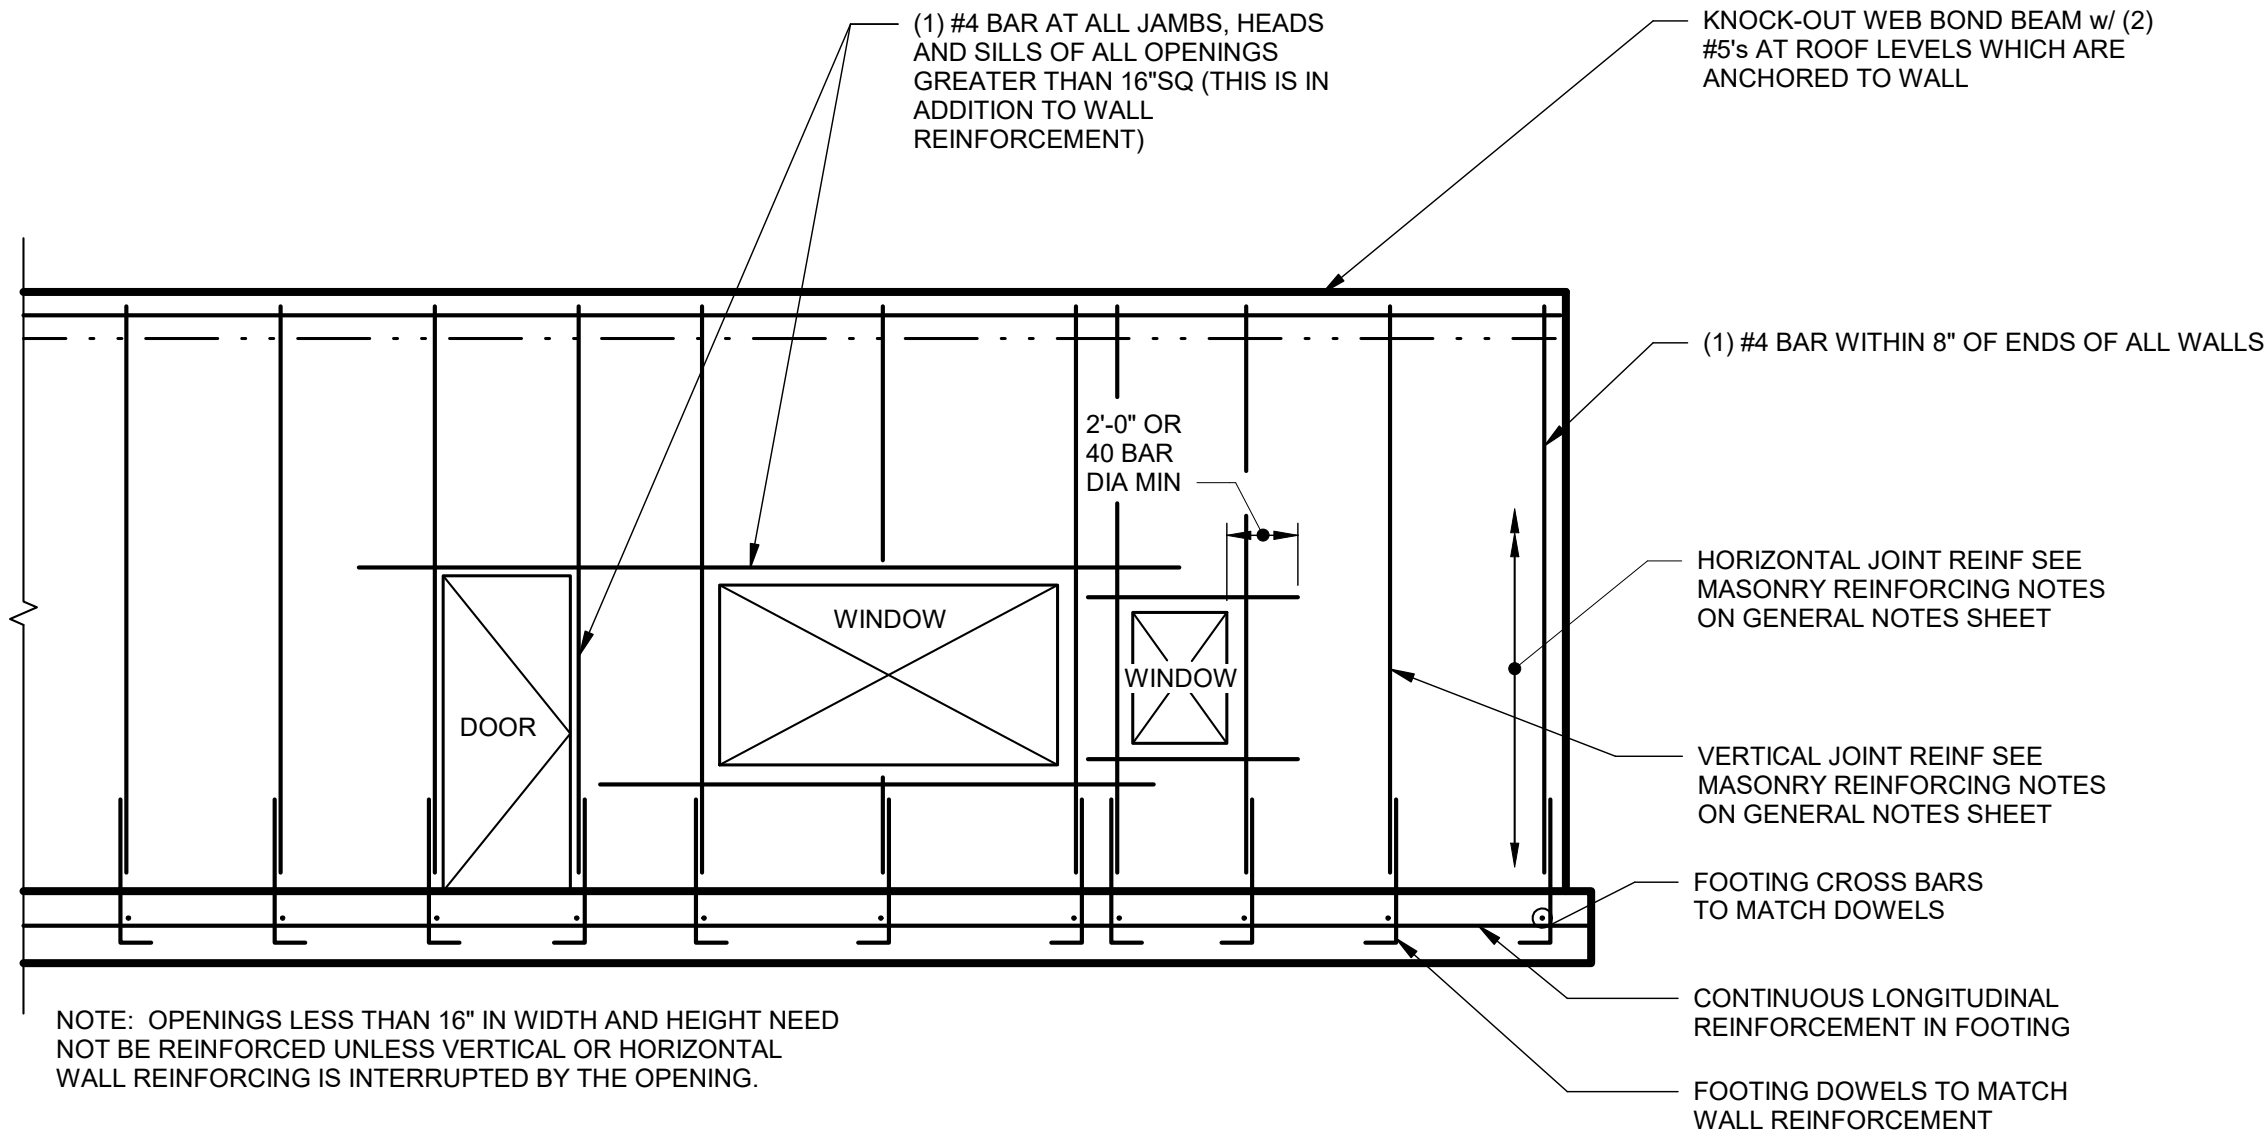

1
S-701


DETAIL
SCALE: 3/16" = 1'-0"

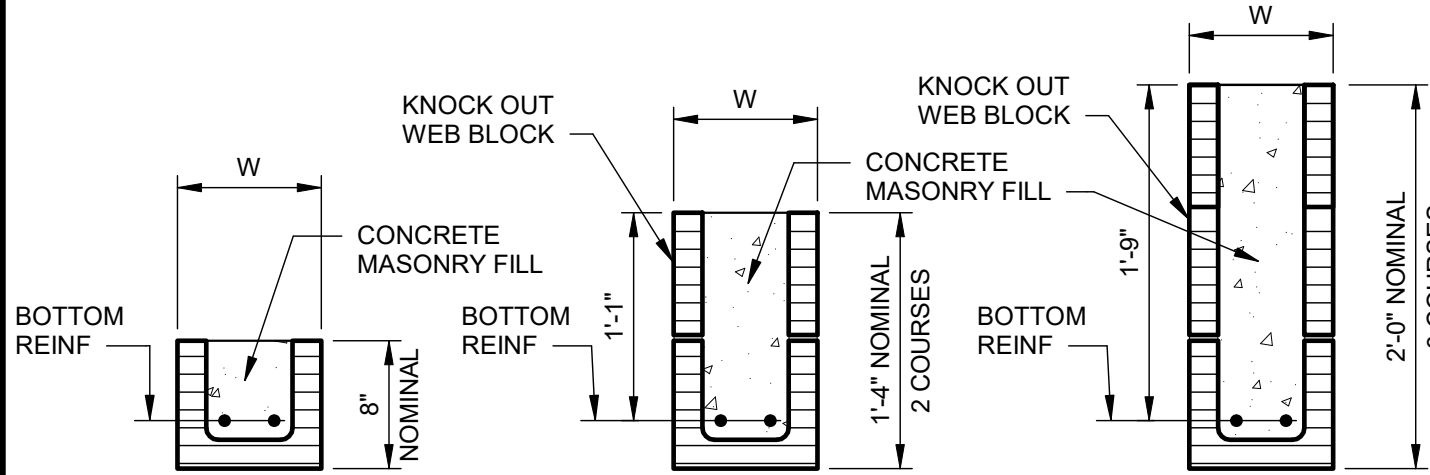

5
S-701


DETAIL
SCALE: 1" = 1'-0"

MASONRY LINTEL SCHEDULE			
CLEAR SPAN	BOTTOM REINFORCING		LINTEL HEIGHT
	W = 8"	W = 12"	
UP TO 6'-0"	2 - #4's	3 - #4's	8"
6'-1" - 8'-0"	2 - #5's	3 - #5's	8"
8'-1" - 10'-0"	2 - #4's	3 - #4's	16"
10'-1" - 12'-0"	2 - #5's	3 - #5's	16"
12'-1" - 14'-0"	2 - #5's	3 - #5's	24"

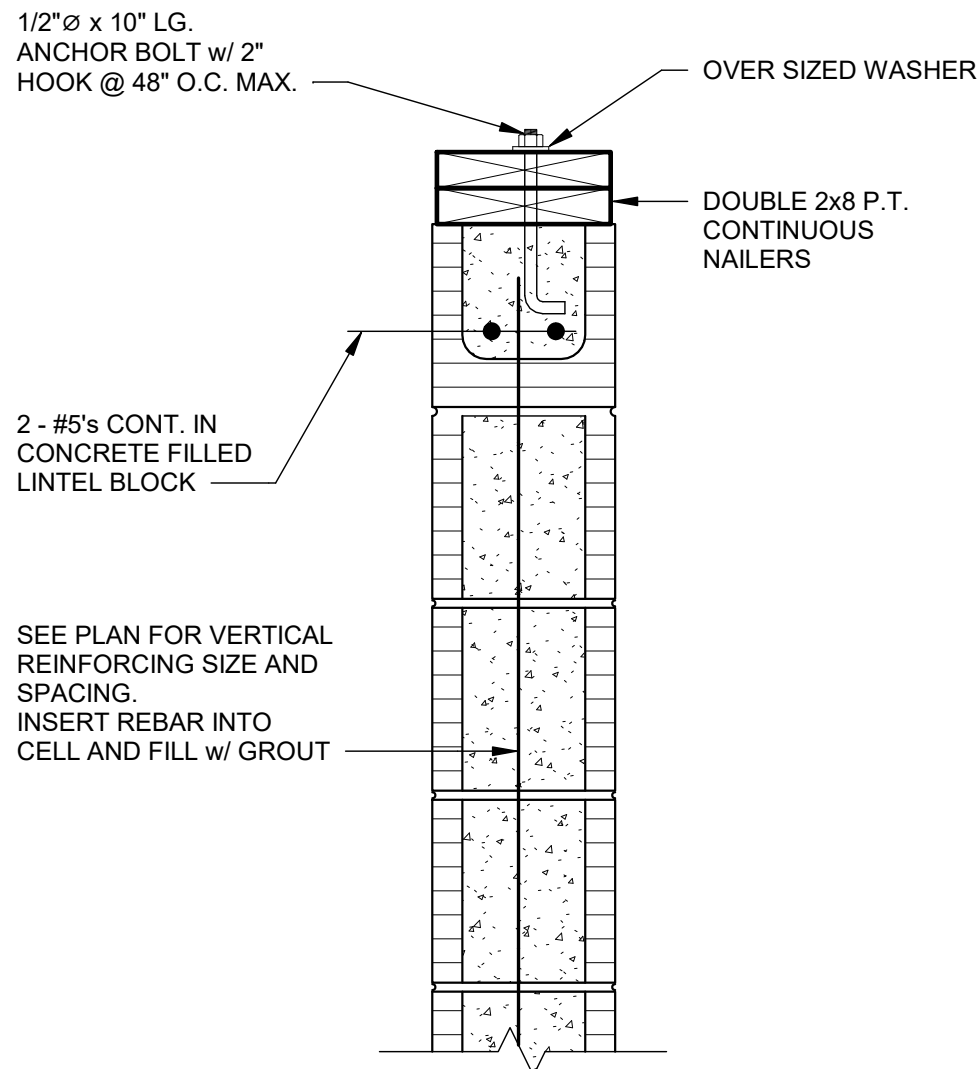


6
S-701

SECTION
SCALE: 1 1/2" = 1'-0"

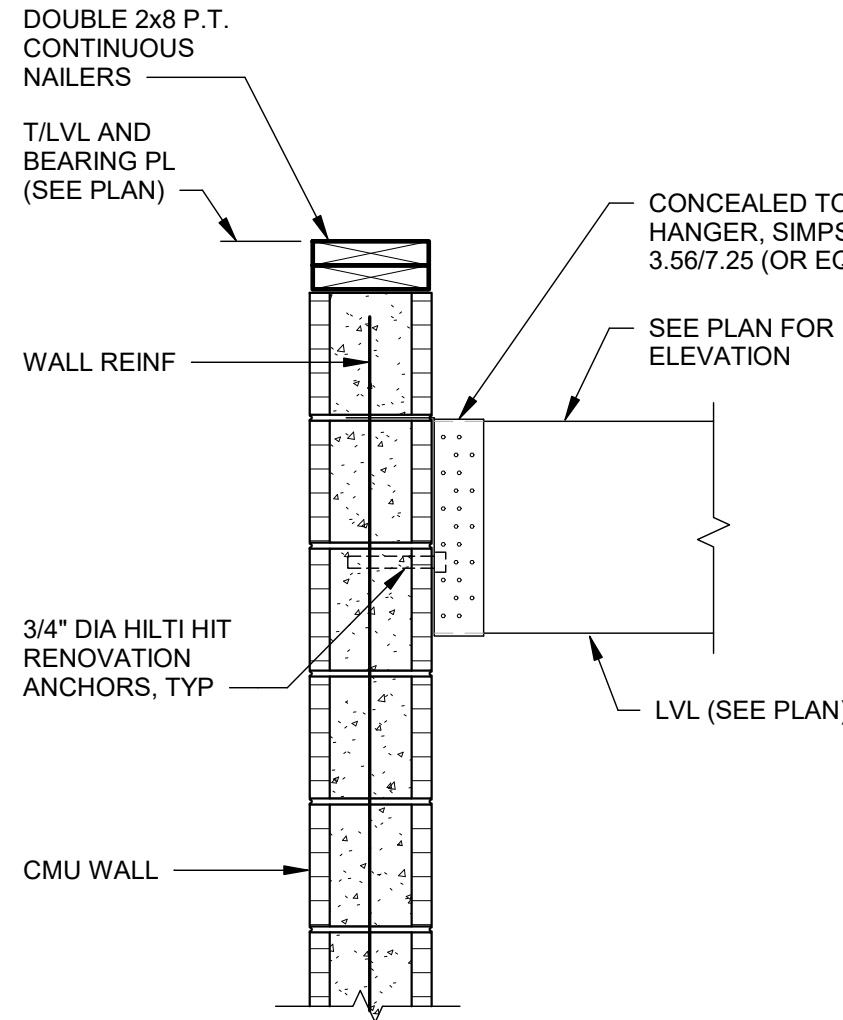


3
S-701

SECTION
SCALE: 1" = 1'-0"

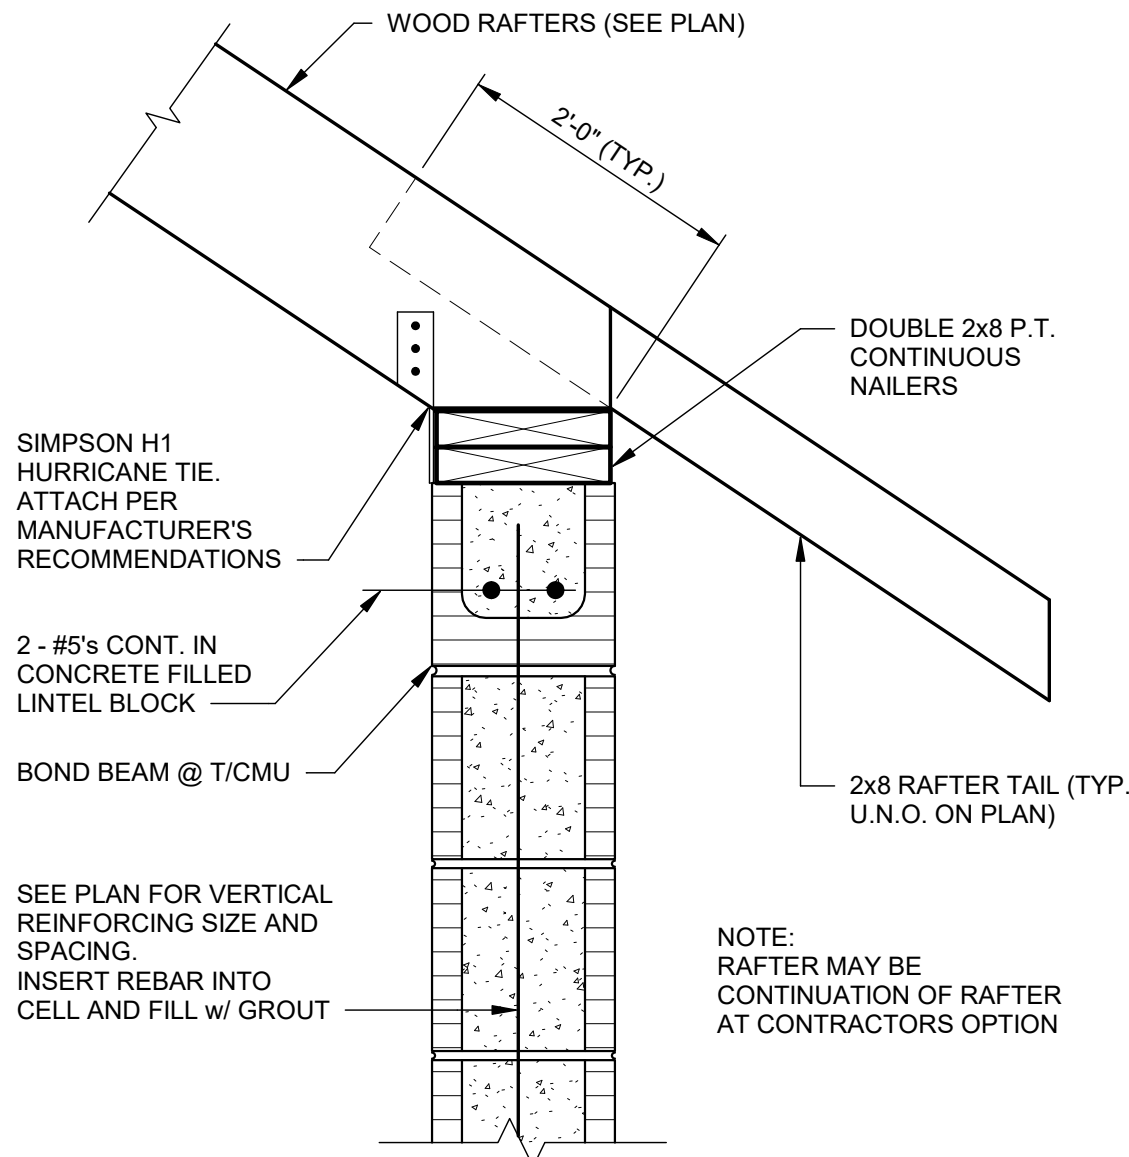


7
S-701

SECTION
NO SCALE

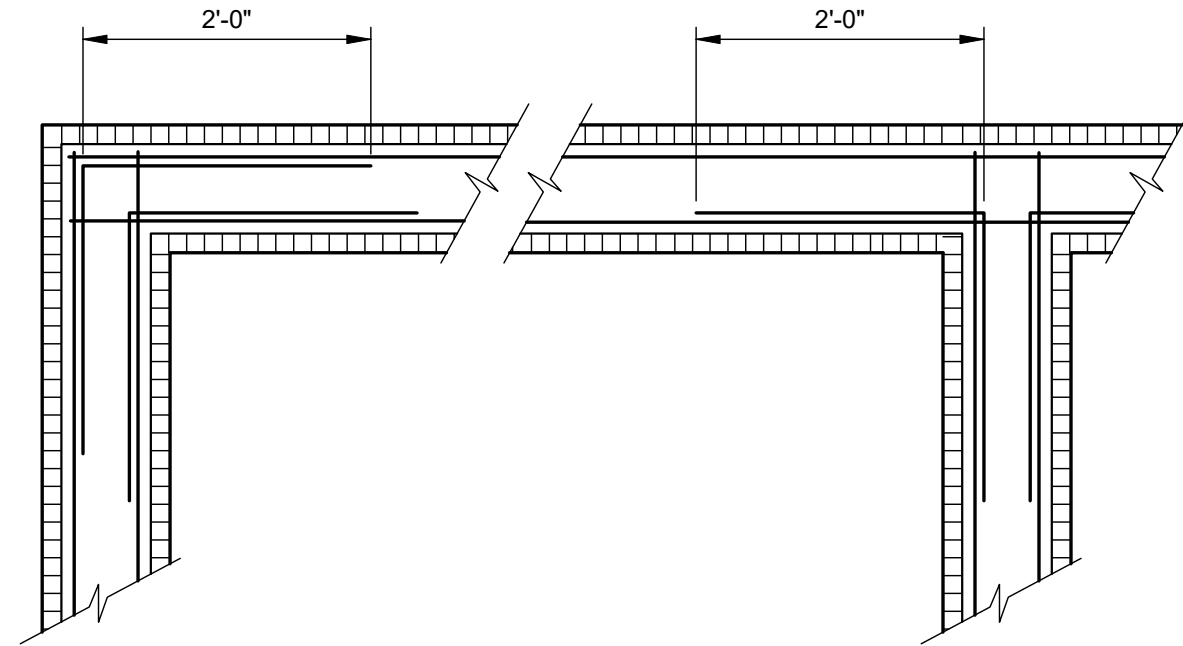

4
S-701

DETAIL
SCALE: 3/4" = 1'-0"

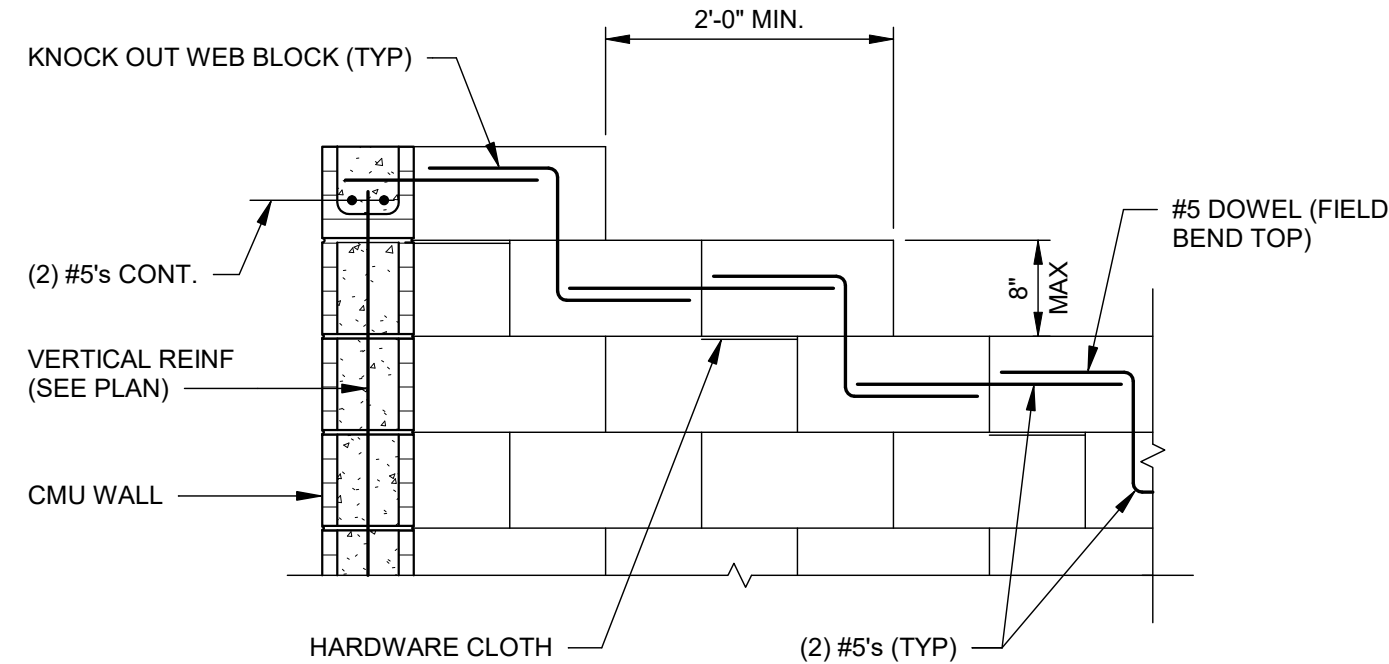


8
S-701

SECTION
SCALE: 3/4" = 1'-0"



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

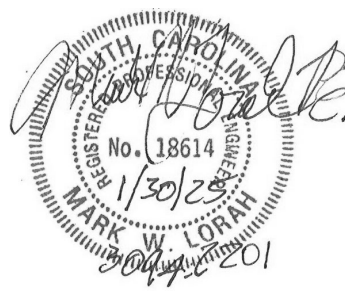

NO.	REVISION/ISSUE	DATE
4		
3		
2		
1	FINAL CDS	01/30/25

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**


1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




DRAWING TITLE
**MASONRY SECTIONS AND
DETAILS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MWL	DRAWING SHEET NO.
DRAWN WBR	S-701
CHECKED MWL	
PROJECT NO. 3094.2201	SHEET 26 OF 53

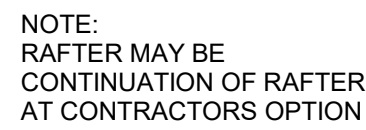

DETAIL
NO SCALE

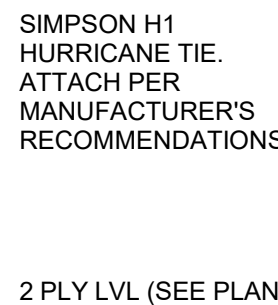

SECTION
SCALE: 1 1/2" = 1'-0"




SECTION
SCALE: 1 1/2" = 1'-0"




SECTION
SCALE: 1 1/2" = 1'-0"



SECTION
SCALE: 1 1/2" = 1'-0"



INTERIOR NON LOAD-BEARING WALL
DETAIL
SCALE: 3/4" = 1'-0"

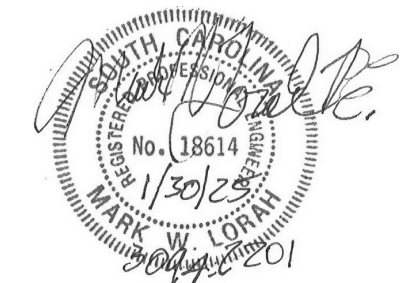

4		
3		
2		
1	FINAL CDS	01/30/20
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:



JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgrou.com

DRAWING TITLE

WOOD SECTIONS AND DETAILS

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER MWL	DRAWING SHEET NO. S-801	
DRAWN WBR		
CHECKED MWL		
PROJECT NO. 3094.2201	SHEET	27 OF 53

PLUMBING GENERAL NOTES:

GENERAL:
THESE GENERAL NOTES PRESENT AND/OR SUMMARIZE KEY PRODUCT INFORMATION FOR THE PLAN READER'S CONVENIENCE. SEE PLANS AND SPECIFICATIONS FOR FURTHER REQUIREMENTS.

WORK COVERED BY THIS DOCUMENT SHALL INCLUDE ALL LABOR, MATERIAL, PRODUCTS, AND SERVICES FOR, AND INCIDENTAL TO, INSTALLATION OF COMPLETE AND OPERATING PLUMBING SYSTEMS DRAWN OR SPECIFIED.

ALL WORK SHALL CONFORM TO ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES.

ALL EQUIPMENT AND MATERIALS SHALL BE AS SPECIFIED OR "APPROVED EQUAL" BY THE ARCHITECT OR ENGINEER.

INSTALL ALL PLUMBING FIXTURES PER MANUFACTURER'S INSTRUCTIONS.

EXACT LOCATIONS AND ROUGHING REQUIREMENTS FOR ALL FIXTURES AND EQUIPMENT SHALL BE DETERMINED FROM ARCHITECTURAL DRAWINGS. LARGE SCALE ARCHITECTURAL DETAILS, AND APPROVED MANUFACTURER'S SHOP DRAWINGS. PARTICULAR ATTENTION SHALL BE DIRECTED TO FIXTURES OR EQUIPMENT FURNISHED UNDER OTHER DIVISIONS.

PIPING IS SHOWN IN ITS GENERAL LOCATION (UNLESS DIMENSIONED). EXACT LOCATION SHALL BE DETERMINED BY JOB CONDITIONS. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF HIS WORK WITH THAT OF OTHER TRADES AND ARRANGE PIPING TO CLEAR STRUCTURAL MEMBERS AND DUCTWORK. EXACT LOCATIONS SHALL BE PROVIDED ON "AS-BUILT" DRAWINGS.

MINIMUM SIZE WATER LINE FOR THREE OR MORE FIXTURES SHALL BE 3/4". REFER TO PLUMBING FIXTURE SCHEDULE FOR INDIVIDUAL RUNOUT SIZES.

ALL PIPING TO BE CONCEALED IN A WALL, CEILING, OR A CHASE UNLESS OTHERWISE NOTED. PIPING SHOWN OUT OF CHASES FOR CLARITY.

PROVIDE SLEEVES FOR PIPES PASSING THROUGH FLOORS, MASONRY WALLS AND FIRE OR SMOKE PARTITIONS. PACK MINERAL WOOL IN ANNULAR SPACE BETWEEN PIPE SLEEVE.

REFER TO ARCHITECTURAL DRAWINGS FOR EXACT FIXTURE MOUNTING HEIGHTS. ALL ACCESSIBLE FIXTURES SHALL COMPLY WITH STATE BUILDING CODE AND ADA STANDARDS FOR ACCESSIBLE DESIGN.

ARRANGEMENTS OF WORK SHALL BE AS SHOWN. DRAWINGS ARE NOT INTENDED TO INDICATE ALL OFFSETS AND FITTINGS. EXAMINE ALL DRAWINGS, INVESTIGATE CONDITIONS TO BE ENCOUNTERED AND ARRANGE WORK ACCORDINGLY; FURNISH ALL FITTINGS AND OFFSETS.

MEASUREMENT OF DRAWINGS BY SCALE SHALL NOT BE USED AS DIMENSIONS FOR FABRICATION. MEASUREMENTS FOR LOCATING FIXTURES, EQUIPMENT, DUCTWORK, PIPING AND ACCESSORIES SHALL BE MADE ON THE SITE AND SHALL BE BASED ON ACTUAL JOB CONDITIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MEASUREMENTS WHERE THE CONTRACTOR PREFABRICATES ANY WORK BASED ON THE DRAWINGS WITHOUT VERIFYING ACTUAL JOB CONDITIONS. THEN THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL COST INVOLVED IN MAKING CHANGES TO PREFABRICATED WORK WHERE CONFLICTS OCCUR.

ARRANGE FOR CHASES, SLOTS, AND OPENINGS IN OTHER BUILDING COMPONENTS DURING PROGRESS OF CONSTRUCTION TO ALLOW FOR INSTALLATIONS.

INSTALL SYSTEMS, MATERIALS, AND EQUIPMENT LEVEL, PLUMB, PARALLEL, AND PERPENDICULAR TO OTHER BUILDING SYSTEMS AND COMPONENTS.

COPPER PIPING SHALL NOT BE INSTALLED IN DIRECT CONTACT WITH MASONRY, CEMENT MORTAR, CONCRETE, OR DISSIMILAR METALS. PLUMBING CONTRACTOR TO PROVIDE SLEEVES AND COORDINATE w/ GENERAL CONTRACTOR DURING SLAB INSTALLATION.

CUTTING AND REPAIRING: THE PLUMBING CONTRACTOR SHALL DO ALL CUTTING AND REPAIRING OF WALLS, FLOORS, CEILINGS, ETC. NECESSARY FOR THE INSTALLATION OF THE WORK BUT HE SHALL NOT CUT INTO ANY STRUCTURAL MEMBER WITHOUT THE PERMISSION OF THE ARCHITECT.

PROVIDE SHOCK ABSORBERS AS INDICATED ON PLANS.

PLUMBING CONTRACTOR TO PROVIDE PROPER SEPARATION BETWEEN WATER SUPPLY AND WASTE/SANITARY PIPING PER INTERNATIONAL PLUMBING CODE.

PLUMBING CONTRACTOR TO PROVIDE PREPRINTED 1/2" HIGH LETTERED LABELS FOR THE FOLLOWING: INTERIOR MAIN SHUT-OFF VALVE, POTABLE WATER SUPPLY PIPING, & HOT WATER PIPING. LABELS SHOULD BE MOUNTED EVERY 20'-0" ON HORIZONTAL RUNS.

GENERAL CONTRACTOR TO PROVIDE ACCESS PANELS FOR ALL INACCESSIBLE, ABOVE CEILING VALVES AND EQUIPMENT. COORDINATE LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION.

ALL LAVATORIES LOCATED IN PUBLIC TOILET FACILITIES SHALL DELIVER TEMPERED WATER THROUGH AN APPROVED WATER-TEMPERATURE LIMITING DEVICE THAT CONFORMS TO ASSE 1070/ASME A112.1070/CSA B125.70 OR CSA B125.3, PER THE IPC.

DOMESTIC WATER PIPING:
UNDER-BUILDING SLAB, DOMESTIC WATER, BUILDING SERVICE PIPING SHALL BE SOFT COPPER TUBING. AVOID JOINTS UNDER BUILDING SLAB WHERE POSSIBLE.

ALL OTHER UNDER-BUILDING SLAB, DOMESTIC WATER PIPING SHALL BE SOFT COPPER TUBING. AVOID JOINTS UNDER BUILDING SLAB WHERE POSSIBLE.

ALL ABOVEGROUND DOMESTIC WATER PIPING SHALL BE PEX TUBING.

ALL INDOOR DOMESTIC COLD AND HOT WATER PIPING SHALL BE INSULATED CONTINUOUSLY THROUGH WALL, PARTITION, FLOOR, AND ROOF PENETRATIONS.

SANITARY WASTE AND VENT PIPING:
ALL SOIL, DRAIN, WASTE AND VENT PIPING SHALL BE SCHEDULE 40 PVC-DWV.

ALL PIPING PASSING THROUGH THE ROOF SHALL BE FLASHED WITH ROOF FLASHING ASSEMBLY COMPATIBLE WITH THE ROOFING SYSTEM.

THERMAL HANGER SHIELD INSERTS:
INSTALL THERMAL HANGER SHIELD INSERT IN PIPE HANGER FOR INSULATED PIPING, WITH PROTECTIVE SADDLE.



SLEEVES AND SLEEVE SEALS:
INSTALL SLEEVES FOR PIPING PASSING THROUGH PENETRATIONS IN FLOORS, PARTITIONS, ROOFS, AND WALLS. INSTALL SLEEVES IN CONCRETE FLOORS, CONCRETE ROOF SLABS, AND CONCRETE WALLS AS NEW SLABS AND WALLS ARE CONSTRUCTED; CUT SLEEVES TO LENGTH FOR MOUNTING FLUSH WITH BOTH SURFACES; USING GROUT OR SILICONE SEALANT, SEAL OUTSIDE OF SLEEVES IN SLABS AND WALLS WITHOUT SLEEVE-SEAL SYSTEM.

WATER HAMMER ARRESTOR:
A WATER HAMMER ARRESTOR HALL BE INSTALLED AT EVERY FIXTURE WHERE QUICK CLOSING VALVES ARE UTILIZED. WATER HAMMER ARRESTORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. WATER HAMMER ARRESTORS SHALL CONFORM TO ASSE 1010.

FIELD QUALITY CONTROL:
ALL DOMESTIC WATER PIPING SHALL BE TESTED FOR LEAKS AND DEFECTS; FILL DOMESTIC WATER PIPING, CAP, AND SUBJECT PIPING TO STATIC WATER PRESSURE OF 50 PSIG ABOVE OPERATING PRESSURE, WITHOUT EXCEEDING PRESSURE RATING OF PIPING SYSTEM MATERIALS. ISOLATE TEST SOURCE AND ALLOW IT TO STAND FOR FOUR HOURS.

LEAKS AND LOSS IN TEST PRESSURE CONSTITUTE DEFECTS THAT MUST BE REPAIRED. LEAVE DOMESTIC WATER PIPING UNCOVERED AND UNCONCEALED UNTIL IT HAS BEEN TESTED AND APPROVED.


ALL SANITARY WASTE AND VENT PIPING SHALL BE TESTED FOR LEAKS AND DEFECTS AT COMPLETION OF ROUGH-IN. CLOSE OPENINGS IN PIPING SYSTEM AND FILL WITH WATER TO POINT OF OVERFLOW, BUT NOT LESS THAN 10-FOOT HEAD OF WATER. FROM 15 MINUTES BEFORE INSPECTION STARTS TO COMPLETION OF INSPECTION, WATER LEVEL MUST NOT DROP. INSPECT JOINTS FOR LEAKS. REPAIR LEAKS AND DEFECTS WITH NEW MATERIALS AND RETEST PIPING, OR PORTIONS THEREOF, UNTIL SATISFACTORY RESULTS ARE OBTAINED. INSTALL TEST TEES WHEN THE SYSTEM IS TO BE TESTED IN SECTIONS. LEAVE SANITARY WASTE AND VENT PIPING UNCOVERED AND UNCONCEALED UNTIL IT HAS BEEN TESTED AND APPROVED.

PLUMBING LEGEND	
SYMBOL	DESCRIPTION
FD	FLOOR DRAIN (SEE SCHEDULE)
SD	SHOWER DRAIN (SEE SCHEDULE)
FCO	FLOOR CLEANOUT (SEE SCHEDULE)
GCO	GROUND CLEANOUT (SEE SCHEDULE)
VTR	VENT THROUGH ROOF
V	VENT PIPE
W	WASTE PIPING
S	SANITARY PIPING
CW	COLD WATER PIPING
HW	HOT WATER PIPING
P.R.V.	PRESSURE REDUCING VALVE
B.F.P.	BACKFLOW PREVENTER
U.N.O.	UNLESS NOTED OTHERWISE
TYP.	TYPICAL
DWN.	DOWN
CO	CLEANOUT
I.E.	INVERT ELEVATION
B.O.P.	BOTTOM OF PIPE ELEVATION
	FULL PORT BALL VALVE
3/4"-WH 	WALL HYDRANT (SEE PLUMBING SCHEDULE)
1/2"-HB 	HOSE BIBB (SEE PLUMBING SCHEDULE)
	PIPE DOWN
	PIPE UP



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

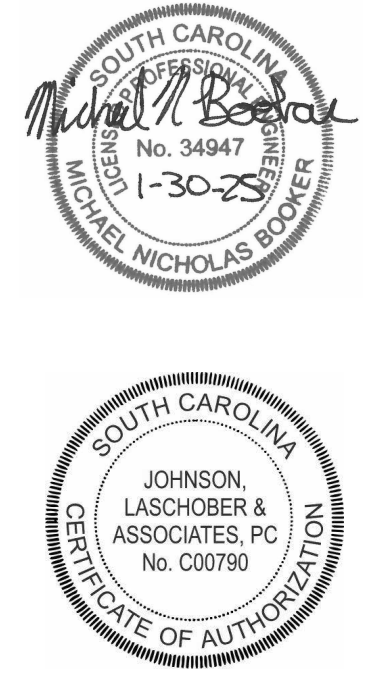

		
		
		
	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com


DRAWING TITLE
PLUMBING GENERAL
NOTES & LEGEND

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER MNB	DRAWING SHEET NO. P-001	
DRAWN SKM		
CHECKED MNB		
PROJECT NO. 3094.2201	SHEET 28 OF 53	

APPLICABLE CODES AND STANDARDS	
CODES AND STANDARDS	EDITION
INTERNATIONAL BUILDING CODE (IBC)	2021
INTERNATIONAL PLUMBING CODE (IPC)	2021
ASHRAE 90.1	2019
NATIONAL ELECTRICAL CODE (NEC)	2020
ABA STANDARDS	2015

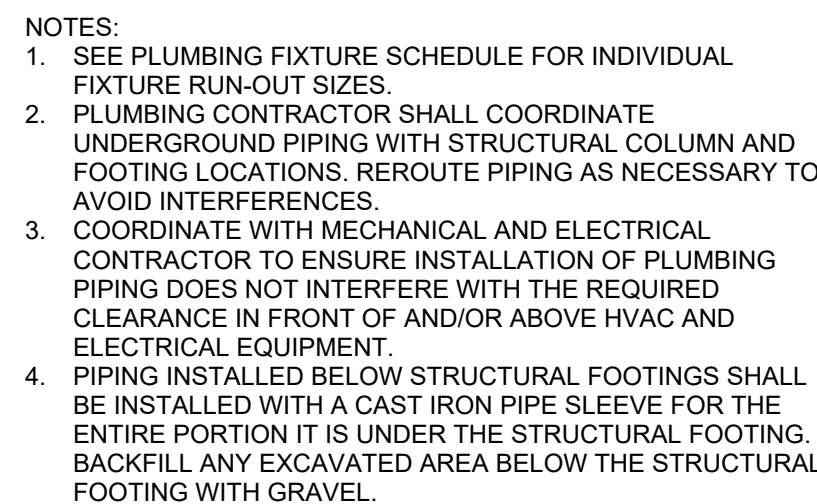

1
P-101

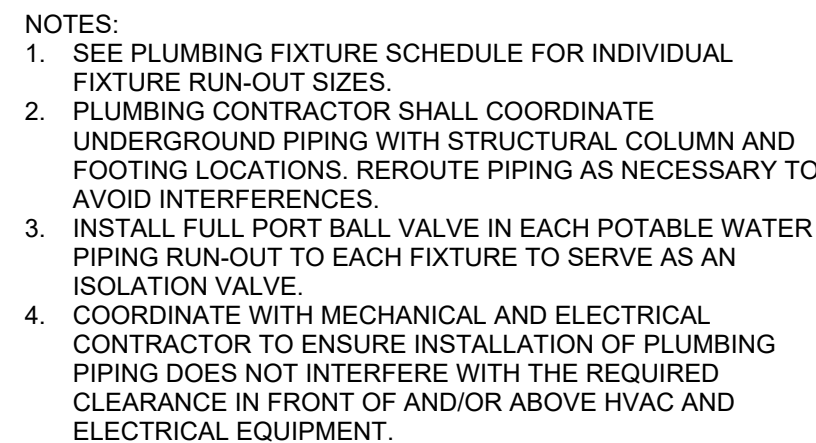

2
P-101

- ① - 4"-GCO
- ② - 3"-FD
- ③ - WASTE AND VENT PIPING SHALL MAINTAIN A MINIMUM 0'-6" HORIZONTAL CLEARANCE FROM ELECTRICAL PANEL(S) ON WALL. SEE ELECTRICAL DRAWINGS FOR PANEL LOCATION.
- ④ - 4" HORIZONTAL BACKWATER VALVE WITH NICKEL BRONZE ACCESS COVER.

- 1 - 3/4" -WH
- 2 - 2" WATER UP THRU SLAB w/ SLEEVE.
(COORDINATE w/ GENERAL CONTRACTOR)
PROVIDE SHUT-OFF VALVE AND P.F.P. -
PROVIDE P.R.V. WATER PRESSURE $\geq$ 80 PSI.
(PLUMBING CONTRACTOR TO VERIFY
WATER PRESSURE IN THE FIELD)
RESIDUAL WATER PRESSURE MUST BE $\geq$ 45 PSI.
AT CLOSEST WATER SOURCE NEAR FACILITY.
IF NOT, CONTACT ENGINEER BEFORE PURCHASING
FLUSH VALVE TOILETS AND ACCESSORIES.
- 3 - 3/4" CW DOWN WITH SHUT-OFF VALVE.
- 4 - 1/2" CW DOWN TO BELOW SLAB TO SERVE
PLUMBING FIXTURE P-7. INSTALL WATER
HAMMER ARRESTOR SIZE PDI "B" IN VERTICAL
PIPING DOWNSTREAM OF THE 1/2" CW BRANCH-
OFF TO PLUMBING FIXTURE P-1. PROVIDE
MINIMUM 0'-6" HORIZONTAL CLEARANCE FROM
ELECTRICAL PANEL(S) ON WALL. SEE ELECTRICAL
DRAWINGS FOR PANEL LOCATION.
- 5 - POTABLE WATER PIPING ABOVE ELECTRICAL
PANELS SHALL MAINTAIN A MINIMUM 0'-8"
CLEARANCE FROM WALL. SEE ELECTRICAL
DRAWINGS FOR PANEL LOCATION.
- 6 - 1/2" CW & 1/2" HW DOWN.
- 7 - 1/2" CW DOWN.
- 8 - 1" CW DOWN.
- 9 - 1/2" HW 0'-6" PROVIDE MINIMUM 0'-6" HORIZONTAL
CLEARANCE FROM ELECTRICAL PANEL(S) ON WALL.
SEE ELECTRICAL DRAWINGS FOR PANEL
LOCATION.
- 10 - 3/4" CW & 3/4" HW DOWN TO EWH-1.



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
 1296 BROAD ST., AUGUSTA, GEORGIA 30901
 PHONE: (706) 724-5756 FAX: (706) 724-3955
 WEBSITE: www.theJLAgrou.com


DRAWING TITLE

BUILDING 100 - DAY USE RESTROOM BUILDING - PLUMBING PLANS

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER MNB	DRAWING SHEET NO. P-101	
DRAWN SKM		
CHECKED MNB		
PROJECT NO. 3094.2201	SHEET	29 OF 53

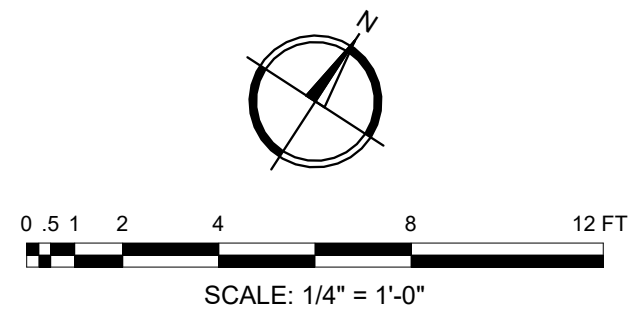


1/30/2025 12:22:50 PM
C:\Revit\Locals\3094.2201 Buckhall Campground Renovations\3094.2201_Plumbing_Local-booker.rvt

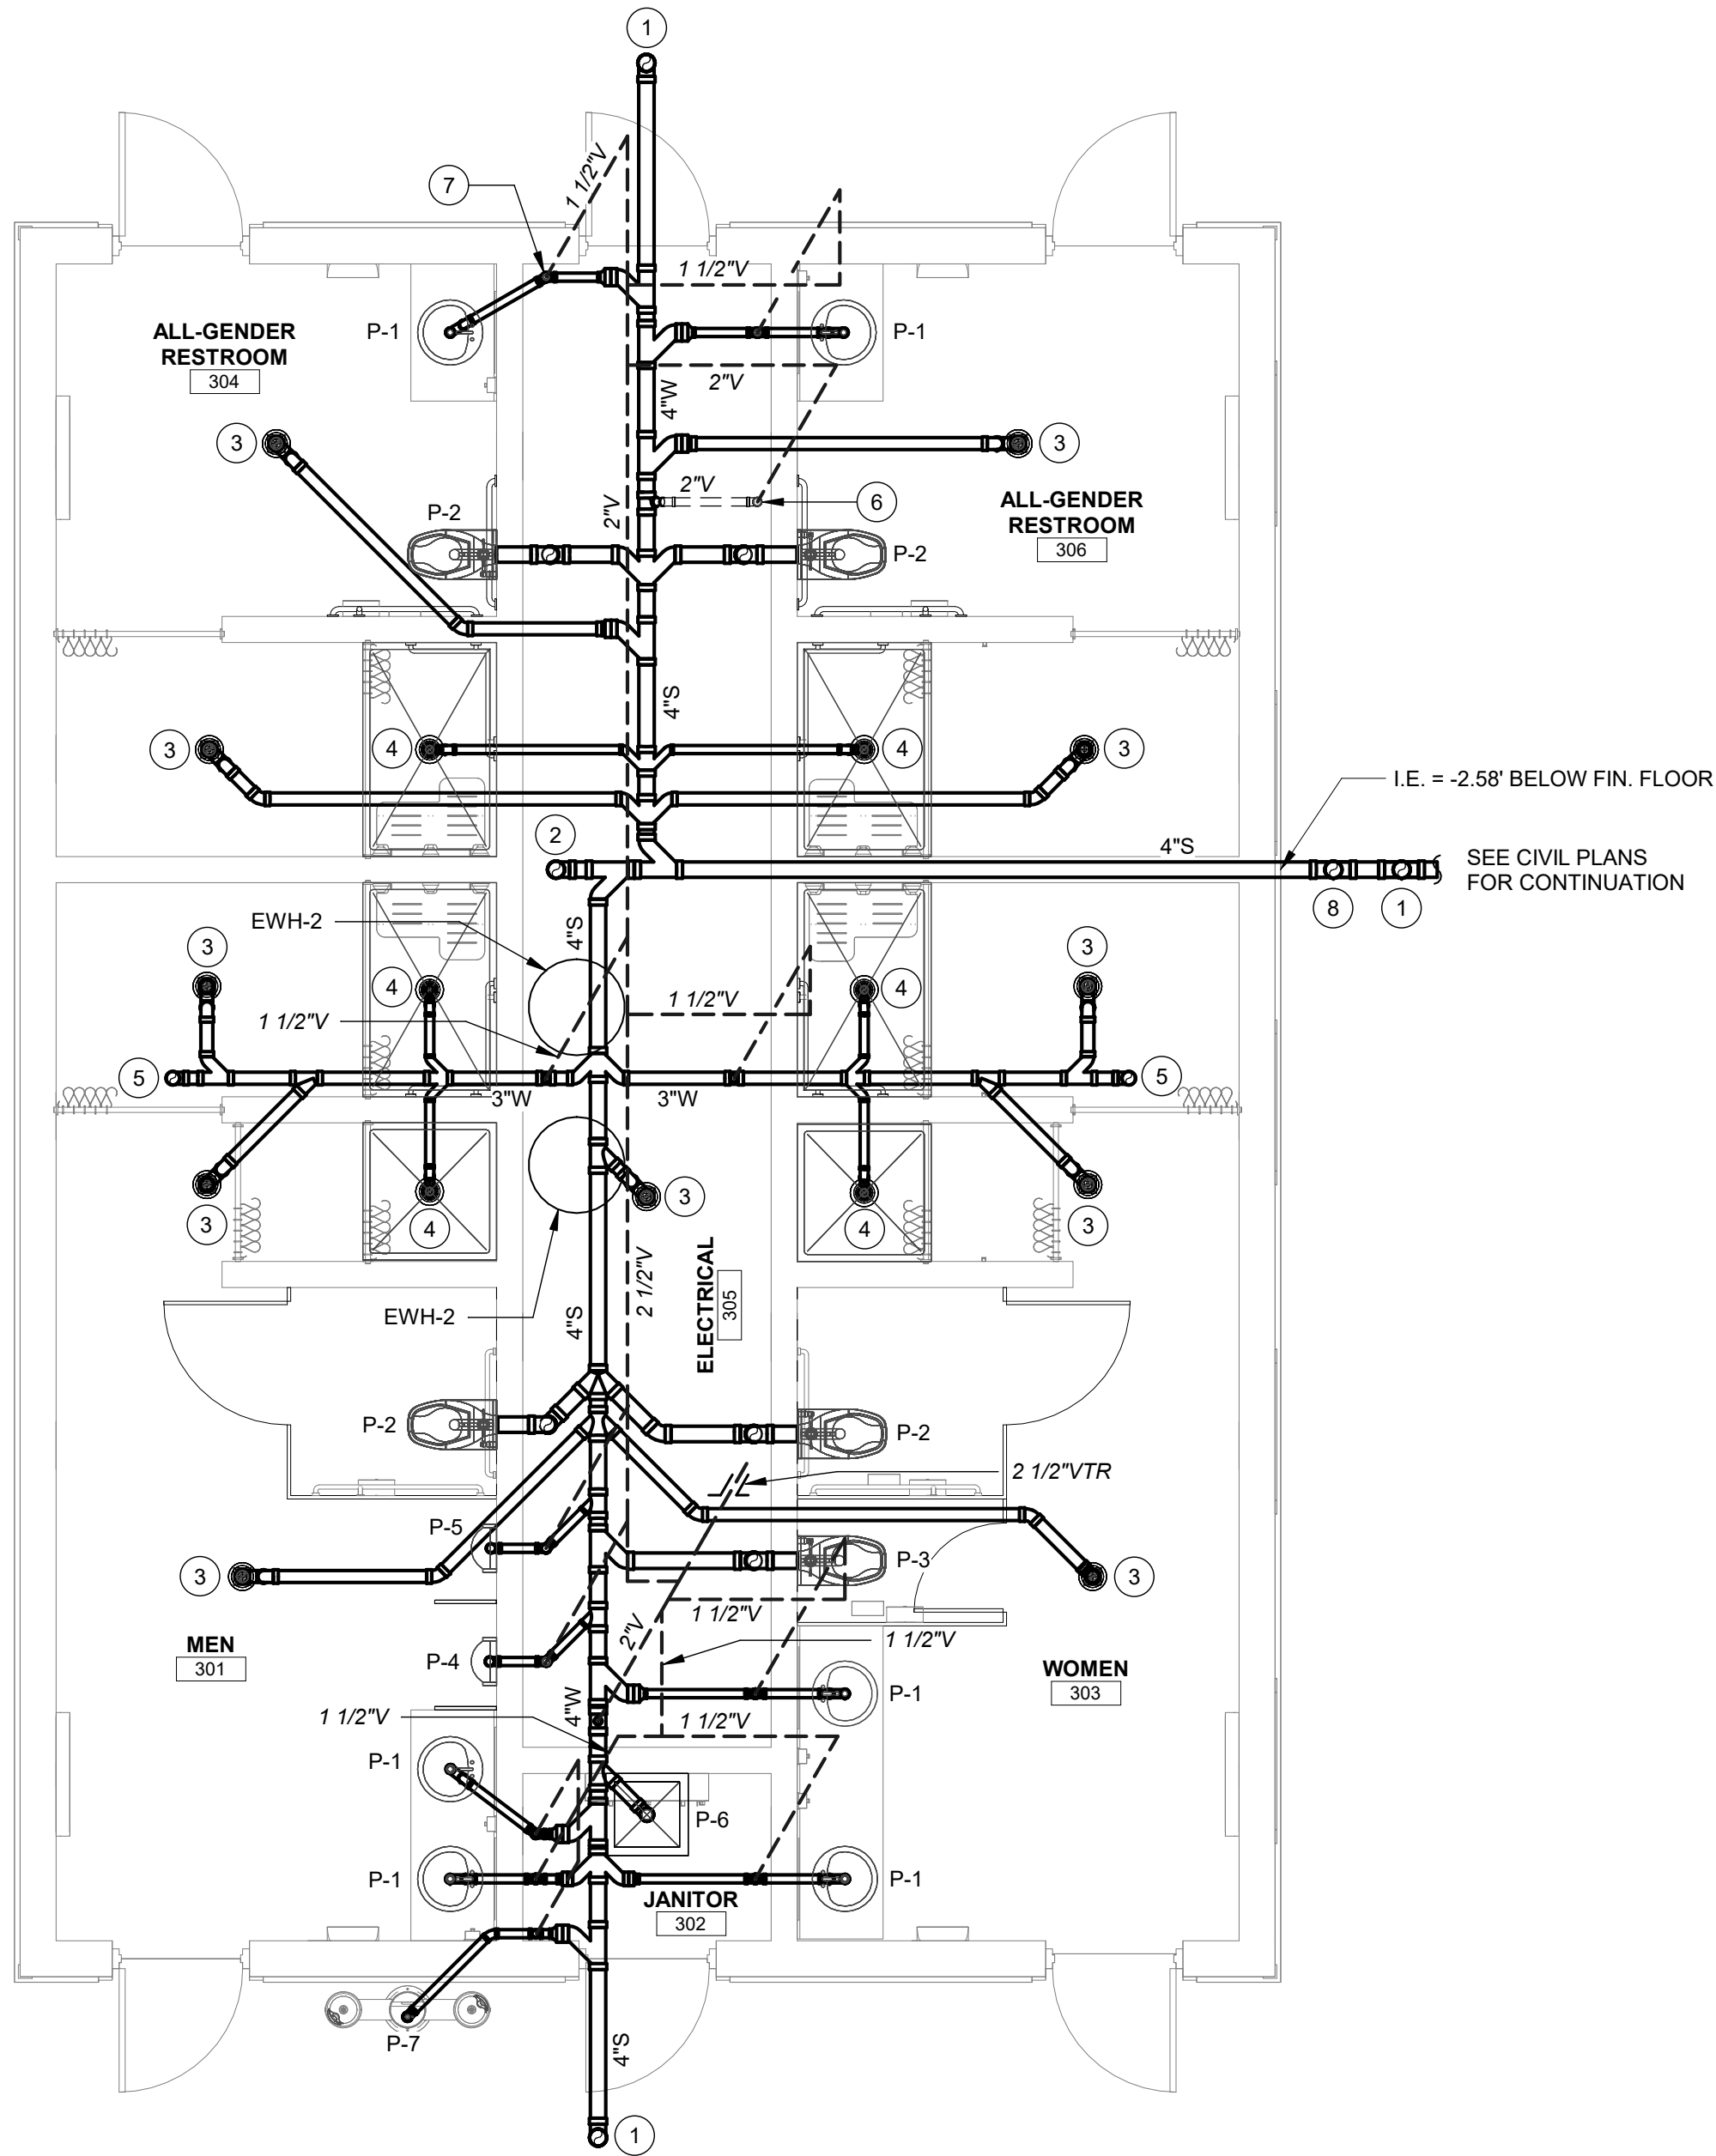

- NOTES:
1. SEE PLUMBING FIXTURE SCHEDULE FOR INDIVIDUAL FIXTURE RUN-OUT SIZES.
 2. PLUMBING CONTRACTOR SHALL COORDINATE UNDERGROUND PIPING WITH STRUCTURAL COLUMN AND FOOTING LOCATIONS. REROUTE PIPING AS NECESSARY TO AVOID INTERFERENCES.
 3. COORDINATE WITH MECHANICAL AND ELECTRICAL CONTRACTOR TO ENSURE INSTALLATION OF PLUMBING PIPING DOES NOT INTERFERE WITH THE REQUIRED CLEARANCE IN FRONT OF AND/OR ABOVE HVAC AND ELECTRICAL EQUIPMENT.
 4. PIPING INSTALLED BELOW STRUCTURAL FOOTINGS SHALL BE INSTALLED WITH A CAST IRON PIPE SLEEVE FOR THE ENTIRE PORTION IT IS UNDER THE STRUCTURAL FOOTING. BACKFILL ANY EXCAVATED AREA BELOW THE STRUCTURAL FOOTING WITH GRAVEL.

1 BUILDING 300/600 - WASTE PIPING PLAN
SCALE: 1/4" = 1'-0"

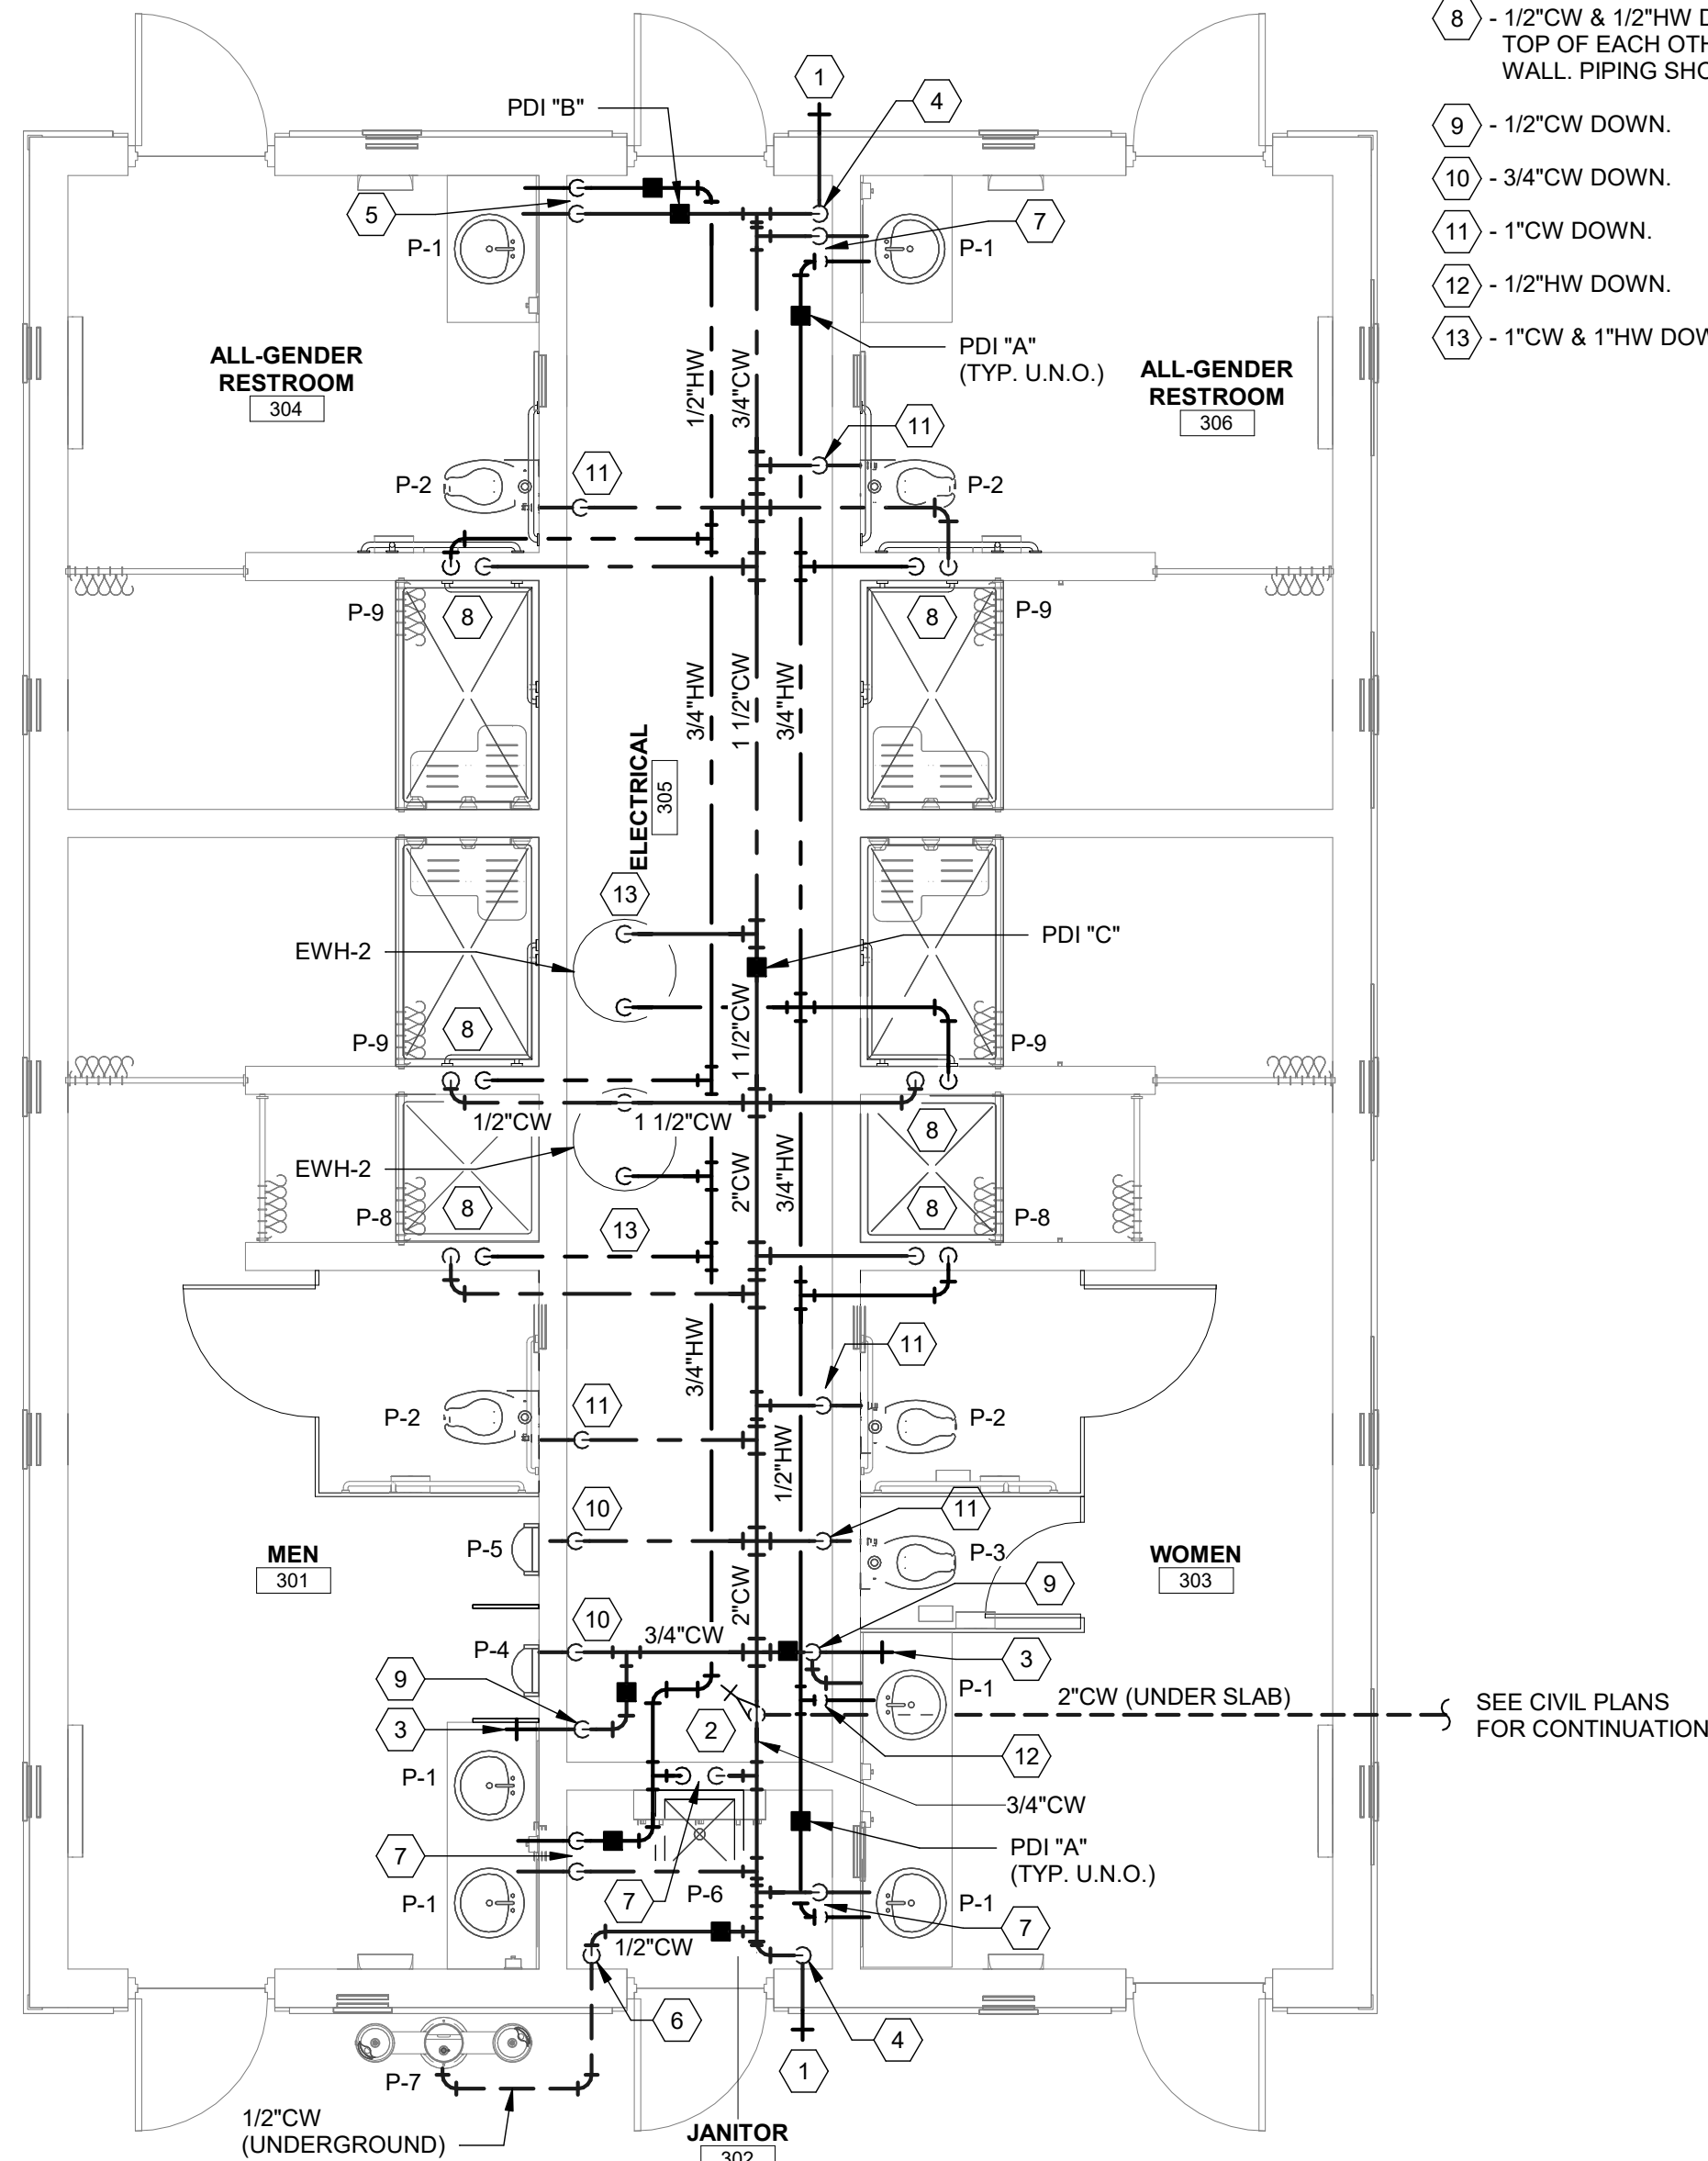

- NOTES:
1. SEE PLUMBING FIXTURE SCHEDULE FOR INDIVIDUAL FIXTURE RUN-OUT SIZES.
 2. PLUMBING CONTRACTOR SHALL COORDINATE UNDERGROUND PIPING WITH STRUCTURAL COLUMN AND FOOTING LOCATIONS. REROUTE PIPING AS NECESSARY TO AVOID INTERFERENCES.
 3. INSTALL FULL PORT BALL VALVE IN EACH POTABLE WATER PIPING RUN-OUT TO EACH FIXTURE TO SERVE AS AN ISOLATION VALVE.
 4. COORDINATE WITH MECHANICAL AND ELECTRICAL CONTRACTOR TO ENSURE INSTALLATION OF PLUMBING PIPING DOES NOT INTERFERE WITH THE REQUIRED CLEARANCE IN FRONT OF AND/OR ABOVE HVAC AND ELECTRICAL EQUIPMENT.

2 BUILDING 300/600 - POTABLE WATER PIPING PLAN
SCALE: 1/4" = 1'-0"

NOTE:
SEE CIVIL DRAWINGS C-102 & C-108 FOR TRUE NORTH



0 5 1 2 4 8 12 FT.
SCALE: 1/4" = 1'-0"

WASTE PIPING NOTES:

- 1 - 4"-GCO
- 2 - 4"-FCO
- 3 - 3"-FD
- 4 - 2"-SD
- 5 - 3"-FCO
- 6 - 2"-V UP FROM UNDER SLAB
- 7 - WASTE AND VENT PIPING SHALL MAINTAIN A MINIMUM 0'-6" HORIZONTAL CLEARANCE FROM ELECTRICAL PANEL(S) ON WALL. SEE ELECTRICAL DRAWINGS FOR PANEL LOCATION.
- 8 - 4" HORIZONTAL BACKWATER VALVE WITH NICKEL BRONZE ACCESS COVER.

POTABLE WATER PIPING NOTES:

- 1 - 3/4"-WH
- 2 - 2" WATER UP THRU SLAB w/ SLEEVE. (COORDINATE w/ GENERAL CONTRACTOR) PROVIDE SHUT-OFF VALVE AND B.F.P. PROVIDE P.R.V. IF WATER PRESSURE ≥ 80 PSI. (PLUMBING CONTRACTOR TO VERIFY WATER PRESSURE IN THE FIELD) RESIDUAL WATER PRESSURE MUST BE ≥ 45 PSI. AT CLOSEST WATER SOURCE NEAR FACILITY. IF NOT, CONTACT ENGINEER BEFORE PURCHASING FLUSH VALVE TOILETS AND ACCESSORIES.
- 3 - 1/2"-HB
- 4 - 3/4"CW DOWN WITH SHUT-OFF VALVE.
- 5 - 1/2"CW & 1/2"HW DOWN. PROVIDE MINIMUM 0'-6" HORIZONTAL CLEARANCE FROM ELECTRICAL PANEL(S) ON WALL. SEE ELECTRICAL DRAWINGS FOR PANEL LOCATION.
- 6 - 1/2"CW DOWN BELOW SLAB.
- 7 - 1/2"CW & 1/2"HW DOWN.
- 8 - 1/2"CW & 1/2"HW DOWN. STACK CW AND HW ON TOP OF EACH OTHER, CENTERED OVER SHOWER WALL. PIPING SHOWN OFFSET FOR CLARITY.
- 9 - 1/2"CW DOWN.
- 10 - 3/4"CW DOWN.
- 11 - 1"CW DOWN.
- 12 - 1/2"HW DOWN.
- 13 - 1"CW & 1"HW DOWN TO EWH-2.

USDA **FOREST SERVICE**
United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

SOUTH CAROLINA
PROFESSIONAL ENGINEER
MICHAEL NICHOLAS BOOKER
No. 34947
1-30-2025

SOUTH CAROLINA
JOHNSON, LASCHNER & ASSOCIATES, P.C.
No. C00790
CERTIFICATE OF AUTHORIZATION

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLENNVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHNER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

**BUILDING 300/600 -
CAMPGROUND BATH
HOUSE - PLUMBING PLANS**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. P-301
DRAWN SKM	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 30 OF 53

PLUMBING FIXTURE SCHEDULE						
MARK	FIXTURE	NOM. PIPE SIZE				DESCRIPTION
		CW	HW	W	V	
P-1	INTEGRAL COUNTER LAVATORY (H.C.)	1/2"	1/2"	2"	1 1/2"	METERING FAUCET, PILLAR TAP WITH EXTENDED SPOUT, 0.5 GPM NON-AERATED SPRAY, GRID DRAIN, ANGLE STOPS, 3/8" SUPPLIES
P-2	WALL MOUNTED WATER CLOSET (H.C)	1"	-	4"	2"	WALL-MOUNTED, ACCESSIBLE FLUSHOMETER VALVE TOILET, ELONGATED BOWL, TOP SPUD, COMMERCIAL HEAVY-DUTY PLASTIC ELONGATED TOILET SEAT, MANUAL PISTON-TYPE FLUSH VALVE, 1.1 GPF, MOUNT FLUSH VALVE OPERATOR ON WIDE SIDE OF TOILET.
P-3	WALL MOUNTED WATER CLOSET	1"	-	4"	2"	WALL-MOUNTED, FLUSHOMETER VALVE TOILET, ELONGATED BOWL, TOP SPUD, COMMERCIAL HEAVY-DUTY PLASTIC ELONGATED TOILET SEAT, MANUAL PISTON-TYPE FLUSH VALVE, 1.1 GPF.
P-4	URINAL (H.C.)	3/4"	-	2"	2"	ACCESSIBLE URINAL, TOP SPUD, MANUAL PISTON-TYPE FLUSH VALVE, 3/4", 0.125 GPF.
P-5	URINAL	3/4"	-	2"	2"	URINAL, TOP SPUD, MANUAL PISTON-TYPE FLUSH VALVE, 3/4", 0.125 GPF.
P-6	MOP BASIN	1/2"	1/2"	3"	2"	24"x24"x10" MOLDED STONE MOP BASIN, CHROME PLATED SERVICE SINK FAUCET WITH VACUUM BREAKER AND INTEGRAL STOPS, ADJUSTABLE WALL BRACE, PAIL HOOK, AND 3/4" HOSE THREAD ON SPOUT, HOSE & HOSE BRACKET, MOP HANGER, AND STRAINER
P-7	HI/LO DRINKING FOUNTAIN w/BOTTLE FILLER	1/2"	-	2"	1 1/2"	ACCESSIBLE, OUTDOOR DRINKING FOUNTAIN WITH UPPER BOTTLE FILLING STATION, 316 STAINLES STEEL, HEAVY DUTY VANDAL RESISTANT, SEALED FREEZE RESISTANT
P-8	WALL MOUNTED SHOWER AND MIXING VALVE	1/2"	1/2"	-	-	SURFACE MOUNTED WALL SHOWER, STANDARD HEIGHT, STAINLESS STEEL, SINGLE, FIXED DIRECTION SHOWERHEAD, 1.5 GPM, BALANCING VALVE, VANDAL RESISTANT SCREWS
P-9	WALL MOUNTED SHOWER AND MIXING VALVE (H.C.)	1/2"	1/2"	-	-	SURFACE MOUNTED, ACCESSIBLE WALL SHOWER, STANDARD HEIGHT, STAINLESS STEEL, SINGLE, FIXED DIRECTION SHOWERHEAD, 1.5 GPM, HAND SHOWER, BALANCING VALVE, VANDAL RESISTANT SCREWS
1/2"-HB	HOSE BIBB	1/2"	-	-	-	HOSE BIBB WITH ANTI-SIPHON VACUUM BREAKER, NON-FREEZE, INSTALLED IN TAMPER RESISTANT BOX
3/4"-WH	WALL HYDRANT	3/4"	-	-	-	WALL HYDRANT WITH INTEGRAL VACUUM BREAKER AND STAINLESS STEEL BOX, NON-FREEZE, WARNING - FAUCET MUST BE INSTALLED w/ DOWNWARD PITCH TOWARD NOZZLE & HOSE MUST BE REMOVED IN FREEZING WEATHER OR FAUCET MAY FREEZE & BURST. FOR 12" WALL THICKNESS.
EWH-1	ELEC. WATER HEATER	3/4"	3/4"	-	-	ELECTRIC 6-GALLON WATER HEATER, NON-SIMULTANEOUS 3.0KW, 230V/1Ø/60, RECOVERY RATE OF 15 GPH AT A 80°F TEMP. RISE. PROVIDE WATER HEATER LEAK DETECTION DEVICE THAT CONSISTS OF A CONTROL UNIT MOUNTED ON WALL, A VALVE WITH ACTUATOR, AND A WATER SENSOR MOUNTED ON THE FLOOR. VALVE SHALL CLOSE TO STOP INCOMING POTABLE WATER TO THE WATER HEATER UPON DETECTION OF A WATER HEATER LEAK. INSTALL PER MANUFACTURER INSTRUCTIONS. ELECTRICAL: 0.6A, 120VAC 60HZ.
EWH-2	ELEC. HEAT PUMP WATER HEATER	1"	1"	-	-	ELECTRIC 80-GALLON HEAT PUMP WATER HEATER, 19.0KW, 230V/1Ø/60, RECOVERY RATE OF 92 GPH AT A 80°F TEMP. RISE, BASIS OF DESIGN HUBBELL OMNI MODEL PBX80A PROVIDE WATER HEATER LEAK DETECTION DEVICE THAT CONSISTS OF A CONTROL UNIT MOUNTED ON WALL, A VALVE WITH ACTUATOR, AND A WATER SENSOR MOUNTED ON THE FLOOR. VALVE SHALL CLOSE TO STOP INCOMING POTABLE WATER TO THE WATER HEATER UPON DETECTION OF A WATER HEATER LEAK. INSTALL PER MANUFACTURER INSTRUCTIONS. ELECTRICAL: 0.6A, 120VAC 60HZ.
NOTES: 1. ALL FIXTURES, FITTINGS, AND TRIM TO COMPLY WITH THE LATEST REVISION OF THE ARCHITECTURAL BARRIERS ACT, WHERE APPLICABLE. 2. SUPPORT URINALS w/ WALL HANGERS AND THRU BOLTS. 3. RIM HEIGHT SHALL COMPLY w/ ABA REQUIREMENTS AND STANDARD MANUFACTURER RECOMMENDED INSTALLATION HEIGHTS FOR NON-ABA FIXTURES. 4. PLUMBING CONTRACTOR TO COORDINATE w/ COUNTER TOP CONTRACTOR BEFORE ORDERING SINKS.						

HANGERS & SUPPORTS				
SPACING: DO NOT EXCEED THE FOLLOWING SPACING, ON CENTERS				
PIPE SIZE	SCH. 40 PVC	COPPER	STEEL	HANGER ROD DIA.
1/2" - 3/4"	4 FT.	5 FT.	7 FT.	1/4"
1"	4 FT.	6 FT.	7 FT.	1/4"
1 1/2"	4 FT.	6 FT.	9 FT.	3/8"
2"	4 FT.	8 FT.	10 FT.	3/8"
2 1/2"	4 FT.	9 FT.	11 FT.	3/8"
3"	4 FT.	10 FT.	12 FT.	3/8"
4"	4 FT.	10 FT.	12 FT.	1/2"

WATER HAMMER ARRESTER SCHEDULE	
SYMBOL	FIXTURE UNIT RATING
PDI "A"	1-11
PDI "B"	12-32
PDI "C"	33-60
PDI "D"	61-113
PDI "E"	114-154
PDI "F"	155-330

NOTE:
USE PISTON TYPE, COMPLYING WITH
STANDARD P.D.I. WH-201 AND ASSE 1010.

FLOOR DRAIN & CLEANOUT SCHEDULE		
SYMBOL	PROVIDE	NOTES
FD	①②	SQUARE TOP, ADJUSTABLE STRAINER HEADS
GCO		ADJUSTABLE BRONZE TOP
FCO		ADJUSTABLE BRONZE TOP
SD	①②	ROUND TOP, STAINLESS STEEL STRAINER
FLOOR DRAIN & CLEANOUT ACCESSORIES		
①	PROVIDE MANUFAC. RECOMMENDED STRAINER SIZE BASED ON OUTLET SIZE	② PROVIDE TRAP SEAL DEVICE

NOTES:
1. COORDINATE FLOOR FINISHES w/ FLOOR DRAINS AND FLOOR CLEANOUTS.
(ADJUST FLOOR DRAIN AND FLOOR CLEANOUT ELEVATIONS AS REQUIRED)




United States Department of Agriculture
Forest Service

R-08

Southern Region

STAMPS, LOGOS, AND SEALS

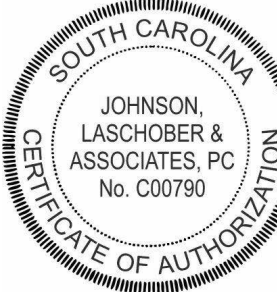

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION AREA RECONSTRUCTION

FRANCIS MARION NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE


PLUMBING SCHEDULES

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO.
DRAWN SKM	P-501
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 31 OF 53

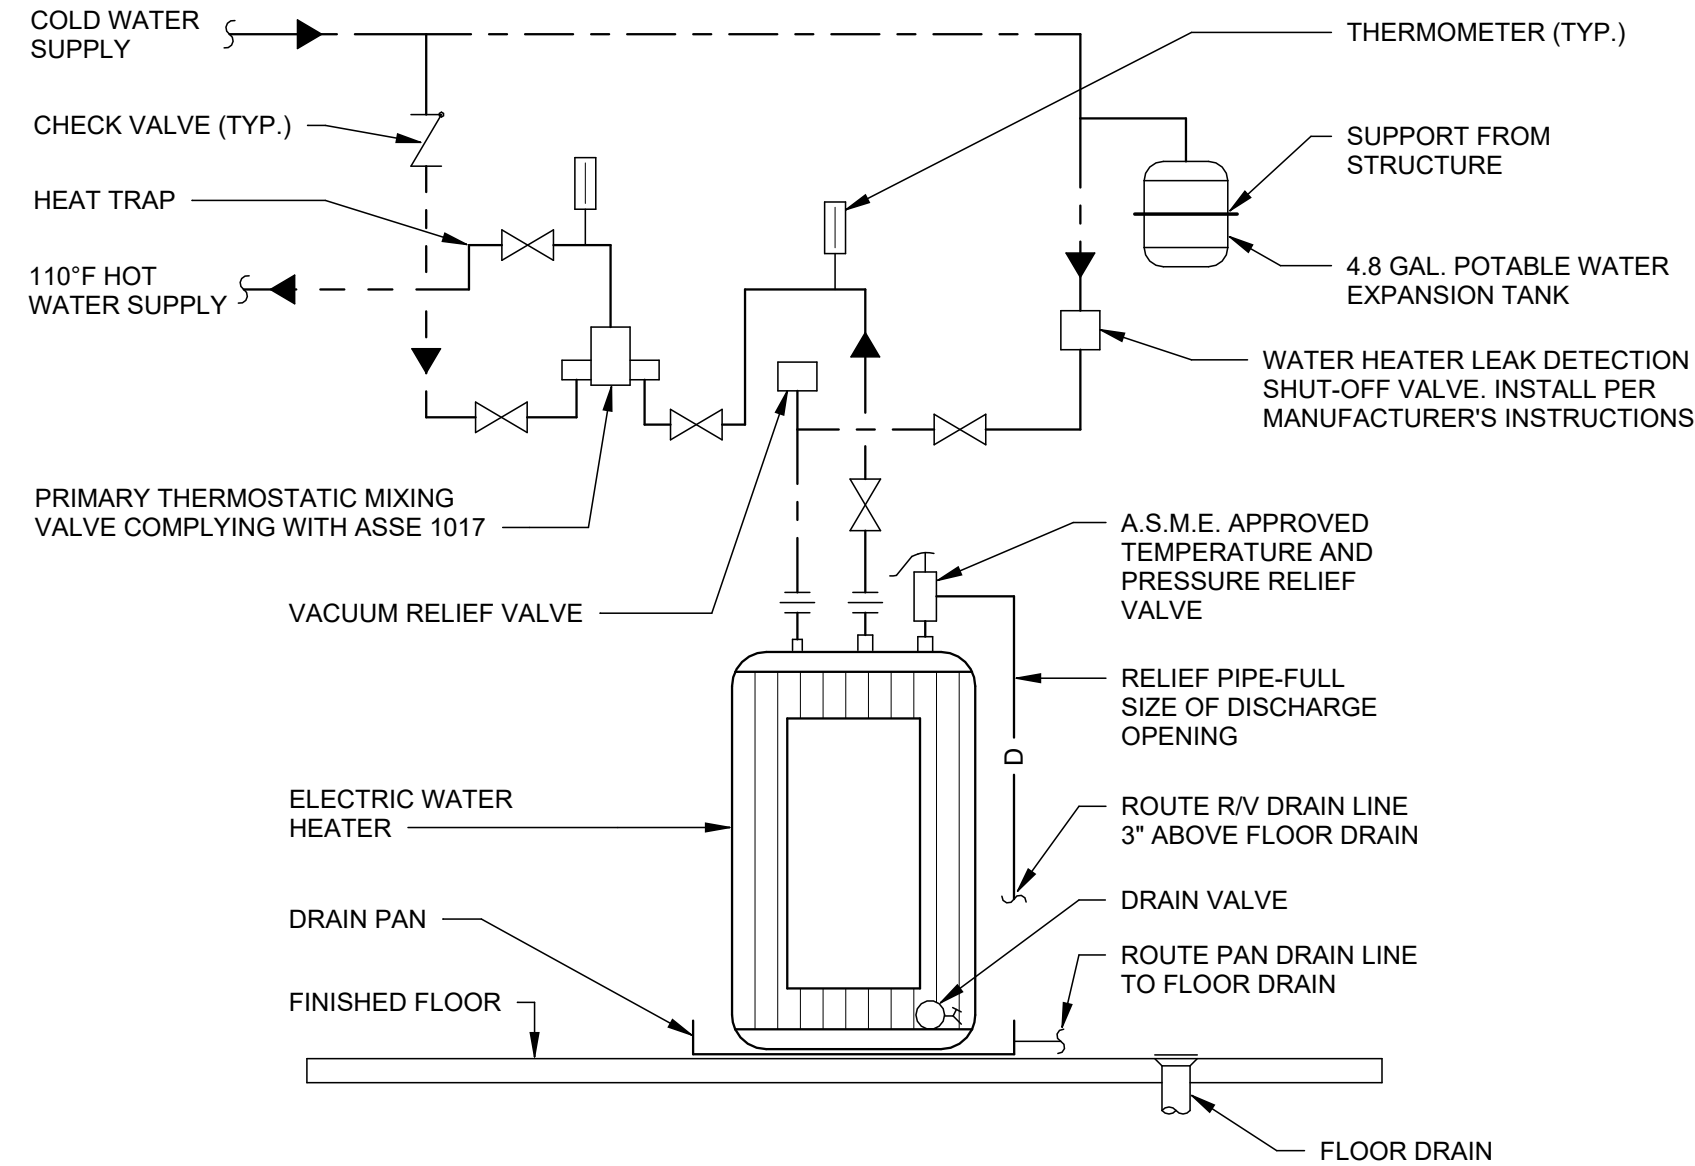


ELECTRIC WATER HEATER SCHEMATIC
NO SCALE

1
P-601

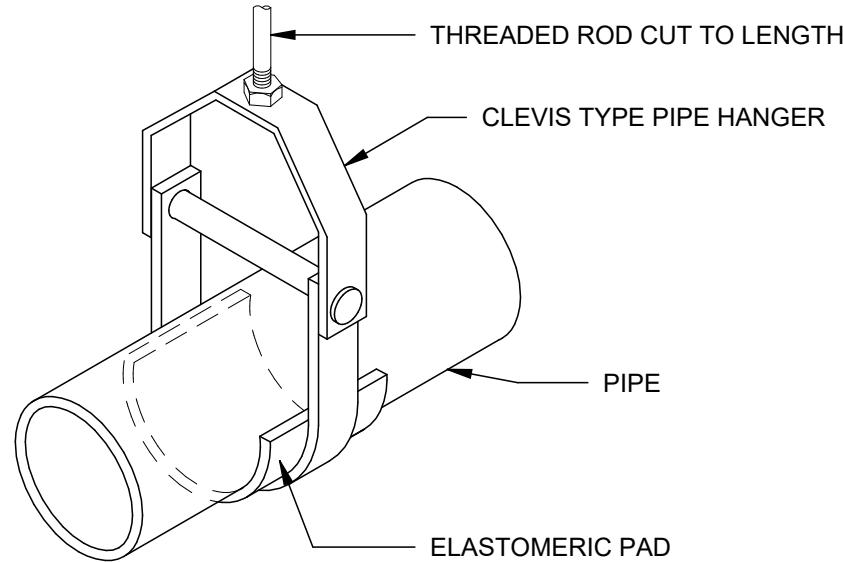


**DETAIL - CLEVIS TYPE PIPE SUPPORT
FOR NONMETALLIC PIPE**
NO SCALE

3
P-601

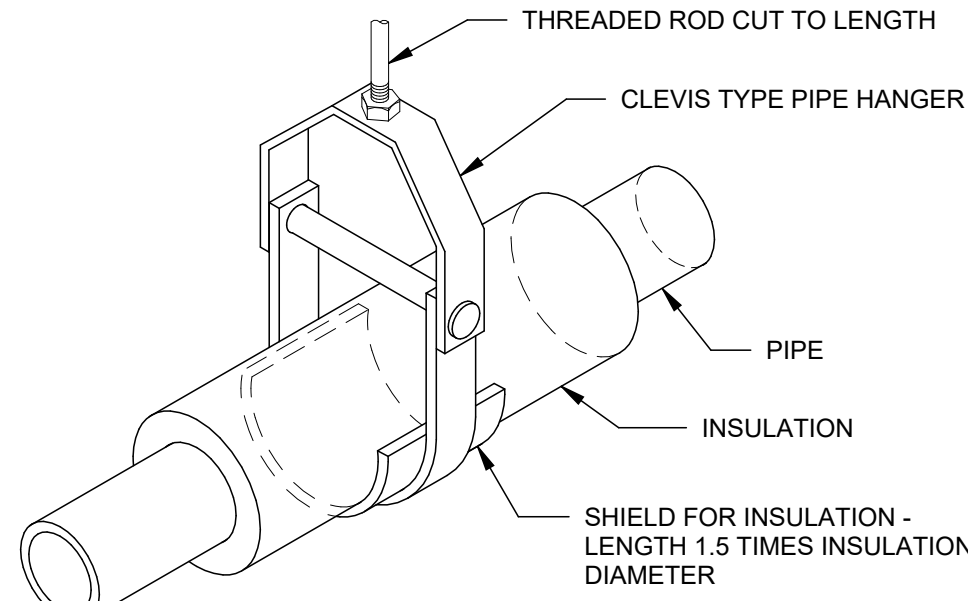


**DETAIL - CLEVIS TYPE PIPE SUPPORT
FOR INSULATED PIPE**
NO SCALE

4
P-601

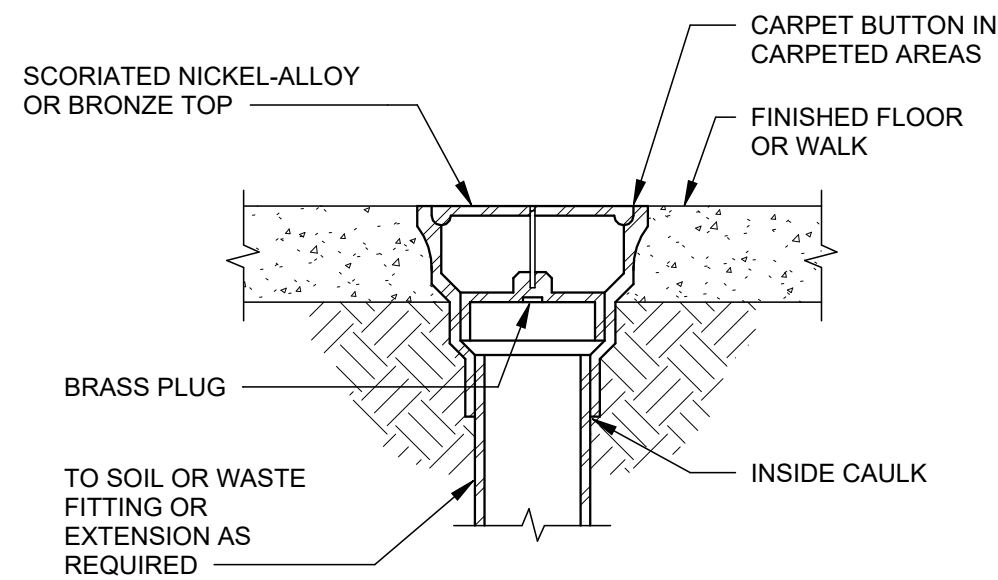


DETAIL - FLOOR CLEANOUT
NO SCALE

5
P-601

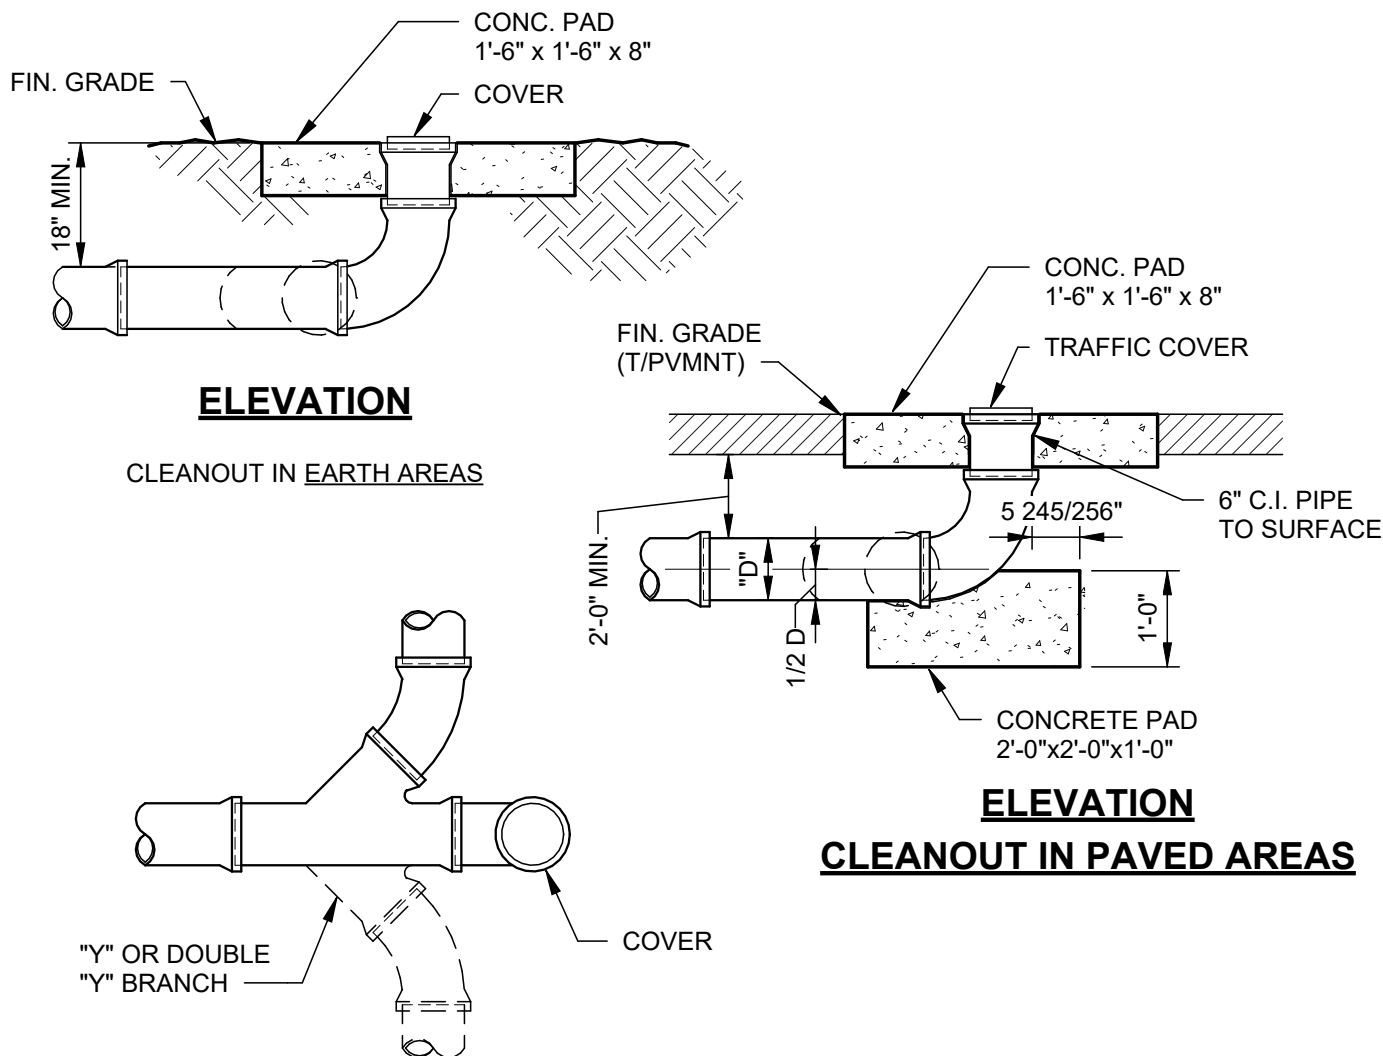


GROUND CLEANOUT DETAILS
NO SCALE

6
P-601

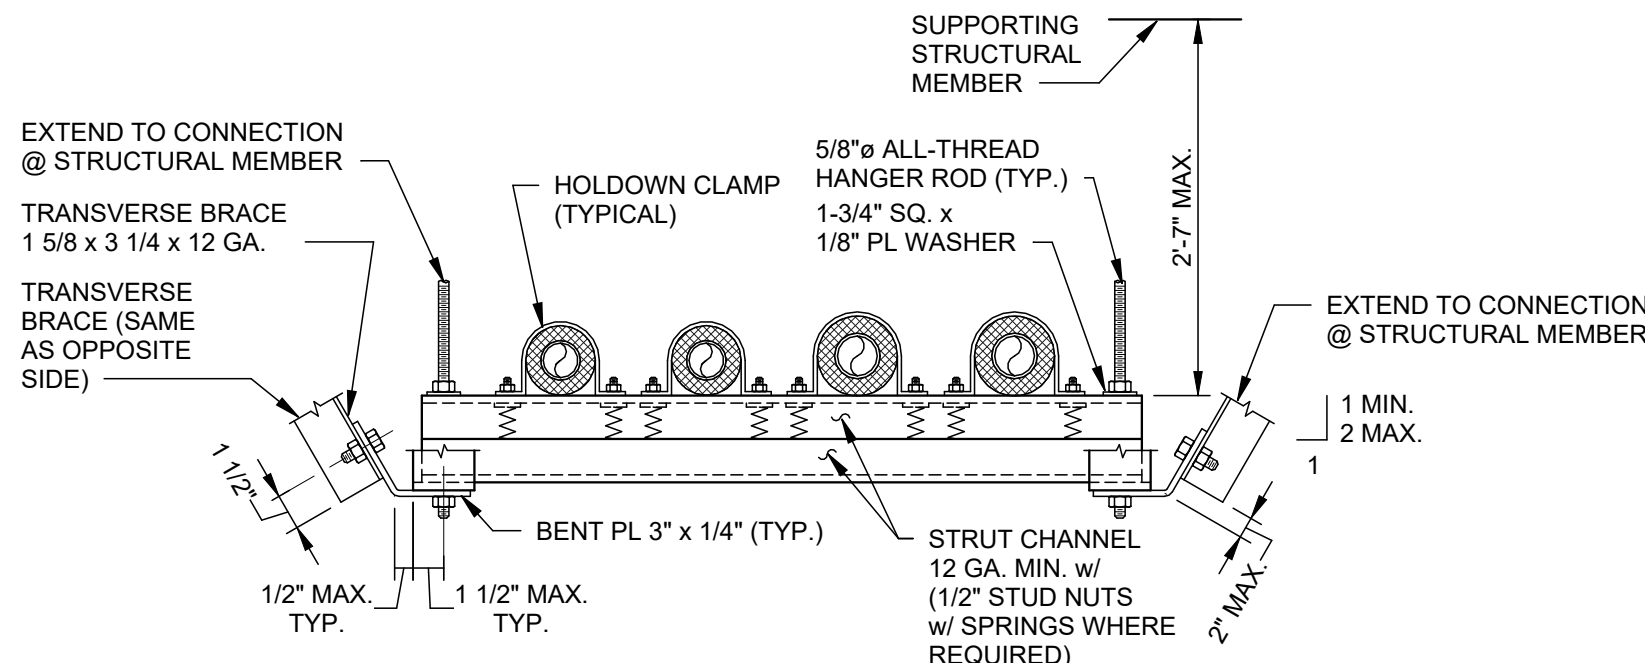

DETAIL - PIPE HANGER TRAPEZE
NO SCALE

7
P-601

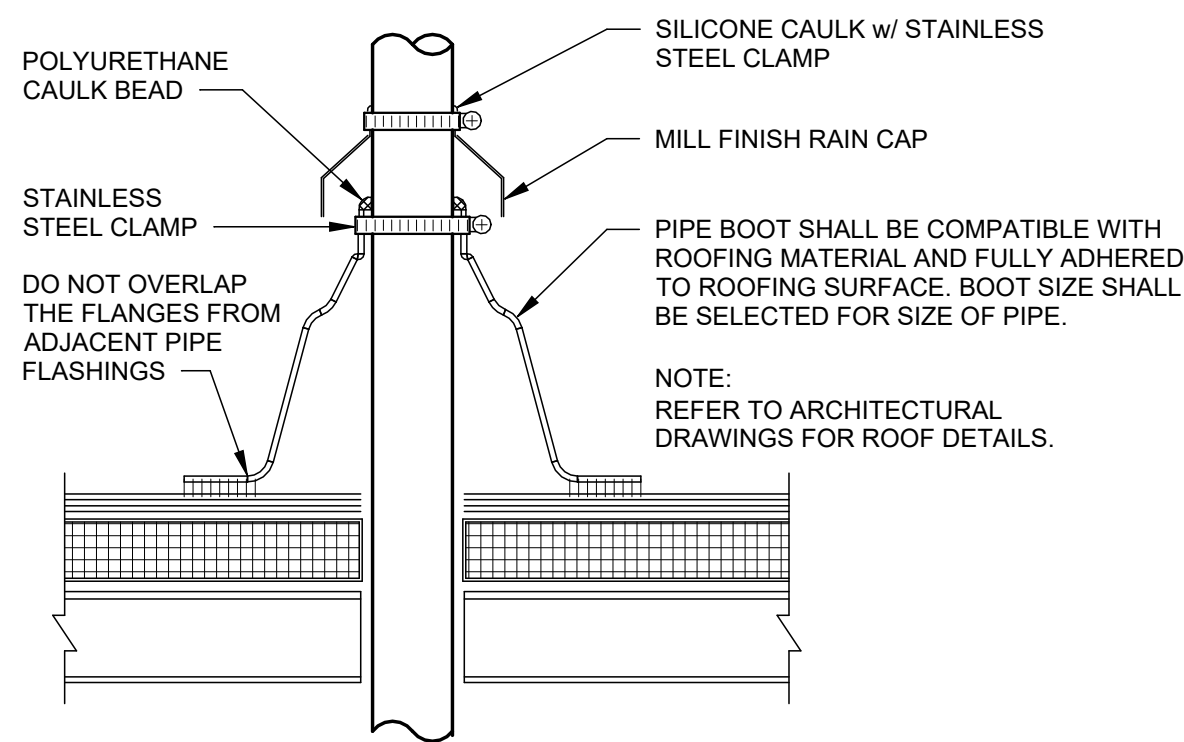

DETAIL - VENT THRU ROOF
NO SCALE


9
P-601

- NOTES:
1. AMBIENT VENT ONLY. DO NOT EXCEED TEMPERATURE RANGE OF BOOT MATERIAL.
 2. ASSEMBLY SHALL MEET OR EXCEED ASTM D-4811.
 3. BOOT SHALL BE JOHNS MANVILLE JM EPDM PEEL & STICK PIPE BOOT OR EQUAL.
 4. FLASHING BY ROOFING CONTRACTOR.



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

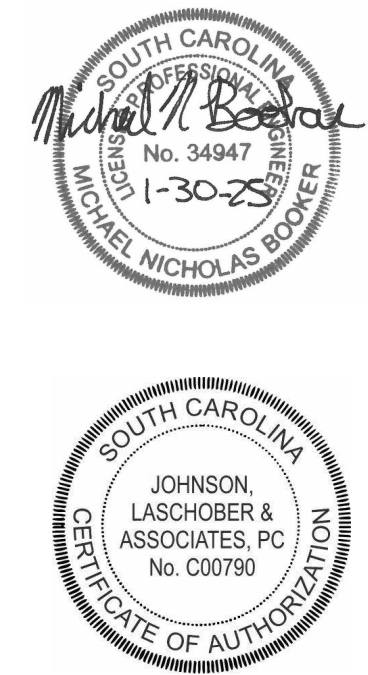

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
PLUMBING DETAILS

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. P-601
DRAWN SKM	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 32 OF 53



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

**FRANCIS MARION
NATIONAL FOREST**

PREPARED BY:



PLUMBING RISER DIAGRAMS

DATE 01/30/25	ARCHIVE NUMBER	
DESIGNER MNB	DRAWING SHEET NO. P-701	
DRAWN MNB		
CHECKED CWW		
PROJECT NO. 3094.2201	SHEET 33 OF 53	

HVAC GENERAL NOTES:

GENERAL:
THESE GENERAL NOTES PRESENT AND/OR SUMMARIZE KEY PRODUCT INFORMATION FOR THE PLAN READER'S CONVENIENCE. SEE PLANS AND SPECIFICATIONS FOR FURTHER REQUIREMENTS.

WORK COVERED BY THIS DOCUMENT SHALL INCLUDE ALL LABOR, MATERIAL, PRODUCTS, AND SERVICES FOR, AND INCIDENTAL TO, INSTALLATION OF COMPLETE AND OPERATING HVAC SYSTEMS DRAWN OR SPECIFIED.

ALL WORK SHALL CONFORM TO ALL APPLICABLE FEDERAL, STATE, AND LOCAL CODES INCLUDING, BUT NOT LIMITED TO, NFPA 13, NATIONAL ELECTRICAL CODE, AND INTERNATIONAL MECHANICAL CODE w/ AMENDMENTS.

ALL EQUIPMENT AND MATERIALS SHALL BE AS SPECIFIED OR "APPROVED EQUAL" BY THE ARCHITECT OR ENGINEER.

INSTALL ALL MECHANICAL EQUIPMENT PER MANUFACTURER'S INSTRUCTIONS.

ARRANGEMENTS OF MECHANICAL WORK SHALL BE AS SHOWN. DRAWINGS ARE NOT INTENDED TO INDICATE ALL OFFSETS AND FITTINGS. EXAMINE ALL DRAWINGS, INVESTIGATE CONDITIONS TO BE ENCOUNTERED AND ARRANGE WORK ACCORDINGLY; FURNISH AND INSTALL ALL FITTINGS AND OFFSETS.

DRAWINGS ARE NOT INTENDED TO SHOW IN DETAIL EXACT LOCATIONS AND CONNECTIONS FOR EQUIPMENT AND ACCESSORIES. FINAL CONNECTIONS SHALL BE AS SHOWN ON APPROVED SHOP DRAWINGS.

MEASUREMENT OF DRAWINGS BY SCALE SHALL NOT BE USED AS DIMENSIONS FOR FABRICATION. MEASUREMENTS FOR LOCATING EQUIPMENT, DUCTWORK, PIPING AND ACCESSORIES SHALL BE MADE ON THE JOB SITE AND SHALL BE BASED ON ACTUAL JOB CONDITIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MEASUREMENTS. WHERE THE CONTRACTOR PREFABRICATES ANY WORK BASED ON THE DRAWINGS WITHOUT VERIFYING ACTUAL JOB CONDITIONS, THEN THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL COSTS INVOLVED IN MAKING CHANGES TO PREFABRICATED WORK WHERE CONFLICTS OCCUR.

THE CONTRACTOR SHALL CHECK CEILING HEIGHTS IN EACH SPACE ON ARCHITECTURAL DRAWINGS AND SHALL ARRANGE ALL MECHANICAL WORK TO FIT IN THE SPACE ABOVE THE CEILING ALLOWING FOR ACCESS TO REMOVE TILE. PARTICULAR ATTENTION SHALL BE DIRECTED TOWARD DUCT SIZES AS SHOWN ON DRAWINGS. TO VERIFY THAT DUCTWORK ALONG WITH ALL OTHER WORK WILL FIT IN THE SPACE ABOVE THE CEILINGS. AFTER VERIFYING DIMENSIONS, IF THE CONTRACTOR DETERMINES THAT THE WORK WILL NOT FIT IN THE SPACE INDICATED, THEN THE CONTRACTOR SHALL NOTIFY THE ARCHITECT/ENGINEER OF THE CONFLICT AND SHALL NOT INSTALL ANY WORK UNTIL INSTRUCTIONS ARE RECEIVED FROM THE ARCHITECT/ENGINEER. IF THE CONTRACTOR INSTALLS WORK AS SHOWN ON DRAWINGS WITHOUT VERIFYING ADEQUACY OF SPACES, AND THE WORK DOES NOT FIT THE SPACE SHOWN, THEN THE CONTRACTOR SHALL BE RESPONSIBLE FOR REARRANGING WORK AND CHANGING DUCT SIZES AS REQUIRED TO FIT THE SPACE AND THE CONTRACTOR SHALL PAY ALL COSTS CONNECTED WITH THE CHANGES.

CONTRACTOR SHALL INSTALL DUCTS, PIPING AND EQUIPMENT IN A NEAT AND WORKMANLIKE MANNER AND SHALL AVOID CONFLICT WITH OTHER WORK. EQUIPMENT SHALL BE SO ARRANGED AND FITTED INTO AVAILABLE SPACE SO THAT WORKING PARTS INCLUDING FILTERS AND LUBRICATION POINTS, AND COIL REMOVAL ARE ACCESSIBLE FOR SERVICE WITHOUT DAMAGE TO BUILDING STRUCTURE OR FINISHES OR WITHOUT MOVING OTHER EQUIPMENT. THE CONTRACTOR SHALL NOT INSTALL ANY EQUIPMENT WHERE PARTS ARE INACCESSIBLE FOR SERVICE.

WHERE MOUNTING HEIGHTS ARE NOT DETAILED OR DIMENSIONED, INSTALL SYSTEMS, MATERIALS, AND EQUIPMENT TO PROVIDE MAXIMUM HEADROOM POSSIBLE.

EXACT LOCATION OF GRILLES & CEILING OUTLETS SHALL BE DETERMINED ON THE JOB. COORDINATE WITH LIGHTS AND ARCHITECTURAL REQUIREMENTS TO PROVIDE A UNIFORM & SYMMETRICAL APPEARANCE. REFER TO ARCHITECTURAL & ELECTRICAL DRAWINGS & DETAILS.

CUTTING AND REPAIRING: THE HVAC CONTRACTOR SHALL DO ALL CUTTING AND REPAIRING OF WALLS, FLOORS, CEILINGS, ETC. NECESSARY FOR THE INSTALLATION OF THE WORK BUT HE SHALL NOT CUT INTO ANY STRUCTURAL MEMBER WITHOUT THE PERMISSION OF THE ARCHITECT.

PROVIDE UNION OR FLANGE CONNECTIONS IN PIPING AT ALL EQUIPMENT & AS REQUIRED FOR SERVICE.

GENERAL CONTRACTOR TO PROVIDE ACCESS PANELS FOR ALL INACCESSIBLE, ABOVE CEILING DAMPERS AND EQUIPMENT. COORDINATE LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION.

METAL DUCT:
ALL DUCTWORK SHALL BE INSTALLED IN STRICT COMPLIANCE WITH SMACNA, NFPA BULLETIN 90A, AND ASHRAE GUIDES. UNLESS OTHERWISE NOTED, DUCTWORK SHALL BE GALVANIZED SHEET STEEL. FIBERGLASS DUCTWORK IS NOT ACCEPTABLE.

MINIMUM DUCTWORK STATIC PRESSURE CLASS SHALL BE 1-INCH W.G. MINIMUM DUCT SEAL CLASS SHALL BE CLASS "A".

ALL DUCT DIMENSIONS ARE CLEAR INSIDE DIMENSIONS. ON RECTANGULAR DUCTS, DIMENSIONS GIVEN FIRST IS DIMENSION SEEN. DUCT DIMENSIONS MAY BE ALTERED AS LONG AS SAME DUCT CROSS SECTIONAL AREA IS MAINTAINED, IN ORDER TO AVOID INTERFERENCES AS NEEDED.

MANUAL VOLUME DAMPERS: DAMPERS SHALL BE SAME MATERIAL AS DUCTWORK, PER SMACNA. PROVIDE AXLES FULL LENGTH OF DAMPER BLADES AND BEARINGS AT BOTH ENDS OF OPERATING SHAFT. PROVIDE MANUAL VOLUME DAMPERS IN ALL BRANCH DUCTS.

FLEXIBLE CONNECTIONS: GLASS FABRIC DOUBLE COATED WITH NEOPRENE, 26 OZ. PER SQUARE YARD, COMPLYING WITH UL 181, CLASS 1. PROVIDE FLEXIBLE CONNECTION BETWEEN ALL EQUIPMENT AND RIGID DUCTWORK. FABRIC CONNECTIONS SHALL BE AT LEAST 3.5 INCHES WIDE AND HAVE A METAL-EDGED CONNECTOR AT EACH END. PROVIDE METAL COMPATIBLE WITH CONNECTED DUCTS.

TURNING VANES: GALVANIZED STEEL, COMPLYING WITH SMACNA. VANES SHALL BE SINGLE WALL FOR DUCTS UP TO 48 INCHES WIDE AND DOUBLE WALL FOR LARGER DIMENSIONS. ALL 90 DEGREE SQUARE ELBOWS AND TEES SHALL HAVE TURNING VANES.

CONTROLS:
PROVIDE AND INSTALL CONTROL WIRING AND 7-DAY PROGRAMMABLE THERMOSTATS AS REQUIRED UNLESS OTHERWISE SPECIFIED. MOUNT THERMOSTATS 4'-0" A.F.F.

ELECTRICAL:
ALL EQUIPMENT FURNISHED UNDER THIS DIVISION SHALL COMPLY WITH THE CURRENT EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE REQUIREMENTS OF DIVISION 26. ALL POWER WIRING AND FINAL POWER CONNECTIONS TO THE SYSTEM SHALL BE PROVIDED PER THE ELECTRICAL DRAWINGS AND UNDER DIVISION 26. CONTROL WIRING (120V AND LESS) SHALL BE PROVIDED UNDER DIVISION 26 AND EXTEND FROM THE INDICATED 120V POWER CIRCUIT INDICATED ON THE ELECTRICAL DRAWINGS. ALL ELECTRICAL CHARACTERISTICS SHALL BE TAKEN FROM THE ELECTRICAL DRAWINGS AND SPECIFICATIONS AND COORDINATED PRIOR TO ORDERING THE EQUIPMENT. ALL WIRING IN THE CEILING PLENUM SHALL BE PLENUM-RATED CABLE OR INSTALLED IN CONDUIT.

MOTORS AND STARTERS:
PROVIDE MOTORS, STARTERS, VARIABLE FREQUENCY DRIVES, PUSH BUTTONS, THERMAL OVERLOAD SWITCHES, AND CONTACTORS FOR EQUIPMENT COVERED HEREIN UNLESS OTHERWISE SPECIFIED. INSTALLATION OF STARTERS, PUSH BUTTONS, THERMAL OVERLOAD SWITCHES, AND CONTACTORS (NOT FACTORY INSTALLED) IS SPECIFIED ON THE ELECTRICAL DRAWINGS AND UNDER DIVISION 26.

CLEANING AND ADJUSTING:
CLEAN ALL GREASE, OIL, PAINT, AND OTHER CONSTRUCTION DEBRIS FROM THE EXTERIOR SURFACES OF ALL MECHANICAL EQUIPMENT, PIPING, AND DUCTS. CLEAN ALL DUCTS, PLENUMS, AND CASINGS OF DEBRIS AND BLOWN FREE OF ALL PARTICLES OF RUBBISH AND DUST PRIOR TO INSTALLATION OF OUTLET FACES.

BEARINGS THAT REQUIRE LUBRICATION SHALL BE LUBRICATED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. ALL CONTROL EQUIPMENT SHALL BE ADJUSTED TO THE SETTINGS INDICATED OR REQUIRED FOR PERFORMANCE AS SPECIFIED. REMOVE ALL STICKERS, RUST, STAINS, LABELS, AND TEMPORARY COVERS BEFORE FINAL ACCEPTANCE. REMOVE FOREIGN MATTER FROM EQUIPMENT, PIPING AND DUCTWORK SYSTEMS AND APPURTENANCES. CLEAN AND POLISH IDENTIFICATION PLATES.

REMOVE ALL TRASH AND DEBRIS FROM THE JOBSITE ON A DAILY BASIS.

TESTING, ADJUSTING, AND BALANCING:
ALL WORK SHALL BE TESTED AND BALANCED BY AN INDEPENDANT CERTIFIED TAB SPECIALIST. TAB SPECIALIST SHALL BE CERTIFIED BY AABC, NEBB, OR TABB.

SUBMIT FINAL TEST AND BALANCE REPORT FOR REVIEW AND APPROVAL PRIOR TO TURN-OVER OF FINAL PROJECT.

APPLICABLE CODES AND STANDARDS	
CODES AND STANDARDS	EDITION
INTERNATIONAL BUILDING CODE (IBC)	2021
INTERNATIONAL MECHANICAL CODE (IMC)	2021
ASHRAE 62.1	2019
ASHRAE 90.1	2019
NATIONAL ELECTRICAL CODE (NEC)	2020

DESIGN CONDITIONS			
	SUMMER	WINTER	COMMENTS
OUTDOORS	94°Fdb / 78°Fwb	27°Fdb	1,2

- OUTDOOR AIR QUANTITIES BASED ON IMC
- BASED ON USDA FOREST SERVICE DESIGN AND CONSTRUCTION STANDARDS FOR SOUTHERN REGION FACILITIES, 2021

HVAC LEGEND	
SYMBOL	DESCRIPTION
	MARK/CFM (SEE AIR DISTRIBUTION DEVICE SCHEDULE)
	DUCT SIZE (WIDTHxHEIGHT)
	MANUAL VOLUME DAMPER
	THERMOSTAT, WALL MOUNTED
	TIME CLOCK, WALL MOUNTED
	CONTROL WIRING
	ROUND (DIAMETER)
	AIR FLOW DIRECTION
	NEW DUCTWORK
EA	EXHAUST AIR
OA	OUTDOOR AIR
U.N.O.	UNLESS NOTED OTHERWISE



United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS



	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

HVAC GENERAL NOTES &
LEGEND

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. M-001
DRAWN AMV	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 34 OF 53

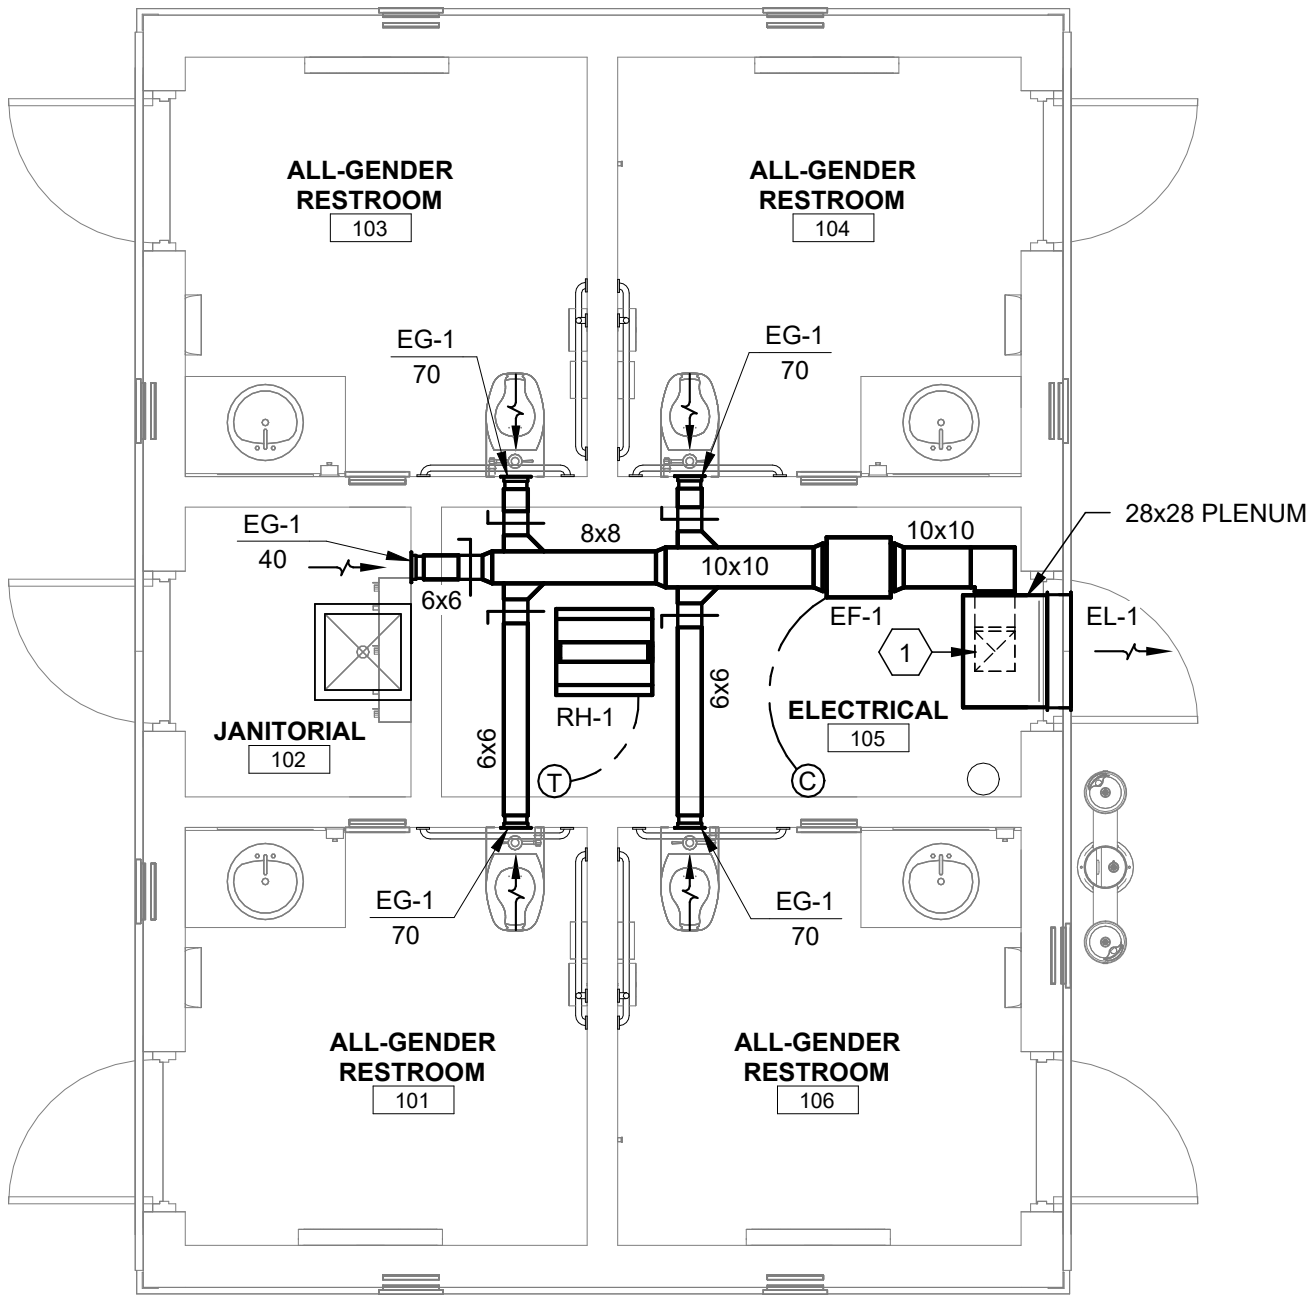

NOTE:
1. COORDINATE WITH PLUMBING AND ELECTRICAL CONTRACTOR TO ENSURE 2'-6" CLEARANCE IN FRONT OF EACH HVAC UNIT IS PROVIDED, PER IMC 308.1, AND REQUIRED CLEARANCE IS PROVIDED IN FRONT OF AND/OR ABOVE ELECTRICAL EQUIPMENT.

1 **BUILDING 100 - HVAC PLAN**
M-101 SCALE: 1/4" = 1'-0"

BUILDING 100 HVAC CONSTRUCTION NOTES:

1 - 10x10 EA DUCT UP TO PLENUM ATTACHED TO EXHAUST LOUVER EL-1.



R-08
Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**


1099 BUCK HALL LANDING RD.,
MC CLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:

JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 100 - DAY USE
RESTROOM BUILDING -
HVAC PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. M-101
DRAWN AMV	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 35 OF 53

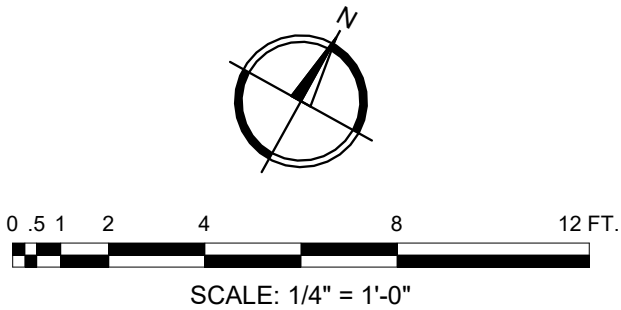

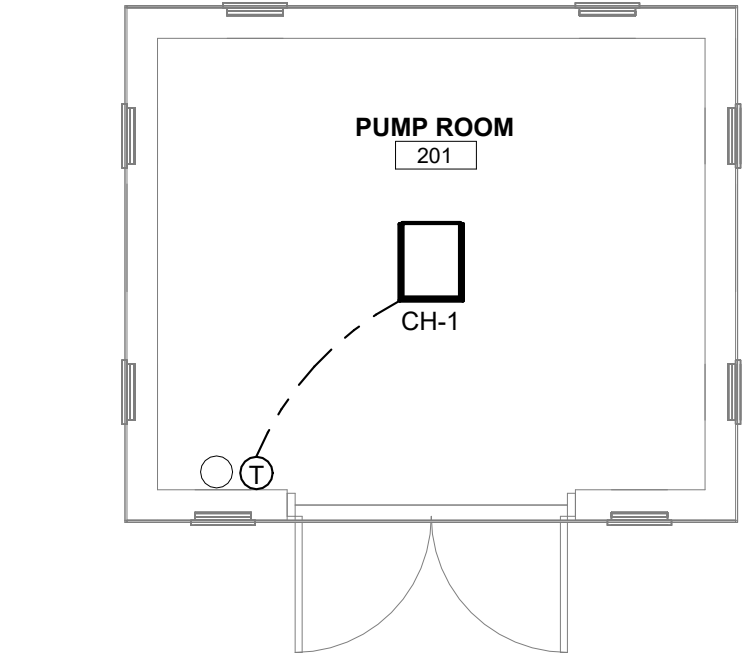

1


M-201

BUILDING 200/700 HVAC PLAN

SCALE: 1/4" = 1'-0"

NOTE:
SEE CIVIL DRAWINGS C-102 & C-107 FOR TRUE NORTH

PLAN NORTH





SCALE: 1/4" = 1'-0"



United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME

**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE


**BUILDING 200/700 - WELL
HOUSE - HVAC PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. M-201
DRAWN AMV	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 36 OF 53

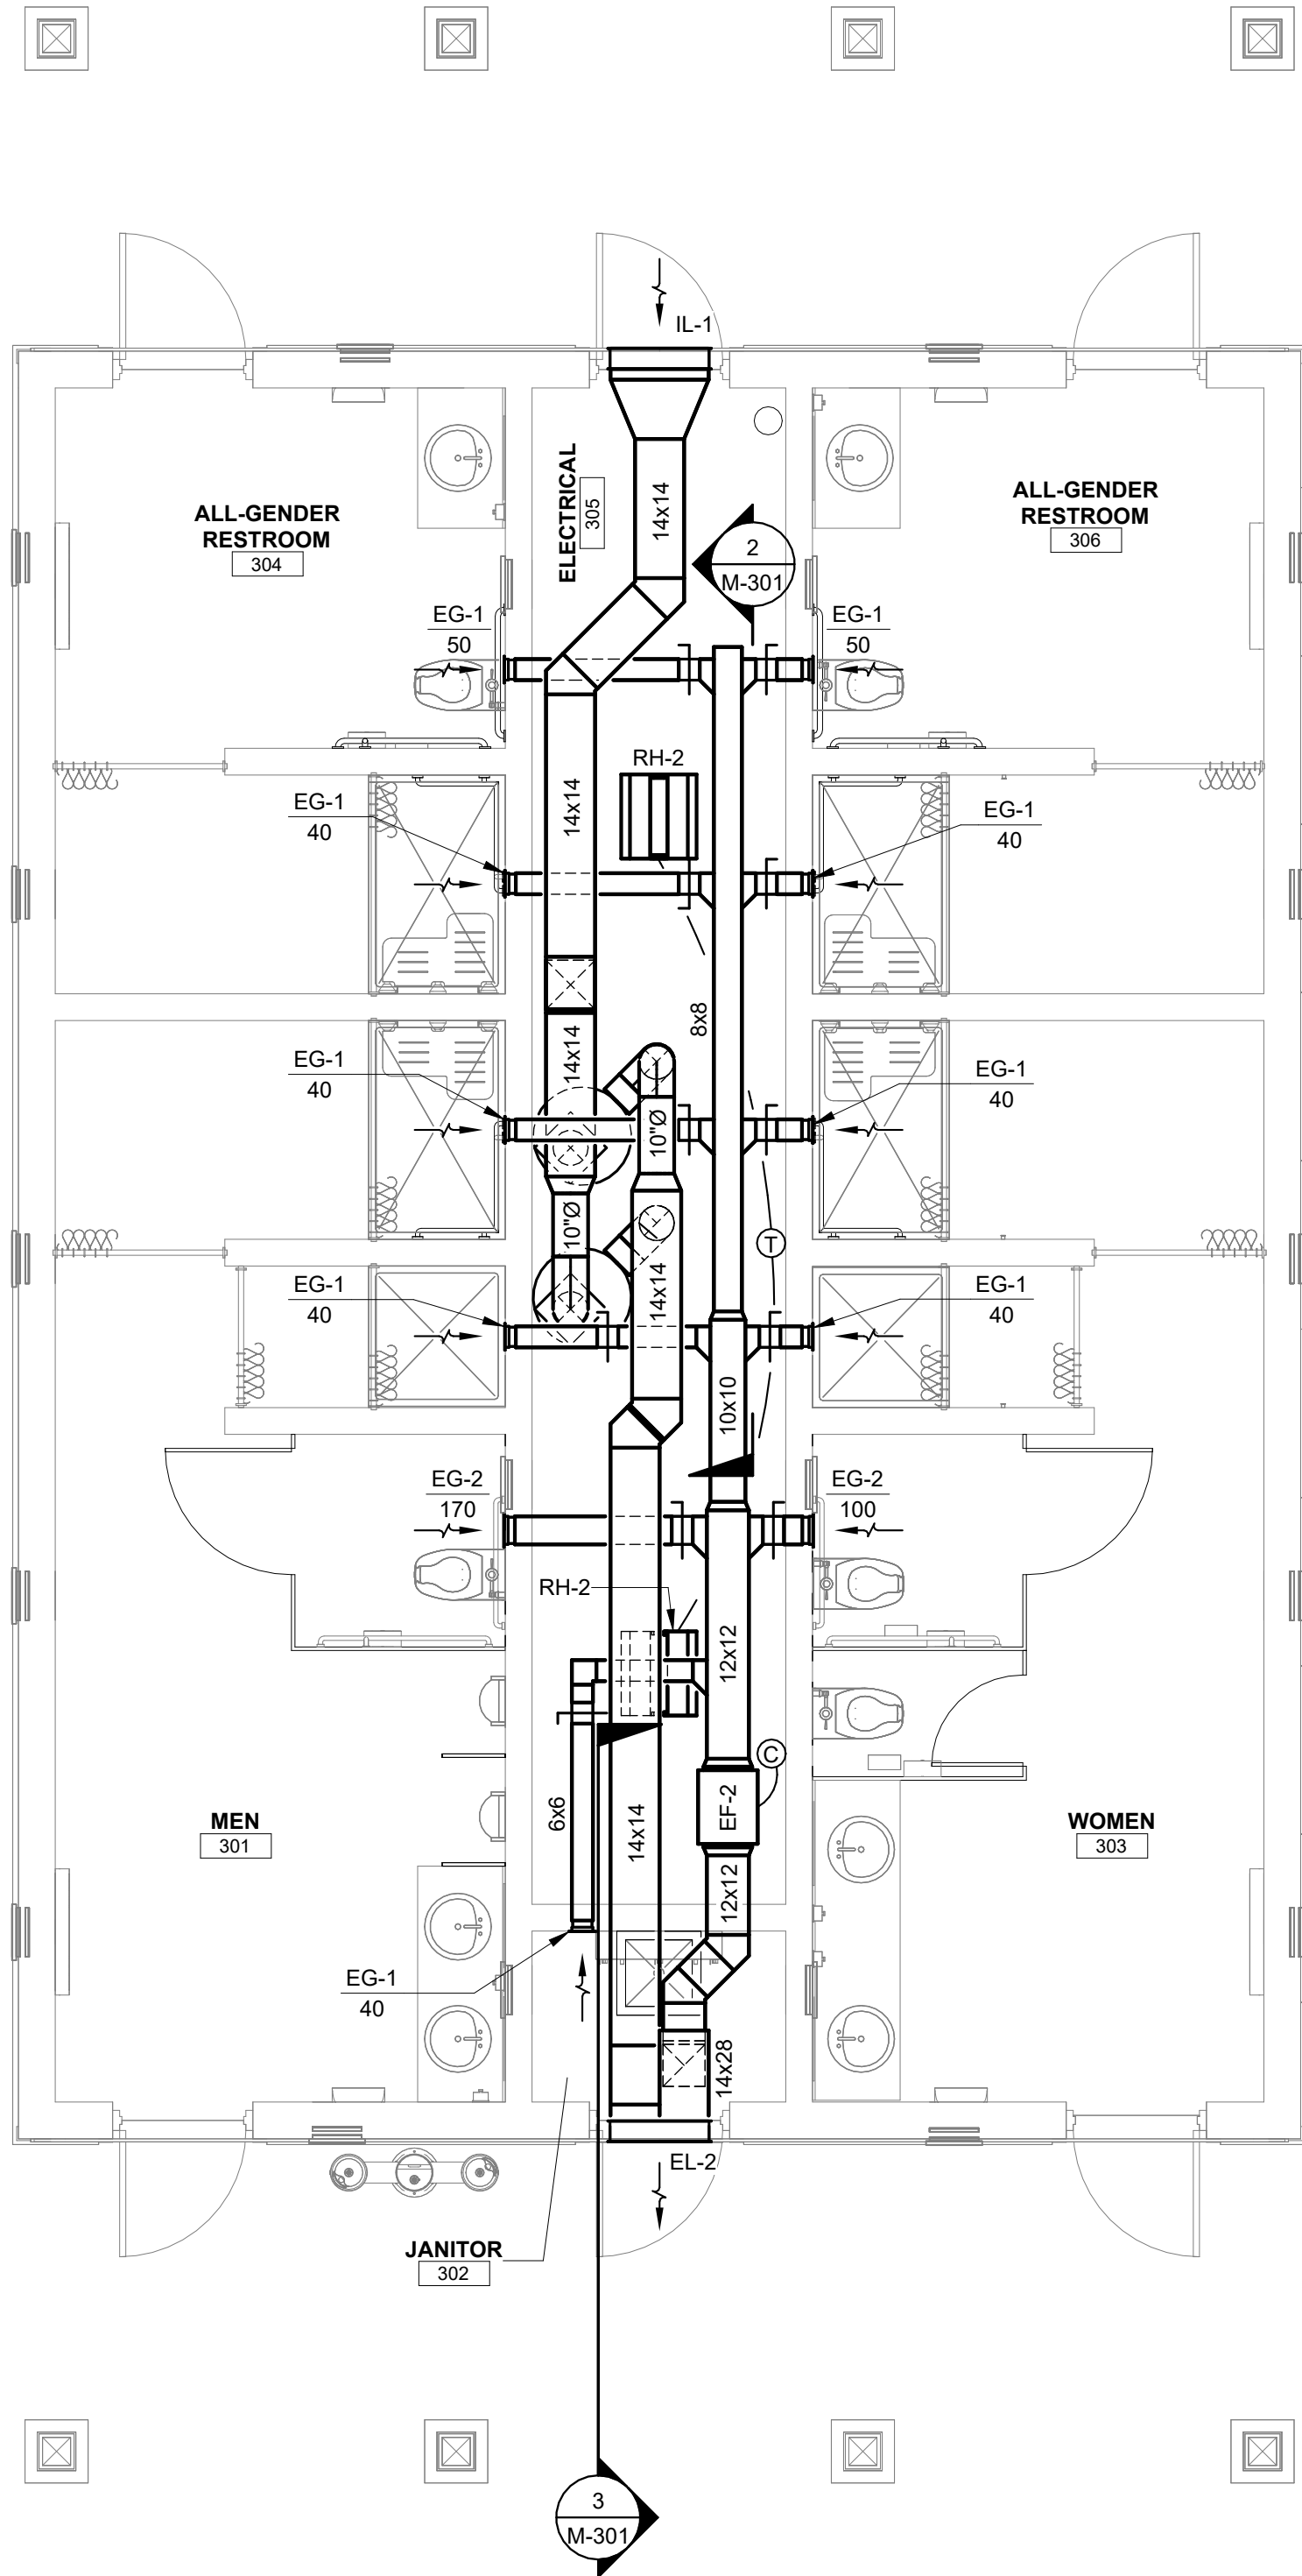


NOTE:
1. COORDINATE WITH PLUMBING AND ELECTRICAL CONTRACTOR TO ENSURE 2'-6" CLEARANCE IN FRONT OF EACH HVAC UNIT IS PROVIDED, PER IMC 306.1, AND REQUIRED CLEARANCE IS PROVIDED IN FRONT OF AND/OR ABOVE ELECTRICAL EQUIPMENT.

1 BUILDING 300/600 - HVAC PLAN
SCALE: 1/4" = 1'-0"

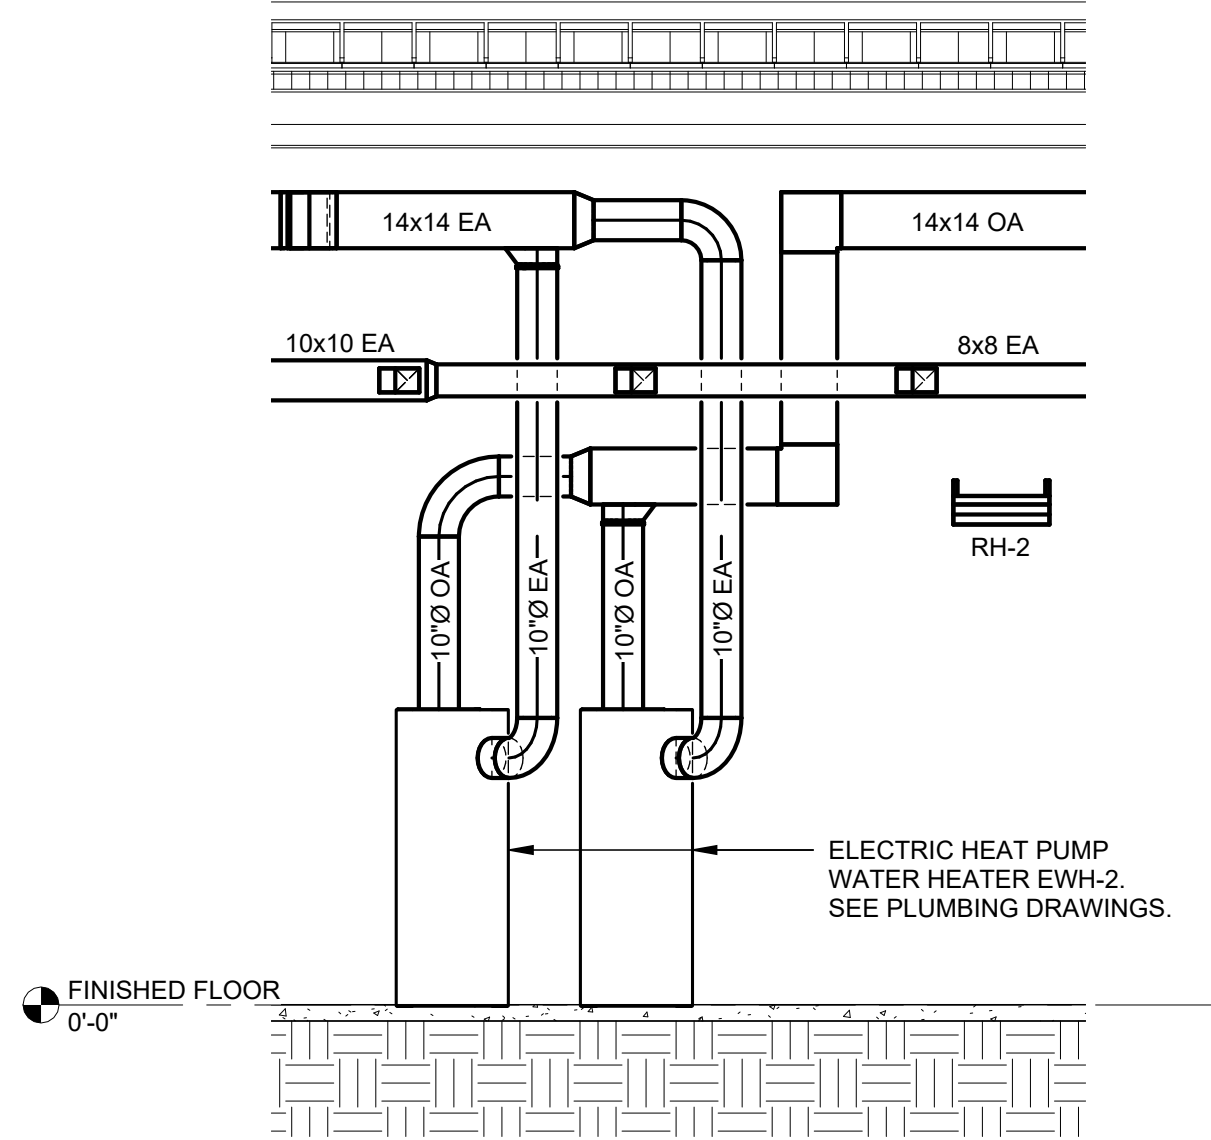


2 WATER HEATER DUCTWORK ELEVATION
SCALE: 1/4" = 1'-0"

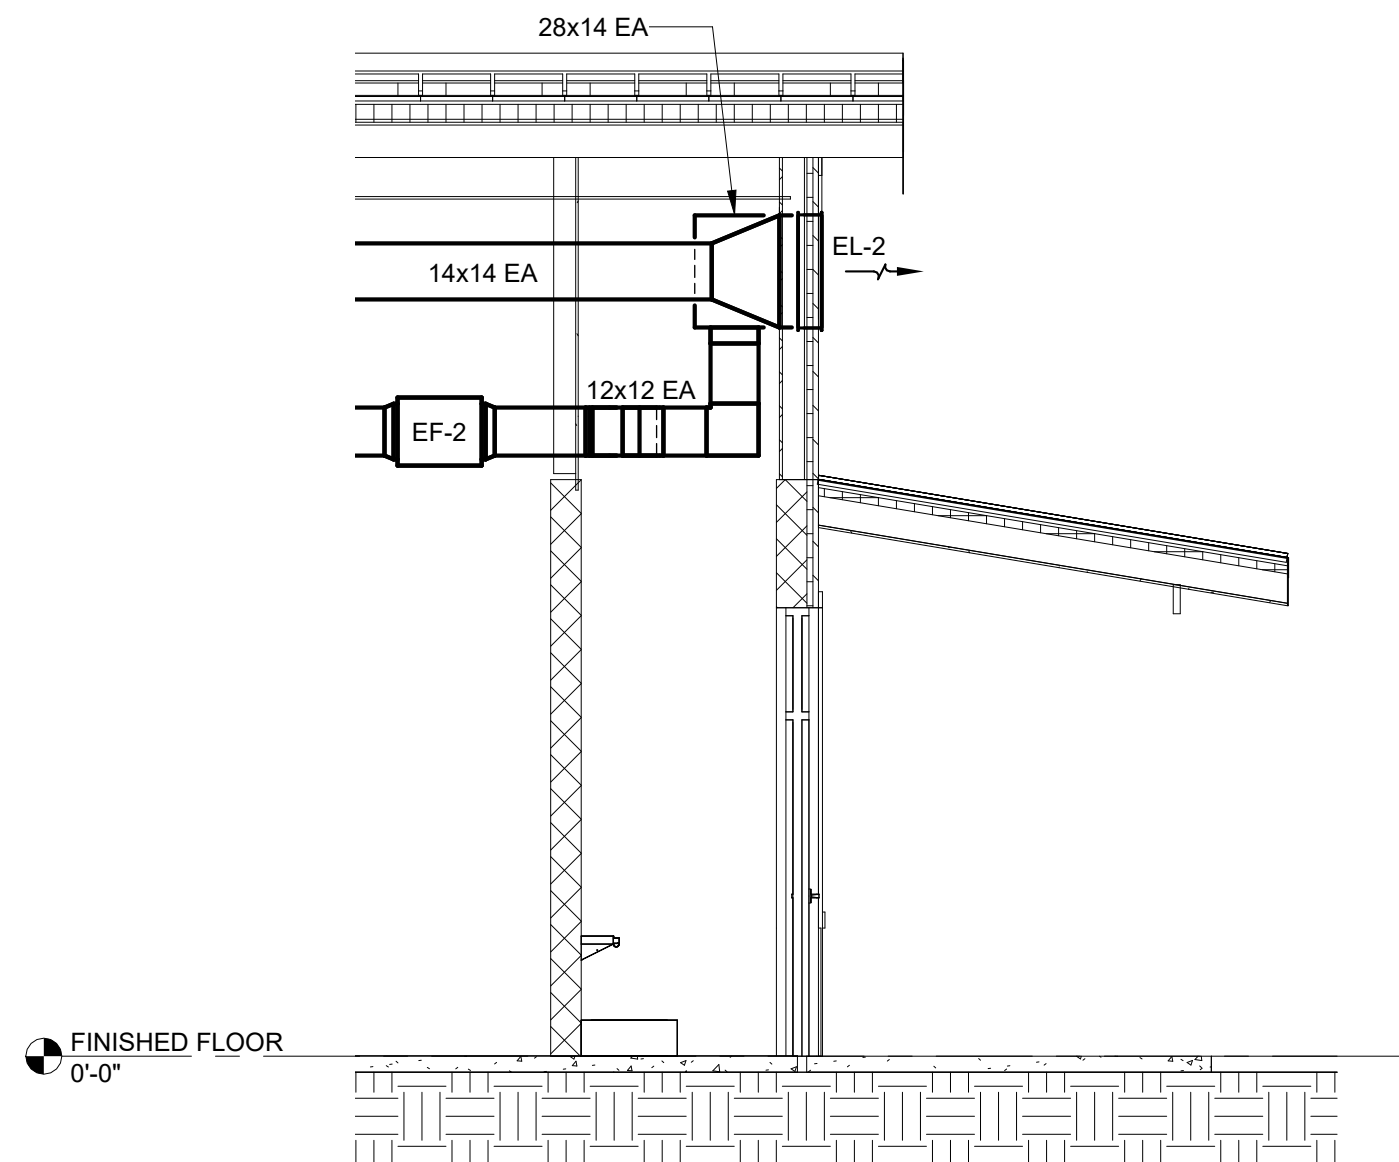

3 EXHAUST LOUVER DUCTWORK ELEVATION
SCALE: 1/4" = 1'-0"

NOTE:
SEE CIVIL DRAWINGS C-102 & C-108 FOR TRUE NORTH

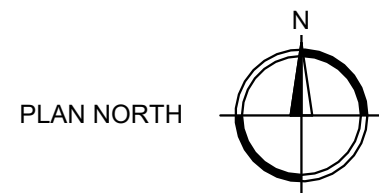


0 5 1 2 4 8 12 FT.
SCALE: 1/4" = 1'-0"



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

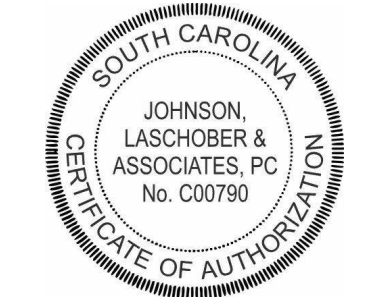

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 300/600 -
CAMPGROUND BATH
HOUSE - HVAC PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. M-301
DRAWN AMV	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 37 OF 53

EXHAUST FAN SCHEDULE												
MARK	BASIS OF DESIGN		TYPE	E.S.P. (IN WC)	NOM. CFM	SONES	ELECTRICAL					NOTES
	MANUFACTURER	MODEL					FRPM MAX	MOTOR POWER	VOLTAGE	PHASE	HZ	
EF-1	GREENHECK	SQ-90-VG	INLINE	0.50	320	7.3	1,539	1/10 HP	115	1	60	1,2,3
EF-2	GREENHECK	SQ-100-VG	INLINE	0.50	650	6.3	1,253	1/4 HP	115	1	60	1,2,3

1. CONTINUOUS OPERATION

2. EC MOTOR W/ SPEED CONTROLLER

3. PROVIDE TIMECLOCK TO SCHEDULE FAN OPERATION. COORDINATE SCHEDULE WITH FOREST SERVICE

AIR DISTRIBUTION DEVICE SCHEDULE													
MARK	SIZE (INCHES)		MOUNTING			THROW	MATERIAL		DEVICE CONNECTION			BASIS OF DESIGN	
	FACE	NECK	CEILING	DUCT	SIDEWALL		STEEL	ALUMINUM	1	2	3	MANUFACTURER	MODEL
EG-1	6x6	6x6					X				X	TITUS	350RL
EG-2	8x8	8x8			X	-	X				X	TITUS	350RL

LEGEND

1. SYMBOL KEY - FIRST LETTER: S-SUPPLY, R-RETURN, E-EXHAUST, T-TRANSFER AND D-DOOR. SECOND LETTER: D-DIFFUSER, R-REGISTER AND G-GRILLE.

2. CONNECTIONS - 1. ROUND DUCT TO ROUND NECK.
(DEVICE CONN. COLUMN) 2. ROUND DUCT TO RECTANGULAR NECK.
3. RECTANGULAR DUCT TO RECTANGULAR NECK.

3. FIELD PAINT ALL SUPPLIES AND RETURNS TO MATCH CEILING AND/OR WHITE FINISH OTHERWISE.

4. 1, 2, 3 AND 4-WAY AND DOUBLE DEFLECTION (DD) AIR DEVICES ARE INDICATED IN "THROW" COLUMN.

1. DUCT RUNOUT SIZE SAME AS NECK CONNECTION SIZE, U.N.O.

ELECTRIC CEILING HEATER SCHEDULE											
MARK	BASIS OF DESIGN		HEATING		ELEVATION (A.F.F.)	ELECTRICAL				QUANTITY	NOTES
	MANUFACTURER	MODEL	KW	BTU/HR		AMPS	VOLTAGE	PHASE	HZ		
CH-1	QMARK	EFF4007	1.5	5,120	NOTE 1	6.2	230	1	60	1	1,2,3

1. SURFACE-MOUNTED ON CEILING

2. DISCONNECT SWITCH

3. PROVIDE THERMOSTAT SET AT 50°F

ELECTRIC INFRARED RADIANT HEATER SCHEDULE											
MARK	BASIS OF DESIGN		HEATING		ELECTRICAL				ELEVATION	QUANTITY	NOTES
	MANUFACTURER	MODEL	KW	BTU/HR	AMPS	VOLTAGE	PHASE	HZ			
RH-1	QMARK	FRS2-26S	2.0	6,824	8.7	230	1	60	10'-0"	1	1,2,3,4
RH-2	QMARK	FRS2-26S	2.0	6,824	8.7	230	1	60	10'-0"	2	1,2,3,4

1. DISCONNECT SWITCH

2. PROVIDE THERMOSTAT SET AT 50°F

3. 60° SYMMETRIC REFLECTOR ANGLE

4. QUARTZ TUBE HEATING ELEMENT

LOUVER SCHEDULE							
MARK	BASIS OF DESIGN		TYPE	NOM. CFM	LOUVER SIZE	MIN. FREE AREA (SQFT)	BOTTOM OF LOUVER ELEV. (FT A.F.F.)
	MANUFACTURER	MODEL					
EL-1	GREENHECK	ESD-635X	EXHAUST	320	28"x28"	2.7	14'-4"
EL-2	GREENHECK	ESD-635X	EXHAUST	1,550	28"x28"	2.7	15'-2"
IL-1	GREENHECK	ESD-635X	INTAKE	900	28"x28"	2.7	15'-2"

1. BIRDSCREEN

2. WELDED CONSTRUCTION

3. PREFINISH WITH BAKED ON "KYNAR" FINISH

USDA

United States Department of Agriculture
Forest Service

FOREST SERVICE
U.S.
DEPARTMENT OF AGRICULTURE

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

SOUTH CAROLINA
FOREST SERVICE
No. 34947
MICHAEL NICHOLAS BOKER

SOUTH CAROLINA
JOHNSON
LASCHNER & ASSOCIATES, P.C.
No. C00790

4

3

2

1

FINAL CDS

01/30/25

NO.

REVISION/ISSUE

DATE

PROJECT NAME

BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA

JOHNSON, LASCHNER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

HVAC SCHEDULES

DATE
01/30/25

ARCHIVE NUMBER

DESIGNER
MNB

DRAWN
AMV

CHECKED
MNB



PROJECT NO.
3094.2201

DRAWING SHEET NO.

M-501


SHEET 38 OF 53

\\jasvr02\Projects\3094\2201\Mech\3094.2201_Mech_Central.rvt

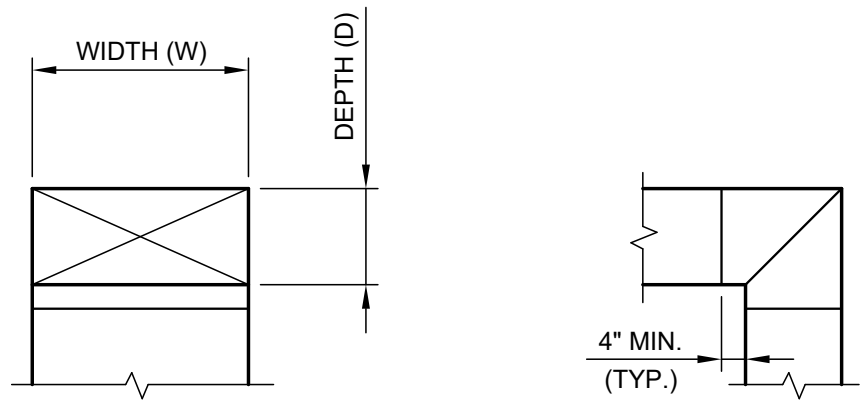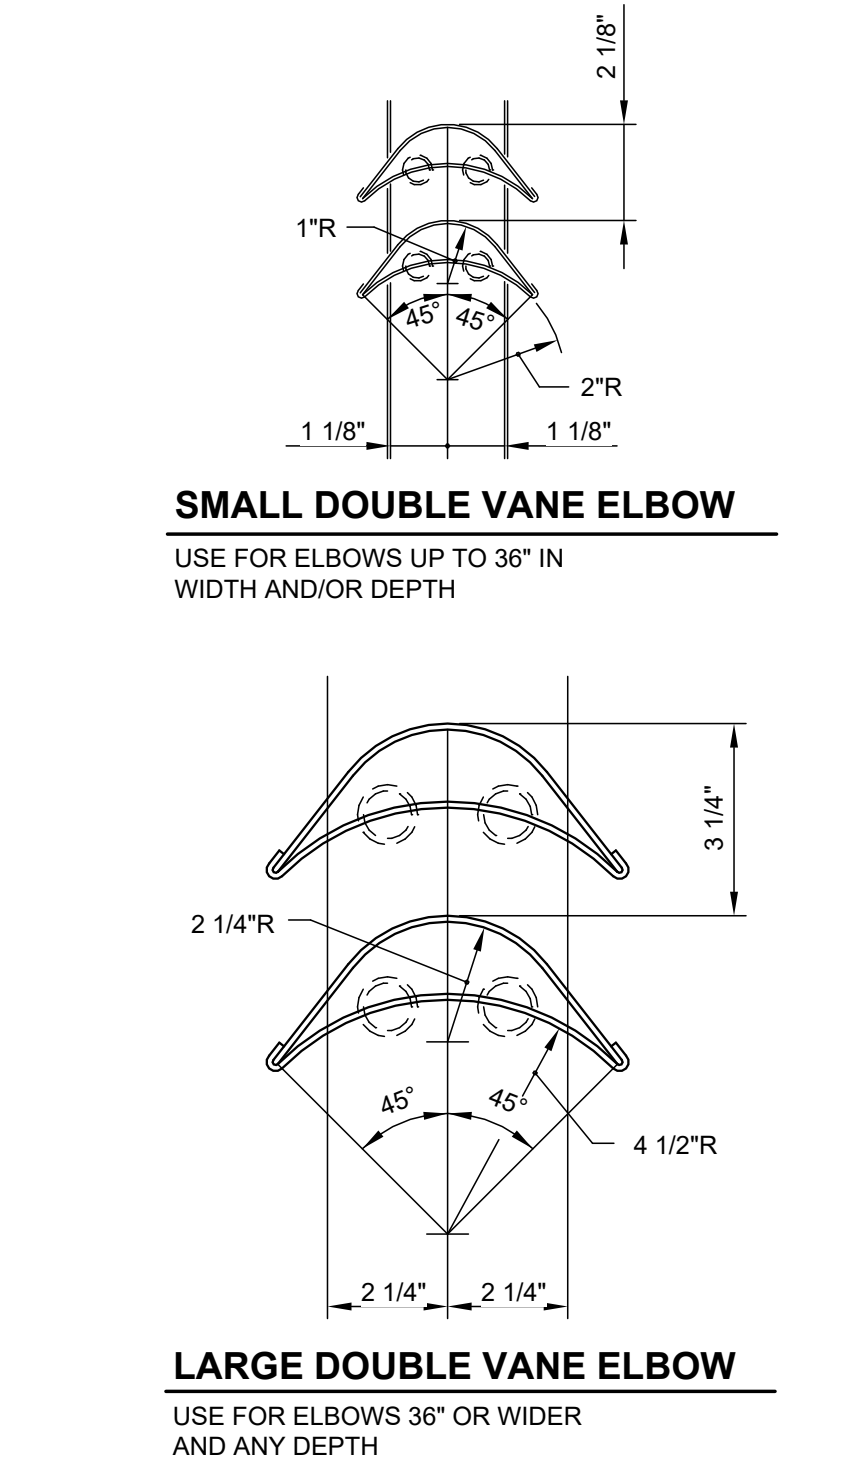


- NOTES:
1. ALL SQUARE OR RECTANGLE ELBOWS SHALL HAVE ONE OF THE TWO TYPES OF TURNING VANES SHOWN ABOVE. SINGLE VANE ELBOWS WILL NOT BE PERMITTED, UNLESS SPECIFICALLY INDICATED.
 2. VANES SHALL BE CONSTRUCTED, SUPPORTED AND FASTENED AS RECOMMENDED BY SMACNA.
 3. ALL SQUARE OR RECTANGLE ELBOWS SHOWN ON PLANS FOR EXHAUST OR RETURN DUCT MAY BE MADE RADIUS ELBOWS PROVIDED SPACE PERMITS RADIUS INSTALLATION.
 4. ALL SQUARE OR RECTANGULAR ELBOWS SHOWN ON PLANS FOR SUPPLY DUCT MAY BE MADE RADIUS ELBOWS PROVIDED SPACE PERMITS RADIUS INSTALLATION AND/OR THERE ISN'T AN OUTLET OR TAKE-OFF WITHIN 5D ON THE DOWNSTREAM SIDE OF THE ELBOW.

DETAIL - TYPICAL ELBOW
NO SCALE

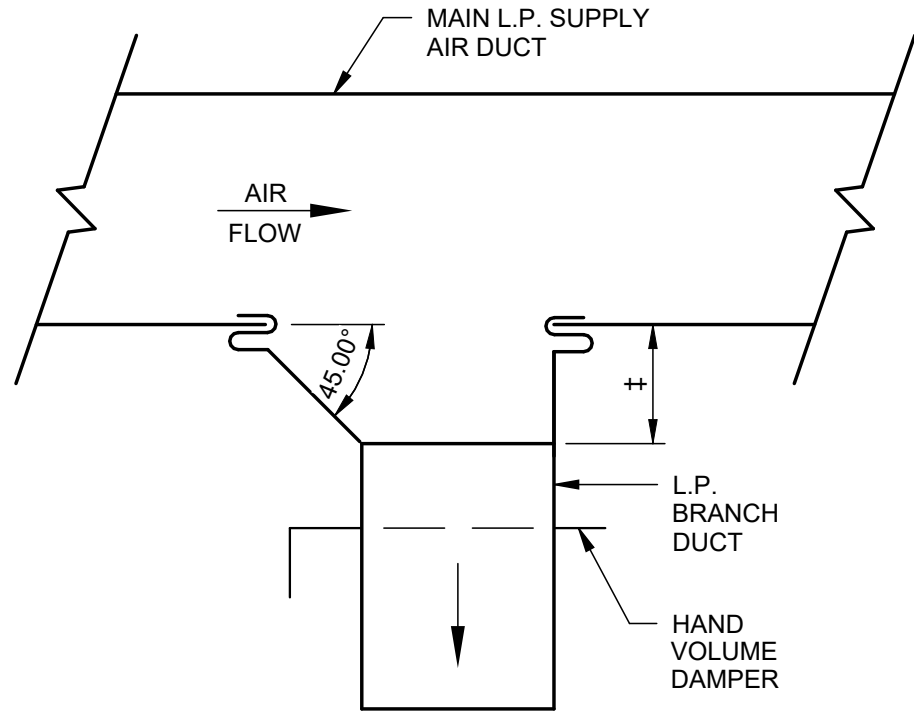


‡ - EQUALS WIDTH OF BRANCH DUCT UP TO 12".
12" FOR ALL BRANCH DUCTS LARGER THAN 12".

**DETAIL - TYPICAL LOW PRESSURE
BRANCH DUCT TAKE OFF**
NO SCALE

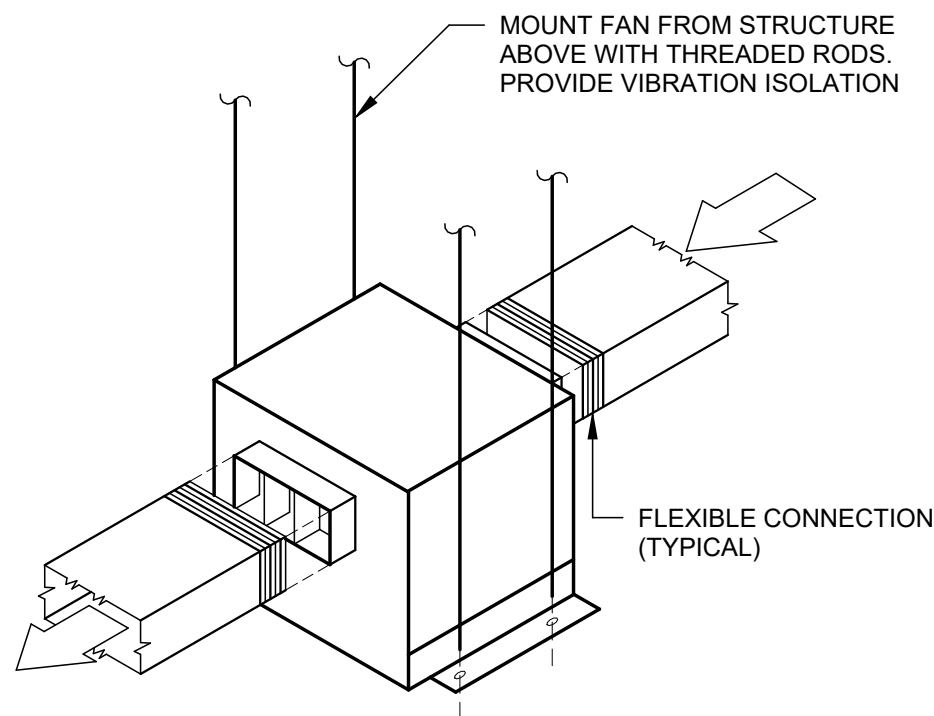

IN-LINE CEILING EXHAUST FAN DETAIL
NO SCALE

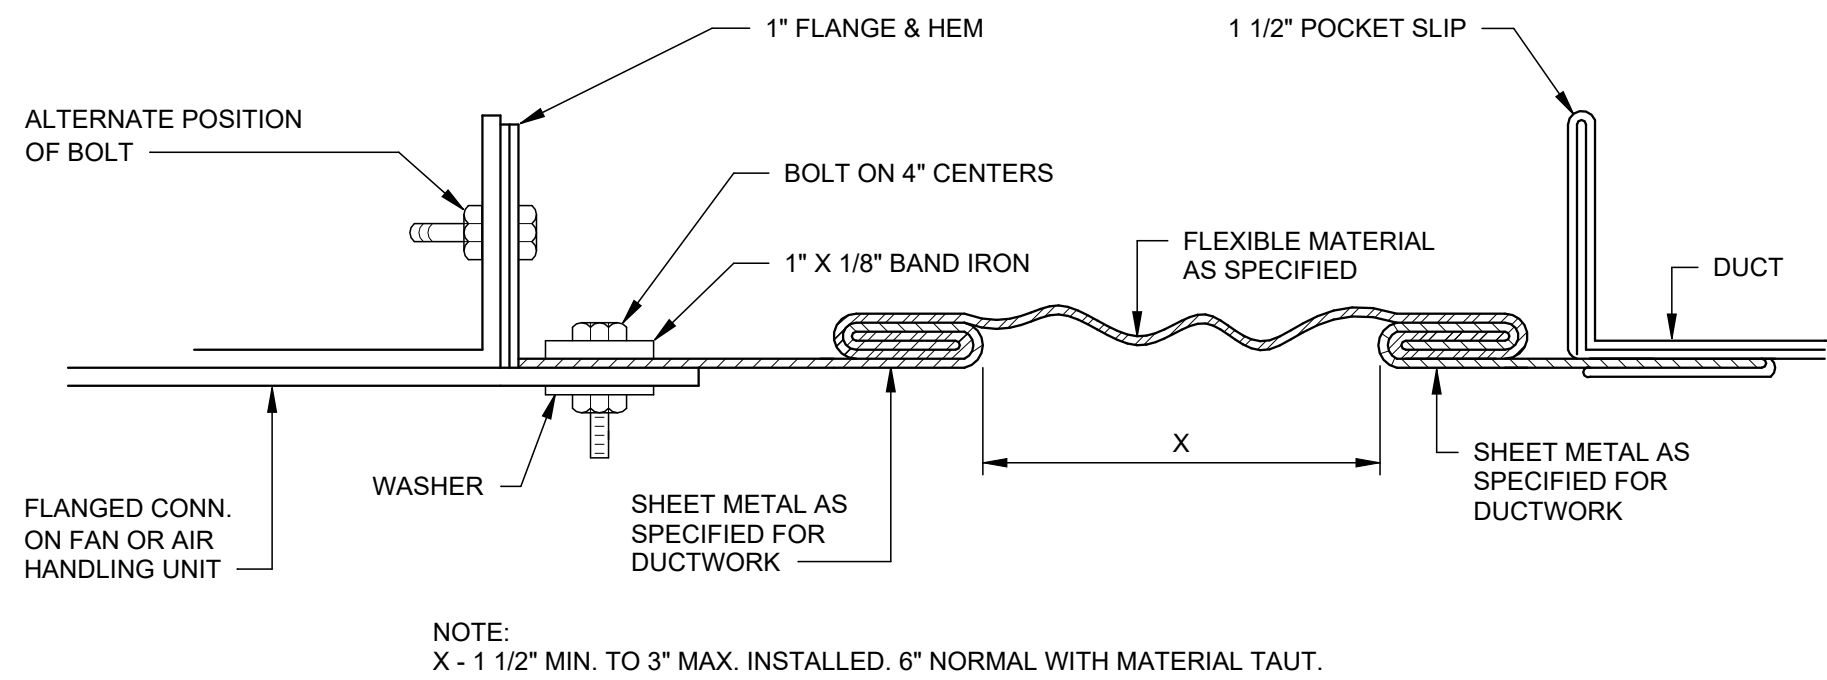


NOTE:
X - 1 1/2" MIN. TO 3" MAX. INSTALLED, 6" NORMAL WITH MATERIAL TAUT.

RECTANGULAR FLEXIBLE CONNECTION DETAIL
NO SCALE



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

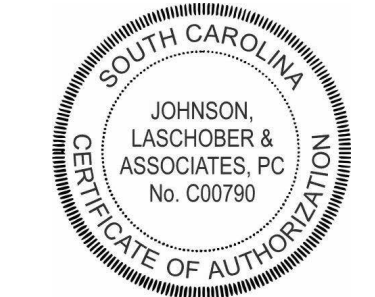

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
HVAC DETAILS

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER MNB	DRAWING SHEET NO. M-601
DRAWN AMV	
CHECKED MNB	
PROJECT NO. 3094.2201	SHEET 39 OF 53

ELECTRICAL GENERAL NOTES:

GENERAL
THESE GENERAL NOTES PRESENT AND/OR SUMMARIZE KEY PRODUCT INFORMATION FOR THE PLAN READER'S CONVENIENCE. SEE PLANS AND SPECIFICATIONS FOR FURTHER REQUIREMENTS.

WORK COVERED BY THIS DOCUMENT SHALL INCLUDE ALL LABOR, MATERIAL, PRODUCTS, AND SERVICES FOR, AND INCIDENTAL TO, INSTALLATION OF COMPLETE AND OPERATING ELECTRICAL SYSTEMS DRAWN OR SPECIFIED.

ALL WORK SHALL CONFORM TO ALL APPLICABLE FEDERAL, STATE AND LOCAL CODES INCLUDING, BUT NOT LIMITED TO, THE NATIONAL ELECTRICAL CODE (NFPA 70). ALL MATERIALS SHALL BE NEW AND UL LISTED/LABELED AS APPROPRIATE. FINAL LOCATIONS FOR ROUGH-INS SHALL BE VERIFIED WITH ACTUAL EQUIPMENT BEING CONNECTED. SUPPORT AND ATTACH ELECTRICAL EQUIPMENT IN ACCORDANCE WITH SEISMIC CONDITIONS AS DETERMINED BY THE STRUCTURAL ENGINEER/BUILDING DESIGNER AND THE INTERNATIONAL BUILDING CODE. AFTER COMPLETING INSTALLATION, REMOVE BURRS, DIRT, AND CONSTRUCTION DEBRIS FROM ALL ELECTRICAL WORK.

COORDINATE OUTLET LOCATIONS WITH ARCHITECTURAL PLANS, ELEVATIONS AND DETAILS.

COORDINATE HVAC AND PLUMBING EQUIPMENT LOCATIONS WITH MECHANICAL PLANS, ELEVATIONS AND DETAILS.

COORDINATE SITE LIGHTING AND SITE UTILITIES WITH LANDSCAPING/CIVIL PLANS AND DETAILS.

CONTRACTOR TO COORDINATE SERVICE AND METERING INSTALLATION REQUIREMENTS, AIC RATING, AND PANEL SCOR WITH UTILITY COMPANY PRIOR TO BID AND INSTALLATION.

COORDINATE SIGNAL SERVICE REQUIREMENTS WITH SERVING UTILITY.

ELECTRICAL INSTALLATION SHALL BE SEISMIC BRACED PER APPLICABLE SECTIONS OF THE STANDARD BUILDING CODE.

CONSULT MANUFACTURERS' SHOP DRAWINGS FOR REQUIREMENTS AND EXACT LOCATION OF ELECTRICAL CONNECTIONS FOR EQUIPMENT FURNISHED BY OTHERS. BRANCH-CIRCUIT WIRING SHALL MEET ALL REQUIREMENTS OF THE EQUIPMENT MANUFACTURER.

SIZE DISCONNECT SWITCHES AND OVERCURRENT PROTECTION IN ACCORDANCE WITH THE EQUIPMENT MANUFACTURERS' RECOMMENDATIONS AND THE N.E.C.

SIZE FUSES IN ACCORDANCE WITH THE EQUIPMENT MANUFACTURERS' RECOMMENDATIONS AND THE NEC.

INSTALL JUNCTION BOXES, CONDUIT BODIES, AND HANDHOLE ENCLOSURES SUCH THAT WIRING WITHIN IS ACCESSIBLE IN ACCORDANCE WITH NEC 314.29.

MOUNTING HEIGHT DIMENSIONS FOR WIRING DEVICES ARE FROM THE FINISHED FLOOR UP TO THE CENTER OF THE OUTLET BOX.

CENTER OUTLETS HORIZONTALLY IN ARCHITECTURAL FEATURES.

DO NOT SCALE DRAWINGS. DEVICE LOCATIONS ARE APPROXIMATE UNLESS DIMENSIONED. ACTUAL DEVICE LOCATIONS SHALL BE FIELD COORDINATED WITH ALL OTHER TRADES AND APPLICABLE CODES.

INSTALL PHOTO CELL(S) ABOVE ROOF. ORIENT TO NORTHERN EXPOSURE AND SHIELD FROM EXTRANEOUS LIGHT. PROVIDE FLASHING AND SEAL ROOF PENETRATION(S).

INSTALL ADDITIONAL BRANCH-CIRCUIT CONDUCTORS TO PROVIDE UN-SWITCHED CONNECTION TO EACH EMERGENCY FIXTURE BATTERY.

DO NOT USE COMMON NEUTRALS FOR MULTI-WIRE CIRCUITS. INSTALL A NEUTRAL FOR EACH PHASE.

ALL CONDUCTORS SHALL BE NO SMALLER THAN #12.

ALL RACEWAYS SHALL BE 3/4" DIA. MIN. UNLESS OTHERWISE NOTED.

GENERAL CONTRACTOR TO PROVIDE ACCESS PANELS FOR ALL INACCESSIBLE, ABOVE-CEILING ELECTRICAL EQUIPMENT AND JUNCTION BOXES PER NEC SECTION 314.29. COORDINATE LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION.

CONDUCTORS
INSULATION SHALL COMPLY WITH NEMA WC 5. CONDUCTORS #8 AWG AND LARGER SHALL BE CONCENTRIC STRANDED. CONDUCTORS #10 AND SMALLER SHALL BE SOLID.

TYPE AND INSULATION (SERVICE): COPPER, TYPE THWN
TYPE AND INSULATION (FEEDER): COPPER, TYPE THHN/THWN
TYPE AND INSULATION (BRANCH): COPPER, TYPE THHN/THWN
COPPER, TYPE MC

COLOR CODING (120/240 V, 1 Ø): A-BLACK, B-RED, N-WHITE, G-GREEN

RACEWAYS
CONDUIT BODIES AND FITTINGS FOR RIGID METAL CONDUIT SHALL BE CAST THREADED TYPE. CONDUIT FITTINGS FOR ELECTRICAL METALLIC TUBING SHALL BE COMPRESSION TYPE. INSTALL 200 lb NYLON PULL CORD IN ALL EMPTY RACEWAYS FOR FUTURE USE. APPLY FIRESTOPPING TO ELECTRICAL PENETRATIONS OF FIRE-RATED FLOOR AND WALL ASSEMBLIES TO RESTORE ORIGINAL FIRE-RESISTANCE RATING OF ASSEMBLY.

OUTDOORS EXPOSED: RIGID GALVANIZED STEEL CONFORMING TO ANSI C80.5
OUTDOORS UNDERGROUND: RIGID NONMETALLIC CONDUIT (SCHEDULE 80 PVC) CONFORMING TO NEMA TC 2
OUTDOORS CONNECTED TO VIBRATING OR MOTORIZED EQUIPMENT: LIQUIDTIGHT FLEXIBLE METAL CONDUIT CONFORMING TO UL 360
INDOORS CONCEALED: ELECTRICAL METALLIC TUBING CONFORMING TO ANSI C80.3
INDOORS EXPOSED: ELECTRICAL METALLIC TUBING CONFORMING TO ANSI C80.3
INDOORS CONNECTED TO VIBRATING OR MOTORIZED EQUIPMENT: FLEXIBLE METALLIC CONDUIT CONFORMING TO UL 1

OUTLET BOXES
BOXES SHALL COMPLY WITH NEMA OS 1 AND SHALL BE SHEET METAL TYPE WITH PLASTER RING IN DRY LOCATIONS. BOXES SHALL COMPLY WITH NEMA FB 1 AND SHALL BE CAST METAL TYPE FD WITH GASKETED COVER IN DAMP OR WET LOCATIONS.

PULL AND JUNCTION BOXES
BOXES SHALL BE HOT-DIPPED GALVANIZED STEEL. BOX COVERS SHALL BE GASKETED TYPE WITH SCREWED OR BOLTED FASTENERS.

WIRING DEVICES
DEVICES SHALL COMPLY WITH NEMA WD 1 AND WD 6. DEVICES SHALL BE COMMERCIAL SPECIFICATION GRADE OR BETTER. ALL DEVICES SHALL BE OF THE GROUNDING TYPE. DEVICES SHALL BE MOUNTED FLUSH WITH THE LONG DIMENSION VERTICAL AND GROUNDING TERMINAL OF RECEPTACLES ON TOP. SWITCHES SHALL BE QUIET TYPE, RATED 20 AMPERES AT 120/277 VOLTS. GROUND FAULT CIRCUIT INTERRUPTERS SHALL BE FEED-THROUGH TYPE. WEATHERPROOF COVERS SHALL BE PROVIDED IN DAMP OR WET LOCATIONS. PROGRAM OCCUPANCY SENSORS FOR FIFTEEN MINUTES WITH MEDIUM SENSITIVITY. TRAIN OWNER TO ADJUST TIME AND SENSITIVITY.

DEVICE COLOR: SELECTED BY ARCHITECT.
DEVICE COVER: SMOOTH PLASTIC WITH COLOR TO MATCH DEVICE COLOR

ELECTRICAL IDENTIFICATION
IN ADDITION TO CODE-REQUIRED LABELING, ALL PANELBOARDS, ELECTRICAL ENCLOSURES, TRANSFORMERS, AND DISCONNECT SWITCHES SHALL BE IDENTIFIED WITH AN ENGRAVED PLASTIC LAMINATED NAMEPLATE. LETTERING SHALL BE 1/2" INCHES HIGH AND SHALL BE WHITE ON A BLACK BACKGROUND. NAMEPLATES SHALL BE ATTACHED TO EQUIPMENT WITH STAINLESS STEEL SELF-TAPPING SCREWS. CONTRACTOR TO COORDINATE WITH THE UTILITY COMPANY TO DETERMINE THE AVAILABLE FAULT CURRENT AT THE PANEL LOCATION SHOWN ON THE DRAWINGS. CONTRACTOR TO PROVIDE ELECTRICAL EQUIPMENT WITH AIC RATING OVER THE CALCULATED FAULT CURRENT. CALCULATED FAULT CURRENT SHALL BE LISTED ON EACH PIECE OF ELECTRICAL EQUIPMENT. CONTRACTOR TO PROVIDE AND AFFIX ARC FLASH WARNING LABELS ON ALL ELECTRICAL SWITCHBOARDS, PANELBOARDS, MOTOR CONTROL CENTERS, LOAD CENTERS, DISCONNECTS AND ENCLOSED CIRCUIT BREAKERS PER NEC ARTICLE 110.16.

GROUNDING
GROUNDING AND BONDING COMPONENTS SHALL COMPLY WITH UL 467. AN INSULATED EQUIPMENT- GROUNDING CONDUCTOR SHALL BE INSTALLED WITH CIRCUIT CONDUCTORS FOR ALL FEEDER AND BRANCH CIRCUITS. EXOTHERMIC-WELDED CONNECTIONS SHALL BE USED FOR ATTACHMENT TO STRUCTURAL STEEL AND UNDERGROUND CONNECTIONS. GROUNDING ELECTRODES SHALL BE 3/4" x 10" COPPERWELD TYPE.

SERVICE GROUNDING
INSTALL TWO (2) GROUND RODS FOR SERVICE ENTRANCE UNLESS INSTALLED PRIMARY GROUND ROD IS TESTED AND FOUND TO HAVE A RESISTANCE TO GROUND OF 25 OHMS OR LESS IN ACCORDANCE WITH NFPA 70 250.53(2).

EQUIPMENT GROUNDING
FOR INDICATED EQUIPMENT (OTHER THAN SERVICE ENTRANCE EQUIPMENT) INSTALL ONE (1) GROUND ROD TO ACT AS AN AUXILIARY GROUNDING ELECTRODE AND BOND TO THE EQUIPMENT GROUNDING CONDUCTOR (EGC) FOR THAT EQUIPMENT, IN ACCORDANCE WITH NFPA 70 250.54 AND 250.118.

PANELBOARDS
PANELBOARDS SHALL COMPLY WITH NEMA PB 1. SHOP DRAWINGS FOR EACH PANELBOARD SHALL BE SUBMITTED AND SHALL INCLUDE BUS CONFIGURATION AND CURRENT RATINGS, OVERCURRENT DEVICE ARRANGEMENT AND SETTINGS, AND PANELBOARD SHORT CIRCUIT RATING. PHASE AND NEUTRAL BUSES SHALL BE COPPER. AN EQUIPMENT GROUND BUS SHALL BE PROVIDED AND SHALL BE BONDED TO THE PANEL BOX. PANELBOARDS WITH A MAIN SERVICE DISCONNECT SHALL BE LISTED FOR USE AS SERVICE EQUIPMENT. PANELBOARD TRIM SHALL BE BOLT-ON TYPE. CIRCUIT BREAKERS SHALL BE BOLT-ON TYPE. CIRCUIT BREAKERS SHALL BE LISTED FOR SWD, HID OR HACR USE AS APPROPRIATE. MULTI-POLE CIRCUIT BREAKERS SHALL HAVE A COMMON TRIP. TANDEM CIRCUIT BREAKERS SHALL NOT BE USED. FILLER PLATES SHALL BE INSTALLED IN UNUSED SPACES. A TYPED CIRCUIT DIRECTORY SHALL BE INSTALLED ON THE INSIDE OF THE PANELBOARD DOOR. ALL OVERCURRENT DEVICES AND PANELS SHALL BE RATED FOR THE FULL AVAILABLE FAULT CURRENT AS INDICATED ON PANEL SCHEDULE AND SHALL NOT BE SERIES RATED.

FUSES
FUSES SHALL BE NEMA FU 1 CARTRIDGE TYPE. VOLTAGE RATING SHALL BE CONSISTENT WITH CIRCUIT VOLTAGE. ARRANGE FUSES IN FUSIBLE DEVICES SO FUSE RATINGS ARE READABLE WITHOUT REMOVING FUSE. INSTALL TYPEWRITTEN LABELS ON INSIDE DOOR OF EACH FUSIBLE DEVICE TO INDICATE FUSE REPLACEMENT INFORMATION.

MOTOR FEEDER AND BRANCH CIRCUITS: UL CLASS RK5, TIME DELAY
OTHER FEEDER AND BRANCH CIRCUITS: UL CLASS RK1, NON-TIME DELAY

DISCONNECT SWITCHES
SWITCHES SHALL BE FUSED OR NONFUSED NEMA KS 1 TYPE HD. SWITCHES SHALL BE HANDLE LOCKABLE AND INTERLOCKED WITH COVER IN CLOSED POSITION. ENCLOSURES SHALL BE NEMA TYPE 1 IN INDOOR LOCATIONS AND NEMA TYPE 3R IN OUTDOOR LOCATIONS. HVAC EQUIPMENT DISCONNECTS ARE TO BE CONSIDERED ELECTRICAL EQUIPMENT AND SHALL BE INSTALLED TO MAINTAIN WORKING SPACE PER NEC ARTICLE 110.26.

INTERIOR LIGHTING
FIXTURE MOUNTING HARDWARE AND TRIM SHALL BE COORDINATED WITH THE CEILING SYSTEM. RECESSED FIXTURES SHALL BE SUPPORTED FROM THE BUILDING STRUCTURAL SYSTEM.

VOICE AND DATA SYSTEMS
PROVIDE EMPTY INFRASTRUCTURE ONLY. INSTALL BLANK FACEPLATES FOR OUTLETS. USE A CONDUIT BUSHING OR INSULATED FITTING TO TERMINATE STUB-UPS. PROVIDE PULL STRING IN EACH CONDUIT.

TELEPHONE BOARD
TELEPHONE BOARD 48" x 96" x 3/4" SHEET OF FIRE TREATED PLYWOOD. PROVIDE BACKBOARD ON WALLS AS INDICATED ON PLANS. PROVIDE GROUNDING BAR BURNDY BBB14210A OR EQUIVALENT. BOND TO SERVICE ENTRANCE PANEL USING CU #6 AWG INSULATED WIRE.

ELECTRICAL SYMBOLS:

	WALL MOUNTED LIGHT FIXTURE
	SURFACE MOUNTED STRIP FIXTURE
	WALL MOUNTED EMERGENCY FIXTURE
	SPST TOGGLE SWITCH 48" UP
	THREE WAY TOGGLE SWITCH 48" UP
	WALL MOUNTED DUAL TECHNOLOGY OCCUPANCY SENSOR. TO BE WATTSTOPPER DT-300 OR EQUAL.
	DUPLEX CONVENIENCE OUTLET 18" UP
	DUPLEX CONVENIENCE OUTLET 48" UP OR 6" ABOVE COUNTER/BACKSPLASH
	DUPLEX CONVENIENCE OUTLET 48" UP OR 6" ABOVE COUNTER/BACKSPLASH GROUND FAULT INTERRUPTER TYPE
	DUPLEX CONVENIENCE OUTLET 18" UP WEATHERPROOF GROUND FAULT INTERRUPTER TYPE
	DUPLEX CONVENIENCE OUTLET 18" UP. GROUND FAULT INTERRUPTER TYPE
	DUPLEX RECEPTACLE - CONCEAL BEHIND OR WITHIN ENCLOSURE OF ELECTRIC WATER COOLER. PROVIDE GFCI TYPE BREAKER.
	SPECIAL OUTLET - SEE SCHEDULE
	MOTOR - SEE PANEL SCHEDULE
	ELECTRICAL PANEL
	FUSIBLE DISCONNECT SWITCH
	TELEPHONE BOARD

United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

1-30-25

	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

ELECTRICAL NOTES AND
SYMBOLS


DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO.
DRAWN JAP	E-001
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 40 OF 53

APPLICABLE CODES AND STANDARDS

CODES AND STANDARDS	EDITION
INTERNATIONAL BUILDING CODE (IBC)	2021
NFPA 70 NATIONAL ELECTRICAL CODE (NEC)	2020
INTERNATIONAL ENERGY CONSERVATION CODE (IECC)	2009
ABA STANDARDS	2015


1/29/2025 4:25:23 PM

C:\REVIT - Local Projects\3094.2201_Elec_Central.rvt

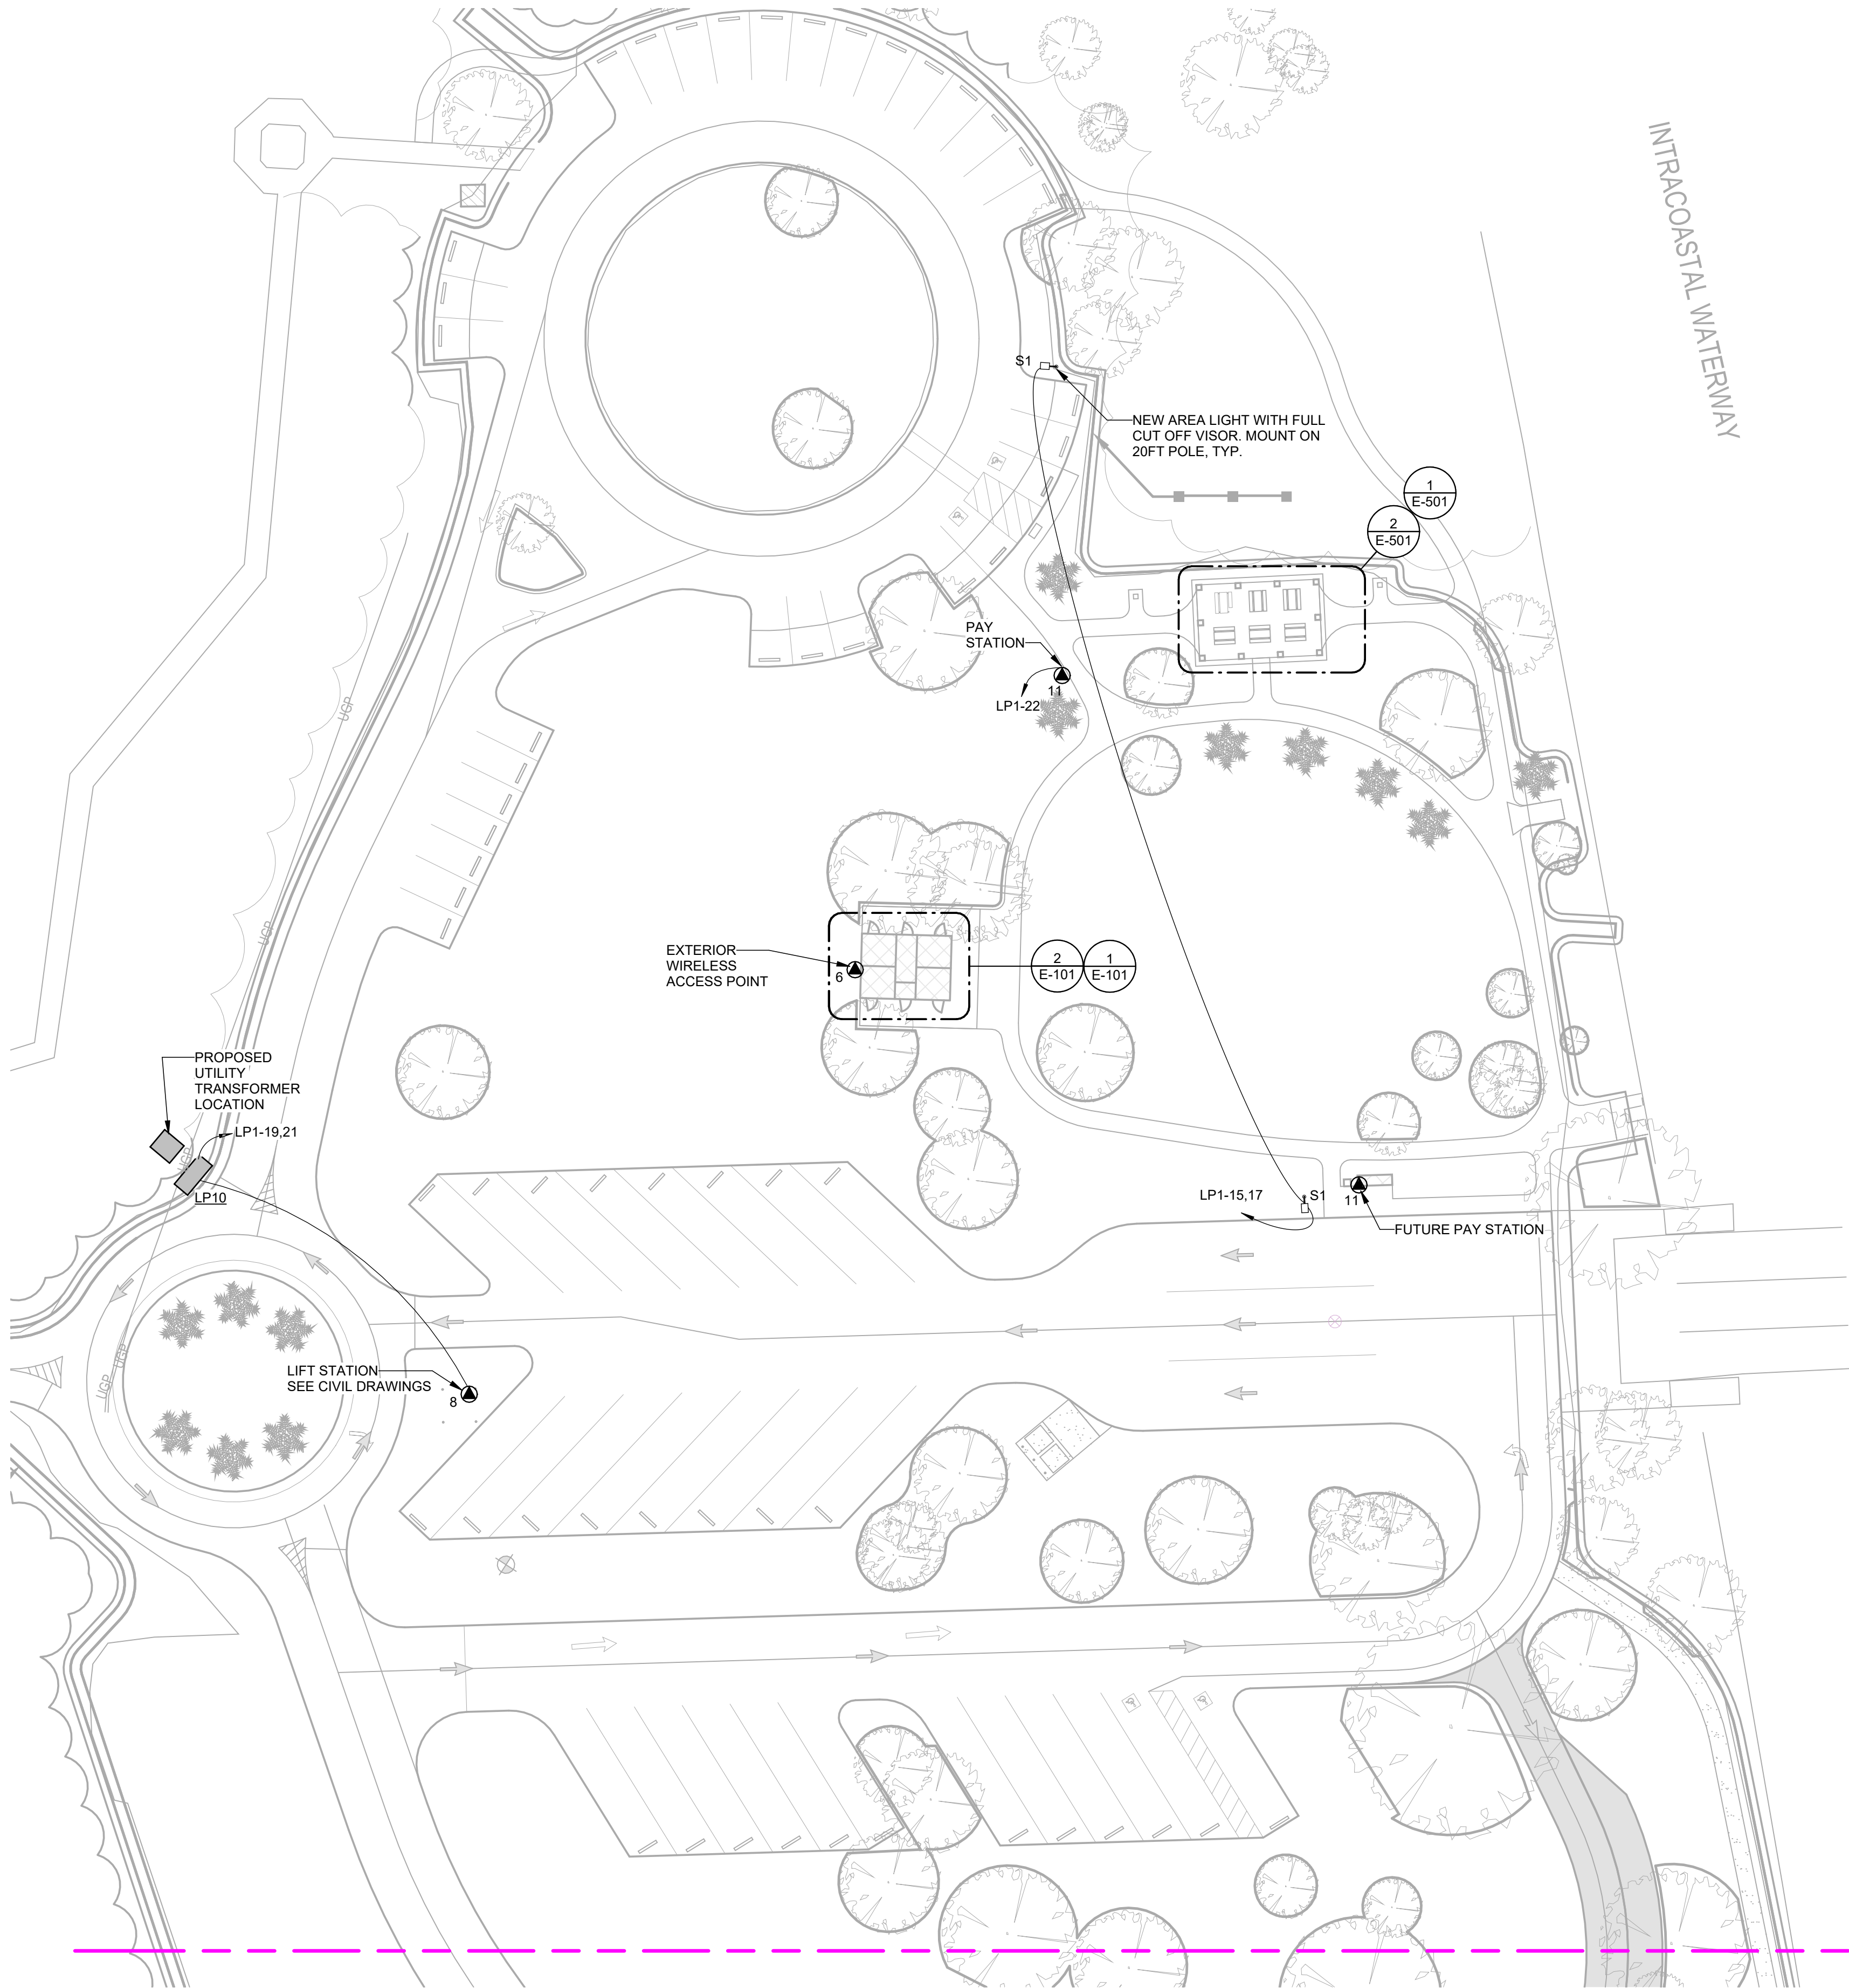


ELECTRICAL SITE PLAN - SHEET 1
SCALE: 1" = 30'-0"

SEE 1/ES002 FOR CONTINUATION
MATCHLINE

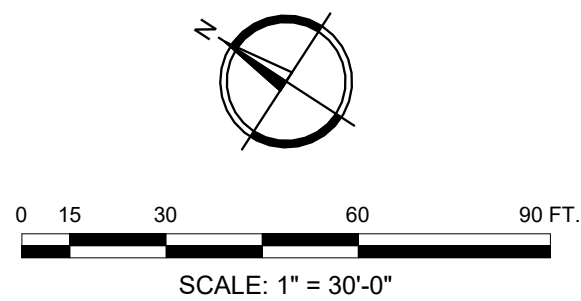

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

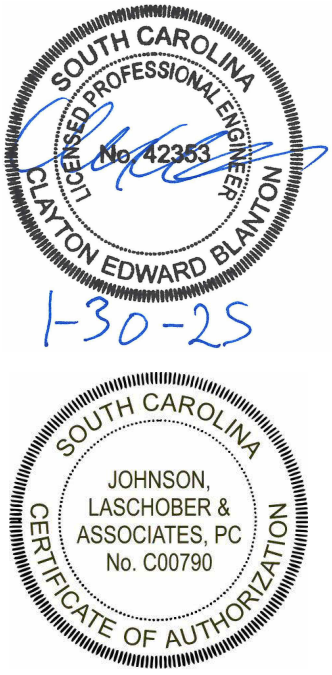

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
ELECTRICAL SITE PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. ES001
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 41 OF 53



SEE 1/ES001 FOR CONTINUATION
MATCHLINE


SEE 1/ES003 FOR CONTINUATION
MATCHLINE



R-08

Southern Region

STAMPS, LOGOS, AND SEALS

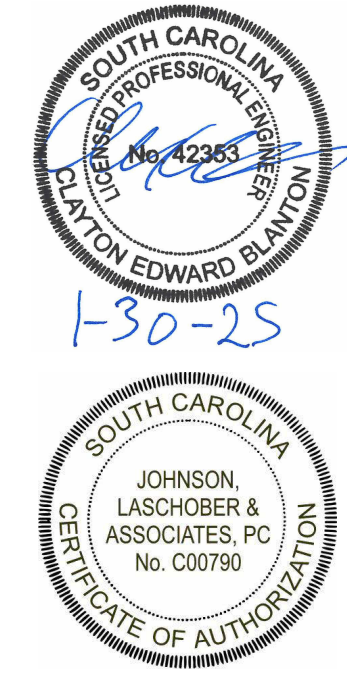

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:


JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
ELECTRICAL SITE PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. ES002
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 42 OF 53




ELECTRICAL SITE PLAN - SHEET 3
SCALE: 1" = 30'-0"

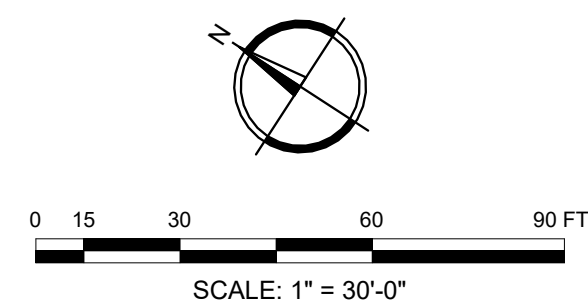

R-08

Southern Region

STAMPS, LOGOS, AND SEALS

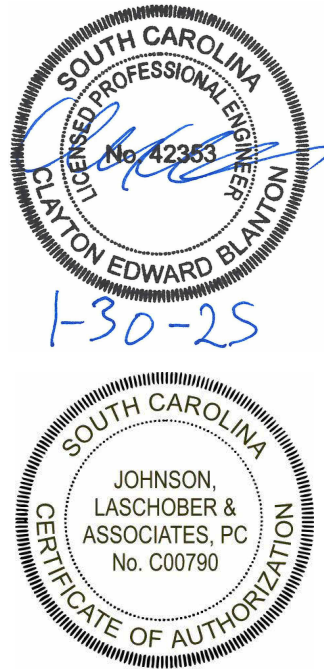

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 1244522F0051

PREPARED BY:


JLA
JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
ELECTRICAL SITE PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. ES003
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 43 OF 53




ELECTRICAL SITE PLAN - SHEET 4
SCALE: 1" = 30'-0"

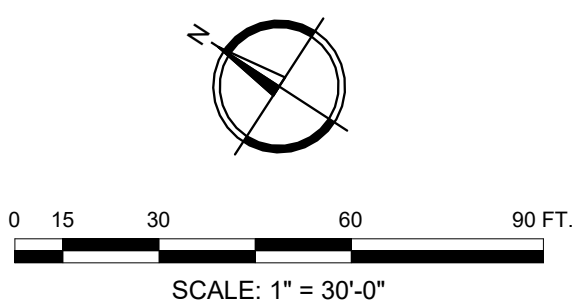

R-08

Southern Region

STAMPS, LOGOS, AND SEALS

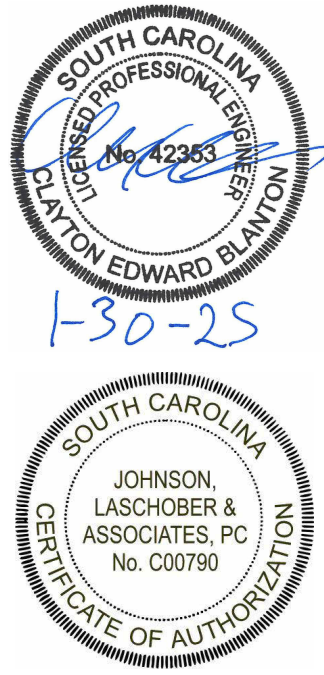

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**


1099 BUCK HALL LANDING RD.,
MCCELLENNVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:


JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
ELECTRICAL SITE PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. ES004
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 44 OF 53

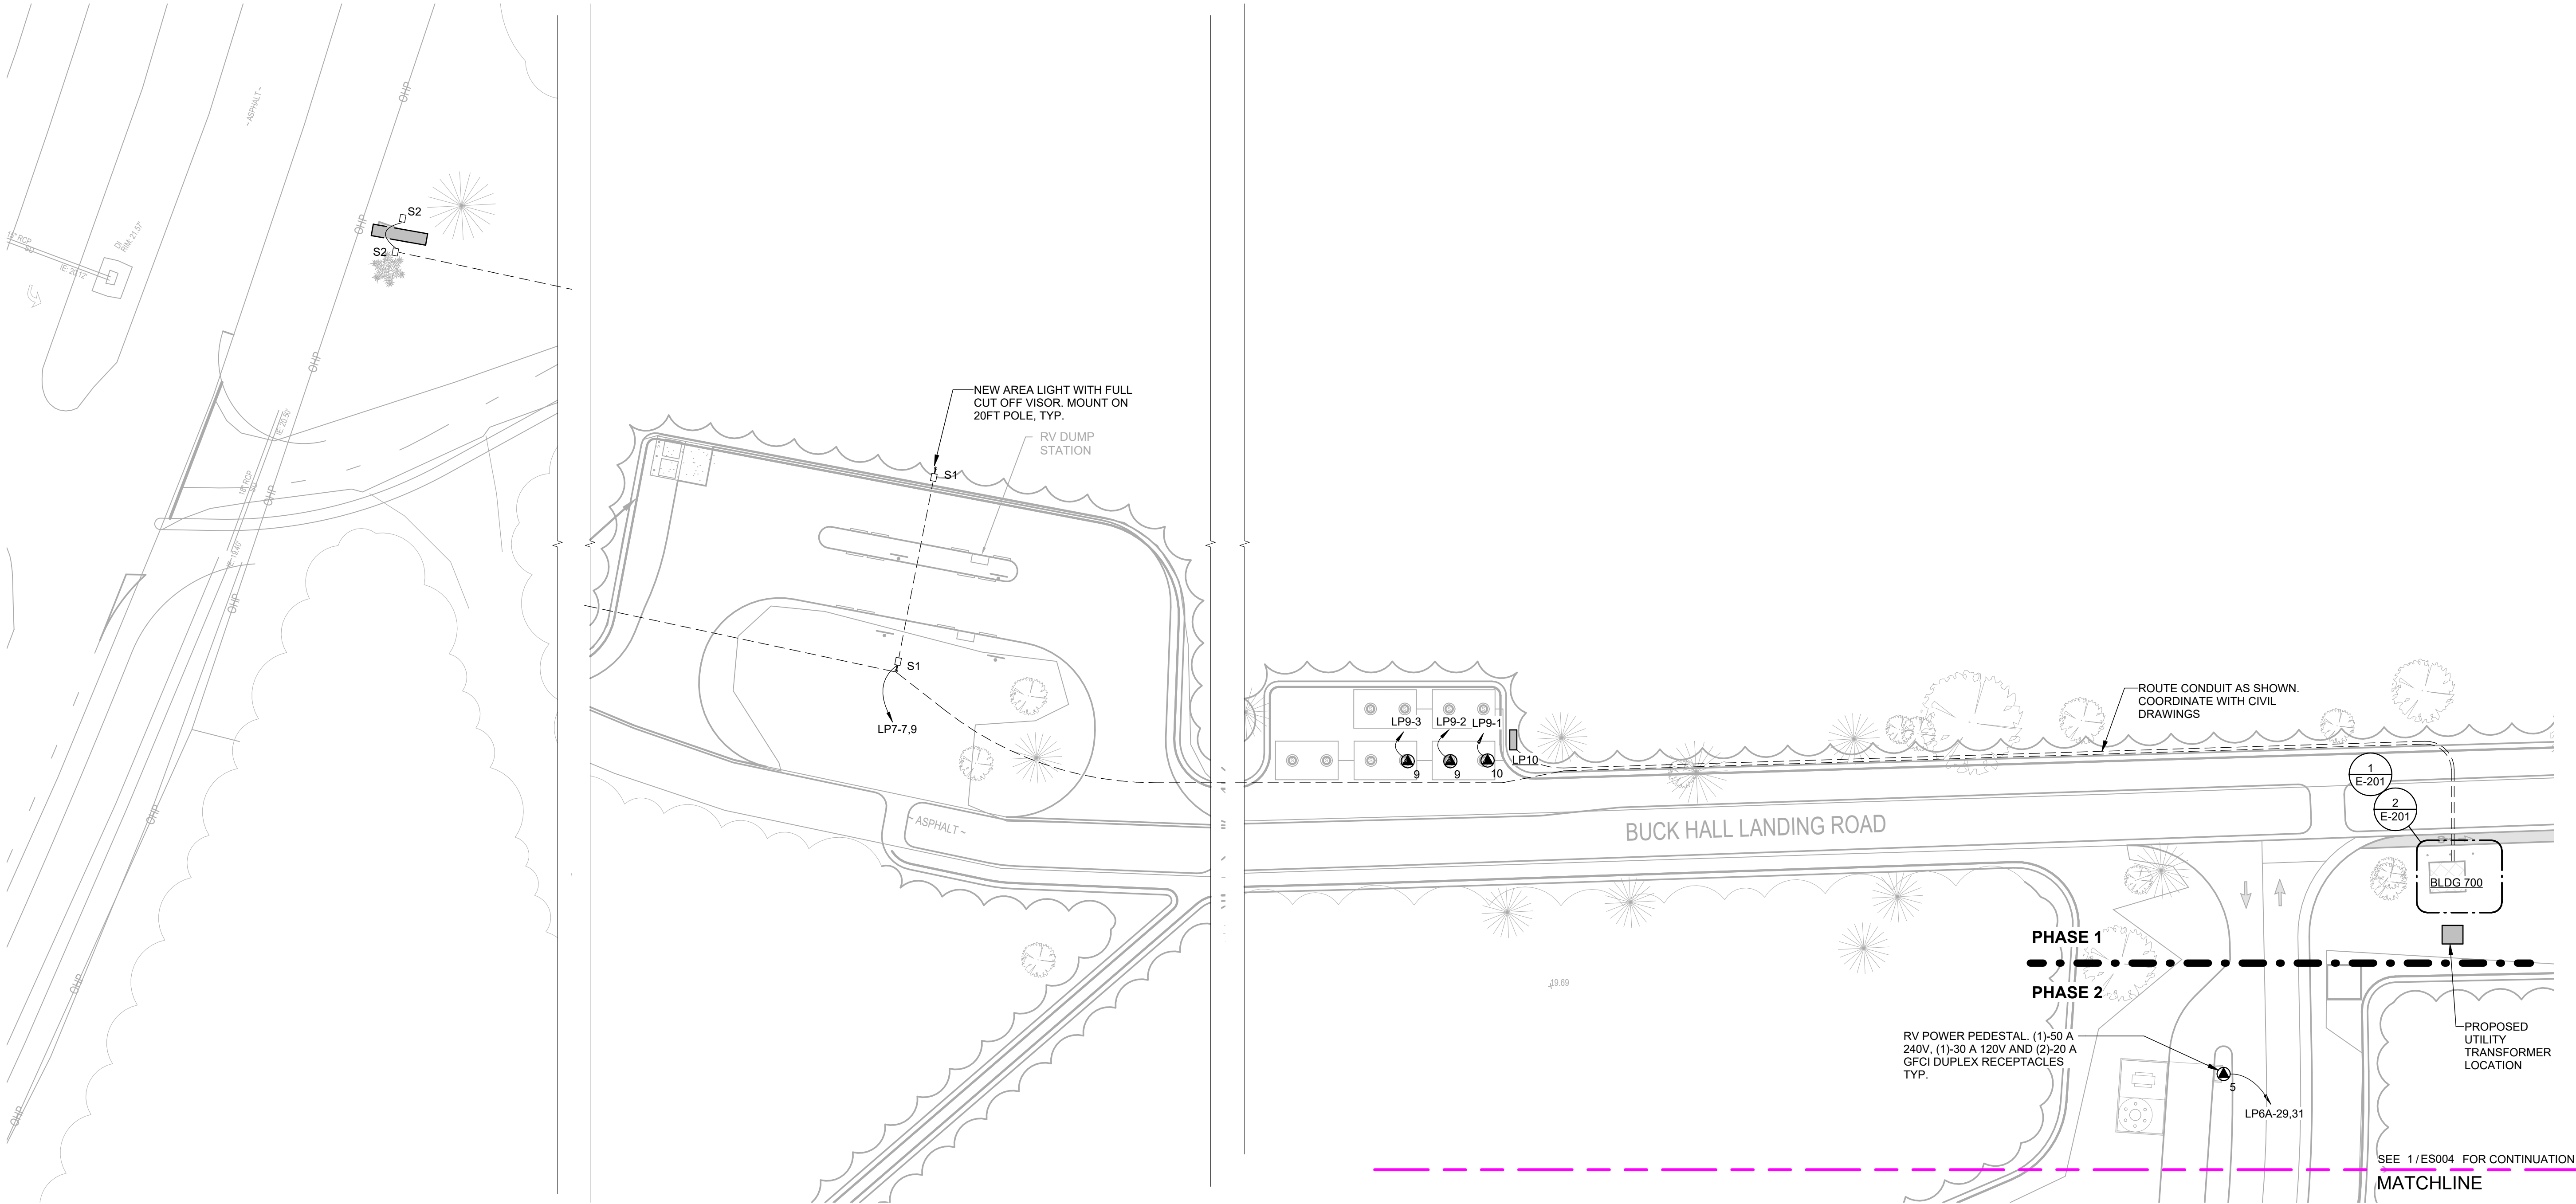

ELECTRICAL SITE PLAN - SHEET 5
ES005 SCALE: 1" = 30'-0"

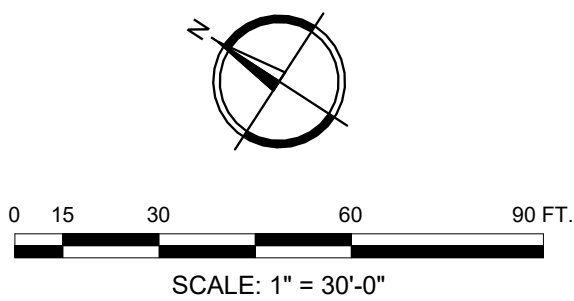



United States Department of Agriculture
Forest Service

R-08

Southern Region

STAMPS, LOGOS, AND SEALS



1-30-25



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME

**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOB & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com


DRAWING TITLE

ELECTRICAL SITE PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO.
DRAWN JAP	ES005
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 45 OF 53

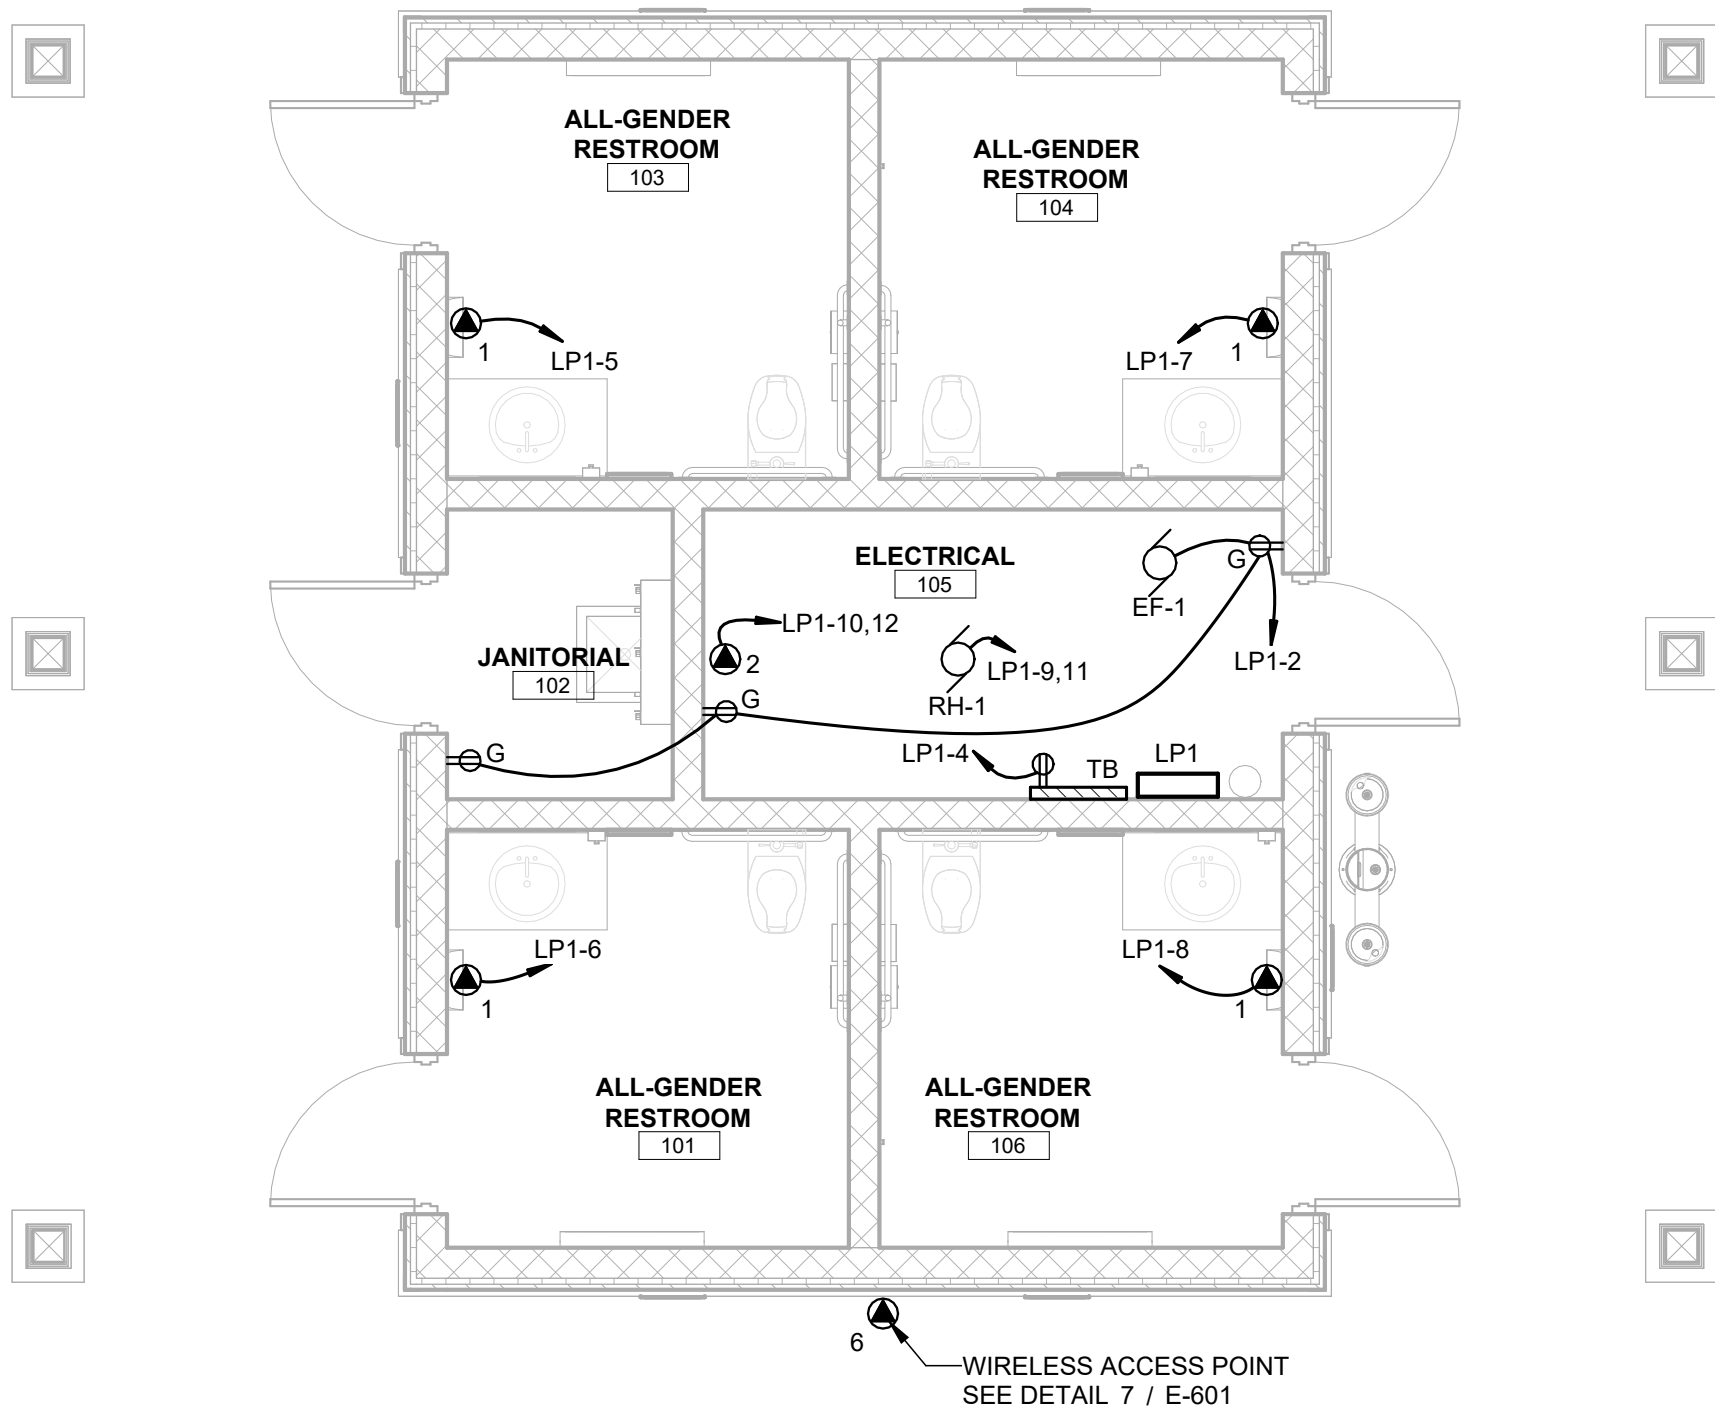


1 BUILDING 100 - POWER PLAN
E-101 SCALE: 1/4" = 1'-0"

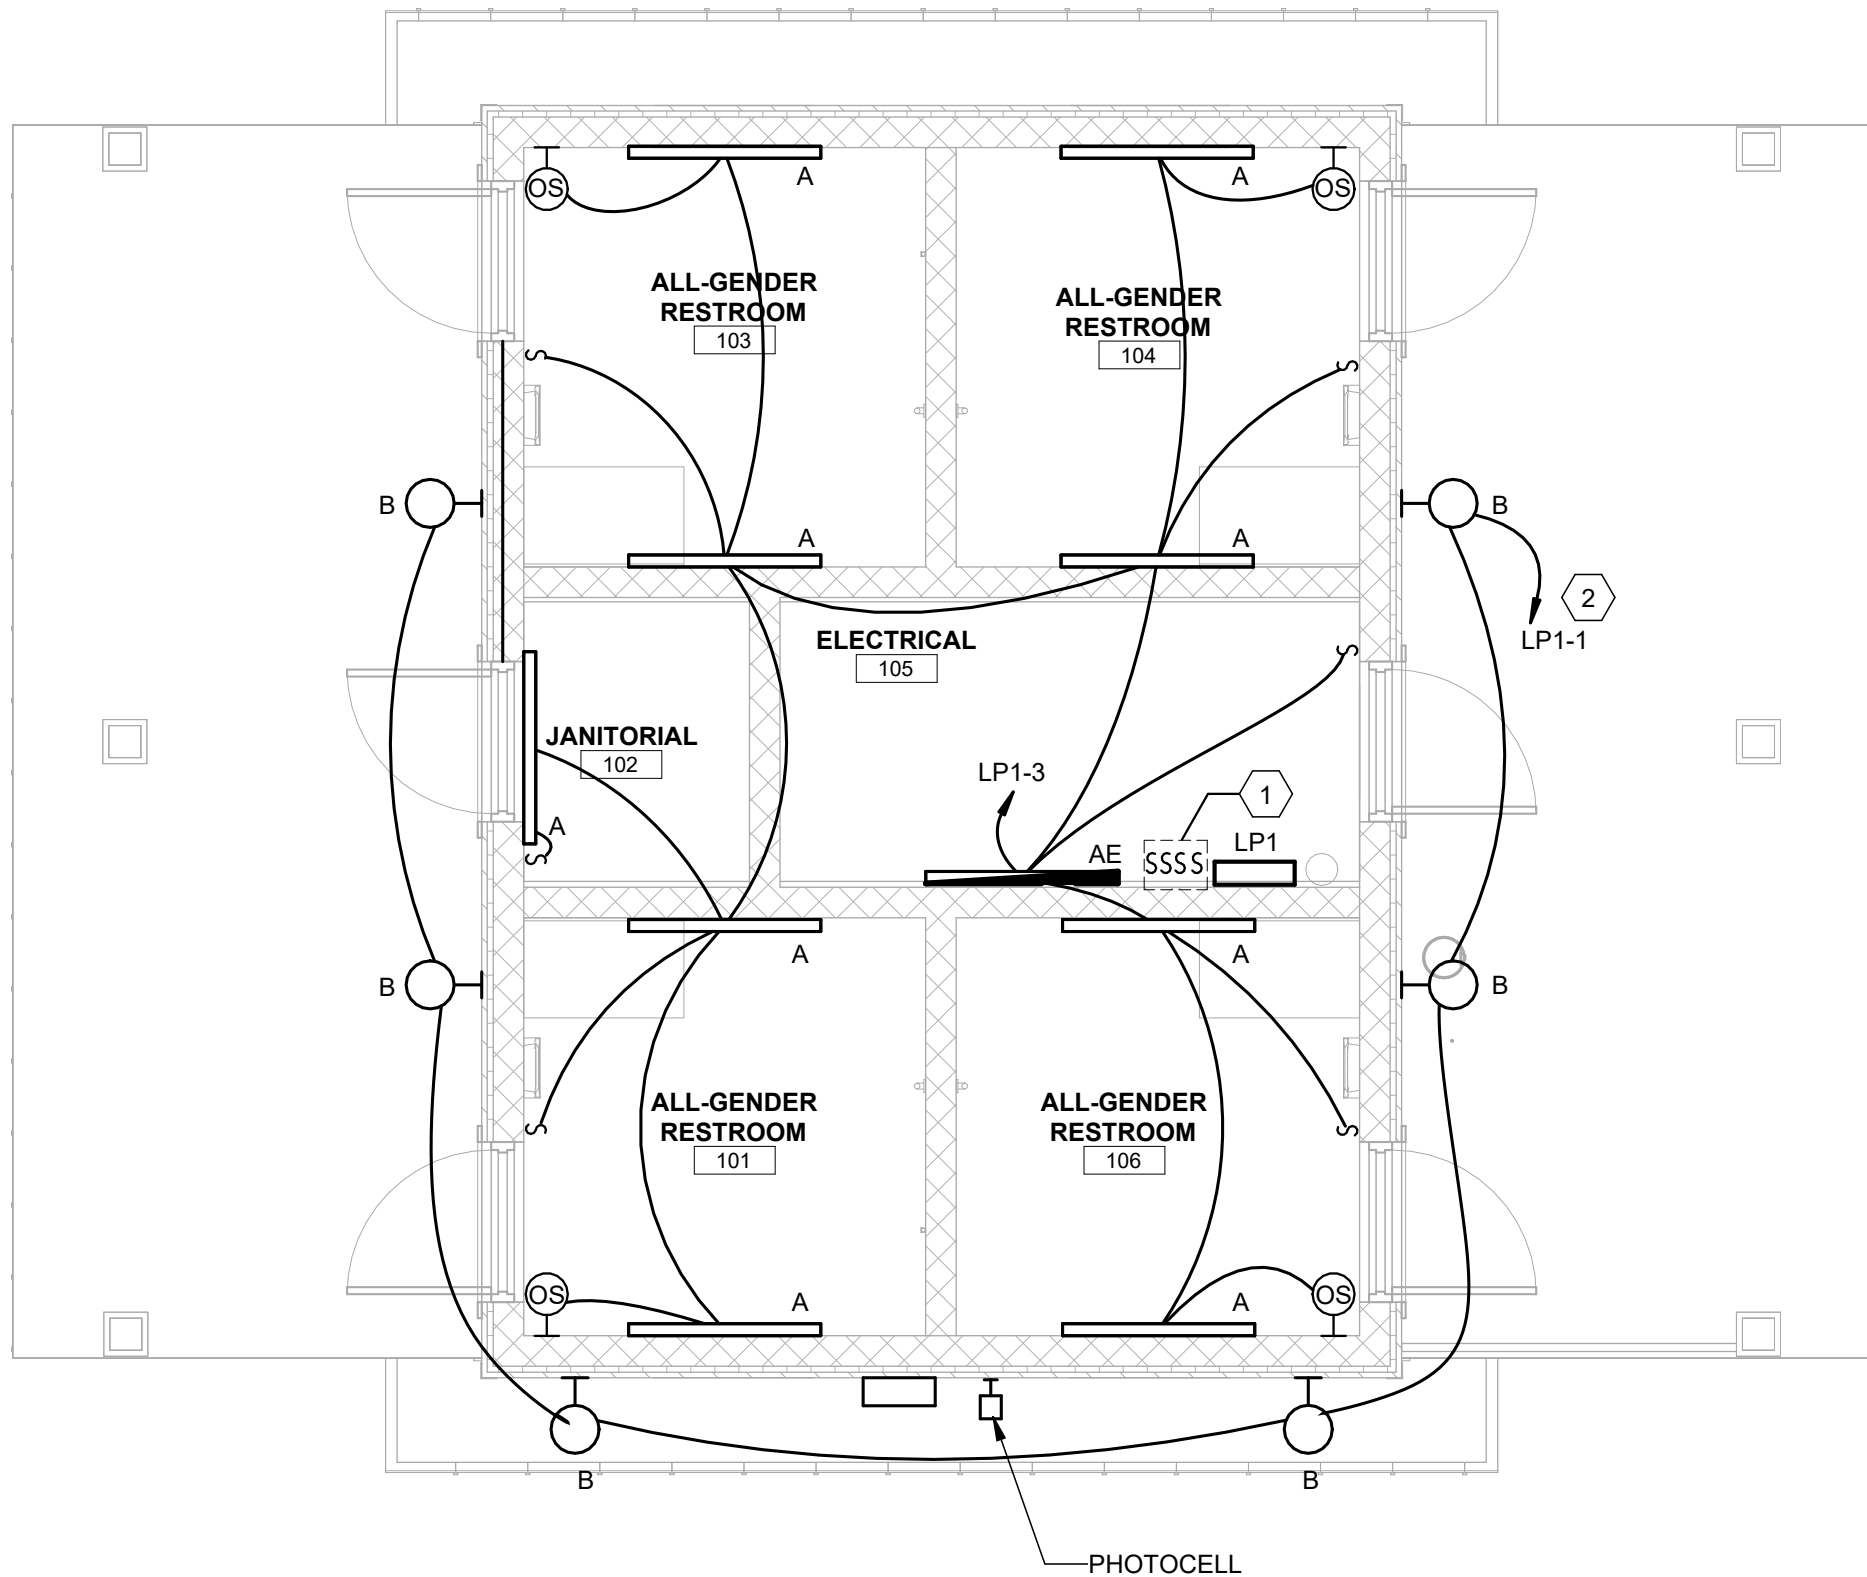

2 BUILDING 100 - LIGHTING PLAN
E-101 SCALE: 1/4" = 1'-0"


ELECTRICAL PLAN KEYED NOTES

- MANUAL OVERRIDE SWITCHES FOR LIGHTING IN RESTROOMS.
- PROVIDE PHOTO CELL, RELAY PANEL AND TIME CLOCK TO CONTROL ALL EXTERIOR LIGHTS.

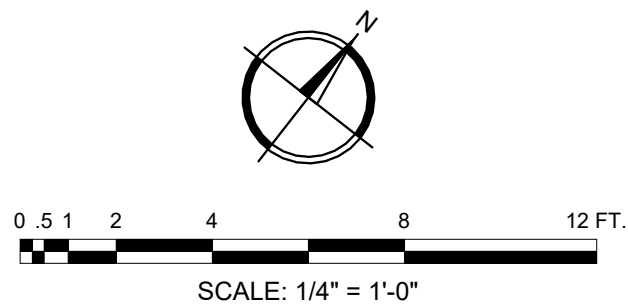

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

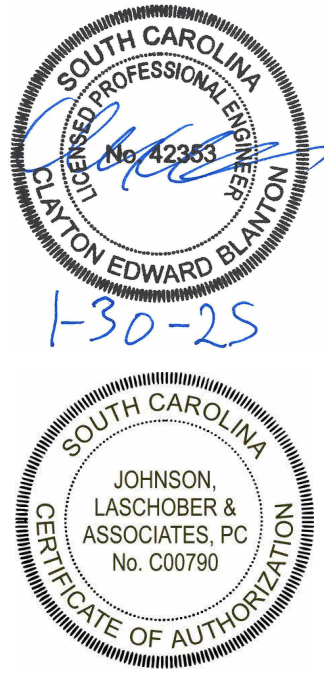

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051


PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
BUILDING 100 - DAY USE
RESTROOM BUILDING -
POWER AND LIGHTING
PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. E-101
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 46 OF 53


1
E-201

BUILDING 200/700 - POWER PLAN
SCALE: 1/4" = 1'-0"

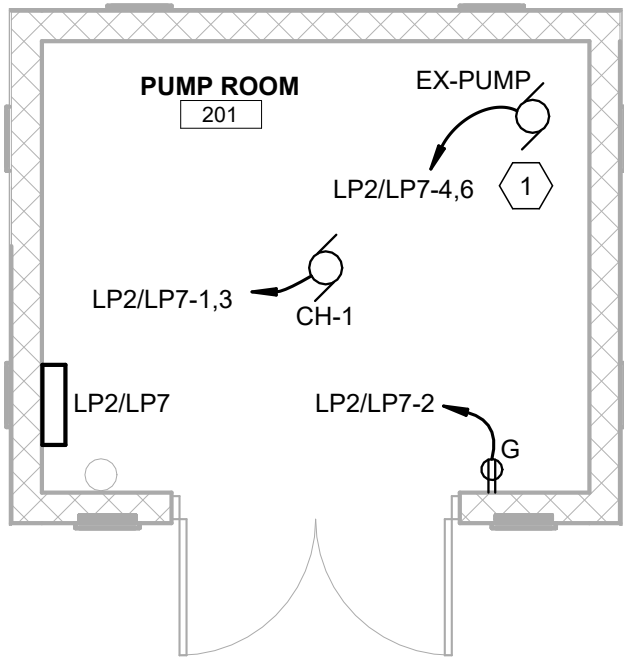

2
E-201

BUILDING 200/700 - LIGHTING PLAN
SCALE: 1/4" = 1'-0"

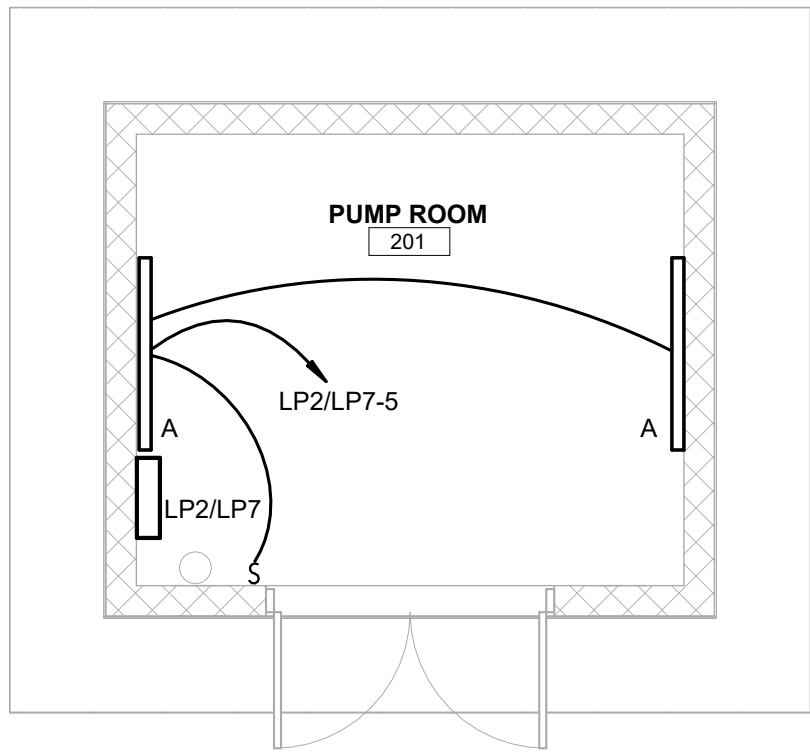

ELECTRICAL PLAN KEYED NOTES

1 RELOCATED EXISTING PUMP. PROVIDE NEW CONDUCTORS AND FUSED DISCONNECT.

NOTE:
SEE CIVIL DRAWING C-102 & C-107 FOR
TRUE NORTH




0 5 1 2 4 8 12 FT.
SCALE: 1/4" = 1'-0"



R-08
Southern Region

STAMPS, LOGOS, AND SEALS

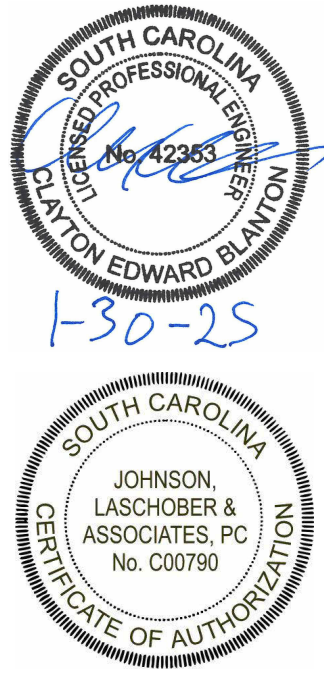

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**


1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JLA
JOHNSON, LASCHOBBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 200/700 - WELL
HOUSE - POWER AND
LIGHTING PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. E-201
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 47 OF 53

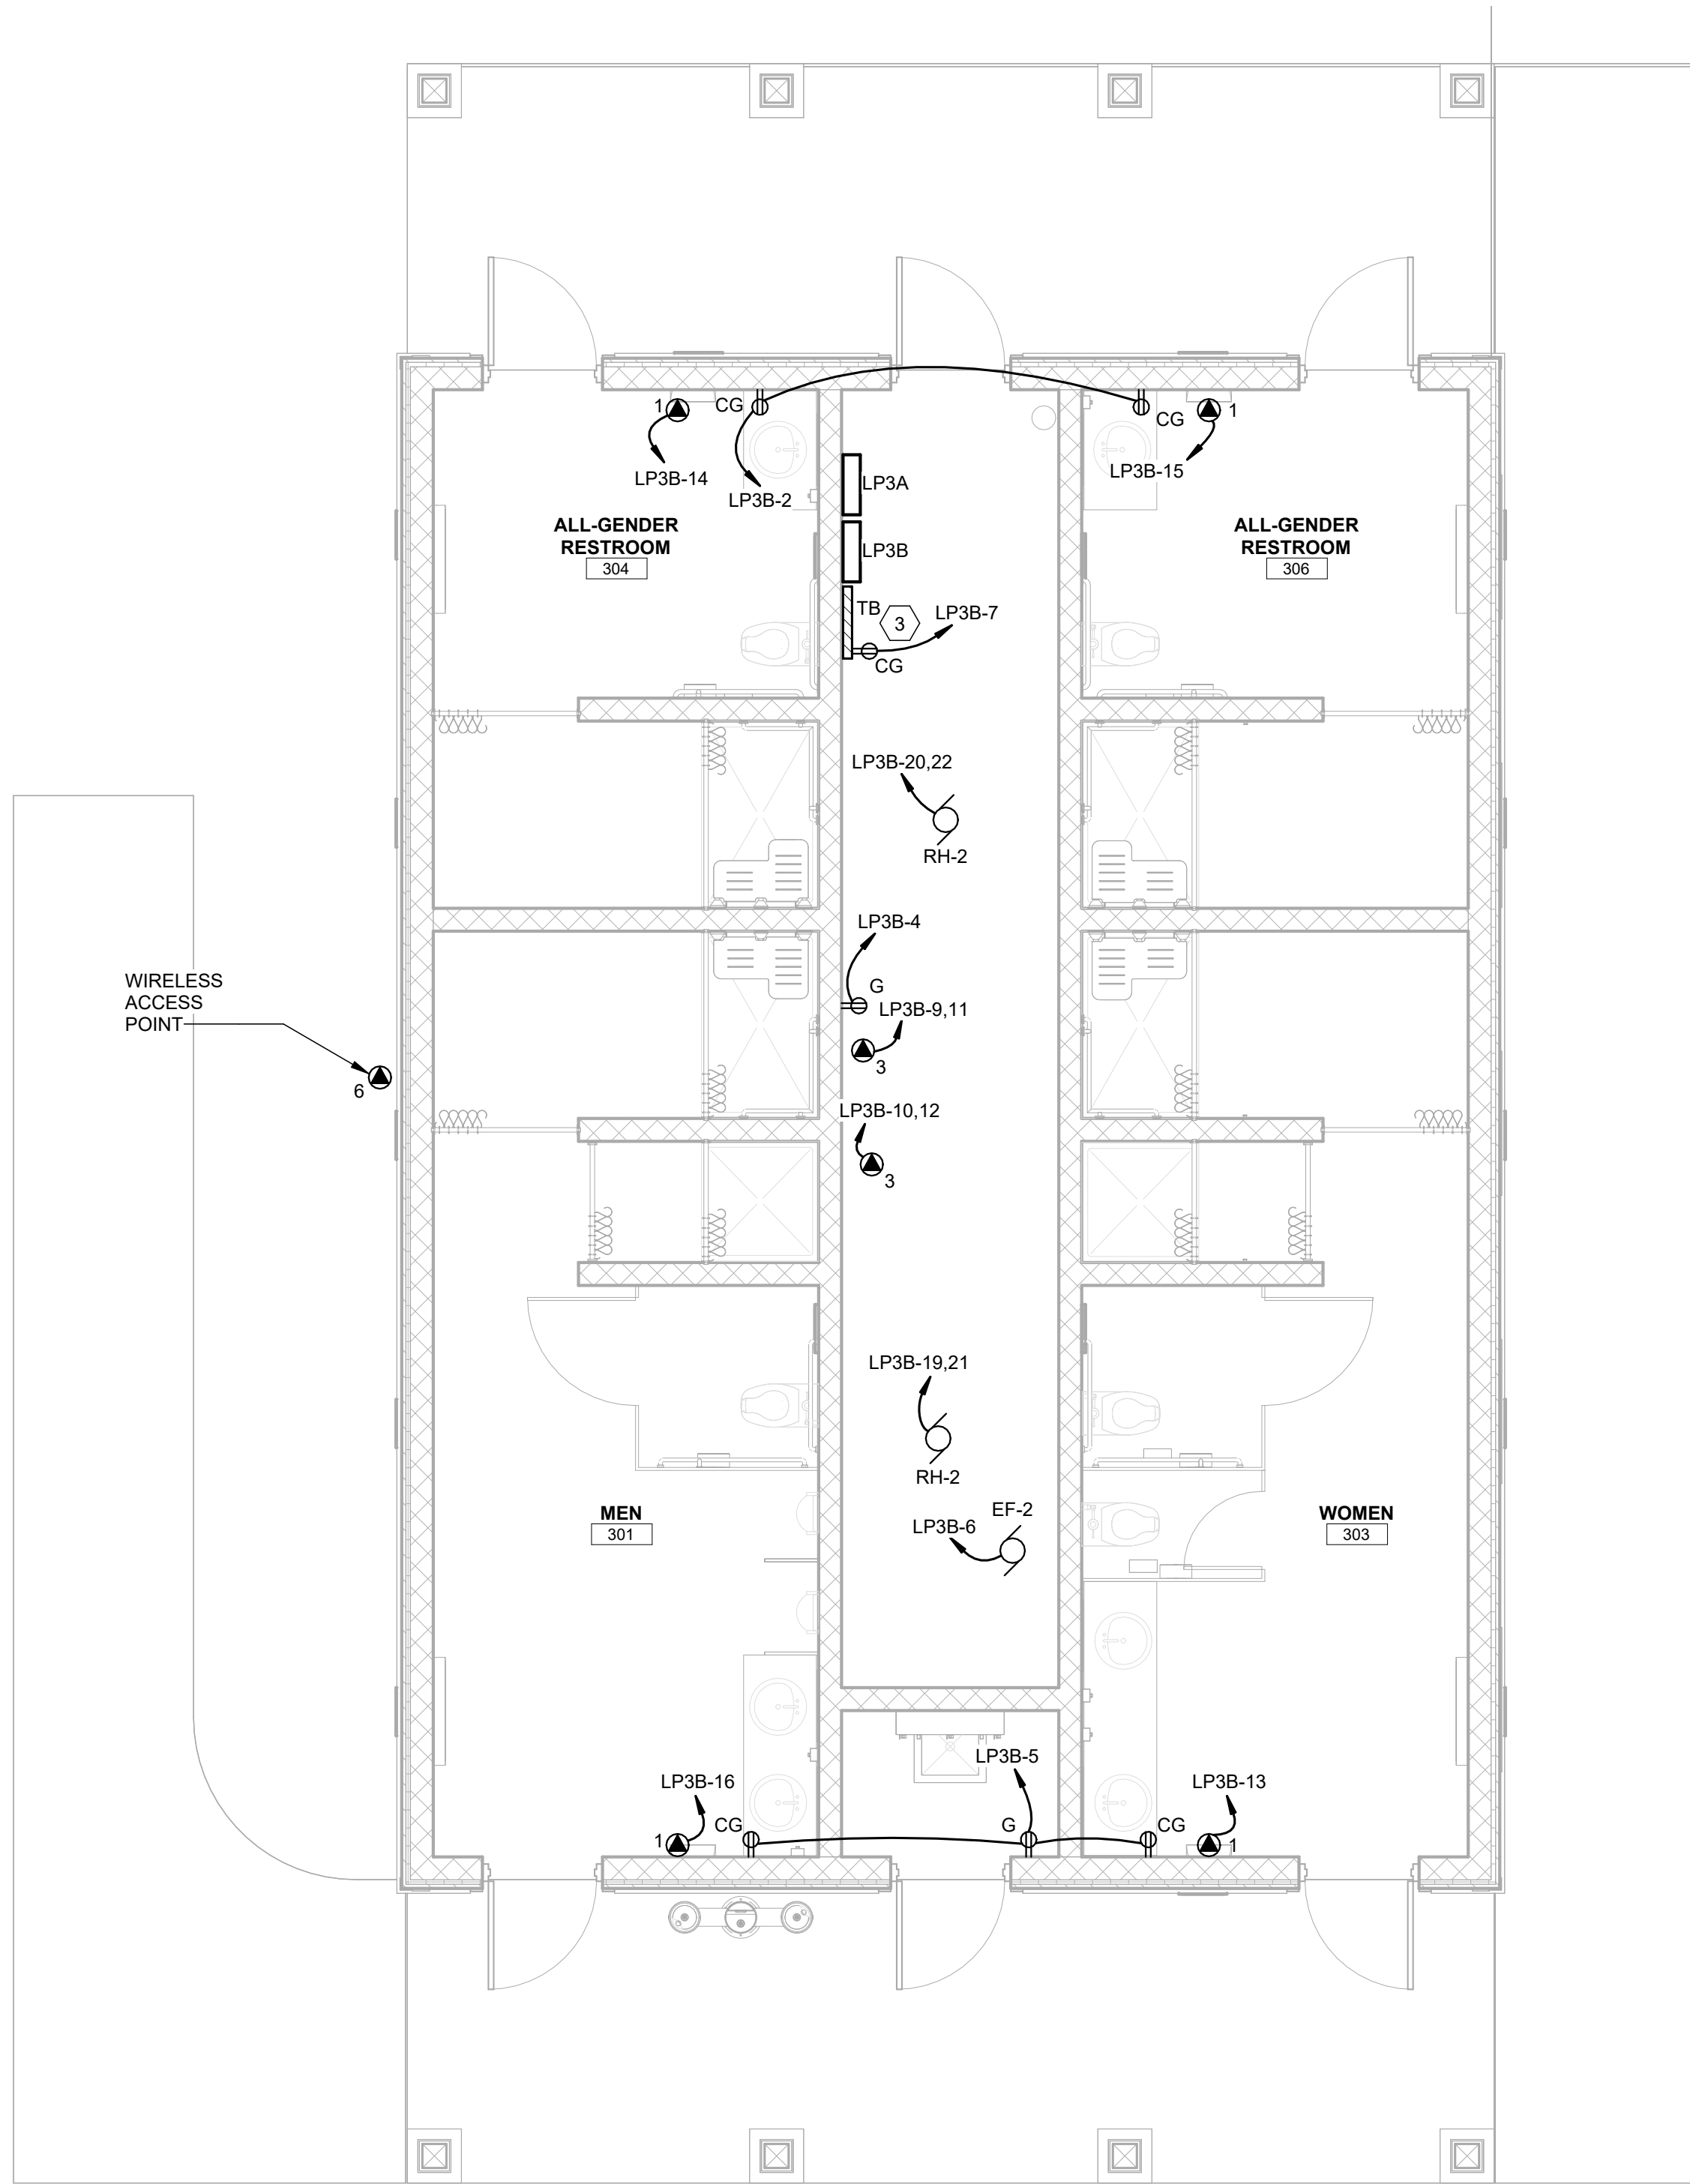


1 **BUILDING 300 - POWER PLAN**
E-301 SCALE: 1/4" = 1'-0"

ELECTRICAL PLAN CONSTRUCTION NOTES


- COORDINATE WITH MECHANICAL AND PLUMBING CONTRACTOR TO ENSURE INSTALLATION OF HVAC AND PLUMBING EQUIPMENT, DUCTWORK, AND PIPING DOES NOT INTERFERE WITH THE REQUIRED CLEARANCE IN FRONT OF AND/OR ABOVE ELECTRICAL EQUIPMENT.
- MARK 2020 NEC WORKING SPACE CLEARANCES ON FLOOR

ELECTRICAL PLAN KEYED NOTES

- MANUAL OVERRIDE SWITCHES FOR LIGHTING IN RESTROOMS.
- PROVIDE PHOTO CELL, RELAY PANEL AND TIME CLOCK TO CONTROL ALL EXTERIOR LIGHTS.
- PROVIDE 2" EMPTY CONDUIT FOR COMMUNICATION SERVICE. TERMINATE 5'-0" OUTSIDE OF BUILDING. COORDINATE LOCATION WITH OWNER.
- THIS FIXTURE SHALL NOT BE CONTROLLED BY SWITCH ONLY AND NOT OCCUPANCY SENSOR

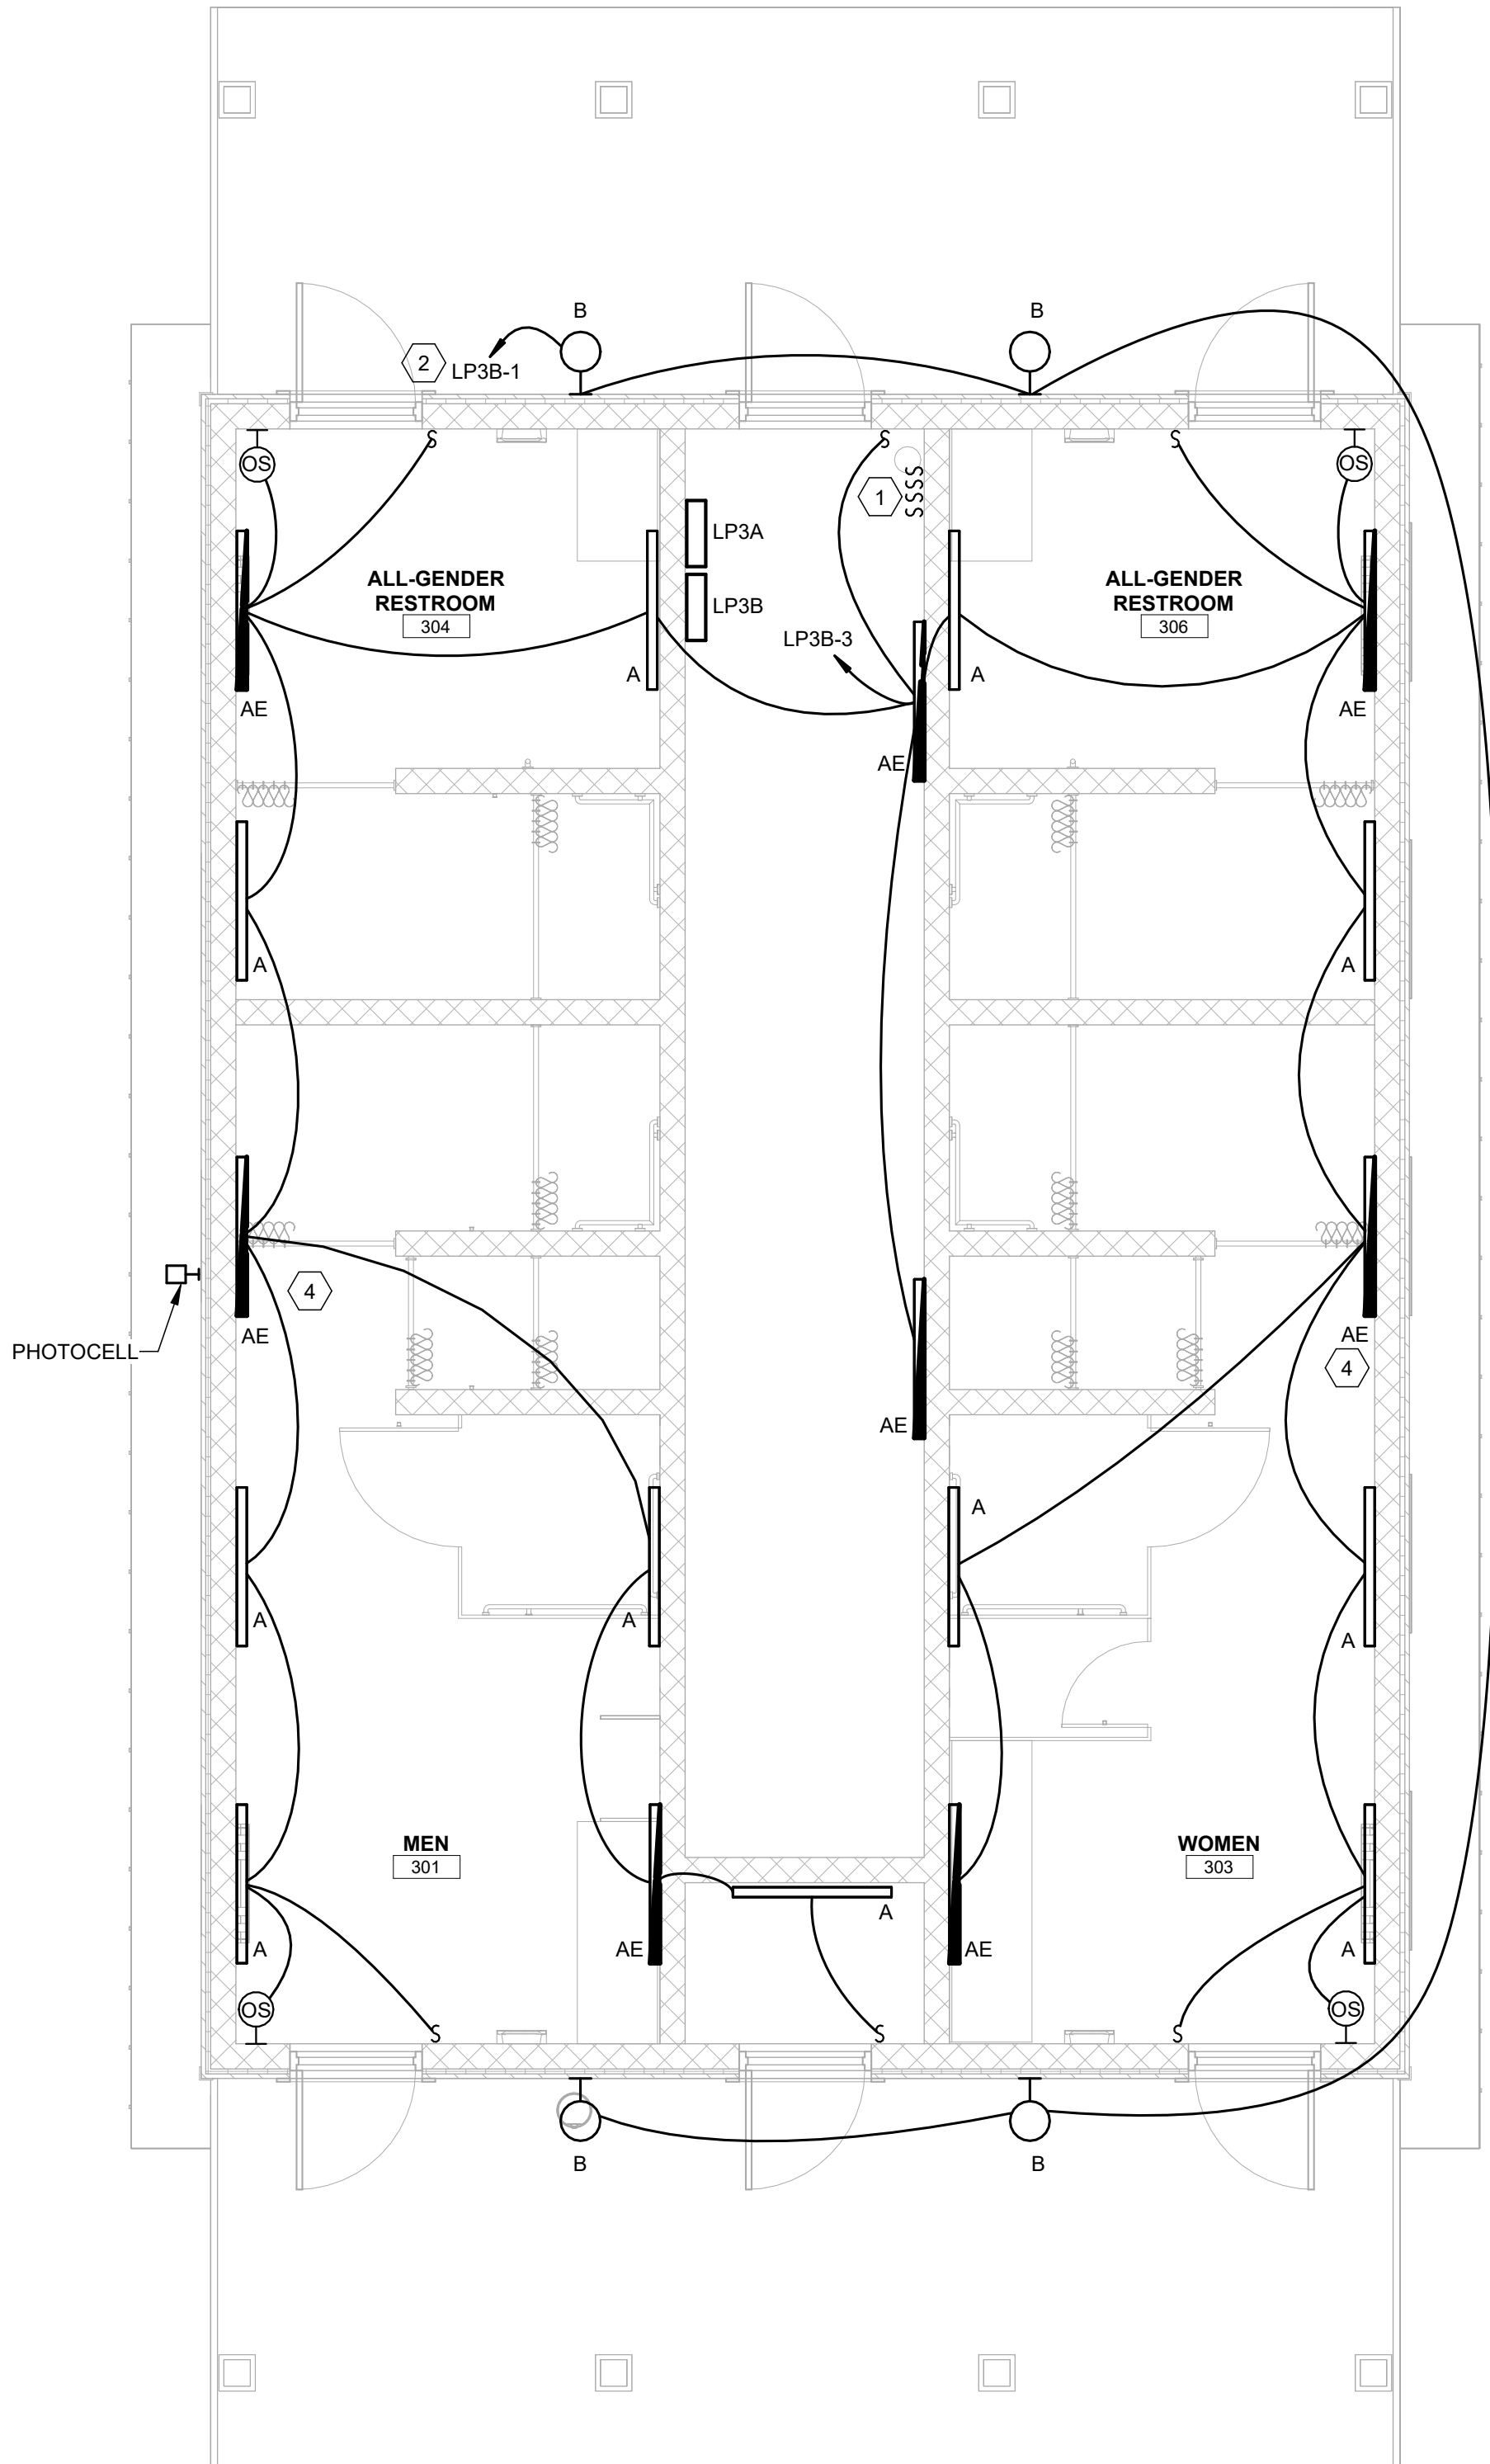


2 **BUILDING 300 - LIGHTING PLAN**
E-301 SCALE: 1/4" = 1'-0"

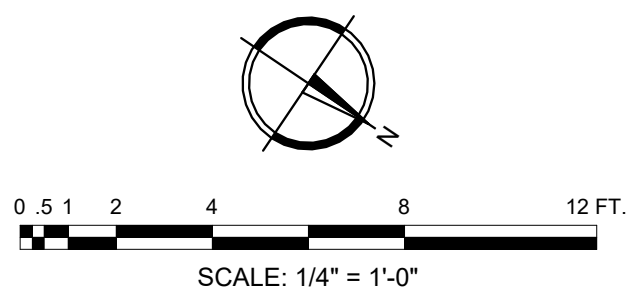

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

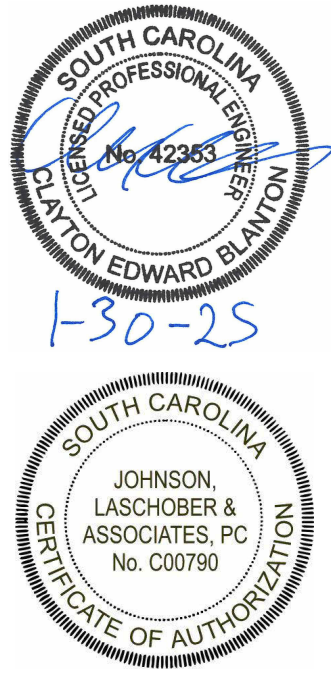

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**


1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:

JOHNSON, LASCHNER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
**BUILDING 300 -
CAMPGROUND BATH
HOUSE - POWER AND
LIGHTING PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. E-301
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 48 OF 53

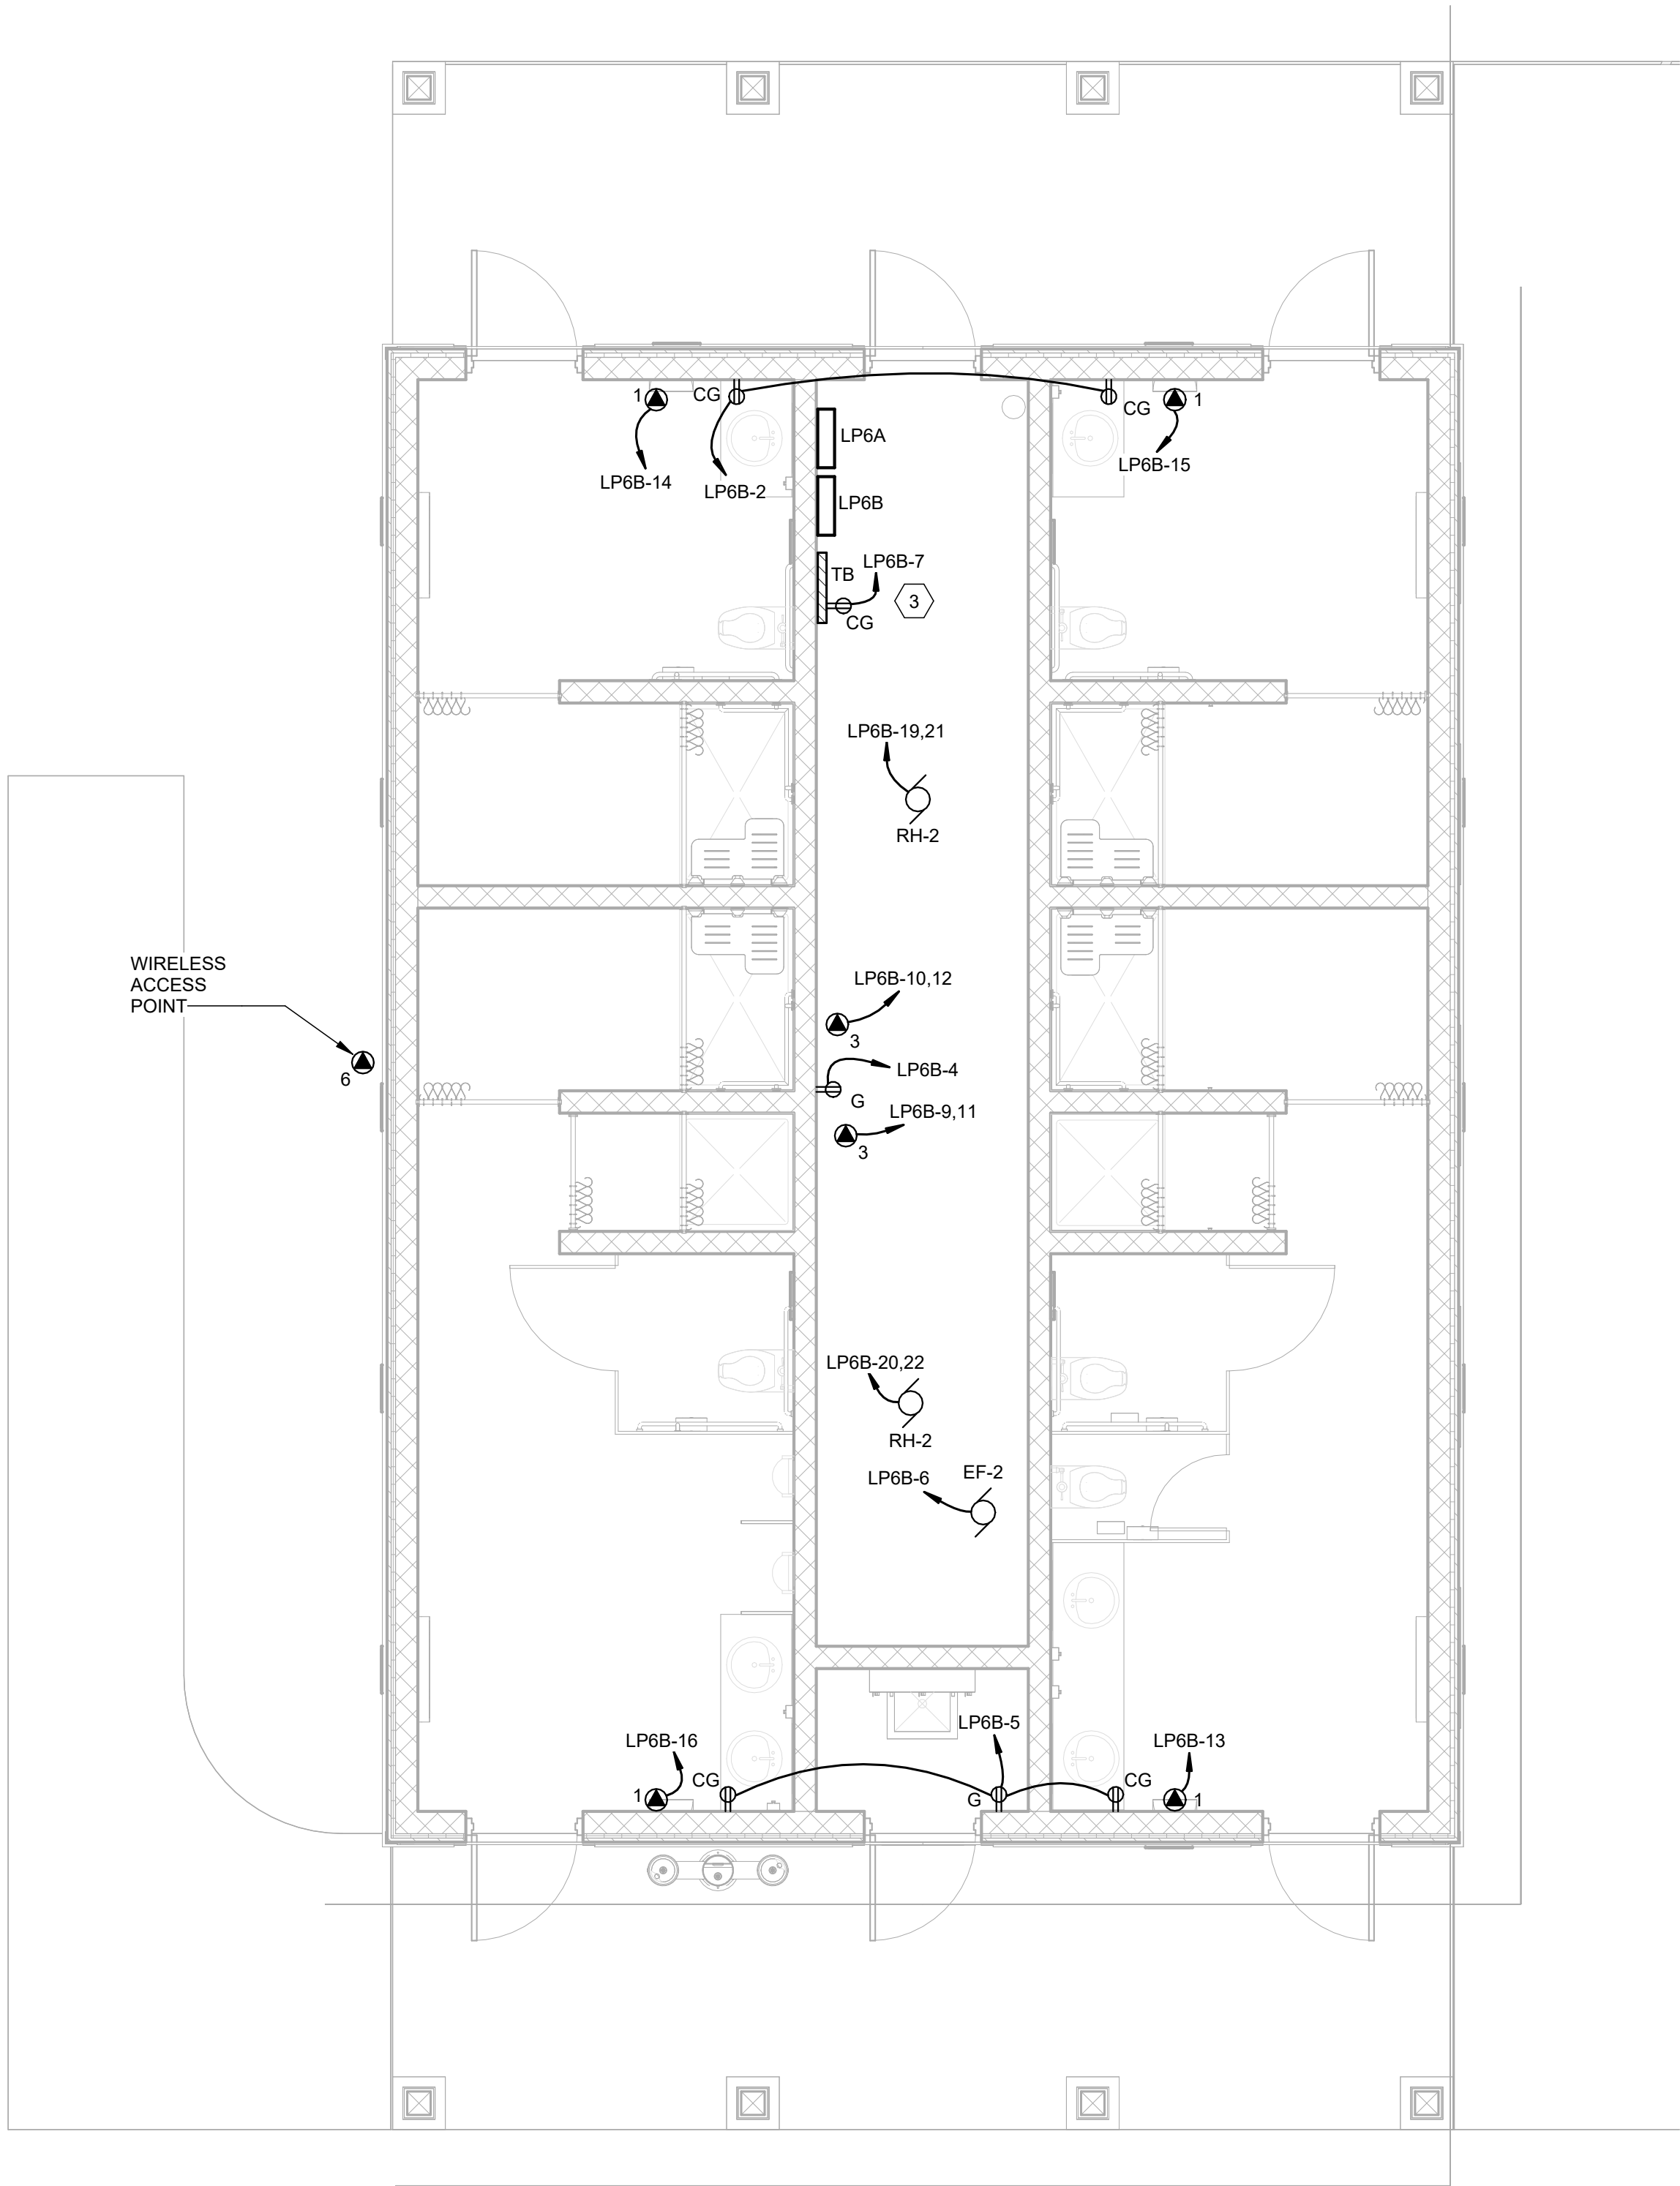


1 BUILDING 600 - POWER PLAN
E-302 SCALE: 1/4" = 1'-0"

ELECTRICAL PLAN CONSTRUCTION NOTES


- COORDINATE WITH MECHANICAL AND PLUMBING CONTRACTOR TO ENSURE INSTALLATION OF HVAC AND PLUMBING EQUIPMENT, DUCTWORK, AND PIPING DOES NOT INTERFERE WITH THE REQUIRED CLEARANCE IN FRONT OF AND/OR ABOVE ELECTRICAL EQUIPMENT.
- MARK 2020 NEC WORKING SPACE CLEARANCES ON FLOOR

ELECTRICAL PLAN KEYED NOTES

- MANUAL OVERRIDE SWITCHES FOR LIGHTING IN RESTROOMS.
- PROVIDE PHOTO CELL, RELAY PANEL AND TIME CLOCK TO CONTROL ALL EXTERIOR LIGHTS.
- PROVIDE 2" EMPTY CONDUIT FOR COMMUNICATION SERVICE. TERMINATE 5'-0" OUTSIDE OF BUILDING. COORDINATE LOCATION WITH OWNER.
- THIS FIXTURE SHALL NOT BE CONTROLLED BY SWITCH ONLY AND NOT OCCUPANCY SENSOR

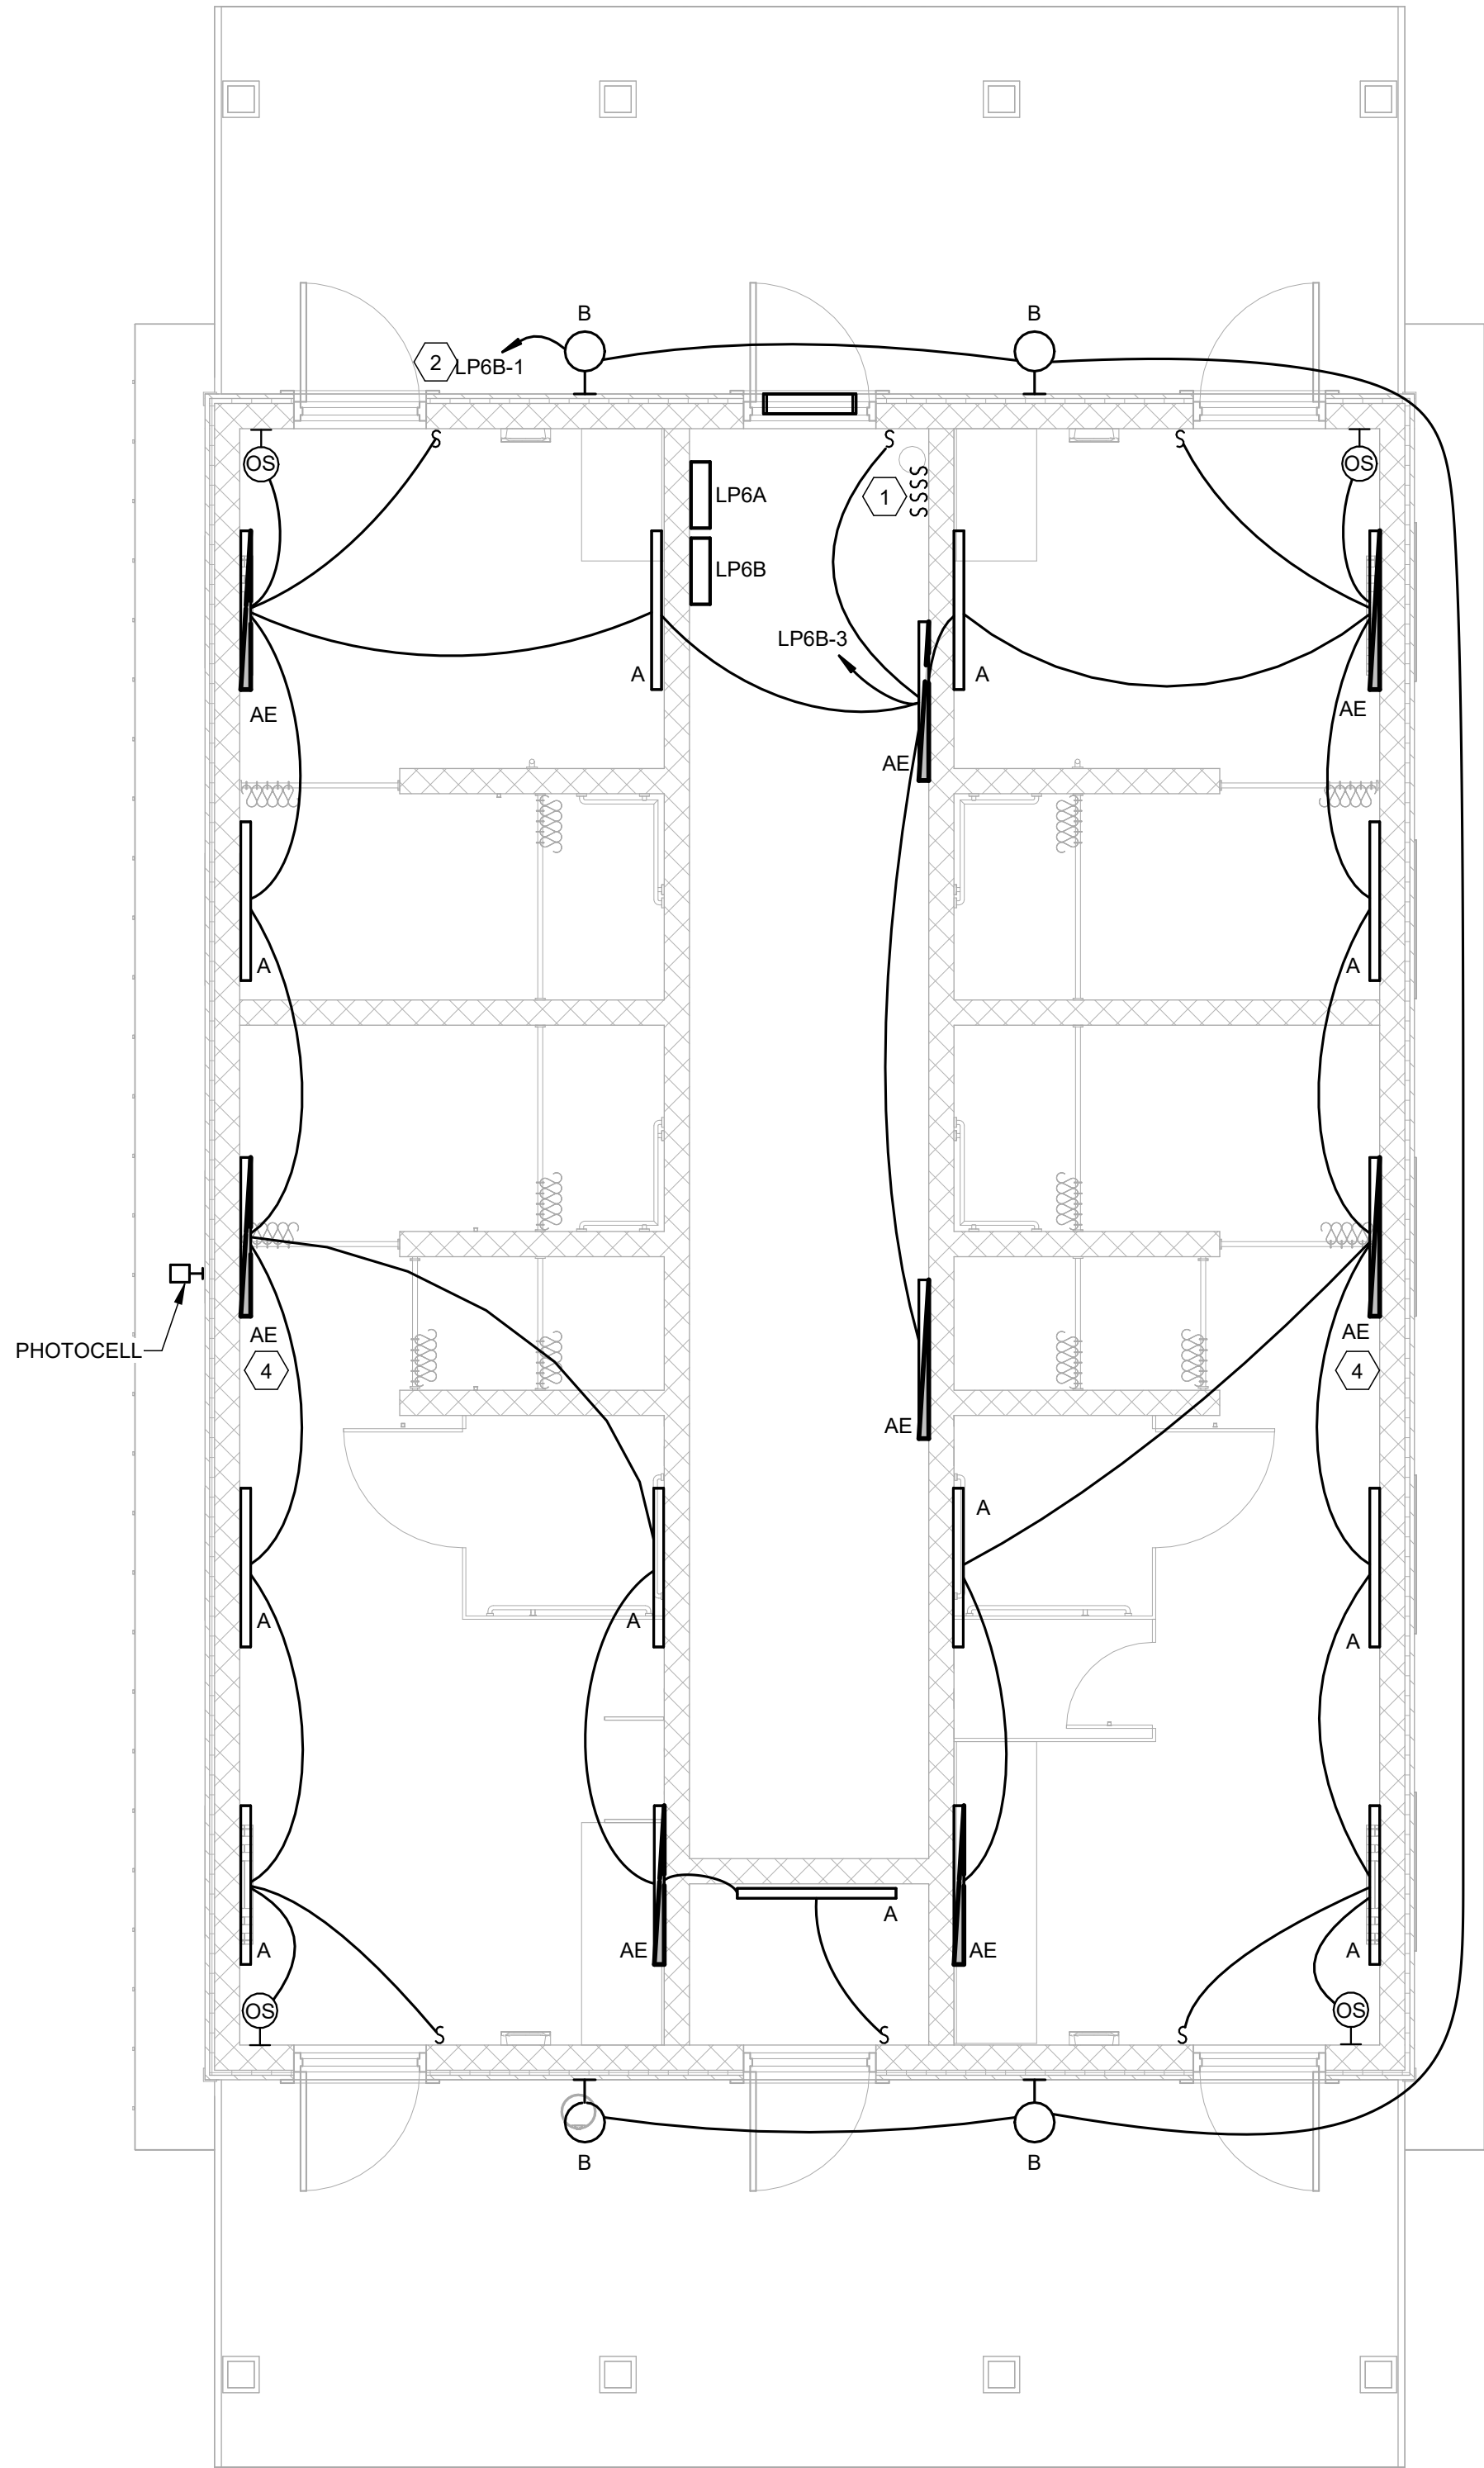


2 BUILDING 600 - LIGHTING PLAN
E-302 SCALE: 1/4" = 1'-0"

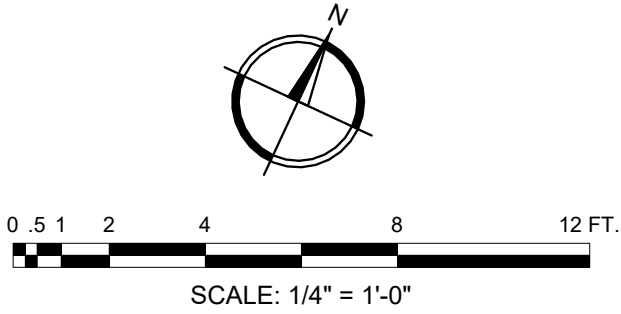

R-08
Southern Region

STAMPS, LOGOS, AND SEALS

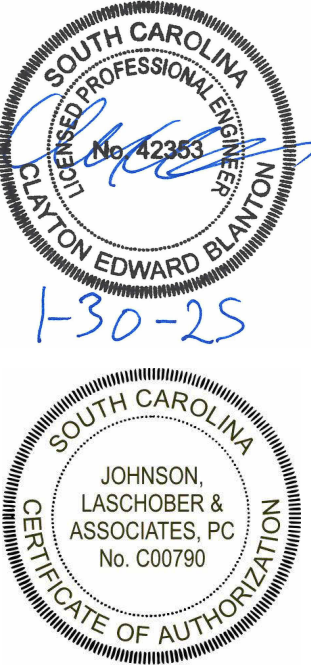

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION


FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:
JLA
JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE
BUILDING 600 -
CAMPGROUND BATH
HOUSE - POWER AND
LIGHTING PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. E-302
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 49 OF 53

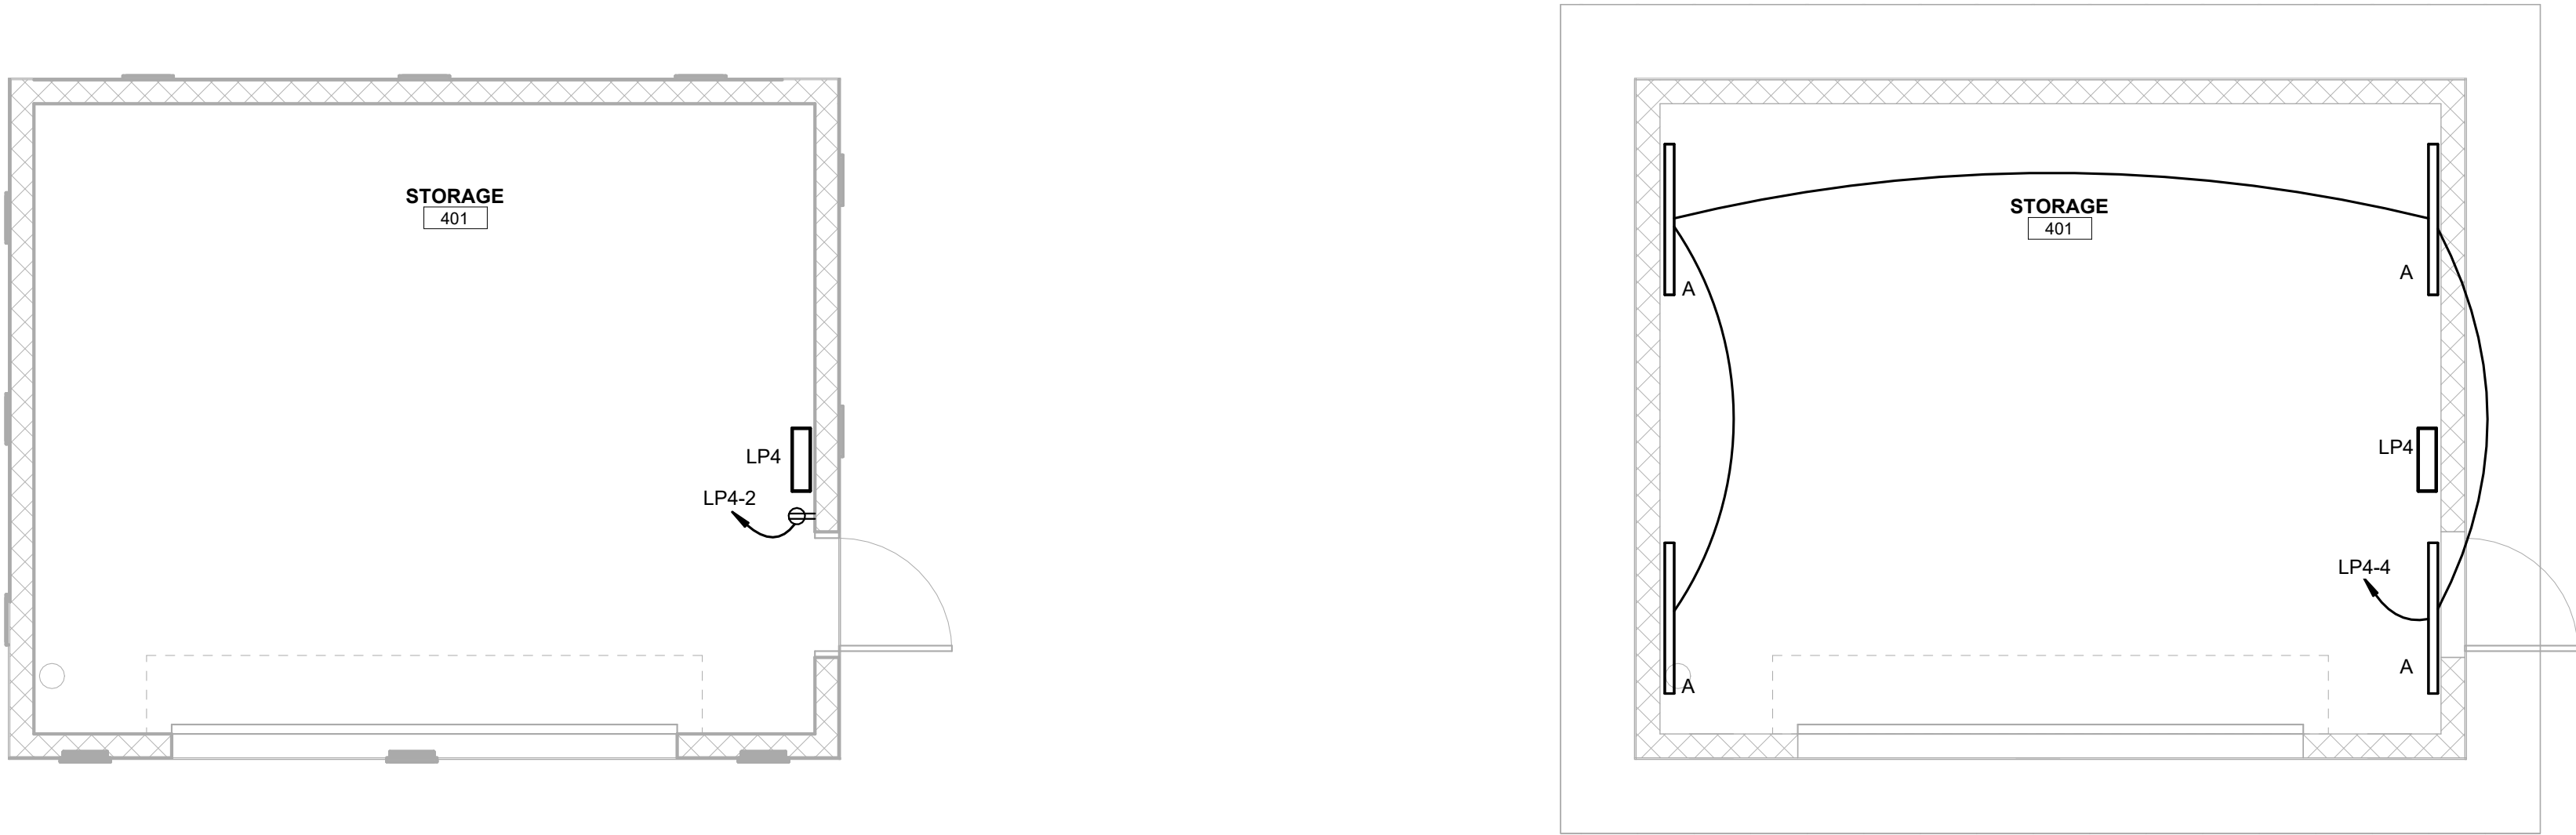

1 BUILDING 400 - POWER PLAN
E-401 SCALE: 1/4" = 1'-0"

2 BUILDING 400 - LIGHTING PLAN
E-401 SCALE: 1/4" = 1'-0"

PANEL: LP4									
LOCATION		STORAGE 401		MAIN AMPS		100 A			
MOUNTING		SURFACE		VOLTAGE		120/240 Single			
MAIN		MCB		PHASE		1		WIRE 3	
FEED FROM		UTILITY		S.C.C. SEE NOTE 1.				MIN. FULLY-RATED	

		A		B		TOTAL		DEMAND	
RECEPTACLE VA						180 VA		180 VA	
KITCHEN VA									
LIGHTING VA						152 VA		152 VA	
OTHER VA									
VA PER PHASE		180 VA		152 VA		332 VA		332 VA	
AMPS PER PHASE		2 A		1 A					

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A		B		CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
	SPARE	20 A	1	1	0 VA	180 VA			2	1	20 A	RECEPTACLES	2#12, #12G, 3/4" C.
	SPARE	20 A	1	3			0 VA	152 VA	4	1	20 A	LIGHTING	2#12, #12G, 3/4" C.
	SPARE	20 A	1	5	0 VA	0 VA			6	1	20 A	SPARE	
	SPARE	20 A	1	7			0 VA	0 VA	8	1	20 A	SPARE	
	SPARE	20 A	1	9	0 VA	0 VA			10	1	20 A	SPARE	
	SPARE	20 A	1	11			0 VA	0 VA	12	1	20 A	SPARE	

REMARKS:													
----------	--	--	--	--	--	--	--	--	--	--	--	--	--

NOTE 1.
CONTRACTOR TO COORDINATE SERVICE AND METERING INSTALLATION REQUIREMENTS, AIC RATING, AND PANEL SCCR WITH UTILITY COMPANY PRIOR TO BID AND INSTALLATION. PANEL SCCR TO BE EQUAL TO OR HIGHER THAN THE AVAILABLE FAULT CURRENT DETERMINED BY UTILITY BUT IN NO CASE LESS THAN 22kA.



United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS



1-30-25



4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
BUCK HALL RECREATION
AREA RECONSTRUCTION

FRANCIS MARION
NATIONAL FOREST

1099 BUCK HALL LANDING RD.,
MCCELLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:




JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com


DRAWING TITLE

BUILDING 400 - STORAGE
BUILDING - POWER AND
LIGHTING PLAN

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO.
DRAWN JAP	E-401
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 50 OF 53

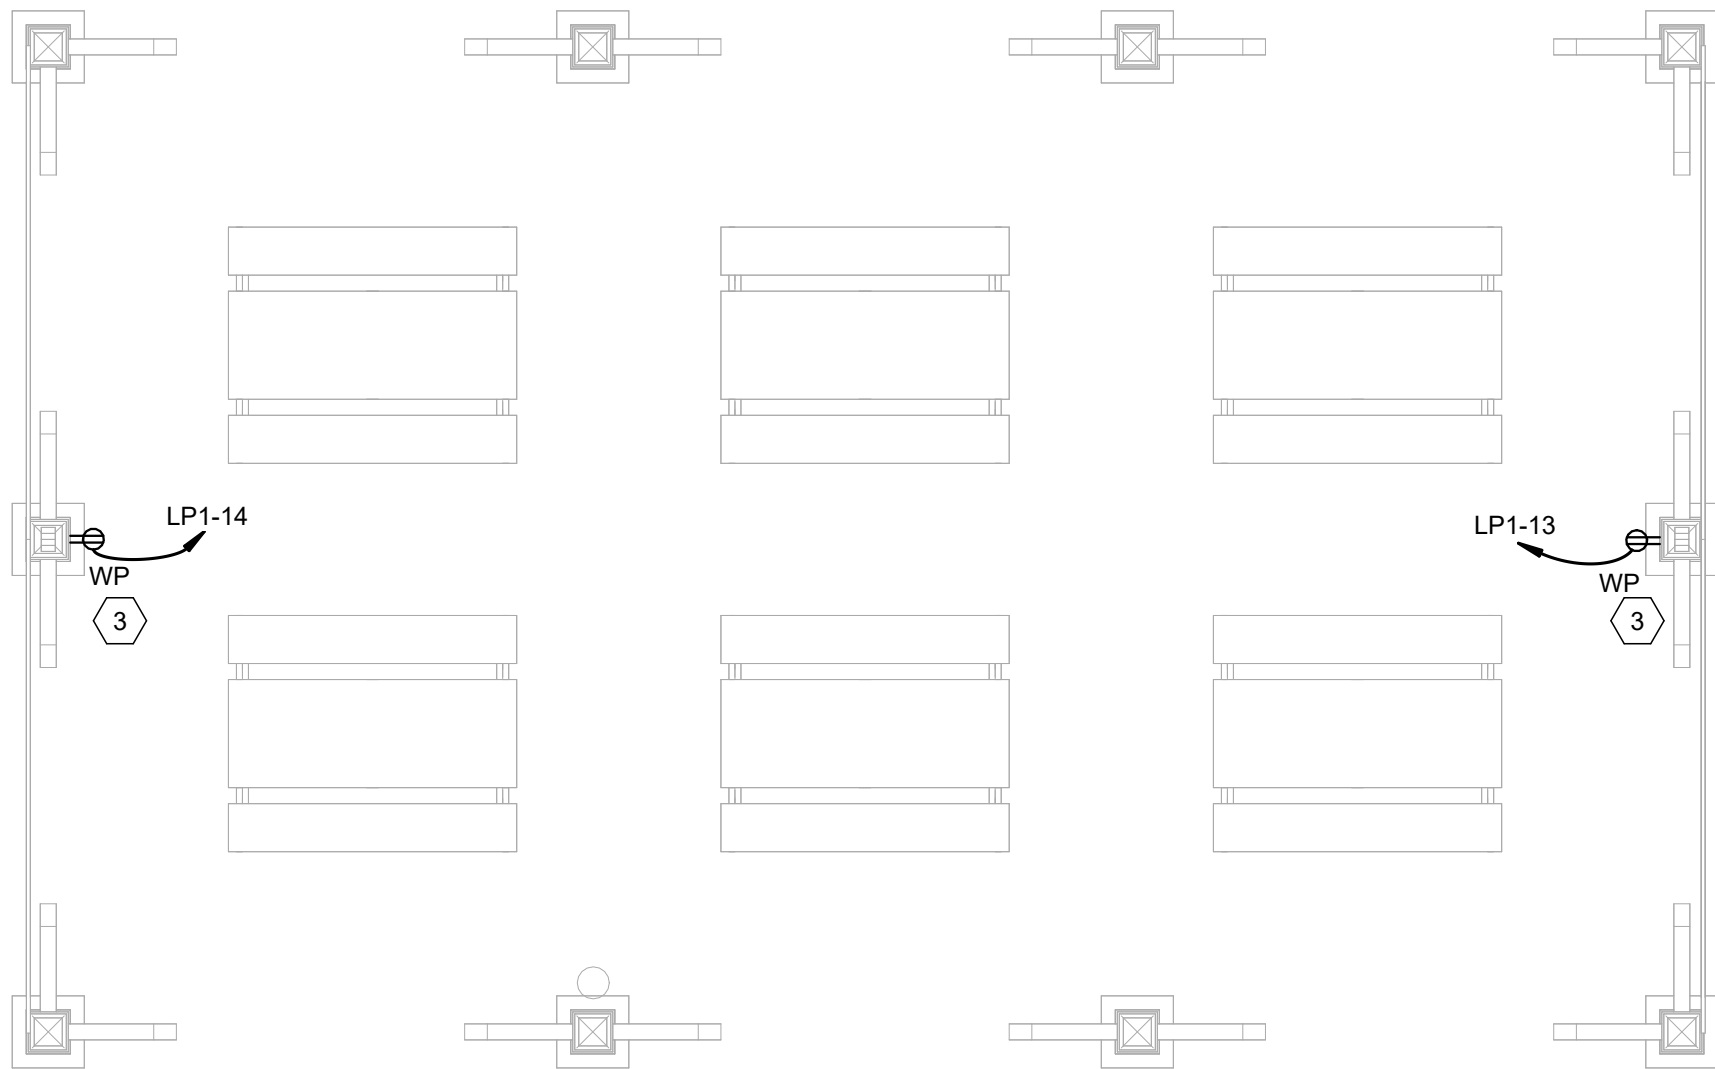


1
E-501
BUILDING 500 - POWER PLAN
SCALE: 1/4" = 1'-0"

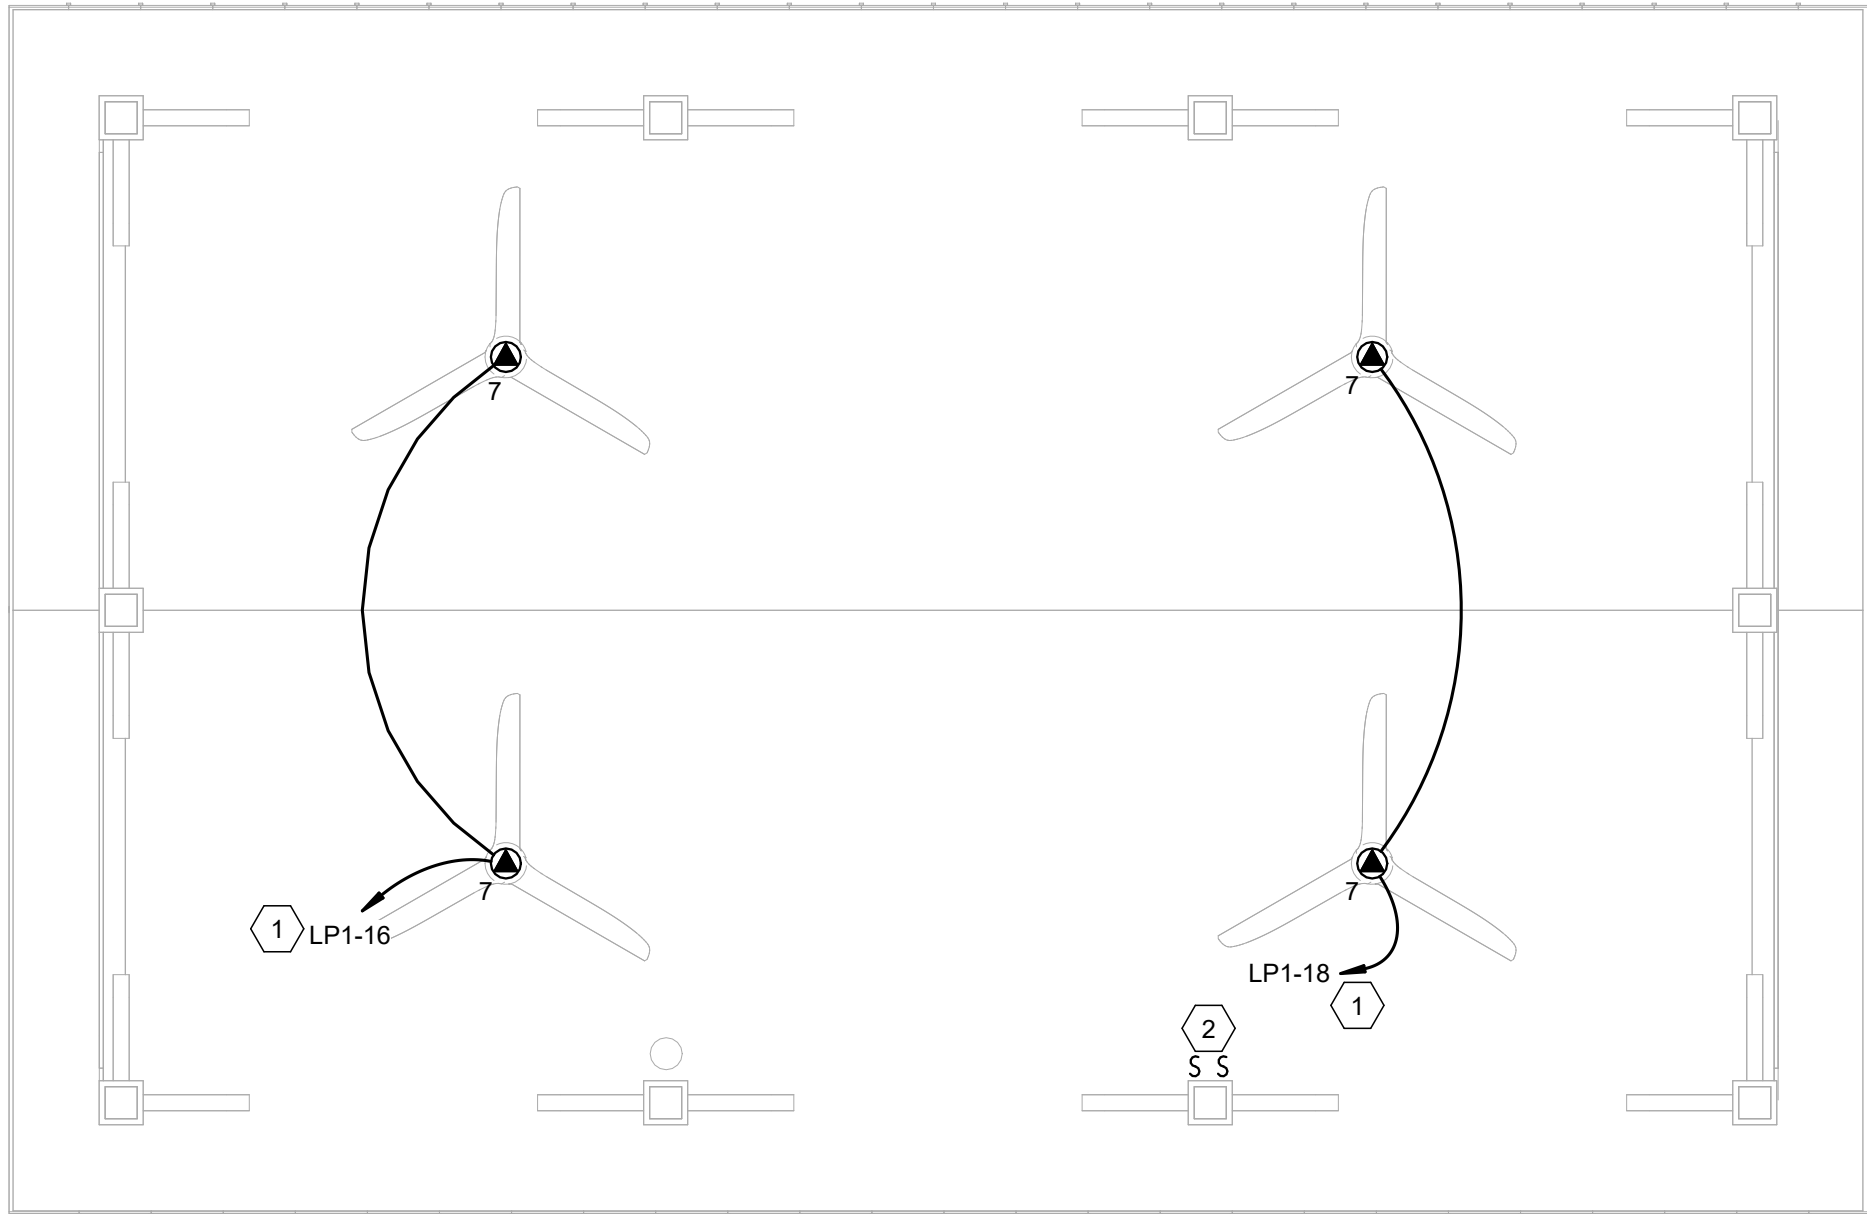

2
E-501
BUILDING 500 - LIGHTING PLAN
SCALE: 1/4" = 1'-0"

- ELECTRICAL PLAN KEYED NOTES**
- 1 FAN / LIGHTS TO BE CONTROLLED BY PHOTO CELL AND TIME CLOCK IN BUILDING 100. FAN REMOTE CONTROL DEVICE TO BE TURNED OVER TO OWNER. COORDINATE CONTROL REQUIREMENTS WITH OWNER.
 - 2 PROVIDE ONE OUTDOOR RATED SPST SWITCH TO CONTROL FAN LIGHTS AND SEPARATE SWITCH TO CONTROL FANS. PROVIDE METAL LOCKABLE SWITCH COVER.
 - 3 RECESS RECEPTACLE IN BLOCK BASE OF COLUMN. SEE ARCHITECTURAL DETAIL 3 / A-904.

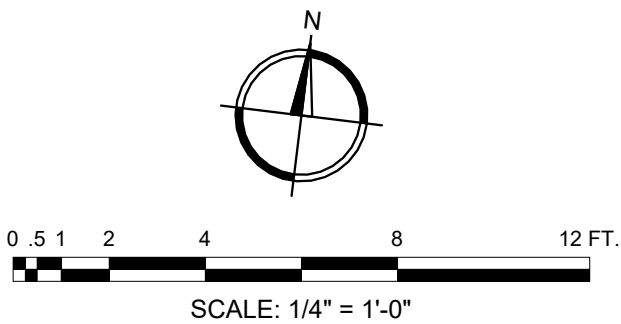




United States Department of Agriculture
Forest Service

R-08
Southern Region

STAMPS, LOGOS, AND SEALS



1-30-25

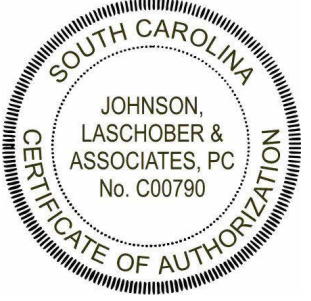

4		
3		
2		
1	FINAL CDS	01/30/25
NO.	REVISION/ISSUE	DATE

PROJECT NAME
**BUCK HALL RECREATION
AREA RECONSTRUCTION**

**FRANCIS MARION
NATIONAL FOREST**

1099 BUCK HALL LANDING RD.,
MC CLELLANVILLE, SC, 29458
Project Issue Date: 01/30/2025
Project Status: Final Construction Documents
Task Order Number: 12445222F0051

PREPARED BY:


JOHNSON, LASCHOBER & ASSOCIATES, P.C.
ARCHITECTS • ENGINEERS
LANDSCAPE ARCHITECTS
1296 BROAD ST., AUGUSTA, GEORGIA 30901
PHONE: (706) 724-5756 FAX: (706) 724-3955
WEBSITE: www.theJLAgroup.com

DRAWING TITLE

**BUILDING 500 - PICNIC
PAVILION - POWER AND
LIGHTING PLAN**

DATE 01/30/25	ARCHIVE NUMBER
DESIGNER JAP	DRAWING SHEET NO. E-501
DRAWN JAP	
CHECKED CEB	
PROJECT NO. 3094.2201	SHEET 51 OF 53

PANEL: LP1																	
LOCATION MOUNTING MAIN FEED FROM	ELECTRICAL 105 SURFACE MCB UTILITY	MAIN AMPS		200 A		VOLTAGE		120/240 Single									
		PHASE		1		WIRE		3									
		S.C.C.		SEE NOTE 1		MIN.		FULLY-RATED									
MIN. WIRE/CONDUIT SIZE		Load Name		AMPS	P	CKT	A		B		CKT	P	AMPS	Load Name		MIN. WIRE/CONDUIT SIZE	
2#12, #12G, 3/4" C.		EXTERIOR LIGHTING		20 A	1	1	300 VA	540 VA			2	1	20 A	RECEPTACLES / EF-1		2#12, #12G, 3/4" C.	
2#12, #12G, 3/4" C.		LIGHTING		20 A	1	3			380 VA	1000 VA	4	1	20 A	IT RECEPTACLE		2#12, #12G, 3/4" C.	
2#12, #12G, 3/4" C.		HAND DRYER		20 A	1	5	1080 VA	1080 VA			6	1	20 A	HAND DRYER		2#12, #12G, 3/4" C.	
2#12, #12G, 3/4" C.		HAND DRYER		20 A	1	7			1080 VA	1080 VA	8	1	20 A	HAND DRYER		2#12, #12G, 3/4" C.	
2#12, #12G, 3/4" C.		RH-1		20 A	2	9	1044 VA	1500 VA			10	2	20 A	EWH-1		2#12, #12G, 3/4" C.	
--		--		--	--	11			1044 VA	1500 VA	12	--	--	--		--	
2#10, #10G, 3/4" C.		PICNIC PAVILION RECEPTACLE		20 A	1	13	180 VA	180 VA			14	1	20 A	PICNIC PAVILION RECEPTACLE		2#10, #10G, 3/4" C.	
2#10, #10G, 3/4" C.		EXTERIOR LIGHTING		20 A	2	15			400 VA	960 VA	16	1	20 A	PICNIC PAVILION FANS		2#10, #10G, 3/4" C.	
--		--		--	--	17	400 VA	960 VA			18	1	20 A	PICNIC PAVILION FANS		2#10, #10G, 3/4" C.	
SEE RISER		LIFT STATION PANEL LP10		40 A	2	19			1440 VA	0 VA	20	1	20 A	SPARE			
--		--		--	--	21	1440 VA	600 VA			22	1	20 A	PAY STATION		2#12, #12G, 3/4" C.	
		SPARE		20 A	1	23			0 VA	0 VA	24	1	20 A	SPARE			
		SPARE		20 A	1	25	0 VA	0 VA			26	1	20 A	SPARE			
		SPARE		20 A	1	27			0 VA	0 VA	28	1	20 A	SPARE			
		SPARE		20 A	1	29	0 VA	0 VA			30	1	20 A	SPARE			
		SPARE		20 A	1	31			0 VA	0 VA	32	1	20 A	SPARE			
		SPARE		20 A	1	33	0 VA	0 VA			34	1	20 A	SPARE			
		SPACE		--	1	35			--	--	36	1	--	SPACE			
		SPACE		--	1	37	--	--			38	1	--	SPACE			
		SPACE		--	1	39			--	--	40	1	--	SPACE			
		SPACE		--	1	41	--	--			42	1	--	SPACE			
REMARKS:																	

LOCATIONPUMP ROOM 201
MOUNTINGSURFACE
MAINMCB
FEED FROMUTILITY

PANEL:LP2/LP7

MAIN AMPS100 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1MIN.
FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA			180 VA	180 VA
KITCHEN VA				
LIGHTING VA			76 VA	76 VA
OTHER VA			5580 VA	5580 VA
VA PER PHASE	5081 VA	6685 VA	11766 VA	11766 VA
AMPS PER PHASE	42 A	56 A		

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
2#12, #12G, 3/4" C.	CH-1	20 A	2	1	744 VA	180 VA	2	1	20 A	RECEPTACLE	2#12, #12G, 3/4" C.
--	--	--	--	3		744 VA	1800 VA	4	2	20 A	WELL PUMP
2#12, #12G, 3/4" C.	LIGHTING	20 A	1	5	76 VA	1800 VA	6	--	--	--	--
2#8, #8G, 3/4" C.	SITE LIGHTING *	20 A	2	7		421 VA	3720 VA	8	2	40 A	SEPTIC PANEL LP9 *
--	--	--	--	9	421 VA	1860 VA		10	--	--	SEE RISER
--	SPARE	20 A	1	11		0 VA	0 VA	12	1	20 A	SPARE

REMARKS: * CIRCUIT ON PANEL LP7 ONLY

LOCATIONELECTRICAL 305
MOUNTINGSURFACE
MAINMCB
FEED FROMUTILITY

PANEL:LP3A

MAIN AMPS1000 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1.
PANEL OVERCURRENT PROTECTION 100% FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA			2080 VA	2080 VA
KITCHEN VA				
LIGHTING VA			722 VA	722 VA
RV POWER			216000 VA	128400 VA
VA PER PHASE	133714 VA	133830 VA	267544 VA	179944 VA
AMPS PER...	1114 A	1115 A		750 A

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
3#1/0, #3G, 1 1/2" C.	RV POWER	70 A	2	1	6000 VA	6000 VA	2	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	3		6000 VA	6000 VA	4	--	--	--
3#1/0, #3G, 1 1/2" C.	RV POWER	70 A	2	5	6000 VA	6000 VA	6	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	7		6000 VA	6000 VA	8	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	9	6000 VA	6000 VA	10	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	11		6000 VA	6000 VA	12	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	13	6000 VA	6000 VA	14	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	15		6000 VA	6000 VA	16	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	17	6000 VA	6000 VA	18	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	19		6000 VA	6000 VA	20	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	21	6000 VA	6000 VA	22	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	23		6000 VA	6000 VA	24	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	25	6000 VA	6000 VA	26	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	27		6000 VA	6000 VA	28	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	29	6000 VA	6000 VA	30	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	31		6000 VA	6000 VA	32	--	--	--
3#1/0, #3G, 1 1/2" C.	RV POWER	70 A	2	33	6000 VA	6000 VA	34	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	35		6000 VA	6000 VA	36	--	--	--
SEE RISER	PANEL LP3B	300 A	2	37	25714 VA	--	38	1	--	SPACE	--
--	--	--	--	39		25830 VA	--	40	1	--	SPACE
--	SPACE	--	1	41	--	--	42	1	--	SPACE	--

REMARKS:

LOCATIONELECTRICAL 305
MOUNTINGSURFACE
MAINMCB
FEED FROMUTILITY

PANEL:LP6A

MAIN AMPS1000 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1.
PANEL OVERCURRENT PROTECTION 100% FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA			2080 VA	2080 VA
KITCHEN VA				
LIGHTING VA			722 VA	722 VA
RV POWER			192000 VA	117120 VA
VA PER PHASE	121714 VA	121830 VA	243544 VA	168664 VA
AMPS PER...	1014 A	1015 A		703 A

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
3#3, #6G, 1" C.	RV POWER	70 A	2	1	6000 VA	6000 VA	2	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	3		6000 VA	6000 VA	4	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	5	6000 VA	6000 VA	6	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	7		6000 VA	6000 VA	8	--	--	--
3#1/0, #3G, 1 1/2" C.	RV POWER	70 A	2	9	6000 VA	6000 VA	10	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	11		6000 VA	6000 VA	12	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	13	6000 VA	6000 VA	14	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	15		6000 VA	6000 VA	16	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	17	6000 VA	6000 VA	18	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	19		6000 VA	6000 VA	20	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	21	6000 VA	6000 VA	22	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	23		6000 VA	6000 VA	24	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	25	6000 VA	6000 VA	26	2	70 A	RV POWER	3#3, #6G, 1" C.
--	--	--	--	27		6000 VA	6000 VA	28	--	--	--
3#3, #6G, 1" C.	RV POWER	70 A	2	29	6000 VA	6000 VA	30	2	70 A	RV POWER	3#1/0, #3G, 1 1/2" C.
--	--	--	--	31		6000 VA	6000 VA	32	--	--	--
SEE RISER	PANEL LP6B	300 A	2	33	25714 VA	--	34	1	--	SPACE	--
--	--	--	--	35		25830 VA	--	36	1	--	SPACE
--	SPACE	--	1	37	--	--	38	1	--	SPACE	--
--	SPACE	--	1	39		--	40	1	--	SPACE	--
--	SPACE	--	1	41	--	--	42	1	--	SPACE	--

REMARKS:

NOTE 1.

CONTRACTOR TO COORDINATE SERVICE AND METERING INSTALLATION REQUIREMENTS, AIC RATING, AND PANEL SCCR WITH UTILITY COMPANY PRIOR TO BID AND INSTALLATION. PANEL SCCR TO BE EQUAL TO OR HIGHER THAN THE AVAILABLE FAULT CURRENT DETERMINED BY UTILITY BUT IN NO CASE LESS THAN 22KA.

LOCATIONSEE ELECTRICAL SITE PLANS
MOUNTINGES001 AND ES005
MAINSTAND
FEED FROMLP1 / LP7

PANEL:LP9/LP10

MAIN AMPS40 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1MIN.
FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA				
KITCHEN VA				
LIGHTING VA				
OTHER VA				
VA PER PHASE	3720 VA	1860 VA	5580 VA	5580 VA
AMPS PER PHASE	31 A	16 A		

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
2#10, #10G, 3/4" C.	CONTOL PANEL *	20 A	1	1	1860 VA	1860 VA	2	1	20 A	PUMP *	2#10, #10G, 3/4" C.
2#10, #10G, 3/4" C.	PUMP *	20 A	1	3		1860 VA	0 VA	4	1	20 A	SPARE
--	SPACE	--	1	5	--	--	6	1	--	SPACE	--

REMARKS: * COORDINATE PUMP AND CONTROL PANEL VOLTAGE WITH EQUIPMENT MANUFACTURER.

LOCATIONELECTRICAL 305
MOUNTINGSURFACE
MAINMLO
FEED FROMPANEL LP3A

PANEL:LP3B

MAIN AMPS300 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1.
FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA			2080 VA	2080 VA
KITCHEN VA				
LIGHTING VA			722 VA	722 VA
OTHER VA			43680 VA	43680 VA
VA PER PHASE	25714 VA	25830 VA	51544 VA	51544 VA
AMPS PER PHASE	214 A	215 A		

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
2#12, #12G, 3/4" C.	EXTERIOR LIGHTING	20 A	1	1	200 VA	360 VA	2	1	20 A	RECEPTACLES	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	LIGHTING	20 A	1	3		722 VA	180 VA	4	1	20 A	RECEPTACLE
2#12, #12G, 3/4" C.	RECEPTACLES	20 A	1	5	540 VA	696 VA	6	1	20 A	EF-2	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	RECEPTACLES	20 A	1	7		1000 VA	0 VA	8	1	20 A	SPARE
2#1, #6G, 1 1/4" C.	EWV-2	120 A	2	9	9840 VA	9840 VA	10	2	120 A	EWV-2	2#1, #6G, 1 1/4" C.
--	--	--	--	11		9840 VA	9840 VA	12	--	--	--
2#12, #12G, 3/4" C.	HAND DRYER	20 A	1	13	1080 VA	1080 VA	14	1	20 A	HAND DRYER	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	HAND DRYER	20 A	1	15		1080 VA	1080 VA	16	1	20 A	HAND DRYER
--	SPARE	20 A	1	17	0 VA	0 VA	18	1	20 A	SPARE	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	RH-2	20 A	2	19		1044 VA	1044 VA	20	2	20 A	RH-2
--	--	--	--	21	1044 VA	1044 VA	22	--	--	--	--
--	SPARE	20 A	1	23		0 VA	0 VA	24	1	20 A	SPARE
--	SPARE	20 A	1	25	0 VA	0 VA	26	1	20 A	SPARE	
--	SPARE	20 A	1	27		0 VA	0 VA	28	1	20 A	SPARE
--	SPACE	--	1	29	--	--	30	1	--	SPACE	
--	SPACE	--	1	31	--	--	32	1	--	SPACE	
--	SPACE	--	1	33	--	--	34	1	--	SPACE	
--	SPACE	--	1	35	--	--	36	1	--	SPACE	
--	SPACE	--	1	37	--	--	38	1	--	SPACE	
--	SPACE	--	1	39	--	--	40	1	--	SPACE	
--	SPACE	--	1	41	--	--	42	1	--	SPACE	

REMARKS:

LOCATIONELECTRICAL 305
MOUNTINGSURFACE
MAINMLO
FEED FROMPANEL LP6A

PANEL:LP6B

MAIN AMPS300 A
VOLTAGE120/240 Single
PHASE1WIRE3
S.C.C. SEE NOTE 1.
FULLY-RATED

	A	B	TOTAL	DEMAND
RECEPTACLE VA			2080 VA	2080 VA
KITCHEN VA				
LIGHTING VA			722 VA	722 VA
OTHER VA			43680 VA	43680 VA
VA PER PHASE	25714 VA	25830 VA	51544 VA	51544 VA
AMPS PER PHASE	214 A	215 A		

MIN. WIRE/CONDUIT SIZE	Load Name	AMPS	P	CKT	A	B	CKT	P	AMPS	Load Name	MIN. WIRE/CONDUIT SIZE
2#12, #12G, 3/4" C.	EXTERIOR LIGHTING	20 A	1	1	200 VA	360 VA	2	1	20 A	RECEPTACLES	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	LIGHTING	20 A	1	3		722 VA	180 VA	4	1	20 A	RECEPTACLES
2#12, #12G, 3/4" C.	RECEPTACLES	20 A	1	5	540 VA	696 VA	6	1	20 A	EF-2	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	RECEPTACLE	20 A	1	7		1000 VA	0 VA	8	1	20 A	SPARE
2#1, #6G, 1 1/4" C	EWV-2	120 A	2	9	9840 VA	9840 VA	10	2	120 A	EWV-2	2#1, #6G, 1 1/4" C.
--	--	--	--	11		9840 VA	9840 VA	12	--	--	--
2#12, #12G, 3/4" C.	HAND DRYER	20 A	1	13	1080 VA	1080 VA	14	1	20 A	HAND DRYER	2#12, #12G, 3/4" C.
2#12, #12G, 3/4" C.	HAND DRYER	20 A	1	15		1080 VA	1080 VA	16	1	20 A	HAND DRYER
--	--	--	--	17				18	--	--	--
2#12, #12G, 3/4" C.	RH-2	20 A	2	19		1044 VA	1044 VA	20	2	20 A	RH-2
--	--	--	--	21	1044 VA	1044 VA	22	--	--	--	--
--	SPARE	20 A	1	23		0 VA	0 VA	24	1	20 A	SPARE
--	SPARE	20 A	1	25	0 VA	0 VA	26	1	20 A	SPARE	
--	SPARE	20 A	1	27		0 VA	0 VA	28	1	20 A	SPARE
--	SPACE	--	1	29	--	--	30	1	--	SPACE	
--	SPACE	--	1	31	--	--	32	1	--	SPACE	
--	SPACE	--	1	33	--	--	34	1	--	SPACE	
--	SPACE	--	1	35	--	--	36	1	--	SPACE	
--	SPACE	--	1	37	--	--	38	1	--	SPACE	
--	SPACE	--	1	39	--	--	40	1	--	SPACE	
--	SPACE	--	1	41	--	--	42	1	--	SPACE	

REMARKS: