

STATEMENT OF WORK
FOR
PROJECT YTPM 26-5001
REPAIR BASKETBALL COURT, B1700



439 CIVIL ENGINEERING
WESTOVER AIR RESERVE BASE
CHICOPEE, MASSACHUSETTS 01022

12 MARCH 2026

SECTION	SECTION TITLE	PAGE
	STATEMENT OF WORK COVER SHEET	01
	DIVISION 1 - GENERAL REQUIREMENTS	03
	DIVISION 1 – SCOPE OF WORK	03
	DIVISION 1 - WESTOVER GENERAL CONDITIONS	05
	SPECIFICATIONS – WOOD ATHLETIC FLOORING – FLOOR SANDING AND REFINISHING	12
	APPENDIX A – LOCUS AND PROJECT LIMITS	16
	APPENDIX B – PICTURES OF EXISTING BASKETBALL COURT	17
	APPENDIX C – CENTER COURT LOGO	18
	APPENDIX D – 2025-26 NCAA BASKETBALL COURT LAYOUT	19
	ATTACHMENTS (FORMS)	
	1. Submittal Register	
	2. Construction Waste Management Plan	
	3. Quarterly Solid Waste Disposal Form - updated 20201001	
	4. 439 AW Form 20, Contractor Information Sheet	

DIVISION 1 - GENERAL REQUIREMENTS

Project is located at Westover Air Reserve Base, Chicopee, Massachusetts.

A. **Purpose:** The purpose of this project is for the complete resurfacing of the basketball court at the Westover Fitness Center, B1700. The Contractor shall provide all necessary labor, materials, and equipment to strip, repair, repaint, and refinish the court floor as detailed herein. All work must meet or exceed accepted commercial industry standards.

B. **Period of Performance:** The performance period for this Statement of Work is ninety (90) calendar days from Notice to Proceed. The Contractor shall begin work as described in the Scope of Work within ten (10) calendar days of Notice to Proceed (NTP). No construction shall begin prior to government approval of the Plans & Submittals. All on site work must be completed within ninety (90) calendar days of mobilization.

C. **Inspection:** A final inspection shall be conducted once all work has been completed in accordance with the Statement of Work prior to contract completion date. All punch list of items shall be corrected within ten (10) calendar days of final inspection or as approved by the Contracting Officer.

D. **Warranty:** The warranty shall be issued in accordance with RFO 52.246-21 Warranty of Construction. Extended warranties offered by the Contractor and its subcontractors or suppliers may be accepted by the Government at its discretion.

E. **Working Hours and Restrictions:** The work hours for this project are 7:00am to 4:00pm Monday through Friday excluding all Federal Holidays.

DIVISION 1 - SCOPE OF WORK

A. Site Preparation:

- Safely remove the court-side bleachers (3 sections) from the basketball court area and provide storage/protection until reinstallation after the resurfacing is complete.
- Remove the existing rubber base molding around the court perimeter, clean and prepare for reinstallation. Provide storage/protection until ready for reinstallation.
- Provide Dust and Debris Control Plan for Government approval.

B. Floor surface Sanding and Refinishing:

- Comply with attached Specification - "Wood Athletic Flooring – Floor Sanding and Refinishing"
- Perform necessary repairs to any damaged sections of the floor to ensure a smooth and uniform surface.
- The Contractor shall paint the following markings with precision, using colors that ensure clear visibility and contrast as specified.

<i>Court Type</i>	<i>Markings</i>
Basketball	Full-sized NCAA-style court with 3-point markings and a designated safety zone. See Appendix D - 2025-26 NCAA Basketball Court Layout. Notes: - The designated safety zone to be painted a solid color is to be 3 feet wide on the 50-foot length ends and 2 feet wide on the 94-foot length sides. - The Commercial advertising areas are not to be marked. - The coaching boxes and team bench areas are not to be marked. - The restraining areas are not to be marked.
	Center Court shall have the 439 th Airlift Wing Logo painted inside the center circle and sized as depicted in Appendix C – Center Court Logo.
Volleyball	A full-sized standard volleyball court. Line colors shall be white to provide a distinct visual contrast against the basketball markings. Volleyball court to be centered on the basketball court.
20M HAMMR Test	Two (2) bright, highly visible lines 2” wide spanning the width of the court, spaced exactly 20 meters apart. Location of these lines to be determined by Base Engineering.

C. Reassembly and Site Restoration:

- Clean and reinstall the original rubber base molding in accordance with manufacturer recommendations.
- Reinstall the bleachers to their original location.
- Clean the entire work area, removing all dust, debris, dust, and waste materials.

See following sections on Westover General Conditions as well as Specifications – “Wood Athletic Flooring – Floor Sanding and Refinishing” for this project.

DIVISION 1 - WESTOVER GENERAL CONDITIONS

INDEX

ARTICLE	PAGE
1. TEMPORARY PROTECTION	06
2. SECURITY	06
3. UNDERGROUND UTILITIES, UTILITY INTERRUPTIONS AND SHUTDOWNS	06
4. QUALITY ASSURANCE	07
5. CONCEALED WORK	08
6. SUBMITTALS	08
7. SUPERINTENDENCE BY THE CONTRACTOR	08
8. NOTIFICATION PRIOR TO CONSTRUCTION OR DEMOLITION	09
9. STORAGE AND HANDLING	09
10. SCHEDULING	09
11. DAMAGED PROPERTY	09
12. CLEANING UP	09
13. SAFETY PRECAUTIONS	09
14. ENVIRONMENTAL PROTECTION	10
15. HAZARDOUS MATERIAL REPORTING	10
16. HAUL ROUTES	10
17. TEMPORARY STAGING AND CONSTRUCTION AIDS	10
18. CONSTRUCTION/DEMOLITION WASTE MANAGEMENT PLAN AND REPORTING	10
19. REQUIREMENTS FOR AIRFIELD WORK	11

1. TEMPORARY PROTECTION

A. The Contractor shall protect all workmen, civilian and military personnel and the general public from injury. The Contractor shall coordinate and schedule all work with the Contracting Officer.

B. The Contractor shall conduct all work so as to cause the least interference possible with the normal activities of the operations of the facility and surrounding areas.

2. SECURITY

A. All project work and conduct of construction activity must comply with all Base security regulations and policies.

B. Arrange for personnel entry request processing with fourteen (14) calendar days or more of advance written notification. Further instructions for base access will be provided by the Contracting Officer. All base visitors requiring a base access pass must present a REAL ID-compliant identification card or approved alternative documents. The REAL ID-compliant identification card or approved alternative documents shall be on the individual at all times while on the Base.

C. Vehicle passes will be processed at the visitor center upon arrival.

D. The Contractor shall enter the project site only at a location approved by the Contracting Officer. Restrict all activities and movement of workers, supplies, and equipment to the designated project area and haul routes.

3. UNDERGROUND UTILITIES, UTILITY INTERRUPTIONS AND SHUTDOWNS

A. The Contractor shall submit a notification prior to excavation or any ground disturbing activity. The notification shall be AF IMT 103, BCE Work Clearance Request (Dig Permit) and shall be submitted to the Contracting Officer at least 30 calendar days prior to the planned excavation. The Contractor shall obtain approval prior to excavation. The government will mark out known existing underground utilities in the work area. The marked location of the existing utilities is approximate. Excavation by power driven equipment is not permitted within three (3) feet of either side of the marked utility. Hand excavate on each side of the indicated obstruction and continue until uncovered or clearance for the new grade is assured.

B. Report damage to underground utilities or subsurface construction immediately to the Contracting Officer. Damage to marked utilities will be satisfactorily repaired or replaced by the Contractor at no additional cost to the government. Damage to unmarked utilities will be repaired or replaced at the government's expense. Should the government engage the Contractor to perform the repairs or replacement; an equitable adjustment in the contract amount will be negotiated prior to the repair or replacement being made. Repair is defined as permanent, code compliant measures as approved by the Contracting Officer.

C. Interruptions shall be defined as any Contractor operation that interferes with access through, or use of facilities or areas including utilities, Energy Monitoring and Control Systems (EMCS), parking lots, generators, roads, or airfields.

D. Request for an interruption shall be submitted in writing at least fifteen (15) calendar days in advance of the date desired and includes at least one alternate date. Include the following information: Location(s) of interruption(s), hours and dates of interruption(s), which services are affected, and which facilities are affected. Contractor is cautioned that outages may not be granted on the date(s) requested. Contractor shall notify the Contracting Officer at least seven (7) calendar days in advance of any cancellation of any scheduled interruption. Services shall not be interrupted until receipt of approval of proposed hours and dates are received from the Contracting Officer.

4. QUALITY ASSURANCE

A. All items of work not addressed in these General Conditions shall be completed in strict accordance with the manufacturers' specifications.

B. The quality assurance procedures of this section are a minimum. Provide additional quality control as required by the Contracting Officer. Any additional quality control, which may be required, shall not constitute a change in the contract.

C. The government is not obligated to inspect the Contractor's work, or to protect the Contractor from the consequences of his work. Government inspection is a general examination of the Contractor's conduct and workmanship and is solely for the purpose of the government. Government inspectors do not have the authority to accept work, nor is government inspection to be construed as conclusive.

D. Government agents including inspectors, engineers and quality assurance evaluators are not authorized to change the contract without the written approval of the Contracting Officer; this lack of authority extends to all situations in which the action of these agents could be construed as constituting a change.

E. The quality of workmanship is subject to audit by government or government-designated inspectors at any time during the contract. The Contractor shall cooperate fully and provide all information necessary for this audit.

F. The Contractor shall institute immediate action to correct all variances from the contract or General Conditions and employ all procedures necessary to ensure future work shall conform to the requirements of the contract.

G. The Contractor shall submit all requests for changes in writing to the Contracting Officer. Do not proceed with changes without possession of written authorization of the Contracting Officer.

5. CONCEALED WORK

The Contracting Officer must approve all items of work including those which are to be concealed. The Contractor shall notify the Contracting Officer of his intention to conceal work 24 hours in advance of concealment.

6. SUBMITTALS

A. Approval must be obtained from the Contracting Officer for the material and equipment proposed to be incorporated into the work. Submittals shall be made no later than thirty (30) calendar days after receipt of the Notice to Proceed or as specified by the Contracting Officer. The Contractor is to complete AF Form 3000, provided by the Contracting Officer, and submit the required materials for review electronically unless otherwise directed by the CO. The Contracting Officer will return the submittals approved or disapproved within ten (10) calendar days after receipt, by AF Form 3000. If submittals cannot be made within thirty (30) calendar days after Notice to Proceed or as specified by the Contracting Officer, the Contracting Officer shall be advised of the difficulty and the Contractor shall request an extension of time for this task. Approval of submittals does not relieve the Contractor from performance in strict accordance with the contract or Statement of Work, nor does such approval constitute “acceptance” under other conditions of this contract.

B. All “or equal” items or materials proposed by the Contractor to be used in the project shall be submitted for approval.

C. Items required to be submitted for approval are listed in the Statement of Work and are a minimum.

7. SUPERINTENDENCE BY THE CONTRACTOR

A. At all times during the performance of the contract and until the work is completed and accepted, the Contractor shall directly superintend the work or assign a competent Superintendent who is satisfactory to the Contracting Officer and has the authority to act for the Contractor.

B. The Superintendent is to oversee and coordinate all project related work being performed. The Superintendent shall be able to read, write, speak and understand the English language.

C. Failure to comply with this requirement may be deemed as cause for a non-compensatory stoppage and suspension of work until the deficiency is remedied.

8. NOTIFICATION PRIOR TO CONSTRUCTION OR DEMOLITION

A. In accordance with the requirements of the Massachusetts Department of Environmental Protection (MADEP), the Contractor shall prepare and submit form BWP AQ 06, Notification Prior to Construction or Demolition, to the Department on behalf of the government. The Contractor is also responsible for the remittance of the \$85.00 notification fee. Complete information is available from the Department or on the DEP Web site at mass.gov/dep.

9. STORAGE AND HANDLING

All new materials shall be transported, stored and handled according to the manufacturers' written recommendations or as otherwise directed by the Contracting Officer.

10. SCHEDULING

All work shall be carefully scheduled to prevent any excessive shutdown time of utilities or services. The Contractor shall make written request to the Contracting Officer for approval of all work requiring shutdown 48 hours prior to commencement of such work.

11. DAMAGED PROPERTY

Work shall proceed in a manner which will minimize disturbance or risk of damage to surrounding structures, interior finishes, room furnishings, personal belongings, equipment or base infrastructure. The Contractor shall repair such items damaged by the Contractor while carrying out the work at no additional cost to the government. All repairs shall match adjacent similar existing items in all aspects. All replacements will be in kind.

12. CLEANING UP

The Contractor shall at all times, keep the premises free from accumulation of waste materials or rubbish caused by work under this contract. All parts and equipment removed for replacement become the property of the Contractor and shall be removed from the premises. At the end of each workday and upon the completion of all work, the Contractor shall leave interior and exterior property in the condition in which it was found at the beginning of work.

13. SAFETY PRECAUTIONS

The Contractor shall take all necessary precautions in observing safety regulations in accordance with all Federal OSHA regulations as well as the most recent edition of USACE EM 381-1-1 and shall assume the responsibility to guard against causing fires and/or explosions and to protect government property. The Contractor shall perform the work in a manner consistent with security and with fire safety regulations especially regarding exits and exit way access. Temporary closures shall not compromise security or fire safety.

14. ENVIRONMENTAL PROTECTION

There is no known or anticipated asbestos, lead nor any type of regulated hazardous material involved with the work of this project. However, to provide for control of all environmental pollution arising from construction activities, the Contractor and his subcontractors, in the performance of this contract, shall comply with all applicable federal state and local laws and regulations concerning environmental protection pollution control and abatement.

15. HAZARDOUS MATERIAL REPORTING

A. The Contractor shall maintain hazardous material inventories and safety data sheets (SDS) for all hazardous materials (as defined in CFR 1910.120, 40 CFR's 355, 370, & 372) to be stored and used on this installation. Hazardous materials must be inventoried when received and at project completion. The amounts used shall be maintained for the project duration, and for the calendar year (ending 31 December).

B. Hazardous Materials Inventories, Safety Data Sheets and material quantities used shall be submitted to the Contracting Officer for approval utilizing 439 AW Form 20, Contractor Information Sheet.

C. In the event of a spill, Contractor shall immediately notify the Base Fire Department at 557-1117 as well as the Contracting Officer. The Contractor shall be solely responsible for the expense of any cleanup of such spill, and the cleanup shall be in accordance with the applicable provisions of 40 CFR Part 761.

16. HAUL ROUTES

The established haul access routes shall be the only routes used by the Contractor. The Contractor shall ensure that all vehicle operators associated with the project, or those of suppliers, are properly instructed before entering the Base.

17. TEMPORARY STAGING AND CONSTRUCTION AIDS

The Contractor shall provide, erect, maintain, and remove all necessary construction aids that are required for the performance of the work.

18. CONSTRUCTION/DEMOLITION WASTE MANAGEMENT PLAN AND REPORTING

A. Prior to the start of the work, the Contractor shall prepare and submit for approval the Construction Waste Management Plan utilizing the template provided.

B. The Contractor shall record, document and report the total amount of construction/demolition debris and other solid waste that is generated and disposed of under this contract. The Contractor shall also record the total amount of debris and waste that has been diverted through sale, reuse, or recycling and the quantity of waste disposed by landfill or incineration. The waste shall be recorded by weight, but volume in cubic yards will also be acceptable. Use the Quarterly Solid Waste Disposal Form - updated 20201001 provided for this reporting.

C. Contractor will salvage and reuse the construction/demolition debris to the greatest extent possible. Waste materials that cannot be salvaged and/or reused and have value as being recyclable, shall be recycled. Only materials unable to be economically salvaged or recycled shall be transported to a landfill or incinerator. Revenues or other savings obtained for recycling or returns shall accrue to the Contractor, except revenues generated from Base recycling activities.

D. The records shall be made available to the Contracting Officer during construction and shall be submitted to the Contracting Officer prior to project closeout.

19. REQUIREMENTS FOR AIRFIELD WORK

Not applicable in this project.

END OF DIVISION 1

SPECIFICATIONS

WOOD ATHLETIC FLOORING – FLOOR SANDING AND REFINISHING

Part 1 – GENERAL

1.1 DESCRIPTION

This specification is for the complete sand and refinish of existing gymnasium's wood floors.

1.2 QUALITY ASSURANCE

Flooring Contractor must be MFMA accredited with experience in gymnasium flooring refinishing.

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

MFMA AFSFSCL (2016) Athletic Floor Sealer and Finish Specifications and Conformance List #35

MFMA SSCLFMGF (2016) Sanding, Sealing, Court Lining, Finishing and Resurfacing of Maple Gym Floors

SCAQMD Rule 1113 (2016) Architectural Coatings

SCAQMD Rule 1168 (2022) Adhesive and Sealant Applications

CDPH SECTION 01350 (2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

1.4 SUBMITTALS

Government approval is required for submittals with a "G" classification on the Submittal Register. Submittals not having a "G" classification are for Contractor Quality Control approval and shall be maintained by the Contractor and made available to the Government upon request.

Product Data

Sealer

Surface Finish

Game Line Paint

Game Line Color Chart

Adhesive for Molded Rubber Base

Certification or Validation

Indoor Air Quality for Seal Coat and Finish Coat Materials

Indoor Air Quality for Game Line Marking Materials

Indoor Air Quality for Adhesives

1.5 CERTIFICATION

1.5.1 Indoor Air Quality Certification

Submit required indoor air quality certifications in one submittal package.

1.5.2 MFMA accreditation

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the building site in original unopened packages, bundles, or containers. Protect materials against dampness during shipment and after delivery. Store material under cover in a well-ventilated building. Prevent exposure to extreme changes of temperature and humidity. Do not store materials in the building under construction until wet-applied building materials are dry.

Part 2 – PRODUCTS

2.1 MATERIALS

2.1.1 Sealing and Finishing for Hardwood Strip Flooring

Conform to MFMA AFSFSCCL, Group III Finish. Seal coat and finish coat materials must be compatible with each other. Provide seal coat and finish coat products meeting either emission requirements of CPDH SECTION 01350 or VOC content requirements of SCAQMD Rule 1113. Provide validation of indoor air quality for seal coat and finish coat materials.

2.1.2 Game Line Marking Materials

As recommended by wood flooring finish manufacturer. Provide game line marking products meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1113. Provide a Color Chart for Game Lines and Center Court Logo for Government approval of color selections. Provide validation of indoor air quality for game line marking materials.

2.1.3 Adhesives

Waterproof, suitable for use with molded rubber base, recommended by rubber base manufacturer. Provide adhesive products meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. Provide validation of indoor air quality for adhesives.

Part 3 – EXECUTION

3.1 Sanding

Sand wood floor surfaces with a machine using coarse, medium, and fine grades of sandpaper; the edges must be sanded to a smooth edge; the finished surface must be smooth and level, free from scratches. A final disc sanding shall be provided. After final sanding or buffing, vacuum floors until clean. Do not walk on floors thereafter until finish has been applied and is dry.

3.2 Finishing

Within one day after the final sanding, buffing, and sweeping have been completed, use a tacky rag to clean flooring with a low VOC solvent recommended by the manufacturer of the floor finish material. Follow cleaning with a coating of sealer; when thoroughly dry, burnish with No. 2 steel wool, using a power machine. After final burnishing and prior to application of final finish coat(s), layout and mark game lines as specified herein; after game lines are thoroughly dry, apply final finish coat. Floors must be wiped with a tacky rag each burnishing. Finish floors in accordance with MFMA SSCLFMGF. Four Coat Specification: Group III finish must consist of two sealer coats and two finish coats. Allow 5 days for proper curing.

3.3 Marking

Lay out game lines and patterns as described in this Statement of Work (Div 1 Scope of Work, Paragraph B) and as shown on Appendix C – Center Court Logo and Appendix D – 2025-26 NCAA Basketball Court Layout. Paint colors to be selected and approved by the Government. All edges are to be masked to provide sharp, clean edges. Edge must be straight and width shall be uniform. Apply marking of colors as indicated, providing a minimum dry film thickness of one mil.

3.4 Protection

After completion of laying, finishing, and marking of the flooring, do not use the floor for at least 72 hours. Avoid heavy traffic on the floor for at least one week. Upon floor drying, use nonstaining, porous building paper of the type and grade recommended by manufacturer, taped along edges. Remove kraft paper covering after work in this area is completed.

3.5 Rubber Molding

Once the protection period is over and the floor is dry, the cleaned and prepared rubber base molding is to be reinstalled with a manufacturer approved adhesive.

END OF SPECIFICATIONS


Appendix A – Base Map and Project Location




Appendix B


Pictures of Existing Basketball Court



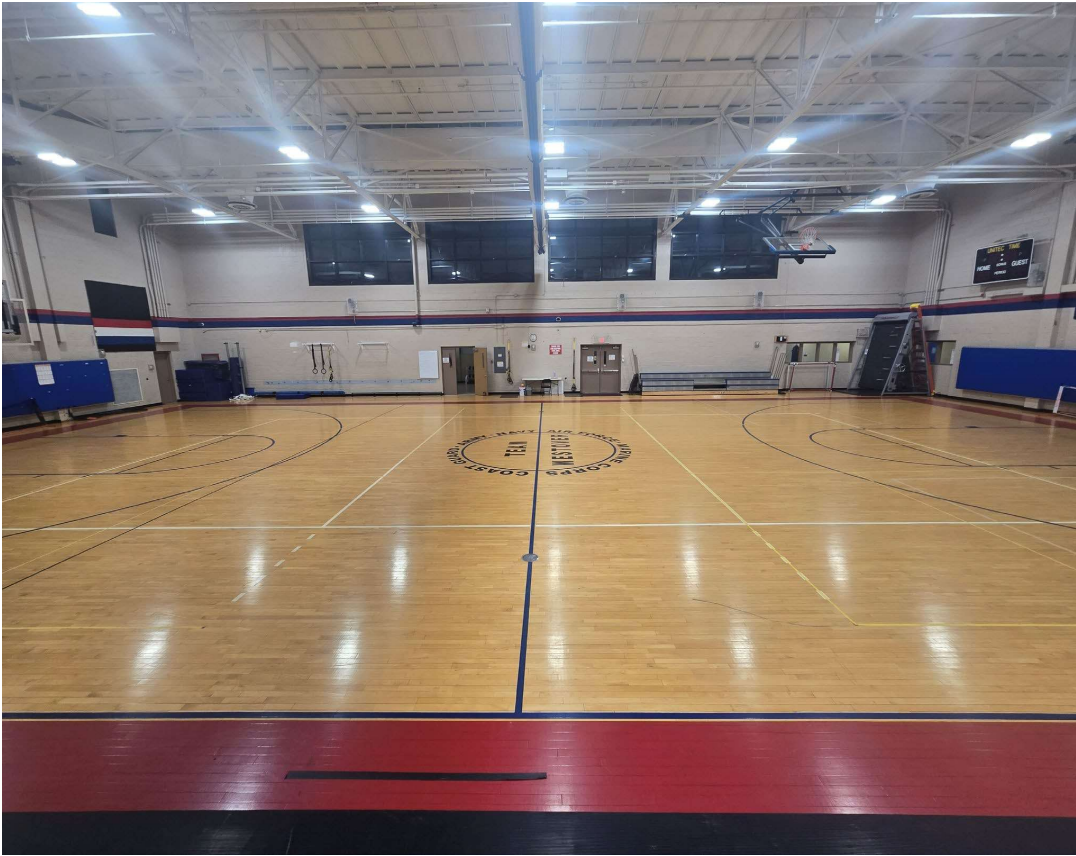



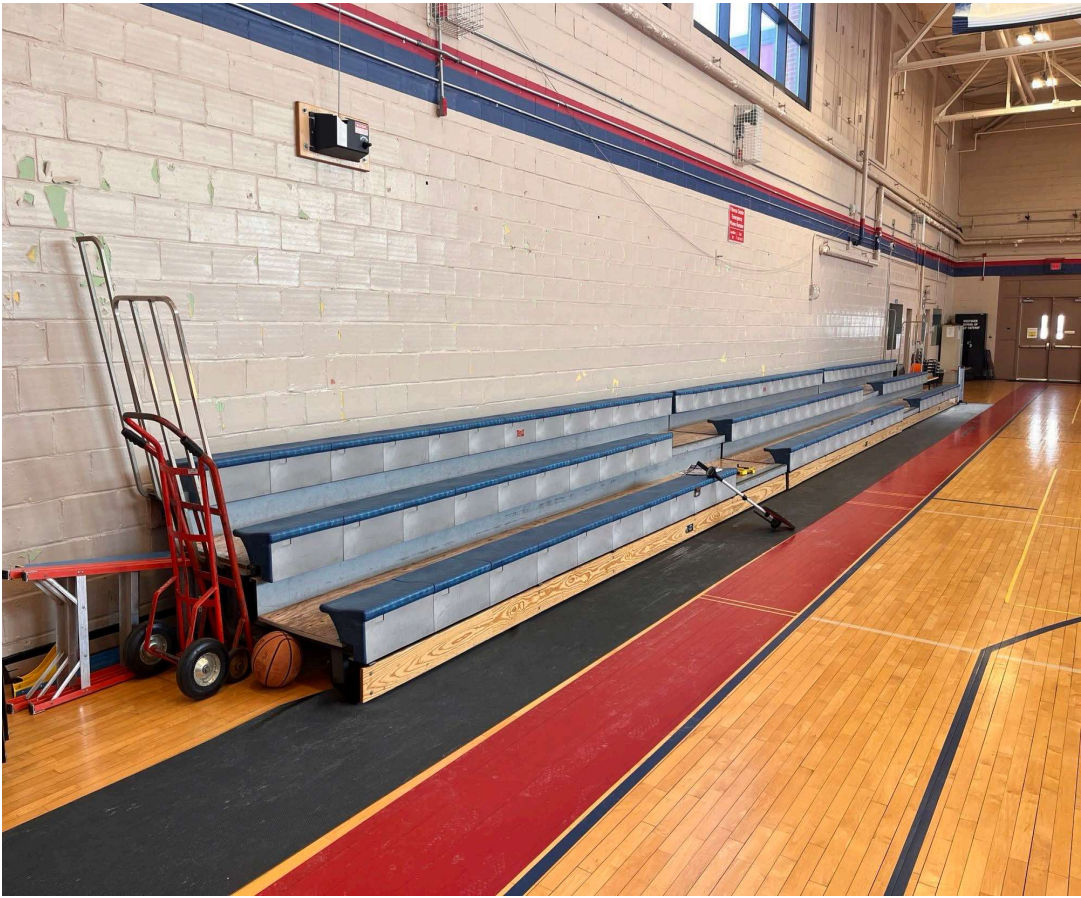

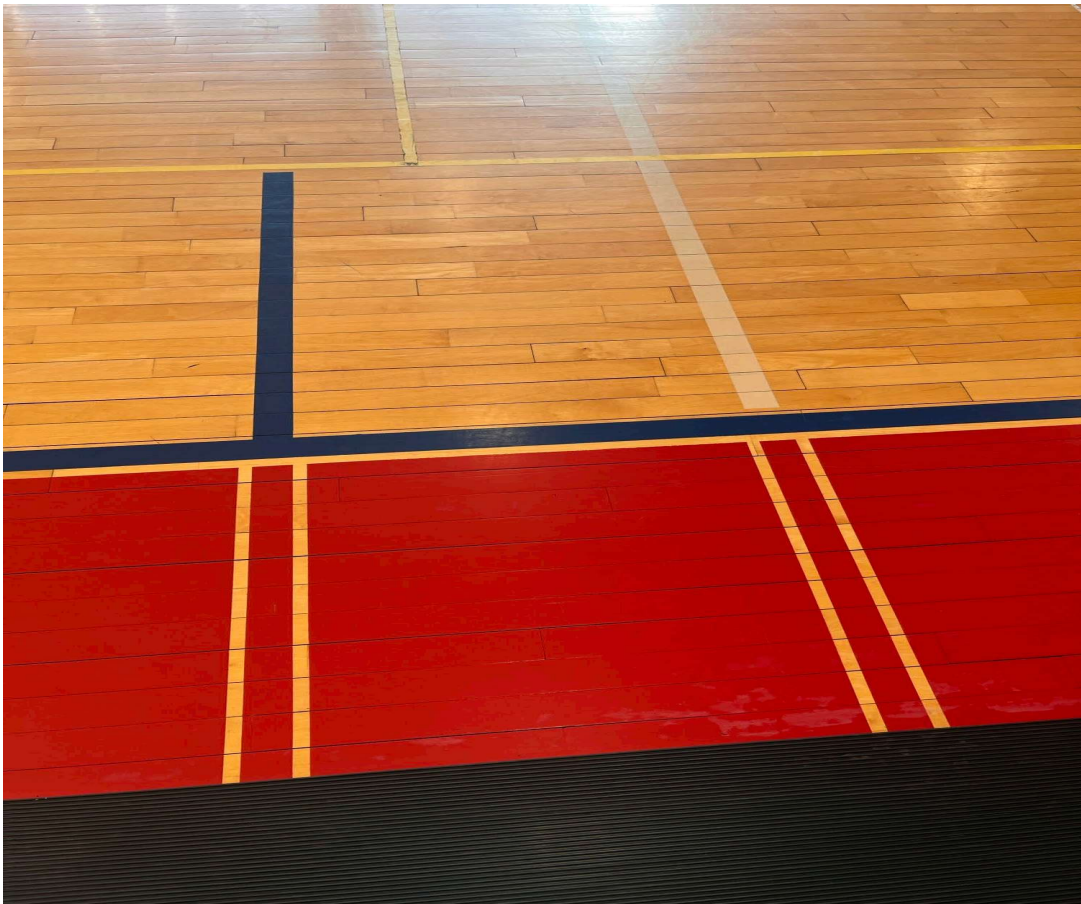




Appendix C – Center Court Logo



Center court circle has a 12 foot diameter.

2025-26 NCAA Men's and Women's Basketball Court

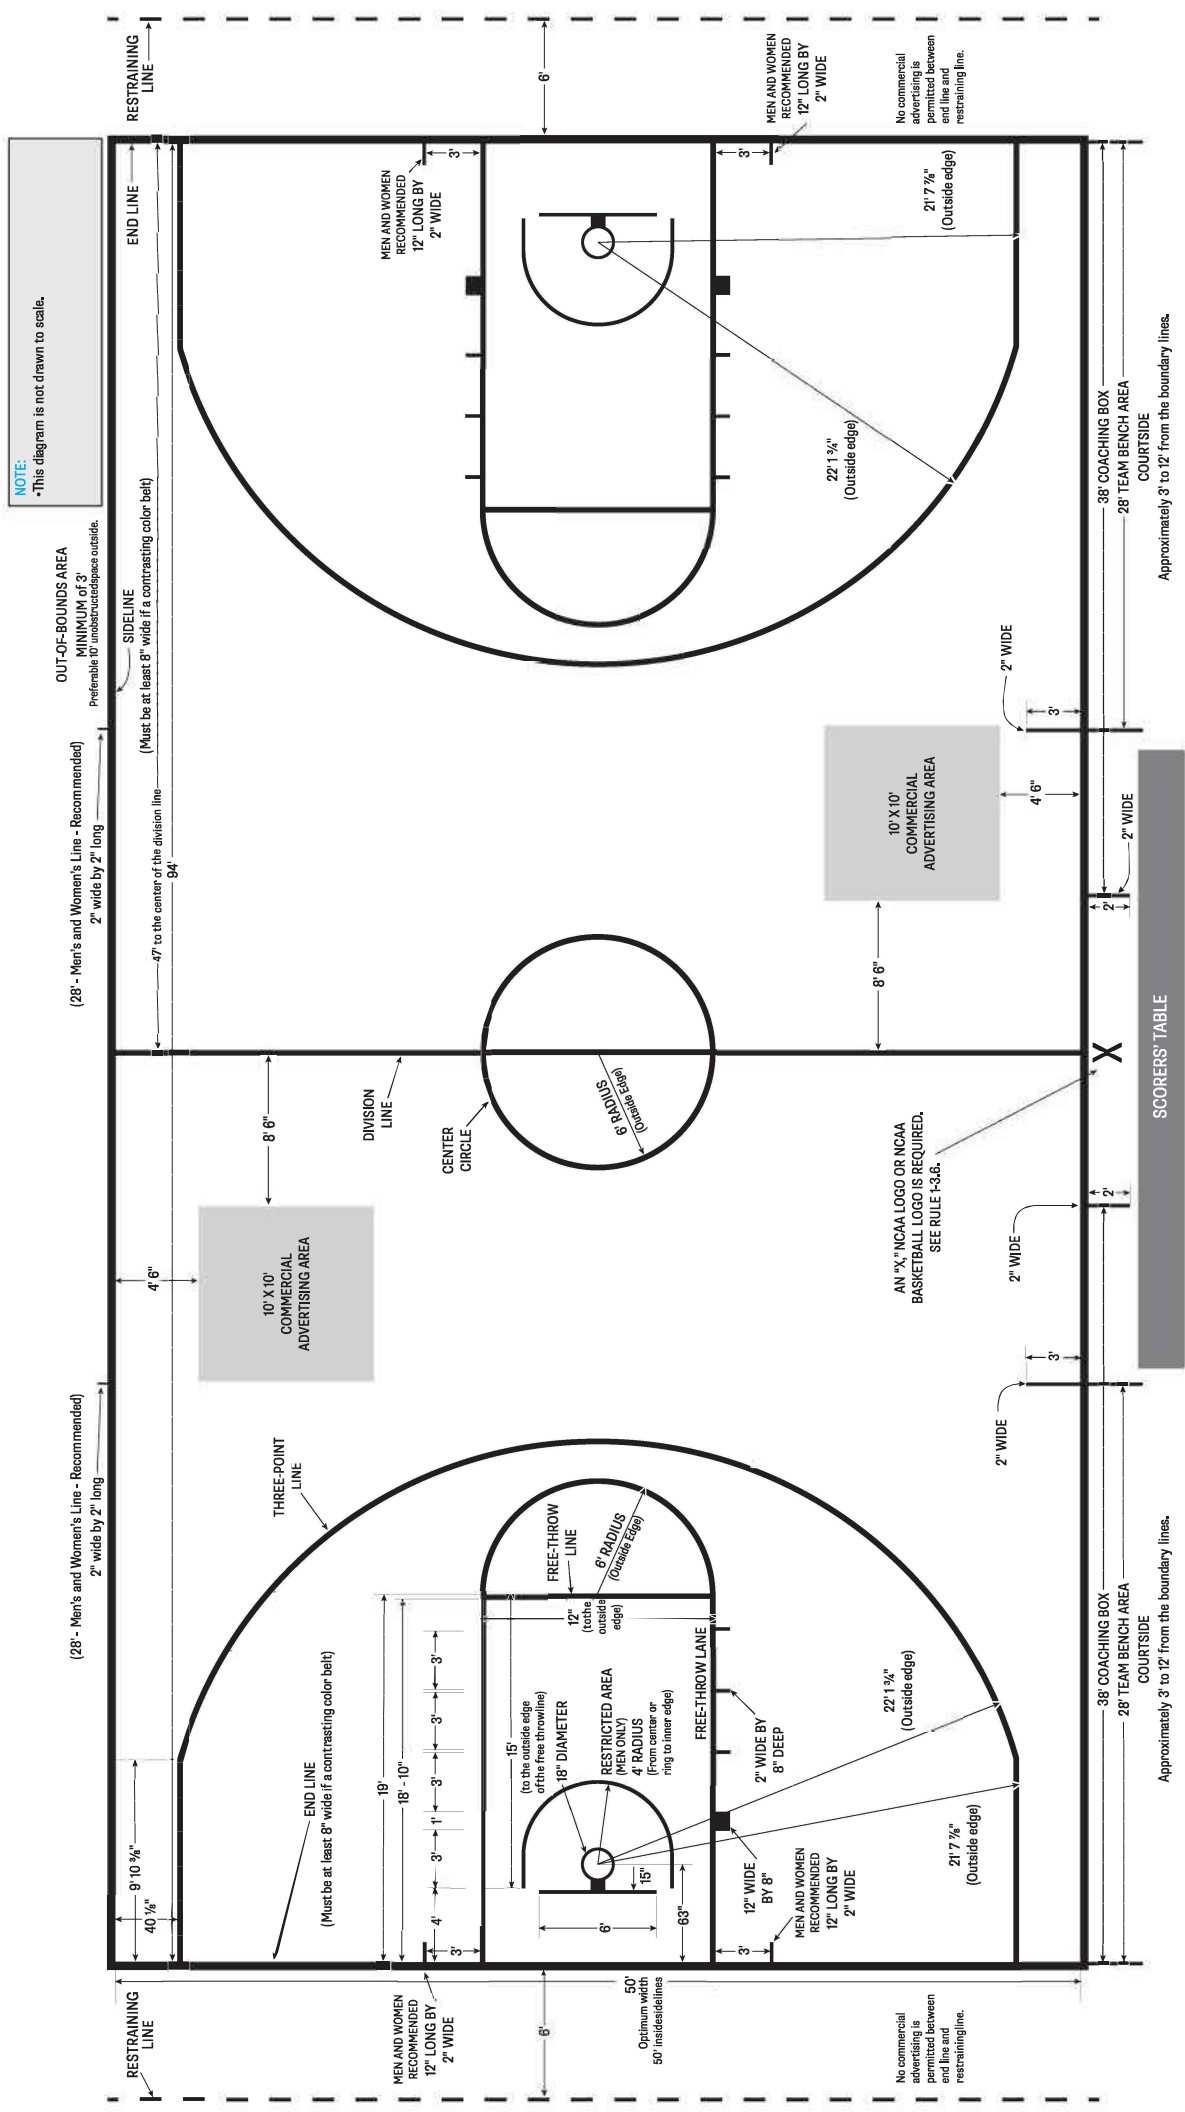

ATTACHMENTS (FORMS)

1. Submittal Register
2. Construction Waste Management Plan
3. Quarterly Solid Waste Disposal Form - updated 1Oct2020
4. 439 AW Form 20, Contractor Information Sheet

Attachment 1

SUBMITTAL REGISTER

Attachment 2

CONSTRUCTION WASTE MANAGEMENT PLAN

CONSTRUCTION WASTE MANAGEMENT PLAN
PROJECT #:

SUBMITTED BY:
DATE:

I. PROJECT WASTE ANALYSIS					
A. Types of Construction waste anticipated		Quantities & Options Available (tons)			
		Resale	Reuse	Recycle	Dispose
1.					
2.					
3.					
4.					
B. Projected Cost of Disposal		Total Quantity (tons)		Total Disposal Cost (\$)	
(all trash with no salvage or recycling)					
III. LANDFILLS AND INCINERATORS TO BE USED					
Name		Tipping Fee	Address		Telephone
1.					
2.					
3.					
IV. SALVAGE PLAN (FOR RESALE, REUSE, OR RECYCLE)					
A. List of Materials & Method of Reuse			Recycling Facility & Means of Transport		
			1.		
			2.		
			3.		
			4.		
B. Cost to Salvage		Savings Resulting from Salvage			Net Cost/Savings
Cost to Separate and Recycle		Reuse of Demo Materials	Revenues from Sale	Avoidance of Tipping Fees	(Savings – Costs)
1.					
2.					
3.					
4.					

V. RECYCLING MANAGEMENT PLAN TO PROTECT RECYCLED MATERIALS FROM CONTAMINATION:

1. Provide containers and bins that are clearly and appropriately marked.
2. Prevent contamination of recyclable materials from incompatible products and materials.
3. Separate construction waste at the project site by one of the following methods: (check appropriate boxes)
 - ☐ Source Separated Method: Waste products and materials, that are recyclable, are separated from trash and sorted into appropriately marked separate containers and then transported to the respective recycling facility for further processing. Trash is transported to a landfill or incinerator.
 - ☐ Co-Mingled Method: All construction waste is placed into a single container and then transported to a recycling facility where the recyclable materials are sorted and processed and the remaining trash is transported to a landfill or incinerator.
 - ☐ Other methods proposed by the Contractor and approved by the Contracting Officer.

Attachment 3

QUARTERLY SOLID WASTE DISPOSAL FORM

QUARTERLY REPORT
WESTOVER CONSTRUCTION/DEMO DEBRIS DISPOSAL & RECYCLING
Form Created By: 439 MSG/CEV Environmental Office

To meet the Air Force goal of diverting 60% of Construction and Demolition (C&D) Debris from the Waste Stream and the Massachusetts landfill-banned items law, Contractors shall recycle C&D debris to the maximum extent possible. This form should include **data for the previous three month period** for the **ENTIRE** duration of the project. Drop-off this Form at Westover Environmental Office, 250 Patriot Avenue or **email to Environmental Office: champanine.saviengvong@us.af.mil (phone 607-237-5133)**

ACCEPTABLE TO FILL OUT THIS FORM EITHER ELECTRONICALLY OR PEN & INK.

PROJECT TITLE: _____

CONTRACTOR COMPANY NAME: _____

WHICH QUARTER (Jan-Mar, Apr-Jun, Jul-Sept, or Oct-Dec): _____

TYPE ITEMS RECYCLED or RE-USED:

____ Concrete without rebar ____ Concrete with rebar ____ Asphalt ____ Roofing Materials

____ Scrap Metals ____ Wood ____ Concrete Block / Cinder Block /
Brick Clay

____ Furniture (Salvaged)

____ General Construction Debris (Sorting facility accepts a comingled/mixed-waste load.)

____ Other: Specify _____

____ Other: Specify _____

TONNAGE OF ITEMS RECYCLED: _____ **TONS**

{Be Comprehensive, Report Anything That Didn't Go To The Landfill.}

DISPOSED OF BY LANDFILL: _____ **TONS**

DISPOSED OF THROUGH REGULAR INCINERATION: _____ **TONS**

DISPOSED OF BY WASTE-TO-ENERGY INCINERATION: _____ **TONS**

QUARTERLY REPORT
WESTOVER CONSTRUCTION/DEMO DEBRIS DISPOSAL & RECYCLING
Form Created By: 439 MSG/CEV Environmental Office

TOTAL COST FOR CONSTRUCTION/DEMO DEBRIS *LANDFILLED* THIS QUARTER :

\$_____

ACTUAL COST OF DEBRIS *DIVERTED* (from landfill) THIS QUARTER: \$_____

*** If answer (cost to perform recycling/salvage/reuse/donation associated with the effort to minimize landfilling) is ZERO, **then answer the following question.**

POTENTIAL COST OF DEBRIS *DIVERTED* (from landfill) THIS QUARTER:

\$_____

When cost (to salvage/recycle) is actually **offset** by proceeds/rebates/savings to the point of there being **zero dollars** paid out, then contractor **still must provide an estimated** "cost avoidance" value. This means contractor must at least roughly estimate the POTENTIAL cost of recycling (i.e., transportation, handling, collection, manpower, fees, taxes, permits, tariffs, collection containers lease/purchase, etc).

CONTRACTOR SIGNATURE & DATE (NOTE: Electronic Signature Acceptable)

Attachment 4

439 AW FORM 20, CONTRACTOR INFORMATION SHEET

CONTRACTOR INFORMATION SHEET

PROJECT NAME:

PROJECT NUMBER: _____

COMPANY NAME:

DATE OF CONTRACT:

LOCATION ON BASE:

TELEPHONE NUMBER (On base, if available):

NAME OF CONTACT:

SHOP CODE (Assigned by HAZMART):

MATERIAL INFORMATION	
----------------------	--

[illegible]