




P:\Projects\0170303 CAD_BMI_Sheets\05_ChiliMCLB_CS521.dgn
22-JUL-2025
08:19

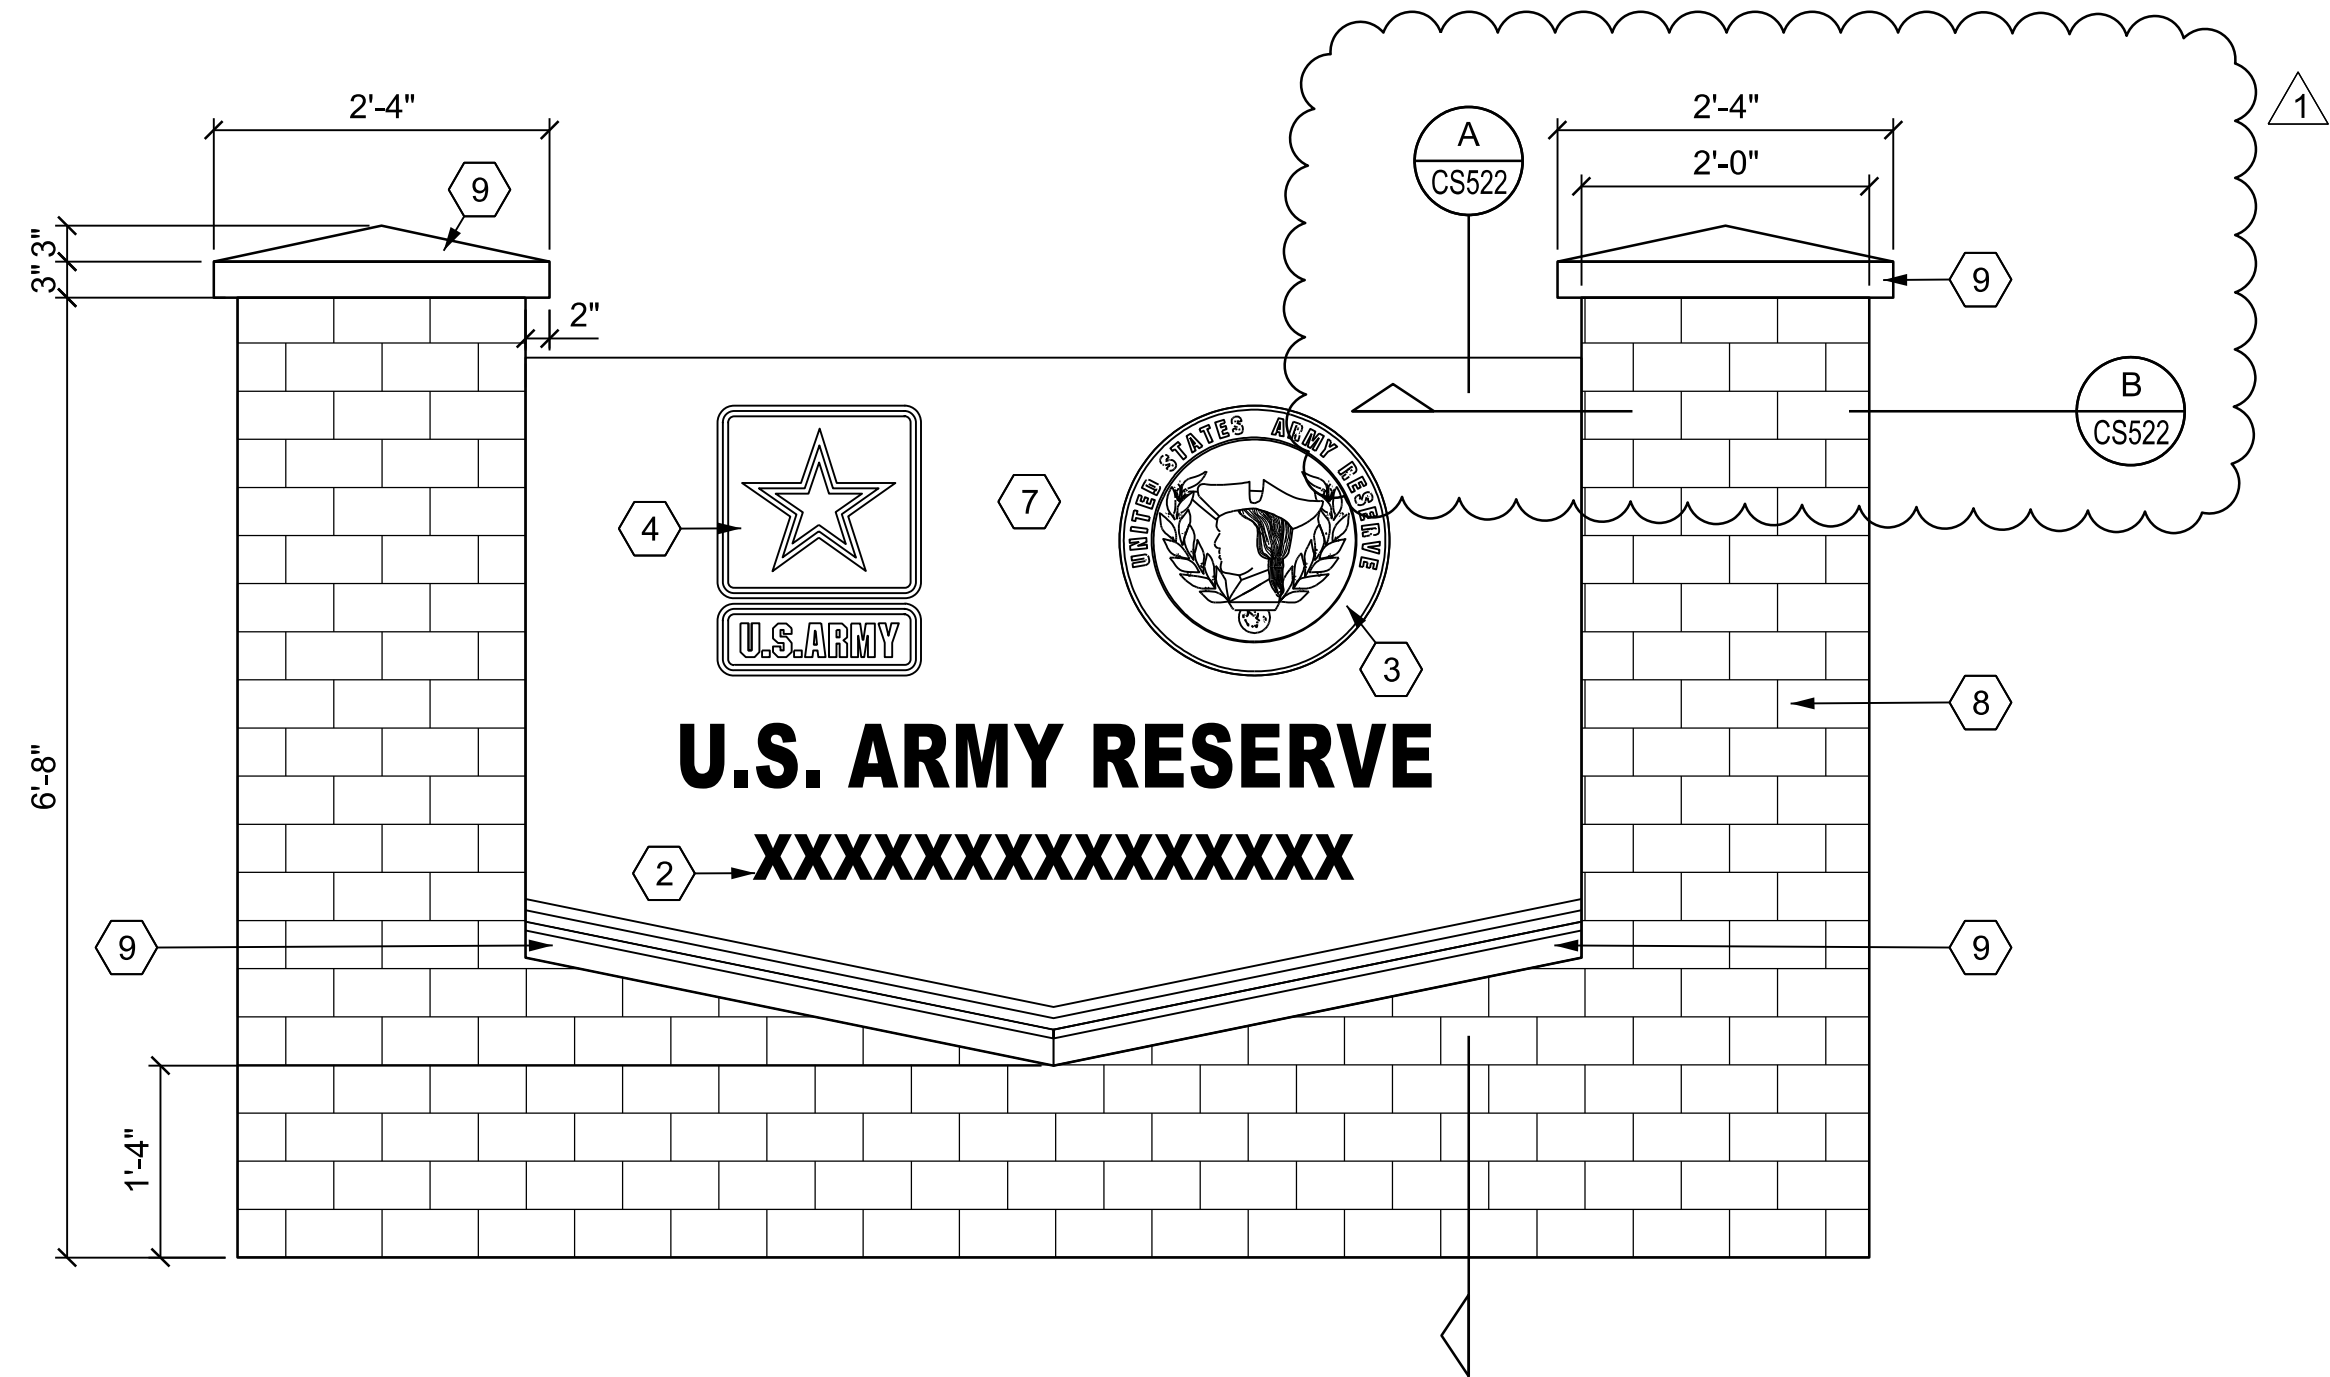

FRONT AND BACK ELEVATION
NOT TO SCALE

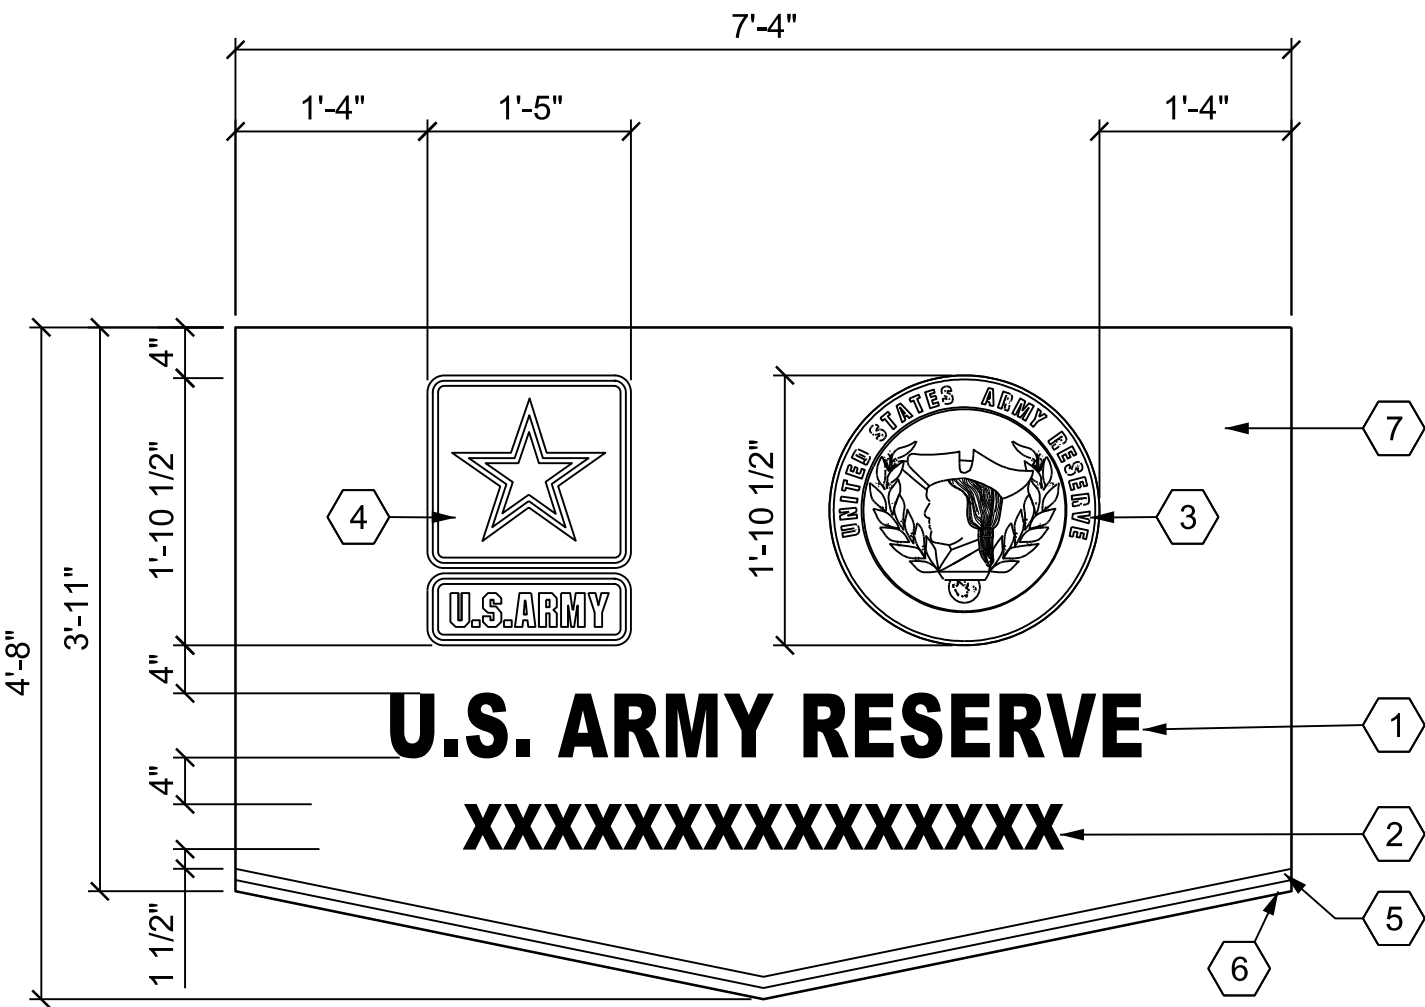

SIGN DETAILS
NOT TO SCALE

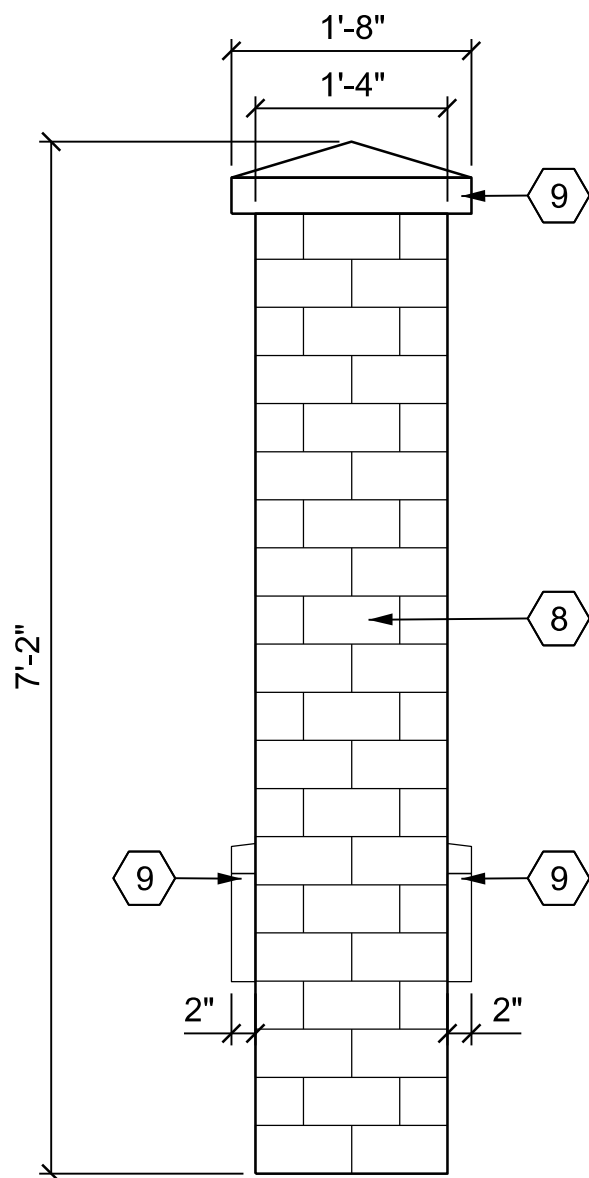


SIDE ELEVATION
NOT TO SCALE

GENERAL NOTES

1. LOCATION AND PLACEMENT OF SIGN SHALL BE COORDINATED WITH THE CONTRACTING OFFICER'S REPRESENTATIVE AND THE ARMY RESERVES FACILITY MANAGER AND SHALL COMPLY WITH INTERSECTION SIGHT DISTANCE REQUIREMENTS IN ACCORDANCE WITH THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO) GEOMETRIC DESIGN OF HIGHWAYS AND STREETS, LATEST EDITION, AS WELL AS ALL LOCAL ZONING REQUIREMENTS, ORDINANCES REGULATIONS AND LAWS.
2. ALL LOGO SYMBOLS AND SEALS SHALL BE 0.5 INCH (13 MILIMETERS THICK AND FABRICATED FROM HIGHLY DURABLE MATERIALS WITH FULL COLOR GRAPHICS. THE CONTRACTOR SHALL COORDINATE THE FACILITY NAME WITH THE CONTRACTING OFFICER PRIOR TO THE START OF THE FACILITY SIGN CONSTRUCTION.
3. SHOP DRAWINGS SUBMITTED BY THE CONTRACTOR FOR GOVERNMENT APPROVAL SHALL INCLUDE FABRICATION DETAILS SUCH AS ELEVATIONS, MESSAGE LAYOUTS, SECTIONS, SIDE VIEWS, PLAN VIEWS, COLOR SAMPLES, AND MOUNTING DETAILS.
4. ACCESS TO THE SITE SHALL BE COORDINATED WITH THE ARMY RESERVES FACILITY MANAGER FOR EACH LOCATION.
5. CONTRACTOR SHALL ADHERE TO AND ENFORCE ON THE JOB SITE ALL PERTINENT REQUIREMENTS OF OSHA AND THE US ARMY CORPS OF ENGINEERS SAFETY MANUAL EM 385-1-1.

SHEET KEYNOTES

1. 5.25" TALL TEXT TO MATCH 2/90 SIGN SYSTEMS "104 BRUSHED NICKEL". LETTERS SHALL BE UPPERCASE HELVETICA NEUE - 95 BLACK FONT.
2. THIS LINE SHALL CONTAIN NAME OF THE ARMY RESERVE CENTER 3.75" TALL TEXT TO MATCH 2/90 SIGN SYSTEMS "104 BRUSHED NICKEL". LETTERS SHALL BE UPPER- AND LOWERCASE IN HELVETICA NEUE - 75 BOLD FONT, CONTRACTOR TO COORDINATE THE FACILITY NAME WITH THE CONTRACTING OFFICER. NUMBER OF "X'S" SHOWN WILL VARY DEPENDING ON THE FINAL NAME.
3. FULL COLOR OFFICAL REGISTERED TRADEMARK US ARMY RESERVES "JOHN PARKER" LOGO. COLORS TO MATCH 2/90 SIGN SYSTEMS "805 PINEAPPLE" AND "756 SAPPHIRE BLUE".
4. FULL COLOR OFFICAL REGISTERED TRADEMARK ARMY LOGO COLORS TO MATCH 2/90 SIGN SYSTEMS "805 PINEAPPLE" AND "704 BLACK".
5. .9" WIDE ACCENT STRIPE PAINTED TO MATCH 2/90 SIGN SYSTEMS "104 BRUSHED NICKEL".
6. .9" WIDE ACCENT STRIPE PAINTED TO MATCH 2/90 SIGN SYSTEMS "805 PINEAPPLE".
7. ALUMINUM WITH FACTORY PAINTED FINISH TO MATCH 2/90 SIGN SYSTEMS "158 GRAPHITE".
8. BRICK VENEER TO MATCH RESERVE CENTER EXTERIOR.
9. CAST STONE.



US Army Corps
of Engineers®

DATE	DESCRIPTION	MARK
07/20/25	REVISED IN ACCORDANCE WITH AMENDMENT 001	1


ISSUE DATE: MAY 1, 2025	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: MMAYER	CHECKED BY: S.CURRY	SUBMITTED BY: D. HENSLEY
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY	SIZE: ANSI D	




MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS), AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	FACILITY SIGN DETAILS
---	-----------------------

SHEET ID

CS521

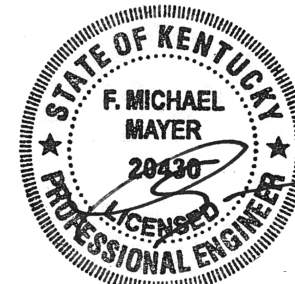

07/22/2025

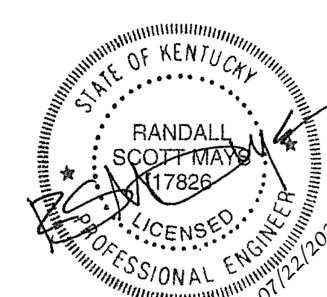




GENERAL SHEET NOTES

1. REFER TO SHEET ES001 FOR DIVISION OF RESPONSIBILITIES.
2. LIGHT POLE BASES LOCATED IN POV AREA AND ALONG THE ACCESS AND THE SERVICE ROADS MUST BE INSTALLED A MINIMUM OF 3'-0" AWAY FROM, THE EDGE OF ALL ROADWAYS.
3. LIGHT POLE BASES LOCATED AROUND THE PERIMETER OF THE MEP AREA MUST BE INSTALLED A MINIMUM OF 5'-0" AWAY FROM THE EDGE OF THE AREA AND MUST BE LOCATED WITHIN THE FENCED MEP AREA.

SITE ELECTRICAL PLAN

SCALE: 1" = 50'

50' 25' 0 50' 100' 150'
GRAPHIC SCALE: 1"=50'-0"

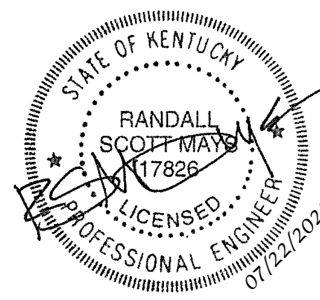

US Army Corps
of Engineers®

DATE	07/2025
DESCRIPTION	REVISED IN ACCORDANCE WITH AMENDMENT 0001
MARK	1

DESIGNED BY: R. MATS	ISSUE DATE: MAY 1, 2025
DRAWN BY: P. KANE	SOLICITATION NO.:
CHECKED BY: J. GREENE	CONTRACT NO.:
SUBMITTED BY: D. HENSLEY	ANS/D
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY	



MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS) AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	
--	--

SITE ELECTRICAL PLAN


SHEET ID

ES101


CERTIFIED FINAL SUBMITTAL W912QR25RA036_Plan001

SHEET KEYNOTES


1. PROVIDE PRIMARY ELECTRIC CONNECTION FROM EXISTING OVERHEAD PRIMARY (12.47 KV) LOCATED AT UTILITY POLE C8011/05-123.
2. PROVIDE A PRIMARY SECTIONALIZING CABINET FOR UNDERGROUND PRIMARY ELECTRIC DISTRIBUTION. REFER TO SHEETS ES505, 1EP601, AND 2EP602 FOR ADDITIONAL INFORMATION.
3. PROVIDE A 500 KVA LOOP-FEED PAD MOUNTED TRANSFORMER FOR THE VMS.
4. PROVIDE A 1000 KVA LOOP-FEED PAD MOUNTED TRANSFORMER FOR THE ARC TRAINING BUILDING.
5. FROM ELECTRICAL ROOM 156 - PROVIDE THREE 4" CONDUITS, STUBBED AND CAPPED FIVE FEET OUTSIDE THE BUILDING FOOTPRINT.
6. PROVIDE PEDESTAL MOUNTED DISCONNECT SWITCH FOR MKT EQUIPMENT CONNECTIONS. CONNECT TO TRANSFORMER 'TYP1', SEE POWER ONE-LINE DIAGRAM ON SHEET 1EP601 FOR ADDITIONAL INFORMATION.
7. OPTION: PROVIDE CONDUIT AND POWER INFRASTRUCTURE FOR ELECTRIC VEHICLE (EV) CHARGING STATIONS. EXTEND A 5" UNDERGROUND, CONCRETE-ENCASED CONDUIT 20'-0" FROM SECTIONALIZING CABINET. SWEEP CONDUIT ABOVEGROUND 1'-0" AFG AND CAP.
8. PROVIDE DUCT BANK ONLY IF UNHEATED STORAGE BUILDING BID OPTION IS AWARDED.
9. PARKING SPACES IDENTIFIED FOR FUTURE EV CHARGING STATIONS.
10. PROVIDE LIGHTING WITH PHOTOCELL ON - PHOTOCELL OFF CONTROL. REFER TO EXTERIOR LIGHTING PHOTOCELL/TIME SCHEMATIC FOR LIGHTING CONTROL PANEL ON SHEET 1EL702 FOR ADDITIONAL INFORMATION.
11. PROVIDE ELECTRICAL MANHOLES PER SPECIFICATION SECTION 33 71 02. PROVIDE MANHOLES THAT ARE A MINIMUM OF 6'-6" DEEP. PROVIDE CABLE RACKS IN ALL NEW MANHOLES. ROUTE CABLE INSTALLATIONS INSIDE MANHOLES ALONG THOSE WALLS PROVIDE THE LONGEST ROUTE AND THE MAXIMUM SPARE CABLE LENGTHS.

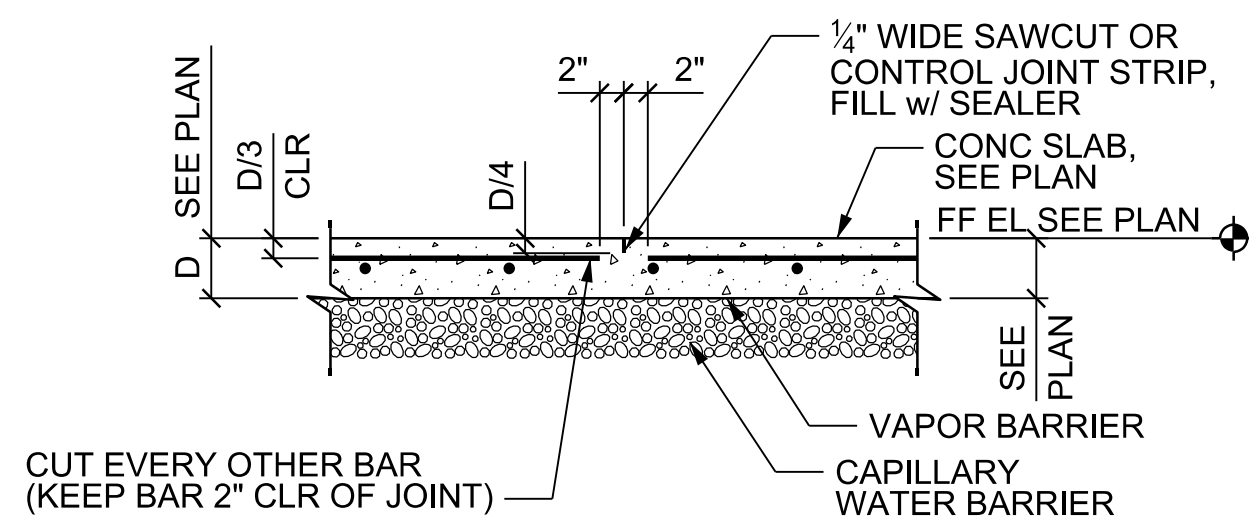

SLAB CONTRACTION JOINT (CJ)

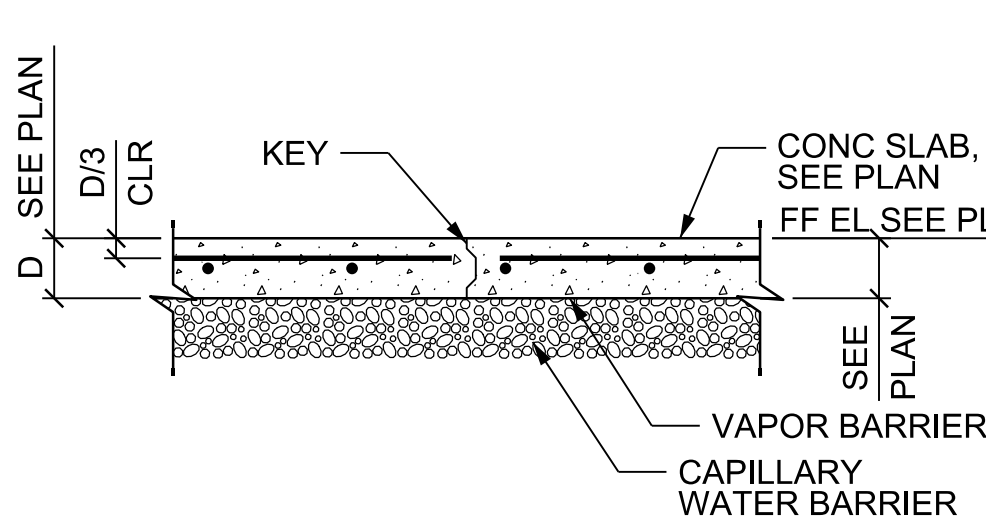


SLAB CONSTRUCTION JOINT (CONST. JT.)

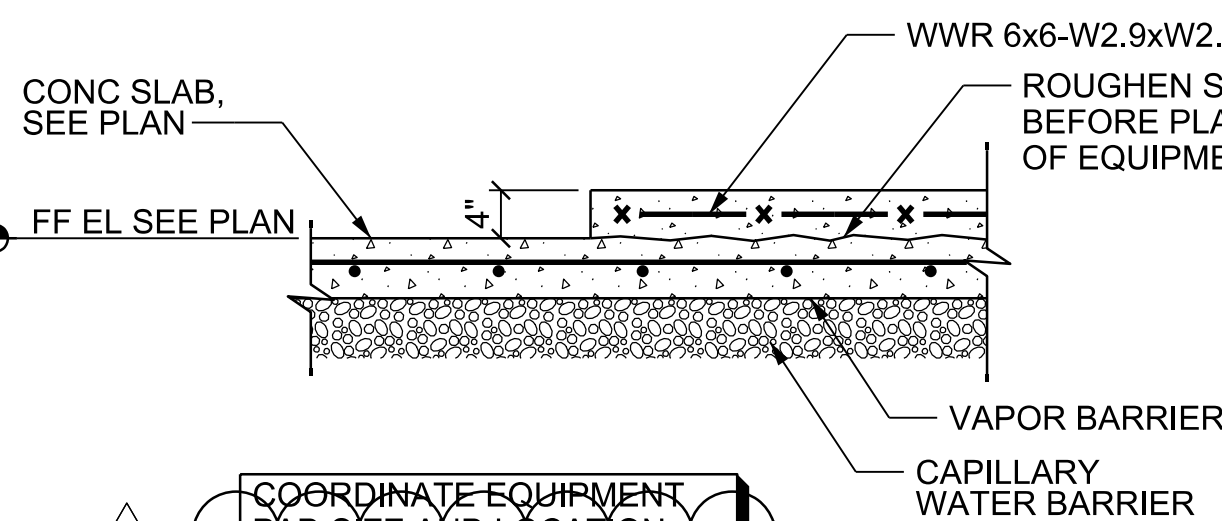

COORDINATE EQUIPMENT PAD SIZE AND LOCATION WHEN REQUIRED BY OTHER DISCIPLINES

EQUIPMENT PAD/CURB DETAIL

SCALE: 3/4"=1'-0"

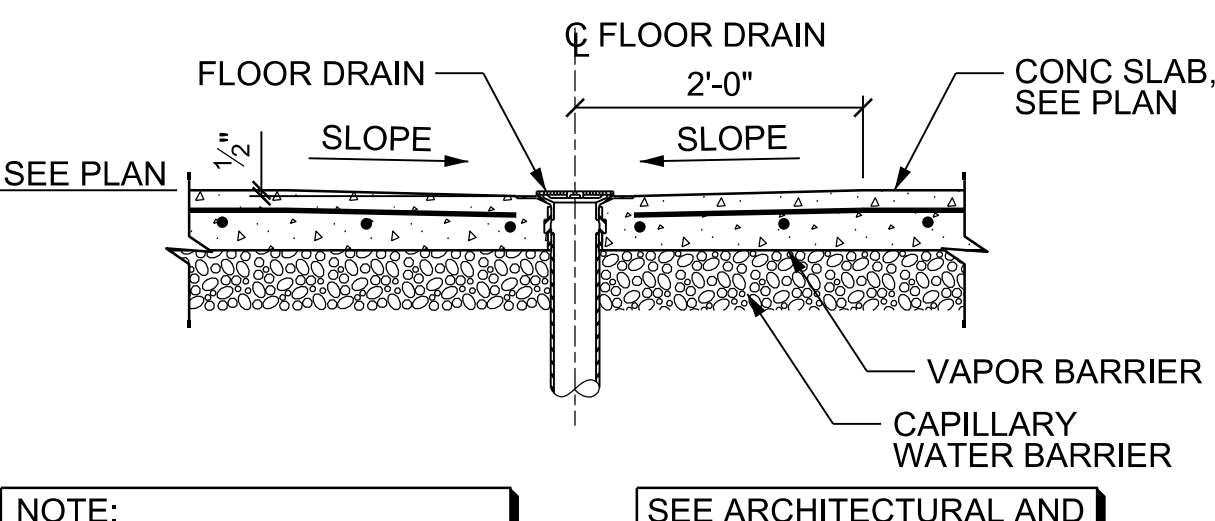


NOTE: SET UP DRAIN AS REQ'D TO RECEIVE FLOOR FINISH. SEE ARCH DRAWINGS.


SEE ARCHITECTURAL AND MECHANICAL DRAWINGS FOR SIZE AND LOCATION OF FLOOR DRAINS.

FLOOR DRAIN


SCALE: 3/4"=1'-0"

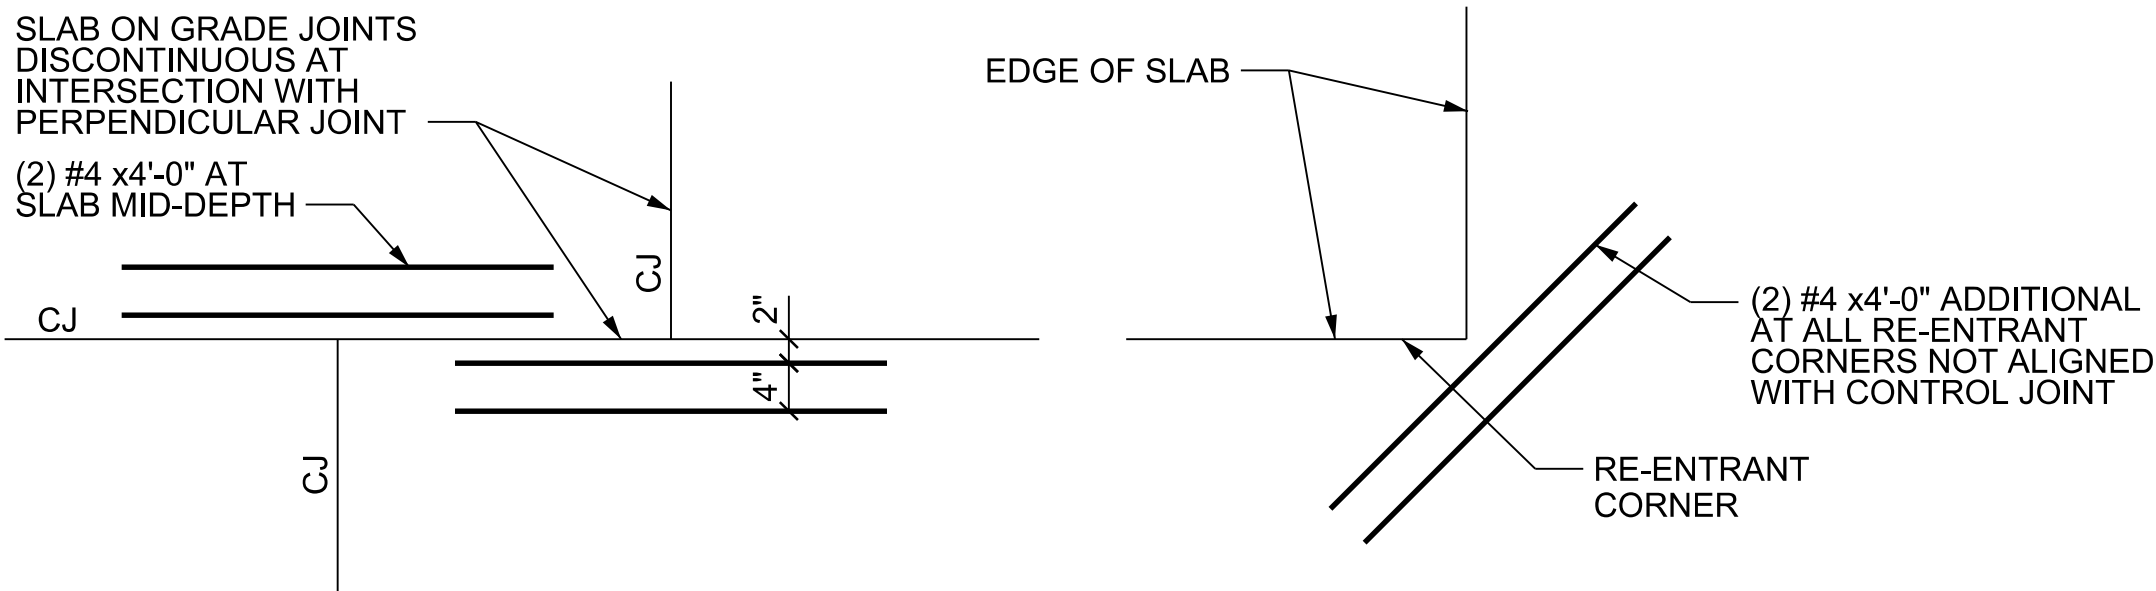

JOINT INTERSECTION DETAIL

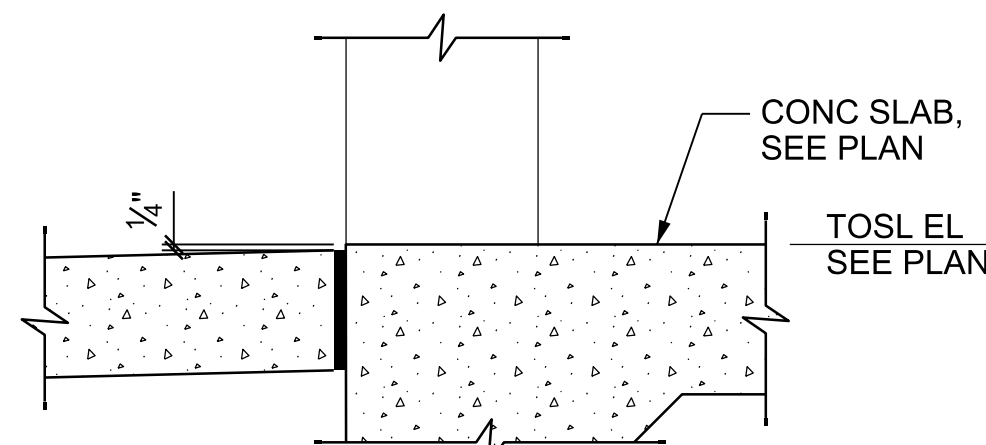

AT PERSONNEL DOOR

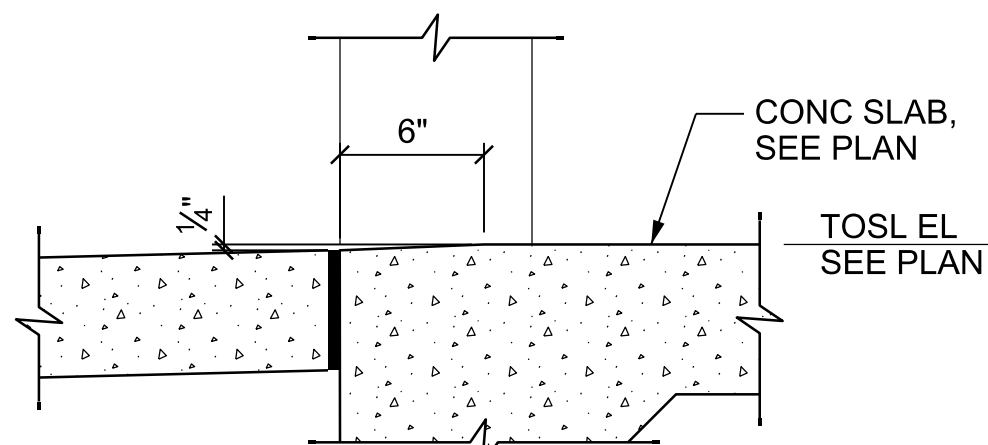


AT ROLLUP DOOR

TYPICAL SLAB EDGE AT DOOR OPENING DETAILS

SCALE: 3/4"=1'-0"


SLAB JOINTS

SCALE: 3/4"=1'-0"

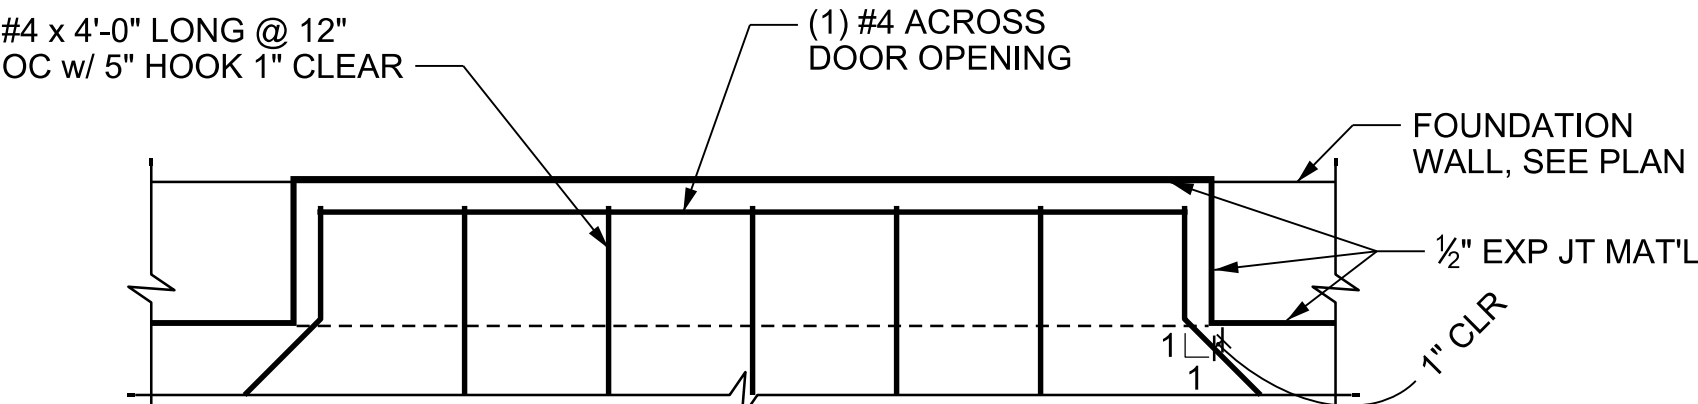


ADDITIONAL SLAB REINFORCING AT DOORWAY

SCALE: 3/4"=1'-0"

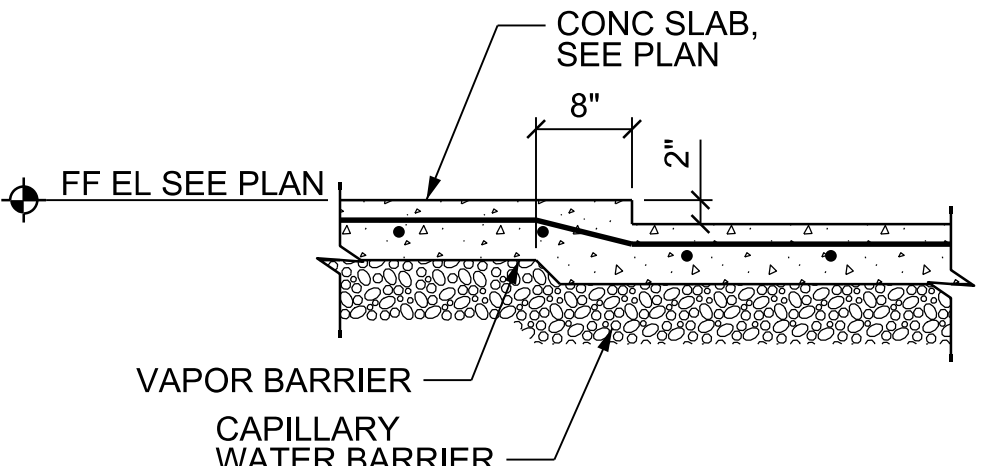

RECESSED SLAB

SCALE: 3/4"=1'-0"

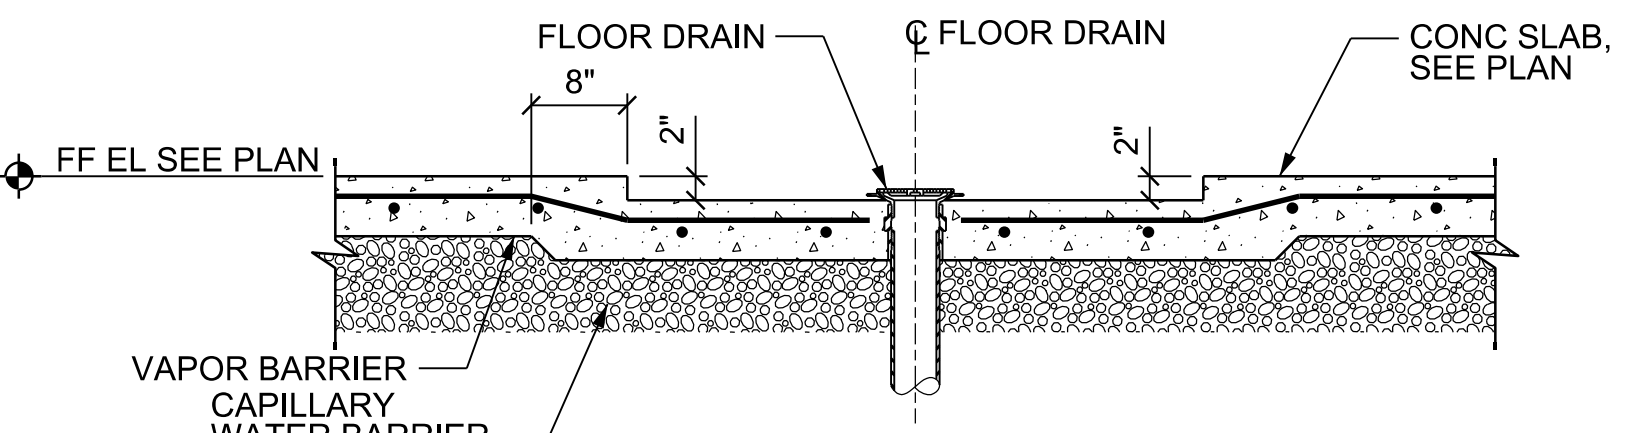


NOTE: SET UP DRAIN AS REQ'D TO RECEIVE SHOWER STALL. SEE ARCH DRAWINGS.

SEE ARCHITECTURAL AND MECHANICAL DRAWINGS FOR SIZE AND LOCATION OF FLOOR DRAINS.

TYPICAL SHOWER STALL FLOOR DRAIN DETAIL


SCALE: 3/4"=1'-0"

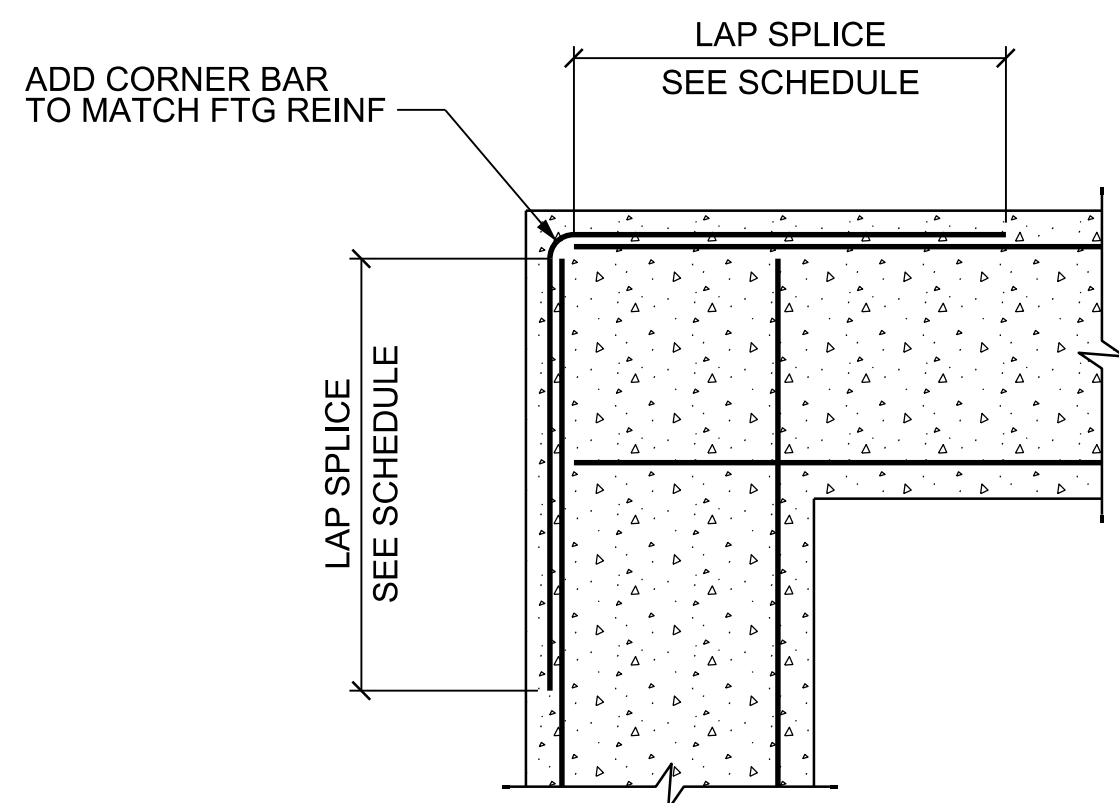

PLAN AT CORNER

TYPICAL FOUNDATION AND WALL DETAILS


SCALE: 3/4"=1'-0"

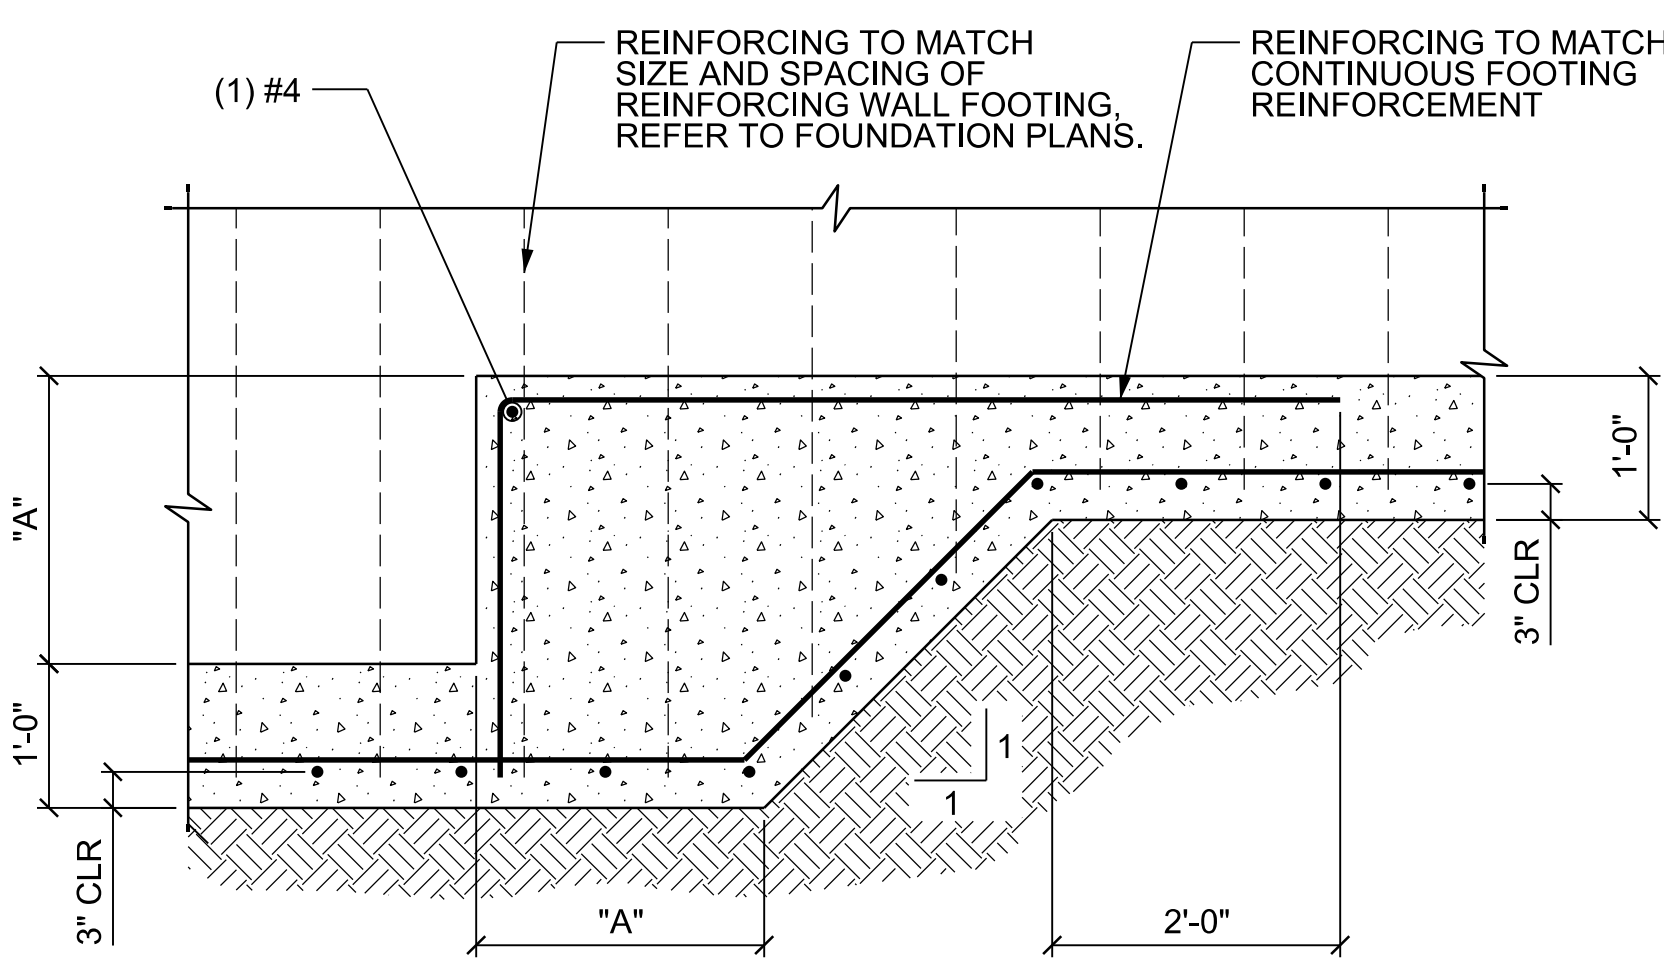

"A" = 2'-0" MAX

STEP FOOTING

SCALE: 3/4"=1'-0"

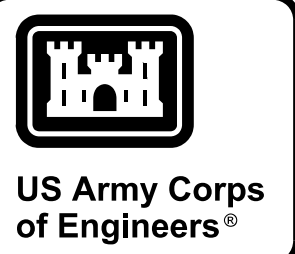

DATE	MARK	DESCRIPTION
07/20/25	1	REVISED IN ACCORDANCE WITH AMENDMENT 0001


ISSUE DATE: MAY 1, 2025	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: C. GIBBS	BY: B. BRANER	CHECKED BY: D. DICKEY
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY	SUBMITTED BY: D. HENSLEY	SIZE: ANSI D

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC) VEHICLE MAINTENANCE SHOP (VMS) AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	ARC TRAINING BUILDING FOUNDATION SECTIONS AND DETAILS
---	--


SHEET ID
1S-301

CERTIFIED FINAL SUBMITTAL W912QR25RA036_Plans-0001


P:\Projects\0170303 CAD_BIM\Sheets\07_Struct\MCLB_1S-303.dgn
21-JUL-2025
10:55

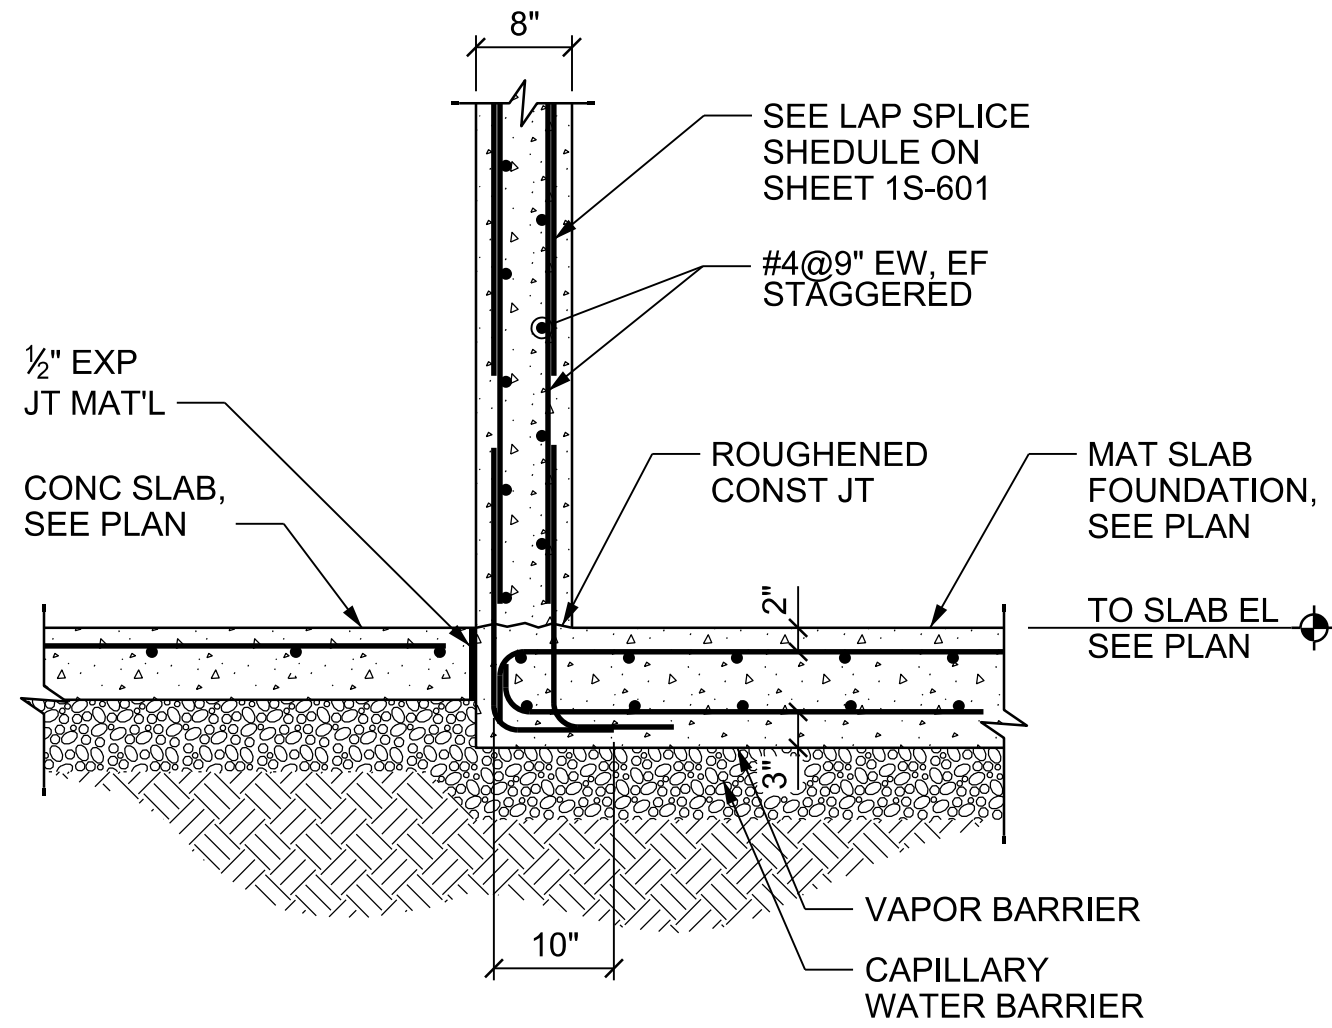


SECTION A
1S-114
SCALE: 3/4" = 1'-0"

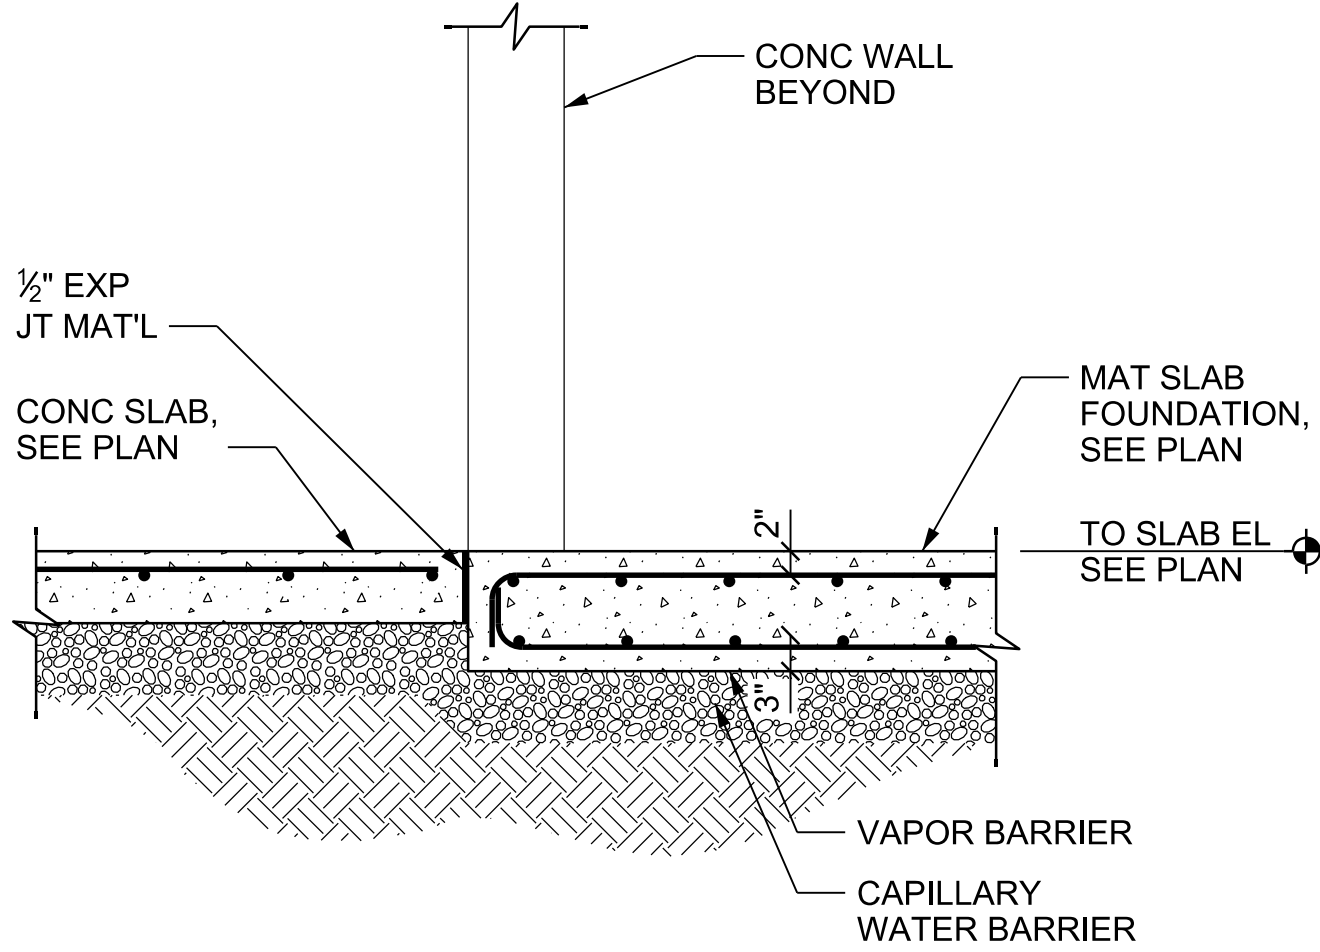

SECTION B
1S-114
SCALE: 3/4" = 1'-0"

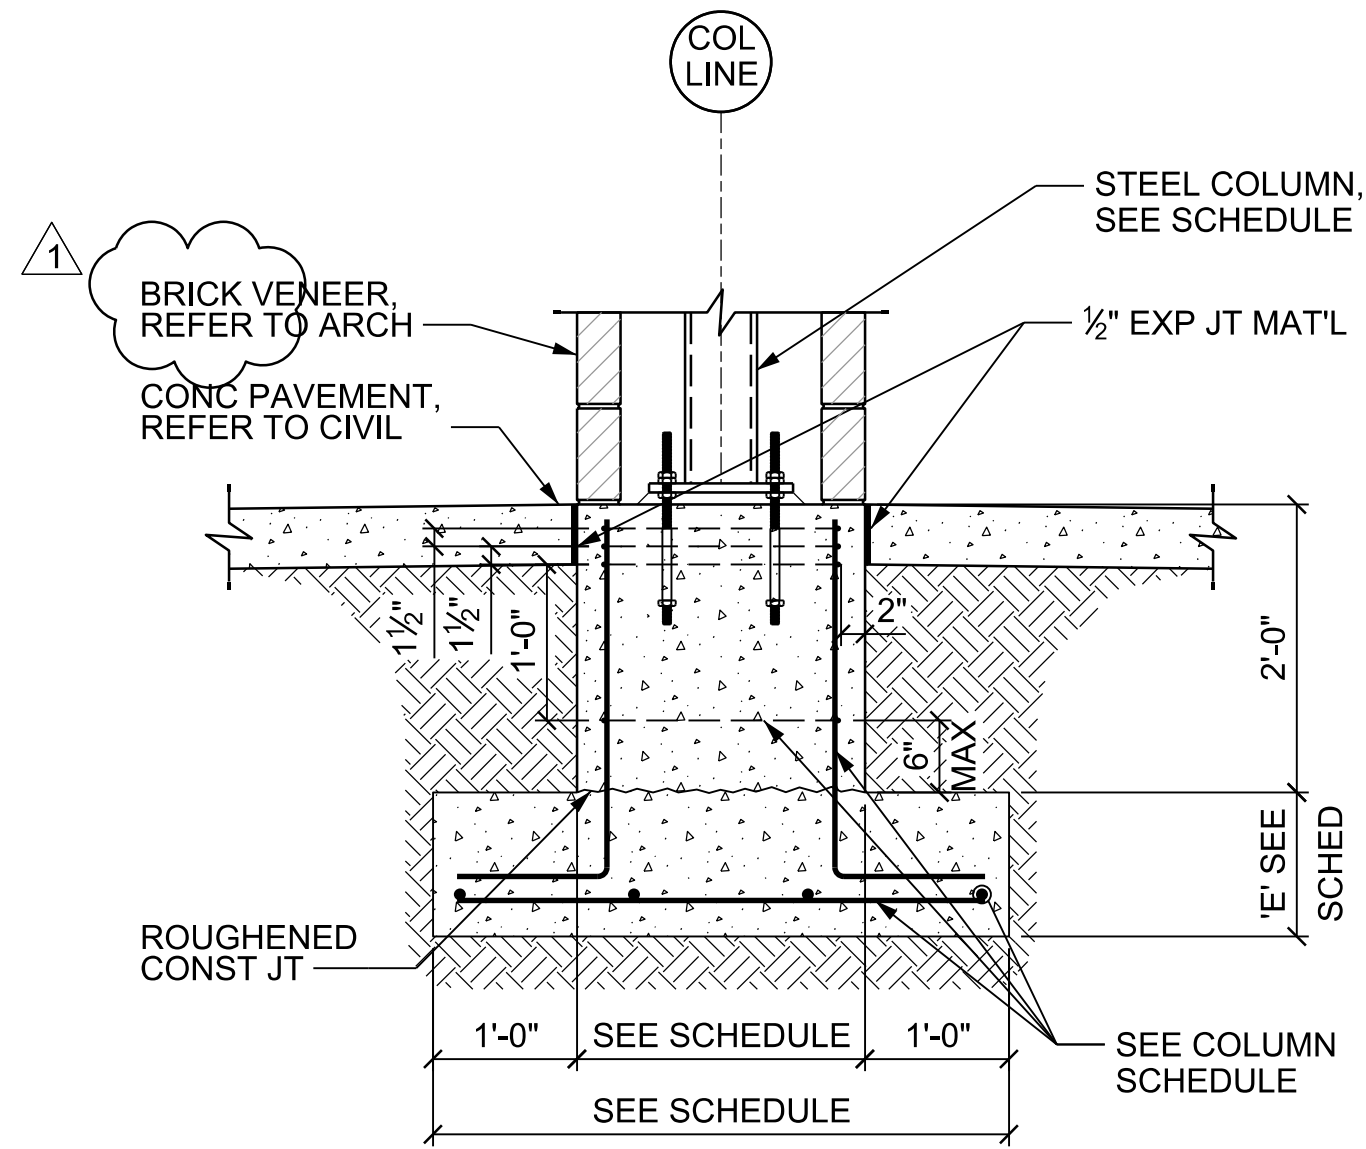

SECTION C
1S-111
1S-114
SCALE: 3/4" = 1'-0"

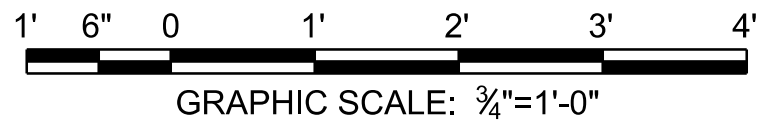

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA
ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS)
AND ORGANIZATIONAL STORAGE BUILDING (OSB)
PN: 092239 P2#-481659
ARC TRAINING BUILDING
FOUNDATION SECTIONS AND DETAILS


SHEET ID
1S-303

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR MARTIN LUTHER KING JR PL
LOUISVILLE, KENTUCKY
Mason & Hanger
A Design/Construct Company

DESIGNED BY:
C. GIBBS
CHECKED BY:
D. DICKEY
SUBMITTED BY:
D. HENSLEY
SIZE:
ANSI D

ISSUE DATE:
MAY 1, 2025
SOLICITATION NO.:
CONTRACT NO.:


MARK	DESCRIPTION	DATE
1	REVISED IN ACCORDANCE WITH AMENDMENT 0001	07/2025

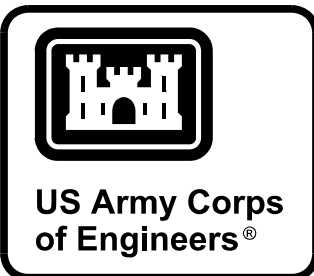


P:\Projects\0170303 CAD_BIM\Sheets\08_Arch\MCLB_1A-541.dgn
21-JUL-2025
14:44

WALL TYPES

SCALE: 1" = 1'-0"

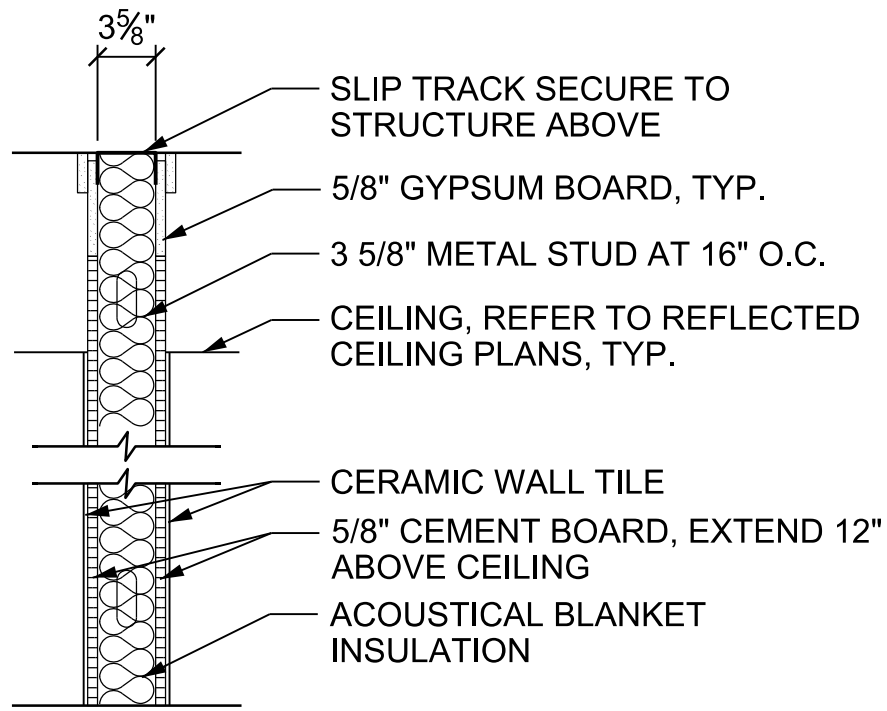


16

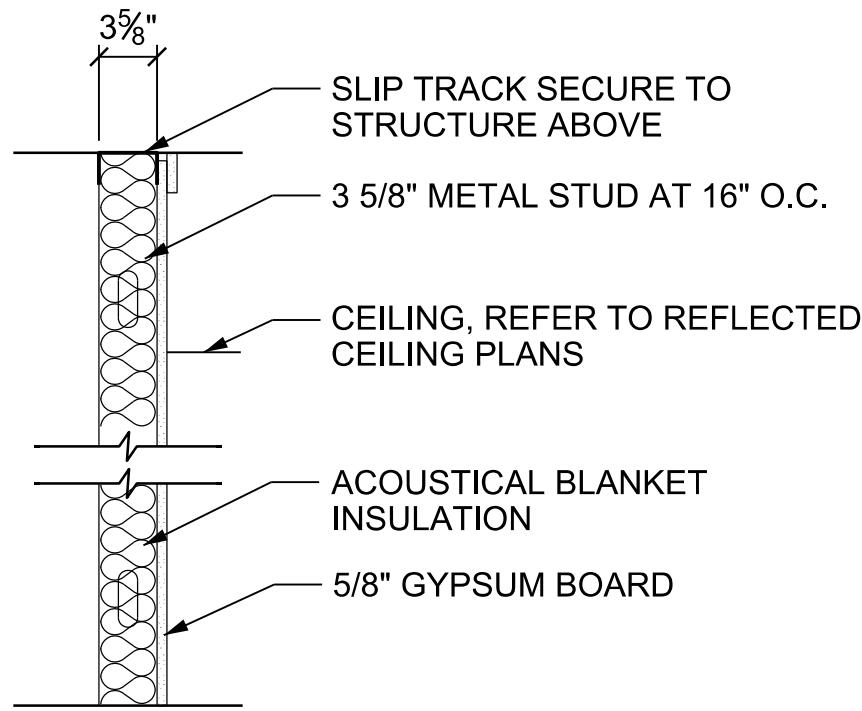


17


17b
SMOKE PARTITION

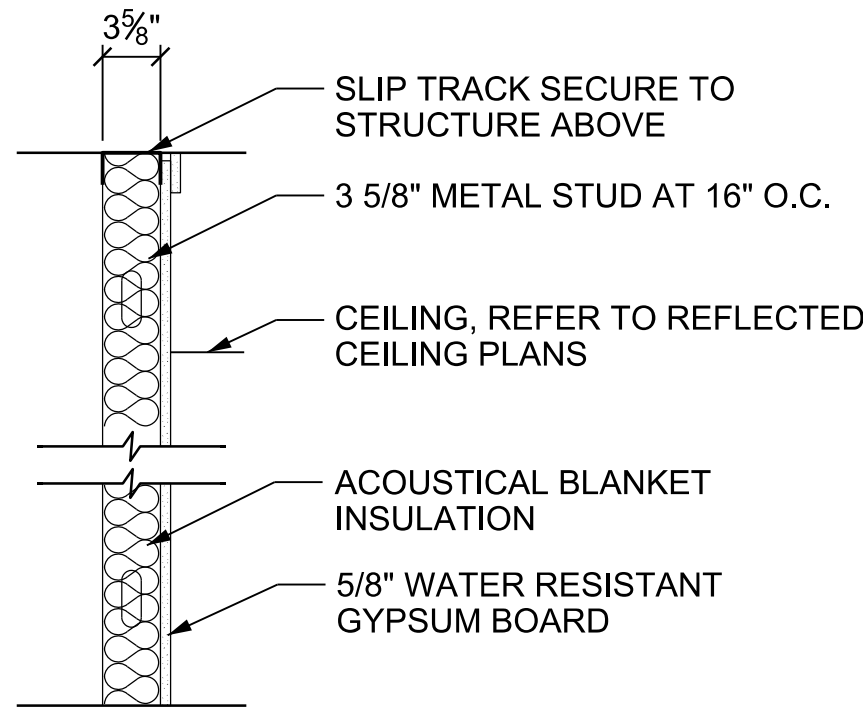


18

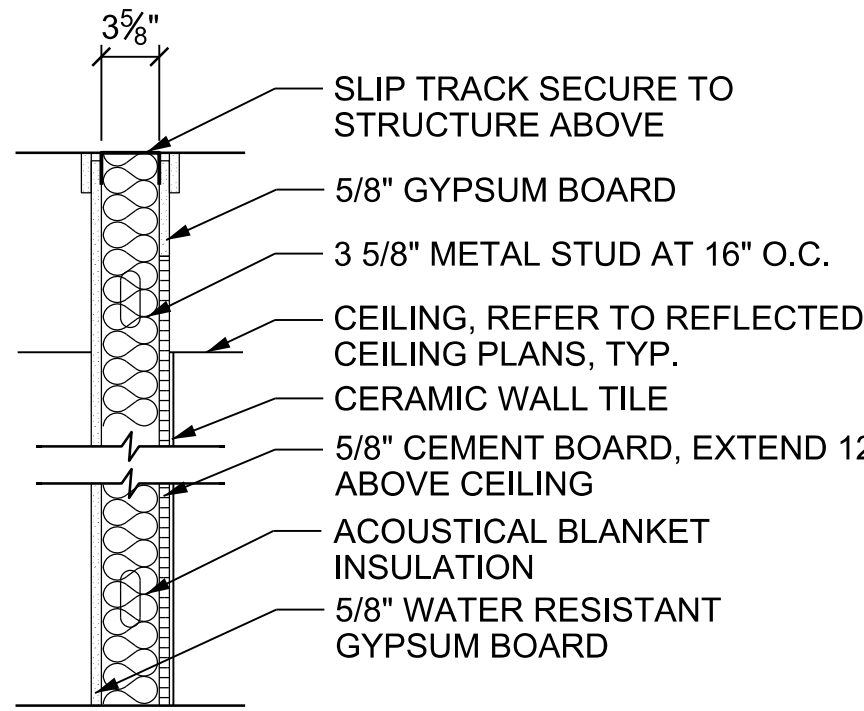


19

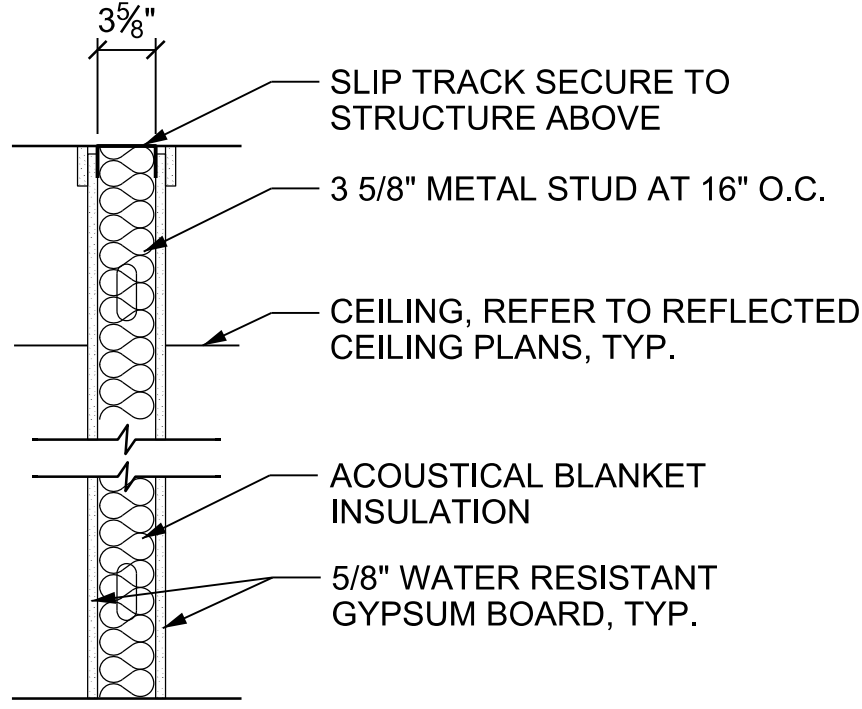

20

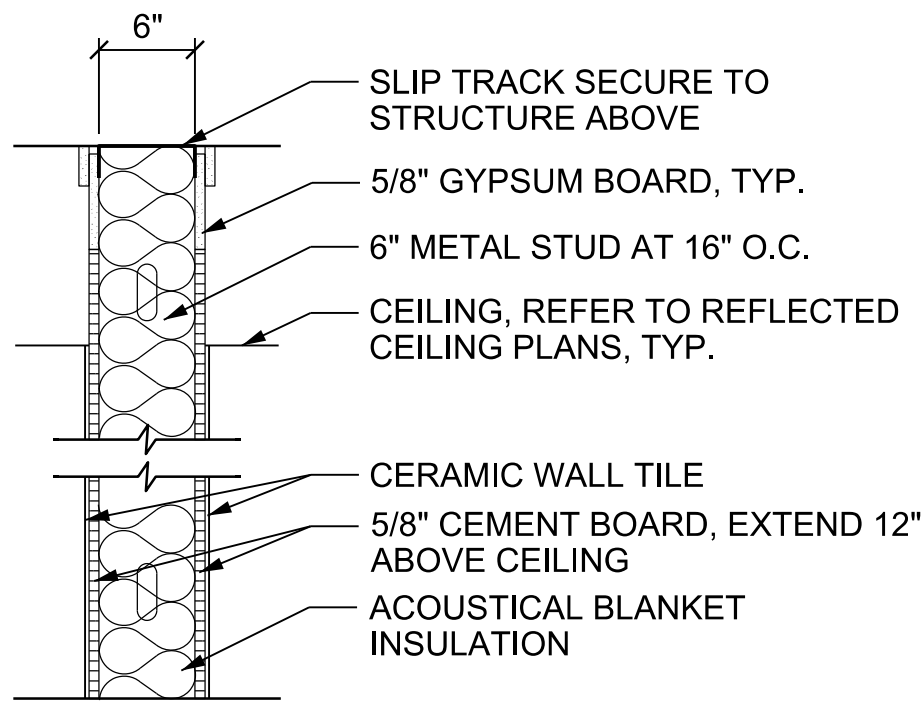


21

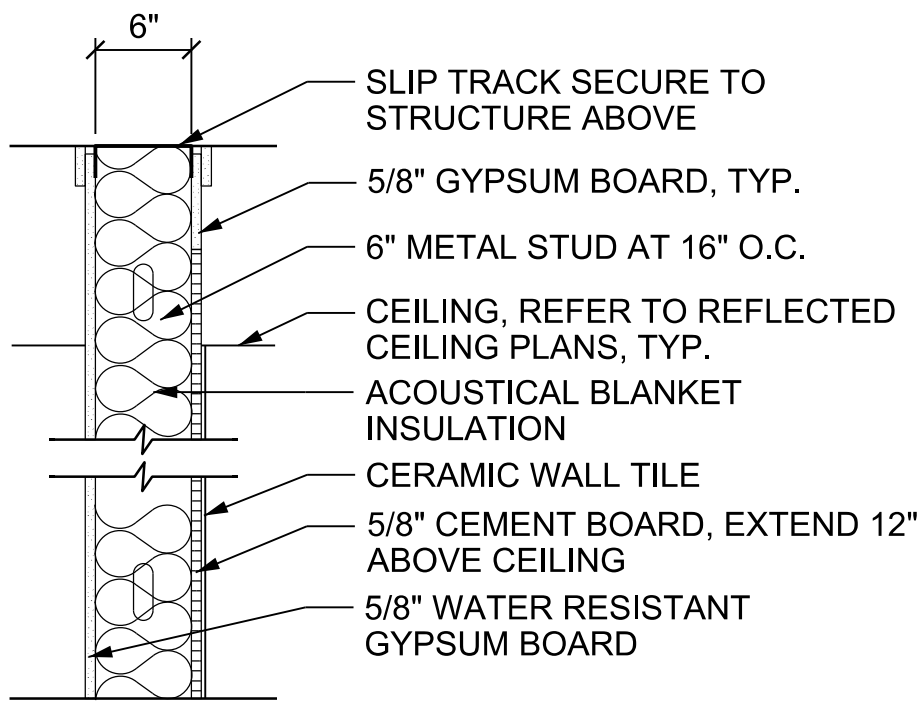

22

GENERAL SHEET NOTES

- WHERE INDICATED ON THE DRAWINGS, EXPOSED CONCRETE WALLS SHALL BE BUILT USING EITHER A TAKE A PART INSULATED CONCRETE FORM SYSTEM OR STRIPPING OFF THE INSULATION WITH ANY MEANS NECESSARY INCLUDING REMOVING PLASTIC CONNECTION STRIPS TO LEAVE A CLASS "B" FINISH.
- INSTALL CONTROL JOINTS IN GYPSUM WALL AND CEILING SYSTEMS PER SPEC SECTION 09 29 00 AND WHERE INDICATED IN GA-216, PARAGRAPHS 4.7.3.1-4.7.4 OR ASTM C840, SYSTEM XIII, PARAGRAPHS 20.3.1-20.3.7.
- THE FOLLOWING ROOMS SHALL USE HIGH IMPACT RESISTANT GYPSUM BOARD INSTEAD OF REGULAR GYPSUM BOARD TO A HEIGHT OF 9'-0": VESTIBULE 100, AND CORRIDOR 101.
- THE FOLLOWING ROOMS SHALL USE WATER RESISTANT GYPSUM BOARD INSTEAD OF REGULAR GYPSUM BOARD TO A HEIGHT OF 9'-0": KITCHEN 135, SCULLERY 136, MEN'S LOCKER ROOM 147 (LOCKER ROOM ONLY) AND WOMEN'S LOCKER ROOM 149 (LOCKER ROOM ONLY).
- THE WALLS OF THE WEAPONS SIMULATOR ROOM SHALL BE STC 48 EXCEPT FOR WALL TYPE 10 ADJOINING THE PHYSICAL READINESS ROOM SHALL BE STC 60. ADD EXTRA LAYERS OF GYPSUM BOARD TO ENTIRE WALL AS NECESSARY TO ACIEVE STC LEVEL.
- WALLS SURROUNDING ROOMS WITH EXPOSED CEILINGS SHALL BE CONTINUOUS FROM CONCRETE FLOOR SLAB EXTENDED TO UNDERSIDE OF DECK ABOVE AND SEALED.
- PROVIDE WALL BLOCKING AT GRAB BARS, SHOWER SEATING, BALLET BARRES, TELEVISIONS, VISUAL BOARDS, FURNITURE, FURNISHINGS, AND OTHER WALL MOUNTED EQUIPMENT. THE CONTRACTOR SHALL DOCUMENT THAT BLOCKING HAS BEEN PROVIDED BEHIND WALL MOUNTED EQUIPMENT WITH PHOTOS.
- REFER TO FINISH SCHEDULE FOR WALL FINISHES.
- REFER TO THE 1A-540 SERIES DRAWINGS FOR MISCELLANEOUS METAL STUD DETAILS.
- CONTRACTOR TO PROVIDE STRAP BRACING IN WALLS AS NEEDED FOR LATERAL BRACING OF WALLS.
- ON FIRE-RATED WALLS EXTEND ENTIRE WALL ASSEMBLY TO THE UNDERSIDE OF ROOF DECK ABOVE AND SEAL WITH FIRE STOPPING MATERIAL. REFER TO PARTIAL PLANS FOR FIRE WALLS.
- ALL PENETRATIONS IN FIRE WALLS SHALL BE FIRE STOPPED.
- ALL FIRE-RATED WALLS OR ANY OTHER WALL REQUIRED TO HAVE PROTECTED OPENINGS OR PENETRATIONS SHALL BE EFFECTIVELY AND PERMANENTLY IDENTIFIED WITH STENCILING. REFER TO DETAIL 8/1A-580.
- PROVIDE 18ga METAL STUDS FOR WALLS THAT RECEIVE WALL TILE. REFER TO FINISH SCHEDULE.
- PROVIDE CONTINUOUS AIR BARRIER AT BUILDING ENVELOPE. SEAL ALL PENETRATIONS.



US Army Corps
of Engineers®

DATE	07/2025
DESCRIPTION	REVISED IN ACCORDANCE WITH AMENDMENT 0001
MARK	1

DESIGNED BY: K. BLANFORD	ISSUE DATE: MAY 1, 2025	SOLICITATION NO.:	CONTRACT NO.:
DRAWN BY: D. HENSLY	CHECKED BY: A. MACCOY	SUBMITTED BY: D. HENSLY	SIZE: ANSI D
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY			
MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS), AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#- 481659			
ARC TRAINING BUILDING WALL TYPES			
 Mason & Hanger A Day & Zimmermann Company			

SHEET ID


1A-541

1" 6" 0 1' 2' 3'
GRAPHIC SCALE: 1"=1'-0"



CERTIFIED FINAL SUBMITTAL W912QR25RA036_Plans-0001

P:\Projects\0170303 CAD_BIM\Sheets\15_Elec\MCLB_1EP114.dgn
22-JUL-2025
13:46

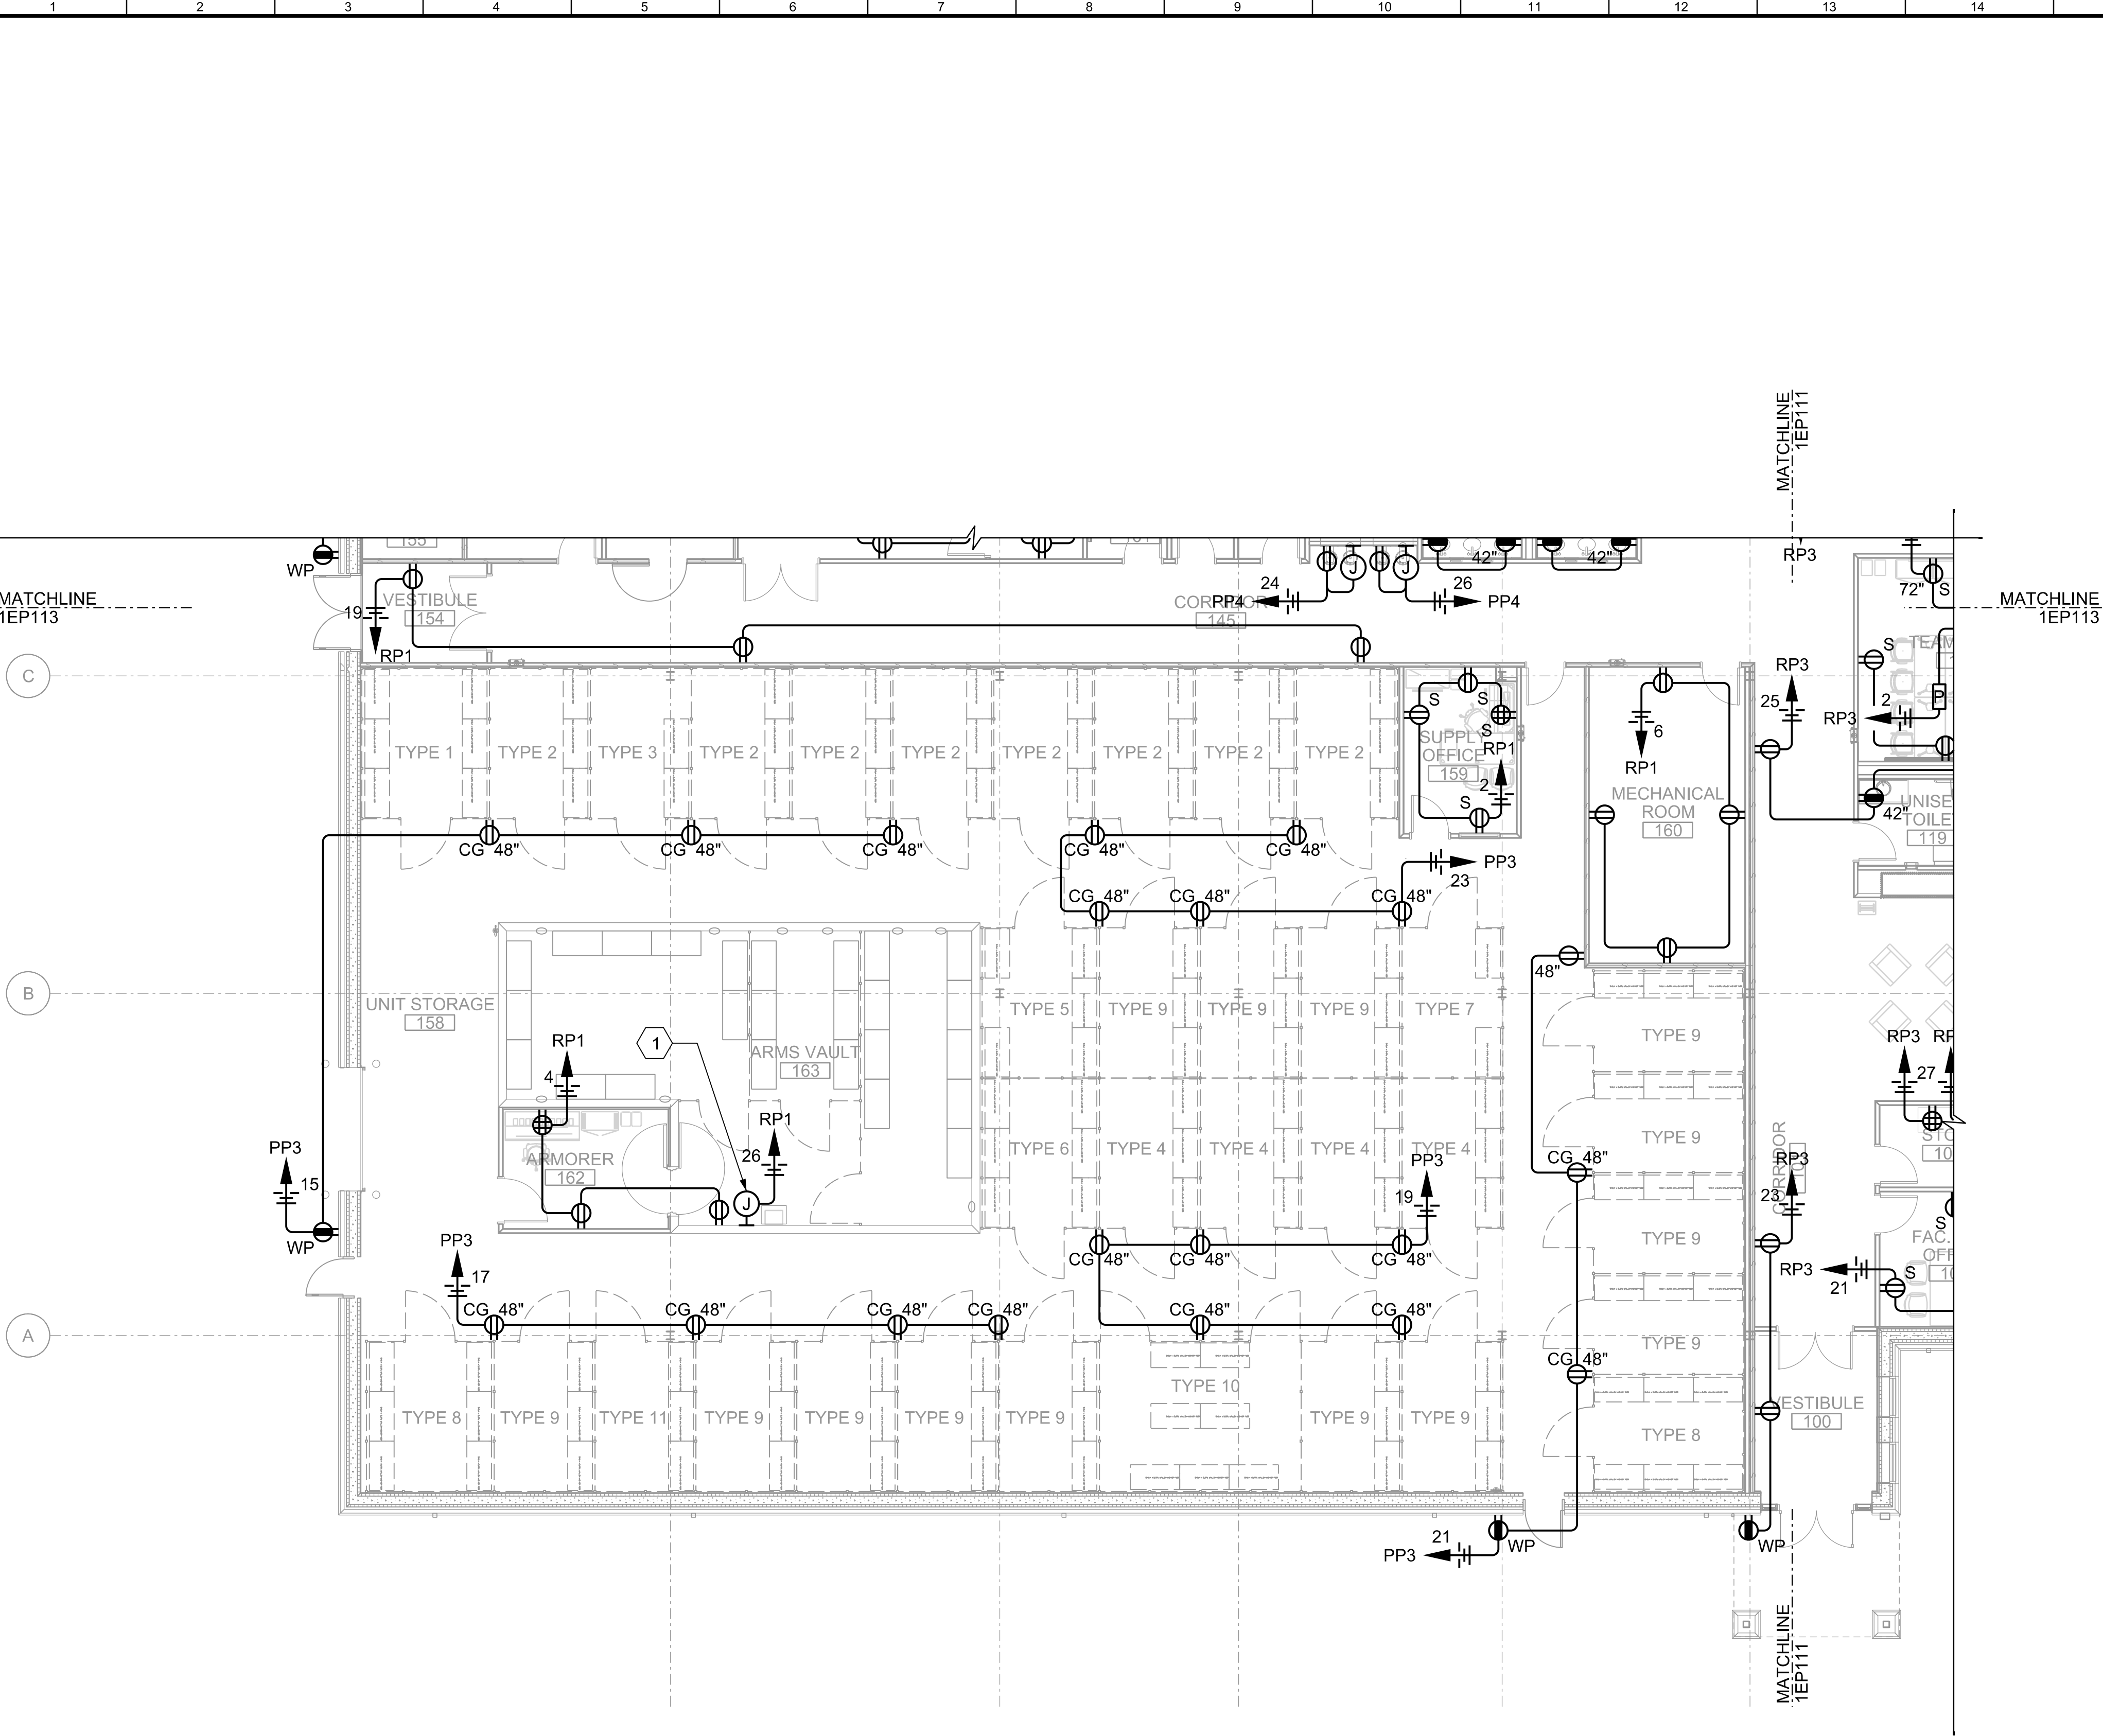


PARTIAL FLOOR PLAN - POWER
SCALE: 1/8" = 1'-0"

GENERAL SHEET NOTES

- ALL RECEPTACLES IN OFFICES, TEAM ROOMS, CLASSROOMS, BREAK ROOMS AND ADMIN SPACES MUST BE SWITCHED. REFER TO SHEET 1EP501 FOR OCCUPANCY RECEPTACLE SCHEMATIC.

SHEET KEYNOTES

- CONNECTION FOR VAULT IDS PANEL. COORDINATE EXACT LOCATION WITH IDS INSTALLER.



US Army Corps
of Engineers®


DATE	DESCRIPTION	MARK
07/20/25	REVISED IN ACCORDANCE WITH AMENDMENT 0001	1

DESIGNED BY: R. MATS	ISSUE DATE: MAY 1, 2025
DRAWN BY: P. HAN	SOLICITATION NO.:
CHECKED BY: J. GREENE	CONTRACT NO.:
SUBMITTED BY: D. HENSLEY	
SIZE: ANSI D	




U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY	Mason & Hanger A Design & Construction Company
--	---

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS), AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	ARC TRAINING BUILDING PARTIAL FLOOR PLAN - POWER
---	---

SHEET ID
1EP114

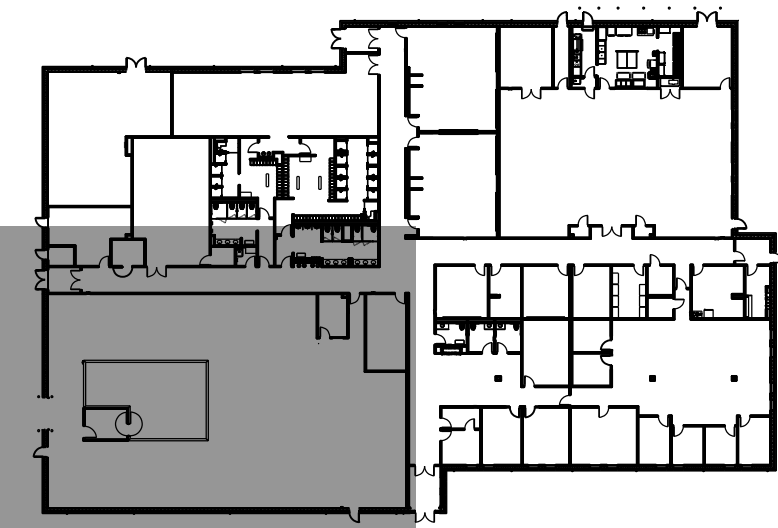


KEY PLAN

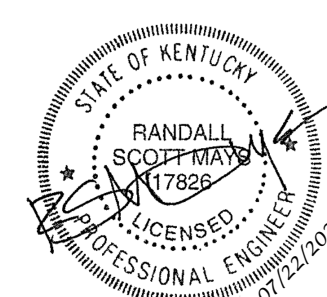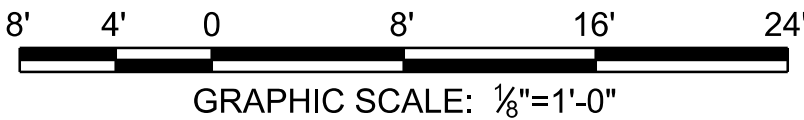

P:\Projects\0170303 CAD_BIM\Sheets\07_Struct\MCLB_2S-110.dgn
21-JUL-2025
14:22

FOUNDATION AND FLOOR SLAB PLAN

SCALE: 1/8" = 1'-0"

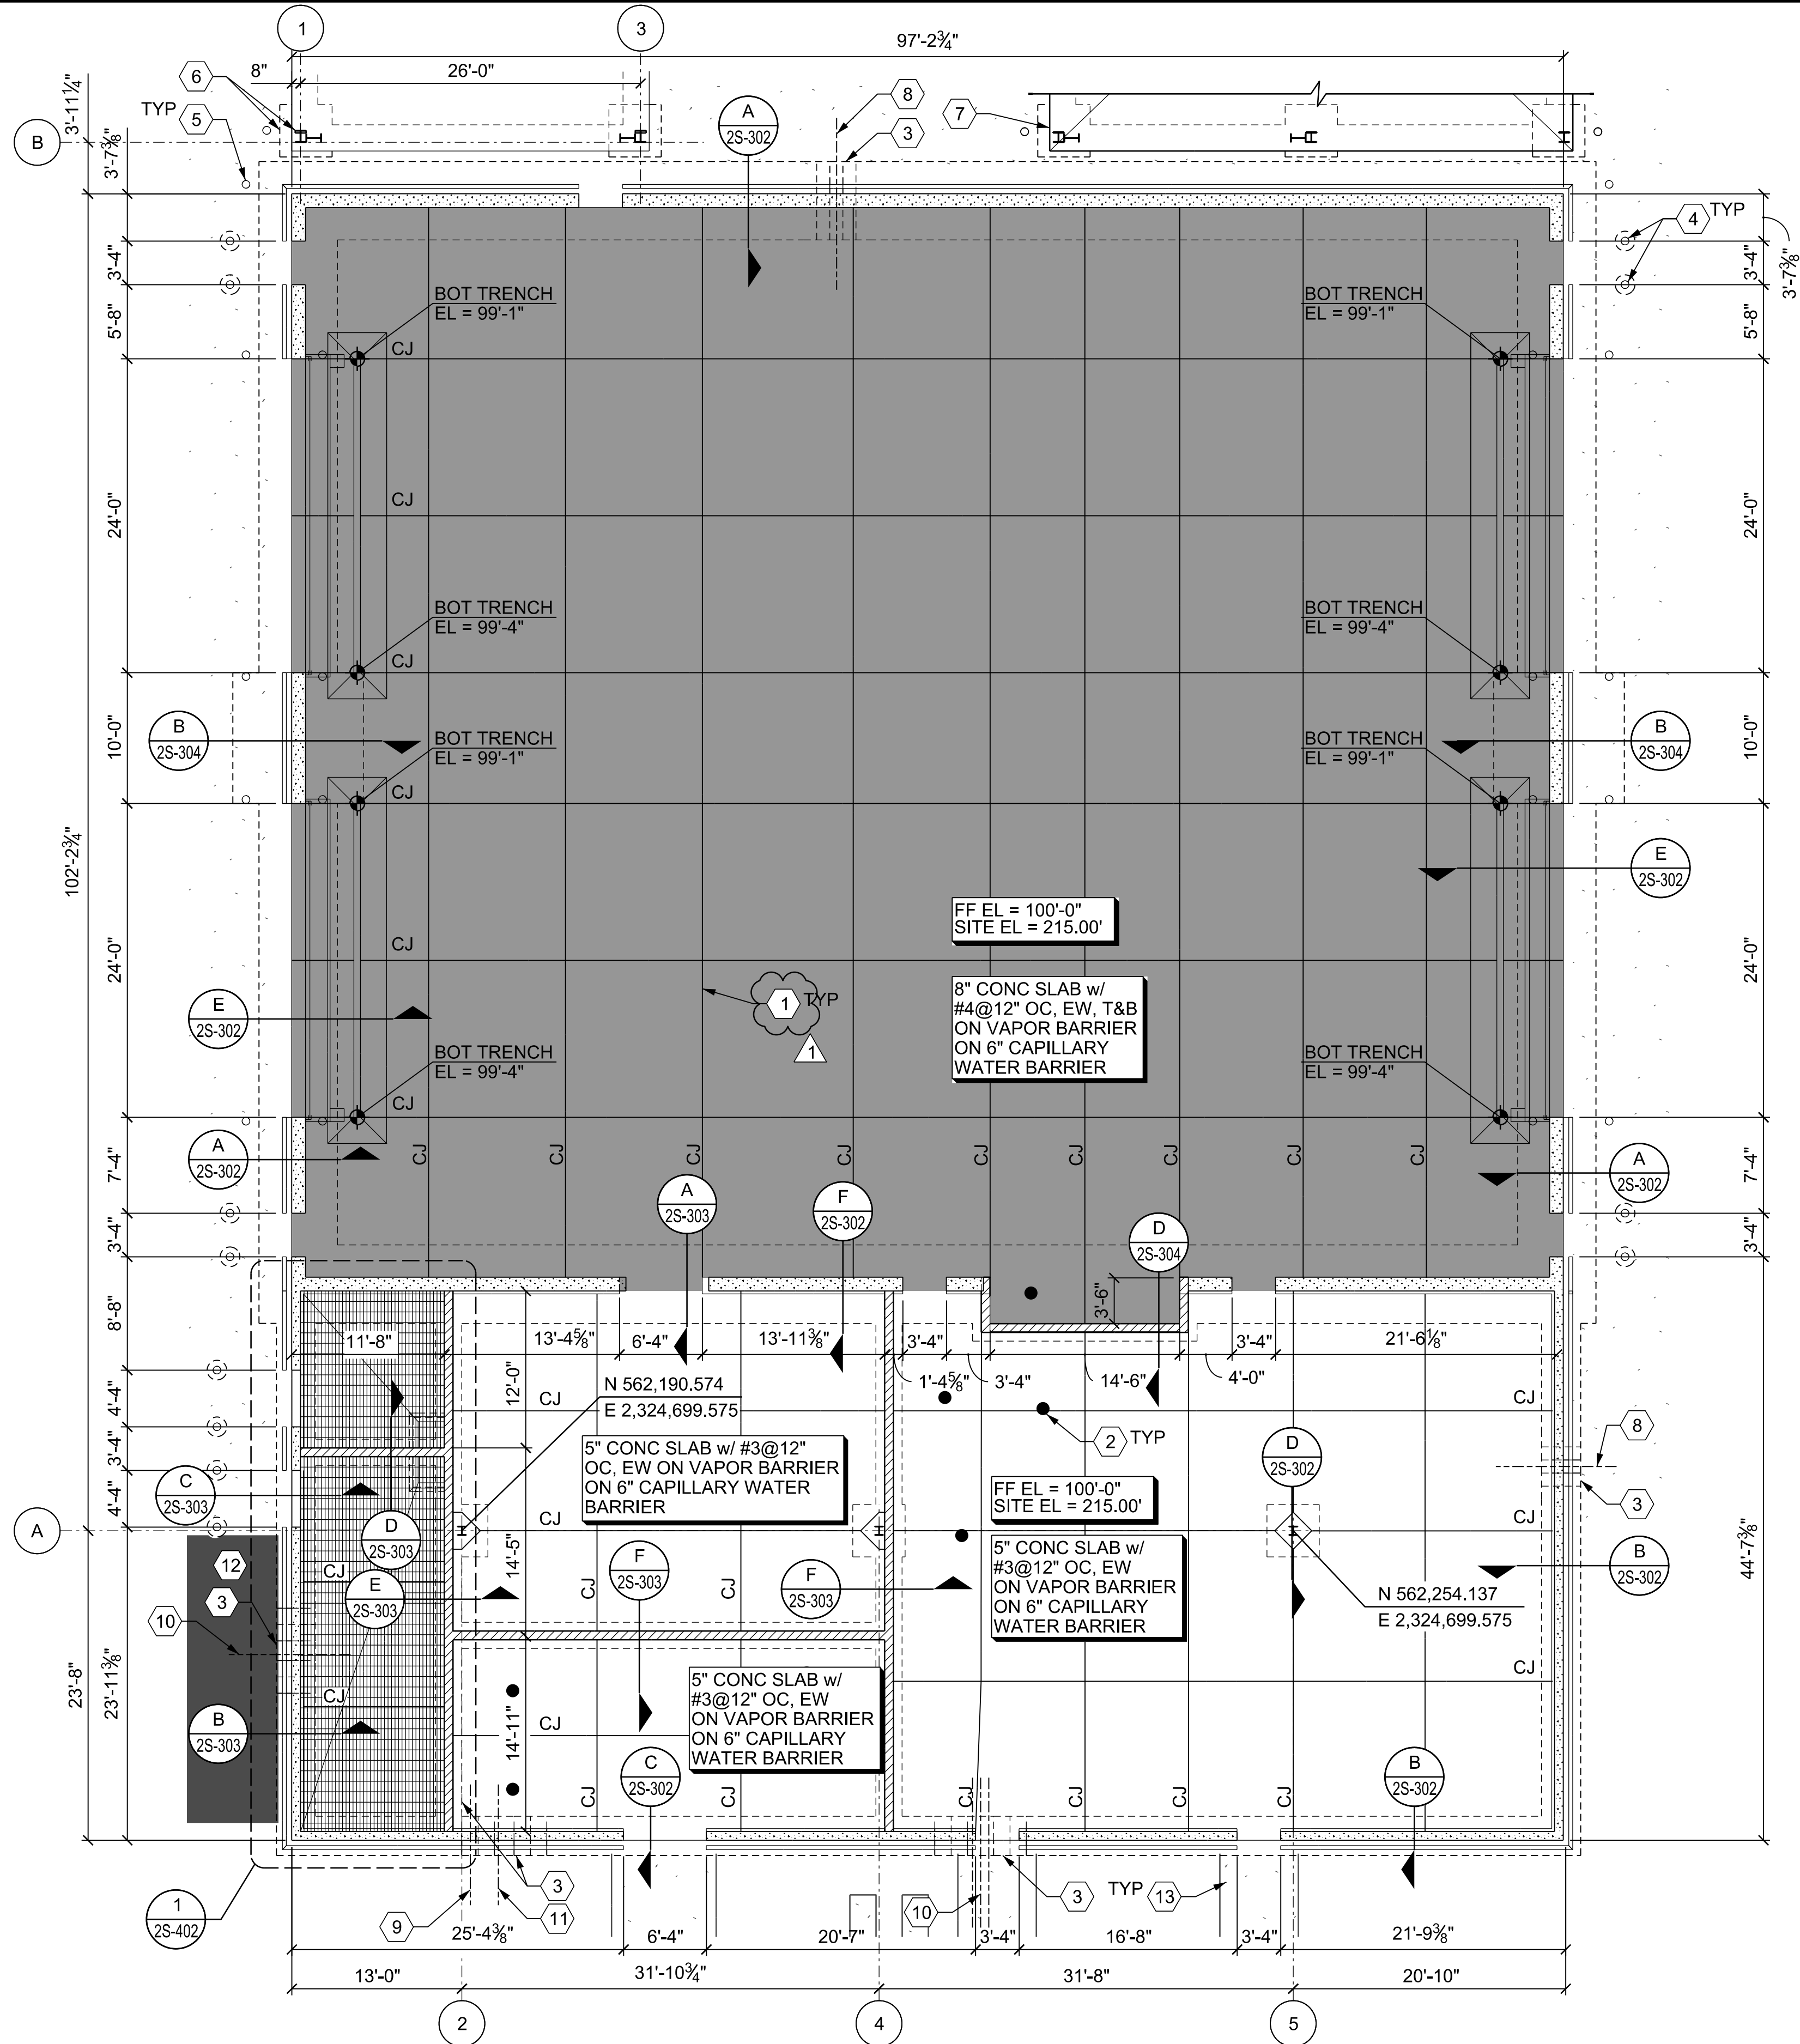

GENERAL SHEET NOTES


1. REFER TO 1S-001 AND 1S-002 FOR GENERAL NOTES.

SHEET KEYNOTES

1. CONTROL JOINT. REFER TO GENERAL NOTES FOR SPACING REQUIREMENTS.
2. FLOOR DRAIN. REFER TO 2S-301.
3. STEPPED FOOTING. REFER TO SITE UTILITIES AND 2S-301 FOR DETAIL.
4. BOLLARD. REFER TO ARCH. FOR LOCATION. REFER TO CIVIL FOR DETAIL.
5. REINFORCED BOLLARD. SEE TYPICAL BOLLARD CONNECTION AT BUILDING FOOTING ON SHEET 2S-304.
6. S.A.T.S. CANOPY FOUNDATION AND BUILDING FRAME. SEE ENLARGED PLAN ON 2S-401.
7. WASHRACK FOUNDATION. SEE PLAN ON 4S-110.
8. SANITARY, REFER TO SITE UTILITIES.
9. DOMESTIC WATER, REFER TO SITE UTILITIES.
10. ELECTRICAL US DUCTBANK, REFER TO SITE UTILITIES.
11. FIRE WATER, REFER TO SITE UTILITIES.
12. CONCRETE PAVEMENT, REFER TO CIVIL DRAWINGS.
13. STOOP/SIDEWALK, REFER TO CIVIL DRAWINGS.

LEGEND

- INDICATES CONTAINMENT AREA GRATING.
- INDICATES AREA TO HAVE DRY SHAKE HARDENER APPLIED. REFER TO SPEC 03 30 00.



US Army Corps
of Engineers®

DATE	DESCRIPTION	MARK
07/20/25	REVISED IN ACCORDANCE WITH AMENDMENT 001	1

DESIGNED BY: C. GIBBS	ISSUE DATE: MAY 1, 2025
CHECKED BY: D. DICKEY	SOLICITATION NO.:
SUBMITTED BY: D. HENSLEY	CONTRACT NO.:
SIZE: ANSI D	

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR MARTIN LUTHER KING JR PL
LOUISVILLE, KENTUCKY




Mason & Hanger
A Day & Zimmermann Company

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS), AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	VEHICLE MAINTENANCE SHOP FOUNDATION AND FLOOR SLAB PLAN
---	--


SHEET ID

2S-110


CERTIFIED FINAL SUBMITTAL W912QR25RA036_Plans-0001

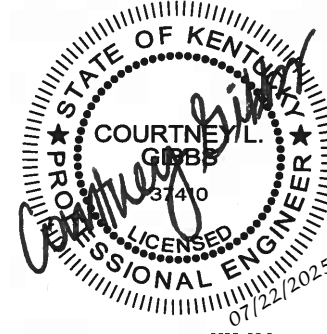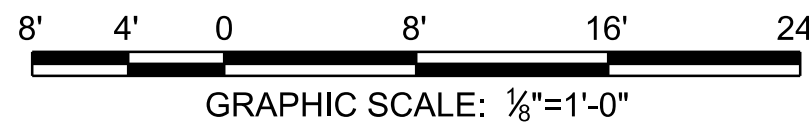


P:\Projects\0170303 CAD_BIM_Sheets\07_Struc\MCLB_2S-301.dgn
21-JUL-2025
11:04

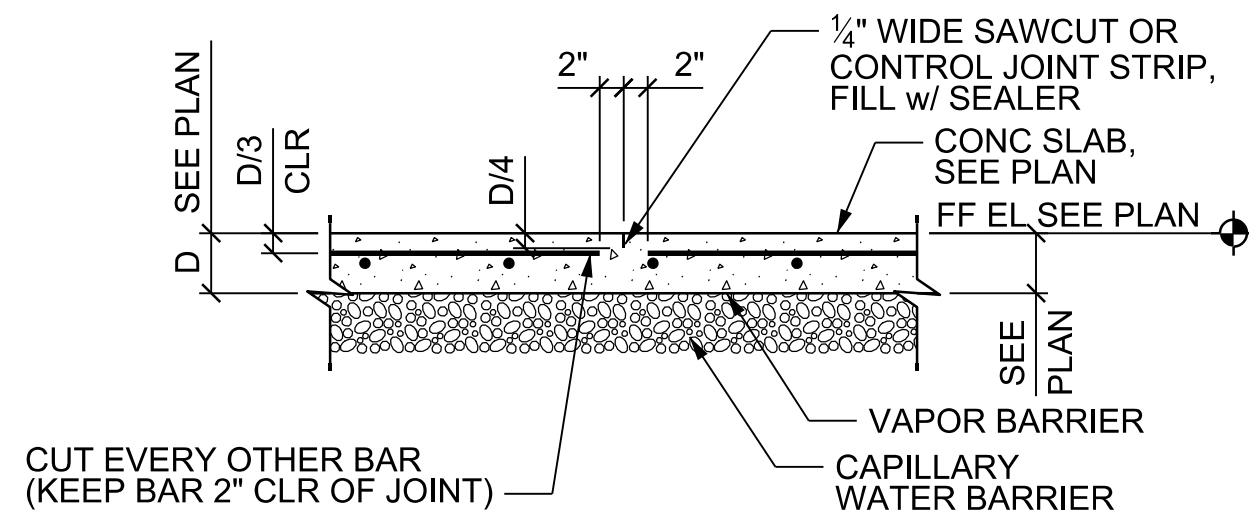


5" SLAB CONTRACTION JOINT (CJ)

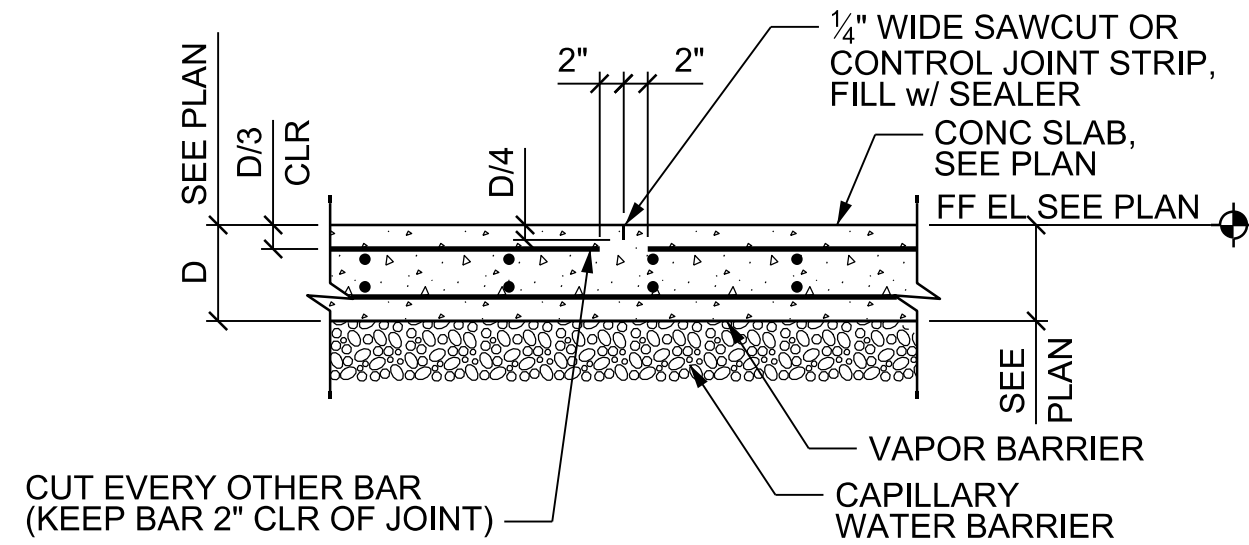


8" SLAB CONTRACTION JOINT (CJ)

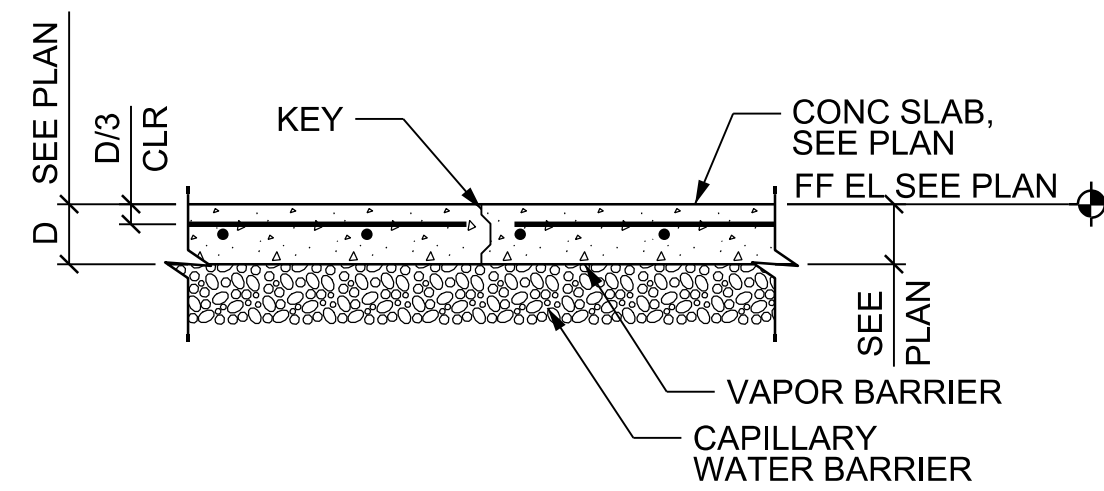

5" SLAB CONSTRUCTION JOINT (CONST JT)

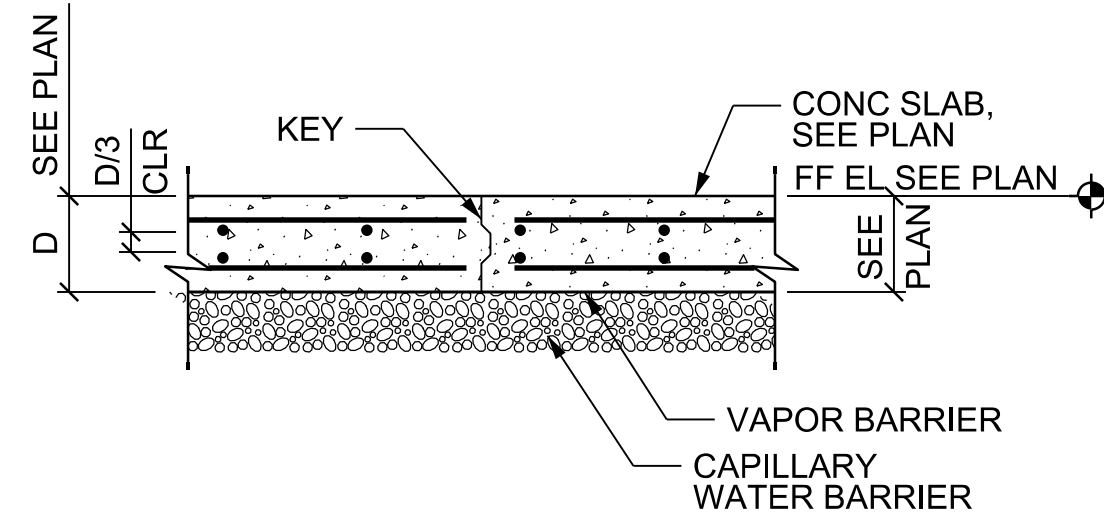


8" SLAB CONSTRUCTION JOINT (CONST JT)

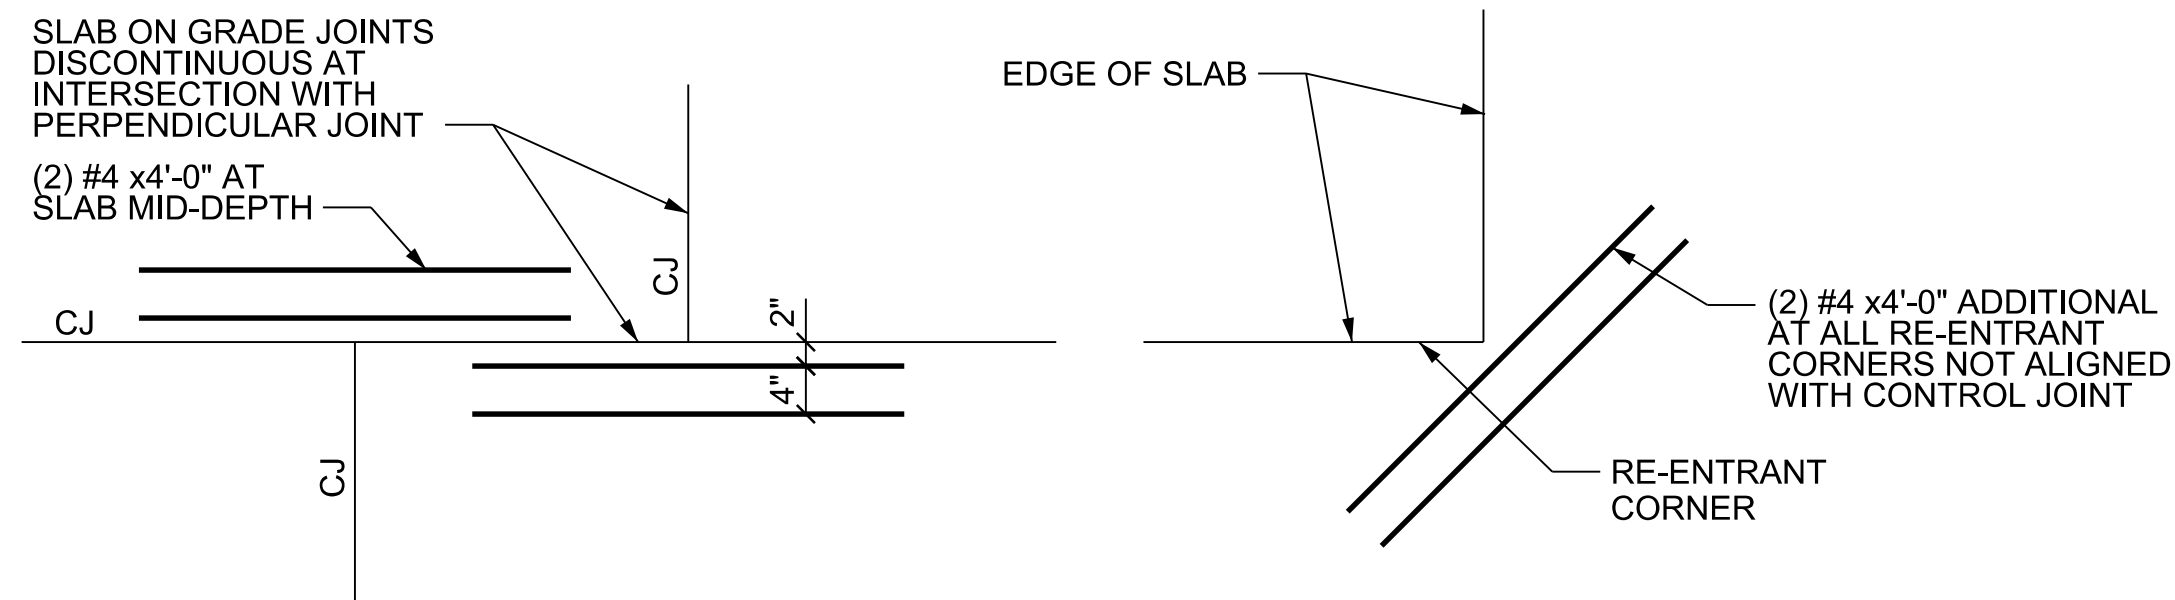

JOINT INTERSECTION DETAIL

SLAB JOINTS

SCALE: 3/4"=1'-0"

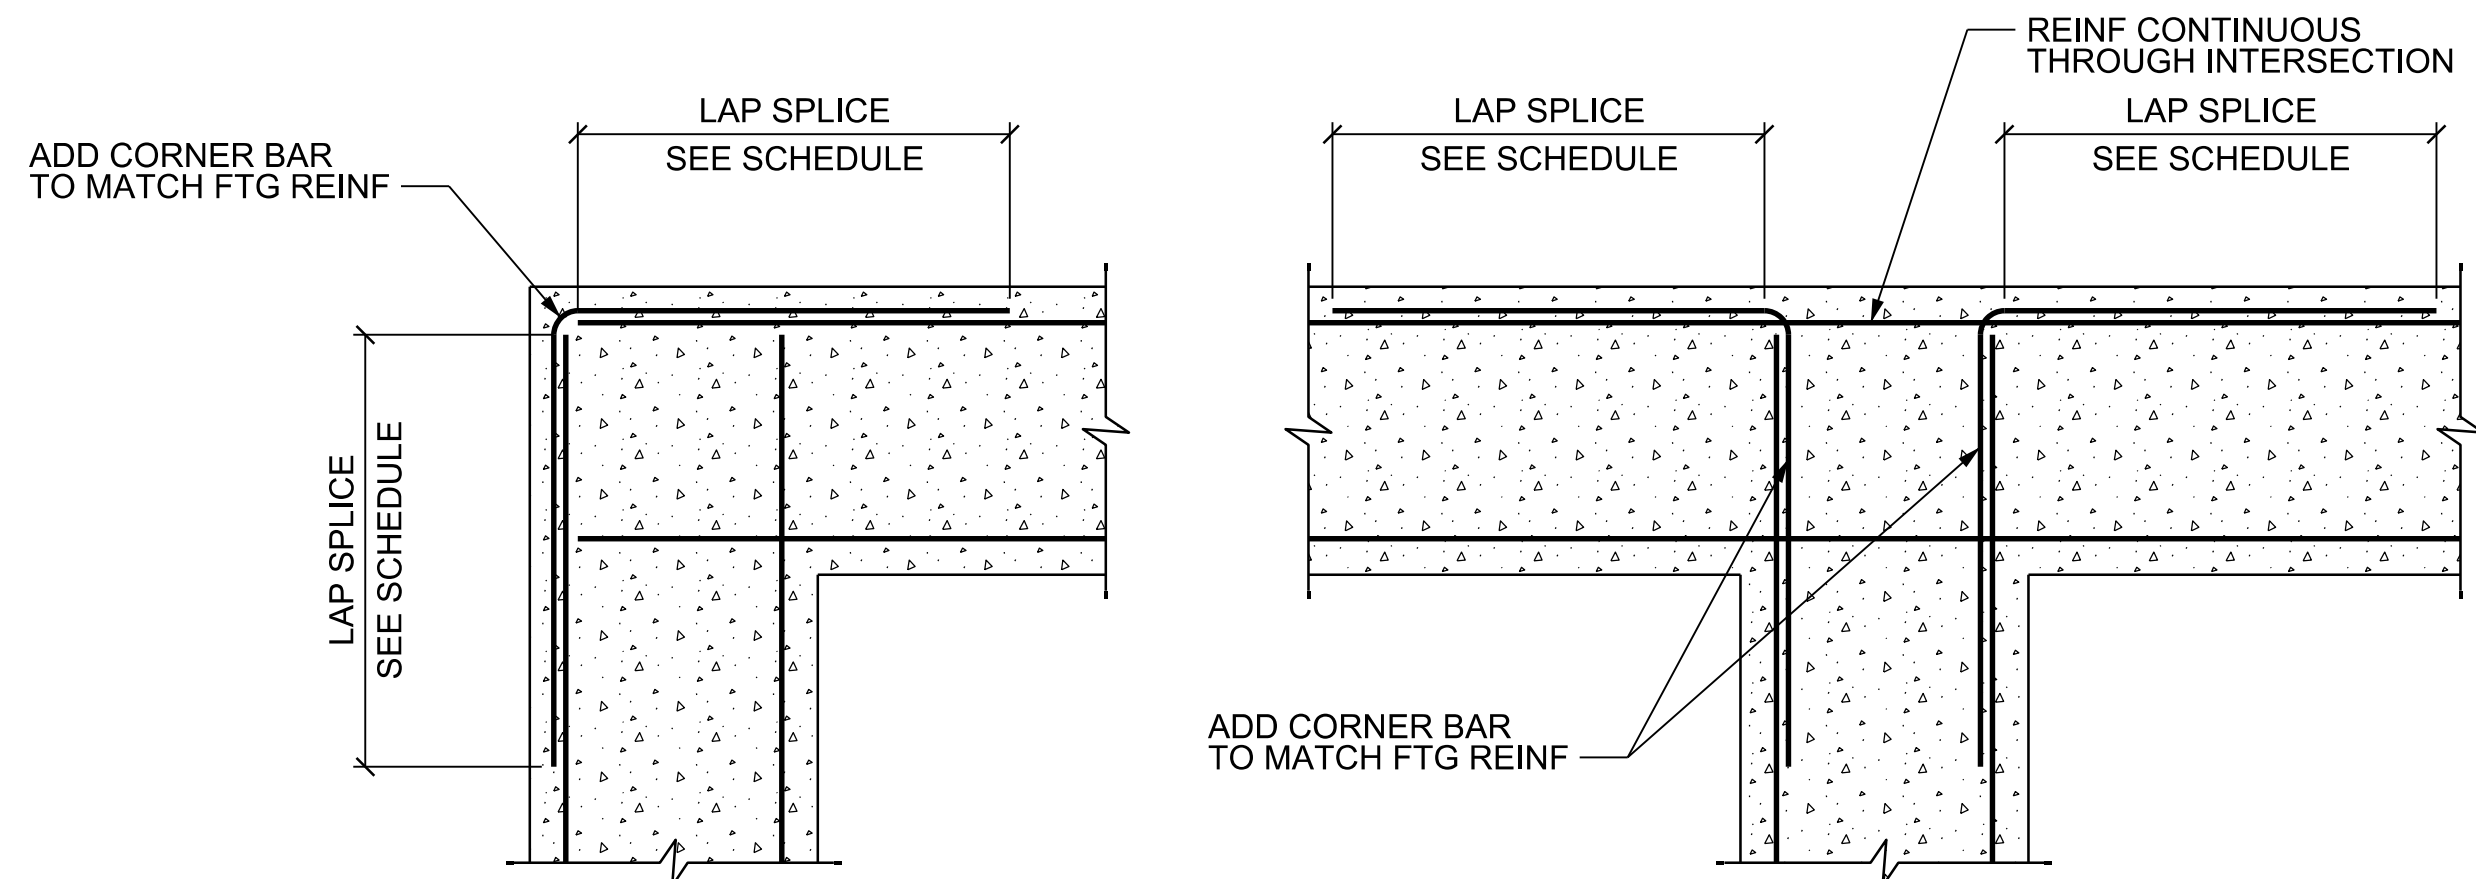


PLAN AT CORNER

PLAN AT INTERSECTION

PLAN AT FOOTING / COLUMN


TYPICAL FOUNDATION AND WALL DETAILS

SCALE: 3/4"=1'-0"

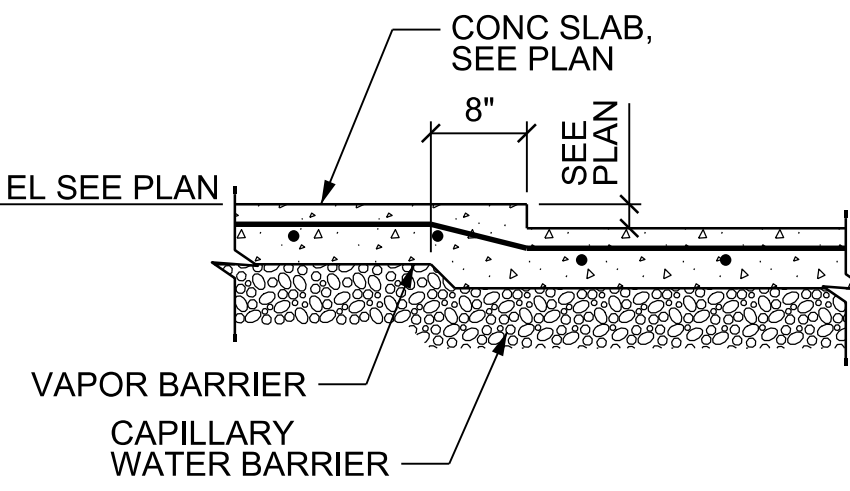


RECESSED SLAB

SCALE: 3/4"=1'-0"

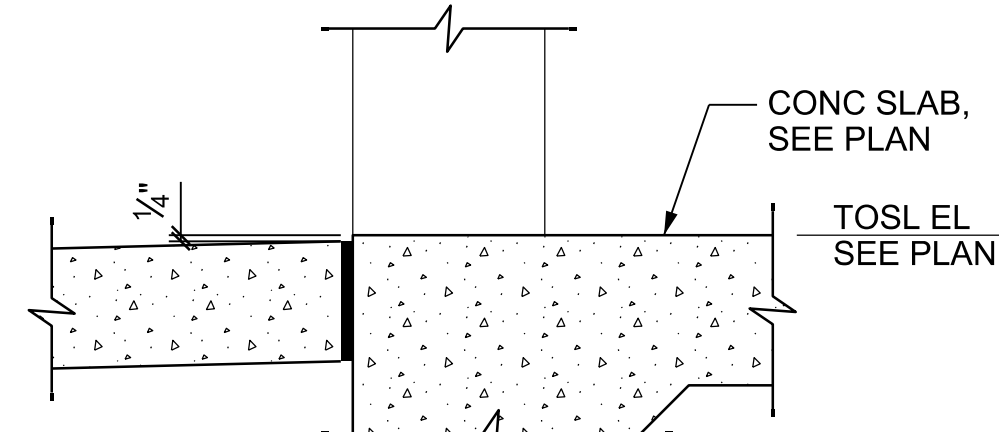

AT PERSONNEL DOOR

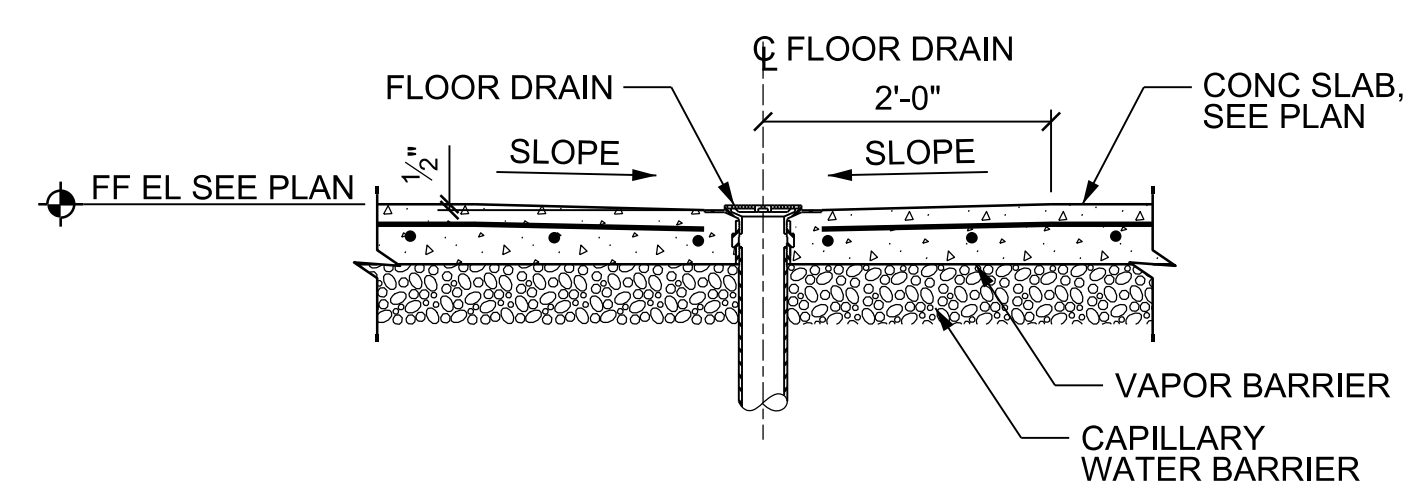


NOTE:
SET UP DRAIN AS REQ'D. TO
RECEIVE FLOOR FINISH. SEE
ARCH DRAWINGS.

SEE ARCHITECTURAL AND
MECHANICAL DRAWINGS
FOR SIZE AND LOCATION
OF FLOOR DRAINS.

FLOOR DRAIN


SCALE: 3/4"=1'-0"

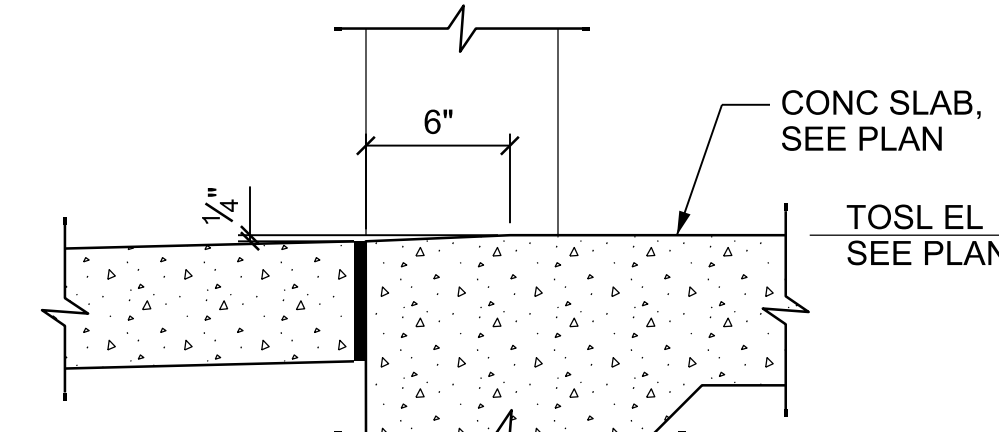

AT ROLLUP DOOR


**TYPICAL SLAB EDGE AT
DOOR OPENING DETAILS**

SCALE: 3/4"=1'-0"

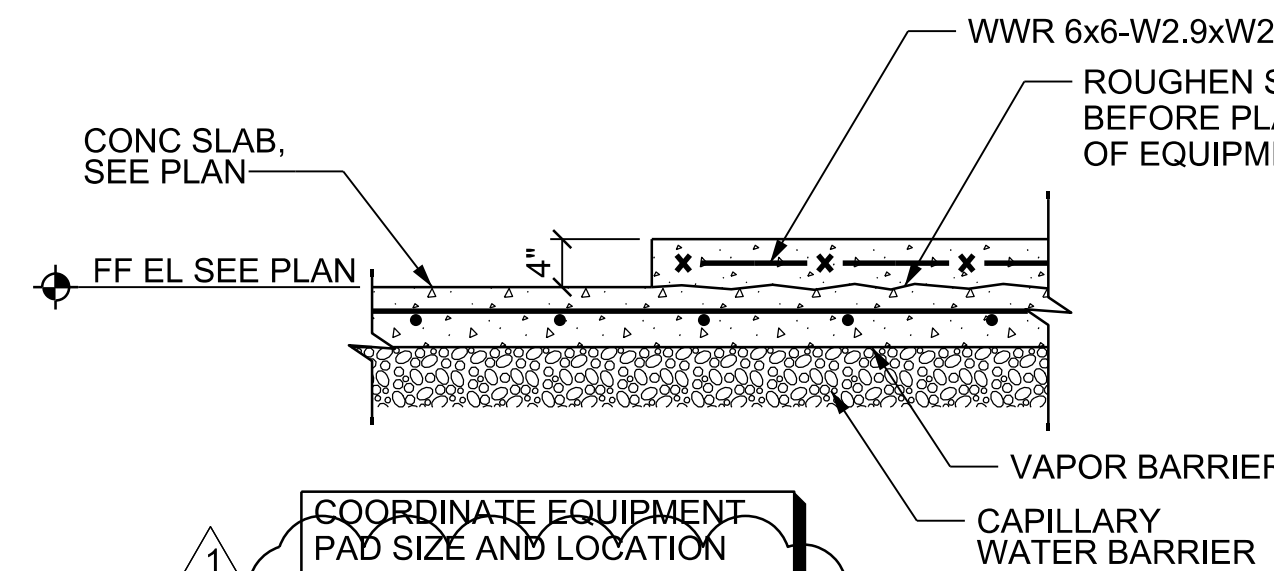


EQUIPMENT PAD/CURB DETAIL

SCALE: 3/4"=1'-0"

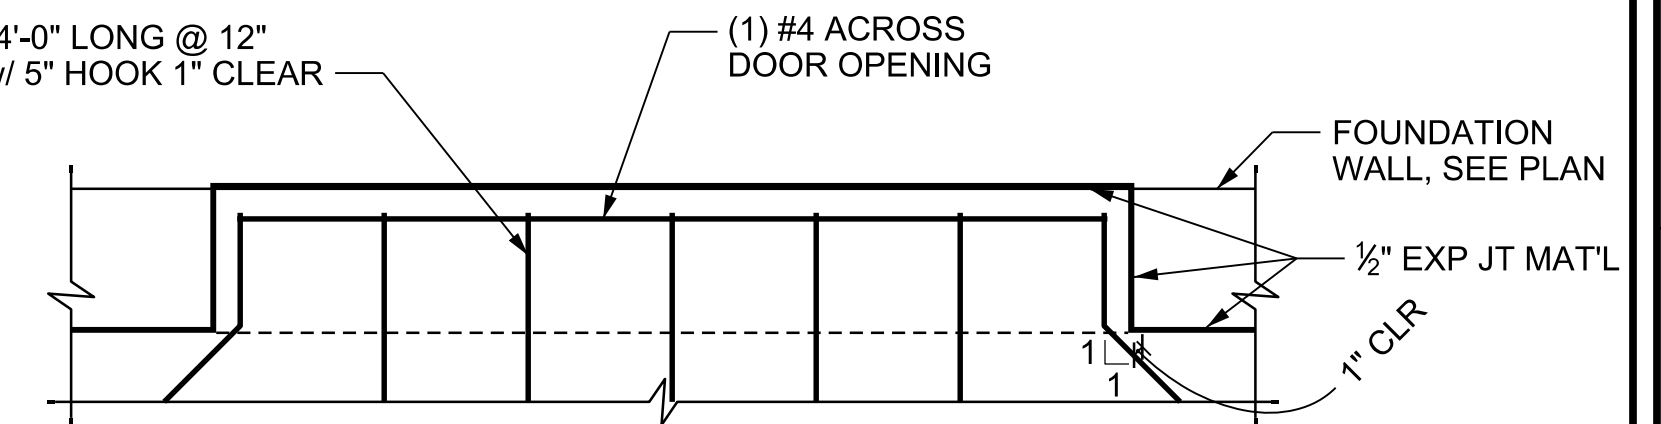

ADDITIONAL SLAB REINFORCING AT DOORWAY




SCALE: 3/4"=1'-0"

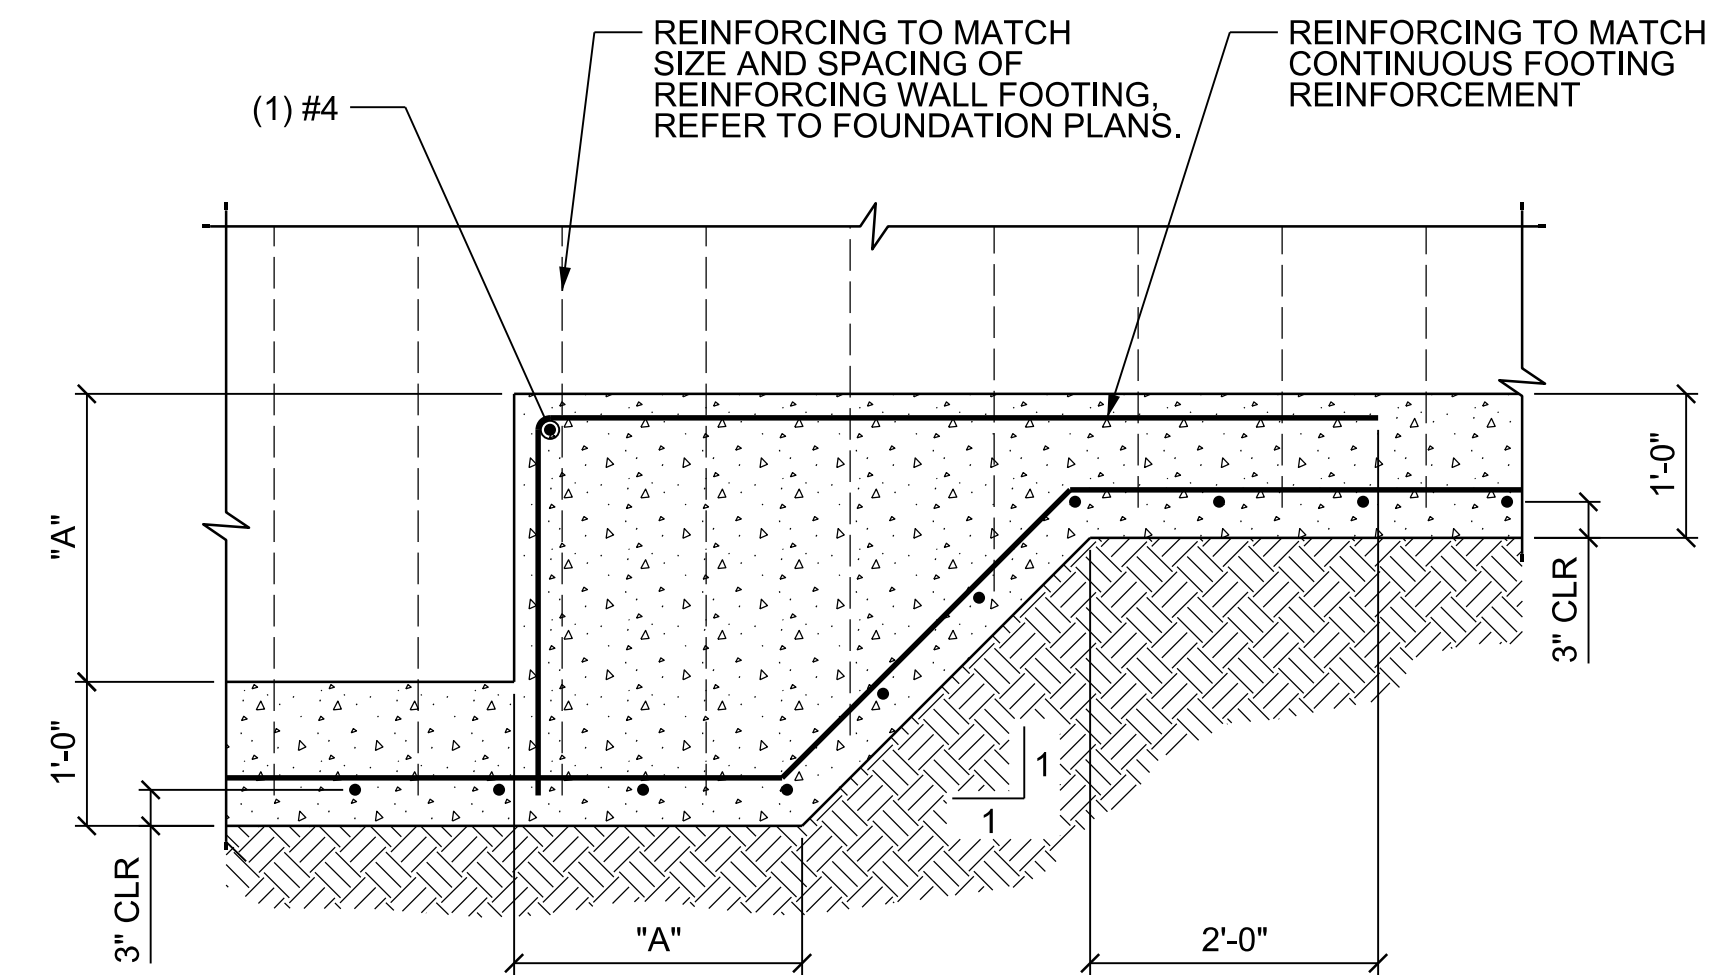

"A" = 2'-0" MAX

STEP FOOTING

SCALE: 3/4"=1'-0"

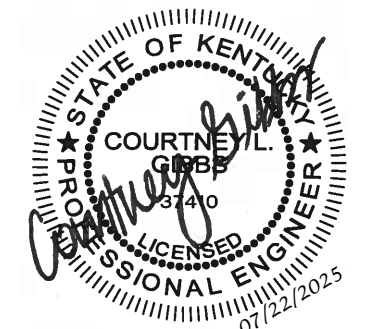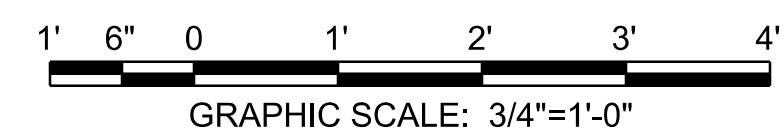

US Army Corps
of Engineers®

DATE	MARK	DESCRIPTION
07/20/25	1	REVISED IN ACCORDANCE WITH AMENDMENT 0001

DESIGNED BY: C. GIBBS B. BRANNEN	ISSUE DATE: MAY 1, 2025	SOLICITATION NO.:	CONTRACT NO.:
CHECKED BY: D. DICKEY			
SUBMITTED BY: D. HENSLEY			
SIZE: ANSI D			


U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR MARTIN LUTHER KING JR PL
LOUISVILLE, KENTUCKY

Mason & Hanger
A Day & Zimmermann Company

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC) VEHICLE MAINTENANCE SHOP (VMS) AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#: 481659	VEHICLE MAINTENANCE SHOP FOUNDATION SECTIONS AND DETAILS
---	---


SHEET ID

2S-301

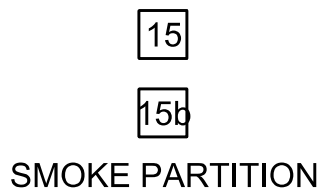

SCALE: 1" = 1'-0"

1. WHERE INDICATED ON THE DRAWINGS, EXPOSED CONCRETE WALLS SHALL BE BUILT USING EITHER A TAKE A PART INSULATED CONCRETE FORM SYSTEM OR STRIPPING OFF THE INSULATION WITH ANY MEANS NECESSARY INCLUDING REMOVING PLASTIC CONNECTION STRIPS TO LEAVE A CLASS "B" FINISH.
2. INSTALL CONTROL JOINTS IN GYPSUM WALL AND CEILING SYSTEMS PER SPEC SECTION 09 29 00 AND WHERE INDICATED IN GA-216, PARAGRAPHS 4.7.3.1-4.7.4 OR ASTM C840, SYSTEM XIII, PARAGRAPHS 20.3.1-20.3.7.
3. THE FOLLOWING ROOMS SHALL USE HIGH IMPACT RESISTANT GYPSUM BOARD INSTEAD OF REGULAR GYPSUM BOARD TO A HEIGHT OF 9'-0": VESTIBULE 101, CORRIDOR 102, AND VESTIBULE 109.
4. WALLS SURROUNDING ROOMS WITH EXPOSED CEILINGS SHALL BE CONTINUOUS FROM CONCRETE FLOOR SLAB EXTENDED TO UNDERSIDE OF DECK ABOVE AND SEALED.
5. PROVIDE WALL BLOCKING AT GRAB BARS, VISUAL BOARDS, FURNITURE, FURNISHINGS, AND OTHER WALL MOUNTED EQUIPMENT. THE CONTRACTOR SHALL DOCUMENT THAT BLOCKING HAS BEEN PROVIDED BEHIND WALL MOUNTED EQUIPMENT WITH PHOTOS.
6. INSTALL FIRE RATED WALL TIGHT TO CONCRETE WALL AT EXTERIOR. INTERIOR RIGID INSULATION AT EXTERIOR WALL SHALL BE REMOVED AT THE CMU WALL LOCATION, SO THAT CMU WALL IS ABUTTING THE CONCRETE WALL.
7. REFER TO FINISH SCHEDULE FOR WALL FINISHES.
8. REFER TO THE 2A-540 SERIES DRAWINGS FOR MISCELLANEOUS METAL STUD DETAILS.
9. CONTRACTOR TO PROVIDE STRAP BRACING IN WALLS AS NEEDED FOR LATERAL BRACING OF WALLS.
10. ON FIRE-RATED WALLS EXTEND ENTIRE WALL ASSEMBLY TO THE UNDERSIDE OF ROOF DECK ABOVE AND SEAL WITH FIRE STOPPING MATERIAL. REFER TO PARTIAL PLANS FOR FIRE WALLS.
11. ALL PENETRATIONS IN FIRE WALLS SHALL BE FIRE STOPPED.
12. ALL FIRE-RATED WALLS OR ANY OTHER WALL REQUIRED TO HAVE PROTECTED OPENINGS OR PENETRATIONS SHALL BE EFFECTIVELY AND PERMANENTLY IDENTIFIED WITH STENCILING. REFER TO DETAIL 8/2A-580.
13. PROVIDE 18ga METAL STUDS FOR WALLS THAT RECEIVE WALL TILE. REFER TO FINISH SCHEDULE.
14. PROVIDE CONTINUOUS AIR BARRIER AT BUILDING ENVELOPE. SEAL ALL PENETRATIONS.

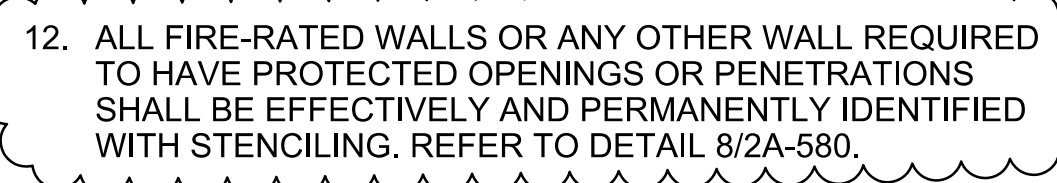


MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA
ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS),
AND ORGANIZATIONAL STORAGE BUILDING (OSB)
PN: 092239 PZF: 481859

2A-541

[illegible]

P:\Projects\0170303 CAD_BIM_Sheets\08_Arch\WCLB_2A-560.dgn
21-JUL-2025
15:18

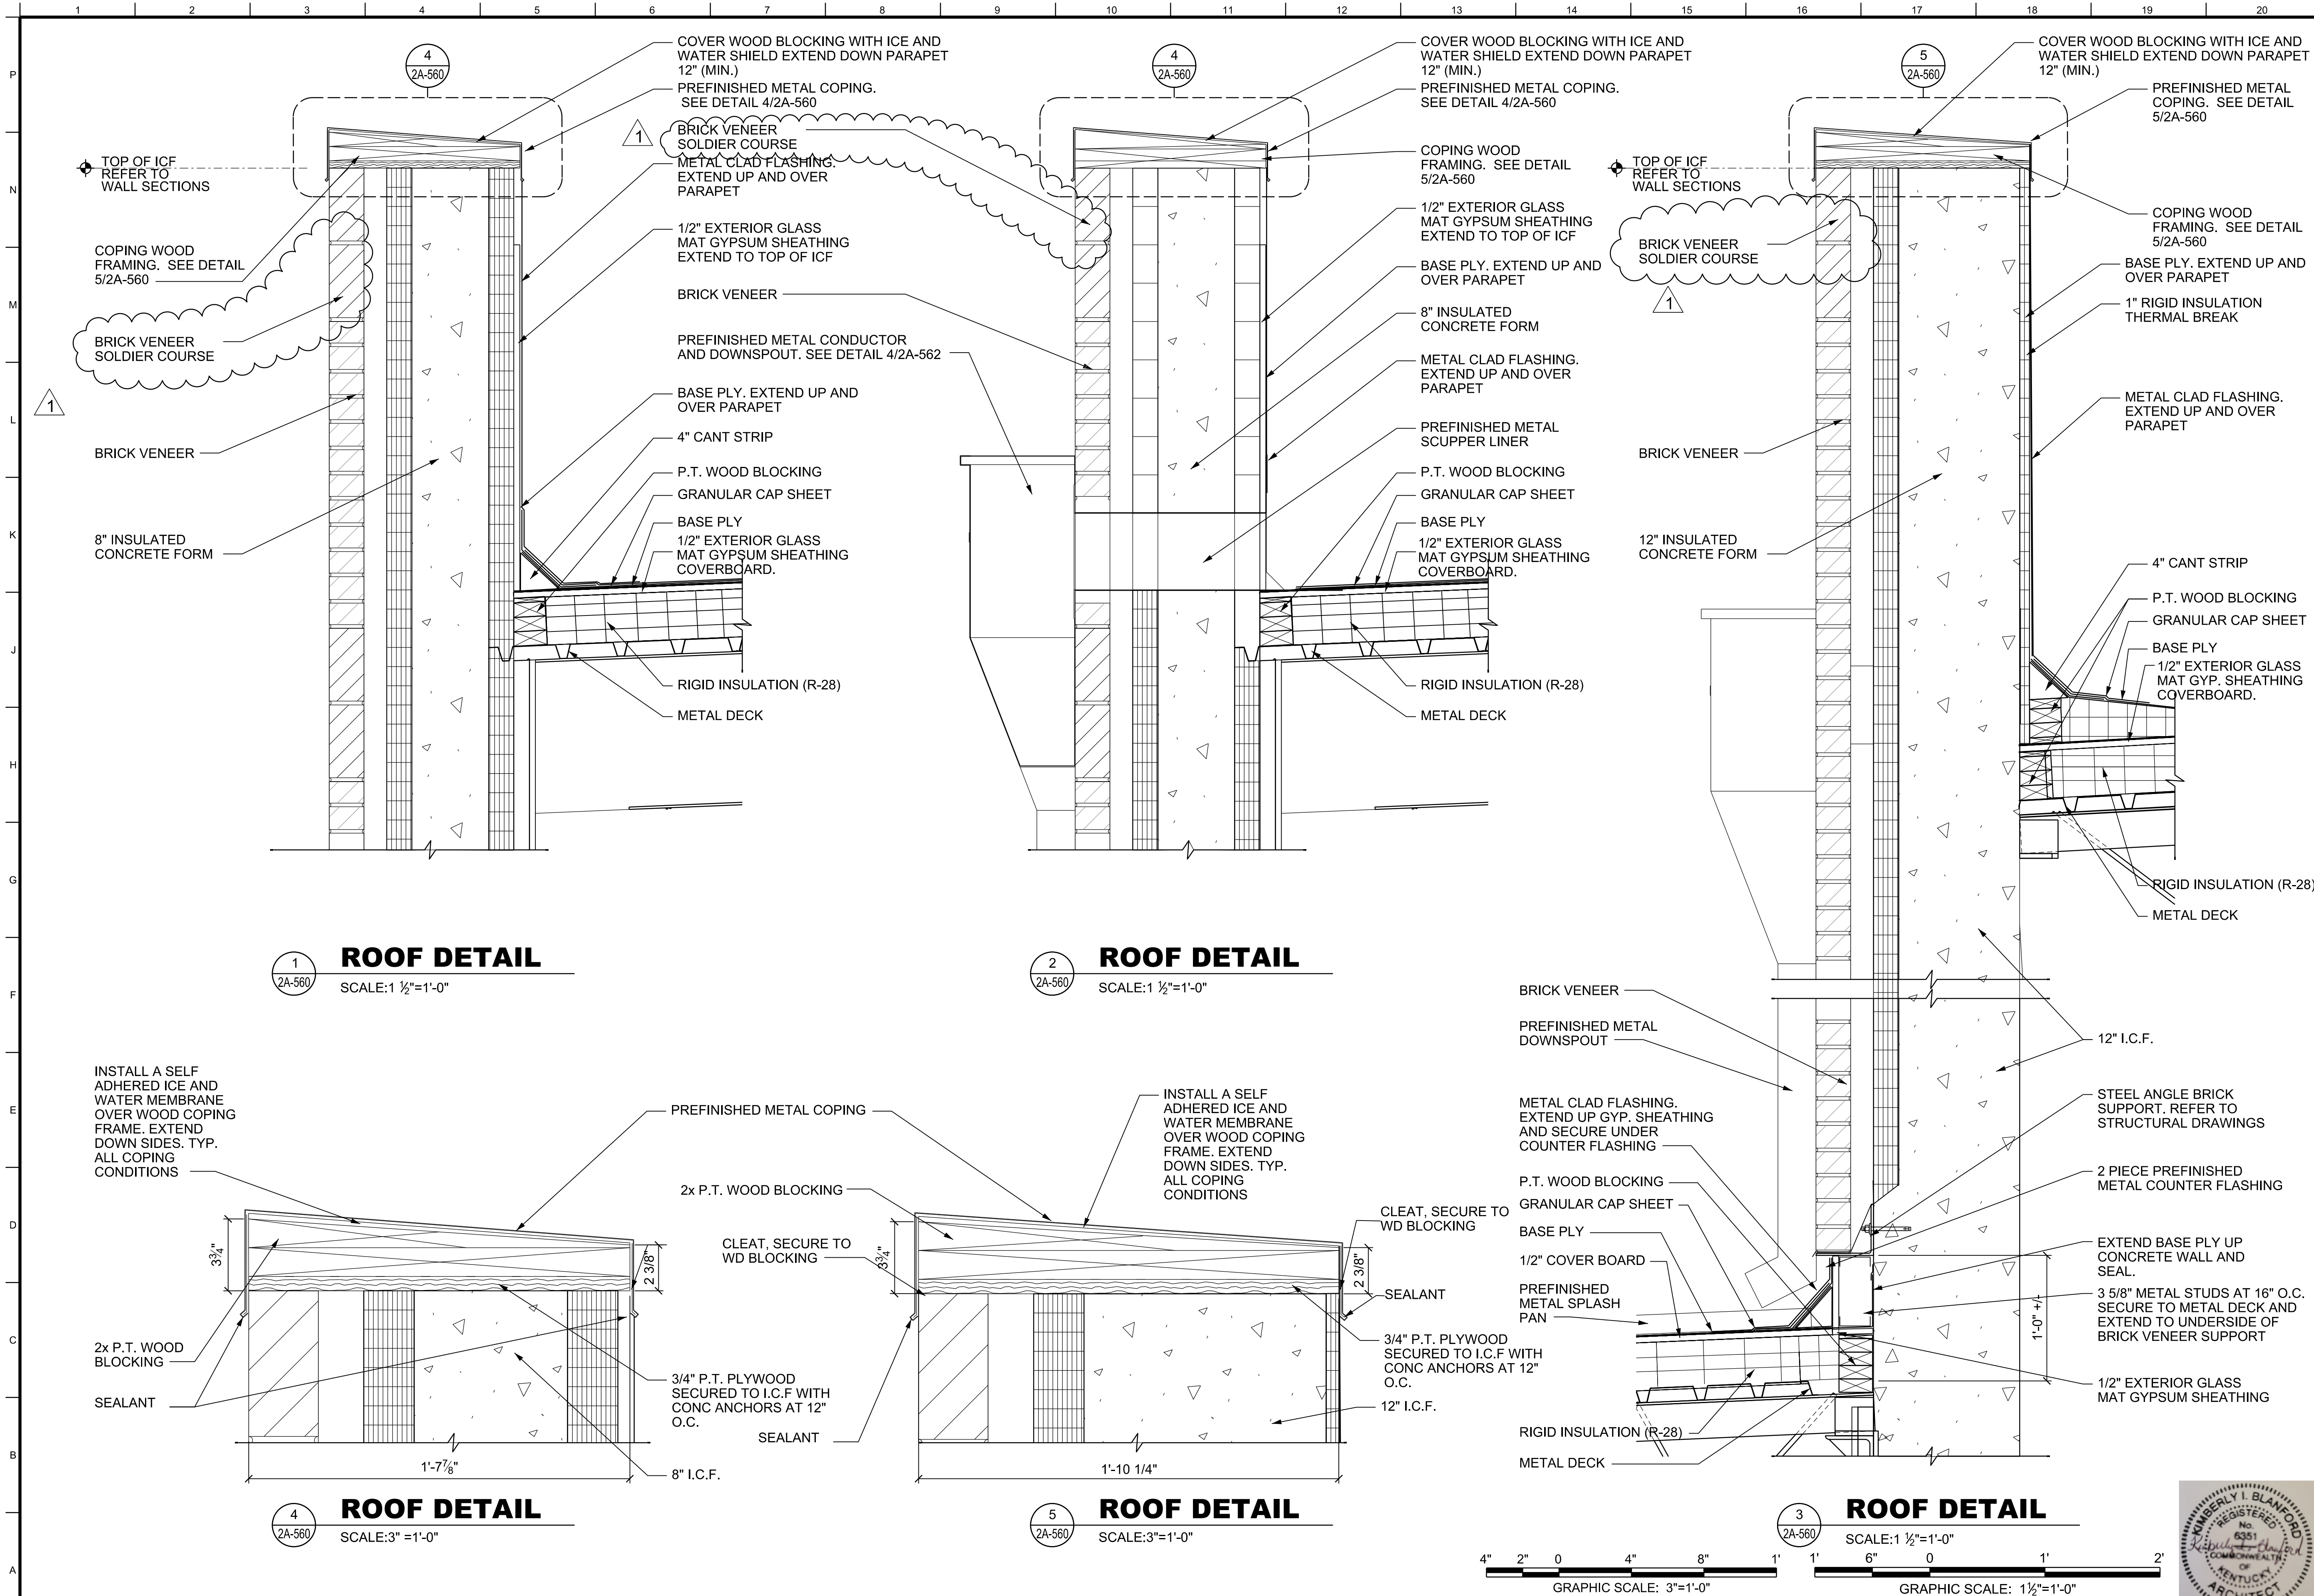

US Army Corps of Engineers®

DATE	07/20/25
REVISION	1
DESCRIPTION	REVISED IN ACCORDANCE WITH AMENDMENT 0001

DESIGNED BY:	K. BLANFORD
DRAWN BY:	D. HENSLEY
CHECKED BY:	A. MCCOY
SUBMITTED BY:	D. HENSLEY
SIZE:	ANSI D

ISSUE DATE:	MAY 1, 2025
SOLICITATION NO.:	600 DR MARTIN LUTHER KING JR PL
CONTRACT NO.:	LOUISVILLE, KENTUCKY

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR MARTIN LUTHER KING JR PL
LOUISVILLE, KENTUCKY

Mason & Hanger
A Design & Construction Company


MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA
ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS),
AND ORGANIZATIONAL STORAGE BUILDING (OSB)
PN: 092239 P2# 481659

VEHICLE MAINTENANCE SHOP
ROOF DETAILS

SHEET ID

2A-560


P:\Projects\0170303 CAD_BIM_Sheets\14_Mech\MCLB_2M-504.dgn
17-JUL-2025
14:38

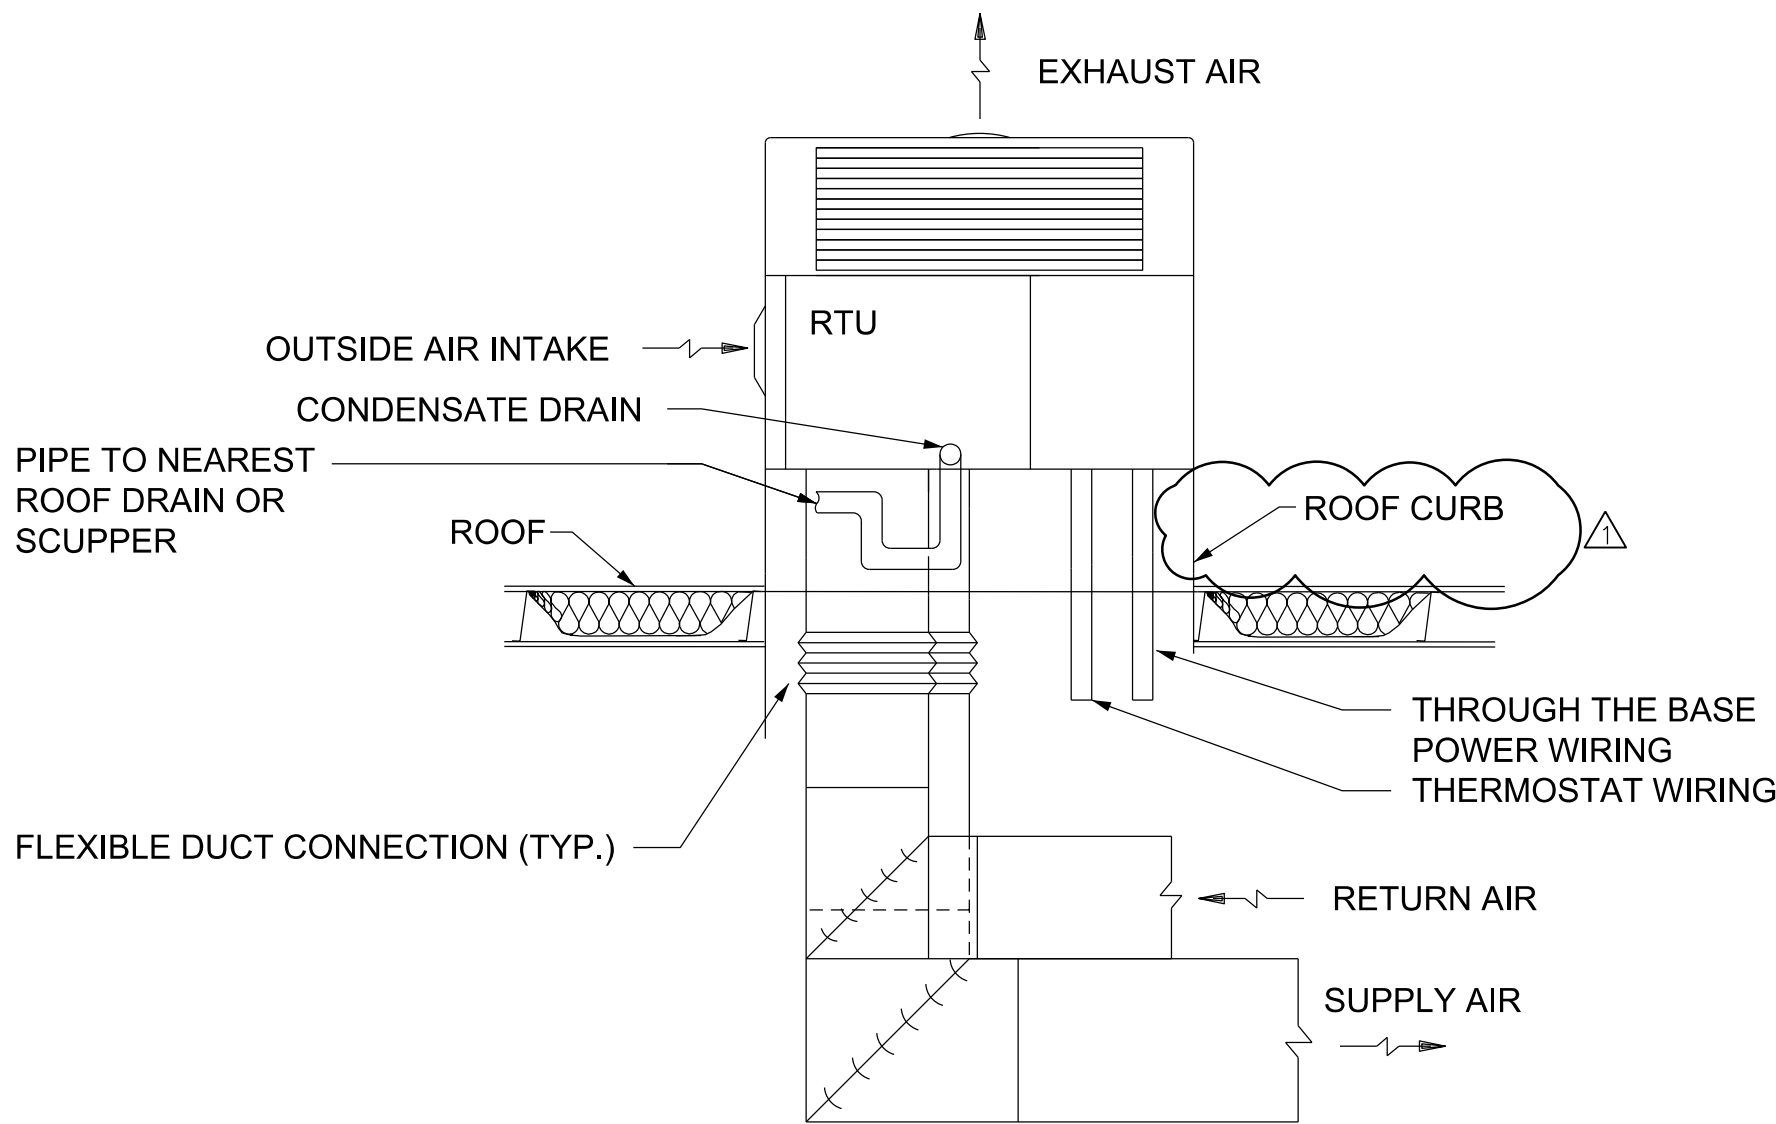

1
2MH130

SINGLE PACKAGE ROOF TOP UNIT

SCALE: NTS

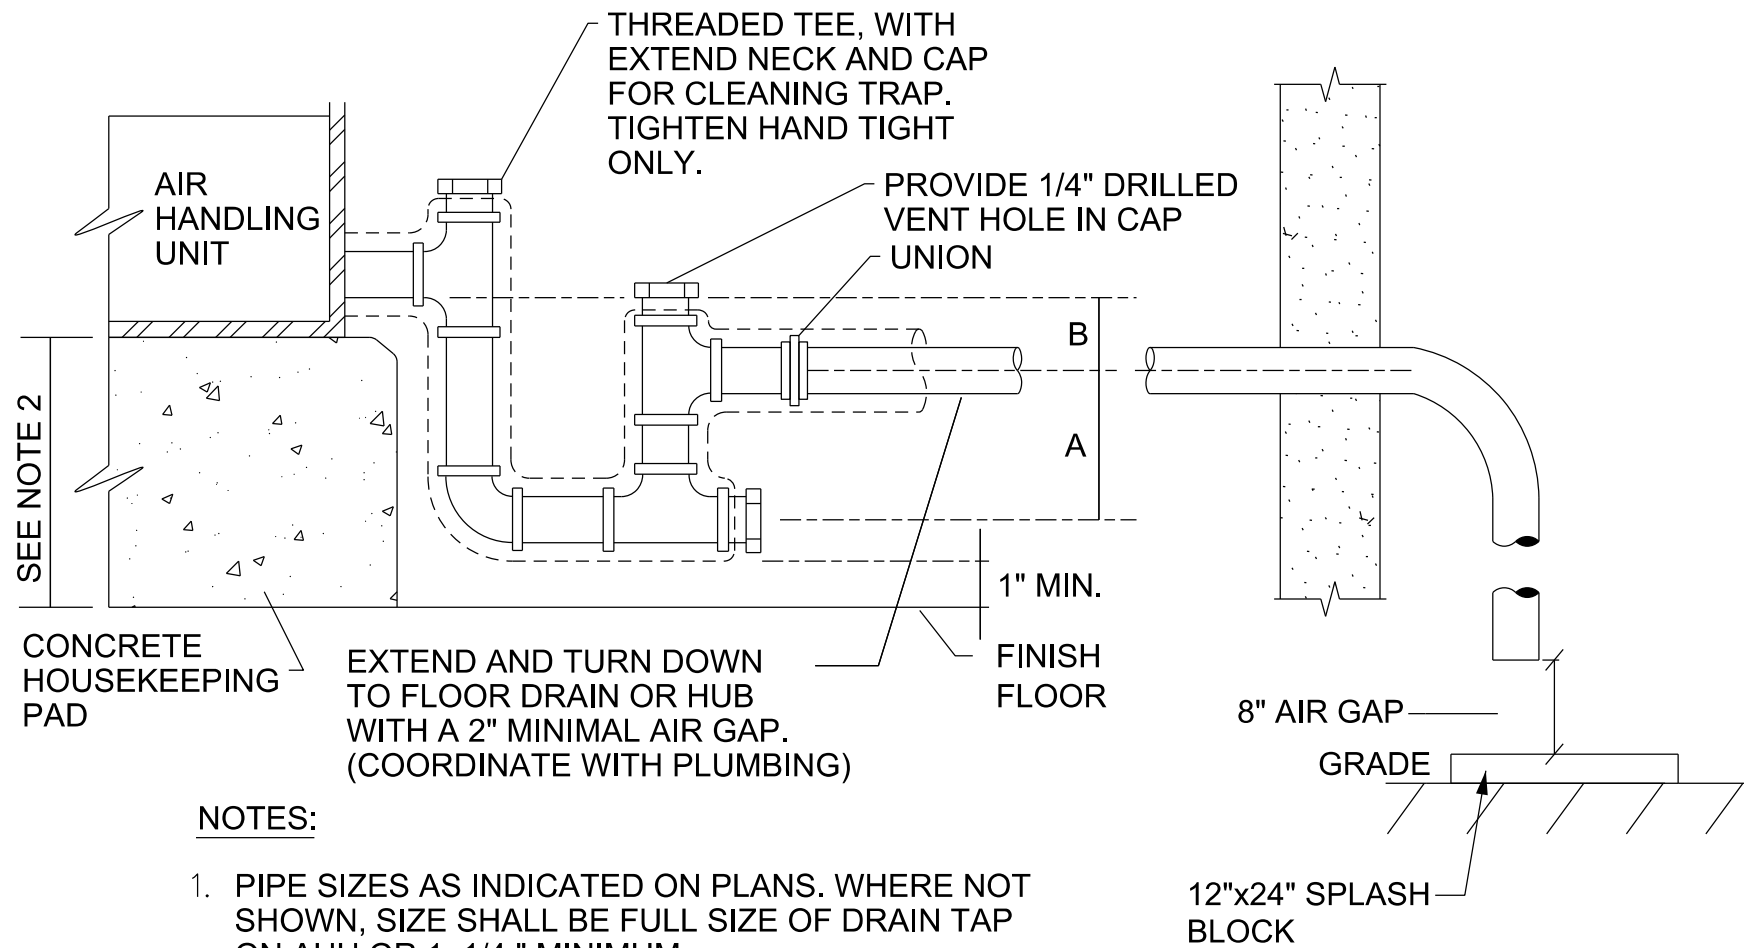


NOTES:

1. PIPE SIZES AS INDICATED ON PLANS. WHERE NOT SHOWN, SIZE SHALL BE FULL SIZE OF DRAIN TAP ON AHU OR 1 1/4" MINIMUM.
2. 6" MINIMUM PAD HEIGHT. IF HIGHER ELEVATION IS REQUIRED FOR TRAP, USE OPTIONAL AHU BASE RAIL, AND 4" HIGH HOUSEKEEPING PAD.
3. SEE SPECIFICATIONS FOR INSULATION REQUIREMENTS.
4. FOR DRAW-THRU UNITS:
B = FAN INLET PRESSURE IN INCHES W.C. + 1"
A = 1/2 B
5. FOR BLOW THRU UNITS:
B = 1/2" MINIMUM.
A = FAN OUTLET PRESSURE, IN INCHES W.C., + 1/2 "

2
2MH130

CONDENSATE DRAIN TRAP


SCALE: NTS

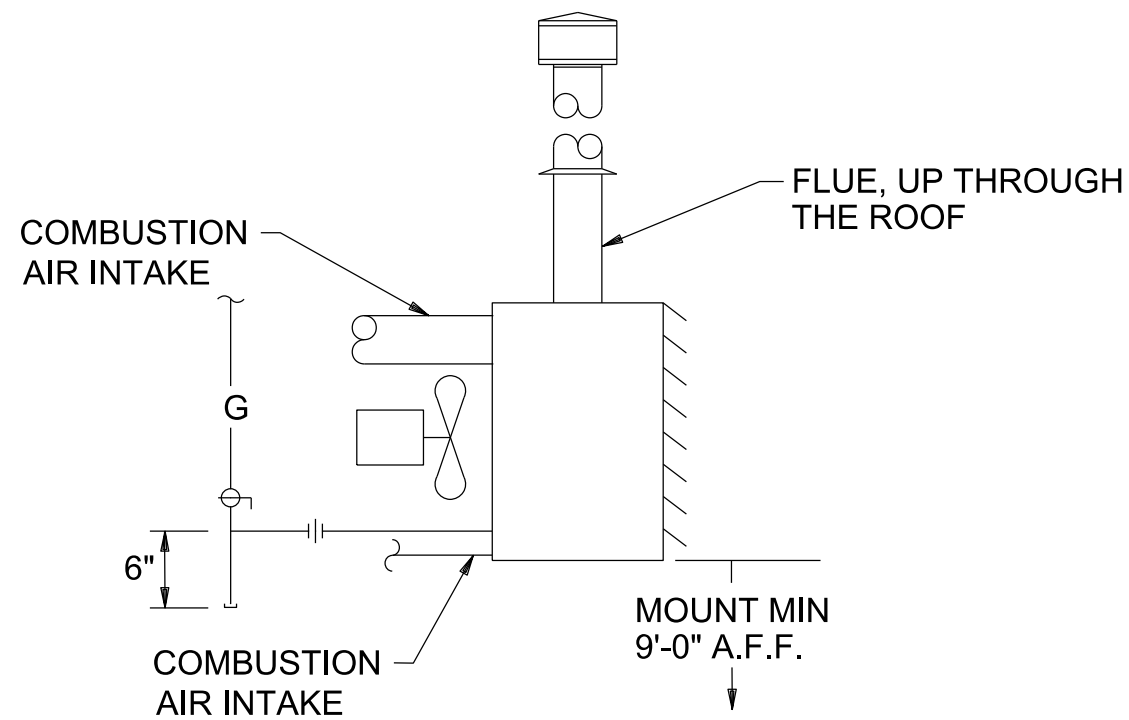

3
2MH110

GAS UNIT HEATER


SCALE: NTS

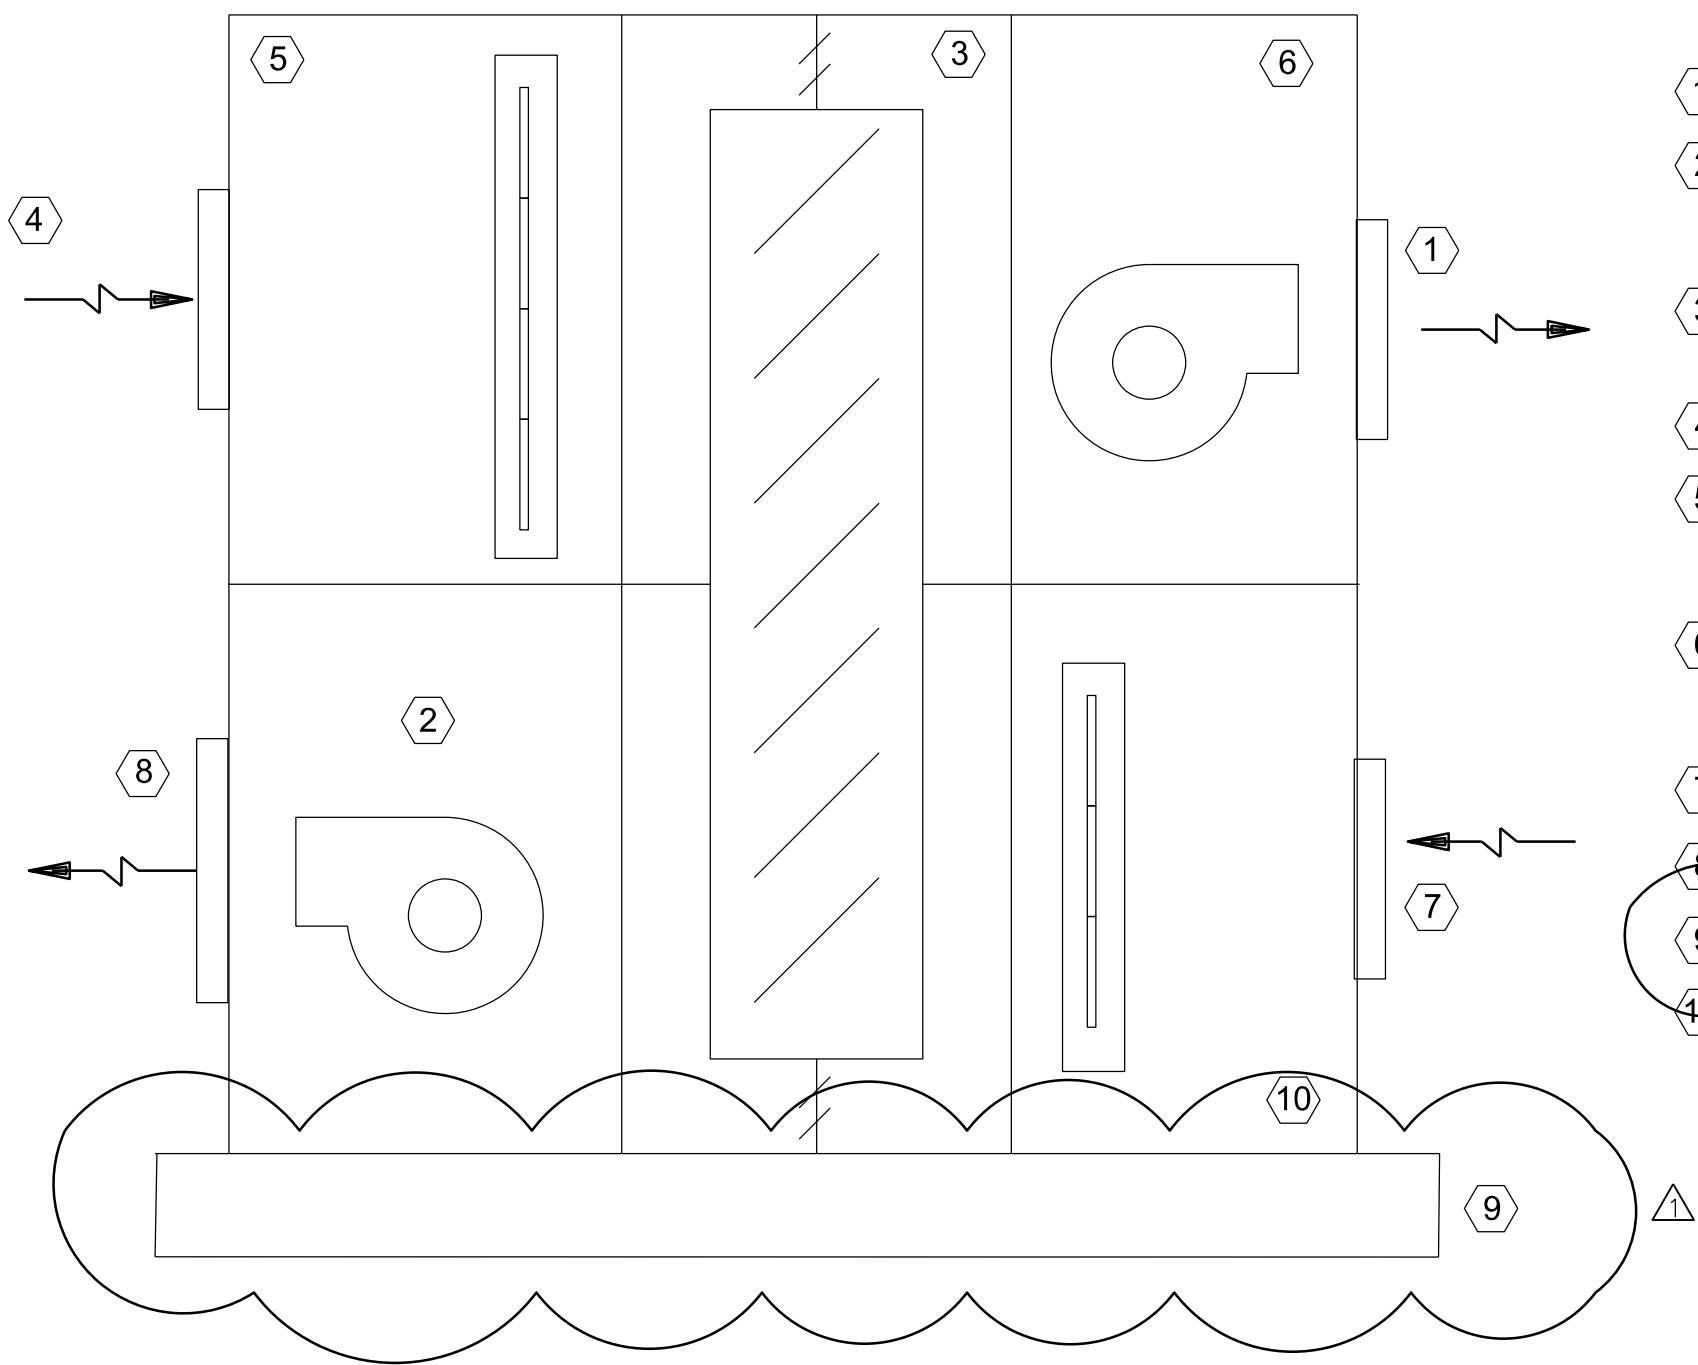

4
2MH130

ENERGY RECOVERY VENTILATOR


SCALE: NTS

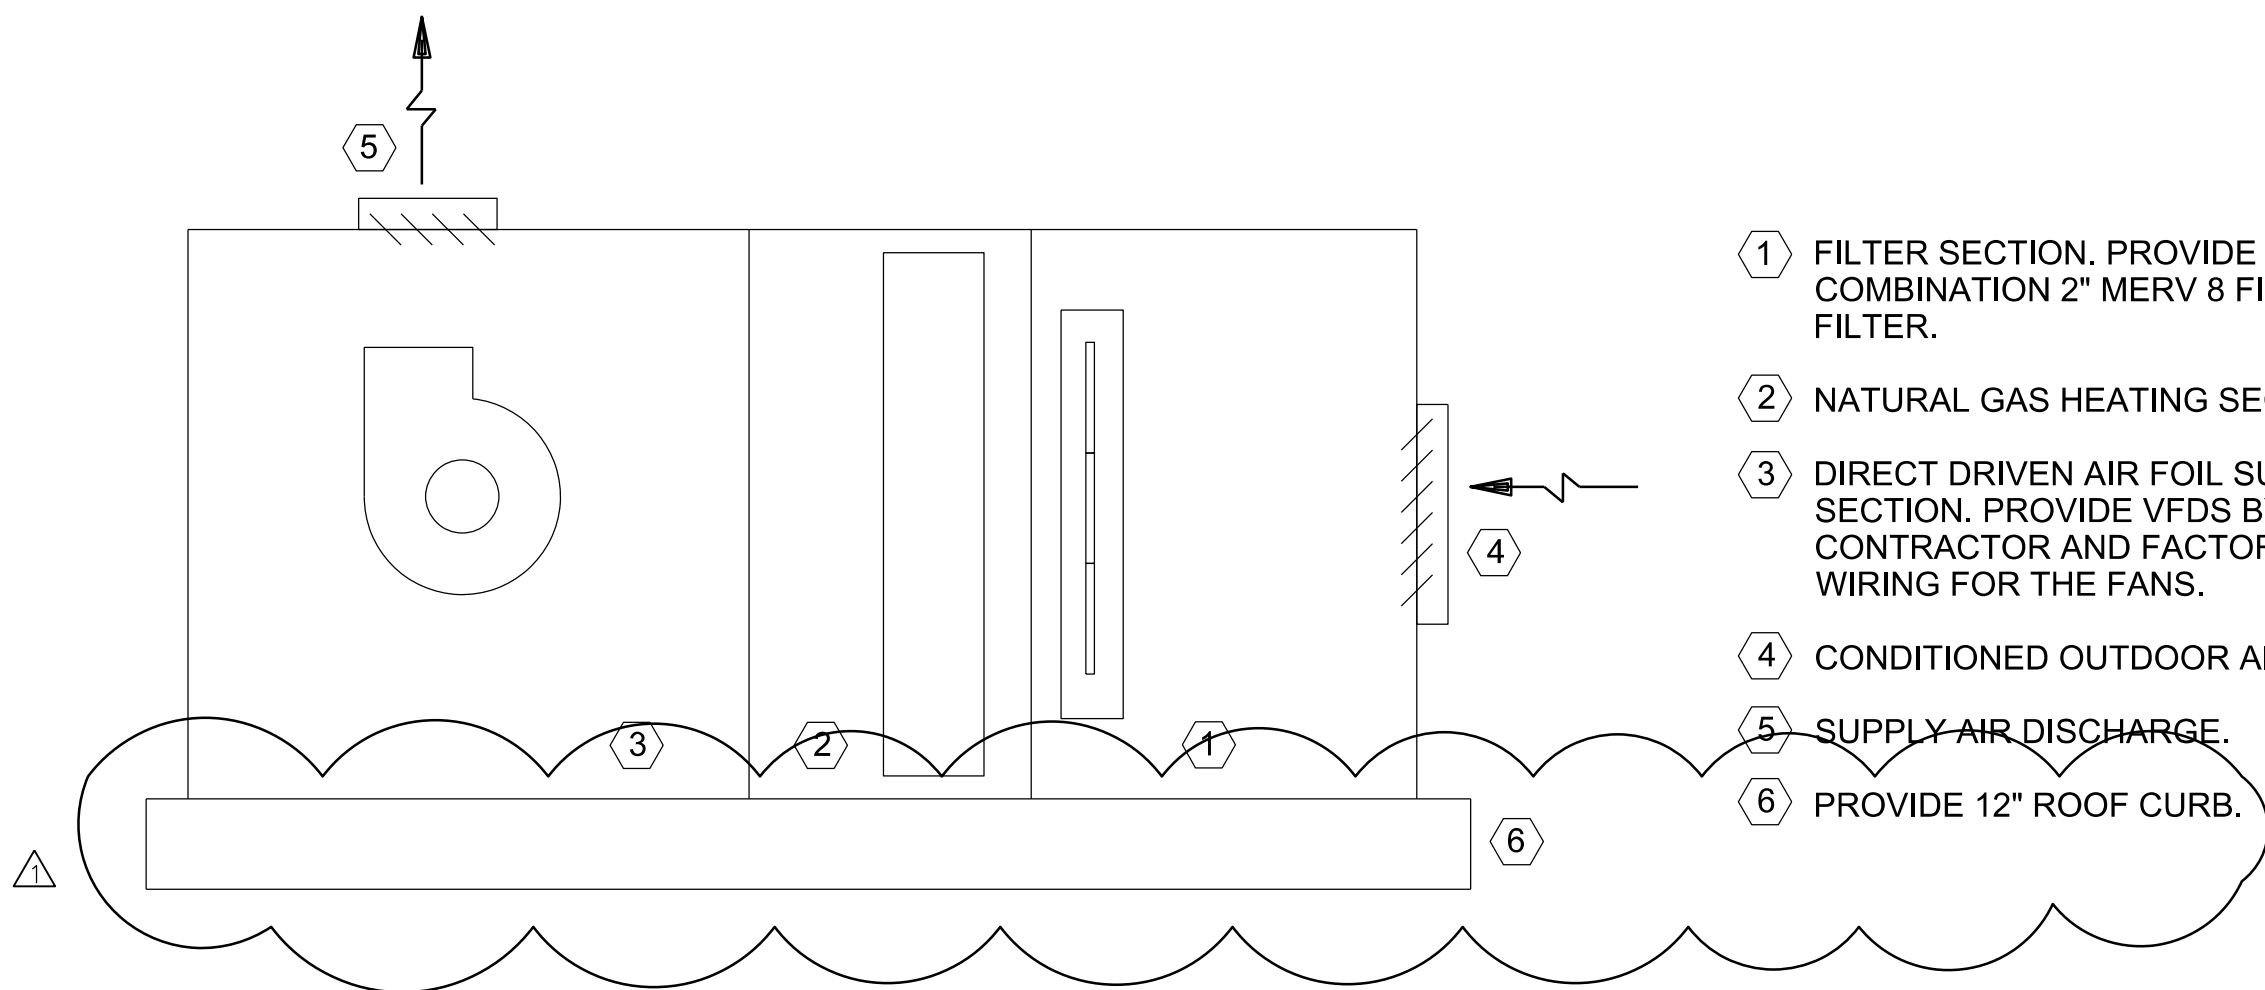

5
2MH130

MAKEUP AIR UNIT

SCALE: NTS



US Army Corps
of Engineers®

DATE	DESCRIPTION	MARK
07/2025	REVISED IN ACCORDANCE WITH AMENDMENT 0001	1

DESIGNED BY: S. FLUTY	ISSUE DATE: MAY 1, 2025
DRAWN BY: S. FLUTY	SOLICITATION NO.:
CHECKED BY: B. EWING	CONTRACT NO.:
SUBMITTED BY: D. HENSLEY	
SIZE: ANSI D	


U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR PL LOUISVILLE, KENTUCKY	Mason & Hanger <i>A Day & Zimmermann Company</i>
--	--

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS), AND ORGANIZATIONAL STORAGE BUILDING (OSB) PN: 092239 P2#- 481659	VEHICLE MAINTENANCE SHOP MECHANICAL DETAILS
---	--

SHEET ID


2M-504

CERTIFIED FINAL SUBMITTAL W912QR25RA036_Plans-0001

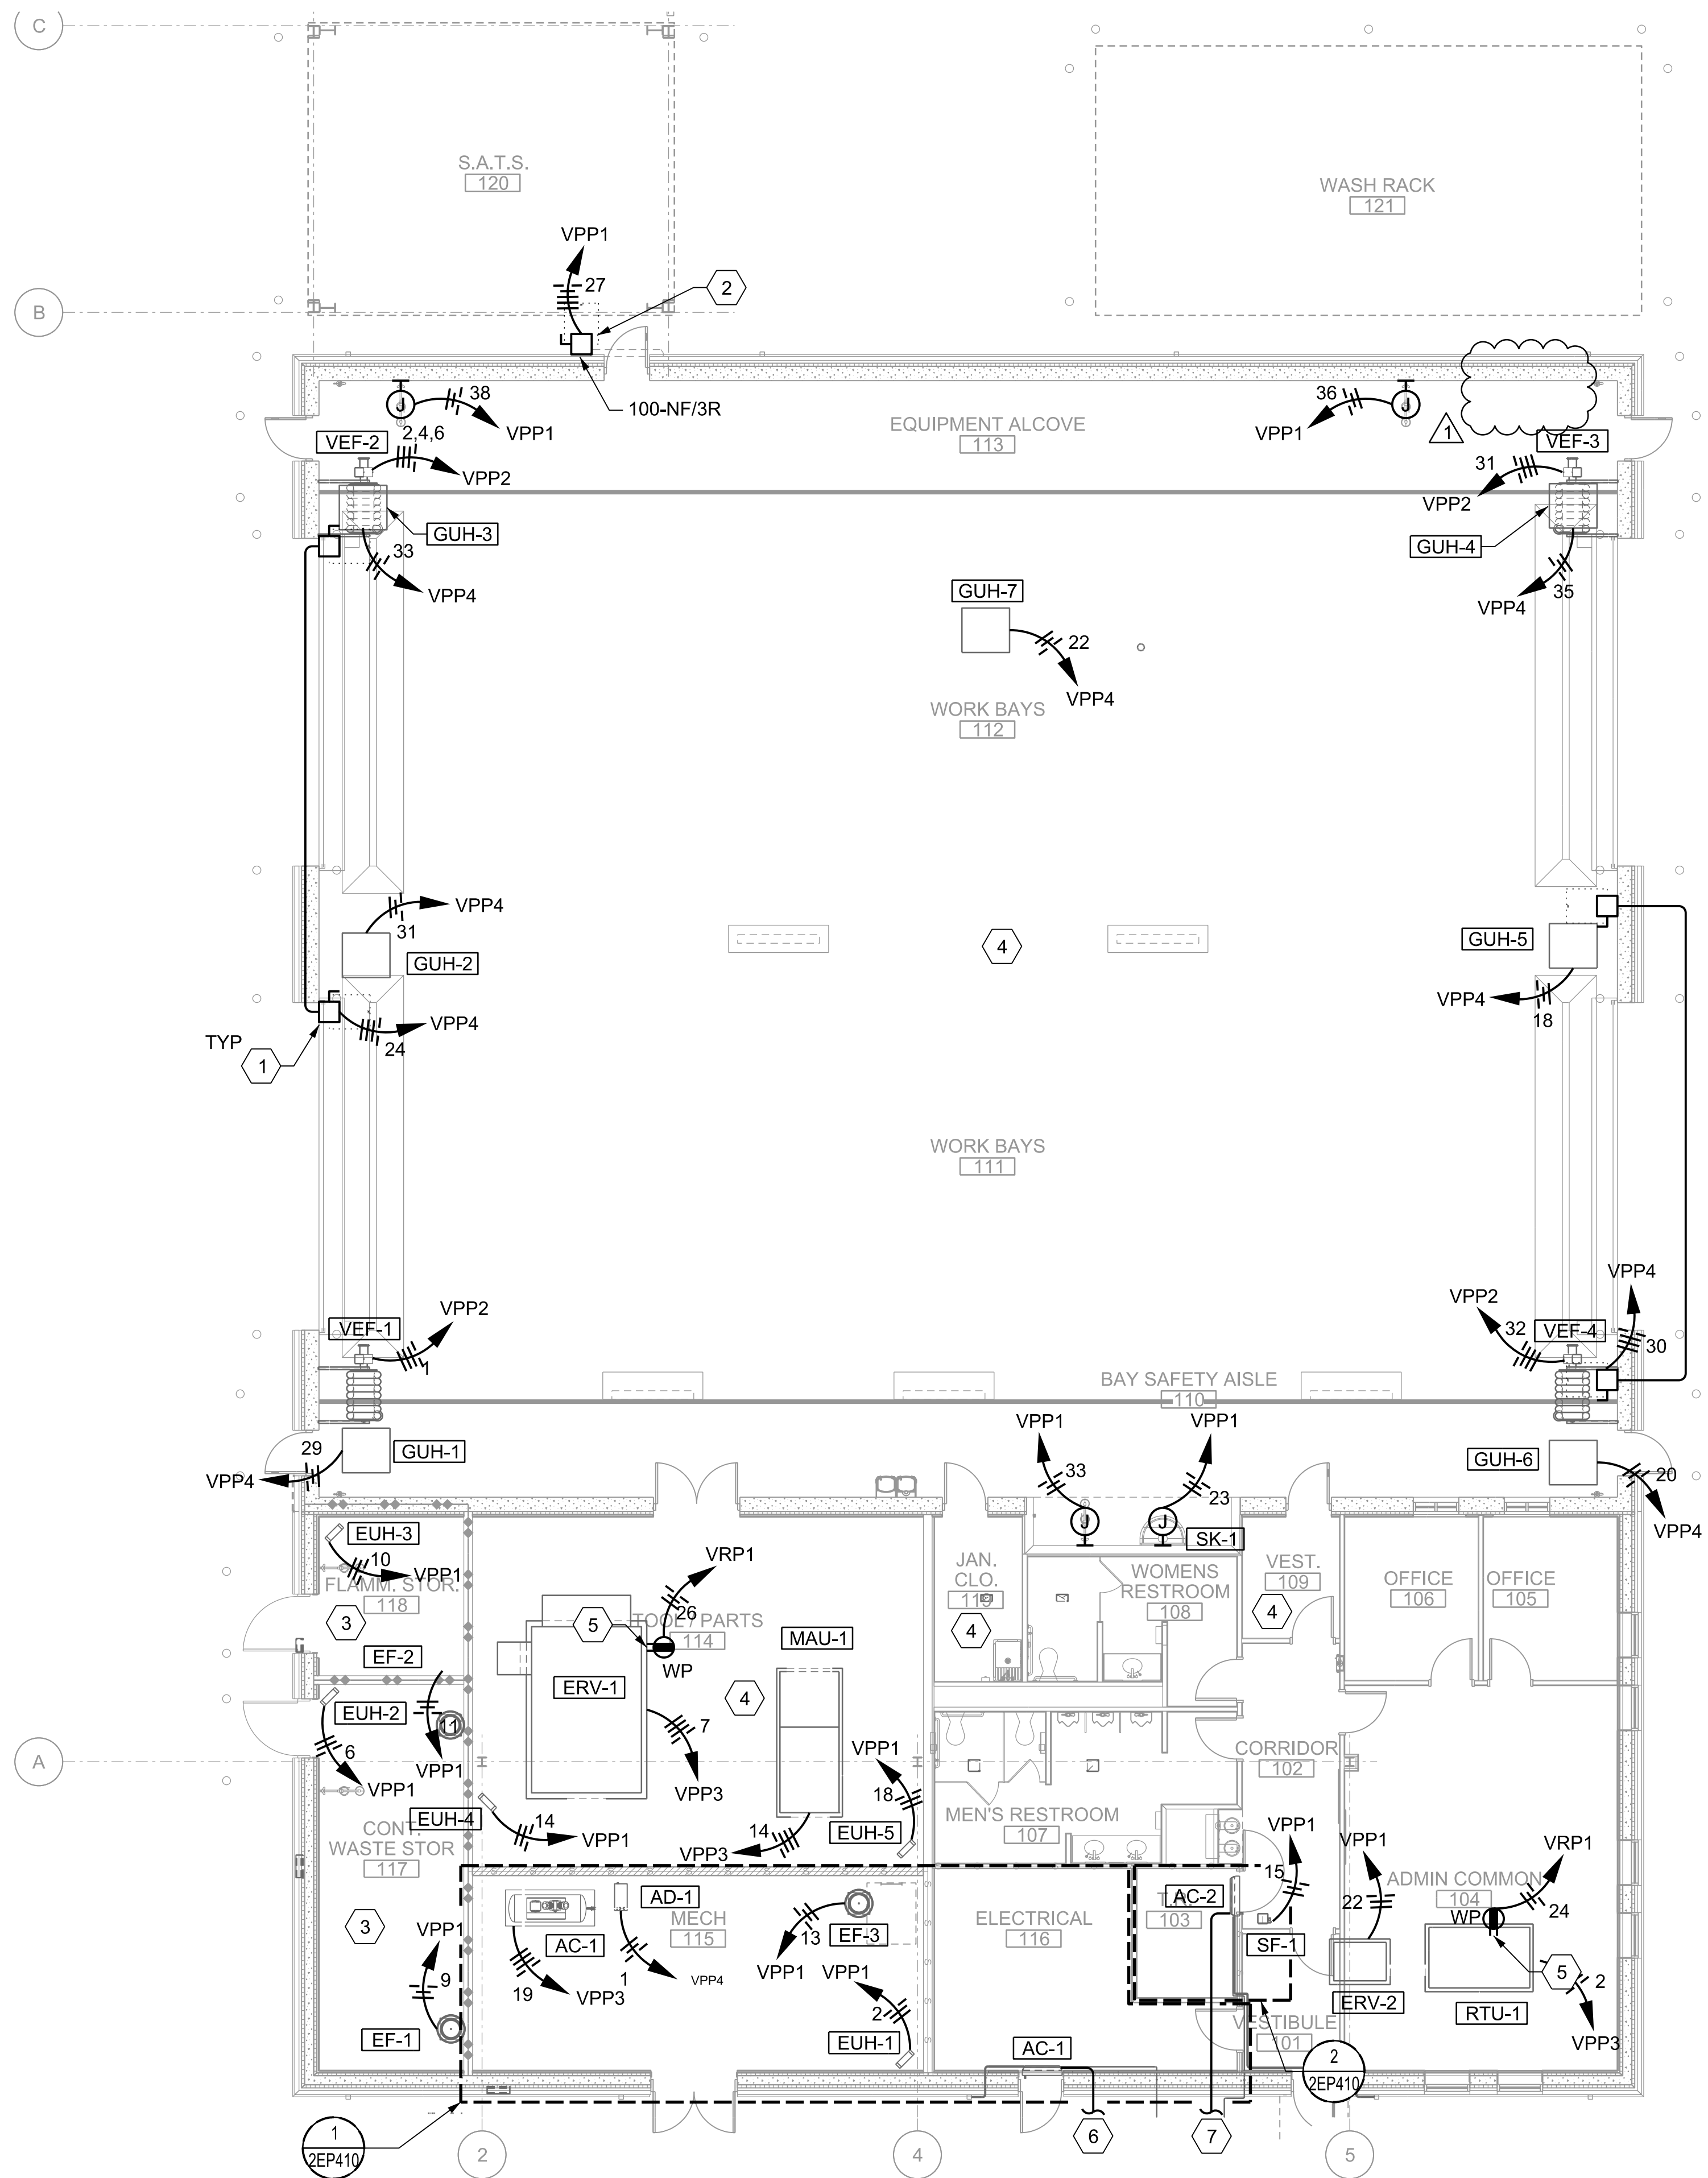

SHEET KEYNOTES

1. CONNECTION FOR OVERHEAD DOOR. TYPICAL OF ALL 4.
2. CONNECTION FOR SATS TRAILER HOOK UP.
3. AREA IS CLASSIFIED AS A HAZARDOUS LOCATION. ELECTRICAL INSTALLATION MUST MEET NFPA 70 REQUIREMENTS FOR CLASS 1, DIVISION 2 LOCATIONS.
4. AREA IS CLASSIFIED AS A HAZARDOUS LOCATION. ELECTRICAL INSTALLATION MUST MEET NFPA 70 REQUIREMENTS FOR CLASS 1, DIVISION 2 LOCATIONS UP TO 18" A.F.F.
5. MOUNT RECEPTACLE TO NON-REMOVABLE ROOF TOP MOUNTED HVAC PANEL OF UNIT. COORDINATE EXACT LOCATION WITH EQUIPMENT MANUFACTURER AND MECHANICAL CONTRACTOR.
6. EXTEND POWER CONNECTION TO CU-1 (SEE SHEET 2EP410).
7. EXTEND POWER CONNECTION TO CU-2 (SEE SHEET 2EP410).



**US Army Corps
of Engineers®**

[illegible]

 Mason & Hanger	DESIGNED BY: R. MAYS		ISSUE DATE: MAY 1, 2025
	DRAWN BY: 600 DR MARTIN LUTHER KING JR PL LOUISVILLE DISTRICT		SOLICITATION NO.:
	CHECKED BY: J. GREENE		CONTRACT NO.:
	SUBMITTED BY: D. HENSLEY		
	SIZE:		

MARINE CORPS LOGISTICS BASE (MCLB) ALBANY, GEORGIA
ARMY RESERVE CENTER (ARC), VEHICLE MAINTENANCE SHOP (VMS),
AND ORGANIZATIONAL STORAGE BUILDING (OSB)
PN: 092239 P2#: 481859

SHEET ID

2EP150

