

Specifications for Concho Billie Trail Stone

Contractor shall provide all labor, supervision, licenses, tools, transportation, and equipment necessary to deliver approximately 5,000 tons of lime rock base, meeting IAW current FDOT Standard, Section 911 (Base and Stabilized Base Materials) Standard Specs, for Road and Bridges Construction. The Government will maintain the stockpiles and will be available at stockpile site to sign delivery tickets. There is adequate room for trucks to turn around. Stockpile site is approximately 3.5 miles North of US41 off Turner River Rd:

BICY - Pad 94

Ochopee, FL 34141

(25°56'17.22"N, 81°15'48.57"W)

FDOT Standard, Section 911 Standard Specs:

911-5.2.1 For Limerock Base: At least 97% (by weight) of the material shall pass a 3 1/2-inch sieve and the material shall be graded uniformly down to dust. The fine material shall consist entirely of dust of fracture.

See maps for delivery location, and GPS attachments.


Damien Hardgrove

Delivery Location

BICY - Pad 94
3.5 miles North of US41

Legend


 Delivery Location

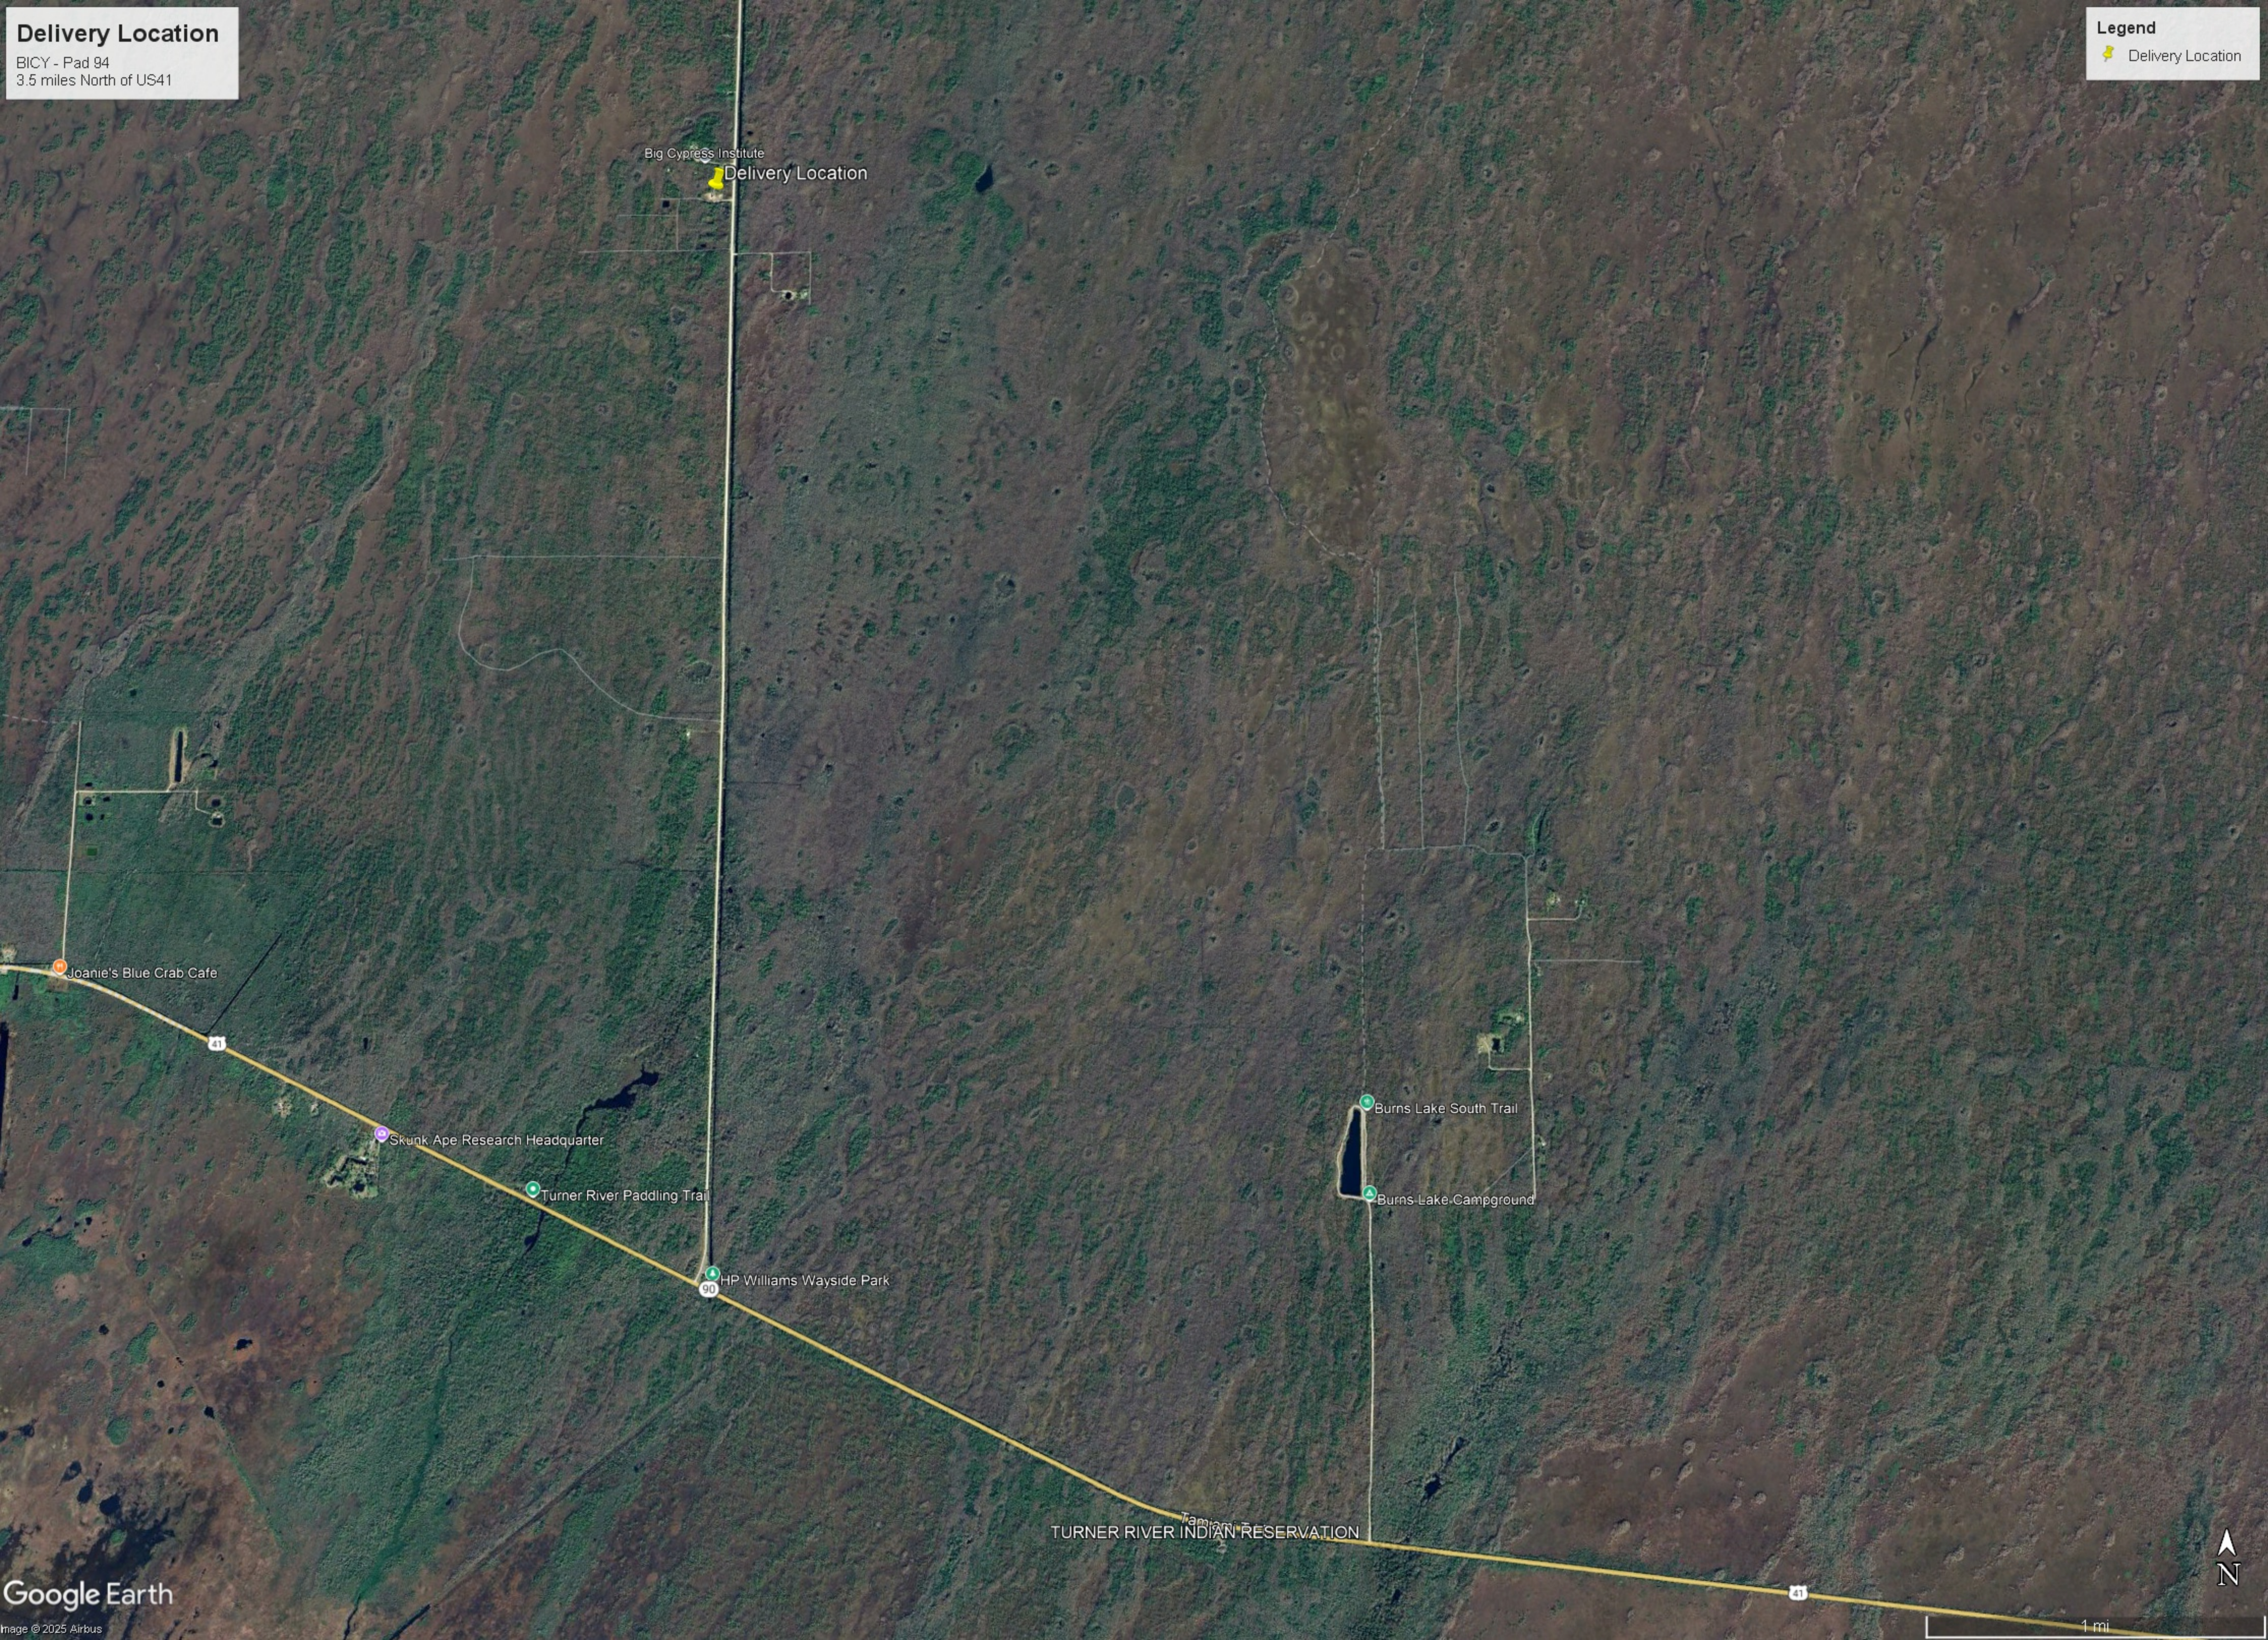



Delivery Location
BICY - Pad 94
3.5 miles North of US41

Legend
📌 Delivery Location

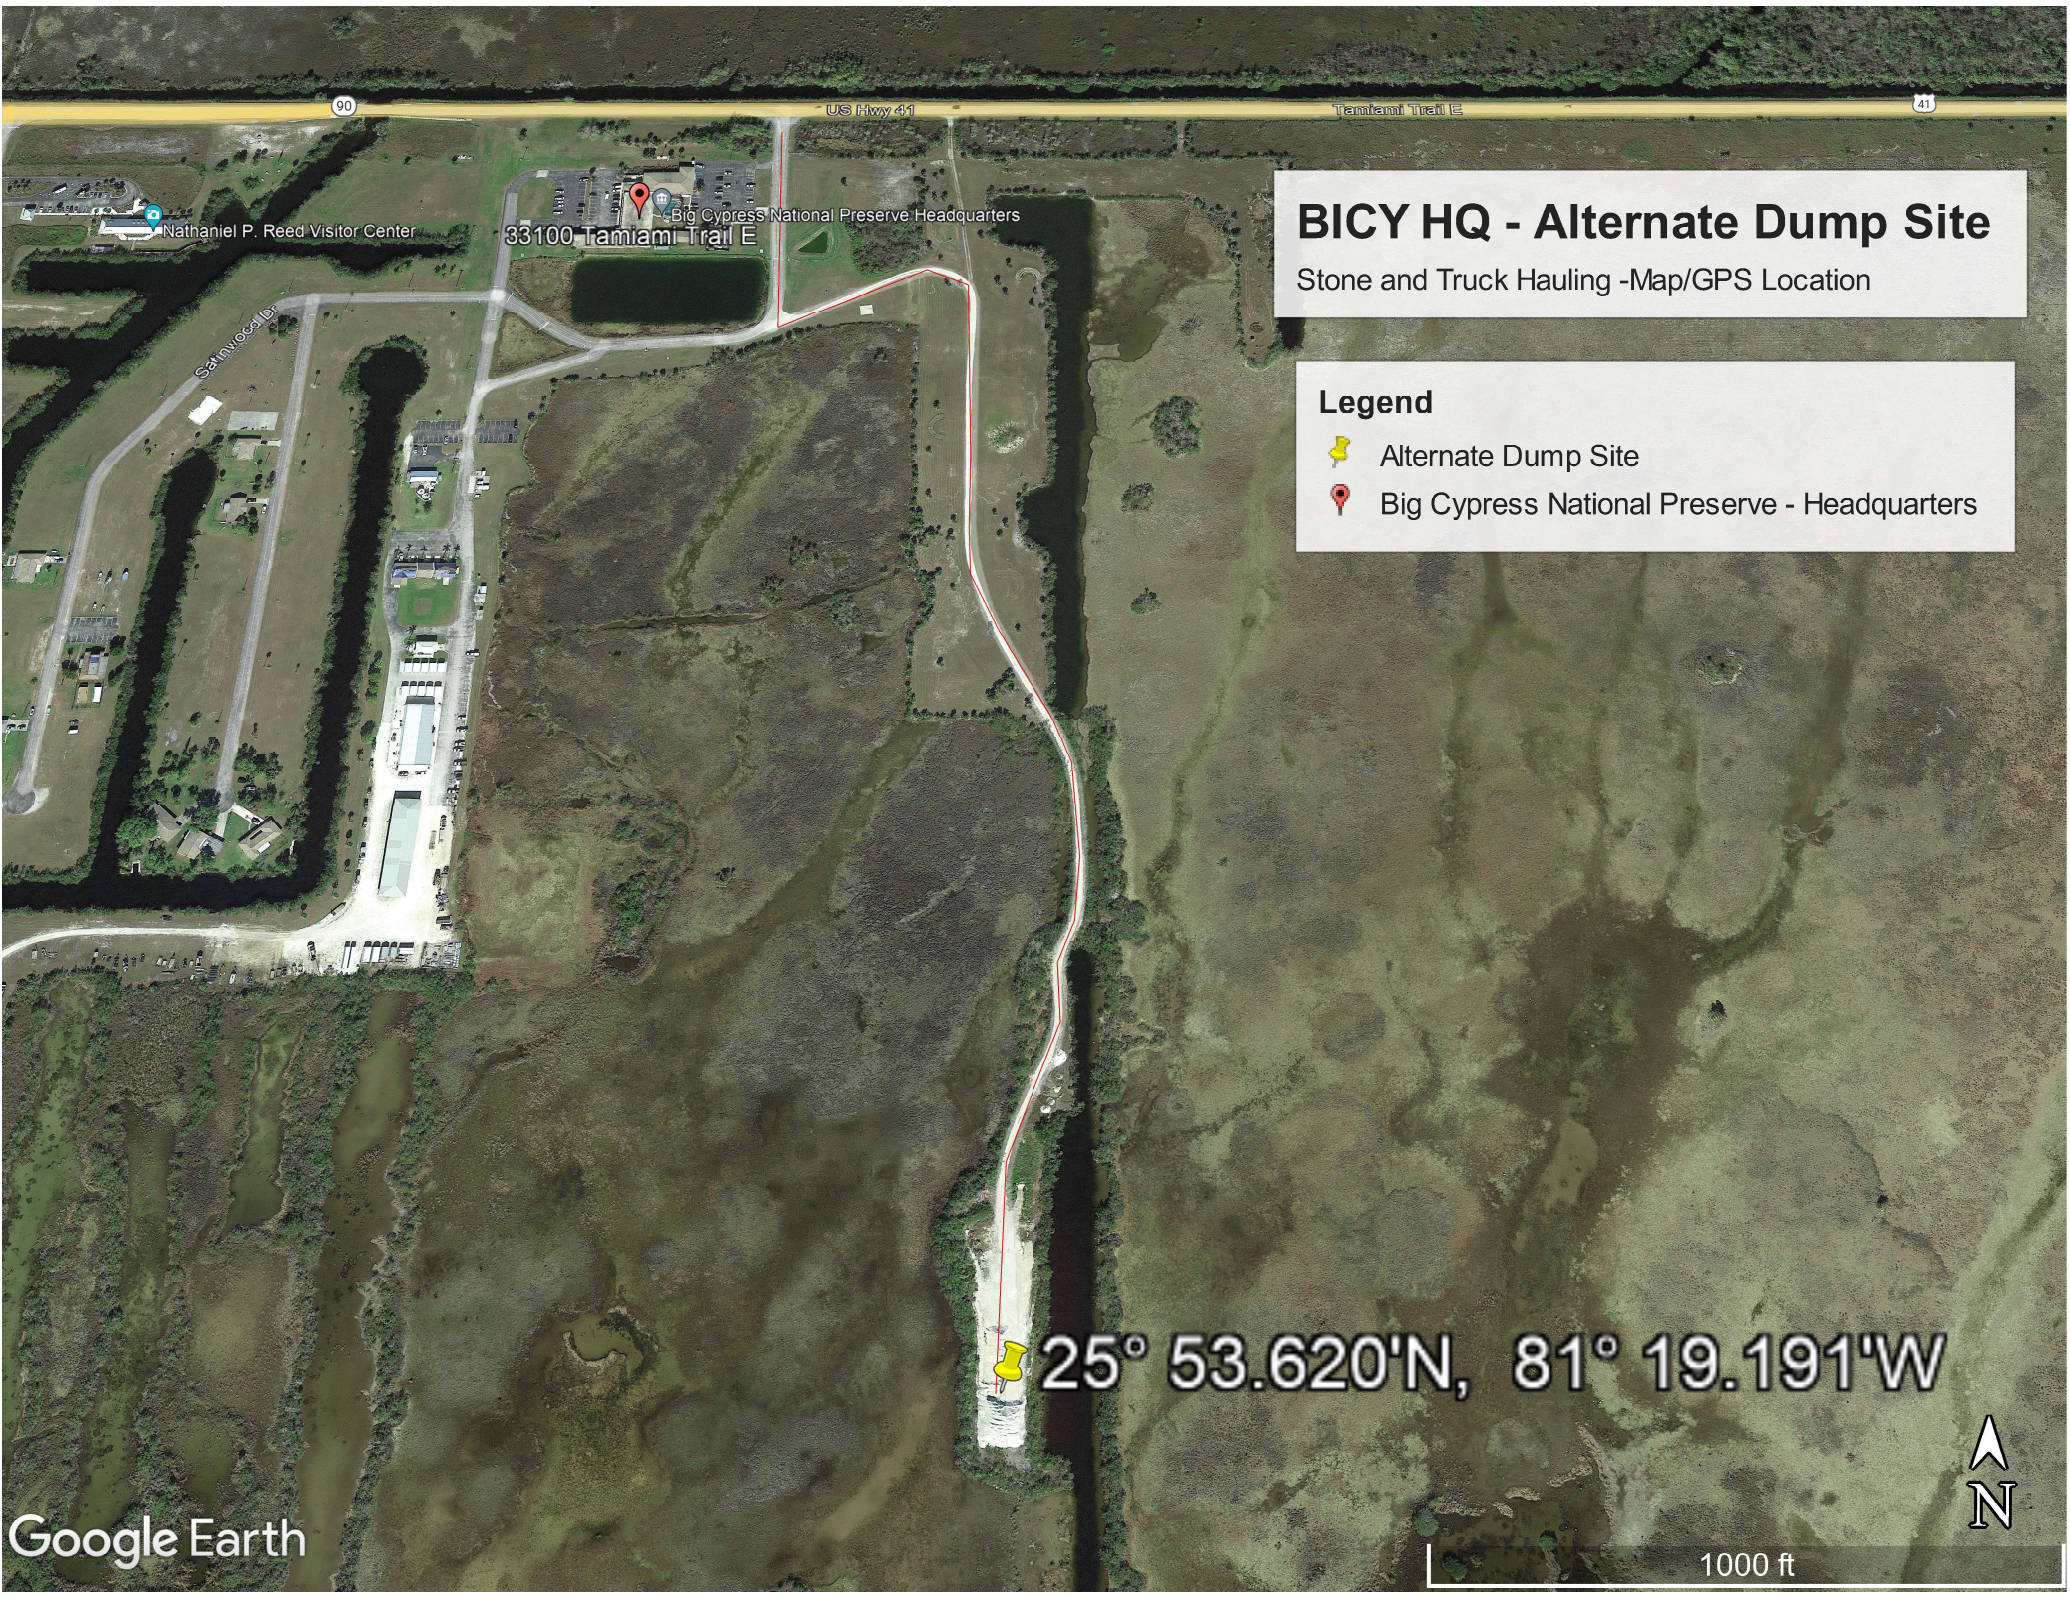

BICY HQ - Alternate Dump Site

Stone and Truck Hauling -Map/GPS Location

- Legend**
-  Alternate Dump Site
 -  Big Cypress National Preserve - Headquarters

 25° 53.620'N, 81° 19.191'W