

WWYK250173
REPLACE BOWLING
ALLEY ROOF, B5703

KEY PLAN:

6002

5701

5711

5703

5702

5715

5704


5730

McNarney Ave.

Rawlings Ave.

PROJECT
LOCATION


The image is a key plan map showing a residential area. McNarney Ave. runs vertically on the left, and Rawlings Ave. runs diagonally on the right. Several lots are outlined in grey, with their addresses labeled: 6002, 5701, 5711, 5703, 5702, 5715, 5704, and 5730. Lot 5703 is highlighted with a red outline. A pink arrow points to lot 5703, labeled 'PROJECT LOCATION'. The map is divided into a grid with letters A, B, C, D on the left and numbers 1, 2 on the top and bottom.

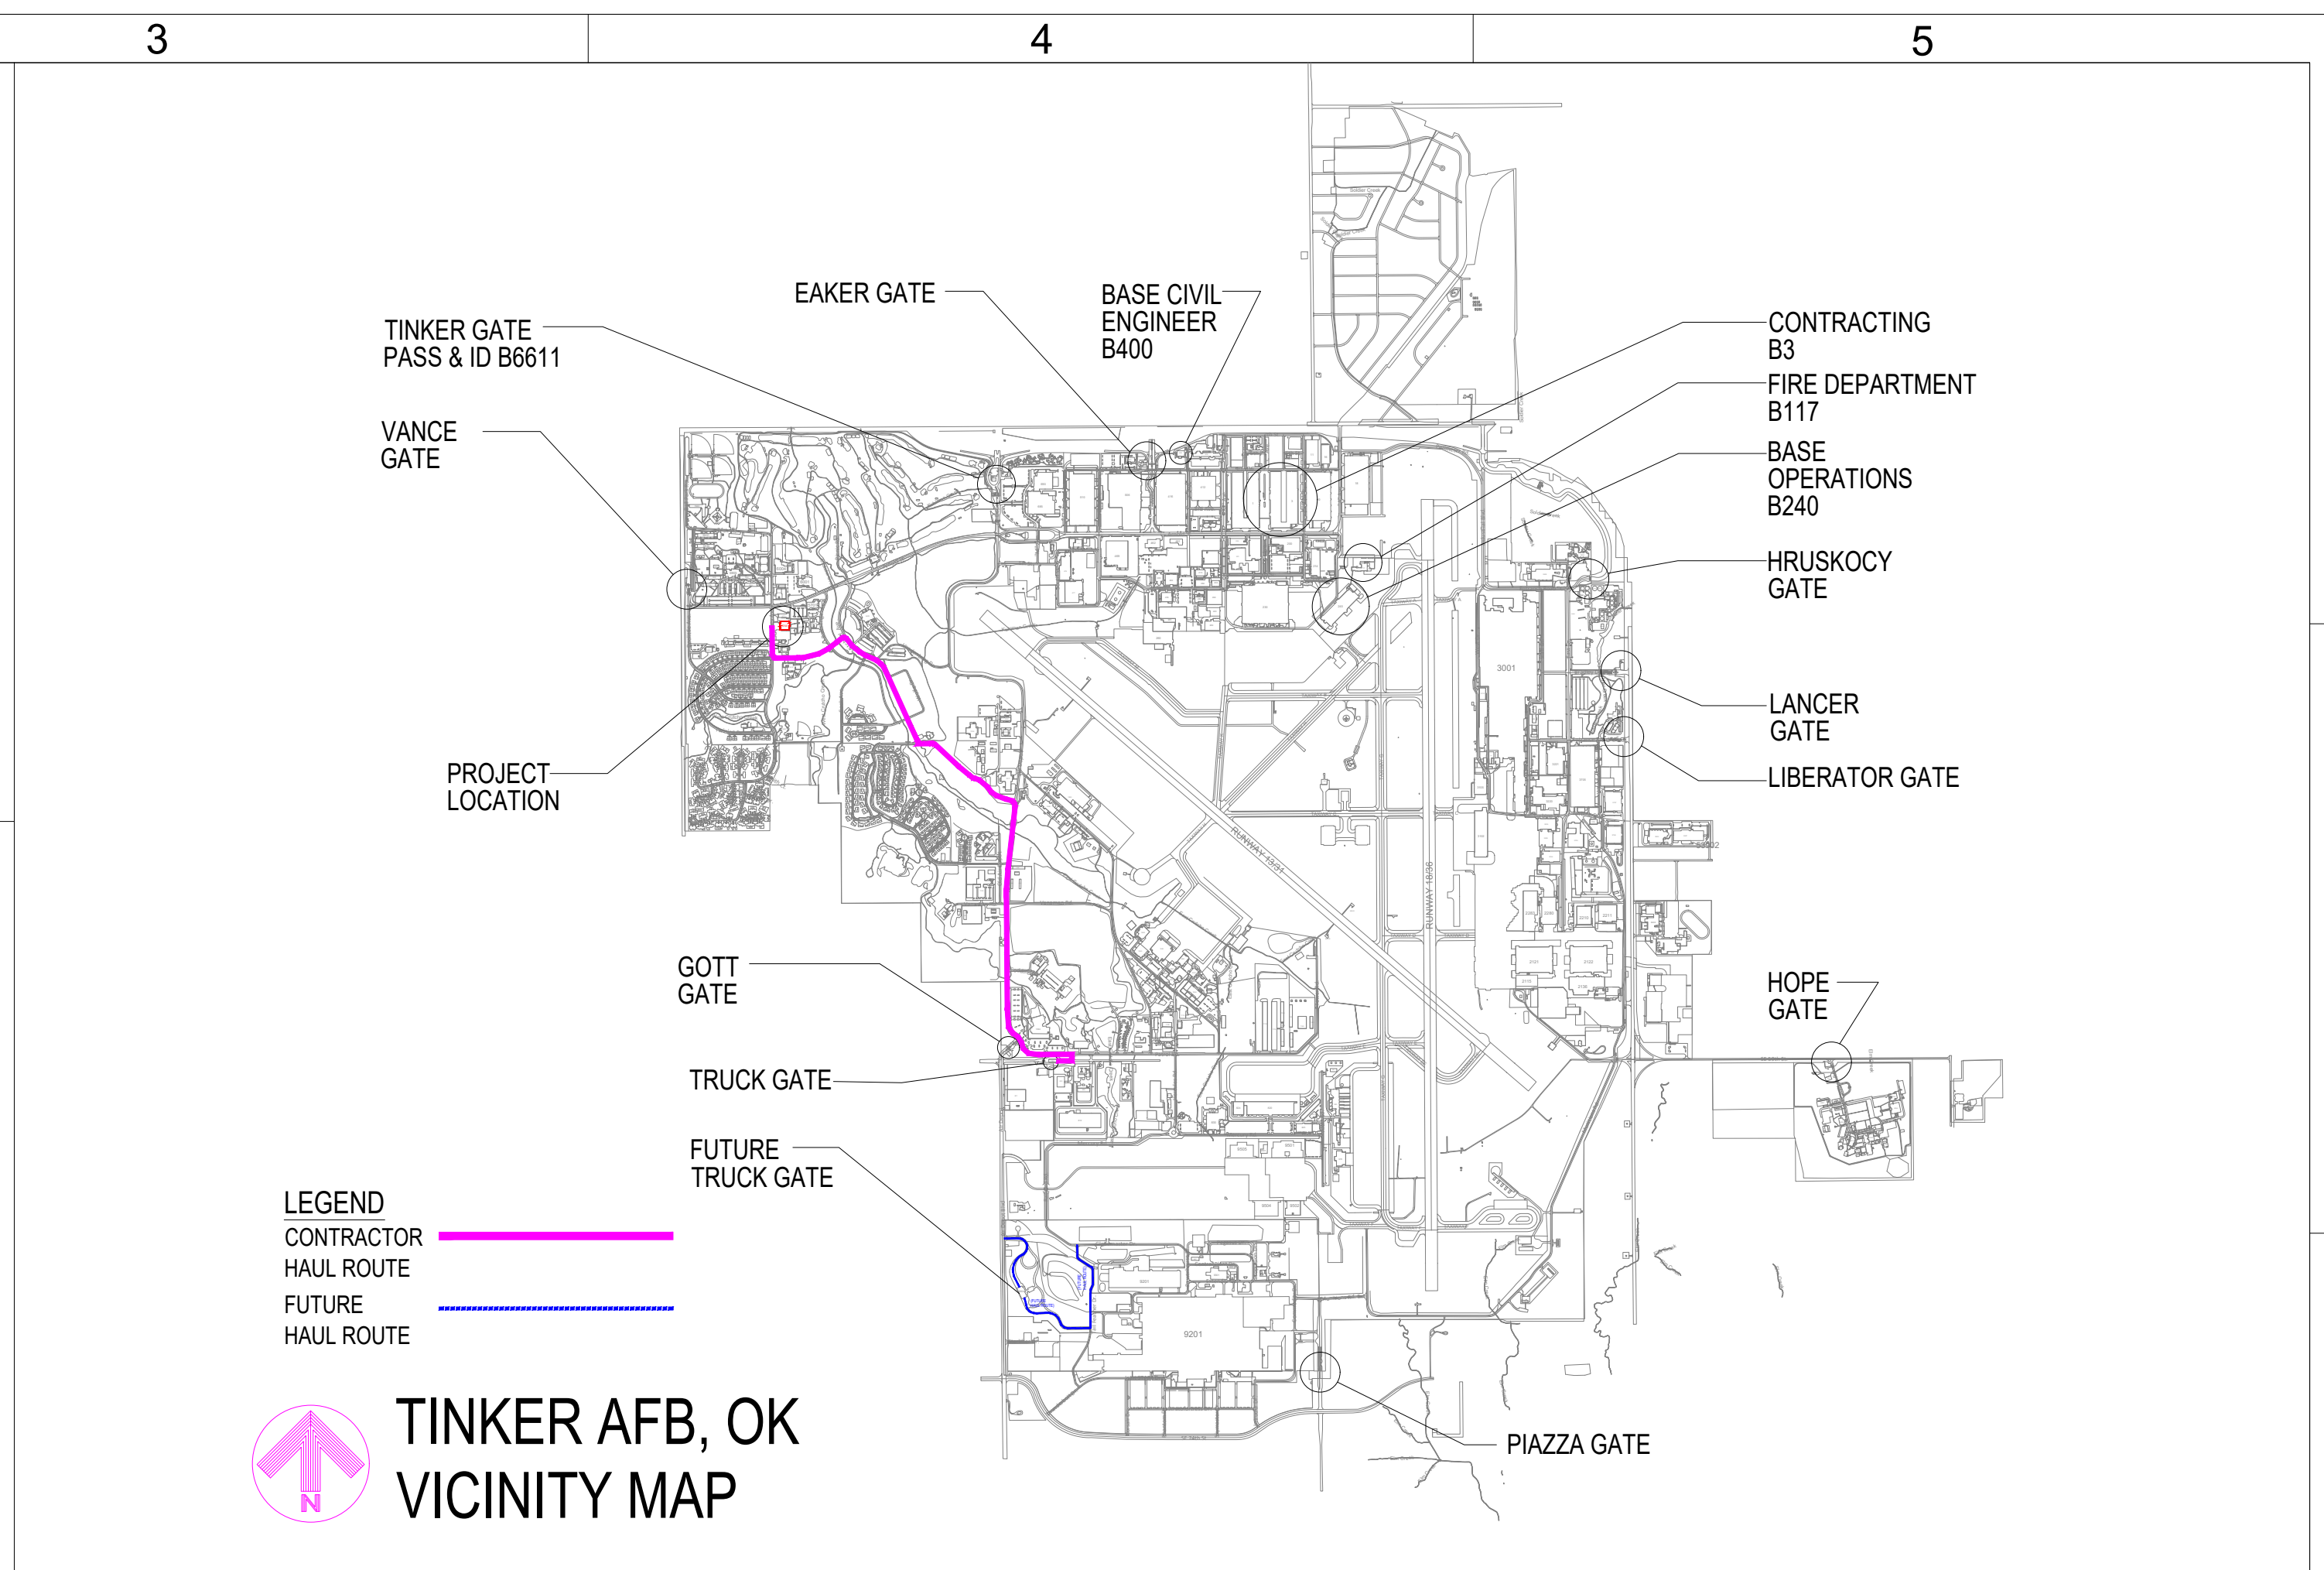

- | MANAGEMENT INFORMATION | | REVISIONS | | DESCRIPTION |
|--|--|-----------|------|-------------|
| | | MARK | DATE | |
| ISSUE DATE: 8 DEC 2025 | | | | |
| DESIGN GROUP: TEPA CSAG | | | | |
| DESIGNED BY: | | | | |
| DRAWN BY: S STARR | | | | |
| CHECKED BY: J MITCHELL | | | | |
| DESIGN FILE LOCATION:
Enat\Design\2020\2025\20250517\30_Support\03 Drawings | | | | |

SHEET NUMBER **G-101**

SHEET **01** OF **05**

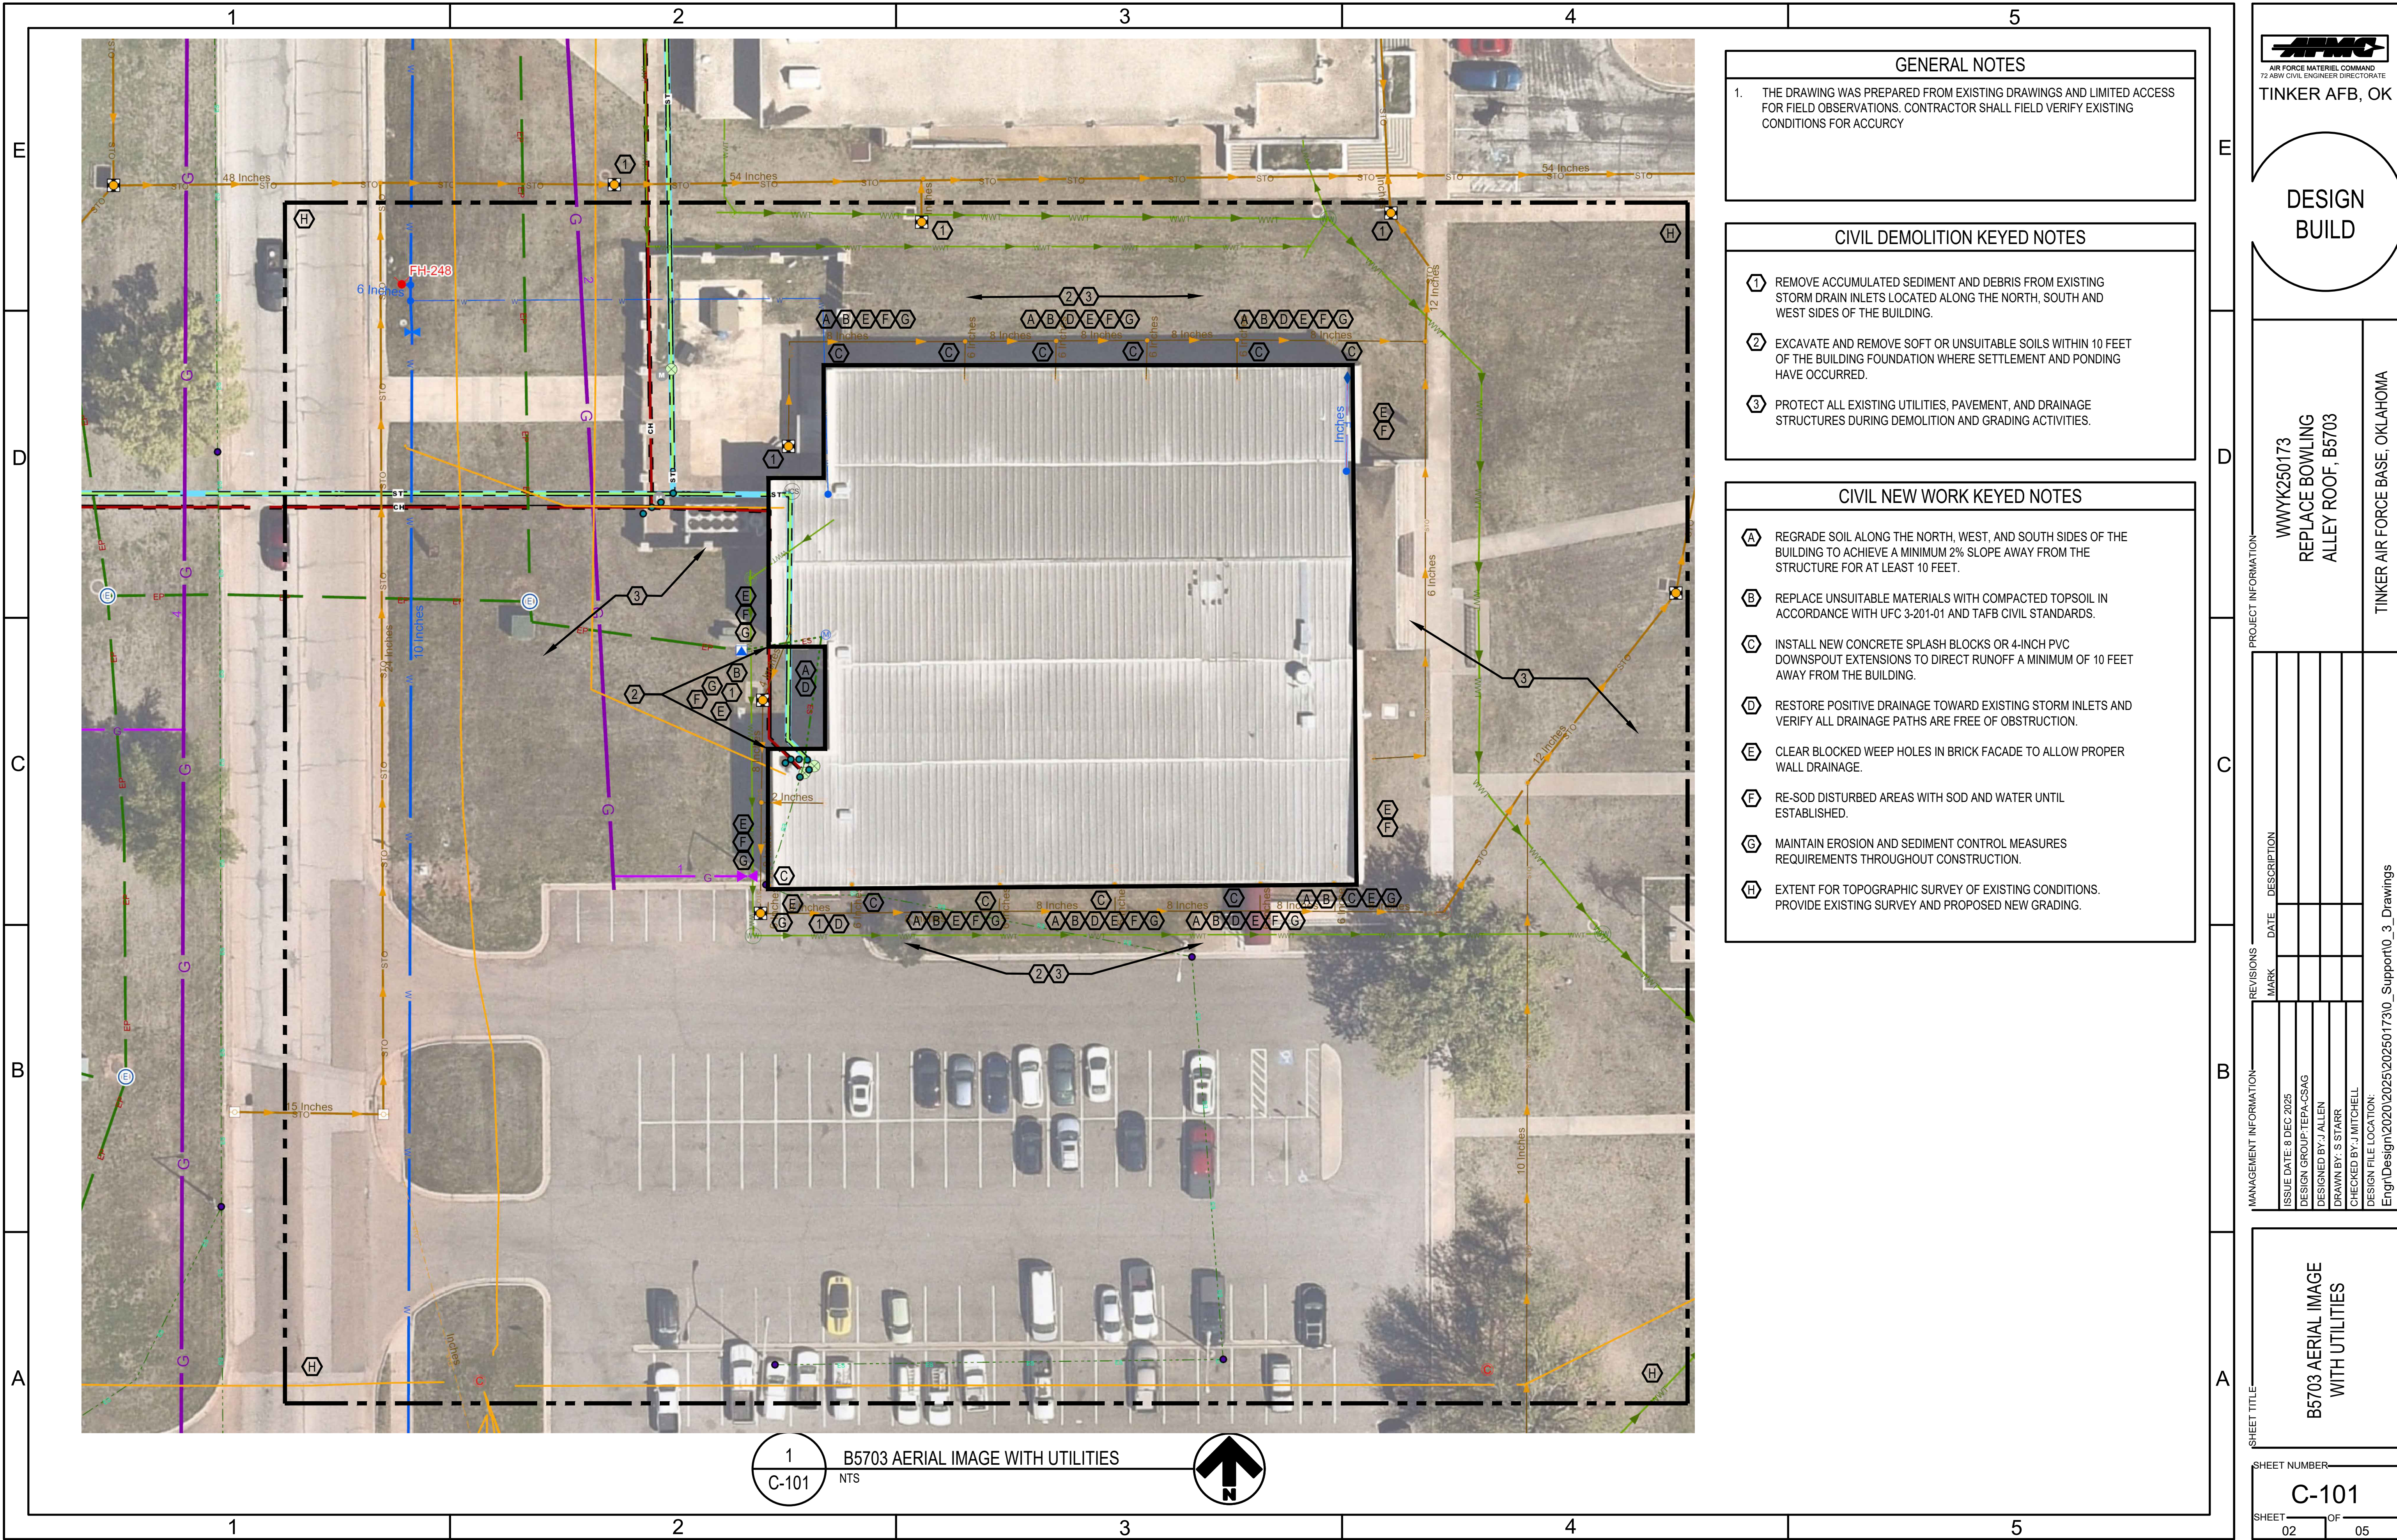

GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURCY

CIVIL DEMOLITION KEYED NOTES

1 REMOVE ACCUMULATED SEDIMENT AND DEBRIS FROM EXISTING STORM DRAIN INLETS LOCATED ALONG THE NORTH, SOUTH AND WEST SIDES OF THE BUILDING.

2 EXCAVATE AND REMOVE SOFT OR UNSUITABLE SOILS WITHIN 10 FEET OF THE BUILDING FOUNDATION WHERE SETTLEMENT AND PONDING HAVE OCCURRED.

3 PROTECT ALL EXISTING UTILITIES, PAVEMENT, AND DRAINAGE STRUCTURES DURING DEMOLITION AND GRADING ACTIVITIES.

CIVIL NEW WORK KEYED NOTES

A REGRADE SOIL ALONG THE NORTH, WEST, AND SOUTH SIDES OF THE BUILDING TO ACHIEVE A MINIMUM 2% SLOPE AWAY FROM THE STRUCTURE FOR AT LEAST 10 FEET.

B REPLACE UNSUITABLE MATERIALS WITH COMPACTED TOPSOIL IN ACCORDANCE WITH UFC 3-201-01 AND TAFB CIVIL STANDARDS.

C INSTALL NEW CONCRETE SPLASH BLOCKS OR 4-INCH PVC DOWNSPOUT EXTENSIONS TO DIRECT RUNOFF A MINIMUM OF 10 FEET AWAY FROM THE BUILDING.

D RESTORE POSITIVE DRAINAGE TOWARD EXISTING STORM INLETS AND VERIFY ALL DRAINAGE PATHS ARE FREE OF OBSTRUCTION.

E CLEAR BLOCKED WEEP HOLES IN BRICK FACADE TO ALLOW PROPER WALL DRAINAGE.

F RE-SOD DISTURBED AREAS WITH SOD AND WATER UNTIL ESTABLISHED.

G MAINTAIN EROSION AND SEDIMENT CONTROL MEASURES REQUIREMENTS THROUGHOUT CONSTRUCTION.

H EXTENT FOR TOPOGRAPHIC SURVEY OF EXISTING CONDITIONS. PROVIDE EXISTING SURVEY AND PROPOSED NEW GRADING.

AFMC
AIR FORCE MATERIEL COMMAND
7240W CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

DESIGN
BUILD

PROJECT INFORMATION

WWYK250173
REPLACE BOWLING
ALLEY ROOF, B5703

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE DATE	DESCRIPTION	MARK	DATE
8 DEC 2025	DESIGN GROUP: TEPA-CSAG		
	DESIGNED BY: J ALLEN		
	DRAWN BY: S STARR		
	CHECKED BY: J MITCHELL		

Engr\Design\2020\2025\20250173\0_Support\0_3_Drawings


SHEET TITLE

B5703 AERIAL IMAGE
WITH UTILITIES

SHEET NUMBER


C-101

SHEET 02 OF 05

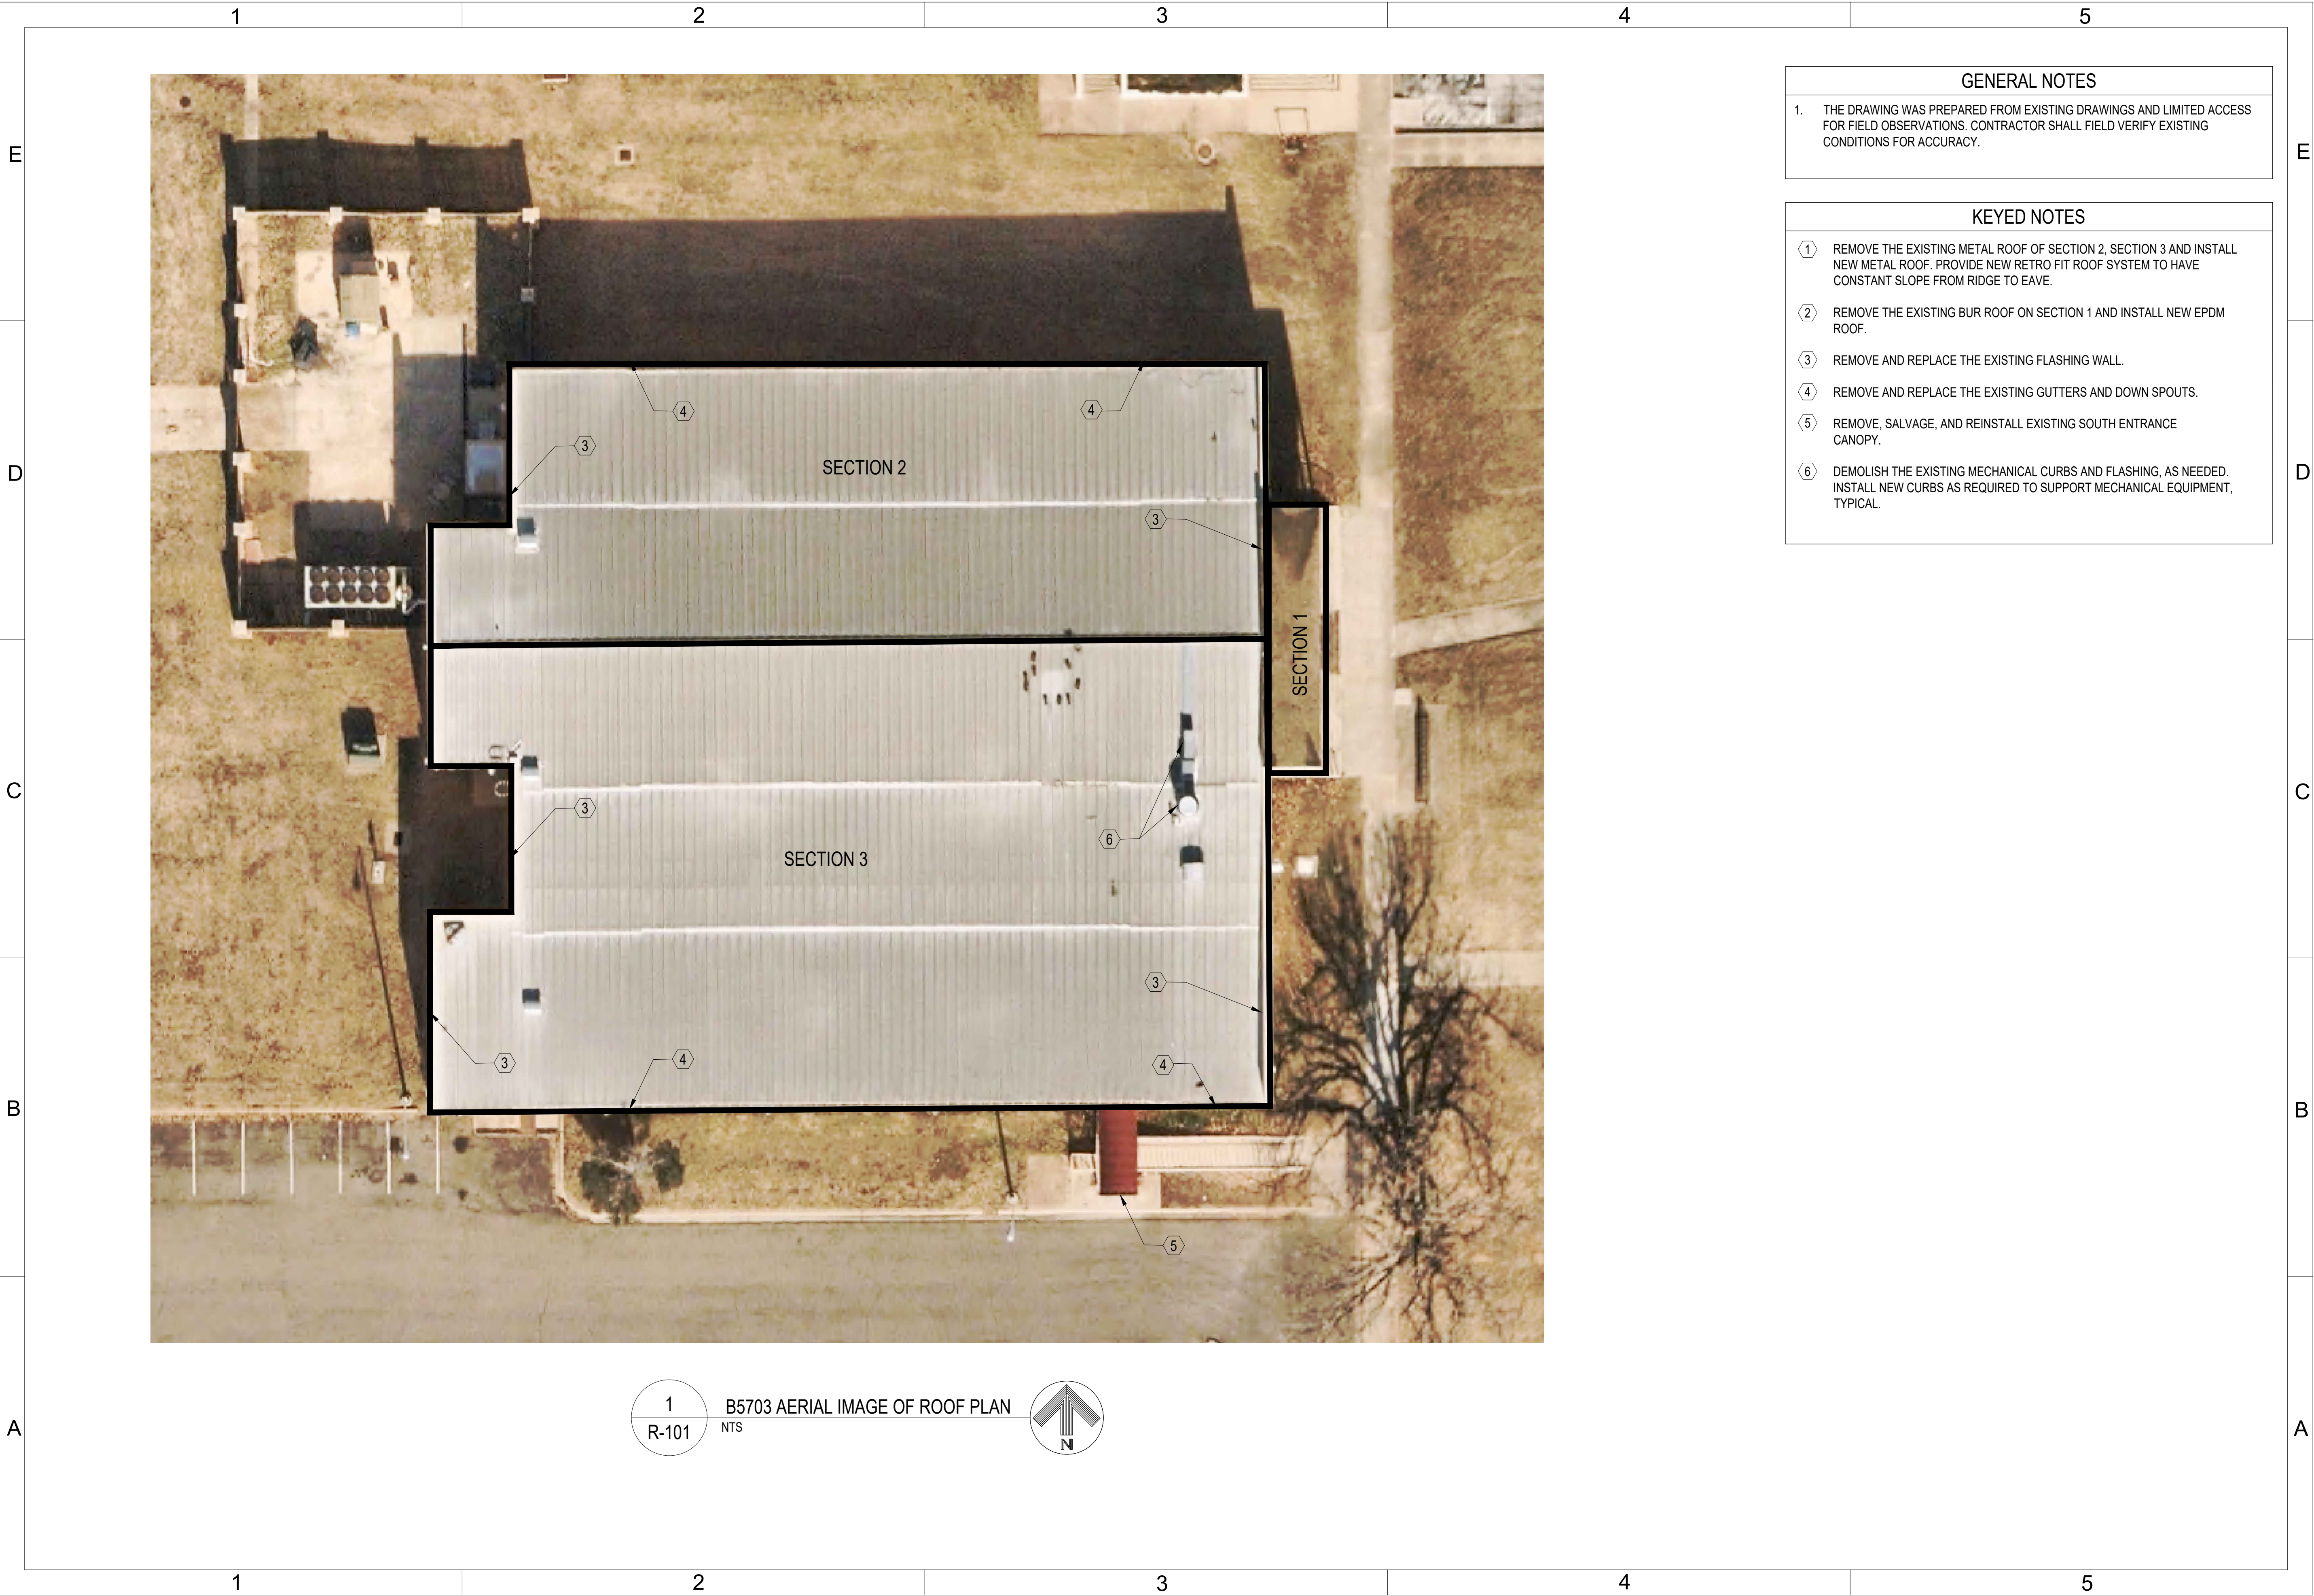

1
R-101

B5703 AERIAL IMAGE OF ROOF PLAN
NTS



GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.

KEYED NOTES

- ① REMOVE THE EXISTING METAL ROOF OF SECTION 2, SECTION 3 AND INSTALL NEW METAL ROOF. PROVIDE NEW RETRO FIT ROOF SYSTEM TO HAVE CONSTANT SLOPE FROM RIDGE TO EAVE.
- ② REMOVE THE EXISTING BUR ROOF ON SECTION 1 AND INSTALL NEW EPDM ROOF.
- ③ REMOVE AND REPLACE THE EXISTING FLASHING WALL.
- ④ REMOVE AND REPLACE THE EXISTING GUTTERS AND DOWN SPOUTS.
- ⑤ REMOVE, SALVAGE, AND REINSTALL EXISTING SOUTH ENTRANCE CANOPY.
- ⑥ DEMOLISH THE EXISTING MECHANICAL CURBS AND FLASHING, AS NEEDED. INSTALL NEW CURBS AS REQUIRED TO SUPPORT MECHANICAL EQUIPMENT, TYPICAL.



TINKER AFB, OK

DESIGN
BUILD

PROJECT INFORMATION

WWYK250173
REPLACE BOWLING
ALLEY ROOF, B5703

TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS

MANAGEMENT INFORMATION

ISSUE DATE: 8 DEC 2025
DESIGN GROUP: TEPA-CSAG
DESIGNED BY: A ALAWADI
DRAWN BY: S STARR
CHECKED BY: J MITCHELL
DESIGN FILE LOCATION:
Engr\Design\2020\2025\20250173\0_Support\0_3_Drawings


SHEET TITLE

B5703 AERIAL IMAGE
OF ROOF PLAN

SHEET NUMBER


R-101

SHEET 04 OF 05

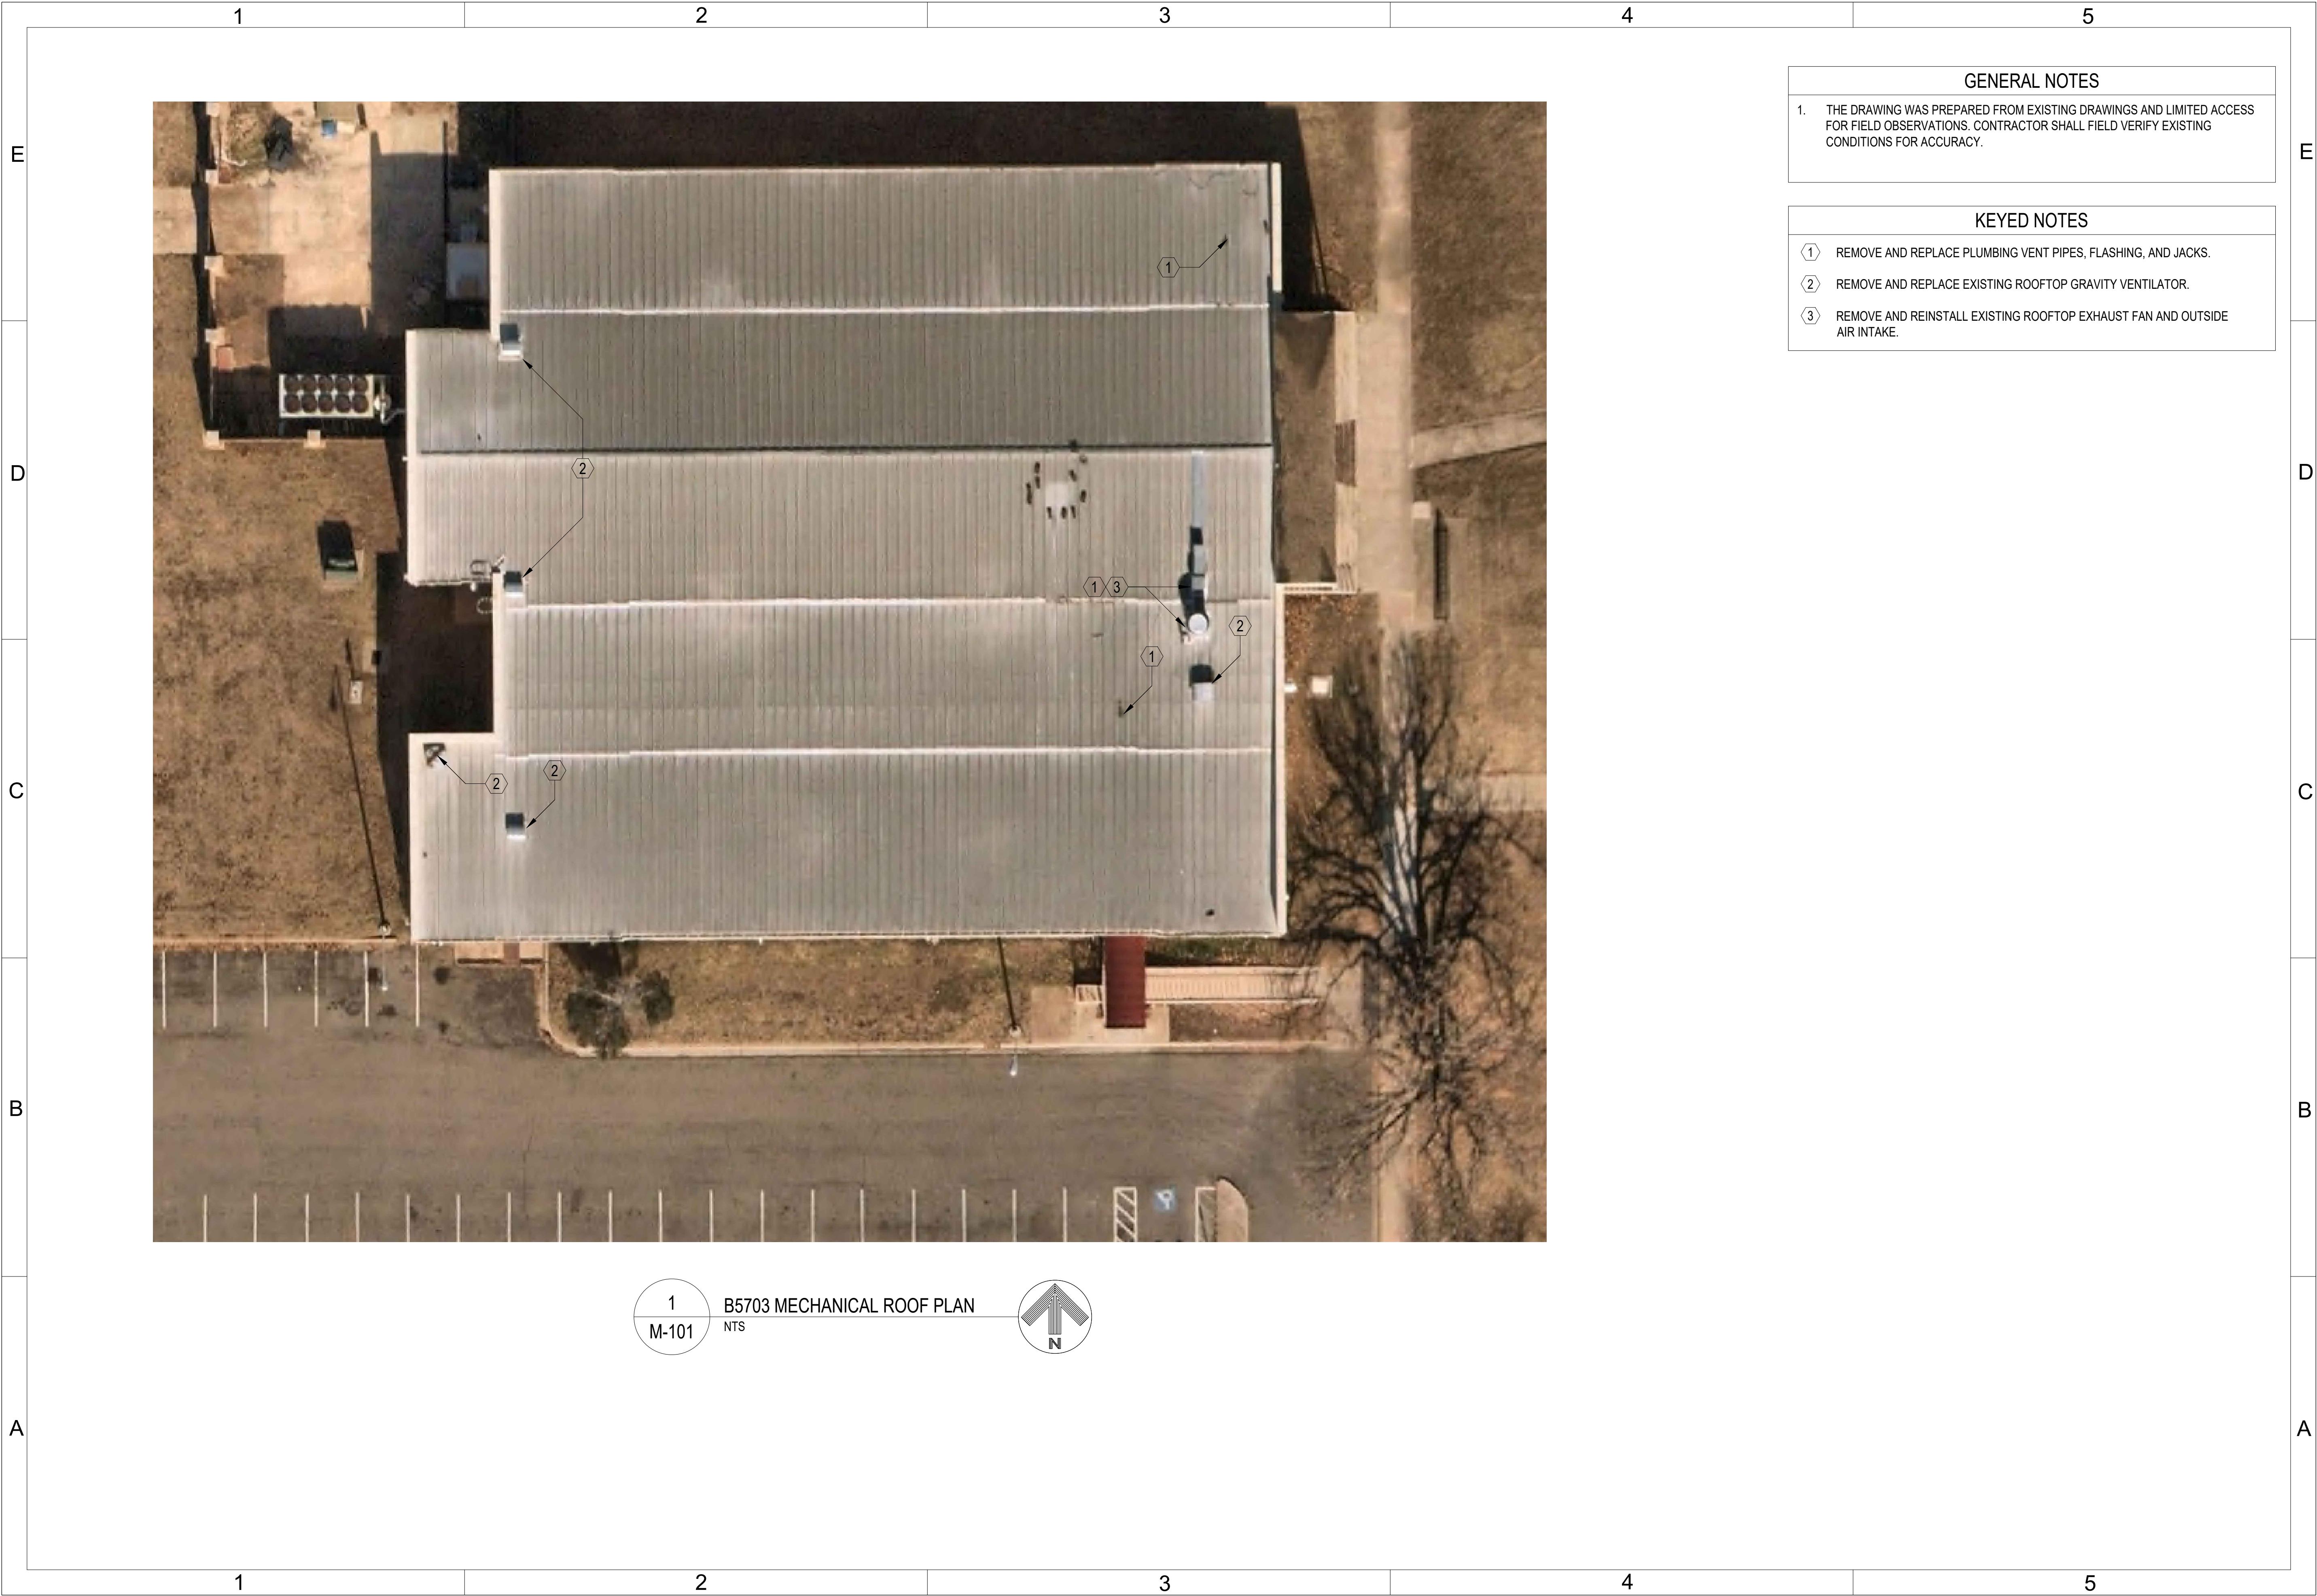

1
M-101

B5703 MECHANICAL ROOF PLAN
NTS



GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.

KEYED NOTES

- ① REMOVE AND REPLACE PLUMBING VENT PIPES, FLASHING, AND JACKS.
② REMOVE AND REPLACE EXISTING ROOFTOP GRAVITY VENTILATOR.
③ REMOVE AND REINSTALL EXISTING ROOFTOP EXHAUST FAN AND OUTSIDE AIR INTAKE.



TINKER AFB, OK

DESIGN
BUILD

PROJECT INFORMATION

WWYK250173
REPLACE BOWLING
ALLEY ROOF, B5703

TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS

MANAGEMENT INFORMATION	REVISIONS		DATE	DESCRIPTION
	MARK			
ISSUE DATE: 8 DEC 2025				
DESIGN GROUP: TEPA-CSAG				
DESIGNED BY: Q GAUNA				
DRAWN BY: S STARR				
CHECKED BY: J MITCHELL				
DESIGN FILE LOCATION: Engr\Design\2020\2025\20250173\0_Support\0_3_Drawings				

SHEET TITLE

B5703 MECHANICAL
ROOF PLAN

SHEET NUMBER

M-101

SHEET 05 OF 05