


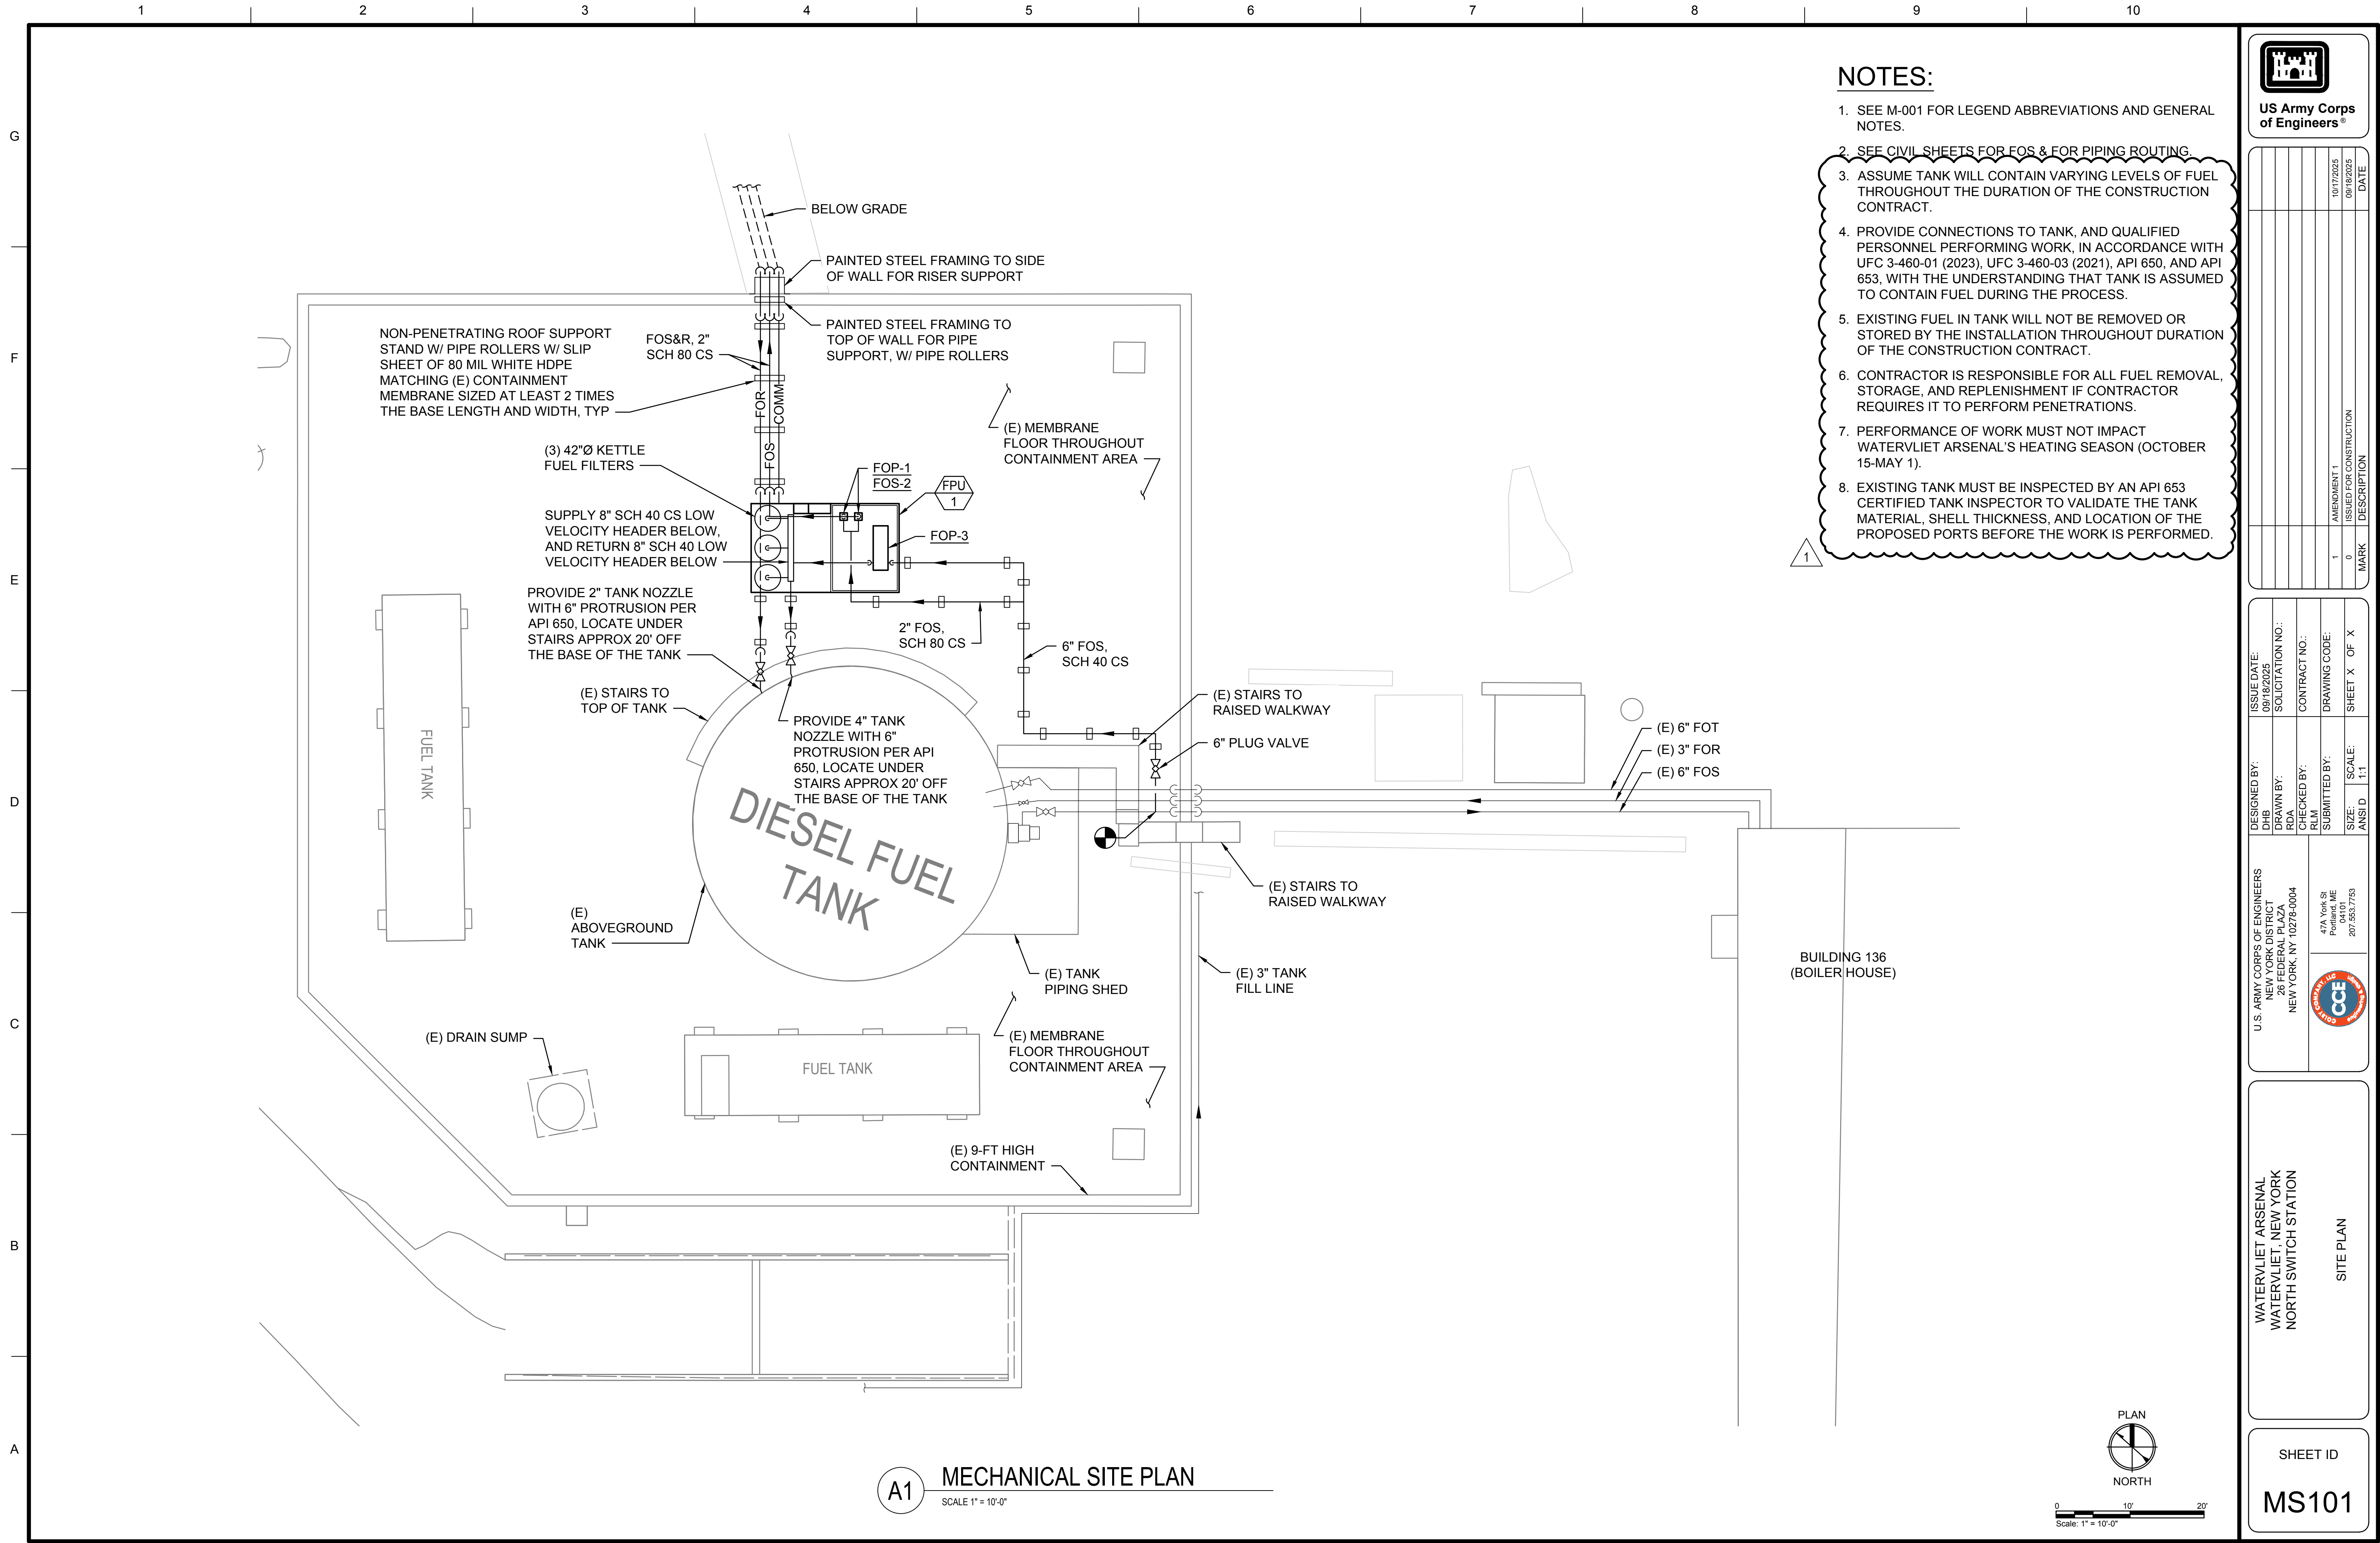

NOTES:

1. SEE M-001 FOR LEGEND ABBREVIATIONS AND GENERAL NOTES.
2. SEE CIVIL SHEETS FOR FOS & FOR PIPING ROUTING.
3. ASSUME TANK WILL CONTAIN VARYING LEVELS OF FUEL THROUGHOUT THE DURATION OF THE CONSTRUCTION CONTRACT.
4. PROVIDE CONNECTIONS TO TANK, AND QUALIFIED PERSONNEL PERFORMING WORK, IN ACCORDANCE WITH UFC 3-460-01 (2023), UFC 3-460-03 (2021), API 650, AND API 653, WITH THE UNDERSTANDING THAT TANK IS ASSUMED TO CONTAIN FUEL DURING THE PROCESS.
5. EXISTING FUEL IN TANK WILL NOT BE REMOVED OR STORED BY THE INSTALLATION THROUGHOUT DURATION OF THE CONSTRUCTION CONTRACT.
6. CONTRACTOR IS RESPONSIBLE FOR ALL FUEL REMOVAL, STORAGE, AND REPLENISHMENT IF CONTRACTOR REQUIRES IT TO PERFORM PENETRATIONS.
7. PERFORMANCE OF WORK MUST NOT IMPACT WATERVLIET ARSENAL'S HEATING SEASON (OCTOBER 15-MAY 1).
8. EXISTING TANK MUST BE INSPECTED BY AN API 653 CERTIFIED TANK INSPECTOR TO VALIDATE THE TANK MATERIAL, SHELL THICKNESS, AND LOCATION OF THE PROPOSED PORTS BEFORE THE WORK IS PERFORMED.

US Army Corps of Engineers®

ISSUE DATE: 09/18/2025	SOLICITATION NO.:	CONTRACT NO.:	DRAWING CODE:	SCALE: 1:1	SIZE: ANSI D
DESIGNED BY: DHB	DRAWN BY: RUM	CHECKED BY: RUM	SUBMITTED BY:		
U.S. ARMY CORPS OF ENGINEERS NEW YORK DISTRICT 26 FEDERAL PLAZA NEW YORK, NY 10278-0004			47A York St Portland, ME 207.553.7739		
WATERVLIET ARSENAL WATERVLIET, NEW YORK NORTH SWITCH STATION			SITE PLAN		
SHEET ID MS101					