




CURVE DATA
 P.I. 101.81, STA. 4+34.00
 P.T. 101.81, STA. 4+32.53
 P.L. 101.81, STA. 4+32.53
 Δ = 170°00'00"
 R = 100.00'
 T = 200.00'
 L = 400.00'
 E = 10.52'

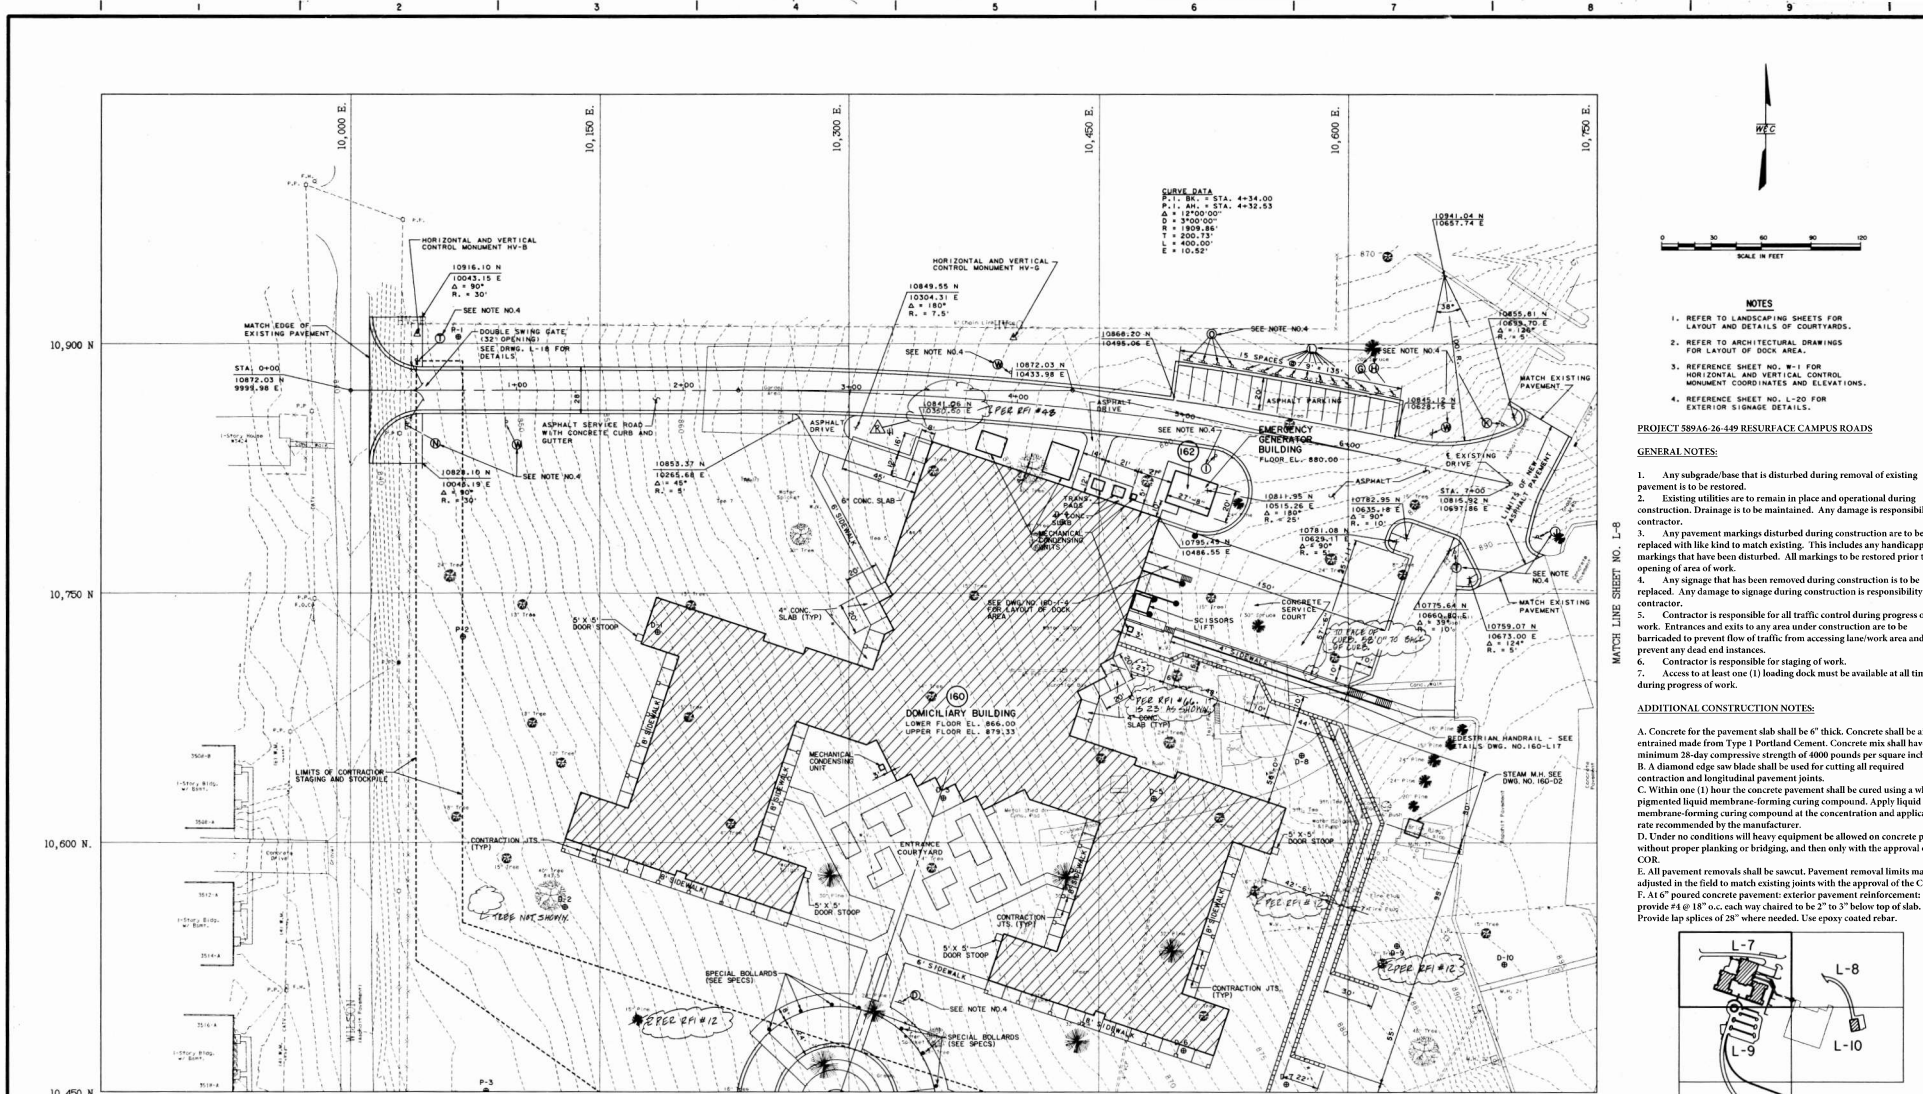

- NOTES**
1. REFER TO LANDSCAPING SHEETS FOR LAYOUT AND DETAILS COURTYARDS.
 2. REFER TO ARCHITECTURAL DRAWINGS FOR LAYOUT OF DOCK AREA.
 3. REFERENCE SHEET NO. W-1 FOR HORIZONTAL AND VERTICAL CONTROL MONUMENT COORDINATES AND ELEVATIONS.
 4. REFERENCE SHEET NO. L-20 FOR EXTERIOR SIGNAGE DETAILS.


PROJECT 589A6-26-449 RESURFACE CAMPUS ROADS

GENERAL NOTES:

1. Any subgrade/base that is disturbed during removal of existing pavement is to be restored.
2. Existing utilities are to remain in place and operational during construction. Drainage is to be maintained. Any damage is responsibility of contractor.
3. Any pavement markings disturbed during construction are to be replaced with like kind to match existing. This includes any handicapped markings that have been disturbed. All markings to be restored prior to opening of area of work.
4. Any signage that has been removed during construction is to be replaced. Any damage to signage during construction is responsibility of contractor.
5. Contractor is responsible for all traffic control during progress of work. Entrances and exits to any area under construction are to be barricaded to prevent flow of traffic from accessing lane/work area and to prevent any dead end instances.
6. Contractor is responsible for staging of work.
7. Access to at least one (1) loading dock must be available at all times during progress of work.

ADDITIONAL CONSTRUCTION NOTES:

- A. Concrete for the pavement slab shall be 6" thick. Concrete shall be air-entrained made from Type I Portland Cement. Concrete mix shall have a minimum 28-day compressive strength of 4000 pounds per square inch.
- B. A diamond edge saw blade shall be used for cutting all required construction and longitudinal pavement joints.
- C. Within one (1) hour the concrete pavement shall be cured using a white pigmented liquid membrane-forming curing compound. Apply liquid membrane-forming curing compound at the concentration and application rate recommended by the manufacturer.
- D. Under no conditions will heavy equipment be allowed on concrete paving without proper planning or bridging, and then only with the approval of the COR.
- E. All pavement removals shall be sawcut. Pavement removal limits may be adjusted in the field to match existing joints with the approval of the COR.
- F. At 6" poured concrete pavement: exterior pavement reinforcement: provide #4 @ 18" o.c. each way chaired to be 2" to 3" below top of slab. Provide lap splices of 36" where needed. Use epoxy coated rebar.




KEY MAP

0-1-2-2340

FOR USE ON PROJECT 589A6-26-449 Resurface Campus Roads

Revisions	Date

WILSON & COMPANY
 Engineers & Architects
 631 East Crawford St.
 Salina, Kansas 67401
 913-827-0433



Drawing Title	SITE PLAN
Approved: Area Project Manager	<i>J.P. Wilson</i>

Project Title	REPLACE DOMICILIARY, DIETETICS AND CHILLER PLANT
Building Number	160
Location	VAMC, LEAVENWORTH, KANSAS

Date	APRIL 1993
Project No.	6860L2060
Drawing No.	160-L-7
Dwg. Of	01

