

PERFORMANCE WORK STATEMENT (PWS)

FOR

Enterprise Land Mobile Radio (ELMR), Electronic Security Systems (ESS) Maintenance, and Engineering Services, Joint Region Marianas (JRM), Guam

PART 1: GENERAL INFORMATION

1.1. Introduction & Scope

This Performance Work Statement (PWS) defines the requirements for non-personal services to provide comprehensive engineering, maintenance, and lifecycle management for the Enterprise Land Mobile Radio (ELMR) and Electronic Security Systems (ESS) infrastructure at Joint Region Marianas (JRM), Guam. The Contractor shall provide all necessary personnel, supervision, and other items necessary to perform the services defined herein. The objective is to ensure the sustained availability, integrity, and modernization of JRM's critical communication and security systems.

1.2. Background

Joint Region Marianas (JRM) requires continuous, on-site technical expertise to maintain mission-critical Enterprise Land Mobile Radio (ELMR) and Electronic Security Systems (ESS). Concurrently, JRM requires high-level systems engineering support to advance strategic initiatives, including network modernization, Virtual Desktop Infrastructure (VDI) implementation, and migration to enterprise cloud environments.

1.3. Period of Performance

The period of performance shall consist of one (1) twelve-month Base Period, four (4) twelve-month Option Periods, and one (1) six-month extension period that may be exercised at the Government's discretion in accordance with FAR 52.217-8, Option to Extend Services.

Base Period: 1 August 2026 – 31 July 2027

Option Period 1: 1 August 2027 – 31 July 2028

Option Period 2: 1 August 2028 – 31 July 2029

Option Period 3: 1 August 2029 – 31 July 2030

Option Period 4: 1 August 2030 – 31 July 2031

Extension of Services (IAW FAR 52.217-8): 1 August 2031 – 31 January 2032

1.4. Place of Performance

The primary place of performance will be government facilities at Joint Region Marianas, Guam, including but not limited to the JRM J6 office on Naval Base Guam, Andersen Air Force Base, and Marine Corps Base Camp Blaz.

1.5. Hours of Operation

Normal hours of operation are 0700 to 1600, Monday through Friday, excluding U.S. Federal holidays. The workday includes a one-hour unpaid lunch break. The Contractor may be required to respond to critical issues outside normal hours as defined in Part 6, Performance Requirements Summary.

1.6. Federal Holidays.

The contractor shall not be required to provide services on federal holidays.

Federal Holiday	Occurrence
New Year's Day	1 January*
Martin Luther King Jr.'s Birthday	3rd Monday of January
President's Day	3rd Monday of February
Memorial Day	last Monday of May
Juneteenth	19 June*
Independence Day	4 July*
Labor Day	1st Monday of September
Columbus Day	2nd Monday of October
Veterans Day	11 November*
Thanksgiving Day	4th Thursday of November
Christmas Day	25 December*

*When a federal holiday falls on a Sunday, the following Monday will be observed as a holiday by the U.S. government. When a federal holiday falls on a Saturday, the preceding Friday will be observed as a holiday.

In addition to these federal holidays, if the President of the United States issues an executive order closing the federal government, that date shall also be considered a recognized federal holiday (Reference Executive Order 11582 of February 11, 1971, and 5 U.S.C. 5546 and 6103(b) and other similar statutes insofar as they relate to the pay and leave of employees of the United States).

1.7. Typhoon Conditions.

Guam-based military installations close when Tropical Cyclone Condition of Readiness 1C (TCCOR 1C or TC-1C) is declared by Military Weather Station authorities. The Contractor will be required to depart military bases, remain indoors, and monitor radio/television to determine when the TCCOR changes to TCCOR SW (Storm Watch) or TCCOR AC (All Clear). When TCCOR SW is declared by Military Weather Station authorities, the Contractor shall restart the service within 2 hours. If that occurs after normal business hours, services shall begin the next normal workday at 0700.

1.8. Points of Contact (POC)

Contracting Officer (CO): To be designated at time of award.

Contracting Officer's Representative (COR):

[REDACTED]
[REDACTED]
[REDACTED]

Technical Point of Contact (TPOC):




1.9. Quality Control

The Contractor shall develop and maintain a Quality Control Plan (QCP) to ensure the services are performed in accordance with this PWS. The Contractor's QCP shall set forth the procedures for self-inspecting the quality, timeliness, and quantity of all work performed. The Contractor shall provide the QCP to the COR for review within 30 days of contract award.

1.10. Quality Assurance

The Government will monitor the Contractor's performance in accordance with the Performance Requirements Summary (Part 6). The Government reserves the right to inspect any and all work performed under this contract.

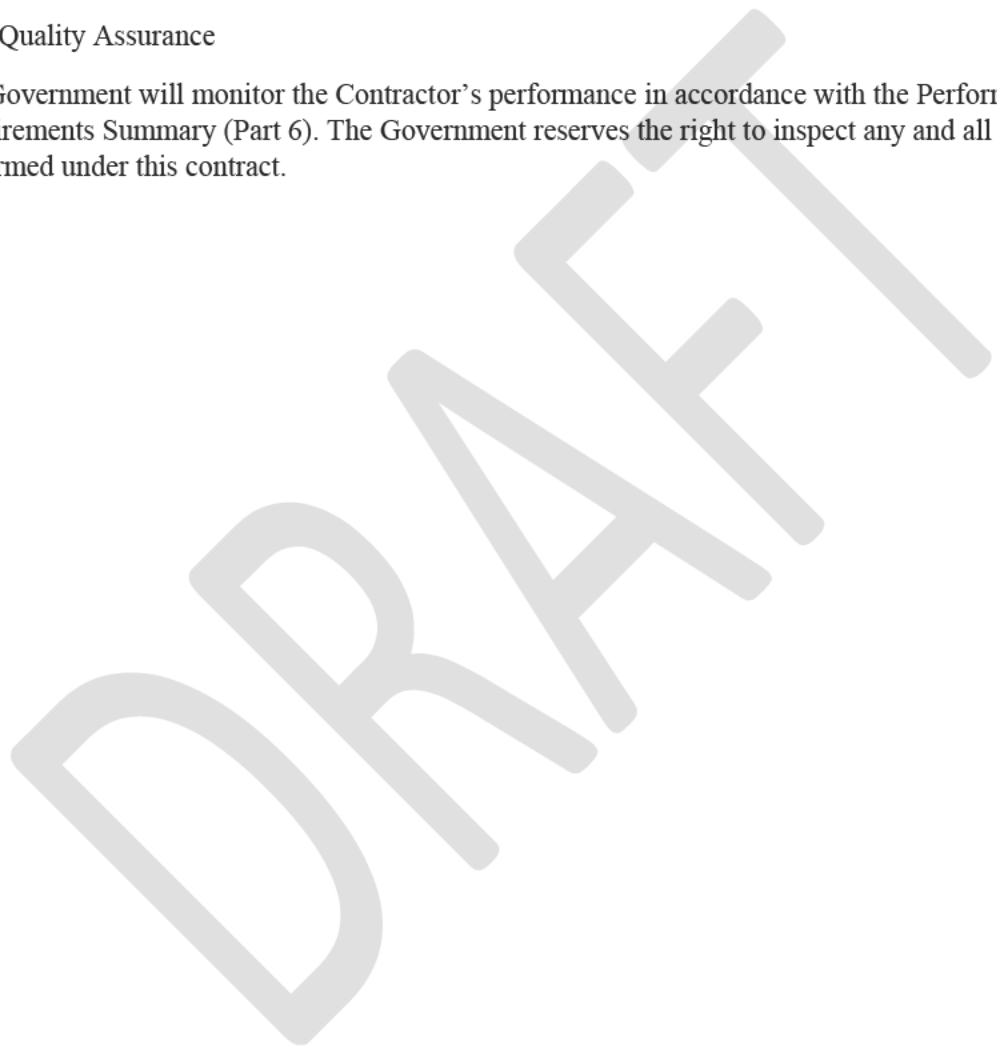

PART 2: APPLICABLE DOCUMENTS, ACRONYMS, AND DEFINITIONS

2.1. Applicable Documents

The Contractor shall comply with the most current versions of the following publications. In case of conflict between this PWS and any listed document, the Contractor shall immediately notify the Contracting Officer for resolution.

- DoD Directive 8140.03: Cyberspace Workforce Management
- NIST SP 800-181: National Initiative for Cybersecurity Education (NICE) Cybersecurity Workforce Framework
- Motorola R56: Standards and Guidelines for Communication Sites
- UFC 4-021-02: Unified Facilities Criteria for Electronic Security Systems (ESS)
- DoD 5200.01 (Vol 1-4): DoD Information Security Program
- Joint Travel Regulations (JTR)
- CNSSI 1253: Security Categorization and Control Selection for National Security Systems

2.2. Acronyms & Definitions

- **ATO:** Authority to Operate. The official management decision given by a senior organizational official to authorize operation of an information system.
- **CO:** Contracting Officer. The only individual with the authority to bind the Government legally by signing contracts or modifications.
- **COR:** Contracting Officer's Representative. The technical liaison between the Government and the Contractor, responsible for monitoring performance but not authorized to change the contract scope or price.
- **ELMR:** Enterprise Land Mobile Radio. The trunked radio system used by First Responders and base operations.
- **ESS:** Electronic Security Systems. Collective term for Intrusion Detection Systems (IDS), Access Control Systems (ACS), and Video Surveillance Systems (VSS).
- **FRCB:** Fleet Readiness Control Board. The governance body responsible for approving hardware/software changes to the Navy network.
- **FTE:** Full-Time Equivalent. A unit that indicates the workload of an employed person (standardized as 2,080 hours per year).
- **JRM:** Joint Region Marianas. The supported command and Requiring Activity.
- **NICE Framework:** National Initiative for Cybersecurity Education. The reference structure (NIST SP 800-181) used to describe cybersecurity roles and responsibilities.
- **PWS:** Performance Work Statement. This document, which describes the Government's requirement.
- **R56:** Motorola R56 Standards. The industry-standard specification for grounding and installation of communications sites.

- **SOVT:** System Operational Verification Test. The formal testing process used to validate that a system meets all requirements before Government acceptance.

DRAFT

PART 3: GOVERNMENT-FURNISHED PROPERTY AND SERVICES

The Government will provide the following at no cost to the Contractor for the sole purpose of performing the requirements of this PWS:

- 3.1. Equipment: Government Furnished Equipment (GFE) will include laptops, Common Access Cards (CAC), and specialized test equipment (e.g., service monitors) as required.
- 3.2. Facilities: Office space, desks, chairs, and access to necessary utilities.
- 3.3. Vehicles: Access to Government Owned Vehicles (GOVs) for official travel between JRM work sites.
- 3.4. Information: Access to network diagrams, system documentation, manuals, codeplugs, and other technical data necessary to perform the required tasks.

PART 4: CONTRACTOR-FURNISHED ITEMS AND SERVICES

4.1. General

The Contractor shall furnish all personnel, supervision, and other items or services required to perform this PWS, except for those items specified as Government-Furnished in Part 3.

4.2. Key Personnel

The Contractor shall provide personnel who meet or exceed the qualifications defined in Section L and Section M of the solicitation. These positions are considered essential to the successful performance of the work.

4.2.1. Senior Systems Engineer: Shall serve as the lead for engineering, design, and technical oversight tasks as defined in this PWS.

4.2.2. Electronics Technician: Shall serve as the primary executor of maintenance, repair, and lifecycle support for ELMR and ESS infrastructure as defined in this PWS.

PART 5: SPECIFIC TASKS

The Contractor shall perform the following tasks to meet the Government's objectives.

5.1. Task 1: Engineering Support

The Contractor shall provide enterprise-level systems engineering to support the modernization and sustainment of JRM J6 infrastructure.

5.1.1. Network, Cloud & VDI Architecture: The Contractor shall provide engineering and design support for VDI and cloud migration initiatives, including developing system designs, configurations, and strategic plans for infrastructure upgrades in alignment with DoD and DoN directives.

5.1.2. Compliance and Authorization: The Contractor shall create, maintain, and deliver all technical documentation required to achieve and sustain system Authorizations to Operate (ATO). This includes producing network topologies, data flow diagrams, and rack elevations. The Contractor shall prepare and submit all required documentation for the Fleet Readiness Control Board (FRCB) and local change management boards.

5.1.3. ESS Project Technical Oversight: The Contractor shall provide technical oversight for third-party ESS installation projects. This includes conducting technical evaluations of vendor proposals, monitoring project execution, witnessing System Operational Verification Tests (SOVT), and validating all final project deliverables for accuracy and completeness before Government acceptance.

5.1.4. Tier III Operational Support: The Contractor shall provide expert-level (Tier III) troubleshooting and root cause analysis for complex network and infrastructure issues escalated from other support tiers, recommending permanent engineering solutions to prevent recurrence.

5.2. Task 2: Electronic Security Systems (ESS) Operations and Maintenance

The Contractor shall ensure the continuous, reliable operation of all JRM ESS components, including Intrusion Detection Systems (IDS), Access Control Systems (ACS), and Video Surveillance Systems (VSS).

5.2.1. Preventative Maintenance: The Contractor shall execute a scheduled preventative maintenance program to ensure system reliability and mitigate environmental degradation. This includes performing corrosion control, load testing backup power systems, and calibrating detection sensors in accordance with OEM and DoD standards.

5.2.2. Corrective Maintenance and System Integrity: The Contractor shall troubleshoot, diagnose, and repair or replace failed ESS field and head-end components. The Contractor is responsible for maintaining system integrity through proper wiring repair and application of authorized software/firmware patches.

5.3. Task 3: Enterprise Land Mobile Radio (ELMR) Operations and Maintenance

The Contractor shall ensure the operational readiness and lifecycle management of the JRM LMR subscriber fleet and supporting RF infrastructure.

5.3.1. Subscriber Unit Lifecycle Management: The Contractor shall manage the entire lifecycle of LMR subscriber units. This includes maintaining and deploying approved codeplugs, performing preventative maintenance checks and tuning using calibrated service monitors, and executing a battery conditioning program to ensure fleet readiness.

5.3.2. Infrastructure and Tower Site Compliance: The Contractor shall ensure all LMR tower and repeater sites are maintained in a state of operational readiness. This includes conducting and documenting monthly inspections to verify compliance with Motorola R56 grounding standards and ensuring the suitability of site environmental systems (HVAC, generators).

5.3.3. Installation and Asset Accountability: The Contractor shall perform the professional installation of mobile radio systems in government vehicles. The Contractor shall maintain 100% accountability of all LMR assets through regular inventories and shall process all asset documentation for turn-in or disposal.

PART 6: PERFORMANCE REQUIREMENTS SUMMARY (PRS)

PWS Ref	Required Service	Performance Standard	Acceptable Quality Level (AQL)	Method of Surveillance
5.1	Engineering Support	All technical documents (drawings, ATO packages, FRCB submissions) are delivered on time, are 100% compliant with governing directives, and receive approval with no more than one round of major revisions.	95% of all submitted documents are approved on first submission.	100% Inspection of all deliverables.
5.2	ESS Operations & Maintenance	System operational availability for all ESS components is maintained at 99% or higher during normal operating hours, excluding scheduled downtime.	No more than 8 hours of critical system downtime per month due to issues within the Contractor's control.	Monthly availability reports; Random inspection.
5.3	ELMR Operations & Maintenance	System operational availability for ELMR infrastructure and 98% of the subscriber fleet is maintained at all times.	99% of ELMR infrastructure is operational at any given time. No more than 2% of subscriber units out of service at once.	Monthly availability reports; Random inspection.
5.3.3	Asset Accountability	100% of all LMR assets are accounted for during all scheduled and random inventories.	Zero loss of serialized assets. 100% accuracy is required.	100% inspection of semi-annual inventory reports; Random spot checks.
-	Corrective Maintenance Response			Log analysis; Customer feedback.
-	Priority 1 (Critical)	Arrive on-site or begin active remote troubleshooting within 2 hours of notification (24/7/365).	95% compliance per month.	COR review of trouble ticket logs.
-	Priority 2 (Urgent)	Arrive on-site within 4 hours of notification during duty hours.	98% compliance per month.	COR review of trouble ticket logs.
-	Priority 3 (Routine)	Address issue within 24 business hours of notification.	100% compliance per month.	COR review of trouble ticket logs.

PART 7: DELIVERABLES

Deliverable	Frequency	Format
Quality Control Plan (QCP)	Once, 30 Days After Award	Microsoft Word
Monthly Status Report	Monthly, NLT 5th business day	Microsoft Word
Response Time Compliance Report	Monthly, with Status Report	Microsoft Excel
Engineering Findings & Recommendations	As Required	Technical Report
ATO/FRCB Documentation	As Required	Government-specified format
Updated Inventory Logs (LMR Assets)	Monthly, with Status Report	Microsoft Excel
Site Audit & Inspection Reports	As completed	Digital Report w/ photos
Transition-Out Plan & COOP Binder	30 Days Prior to PoP End	Hard copy and digital
Enterprise Contractor Manpower Report	Annually, by Oct 31st	Via System for Award Management (SAM)