


BID DOCUMENTS



VICINITY MAP

PROJECT LOCATION

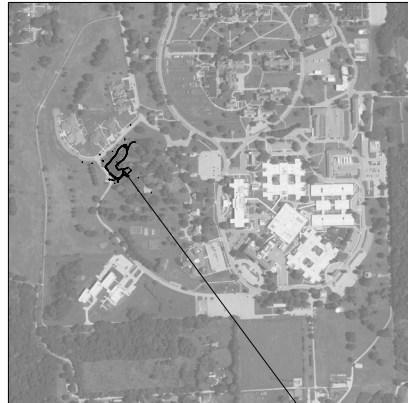

LOCATION MAP



OWNER

VA ILLIANA
HEALTHCARE SYSTEM

Contact:
Austin Johnson
Contracting Officer's
Representative (COR)

1900 E. Main Street, Room 127G
Danville, IL 61832

p: 217.274.8657
e: austin.johnson@va.gov

CIVIL, STRUCTURAL,
ELECTRICAL

GUIDON DESIGN, INC.

Contact
Chad Butler, PE
Project Manager

1221 N. Pennsylvania Street
Indianapolis, IN 46202

p: 317.800.6388
e: cbutler@guidon.com

LANDSCAPE
ARCHITECT

HITCHCOCK DESIGN GROUP

Contact:
MJ Menely, PUA, ASLA
Principal

405 Massachusetts Avenue
Suite B
Indianapolis, IN 46204

p: 317.536.6161
e: rajmoneley@hitchcockdesigngroup.com

SHEET LIST

SHEET NUMBER	SHEET NAME
GENERAL G001	COVER SHEET
CIVIL C101 C102 C201 C301 C301 C301 C301 C301 C301 C301 C301 C301 C301	CIVIL LEGEND AND NOTES PHASING PLAN DEMOLITION PLAN SITE AND UTILITY PLAN SITE DETAILS GRADING PLAN GRADING PLAN (ALTERNATE VIEW) DREDGING PLAN EROSION CONTROL PLAN EROSION CONTROL DETAILS
LANDSCAPE L101	LANDSCAPE PLAN
STRUCTURAL S101	STRUCTURAL NOTES AND DETAILS
ELECTRICAL E000 E001 E010 E0500	ELECTRICAL SYMBOLS AND ABBREVIATIONS ELECTRICAL GENERAL NOTES ELECTRICAL SITE PLAN ELECTRICAL DETAILS

BID ALTERNATE DEDUCTS: DEDUCT ALTERNATE

BASE BID: PROVIDE ALL WORK AS SHOWN IN THE DRAWINGS AND SPECIFICATIONS.

BID ALTERNATE DEDUCT #1: PROVIDE BASE BID AND DEDUCT POND DREDGING SCOPE, INCLUDING ASSOCIATED TURF RESTORATION AND DREDGING SPOILS STORAGE/RELOCATION.

BID ALTERNATE DEDUCT #2: PROVIDE BID ALTERNATE DEDUCT #1 AND LEAVE CONCRETE/ASPHALT DEBRIS ADJACENT TO ROAD IN PLACE. DEDUCT PERIMETER RIPRAP EROSION CONTROL W/ GEOTEXTILE.

BID ALTERNATE DEDUCT #3: PROVIDE BID ALTERNATE DEDUCT #2 AND DEDUCT NEW CONCRETE FISHING PIER, KAYAK BEACH, AND ASSOCIATED ASPHALT TRAIL CONNECTION.

BID ALTERNATE DEDUCT #4: PROVIDE BID DEDUCT ALTERNATE #3 AND DEDUCT ALL PLANTINGS SHOWN ON L101 EXCEPT THE SHORELINE SEED MIX AND TURF GRASS.

[illegible]

CIVIL SITE NOTES

GENERAL

1. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE LOCAL, STATE, AND FEDERAL LAWS AND REGULATIONS.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL PERMITS AND APPROVALS ARE OBTAINED FROM THE RESPECTIVE CITY, COUNTY, AND STATE AGENCIES PRIOR TO STARTING CONSTRUCTION.
3. FOR VIEWING CLARITY OF THESE PLANS, THE PIPES OR STRUCTURES MAY NOT BE DRAWN TO SCALE.
4. THE UTILITIES INDICATED ON THESE PLANS MAY NOT BE A COMPLETE INVENTORY OF ALL UTILITIES CURRENTLY ON OR NEAR THE SITE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING PUBLIC AND/OR PRIVATE UTILITY LOCATING SERVICES PRIOR TO STARTING CONSTRUCTION.
5. THE SIZE AND LOCATIONS OF THE UTILITIES INDICATED ON THESE PLANS ARE APPROXIMATE. THE CONTRACTOR IS TO DETERMINE AND FIELD VERIFY ALL HORIZONTAL AND VERTICAL LOCATIONS PRIOR TO STARTING CONSTRUCTION ACTIVITIES.
6. ANY DISCREPANCIES OR CONFLICTS WHICH BECOME APPARENT BEFORE OR DURING CONSTRUCTION SHALL BE REPORTED TO THE ATTENTION OF THE ENGINEER OF RECORD AND COR PRIOR TO CONSTRUCTION SO THAT REDESIGN OR CLARIFICATION MAY OCCUR.

DEMOLITION

1. ALL DEMOLISHED MATERIAL, TO BECOME THE PROPERTY OF THE CONTRACTOR, UNLESS OTHERWISE NOTED, AND SHALL BE LEGALLY DISPOSED OF OFFSITE.
2. CONDUCT DEMOLITION AND CONSTRUCTION ACTIVITIES IN SUCH A MANNER TO PROVIDE MINIMUM TRAFFIC DISRUPTIONS. CONTRACTOR TO INSTALL TRAFFIC CONTROL DEVICES PER THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), LATEST EDITION, AS NECESSARY.
3. ALL EXISTING TREES TO REMAIN SHALL BE PRESERVED AND PROTECTED.
4. CONTRACTOR SHALL COORDINATE ALL WORK ASSOCIATED WITH THE REMOVAL, RELOCATION, AND DEMOLITION OF EXISTING UTILITIES WITH THE RESPECTIVE UTILITY COMPANY.
5. EXISTING UNDERGROUND ELECTRIC AND TELEPHONE CABLES THAT ARE SHOWN TO BE ABANDONED IN PLACE MAY BE CUT AS NECESSARY TO FACILITATE CONSTRUCTION ACTIVITIES. THE CONTRACTOR SHALL ENSURE THAT LINES ARE NOT ACTIVE PRIOR TO CUTTING.
6. CONTRACTOR TO MAINTAIN PROPER DRAINAGE IN DEMOLITION AREAS.
7. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING DAMAGE TO EXISTING BUILDINGS AND/OR SITE ENTITIES THAT ARE TO REMAIN.
8. CONCRETE TO BE SAWCUT SHALL BE SAWCUT TO THE NEAREST CONCRETE JOINT BEYOND THE LIMITS ILLUSTRATED.

SITE PLAN

1. ALL DIMENSIONS ARE TO THE BACK OF CURB. WHEN CURBS ARE NOT PRESENT, DIMENSION ARE TO THE EDGE OF PAVEMENT.
2. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS ON THE SITE PRIOR TO CONSTRUCTION AND IDENTIFY DISCREPANCIES TO THE ENGINEER OF RECORD AND COR.
3. SEE SHEET CS501 FOR PROPOSED SITE IMPROVEMENT DETAILS REFERENCED.
4. WHERE WORK IS DONE IN EXISTING AREAS, THE EXISTING FINISHED CONDITIONS SHALL BE REPAIRED OR REPLACED IF DAMAGED. IF REPAIRS ARE REQUIRED NEW FINISHED CONDITIONS SHALL MATCH EXISTING CONDITIONS, UNLESS OTHERWISE NOTED.

GRADING

1. CONTRACTOR SHALL ENSURE THAT POSITIVE DRAINAGE IN IMPROVED AREAS IS ACHIEVED. CONTRACTOR TO TEST AND CORRECT ANY PONDING CONDITIONS.
2. ALL SLOPES SHALL BE 3:1 OR FLATTER, UNLESS OTHERWISE SHOWN.
3. ALL GRADES AT THE PROJECT BOUNDARY OR PROPERTY LINE SHALL MEET EXISTING GRADES.
4. BUILDING PAD AREAS AND PAVED AREAS DESIGNATED FOR FILL SHALL BE CONSTRUCTED OF SUITABLE FILL MATERIAL AND COMPACTED PER SPECIFICATIONS. ALL FILL AREAS ARE TO BE STRIPPED OF TOPSOIL PRIOR TO PLACEMENT OF FILL.
5. ANY EXCESS SOIL MATERIAL SHALL BE EXPORTED FROM THE SITE AFTER CONSTRUCTION IS COMPLETE.

UTILITIES

1. CONTRACTOR TO MAINTAIN ALL EXISTING UTILITIES TO STAY IN SERVICE DURING CONSTRUCTION.
2. CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES 72 HOURS PRIOR TO CONSTRUCTION TO VERIFY UTILITIES THAT MIGHT BE PRESENT ON SITE.
3. THE CONTRACTOR IS REQUIRED TO PROVIDE ADEQUATE SHEETING, SHORING, AND Dewatering IN ALL TRENCHES AND EXCAVATIONS AS NECESSARY IN ACCORDANCE WITH OSHA, AND IS SOLELY RESPONSIBLE FOR THE SAFETY OF SHEETING, SHORING, AND Dewatering.
4. WHEN CONNECTIONS ARE TO BE MADE TO EXISTING PIPING AND STRUCTURES OR WHERE CONSTRUCTION IS IN THE VICINITY OF EXISTING PIPING, THE LOCATION AND ELEVATION OF THE EXISTING PIPING AND STRUCTURES SHALL BE FIELD VERIFIED BY THE CONTRACTOR. IF ANY DISCREPANCIES ARE FOUND, THEN THE ENGINEER SHALL BE NOTIFIED IMMEDIATELY.
5. ALL WORK SHALL BE PERFORMED IN A SAFE MANNER. ALL SAFETY RULES AND GUIDELINES OF O.S.H.A. SHALL BE FOLLOWED. THE CONTRACTOR SHALL BE WHOLLY RESPONSIBLE FOR ANY INJURIES TO HIS EMPLOYEES, AND ANY DAMAGE TO PRIVATE PROPERTY OR PERSONS DURING THE COURSE OF THIS PROJECT.
6. MEASUREMENTS AND SLOPES SHOWN ARE FROM CENTER OF STRUCTURE TO CENTER OF STRUCTURE.
7. QUANTITIES PROVIDED ARE ESTIMATES AND SHALL BE CONFIRMED BY THE CONTRACTOR.

EROSION CONTROL

1. EROSION AND SEDIMENTATION CONTROL DEVICES TO BE INSTALLED PRIOR TO BEGINNING CONSTRUCTION.
2. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN SEVEN (7) DAYS AFTER WORK HAS CEASED. UNLESS ACTIVITY IN THAT PART OF THE SITE WILL RESUME WITHIN TWENTY-ONE (21) DAYS.
3. PROVIDE SILT FENCE AND/OR OTHER CONTROL DEVICES, AS MAY BE REQUIRED, TO CONTROL SOIL EROSION DURING UTILITY CONSTRUCTION. ALL DISTURBED AREAS SHALL BE CLEANED, GRADED, AND STABILIZED WITH GRASSING IMMEDIATELY AFTER THE UTILITY INSTALLATION.
4. EROSION CONTROL AND SEDIMENTATION CONTROL DEVICES TO BE MAINTAINED SUCH THAT THEY FUNCTION AS INTENDED, AFTER COMPLETION OF THE PROJECT THE CONTRACTOR SHALL REMOVE ALL DEVICES WHERE A GOOD STAND OF GRASS HAS BEEN ESTABLISHED AND EROSION IS NO LONGER EVIDENT. REMOVAL OF THE REMAINING DEVICES SHALL OCCUR AS OTHER AREAS ARE ESTABLISHED.
5. EROSION CONTROL MEASURES SHALL BE INSPECTED EVERY SEVEN (7) DAYS OR AFTER EACH RAINFALL OCCURRENCE THAT EXCEEDS ONE-HALF (1/2) INCH. DAMAGED OR INEFFECTIVE DEVICES SHALL BE REPAIRED OR REPLACED IMMEDIATELY.
6. ALL AREAS DISTURBED BY GRADING, EXCAVATION, AND GENERAL CONSTRUCTION SHALL BE SEEDED, MULCHED, AND RESTORED IN ACCORDANCE WITH THE SPECIFICATIONS.
7. THE CONTRACTOR MUST TAKE NECESSARY ACTION TO MINIMIZE THE TRACKING OF MUD ONTO PAVED ROADWAYS. THE CONTRACTOR SHALL DAILY REMOVE MUD/SOIL FROM PAVEMENT, AS MAY BE REQUIRED.
8. SEE SHEET CS501 FOR PROPOSED EROSION AND SEDIMENT CONTROL DETAILS REFERENCED.

CIVIL SITE ABBREVIATIONS

AC	ACRE	MAX	MAXIMUM
ABC	AGGREGATE BASE COURSE	MB	MAN BOX
ADA	AMERICANS WITH DISABILITIES ACT	MEQ	MEET EXISTING GRADE
ADSR	ALTERNATE	MEMO	MEMORANDUM
ALT	ALTERNATE	MFG	MANUFACTURED OR MANUFACTURE
APPROX	APPROXIMATE	MIN	MINIMUM
ARV	AIR RELEASE VALVE	MISC	MISCELLANEOUS
ASPH	ASPHALT	MISC	MISCELLANEOUS
ASST	ASSEMBLY	MJ	MECHANICAL JOINT
ASST	ASSEMBLY	MOD	MODIFY
ASST	ASSEMBLY	MOT	MAINTENANCE OF TRAFFIC
ASST	ASSEMBLY	MULT	MULTIPLE
ASST	ASSEMBLY	MUNIC	MUNICIPAL
ASST	ASSEMBLY	MUTCD	MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES
ASST	ASSEMBLY	NA	NOT APPLICABLE
ASST	ASSEMBLY	NC	NOT IN CONTRACT
ASST	ASSEMBLY	NR	NORMAL
ASST	ASSEMBLY	NOM	NORMAL
ASST	ASSEMBLY	NRCP	NON-REINFORCED CONCRETE PIPE
ASST	ASSEMBLY	NTP	NOTICE TO PROCEED
ASST	ASSEMBLY	NTS	NOT TO SCALE
ASST	ASSEMBLY	OC	ON CENTER
ASST	ASSEMBLY	PAR	PARALLEL
ASST	ASSEMBLY	PAVT	PAVEMENT
ASST	ASSEMBLY	PULL BOX	PULL BOX
ASST	ASSEMBLY	PC	POINT OF CURVE
ASST	ASSEMBLY	PCC	POINT OF COMPOUND CURVE
ASST	ASSEMBLY	PCP	CONCRETE PAVEMENT
ASST	ASSEMBLY	PE	POLYETHYLENE (PLASTIC)
ASST	ASSEMBLY	PERF	PERFORATED
ASST	ASSEMBLY	PERM	PERMANENT
ASST	ASSEMBLY	PERF	PERFORATED
ASST	ASSEMBLY	PERF	PERFORATED
ASST	ASSEMBLY	PH	PROFILE GRADE
ASST	ASSEMBLY	PI	POINT OF INTERSECTION
ASST	ASSEMBLY	PIV	POINT OF INTERSECTION
ASST	ASSEMBLY	PL	PROPERTY LINE
ASST	ASSEMBLY	PL	POLYPROPYLENE
ASST	ASSEMBLY	PR	PROPOSED
ASST	ASSEMBLY	PRG	POINT OF REVERSE CURVE
ASST	ASSEMBLY	PRG	PARKING
ASST	ASSEMBLY	PROJ	PROJECT
ASST	ASSEMBLY	PROP	PROPOSED
ASST	ASSEMBLY	PRV	PRESSURE RELIEF VALVE
ASST	ASSEMBLY	PS	POUNDS PER SQUARE INCH
ASST	ASSEMBLY	PS	PIPE SLEEVE
ASST	ASSEMBLY	PT	POLYETHYLENE (PLASTIC)
ASST	ASSEMBLY	PVC	POLYVINYL CHLORIDE (PLASTIC)
ASST	ASSEMBLY	R	RADIUS
ASST	ASSEMBLY	RC	REINFORCED CONCRETE
ASST	ASSEMBLY	RC	REINFORCED CONCRETE BOX
ASST	ASSEMBLY	RC	REINFORCED CONCRETE PIPE
ASST	ASSEMBLY	RD	ROAD OR ROAD DRIVE
ASST	ASSEMBLY	RD	REDUCER
ASST	ASSEMBLY	REQ	REQUIRED OR REQUIRED
ASST	ASSEMBLY	RFR	REQUEST FOR INFORMATION
ASST	ASSEMBLY	RHW	RIGHT OF WAY
ASST	ASSEMBLY	RR	RAILROAD
ASST	ASSEMBLY	RT	RIGHT
ASST	ASSEMBLY	SAN	SANITARY
ASST	ASSEMBLY	SB	SPASH BLOCK
ASST	ASSEMBLY	SCH	SCHEDULE
ASST	ASSEMBLY	SD	STORM DRAIN
ASST	ASSEMBLY	SDL	SADDLE
ASST	ASSEMBLY	SECT	SECTION
ASST	ASSEMBLY	SEP	SEPARATE
ASST	ASSEMBLY	SF	SQUARE FOOT (FEET)
ASST	ASSEMBLY	SG	SINGLE
ASST	ASSEMBLY	SHLD	SHOULDER
ASST	ASSEMBLY	SDV	SHUT OFF VALVE
ASST	ASSEMBLY	SPEC	SPECIFICATION
ASST	ASSEMBLY	SF	SQUARE FEET
ASST	ASSEMBLY	SS	SANITARY SEWER
ASST	ASSEMBLY	STA	STATION
ASST	ASSEMBLY	STM	STEAM
ASST	ASSEMBLY	STD	STANDARD
ASST	ASSEMBLY	SURV	SURVEY
ASST	ASSEMBLY	SV	SURVEY
ASST	ASSEMBLY	SY	SQUARE YARD
ASST	ASSEMBLY	T	TELEPHONE
ASST	ASSEMBLY	TBM	TEMPORARY BENCHMARK
ASST	ASSEMBLY	TR-X	TEST BORING/AX (E.G. TR-01)
ASST	ASSEMBLY	TD	TRENCH DRAIN
ASST	ASSEMBLY	TE	TEMP
ASST	ASSEMBLY	THK	THICKNESS
ASST	ASSEMBLY	TOT	TOP OF BANK
ASST	ASSEMBLY	TOC	TOP OF CURB
ASST	ASSEMBLY	TOPO	TOPOGRAPHY
ASST	ASSEMBLY	TOP	TOP OF SLOPE
ASST	ASSEMBLY	TP	TELEPHONE POLE
ASST	ASSEMBLY	TP	TYPICAL
ASST	ASSEMBLY	TW	TOP OF WALL
ASST	ASSEMBLY	UD	UNDERDRAIN
ASST	ASSEMBLY	UP	UTILITY POLE
ASST	ASSEMBLY	UTL	UTILITY
ASST	ASSEMBLY	USGS	U.S. GEOLOGICAL SURVEY
ASST	ASSEMBLY	V	VALVE
ASST	ASSEMBLY	VB	VALVE BOX
ASST	ASSEMBLY	VC	VERTICAL CURVE
ASST	ASSEMBLY	VERT	VERTICAL
ASST	ASSEMBLY	VIF	VERIFY IN FIELD
ASST	ASSEMBLY	VOL	VOLUME
ASST	ASSEMBLY	W	WATER LINE
ASST	ASSEMBLY	WM	WATER METER OR WATER MAIN
ASST	ASSEMBLY	WT	WATER TABLE
ASST	ASSEMBLY	WTR	WATER
ASST	ASSEMBLY	WW	WASTE WATER
ASST	ASSEMBLY	WWF	WEALED WIRE FABRIC
ASST	ASSEMBLY	XPFR	TRANSFORMER

PROPOSED LEGEND

MATCH EXISTING GRADE		TEMPORARY SEEDING	
SPOT ELEVATION		CONSTRUCTION STAGING AREA	
TOP OF CURB		CONCRETE LIMITS	
EDGE OF PAVEMENT		LIGHT DUTY ASPHALT LIMITS	
TOP OF CURB GUTTER		HEAVY DUTY ASPHALT LIMITS	
PROPOSED MINOR CONTOUR		ASPHALT RESURFACING LIMITS	
PROPOSED MAJOR CONTOUR		GRAVEL LIMITS	
STORM STRUCTURES		BUILDING LIMITS	
STORM SEWER		LIGHT POLE	
SANITARY STRUCTURE		INLET PROTECTION	
SANITARY SEWER		CONCRETE WASHOUT AREA	
WATER MAIN		WATER TEE, BENDS	
UNDERGROUND ELECTRIC		WATER MAIN VALVE	
ROOF DRAIN		CLEANOUT	
UNDER DRAIN		FIRE HYDRANT	
FIBER OPTIC		WATER MAIN REDUCER	
GAS MAIN		PARKING BUMPER	
FIRE MAIN		DIRECTION OF FLOW	
SANITARY FORCE MAIN			
CONSTRUCTION FENCE			
TREE PROTECTION			
SILT FENCE			
SUPER SILT FENCE			
CENTERLINE			
FEMA FLOOD ZONE			
SECTION NAME			
SECTION LOCATED ON SHEET NO.			

CONSULTANT

LANDSCAPE ARCHITECT:
HITCHCOCK DESIGN GROUP
405 MASSACHUSETTS AVENUE, SUITE 8
INDIANAPOLIS, IN 46204
317.536.6161

DESIGNER OF RECORD

A.E.
GUIDON DESIGN INC.
1221 N. PENNSYLVANIA STREET
INDIANAPOLIS, IN 46202
317.800.6388

STAMP



Office of
Construction
and Facilities
Management



Drawing Title

CIVIL LEGEND AND NOTES

Approved: Project Director

Phase

BID DOCUMENTS

Project Title

POND AREA IMPROVEMENT
PROJECT

Location

1900 E. MAIN ST., DANVILLE, IL 61832

Issue Date

05/28/2024

Checked

CMB

Drawn

SJC

Project Number

550-24-109

Building Number

N/A

Drawing Number

C1101

PROJECT
BOUNDARY



PHASING PLAN NOTES

PHASE 1
INSTALL EROSION CONTROL MEASURES AND TEMPORARY FENCING TO SECURE WORK AREA. PERFORM CLEARING AND GRUBBING OF TREES AND PERIMETER VEGETATION. DREDGING ACTIVITIES TO REQUIRED DEPTH UTILIZING INDICATED DREDGING SPOILS STOCKPILE AREA. ONCE SUFFICIENTLY DRY FOR TRANSPORT, RELOCATE SPOILS TO A SOIL STORAGE LOCATION ON VA DANVILLE CAMPUS. COORDINATE WITH COR FOR LOCATION.

PHASE 2
WHILE POND LEVELS ARE LOWERED DUE TO DREDGING ACTIVITY, PERFORM BRIDGE ABUTMENT AND RETAINING WALL REPAIRS. INSTALL PERIMETER RIPRAP, KAYAK BEACH/LAUNCH, AND FISHER PIER.

PHASE 3
PERFORM REMAINING SITE SCOPE INCLUDING ELECTRICAL AND LIGHT INSTALLATION, ASPHALT TRAIL, AND PAVEMENT PATCHING. ENSURE ALL DREDGING SPOILS HAVE BEEN REMOVED FROM PROJECT AREA AND RESTORE TURF GRASS. INSTALL REMAINING VEGETATION.

PHASING GENERAL NOTES

1. LIGHT POLE AND ELECTRICAL INSTALLATION MAY BE MOVED TO OTHER PHASES WITH COR APPROVAL.
2. DREDGING SPOILS DRYING TIME MAY REQUIRE LEAVING SPOILS IN THE STOCKPILE AREA DURING PHASES 2 AND/OR 3. COORDINATE WITH COR ON SPOIL DRYING PROGRESS REGULARLY THROUGHOUT CONSTRUCTION. REASONABLY PROTECT SPOILS STOCKPILE FROM WET WEATHER EVENTS UNTIL DRY ENOUGH TO TRANSPORT.
3. THIS POND SERVES AS A STORMWATER DETENTION POND. RAINFALL EVENTS WILL TEMPORARILY IMPACT WATER SURFACE ELEVATIONS. CONTRACTOR TO COORDINATE ANTICIPATED WEATHER WITH SCHEDULE AND PROVIDE DEWATERING OF POND AS REQUIRED.
4. PROTECT THE POND'S FISH HABITAT TO THE GREATEST EXTENT PRACTICABLE. DO NOT DEWATER POND MORE THAN IS REQUIRED TO FACILITATE IMMEDIATE WORK.

BID ALTERNATE DEDUCTS:

BASE BID: PROVIDE ALL WORK AS SHOWN IN THE DRAWINGS AND SPECIFICATIONS.

BID ALTERNATE DEDUCT #1: PROVIDE BASE BID AND DEDUCT POND DREDGING SCOPE, INCLUDING ASSOCIATED TURF RESTORATION AND DREDGING SPOILS STORAGE/RELOCATION.

BID ALTERNATE DEDUCT #2: PROVIDE BID ALTERNATE DEDUCT #1 AND LEAVE CONCRETE/ASPHALT DEBRIS ADJACENT TO ROAD IN PLACE. DEDUCT PERIMETER RIPRAP EROSION CONTROL WI GEOTEXTILE.

BID ALTERNATE DEDUCT #3: PROVIDE BID ALTERNATE DEDUCT #2 AND DEDUCT NEW CONCRETE FISHING PIER, KAYAK BEACH, AND ASSOCIATED ASPHALT TRAIL CONNECTION.

BID ALTERNATE DEDUCT #4: PROVIDE BID DEDUCT ALTERNATE #3 AND DEDUCT ALL PLANTINGS SHOWN ON L101 EXCEPT THE SHORELINE SEED MIX AND TURF GRASS.

PHASING PLAN
1" = 20'

CONSULTANT

LANDSCAPE ARCHITECT:
HITCHCOCK DESIGN GROUP
405 MASSACHUSETTS AVENUE, SUITE B
INDIANAPOLIS, IN 46204
317.536.6161

DESIGNER OF RECORD

A/E:
GUIDON DESIGN INC.
1221 N. PENNSYLVANIA STREET
INDIANAPOLIS, IN 46202
317.800.6388

STAMP



Office of
Construction
and Facilities
Management



Drawing Title
PHASING PLAN

Approved: Project Director

Phase
BID DOCUMENTS

Project Title
**POND AREA IMPROVEMENT
PROJECT**

Location
1900 E. MAIN ST., DANVILLE, IL 61832

Issue Date
05/28/2024

Checked
CMB


Drawn
SJC


Project Number
550-24-109

Building Number
N/A

Drawing Number

C102

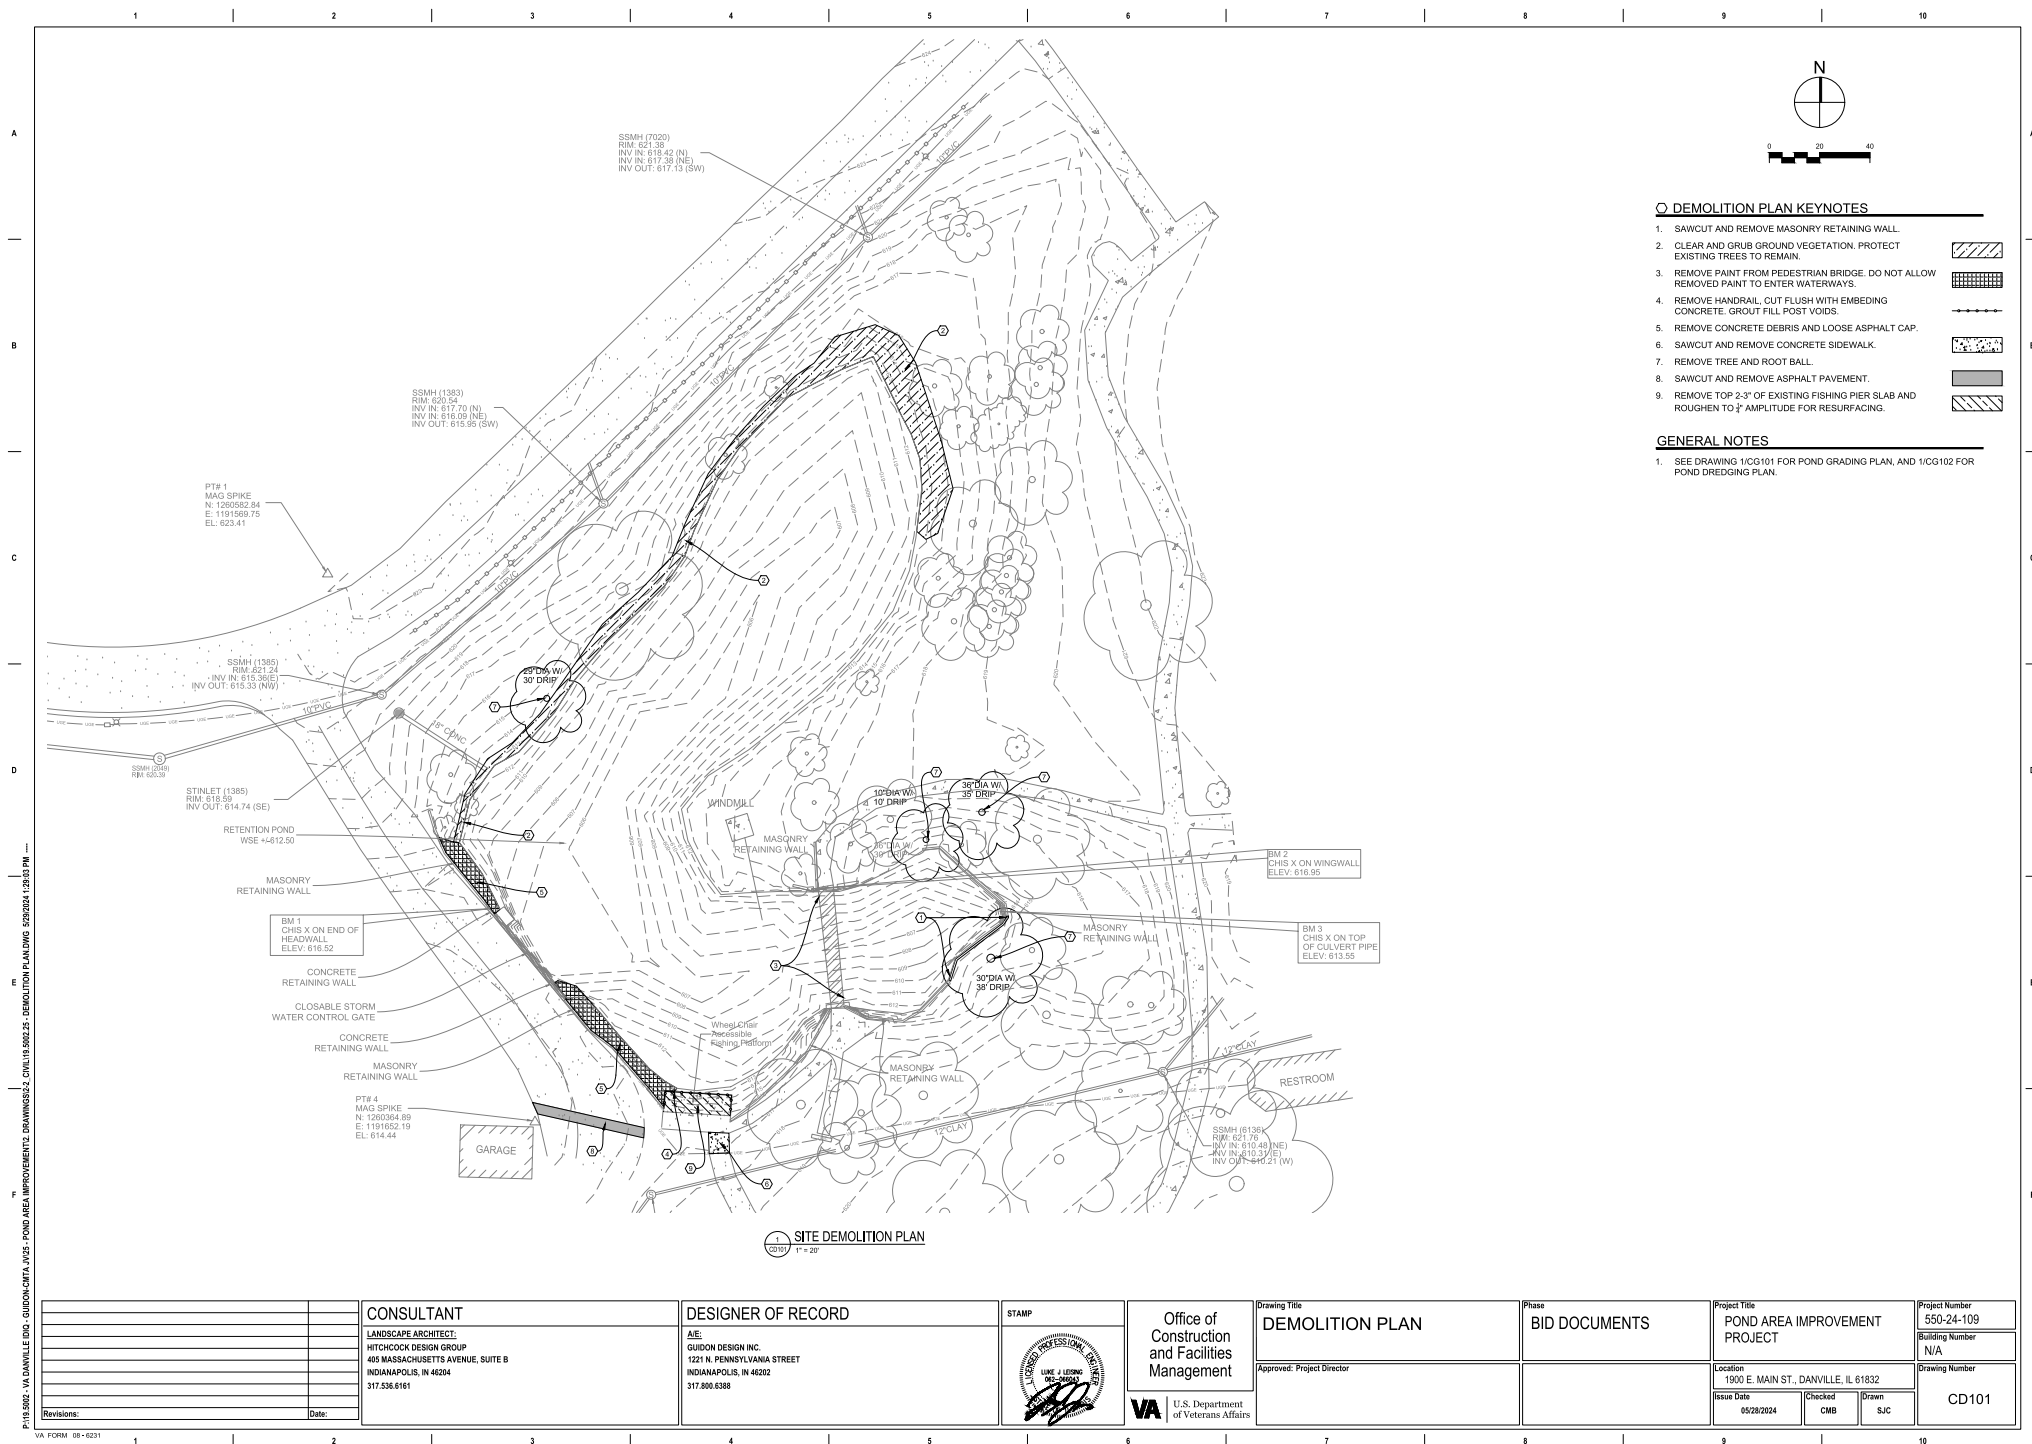


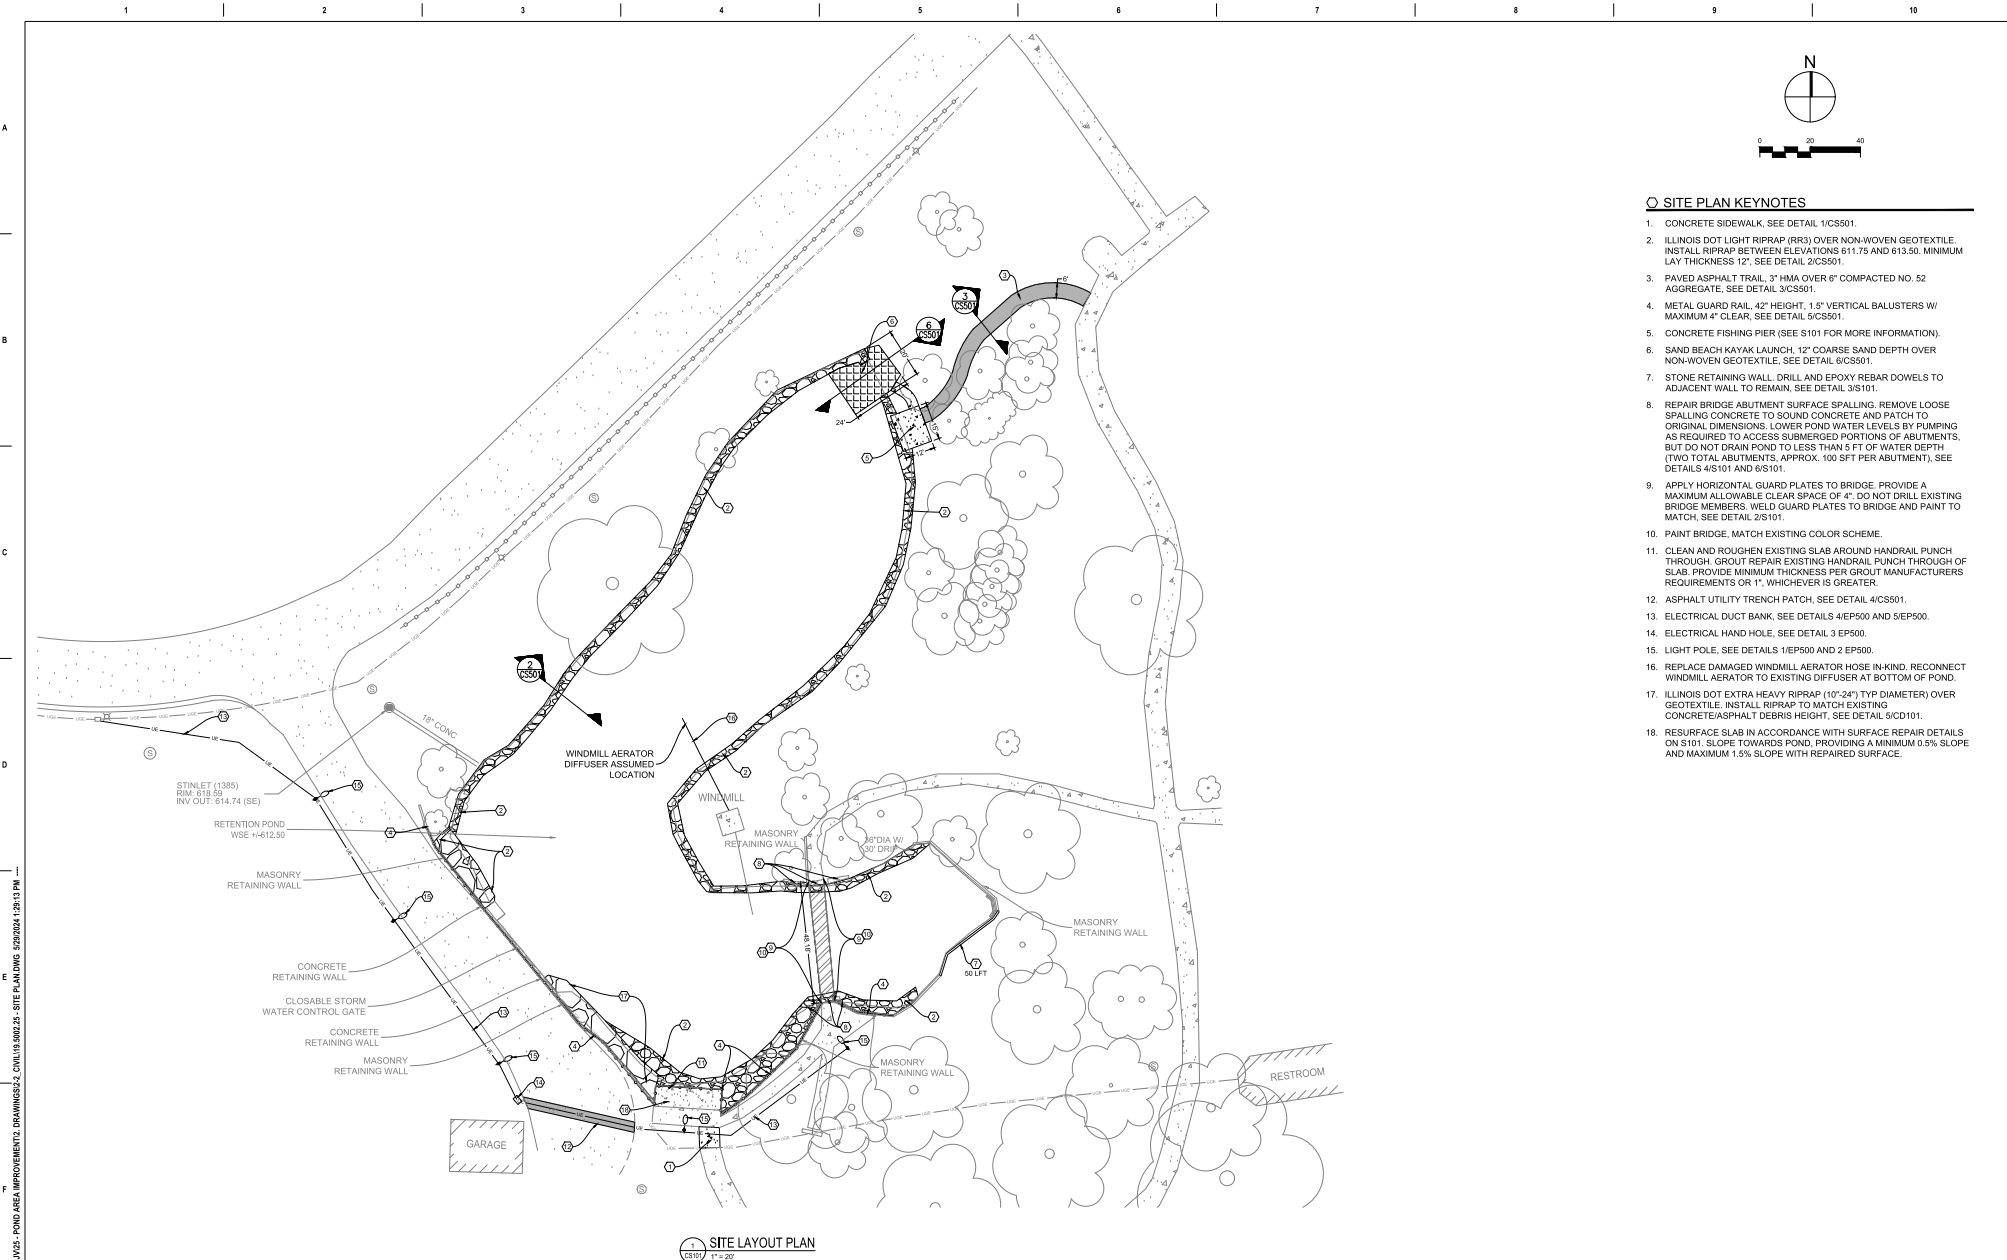


- SITE PLAN KEYNOTES**
1. CONCRETE SIDEWALK, SEE DETAIL 1/CS501.
 2. ILLINOIS DOT LIGHT RIPRAP (IR3) OVER NON-WOVEN GEOTEXTILE. INSTALL RIPRAP BETWEEN ELEVATIONS 611.75 AND 613.50. MINIMUM LAY THICKNESS 12". SEE DETAIL 2/CS501.
 3. PAVED ASPHALT TRAIL, 3" HMA OVER 6" COMPACTED NO. 52 AGGREGATE. SEE DETAIL 3/CS501.
 4. METAL GUARD RAIL, 42" HEIGHT, 1.5" VERTICAL BALUSTERS W/ MAXIMUM 4" CLEAR. SEE DETAIL 5/CS501.
 5. CONCRETE FISHING PIER (SEE S101 FOR MORE INFORMATION).
 6. SAND BEACH KAYAK LAUNCH, 12" COARSE SAND DEPTH OVER NON-WOVEN GEOTEXTILE. SEE DETAIL 6/CS501.
 7. STONE RETAINING WALL. DRILL AND EPOXY REBAR DOWELS TO ADJACENT WALL TO REMAIN. SEE DETAIL 3/S101.
 8. REPAIR BRIDGE ABUTMENT SURFACE SPALLING. REMOVE LOOSE SPALLING CONCRETE TO SOUND CONCRETE AND PATCH TO ORIGINAL DIMENSIONS. LOWER POND WATER LEVELS BY PUMPING AS REQUIRED TO ACCESS SUBMERGED PORTIONS OF ABUTMENTS, BUT DO NOT DRAIN POND TO LESS THAN 5 FT OF WATER DEPTH (TWO TOTAL ABUTMENTS, APPROX. 100 SFT PER ABUTMENT), SEE DETAILS 4/S101 AND 6/S101.
 9. APPLY HORIZONTAL GUARD PLATES TO BRIDGE. PROVIDE A MAXIMUM ALLOWABLE CLEAR SPACE OF 4". DO NOT DRILL EXISTING BRIDGE MEMBERS. WELD GUARD PLATES TO BRIDGE AND PAINT TO MATCH. SEE DETAIL 2/S101.
 10. PAINT BRIDGE, MATCH EXISTING COLOR SCHEME.
 11. CLEAN AND ROUGHEN EXISTING SLAB AROUND HANDRAIL PUNCH THROUGH. GROUT REPAIR EXISTING HANDRAIL PUNCH THROUGH OF SLAB. PROVIDE MINIMUM THICKNESS PER GROUT MANUFACTURERS REQUIREMENTS OR 1", WHICHEVER IS GREATER.
 12. ASPHALT UTILITY TRENCH PATCH. SEE DETAIL 4/CS501.
 13. ELECTRICAL DUCT BANK. SEE DETAILS 4/EP500 AND 5/EP500.
 14. ELECTRICAL HAND HOLE. SEE DETAIL 3 EP500.
 15. LIGHT POLE. SEE DETAILS 1/EP500 AND 2 EP500.
 16. REPLACE DAMAGED WINDMILL AERATOR HOSE IN-KIND. RECONNECT WINDMILL AERATOR TO EXISTING DIFFUSER AT BOTTOM OF POND.
 17. ILLINOIS DOT EXTRA HEAVY RIPRAP (10"-24" TYP DIAMETER) OVER GEOTEXTILE. INSTALL RIPRAP TO MATCH EXISTING CONCRETE/ASPHALT DEBRIS HEIGHT. SEE DETAIL 6/CD101.
 18. RESURFACE SLAB IN ACCORDANCE WITH SURFACE REPAIR DETAILS ON S101. SLOPE TOWARDS POND, PROVIDING A MINIMUM 0.5% SLOPE AND MAXIMUM 1.5% SLOPE WITH REPAIRED SURFACE.

P10-5002 - VA DANVILLE DRG. GUIDON-CRITA, INC. - POND AREA IMPROVEMENTS DRAWINGS-2, CON. US 5602-25 - SITE PLAN/UTILITY 2/20/2024 1:20:13 PM

Revisions: Date:		CONSULTANT LANDSCAPE ARCHITECT: HITCHCOCK DESIGN GROUP 405 MASSACHUSETTS AVENUE, SUITE B INDIANAPOLIS, IN 46204 317.536.6161	DESIGNER OF RECORD A/E: GUIDON DESIGN INC. 1221 N. PENNSYLVANIA STREET INDIANAPOLIS, IN 46202 317.800.6388	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title SITE AND UTILITY PLAN Approved: Project Director	Phase BID DOCUMENTS	Project Title POND AREA IMPROVEMENT PROJECT Location 1900 E. MAIN ST., DANVILLE, IL 61832 Issue Date 05/28/2024 Checked CMB Drawn SJC	Project Number 550-24-109 Building Number N/A Drawing Number CS101
--	--	--	--	------------------------------	---	---	---	---	--

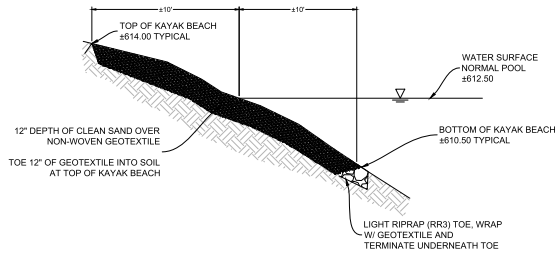


8 SAND BEACH KAYAK LAUNCH
NTS

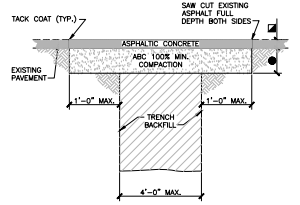


- 4" (50mm) MINIMUM OR THICKNESS OF EXISTING PAVEMENT WHICHEVER IS GREATER. INSTALL IN MINIMUM TWO LIFTS.
- 6" (150mm) MINIMUM ABC OR THICKNESS OF EXISTING GRANULAR BASE COURSE MATERIALS (E.G. ABC & SELECT MATERIAL) WHICHEVER IS GREATER.

4 ASPHALT UTILITY TRENCH PATCH
NTS

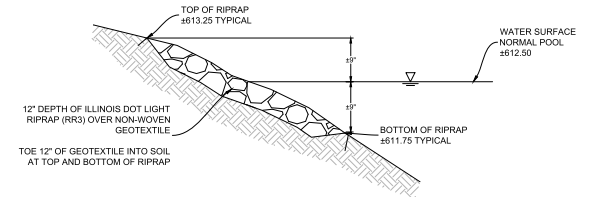


2 PERIMETER RIPRAP LAY DETAIL
NTS

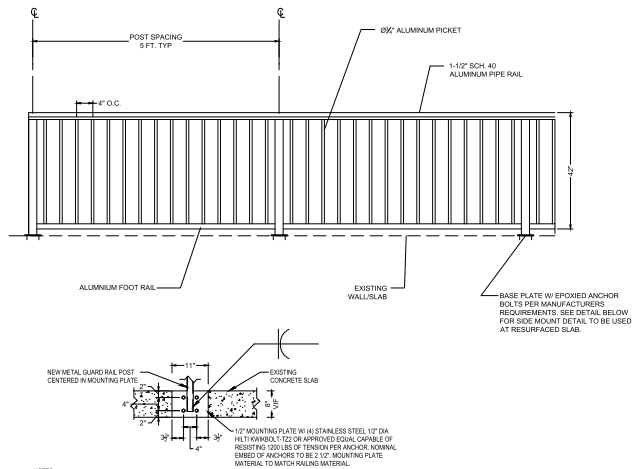



- NOTES:
1. DETAIL IS APPLICABLE TO RESURFACED FISHING LBS

5 METAL GUARD RAIL
NTS

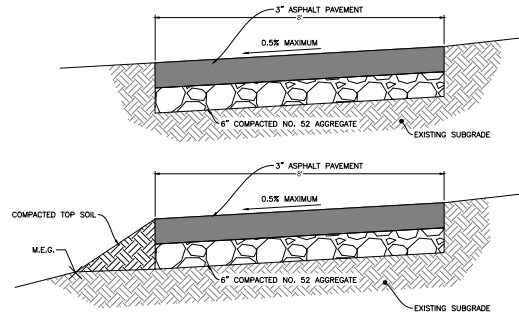

- NOTE:
ASPHALT SIDEWALK CROSS SLOPE NOT TO EXCEED 0.5%. WHERE EXISTING GROUND SLOPE EXCEEDS 0.5% FILL LOWER ELEVATION TO MAINTAIN CROSS SLOPE.


3 ASPHALT TRAIL
NTS

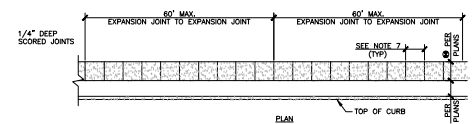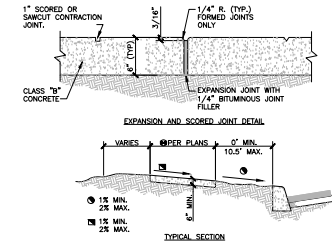



- NOTES:
1. EXPANSION JOINTS SHALL BE LOCATED WHERE SIDEWALK ABUTS CONCRETE DRIVEWAYS, CURB OR OTHER ADJACENT STRUCTURES.
2. ONE-HALF INCH BITUMINOUS JOINT FILLER SHALL BE INSTALLED AT EXPANSION JOINT LOCATIONS AND SHALL EXTEND THE FULL DEPTH OF THE CONCRETE.
3. 1" DEEP CONTRACTION JOINTS SHALL BE PLACED AT INTERVALS OF APPROXIMATELY 15' OR AT A SPACING THAT MATCHES THE ADJACENT CURB.
4. FORMED CONTRACTION JOINTS SHALL BE FINISHED WITH A TOOL HAVING A 1/4" RADIUS.
5. SCORED JOINTS SHALL BE 1/4" DEEP AND PLACED AT THE SPACING INDICATED FOR THE WIDTH OF SIDEWALK OR MATCH SCORED JOINTS OF ADJACENT CURB.
6. CONCRETE SHALL BE FINISHED BY MEANS OF A FLOAT, STEEL TROWELLED AND BROOMED WITH A FINE BRUSH IN A TRANSVERSE DIRECTION.
7. 1/4" DEEP SCORED JOINTS (TYP) SPACED AT 6' OR EQUAL TO SIDEWALK WIDTH.


1 CONCRETE SIDEWALK
NTS

		CONSULTANT		DESIGNER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title SITE DETAILS		Phase BID DOCUMENTS		Project Title POND AREA IMPROVEMENT PROJECT		Project Number 550-24-109	
		LANDSCAPE ARCHITECT: HITCHCOCK DESIGN GROUP 405 MASSACHUSETTS AVENUE, SUITE B INDIANAPOLIS, IN 46204 317.536.6161		A/E: GUIDON DESIGN INC. 1221 N. PENNSYLVANIA STREET INDIANAPOLIS, IN 46202 317.800.6388				 U.S. Department of Veterans Affairs		Approved: Project Director				Location 1900 E. MAIN ST., DANVILLE, IL 61832		Building Number N/A	
Revisions:		Date:												Issue Date 05/28/2024		Drawing Number CS501	
														Checked CMB		Drawn SJC	

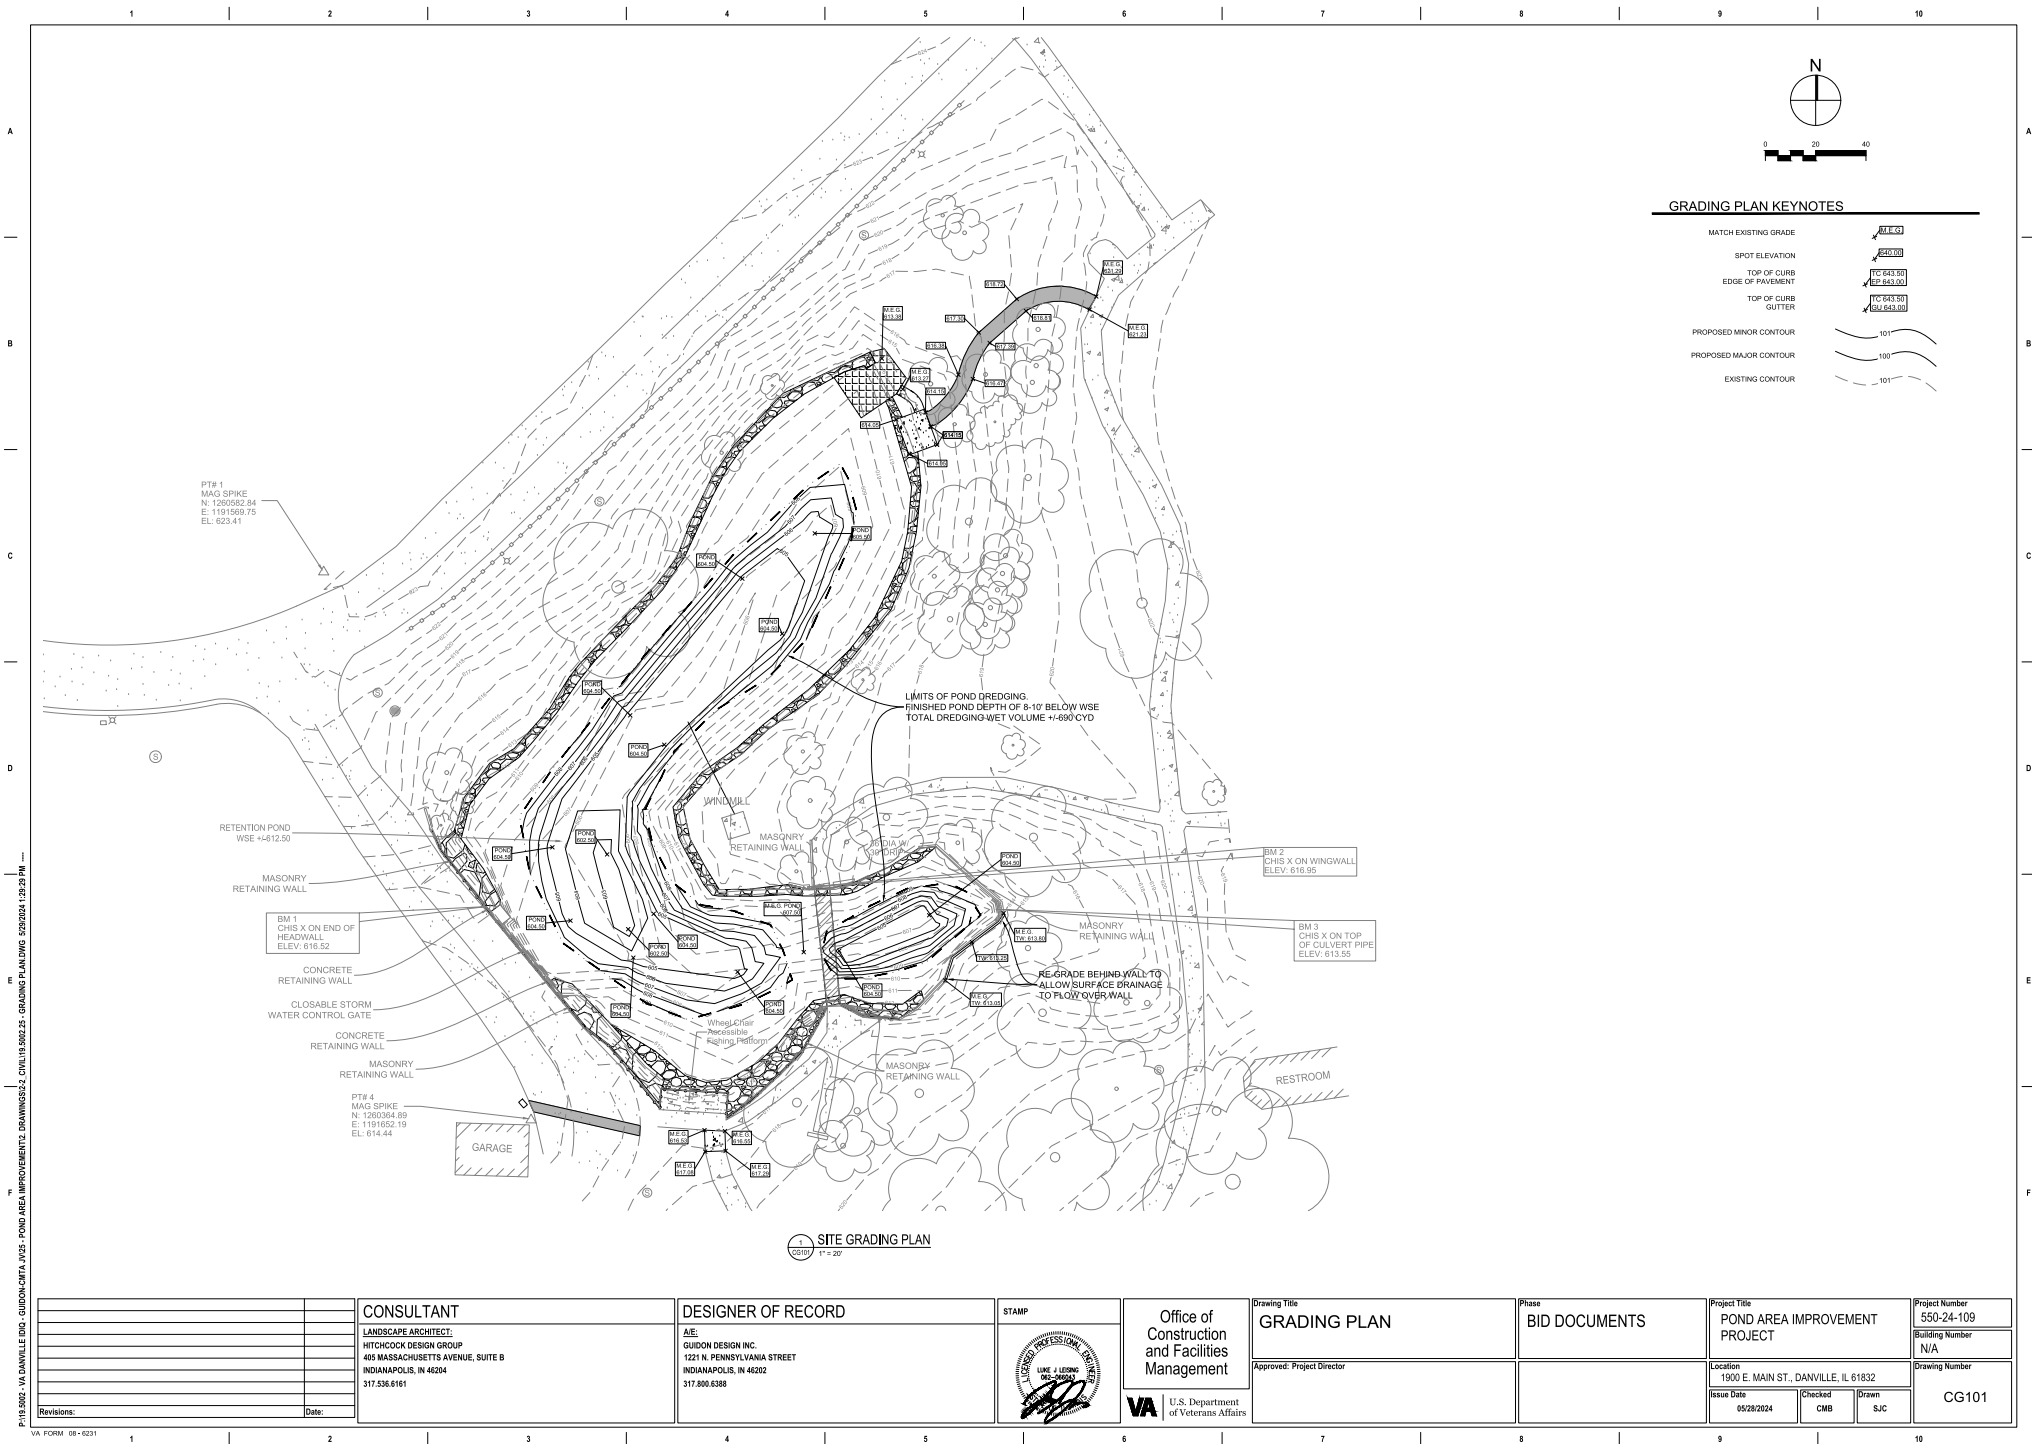

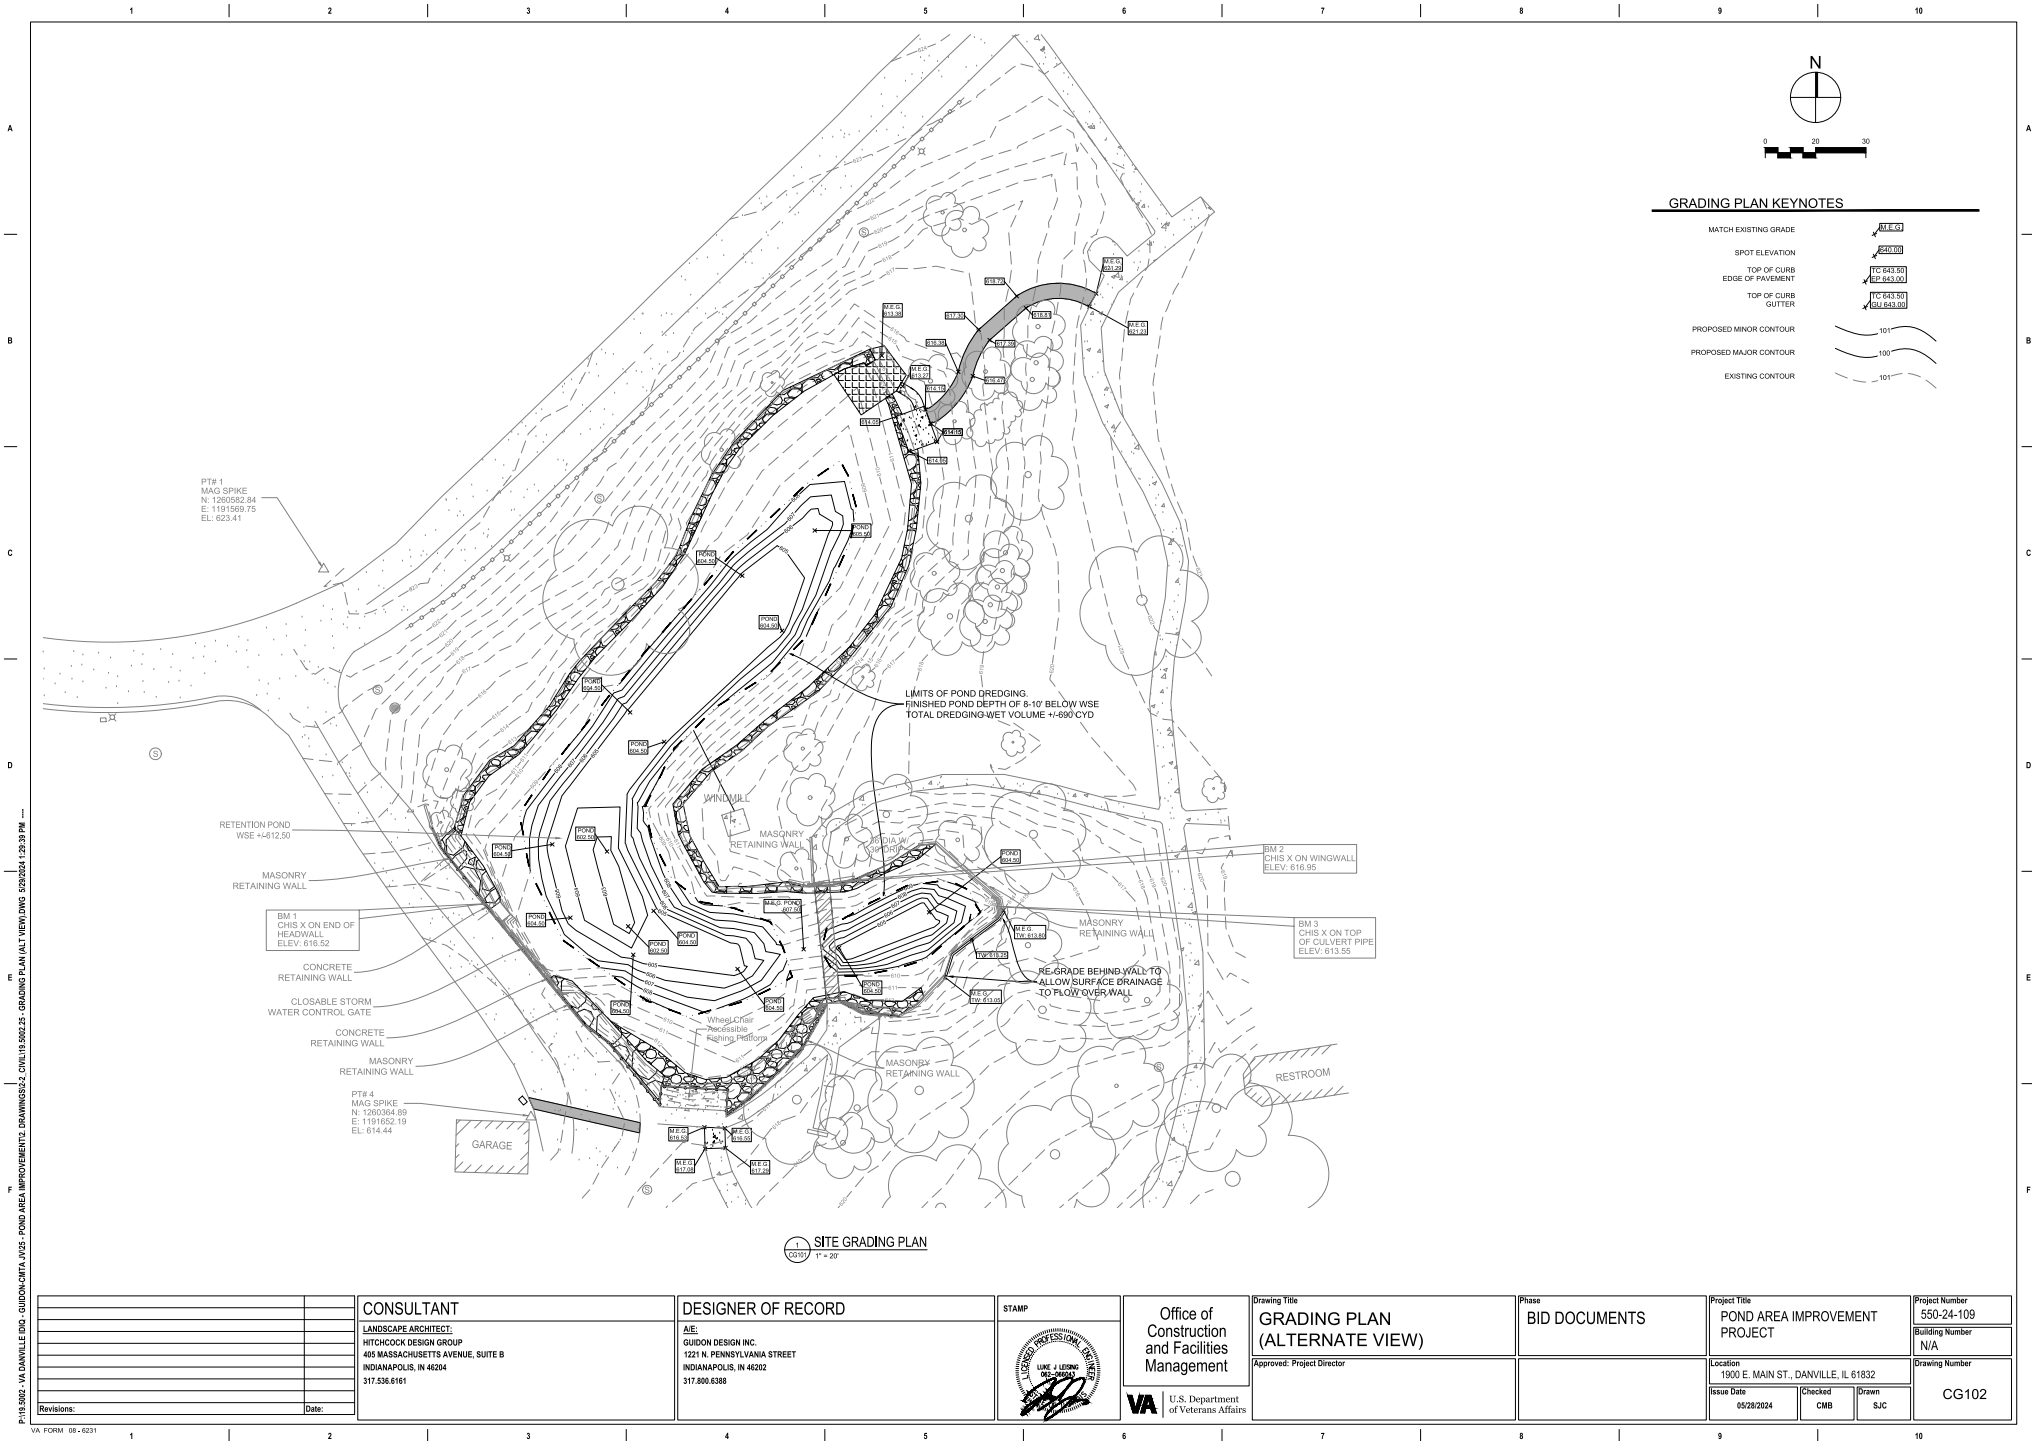

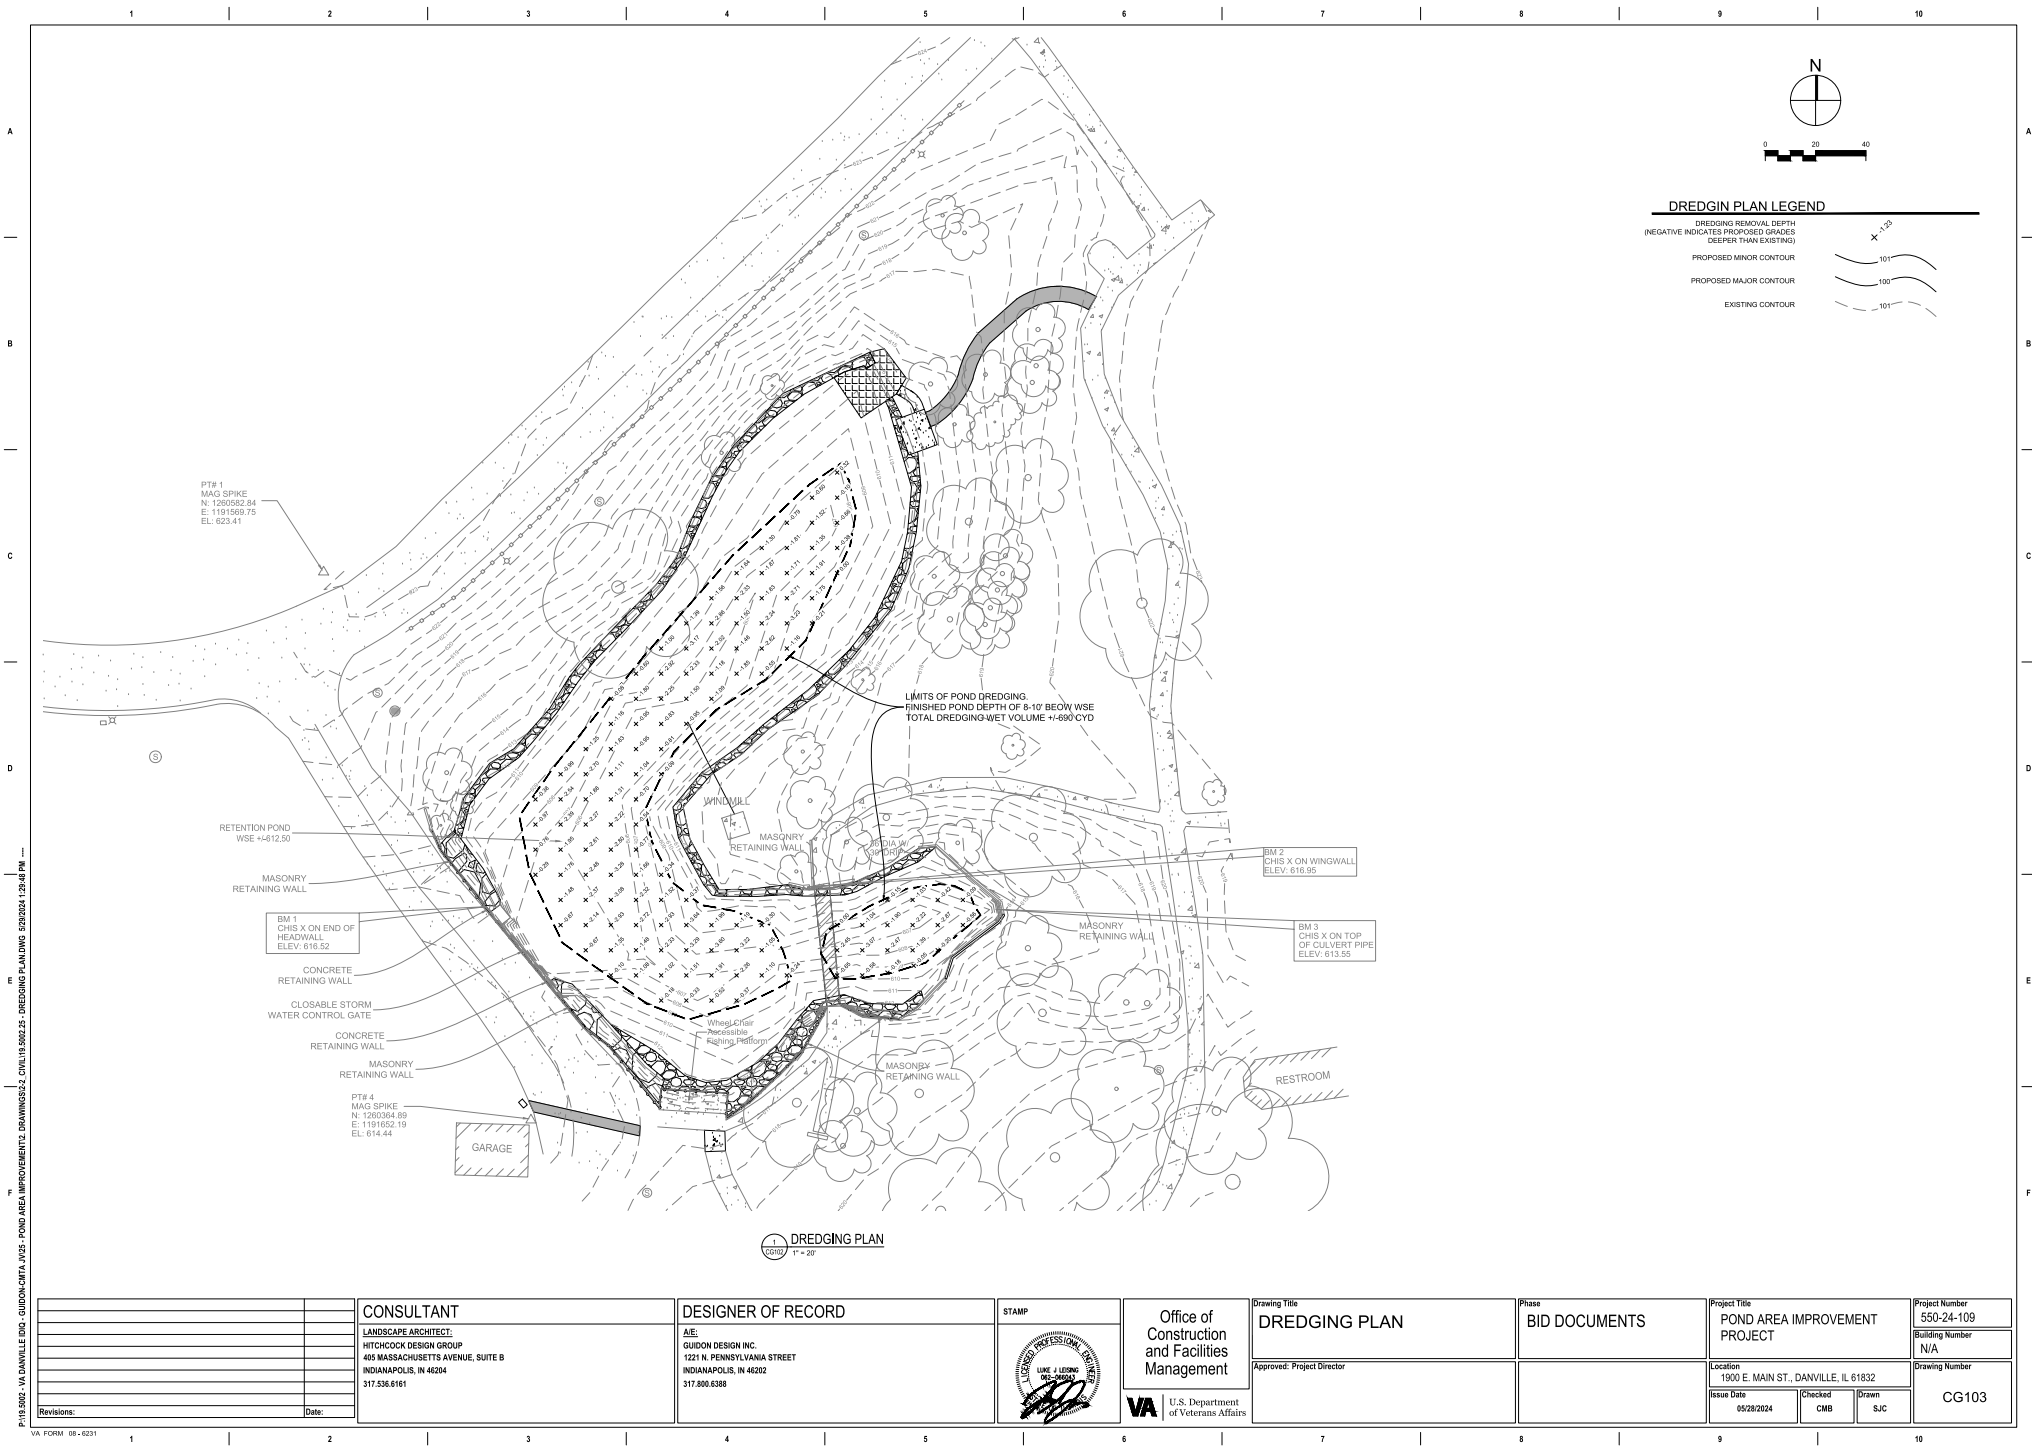

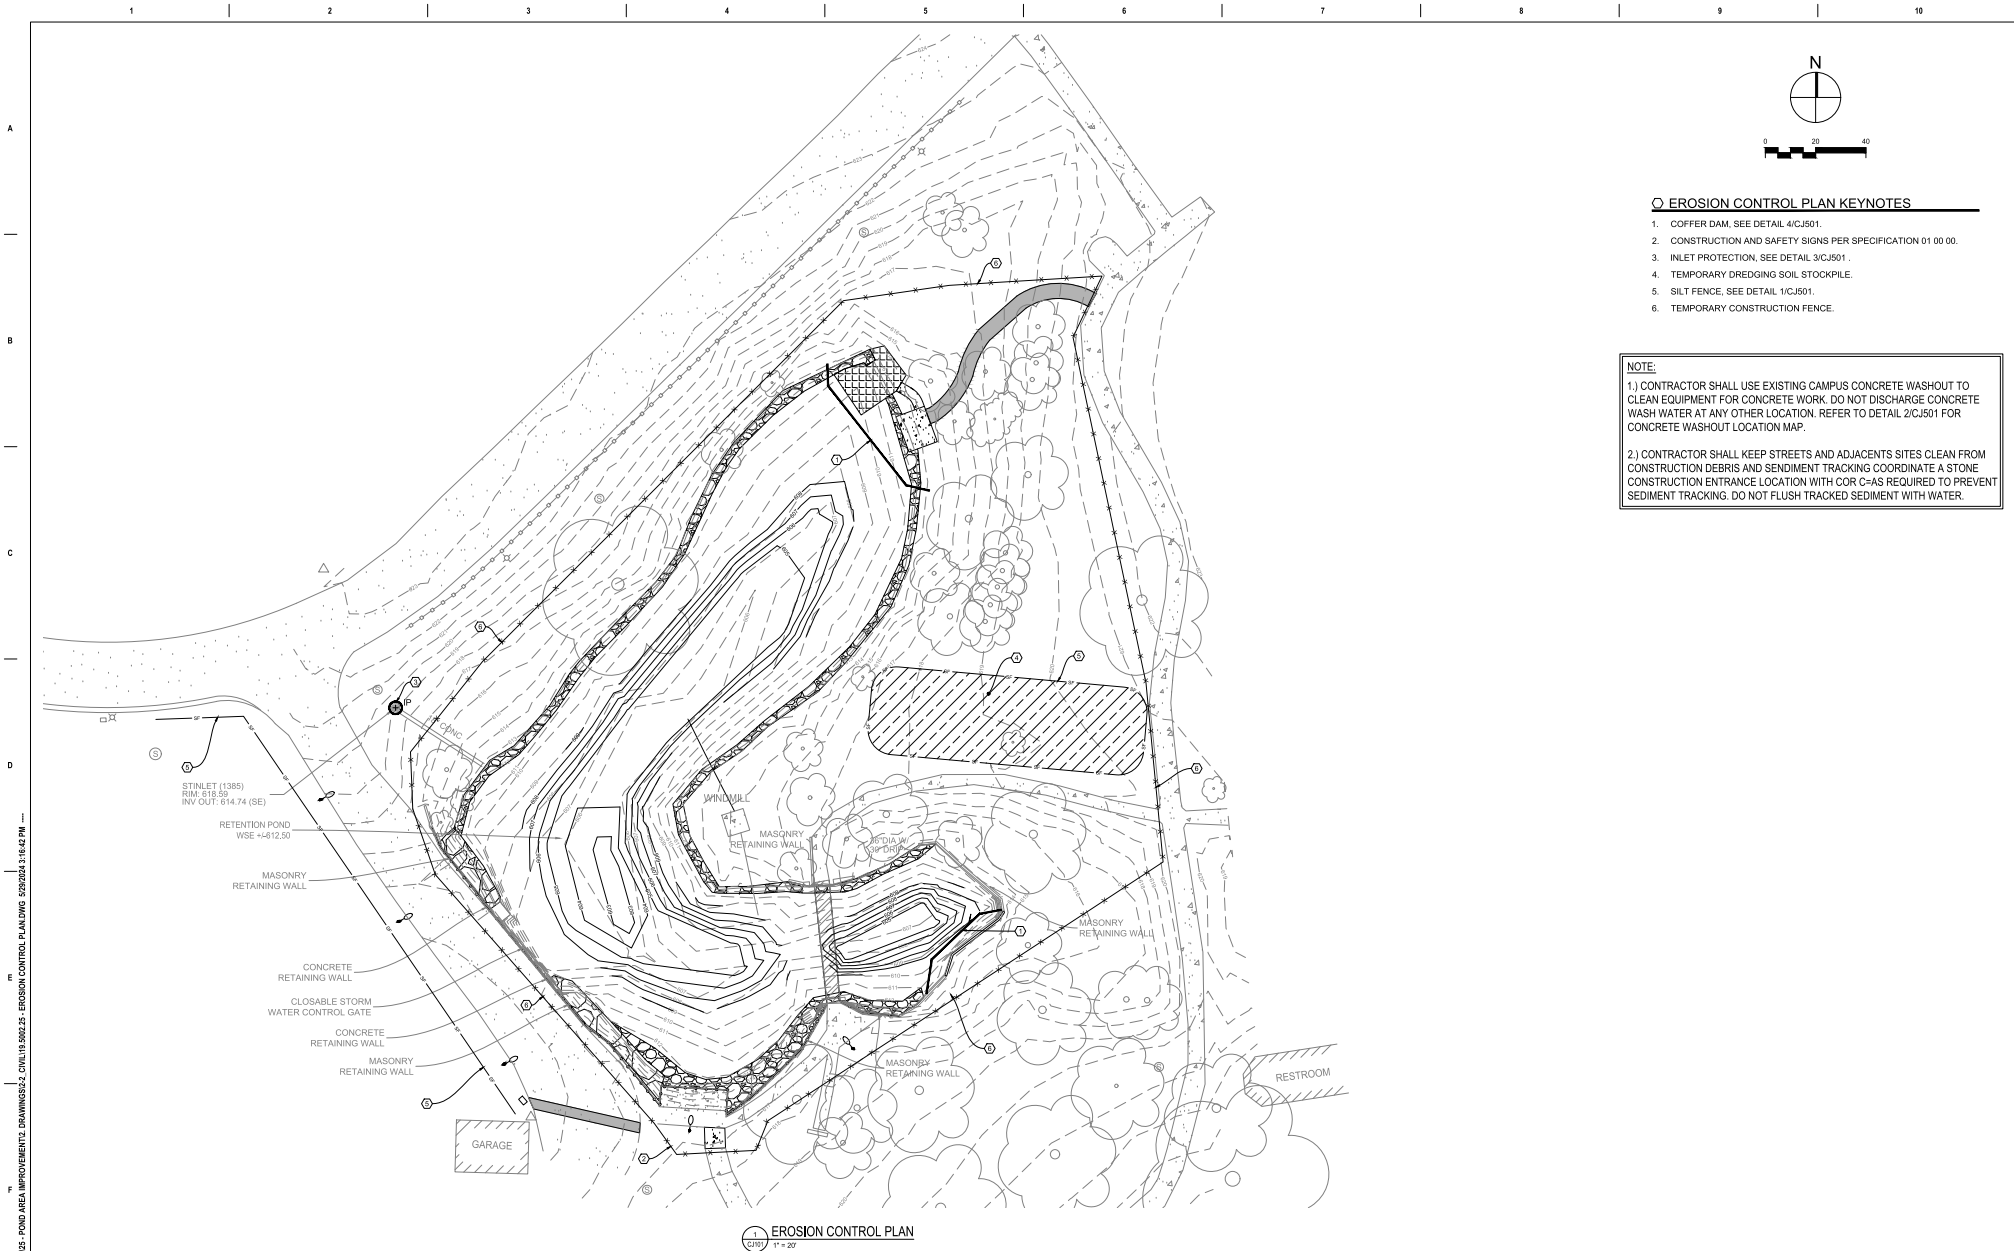

- EROSION CONTROL PLAN KEYNOTES**
1. COFFER DAM, SEE DETAIL 4/CJ501.
 2. CONSTRUCTION AND SAFETY SIGNS PER SPECIFICATION 01 00 00.
 3. INLET PROTECTION, SEE DETAIL 3/CJ501.
 4. TEMPORARY DREDGING SOIL STOCKPILE.
 5. SILT FENCE, SEE DETAIL 1/CJ501.
 6. TEMPORARY CONSTRUCTION FENCE.

NOTE:

1.) CONTRACTOR SHALL USE EXISTING CAMPUS CONCRETE WASHOUT TO CLEAN EQUIPMENT FOR CONCRETE WORK. DO NOT DISCHARGE CONCRETE WASH WATER AT ANY OTHER LOCATION. REFER TO DETAIL 2/CJ501 FOR CONCRETE WASHOUT LOCATION MAP.

2.) CONTRACTOR SHALL KEEP STREETS AND ADJACENT SITES CLEAN FROM CONSTRUCTION DEBRIS AND SEDIMENT TRACKING COORDINATE A STONE CONSTRUCTION ENTRANCE LOCATION WITH COR C-4S REQUIRED TO PREVENT SEDIMENT TRACKING. DO NOT FLUSH TRACKED SEDIMENT WITH WATER.




EROSION CONTROL PLAN

P:\10.000 - VA DANVILLE BLDG. GUIDON-CJ101A.DWG - POND AREA IMPROVEMENTS.DWG 5/20/2024 1:14:42 PM

Revisions:		Date:		CONSULTANT LANDSCAPE ARCHITECT: HITCHCOCK DESIGN GROUP 405 MASSACHUSETTS AVENUE, SUITE B INDIANAPOLIS, IN 46204 317.536.6161		DESIGNER OF RECORD A/E: GUIDON DESIGN INC. 1221 N. PENNSYLVANIA STREET INDIANAPOLIS, IN 46202 317.800.6388		STAMP 		Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title EROSION CONTROL PLAN		Phase BID DOCUMENTS		Project Title POND AREA IMPROVEMENT PROJECT		Project Number 550-24-109 Building Number N/A Drawing Number CJ101	
Issue Date		Checked		Drawn		Location		Approved: Project Director		1900 E. MAIN ST., DANVILLE, IL 61832									
6/28/2024		CMB		SJC															


A
B
C
D
E
F

1 2 3 4 5 6 7 8 9 10

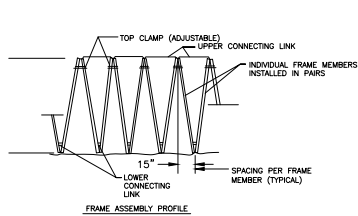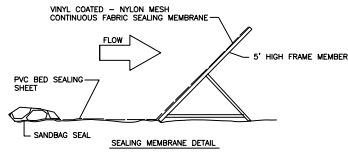


- NOTES:
1. OPTIONAL ATTACHMENTS:
 - BACK BRACE POLE
 - HORIZONTAL ADDITIONAL BRACING
 - SINGLE FRAME ATTACHMENTS FOR IRREGULAR CONTOURS & TURNS
 2. ANCHOR BOLTS MAY BE REQUIRED ON HARD ROCK, FLAT OR CONCRETE SURFACES
 3. MANUFACTURED COFFER DAMS MAY BE USED WITH VA APPROVAL.


4 COFFER DAM
CMB NTS

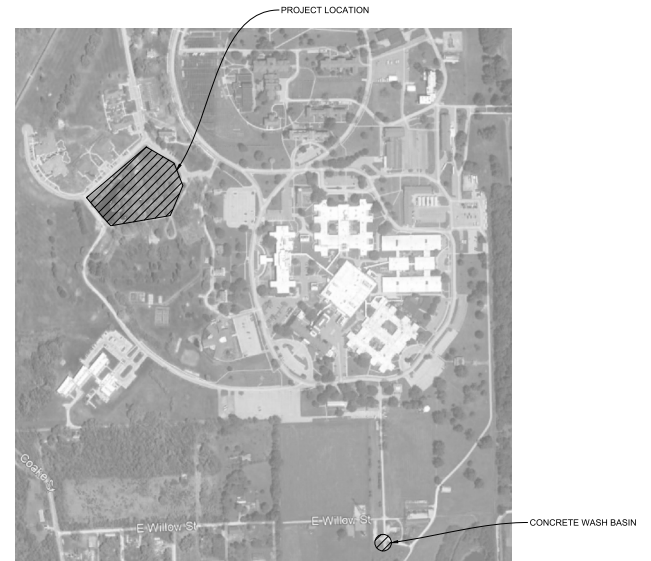

2 CONCRETE WASHOUT LOCATION
CMB NTS

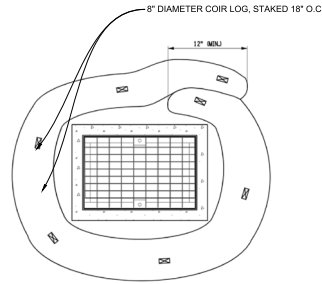

3 SEDIMENT LOG INLET PROTECTION
CMB NTS




5 TEMPORARY SILT FENCE
CMB NTS

Revisions:	Date:

CONSULTANT
LANDSCAPE ARCHITECT:
HITCHCOCK DESIGN GROUP
405 MASSACHUSETTS AVENUE, SUITE B
INDIANAPOLIS, IN 46204
317.536.6161


DESIGNER OF RECORD
A/E:
GUIDON DESIGN INC.
1221 N. PENNSYLVANIA STREET
INDIANAPOLIS, IN 46202
317.800.6388



Drawing Title
EROSION CONTROL DETAILS
Approved: Project Director

Phase
BID DOCUMENTS

Project Title
POND AREA IMPROVEMENT PROJECT
Location
1900 E. MAIN ST., DANVILLE, IL 61832
Issue Date
05/28/2024
Checked
CMB
Drawn
SJC
Project Number
550-24-109
Building Number
N/A
Drawing Number
CJ501

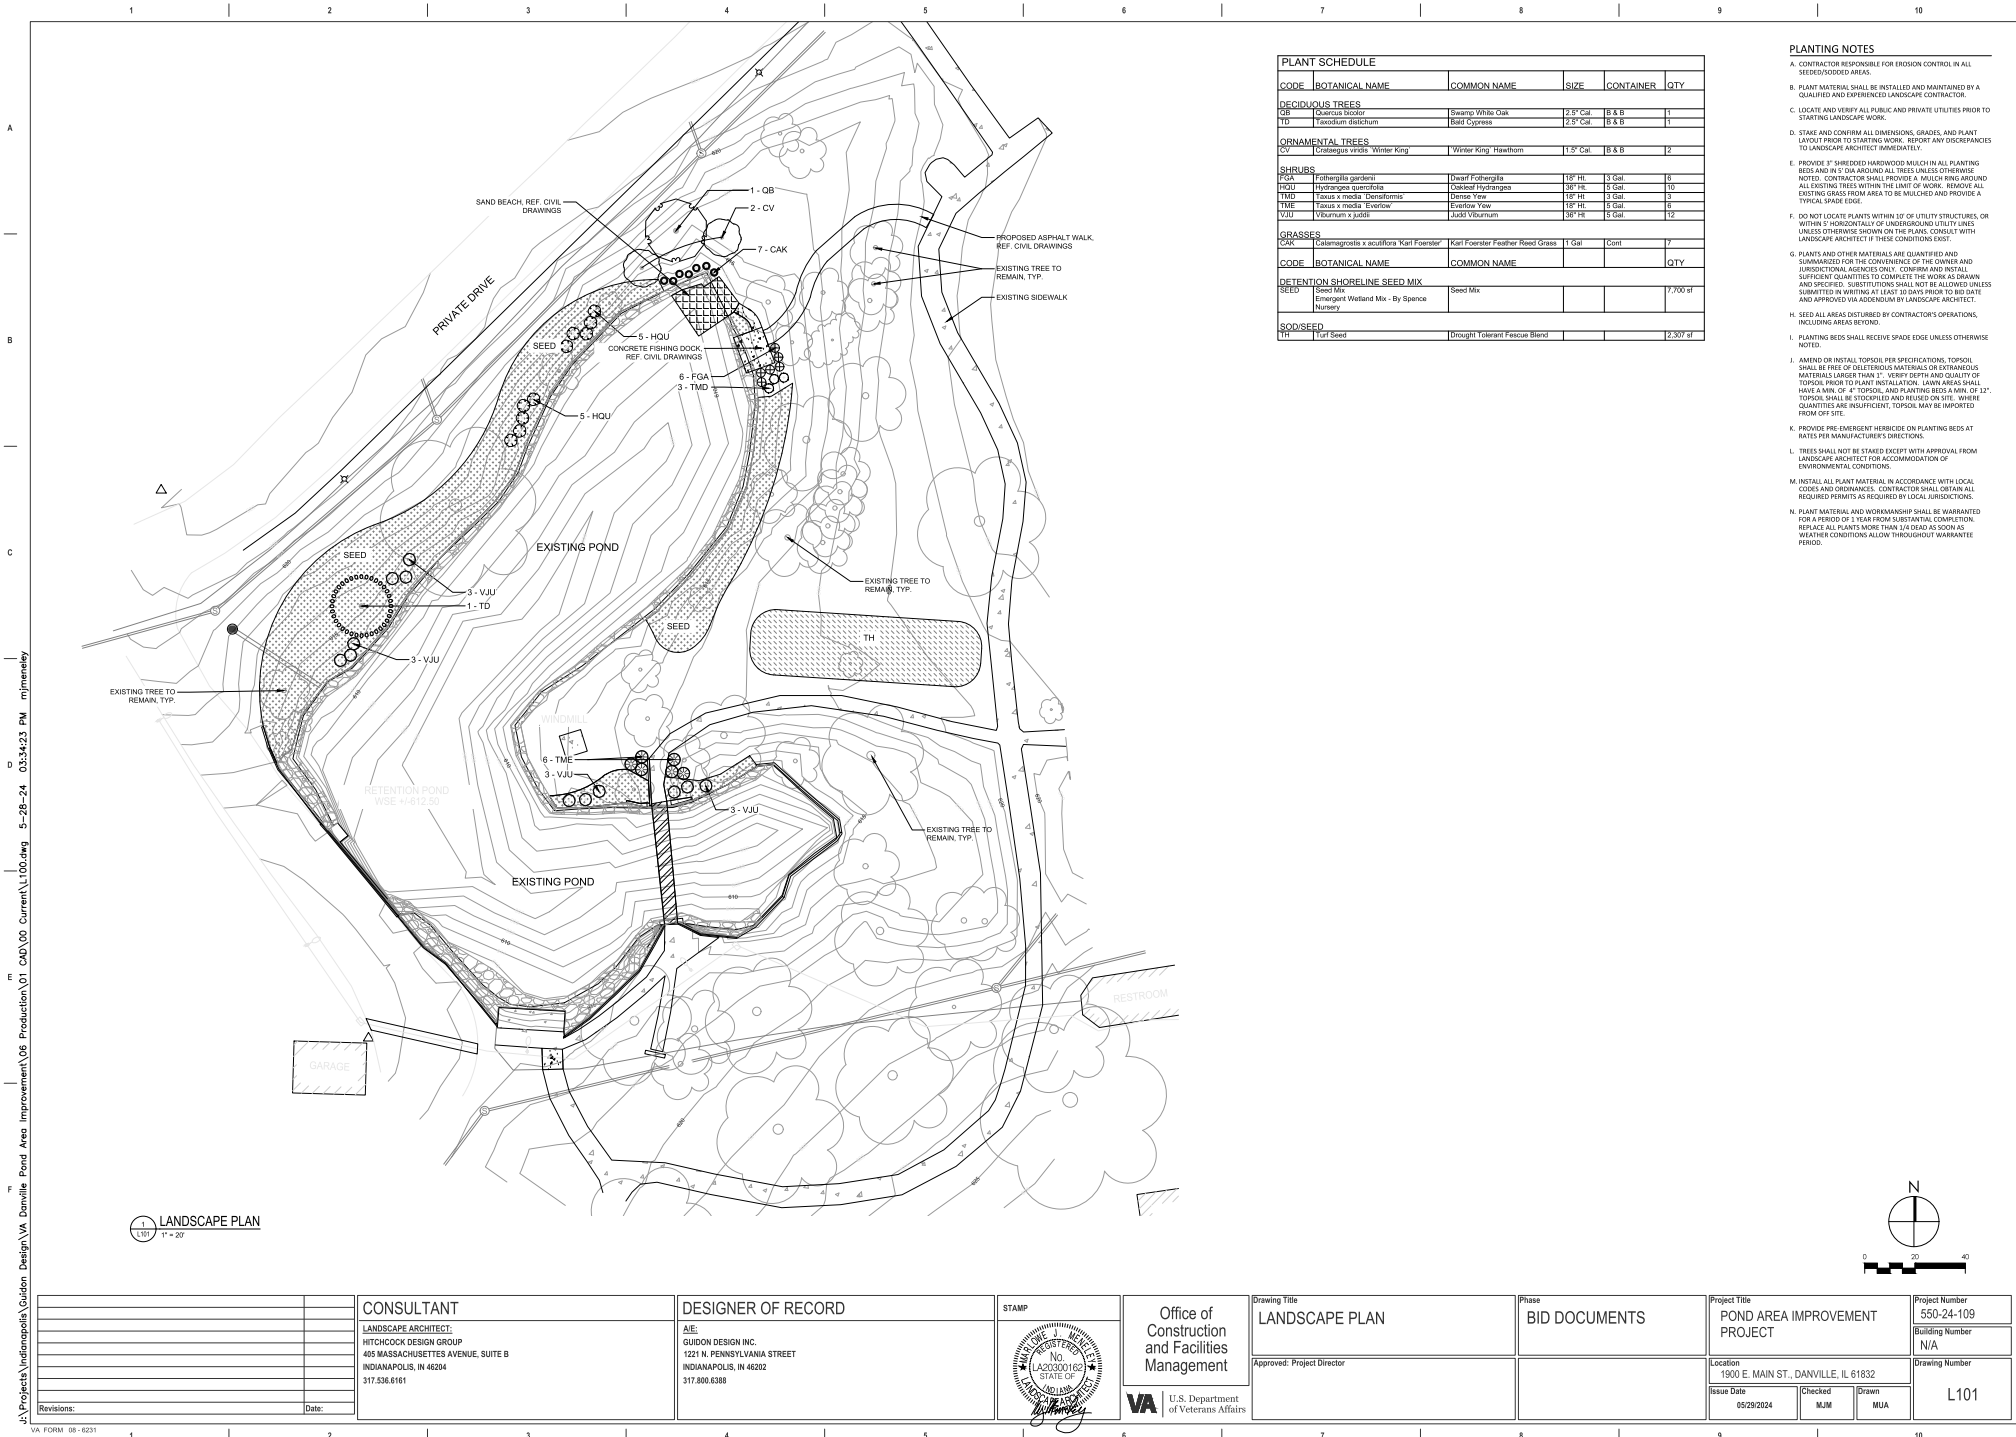

\\Projects\Indiana\Goulden Design\VA Danville Pond Area Improvement\06 Production\01 CAD\00 Current\1100.dwg 5-28-24 03:44:23 PM m:\mreedy

CONSULTANT LANDSCAPE ARCHITECT: HITCHCOCK DESIGN GROUP 405 MASSACHUSETTS AVENUE, SUITE B INDIANAPOLIS, IN 46204 317.536.6161		DESIGNER OF RECORD A/E: GUIDON DESIGN INC. 1221 N. PENNSYLVANIA STREET INDIANAPOLIS, IN 46202 317.800.6388		STAMP 		Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title LANDSCAPE PLAN Approved: Project Director		Phase BID DOCUMENTS		Project Title POND AREA IMPROVEMENT PROJECT		Project Number 550-24-109 Building Number N/A Drawing Number L101	
Revisions: _____ Date: _____															

A


B

C

D

E

F

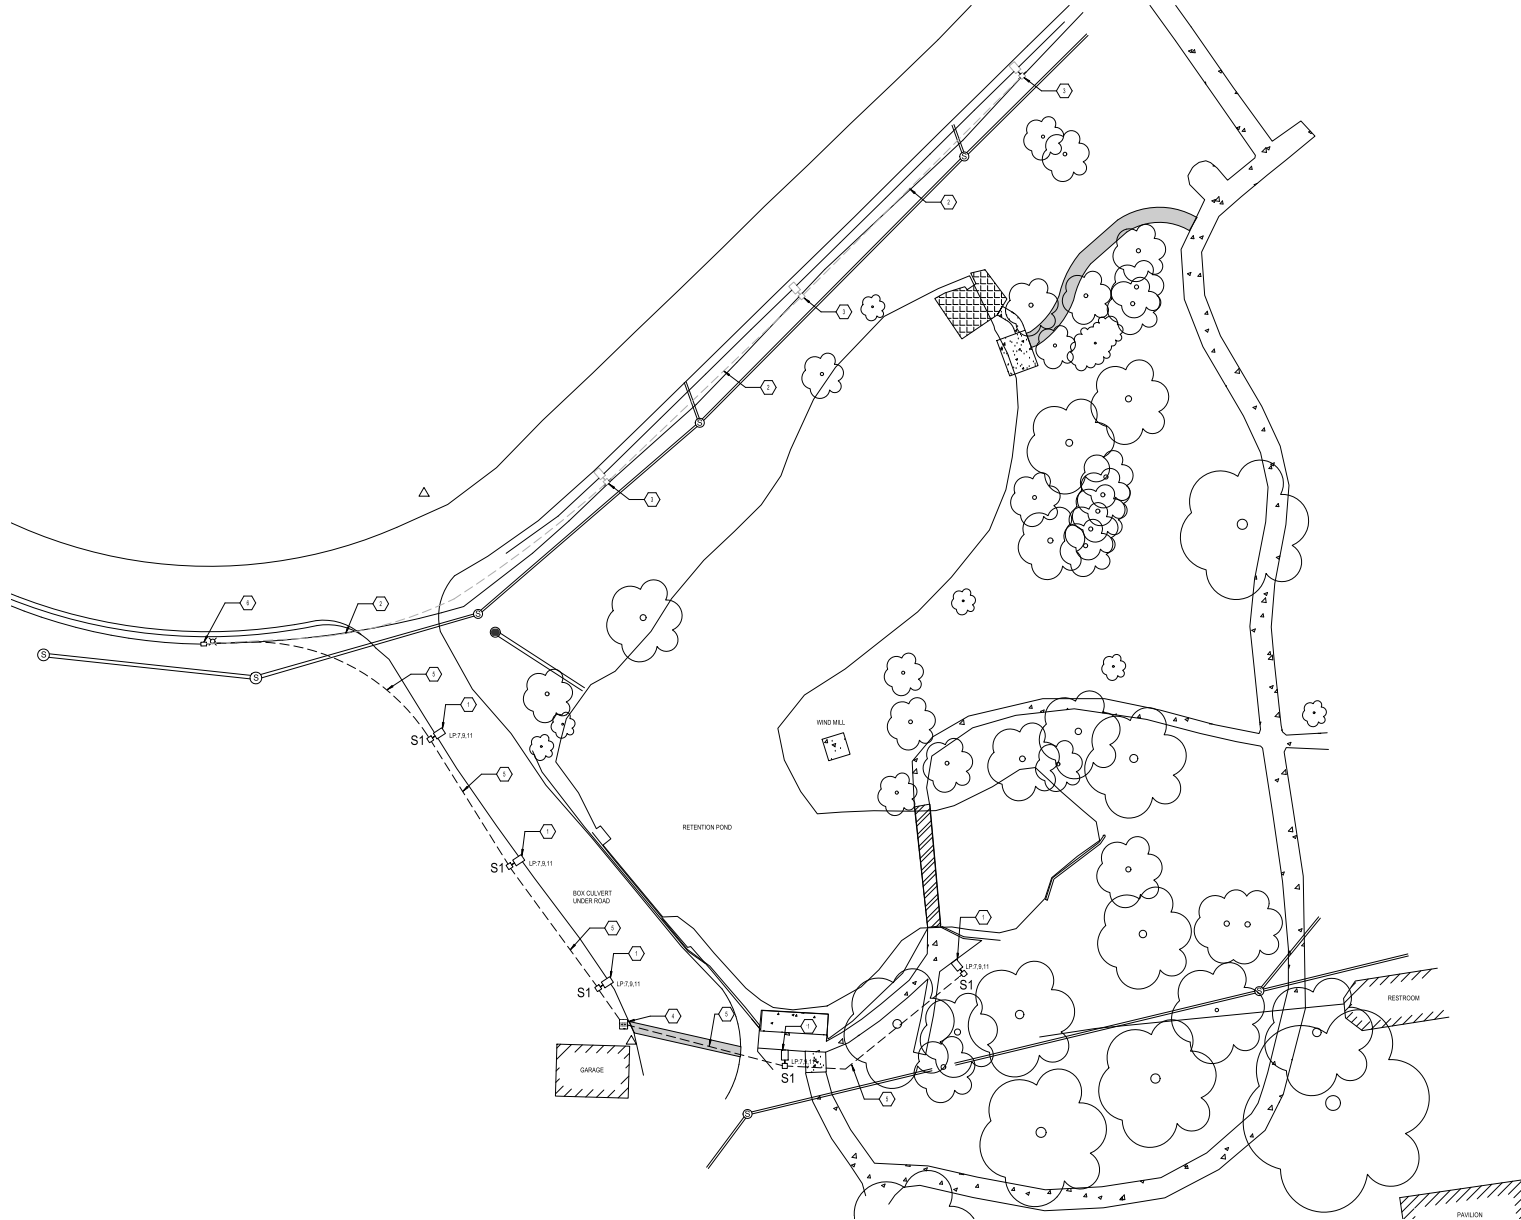


- ELECTRICAL SITE PLAN GENERAL NOTES**
- A. ALL EQUIPMENT AND DEVICES SHOWN IN THIS LIGHT UNLESS NOTED OTHERWISE ARE NEW WORK. BY OTHERS - ALL ITEMS SHOWN IN BOLD DARK UNLESS NOTED OTHERWISE ARE NEW WORK.
- B. ALL UNDERGROUND ELECTRICAL CONSTRUCTION COMPONENTS INCLUDING BUT NOT LIMITED TO TRANSFORMER HANDS, PULL BOXES, HANDHOLES, HANDHOLES, DUCTBANKS, CABLES, CONDUITS, GROUNDING, ELECTRICAL EQUIPMENT AND DEVICES, ETC., ARE MEANT TO DEFINE THE ELECTRICAL DESIGN INTENT AND REQUIRED CONFIGURATION ONLY. REFER TO CIVIL DRAWINGS FOR ACTUAL LOCATIONS AND OTHER CONSTRUCTION REQUIREMENTS. CONTRACTOR SHALL COORDINATE WITH CIVIL TO IDENTIFY ANY UNDERGROUND WORK BY OTHERS DISCLOSED IN SAME AREAS PRIOR TO EXCAVATIONS.
- C. ALL GROUND CONNECTIONS SHALL BE EXOTHERMICALLY WELDED UNLESS OTHERWISE INDICATED ON THE CONSTRUCTION DRAWINGS AND SPECIFICATIONS. ALL EXOTHERMICALLY WELDED CONNECTIONS SHALL REMAIN INTACT WHEN SUBJECT TO A HAMMER STRIKE OF MODERATE FORCE. ANY CONNECTION WHICH FAILS SUCH A TEST OR FROM WHICH INSPECTION INDICATES A POROUS OR DEFECTIVE WELD, SHALL BE REWELDED.
- D. CONTRACTOR SHALL COORDINATE EXACT LOCATION OF ALL FIXTURES, EQUIPMENT, AND DEVICES WITH ALL TRADES PRIOR TO INSTALLATION.
- E. EXACT CONDUIT ROUTING AND DEPTH SHALL BE DETERMINED AND ADJUSTED IN THE FIELD DURING INSTALLATION AS NECESSARY BY THE CONTRACTOR.
- F. ALL JUNCTION AND PULL BOXES SHALL BE SIZED PER NEC ARTICLE 314.16 AND 314.28.
- POWER PLAN NOTES**
1. PROVIDE NEW SITE LIGHTING AND POLE MOUNTED ON CONCRETE BASE. REFER TO POLE BASE DETAIL FOR ADDITIONAL REQUIREMENTS. LIGHTING FIXTURE SHALL BE COOPER CIRC-14 (6000, 100W, 800 LUMENS).
2. EXISTING UNDERGROUND FEEDER TO REMAIN. FEEDER ROUTES TO EXISTING SITE LIGHTING CIRCUITS LP7.8.11 IN PANEL '1P' AND EXISTING PHOTOCELL LIGHTING CONTROLS, BOTH LOCATED AT EXISTING PUMP HOUSE BUILDING.
3. EXISTING SITE LIGHTING AND POLE TO REMAIN.
4. PROVIDE FLUSH IN-GRADE HANDHOLE MINIMUM SIZE. CALCULATE PER NEC 314.28. HUBBELL POLYMER CONCRETE DETACHABLE HANDHOLE OR APPROVED EQUAL, WITH OPEN BOTTOM. ALL CONNECTIONS WITHIN FILL BOX SHALL BE WATER TIGHT SINGLE HT. ELECTRICAL TAPE AND HOT OR COLD SPRING INSULATION. REFER TO HANDHOLE DETAIL.
5. PROVIDE A NEW UNDERGROUND CONDUIT AND FEEDER, (2W5 3/4" MIN CU & 1/2" & 3/4" IN 1/2-1/4" IN NEW DUCT BANK AND CONNECT TO EXISTING SITE LIGHTING CIRCUIT AND LIGHTING CONTROLS. REFER TO DUCT BANK DETAIL 40P01.
6. EXISTING HANDHOLE. PROVIDE CONNECTION TO NEW LIGHTING FROM EXISTING CIRCUIT AT THIS LOCATION.

ELECTRICAL SITE PLAN
SCALE: 1"=30'

Revisions:	Date:

CONSULTANT
LANDSCAPE ARCHITECT:
HITCHCOCK DESIGN GROUP
405 MASSACHUSETTS AVENUE, SUITE B
INDIANAPOLIS, IN 46204
317.536.6161

ARCHITECT/ENGINEER OF RECORD
A/E:
GUIDON DESIGN
1221 N. PENNSYLVANIA STREET
INDIANAPOLIS, IN 46202
317.800.6388



Office of
Construction and
Facilities
Management
VA U.S. Department
of Veterans Affairs

Drawing Title
ELECTRICAL SITE PLAN
Approved:

Phase
BID DOCUMENTS

Project Title POND AREA IMPROVEMENT PROJECT			Project Number 550-24-109	
Location 1900 E. MAIN ST., DANVILLE, IL 61832			Building Number N/A	
Issue Date 05/29/2024			Drawing Number ES101	
EAE			MCP	



- 4 TYPICAL DUCT BANK DETAIL BELOW ROADWAY OR PARKING LOT



1. ELECTRICAL CONTRACTOR TO MATCH EXISTING CONCRETE POLE BASE



- 3 EXTERIOR HANDHOLE DETAIL
SCALE: 12" = 1'-0"



- **TYPICAL DUCT BANK DETAIL BELOW UNDER LAWN AREAS**



1. MATCH EXISTING POLE BASES. THIS DETAIL FOR REFERENCE ONLY.



100