



This project involves construction of 2 earthen berms with pipe and WCS

Detail Plans for Blythe WRE North and South Wetlands

not to scale

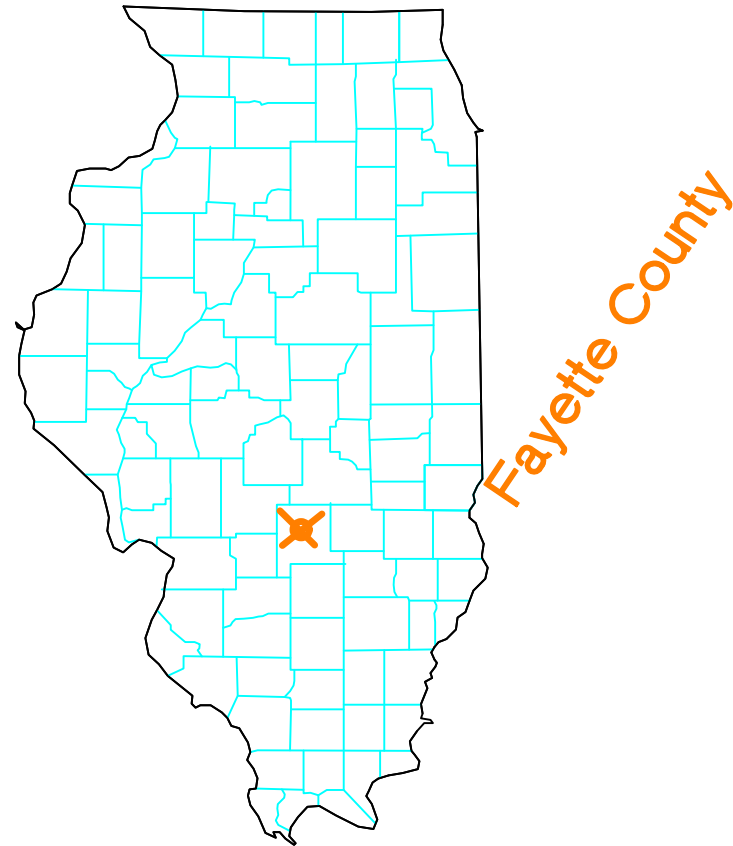

Location Map

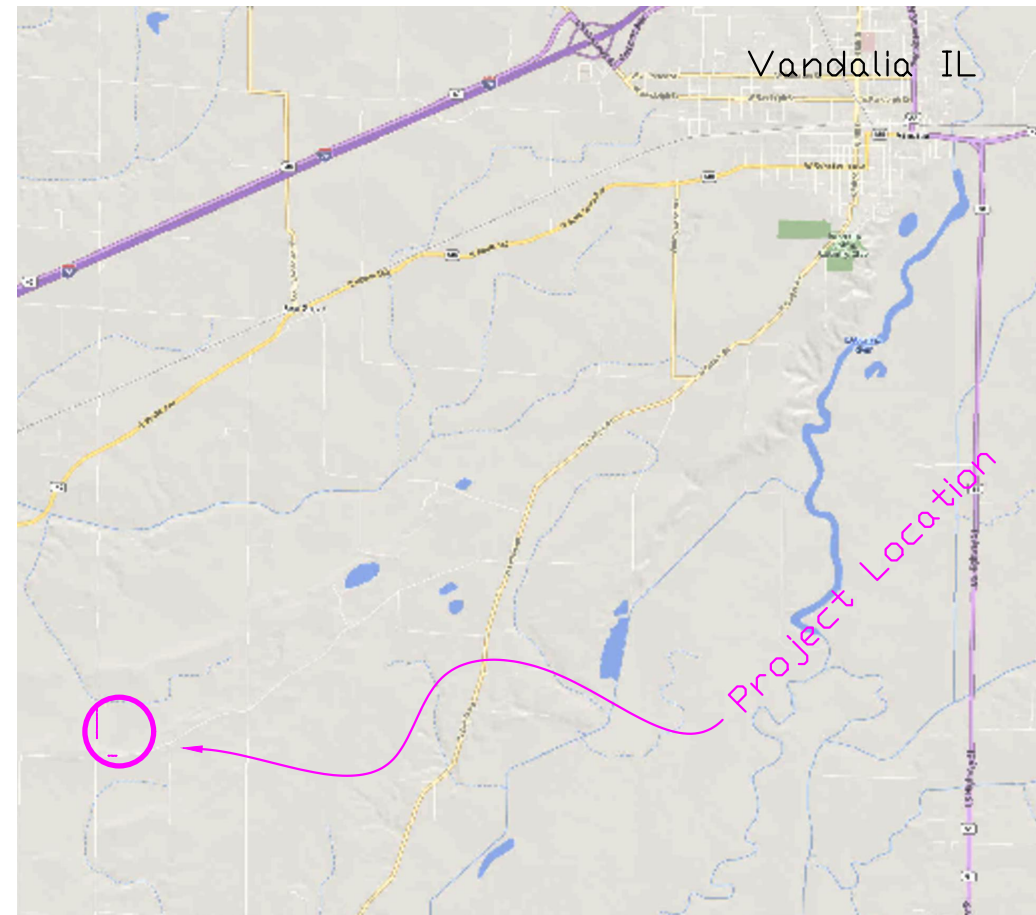

- INDEX
- (1. Coversheet
 - (2. Plan View
 - (3. Tile Decommissioning View
 - (4. Plan View North Berm
 - (5. N. Berm Profile/ Pipe Profile
 - (6. N. Berm x-sections
 - (7. N. Berm x-sections (2)
 - (8. N. Berm Pipe and Str details
 - (9. N. Berm trash rack details
 - (10. N. Berm Aux spillway profile and details
 - (11. N. Berm Aux Spillway x-sections
 - (12. Plan View - South Berm
 - (13. S. Berm Profile
 - (14. S. Berm Pipe profile
 - (15. S. Berm x-sections
 - (16. S. Berm x-sections (2)
 - (17. S. Berm Aux Spillway Profile and details
 - (18. S. Berm Pipe Details
 - (19. S. Berm Trash Rack Details
 - (20. South Pool Sections

Must provide NRCS with DIG number(s) prior to start of construction.

Fayette County, Illinois
Northeast of intersection of East Ridge Road and 300E

Designed M. Dasenbrock Date 2.2025
Drawn M. Dasenbrock Date 2.2025
Checked Kerry Bushua Date 7-9-2025
Approved M. Dasenbrock Date 7.2025

**BLYTHE WRE
WETLAND RESTORATION
COVERSHEET**

Corner of East Ridge road and 300E Fayette County, IL


United States
Department of
Agriculture
USDA
Natural Resources
Conservation Service

File No.
Blythe WRE_C3020

Drawing No.

6/18/25 4:20 PM

Sheet ### of .

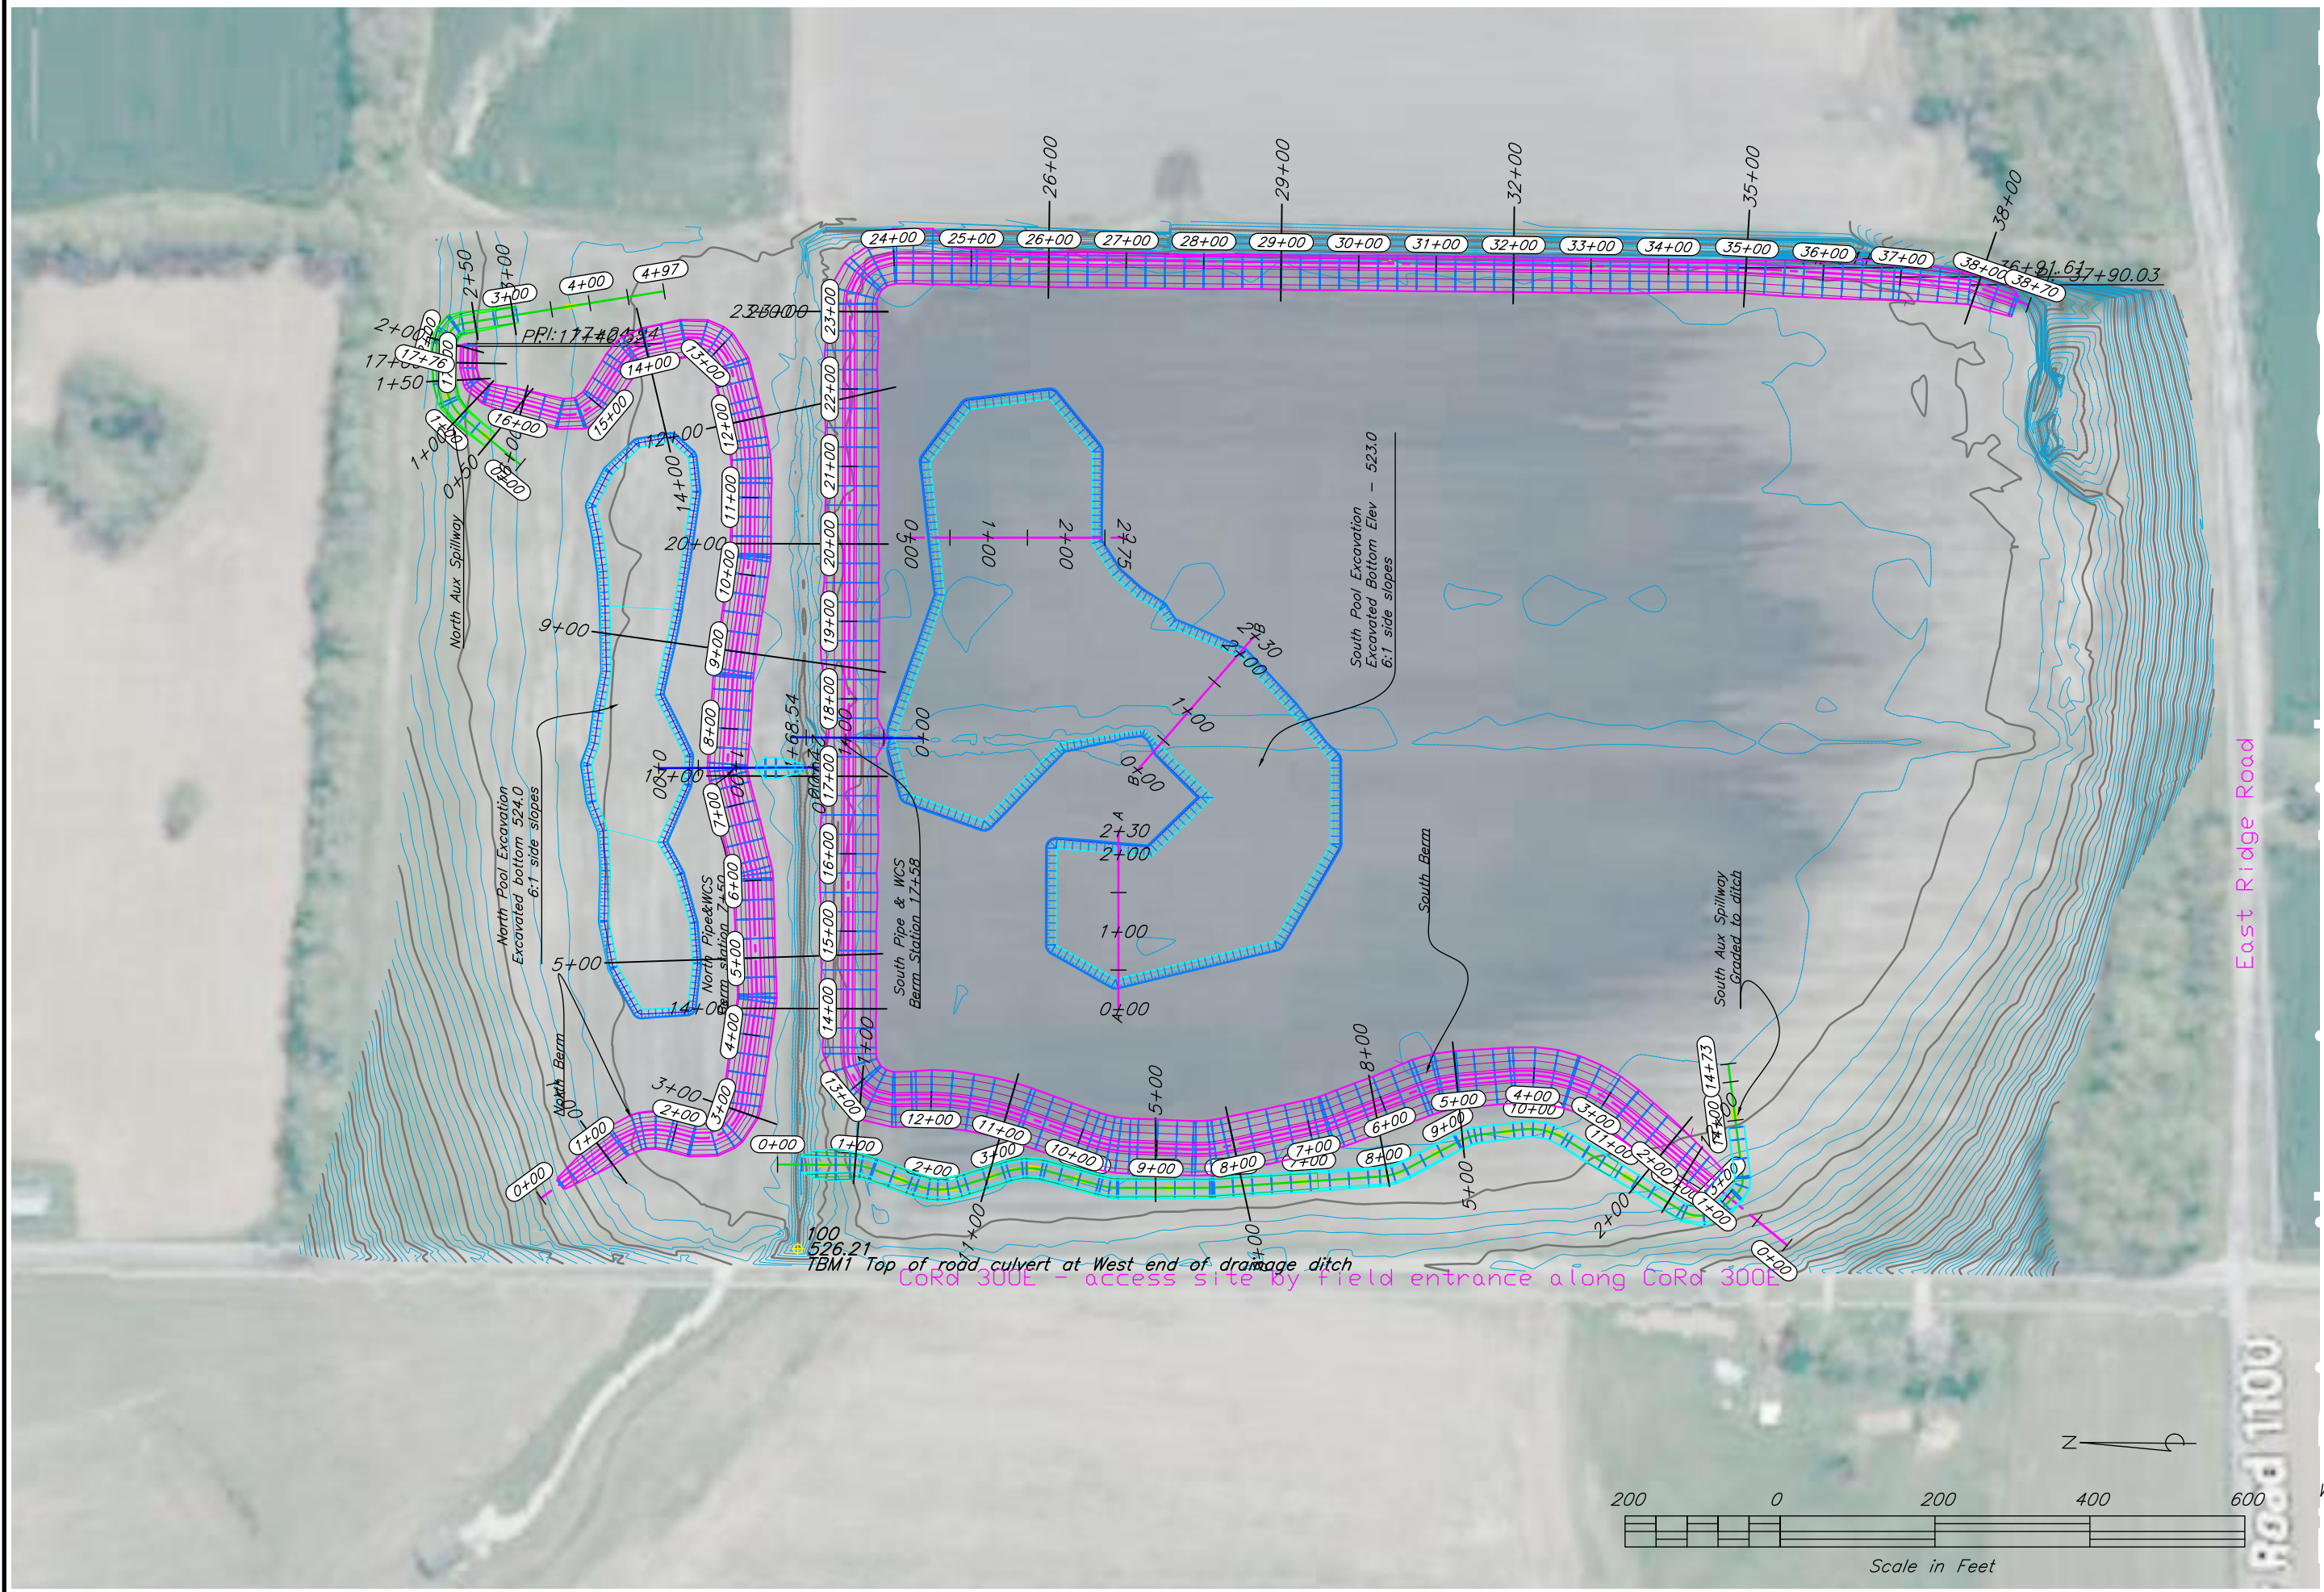



United States
Department of
Agriculture

Natural Resources
Conservation Service

File No.
Blythe
WRE_C3D2022.dwg

Drawing No.
6/18/25 4:20 PM
Sheet 2 of 2

Corner of East Ridge road and 300E


PLAN VIEW

Sheet 2

**BLYTHE WRE
WETLAND RESTORATION**

PLANNED VIEW

Designed	M.Dasenbrock	Date	2.2025
Drawn	M.Dasenbrock		2.2025
Checked	Kerry Buehler		7-9-2025
Approved	M.Dasenbrock		7-2025

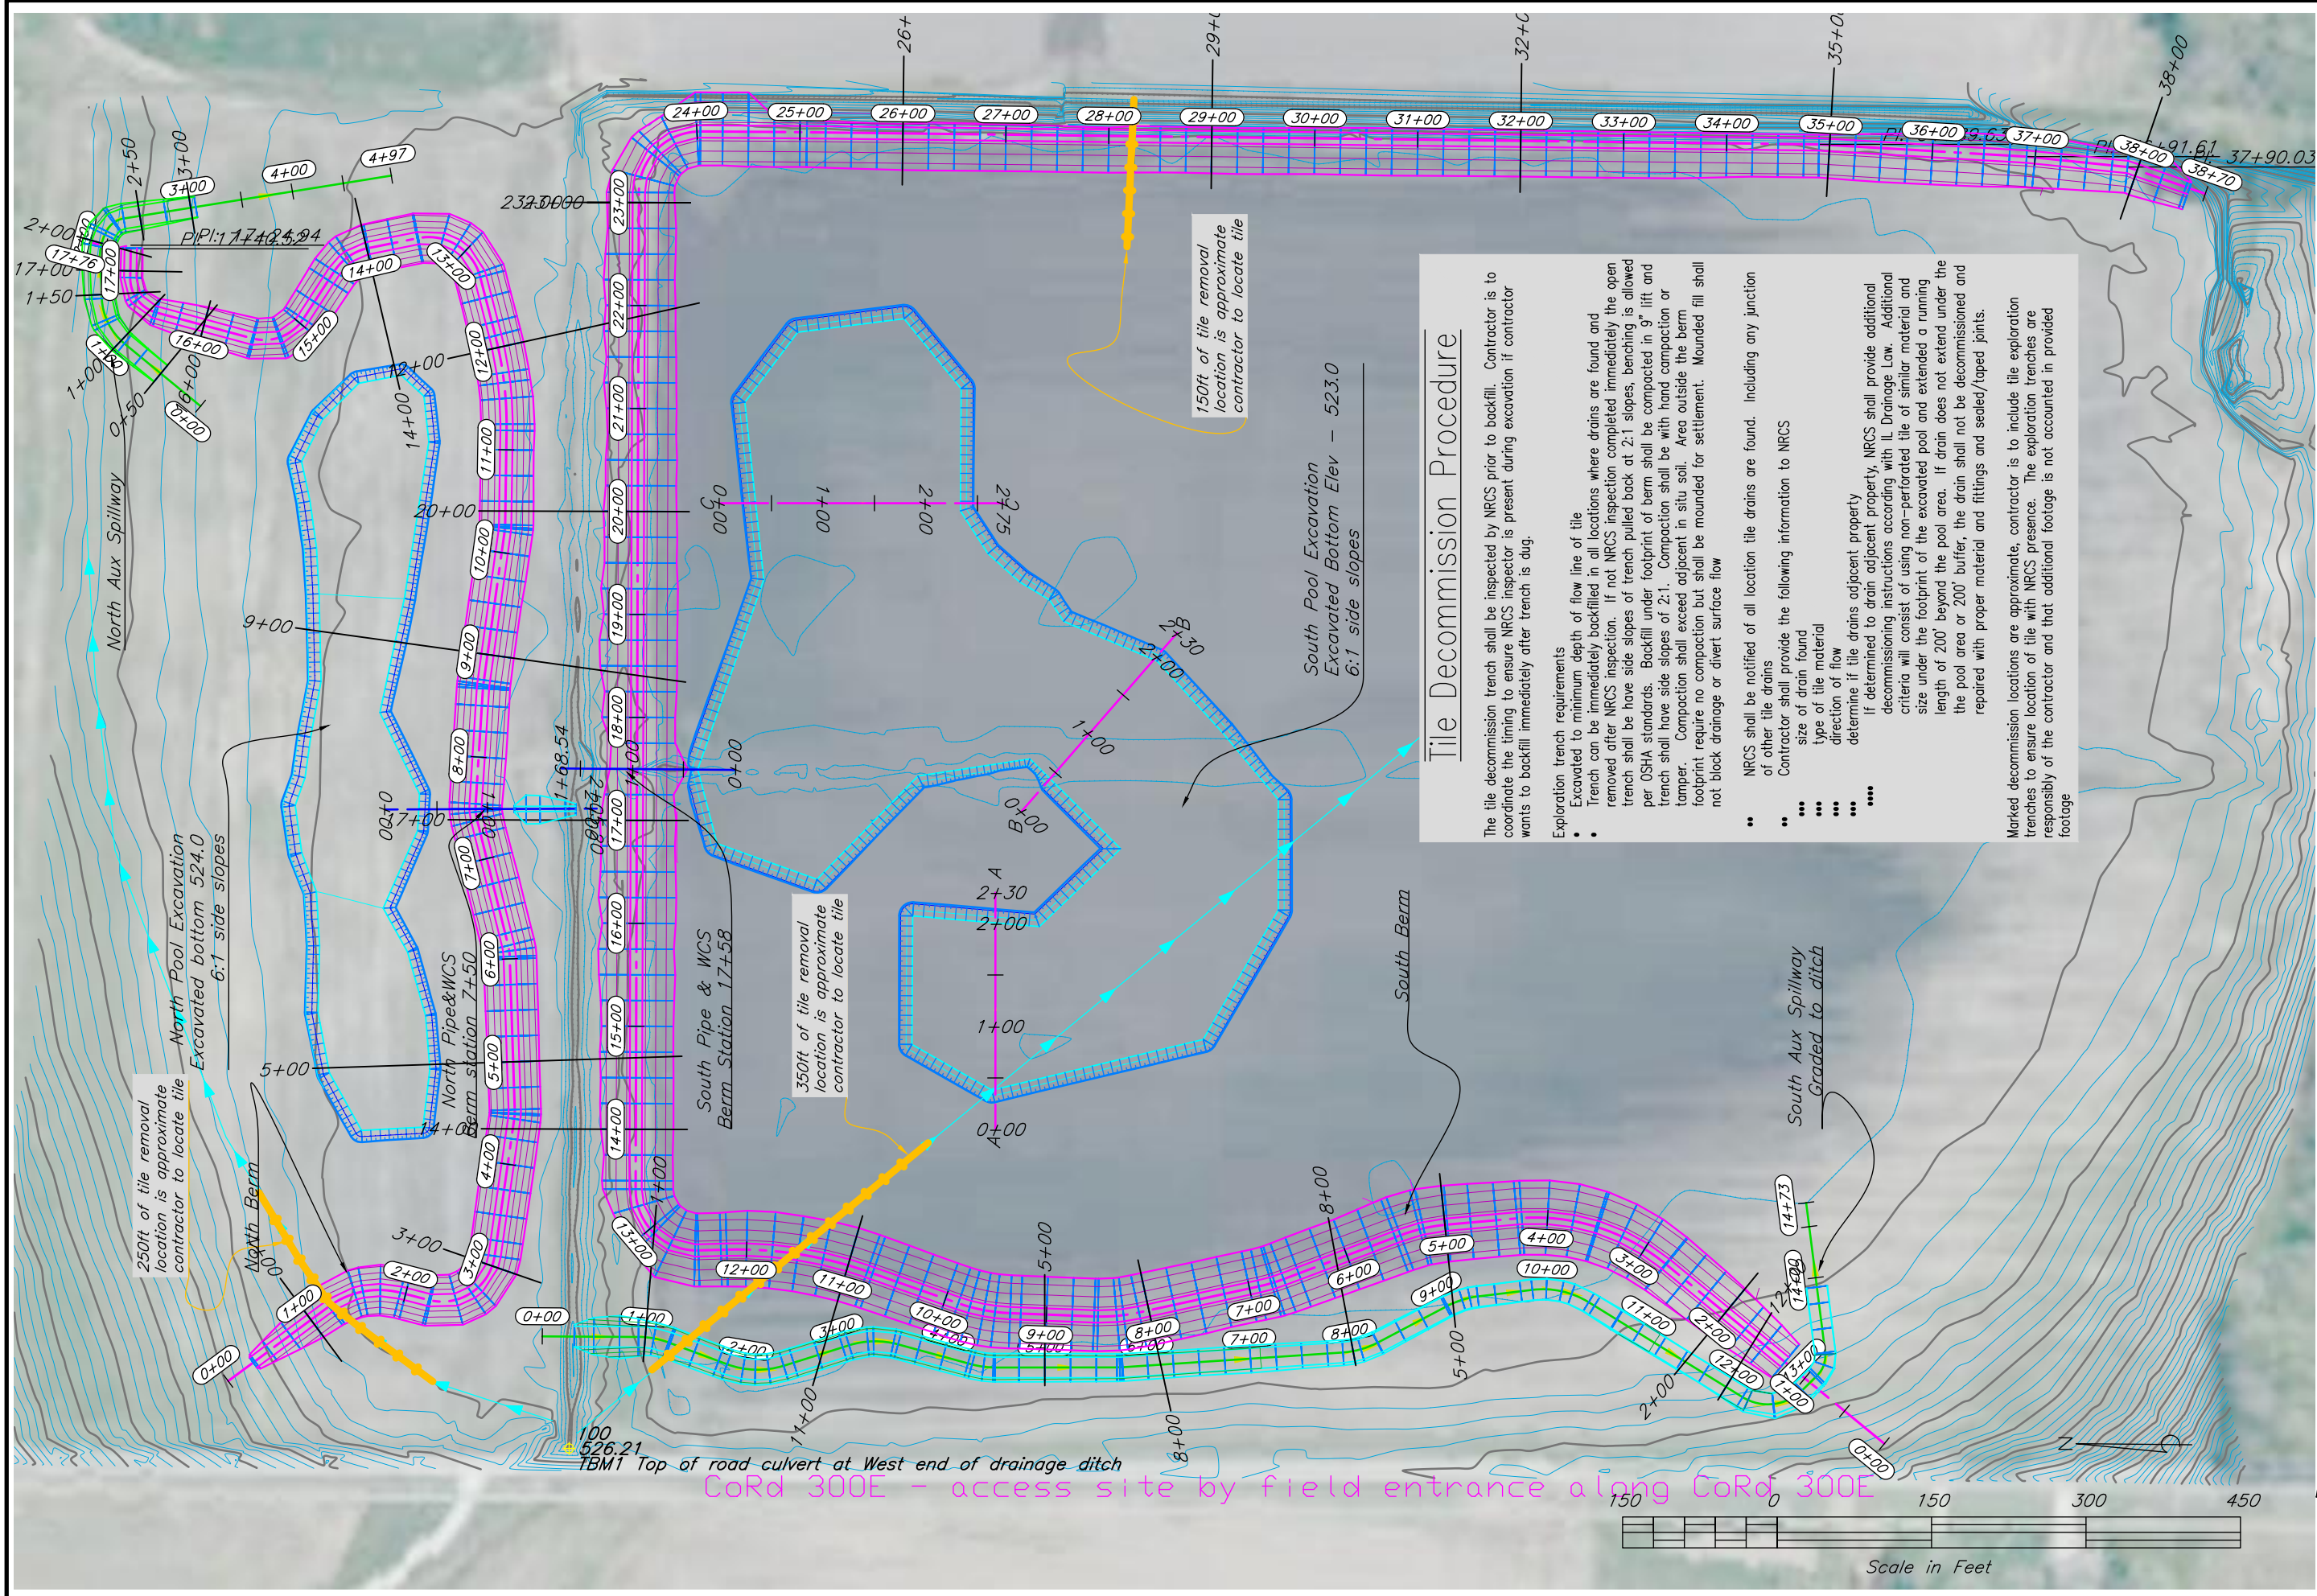

Tile Decommission Procedure

The tile decommission trench shall be inspected by NRCS prior to backfill. Contractor is to coordinate the timing to ensure NRCS inspector is present during excavation if contractor wants to backfill immediately after trench is dug.

Exploration trench requirements

- Excavated to minimum depth of flow line of tile
- Trench can be immediately backfilled in all locations where drains are found and removed after NRCS inspection. If not NRCS inspection completed immediately the open trench shall have side slopes of trench pulled back at 2:1 slopes, benching is allowed per OSHA standards. Backfill under footprint of berm shall be compacted in 9" lift and trench shall have side slopes of 2:1. Compaction shall be with hand compaction or tamper. Compaction shall exceed adjacent in situ soil. Area outside the berm footprint require no compaction but shall be mounded for settlement. Mounded fill shall not block drainage or divert surface flow

- NRCS shall be notified of all location tile drains are found. Including any junction of other tile drains

Contractor shall provide the following information to NRCS

- size of drain found
- type of tile material
- direction of flow
- determine if tile drains adjacent property

If determined to drain adjacent property, NRCS shall provide additional decommissioning instructions according with IL Drainage Law. Additional criteria will consist of using non-perforated tile of similar material and size under the footprint of the excavated pool and extended a running length of 200' beyond the pool area. If drain does not extend under the pool area or 200' buffer, the drain shall not be decommissioned and repaired with proper material and fittings and sealed/taped joints.

Marked decommission locations are approximate, contractor is to include tile exploration trenches to ensure location of tile with NRCS presence. The exploration trenches are responsibility of the contractor and that additional footage is not accounted in provided footage



United States
Department of
Agriculture

Natural Resources
Conservation Service

File No.
Blythe
WRE_C3D2022.dwg

Drawing No.
6/18/25 4:20 PM

Sheet 3 of 3

Corner of East Ridge road and 300E

Sheet 3


PLAN VIEW (TILE DECOMMISSION)

WETLAND RESTORATION


BLYTHE WRE

Designed	M.Dasenbrock	Date	2.2025
Drawn	M.Dasenbrock		2.2025
Checked	Kerry Buhrle		7-9-2025
Approved	M.Dasenbrock		7.2025


Fayette County, IL

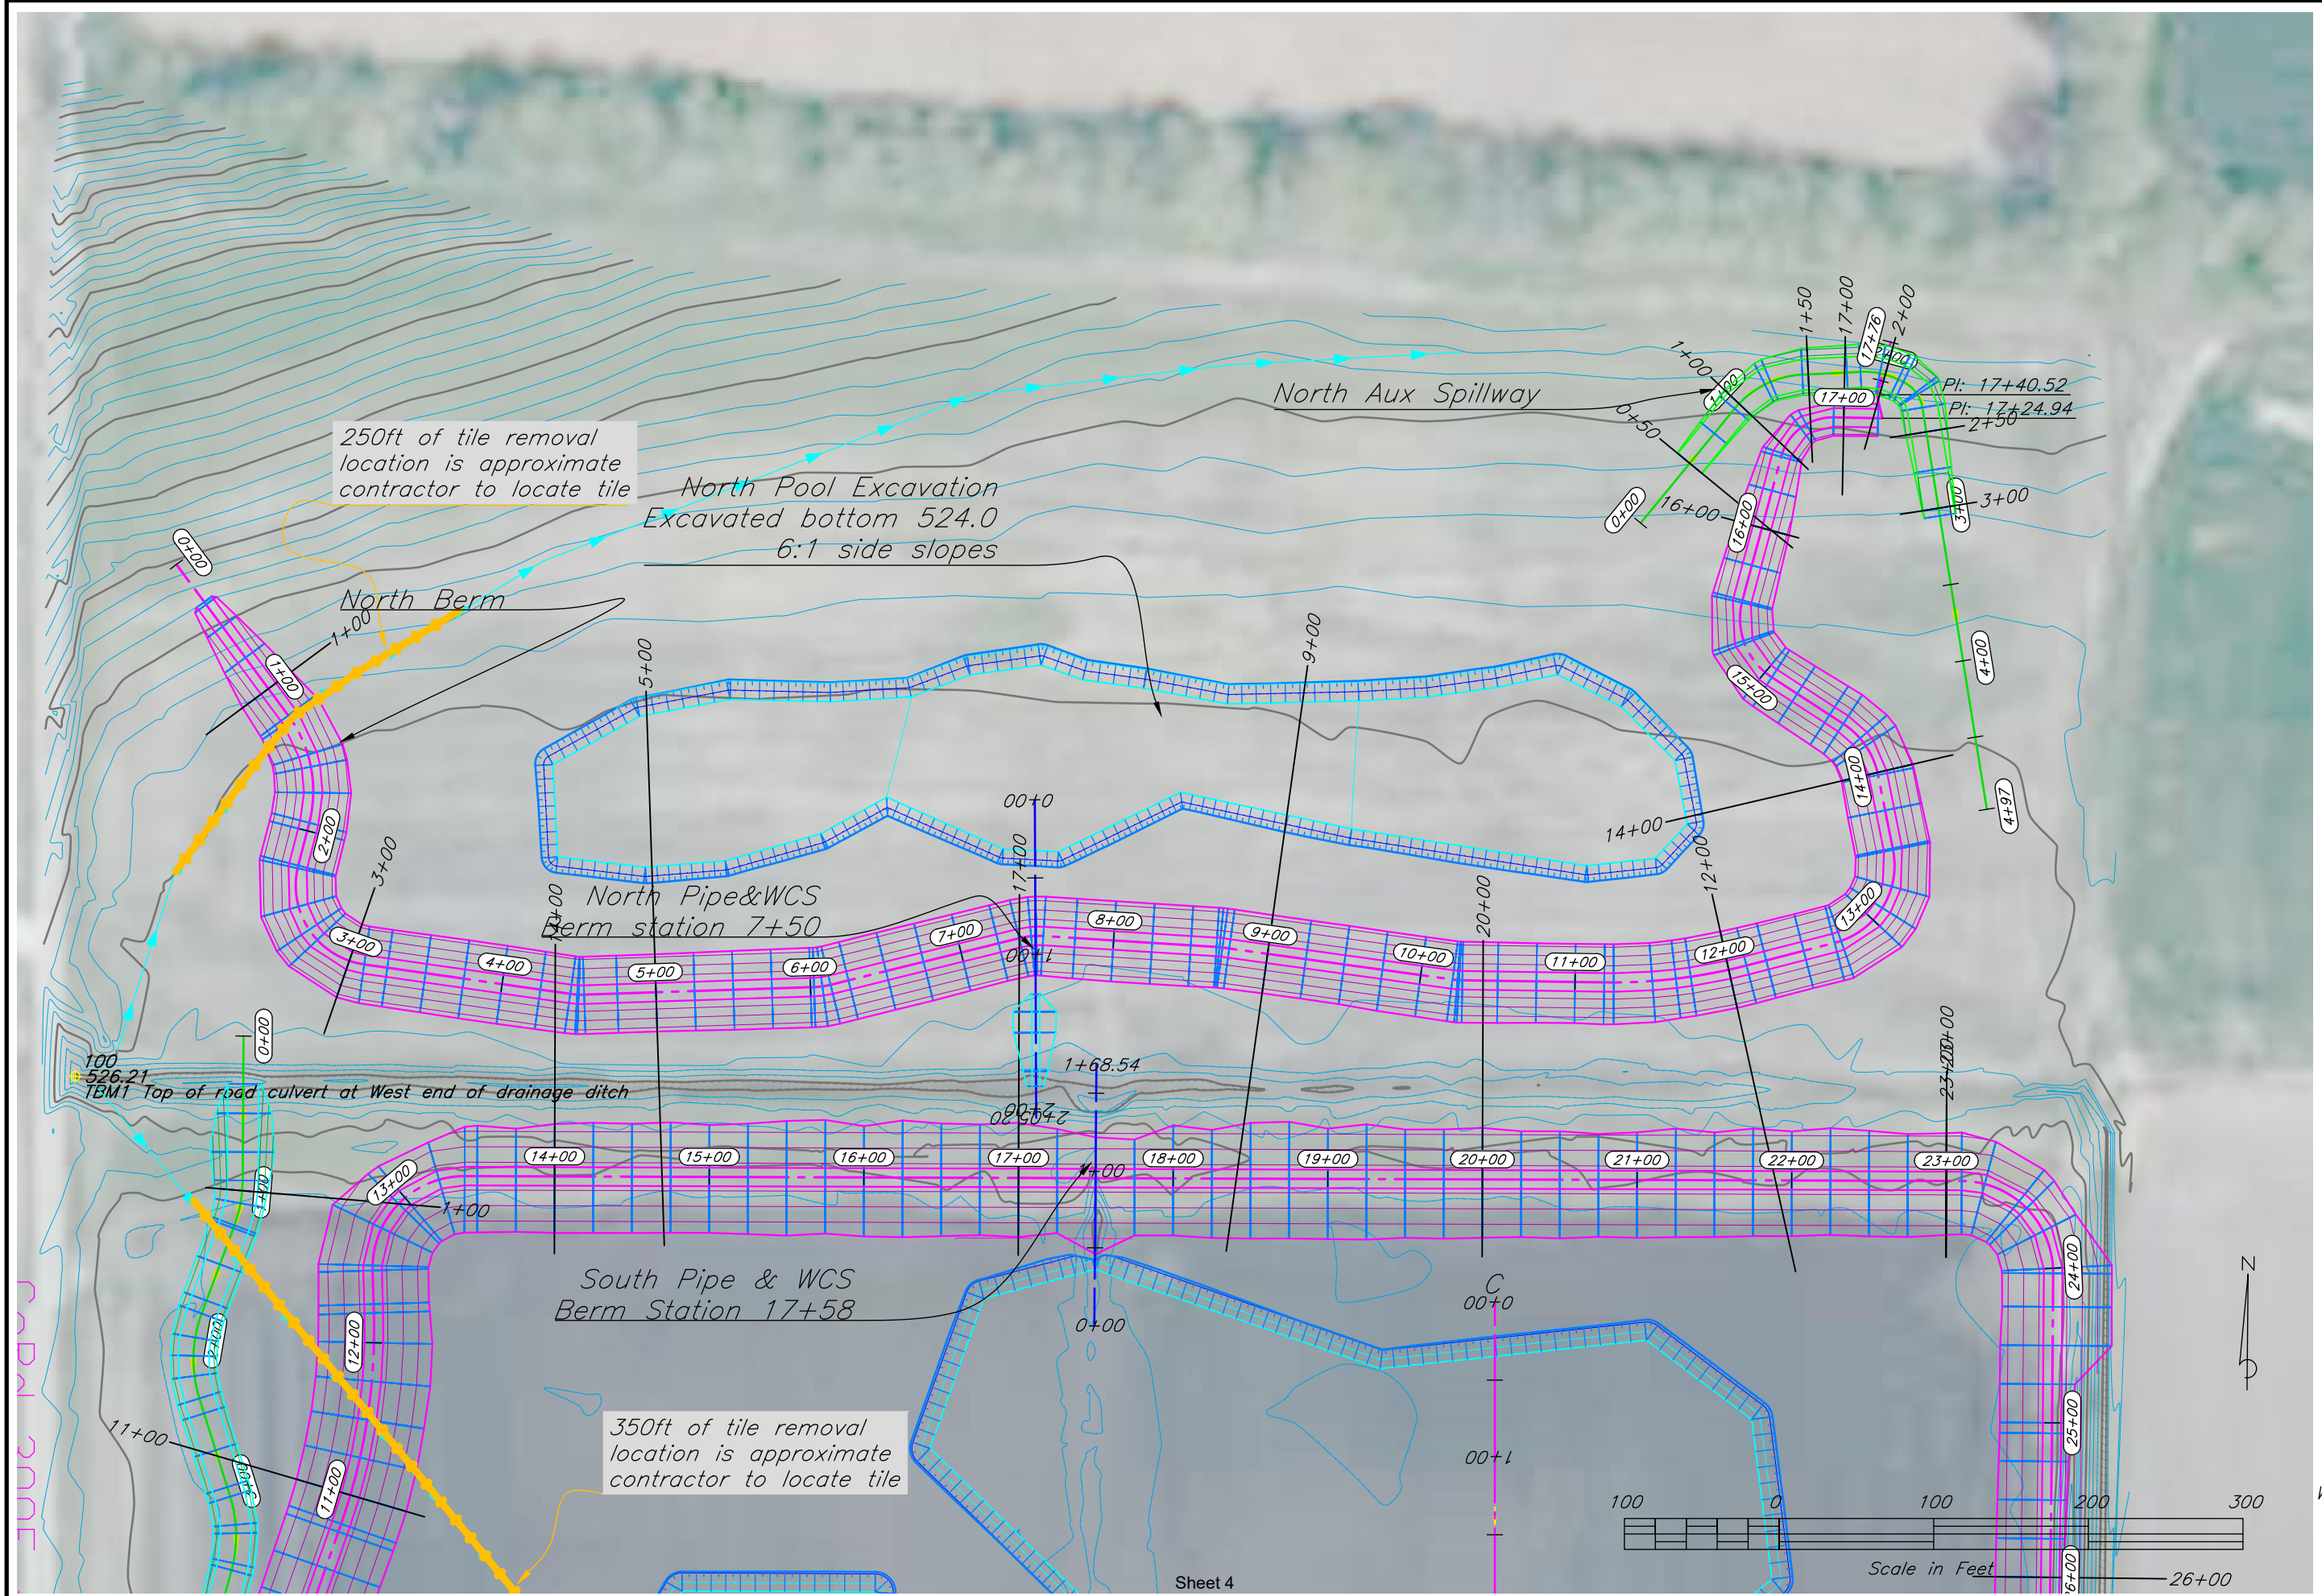


 United States Department of Agriculture Natural Resources Conservation Service	BLYTHE WRE WETLAND RESTORATION PLAN VIEW NORTH WETLAND				Corner of East Ridge road and 300E Fayette County, IL
	File No. Blythe WRE_C3D2022.dwg				
	Drawing No. 6/18/25 4:20 PM Sheet ### of .				
	Date 2.2025 Designed M.Dasenbrock Drawn M.Dasenbrock Checked Kerry Budine Approved M.Dasenbrock				

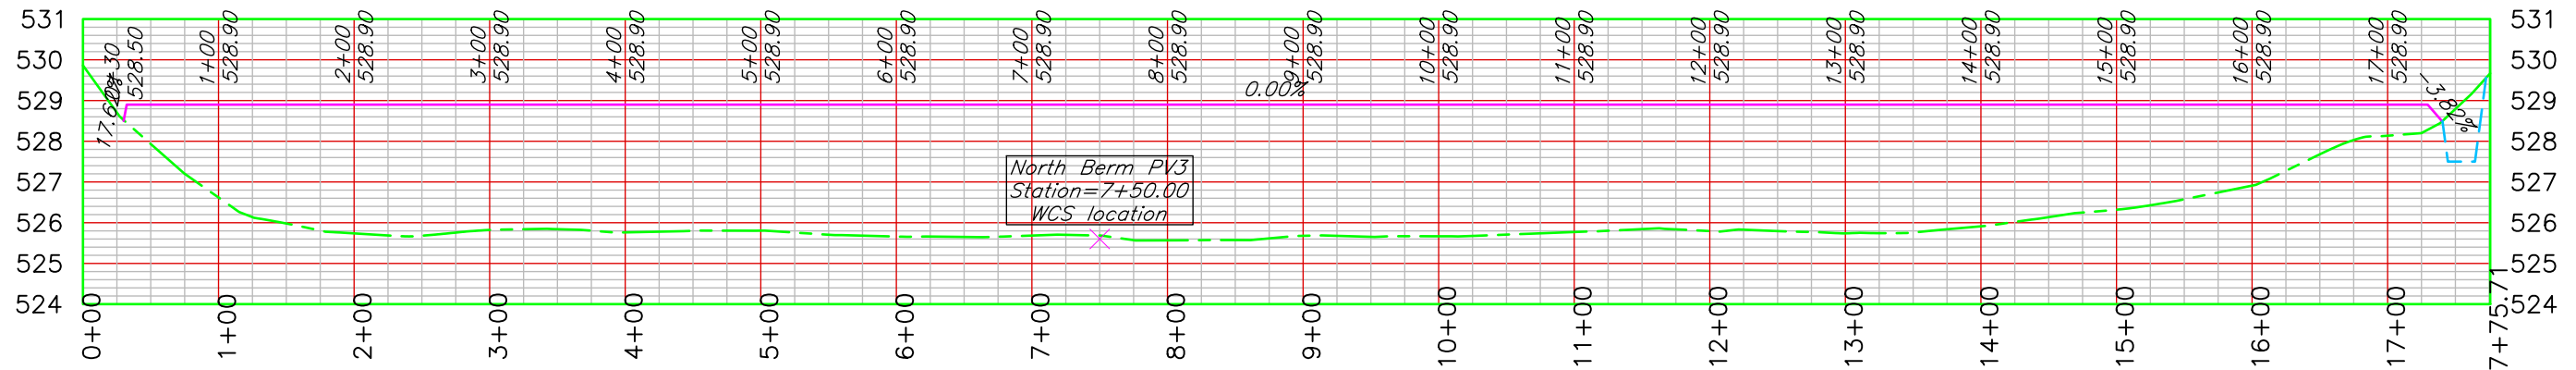

North Berm PROFILE

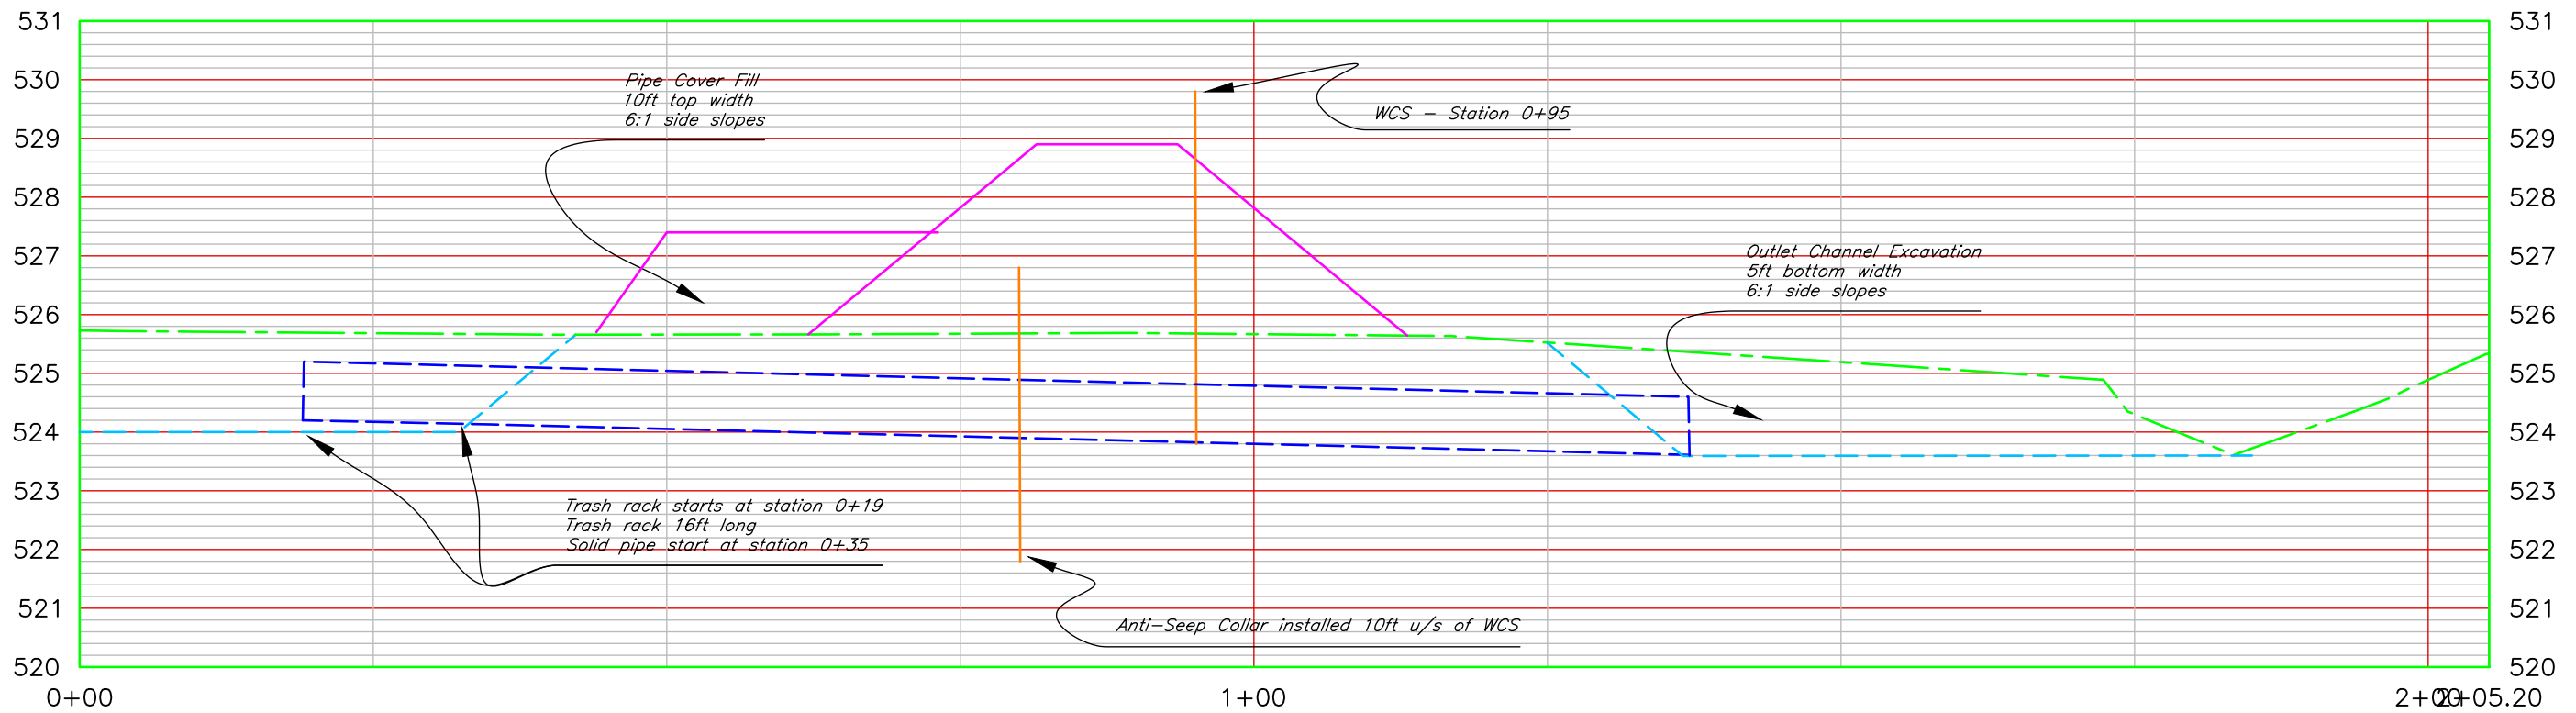



Pipe North PROFILE

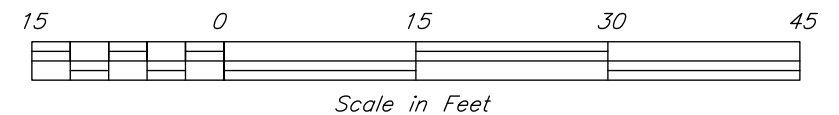


Designed	M.Dasenbrock	Date	2.2025
Drawn	M.Dasenbrock		2.2025
Checked	Kerry Bushue		7-9-2025
Approved	M.Dasenbrock		7.2025

BLYTHE WRE
WETLAND RESTORATION
NORTH BERM PROFILE
Corner of East Ridge road and 300E
Fayette County, IL




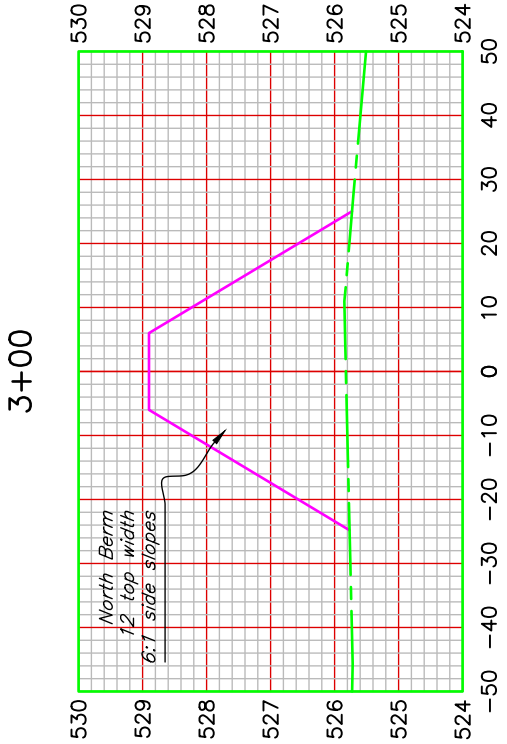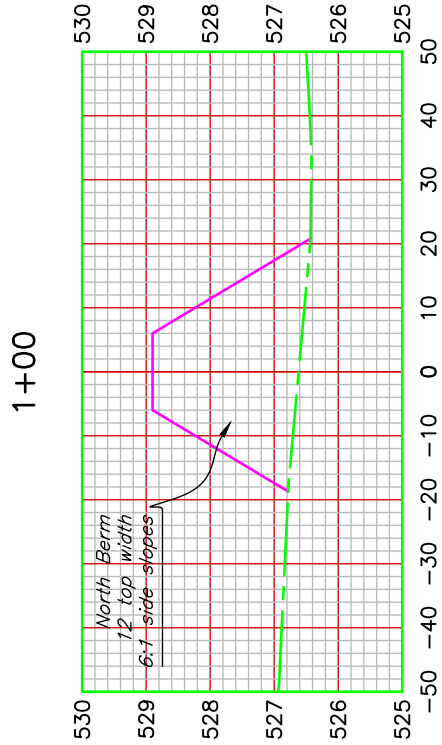


5+00

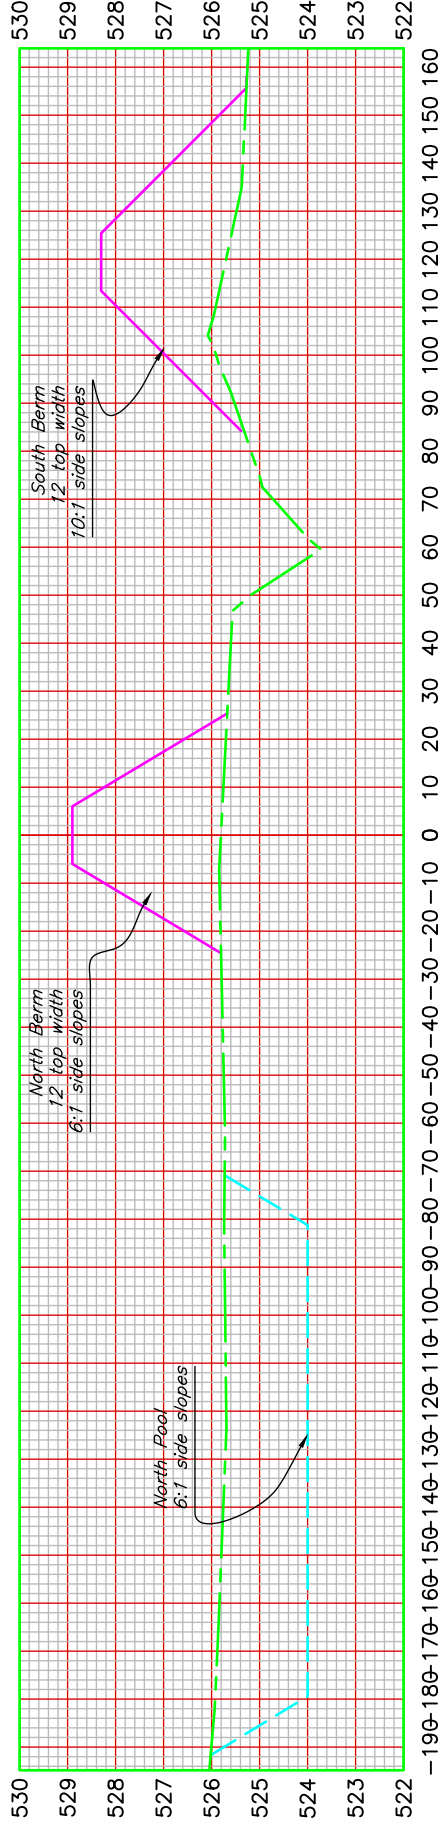


9+00

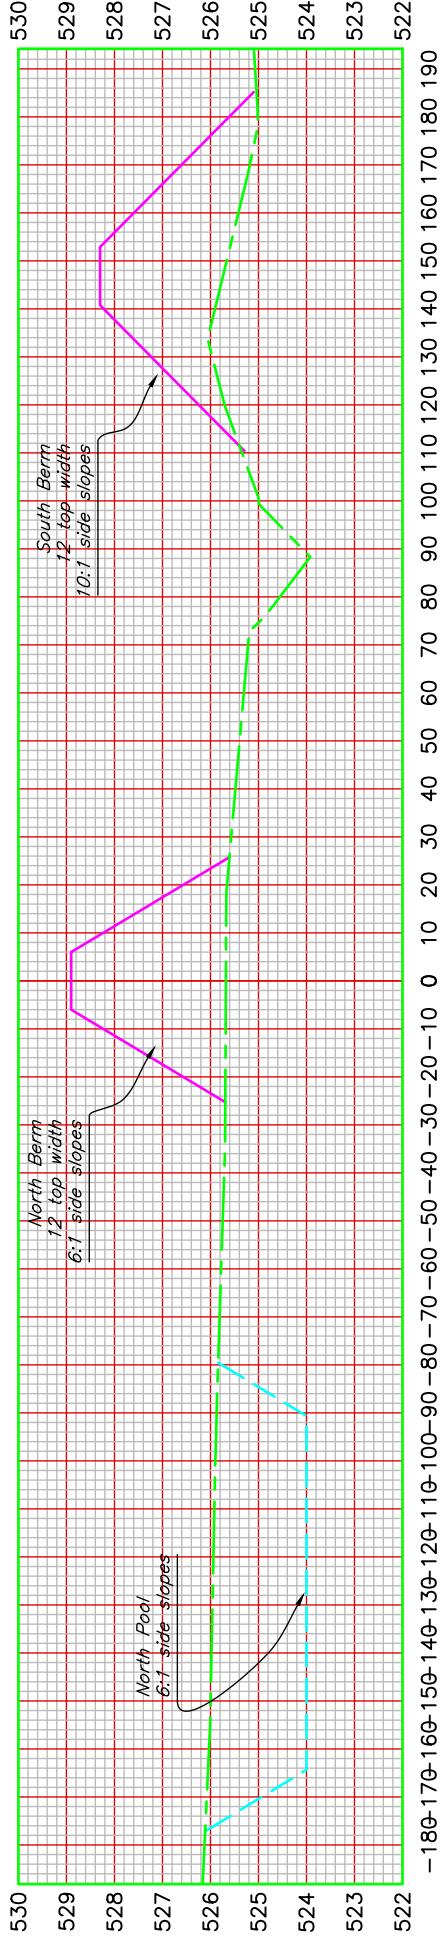


12+00

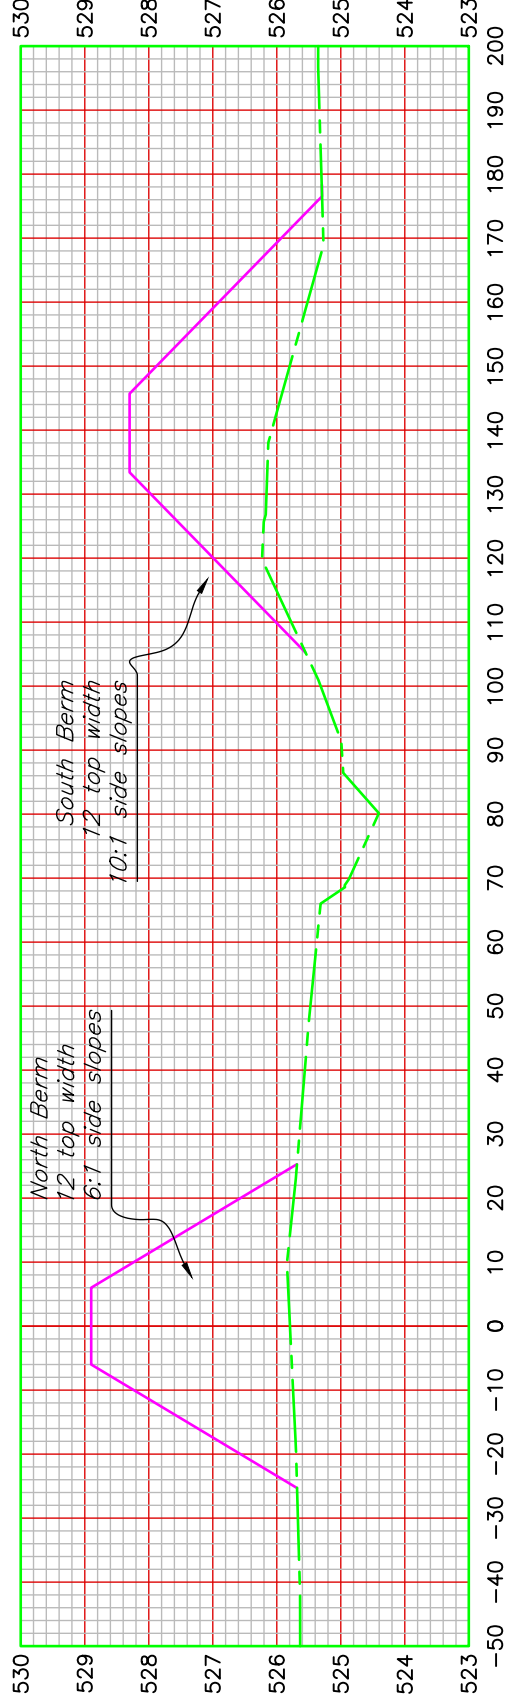


14+00

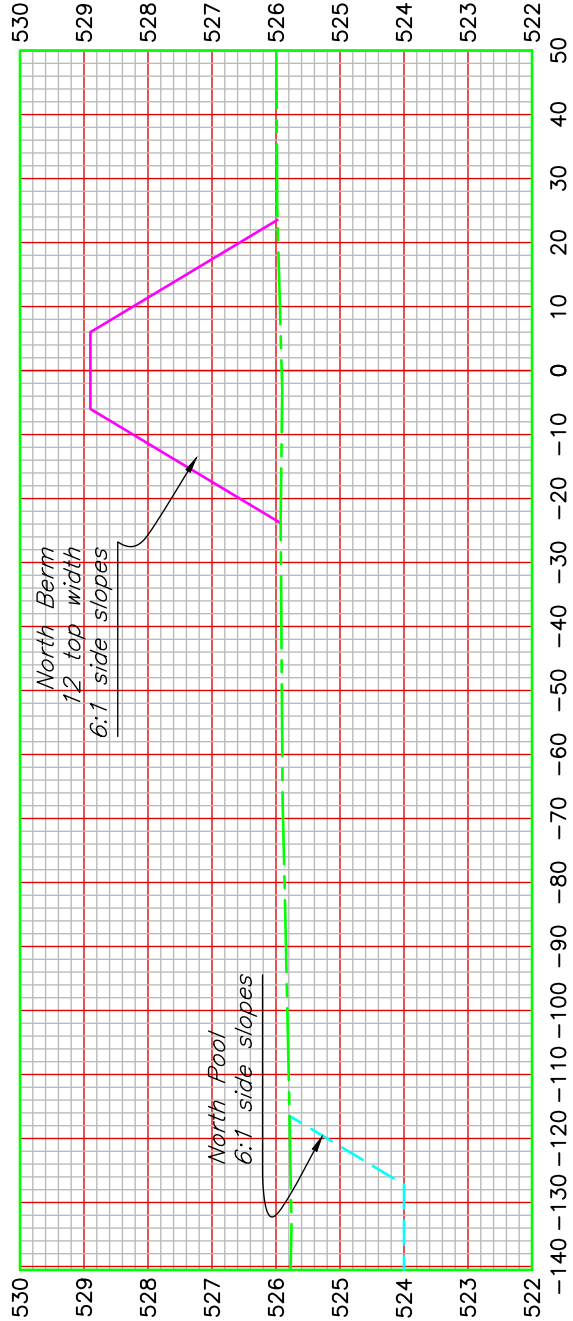


16+00

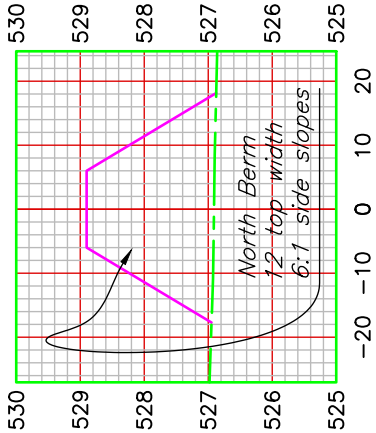


17+00

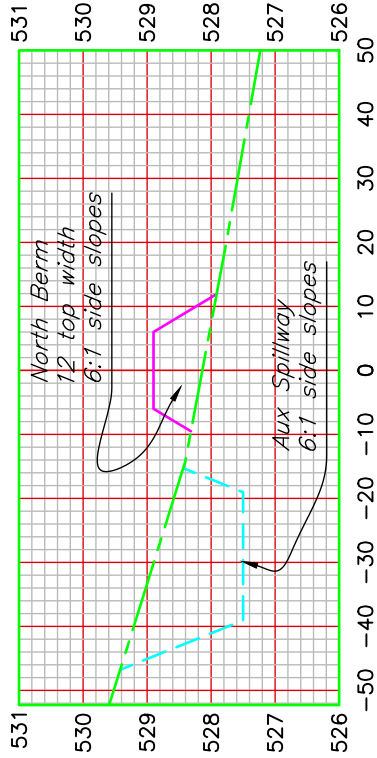


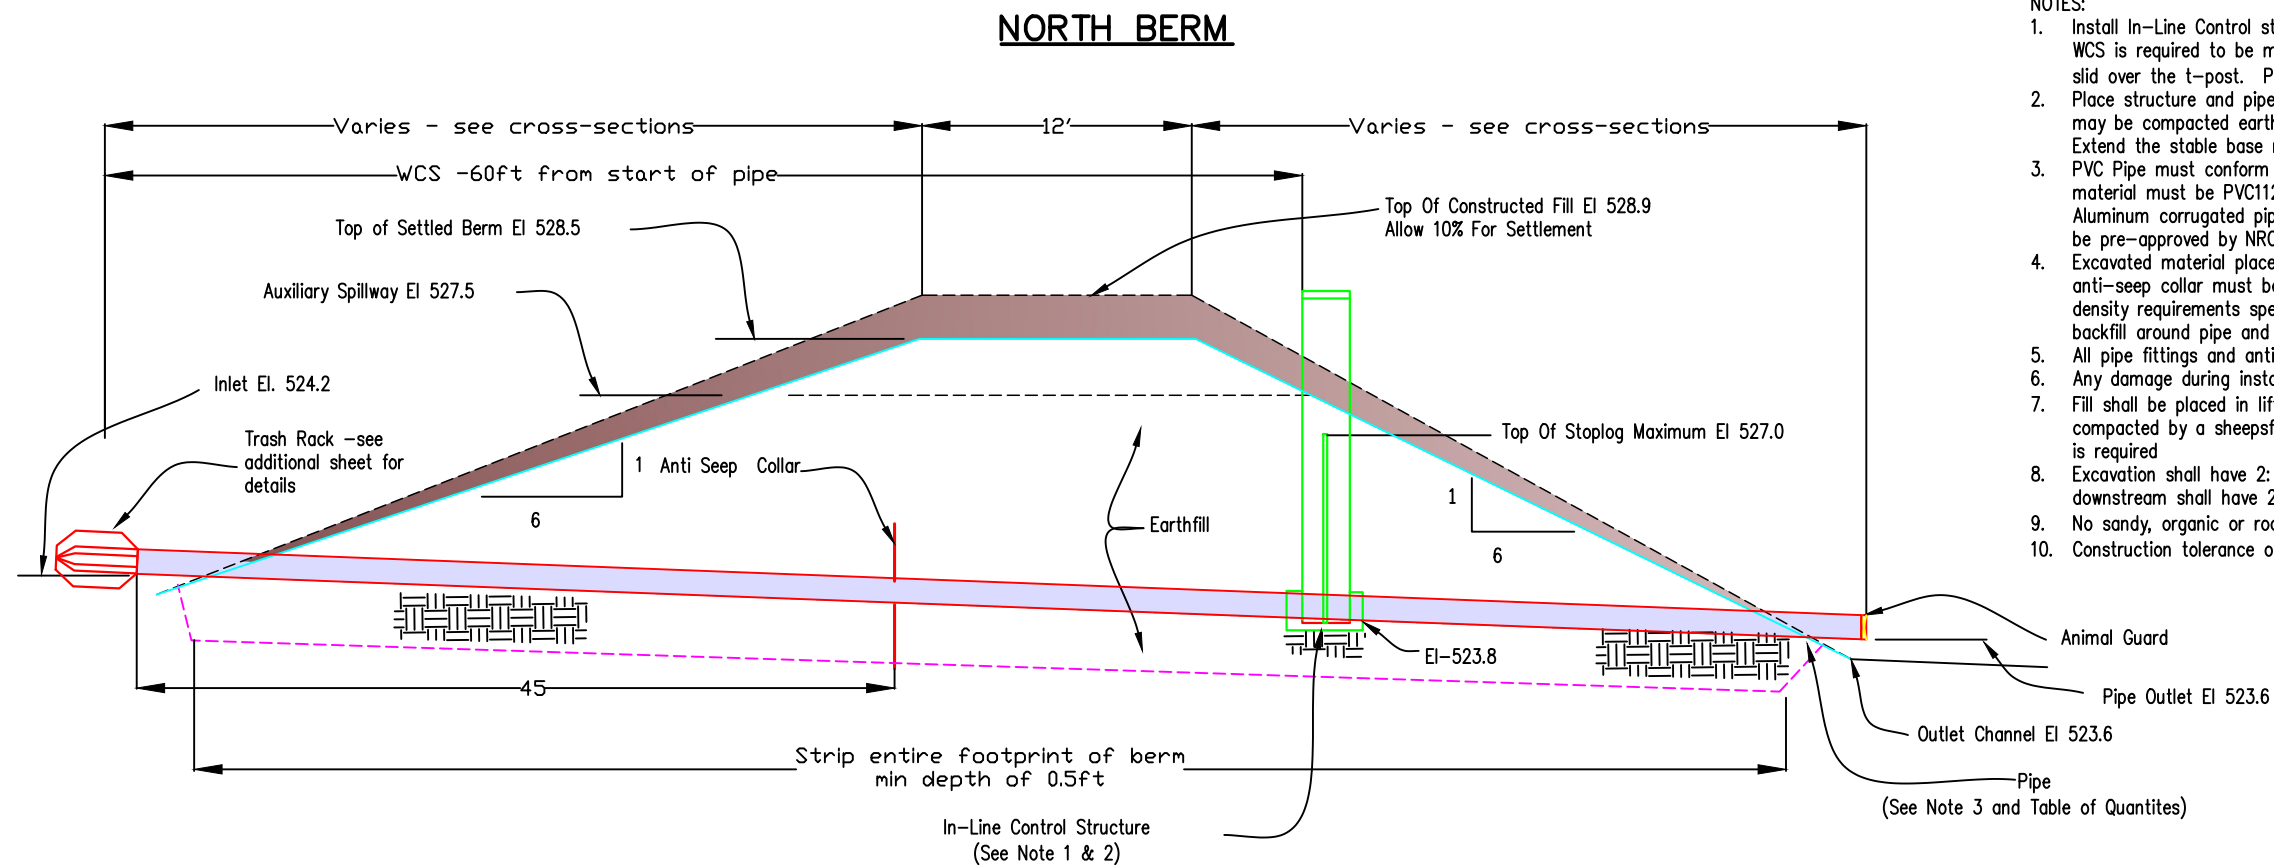


TYPICAL BERM CROSS SECTION

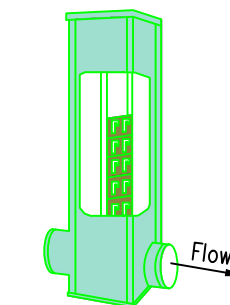

IN-LINE CONTROL STRUCTURE

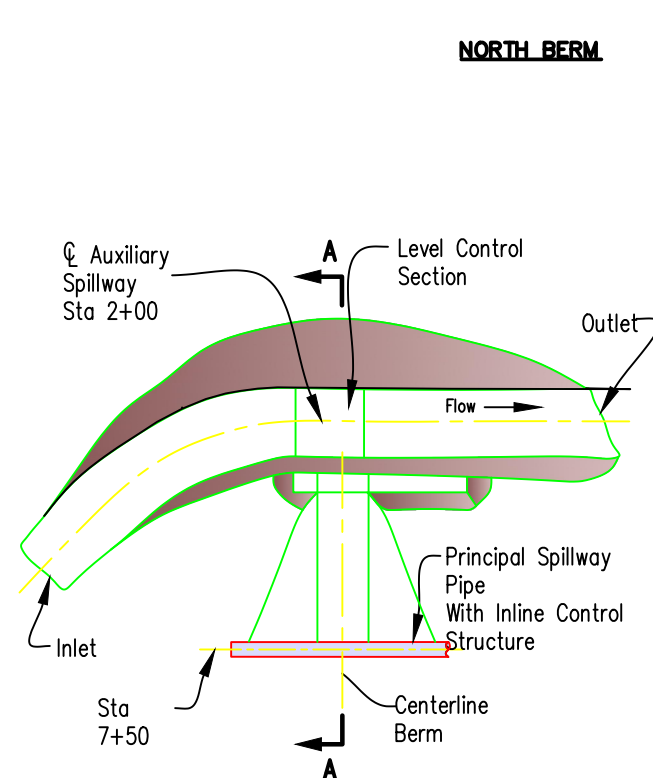


AUXILIARY SPILLWAY PLAN

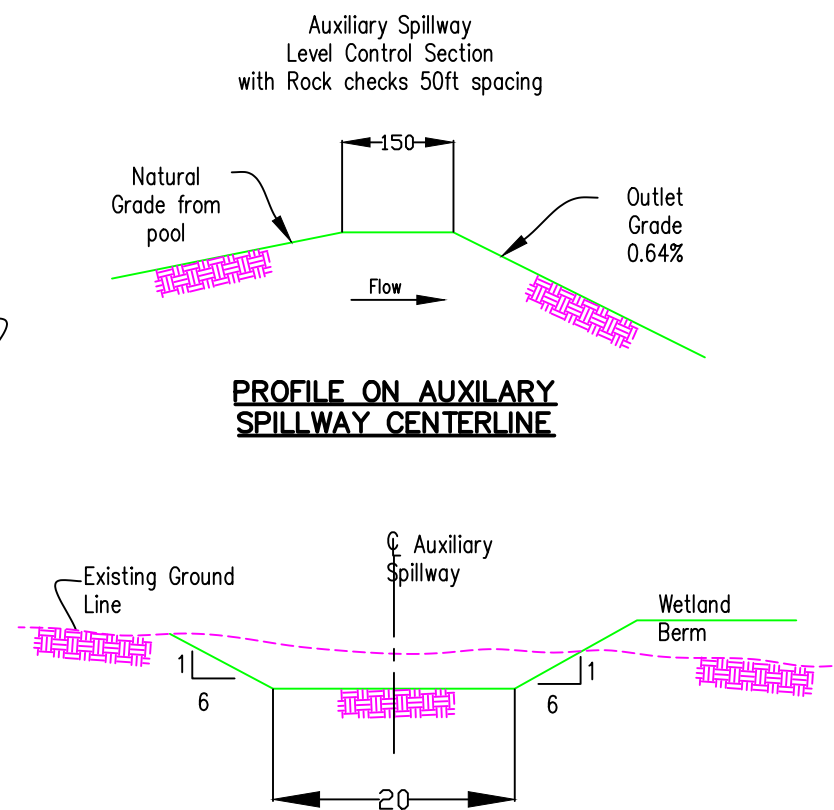

SECTION A-A

TABLE OF QUANTITIES		
ITEM	UNIT	QUANTITY
Embankment Earthfill	Cu. Yd.	4,310
Stripping of footprint (use at topsolling)	Cu. Yd.	1,584
PVC Pipe 12" Dia, SDR 26	L.F.	100
Control Structure 12" Dia x 6' High, 16' Weir Length	Ea	1
Antiseep Collar (pvc) 5' x 5'	Ea	1
60" t-post with 8ft PVC marker post	Ea	2
Trash Rack - see additional sheets	Ea	1
Animal guard	Ea	1

Trash Rack Detail For Water Control Structure


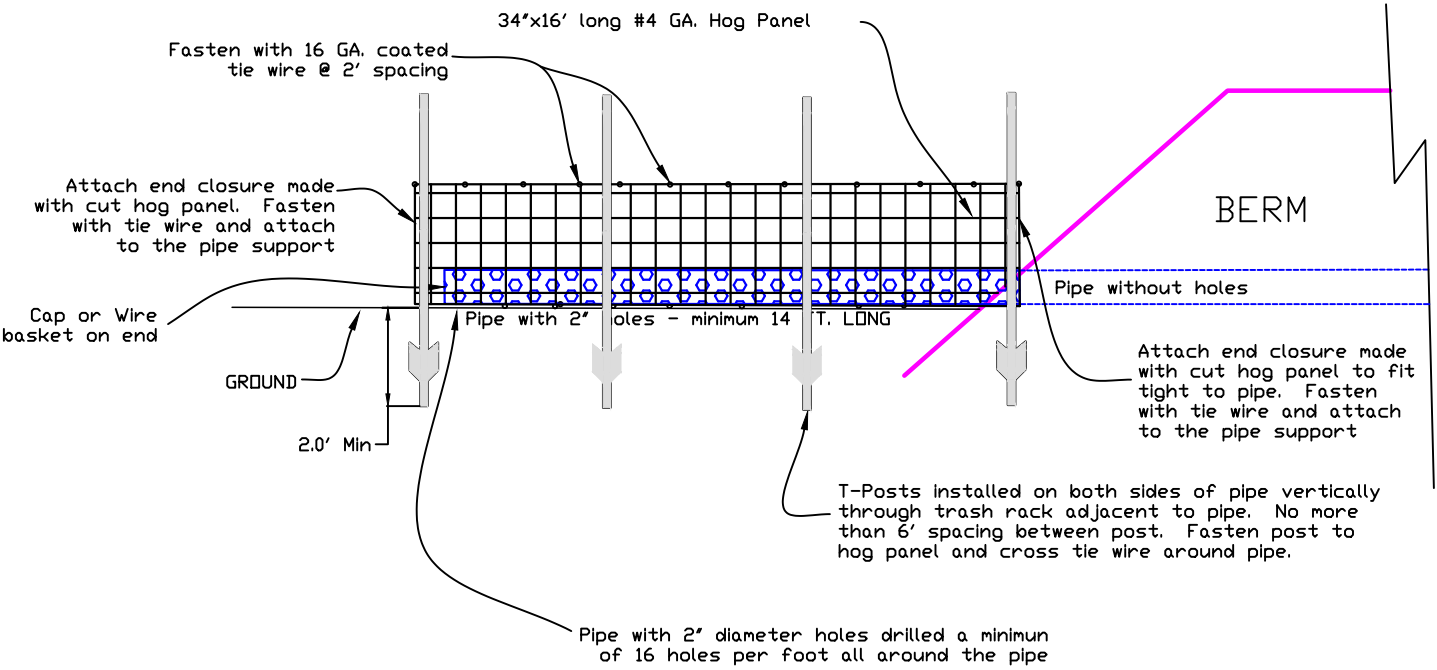


- NOTES:
1. Coat pipe at collar location with butyl roof patch sealer or other butyl rubber sealer. (Do not use asphalt roof patch).
 2. Completed installation must be water tight.
 3. Cut a circular hole (centered) in butyl rubber sheet approximately 1/3 smaller in diameter than the pipe diameter. For example-cut a 4 inch hole in sheet with 6 inch diameter pipe, cut a 7 inch hole in sheet with 10 inch diameter pipe. Force butyl rubber sheet over upstream end of pipe over butyl roof sealer.
 4. Install a 1/2 inch minimum width stainless steel clamp. Clamp around pipe over butyl rubber sheet and tighten until sealer is forced out.
 5. Staple butyl rubber sheet to lumber frame.
 6. Wood frame shall be rigid enough to withstand backfill operations.
 7. Other anti-seep collar material options shall be approved by engineer prior to installation.

TABLE OF QUANTITIES				
W FEET	Rubber Sq. Ft.	Stainless Steel Clamp	Lumber Lin. Ft.	No. Of Collars
5	25	1	20	1

HOG PANEL IS REQUIRED FOR END ENCLOSURES

TABLE OF QUANTITIES- TRASH RACK		
ITEM	UNIT	QUANTITY
34x16' LONG 4 GA. HOG PANEL	EACH	4
T-post	EACH	8

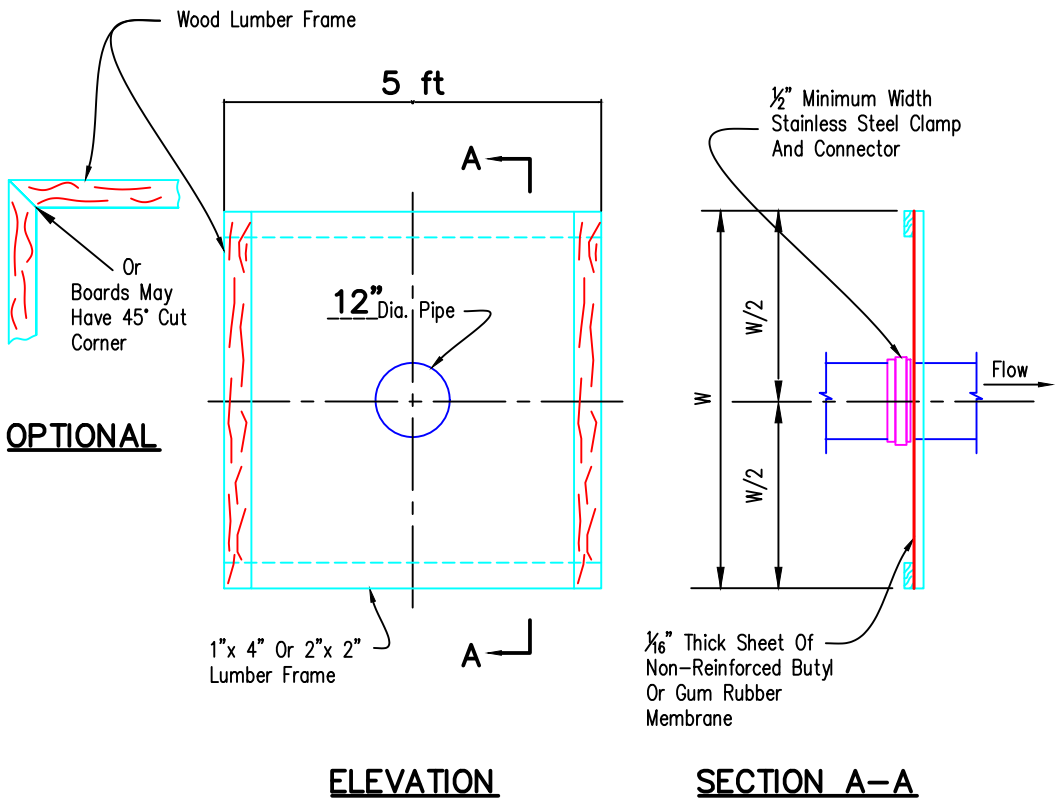
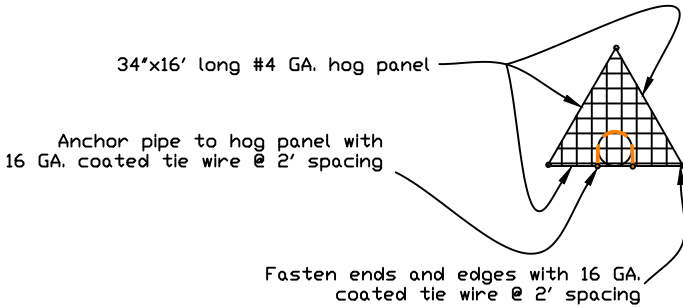


Designed: ###M.Dasenbrock 7-2025###
Drawn: M.Dasenbrock
Checked: Kerry Buehler
Approved: ###M.Dasenbrock 7-2025###

BLYTHE WRE
WETLAND RESTORATION
NORTH BERM DETAILS (2)
Fayette County, IL
Corner of East Ridge road and 300E

United States
Department of
Agriculture
USDA
Natural Resources
Conservation Service
File No. Blythe WRE_C3D2022.dwg
Drawing No. ###
6/20/25 2:02 PM
Sheet ### of ###


North Wetland Auxiliary Spillway
Qty 3 checks

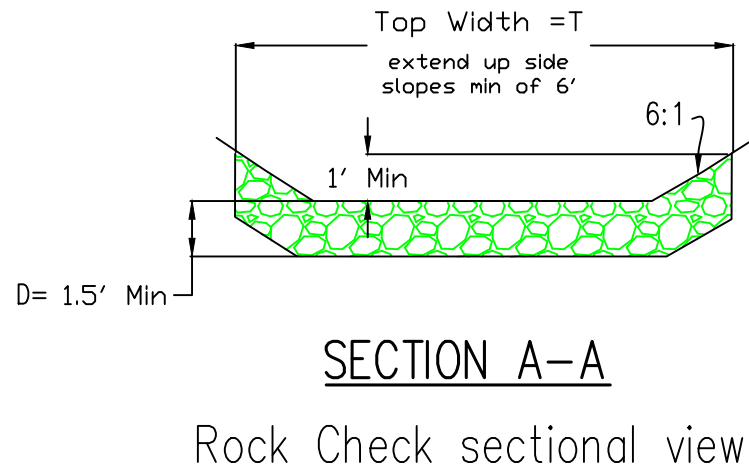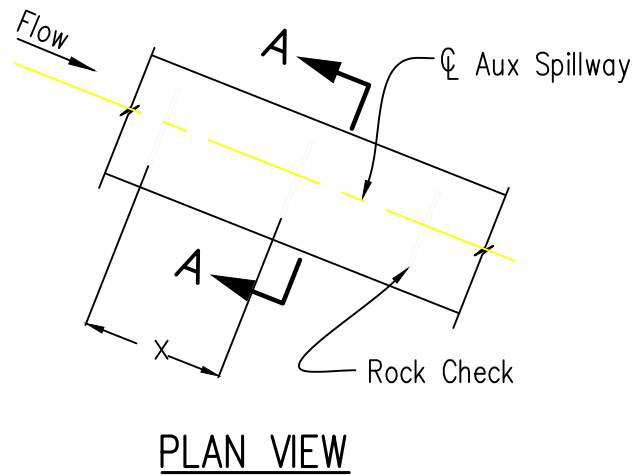

- NOTES:
- Excavate trench 3' wide.
 - Compact rock backfill by rolling with construction equipment.
 - Finished rock surface will be flush with the ground surface when completed.

BILL OF MATERIAL
27 Tons
Rock gradation shall meet IDOT requirement for Gradation 3 quality designation A or B

ROCK GRADATION 3	
Size	% Passing By Weight
50 lb	100
10 lb	30-70
1 lb	0-16

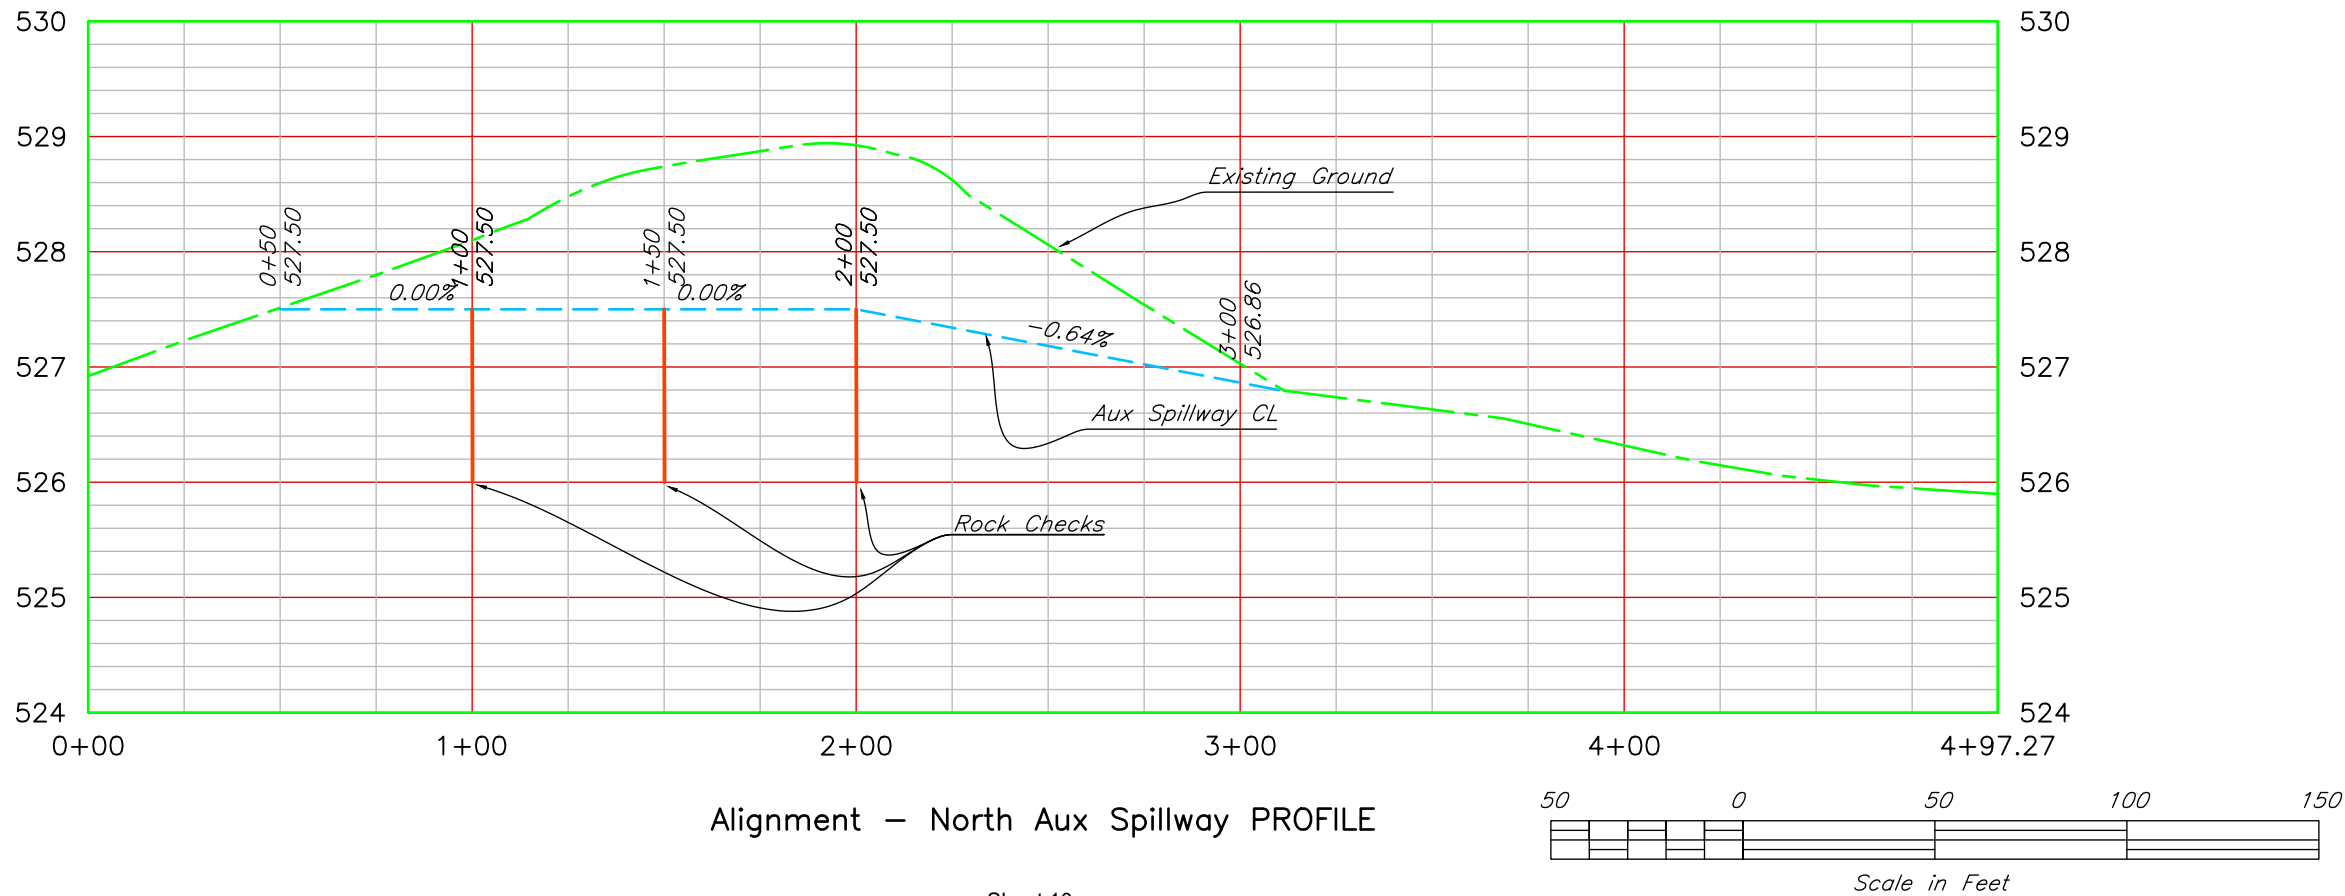

Date
2.2025

Designed
M.Dasenbrock

2.2025

Drawn
M.Dasenbrock

7-9-2025

Checked
Kerry Busch

Approved
M.Dasenbrock 7.2025

BLYTHE WRE
WETLAND RESTORATION

NORTH AUX SPILLWAY PROFILE

Corner of East Ridge road and 300E

United States
Department of
Agriculture







USDA

Natural Resources
Conservation Service


File No.
Blythe
WRE_C3D2022.dwg




Drawing No.
.

6/20/25 2:02 PM

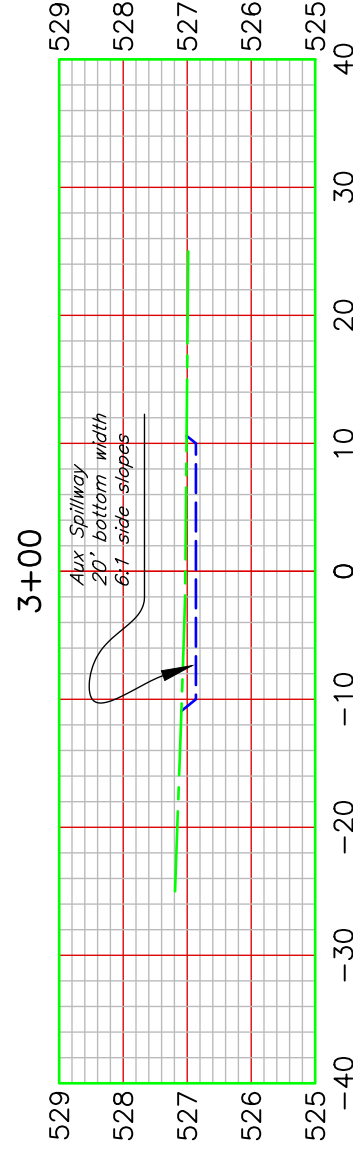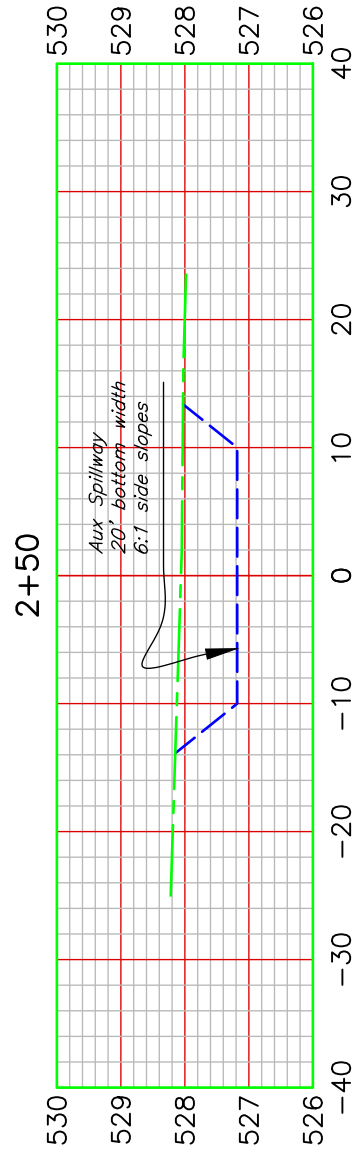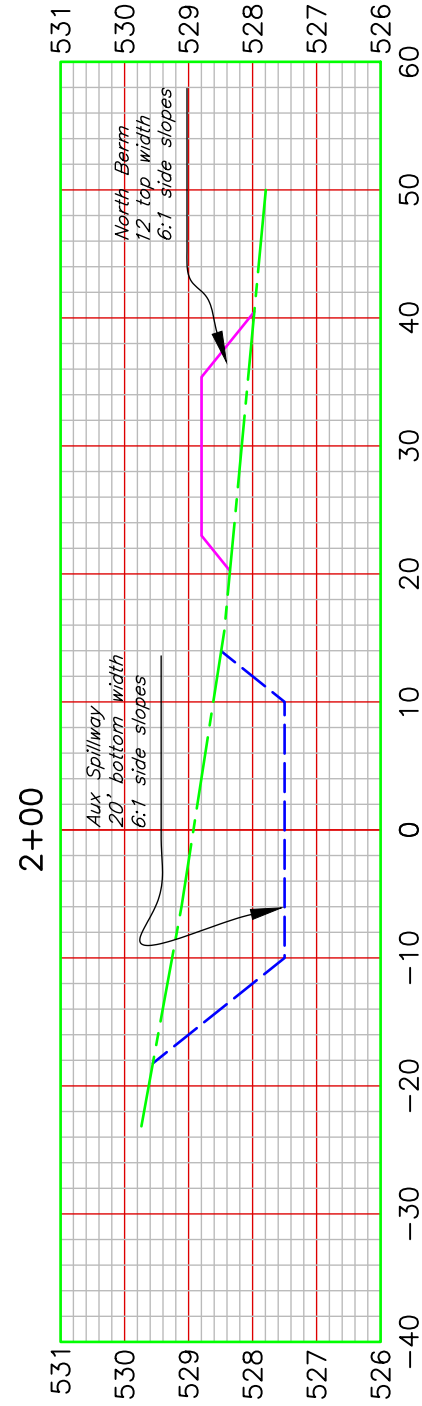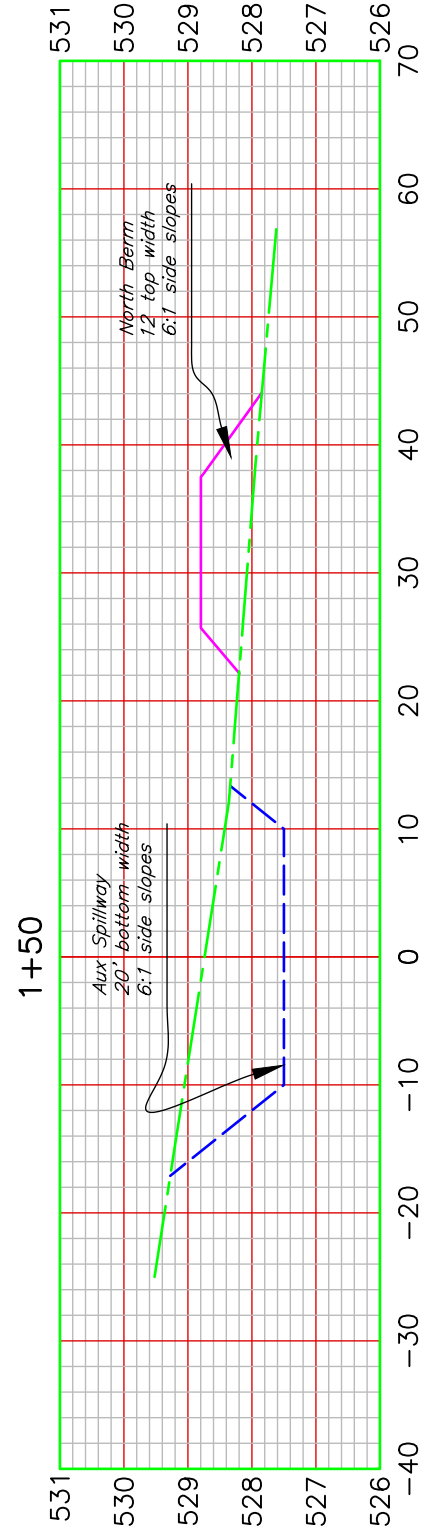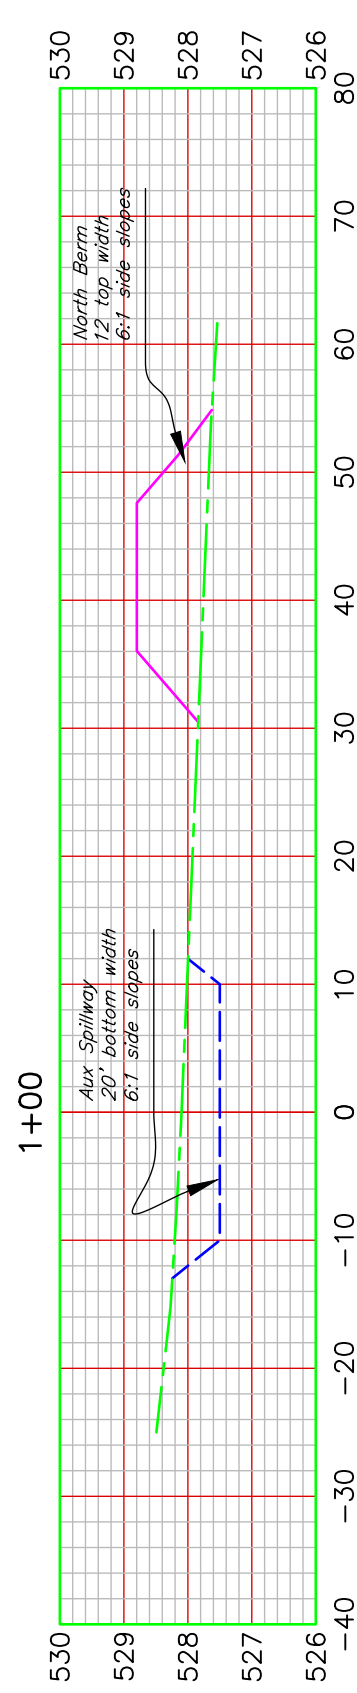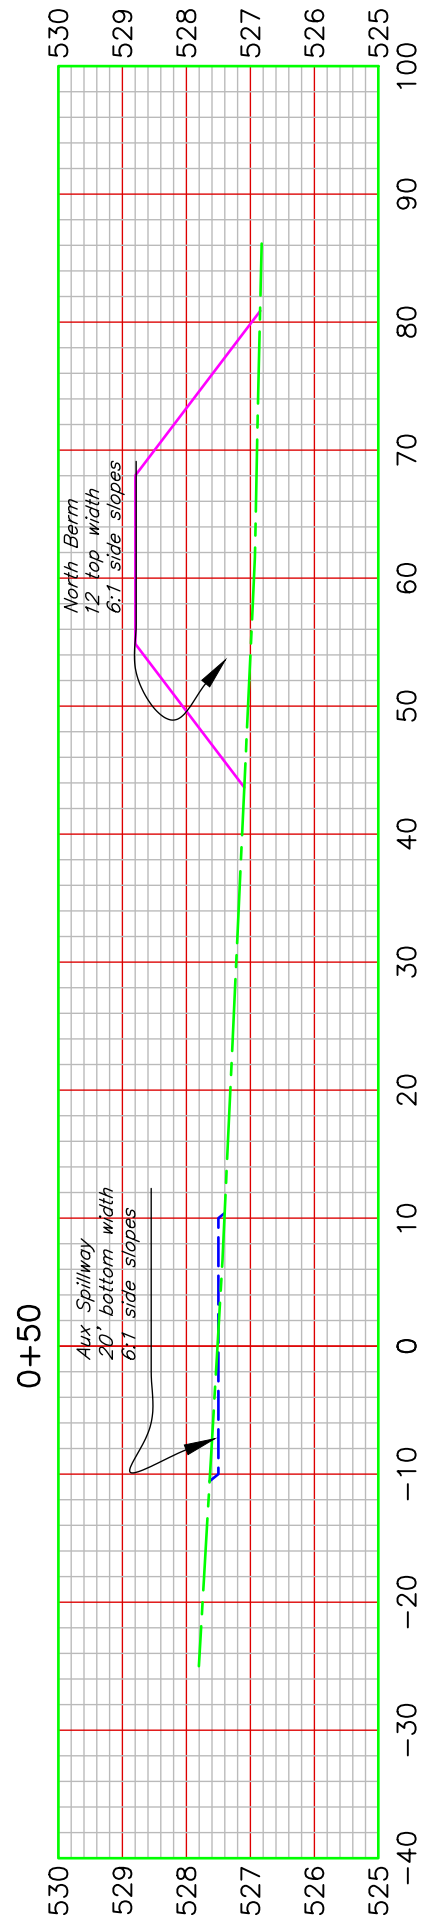

CORR 300E - access site by field entry

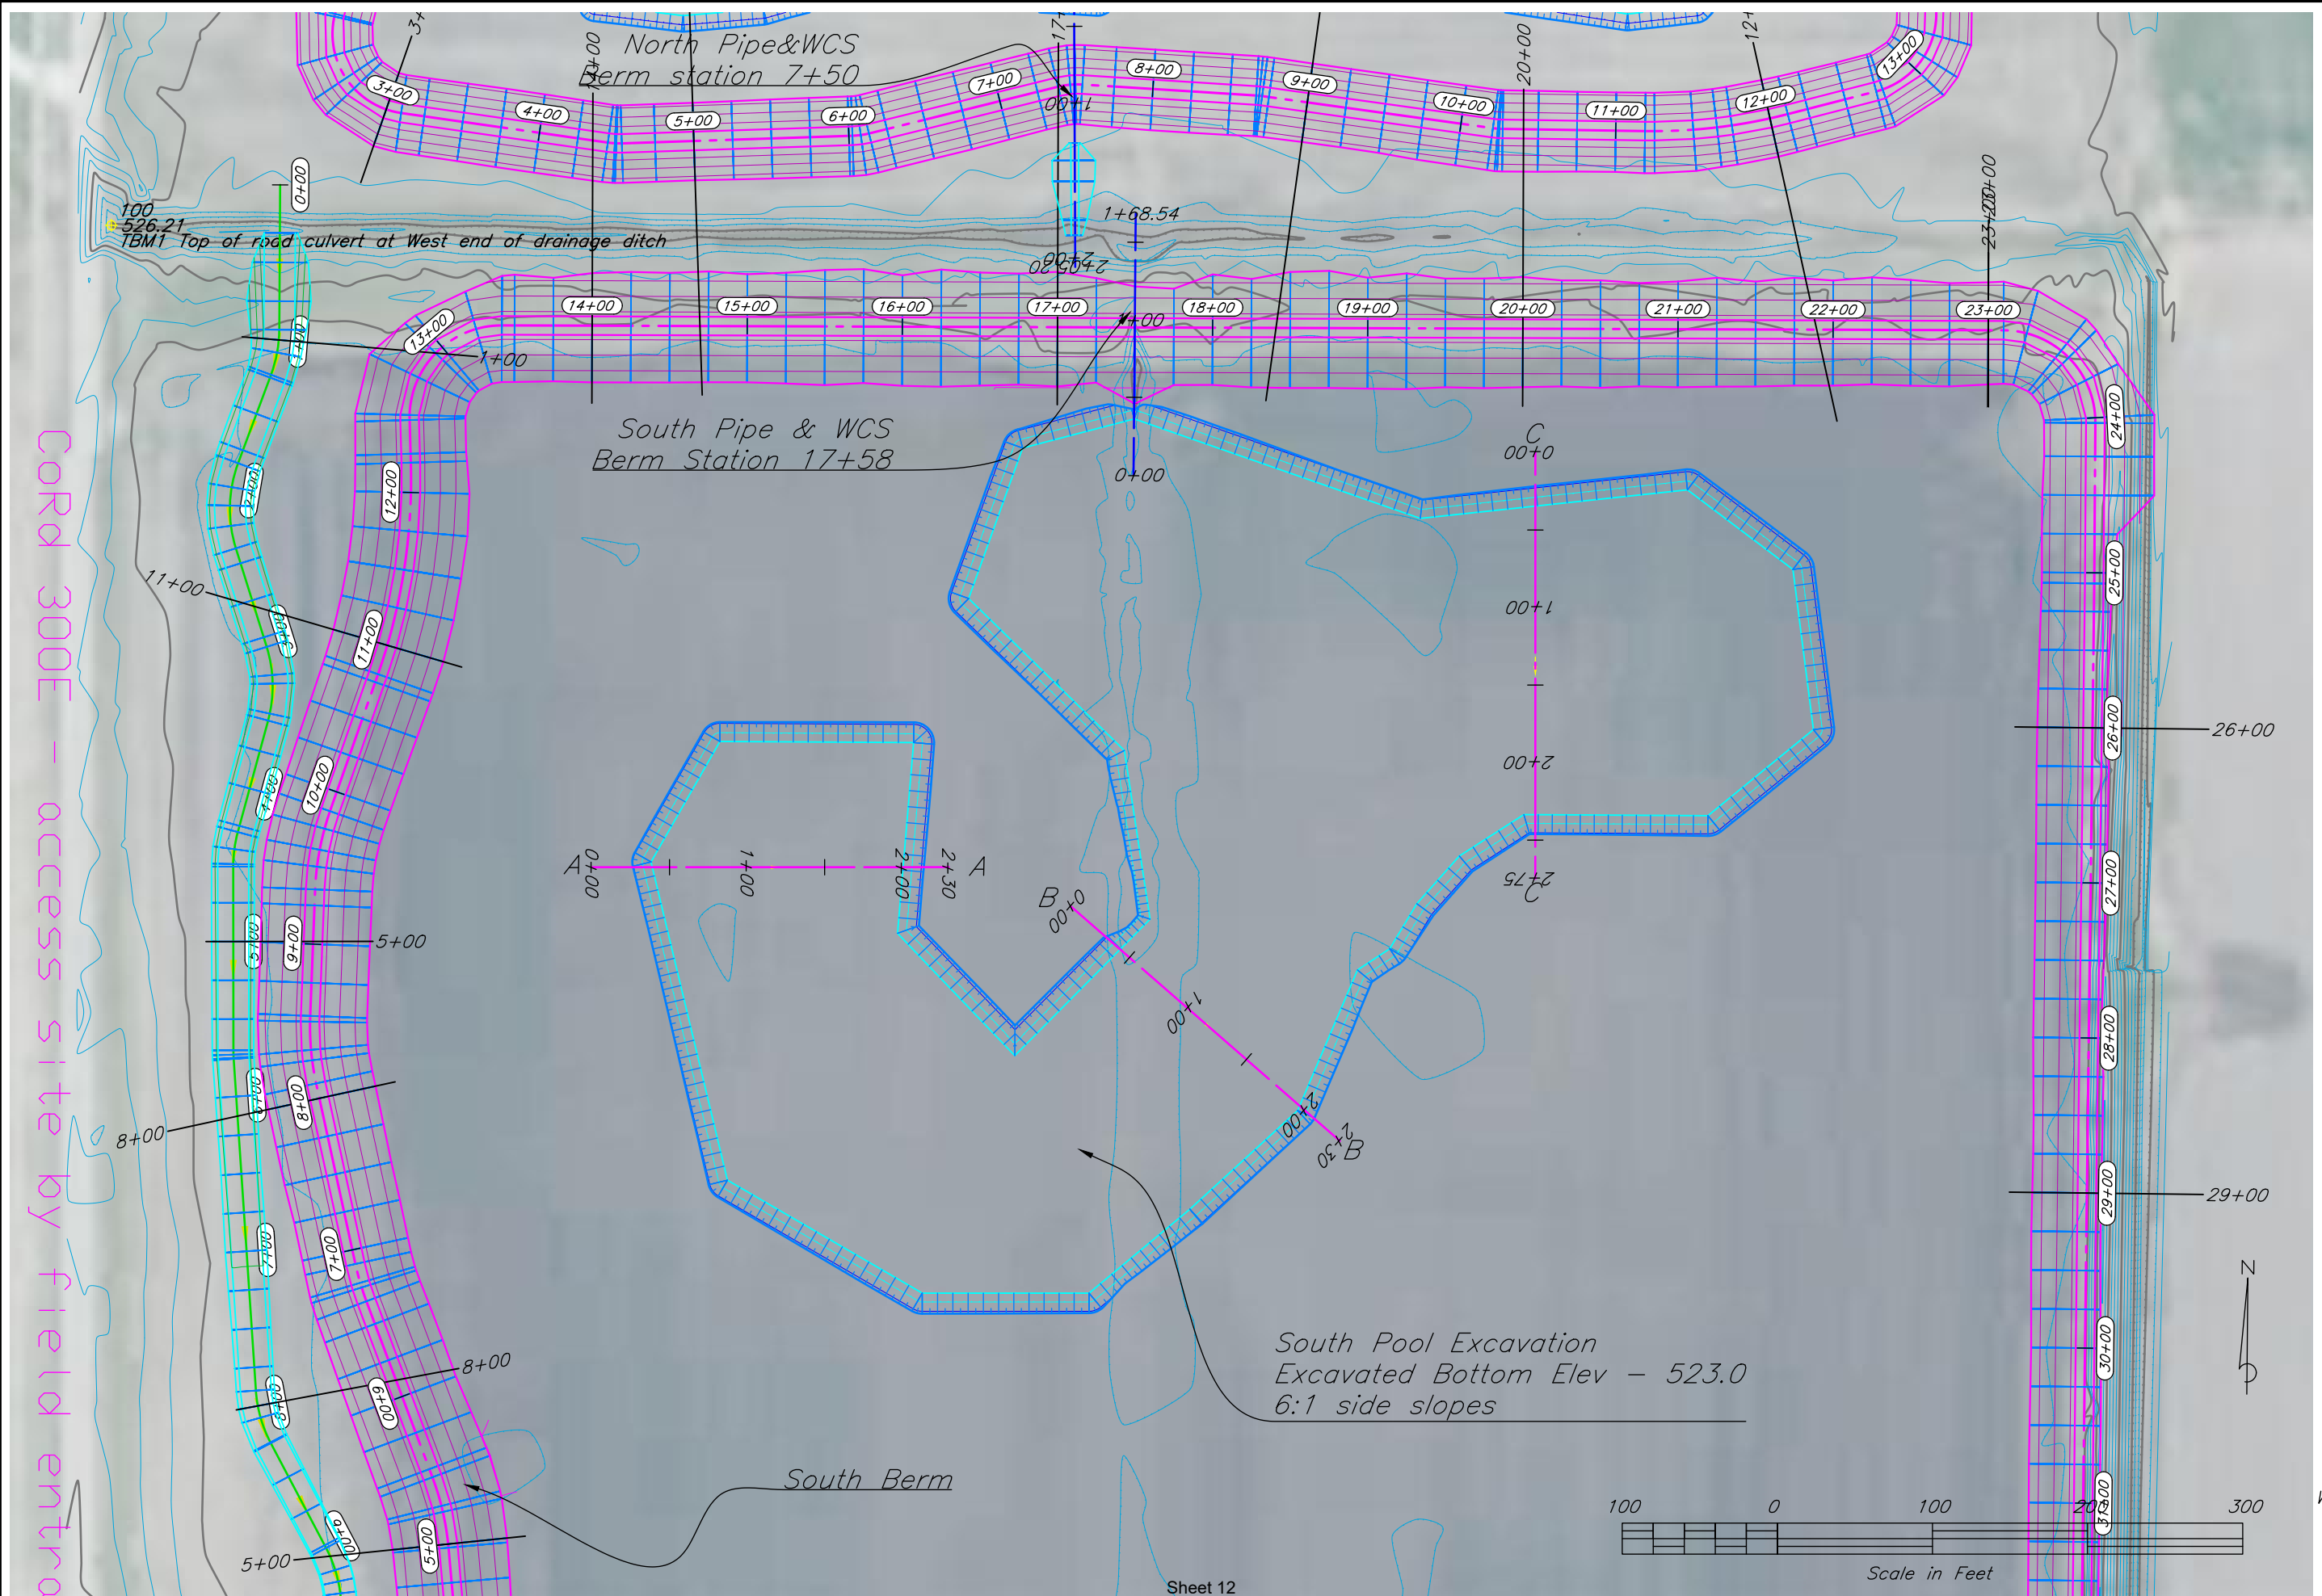

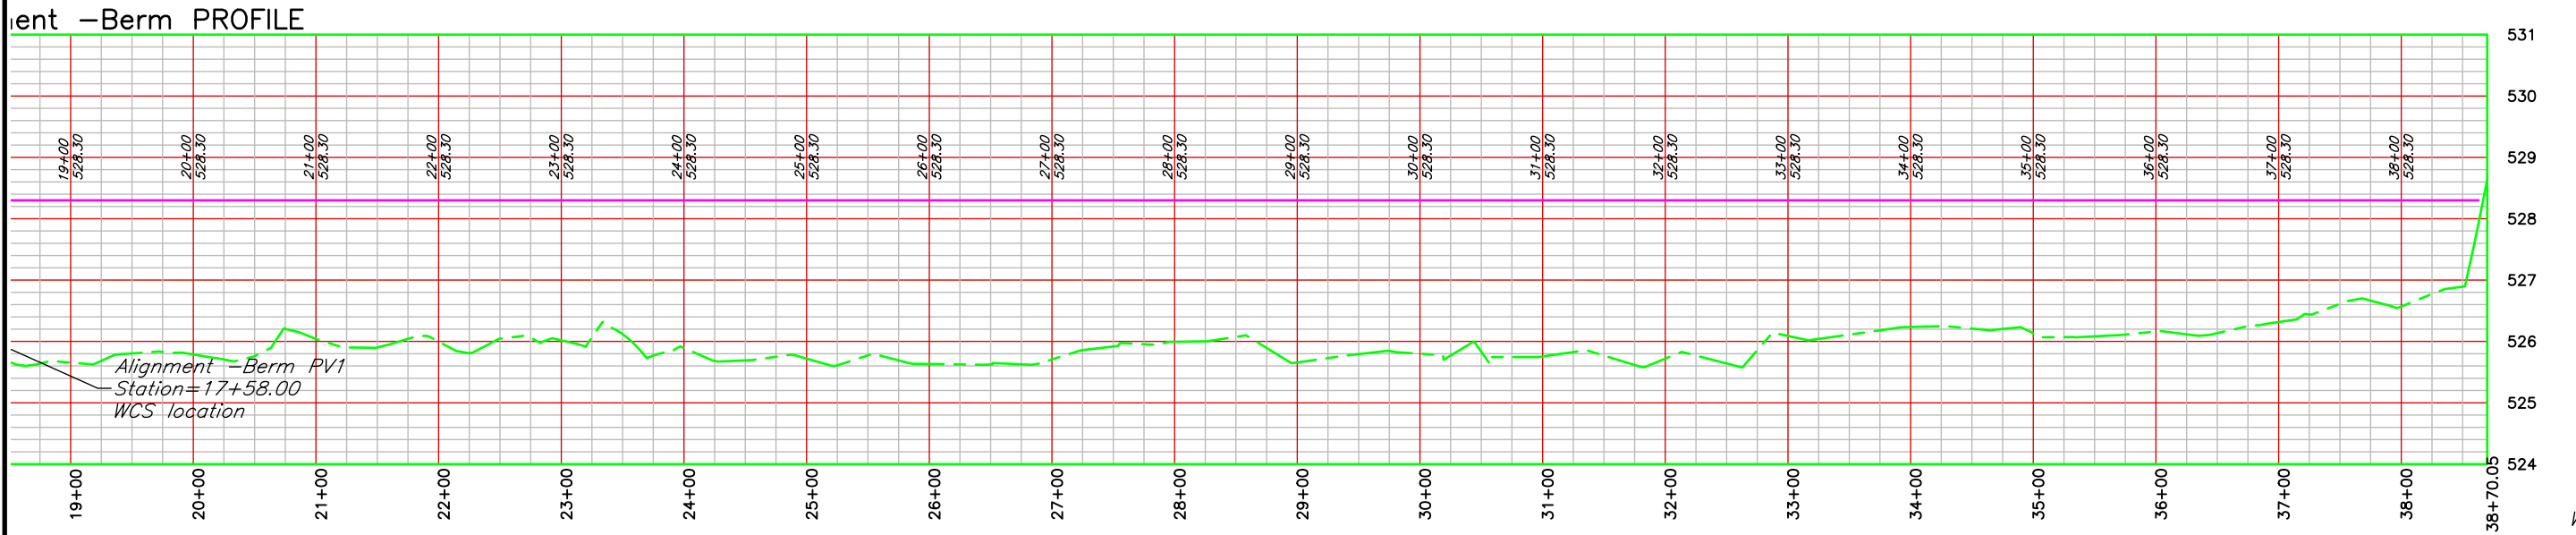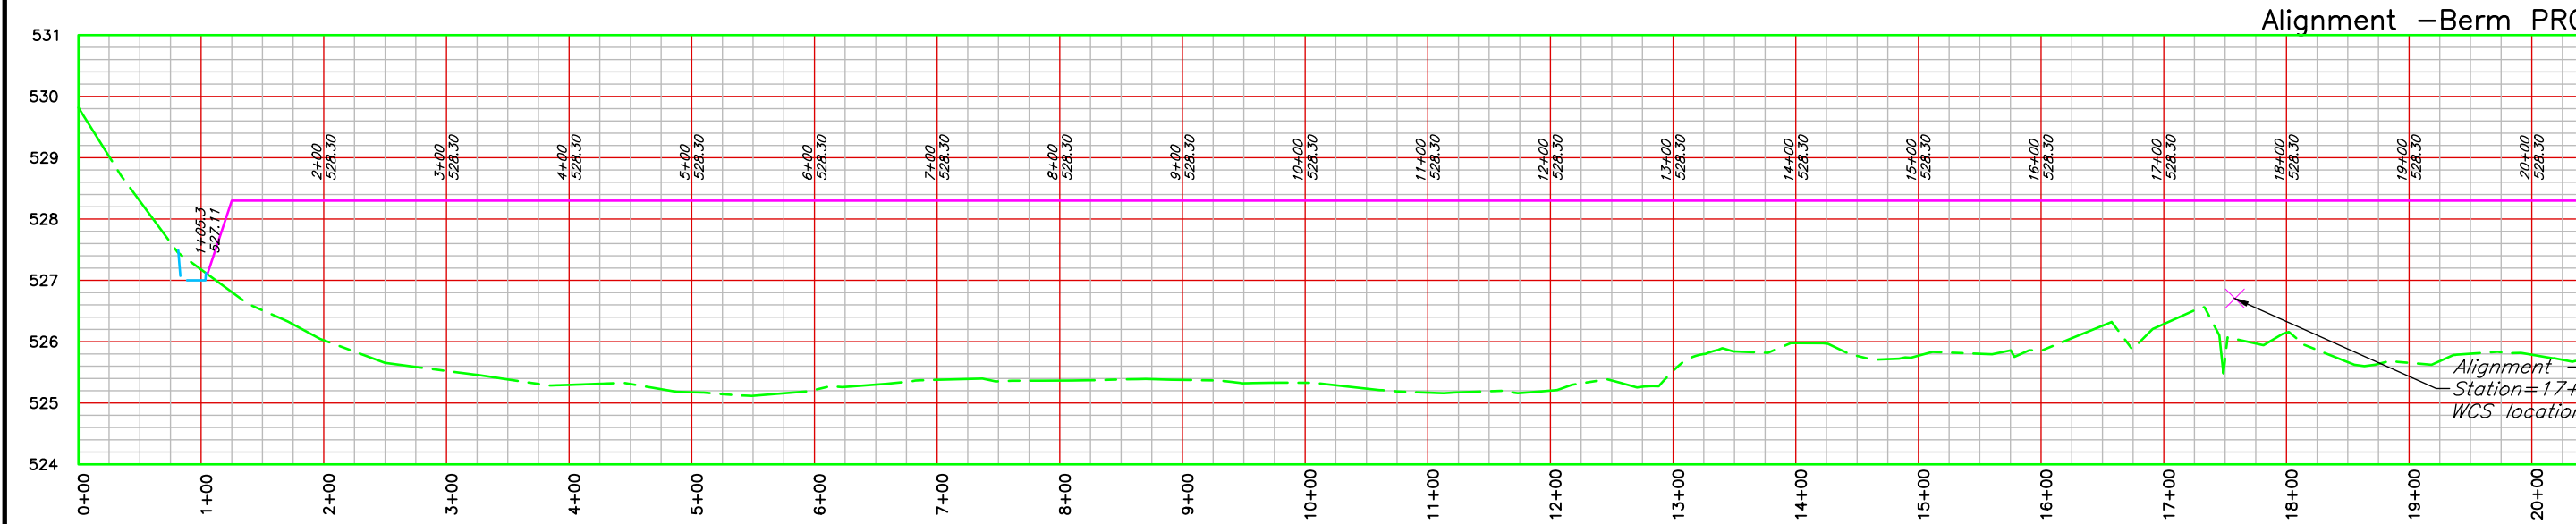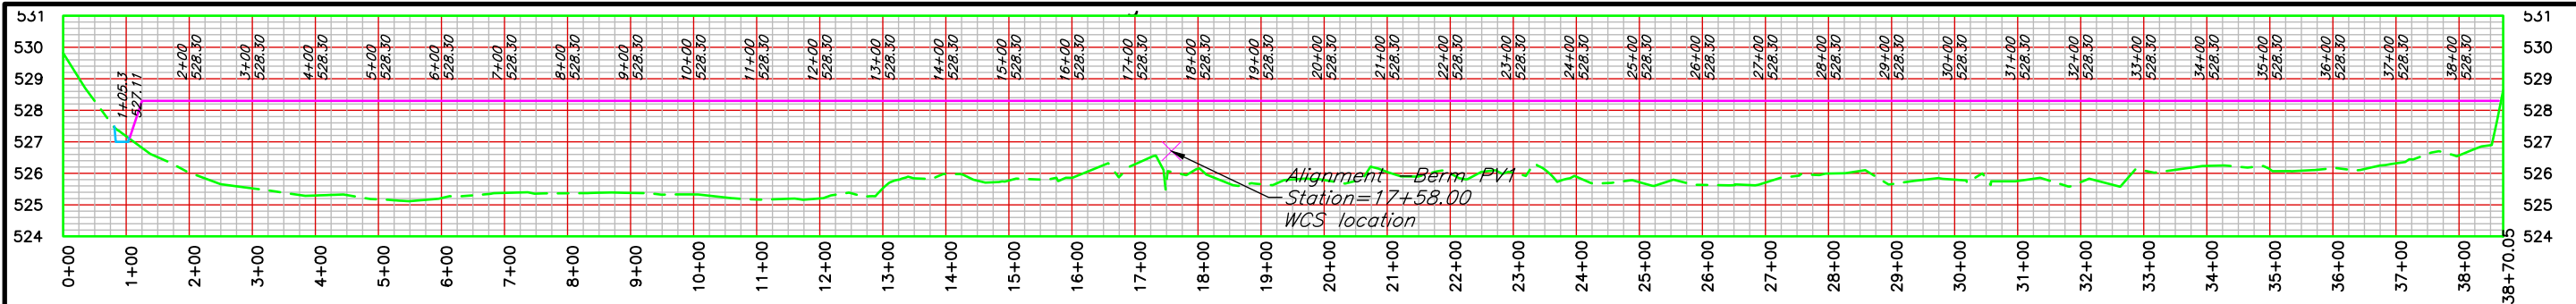

Designed	M.Dasenbrock	Date	2.2025
Drawn	M.Dasenbrock		2.2025
Checked	Kerry Buehler		7-9-2025
Approved	M.Dasenbrock		7.2025

BLYTHE WRE
WETLAND RESTORATION
SOUTH BERM PROFILE
Corner of East Ridge road and 300E
Fayette County, IL





United States
Department of
Agriculture

Natural Resources
Conservation Service


File No.
Blythe
WRE_C3D2022.dwg







Drawing No.
.








6/20/25 2:02 PM
Sheet ### of .

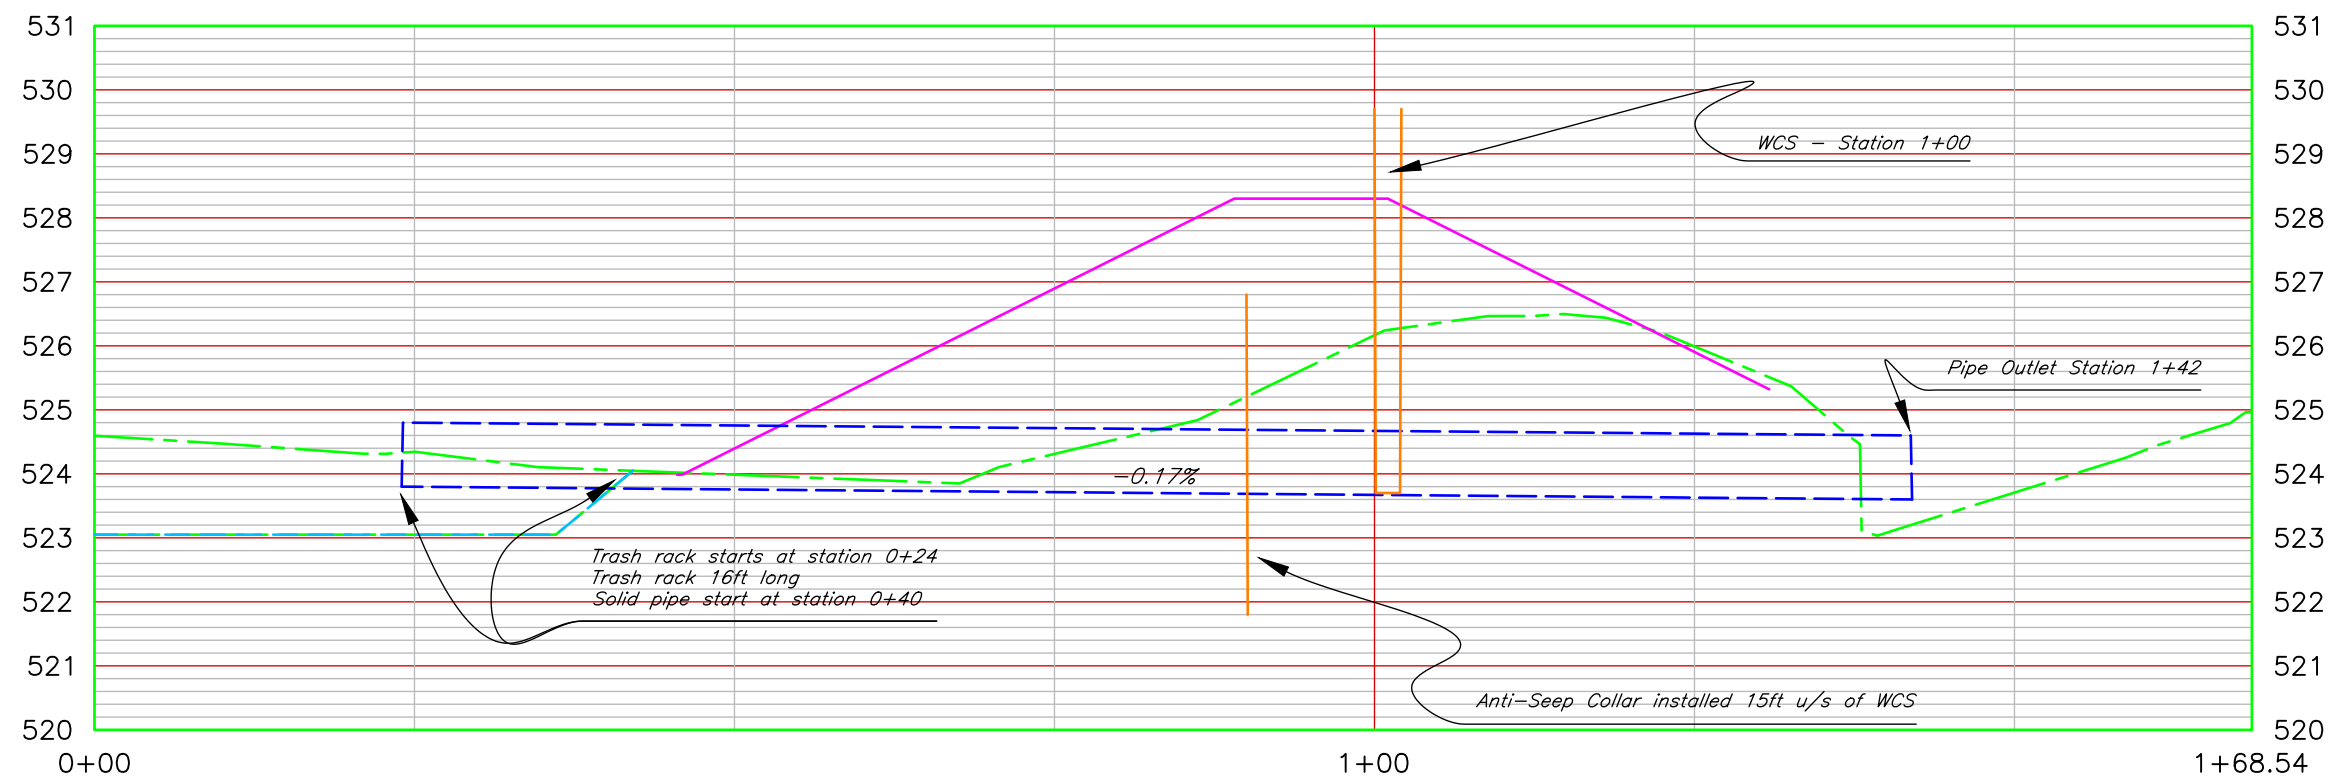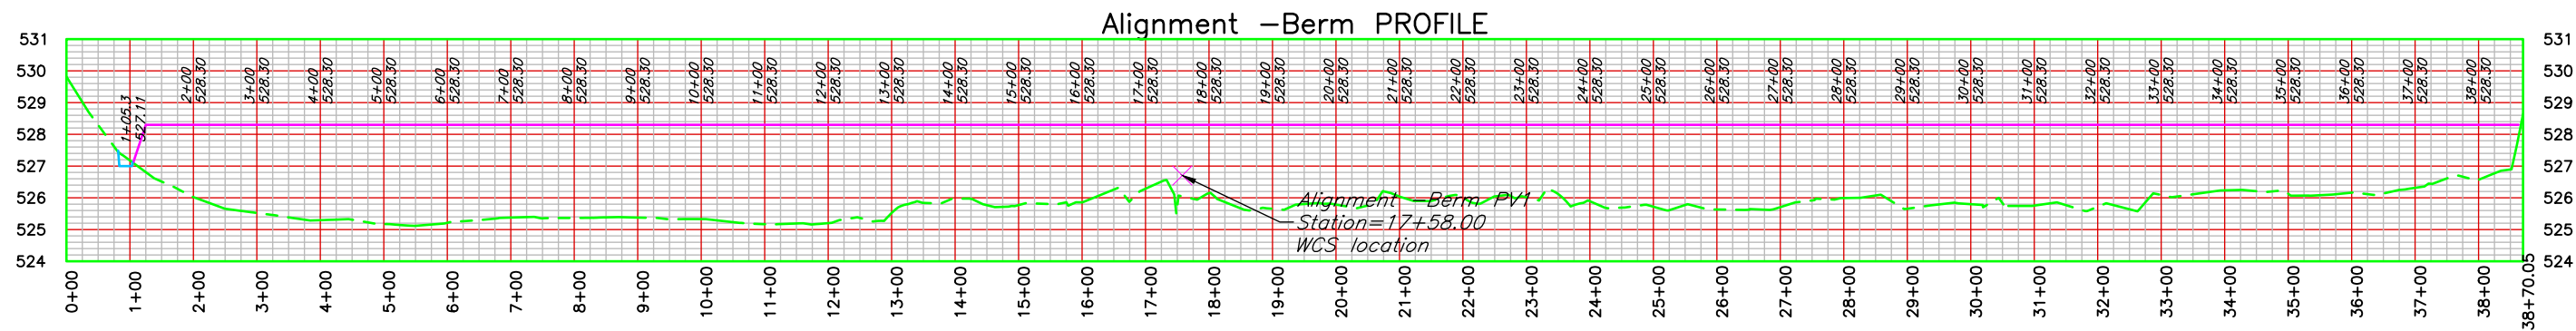


Pipe South PROFILE

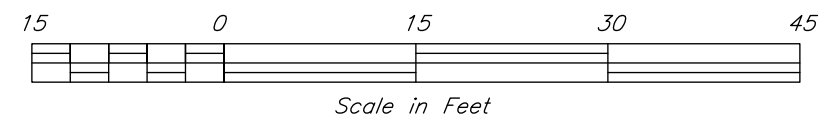

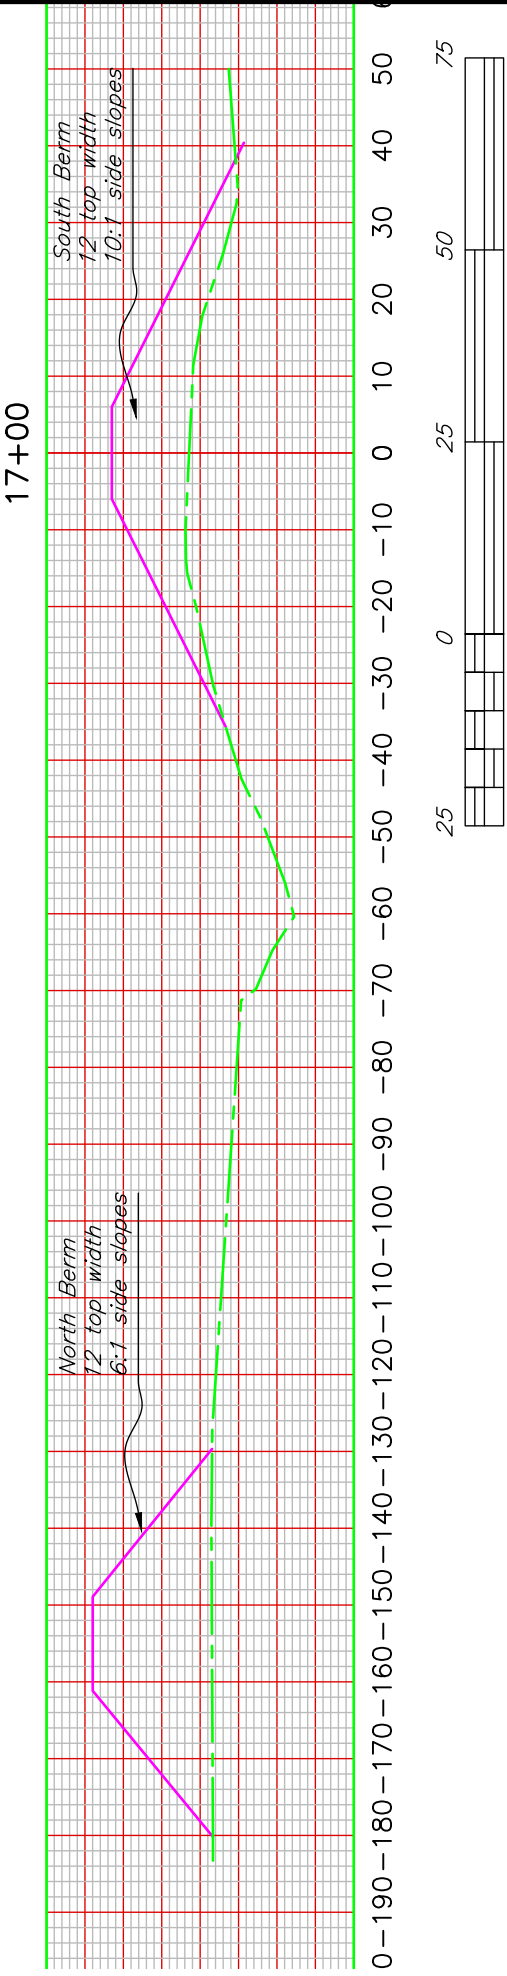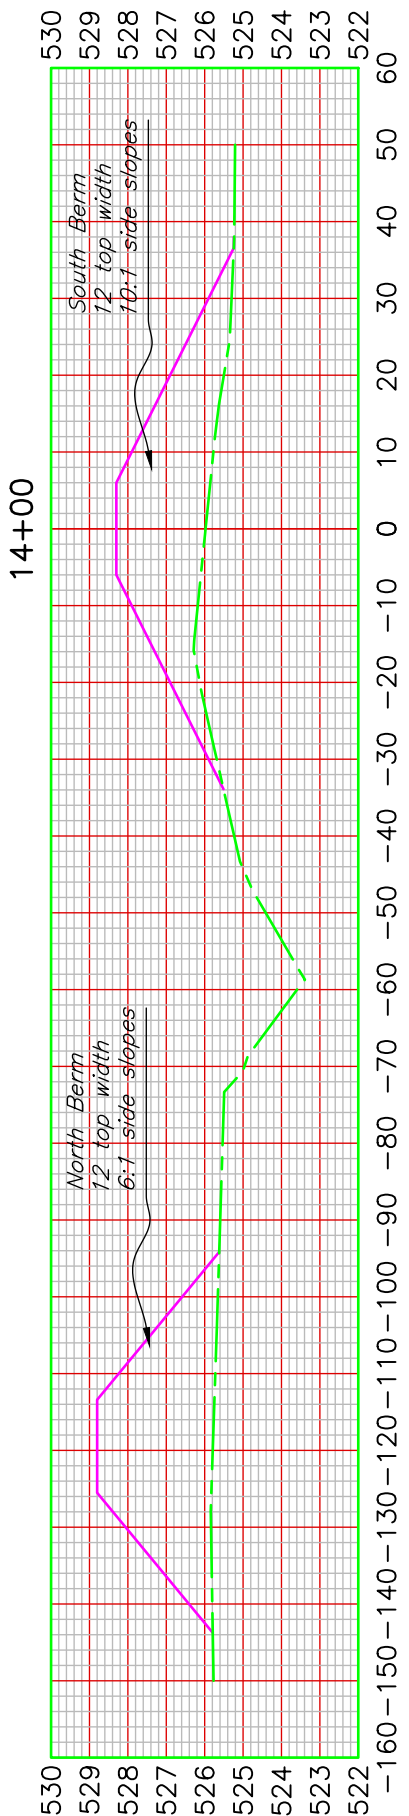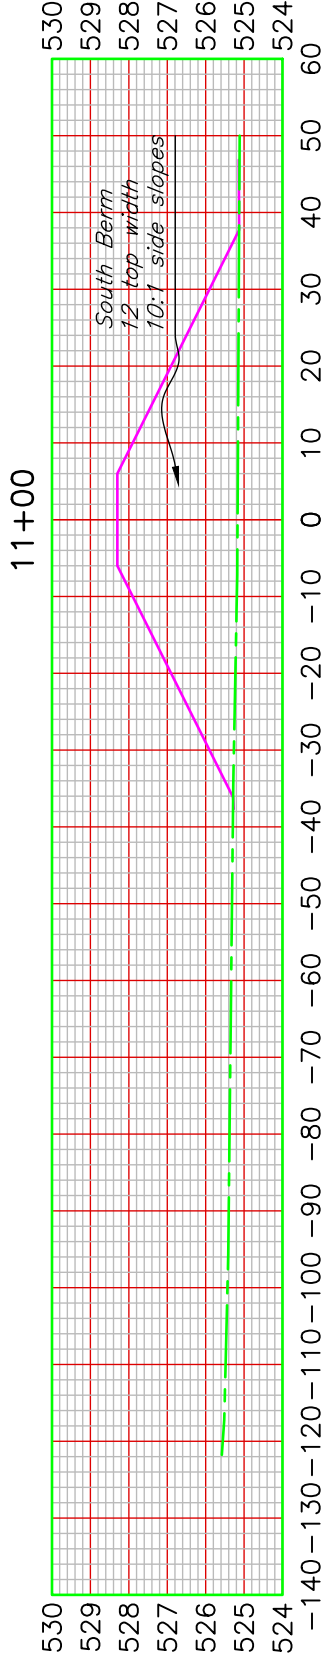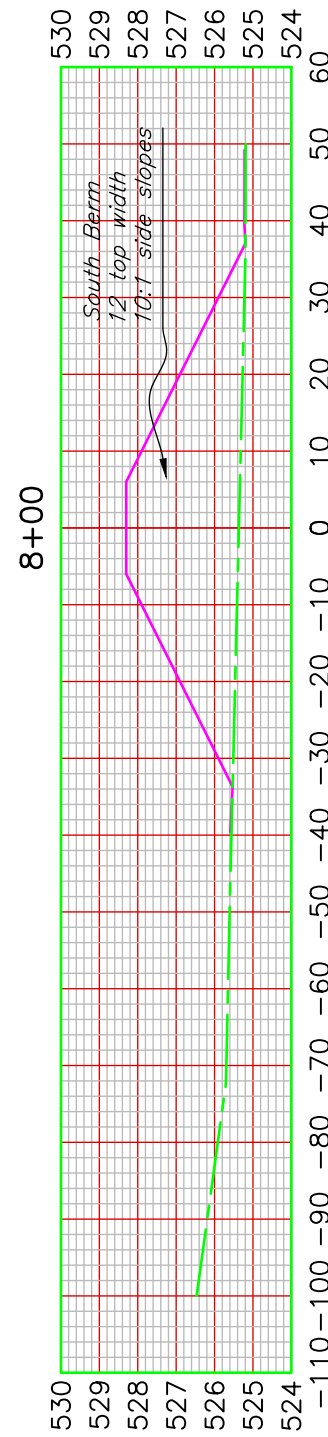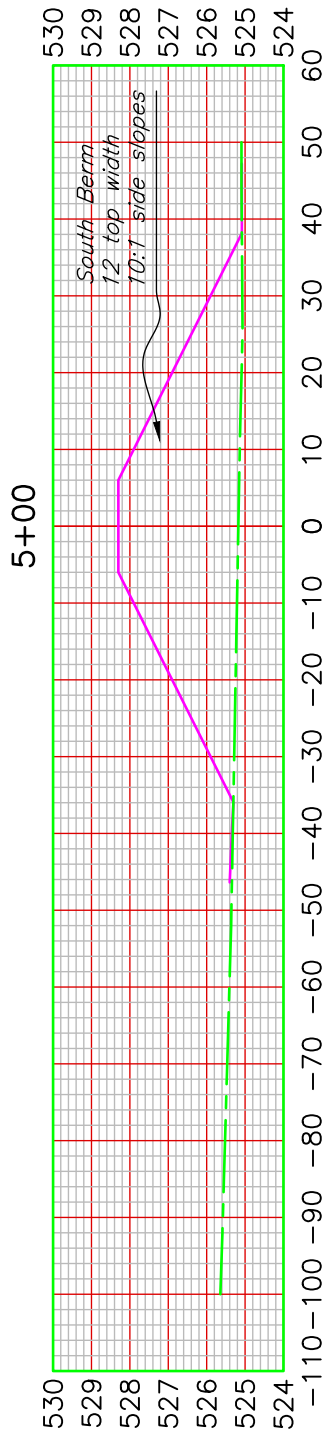
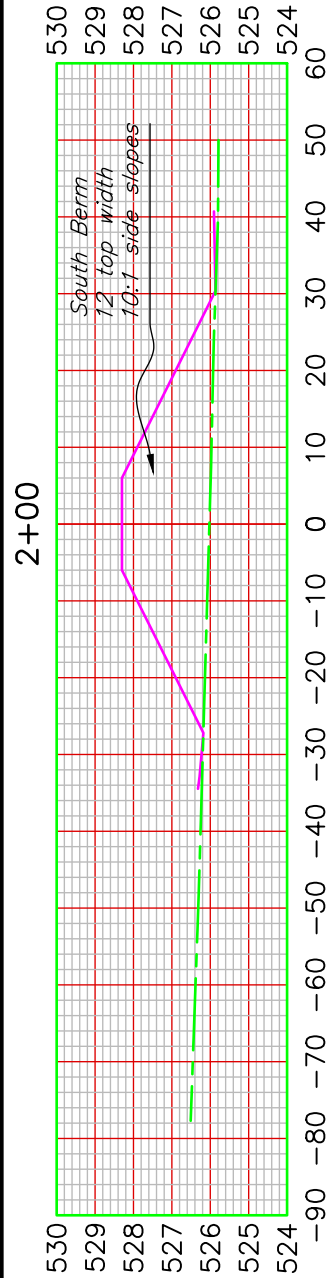


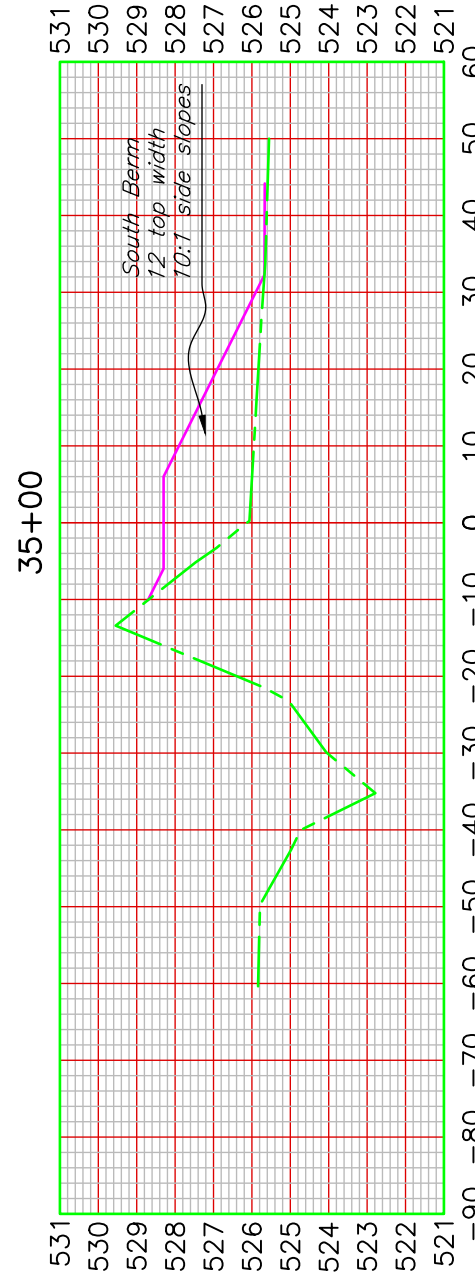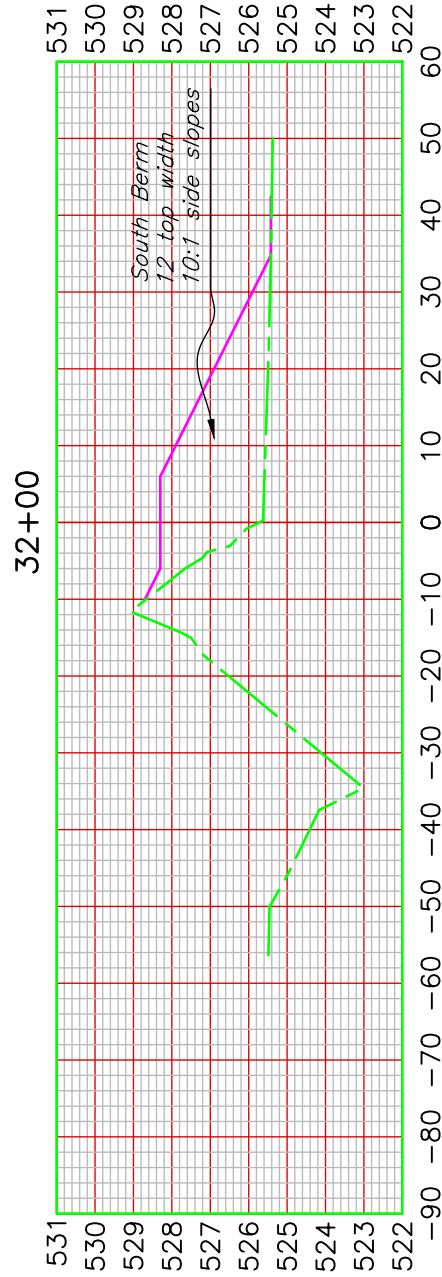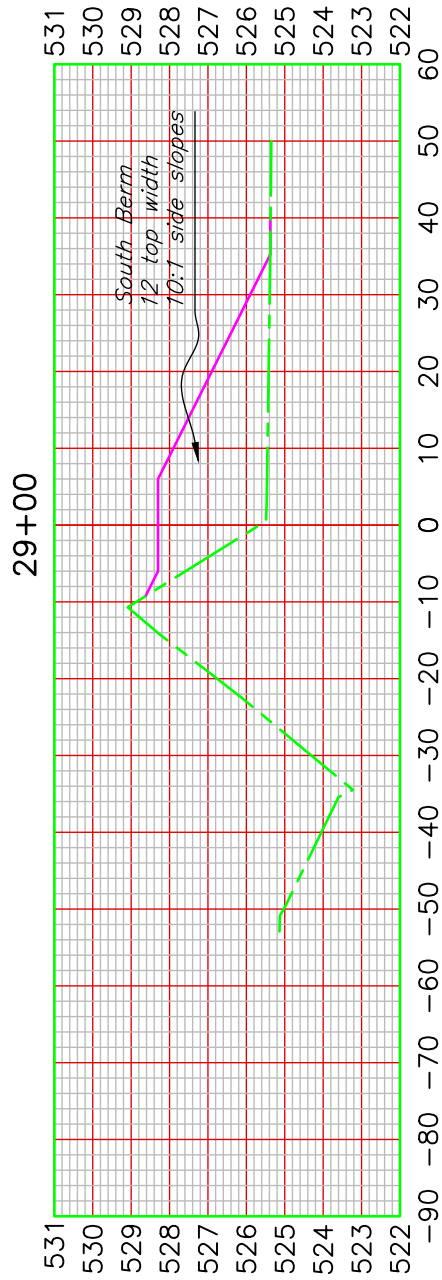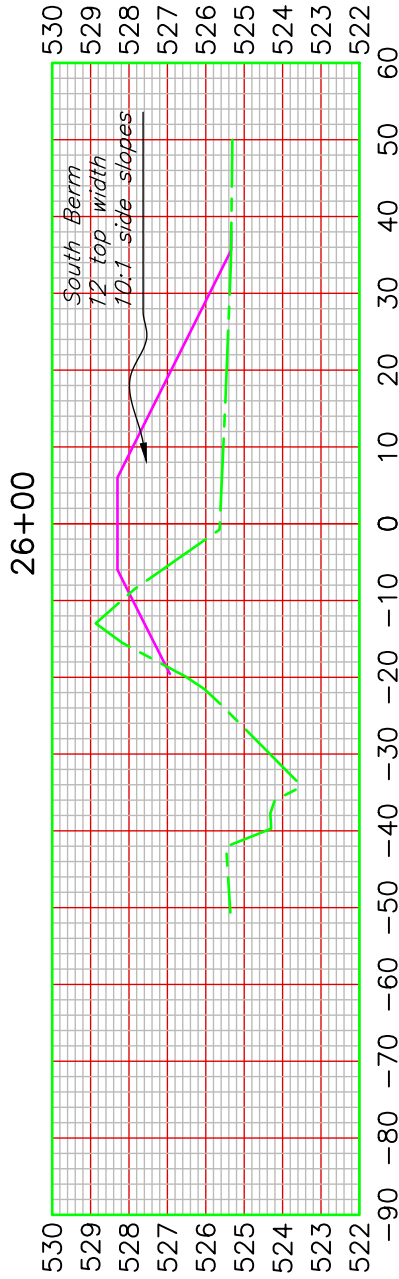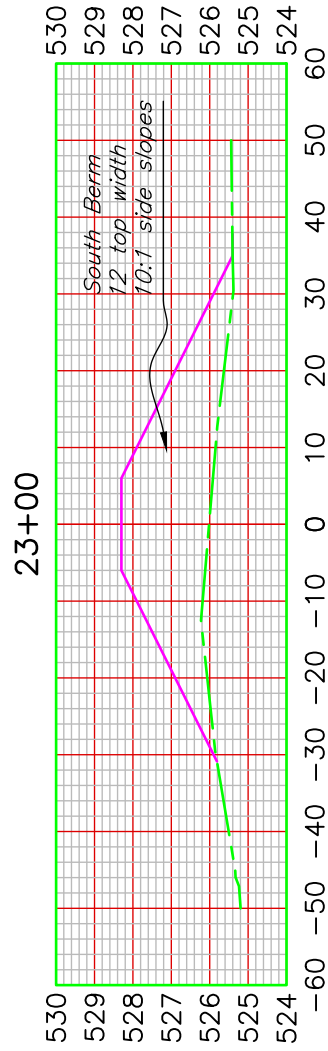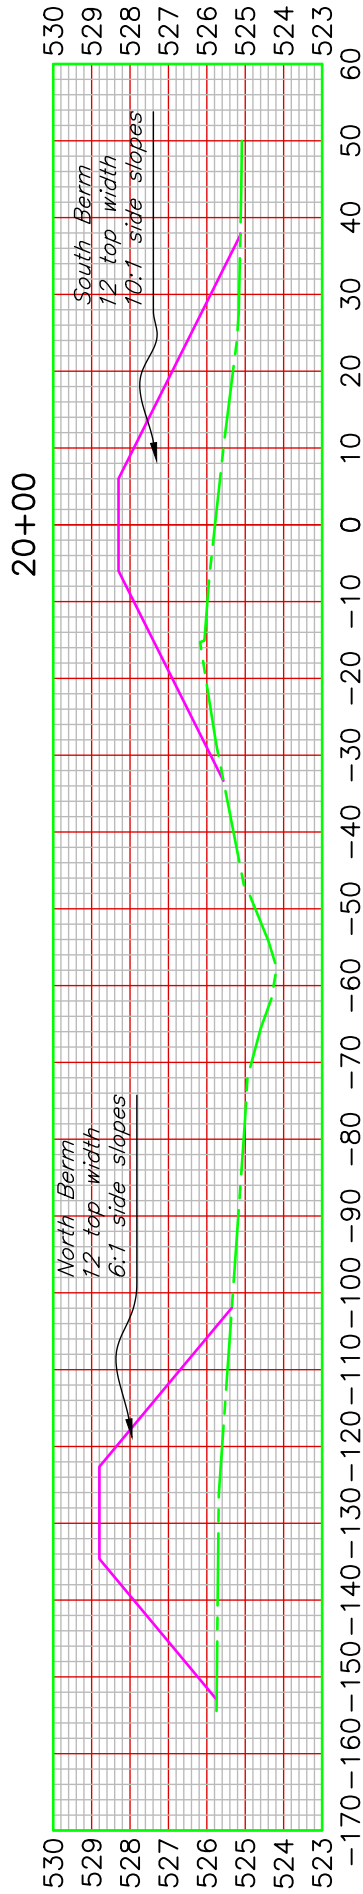

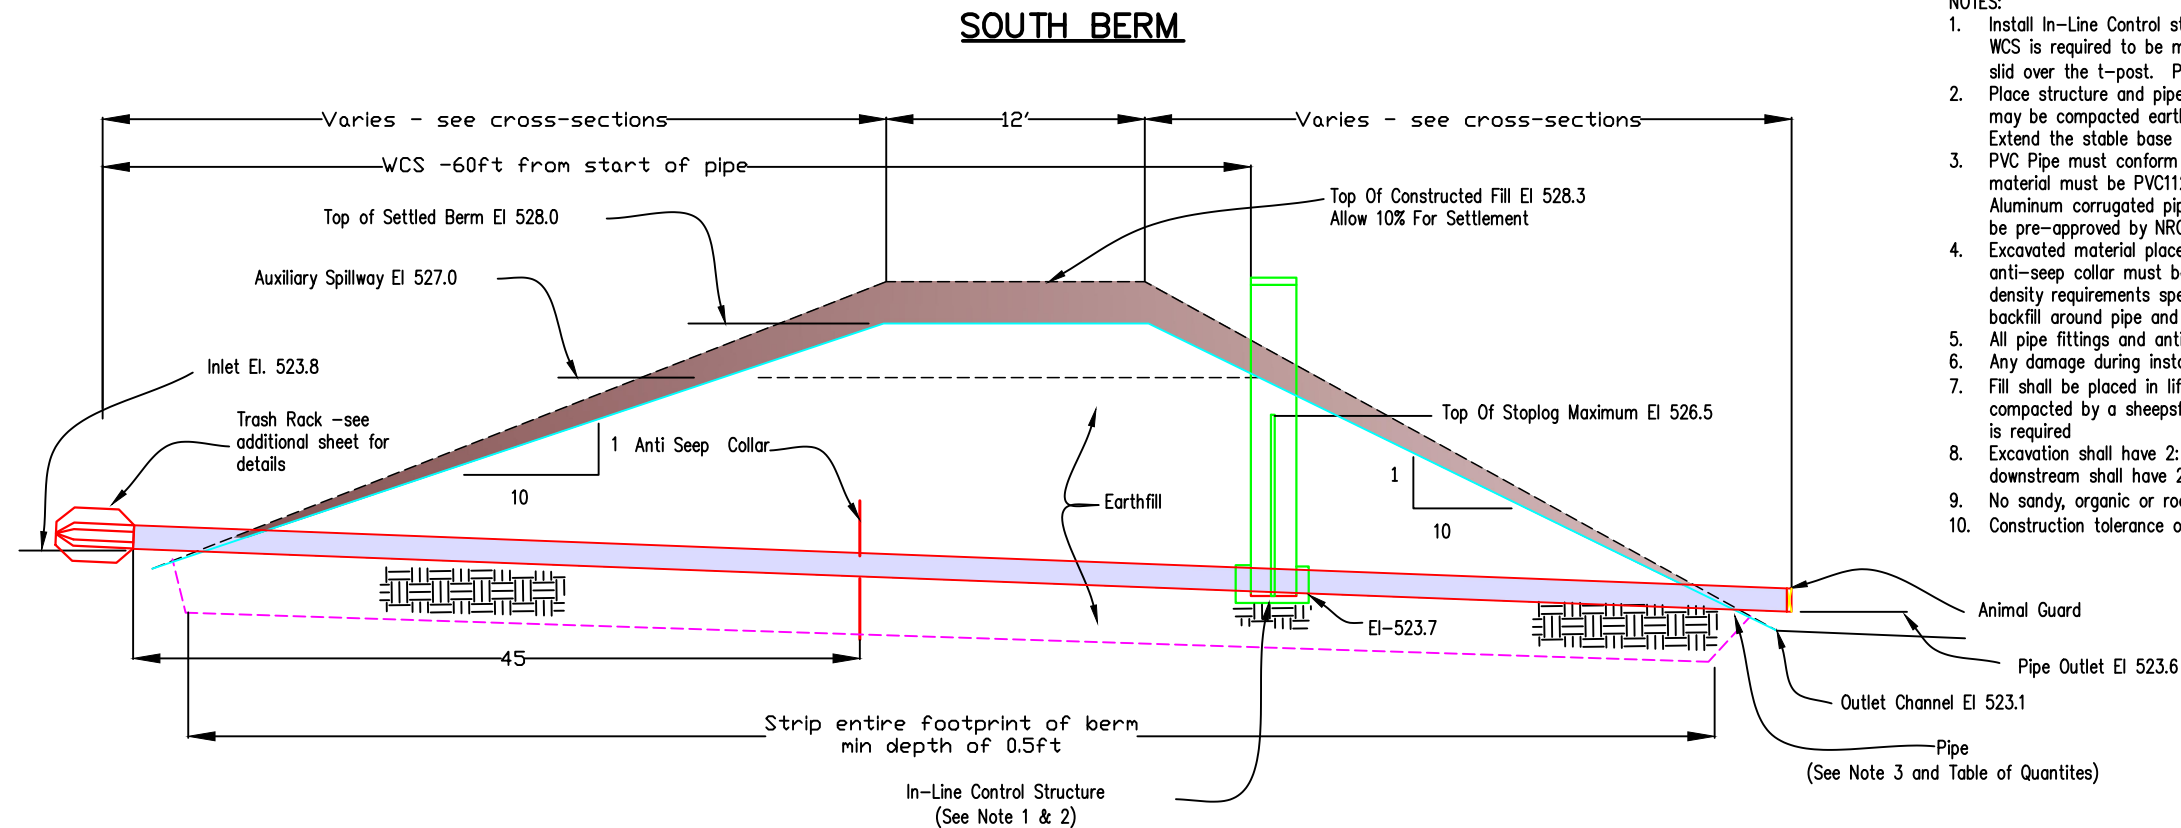


TYPICAL BERM CROSS SECTION

- NOTES:
1. Install In-Line Control structure in back slope of berm near top. WCS is required to be marked with 2 t-post and 8ft tall pvc pipe slid over the t-post. Post/pipe shall be placed on each side of WCS
 2. Place structure and pipe couplers on a stable base. A stable base may be compacted earth, compacted fill sand, or a concrete pad. Extend the stable base no less than 1 foot around structure.
 3. PVC Pipe must conform to ASTM Standard D2241 or D 1785. Pipe material must be PVC1120 or PVC 1220. Or Pipe can be SDR 26 or Aluminum corrugated pipe with min 16 gauge. Pipe materials must be pre-approved by NRCS prior to delivery
 4. Excavated material placed around structure, spillway pipe and anti-seep collar must be hand compacted in 4 inch lifts to same density requirements specified for the adjacent embankment. All backfill around pipe and WCS must be inspected by NRCS
 5. All pipe fittings and anti-seep collar shall be watertight
 6. Any damage during installation to pipe shall be immediately replaced
 7. Fill shall be placed in lifts no greater than 9" and shall be compacted by a sheepsfoot roller. A minimum of 2 passes per lift is required
 8. Excavation shall have 2:1 sideslopes. Entire pipe from upstream to downstream shall have 2ft of cover along entire pipe
 9. No sandy, organic or rocks larger than 2" allowed in fill.
 10. Construction tolerance of +0.2 and -0.0'

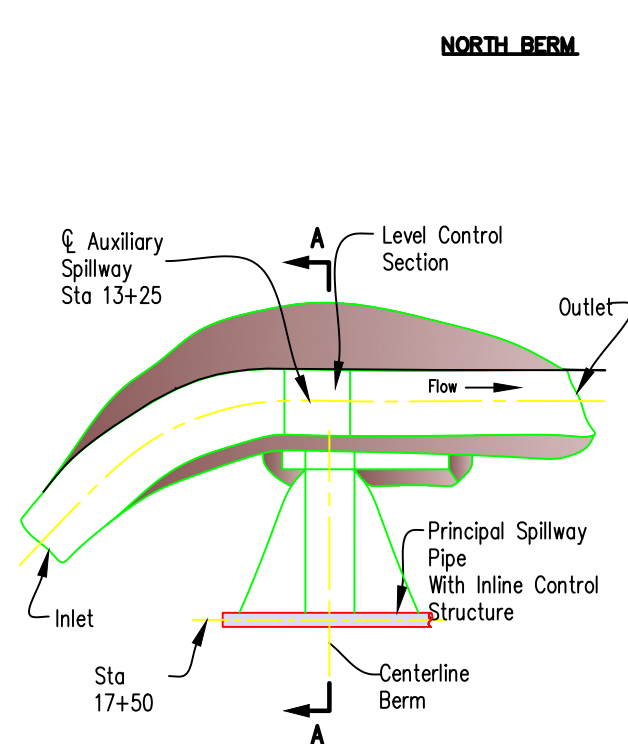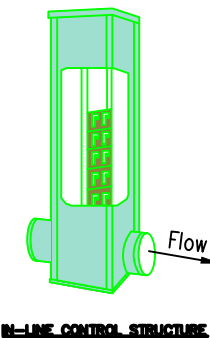

AUXILIARY SPILLWAY PLAN

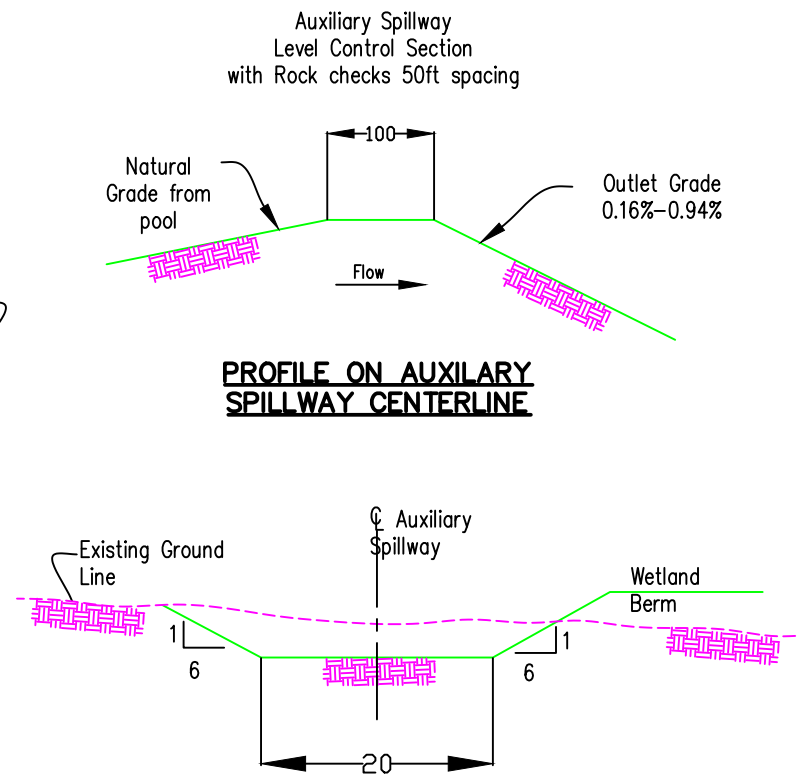


PROFILE ON AUXILIARY SPILLWAY CENTERLINE

SECTION A-A


TABLE OF QUANTITIES		
ITEM	UNIT	QUANTITY
Embankment Earthfill	Cu. Yd.	10,425
Stripping of footprint (use at topsolling)	Cu. Yd.	4,830
PVC Pipe 12" Dia, SDR 26	L.F.	100
Control Structure 12" Dia x 6' High, 16' Weir Length	Ea	1
Antiseep Collar (pvc) 5' x 5'	Ea	1
60' t-post with 8ft PVC marker post	Ea	2
Trash Rack - see additional sheets	Ea	1
Animal guard	Ea	1

Trash Rack Detail For Water Control Structure

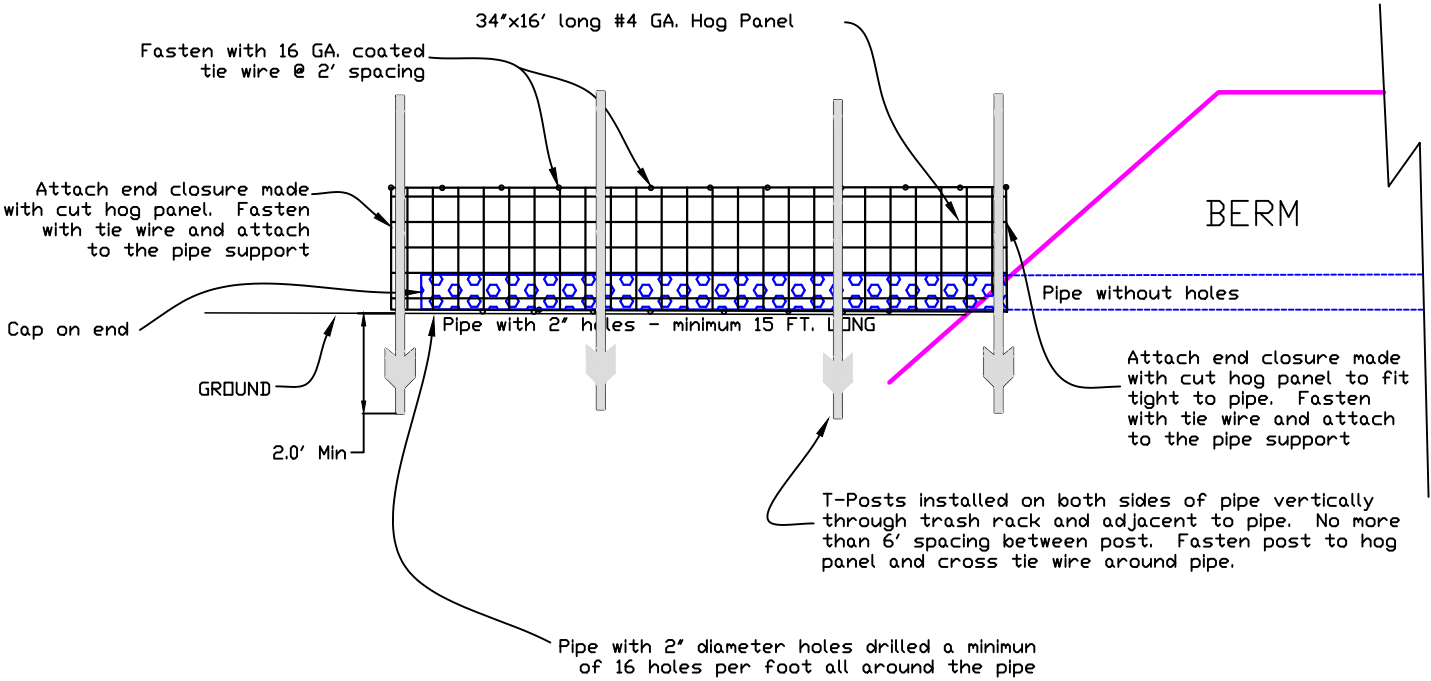

HOG PANEL IS REQUIRED FOR END ENCLOSURES


TABLE OF QUANTITIES- TRASH RACK		
ITEM	UNIT	QUANTITY
34'x16' LONG 4 GA. HOG PANEL	EACH	4
T-post - 6ft long	EACH	8

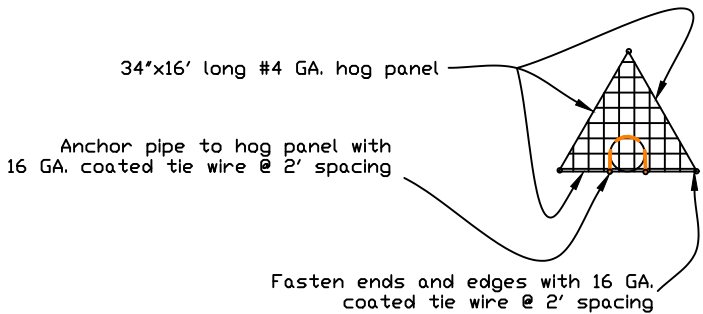

- NOTES:
1. Coat pipe at collar location with butyl roof patch sealer or other butyl rubber sealer. (Do not use asphalt roof patch).
 2. Completed installation must be water tight.
 3. Cut a circular hole (centered) in butyl rubber sheet approximately 1/3 smaller in diameter than the pipe diameter. For example-cut a 4 inch hole in sheet with 6 inch diameter pipe, cut a 7 inch hole in sheet with 10 inch diameter pipe. Force butyl rubber sheet over upstream end of pipe over butyl roof sealer.
 4. Install a 1/2 inch minimum width stainless steel clamp. Clamp around pipe over butyl rubber sheet and tighten until sealer is forced out.
 5. Staple butyl rubber sheet to lumber frame.
 6. Wood frame shall be rigid enough to withstand backfill operations.
 7. Other anti-seep collar material options shall be approved by engineer prior to installation.

TABLE OF QUANTITIES

W FEET	Rubber Sq. Ft.	Stainless Steel Clamp	Lumber Lin. Ft.	No. Of Collars
5	25	1	20	1

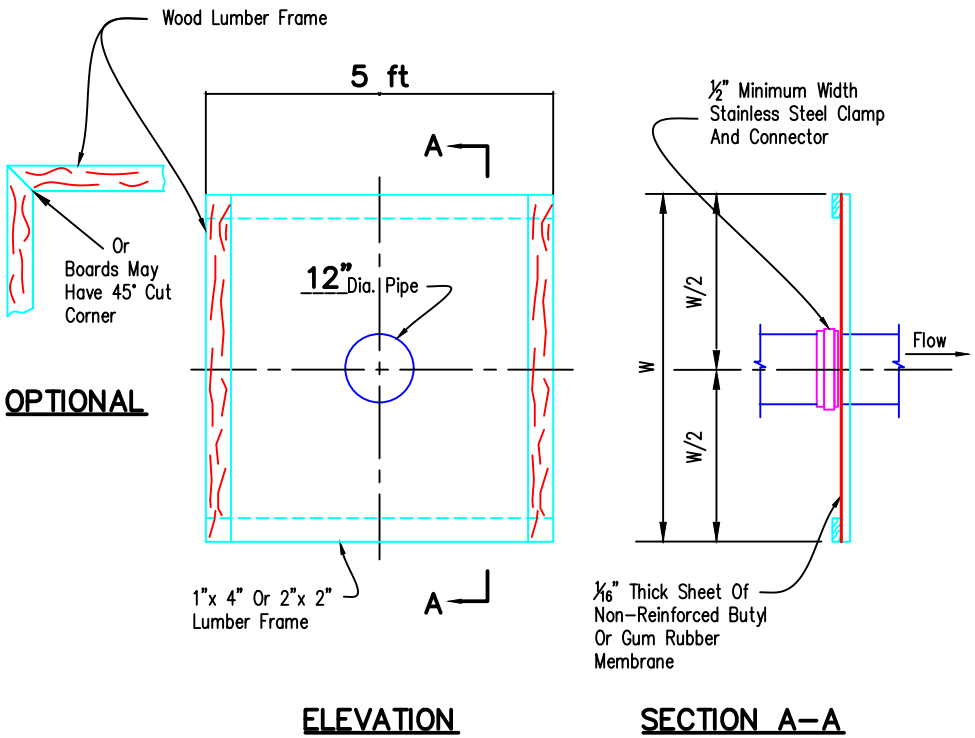


Date	###
Designed	###
Drawn	M.Dasenbrock
Checked	Kerry Buehler
Approved	M.Dasenbrock
2.2025	7-9-2025

BLYTHE WRE
WETLAND RESTORATION
SOUTH BERM DETAILS (2)





Corner of East Ridge road and 300E





File No.	Blythe WRE_C3D2022.dwg
Drawing No.	
6/20/25 2:02 PM	Sheet ### of .

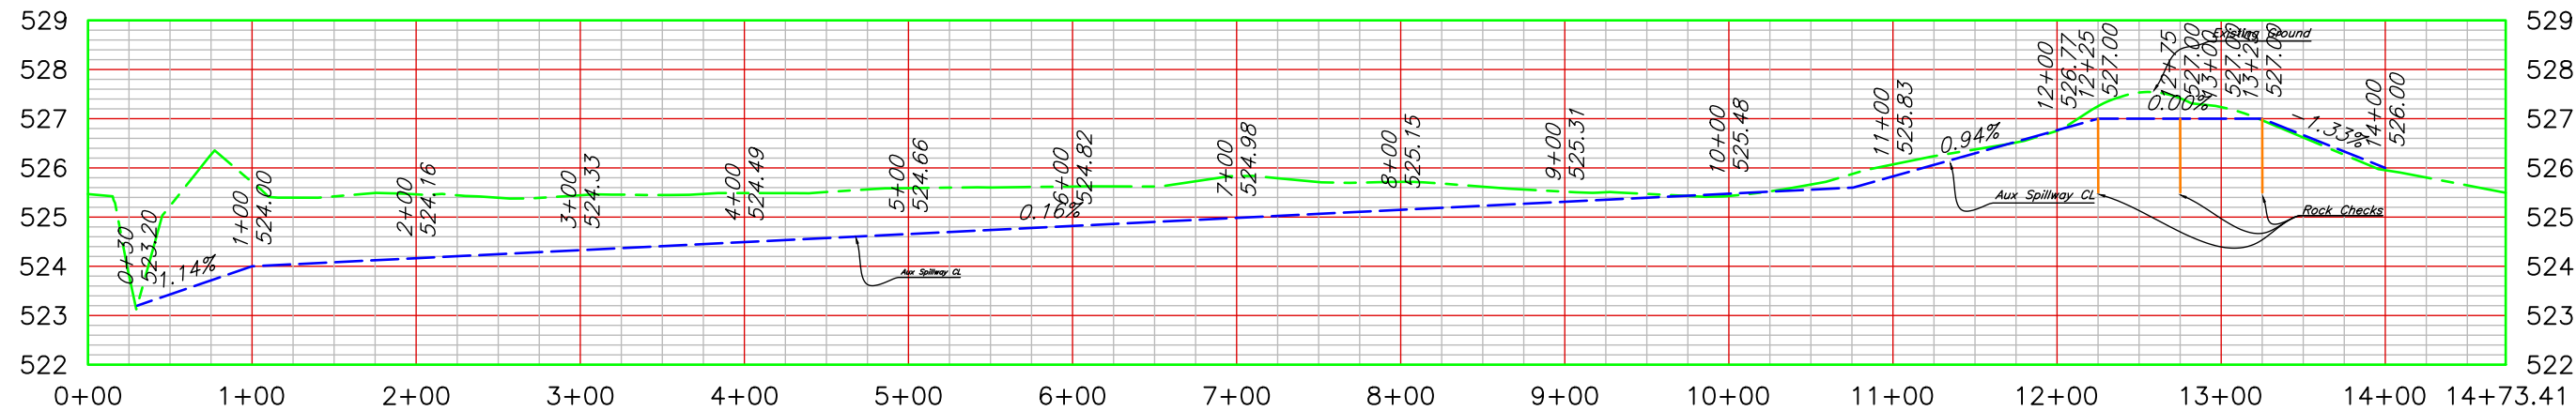

Alignment – Aux Spillway PROFILE

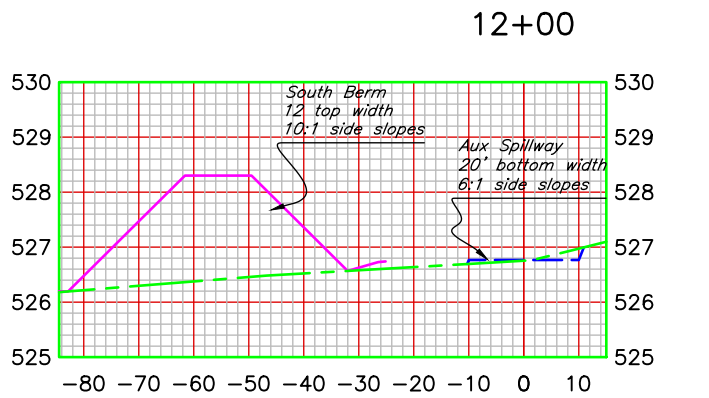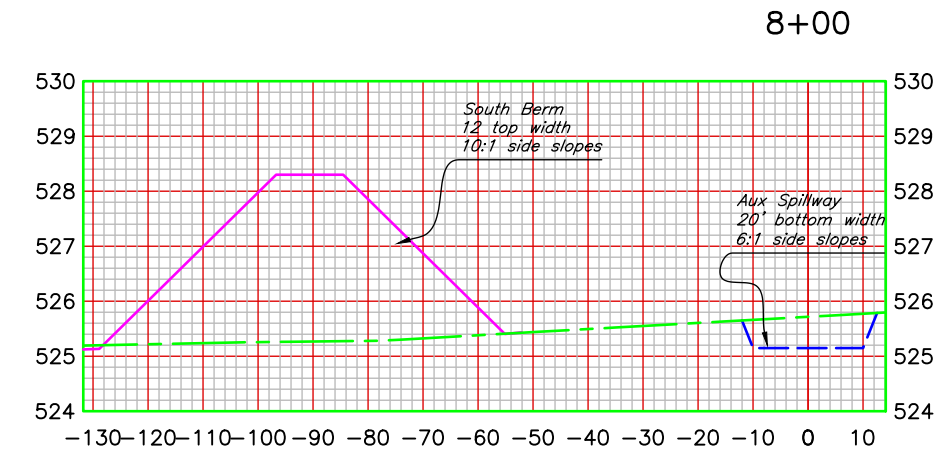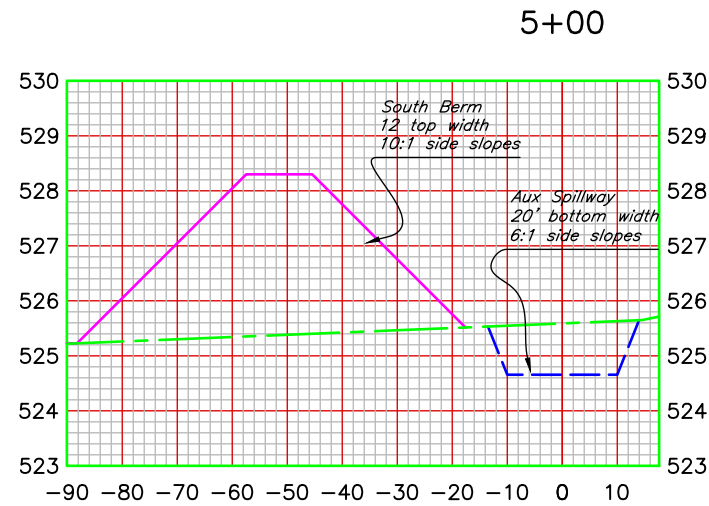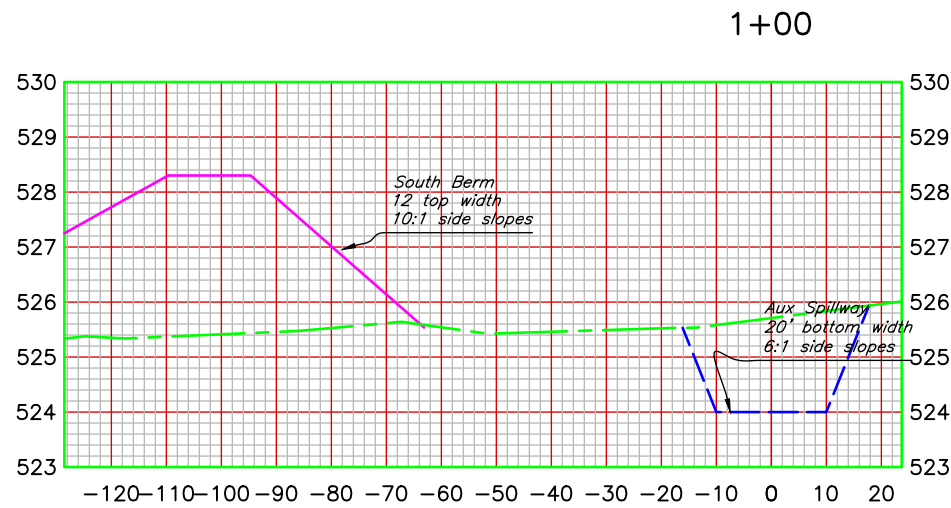

South Wetland Auxiliary Spillway
Qty 3 checks

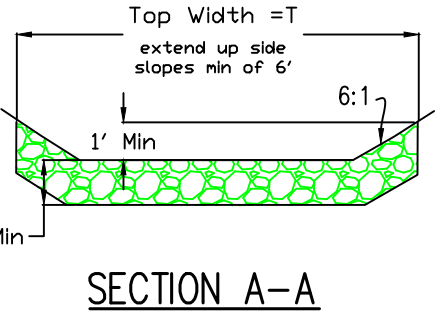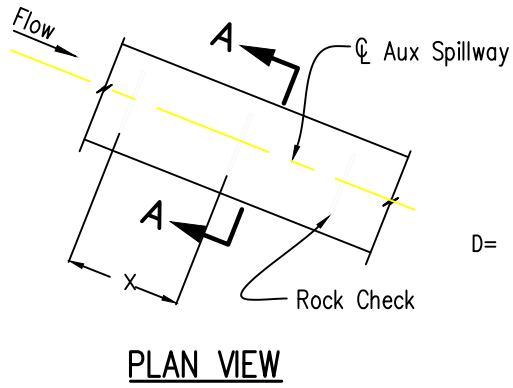

Rock Check sectional view

ROCK GRADATION 3	
Size	% Passing By Weight
50 lb	100
10 lb	30-70
1 lb	0-16

Aux Spillway		
From Station	12+25	
To Station	13+25	
Top Width T (Ft)	32	
Check Width (Ft)	3	
Check Spacing X (Ft)	50	
Number Of Checks	3	
Check Depth D (In)	18	

BILL OF MATERIAL	
27 Tons	
Rock gradation shall meet IDOT requirement for Gradation 3 quality designation A or B	

- NOTES:
- Excavate trench 3' wide.
 - Compact rock backfill by rolling with construction equipment.
 - Finished rock surface will be flush with the ground surface when completed.

Designed	M.Dasenbrock	Date	2.2025
Drawn	M.Dasenbrock		
Checked	Kerry Blakely		
Approved	M.Dasenbrock		

BLYTHE WRE
WETLAND RESTORATION
SOUTH BERM PROFILE (AUX SPILLWAY)

Fayette County, IL
Corner of East Ridge road and 300E


United States
Department of
Agriculture

USDA
Natural Resources
Conservation Service


File No.
Blythe
WRE_C3D2022.dwg

Drawing No.
.


6/20/25 2:02 PM
Sheet ### of .

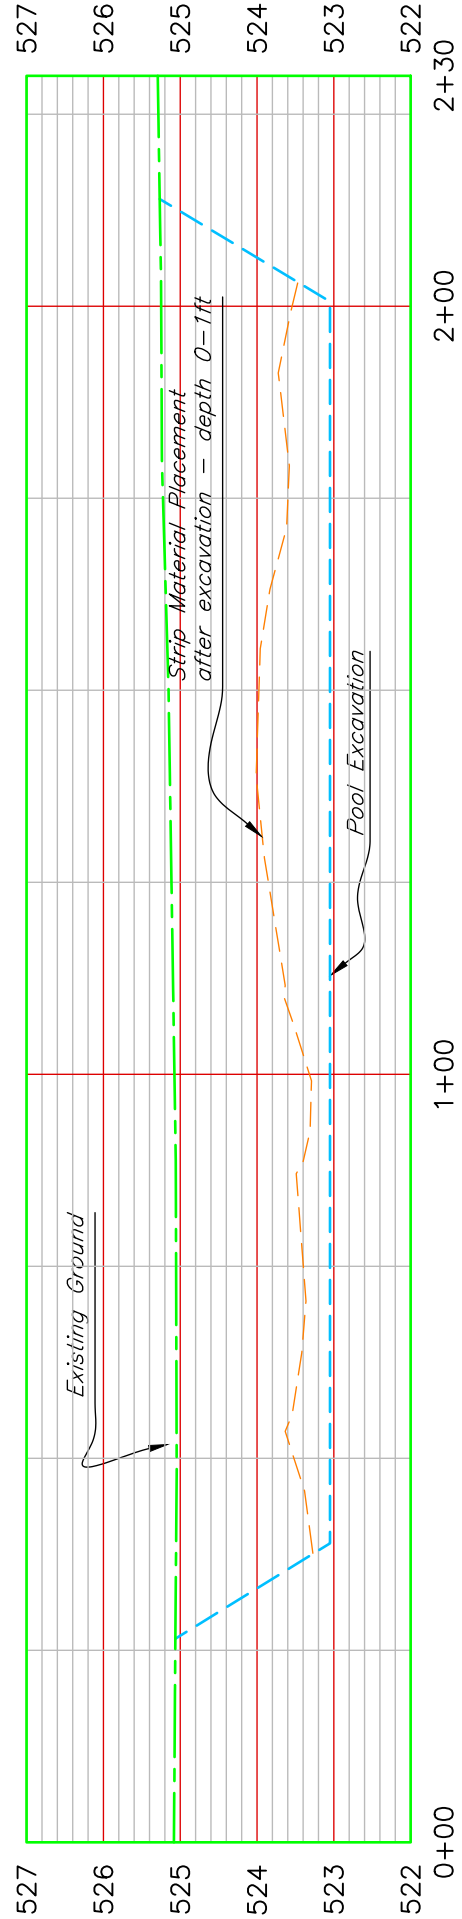

Section A-A PROFILE

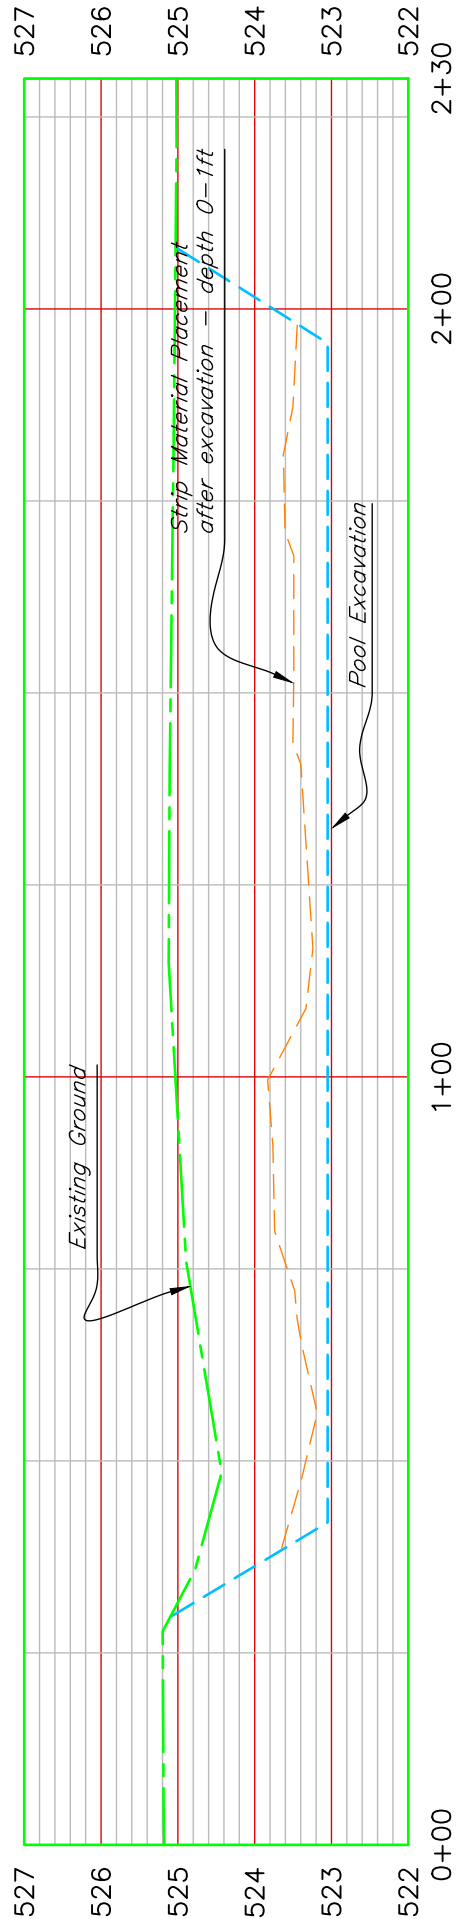

Section B-B PROFILE

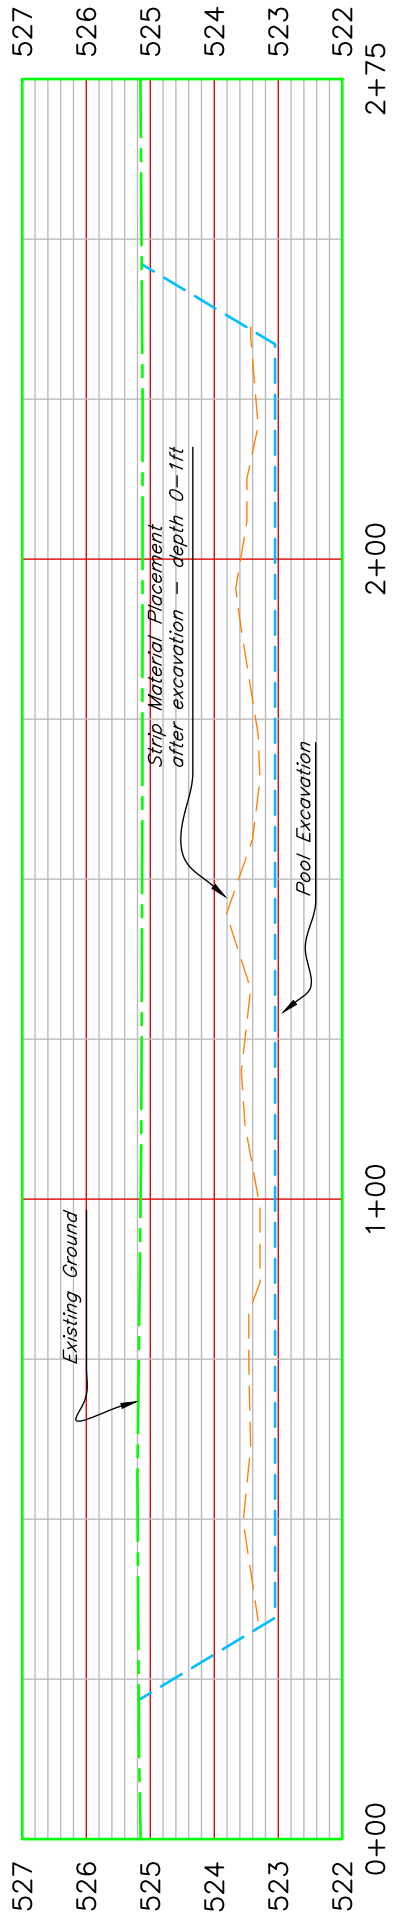

Section C-C PROFILE