


ABBREVIATIONS

A ANGLE (GEOMETRY) ANGLE (STEEL) AMP A/C ACT ACU ADDUM ADH ADJ A/E AFF AG AGG AHU AL ALT ANOD APPD APPROX ARCH ASPH AUTO	B BIT BD B/L BLDG BLK BM B.M. BP BRC BRIDG BRKT BS BTWN BVL	C C CAB CF CFM CG CIR CJ CL CLG CLR CMU CONC COND CONST CNT CPT CTD CTR CTRD CU CU IN. CW CT	D DBL DEG DEPT DIA DIM DIV DN DR DS DWG E E EA EC EF EL ELEV ENGR ENT EOS EQ OR = EQUIP EW EWC EXH EXIST EXP EJ EXT F F TO F FA FAB FD FDN FE FEC FF FHC FIG FIN FLR FLUR FM FOM FOS FRT FS FT FTG FUR FUT FW G GA GALV GC GEN GFI INTERRUPT GL GND GR GWB GYP	H HB HC HDW HORZ HP HR HT OR H HW IN INCL INSUL INV I.B.O. KL KIT LAM LAV LF LH LKR LVR M MATL MAX MDP MECH MEZZ MFR MH MIN MIR MISC ML MO MTD MTG MTL N N N/A N/C N/L NO NOM NS NTS O OA OC OD OFF OPNG OPP OVHD OF P PART PFN PL PLMB PLYWD PNL PR PRE FAB PSF PSI PT PVC PVMT	R RCP RD RECP REINF REQD REV RHL RL RM RO RTU S S SAN SFT SHIT SIM SL SM SPEC SQ SS SSTL ST STC STD STL STR STRUC SUSP SYM SYS T T&B TEL TEMP TERR THRU THK TOC TOF TOJ TOP TOP OF TRANSF TRD OR T TYP U UL UNF UON V V VAV VCT VERT VEST VTR VOL VWC W W WDTH W/ W/O WC WD WH WP WSCOT WT	R RISER REFLECTED CEILING PLAN ROOF DRAIN RECEPTACLE REINFORCE REQUIRED REVISION RIGHT HAND RAIN LEADER ROOM ROUGH OPENING ROOF UNIT S SOUTH SANITARY SUPPLY FAN SHEET SIMILAR SLOPE SHEET METAL SPECIFICATION SQUARE SERVICE SINK STAINLESS STEEL STREET SOUND TRANSMISSION CLASS STANDARD STEEL STRAIGHT STRUCTURAL STRUCTURE SUSPENDED SYMMETRICAL SYSTEM T TOP AND BOTTOM TELEPHONE TEMPERATURE TERRAZZO THROUGH THICK TOP OF CURB TOP OF FOOTING TOP OF JOIST TOP OF PIER TOP OF STEEL OR SLAB TRANSFORMER TREAD TYPICAL U UNDERWRITER'S LABORATORY UNFINISHED UNLESS OTHERWISE NOTED V VOLT VARIABLE AIR UNIT VINYL COMPOSITION TILE VERTICAL VESTIBULE VENT THROUGH ROOF VOLUME VINYL WALL COVERING W WEST WIDTH WITH WITHOUT WATER CLOSET WOOD WATER HEATER WATERPROOF(ING) WAINSCOT WEIGHT
---	--	--	---	---	---	---

SYMBOL LEGEND

	DEMOLITION KEYNOTE		CONSTRUCTION KEYNOTE
	DOOR TAG		
	ROOM TAG		
	COLUMN LINE		
	SECTION MARK		INTERIOR ELEVATION DETAIL MARK
	ELEVATION MARK		TRUE NORTH
	ENLARGED PLAN DETAIL MARK		NORTH ARROW
	PARTITION TYPE TAG		

CHERRY POINT AIR STATION MAP
NOT TO SCALE

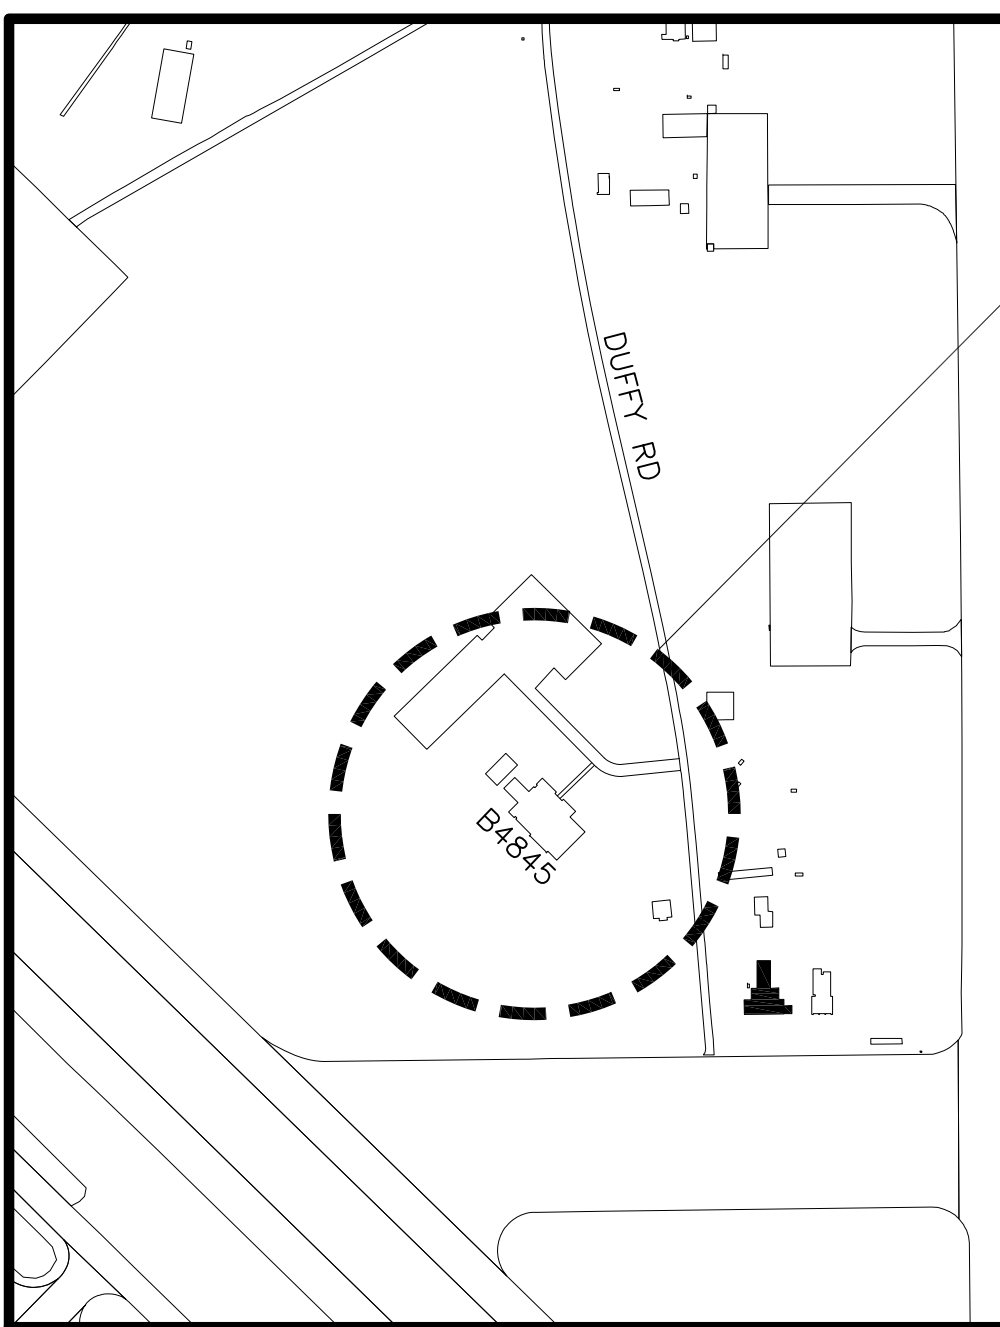

VICINITY MAP

NOT TO SCALE

AREA OF WORK
B4845

R149 MODIFICATION FOR MSAT
B4845, VMUT-2
MARINE CORPS AIR STATION
CHERRY POINT, NORTH CAROLINA
PW WO.# 7364533

INDEX OF DRAWINGS			
SHEET NUMBER	NAVFAC NUMBER	PLATE NUMBER	SHEET TITLE
1	12912599	G-001	COVER SHEET
2	12912600	AD101	B4845 FLOOR PLAN - DEMOLITION
3	12912601	A-101	B4845 FLOOR PLAN - CONSTRUCTION
4	12912602	A-501	PARTITION TYPES & PHOTOS
5	12912603	A-601	DOOR SCHEDULE & DETAILS
6	12912604	A-602	FINISH SCHEDULE & SIGNAGE
7	12912605	FA101	B4845 FIRE ALARM PLAN RM 148, 149, & 150
8	12912606	M-101	B4845 FLOOR PLAN - MECHANICAL
9	12912607	M-501	MECHANICAL DETAILS
10	12912608	M-502	MECHANICAL - DETAILS & GENERAL NOTES
11	12912609	EL101	B4845 LIGHTING PLAN RM 148 & 149
12	12912610	EL501	LIGHTING SCHEDULE AND DETAILS
13	12912611	EP101	B4845 - ROOM 149 NEW WORK POWER PLAN
14	12912612	ES601	PANEL SCHEDULES B4845

DESIGNED & ENGINEERED BY: FACILITIES ENGINEERING	DATE
SYN DESCRIPTION	
DESIGNED & ENGINEERED BY: FACILITIES ENGINEERING	DATE
FINAL	
02.15.2026	
APPROVED	
ACTIVITY - SATISFACTORY TO	
DATE	
APPROVED	
FOR EFD FOR COMMANDER NAVFAC	
DATE	
A/E	EFD
DESIGN	LTP
DRAWN	LTP
REVIEW	HLP
OC	
CHIEF ARCH/ ENGR	
PROJECT MANAGER	LTP
FIRE PROTECTION	
BRANCH MANAGER	LPF
DESIGN DIRECTOR	LPF
NAVAL FACILITIES ENGINEERING COMMAND	
MARINE CORPS AIR STATION, CHERRY POINT, N.C.	
PROJECT STATION	
CHERRY POINT, NC	
R149 MODIFICATION FOR MSAT, B4845, VMUT-2	
COVER SHEET	
CODE ID. NO. 80091	SIZE D
SCALE: AS NOTED	
FED. NO.	
STA. PROJ. NO. 7364533	
SPEC. NO.	
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12912599	
SHEET 01 OF 14	
G-001	
DRAWING REVISION: 07 AUG 2018	


GENERAL NOTES

1. SEE SYMBOL LEGEND ON SHEET G-001.
2. SEE FINISH SCHEDULE ON SHEET A-601 FOR ALL MATERIAL AND COLOR SELECTIONS
3. ALL MATERIALS ARE TO BE CONSIDERED NEW UNLESS SPECIFICALLY REFERRED TO AS "EXISTING".
4. DOORS INDICATED WITH A NUMBER IN THE CONSTRUCTION PLAN MUST BE NEW DOORS AND NEW FRAMES UNLESS OTHERWISE NOTED. REFER TO THE DOOR SCHEDULE SHEET A-601 FOR NEW DOOR DESCRIPTIONS.
5. WALLS INDICATED WITH A NUMBER ARE NEW. SEE WALL TYPES SCHEDULE SHEET A-501.
6. DIMENSIONS ORIGINATE FROM THE FACE OF STEEL STUDS AND FACE OF CONCRETE MASONRY UNLESS OTHERWISE NOTED.
7. WALLS MUST EXTEND TO THE STRUCTURE ABOVE UNLESS OTHERWISE NOTED.
8. SEE DETAIL A4/A-601 FOR SIGNAGE DETAILS.
9. EXISTING CEILING IS GYPSUM BOARD FASTENED TO CEILING JOISTS $\pm 8'-6"$ ABOVE FINISH FLOOR. CEILING JOIST ARE $\pm 1'-4"$ ON CENTER.
10. FIRE SPRINKLER PENDANTS AND PIPING ARE EXISTING TO REMAIN.


KEYNOTES

APPLIES TO THIS SHEET ONLY


- ① DEMOLISH EXISTING 3'-0" X 7'-0" WOOD DOOR, EXISTING METAL FRAME, EXISTING GYPSUM BOARD TRIM SURROUND ON BOTH SIDES OF DOOR OPENING, AND EXISTING METAL WIDE-FLANGE LINTEL. SEE DETAIL A1/A-501.
- ② DEMOLISH EXISTING 6'-0" X 7'-0" HOLLOW METAL DOOR. EXISTING METAL DOOR FRAME TO REMAIN. PREPARE FRAME FOR NEW FINISH.
- ③ DEMOLISH EXISTING (7'-11" TALL X LENGTH X WIDTH DESIGNATED ON PLAN) ROLLING STORAGE SHELVES, WHEEL TRACKS, AND RUBBER MAT.
- ④ DEMOLISH EXISTING EPOXY FLOORING AND 4" RESILIENT BASE. PREPARE EXISTING CONCRETE FLOOR FOR NEW FLOOR FINISH.
- ⑤ PREPARE EXISTING CONCRETE MASONRY WALLS TO RECEIVE FINISH.
- ⑥ EXISTING CONTROL JOINT IN CONCRETE SLAB.
- ⑦ DEMOLISH EXISTING LIGHT FIXTURES. SEE ELECTRICAL FOR MORE INFORMATION.
- ⑧ DEMOLISH EXISTING MECHANICAL SUPPLY AND RETURN. SEE MECHANICAL FOR MORE INFORMATION.
- ⑨ DEMOLISH EXISTING 3/4" PLYWOOD CAP ABOVE METAL CEILING JOISTS.
- ⑩ DEMOLISH EXISTING GYPSUM BOARD CEILING.
- ⑪ SAW CUT AND REMOVE PORTION OF EXISTING 8" CMU WALL 7'-4" HIGH BY WIDTH INDICATED ON PLAN TO ACCOMMODATE NEW DOOR OPENING. PROVIDE TEMPORARY SHORING AND BRACING. REMOVE ONE COURSE OF CONCRETE MASONRY BELOW FINISH FLOOR LEVEL TO ALLOW FOR NEW DOOR SILL INSTALLATION.
- ⑫ LOCATE WALL OPENING TO CLOSEST FULL MASONRY BLOCK.

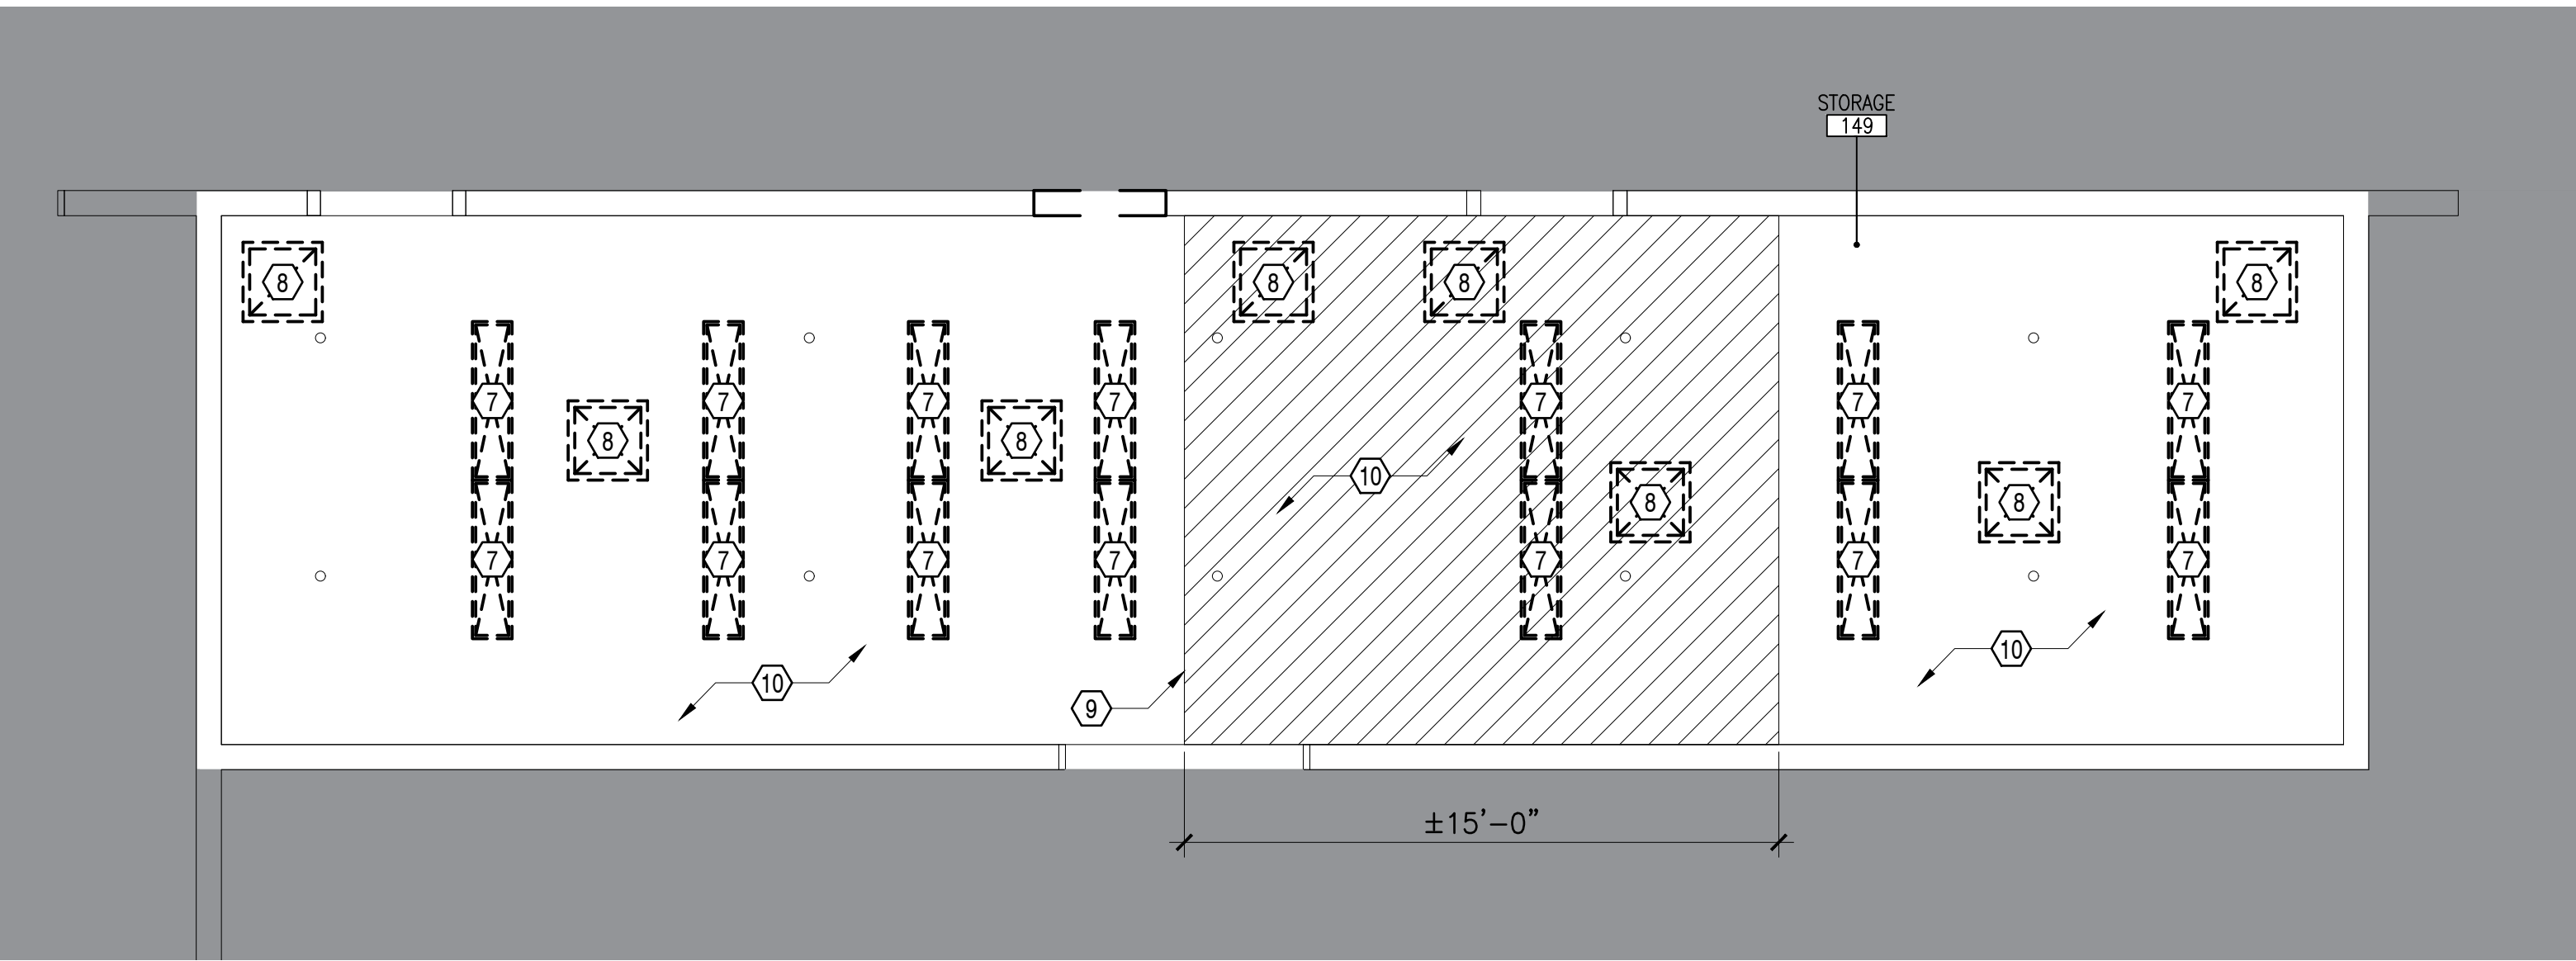

C1 B4845 REFLECTED CEILING PLAN - DEMOLITION
SCALE: 1/4"=1'-0"

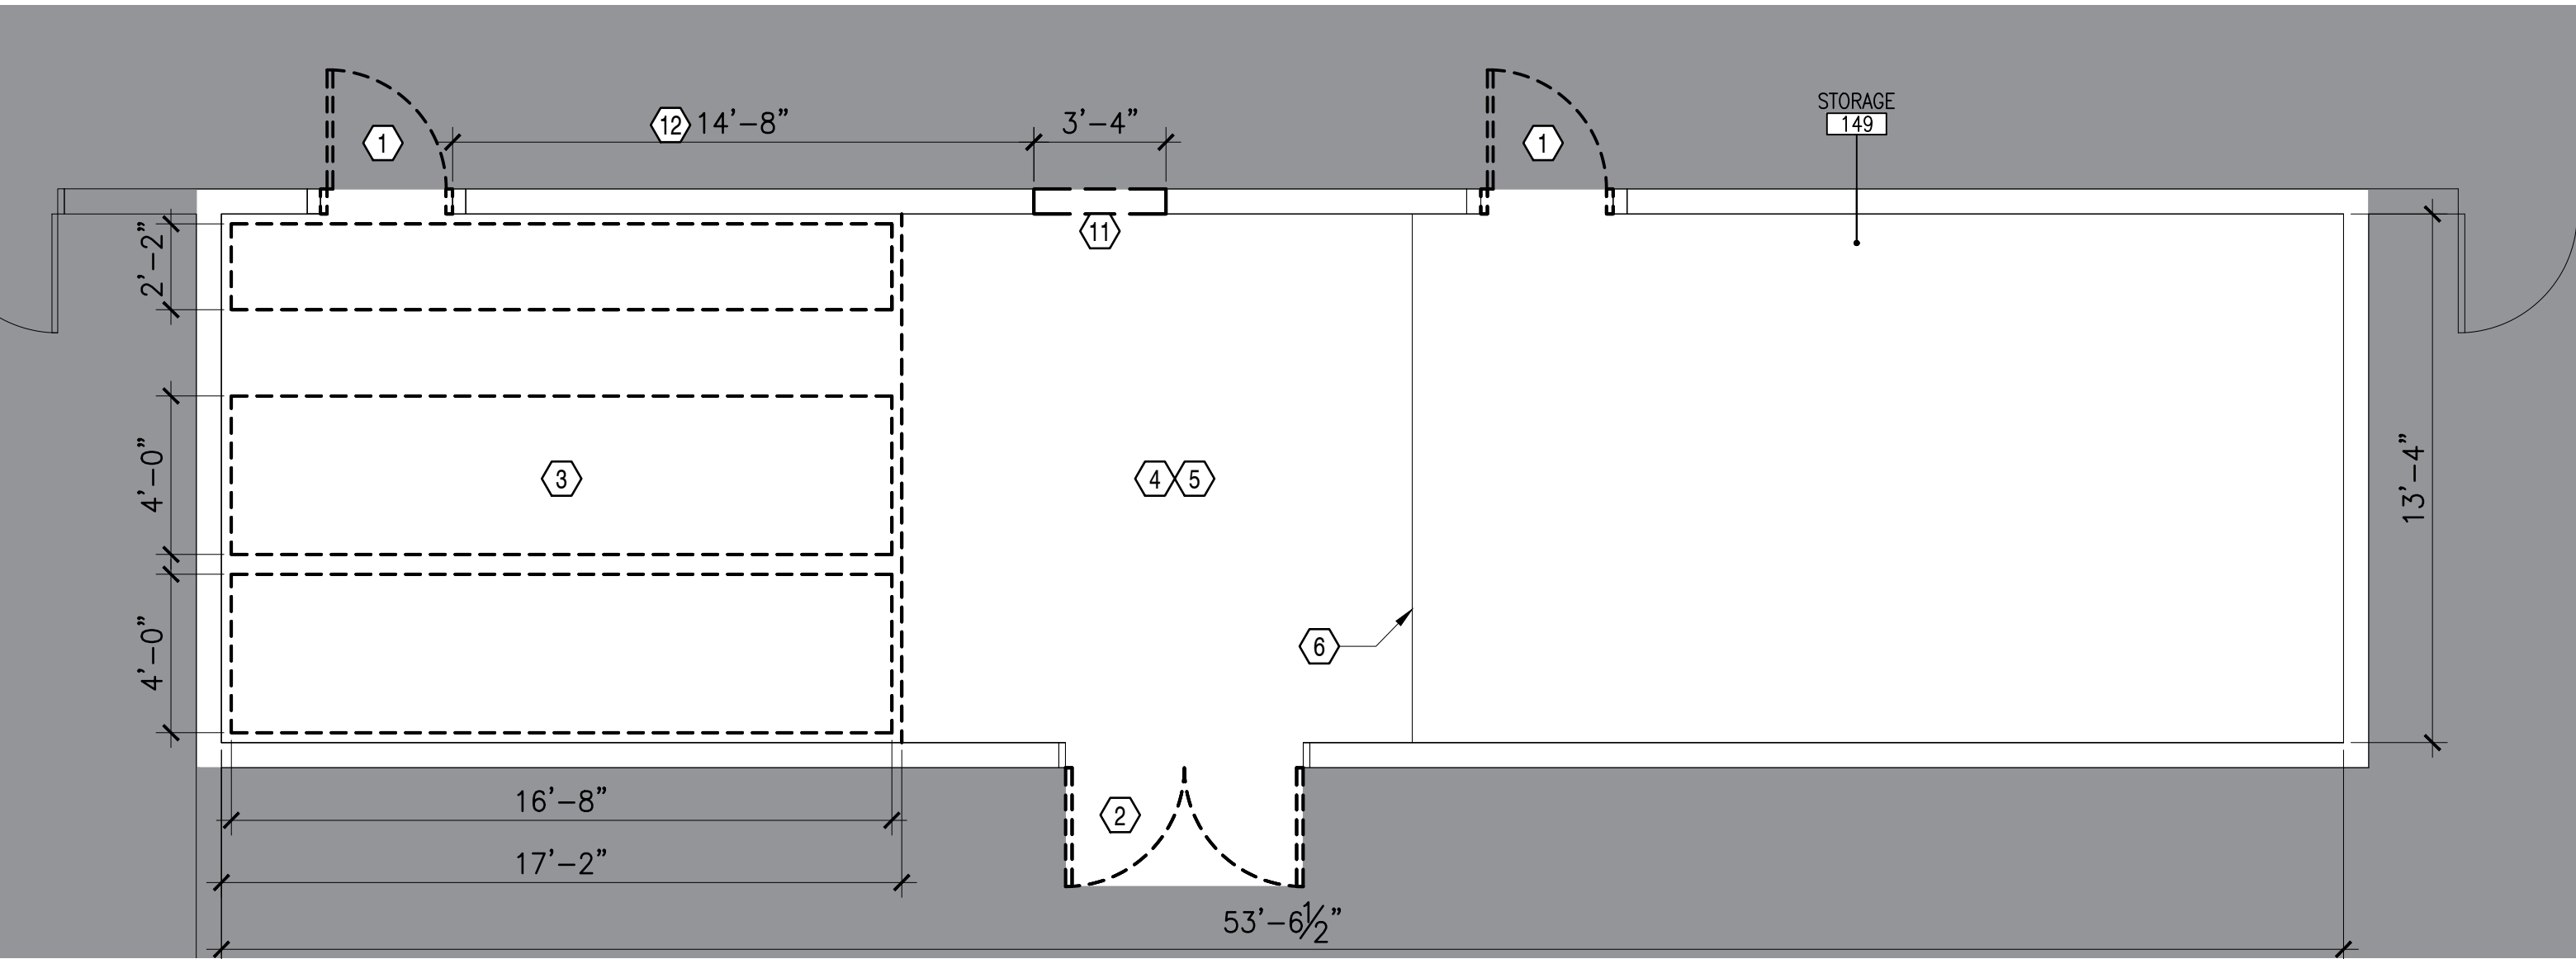

A1 B4845 FLOOR PLAN - DEMOLITION
SCALE: 1/4"=1'-0"

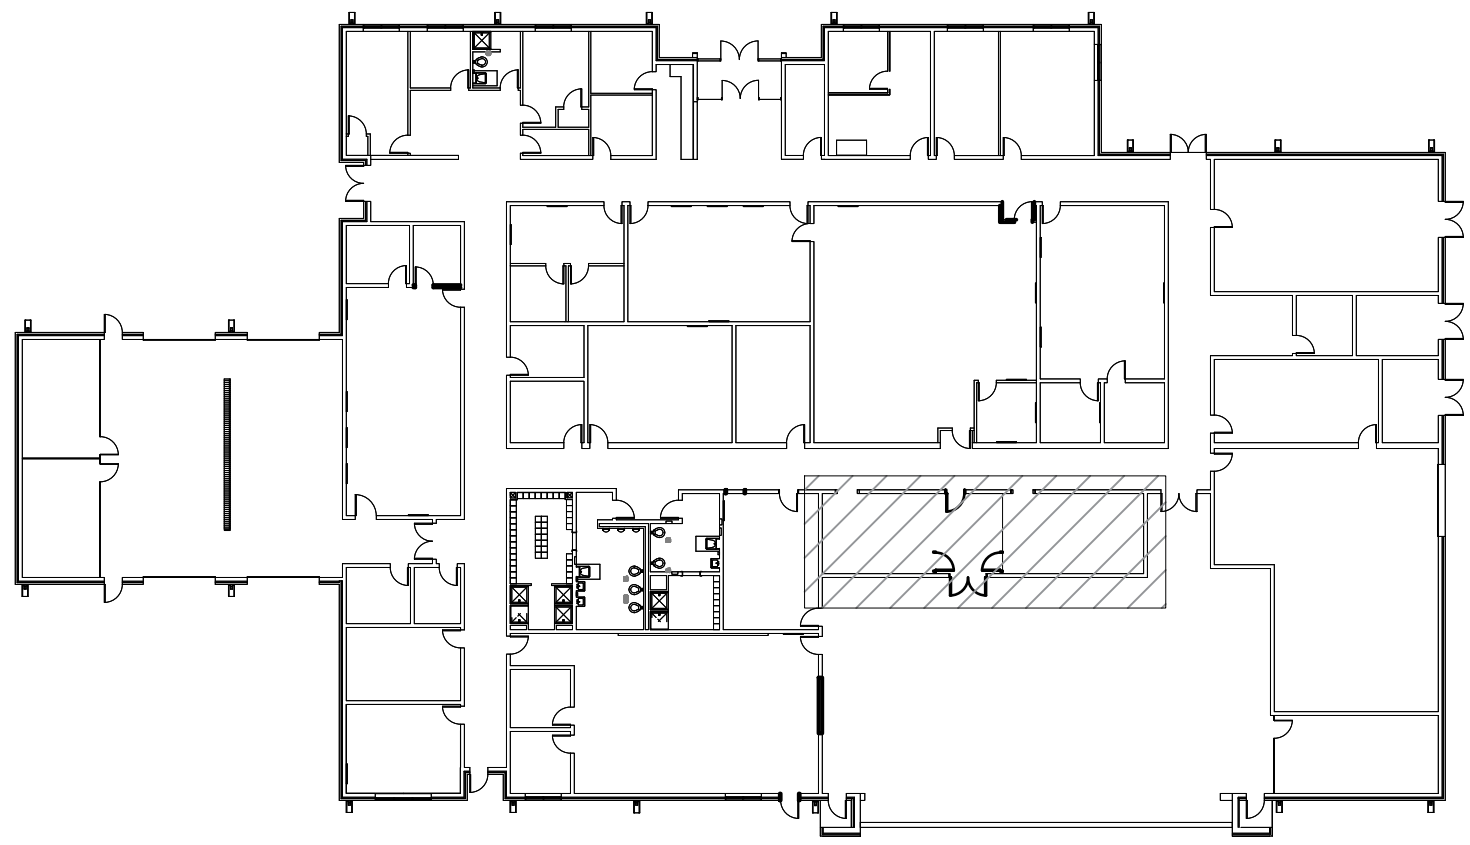


KEY PLAN


SCALE: 1/32"=1'-0"



APPROVED	DATE	APPR
ACTIVITY - SATISFACTORY TO		
DATE		
APPROVED		
FOR EFD FOR COMMANDER NAVFAC		
DATE		
A/E	EFD	
DESIGN	LTP	
DRAWN	LTP	
REVIEW	HLP	
QC		
CHIEF ARCH/ ENGR		
PROJECT MANAGER	LTP	
FIRE PROTECTION		
BRANCH MANAGER	LPF	
DESIGN DIRECTOR	LPF	
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING COMMAND MARINE CORPS AIR STATION, CHERRY POINT, N.C. PROJECT STATION CHERRY POINT, NC R149 MODIFICATION FOR MSAT, B4845, VMUT-2 B4845 FLOOR PLAN - DEMOLITION		
CODE ID. NO. 80091	SIZE D	
SCALE: AS NOTED		
FED. NO.		
STA. PROJ. NO. 7364533		
SPEC. NO.		
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO. 12912600		
SHEET 02 OF 14		
AD101		
DRAWING REVISION: 07 AUG 2018		

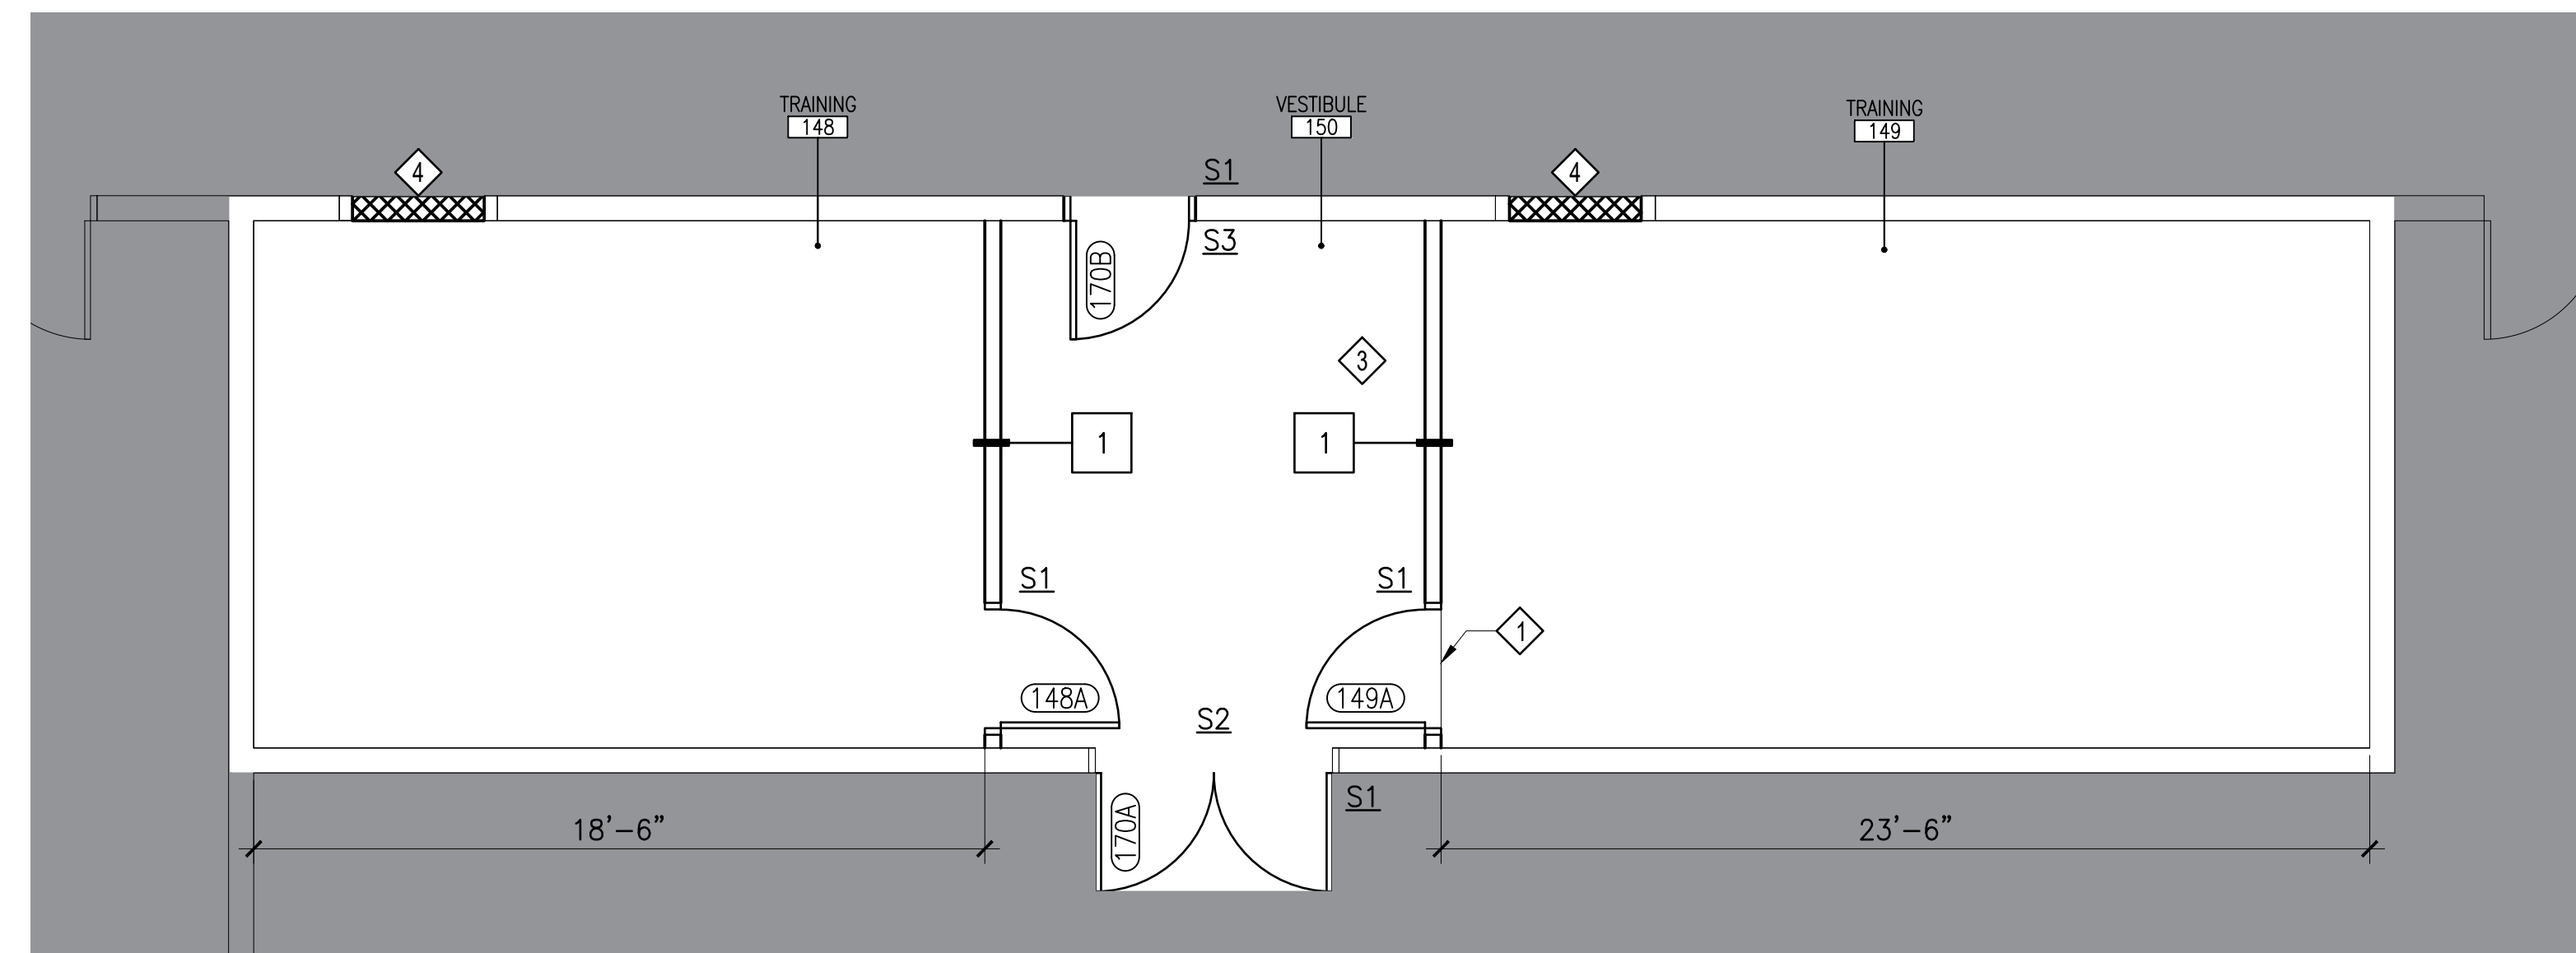

A1 B4845 FLOOR PLAN - CONSTRUCTION
SCALE: 1/4"=1'-0"

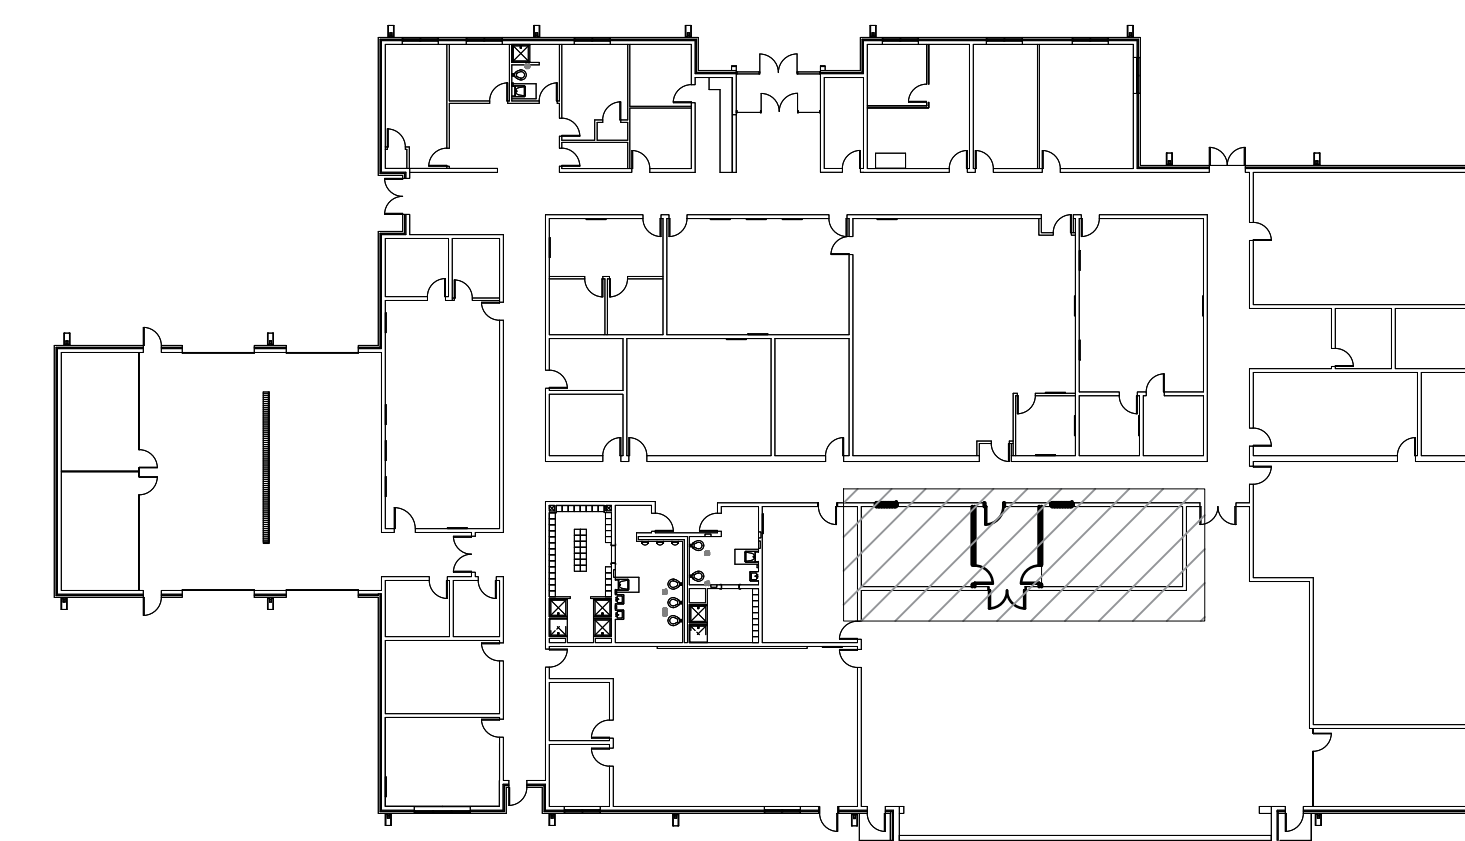



SCALE: 1/32"=1'-0"

KEYNOTES

APPLIES TO THIS SHEET ONLY

- 1 EXISTING CONTROL JOINT.
- 2 PROVIDE R-25 BATT INSULATION BETWEEN METAL CEILING JOISTS AND GYPSUM BOARD CEILING. PROVIDE 3/4" PLYWOOD CEILING CAP AND FASTEN TO STRUCTURE. PROVIDE CUT OUTS AND ACOUSTIC SEALANT AROUND SPRINKLER PIPING, DUCTWORK, ELECTRICAL CONDUIT, STRUCTURAL PENETRATIONS, ETC. PAINT PLYWOOD PNT-3.
- 3 PROVIDE METAL CELL PHONE LOCKERS. PROVIDE PRESERVATIVE TREATED WOOD BLOCKING FOR INSTALLATION OF CELL PHONE LOCKERS. SEE DETAIL C2/A-501.
- 4 PROVIDE MASONRY WALL INFILL AT DEMOLISHED DOOR LOCATION. SEE DETAIL A1/A-501.

LEGEND

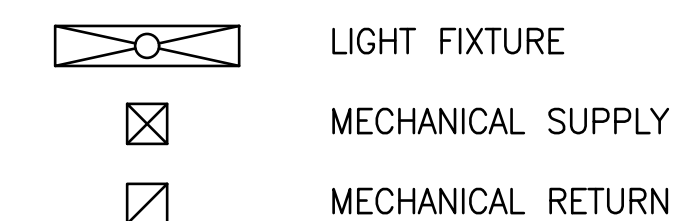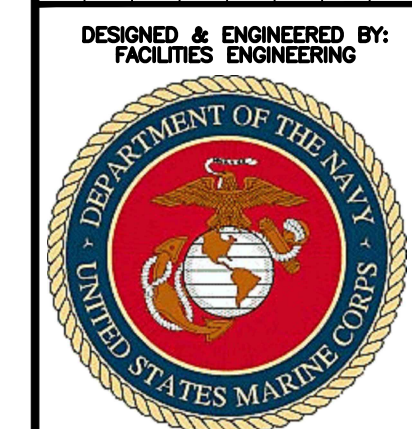[illegible]

FINAL
02.15.2026

APPROVED

ACTIVITY - SATISFACTORY TO

DATE _____
APPROVED _____

FOR EFD FOR COMMANDER NAVFAC

DATE _____

A/E	EFD
DESIGN	LTP
DRAWN	LTP
REVIEW	HLP
QC	
CHIEF	ARCH./ ENGR.
PROJECT MANAGER	LTP
FIRE PROTECTION	
BRANCH MANAGER	LPF
DESIGN DIRECTOR	LPF


DEPARTMENT OF THE NAVY MARINE CORPS AIR STATION, CHERRY POINT, N.C.	CHERRY POINT, NC R149 MODIFICATION FOR MSAT, B4845, VMUT-2	B4845 FLOOR PLAN – CONSTRUCTION
---	--	---------------------------------

CODE ID. NO. 80091	SIZE D
SCALE: AS NOTED	
FED NO.	
STA. PROJ. NO.	7364533
SPEC. NO.	
CONSTR. CONTR. NO.	

NAVFAC DRAWING NO.			
12912601			
SHEET	03	OF	14


A-101

DRAWFORM REVISION: 07 AUG 2018


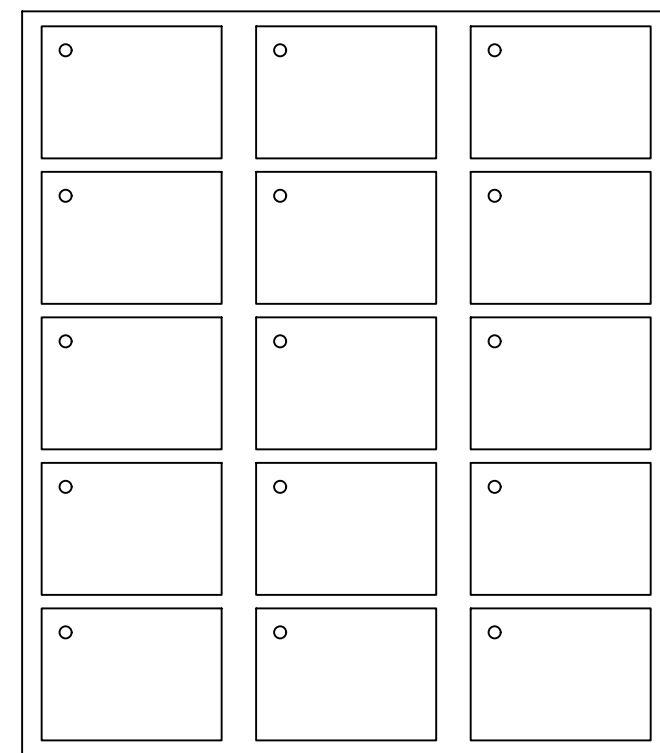


C2 METAL FRON
SCALE: 1 1/2"=1'-0"

1) WALL TYPE 1
SCALE: 1 1/2"=1'-0"

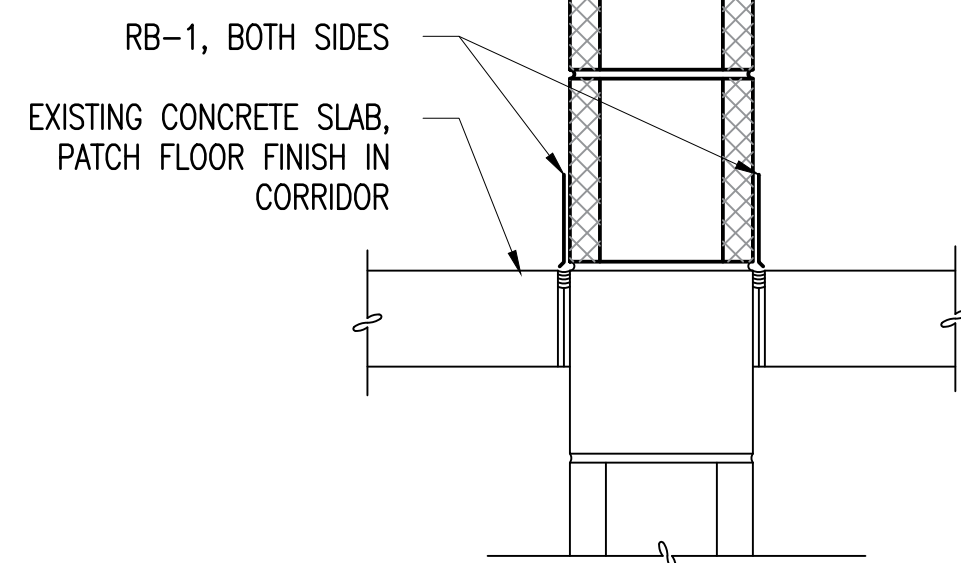

A1) WALL INFILL L
SCALE: 1 1/2"=1'-0"

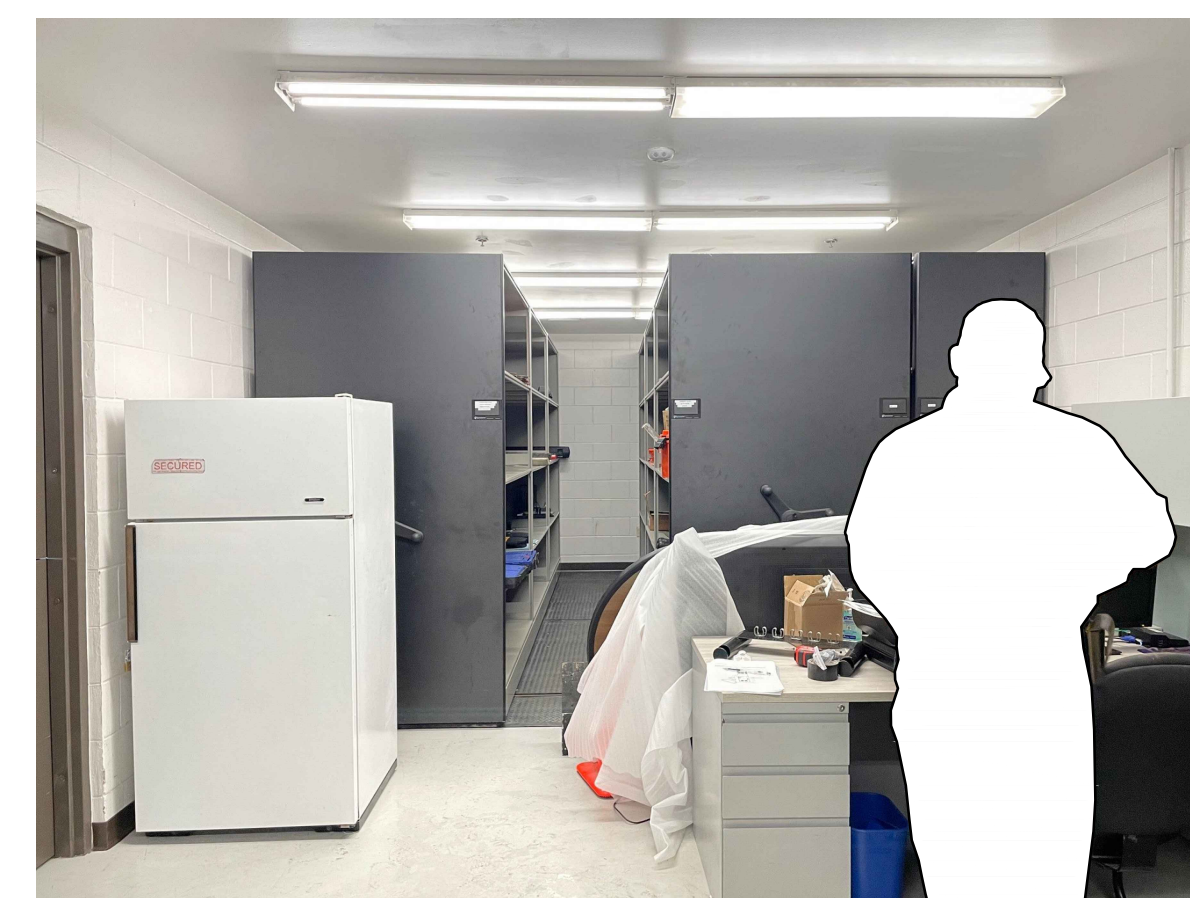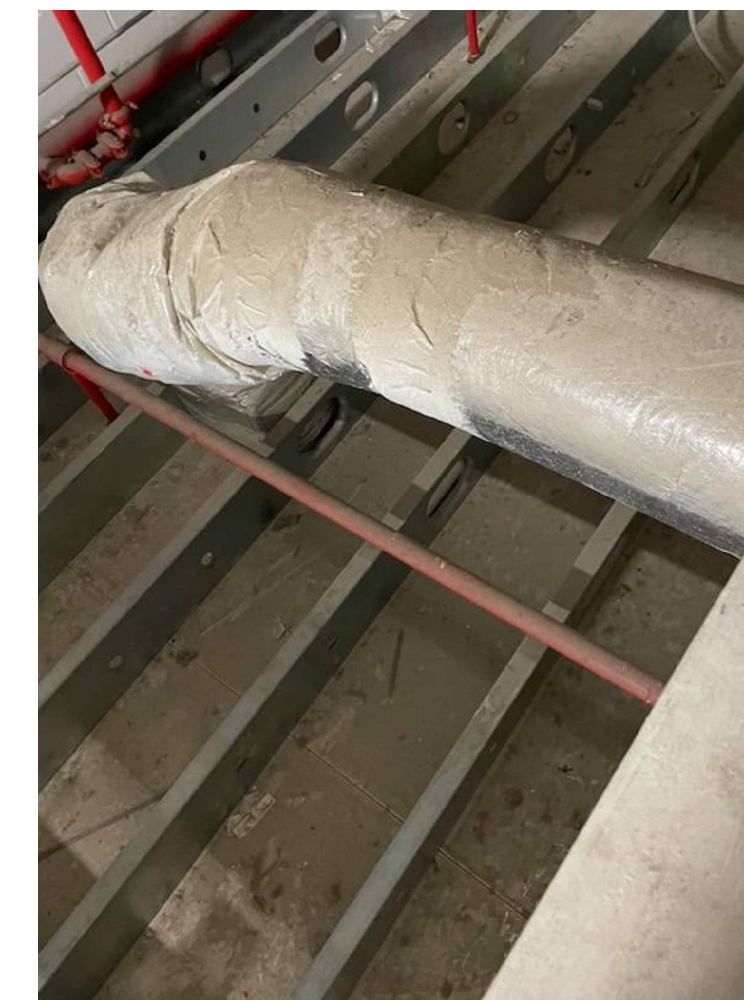

B4845 EXISTING PHOTOS



DESIGNED & ENGINEERED BY
FACILITIES ENGINEERING

02.15.2026

ACTIVITY - SATISFACTORY TO

APPROVED

FOR EFD FOR COMMANDER NAVFAC

A/

A/E	EFD
DESIGN	LTP
DRAWN	LTP
REVIEW	HLP
QC	
CHIEF	ARCH./ ENGR.
PROJECT MANAGER	LTP
FIRE PROTECTION	
BRANCH MANAGER	LPF
DESIGN DIRECTOR	LPF

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING COMMAND
MARINE CORPS AIR STATION, CHERRY POINT, N.C.	
PROJECT STATION	CHERRY POINT, NC
R149 MODIFICATION FOR MSAT, B4845, VMUT-2	
PARTITION TYPES & PHOTOS	

CODE ID. NO. 80091	SIZE D
SCALE: AS NOTED	
FED NO.	
STA. PROJ. NO.	7364533
SPEC. NO.	
CONSTR. CONTR. NO.	


NAVFAC DRAWING NO.			
12912602			
SHEET	04	OF	14
A-501			
DRAWFORM REVISION: 07 AUG 2018			

DOOR SCHEDULE


MARK	DOOR						FRAME						REMARKS
	TYPE	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HEAD	JAMB	SILL	
148A	F	3'-0"	7'-0"	1 3/4"	WOOD	-	A	STEEL	PNT-2	A2/A-601	A2/A-601	-	STC-55
149A	F	3'-0"	7'-0"	1 3/4"	WOOD	-	A	STEEL	PNT-2	A2/A-601	A2/A-601	-	STC-55
170A	F	6'-0"	7'-0"	1 3/4"	STEEL	PNT-2	-	-	PNT-2	-	-	-	
170B	F	3'-0"	7'-0"	1 3/4"	WOOD	-	B	STEEL	PNT-2	A1/A-601	A1/A-601	A1/A-601	

MASONRY LINTEL SCHEDULE

WALL TYPE	SPAN	NOMINAL WALL THICKNESS	BEARING	DEPTH	BOTTOM STEEL	TOP STEEL	REMARKS
INTERIOR WALL	3'-4"	0'-8"	0'-8"	0'-8"	(1)-#5	(1)-#4	L1

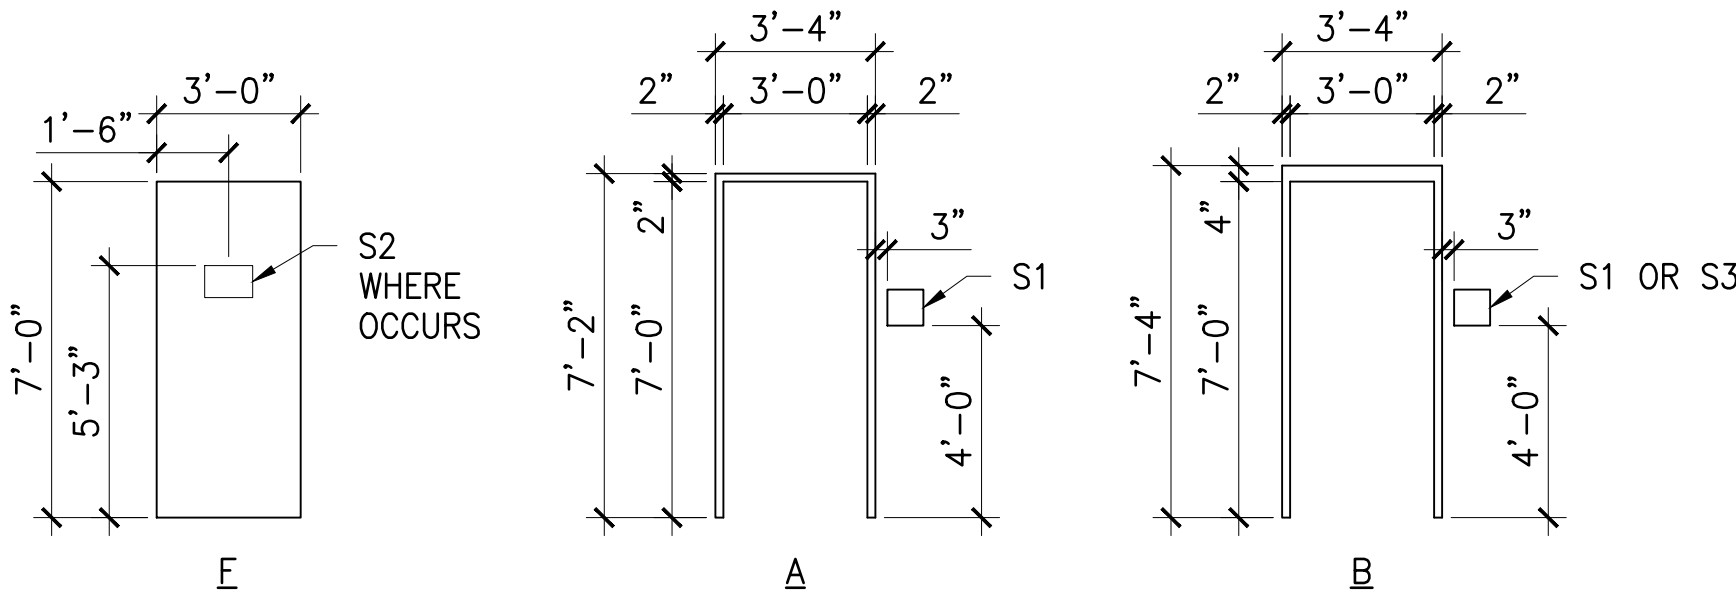


C1 DOOR & STEEL FRAME DIMENSIONS
SCALE: 1/4"=1'-0"

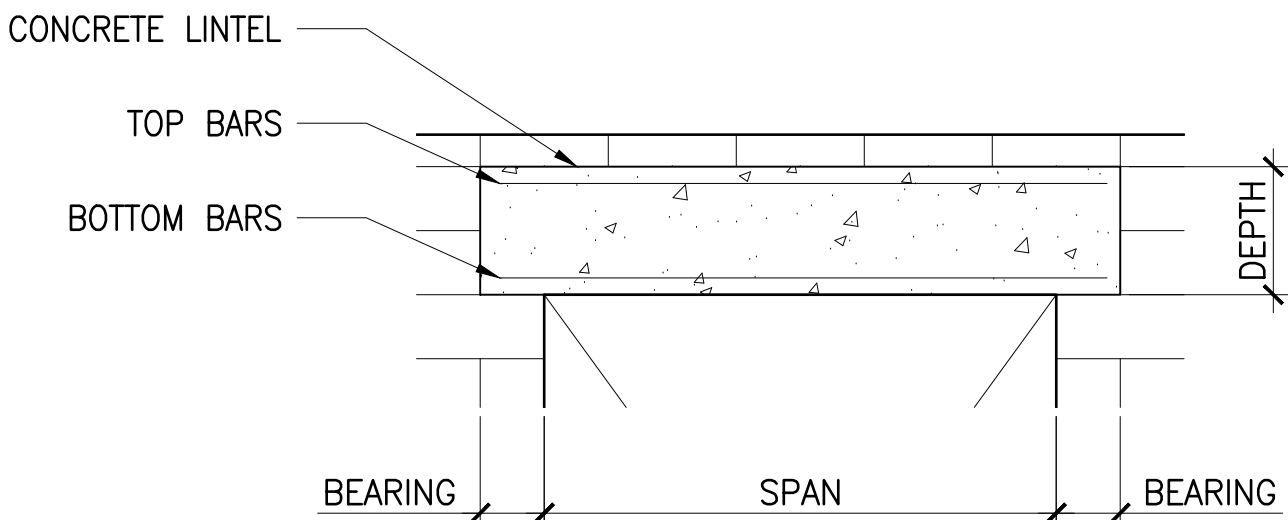


C4 DETAIL
SCALE: NTS


PRE-CAST CONCRETE LINTEL,
0'-8" HIGH x 0'-8" WIDE WITH
#3 STIRRUPS @ 1'-0" ON
CENTER, SEE LINTEL SCHEDULE
FOR TOP AND BOTTOM
REINFORCING

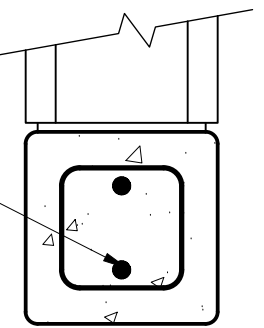


C5 DETAIL
SCALE: 1 1/2"=1'-0"

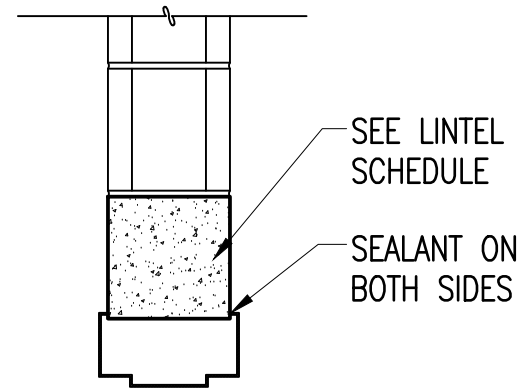


A HEAD

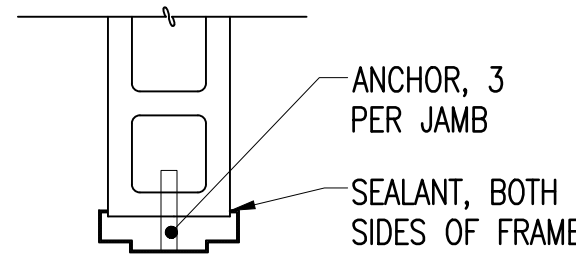


A JAMB

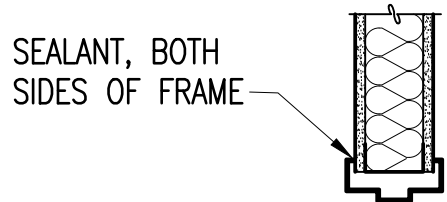

A HEAD

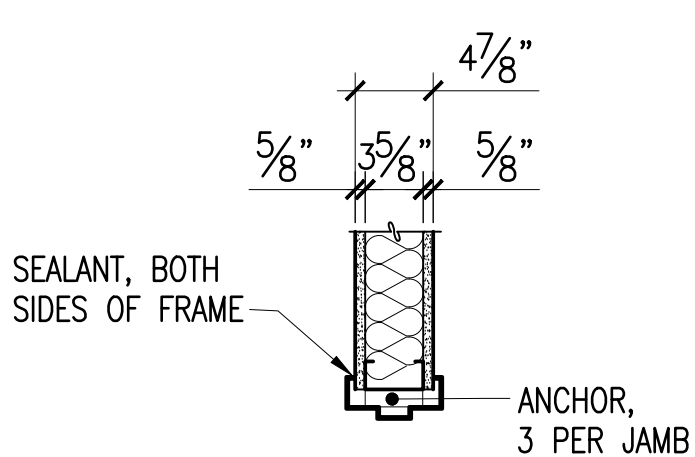


A JAMB

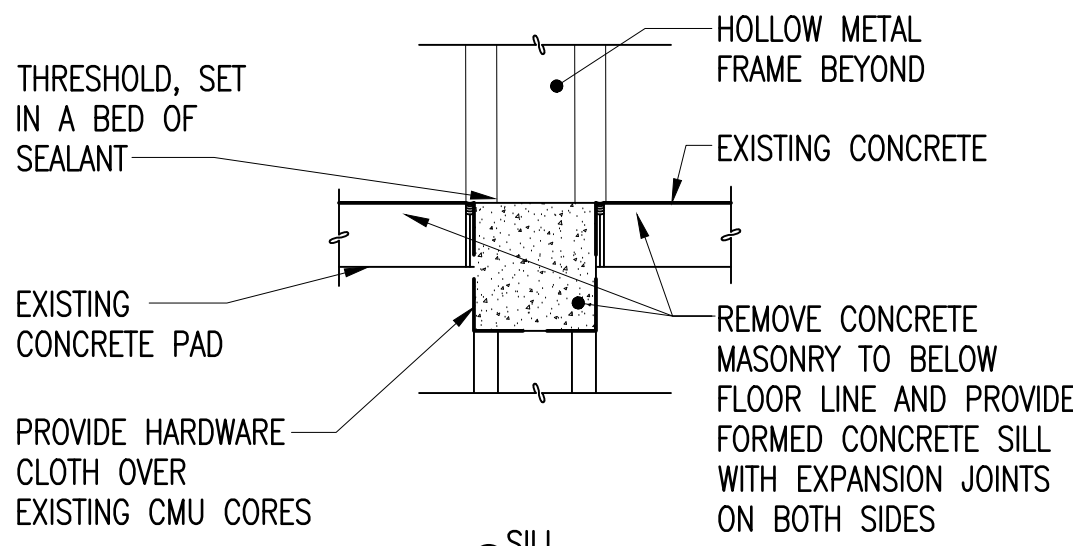

A SILL

A1 MASONRY FRAME DETAILS
SCALE: 1"=1'-0"

A2 INTERIOR STEEL FRAME DETAILS
SCALE: 1"=1'-0"

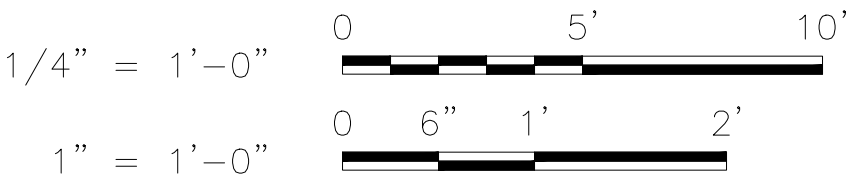

FINAL
02.15.2026

APPROVED

ACTIVITY - SATISFACTORY TO

DATE

APPROVED

FOR EFD FOR COMMANDER NAVFAC

DATE

A/E EFD

DESIGN LTP

DRAWN LTP

REVIEW HLP

QC

CHIEF ARCH/ ENGR

PROJECT MANAGER LTP

FIRE PROTECTION

BRANCH MANAGER LPP

DESIGN DIRECTOR LPP

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING COMMAND
MARINE CORPS AIR STATION, CHERRY POINT, N.C.
PROJECT STATION
CHERRY POINT, NC
R149 MODIFICATION FOR MSAT,
B4845, VMUT-2
DOOR SCHEDULE & DETAILS

CODE ID. NO. 80091 SIZE D

SCALE: AS NOTED

FED. NO.

STA. PROJ. NO. 7364533

SPEC. NO.

CONSTR. CONTR. NO.

NAVFAC DRAWING NO.

12912603

SHEET 05 OF 14

A-601




DRAWING REVISION: 07 AUG 2018

FINISH SCHEDULE						
ROOM		FLOOR FINISH	BASE FINISH	WALL FINISH	CEILING FINISH	REMARKS
NUMBER	NAME					
148	TRAINING	VCT-1	RB-1	PNT-1	PNT-3	
149	TRAINING	VCT-1	RB-1	PNT-1	PNT-3	
170	VESTIBULE	VCT-1	RB-1	PNT-1	PNT-3	

FINISH LEGEND						
NUMBER	NAME	MANUFACTURER	MODEL	COLOR	SIZE	REMARKS
PNT-1 (TYPICAL WALL)	PAINT	SHERWIN WILLIAMS	-	SW 7035 AESTHETIC WHITE	-	
PNT-2 (DOOR & FRAME)	PAINT	SHERWIN WILLIAMS	-	SW 7020 BLACK FOX	-	
PNT-3 (TYPICAL CEILING)	PAINT	SHERWIN WILLIAMS	-	SW 7006 EXTRA WHITE	-	
RB-1	RUBBER BASE	FLEXCO	1/8" COVED	038 OUTER BANKS	4" H	
S-1	SIGNAGE	2/90	SLIDE ESSENTIALS	COFFEE 811		
WD-1	WOOD DOOR		ROTARY CUT, BOOK MATCH			
VCT-1	VINYL COMPOSITE TILE	ARMSTRONG FLOORING	STANDARD EXCELON IMPERIAL TEXTURE	51804 EARTHSTONE GREIGE	12" X 12"	


FINISH NOTES


1. NAMES INDICATED FOR COLORS, TEXTURES, AND PATTERNS OF MATERIALS ARE FOR THE PURPOSE OF SELECTION ONLY. OTHER MANUFACTURERS' MATERIALS MAY BE ACCEPTABLE PROVIDED MATERIALS CLOSELY MATCH COLORS, TEXTURES, AND PATTERNS INDICATED AND CONFORM TO ALL SPECIFICATION REQUIREMENTS.
2. ALL MATERIALS/PRODUCTS ARE TO BE INSTALLED PER MANUFACTURER'S INSTALLATION REQUIREMENTS.
3. ALL TRANSITIONS MUST MEET ABA GUIDELINES.
4. LEVEL CHANGES TO BE FEATHERED BACK NO LESS THAN 48".
5. HATCH PATTERN DOES NOT INDICATE DIRECTION OF INSTALLATION OF MATERIAL.
6. ELECTRICAL PANELS, ACCESS PANELS, AND EXPOSED JOINTS MUST BE PAINTED OR FINISHED TO MATCH ADJACENT SURFACES.
7. WALLS TO BE PAINTED PNT-1 UNLESS OTHERWISE INDICATED.

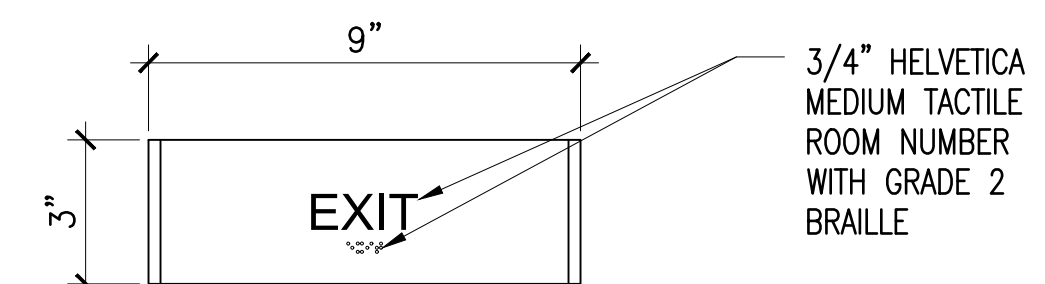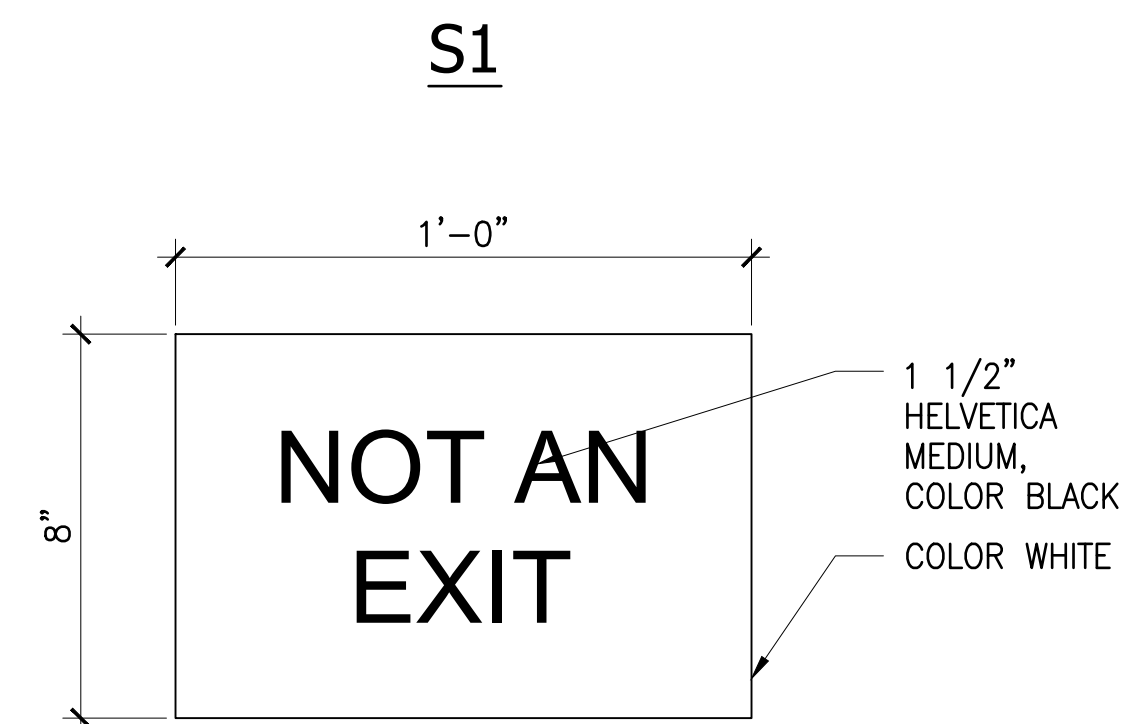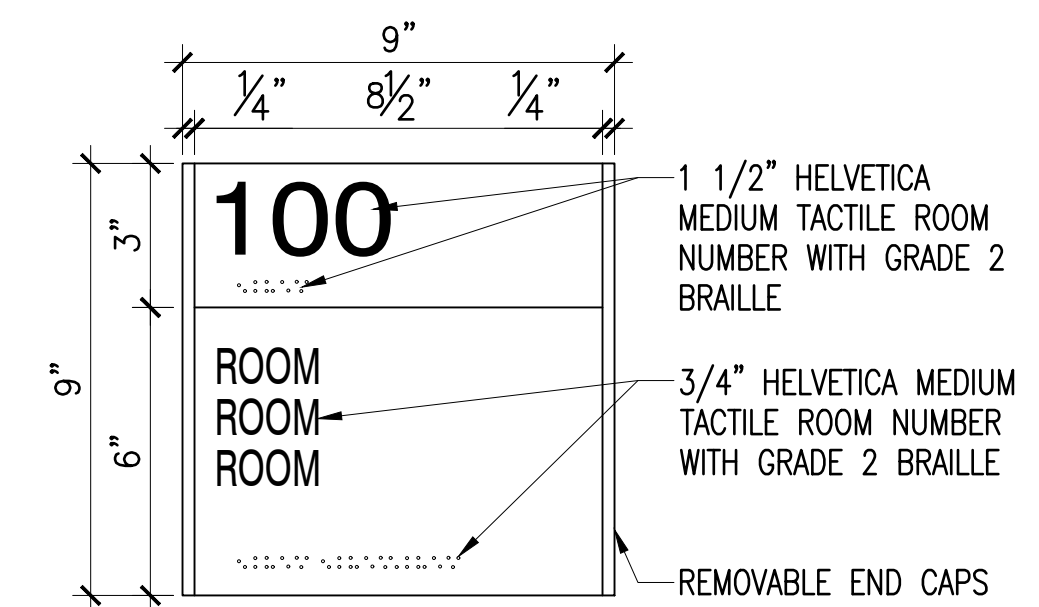


NOTE: SEE FINISH SCHEDULE FOR SIGNAGE FINISH

B5 **SIGNAGE DETAIL**
SCALE: 3"=1'-0"

[illegible]

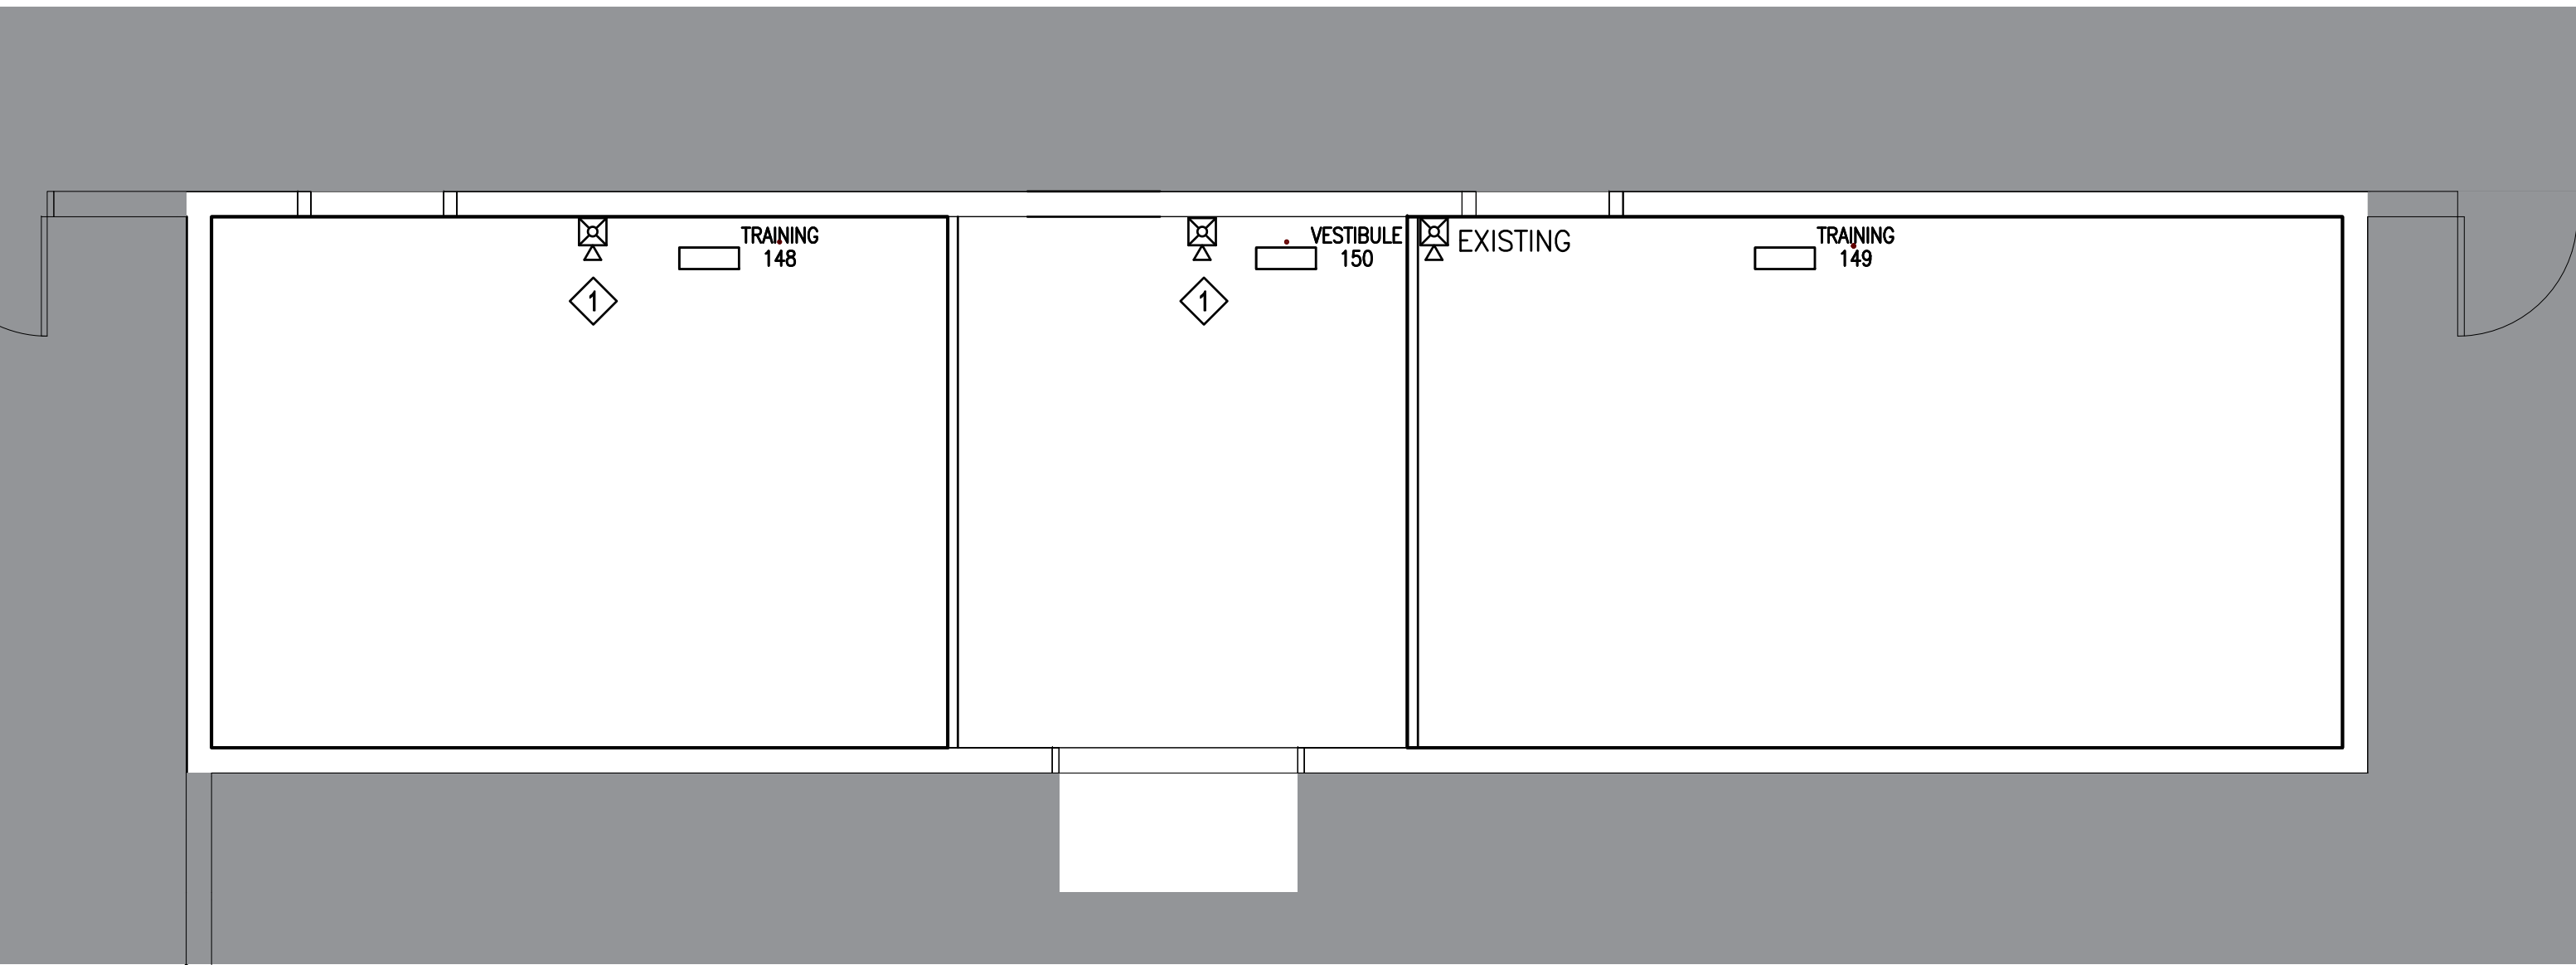

C1 B4845 - ROOM 148, 149 & 150 FIRE ALARM PLAN
SCALE: 1/4"=1'-0"



LEGEND

WALL MOUNTED SPEAKER STROBE

NEW WORK NOTES:

1. PROVIDE WALL MOUNTED SPEAKER STROBE CONNECTED TO EXISTING SPEAKER STROBE USING 3/4" EMT TO CONNECT BACK TO EXISTING FACP SYSTEM

GENERAL NOTES

- SEE SYMBOL LEGEND ON SHEET G-001.
- ALL MATERIALS ARE TO BE CONSIDERED NEW UNLESS SPECIFICALLY REFERRED TO AS "EXISTING".
- CONDUIT MUST BE PROVIDED AND INSTALLED NOT TO INHIBIT AND/OR OBSTRUCT THE ACCESS INTO CEILINGS AND TO SERVICE, REPAIR, OR REPLACE ANY MATERIALS.

SYN	DESCRIPTION	DATE	APPR



FINAL
02.15.2026

APPROVED

ACTIVITY - SATISFACTORY TO

DATE
APPROVED

FOR EFD FOR COMMANDER NAVFAC

DATE

A/E EFD

DESIGN CRL

DRAWN CRL

REVIEW RCM

QC

CHIEF ARCH/ ENGR

PROJECT MANAGER LTP

FIRE PROTECTION

BRANCH MANAGER LPF

DESIGN DIRECTOR LPF

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING COMMAND
MARINE CORPS AIR STATION, CHERRY POINT, N.C.
PROJECT STATION
CHERRY POINT, NC
R149 MODIFICATION FOR MSAT,
B4845, VMUT-2
B4845 FIRE ALARM PLAN RM 148, 149 & 150

CODE ID. NO. 80081 SIZE D

SCALE: AS NOTED

FED NO.

STA. PROJ. NO. 7364533


SPEC. NO.


CONSTR. CONTR. NO.

NAVFAC DRAWING NO.
12912605

SHEET 7 OF 14
FA101
DRAWING REVISION: 07 AUG 2018

1/4" = 1'-0"



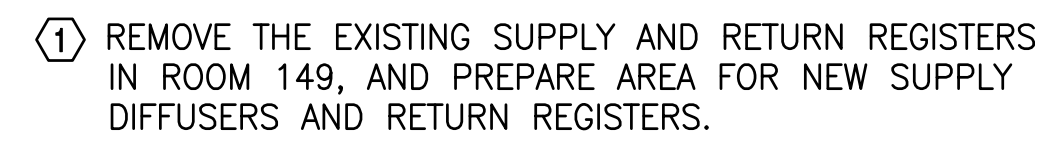

- 1 PROVIDE NEW 1 TON DUCTLESS SPLIT SYSTEM (ADU).THE BASIS OF DESIGN IS BASED ON A MITSUBISHI MODEL PKA-A12LA & PUZ-A12NKA7.
- 2 PROVIDE NEW REMOTE CONDENSING UNIT.
- 3 PROVIDE APPROXIMATELY 70FT OF NEW REFRIGERANT LINES AND THE CONDENSATE DRAIN LINE THROUGH A INTERIOR AND EXTERIOR WALL PENETRATION.
- 4 PROVIDE MANUFACTURER'S RECOMMENDED CLEARANCE FOR THE NEW DUCTLESS SPLIT SYSTEM.
- 5 PROVIDE A NEW 12"X 24" CONC. SPLASH BLOCK FOR NEW CONDENSING UNIT.
- 6 PROVIDE 2 NEW HIGH VISIBILITY PROTECTIVE BOLLARDS AROUND THE NEW DUCTLESS CONDENSING UNIT. SEE DETAIL (C2) ON SHEET M-502.
- 7 PROVIDE A NEW CONCRETE PAD OUTSIDE OF BLDG. 4845, FOR THE NEW REMOTE CONDENSING UNIT TO BE MOUNTED ON. SEE DETAIL(A3) ON SHEET M-501.
- 8 PROVIDE 4 NEW 16"X16" SUPPLY DIFFUSERS AND 4 16"X16" RETURN REGISTERS IN ROOM 148 & 149 AT BUILDING 4845.
- 9 RELOCATE THERMOSTAT AV-21 APPROXIMATELY 4FT DOWN THE WALL FROM THE DOUBLE DOOR IN ROOM 148.

OPEN OFFICE 148

A1 M-501

AIRFLOW

1

8

9 AV-21

A1 M-501

1

4

AIRFLOW

8

AV-22

INSULATED RS, RL REFRIGERANT LINES

3

POWER & HIGH VOLTAGE CONTROL TO INDOOR UNIT

THERMISTOR CABLE

REFRIGERANT LINE SET, DRAIN LINE & ELECTRICAL TO OUTSIDE UNIT

AIRFLOW

3

OUTDOOR UNIT. SECURE TO NEW CONCRETE PAD.

5'-0"

A2 M-502

2

4

5


6

7

AIRFLOW

1. ALL PENETRATIONS THROUGH SECURE AREA MUST MEET SECURE PERIMETER PENETRATION REQUIREMENTS SEAL OPENINGS AROUND PIPING, SEE DETAILS A1 ON SHEET M-501.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR INSURING THAT ALL CONTROL SYSTEMS AND COMPONENTS AFFECTED BY THEIR WORK IS RETURNED TO ITS FULLY OPERATIONAL STATE.
3. INSTALL ALL EQUIPMENT AND APPURTENANCES IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS, CONTRACT DOCUMENTS, APPLICABLE CODES AND REGULATIONS.
4. PVC IS SUITABLE FOR THE APPLICATION OF THE CONDENSATE DRAIN LINES FOR THE NEW AIR CONDITIONING SYSTEMS.
5. MISCELLANEOUS ITEMS NOT SHOWN ON PLANS BUT NECESSARY FOR A COMPLETE OPERABLE SYSTEM SHALL BE SUPPLIED AND INSTALLED.
6. SEE SYMBOL LEGEND ON SHEET G-001.
7. ALL MATERIALS ARE TO BE CONSIDERED NEW UNLESS SPECIFICALLY REFERRED TO AS "EXISTING".

	MECHANICAL SUPPLY
	MECHANICAL RETURN
	OUTDOOR CONDENSER UNIT
	NEW WORK
	DEMOLITION WORK

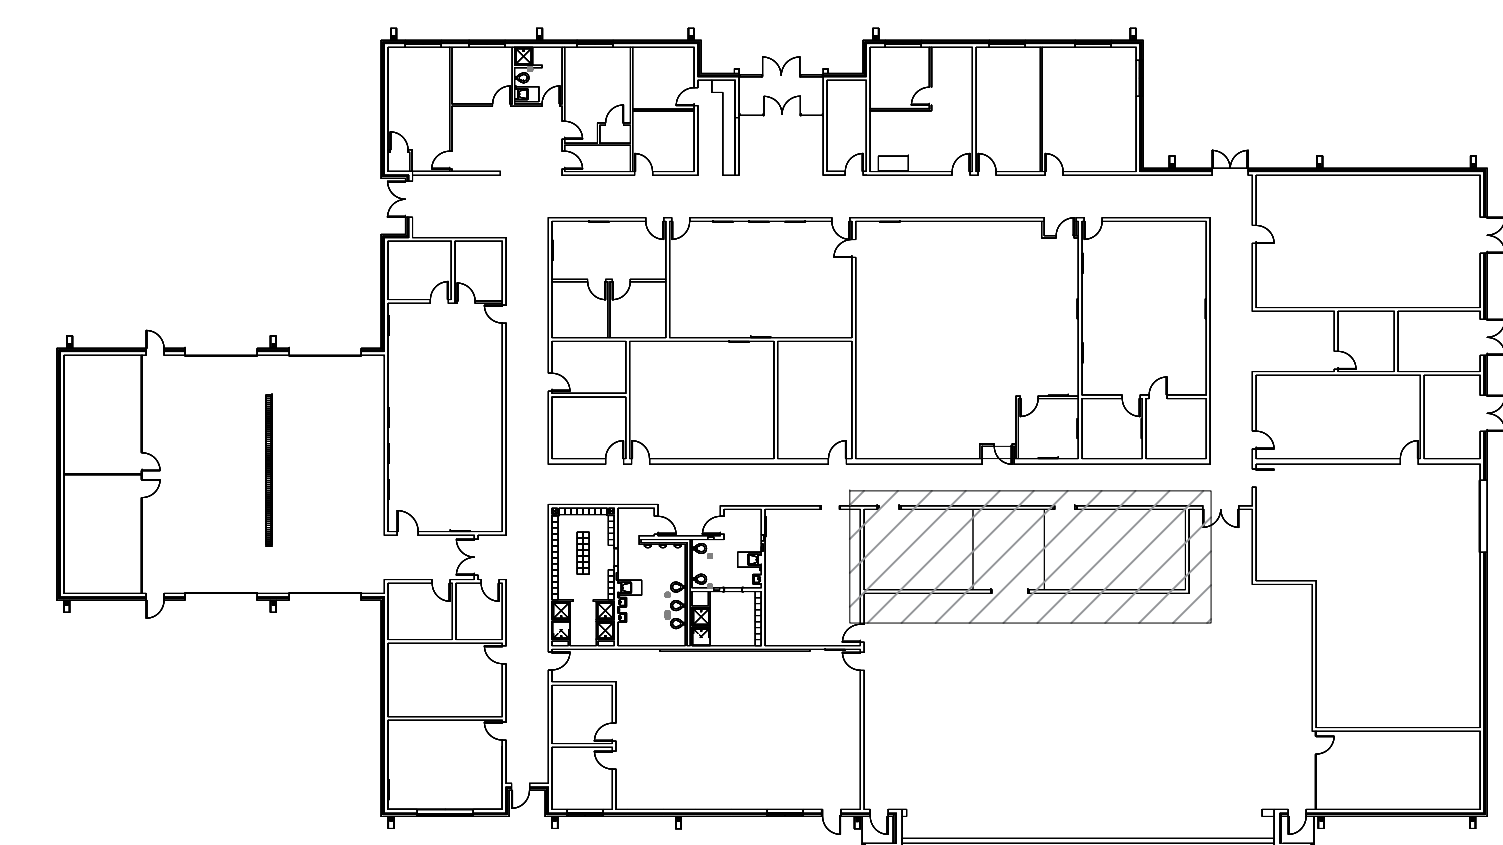


SCALE: 1/32"=1'-0"

[illegible]




C4



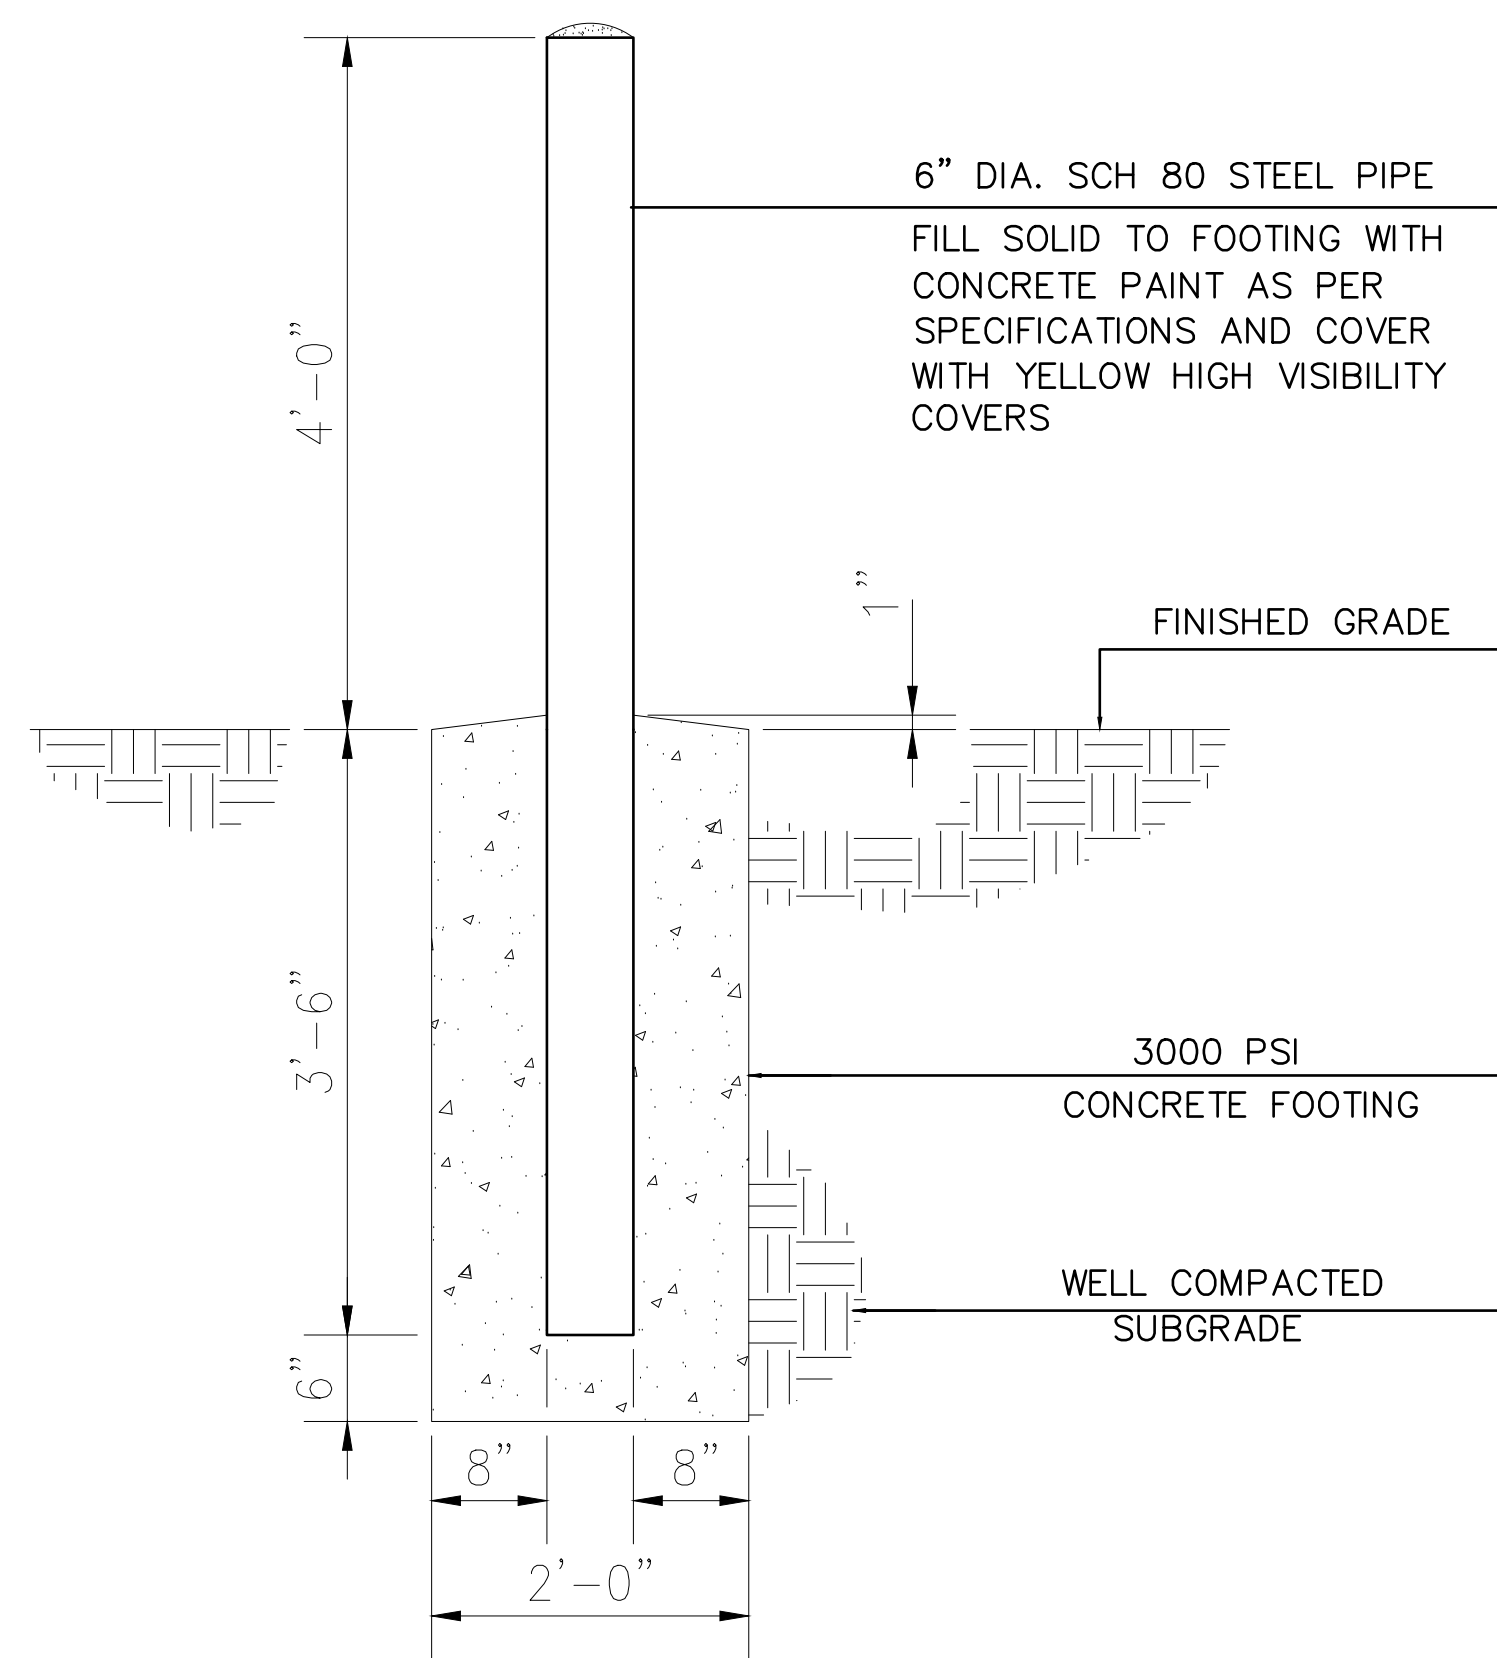

HIGH VISIBILITY BOLLARDS DETAIL

NO SCALE

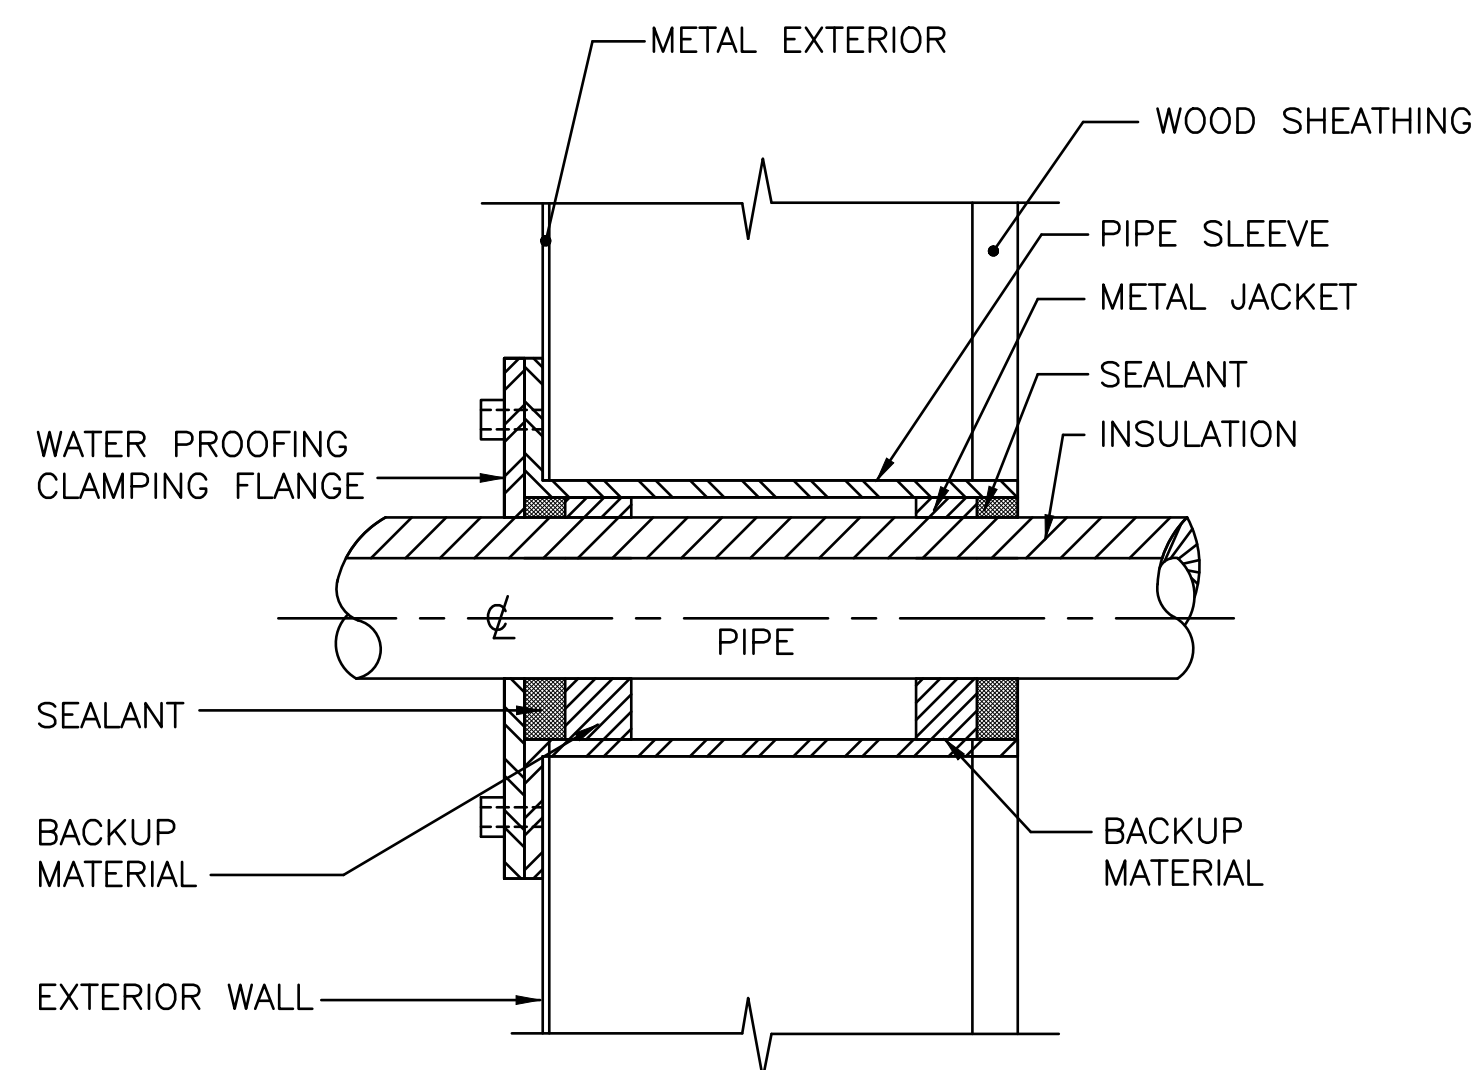

PIPE SLEEVE THROUGH EXTERIOR WALL DETAIL

NO SCALE



GRILLE, REGISTER & DIFFUSER SCHEDULE							
TAG	TYPE	SERVICE	C.F.M. RANGE	NECK SIZE	FINISH	MODEL NO.	REMARKS
RM 148	CEILING SUPPLY DIFFUSER	SUPPLY	250	9X9X8	WHITE	AMD-3P	SEE NOTES
RM 149	CEILING SUPPLY DIFFUSER	SUPPLY	285	9X9X8	WHITE	AMD-3P	SEE NOTES
RM 148	CEILING RETURN GRILLE	RETURN	500	15X15X12	WHITE	630-3PA	SEE NOTES
RM 149	CEILING RETURN GRILLE	RETURN	570	15X15X12	WHITE	630-3PA	SEE NOTES

THE FOLLOWING NOTES ARE TYPICAL UNLESS OTHERWISE NOTED:

1. SELECTIONS BASED ON TITUS.
2. PROVIDE ALUMINUM DIFFUSERS AND REGISTERS WITH OPPOSED BLADE VOLUME DAMPERS, BAKED STANDARD WHITE ENAMEL FINISH (INCLUDING HEAD OF SCREWS), MAXIMUM NC=25 AT HIGHEST CFM AND PROVIDE SQUARE TO ROUND TRANSITION AS REQUIRED.
3. PROVIDE 4-WAY PATTERN CEILING DIFFUSERS, U.O.N. ON PLANS OR SCHEDULE.
4. MAXIMUM PRESSURE DROP SHALL INCLUDE VOLUME DAMPER WHERE DAMPER IS PROVIDED.

GENERAL NOTES:

1. ALL PENETRATIONS THROUGH SOUND-RATED PARTITIONS MUST SOUND-RATED PENETRATION REQUIREMENTS SEAL OPENINGS AROUND PIPING, MISCELLANEOUS ITEMS NOT SHOWN ON PLANS BUT NECESSARY FOR A COMPLETE OPERABLE SYSTEM SHALL BE SUPPLIED AND INSTALLED.
2. CONTRACTOR MUST BE RESPONSIBLE FOR INSURING THAT ALL CONTROL SYSTEMS AND COMPONENTS AFFECTED BY THEIR WORK IS RETURNED TO ITS FULLY OPERATIONAL STATE.
3. PROVIDE ALL EQUIPMENT AND APPURTENANCES IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS, CONTRACT DOCUMENTS, APPLICABLE CODES AND REGULATIONS.
4. PVC IS SUITABLE FOR THE APPLICATION OF THE CONDENSATE DRAIN LINES FOR THE NEW AIR CONDITIONING SYSTEMS.

[illegible]

LEGEND

- \$ EXISTING LIGHT SWITCH
- \$o 0-10V DIMMING LIGHT SWITCH
- \$o CEILING MOUNTED SENSOR
- PP 0-24V POWER PACK

DEMOLITION NOTES


- 1 REMOVE EXISTING 2' X 4' LIGHTS IN RM 148 AND 149.
- 2 REMOVE EXISTING LIGHT SWITCH.

NEW WORK NOTES:


- 1 PROVIDE 2' X 4' INDIRECT LED WITH DRIVER SEE EL501 FOR LIGHTING SCHEDULE
- 2 PROVIDE 0-10V DIMMING LIGHT SWITCH TO CONTROL LIGHTS IN EACH SECTION SEE EL501 FOR DETAILS
- 3 PROVIDE 16-2 CONTROL WIRE FOR EACH FIXTURE TIED INTO DIMMING LIGHT SWITCH.

GENERAL NOTES

- 1. SEE SYMBOL LEGEND ON SHEET G-001.
- 2. ALL MATERIALS ARE TO BE CONSIDERED NEW UNLESS SPECIFICALLY REFERRED TO AS "EXISTING".
- 3. CONDUIT MUST BE PROVIDED AND INSTALLED NOT TO INHIBIT AND/OR OBSTRUCT THE ACCESS INTO CEILINGS AND TO SERVICE, REPAIR, OR REPLACE ANY MATERIALS.

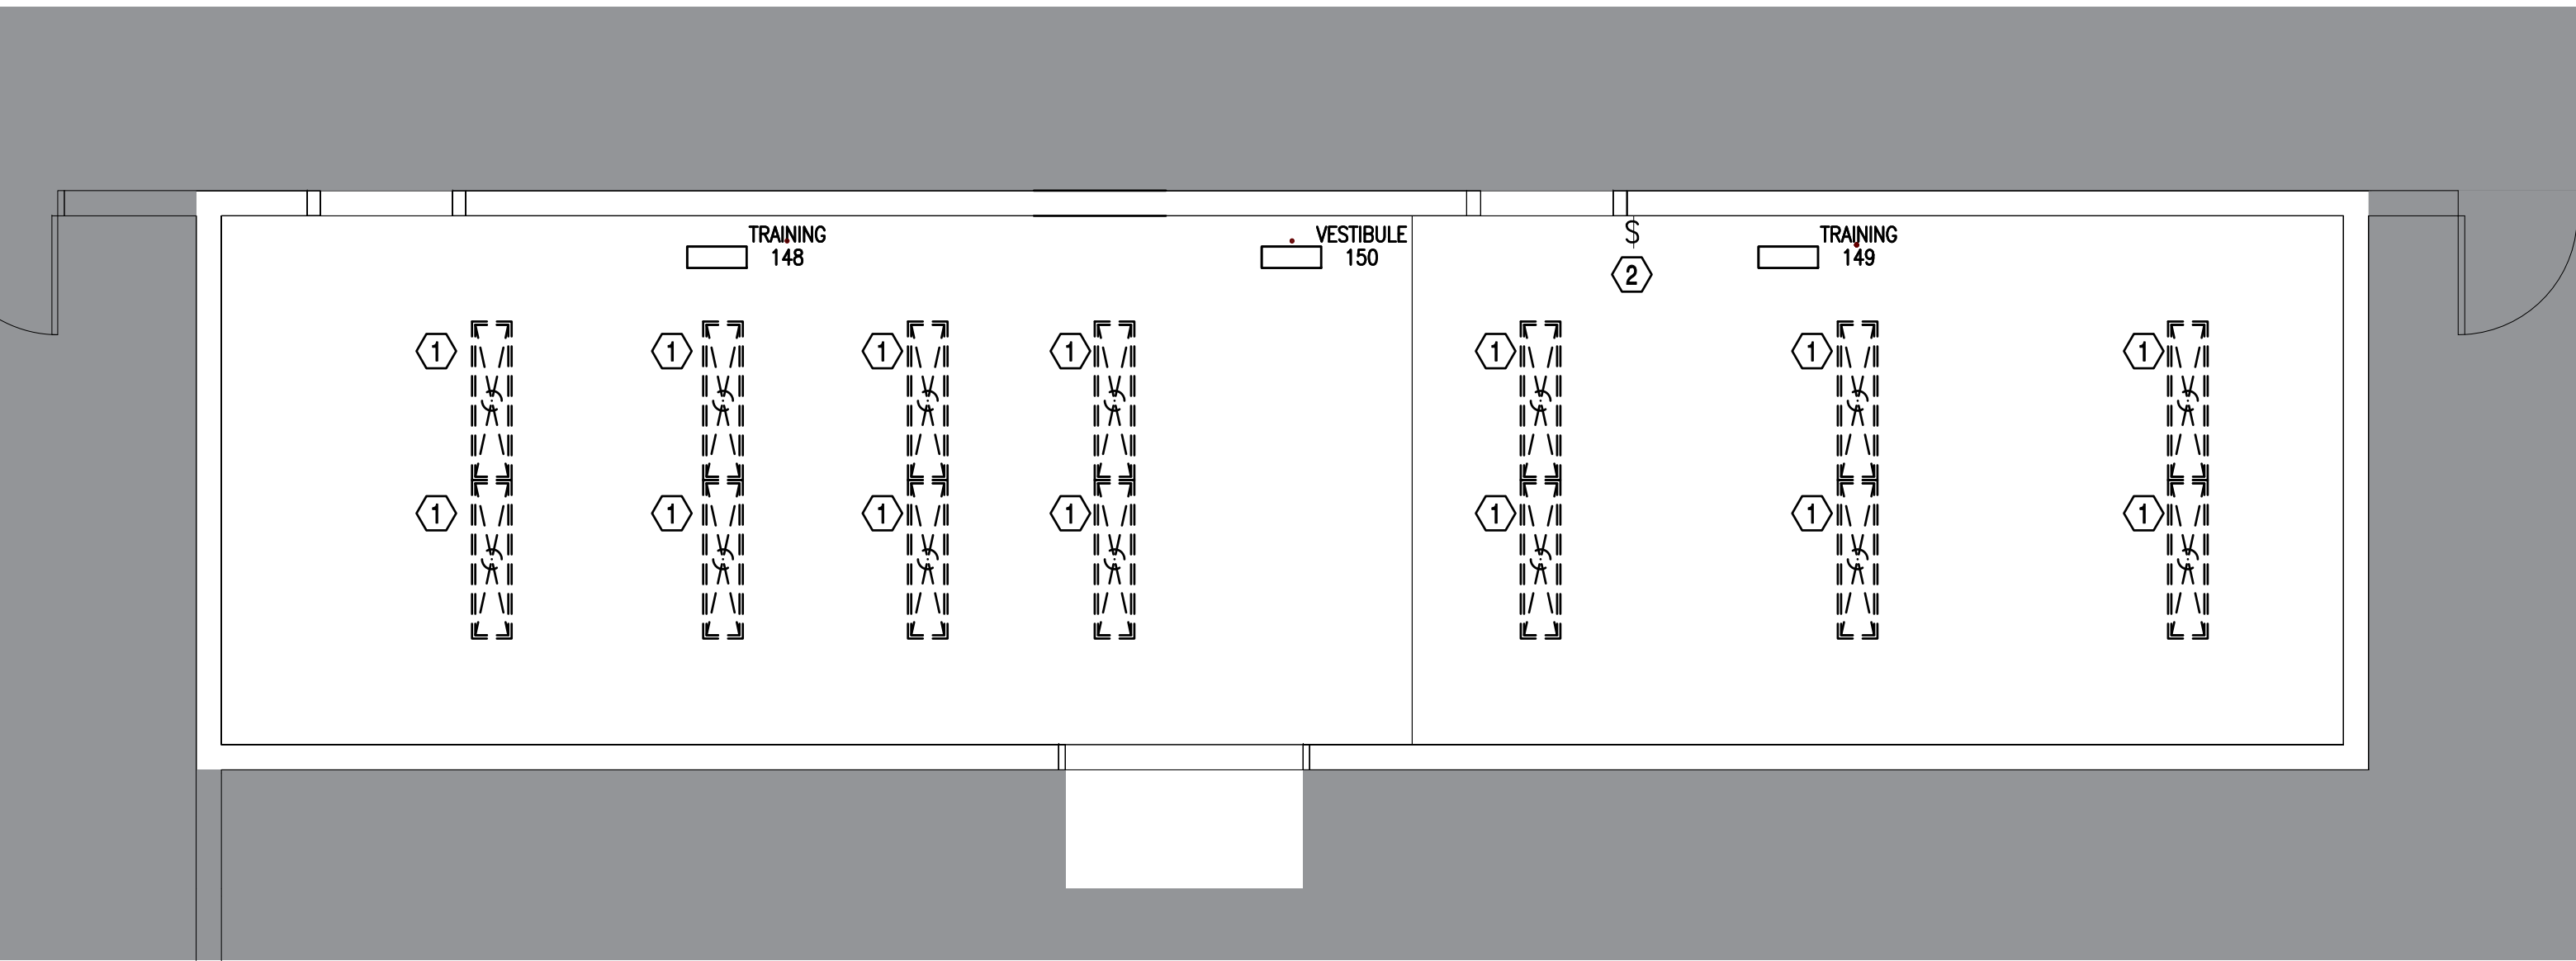

C1 B4845 - ROOM 148, 149 & 150 LIGHTING DEMO PLAN
SCALE: 1/4"=1'-0"

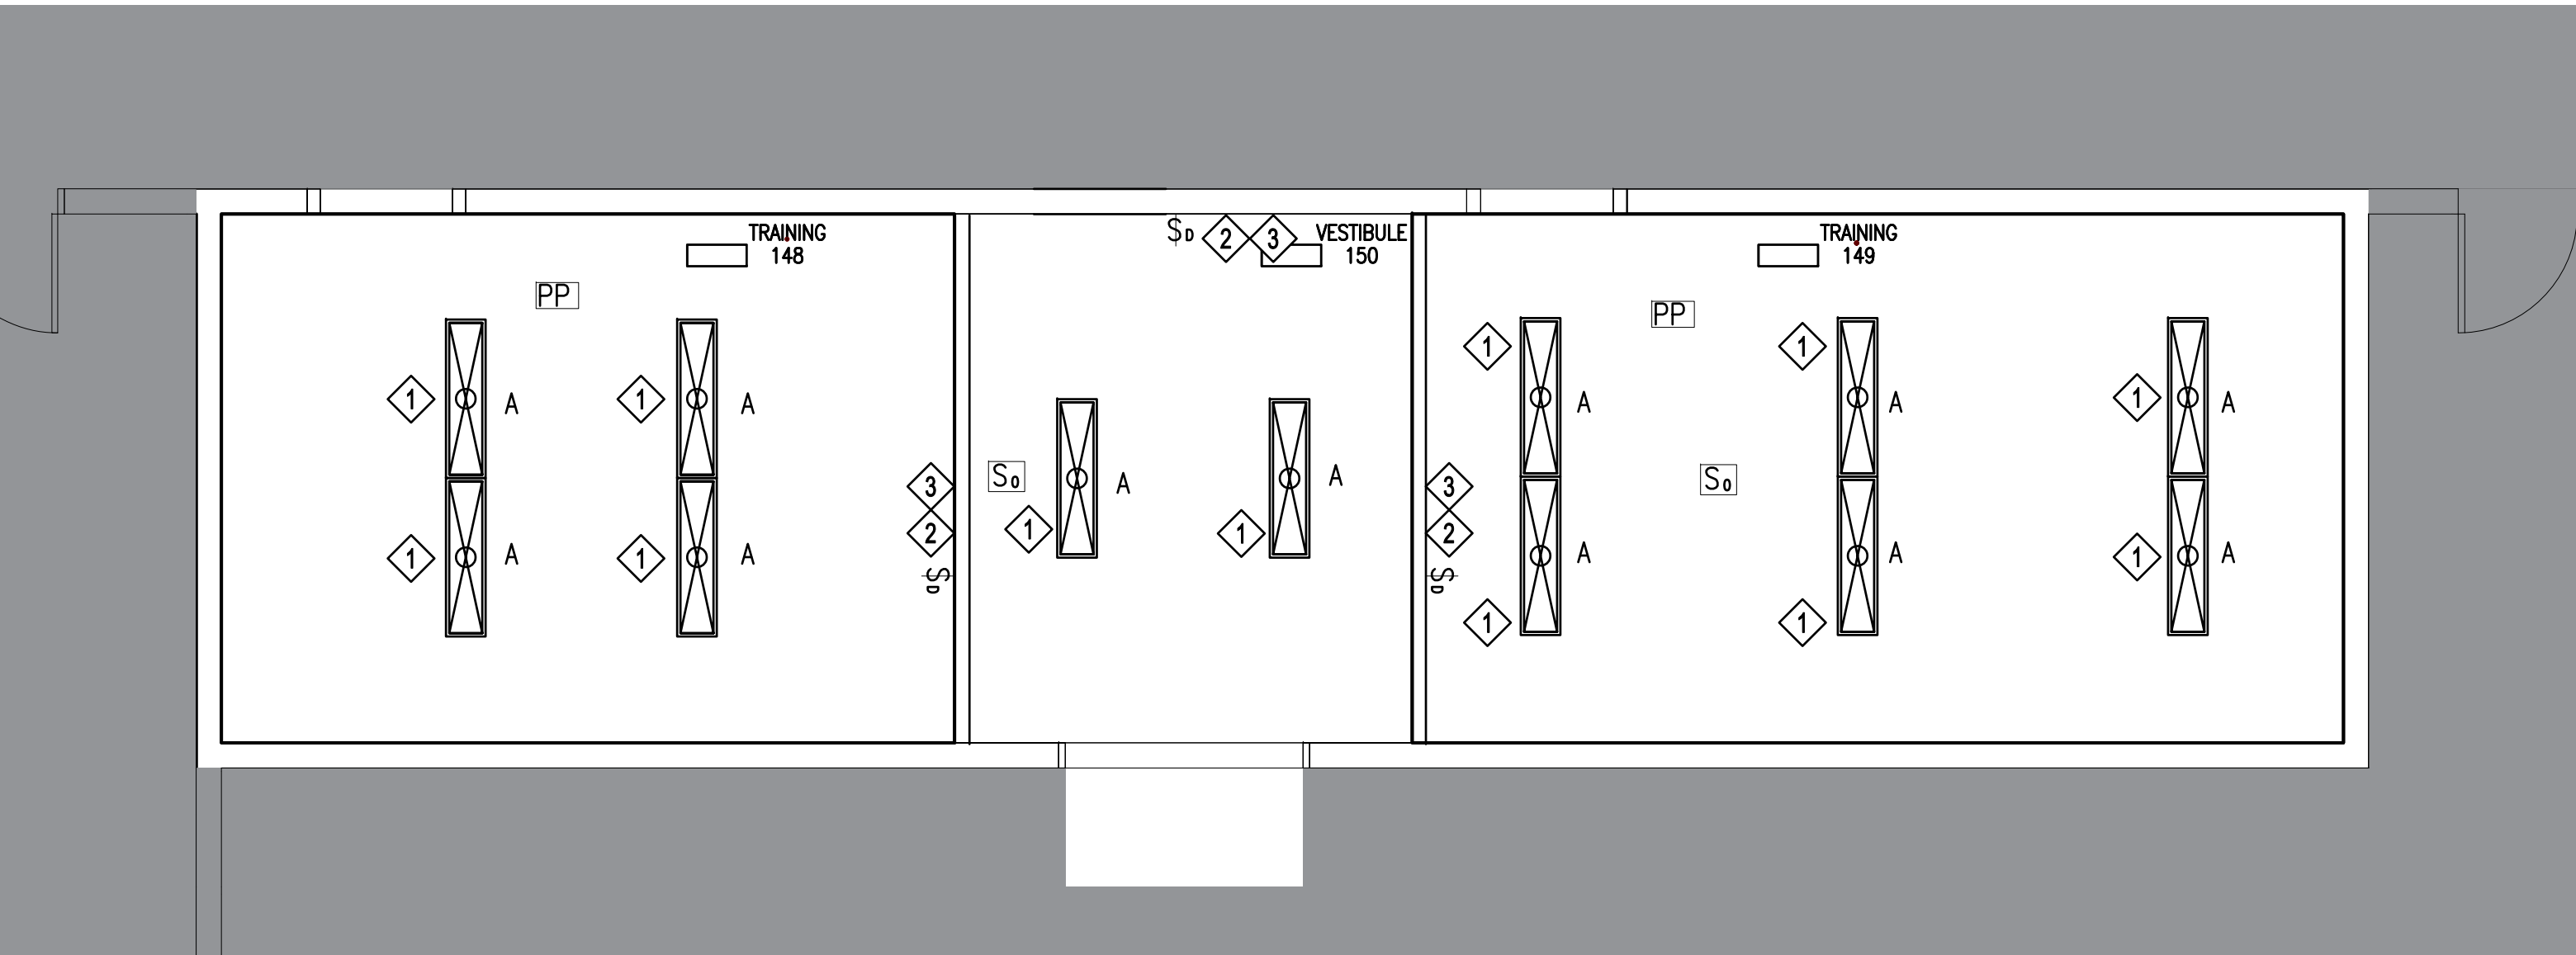

A1 B4845 - ROOM 148,149 & 150 LIGHTING NEW WORK PLAN
SCALE: 1/4"=1'-0"

1/4" = 1'-0" 0 5' 10'


APPR	DATE	DESCRIPTION	SYN
DESIGNED & ENGINEERED BY: FACILITIES ENGINEERING			
			
FINAL			
02.15.2026			
APPROVED			
ACTIVITY - SATISFACTORY TO			
DATE			
APPROVED			
FOR EFD FOR COMMANDER NAVFAC			
DATE			
A/E		EFD	
DESIGN	CRL	DESIGN	CRL
DRAWN	CRL	DRAWN	RCM
REVIEW	RCM	REVIEW	RCM
QC		QC	
CHIEF ARCH/ ENGR.		CHIEF ARCH/ ENGR.	
PROJECT MANAGER	LTP	PROJECT MANAGER	LTP
FIRE PROTECTION		FIRE PROTECTION	
BRANCH MANAGER	LPF	BRANCH MANAGER	LPF
DESIGN DIRECTOR	LPF	DESIGN DIRECTOR	LPF
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING COMMAND MARINE CORPS AIR STATION, CHERRY POINT, N.C. PROJECT STATION CHERRY POINT, NC R149 MODIFICATION FOR MSAT, B4845, VMUT-2 B4845 LIGHTING PLAN RM 148 & 149			
CODE ID. NO. 80091 SIZE D			
SCALE: AS NOTED			
FED. NO.			
STA. PROJ. NO. 7364533			
SPEC. NO.			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO. 12912609			
SHEET 11 OF 14			
EL101			
DRAWING REVISION: 07 AUG 2018			

D


C

B

A

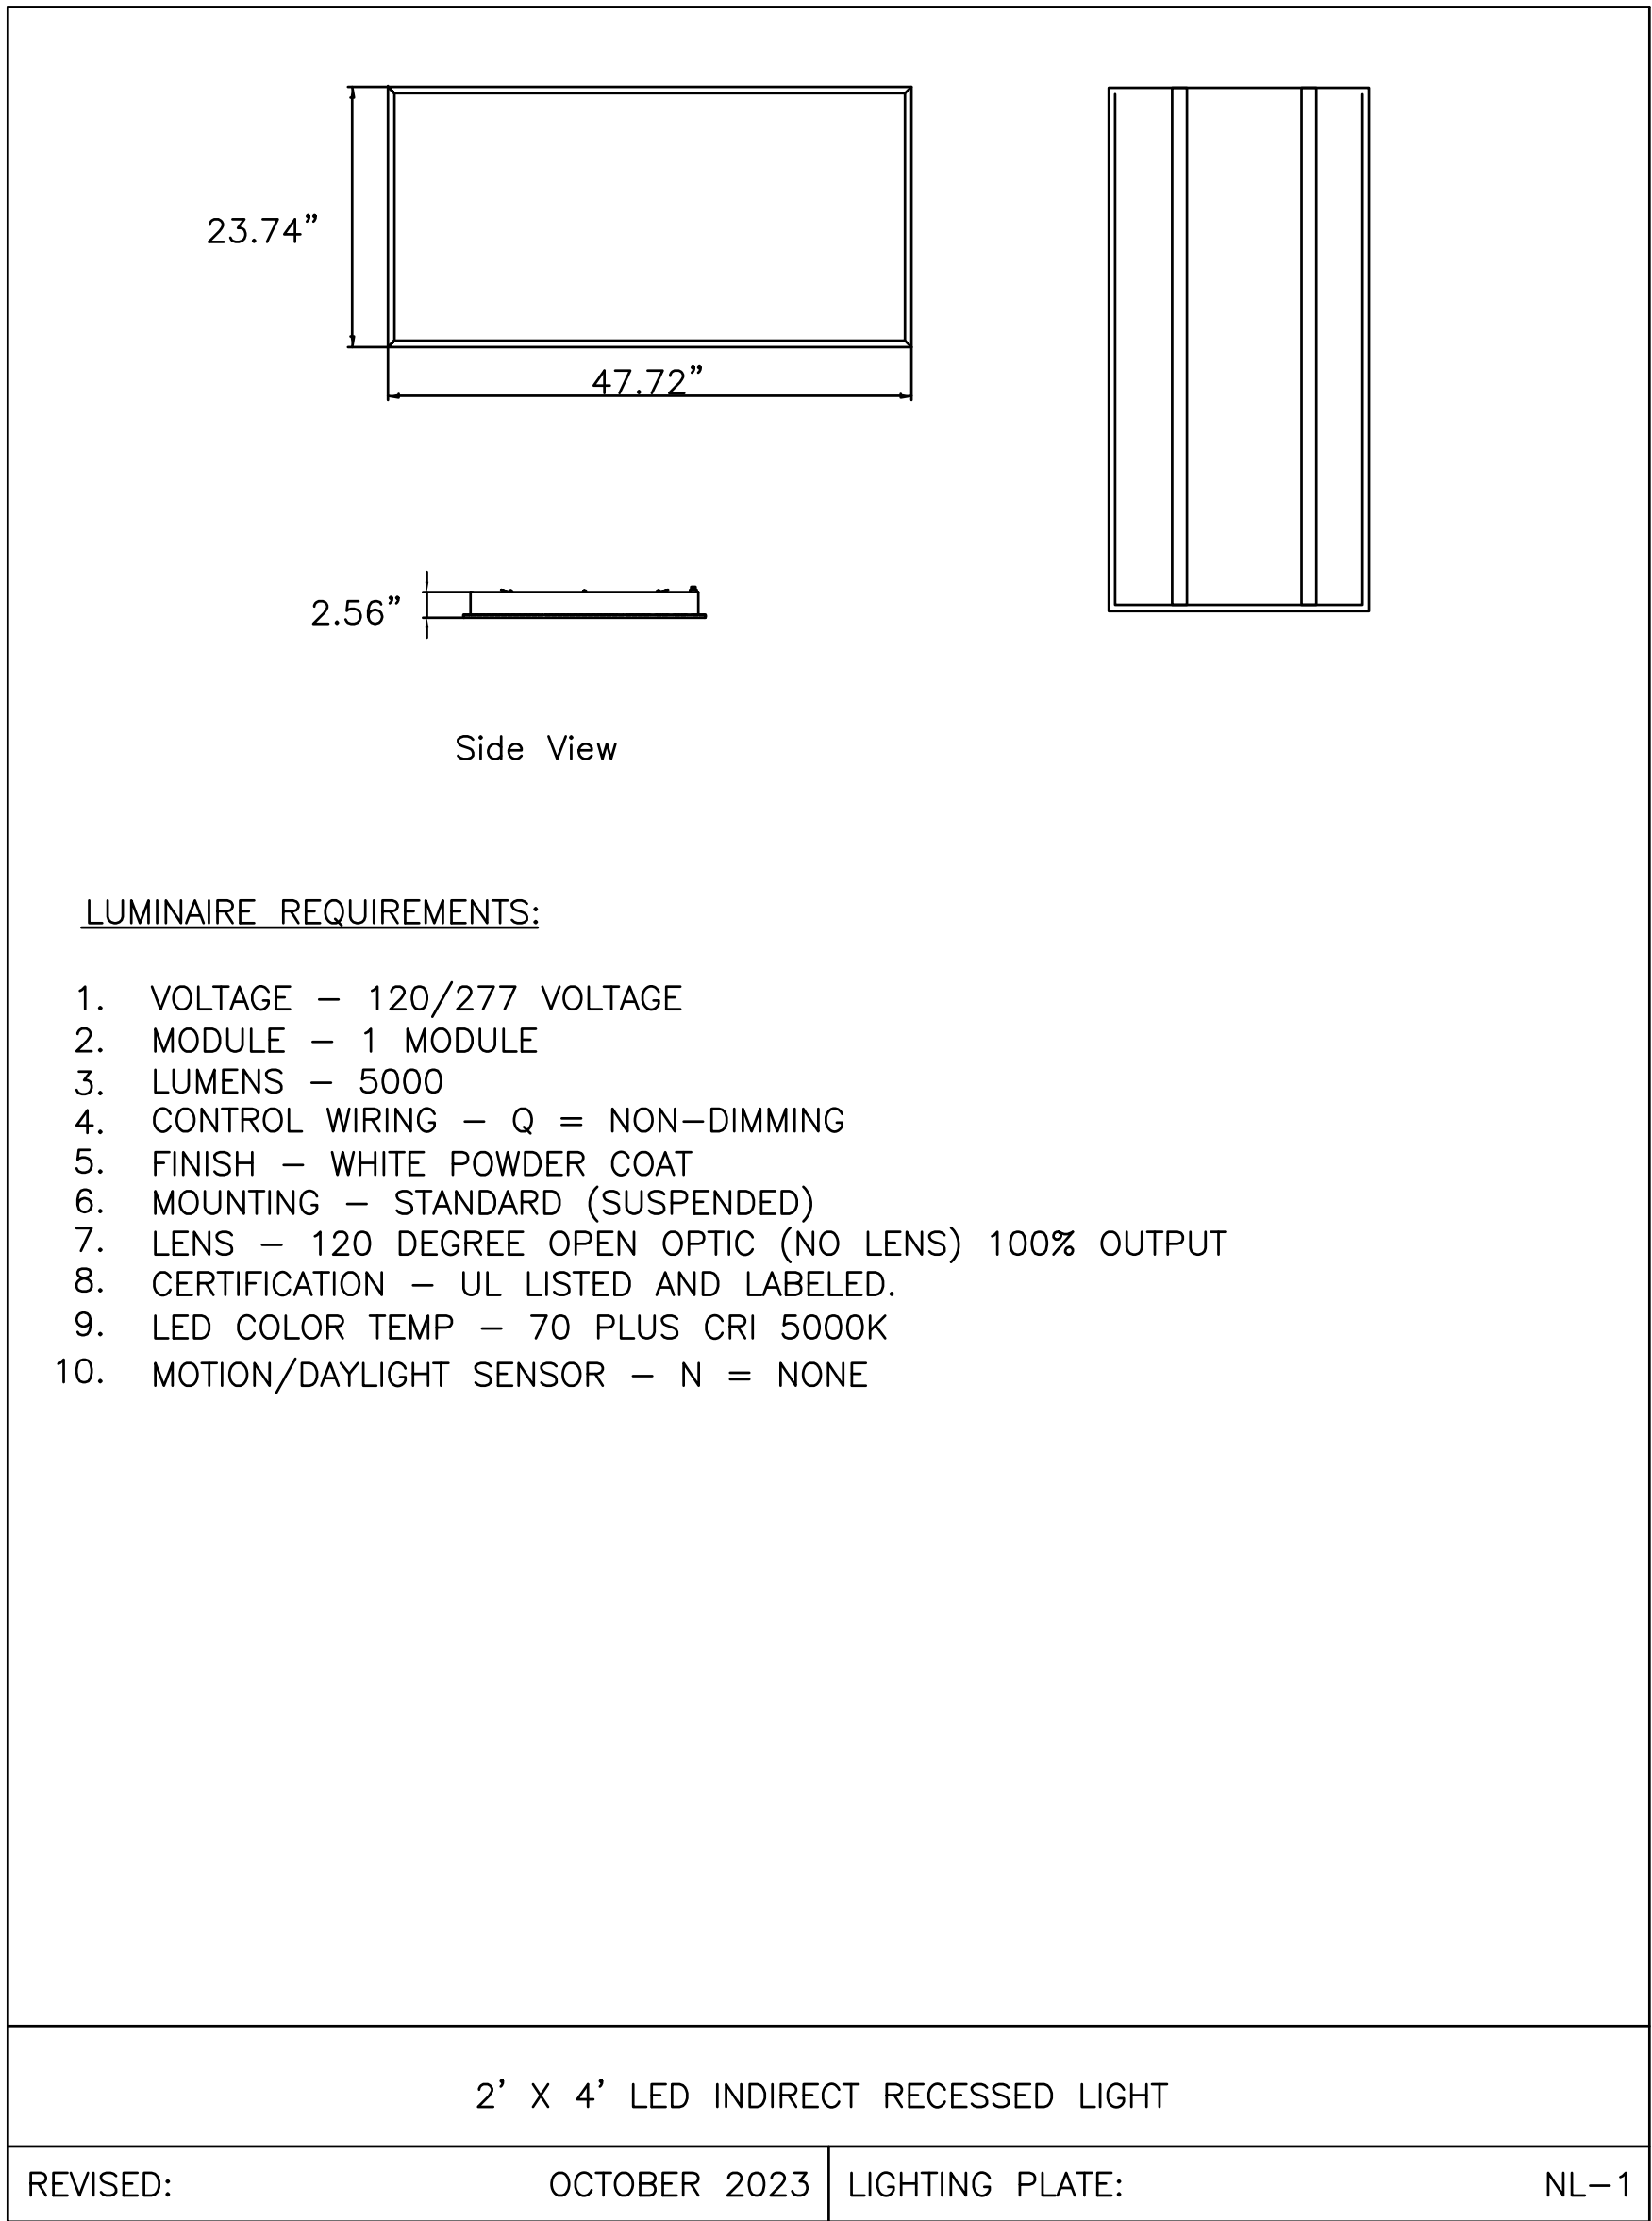


LIGHTING SCHEDULE						
TYPE	DESCRIPTION	WATTS	LUMENS	QTY	VOLTS	CRI
	NL-1 RECESSED IN CEILING	50W	5000	8	120V	5000K

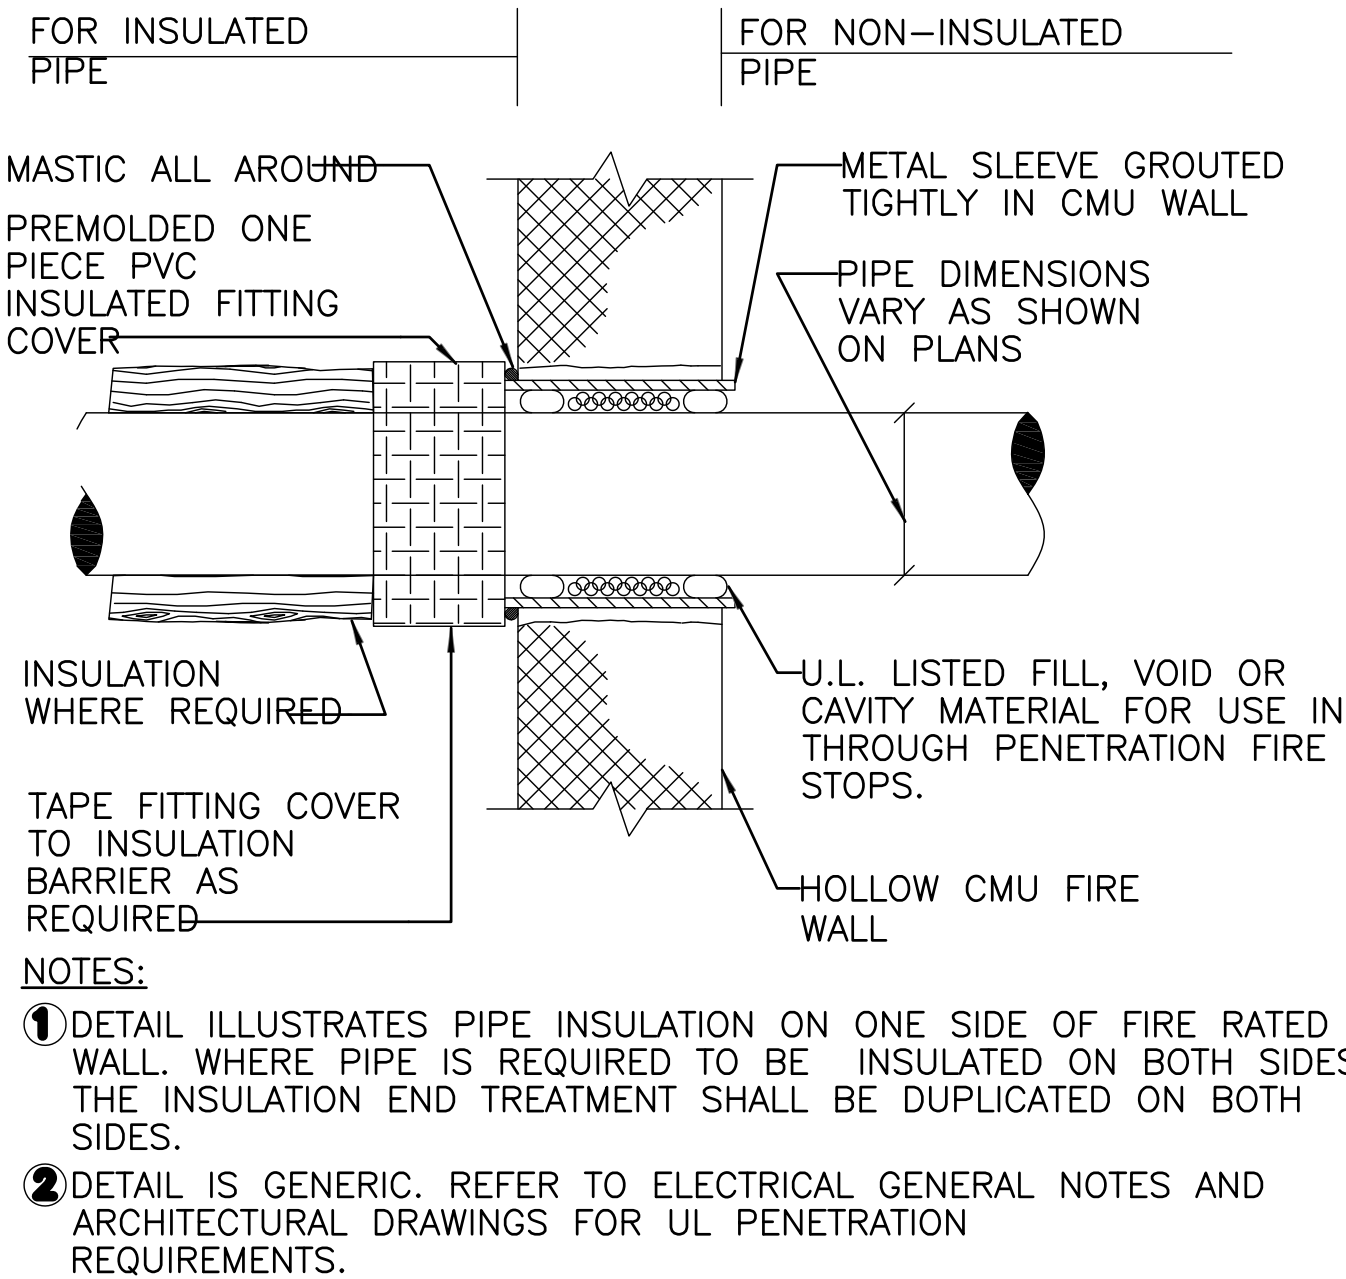

FIRE WALL AND SOUND PENETRATION DETAIL

NO SCALE

C5

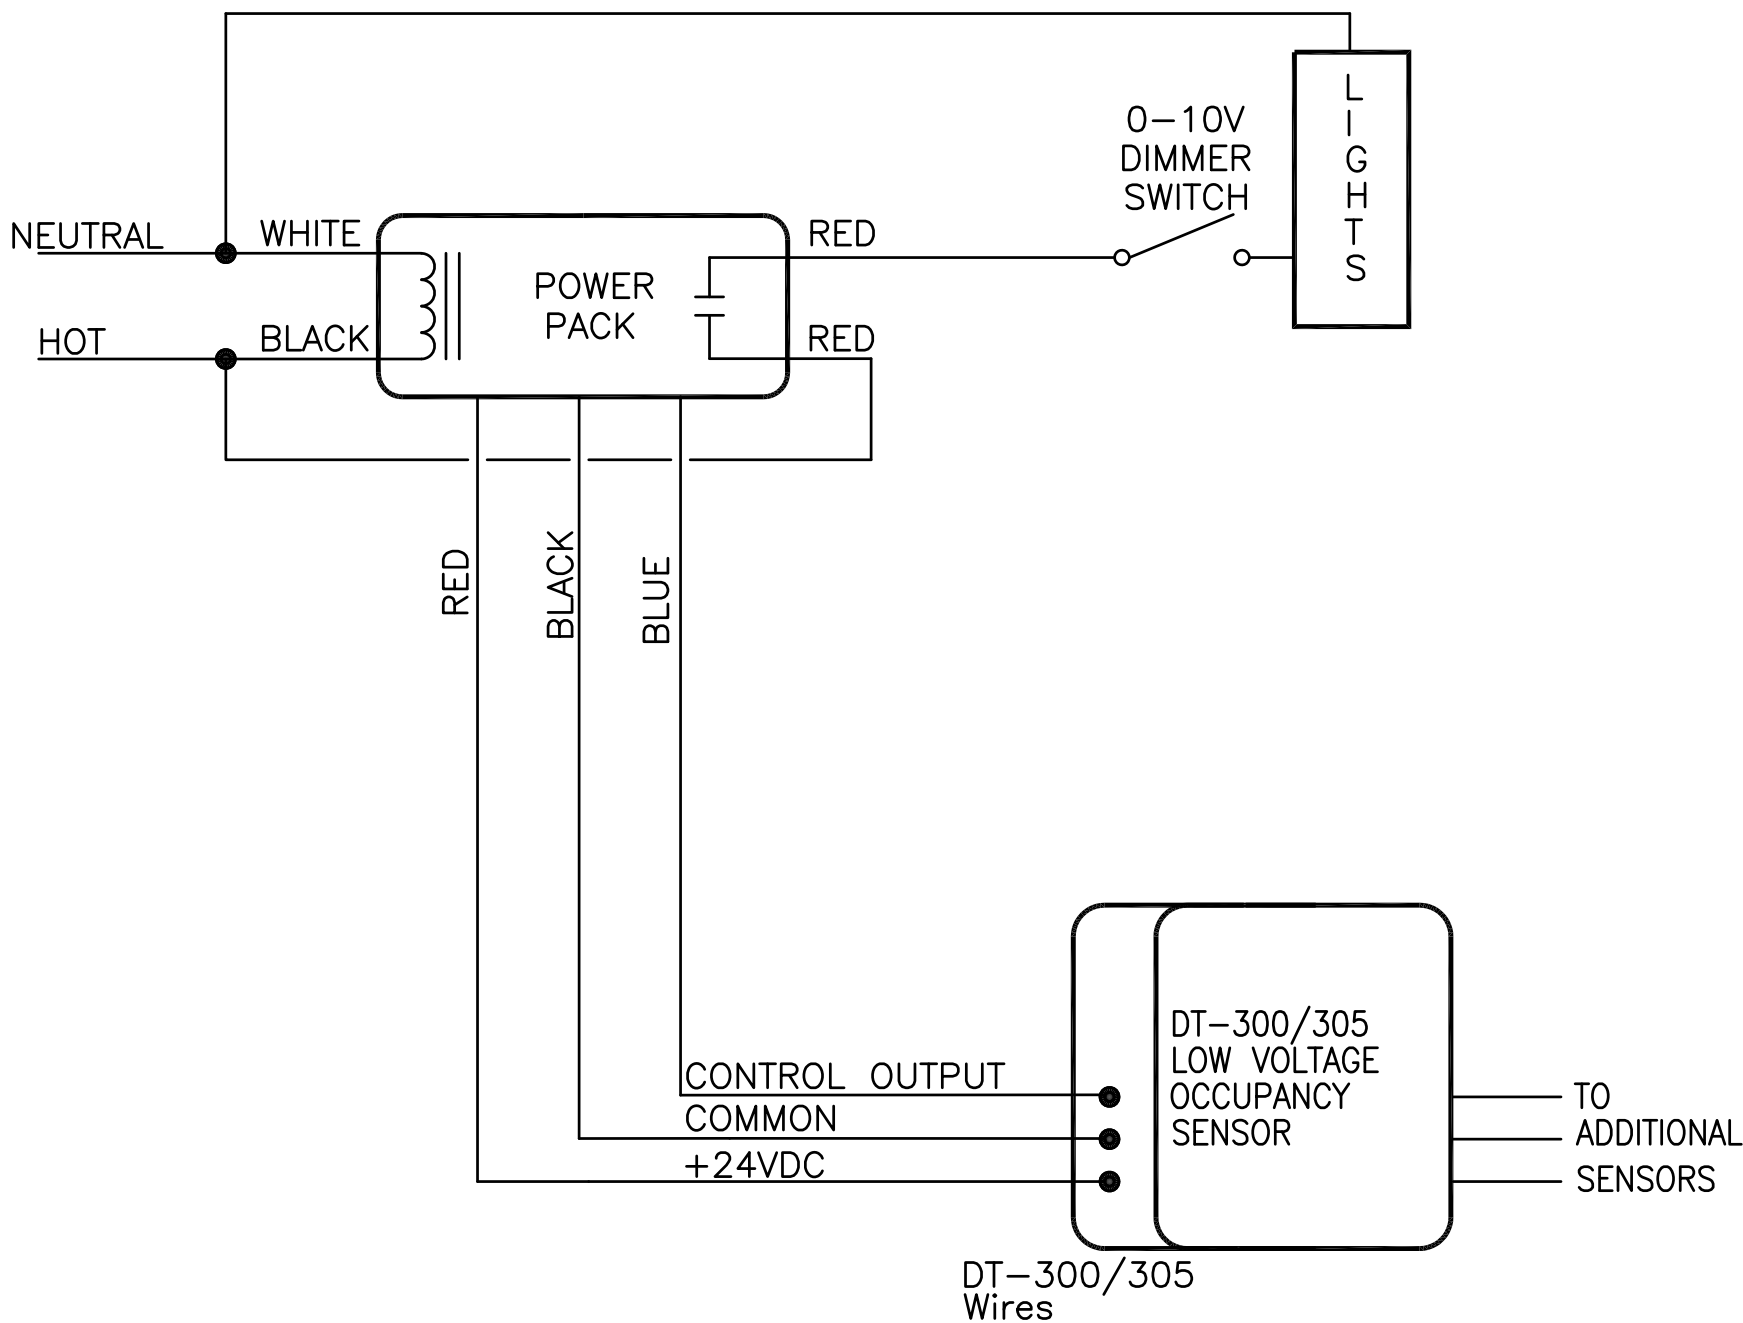

MODIFIED WIRING DIAGRAM B4845

NOT TO SCALE

						APPR
						DATE
						SYN
						DESCRIPTION



FINAL

02.15.2026

APPROVED

ACTIVITY – SATISFACTORY TO

DATE

APPROVED

FOR EFD FOR COMMANDER NAVFAC

DATE

A/E	EFD
DESIGN	CRL
DRAWN	CRL
REVIEW	RCM
QC	
CHIEF ARCH/ ENGR	
PROJECT MANAGER	LTP
FIRE PROTECTION	
BRANCH MANAGER	LPF
DESIGN DIRECTOR	LPF

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING COMMAND

MARINE CORPS AIR STATION, CHERRY POINT, N.C.


PROJECT STATION

CHERRY POINT, NC

R149 MODIFICATION FOR MSAT, B4845, VMUT-2

LIGHTING SCHEDULE AND DETAILS

CODE ID. NO. 80091	SIZE D
SCALE: AS NOTED	
FED. NO.	
STA. PROJ. NO. 7364533	
SPEC. NO.	
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12912610	
SHEET 12 OF 14	
EL501	

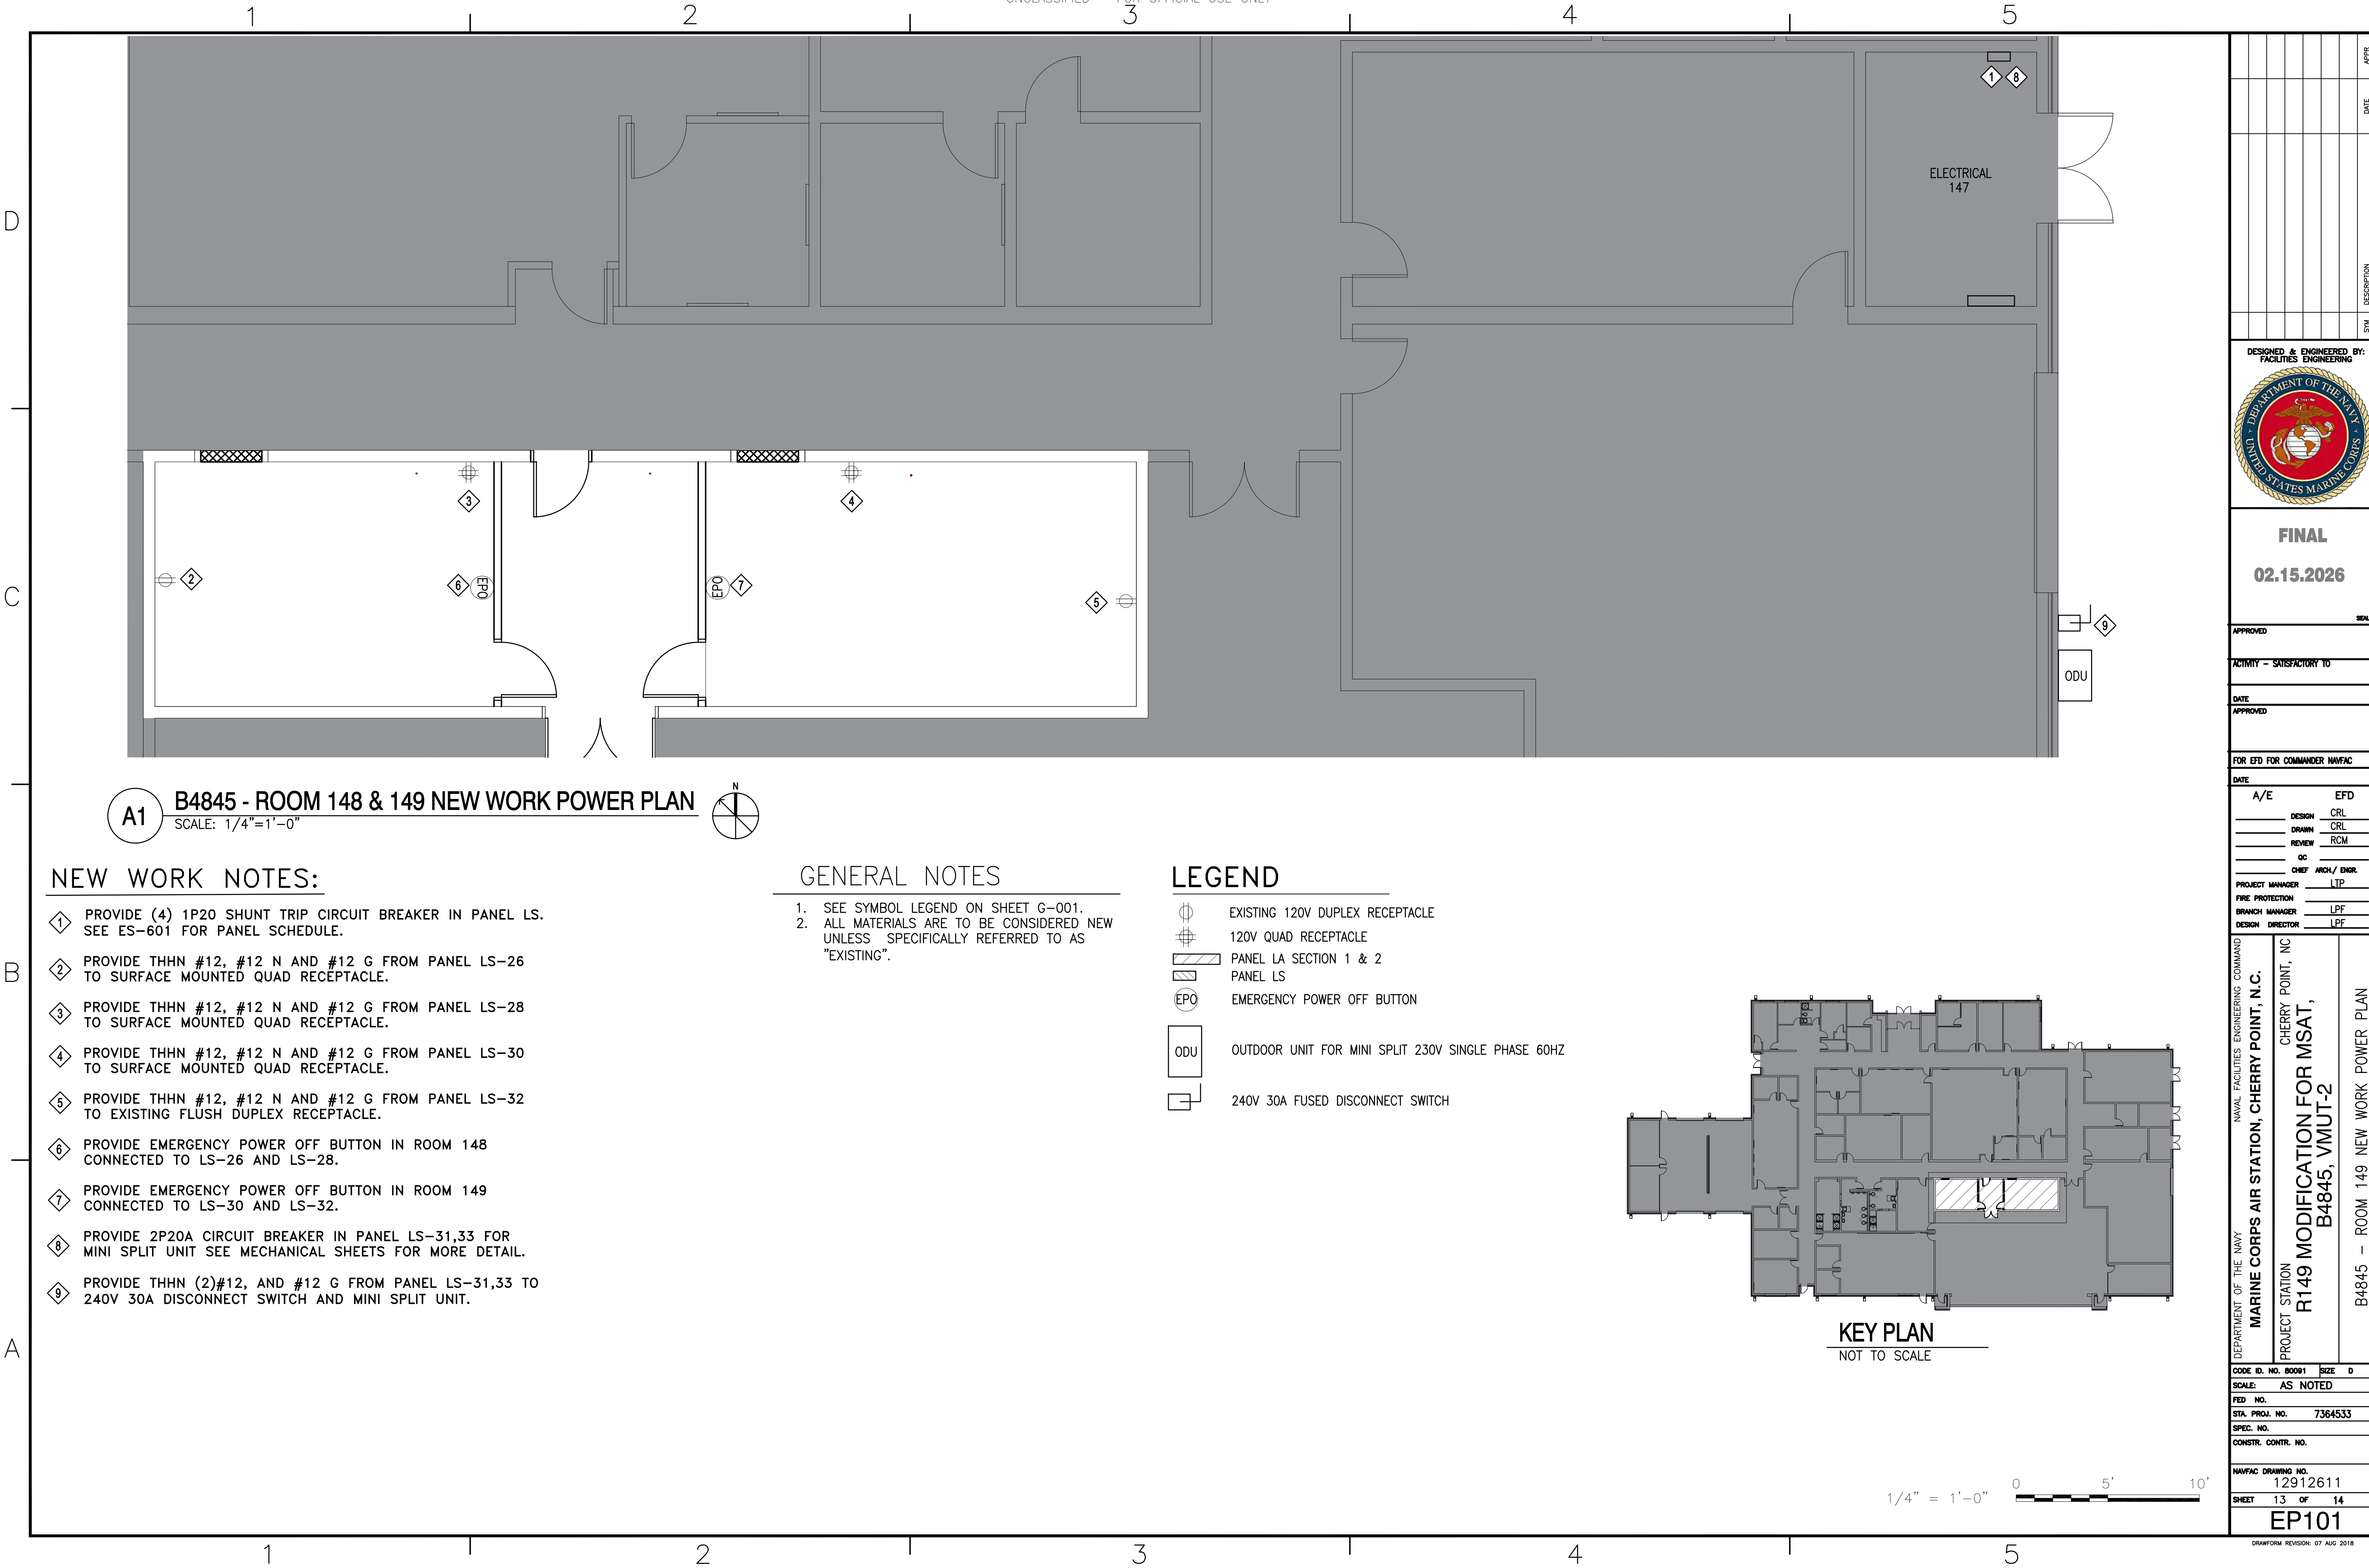

A1 B4845 - ROOM 148 & 149 NEW WORK POWER PLAN
SCALE: 1/4"=1'-0"

NEW WORK NOTES:


1. PROVIDE (4) 1P20 SHUNT TRIP CIRCUIT BREAKER IN PANEL LS. SEE ES-601 FOR PANEL SCHEDULE.
2. PROVIDE THHN #12, #12 N AND #12 G FROM PANEL LS-26 TO SURFACE MOUNTED QUAD RECEPTACLE.
3. PROVIDE THHN #12, #12 N AND #12 G FROM PANEL LS-28 TO SURFACE MOUNTED QUAD RECEPTACLE.
4. PROVIDE THHN #12, #12 N AND #12 G FROM PANEL LS-30 TO SURFACE MOUNTED QUAD RECEPTACLE.
5. PROVIDE THHN #12, #12 N AND #12 G FROM PANEL LS-32 TO EXISTING FLUSH DUPLEX RECEPTACLE.
6. PROVIDE EMERGENCY POWER OFF BUTTON IN ROOM 148 CONNECTED TO LS-26 AND LS-28.
7. PROVIDE EMERGENCY POWER OFF BUTTON IN ROOM 149 CONNECTED TO LS-30 AND LS-32.
8. PROVIDE 2P20A CIRCUIT BREAKER IN PANEL LS-31,33 FOR MINI SPLIT UNIT SEE MECHANICAL SHEETS FOR MORE DETAIL.
9. PROVIDE THHN (2)#12, AND #12 G FROM PANEL LS-31,33 TO 240V 30A DISCONNECT SWITCH AND MINI SPLIT UNIT.

GENERAL NOTES

1. SEE SYMBOL LEGEND ON SHEET G-001.
2. ALL MATERIALS ARE TO BE CONSIDERED NEW UNLESS SPECIFICALLY REFERRED TO AS "EXISTING".

LEGEND

- EXISTING 120V DUPLEX RECEPTACLE
- 120V QUAD RECEPTACLE
- PANEL LA SECTION 1 & 2
- PANEL LS
- EMERGENCY POWER OFF BUTTON
- ODU
- OUTDOOR UNIT FOR MINI SPLIT 230V SINGLE PHASE 60HZ
- 240V 30A FUSED DISCONNECT SWITCH

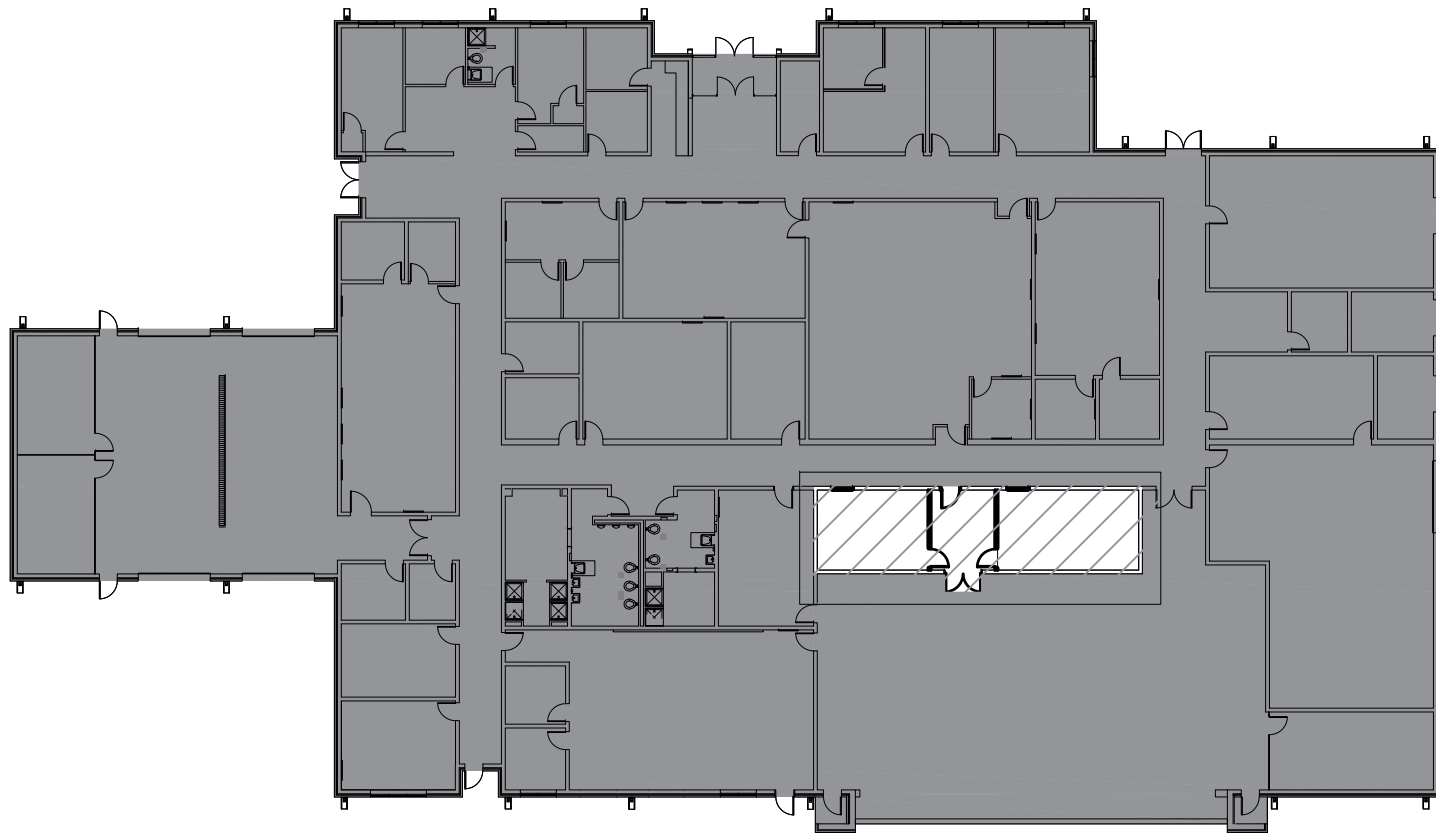

KEY PLAN
NOT TO SCALE

1/4" = 1'-0" 0 5' 10'

APPR	DATE	DESCRIPTION	SYN	DATE	APPR
DESIGNED & ENGINEERED BY: FACILITIES ENGINEERING					
					
FINAL					
02.15.2026					
APPROVED					
ACTIVITY - SATISFACTORY TO					
DATE					
APPROVED					
FOR EFD FOR COMMANDER NAVFAC					
DATE					
A/E EFD					
DESIGN CRL					
DRAWN CRL					
REVIEW RCM					
QC					
CHIEF ARCH/ ENGR					
PROJECT MANAGER LTP					
FIRE PROTECTION					
BRANCH MANAGER LPF					
DESIGN DIRECTOR LPF					
NAVAL FACILITIES ENGINEERING COMMAND					
MARINE CORPS AIR STATION, CHERRY POINT, N.C.					
PROJECT STATION					
CHERRY POINT, NC					
R149 MODIFICATION FOR MSAT, B4845, VMUT-2					
B4845 - ROOM 149 NEW WORK POWER PLAN					
CODE ID. NO. 80091 SIZE D					
SCALE: AS NOTED					
FED. NO.					
STA. PROJ. NO. 7364533					
SPEC. NO.					
CONSTR. CONTR. NO.					
NAVFAC DRAWING NO. 12912611					
SHEET 13 OF 14					
EP101					
DRAWING REVISION: 07 AUG 2018					

BLDG. 4845 PANELBOARD SCHEDULE

PANEL: LS 208Y/120V, 3PHASE, 4WIRE 100A

LOAD SERVED	LOAD (A)			BKR. TRIP	WIRE SIZE	CKT. NO.	PHASE A B C	CKT. NO.	WIRE SIZE	BKR. TRIP	LOAD (A)			LOAD SERVED
	A	B	C								A	B	C	
HALLWAY LIGHTS				20	12	1		2	12	20				OUTSIDE LIGHTS
HALLWAY LIGHTS				20	12	3		4	12	20				OUTSIDE LIGHTS
EXITS				20	12	5		6	12	20				LIGHTING
LIGHTING				20	12	7		8	12	20				LIGHTING
DDC MOTOR BAY				20	12	9		10	12	20				LIGHTING
PROJECTOR 126				20	12	11		12	12	20				TIMECLOCKS
SPRINKLER RM BELL				20	12	13		14	12	20				ACCESS CONTROL
MINI SPLIT NC				15	12	15		16	12	20				BAY B ADDITIONAL OUTLETS
S-2 VAULT						17		18	10	30				DISCONNECT
DISCONNECT				30	10	19		20						
						21		22	10	30				RECEPT RM 134
CASSETTE				30	10	23		24	10	30				RECEPT RM 134
						25		26	12	20				RECEPT RM 149
CASSETTE				30	10	27		28	12	20				RECEPT RM 149
						29		30	12	20				RECEPT RM 149
MINI SPLIT RM 149				20	12	31		32	12	20				RECEPT RM 149

[illegible]