

STATEMENT OF WORK FOR: SABINE DISTRICT OFFICE HVAC REPAIRS

DESCRIPTION:

The existing two units, #1 and # 4, are inoperable and are more than 10 years old and shall be replaced. Below are the characteristics of the existing unit and are the minimum requirements for replacements:

EXISTING HVAC UNITS:

Replacement unit must match or exceed existing tonnage and salient characteristics to include performance and capacity. Current inoperable units are (2) 5 Ton, closed loop dual inline pump Geothermal Heat Pumps; TRANE, model number: GEVE06011G01ATR0010000100000000000.

****** All quoted geothermal units shall provide the Manufacturer's salient features that meet or exceed those characteristics by attaching the manufacturers' specifications as an attachment to your quote. ******

- The New units shall have a 2 stage scroll compressor, up flow unit
- The New units shall have a dual flow pump center for water flow and serviceability.
- The New geothermal heat pump shall not have electric resistance heat.
- The New units shall be installed with new programmable controls.
- Additional Work:
 - Contractor shall be responsible for any system balancing work and also but not limited to:


connecting to existing air distribution system and water circulation system and power.
 - Existing ducting and/or supply/ return pipe shall not be significantly altered from its current configuration.
 - Contractor shall purge geothermal system lines for adequate operation of the geothermal field and shall be responsible to commission system.
 - The contractor shall be responsible for installing the new unit to the existing location to include the existing control system and verify operation. Unit shall be 100% operational prior to any demobilization.
 - Install new polymer drain pan(s) with each new unit, plumbed to drain unobstructed to outside the building.
 - Contractor shall remove and dispose of existing units from government property.
 - Contractor shall provide pleated air filtration needed for new units. Minimum quality of filtration is a MERV 8, pleated filter.

WARRANTY:

Contractor shall provide a manufacturer warranty for any unit that is to be installed. Adequate documentation providing such a warranty for compressor (5 year min), parts and labor (5 year min) and will be present and verified by the COR prior to the installation of the new unit. The warranty shall be effective from date of acceptance and final payment by the US Govt

Unit Pictures from Attic space:

UNIT #1

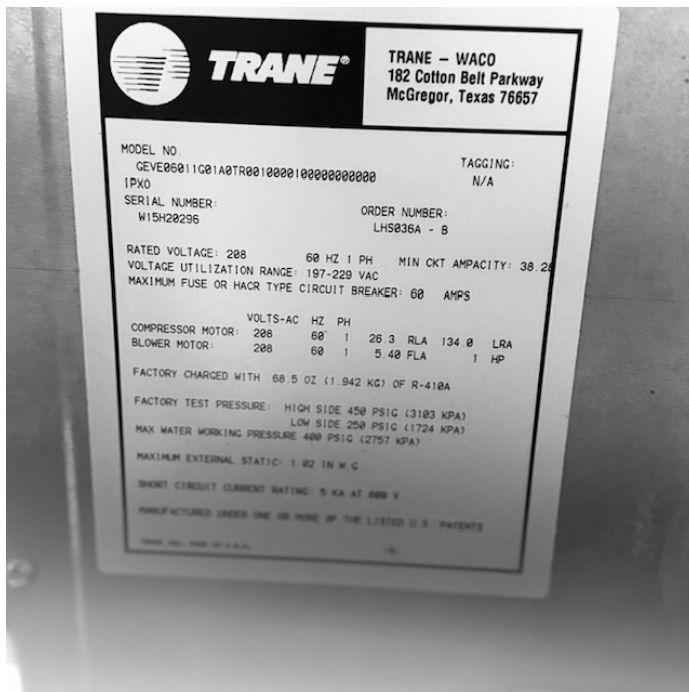



UNIT #4



Unit #4 evaporator and blower.



Circulation pumps in red. Typical of 2 pumps per unit.

Reference Maps (3):

5050 TX 21, Hemphill, TX 85948


Sabine Ranger District Office





5050 TX 21, Hemphill, TX 85948

Sabine Ranger District Office

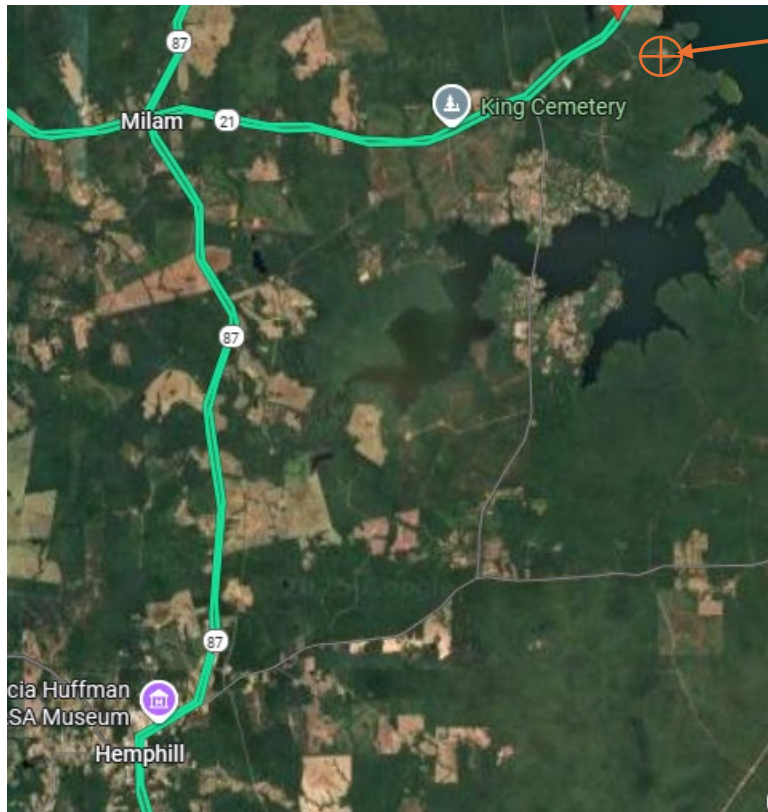

5050 TX 21, Hemphill, TX 85948

Sabine Ranger District Office