


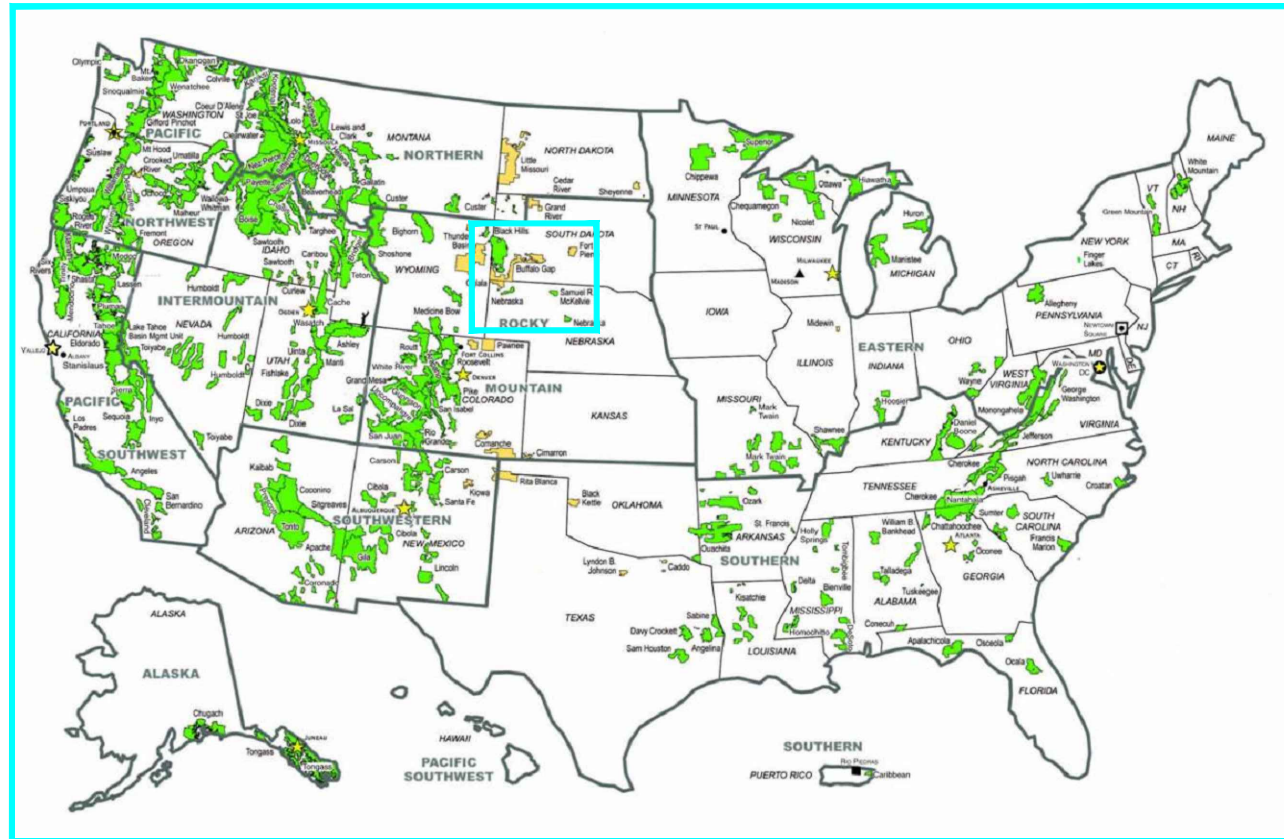


**UNITED STATES DEPARTMENT OF AGRICULTURE
FOREST SERVICE**

ROCKY MOUNTAIN REGION

NEBRASKA NATIONAL FORESTS & GRASSLANDS

**BESSEY RANGER DISTRICT
THOMAS COUNTY,
NEBRASKA**

2026 WHITETAIL ROAD 224 CONSTRUCTION

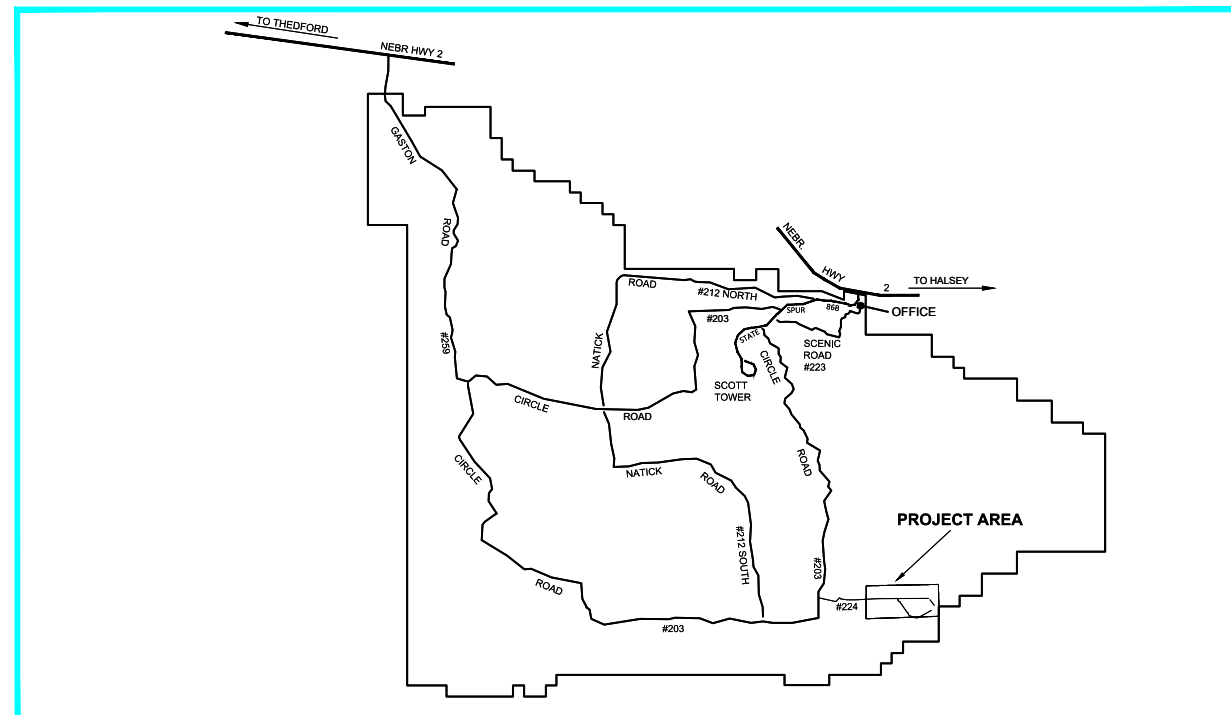

PROJECT LOCATION



TRAVEL DIRECTIONS

- FROM THE INTERSECTION OF MAIN STREET AND NEBRASKA HIGHWAY 2 IN HALSEY, NEBRASKA, TRAVEL WEST ON NEBRASKA HIGHWAY 2 WESTBOUND FOR 1.5 MILES.
- TURN LEFT ONTO NE-86B SPUR FOR 0.2 MILES.
- TAKE A SLIGHT RIGHT TO STAY ON NE-86B FOR 2.4 MILES.
- TURN LEFT ONTO CIRCLE ROAD FOR 7.7 MILES
- TURN LEFT ONTO WHITETAIL ROAD FOR 1.5 MILES

REVIEWED AND RECOMMENDED BY:

REVIEWER POSITION TITLE
PLANS, SPECIFICATIONS, AND COST ESTIMATES MEET TECHNICAL REQUIREMENTS

APPROVED:

FOREST STAFF OFFICER FOR ENGINEERING ACTIVITIES
COMPLIES WITH TECHNICAL ROAD REQUIREMENTS AND
ENGINEERING STANDARDS

DISTRICT RANGER
CONSISTENT WITH APPLICABLE REGULATORY AND
LAND MANAGEMENT PLAN REQUIREMENTS

Date

Date

Date _____



UNITED STATES
DEPARTMENT OF AGRICULTURE

FOREST SERVICE

NEBRASKA NATIONAL
FORESTS &
GRASSLANDS

STAMPS, LOGOS, AND SEALS

3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

2026 WHITETAIL ROAD
224 CONSTRUCTION

DRAWING TITLE

TITLE SHEET

ARCHIVE NO.

DESIGNER

CHECKED
TEMERSON


DATE
02/19/2020

SUB SHEET NO.

XX

SHEET
01 OF 04

C:\USERS\THOMASEMERSON\APPDATA\LOCAL\BOX\BOX EDIT\DOCUMENTS\LN7\KWEIUMJUPANDNQFXQ==\USFS-TITLE-WHITETAIL-ROAD.DWG; 3/26/26 09:53 THOMASEMERSON

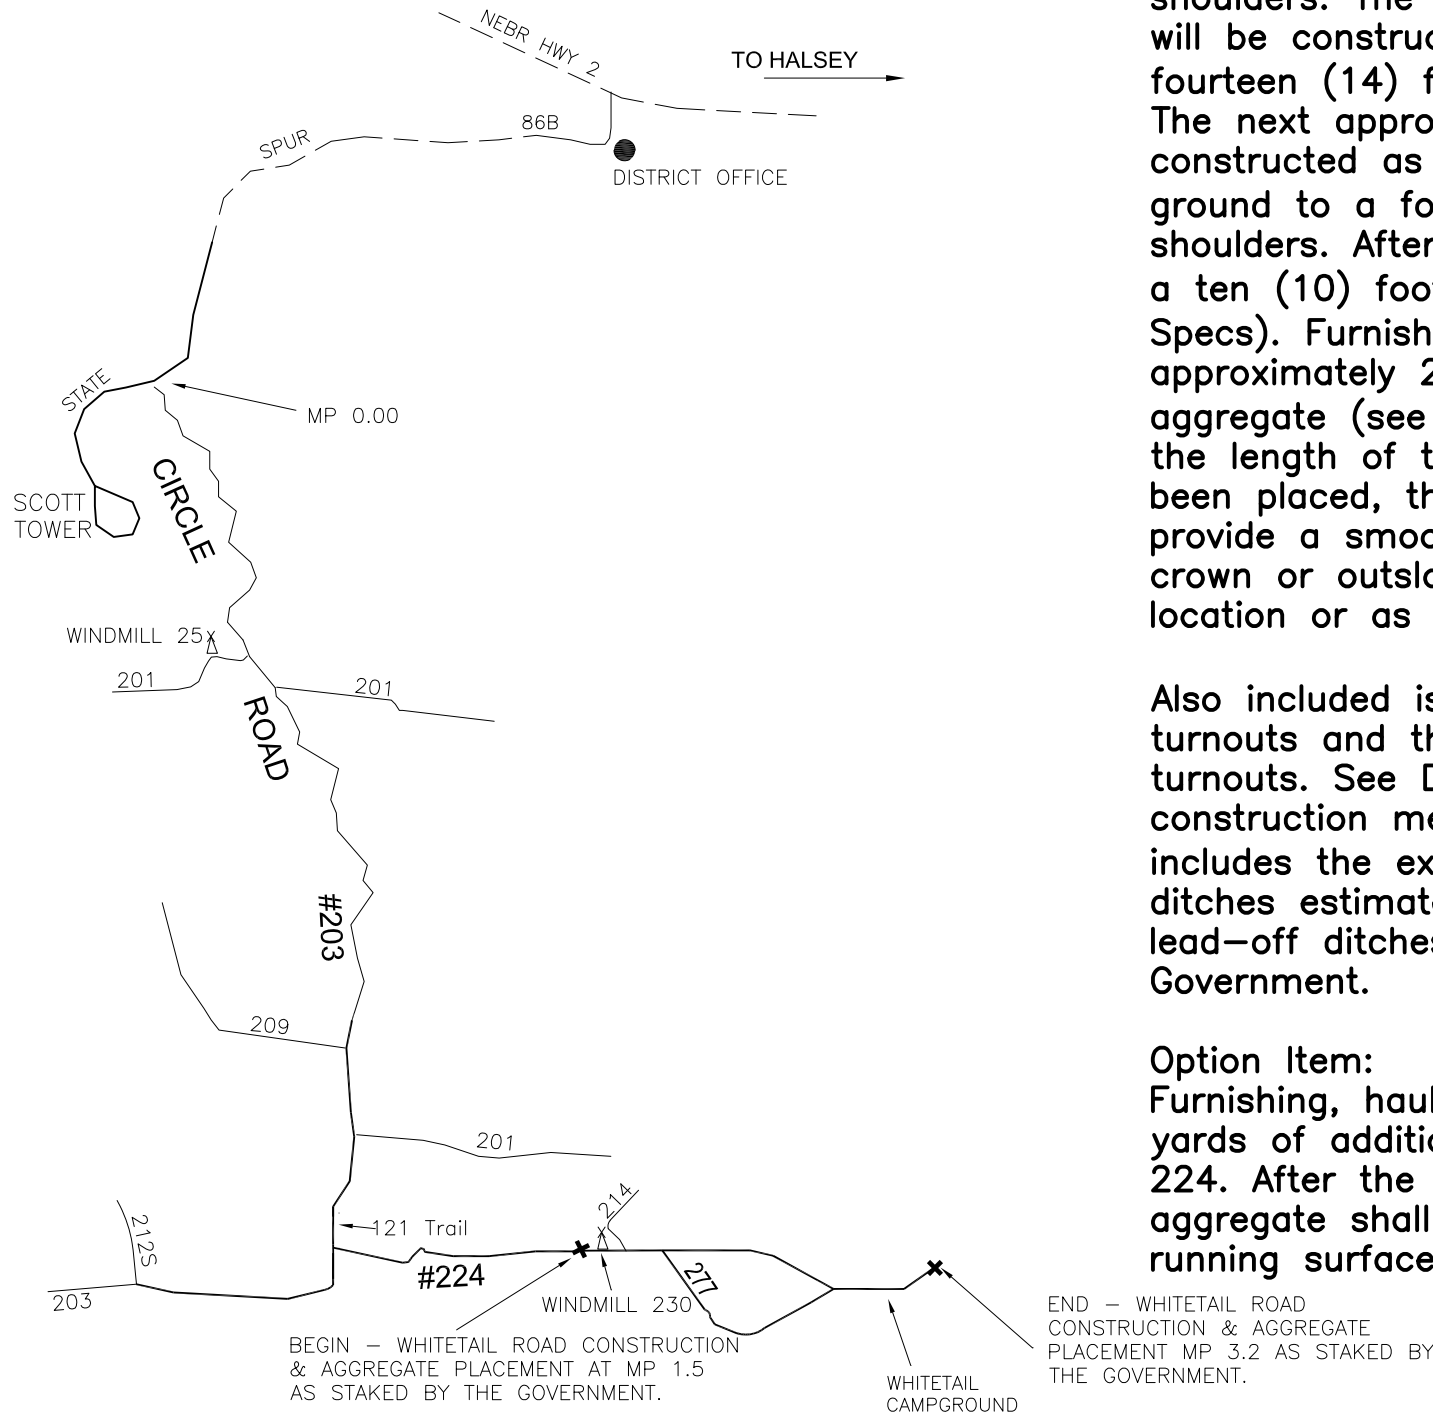

NOTES:

This project consists of restructuring and resurfacing up to 1.70 designated miles of Whitetail Road NFSR 224 per the Base Item found on the Summary of Work. Work consists of reconditioning and lifting the existing roadway (first approx. 0.5 miles) to a fourteen (14) foot wide roadway with shoulders. The next approx. 0.5 miles of roadway will be constructed from an existing atv trail to a fourteen (14) foot wide roadway with shoulders. The next approx. 0.4 miles of roadway will be constructed as new road from existing native ground to a fourteen (14) foot wide roadway with shoulders. After the roadway has been constructed, a ten (10) foot wide specified geogrid textile (see Specs). Furnishing, hauling and placing approximately 2,420 cubic yards of specified aggregate (see Specs) twelve (12) foot wide for the length of the road. After the aggregate has been placed, the aggregate shall be bladed to provide a smooth running surface with a centerline crown or outslope where appropriate for road location or as marked by the Government.

Also included is the construction of up to six (6) turnouts and the placement of aggregate on these turnouts. See Drawings and Specifications for construction method of turnouts. Optional work also includes the excavation of up to six (6) lead-off ditches estimated at 100 LF each. Turnouts and lead-off ditches will be located and flagged by the Government.

Option Item:

Furnishing, hauling and placing up to 1,655 cubic yards of additional specified aggregate on NFSR 224. After the aggregate has been placed, the aggregate shall be bladed to provide a smooth running surface.



UNITED STATES
DEPARTMENT OF AGRICULTURE
FOREST SERVICE

NEBRASKA NATIONAL
FORESTS &
GRASSLANDS

STAMPS, LOGOS, AND SEALS

3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

2026 WHITETAIL ROAD
224 CONSTRUCTION

DRAWING TITLE

SITE MAP AND NOTES

ARCHIVE NO.

DESIGNER TEMERSON	SUB SHEET NO. XX
CHECKED TEMERSON	
DATE 02/19/2026	SHEET 02 OF 04

NEBRASKA NATIONAL
FORESTS &
GRASSLANDS

STAMPS, LOGOS, AND SEALS

3		
2		
1		
NO.	REVISION / ISSUE	DATE

PROJECT NAME

2026 WHITETAIL ROAD
224 CONSTRUCTION

DRAWING TITLE

TYPICAL TURNOUT SECTIONS AND DETAILS

ARCHIVE NO.

DESIGNER EMERSON	SUB SHEET NO. XX
CHECKED EMERSON	
DATE 2/19/2026	SHEET 04 OF 04

