


REPLACE ROOF BUILDING 1A

PROJECT NUMBER: 757-21-101


VA CENTRAL OHIO HEALTH CARE SYSTEM
CHALMERS P. WYLIE VETERANS OUTPATIENT CLINIC
DEPARTMENT OF VETERANS AFFAIRS
420 N. JAMES RD.
COLUMBUS OHIO, 43219

GENERAL NOTES

- B. THE CONTRACT DRAWINGS AND PROJECT MANUAL (INDICATED BY THE SAME PROJECT NUMBER) ARE COMPLEMENTARY. THE CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICERS REPRESENTATIVE (C.O.R.) OF ANY DISCREPANCIES FOUND DURING BIDDING AND THROUGH CONSTRUCTION.
- B. DO NOT SCALE DRAWINGS. DIMENSIONS SHALL GOVERN WHERE DIMENSIONS EXIST.
- C. VERIFY ALL EXISTING DIMENSIONS AND FIELD CONDITIONS PRIOR TO DEMOLITION AND CONSTRUCTION. IF PROVIDED, EXAMINE EXISTING BUILDING DOCUMENTS. THE CONTRACTOR SHALL NOTIFY ANY DISCREPANCIES TO THE IMMEDIATE ATTENTION OF THE CONTRACTING OFFICER REPRESENTATIVE.
- D. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF EXISTING ITEMS TO REMAIN DURING DEMOLITION AND CONSTRUCTION.
- E. CONTRACTORS WORKING AT VA FACILITIES ARE REQUIRED TO PROVIDE A DOCUMENT STATING THAT ALL WORKERS, PRIME AND SUBS, HAVE HAD THE FLU SHOT FOR THE CURRENT YEAR OF THE CONTRACT. THIS IS IN COMPLIANCE WITH VA DIRECTIVE 1013. PREVENTION AND CONTROL OF SEASONAL INFLUENZA WITH VACCINES. ACCORDINGLY, PROVIDE A CERTIFICATION THAT ALL WORKERS ON THIS CONTRACT HAVE BEEN IMMUNIZED IN ACCORDANCE WITH THIS DIRECTIVE.
- F. MAINTAIN ACCESSIBLE EGRESS FOR THE DURATION OF THE PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF ALL CONSTRUCTION ROUTES BEYOND THE AREAS OF WORK AND THE ROUTES MUST BE RETURNED TO THEIR ORIGINAL CONDITION AT THE END OF THE PROJECT.
- G. PENETRATIONS THROUGH EXISTING FIRE RATED CONSTRUCTION MUST BE PROPERLY CLOSED AND FIRE SALED TO ACHIEVE THE REQUIRED FIRE RATING BY THE END OF CONSTRUCTION OPERATIONS FOR EACH DAY.
- H. ALL WORK SHALL BE DONE IN ACCORDANCE WITH APPLICABLE CODES AND FEDERAL, STATE, AND LOCAL REGULATIONS.
- I. THESE DOCUMENTS SHOW DESIGN INTENT WITH MINIMUM CONSTRUCTION REQUIREMENTS AND MINIMUM QUALITY OF WORK EXPECTED. THE CONTRACTOR IS RESPONSIBLE FOR ALL MEANS, METHODS AND TECHNIQUES FOR CONSTRUCTION AND EXPECTED QUALITY.
- J. ALL MATERIALS UTILIZED ON THIS PROJECT SHALL BE NEW UNLESS OTHERWISE NOTED TO BE SALVAGED AND REFINISHED. MATERIAL QUALITY SHALL MEET OR EXCEED APPLICABLE INDUSTRY STANDARDS.
- K. COORDINATE ALL WORK WITH ALL OTHER DISCIPLINES. EXACT SIZE AND LOCATION OF ROOF, WALL AND FLOOR OPENINGS SHALL BE VERIFIED WITH CORRESPONDING CONTRACTING TRADES PRIOR TO CONSTRUCTION.
- L. ALL CONCEALED WORK SHALL BE FIRE RETARDANT TREATED.
- M. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL EQUIPMENT INSTALLATION AND VARYING ALL REQUIRED ROUGH OPENINGS AND ROUGH-IN DIMENSIONS WITH THE EQUIPMENT MANUFACTURER AND CONTRACTING OFFICER REPRESENTATIVE PRIOR TO CONSTRUCTION.
- N. WHERE EXISTING SURFACES ARE TO BE RE-FINISHED WILL SERVE AS SUBSTRATE FOR THE ATTACHMENT OF NEW CONSTRUCTION. PREPARE EXISTING SURFACES AS NECESSARY TO RECEIVE THE NEW MATERIALS FOR A LEVEL AND SMOOTH FINISH.
- O. FIELD VERIFY SIZES AND DIMENSIONS OF ALL EXISTING UTILITIES APPARATUS WITH IMPACTING NEW CONSTRUCTION. DETERMINE EXACT SIZE AND LOCATION OF PENETRATIONS THROUGH CONSTRUCTION. TIGHTLY SEAL AND CAULK.
- P. HOST ONLINE CONSTRUCTION ADMINISTRATION SOFTWARE FOR THE DURATION OF THE PROJECT.
- Q. INCLUDE IN CONTRACTORS BID AN INFRARED MOISTURE SURVEY OF FULL SCOPE AREA TO VACUATE ANY CHANGES OF MOISTURE BEFORE EXISTING ROOF MEMBRANE.

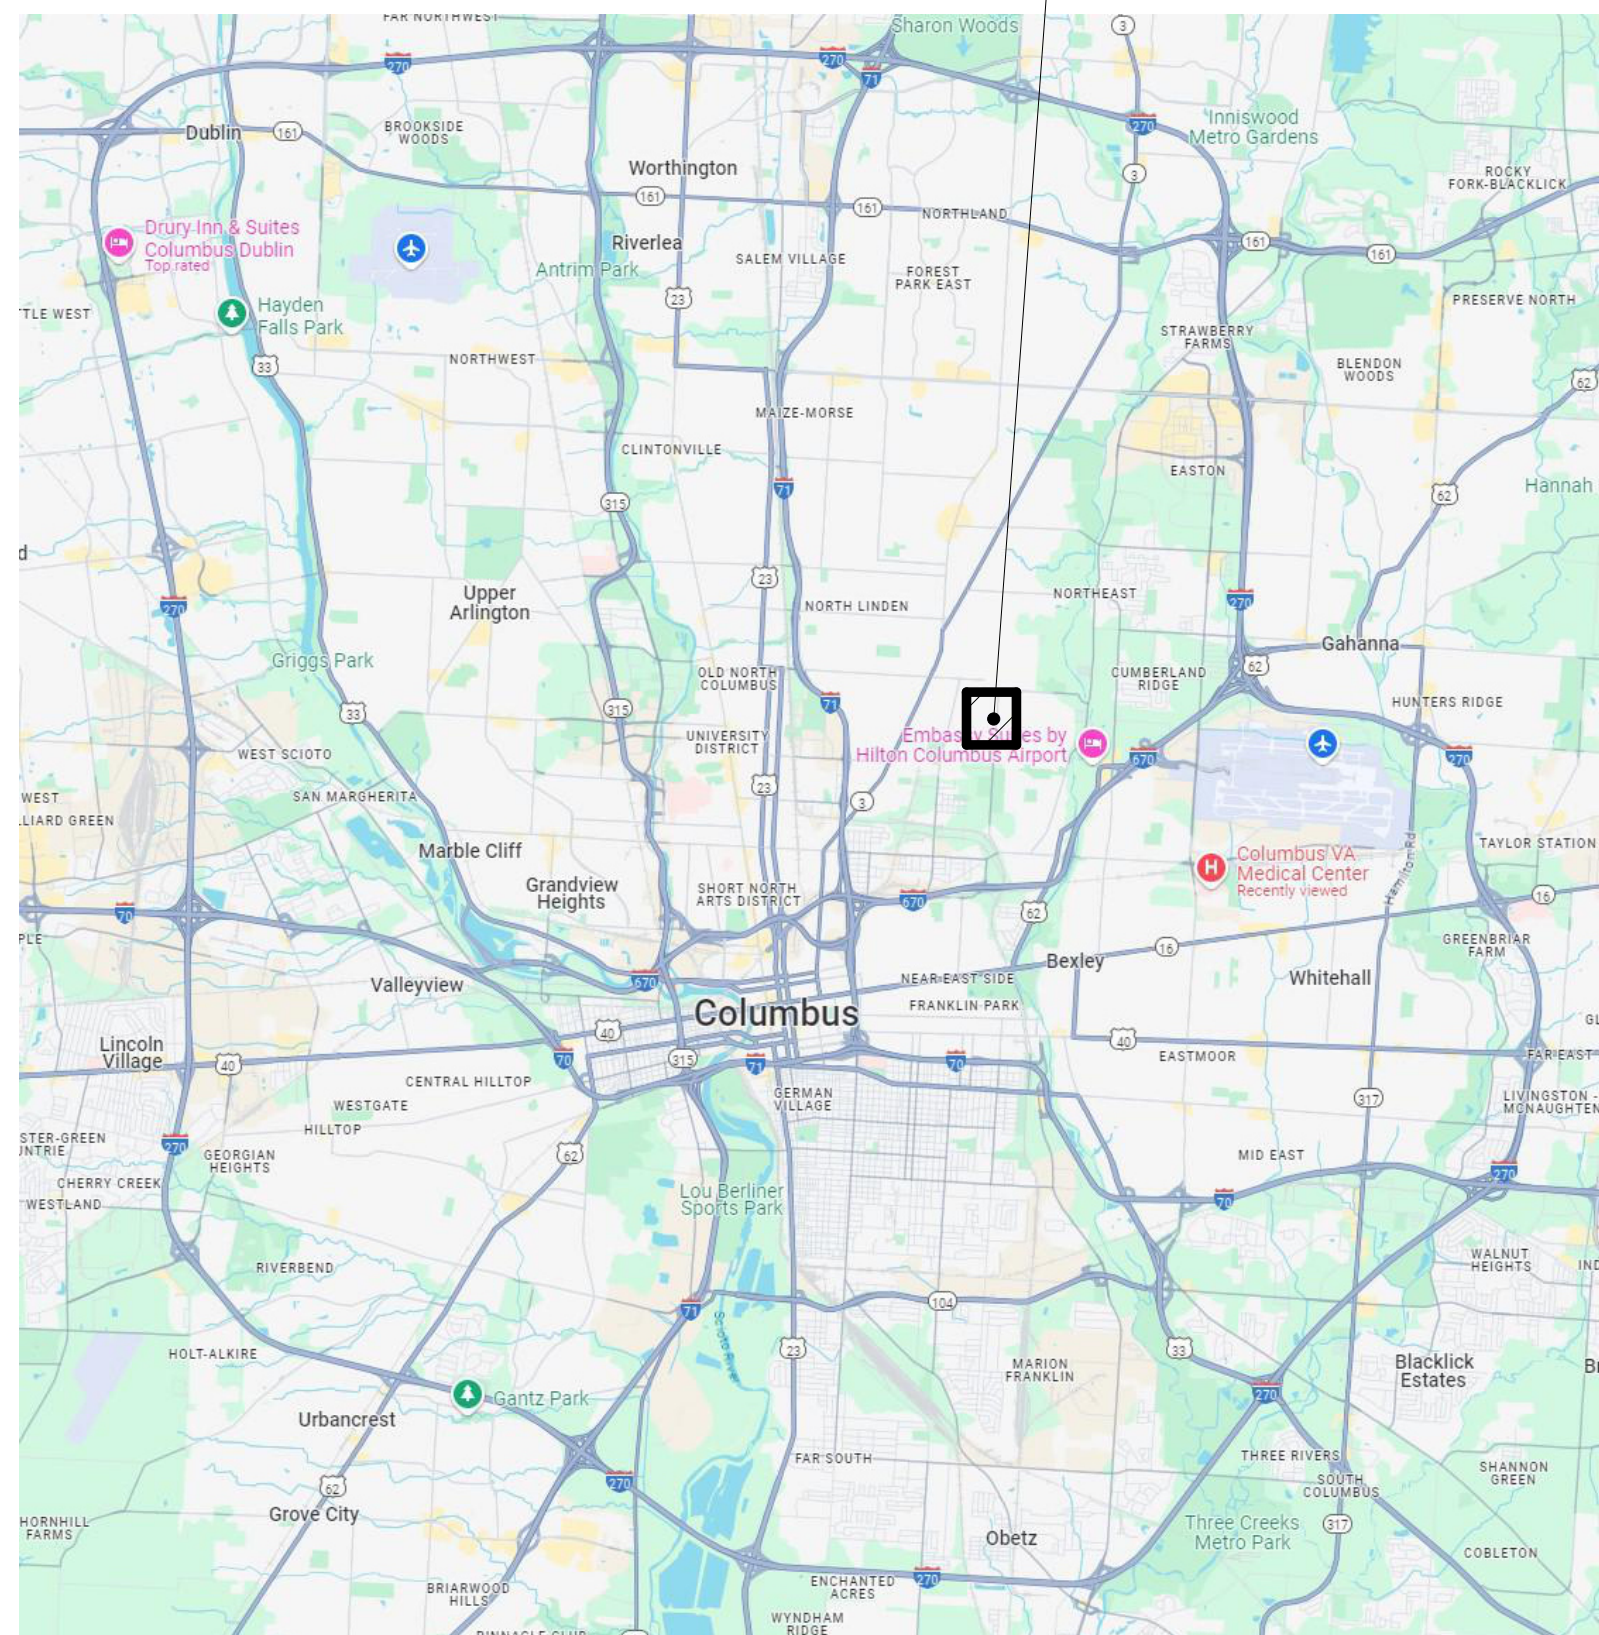

CAMPUS LOCATION

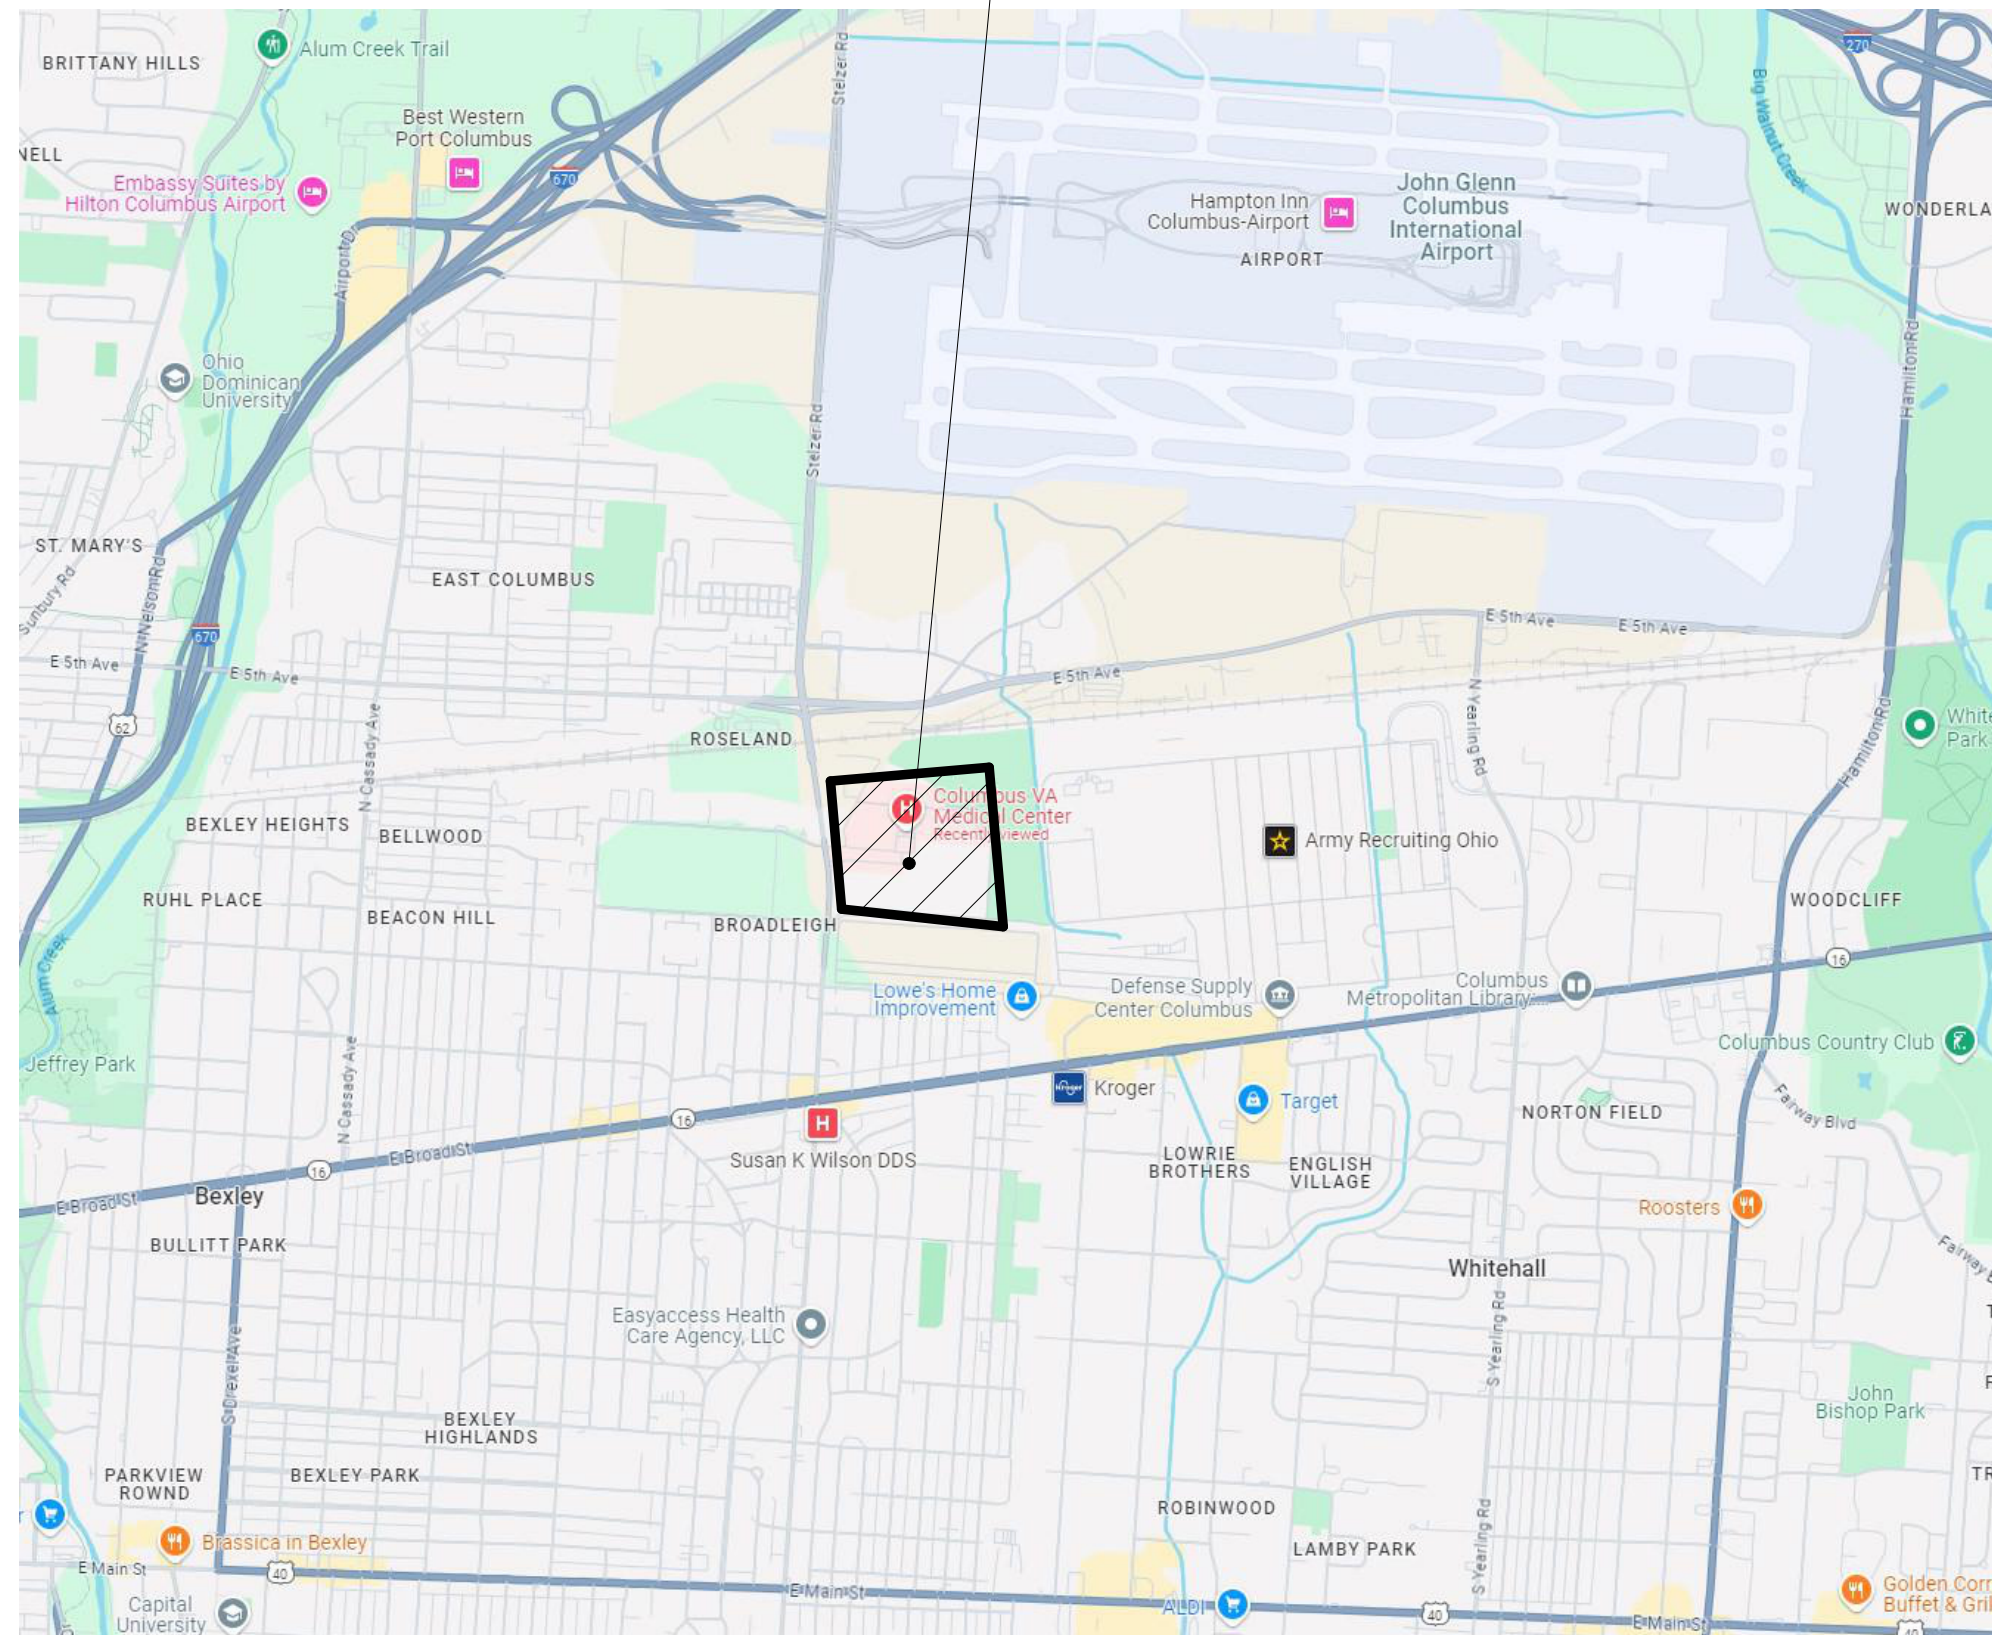

PROJECT LOCATION

SHEET NUMBER		SHEET NAME
GENERAL		
G001	COVER SHEET	
G100	OVERALL ROOF PLAN & 3D ROOF VIEW	
ARCHITECTURE		
AE101	ENLARGED ROOF PLAN - ROOF 1A	
AE102	ENLARGED ROOF PLAN - ROOF 1B	
AE103	ENLARGED ROOF PLAN - ROOF 1C	
AE104	ENLARGED ROOF PLAN - ROOF 1D	
AE105	ENLARGED ROOF PLAN - ROOF 3A	
AE106	ENLARGED ROOF PLAN - ROOF 3B	
AE107	ENLARGED ROOF PLAN - ROOFS 5 & 7	
AE108	ENLARGED ROOF PLAN - ROOF 17A	
AE109	ENLARGED ROOF PLAN - ROOF 17B	
AE110	ENLARGED ROOF PLAN - ROOF 14A	
AE111	ENLARGED ROOF PLAN - ROOF 14B	
AE141	ROOF RESTORATION DETAILS	
AE142	ROOF REPLACEMENT AND RESTORATION DETAILS	
AE143	ROOF 5, 5A & 5B DETAILS - DEMOLITION AND NEW WORK	
ELECTRICAL		
E001	ELECTRICAL LEGEND ABBREVIATIONS AND GENERAL NOTES	
E100	ELECTRICAL ROOF PLAN - OVERALL	
ED101	ELECTRICAL ROOF PLAN EAST - DEMO	
ED102	ELECTRICAL ROOF PLAN WEST - DEMO	
EP101	ELECTRICAL ROOF PLAN EAST - NEW	
EP102	ELECTRICAL ROOF PLAN WEST - NEW	

BASE BID:
- REPLACE ONLY DAMAGE PORTIONS OF ROOF IN KIND AND RESTORE ALL ROOFS IN SCOPE. THE CURRENT ROOFS IN SCOPE TO REPLACE AND/OR RESTORE ARE ROOFS 1(A - D), 3(A & B), 6, 7(A), 12, 13, 14(A & B), AND 17 (A & B). ROOFS 5, 5A, AND 5B WILL BE REPLACED WITH FLUID APPLIED WATERPROOFING AND PAVER ROOF SYSTEM.

BID ALTERNATE:

- DESCOPE ROOFS 6, 12, AND 13 FROM THE PROJECT.
- ADDING A NON-SLIP AGGREGATE TO PATHWAYS IN THE FLUID-APPLIED MEMBRANE INSTEAD OF RAISED GRATED WALKWAY SYSTEM.

[illegible]