

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

1. Scope. Provide two, model PL 8-120 High Integrity Containers (Energy Solutions Drawing C-003-001456-007) collection tanks (LPRCT), fabricated and final assembled as shown on Duratek Drawing C-042-046941-001, with the clarifications/exceptions contained and detailed within this statement of work.

2. References:
 - 2.1 Duratek Drawing C-042-046941-001, Rev. 2, CLPRCT Navy Cask Liner.
 - 2.2 Energy Solutions Drawing COLSC-000644, Rev 0, CLPRCT Support Collar
 - 2.3 Energy Solutions Drawing COLSC-000047 Rev 4, NON-DHEC Naval CLPRCT HIC Internals.
 - 2.4 Energy Solutions Drawing C-372-B-0011, Rev 1, Panel Filters.
 - 2.5 Duratek Drawing C-372-D-0012, Rev 1, Liner & Panel Filter Assembly.
 - 2.6 Energy Solutions Drawing C-003-01456-007, Rev 3, Polyethylene High Integrity Container C.R.M Flat Bottom Liner
 - 2.7 A-A-59326D, Coupling Halves, Quick-Disconnect, Dam-Locking Type, General Specification For
 - 2.8 Energy Solutions Drawing C-003-01456-002, Rev 4, Polyethylene High Integrity Container C.R.M. Closure System.
 - 2.9 Energy Solutions Engineering Change Notice, ECN No.:COLSC-000283, Rev 0.
 - 2.10 Energy Solutions Drawing CHNC-000738, Rev 0, LPRCT Lifting Arrangement for PL 8-120 HIC.
 - 2.11 ANSI N14.6-1993, for Radioactive Materials – Special Lifting Devices for Shipping Containers Weighing 10,000 Pounds (4500 kg) or More.
 - 2.12 Energy Solutions Drawing DWG-LIN-166209-ME-002 Rev 6, Non-DHEC Naval LPRCT HIC Internals.

3. General Requirements. Unless otherwise specified, Item numbers referenced for this section are from reference 2.1.
 - 3.1 Do not install or provide the Steel Shell (Item 4).
 - 3.2 Do not spray final foaming (Item 15) external to the High Integrity Container/HIC (Item 5) shown on Sheet 1 of 7 of reference 2.1.
 - 3.3 Do not spray foaming (Item 15) to fill internal void space around High Integrity Container/HIC (Item 5) access opening collar. Only apply spray foaming as specified per reference 2.2. to facilitate installation of the pan assembly support collar assembly.
 - 3.4 Do not provide Containment Lid (Item 59) shown on Sheet 5 of 7 of reference 2.1.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 3.5 Do not provide FAVA level indication system (Items 9, 39 and 40) shown on Sheet 5 of 7 of reference 2.1. See Section 4 of this document regarding ultrasonic and visual (e.g. camera) level indication systems and components.
- 3.6 Install support collar per reference 2.2 in lieu of the design shown on sheets 2 and 3 of reference 2.1. See Section 4 of this document regarding alterations/specifications.
- 3.7 Install closure pan assembly per reference 2.3 in lieu of the design shown on sheets 3, 4 and 7 of reference 2.1. See Section 4 of this document regarding alterations/specifications.
- 3.8 The Panel Filter Assembly (Item 6) shall be equipped with 1-micron panel filters with 4 filtration and drainage layers, per design of reference 2.4. Panel filters shall be connected with a dewatering header, as shown on reference 2.5, and located at the bottom of a reference 2.6 PL 8-120 HIC.
- 3.9 Each component of the internal dewatering assembly (including filters, PVC fittings, and hoses) shall be individually inspected (1x visual inspection of external and accessible internal surfaces) prior to installation into the system. The acceptance criteria shall be: no signs of cuts, cracks, nicks, permanent distortion or other damage.
 - 3.9.1 Upon completion of assembly installation into the HIC liner, a visual inspection of accessible external surfaces shall be conducted. The acceptance criteria shall be: no signs of cuts, cracks, nicks, permanent distortion or other damage.
 - 3.9.2 The vendor shall provide the Contract Officer Representative (COR) the opportunity to perform an inspection of the accessible internal and external surfaces of the assembly.
- 3.10 All Camlock fittings shall be stainless steel and meet requirements of reference 2.7. Rings and pins on camlock arms shall NOT be cadmium plated.
- 3.10.1 All Camlock closure dust caps shall be Dixon Cam and Groove EZ-Link armless dust caps. Caps shall be installed on Media Inlet, Dewatering, Vent, Light Housing and Camera Housing connection Camlock adapters.
- 3.11 All piping and components that will become wetted or exposed to a high humidity environment (i.e. tank internal surfaces) during use shall be made of corrosion resistant material (e.g. PVC, Stainless Steel, NICU, etc.), unless otherwise specified.
- 3.12 Coating Systems (i.e. paints and primers) shall be Non-hazardous per Resource Conservation and Recovery Act (RCRA) requirements.
 - 3.12.1 NNSY shall approve coating systems prior to coating system use/application.
 - 3.12.2 Prohibited colors are yellow, magenta, red and orange.
- 3.13 Using 1" high letters and highly contrasting color paint, stencil the HIC serial number on the Closure Lid of reference 2.8 and HIC body (Item 5).

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 3.14 The collection tank assembly shall have a useable volume of at least 600 gallons. Useable volume shall be defined as the internal volume of the HIC below the bottom of the closure pan (Item 24).
- 3.15 All testing, requiring or resulting in water entering/being supplied to the collection tank assemblies internals, shall be performed using deionized water. Low chloride content water ($\leq 1\%$ Chlorine bleach to water solution mixed at high HIC volume of 500 gallons; used to prevent biological growth) is acceptable for use.
- 3.16 The HIC shall be capable of receiving and containing contents to a temperature of at least 140 degrees Fahrenheit.
- 3.17 LED light assemblies (Item 27), DOTCAM assemblies (Item 28), and monitors (Item 29), of reference 2.3, shall not be provided.
- 3.18 The closure pan assembly (paragraph 3.7) with support collar assembly (paragraph 3.6), when installed to HIC, shall be capable of supporting 500 lbs. of direct weight placed on/within the pan assembly area. No movement/damage to the support collar/pan assembly and no permanent deformation to the HIC shall result from this loading.
- 3.19 All equipment/components furnished shall NOT contain mercury. In addition, equipment/components furnished shall NOT have come into direct contact with mercury or mercury containing components during fabrication or testing.
- 3.20 The use of Brass/Bronze components or fittings is prohibited. Any use of Brass/Bronze components or fittings shall be formally authorized and agreed to between NNSY and the vendor.
- 3.21 Vendor shall deliver LPRCT(s) to Energy Solutions (contractor) Barnwell Logistics facility in Barnwell South Carolina.
- 3.21.1 The contractor shall store the LPRCT in a secure facility, with weather protection, from completion of fabrication receipt, until it is requested for use by the customer. Storage period may be as long as 48 months.
- 3.22 The COR reserves the right to witness fabrication and testing of the LPRCT, and for inspection of the LPRCT for damage for defects after storage; prior to use.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

4. Closure Pan Assembly, Support Collar Assembly, Dewatering System and Level Indication Requirements: (Item numbers for this section are from reference 2.3 unless otherwise specified).
- 4.1 The Closure Pan Assembly shall be per reference 2.3 with the following modifications.
- 4.1.1 Closure Pan (Item 1) penetration and component (e.g. level flag, half pipe shield for camera/vent, etc.) arrangement shall be as shown in figure (1) of this document.
- 4.1.1.1 Connection and penetrations for the following shall be provided within the closure pan assembly.
- Media Inlet: 3 inch male camlock connection
 - Dewatering Connection: 1 ½ inch male camlock connection
 - Vent Connection: 2 inch male camlock connection
 - Ultrasonic Level Detection Transmitter: See paragraph 4.4 for details and figure (1) of this document for dimensional details.
 - Camera Housing: 1 ½ inch male camlock connection (see paragraph 4.5).
 - Light Housing: 1 ½ inch male camlock connection (see paragraph 4.5).
 - Camera and Light Lens Flush: 3/8 inch quick disconnect connection with attached hose assembly.
- 4.1.1.2 Vent connection shall have a cyclonic separator, similar to that detailed in Assembly A5 of reference 2.12. Maximum outside diameter of the mounting base and fin assembly should be limited/reduced to 5 inch, as much as reasonably achievable.
- 4.1.2 Bolt holes (Qty 20; 3/8 inch diameter on 18-1/4 inch bolt circle), used for securing the Closure Pan (Item 1) to the Collar Assembly of reference 2.2, shall NOT be made in the Closure Pan (Item 1). See section 4.2 for Closure Pan to Collar Assembly joint and sealing.

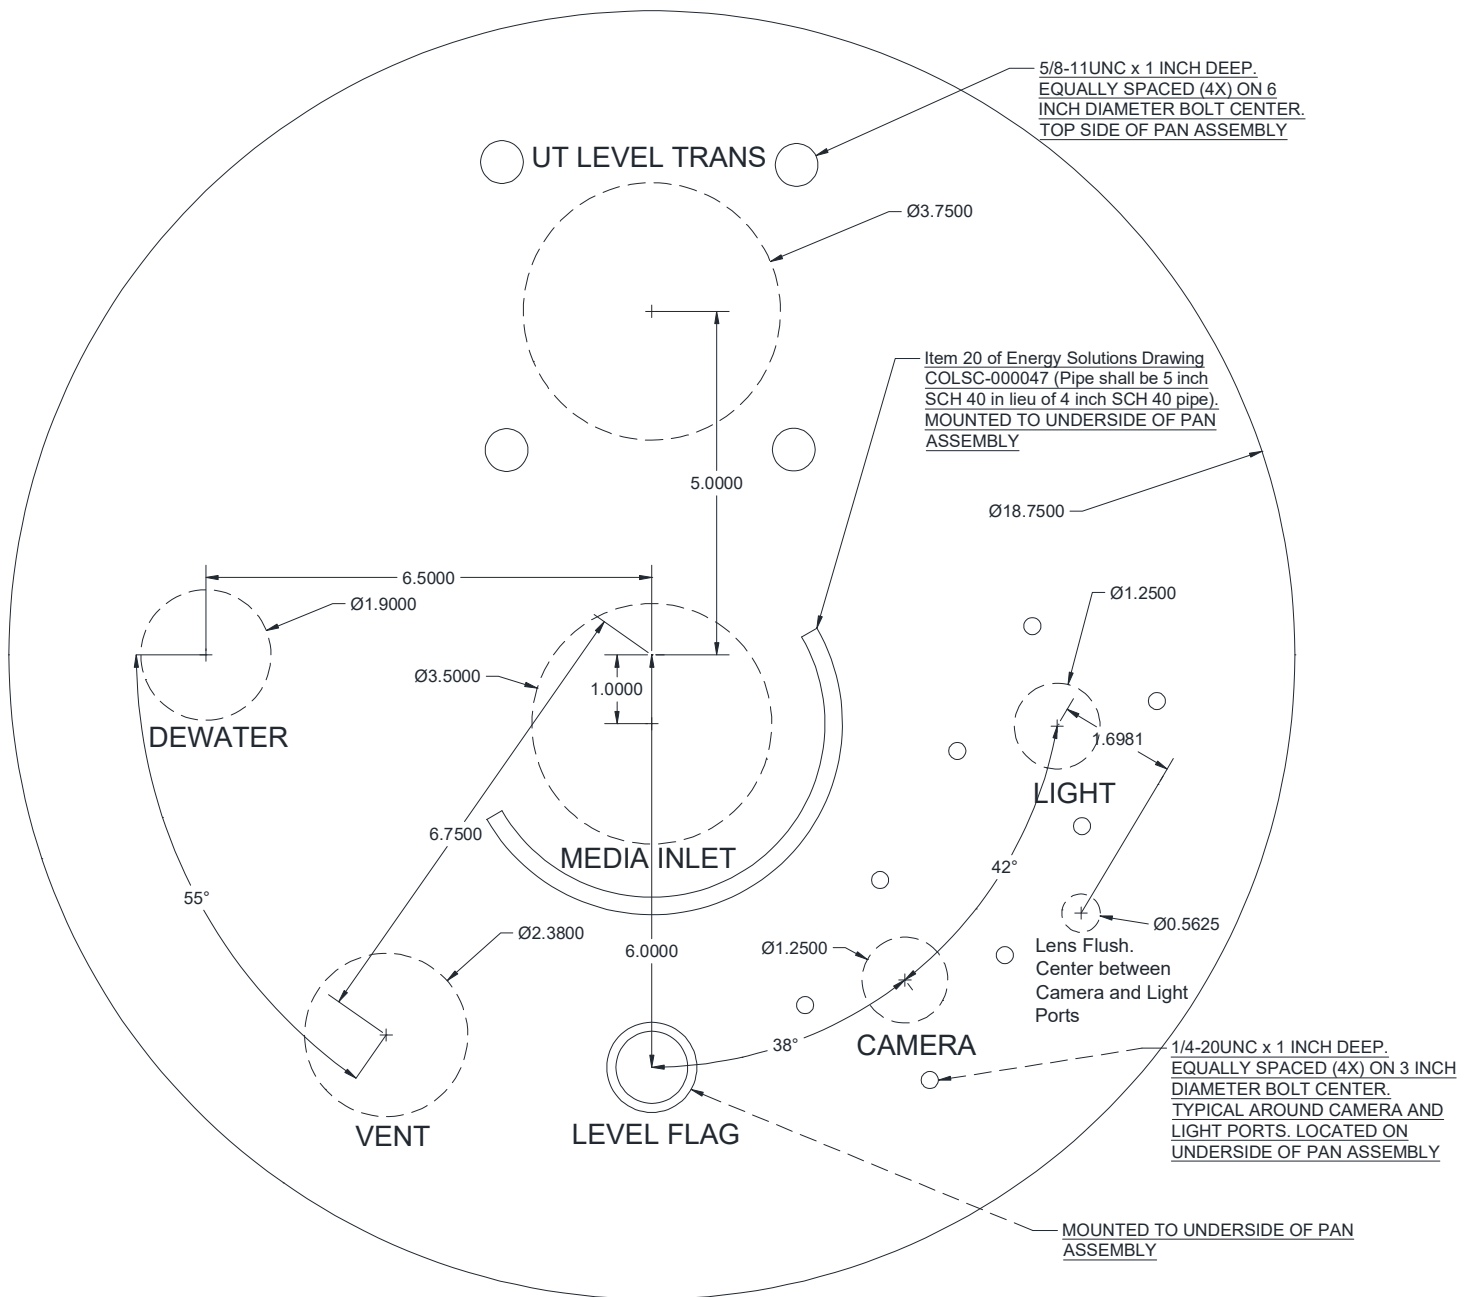


Figure (1); Closure Pan Assembly Penetration and Component Arrangement Details.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.2 Closure Pan Assembly shall be mounted/installed to a reference 2.6 PL 8-120 HIC via a reference 2.2 Support Collar Assembly, with the following modifications.
 - 4.2.1 Support Collar Assembly materials of construction shall be in accordance with reference 2.2, except as noted in figure (2) and table (1) of this document.
 - 4.2.2 Bolt holes (Qty 20; 3/8 inch diameter on a 18-1/4 inch bolt circle) shall NOT be drilled/placed in the collar ring plate (Item 1 of reference 2.2), and the associated bolts and nuts (Items 4 & 7 of reference 2.2) shall NOT be provided/used.
 - 4.2.3 The 13/32 inch diameter hole shall NOT be drilled/placed in the support collar ring plate (Item 1 of reference 2.2), as detailed in the “Closure Pan Retaining Ring Top View” of COLSC-000644. The associated Closure Pan Alignment pin (Item 3 of reference 2.2) shall NOT be provided/installed on the collar ring plate (Item 1 of reference 2.2).
 - 4.2.4 Closure Pan Assembly shall be mounted/installed to the reference 2.2 support collar (Item 2 of table (1)) using a 1” x 5/8” rectangular seal ring, via welding, as detailed in figure (2) and table (1) of this document.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

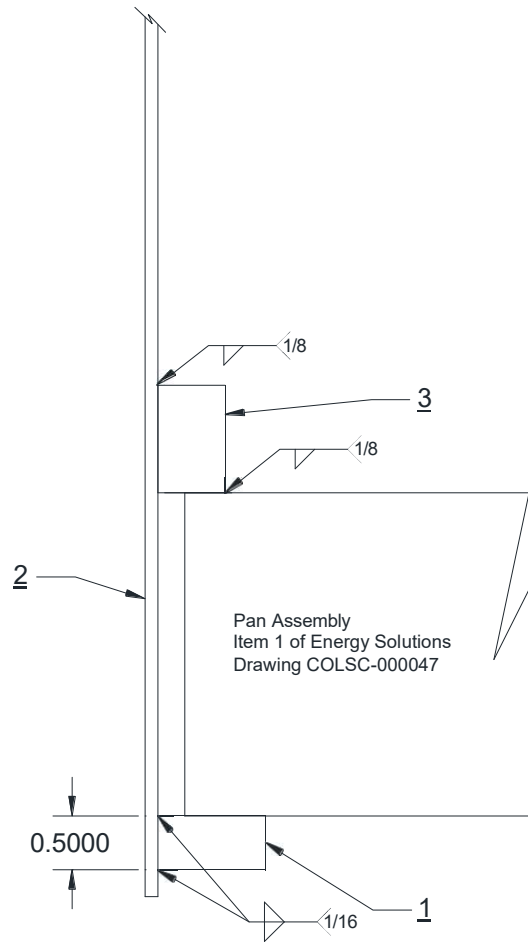


Figure (2); Closure Pan Assembly Seal Ring (Support Collar to Pan Assembly).

Item	Description
1	Support Collar Ring Plate. Item 1 of reference 2.2. See also paragraphs 4.2.2 and 4.2.3.
2	Support Collar. Item 2 of reference 2.2. 1/8" Thick Sheet; Stainless Steel (300 Series ASTM A240 or equivalent).
3	Seal Ring. 1 inch x 5/8 inch rectangular rod. Bend/Roll to match ID of Support Collar (Item 2). Single Butt Joint weld at seam with welds ground smooth. Stainless Steel (300 Series ASTM A240 or equivalent).


Table (1): Figure (2) List of Material(s).

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.3 The bottom of the level bar (Item 13) shall be capped or sealed, similar to closure assembly detailed in reference 2.9 for reference 2.1. A welded cap/disc can be used in place of a threaded cap. National Pipe Thread (NPT) joints shall be sealed via welding or with use of LOCTITE 5772.
- 4.3.1 Perform a standing water test/atmospheric test of the seal connection on the level bar and fill up to bolt holes located at the top of the level bar. Hold for 5 minutes with no visible leaks.
- 4.4 The closure pan (Item 1) shall be equipped with a Siemens Echomax XPS-10 ultrasonic transducer with factory flange (Item 3B) installed per Assembly A3 on sheet 1 of reference 2.3.
- 4.4.1 The transducer shall be equipped with a vendor-installed six foot long (minimum) cable, which shall be provided with a Switchcraft SL403MX connector. The connector shall be wired as listed below (These connector instructions supersede material Item 9 and note 14 details of reference 2.3). Connector shall be attached using solder and heat shrink wrap.
- Shield to pin 1
 - White to pin 2
 - Black to pin 3
- 4.4.2 The contractor supplied 50 foot extension cable of note 18 of reference 2.3 shall be modified as follows. Cable (Item 8) shall be 3-wire Belden 8760 which is equivalently wired (see paragraph 4.4.1) with a Switchcraft SL413FX connector on one end and a Switchcraft SL403MX connector on the other end. Connectors shall be attached using solder and heat shrink wrap.
- 4.4.3 Ensure no components/equipment inside the HIC interfere with the ultrasonic transducer signal, especially the dewatering hose (Item 60).
- 4.4.3.1 It is understood that minor interference (e.g. false level indication of 2-4 inches at true tank empty), due to signal reflection from the dewatering header piping of reference 2.5, may be experienced. Refer to paragraph 4.8 for closure pan assembly orientation.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.5 The LPRCT Closure Pan Assembly shall be equipped with housings for a camera and a light. The configuration of the camera and light housings shall be identical as shown in figure (3) and table (2) of this document, in lieu of those detailed in Sections B-B, C-C, D-D, E-E and F-F of reference 2.3. No air cooling or exhaust connections shall be installed. The penetrations for the light and camera housings shall be identical and located as shown on figure (1) of this document.

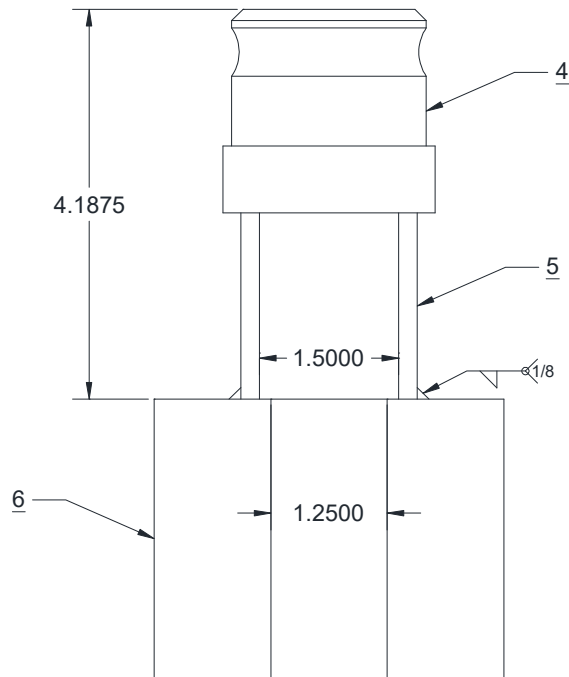

CAMERA / LIGHT HOUSING

1 ½" Camlock with 1 ½" SCH 80
piping with a 1 ¼" hole bore for
camera/light.

Figure (3): Camera and Light housing detail.

Item	Description
4	1 ½" Male Camlock x Female NPT, CRES Dixon P/N 150-A-SS or equivalent.
5	1 ½" SCH 80 Seamless Pipe, Stainless Steel Grade 304/316 (ASTM A312 or equivalent) NPT Threaded One End (TOE).
6	Pan Assembly. Item 1 of reference 2.3.

Table (2): Figure (3) List of Material(s).

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.5.1 Camera and light housing lens, retaining ring designs and installation shall be similar to Item 39 & 40 Details and Section F-F of reference 2.3. Camera and light lens retaining rings, lens and associated gaskets shall be sized as shown in figure (4) of this document. Lens retaining ring installation bolt holes shall be located on the underside of the Closure Pan as shown in figure (1) of this document.

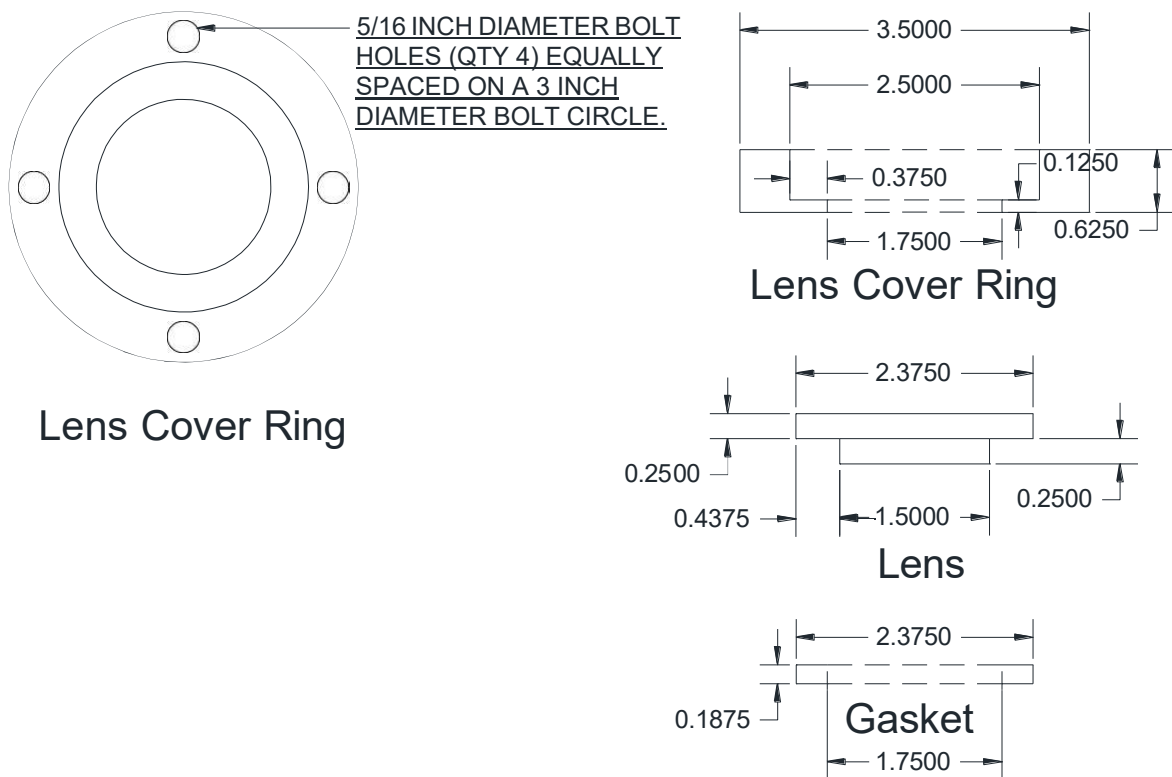


Figure (4): Camera and Light housing lens cover, lens and gasket dimensions.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.6 The level flags shall be installed on the level bar (Item 13) on sheet 3 of reference 2.3 and located as follows (% full flag locations shall be based on distance from bottom of LPRCT to the top of the flag; this is contrary to dimensional measurements taken to center of flags in reference 2.3). Tank height measurement associated with 100% full shall be distance from bottom of HIC to underside surface of the closure pan (Item 1 of reference 2.3).
- (1) Flag 1 – 20 +/- 1% of LPRCT usable volume.
 - (2) Flag 2 – 40 +/- 1% of LPRCT usable volume.
 - (3) Flag 3 – 60 +/- 1% of LPRCT usable volume.
 - (4) Flag 4 – 80 +/- 1% of LPRCT usable volume.
- 4.6.1 Level Flags shall have number plates attached (Black background with White numbers). Flag number plates shall be made from Gravotech Gravoply 1 1/16 material, or an equivalent material type/thickness. Number plates shall be attached to the level flags via stainless steel rivets (equivalent corrosion resistant materials may be used; aluminum, nickel copper, etc.).
- 4.6.2 Level bar shall be Black below flag 1 and above flag 4; level bar shall be colored White between flag 2 and flag 3. Paint/Coating system used shall meet requirements of paragraph 3.12. Powder coating may be used provided materials are non-hazardous per RCRA requirements.
- 4.6.3 The vendor shall perform a calibrated fill of the LPRCT to verify proper TLI operation and corresponding level flag positions.
- 4.6.4 As part of the calibration testing the vendor shall provide the following information for each LPRCT for programming of the UT controller. The vendor shall provide certification of this data.
- (1) The distance (in inches) from the UT Transducer face to the bottom of the LPRCT $\pm 1/4"$.
 - (2) The height (in inches) of each of the level indication flags from the bottom of the LPRCT (height recorded at the top of the level indication flags).
- 4.6.5 Provide calibration data showing LPRCT volume (in gallons) at each of the level indication flags (volume when filled to top of flag).
- 4.6.6 Vendor shall completely dewater each LPRCT following the calibrated fill.
- 4.7 The dewatering system, internal to LPRCT, shall be per Energy Solutions drawing COLSC-000047 with the following modifications and specifications.
- 4.7.1 Dewatering connection (Item 61 of reference 2.3) shall be connected to a panel filter assembly of reference 2.5. The Panel Filter Assembly shall be equipped with 1-micron panel filters with 4 filtration and drainage layers, per design of reference 2.4. Panel filter assemblies shall be sized, as necessary, to facilitate installation of a 4 panel arrangement with dewatering header within the bottom of a PL 8-120 HIC.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 4.7.2 Vendor shall perform hydrostatic testing of the dewatering connection per note 10 of reference 2.3.
- 4.7.3 Vendor shall perform hydrostatic testing of the dewatering hose assembly (Item 60), per note 19 of reference 2.3, to the manufacturer's rated working pressure. Test pressure shall be maintained for 30 minutes (no leaks, damage or permanent deformation).
- 4.8 The Closure Pan Assembly shall be oriented at installation to the Support Collar Assembly with the ultrasonic level indication transmitter directly over raised lifting bail ridge in bottom of HIC. The dewatering header suction hose shall be located 90 degrees counterclockwise from the ultrasonic level indication transmitter. See figure (5) of this document for additional details.

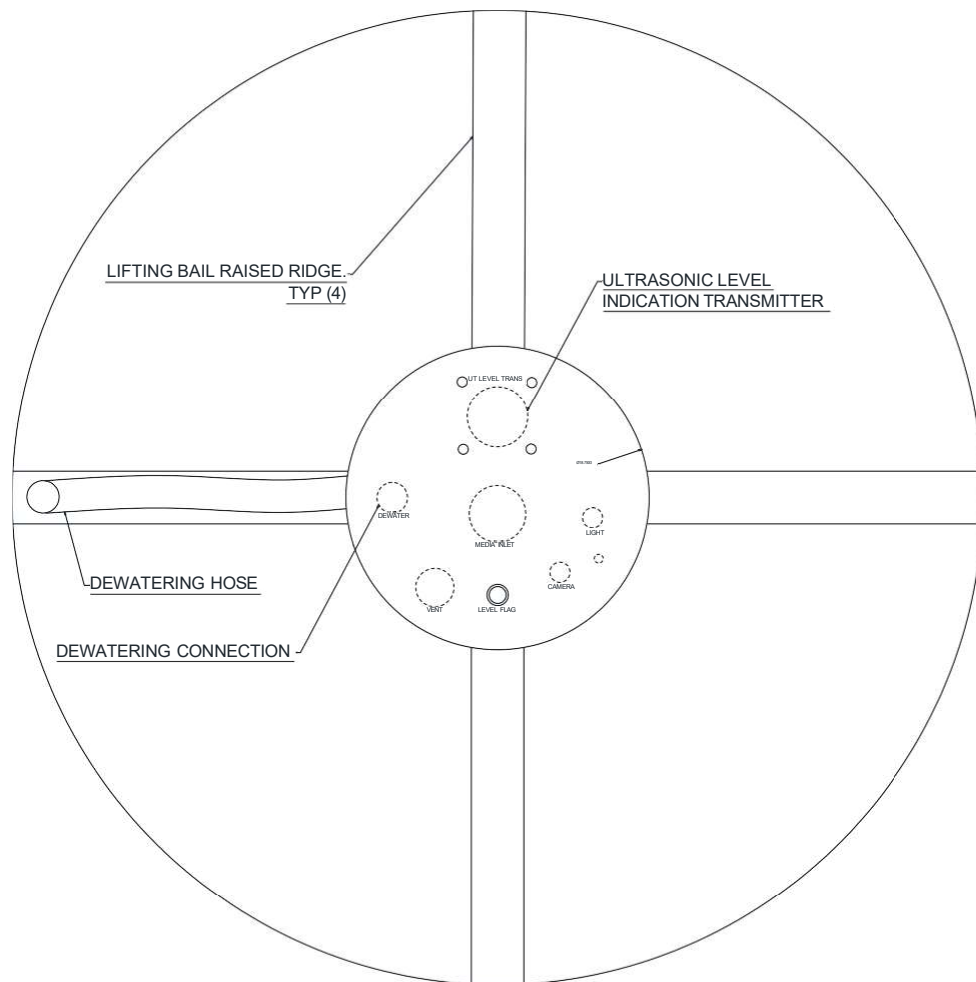


Figure (5): Closure Pan Assembly orientation in PL 8-120 HIC.

- 4.9 Each LPRCT (including the attached Closure Pan Assembly) shall be hydrostatically/pneumatically tested to 5 (+0.5, -0) psig.
- 4.10 Vendor shall perform a hydrostatic test of the camera/light lens air flush hose (Item 52), per note 10 of reference 2.3.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 5 Lifting and Handling Requirements: Provide a lifting liner bail assembly and all rigging gear, as detailed on reference 2.10 (to include Items 7, 12, 14 and 15), for lifting a PL 8-120 LPRCT. Item numbers for this section are per reference 2.10.
- 5.1 NNSY approval of lifting liner bail assembly drawing shall be obtained prior to beginning fabrication.
 - 5.2 Vendor shall provide certification of the breaking strength of wire rope (Items 5 and 14), by obtaining breaking strength results from destructive testing of a sample from the originating wire rope reel.
 - 5.3 Lifting Liner Bail Assembly and Integral Lifting Attachments shall meet the design and test requirements of reference 2.11.
 - 5.3.1 The load-bearing members of a special lifting device shall be capable of lifting three times the combined weight of the shipping container (3:1 yield) with which it will be used, plus the weight of intervening components of the special lifting device, without generating a combined shear stress or maximum tensile stress at any point in the device in excess of the corresponding minimum tensile yield strength of their materials of construction.
 - 5.3.2 The load-bearing members shall also be capable of lifting five times the weight of the shipping container (5:1 ultimate) without exceeding the ultimate tensile strength of the materials.
 - 5.3.3 Vendor shall provide certification and results of the drop weight test per ASTM E208 or a Charpy Impact test per ASTM A370. The anticipated minimum service temperature for the Lifting Liner Bail Assembly and Integral Attachments is 20 degrees F.
 - 5.4 Vendor shall perform a pre load test visual inspection of the lifting liner bail and all rigging gear, including a certification of satisfactory inspection per note 1 of reference 2.10.
 - 5.5 Vendor shall perform a load test of the lifting liner bail and all rigging gear, including certification of load testing per note 2 of reference 2.10. Maximum expected service load is 5,700 lbs.
 - 5.6 Vendor shall perform a post load test visual inspection of the lifting liner bail and all rigging gear including certification of satisfactory inspection per note 3 of reference 2.10.
 - 5.7 Vendor shall perform Pre and Post load test Magnetic Particle inspections of Master Link(s), Shackles and lifting padeyes (Items 2, 4 and 12), with certification of satisfactory Magnetic Particle Inspections per note 16 of reference 2.10.
 - 5.8 Lifting Liner Bail Assembly shall have a paragraph 3.12 coating system applied to its carbon steel components. Rigging gear (e.g. wire rope slings, shackles, D-rings, etc.) are not required to have an additional paragraph 3.12 coating system applied. Coating system color shall be in accordance with Note 4 of reference 2.10.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

6 LPRCT Marking Requirements

6.1 The LPRCT shall be marked on the top and side using one inch high, minimum, letters and highly contrasting color paint, per paragraph 3.12. Marking on top shall be located so that it is visible with the LPRCT in its shielded transport cask with the primary lid installed and associated secondary lid removed. Markings on top and side of LPRCT shall provide the following information, at a minimum.

(1) Purchase Order Number

(2) LPRCT serial number.

(3) Empty weight, including lifting liner lifting bail assembly and all rigging equipment of section 5.

(4) Maximum gross weight of assembly with lifting bail assembly of section 5.

6.2 The LPRCT Lifting Liner Bail Assembly, discussed in section 5, shall be marked in accordance with reference 2.10. All paint/coating systems used for application of markings shall meet paragraph 3.12 requirements.

6.3 The LPRCT Closure Pan Assembly, discussed in section 4, shall be marked as specified.

6.3.1 Pan Assembly Component/Connection locations shall be marked using bold lettering in plain view in approximate location of component/connection. Lettering shall be stamped into 3 inch thick pan surface using 1/2 inch tall maximum and 3/8 inch tall minimum letters on smaller components and connections. The following listed components/connections shall be identified as located and listed in figure (1).

- “MEDIA INLET”
- “UT LEVEL TRANS”
- “DEWATER”
- “VENT”
- “CAMERA”
- “LIGHT”

6.3.2 Pan Assembly shall be marked with its associated serial number using 1/2 in tall stamped letters. Serial number shall be located in plain view. Marking shall be per format listed below or alternate containing vendor name and serial number information.

“ENERGY SOLUTIONS”

“SERIAL NO.: XXXX”

6.3.3 Stamped letters shall be highlighted with a paint/coating system (Black color) meeting requirements of paragraph 3.12

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 7 Vendor shall provide the following certification of compliance, inspection/test reports and additional information:
- 7.1 Certification of Compliance in accordance with Exhibit A (CDRL A001) of the following:
 - 7.1.1 The materials, processes and manufactured items were controlled and tested in accordance with the appropriate drawings; the requirements of Energy Solutions Quality Assurance Program “ES-QA-PG-001”, Revision 14; USNRC Docket Number 71-0935, Revision 14; and the referenced contract/purchase order.
 - 7.1.2 The internal dewatering assembly consists of four 1-micron (4 filtration and drainage layer) panel style filters (see section 4.).
 - 7.1.3 South Carolina Department of Environmental Services (SCDES) approval of the HIC handling procedure applicable revision if not included on the HIC Certificate of Compliance (C of C) in accordance with Exhibit A (CDRL A001).
 - 7.1.4 SCDES approval of the HIC drawing and applicable revision, if not included in the HIC C of C.
 - 7.1.5 Certification of the number of days of sunlight exposure for each HIC
 - 7.2 Inspection/Test Reports in accordance with Exhibit B (CDRL A002):
 - 7.2.1 Hydrostatic testing of dewatering hose assembly. (see paragraph 4.7.3)
 - 7.2.2 Hydrostatic testing of dewatering connection and air hose. (see paragraphs 4.7.2 and 4.10)
 - 7.2.3 Hydrostatic/pneumatic testing of the LPRCT. (see paragraph 4.9)
 - 7.2.4 Drop weight test of Lifting Liner Bail and Integral Lifting Attachment per ASTM E208 or a Charpy Impact test per ASTM A370. (see paragraph 5.3.3)
 - 7.2.5 Breaking strength of the wire rope(s), by obtaining breaking strength results from destructive testing of a sample from the originating wire rope reel. (see paragraph 5.2)
 - 7.2.6 Factor of safety greater than 3:1 yield and 5:1 ultimate. (see paragraphs 5.3.1 & 5.3.2)
 - 7.2.7 Satisfactory pre load test visual inspection. (see paragraph 5.4)
 - 7.2.8 Satisfactory load testing. (see paragraph 5.5)
 - 7.2.9 Satisfactory Post load test visual inspection. (see paragraph 5.6)
 - 7.2.10 Satisfactory Pre and post load test Magnetic Particle inspections of the Master Link, the four Shackles and the four lifting padeyes. (see paragraph 5.7)
 - 7.2.11 The PL8-120 HIC dimensions (e.g. height with lid installed, inside diameter, outside diameter, wall thickness, etc.) and dimensional tolerances are in accordance with reference 2.6.

SPECIFICATION FOR A CONTRACT TO PURCHASE TWO PL 8-120 LPRCTs

- 7.3 Additional information with Exhibit A (CDRL A001):
 - 7.3.1 Total usable volume of the LPRCT (see paragraph 3.14).
 - 7.3.2 Data table for each LPRCT to include level flag distance from bottom of HIC with percent full level, water level checks, required data for programming of the UT controller, volume at top of each flag, and LPRCT is completely dewatered after performance of the calibrated fill. (see paragraphs 4.6, 4.6.3, 4.6.4, 4.6.5 and 4.6.6).
 - 7.3.3 A listing of the applicable LPRCT/HIC handling and dewatering procedures (with revision listed).
 - 7.3.4 Empty weight for each 8-120 LPRCT with lifting liner bail assembly and all associated rigging gear installed.
- 7.4 Vendor shall provide data requested in paragraphs 7.1 through 7.3, including all sub paragraphs, via e-mail, to [REDACTED] at [REDACTED] or [REDACTED] at [REDACTED]