

ABBREVIATIONS											
ABBR	TERM	ABBR	TERM	ABBR	TERM	ABBR	TERM	ABBR	TERM	ABBR	TERM
&	AND	CFCI	CONTRACTOR FURNISHED /	EQ	EQUAL	INSP	INSPECT	OPT	OPTIMUM; OPTIONAL	SST	STAINLESS STEEL
∠, L, L;	ANGLE		CONTRACTOR INSTALLED	EQUIP	EQUIPMENT	INSL	INSTALL	PL; ¶	PROPERTY LINE	STA	USCG STATION
@	AT	CFOI	CONTRACTOR FURNISHED /	FA	FIRE ALARM	INSUL	INSULATION; INSULATED	PLAM	PLASTIC LAMINATE	STD	STANDARD
∓, CL	CENTER LINE; CENTERING	CFOI	OWNER INSTALLED	FAC;FACIL	FACILITY	INT;	INTERIOR	PLBG	PLUMBING	STL	STEEL
Ø	DIAMETER; ROUND	CFM	CUBIC FEET PER MINUTE	FD	FLOOR DRAIN	ISO	ISOMETRIC	PLT; ¶	PLATE	STOR	STORAGE
#	NUMBER	CG	COAST GUARD; CORNER GUARD	FDC	FIRE DEPARTMENT CONNECTION	JAN	JANITOR	PLYWD	PLYWOOD	STRUCT	STRUCTURAL
¶; PL	PLATE; PROPERTY LINE	CI	CONSTRUCTION INSPECTOR	FDTN	FOUNDATION	JST	JOIST	PRCST	PRECAST	SUSP	SUSPENDED
AB	ANCHOR BOLT	CIP	CAST IN PLACE	FE	FIRE EXTINGUISHER	JT	JOINT	PROJ	PROJECT	SW	SIDE WALK; SWITCH; SOUTH WEST
ABAN	ABANDON	CJ	CONTROL JOINT; CONST. JOINT	FEC	FIRE EXTINGUISHER CABINET	KO	CONTRACTING OFFICER	PSF	POUNDS PER SQ. FT.	SYMM	SYMMETRICAL
ABV	ABOVE	CLG	CEILING	FF	FINISHED FACE	L	LONG; LITER	PT	PAINT; POST-TENSIONED;	TYP	TYPICAL
ADA	AMERICANS W/ DISABILITIES ACT	CLR	CLEAR	FIN	FINISH	LAV	LAVATORY		PRESSURE TREATED	T; TMPD	TEMPERED
ADDL	ADDITIONAL	CMU	CONCRETE MASONRY UNIT	FIXT	FIXTURE	LB	POUND	QA	QUALITY ASSURANCE	T&B	TOP AND BOTTOM
ADJ	ADJACENT; ADJUSTABLE	CND	CONDUIT	FLASH	FLASHING	LKR	LOCKER	QC	QUALITY CONTROL	TEL	TELEPHONE
AFF	ABOVE FINISHED FLOOR	CO	CLEAN OUT; CUT OUT	FLR	FLOOR	LT WT	LIGHT WEIGHT	QT	QUARRY TILE	TO	TOP OF
AFG	ABOVE FINISHED GRADE	COL	COLUMN	FP	FIRE PROTECTION	LTG	LIGHTING	R	RADIUS; RISER	TOL	TOLERANCE
AFS	ABOVE FINISHED SLAB	CONC	CONCRETE	FRT	FIRE RETARDANT TREATED	LVR	LOUVER	RD	ROAD; ROOF DRAIN	TS	TUBE STEEL
AHJ	AUTHORITY HAVING JURISDICTION	CONF	CONFERENCE	FSTNR	FASTENER	LWC	LIGHTWEIGHT CONCRETE	REC	RECESSED	TSTAT	THERMOSTAT
ALT	ALTERNATE	CONN	CONNECTION	FT	FEET	MATL	MATERIAL	REF	REFERENCE	TYP	TYPICAL
ALUM	ALUMINUM	CONST	CONSTRUCTION	FTG	FOOTING	MAX	MAXIMUM	REINF	REINFORCEMENT	VCT	VINYL COMPOSITION TILE
APPROX	APPROXIMATE	CONT	CONTINUOUS	FURG	FURRING	MECH	MECHANICAL	REQ	REQUIRE	UNO;	UNLESS NOTED OTHERWISE;
ARCH	ARCHITECTURAL	CONTR	CONTRACTOR	FURG	FURRING	MED	MEDIUM	REV	REVISION	UON	UNLESS OTHERWISE NOTED
ATC	ACOUSTICAL TILE CEILING	COR	CONTRACTING OFFICER'S REP	GA	GAGE	MEMB	MEMBRANE	RM	ROOM	USCG	UNITED STATES COAST GUARD
AT/FP;	ANTI-TERRORISM AND FORCE	CORR	CORRIDOR	GAL	GALLON	MFR	MANUFACTURER	RO	ROUGH OPENING	UTIL	UTILITY
ATFP	PROTECTION	CPT	CARPET	GALV	GALVANIZED	MID	MIDDLE	RTG	RATING	W	WATT; WEST; WIDE
AUTO	AUTOMATIC	CT	CERAMIC TILE	GEN	GENERAL	MIN	MINIMUM	RTG	RATING	VA	VALVE
BD	BOARD	CW	COLD WATER	GL	GLASS	MISC	MISCELLANEOUS	S	SOUTH	VAC	VACUUM
BDRY	BOUNDARY	DAT	DATUM	GLZ	GLAZING	MTD	MOUNTED	SAM	SELF-ADHERING MEMBRANE	VCT	VINYL COMPOSITION TILE
BF	BARRIER FREE	DEG	DEGREE	GOVT	GOVERNMENT	MTL	METAL	SC	SOLID CORE	VERT	VERTICAL
BFF	BELOW FINISHED FLOOR	DEPT	DEPARTMENT	GRL	GRILLE	N	NORTH	SCHED	SCHEDULE	VIC	VICINITY
BFG	BELOW FINISHED GRADE	DET;DETAL	DETAIL	GYP BD	GYPSPUM BOARD; GYP. WALLBOARD	NIC	NOT IN CONTRACT	SECT	SECTION; SECTIONAL	VIF	VERIFY IN FIELD
BFS	BELOW FINISHED SLAB	DIA	DIAMETER			NO; #	NUMBER	SHT	SHEET	WDW	WINDOW
BKG	BACKING	DIAG	DIAGONAL; DIAGRAM	H	HIGH	NOM	NOMINAL	SHTHG	SHEATHING	W	WATT; WEST; WIDE
BLDG	BUILDING	DIM	DIMENSION	HAZMAT	HAZARDOUS MATERIAL	NTS	NOT TO SCALE	SIM	SIMILAR	W/	WITH
BLKG	BLOCKING	DN	DOWN	HDR	HEADER	O/	OVER	S	SOUTH	WIN	WITHIN
BLW	BELOW	DR	DOOR	HDW	HARDWARE	OC	ON CENTER	SAM	SELF-ADHERING MEMBRANE	W/O	WITHOUT
BM	BEAM; BENCH MARK	DWG	DRAWING	HGR	HANGER	OD	OUTSIDE DIAMETER	SC	SOLID CORE	WARR	WARRANTY
BO	BOTTOM OF	E	EAST	HM	HOLLOW METAL	OF/CI;	OWNER FURNISHED;	SCHED	SCHEDULE	WC	WATER CLOSET
BOT	BOTTOM	EA	EACH	HORIZ	HORIZONTAL	OFCI	CONTRACTOR INSTALLED	SECT	SECTION; SECTIONAL	WD	WOOD
BRCG	BRACING	EJ	EXPANSION JOINT	HR	HOUR	OF/OI;	OWNER FURNISHED;	SHT	SHEET	WDW	WINDOW
BRDG	BRIDGING	EL	ELEVATION	HSS	HOLLOW STRUCTURAL STEEL	OFOI	OWNER INSTALLED	SHTHG	SHEATHING	WM	WATER METER; WIRE MESH
BRG	BEARING	ELEC	ELECTRICAL	HT	HEIGHT	OH	OVERHANG	SIM	SIMILAR	WP	WEATHERPROOF
BRKT	BRACKET	ELEV	ELEVATOR	HW	HOT WATER	OHD	OVERHEAD	SLNT	SEALANT	WR	WEATHER-RESISTIVE
BTWN	BETWEEN	ENGR	ENGINEER	HYD	HYDRANT	OPNG	OPENING	SP EL	SPOT ELEVATION	WRB	WEATER-RESISTIVE BARRIER
BRKT	BRACKET	(E);EXST	EXISTING	HYD	HYDRANT	OPP	OPPOSITE	SPEC	SPECIFICATIONS	WT	WEIGHT
CAB	CABINET	EXT	EXTINGUISHER; EXTERIOR	ID	INSIDE DIAMETER	OPT	OPTIMUM; OPTIONAL	SQ	SQUARE	XFER	TRANSFER
CEU	CIVIL ENGINEERING UNIT										

PROJECT DESCRIPTION - SUMMARY

1. THE SEWARD FAMILY HOUSING PROJECT CONSISTS OF CONSTRUCTION OF A TWO STORY 4-BEDROOM DUPLEX, A TWO STORY 3 BEDROOM DUPLEX, A SINGLE STORY 4-BEDROOM ADA DUPLEX AND A SINGLE STORY ACCESSORY SUPPORT BUILDING (ALTERNATE NO. 1). CONSTRUCTION SHALL BE WOOD FRAME WITH CONCRETE FOUNDATIONS AND INCLUDES CRAWL SPACES. EACH DUPLEX WILL HAVE AN EXTERIOR DECK AT, OR NEAR GRADE.
2. THE SUPPORT BUILDING (ALT. NO. 1) INCLUDES A SHOP, STORAGE AREA, OFFICE, TOILET ROOM AND SMALL KITCHENETTE AND IS APPROXIMATELY 1,000 SQUARE FEET IN AREA.
3. THE SUBDIVISION SITE IS CURRENTLY UNDER CONSTRUCTION. UTILITIES INCLUDING WATER AND SEWER ARE INSTALLED ALONG THE ADJACENT PHOENIX ROAD, INCLUDING STUB OUTS AT EACH EXISTING PARCEL. HOWEVER, THE CURRENT STUB OUTS DO NOT ALIGN WITH THE PROPOSED BUILDINGS. THE EXISTING STUB OUTS WILL NEED TO BE REMOVED AND NEW EXTENSIONS TO EACH BUILDING PROVIDED.
4. THE SITE HAS A BUILT UP GRAVEL PAD OVER APPROXIMATELY HALF OF THE SITE ADJACENT TO PHOENIX ROAD. THE PAD WILL BE EXTENDED AND FURTHER BUILT UP TO PROVIDE POSITIVE DRAINAGE AWAY FROM THE BUILDINGS.
5. ASPHALT DRIVEWAYS TO EACH GARAGE ARE INCLUDED.
6. THE ENTIRE PROJECT SITE REQUIRES TOP SOIL AND SEED.
7. SIX FEET HIGH WOODEN FENCES ARE PROVIDED AT EACH DUPLEX DWELLING UNIT.

GENERAL NOTES

1. EXISTING CONDITIONS ARE SHOWN AS ACCURATELY AS POSSIBLE. SITE VERIFY ALL INFORMATION NOTED IN THESE CONTRACT DOCUMENTS.
2. ALL DETAILS ARE TO BE CONSIDERED TYPICAL. SIMILAR DETAILS OCCUR AT SIMILAR LOCATIONS.
3. CONTRACTOR SHALL VERIFY LOCATION OF ALL UTILITIES, ELECTRICAL EQUIPMENT AND WIRING, INCLUDING ANY BELOW DECK APPURTENANCES BEFORE PROCEEDING WITH ANY WORK. CONTRACTOR IS RESPONSIBLE FOR DAMAGE TO EXISTING MECHANICAL, ELECTRICAL, PLUMBING APPURTENANCES.
4. CLEANING DURING CONSTRUCTION: CONTROL ACCUMULATION WASTE MATERIALS AND RUBBISH. DISPOSE OF WASTE IMMEDIATELY. KEEP AREAS FREE OF HAZARDS AND RUBBISH.
5. CONTRACTOR IS RESPONSIBLE FOR PROTECTING THE SITE AND BUILDINGS FROM PROJECT RELATED DAMAGE.
6. TAKE SPECIAL CARE TO SECURE ALL CONSTRUCTION AND DEMOLITION MATERIALS FROM WIND DISPLACEMENT.
7. CONFIRM WITH LOCAL AUTHORITY HAVING JURISDICTION FOR FIRE APPARATUS ACCESS AND LAY-DOWN AREAS.
8. MANUFACTURER SPECIFIC PRODUCTS LISTED IN THIS PLAN SET REPRESENT A BASIS OF DESIGN. THE CONTRACTOR CAN PROVIDE THE BASIS OF DESIGN OR EQUAL.

CODE INFORMATION

APPLICABLE CODES: INTERNATIONAL RESIDENTIAL CODE (IRC) 2021, SEWARD ALASKA CODE OF ORDINANCES / TITLE 12 - BUILDINGS AND CONSTRUCTION

1. CONSTRUCTION TYPE VB.
2. CONSTRUCTION SHALL BE WOOD IN ACCORDANCE WITH INTERNATIONAL RESIDENTIAL CODE (IRC) R502 - WOOD FLOOR FRAMING - R602; WOOD WALL FRAMING - R802; WOOD ROOF FRAMING.
3. IRC R313.2 REQUIRES AN AUTOMATIC SPRINKLER SYSTEM FOR ONE AND TWO FAMILY DWELLINGS, HOWEVER SEWARD ALASKA CODE OF ORDINANCES ITEM (17) AMENDS R313.2 BY DELETING THE SECTION, THEREFORE AUTOMATIC SPRINKLER SYSTEMS ARE NOT REQUIRED FOR THIS PROJECT.
4. IRC R302.3 TWO FAMILY DWELLINGS SHALL BE SEPARATED FROM EACH OTHER BY WALL AND FLOOR ASSEMBLIES HAVING NOT LESS THAN A 1 HOUR FIRE RESISTANCE RATING IN ACCORDANCE WITH ASTM E119, UL 263 OR SECTION 703.2.2 OF THE INTERNATIONAL BUILDING CODE (IBC). THE ASSEMBLY SHALL EXTEND FROM THE FOUNDATION TO THE UNDERSIDE OF THE ROOF SHEATHING.
- 4.1. EXCEPTION 2: TERMINATION IN TYPE - X GYP BD 5/8" MEMBRANE OF UNDERSIDE OF TRUSSES WITH A DRAFT STOP OF PLYWOOD OF 3/8" BETWEEN DWELLING UNITS.
5. IRC 302.5.1 DOOR BETWEEN GARAGE AND DWELLING UNITS TO BE SOLID WOOD.
6. IRC 302.6 (TABLE 302.6) TYPE-X 5/8" BETWEEN GARAGE AND HABITABLE ROOMS ABOVE.
7. IRC 302.4.1.1 FIRE STOP SYSTEM FOR THROUGH PENETRATIONS OF RATED WALLS.
8. IRC 302.4.2 PENETRATION INTO MEMBRANE STEEL ELECTRICAL BOXES REQUIRE LISTED PUTTY PADS.
9. IRC 806 ALL ATTIC SPACES SHALL BE ENCLOSED. COLD SPACES AND BE VENTILATED IN ACCORDANCE WITH R806 OF THE IRC.
10. CRAWL SPACES SHALL BE VENTILATED IN ACCORDANCE WITH R408 AND INSULATED TO MEET BEES STANDARDS.
11. IRC 315 PROVIDE INTERCONNECTED WITH BATTERY BACKUP SMOKE DETECTOR (R314) EACH BEDROOM AND COMMON SPACE WITH ONE AND CARBON MONOXIDE DETECTOR (R315).
12. IRC 311 PROVIDE EMERGENCY ESCAPE AND RESCUE WINDOWS AT EACH BEDROOM MEETING R311 OF THE IRC.
13. PROVIDE 10A-B-C FIRE EXTINGUISHER
14. IN DWELLING UNITS, WHERE THE TOP OF THE SILL OF AN OPERABLE WINDOW OPENING IS LOCATED LESS THAN 24 INCHES ABOVE THE FINISH FLOOR AND 72 INCHES ABOVE THE FINISH GRADE SHALL COMPLY WITH IRC R312.2.1

BID OPTIONS

BID OPTION 1: ALL CONSTRUCTION OF THE SUPPORT BUILDING INDICATED WITHIN PLANS AND SPECIFICATIONS REPRESENT BID OPTION 1 EXCEPT THE REMOVAL OF THE ORGANIC SOILS, GRADING OF THE SITE, AND CONSTRUCTION OF THE ASPHALT PARKING LOT/DRIVEWAY.

MATERIAL UPGRADE OPTIONS. THE FOLLOWING OPTIONS REPRESENT MATERIAL/FINISH UPGRADES TO THE SPECIFIED WITHIN THE PROJECT. THE CONTRACTOR SHALL PROVIDE THE ADDITIONAL COST FOR LABOR AND MATERIALS TO INSTALL THE UPGRADES VERSUS THE SPECIFIED MATERIALS. THE CONTRACTOR WILL PROVIDE ALL PRODUCT SUBMITTALS FOR THE UPGRADED MATERIALS. CONTRACTOR SHALL SHIP, STORE, HANDLE, AND INSTALL UPGRADE OPTIONS ACCORDING TO MANUFACTURER INSTRUCTIONS. PRODUCTS LISTED BELOW REPRESENT A DESIGN BASIS AND THE CONTRACTOR CAN PROVIDE THE PRODUCT OR EQUAL.

BID OPTION 2: INSTALL AN ALUMINUM STANDING SEEM METAL ROOFING SYSTEM UPGRADE INSTEAD OF THE SPECIFIED ROOFING MATERIALS. DESIGN BASIS IS THE TITE-LOC METAL ROOFING BY PAC-CLAD. ROOF PANELS SHALL BE 18" WIDE AND HAVE PENCIL RIBS. PANEL MATERIAL SHALL BE .040 ALUMINUM AND FLASHING SHALL BE ALUMINUM ALSO. PROVIDE 35-YEAR NON-PRORATED FINISH WARRANTY AND WEATHERTIGHTNESS WARRANTY ALSO. FLASHING MATERIALS SHALL BE ALUMINUM FROM THE SAME MANUFACTURER AND APPROVED FOR USE WITH THIS SYSTEM. ROOFING SHALL MEET ALL WIND SPEED REQUIREMENTS OF THE ORIGINAL PRODUCTS FOR SEWARD, ALASKA. CONTRACTOR TO PROVIDE FULL COLOR RANGE FOR SELECTION INCLUDING PREMIUM COLORS.

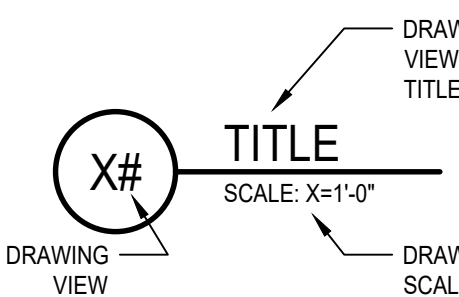
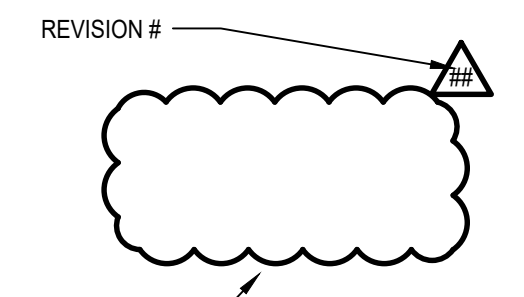
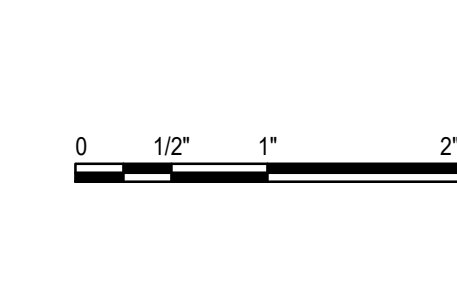
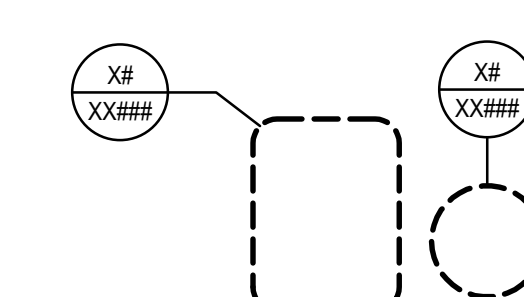
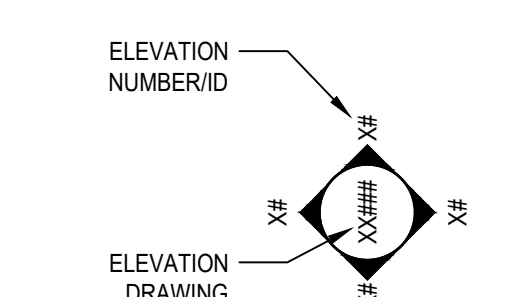
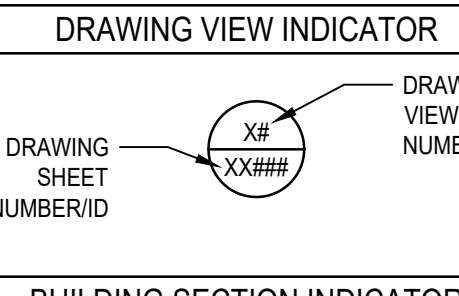
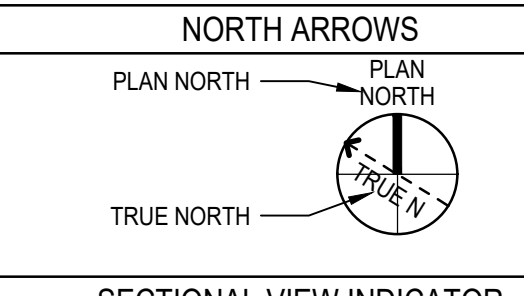
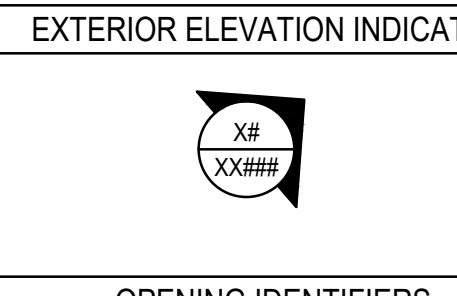
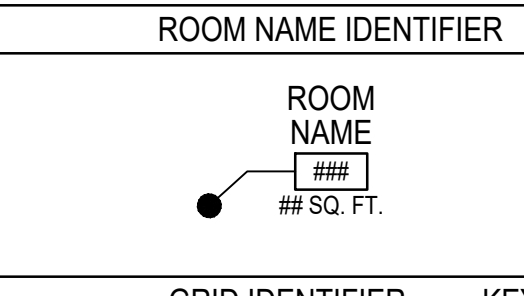
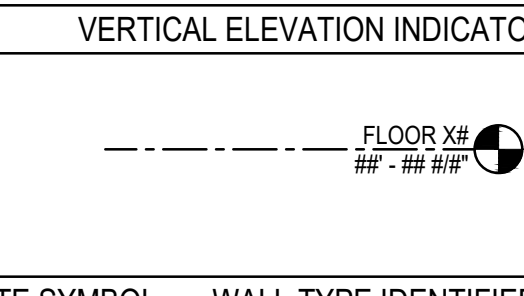
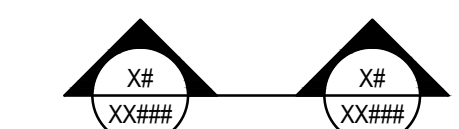
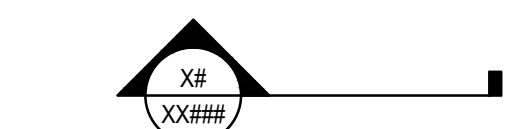
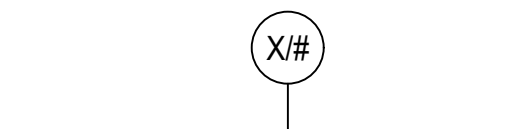
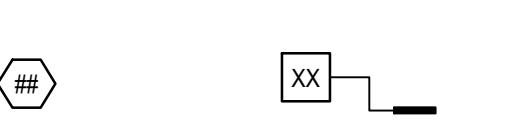
BID OPTION 3: INSTALL A PREMIUM VINYL SIDING SYSTEM UPGRADE INSTEAD OF THE SPECIFIED SIDING MATERIAL. VINYL SIDING SYSTEM SHALL INCLUDE ALL FLASHING, TRIM, SIDING, AND ACCESSORIES. DESIGN BASIS FOR THE SIDING IS MASTIC EVERPLANK 6" VINYL PLAN BY PLYGEM.


BID OPTION 4: INSTALL ALL PLYWOOD FURNITURE CONSTRUCTION CASEWORK INSTEAD OF THE SPECIFIED CASEWORK MATERIAL (KITCHEN AND BATH CABINETRY). DESIGN BASIS FOR CABINETRY: MFR. KRAFTMAID IS ALL PLYWOOD FURNITURE CONSTRUCTION. FINISHED FURNITURE END PANELS WHERE END OF CABINETS ARE EXPOSED.DESIGN BASIS OF CABINETRY FRONT AND DOORS: MFR. KRAFTMAID DOORS, R. DORSEY (AV4M6) STYLE, MAPLE WOOD MATERIAL WITH A WICKER FINISH. CABINET FRONTS SHALL MATCH DOOR MATERIAL AND FINISH. CABINETS SHALL BE FULL OVERLAY -CONCEALED HINGES.

ZONING INFORMATION


1. PER CITY OF SEWARD ZONING REQUIREMENTS
- 1.1. GATEWAY SUBDIVISION HILLTOP ADDITION BLOCK 4 LOTS 17-29 ARE ZONED MULTI-FAMILY RESIDENTIAL (R3).
- 1.2. MAXIMUM BUILDING HEIGHT = 34 FEET ABOVE ADJACENT GRADE
- 1.3. MINIMUM FRONT YARD SETBACK = 20 FEET
- 1.4. MINIMUM SIDE YARD SETBACK = 10 FEET
- 1.5. MINIMUM BACK YARD SETBACK = 10 FEET
- 1.6. MAXIMUM ACCESSORY BUILDING HEIGHT = 20 FEET
- 1.7. MAXIMUM LOT COVERAGE = 40 PERCENT

SYMBOLS

DRAWING VIEW TITLES	REVISIONS CLOUDS & DETAILS	GRAPHIC SCALES	ENLARGED DETAIL INDICATORS	EXTERIOR ELEVATION INDICATOR
				
DRAWING VIEW INDICATOR	NORTH ARROWS	EXTERIOR ELEVATION INDICATOR	ROOM NAME IDENTIFIER	VERTICAL ELEVATION INDICATOR
				
BUILDING SECTION INDICATOR	SECTIONAL VIEW INDICATOR	OPENING IDENTIFIERS	GRID IDENTIFIER	KEYNOTE SYMBOL
				
		 WINDOWS & LOUVERS	 DOORS & GATES	

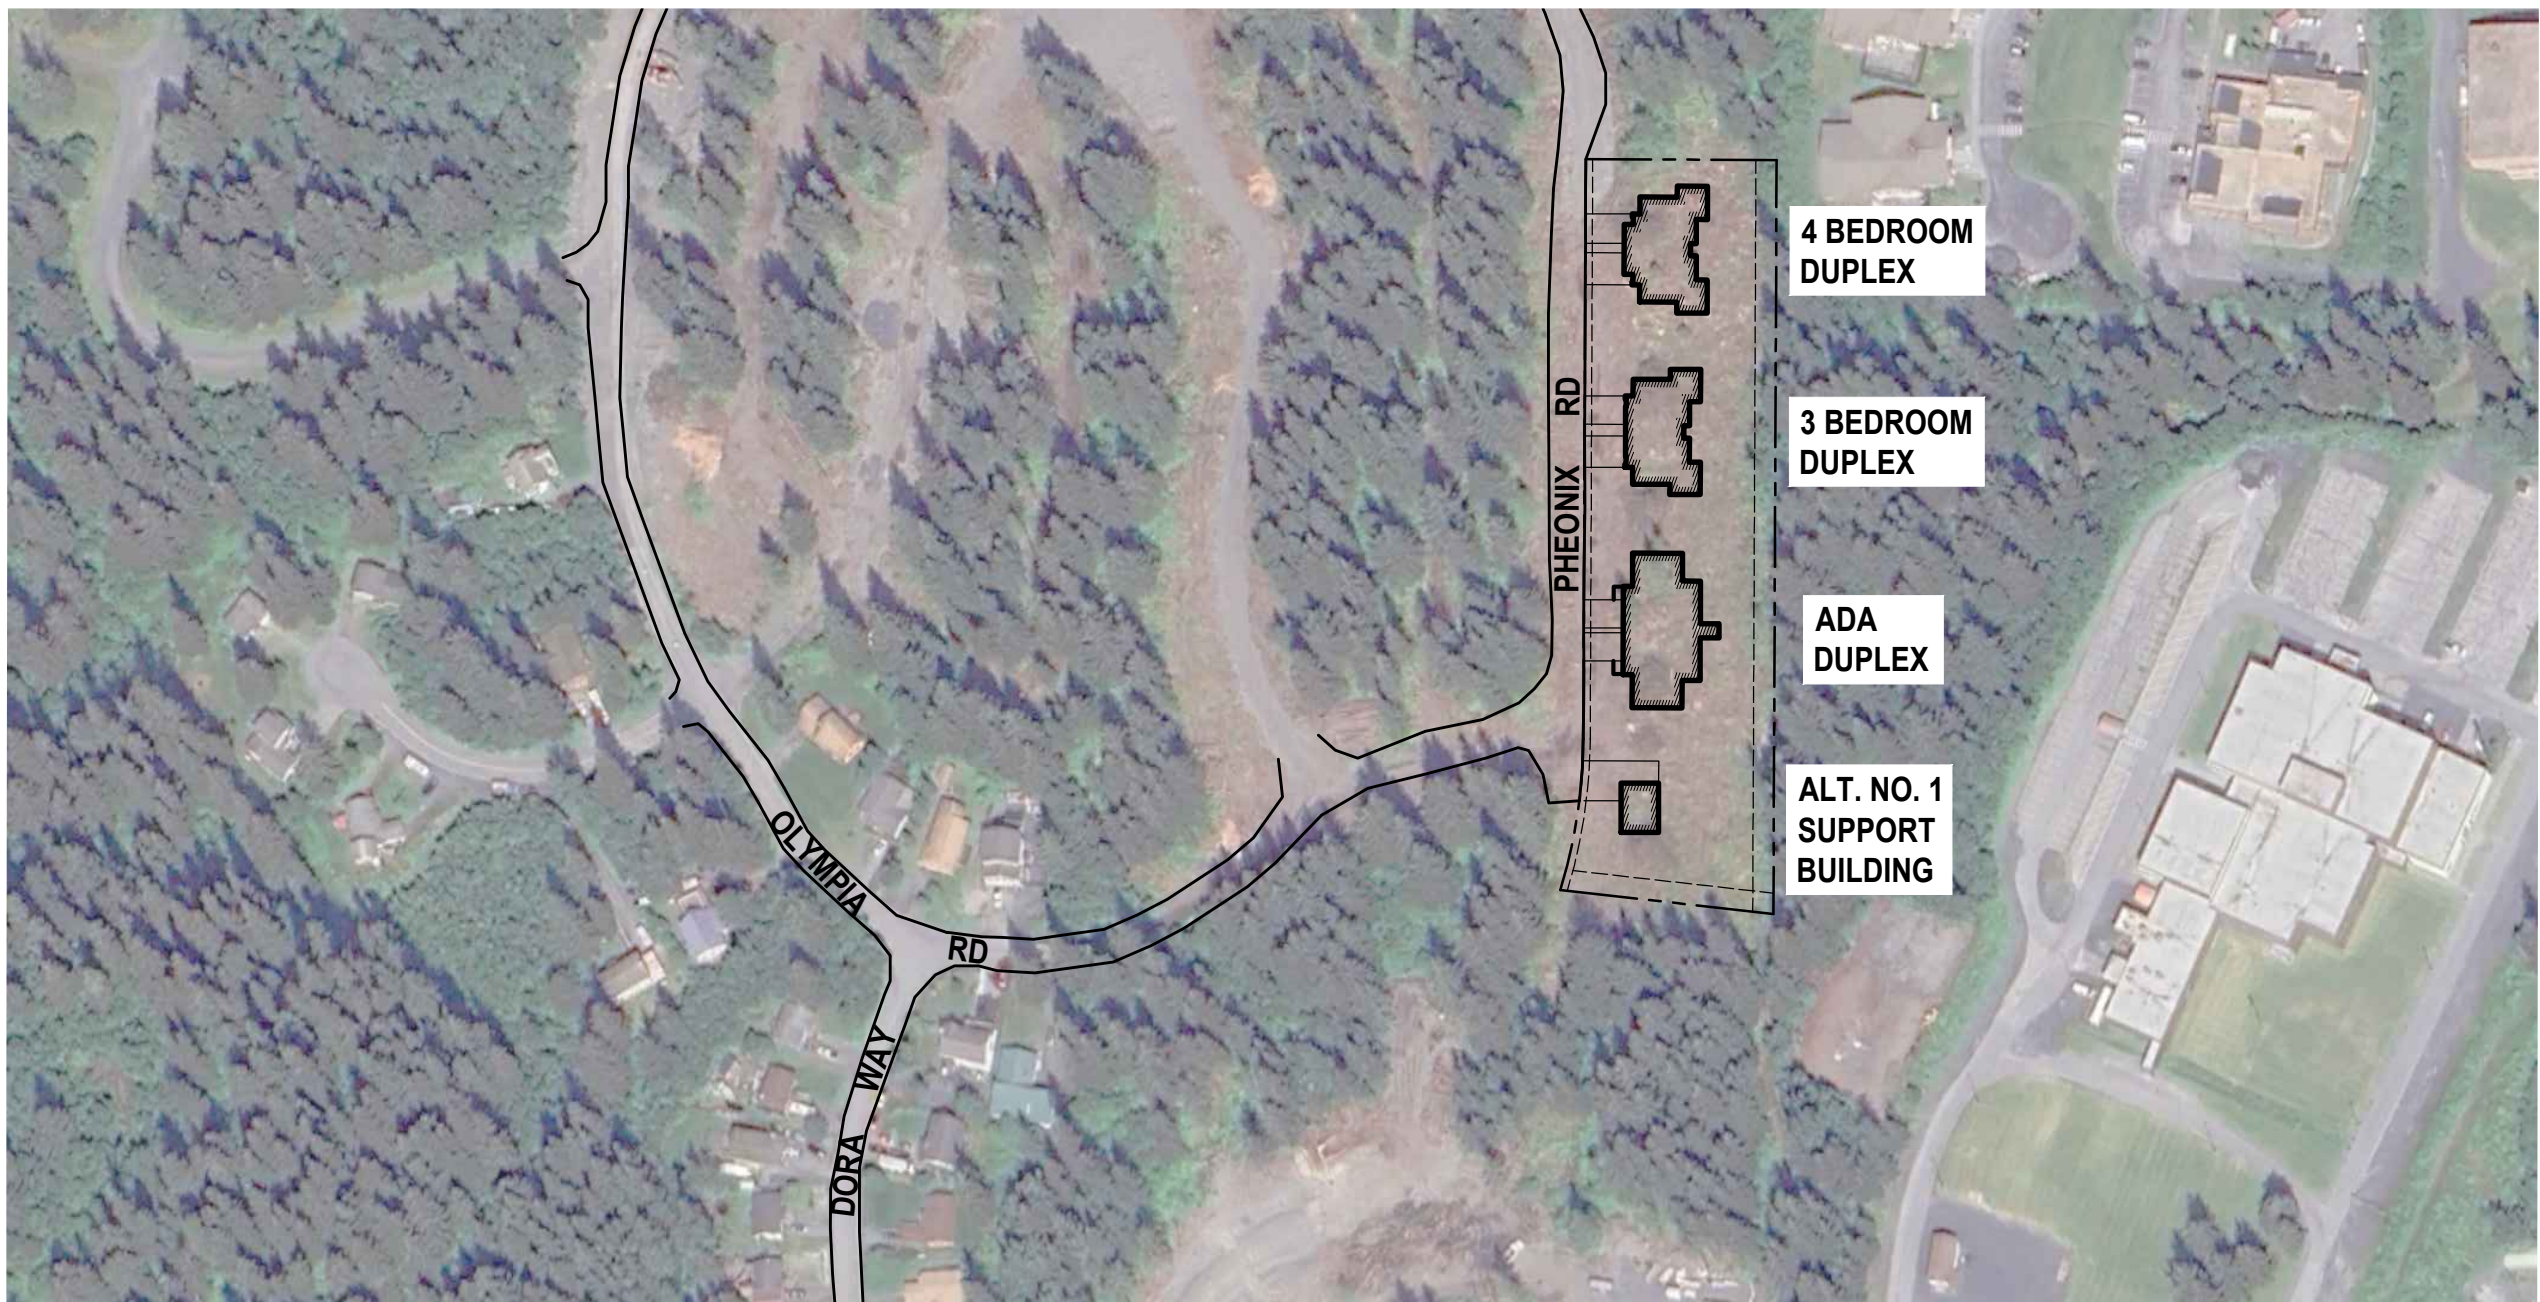

A1 EXISTING SITE
SCALE: NTS

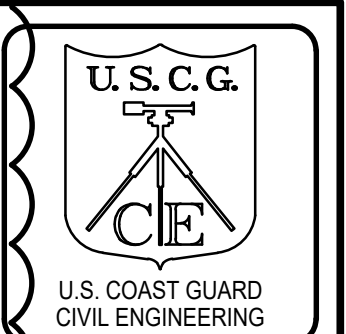

DATE	3/30/2026
MARK	1
DESCRIPTION	AMENDMENT 0003
MEASUREMENT BAR	= 1" (HALF SIZE = 1/2")

USCG PROJECT NUMBER 13611688	USCG DRAWING SERIES NUMBER J13611688	USCG FILENAME J13611688-G-002.dwg	DESIGNED BY SCOTT WORTHINGTON	EDITED BY EMILY HUBBARD	DRAWN BY EMILY HUBBARD	CHECKED BY SCOTT WORTHINGTON
BUS ARCHITECTS ANCHORAGE, AK (907) 562-8076			CONSULTING A/E/ RESPEC COMPANY, LLC A/ECC 163270 ANCHORAGE, AK (907) 743-3200			
709 WEST NINTH STREET, ROOM 817 JUNEAU, AK 99802			USCG PROJECT MANAGER WATT MCGUIRE			

CONSTRUCT SEWARD HOUSING CEU JUNEAU SEWARD	AK	GENERAL
--	----	---------

SHEET ID
SEWARD
HOUSING
G-002

NOTES, ABBREVIATIONS, & LEGEND