

Sarasota National Cemetery Raise & Re-Alignment Project SOW

General Information

The Department of Veterans Affairs, National Cemetery Administration honors veterans with a final resting place and lasting memorials that commemorate their service to our Nation. National cemeteries are national shrines. The standards of maintenance, appearance and operational procedures performed by the contractor at this cemetery shall reflect this nation's concern for those interred there. For this reason, the contractor's strict adherence to the specifications shall be required and shall be essential.

This performance work statement describes the objectives for Sarasota National Cemetery

General Scope of Work

Sarasota National Cemetery needs the raise and re-align of the upright headstones and floral vases to sections 1,2,3,4,5,6,7, 8 and 16 to the cemetery consisting of approximately +/- 18,188 upright headstones and 28 section markers. The work shall consist of removing, cleaning, raising, realigning, and resetting the upright headstones, markers and floral vases that are already in place these sections.

Supplies, Services and Prices/Costs:

Contractor shall provide all labor, supervision, equipment; materials and supplies to perform the raise and re-align to sections 1,2,3,4,5,6,7, 8 and 16 at Sarasota National Cemetery by contractor for these sections.

Place of Performance

**Sarasota National Cemetery
9810 State Rd 72
Sarasota, FL 34241**

SEE ATTACHMENTS AND BURIAL SECTION DRAWINGS.

General Requirements:

Site Manager: A “Site Manager” provided by the Contractor shall be at the work site whenever work is being performed. The “Site Manager” must have a minimum of five (5) years’ experience as a direct supervisor of a commercial landscaping operation that included surveying, soil excavation, and site construction in industrial, commercial, or public sites. The “Site Manager” will ensure all specifications are being met, ensure contract work does not conflict with ceremonies and funerals, and ensure employees are adequately supervised and proper conduct is maintained. At all times when any performance of the work at the site is being conducted by any employee of the Contractor or his subcontractors, the Contractor shall have a representative (this person may or may not be the “Site Manager”) present who has the capability of receiving instructions in the English language, fluently speaking the English language and explaining the work operations to persons performing the work in the language that those performing the work are capable of understanding. The Contracting officer shall have the right to determine whether the proposed representative has sufficient technical and bilingual capabilities, and the Contractor shall immediately replace any individual not acceptable to the Contracting Officer.

Work Hours: Normal working hours are from 7:00 a.m. to 5:00 p.m. CST Monday through Friday. All work will be scheduled within normal work hours of the work week, Monday through Friday only.

Contractor Response Times:

- During Normal Working Hours. The Contractor shall be prepared to shift workers and work areas as necessary to safeguard the cemetery and its visitors and restore the work area(s) to a safe condition. The Contractor shall respond to all normal working hours’ requests made by the COR within 30 minutes of the initial notification.
- Calls by other Government employees other than the COR shall not be acted upon but shall be referred to the COR for review. Repairs shall begin as expeditiously as circumstances allow and should normally be completed within (24) hours of the initial emergency call. The Contractor shall keep the COR fully informed of the situation and what action will be taken to secure and correct the situation.
- Scheduled Ceremonies and Events. A list of scheduled ceremonies will be provided the week prior to the event, and a list of scheduled funerals and other events will be provided the day prior to the service. The Contractor has responsible for staying abreast of all such upcoming events and when in doubt, shall contact the COR for clarification.
- Disruption of ceremonies, funerals, and other special events. The Contractor is responsible for ensuring that no contract work causes any funeral, ceremony, procession, or visitation to be delayed, altered, or otherwise impacted in such a way that the dignity or security of the event is compromised.
- Meetings. The Contractor shall coordinate with the COR on a regular basis to ensure that work in proceeding satisfactorily and that the work will not interfere with any scheduled ceremonies, funerals, or processions. Meetings will be scheduled at least as frequently as shown below and may be requested by either party at any time. Participants in these meetings are not limited to the Site Manager and COR but may include additional Contractor or Government Personnel as required.

Daily: To report on work completed, establish a work schedule and to ensure that no work is being performed at the immediate site of a scheduled interment or ceremony. These daily meetings are also an opportunity for the Contractor to ask questions and ensure he/she understands the off-limit areas, which may vary, depending on the event.

Weekly: To propose work to be done during the coming week, receive the schedule of upcoming ceremonies, discuss work progress and other items as appropriate.

- Record Keeping and Reporting. The Site Manager or his designee shall provide the COR with weekly written accurate reports identifying work completed during the past seven days including the following: All upright headstone/markers that will be raise/realigned as well as all floral vases that were removed/replaced and the sq. yards. of turf renovation (gravesite renovation) shall be recorded per gravesite location and a proposed plan of work for the upcoming week.
- Licenses; Permits; Vehicle, Liability and Workman's Compensation Insurance. The Contractor shall be responsible for obtaining all necessary and current licenses, permits, vehicular insurance and registration, Workman's Compensatory Liability Insurance, property liability insurance etc., prior to the start date of this service. The contractor shall provide the Contracting Officer copies of these policies before commencing work.
- Utility Location. Prior to commencing any excavation or turf removal operations, the Contractor shall confirm the location of any utilities in the work area. Utilities include potable water systems, electrical power, gas, and water and sewer lines. A utility locator company may be brought in to assist in this process at the sole expense of the Contractor.
- Contractor Equipment. The Contractor shall not operate trucks, tractors, and other heavy equipment more than five tons on any turf area except when authorized in writing by the COR.
- Erosion Control. Contractor shall Install and maintain erosion control material/methods to meet local requirements. Copies of these requirements may be reviewed by contacting the COR.
- The Contractor shall provide adequate warning devices, signage, barricades, guards, flagmen or other necessary precautions, as determined by the COR for the protection, safety, and warning to all pedestrians and vehicular traffic within the area. At least four signs will be provided and erected by the Contractor on the perimeter of the burial section being worked on to indicate to the public of work in progress.
- The Contractor is responsible to ensure that all work shall be done in a manner that safeguards all VA visitors, employees, and public. The Contractor shall be solely responsible for any and all actions initiated and/or completed by his/her employees. Furthermore, the contractor and his/her employees shall have a clear understanding of, and be sensitive to, such environmental issues as ground water contamination, wetlands, etc., and be consistent and fully compliant with all applicable Federal, State laws, ordinances, Right-to-Know laws, EPA guidelines, and regulations.
- The Contractor shall schedule an on-site session(s) with the COR to review site conditions; handling, numbering, placement of floral vases; and any other Contractual requirements as determined by either the Contractor or COR prior to beginning work.

Work Scheduling:

- Upon receiving Notice to Proceed (NTP) under this contract, the Contractor and Site Manager shall contact the COR to visit the site and plan the work schedule. The contractor will have all work/services for the base project completed, not to exceed 365 calendar days.
- In planning the work schedule, the following standards will apply:
- Provide schedule of Irrigation repair installation to include location, employees, and equipment.
- All contract work **MUST** be completed as required under this contract in the Burial Section/Border Areas (designated on the contract drawings and provided to the Contractor by the Contracting Officer and/or COR.
- Work Activity Sequence: In burial sections where work consists of irrigation installation and Repairs -- The Contractor shall submit proposed sequence of work activities to COR for approval prior to starting work.
- The contractor shall provide a schedule of re-surveying of any permanent gravesite control monumentation that has been disrupted in each section from the turf renovation or irrigation installation process.
- The contractor shall provide a schedule of any headstone miss-alignment problem cause by the irrigation repair process. The COR will supply contractor headstone spec (height and tolerances per request). Any adjustment to headstones caused by the turf renovation process as well as any cleaning of headstones will be at the contractor's expense pending investigation of cause. (***Note: No headstone shall be removed or leave the individual gravesite).**
- “Work Hours: Work shall be performed between the hours of 7:00 a.m. to 5:00 p.m., Monday through Friday, except for Holidays, unless otherwise directed by the COR. At Contractor request and with the written permission of the COR, work shall also be permitted to be scheduled for weekends and/or Holidays. When emergency situations, that are caused by the Contractor or severe adverse weather prohibits work during the week, then he/she must obtain approval from the COR to work on weekends in order to meet the period of performance. The Government will not compensate the Contractor for any alternate work schedules needed for the Contractor to complete all contract work within the specified project duration time frame. No work is permitted on Veterans Day and Memorial Day and the two days immediately prior to Memorial Day for preparation. Notwithstanding, if any work under this contract shall be performed outside of the VA's normal working hours (8:00 a.m. to 4:30 p.m. Monday through Friday), then Contractor must notify the COR at least 48 hours in advance. Federal Holidays: Memorial Day, Juneteenth, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day, New Year's Day, Martin Luther King, Jr., Presidents Day” or something to this affect.
- Phasing and Work Sequencing: Contract work shall be accomplished in a sequenced manner, with work limited to occurring in no more than one burial section at any given time to minimize overall disruption to the cemetery. Requests to work on more than one burial section at a time may be submitted to the COR for approval. Approval/disapproval will be based on the impact to the cemetery operations and the progress and workmanship of the contractor, as determined by the COR. Work cannot begin in subsequent sections until such time that work has been

completed in prior sections. Submit proposed project work schedule sequence for COR review and approval prior to start of project.

- Record Keeping and Reporting. The Contractor's Project Manager designee shall provide the COR with weekly written accurate reports detailing the section and range of graves in that specific week. These lists will be provided on not less than a weekly basis and shall identify all the above work that took place within the previous seven calendar days. Upon request, the Project Manager will also provide a plan of action for the upcoming week.
- All temporary markers, floral, commemorative, buried permanent floral vases, or other types of decorations and arrangements causing interference with the irrigation operation shall be carefully, and in an orderly manner moved from, and per completion of work, moved back to all gravesites by the Contractor. Contractor may be required to probe each grave site before turf removal to locate floral vases. This is to ensure that floral vases are placed back on the correct burial site. Prior to removal, the Contractor shall verify the location of the items and associated decorations by using tags and a permanent ink marker indicating from which grave the item was removed as well as a graph, notating from which grave each floral vase came from. This is to be coordinated with the COR. ***Note (No headstone/marker shall be removed from the individual gravesite.**
- Any upright headstones broken or damaged by the Contractor shall be reported to the COR or CO by close of business each working day in order that the grave can be properly marked. The Contractor shall be responsible for the cost of the headstone replacement. All headstone replacements must be coordinated with the COR. Any grid or sectional monuments disturbed, displaced or broken shall be replaced by the Contractor at his cost. All grid or sectional monuments disturbed, etc., shall be properly reset by a licensed land surveyor at Contractor's expense. Curbs, roads, walks, turf, trees, utilities, etc. existing above and below the ground that are damaged or disturbed by the Contractor during performance of contract work shall be repaired at the expense of the Contractor. Repairs to the above shall be corrected by the Contractor.

Upright Headstones, Marker and Floral Vases Realignment, Resetting, Backfill

Scope

The realignment, resetting and backfill of all upright headstone markers and floral vases in sections 1,2,3,4,5,6,7, 8 and 16. The Raise, Lower, Realignment, Reset, Clean and Backfill shall consist of upright headstones, markers and floral vases that are already in place which have shifted out of vertical and/or horizontal alignment and plumb, as well as inventorying and assuring accurate placement of gravesites at the Sarasota National Cemetery. Work shall include, but not limited to:

- Extracting upright headstones, markers and floral vases.
- Resetting headstones, markers and floral vases upright.
- Aligning upright headstones, markers and floral vases.
- Backfilling upright headstones, markers and floral vases.
- Tamping/compacting upright headstones, markers and floral vases.
- Cleaning of upright headstones, markers and floral vases

The Contractor shall provide all supervision, professional advice/guidance labor, parts, materials, equipment, and personnel necessary to provide the services defined herein.

(*Note: No headstone shall be removed from the gravesite, headstone must be supported and not allow to rest on the ground/turf).

Phasing and Work Sequencing

All work is to be accomplished in a sequential manner, with work limited to no more than six (6) burial rows of a section at any given time to minimize overall disruption to the cemetery. Requests to work on more than six (6) rows in a section at one time or move to another section before finishing previous section may be submitted to the COR for approval. Approval/disapproval will be based on the impact to the cemetery operations and the progress and workmanship of the contractor, as determined by the COR. Work cannot begin in subsequent rows until such time that work has been completed in prior areas. Submit proposed project work schedule sequence for COR review and approval prior to start of project.

Record Keeping and Reporting

The Contractor's Project Manager Designee shall provide the COR(s) with weekly written accurate reports detailing the section and range of graves in that specific week. These lists will be provided on not less than a weekly basis and shall identify all the above work that took place within the previous seven calendar days. Upon request, the Project Manager will also provide a plan of action for the upcoming week, regarding headstone/marker locations and specific areas where work is being scheduled to occur.

1.1 Upright Headstone Specifications

Raise, lower, realign, reset, and backfill of upright headstones shall be accomplished as follows:

1. Standard upright marble headstones are approximately 42 inches long, 13 inches wide, 4 inches thick, and weigh approximately 230 pounds. **Contractor will immediately report any pre-existing damage to the COR.**
2. All temporary markers, floral, commemorative, buried permanent floral vases, or other types of decorations and arrangements causing interference with the raise and realignment of upright headstone operation shall be carefully, and in an orderly manner moved from, and per completion of work, moved back to all gravesites by the Contractor. Prior to removal, the Contractor shall verify the numbering sequence and location of the headstone and associated decorations by using tags and a permanent ink marker indicating from which grave the item was removed.
3. Headstones will be removed from their sockets by using wooden, and or metal clamps. If metal clamps are used the area that contacts the headstone must be protected with a rigid fabric that will prevent damage to, and marking of, the headstone. Clamps may be attached to a Bob Cat or similar Machine to extract headstone from socket. Extreme care will be used not to scratch or damage headstones in any manner. Contractor is responsible for restoring all damages caused to turf and headstones during performance of this work. Headstones are to be raised, realigned, and lowered in the following manner:
 - All headstones are to be extracted from the socket.
 - ALL sockets are to be re-dug by hand to allow for a 3" perimeter around all sides of the headstone and to a sufficient depth so that a 3" compacted base can be established, allowing the stone to extend out of the ground at a height of 24-26 inches to the top of the arch on the standard headstone.
 - (Note: In areas where smaller than standard size headstones may occur, Contractor shall coordinate specified measurements and dimensions of required work with COR.)
 - Moistened Crushed Limestone Base Material (graded aggregate sizes ranging from crushed fines up to ¼" maximum) will be placed around all sides of the headstones and in the bottom of the socket before being thoroughly tamped to full compaction at each three (3) inch vertical interval, leaving the last 3 inches at the top to have tamped topsoil. The government will not provide any material. The Contractor is required to provide these materials. (Note: Moist Class II Road Base may be considered as an alternate.
 - Contractor shall obtain approval from the COR for any substitute base material).
4. Straight Rows
 - Headstones shall be set vertically plumb in all directions, in all cases in a line vertically and laterally, and where possible transversely (coordinate with COR), with headstones of other graves using a top string, a back of headstone string line, and a side of headstone string line.
 - **Maximum vertical, lateral, and transverse tolerance of any headstone off the alignment string lines and/or marks shall be 1/8" or less.**

- All measurements and string line set ups shall be taken from established section layout control points, **not from previously set headstones**, unless otherwise directed by the COR. In situations where there is no monumentation, a top string shall be centered over the arc of the headstone for vertical alignment.
- The consistency of the row will be used as the medium.
- At no time, will any headstone be reset in a totally new socket unless otherwise directed by the COR. Raised and realigned headstones in all soil and terrain shall be firmly in place so that headstones are rigid with no give or play.

1.2 Irregular Terrain

1. When sloping and uneven ground conditions exist in burial sections, all headstones and markers will be set at field approved heights and levels using multiple keystones, back strings, top strings, and side strings to provide a flowing transition through uneven terrain.
2. Field guidance will be provided by the COR upon the written request from the Contractor. The established field guidance will overrule the height requirements that will be found in other parts of this specification.

1.3 Handling of Headstones

1. Prior to ANY removal of the existing headstones or markers from any row, the Contractor **MUST** verify to the COR's satisfaction that permanent gravesite control monumentation has been established **AND** approval of the Contractor provided as-built drawings has been obtained **IN WRITING** from the Contracting Officer and/or the COR's.
2. In cases where headstone sockets need to be realigned/shifted, and/or re-dug, the headstone sockets (holes) to receive headstones shall be dug by hand and/or mechanical devices to a sufficient depth so that 24-26 inches of the headstone is extending from the topsoil level of the sod to the top of the arc on the headstone. Contractor shall not dig a headstone socket wider than twelve (12) inches, twenty (20) inches in length, or exceed a depth of 20 inches that may cause the headstone to settle below height requirement.
3. The measurements between rows of headstones and headstones within each row may differ from one section to the next, discuss with COR where this is found to occur. These measurements must be adhered to as closely as possible. Some variances may be allowed to keep a uniform appearance of headstones being aligned. Headstones will be accurately and precisely reinstalled on the correct gravesites with the utilization of temporary grave plotting maps, existing permanent control markers where available and temporary Contractor installed control markers accurately and precisely installed at the ends of each gravesite row.
4. The realign crew is to start on a row of headstones close to the center of the section to be realigned. Headstones are chosen to be "key" stones. These keystones are ones that are visibly in line with most the rest of the headstones in the row and are as close as possible to the proper measurements for that section of headstones. "Key" stones are to be chosen and utilized at a maximum of every 10th headstone (or more frequently in areas of rolling terrain). These keystones are then aligned by leveling front and back and side-to-side, and raised or lowered to a height of 24-26(or other measurement designated by COR) inches above topsoil level (this includes topsoil on sod).

5. At the start of work in each burial section, the first row of reset/realigned headstones in each burial section is to be inspected by COR for appearance, spacing, depth, alignment, plumbness, height, accuracy, and smoothness in grade transition. No further setting of headstones shall be done until this first row has been inspected and accepted by the COR. It is the Contractors responsibility to notify the COR 24 hours in advance of when each of these inspections will be needed.
6. Tape measures and Heavy strings or lines must run along the backs, sides, and tops of these keystones. The Contractor shall mark the lines with the proper measurements for the section being aligned. All remaining headstones in the row are then aligned along the strings front to back and side-to-side even with the measured marks on the line. Each headstone is leveled and plumbed front to back and side-to-side keeping the back of the headstone along the string and the side of the headstone along the measured mark. Maximum vertical, lateral, and transverse tolerance of any headstone off the alignment string lines and/or marks shall be 1/8", or less. Each headstone is also raised or lowered as necessary to ensure a uniform measurement of 24-26 inches above topsoil level to include topsoil of sod. The headstone is then aligned along the string front to back and side-to-side even with the measured mark on the line. The headstone is leveled and plumbed front to back and side-to-side keeping the back of headstone along the string and the side of the headstone along the measured mark.
7. The alignment of the headstones shall be checked frequently during this process because the tamping may move the headstone out of level or off the mark on the line. This process of raising and realigning is repeated for each row of headstones. Upright headstones in all completed work areas shall be firmly set and anchored in place with no movement from forces subjected by the COR.
8. Any upright headstones broken or damaged by the Contractor shall be reported to the Cemetery Administrator or COR by close of business each working day in order that the grave can be properly marked. The Contractor shall be responsible for the cost of the headstone replacement. All headstone replacements must be coordinated with the COR. Any grid or sectional monuments disturbed, displaced or broken shall be replaced by the Contractor at his cost. All grid or sectional monuments disturbed, etc., shall be properly reset by a licensed land surveyor at Contractor's expense. Curbs, roads, walks, turf, trees, utilities, etc. existing above and below the ground that are damaged or disturbed by the Contractor during performance of contract work shall be repaired at the expense of the Contractor. Repairs to the above shall be corrected by the Contractor within fourteen (14) workdays, unless otherwise agreed to with the COR.

1.4 Headstone Marker Cleaning

1. The VA is the authority on determining what is clean and what is not clean. The definition of
2. a “clean stone” is that the stone has no dirt lines or watermarks and no visible signs of fungi.
3. Cleaning shall be accomplished with the use of a high-pressure washer (pressure not to exceed 800 PSI) and an acceptable cleaning agent that that does not harm the stone and that is environmentally acceptable.
4. The cleaning will consist of the removal of stains, dirt, grass, or fungi leaving the marker undamaged and in a clean, acceptable condition.
5. Cleaning shall be completed with the use of a high-pressured washer (not to exceed 800 PSI) and an acceptable cleaning agent that doesn’t harm the grave marker and/or turf. The cleaning will consist of the removal of stains, dirt, grass, or fungi leaving the marker undamaged and in an acceptable appearance.
6. Cleaning shall be completed after re-installation.
7. The Contractor shall be responsible for any turf or sod damaged during the cleaning process.

1.5 Guaranty

1. The Contractor shall guaranty all work for a period of one year (182 calendar days) after final inspection and acceptance of the entire project by the Government.
2. Any headstone adjusts, realign, reset, and/or backfill workmanship that does not meet the specified requirements (including specified tolerance requirements) at the end of this guaranty period is to be reworked, adjusted, and corrected by the Contractor at no additional cost to the government.
3. Remainder of all other work related to this project is to be warranted for a period of one (1) year after final acceptance by the government. Work performed under the Guaranty shall be corrected within ten (10) workdays from receipt of notification or as directed by the COR.

1.6 Clean Up and Repair of Damaged Areas

- a. Upon completion of the work, the Contractor shall remove all debris, rubbish, and excess material from Cemetery Property.
- b. A temporary storage site may be provided by the COR for short-term storage (not to exceed two weeks).
- c. At the end of each day the Contractor shall remove all debris from the work site and the cemetery. The Contractor shall always ensure that rubbish and trash generated by the Contractor is kept clear of vehicular and pedestrian traffic throughout the site. This may include sweeping or washing down the roadways of dirt and debris. The Government shall not provide receptacle(s) for disposal of debris related to this contract. All unsuitable/unusable materials are to be disposed of off station.

- d. Contractors shall be responsible for cleaning any cemetery structures that are soiled or stained because of contractor's performance. The Contractor shall wash-down with water all soiled or stained structures and grounds at the end of each workday. No chemicals are to be during the wash down. The Contractor shall bear all costs associated with washing and cleaning. Any such soiled or stained areas shall be brought to the immediate attention of the COR prior to washing/cleaning.
- e. In areas where planting and turf work have been completed, clear the area of all debris, Spoil piles, and containers. Clear all other paved areas when work in adjacent areas is completed. Remove all debris, rubbish, and excess material from the Cemetery.
- f. Contractors shall be responsible for replacement of any cemetery structure, to include turf, curb, road pavement, headstone or marker, valve boxes, control markers, sprinkler heads, which is chipped, marred, damaged and/or ruined at the fault of the Contractor shall bear all costs associated with replacement and reinstallation. Any such damage shall be brought to the immediate attention of the appointed COR prior to repair/replacement/installation.
- g. The Contractor shall either repair or replace the property or reimburse the Government the full amount for all property damage(s). The Contractor shall be aware that Government property - beyond standard structures and equipment - also includes markers, monuments, trees, beds, and turf, i.e. - wounded trees or scalped turf, roads, curbs, potable water system as well as headstones/markers shall be repaired or replaced.
- h. The contractor and COR shall inspect the trees and shrubbery of a schedule renovation area prior to the start of the renovation and note all abnormalities or existing conditions. Another inspection will be conducted after the completion of the renovation and the contractor will make all corrective actions to any noted damage. A licensed arborist will complete all corrective actions to damaged trees.
- i. Where existing or new turf areas have been damaged or scarred during planting and construction operations, restore disturbed area to their original condition.

1.7 WORK ENVIRONMENT:

- a. All work under this contract will be performed primarily out-of-doors and personnel performing these services will be exposed to wind, sun, cold, dampness, fog and rain. These conditions, may, at times, be extreme. The contractor shall take all necessary precautions to protect his/her employees from the elements to the maximum practicable extent. No work shall be done when the ground is too wet or in an otherwise unsuitable condition for planting. Submit a written request to the COR stating the special conditions and proposal variance.
- b. Due to the sensitive mission of the cemetery, the work often requires contact with, and exposure to, grieving individuals. Contractor personnel must exercise and exhibit absolute decorum, courtesy, and respect while within the cemetery or at its perimeter or entrances. Inquiries from cemetery visitors shall be politely referred to Government cemetery staff. Gratuities of any kind are strictly prohibited.

1.8 CEMETERY RESPONSIBILITIES

- a. Locate the temporary gravesite control monumentation markers if applicable.
- b. Verify the location of all gravesites within the scope of work.

1.9 CONTRACTOR-FURNISHED ITEMS AND RESPONSIBILITIES

- a. The Contractor is responsible for supplying all equipment, personnel, tools, supplies and materials necessary to perform the services required by this contract.
- b. Contractor-furnished items necessary to perform work as required under this contract shall be furnished, maintained, and operated by the Contractor and shall be consistent and fully compliant with all applicable OSHA, Federal, State, County, City laws, ordinances, and regulations.
- c. Materials and supplies procured for the performance of the contract by the Contractor shall be consistent and fully compliant with all applicable Federal, State, County, and City laws, ordinances, and regulations.
- d. The Contractor is responsible for the supply, maintenance, and repair of all Contractor-owned equipment. This includes minor maintenance/repair and minor operating parts for equipment such as lubrication, oil changes, spark plugs, gaskets, cotter pins/keys, electric extension cords, etc., to keep all equipment in good operational condition throughout the period of performance of this contract.
- e. Contractor Staging area location must be approved by the COR. Contractor shall base operations out of this staging area, using it for materials and equipment storage, administration, employee toilets, trash dumpster area, employee parking, employee lunch/break area, etc. Because of the limited area of the cemetery for staging the contractor may have to secure/arrange an alternate location off site at his expense for spoils or other material/equipment storage.
- f. The Contractor is responsible for ensuring that all its motor vehicles and equipment meet State inspection, safety, licensing, registration, and insurance requirements.
- g. Electricity: In case the Contractor requires electricity while in performance of this contract, the Contractor shall provide and utilize portable generators as necessary to complete the work. If Contractor hookup to Cemetery's electrical distribution system is approved by COR, Contractor is to provide all necessary connections and complete connection work in accordance with NEC requirements.
- h. Refuse Facilities: The Contractor shall provide his/her OWN refuse facilities of which will be located only in the COR approved "Staging Area" at contractor's expense. Contractor shall not place dumpsters or refuse facilities in any other location at the cemetery other than the approved staging area.
- i. The Contractor is required to dispose of all debris and other waste materials generated by his/her work at a licensed off-site landfill unless otherwise directed by the COR. The Government shall not provide receptacles for disposal of debris because of the services provided under this contract. In case of Hazardous Materials, the Contractor is required to obtain required disposal permits from the State regulatory agency.

- j. Portable Chemical Toilets: The Contractor shall provide portable chemical toilets for use by workmen as necessary to comply with applicable OSHA requirements at contractor's expense. These portable toilet facilities shall be kept clean and free of excessive odors, insects, etc. Portable toilet facilities will be in the COR approved Contractor Staging Area only - it is not permissible to locate portable toilet facilities in any other locations throughout the cemetery. Use of the permanent cemetery toilet facilities by workmen is strictly prohibited throughout the duration of this contract.
- k. Only Contractor's equipment and supplies (property) required performing work under this contract shall be stored at the Contractor's designated storage area at the end of each workday. No Contractor equipment maintenance repairs of any kind can be done on cemetery property without the prior approval of the COR.
- l. SAFETY: Any actions of the Contractor must meet all safety requirements of Sarasota National Cemetery's Safety Officer, Department of Veterans Affairs, OSHA, and the State. It is incumbent upon the Contractor to be familiar with these requirements. Copies of all referenced safety standards may be reviewed by contacting the Sarasota National Cemetery Safety Officer. "Safety" shall also include the Contractor having a safety representative who maintains regular and routine contact with the Safety Officer of Sarasota National Cemetery.

Price Schedule of Services

ITEM NUMBER	DESCRIPTION OF SUPPLIES/SERVICES	QUANTITY	UNIT
0001	Removing, cleaning, raising, realigning, and resetting the upright headstones, markers and floral vases that are already in place in sections 1,2,3,4,5,6,7, 8 and 16 (Approximately +/- 18,188 upright headstones and 28 markers) in accordance with the attached Statement of Work Contract Period: Base POP Begin: POP End:	1	JB

UPRIGHT HEADSTONE REALIGNMENT DIAGRAMS

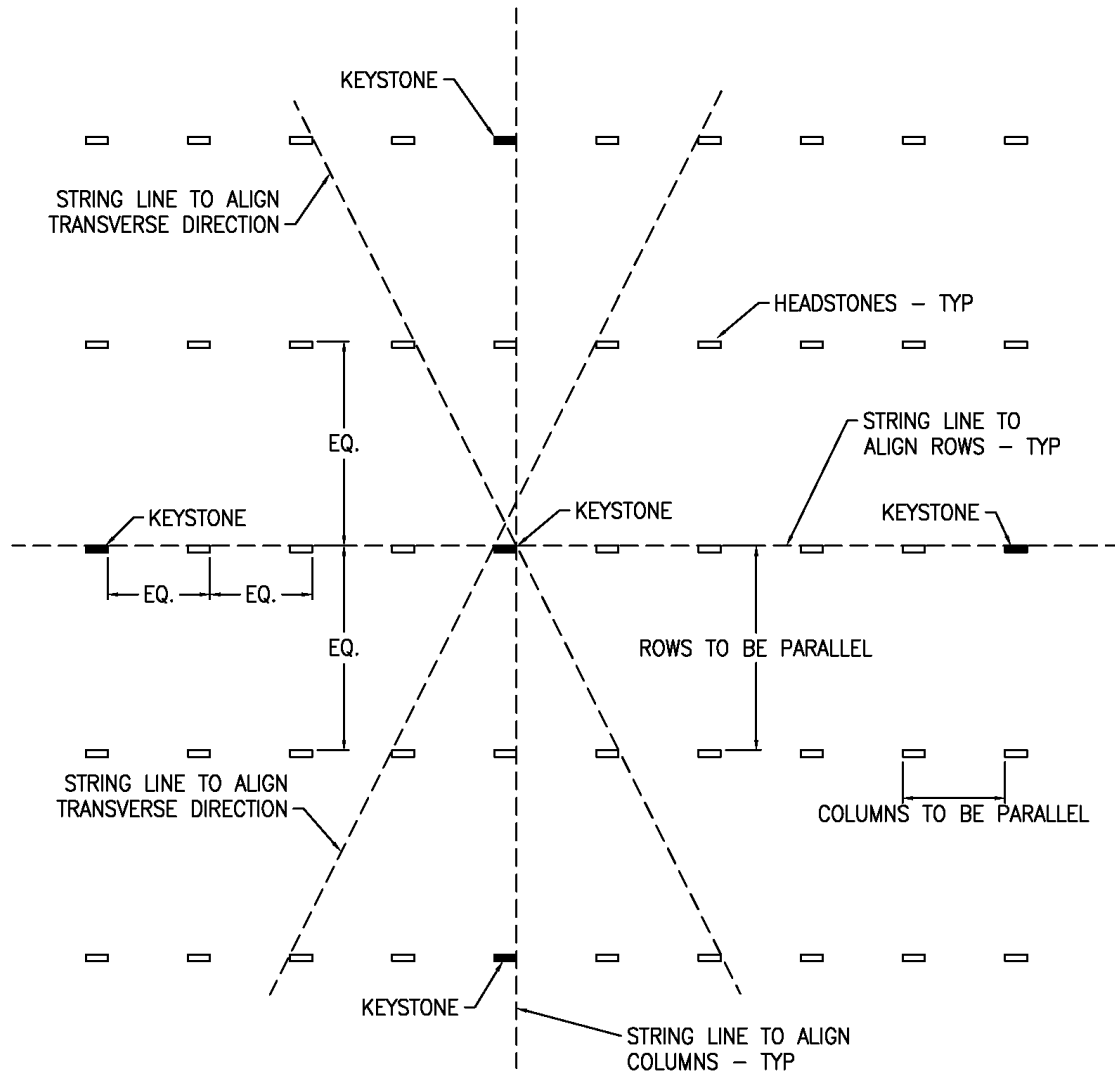


FIGURE 2
PLAN VIEW OF
BURIAL SECTION REALIGNMENT

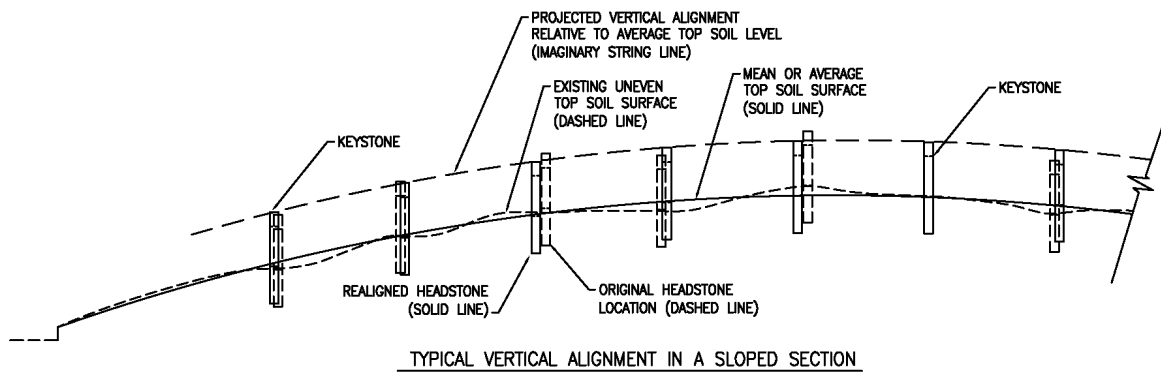
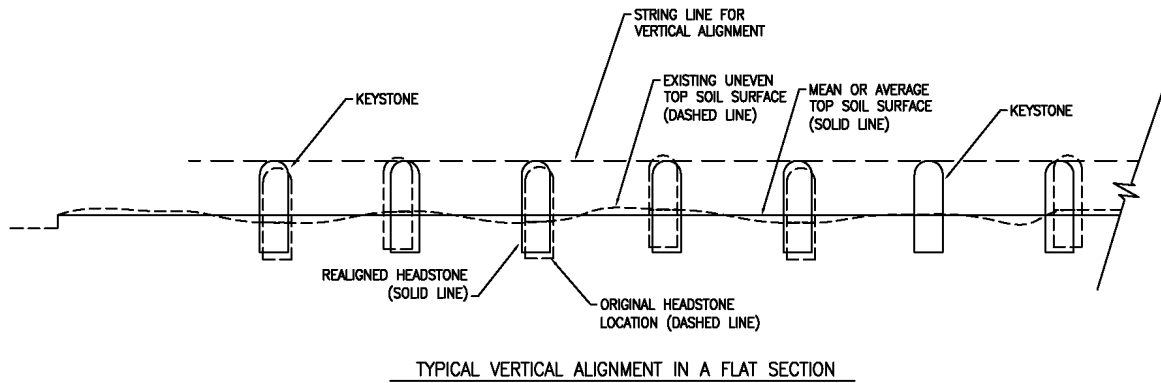


FIGURE 3
ELEVATION VIEW OF
BURIAL SECTION REALIGNMENT

WORK SUMMARY & PROGRESS REPORT

UPRIGHT HEADSTONE RAISE & REALIGNMENT

WORK SUMMARY & PROGRESS REPORT		Period Covered:	From:	To:
<u>Cemetery Location:</u> Sarasota National Cemetery 553 AL-165 Ft. Mitchell, AL 36856		Contractor Information:		
<u>Project Title:</u> Raise/Re-Align Shrine project				
Contract No:				
<i>Inspection / Acceptance: The Contractor shall only tender for acceptance those items that conform to the requirements of this contract. The Government reserves the right to inspect or test some or all of the services that have been tendered for acceptance. The Government may require re-performance of nonconforming services at no increase in contract price. The Government shall exercise its post-acceptance rights:</i> <i>1. Within a reasonable time after the defect was discovered or should have been discovered; and</i> <i>2. Before any substantial change occurs in the condition of the item unless the change is due to the defect in the item.</i>				
WORK COMPLETED & SUBMITTED FOR ACCEPTANCE (This form is not to be used as an Invoice)				
1.	Section keystones have been properly chosen with the approval of the COR in order to achieve a smooth, flowing transition between the rows and columns. Keystones have been set in accordance with the requirements using a licensed surveyor.	No. of Keystones & Section #'s:		
		Date Completed:		
2.	Upright headstone sockets are dug with a 3-inch minimum clearance on all four sides and the bottom of the headstone to meet the height and alignment requirements. Sockets are clean and free of loose dirt and debris. The crushed stone base material has been added to the correct level and fully compacted.	Quantity & Section #'s:		
		Date Completed:		
3.	Upright headstones in burial sections are uniform in height (25") above ground (20" for older/smaller headstones), horizontally and vertically plumb, with inscriptions visible, and installed to ensure a pleasing top line while compensating for irregular terrain (sloping and uneven ground). Transverse and lateral alignment is within the maximum allowable tolerance of 1/8" and vertical alignment is within one degree of fully vertical when measured on front and sides using a digital level. COR has randomly sampled the headstones to verify height and alignment.	Quantity & Section #'s:		
		Date Completed:		
4.	Completed raised and realigned headstones in all soil and terrain conditions are firmly set in place so that the headstones are rigid with no give or play. COR has randomly checked to assure headstones are firmly set in place.	Section Numbers:		
		Date Completed:		
5.	Headstones otherwise present a neat overall appearance in a line vertically, laterally & transversely and provide a uniformly flowing transition throughout the Section and with adjoining Sections.	Section Numbers:		
		Date Completed:		
6.	Headstones have been cleaned in accordance with the contract requirements.	Quantity & Section #'s:		
		Date Completed:		

Report below any circumstances which may have adversely affected work progress such as weather, strikes, delays by the Government, etc.			
Signature of Contractor:	Date Signed	Signature of COR	Date Signed
<i>Note: Contractor shall sign confirming that services indicated have been completed. Government shall also sign in acknowledgment of receipt of the Progress Report.</i>			

Duplicate Form as Necessary

-- Raise & Re-Alignment Project SOW END--