

April 28, 2026

Design Percent Completion: 100%

Statement of Work

CHAPEL ACTIVITY CENTER (CAC) INTERIOR REFRESH, F528

VANCE AIR FORCE BASE, OKLAHOMA

FACILITY PROJECT ID 1019545

PREPARED BY JAHNIA WRIGHT

POC: JOMARA ORTIZ



INDEX

PART 1	GENERAL	2
1.01.	PROJECT DESCRIPTION	2
1.02.	INSTRUCTIONS TO BIDDERS	2
1.03.	LOCATION OF WORK	2
1.04.	SCOPE OF WORK	2
1.05.	CHANGES	6
1.06.	WARRANTY	7
1.07.	SCHEDULE OF WORK	7
1.08.	WORK RESTRICTIONS	7
1.09.	CONTRACTOR’S REPRESENTATIVE	9
1.10.	PROVIDED SERVICES AND UTILITIES	10
1.11.	INSPECTION	10
1.12.	EXCESS MATERIALS (EXCLUDING HAZARDOUS MATERIALS OR WASTE)	10
1.13.	SPECIAL MATERIALS	10
1.14.	MATERIALS	11
PART 2	EXECUTION	12
2.01.	SITE SAFETY REQUIREMENTS	12
2.02.	INSTALLATION	12
PART 3	SITE INFORMATION	13
PART 4	APPENDICES	14
4.01.	APPENDIX A – SITE PHOTOS	16
4.02.	APPENDIX B – BID FORM	19
4.03.	APPENDIX C – DRAWINGS	21
4.04.	APPENDIX D – SCHEDULE E	34

PART 1 GENERAL

1.01. PROJECT DESCRIPTION

- A. The work covered under this Statement of Work shall consist of an interior refresh of Facility 528 and any incidental work necessary to provide a complete and usable finished product.

1.02. INSTRUCTIONS TO BIDDERS

- A. As part of the bid package the Contractor shall submit a completed copy of *APPENDIX B – BID FORM*, along with all required documentation as stated in Sam.gov.

1.03. LOCATION OF WORK

- A. Location of work to be accomplished under this statement of work is at Vance Air Force Base (AFB). Vance AFB is located three miles south of the City of Enid, Oklahoma. Facility 528 is located northeast of the intersection of Elam Road and Brown.

1.04. SCOPE OF WORK

- A. The Contractor shall furnish all supervision, labor, equipment, consumable materials, supplies, tools, and other items to complete the construction as listed in the Scope of Work. All quotes shall include all shipping charges for completion of the project. The contractor will coordinate all work with *ASRC Federal (ASRC)* Construction Management prior to execution. The list of items below are to be considered the general Scope of Work for the project.
- B. The Contractor shall field verify location of work, dimensions, and existing site conditions prior to commencing work. The Contractor shall contact ASRC Construction Management for any discrepancies with the Scope of Work.

- C. Additional details are described below:

1. DEMOLITION

- a. Refer to *APPENDIX C – DRAWINGS, SHEETS ID101 DEMOLITION PLAN, ID102 KITCHEN DEMOLITION and ID103 RESTROOM DEMOLITION*, for location and details of work.
- b. Follow all recommended safety protocols prior to beginning demolition on each work phase.

-
- c. Dispose of demolished materials in accordance with all applicable statutes and limitations.

2. ASBESTOS ABATEMENT

- a. Refer to *APPENDIX C – SHEET D101, DEMOLITION PLAN*, for location of work.
- b. Follow all recommended safety protocols prior to beginning demolition of VCT as shown in *APPENDIX C – SHEET D101, DEMOLITION PLAN*.
- c. Dispose of asbestos waste in accordance with the Oklahoma Asbestos Control Act. Refer to the Oklahoma Asbestos Control Act for personal protective equipment (PPE) and certification requirements. Ensure all asbestos waste is disposed of at an accredited asbestos disposal facility.
- d. Ensure abated asbestos flooring waste that are staged for disposal are sealed with minimum 6 mil poly sheeting or bags with asbestos hazard warning labels to prevent release of fibers during transport.
- e. Ensure all OSHA 1910.132-138 standards are enforced as they apply to the project.
- f. Ensure any abatement areas that are in operation inside an occupied facility are equipped with negative air pressure containment. Any abatement of resilient flooring/mastic that includes mechanical removal, such as chipping and grinding, will require negative air pressure containment and subsequent air clearance testing.
 - 1. Cleaning – All abatement areas will undergo a thorough cleaning to ensure fibers do not linger in occupied areas and cleanups will be inspected by ASRC Construction Management and a Civil Engineering Environmental (CEV) representative.
- g. Provide the following submittals prior to construction to ASRC Construction Management:
 - 1. Copies of all asbestos manifests signed by the disposal facility and complete with updated asbestos waste weights.
 - 2. Training certificates for all contractor personnel who will be handling asbestos on the installation.
 - 3. Asbestos Work Plan detailing how abatement will be accomplished at Vance AFB and submitted prior to start of project for Environmental review/approval.
 - 4. If applicable, all air clearance testing records relating to use of a negative air pressure containment.

h. Base Procedures

1. The Contractor will prepare/submit a template waste manifest complete with the predicted waste quantity per phase of abatement and complete receiving facility information to ASRC Construction Management so CEV can obtain a government signature prior to the waste departing the Installation.

3. EXISTING FURNITURE

- a. For each work phase, Contractor shall relocate all furniture obstructing the work zone.
- b. Remove existing furniture and reserve for future reinstallation.
 1. All relocated furniture shall be restored to pre-existing condition upon work phase completion; and prior to commencing other phasing work.
 - a. Users are responsible for removing computers, telephones, printers, and other electronic equipment prior to commencing work and replacing after work phase is completed.

4. FLOORING PRODUCTS

- a. Refer to *APPENDIX C – DRAWINGS, SHEET I101 – FINISH PLAN, I102 – KITCHEN FINISH PLAN, I103 – RESTROOM FINISH PLAN* for location and details of work.
- b. Refer to *APPENDIX C – DRAWINGS, SHEET IN601 – FINISH SCHEDULE*, for finishes.
- c. Contractor to provide adhesive for all flooring materials.
 1. Subfloor:
 - a. *Prepare subfloor in Room 24 with ¼” plywood for installation of new flooring.*
 - b. *Subfloor is to be screwed to the existing ¼” plate steel raised base floor.*
 2. Carpet:
 - a. *Product to be provided by Owner.*
 3. Ceramic Tile
 4. Rubber Wall Base

5. Transition strips:

- a. *Install new transition strips to match wall base as needed between flooring materials and where change of level exceeds ¼".*

6. Threshold

- a. *Replace with like kind.*

5. PAINT

- a. Sherwin Williams brand was utilized as the standard of design. The Contractor may utilize the standard or submit an equivalent product for review.
- b. Prepare surface of wall, doors, door frames and cabinets prior to applying coat of paint. This includes repairing any dents, holes, or other imperfections on the surface.
- c. Contractor to apply a minimum of two coats in required locations.

6. CEILING TILES

- a. Refer to *APPENDIX C – DRAWINGS, SHEET I101 – FINISH PLAN*, for location of work.
- b. Refer to *APPENDIX C – DRAWINGS, SHEET IN601 – FINISH SCHEDULE*, for finishes.

7. KITCHEN, ROOM 22

- a. Refer to *APPENDIX C – DRAWINGS, I102 – KITCHEN REFLECTED CEILING PLAN, I103 – KITCHEN FINISH PLAN, IN601 – FINISH SCHEDULE, IN401 – KITCHEN ELEVATIONS, and IN402 – KITCHNE ELEVATIONS*, for location and details of work.

1. Cabinets:

- a. *Upper and base cabinets to be added on North wall of kitchen. Refer to APPENDIX C – DRAWINGS, SHEET IN402 – KITCHEN ELEVATIONS.*
 - 1. *In the added upper cabinet, contractor to drill a hole from the bottom of the upper cabinet for microwave cord connection.*
 - 2. *Contractor to provide new case work like kind to existing casework.*
- b. *Contractor to apply minimum of two coats of paint in required location.*

- c. Prepare surface of cabinets prior to applying coat of paint. This includes repairing the surface for any dents, holes, or other minor imperfections.*
- d. Only the exterior of the cabinet doors, drawers and sides of the cabinet will be painted i.e.: cabinet door and drawer fronts and the sides of the cabinets, and paint application.*
- e. Prepare surface of walls prior to applying coat of paint. This includes repairing the surface for any dents, holes, or other imperfections.*

8. APPLIANCES

- a. Contractor to test and verify all mechanical and plumbing installations along with any corrections if a test failed. Refer to 2024 IPC, IMC and IFGC on ICC Codes.
- D. The Contractor shall always maintain clean areas free of clutter and debris during construction. After the work is completed, clean site to preconstruction conditions, or better.
- E. Protection of Government Property
 - 1. Take special care to protect Government property. Return areas damaged as a result of construction under this contract to their original condition. In addition to FAR 52.236-9, Protection of existing vegetation, structures, equipment, utilities, and improvements, perform the following:
 - a. Remove or alter existing work or facilities in such a manner as to prevent injury or damage to any portion of the existing work or facilities to remain.
 - b. Repair or replace portions of existing work altered during construction operations to match existing or adjoining work, as approved by ASRC Construction Management. At the completion of operations, existing work must be in a condition equal or better than that which existed before any new work started.

1.05. CHANGES

- A. No oral statement by any person other than the Contracting Officer as provided in the Federal Acquisition Regulation (FAR) will in any manner or degree modify or otherwise affect the terms of this contract.

1.06. WARRANTY

- A. The Contractor shall provide a standard 1-year Warranty for all labor and material from date of the base's acceptance of completion in accordance with Federal Acquisition Regulation (FAR) clause 52.246-21. For warranted items furnish the Manufacturer's original warranty accompanied by a copy of the supplier's receipt showing place of purchase, telephone number of supplier, address, delivery order if applicable and ticket number.

1.07. SCHEDULE OF WORK

- A. The Contractor shall be responsible for establishing a schedule to meet construction time.
- B. The Contractor shall submit a schedule of all project work in advance to ASRC Construction Management indicating all work activities including required interruptions of utilities, facilities activities, or traffic flow.
- C. The Contractor shall complete work on this contract such that interferences to necessary activities within and adjacent to the construction site are minimized and all Government property and personnel are always protected from incidental damage.
- D. The Contractor shall coordinate work of all trades to prevent any conflicts. The Contractor shall resolve any conflicts of components before proceeding with construction.

1.08. WORK RESTRICTIONS

A. EXISTING UNDERGROUND UTILITIES

Any underground utilities within the work areas will initially be located and identified with paint markings on the surface by Vance AFB personnel. The Contractor shall maintain all utility markings, after base personnel have located them, for the duration of the contract. The Contractor shall obtain an approved Air Force Form 103, BASE CIVIL ENGINEERING WORK CLEARANCE REQUEST before beginning any underground work. ***The Contractor shall notify ASRC Construction Management at least two weeks in advance of desired commencement of work.*** The Contractor is responsible for repairing any utilities damaged during construction.

B. WORK HOURS, ACCESS, AND PASSES

All Contractor employees, including subcontractors, subcontractors' employees, suppliers, and suppliers' employees are required to comply with the Installation Security Requirements regarding personnel, vehicle, and equipment security passes and access to the jobsite. Nothing in the contract is to be construed in any way to limit the authority of the Commanding Officer to prescribe new, or to enforce existing security regulations governing the admission or exclusion of persons and the conduct of persons while on VAFB, including but not limited to, the rights of search of all persons or vehicles on the Installation.

1. Access to Buildings / Occupied Buildings: The Contractor may work in or around existing occupied buildings. The Contractor is responsible, via the ASRC Construction Management, to obtain access to building and facilities and arrange for them to be opened and closed. Do not enter the building(s) without prior approval of the ASRC Construction Management. Keep the existing buildings and their contents secure at all times. Provide temporary closures as required to maintain security.
2. Passes: Contractor employees and representatives performing work under this contract are required to be either United States citizens or documented legal residents (status verified by prime contractor) and have a Real ID driver's license. All Contractor employees must obtain the required passes. Failure to obtain security and base access passes must not be a cause for contract performance time extension. The Contractor is required to immediately turn in all terminated employee's passes to the issuing office.
3. Contractor Vehicles: All vehicles must display a valid state license plate and safety inspection sticker, if applicable, and must be maintained in good condition. The company name must be displayed in a clearly visible manner and size on each Contractor vehicle used in the course of work. Registration, proof of insurance and driver's licenses are required to obtain a station vehicle pass.
4. Work Hours: Normal working hours are from 7:30 a.m. to 4:30 p.m., Monday through Friday. Night, Weekend (Saturday and Sunday) and Federal Holiday work will be subject to approval by the ASRC Construction Management. ***The Contractor must provide a written request of their intention to work outside of normal working hours to ASRC Construction Management at least 48 hours in advance of the specified time.***
 - a. The Contractor shall perform all work during normal working hours except as otherwise approved to accommodate agreed upon "shutdowns" and other required "after hours" work. At no time will any facility have their services or

utilities disrupted during normal working hours without prior approval from the ASRC Construction Management.

5. Contractor employees must conduct themselves in a proper, efficient, courteous, and businesslike manner. Remove from the site any individual whose continued
6. employment is deemed by the ASRC Construction Management to be contrary to the public interest or inconsistent with the best interests of National Security.

1.09. CONTRACTOR'S REPRESENTATIVE

- A. Superintendent: A representative of the Contractor shall directly supervise accomplishment of this work. The representative will be responsible for coordinating all phases of work with the ASRC Construction Management. The representative shall always be on the job site when work is being performed and shall have authority to execute no cost field changes on behalf of the Contractor if agreed to by all parties involved.
 1. Qualifications: Must have a minimum of 3 years of experience as a Superintendent on previous projects of similar size and complexity. Provide a Superintendent Resume for the proposed on-site Project Superintendent describing experience with references and qualifications to ASRC Construction Management for approval. ASRC Construction Management reserves the right to interview the proposed on-site Project Superintendent at any time in order to verify the submitted qualifications.
- B. Quality Control (QC): A representative of the Contractor responsible for all quality control of the job site and will be held responsible by the ASRC Construction Management for the removal and installation of all products in accordance with the statement of work. The representative shall be competent and familiar with all phases of work under their authority.
 1. Qualifications: Must have a minimum of 2 years combined experience as a Superintendent, Inspector, QC manager, Project Manager, or Construction Manager on similar size and type construction contracts which included major trades included in this statement of work. The individual must be familiar with the requirements of EM 385-1-1 and have experience in the areas of hazard identification and safety compliance.
- C. A single representative of the Contractor for supervising the project, ensuring quality control (QC) and site safety is permitted provided that the representative is competent and familiar with all phases of work under their authority, it is qualified to perform these duties and meets all requirements as stated in sections 1.09.A.1 and 1.09.B.1.

- D. Contractor Personnel: Provide ASRC Construction Management the name(s) of the supervisory person(s) authorized to act for the Contractor. Provide, and update as required, a list of the key personnel for the Contractor and Subcontractors including addresses and telephone numbers (main and cell) for use in the event of an emergency.

1.10. PROVIDED SERVICES AND UTILITIES

- A. All reasonable required amounts of electric power will be made available to the Contractor at the discretion of ASRC Construction Management from the nearest suitable and available connection.
- B. All reasonable required amounts of water will be made available to the Contractor at the discretion of ASRC Construction Management.
- C. The Contractor shall be required to provide their own latrines that are staked down to prevent being turned over.

1.11. INSPECTION

- A. The work shall be conducted in accordance with the Statement of Work and is subject to the inspection of the ASRC Construction Management and Government Representative to ensure strict compliance with the terms of the statement of work.

1.12. EXCESS MATERIALS (EXCLUDING HAZARDOUS MATERIALS OR WASTE)

- A. All waste materials resulting from execution of work shall become the property of the Contractor. The Contractor shall haul all non-hazardous waste off Vance AFB and dispose of it in a legal manner.
- B. The Contractor shall be required to control all foreign objects debris (FOD) from exiting the job site at all times.
- C. At no time shall the Contractor dispose of any recyclable materials in the landfill. All recyclable material shall be taken to an approved recycling center at no cost to the government.

1.13. SPECIAL MATERIALS

- A. Prohibited Material: The manufacturer of materials to be used shall certify the products do not contain mercury, toluene, chlorinated solvents, hydrolysable chlorine derivatives, ethylene base glycol ethers and their acetates, nor any carcinogen, as defined in 29 CFR 1910.1200. Materials used shall not contain lead and hexavalent chromium compounds.

-
- B. At no time shall class 1 Ozone Depleting Chemical (ODC's) be specified and shall not be used unless otherwise allowed by ASRC Construction Management.

1.14. MATERIALS

- A. All materials must meet the Buy American Act.
- B. Material Submittals:
1. Copies of all materials and shop drawings are to be submitted to ASRC Construction Management and must be approved prior to purchasing any items.
 2. All hazardous chemicals used on the project are required to have Safety Data Sheets (SDS) approved by the Vance Environmental Office prior to transport to the installation.
 3. All hazardous waste generated by the project shall become the property of Vance AFB for legal disposal.
 4. The Contractor shall use the Short-Term Hazardous Material Inventory and Usage Report Form to get Hazardous Materials authorized for use inside the fence.
- C. List of Materials
1. Refer to Appendix C – Drawings
- D. Material Delivery: The Contractor shall have all materials delivered during normal working hours and will have a representative present to receive shipments. The Contractor shall ensure all delivery vehicles have sufficient project information and are prepared to undergo inspection upon entering the Installation. This includes name and address of the project site, name of prime contractor and a point of contact for delivery. Material will be delivered to a location for staging as approved by ASRC Construction Management.
- E. Attic Stock: The Contractor shall provide 10% of materials as attic stock. The Contractor shall deliver attic stock to a location at Vance AFB as directed by ASRC Construction Management.

PART 2 EXECUTION

2.01. SITE SAFETY REQUIREMENTS

- A. All work shall be done in compliance with the safety standards as defined in DAFMAN 91-203, Air Force Occupational Safety, Fire, and Health Standards.
- B. The Contractor shall comply with all applicable standards and provisions of the Occupational Safety and Health Act (OSHA) (29 CFR OSHA 1926).
- C. The Contractor shall take all necessary and prudent safety precautions to ensure safety of the workforce and other exposed personnel.
- D. The Contractor shall coordinate all requests for entry to the airfield or Air Force control/restricted areas through ASRC Construction Management.

2.02. INSTALLATION

- A. Project Duration:
 - 1. The total period of performance is 135 calendar days as described below.
 - a. Non-Performance Period: The Contractor shall have up to 45 calendar days of nonperformance for mobilization and material lead time. If material lead time exceeds this number of days, the nonperformance period may be extended with coordination of the ASRC Construction Management and approval by Contracting Officer.
 - b. Performance Period: All work shall be completed within 90 calendar days after obtaining a Notice to Proceed from the Contracting Officer.
- B. Installation shall include all items listed in this statement of work, and any incidental work necessary to provide a complete and usable finished product.
- C. Contractor shall remove equipment and material from the site upon completion of work as directed by ASRC Construction Management.

PART 3 SITE INFORMATION

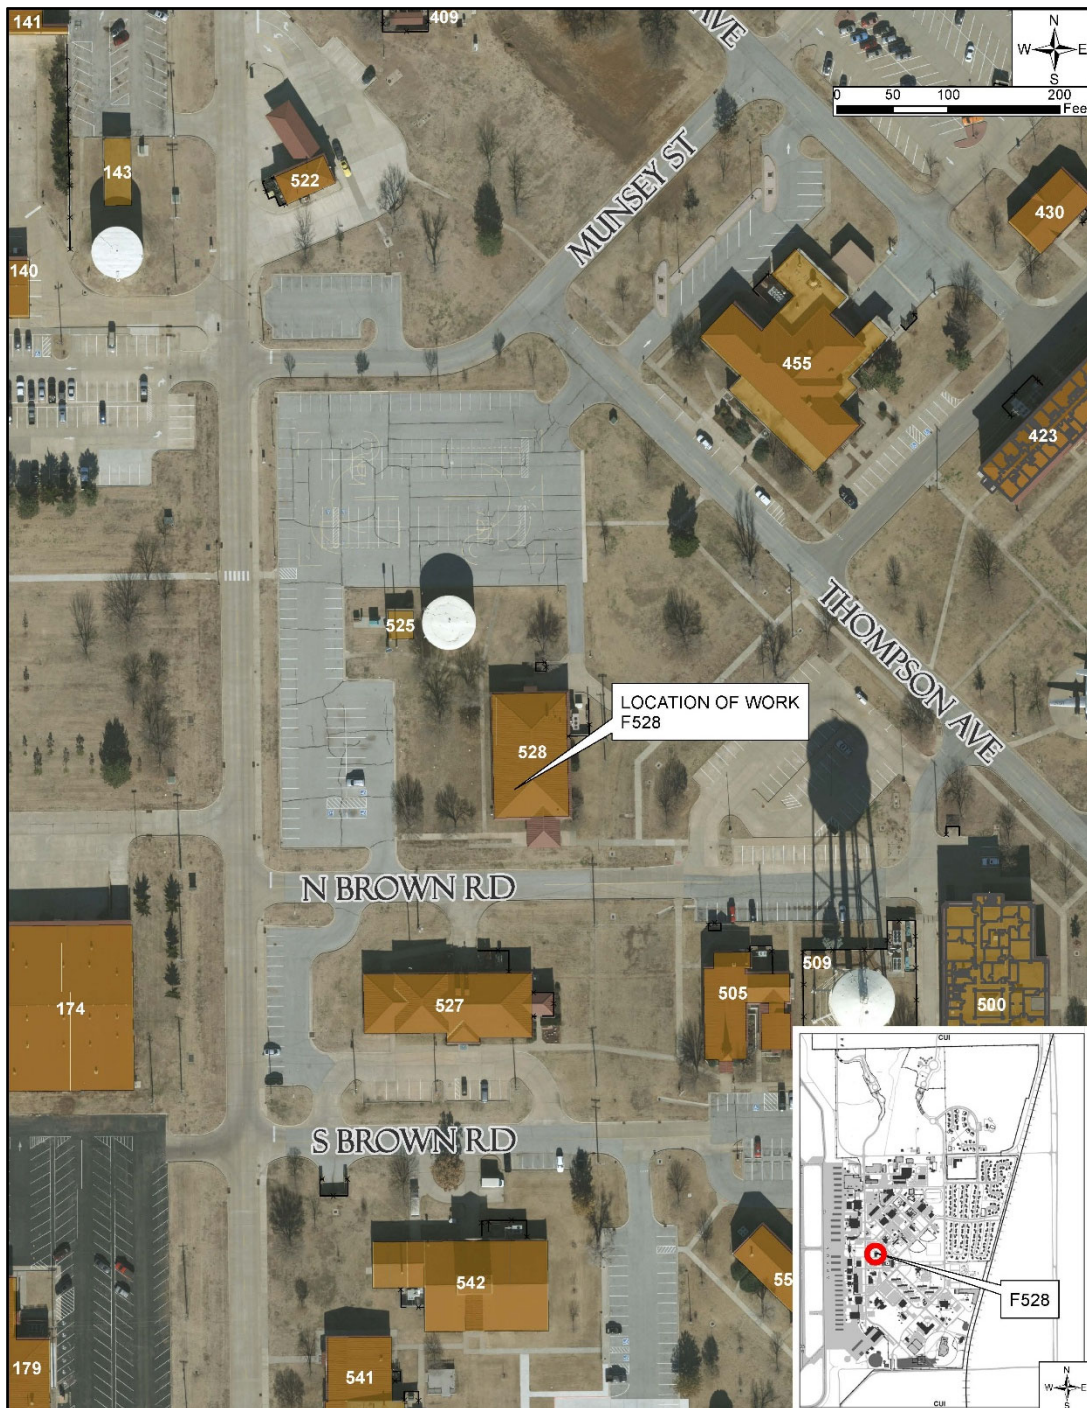


Figure 1: Project Location

PART 4 APPENDICES

4.01. APPENDIX A – SITE PHOTOS

4.02. APPENDIX B – BID FORM

4.03. APPENDIX C – DRAWINGS

ID101 – DEMOLITION PLAN

ID102 - KITCHEN DEMOLITION

ID103 – RESTROOM DEMOLITION PLAN.

I101 – FINISH PLAN

I102 – KITCHEN FINISH PLAN

I103 – RESTROOM FINISH PLAN

IN401 – KITCHEN ELEVATIONS

IN402 – KITCHEN ELEVATIONS

IN403 – WOMEN’S RESTROOM ELEVATIONS

IN404 – MEN’S RESTROOM ELEVATIONS

IN601 – FINISH SCHEDULE

IN602 - FINISH SCHEDULE (CONTINUED)

4.04. APPENDIX D – SCHEDULE E

END OF STATEMENT OF WORK

APPENDIX A – SITE PHOTOS

APPENDIX A – SITE PHOTOS



Figure 2: North Wall – Existing Range



Figure 3: South Wall – Existing Cabinet



Figure 4: Main Gathering Area (Rm. 24)



Figure 5: Women's Restroom

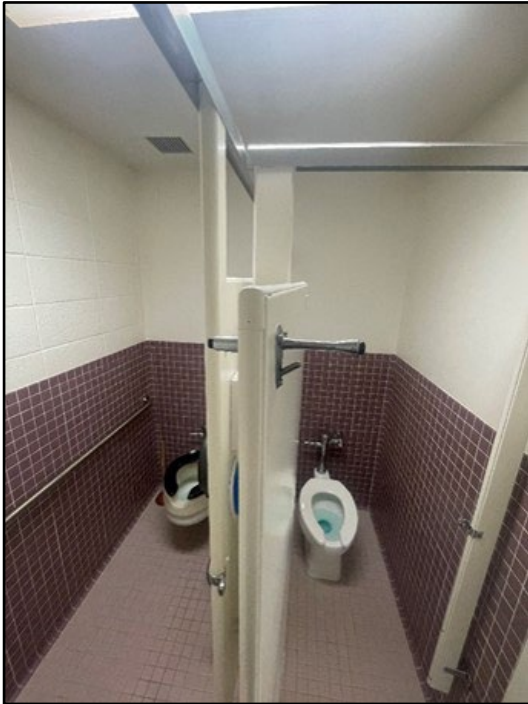


Figure 6: Women's Restroom Partition



Figure 7: Men's Restroom Partition

APPENDIX B- BID FORM

APPENDIX B - BID FORM

Fac. Proj. ID: 1019545

Proj. Name: CAC Interior Refresh, F528

ITEM	DESCRIPTION	UNIT	QTY	UNIT PRICE	TOTAL
Base Bid					
1	Mobilization	LS	1		\$ -
2	Demolition	LS	1		\$ -
3	Asbestos Abatement	LS	1		\$ -
4	Flooring Products	LS	1		\$ -
5	Carpet Installation Only	LS	1		\$ -
6	Paint	LS	1		\$ -
7	Ceiling Tiles	LS	1		\$ -
8	Kitchen Renovation	LS	1		\$ -
9	Women's Restroom Renovation	LS	1		\$ -
10	Men's Restroom Renovation	LS	1		\$ -
11	Clean Up	LS	1		\$ -
12	Total Cost Base Bid (Sum of lines 1 through 11)				\$ -

Contractor's Name

Date


Contractor's Signature

Address:


Phone Number: _____

E-mail address: _____

APPENDIX C – DRAWINGS

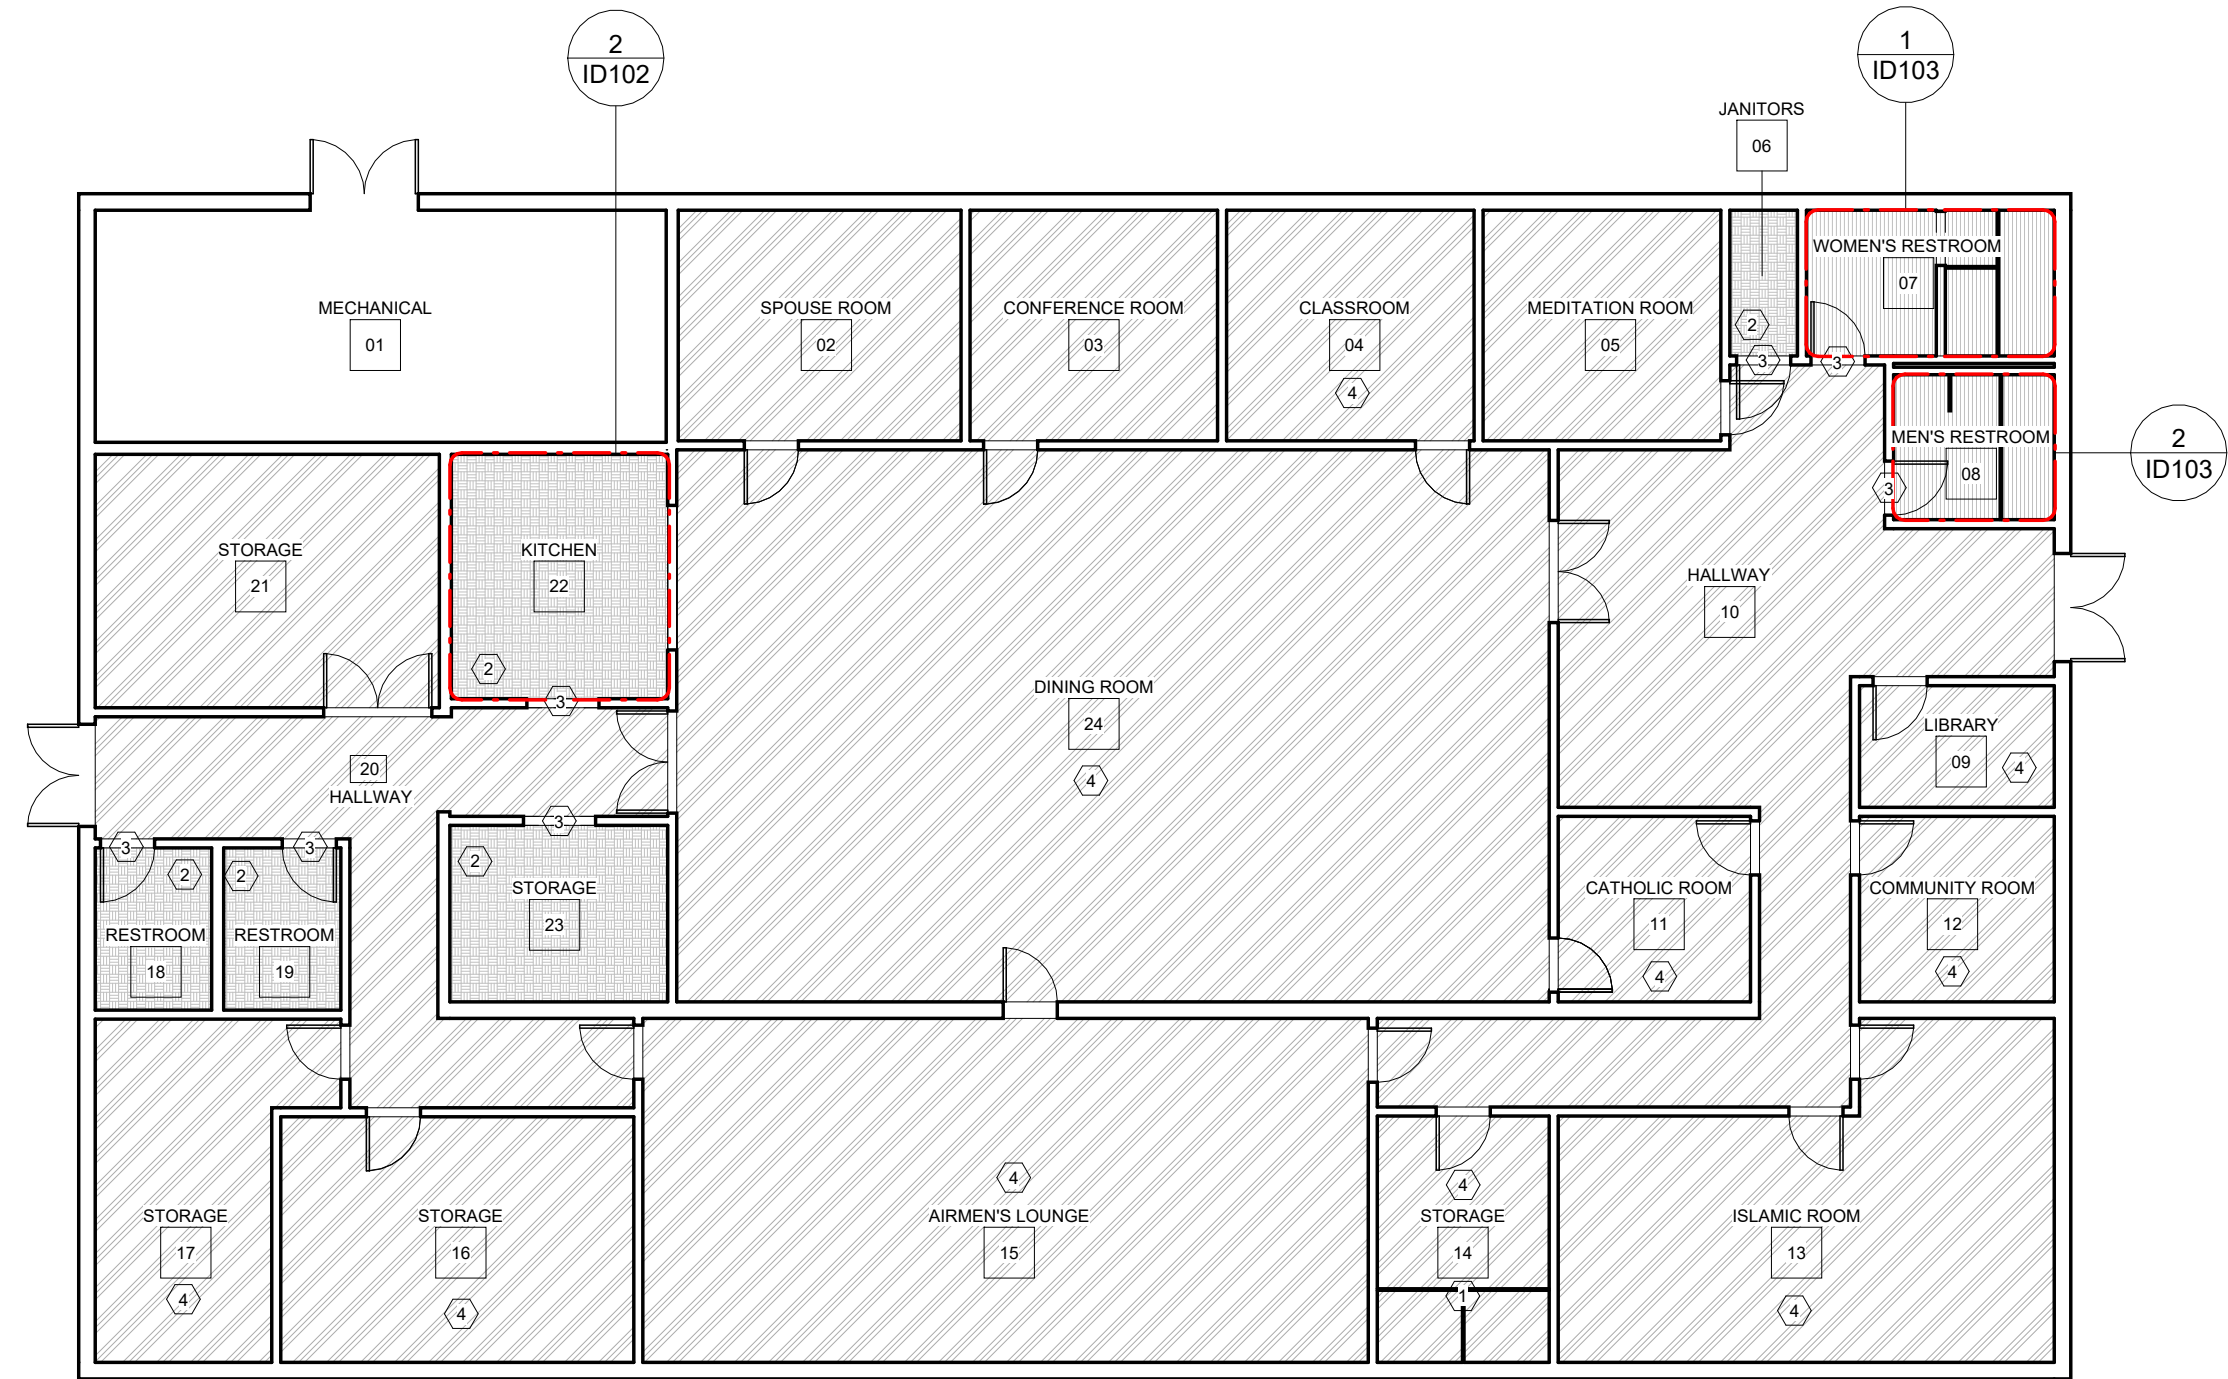

1 DEMOLITION PLAN
3/32" = 1'-0"



DEMOLITION NOTES

1. CEILING MOUNTED MATERIAL TO REMAIN UNLESS NOTED OTHERWISE.
2. ROOMS THAT CONTAIN CEILING TILES ARE TO BE REMOVED AND DEMOLISHED. CEILING GRID TO REMAIN.
3. DINING ROOM 24, CONTAINS 1/4" PLYWOOD SUB FLOOR. CONTRACTOR TO REMOVE AND DEMOLISH.

FLOORING DEMOLITION LEGEND

-  NIC
-  EXISTING CARPET
-  EXISTING CERAMIC TILE
-  EXISTING VINYL TILE

DEMOLITION KEY NOTES

- 1 DEMOLISH AND REMOVE EXISTING WALLS.
- 2 ASBESTOS ABATEMENT (FLOORING MATERIAL)
- 3 DEMOLISH AND REMOVE EXISTING TRANSITION STRIP
- 4 DEMOLISH CEILING TILES

SHEET ABBREVIATIONS

NIC NOT IN CONTRACT



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076


APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH


F528

DEMOLITION PLAN


Project Status	100%
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ
ID101	
Scale	3/32" = 1'-0"

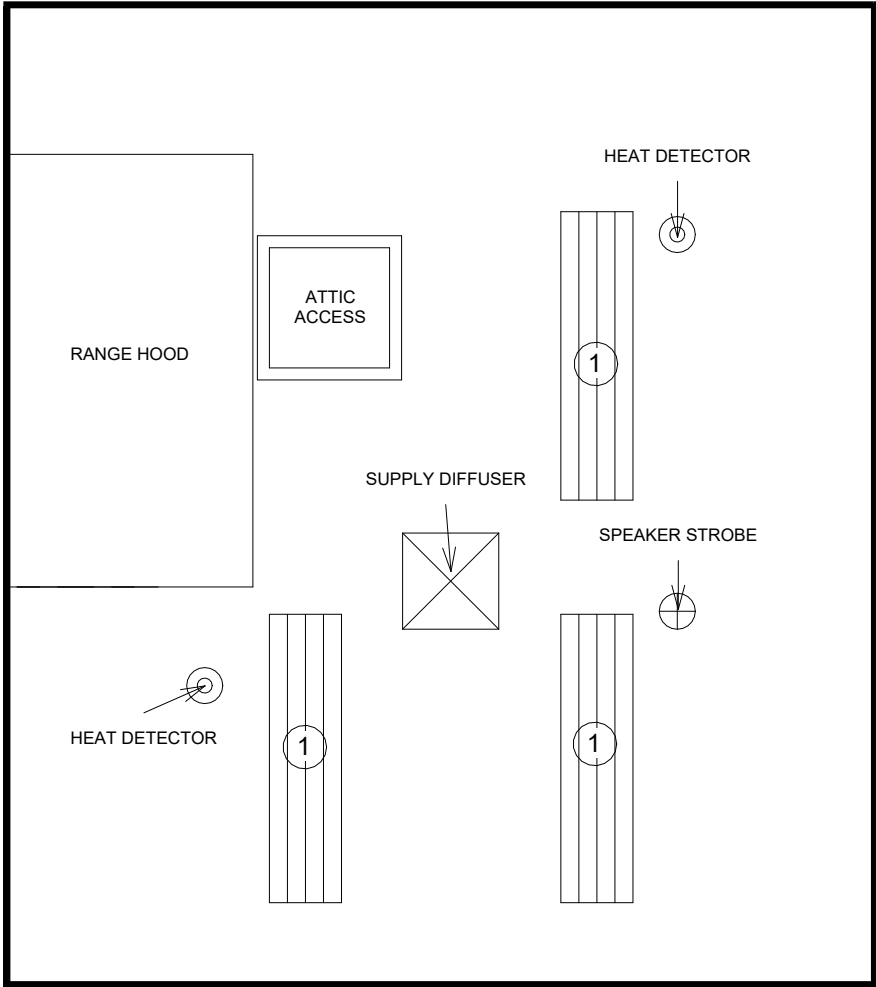

1 KITCHEN DEMOLITION RCP
3/8" = 1'-0"

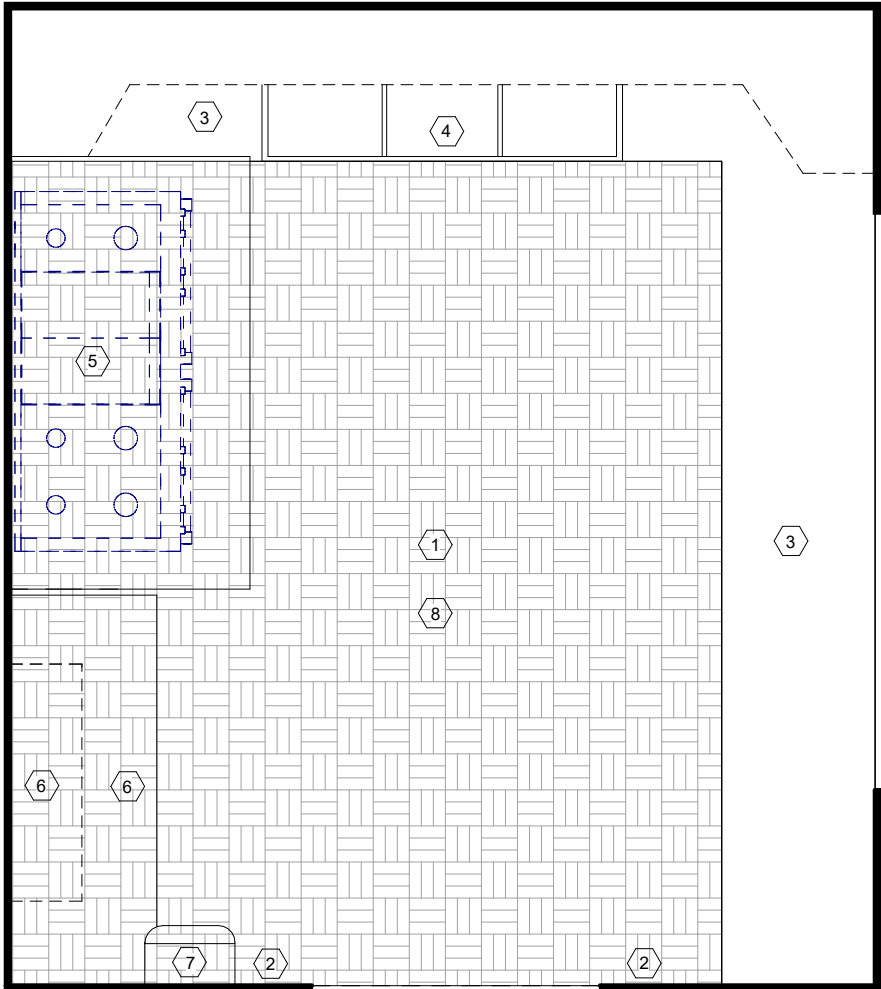


2 KITCHEN DEMOLITION PLAN
3/8" = 1'-0"



DEMOLITION NOTES

1. CONTRACTOR IS TO REMOVE EXISTING LIGHTS AND PATCH AND FINISH CEILING AFTER THE REMOVAL OF THE LIGHTS.
2. CEILING MOUNTED MATERIAL TO REMAIN.
3. RANGE HOOD TO REMAIN DURING CONSTRUCTION.
4. EAST WALL EXISTING UPPER CABINETS TO REMAIN.

FLOOR DEMOLITION LEGEND



DEMOLITION RCP KEY NOTES:

- 1 DEMO TWO LAMP STRIP LIGHTS


DEMOLITION KEY NOTES:

- 1 DEMOLISH AND REMOVE EXISTING VCT.
- 2 DEMOLISH AND REMOVE EXISTING WALL BASE.
- 3 DEMOLISH AND REMOVE EXISTING COUNTERTOP.
- 4 DEMOLISH AND REMOVE EXISTING SINK AND DISHWASHER UNIT.
- 5 REMOVE AND RETURN EXISTING RANGE TO GOVERNMENT.
- 6 REMOVE AND RETURN EXISTING METAL UTILITY SHELVING TO GOVERNMENT.
- 7 REMOVE AND RETURN EXISTING PAPER TOWEL DISPENSER TO GOVERNMENT.
- 8 ASBESTOS ABATEMENT (FLOORING MATERIAL)

SHEET ABBREVIATIONS:

- RCP REFLECTED CEILING PLAN
- VCT VINYL COMPOSITION TILE

KEY PLAN:



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

KITCHEN DEMOLITION

Project Status 100%

Project Number 1019545


Date 15 APR 2026

Drawn by J.WRIGHT


Checked by J. ORTIZ

ID102


Scale 3/8" = 1'-0"

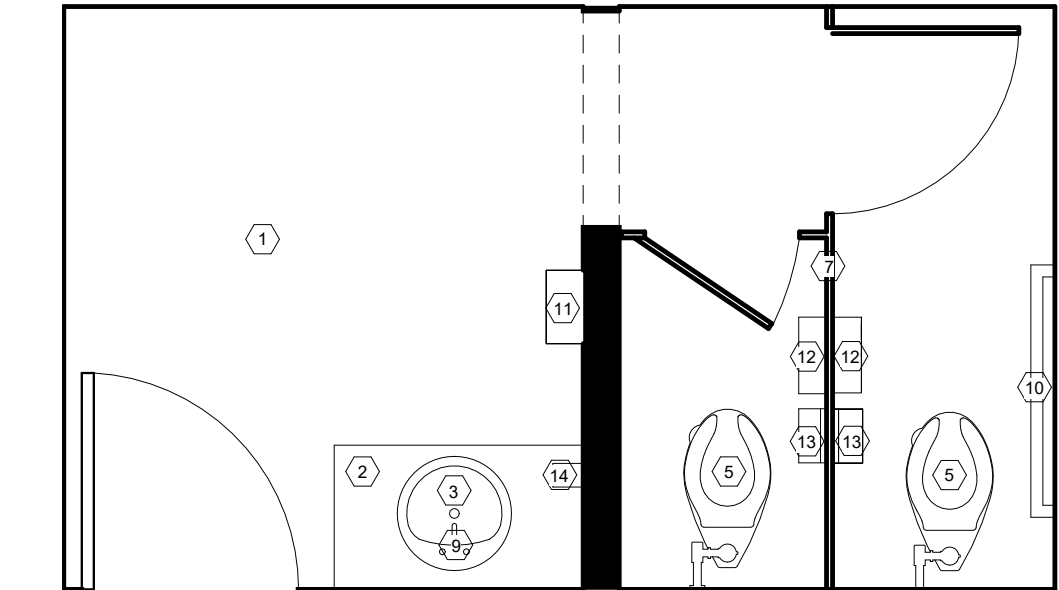

1 WOMEN'S RESTROOM DEMOLITION
3/8" = 1'-0"

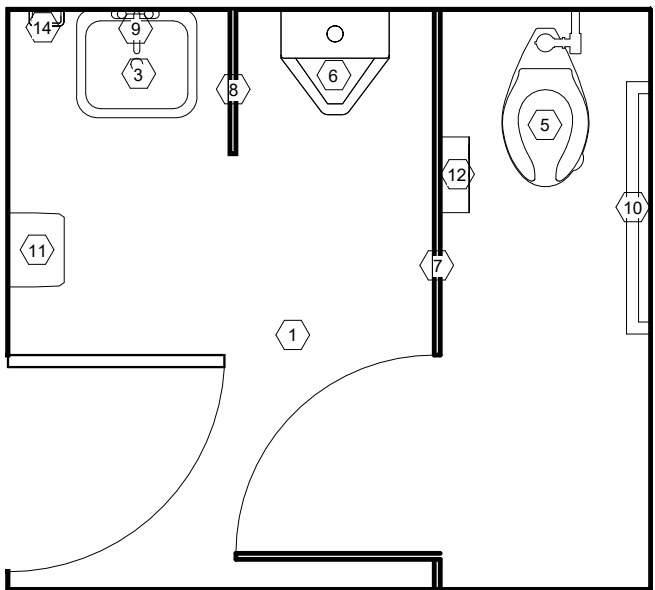

2 MEN'S RESTROOM DEMOLITION
3/8" = 1'-0"




DEMOLITION NOTES:

1. DEMOLITION OF CERAMIC TILE INCLUDES FLOORING AND WALLS.

DEMOLITION KEY NOTES:

- 1 DEMOLISH AND REMOVE EXISTING CERAMIC TILE.
- 2 DEMOLISH AND REMOVE EXISTING COUNTERTOP.
- 3 DEMOLISH AND REMOVE EXISTING SINK.
- 4 DEMOLISH AND REMOVE EXISTING MIRROR.
- 5 DEMOLISH AND REMOVE EXISTING TOILET.
- 6 DEMOLISH AND REMOVE EXISTING URINAL.
- 7 DEMOLISH AND REMOVE EXISTING RESTROOM PARTITIONS.
- 8 DEMOLISH AND REMOVE EXISTING URINAL SCREEN.
- 9 DEMOLISH AND REMOVE EXISTING PLUMBING FIXTURE.
- 10 DEMOLISH AND REMOVE EXISTING GRAB BAR.
- 11 REMOVE AND RETURN EXISTING PAPER TOWEL DISPENSER TO GOVERNMENT.
- 12 REMOVE AND RETURN EXISTING TOILET PAPER DISPENSER TO GOVERNMENT.
- 13 REMOVE AND RETURN EXISTING SANITARY TISSUE DISPOSAL TO GOVERNMENT.
- 14 REMOVE AND RETURN EXISTING SOAP DISPENSER TO GOVERNMENT.

KEY PLAN:

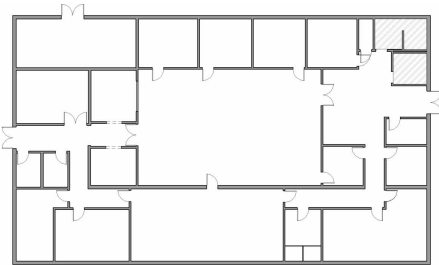

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

RESTROOM DEMOLITION PLANS

Project Status

Project Number 1019545


Date 15 APR 2026

Drawn by J.WRIGHT


Checked by J.ORTIZ

ID103

Scale 3/8" = 1'-0"

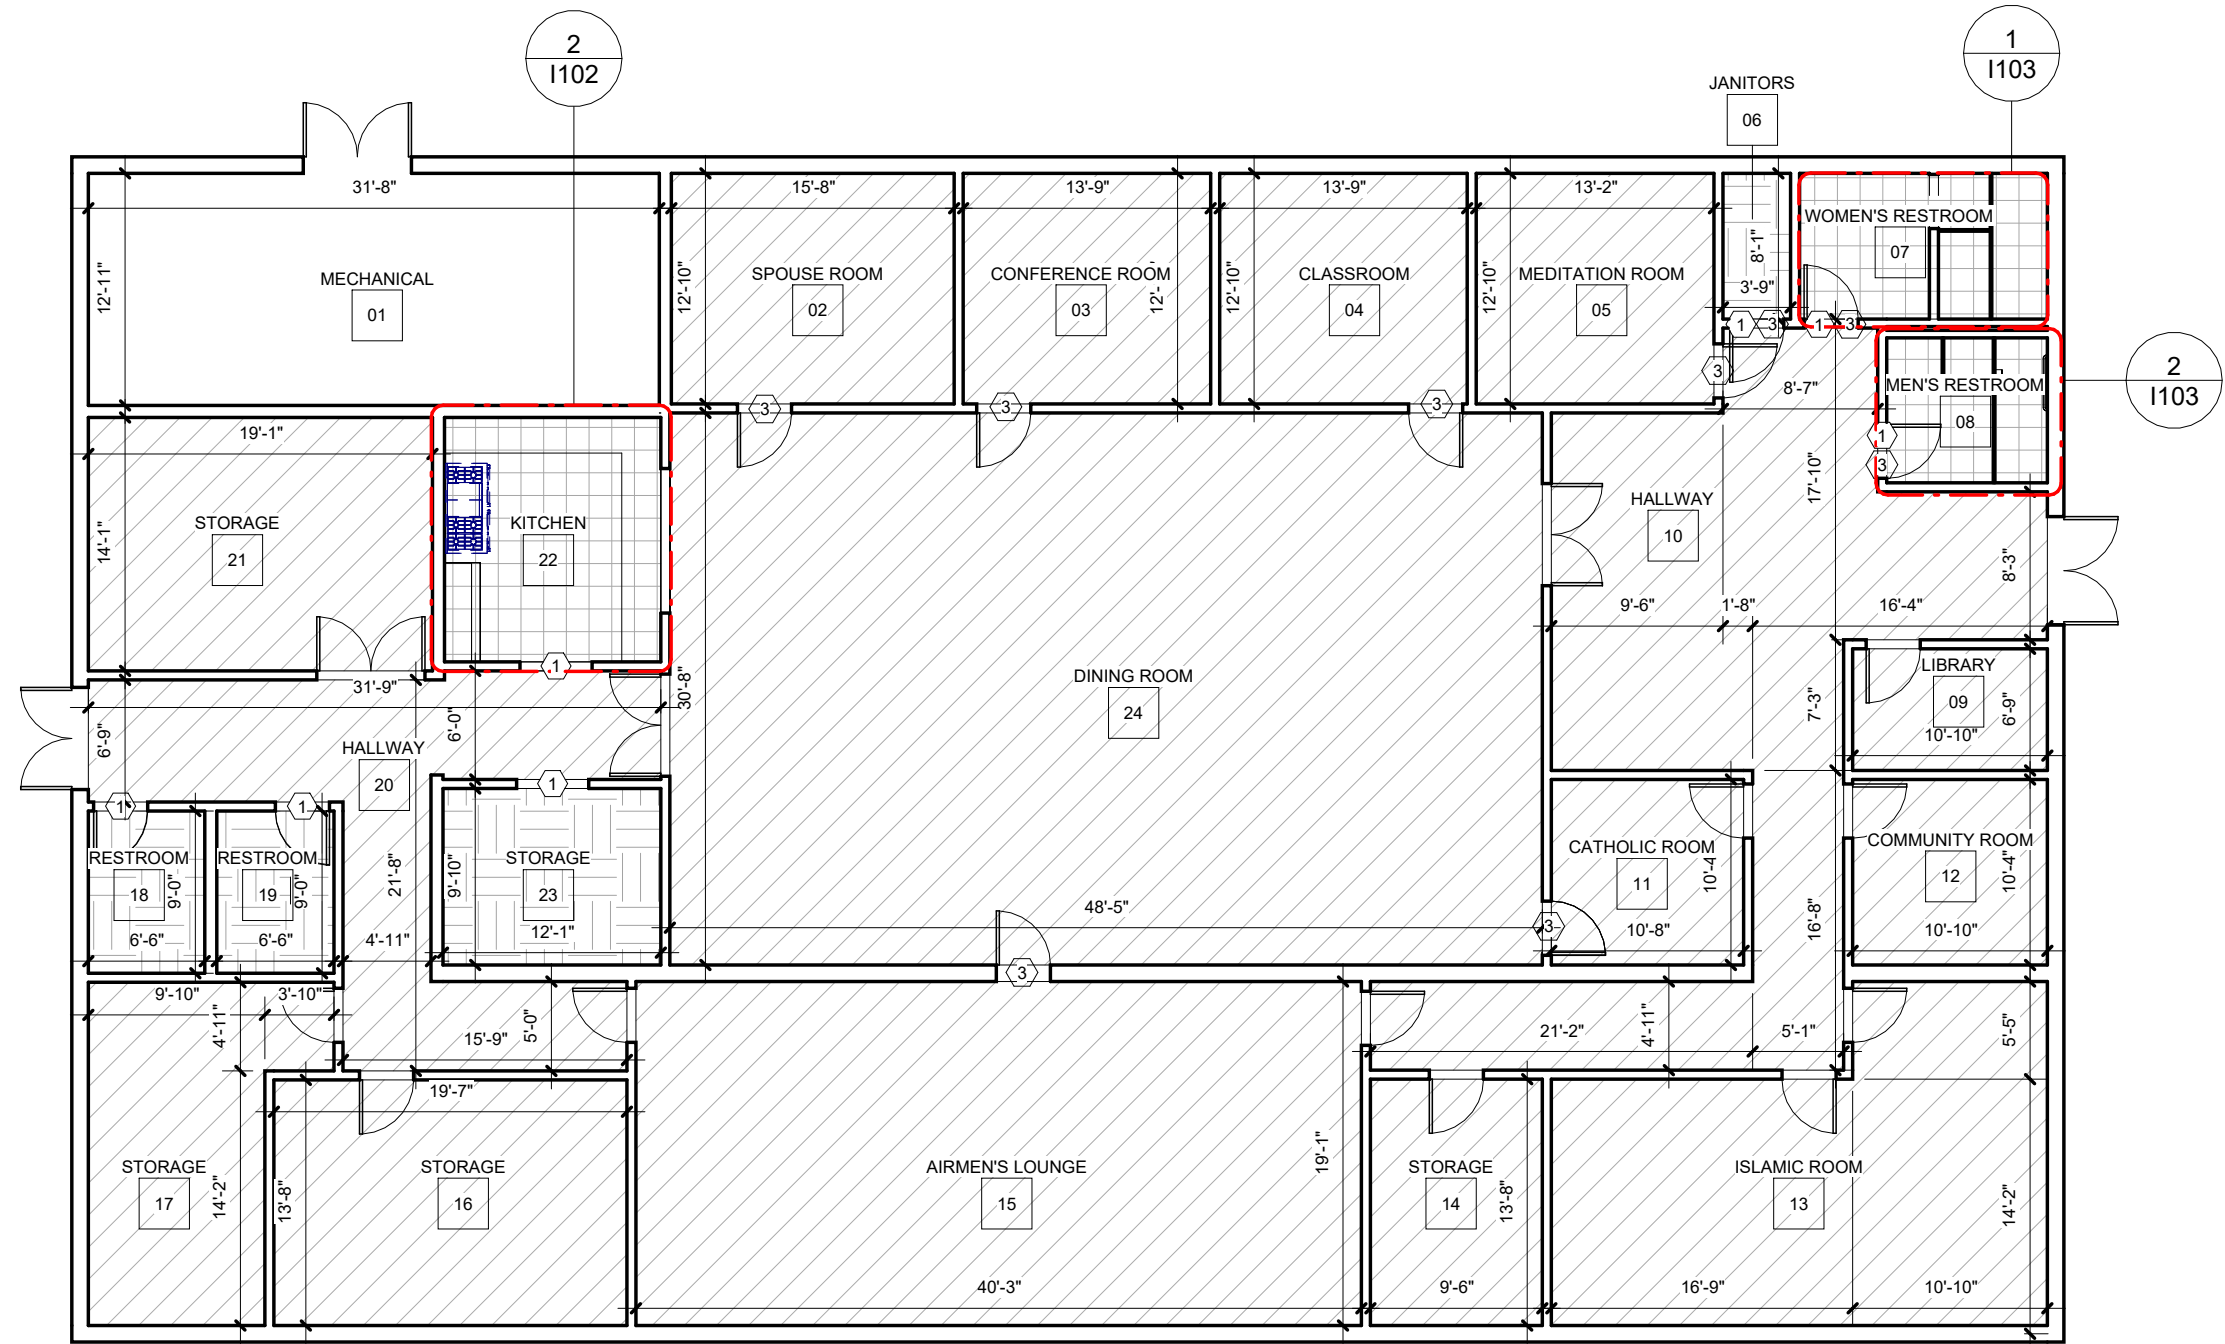

1 FINISH PLAN
3/32" = 1'-0"



GENERAL NOTES

1. ROOM DIMENSIONS PROVIDED FOR REFERENCE ONLY. CONTRACTOR TO VERIFY ALL AREAS.
2. ROOMS WITH GYPSUM WALL BOARD CEILING TO BE PAINTED THE SAME AS THE WALLS.
3. REFER TO SHEETS I102, IN401, AND IN402 FOR KITCHEN FINISH DETAILS.
4. REFER TO SHEETS I103, IN403 AND IN404 FOR RESTROOM FINISH DETAILS.
5. REFER TO SHEET IN601 FOR FINISH SCHEDULE.
6. ROOM 15, AIRMEN'S LOUNGE TO NOT BE PAINTED.

FLOOR PLAN LEGEND

- NIC
- CPT1
- CT1
- VCT1

FLOOR PLAN KEY NOTES

- 1 TRANSITION STRIPS
- 2 REPAIR AND PATCH GYPSUM WALL AND CEILING
- 3 PAINT DOOR AND FRAME

SHEET ABBREVIATIONS

- | | |
|-----|------------------------|
| CPT | CARPET |
| CT | CERAMIC TILE |
| NIC | NOT IN CONTRACT |
| VCT | VINYL COMPOSITION TILE |



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

FINISH PLAN

Project Status 100%

Project Number 1019545


Date 15 APR 2026

Drawn by J.WRIGHT


Checked by J.ORTIZ

I101


Scale 3/32" = 1'-0"

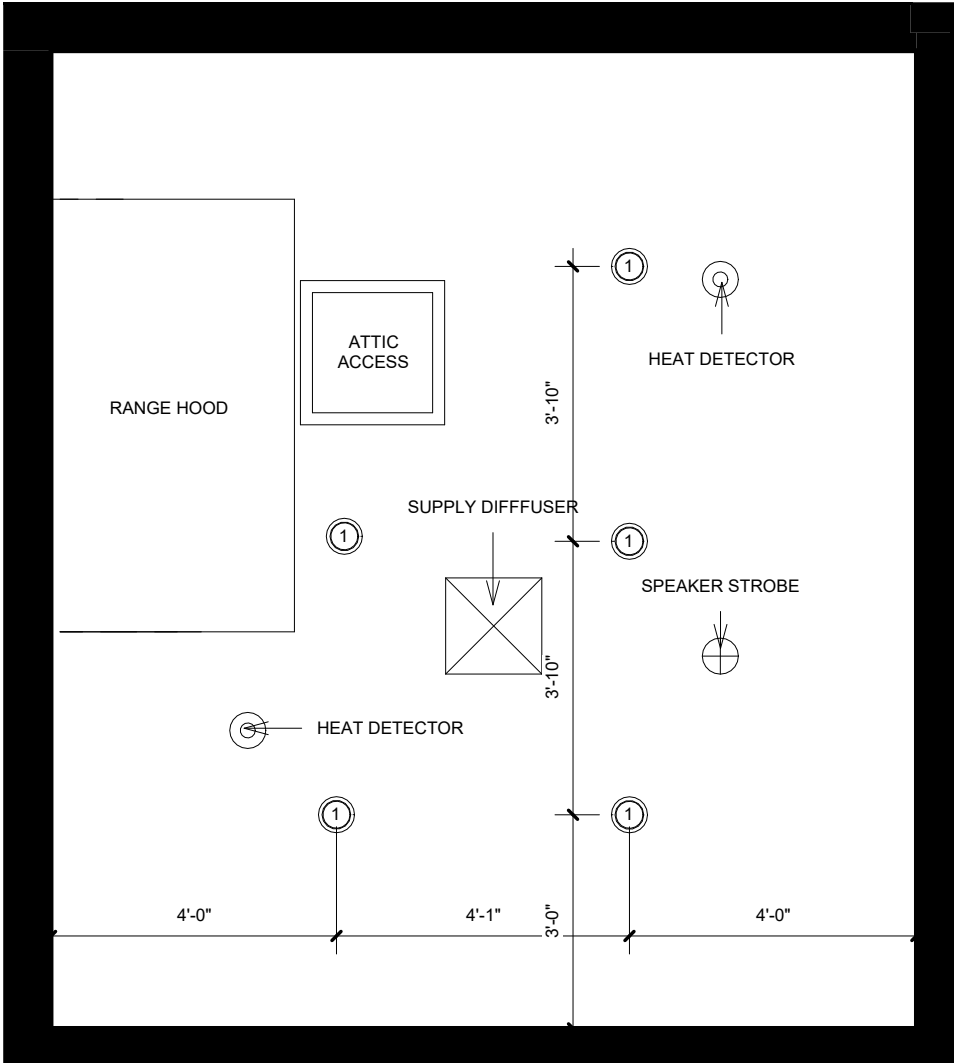

1 KITCHEN REFLECTED CEILING PLAN
3/8" = 1'-0"

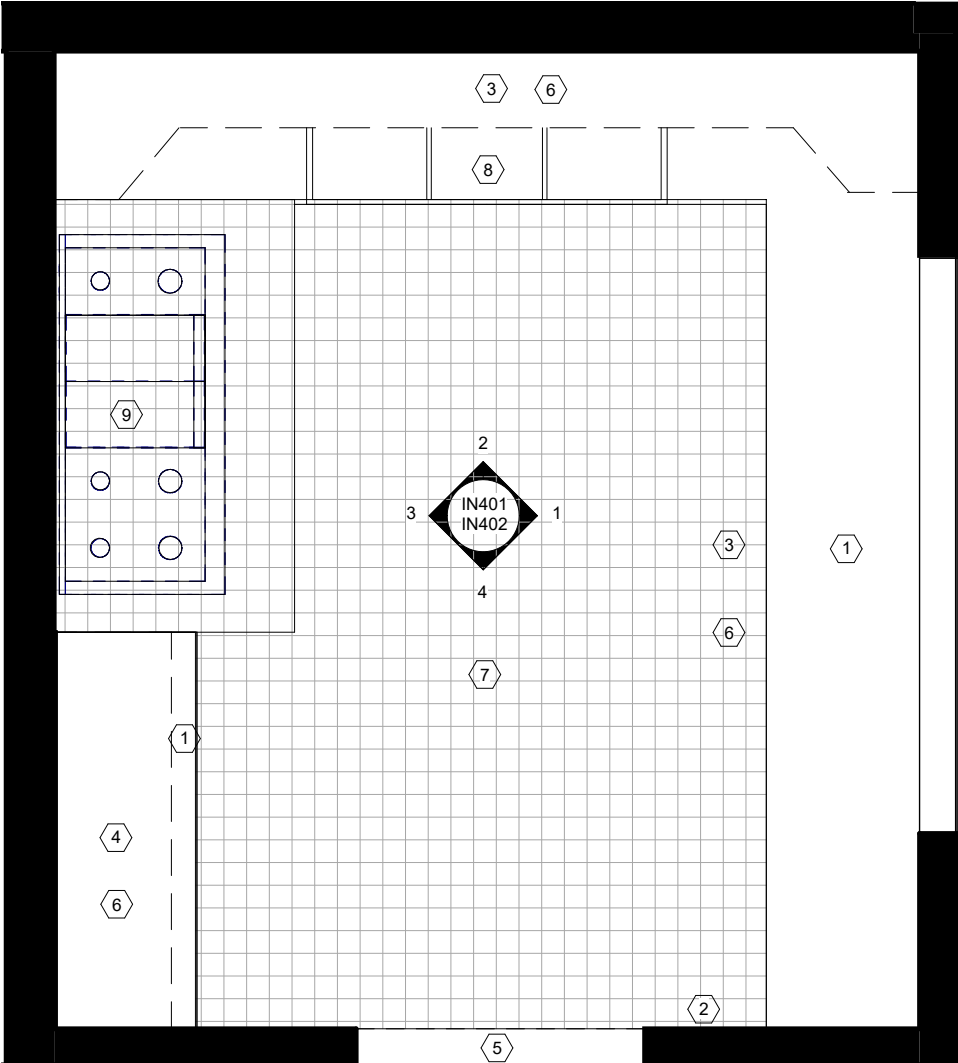

2 KITCHEN FINISH PLAN
3/8" = 1'-0"



SHEET NOTES

1. CONTRACTOR IS TO PATCH AND FINISH CEILING AFTER INSTALLING LIGHT FIXTURES.
2. CEILING MOUNTED MATERIAL TO REMAIN.
3. RANGE HOOD TO REMAIN DURING CONSTRUCTION.

FLOORING LEGEND



CT1

RCP KEY NOTES

- 1 RECESSED CAN LIGHT


FINISH KEY NOTES

- 1 SOLID SURFACE COUNTERTOP
- 2 RB1
- 3 EXISTING CABINETS
- 4 NEW CABINETS
- 5 TH1
- 6 PAINT CABINETS
- 7 CT1
- 8 3 BASIN SINK AND FAUCET
- 9 KR1

SHEET ABBREVIATIONS

- CT CERAMIC TILE
- KR KITCHEN RANGE
- TH THRESHOLD
- RB RUBBER WALL BASE

KEY PLAN:

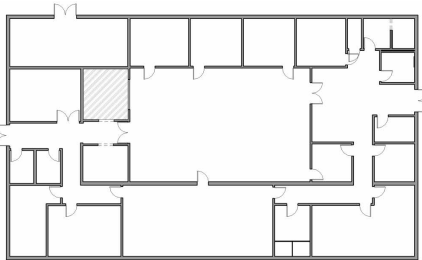

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

KITCHEN FINISH PLAN

Project Status 100%

Project Number 1019545


Date 15 APR 2026

Drawn by J.WRIGHT


Checked by J. ORTIZ

1102


Scale As indicated

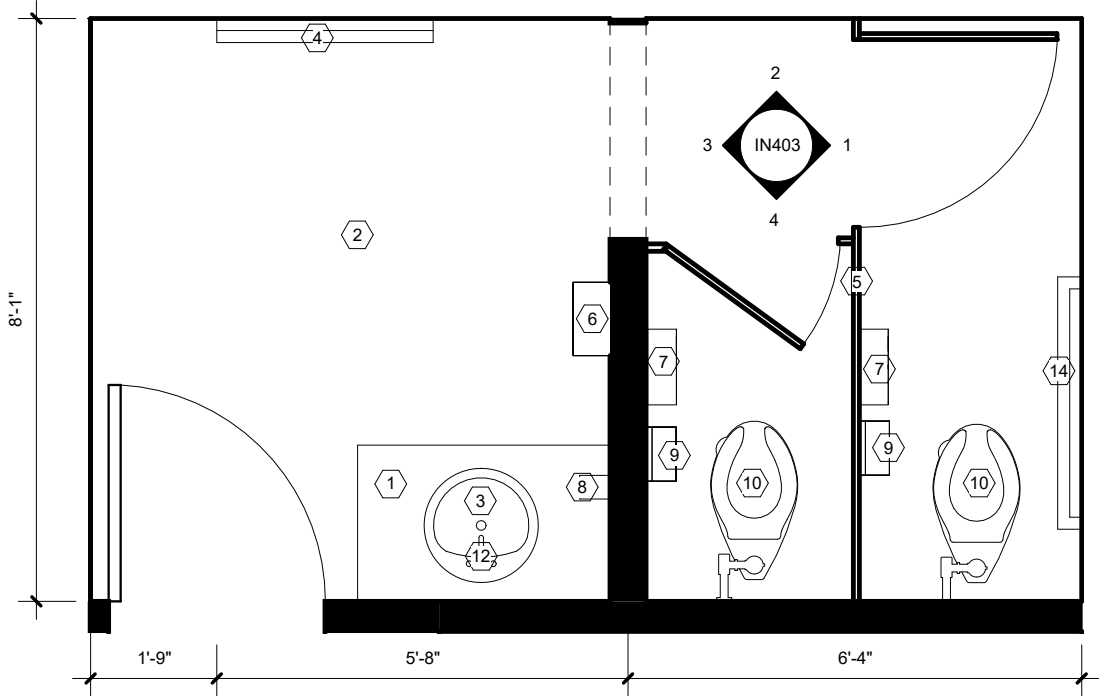

1 WOMEN'S RESTROOM FINISH PLAN
3/8" = 1'-0"

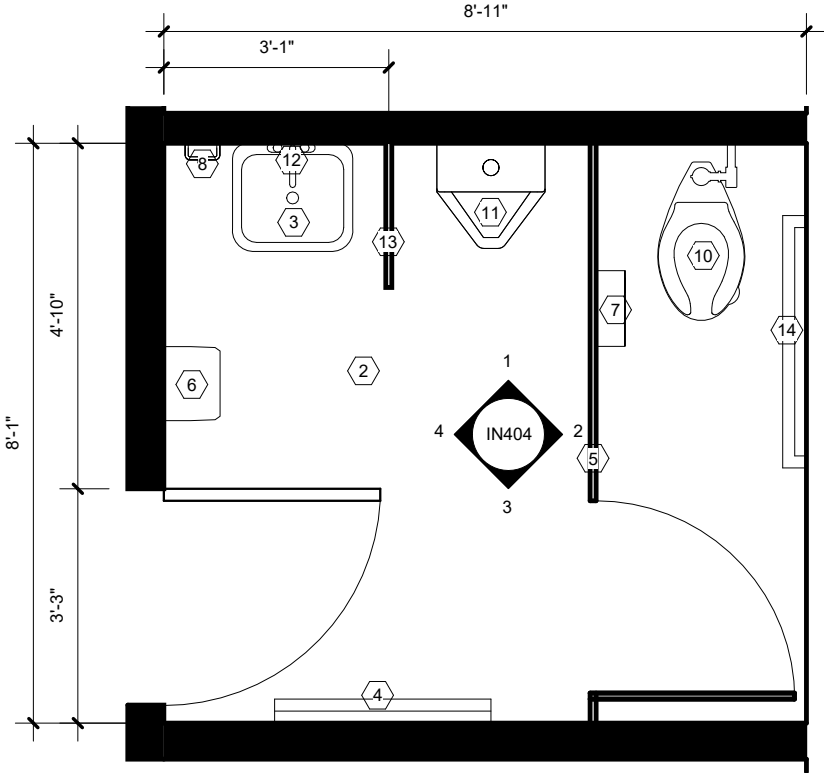

2 MEN'S RESTROOM FINISH PLAN
3/8" = 1'-0"



SHEET NOTES

1. REFER TO FINISH SCHEDULE ON SHEET IN601 FOR FINISH CODE LEGEND, AND BASIS-OF-DESIGN FINISHES, MATERIALS, PATTERNS, AND COLORS.


FINISH LEGEND:

- 1 SOLID SURFACE COUNTERTOP
2 CERAMIC FLOOR TILE
3 SINK AND FAUCET
4 BCT1
5 P
6 FOR REFERENCE ONLY PAPER TOWEL DISPENSER, GOVERNMENT ISSUED AND INSTALLED
7 FOR REFERENCE ONLY TOILET PAPER DISPENSER, GOVERNMENT ISSUED AND INSTALLED
8 FOR REFERENCE ONLY SOAP DISPENSER, GOVERNMENT ISSUED AND INSTALLED
9 FOR REFERENCE ONLY SANITARY TISSUE DISPOSAL, GOVERNMENT ISSUED AND INSTALLED
10 TL1
11 UL1
12 SINK FIXTURE
13 URINAL SCREEN
14 GB

SHEET ABBREVIATIONS

- BCT BABY CHANGING TABLE
GB GRAB BARS
P PARTITION
TL TOILET
UL URINAL

KEY PLAN:

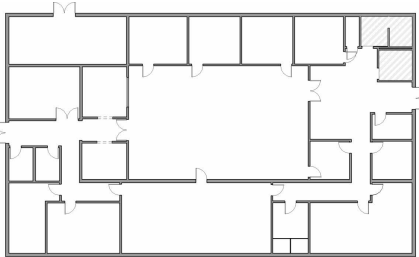

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076


APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH


F528

RESTROOM FINISH PLAN


Project Status	100%
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ
I103	
Scale	3/8" = 1'-0"

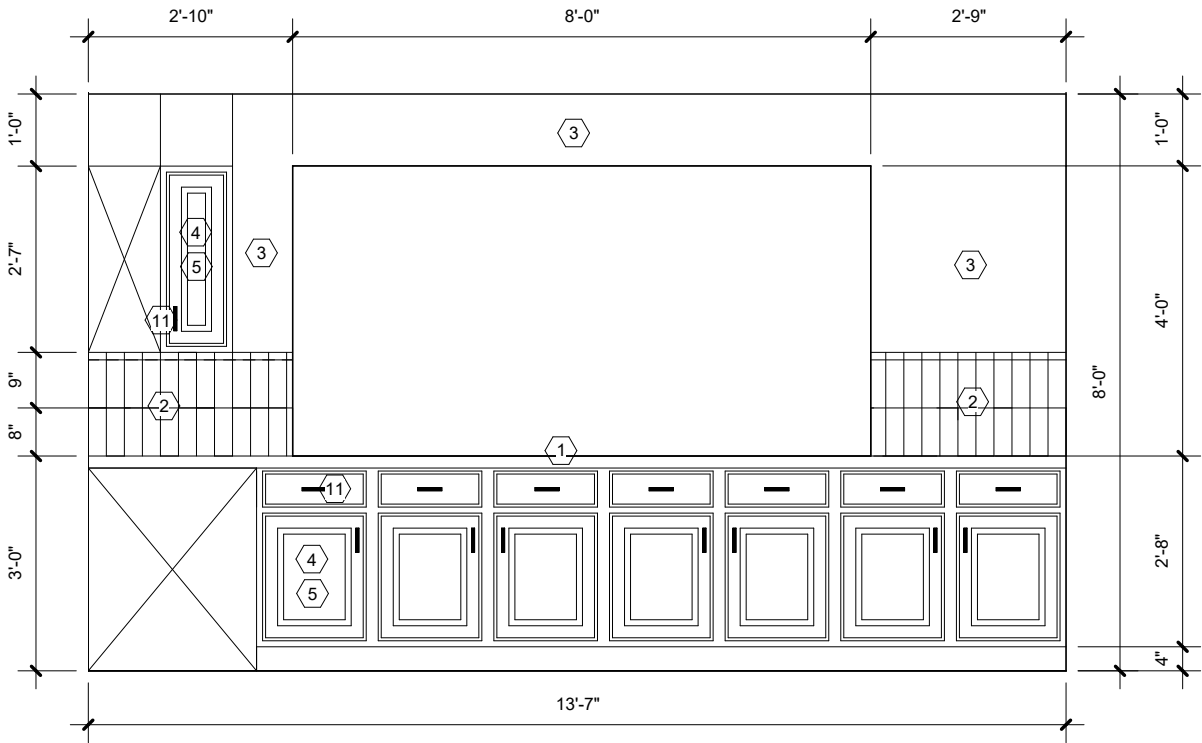


1 SOUTH KITCHEN ELEVATION
3/8" = 1'-0"

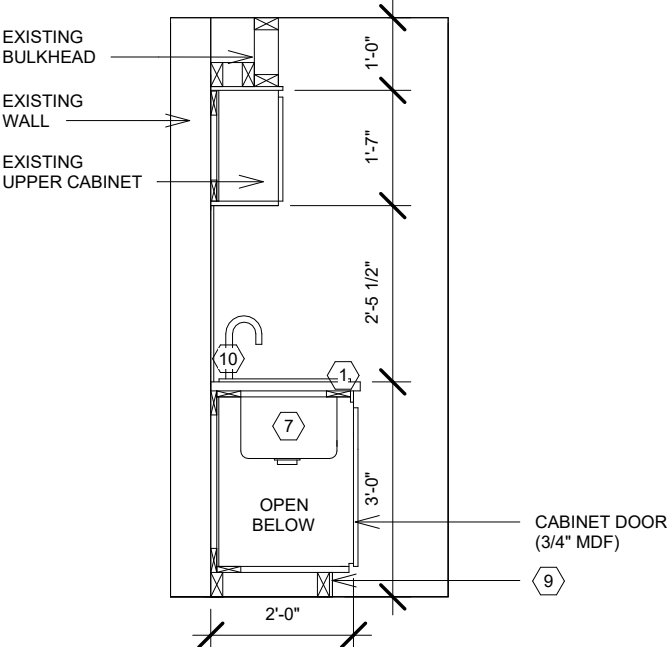


3 KITCHEN SINK SECTION VIEW
3/8" = 1'-0"

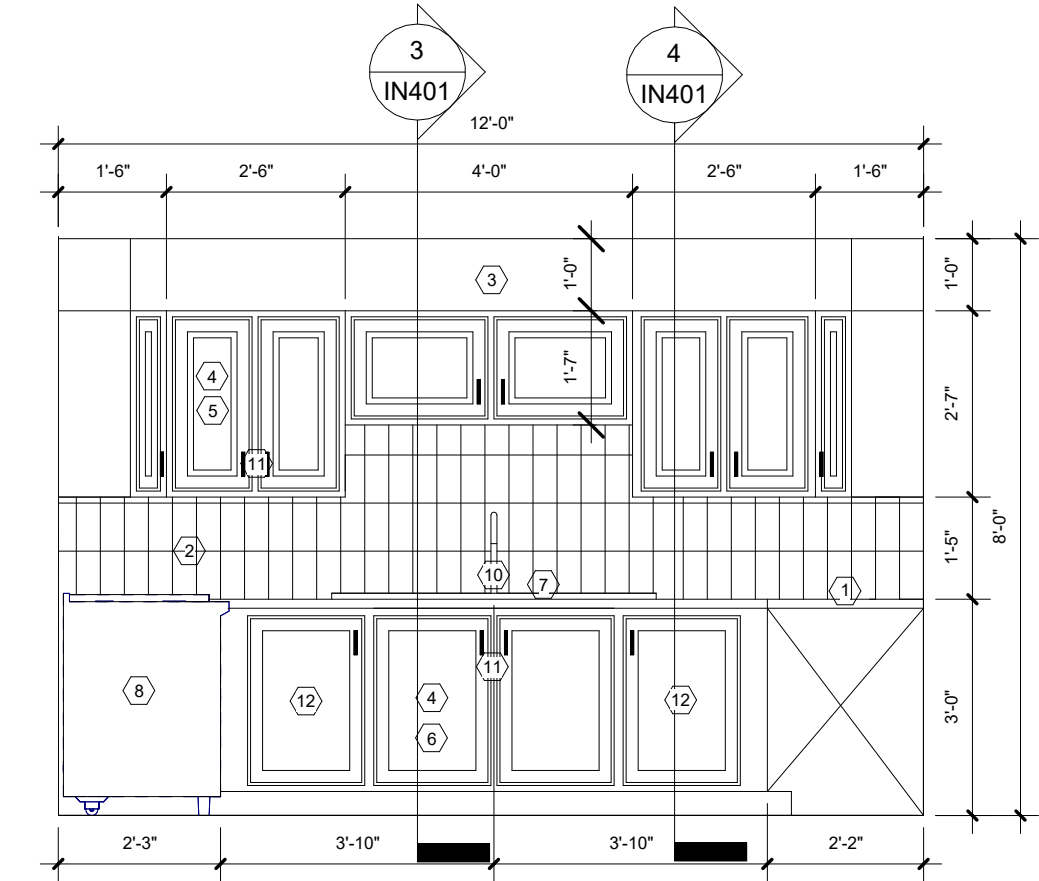

2 EAST KITCHEN ELEVATION
3/8" = 1'-0"

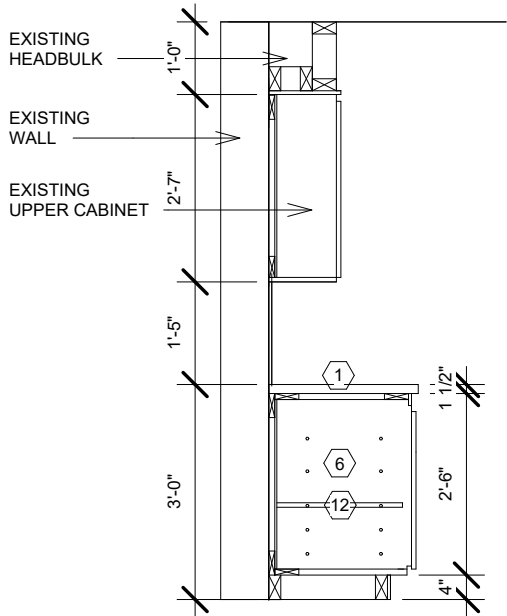

4 KITCHEN BASE CABINET SECTION VIEW
3/8" = 1'-0"



SHEET NOTES

- CABINETRY PAINT AND HARDWARE ARE TYPICAL THROUGHOUT THE KITCHEN.
- NOTE THAT BASE CABINETS THAT ARE LABELED 13 INCLUDE ADJUSTABLE SHELVING.
- CONTRACTOR TO PROVIDE DRAWINGS FOR KITCHEN SINK BASE CABINETRY MILWORK.
- REFER TO FINISH SCHEDULE ON SHEET IN601 FOR FINISH CODE LEGEND, AND BASIS-OF-DESIGN FINISHES, MATERIALS, PATTERNS, AND COLORS.


FINISH LEGEND

- | | |
|----|----------------------------|
| 1 | CO1 |
| 2 | CT3 / GR1 |
| 3 | PT3 |
| 4 | PT4 |
| 5 | EXISTING CABINETS |
| 6 | NEW BASE CABINETRY MILWORK |
| 7 | TRIPLE BOWL SINK |
| 8 | RANGE |
| 9 | RB1 |
| 10 | FAUCET |
| 11 | HD1 |
| 12 | ADJUSTABLE SHELVING |

SHEET ABBREVIATIONS

- | | |
|----|------------------|
| CO | COUNTERTOP |
| CT | CERAMIC TILE |
| GR | GROUT |
| HD | HARDWARE |
| PT | PAINT |
| RB | RUBBER WALL BASE |

KEY PLAN:

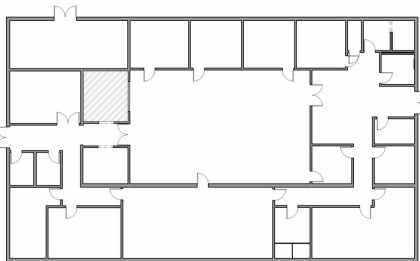

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

KITCHEN ELEVATIONS

Project Status 100%

Project Number 1019545


Date 15 APR 2026

Drawn by J.WRIGHT


Checked by J.ORTIZ

IN401


Scale 3/8" = 1'-0"

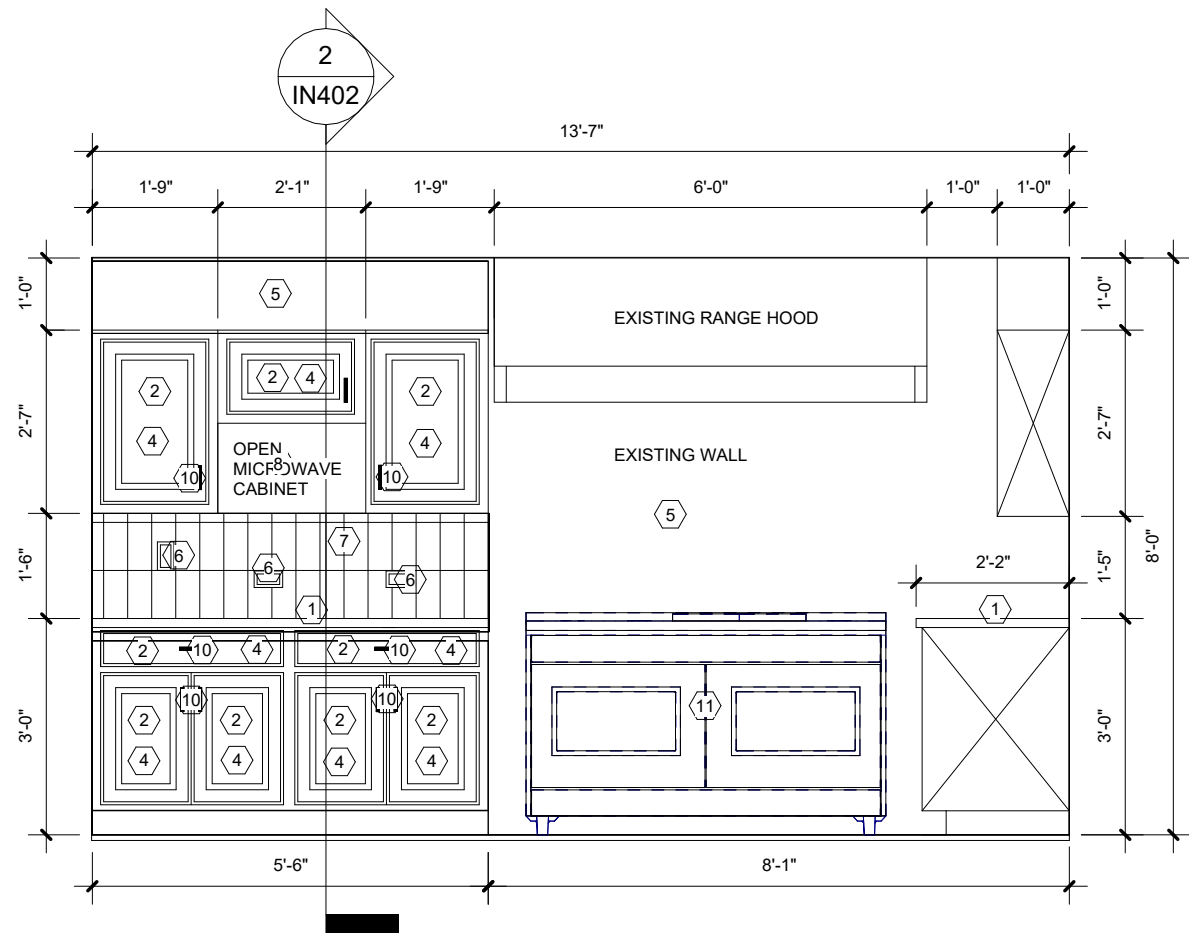

1 NORTH KITCHEN ELEVATION
3/8" = 1'-0"

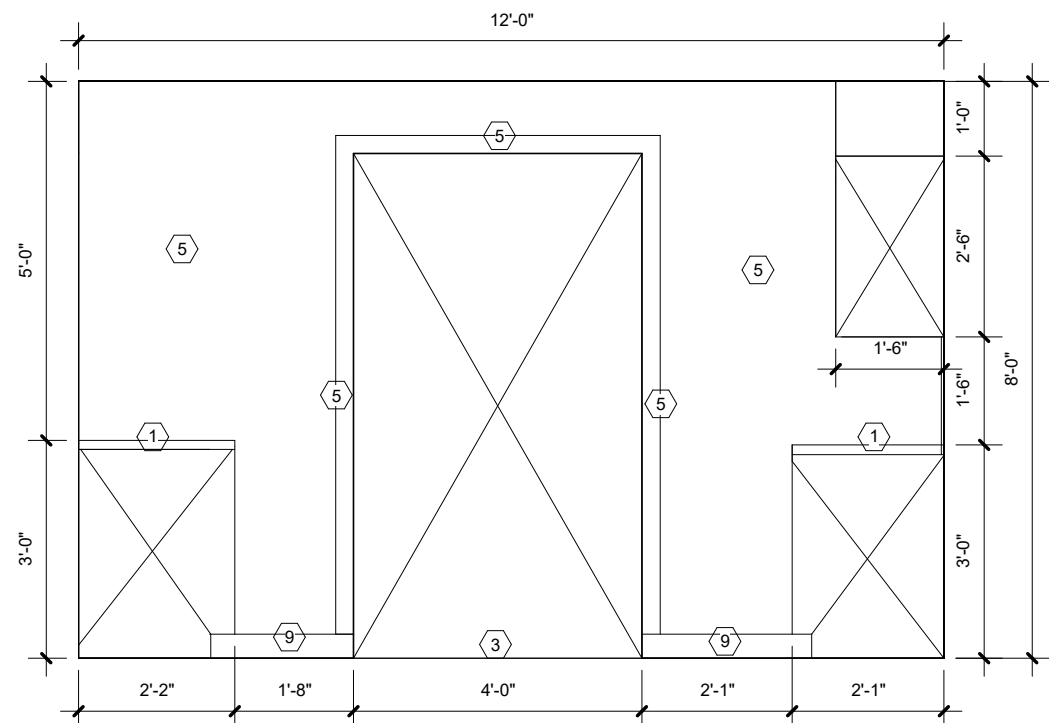

3 WEST KITCHEN ELEVATION
3/8" = 1'-0"

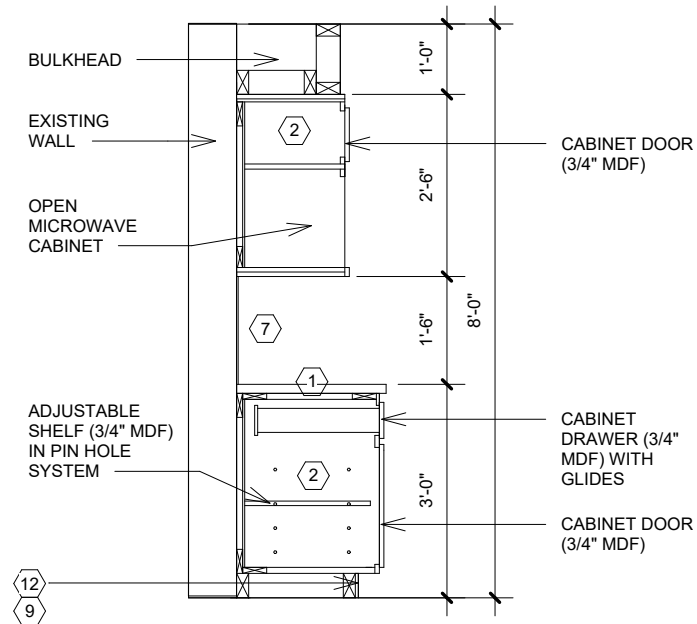

2 MICROWAVE SECTION VIEW
3/8" = 1'-0"

SHEET NOTES

1. THE MICROWAVE IS TO BE PROVIDED BY OTHERS.
1. REFER TO FINISH SCHEDULE ON SHEET IN601 FOR FINISH CODE LEGEND, AND BASIS-OF-DESIGN FINISHES, MATERIALS, PATTERNS, AND COLORS.


FINISH LEGEND:

- 1 SOLID SURFACE COUNTERTOP
- 2 NEW CABINETRY
- 3 TH1
- 4 PAINT CABINETS
- 5 PT3
- 6 EXISTING SURFACE MOUNTED
DUPLEX RECEPTACLE
- 7 CERAMIC BACKSPLASH
- 8 OPEN MICROWAVE CABINET
- 9 RB1
- 10 HD1
- 11 KR1

SHEET ABBREVIATIONS

CO	COUNTERTOP
HD	HARDWARE
KR	KITCHEN RANGE
PT	PAINT
RB	RUBBER WALL BASE

KEY PLAN:

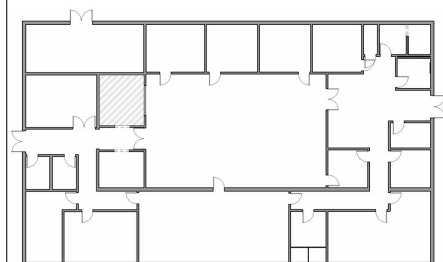

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH


F528


KITCHEN ELEVATIONS

Project Status	100%
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ


IN402

Scale	$3/8" = 1'-0"$
-------	----------------




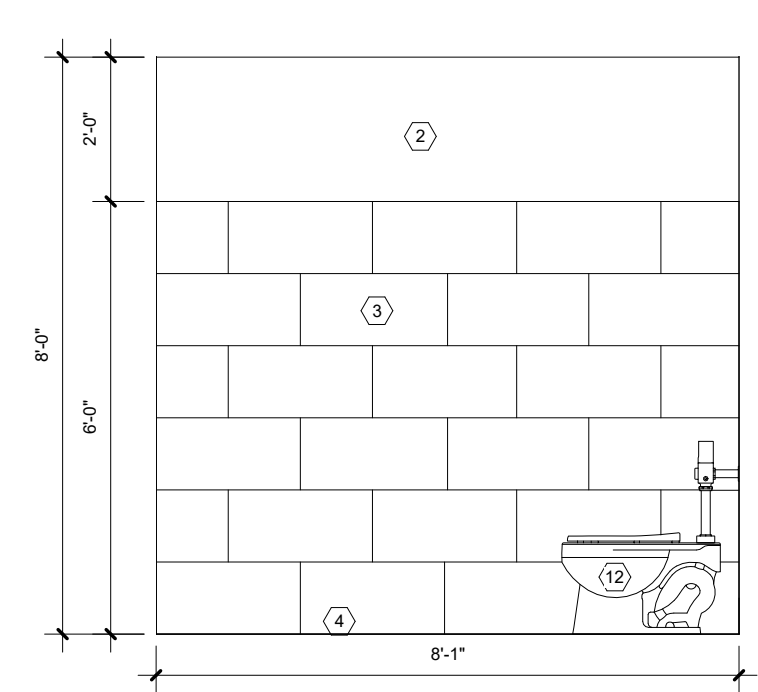


1 SOUTH WOMEN'S RESTROOM ELEVATION
3/8" = 1'-0"

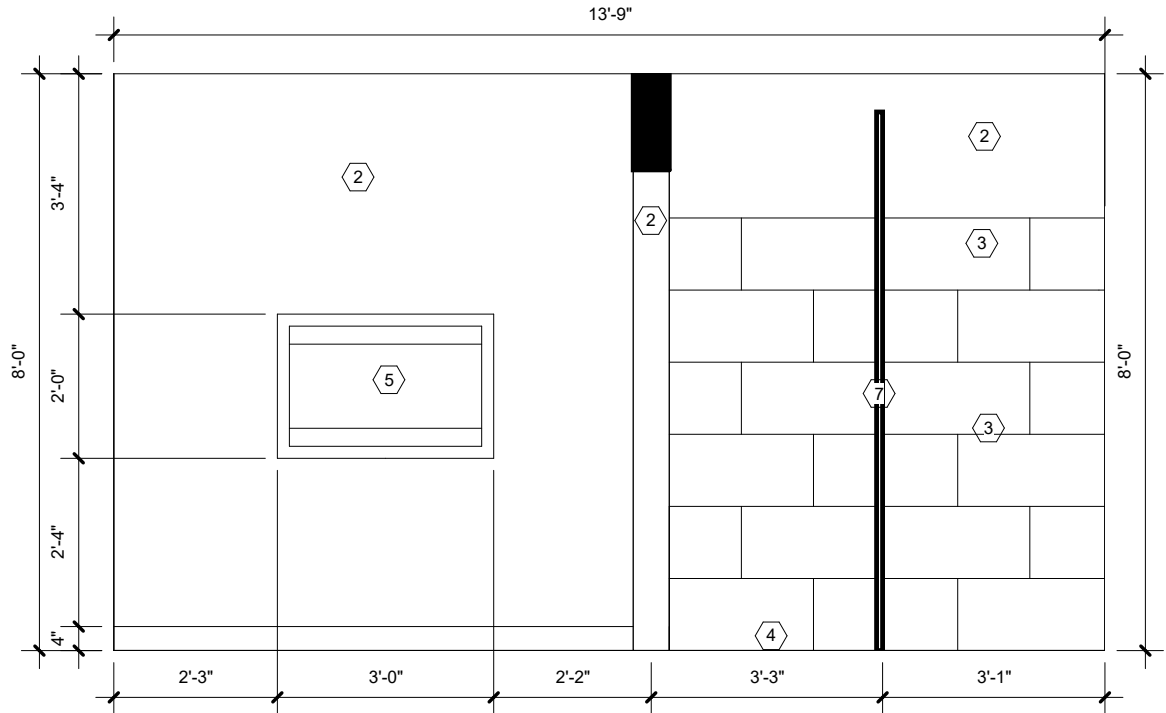


2 EAST WOMEN'S RESTROOM ELEVATION
3/8" = 1'-0"

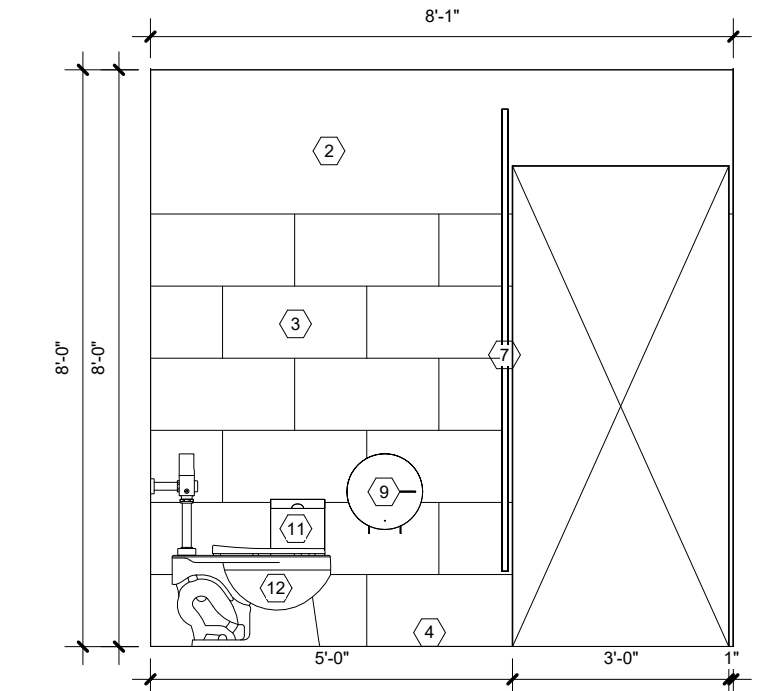

3 NORTH WOMEN'S RESTROOM ELEVATION
3/8" = 1'-0"

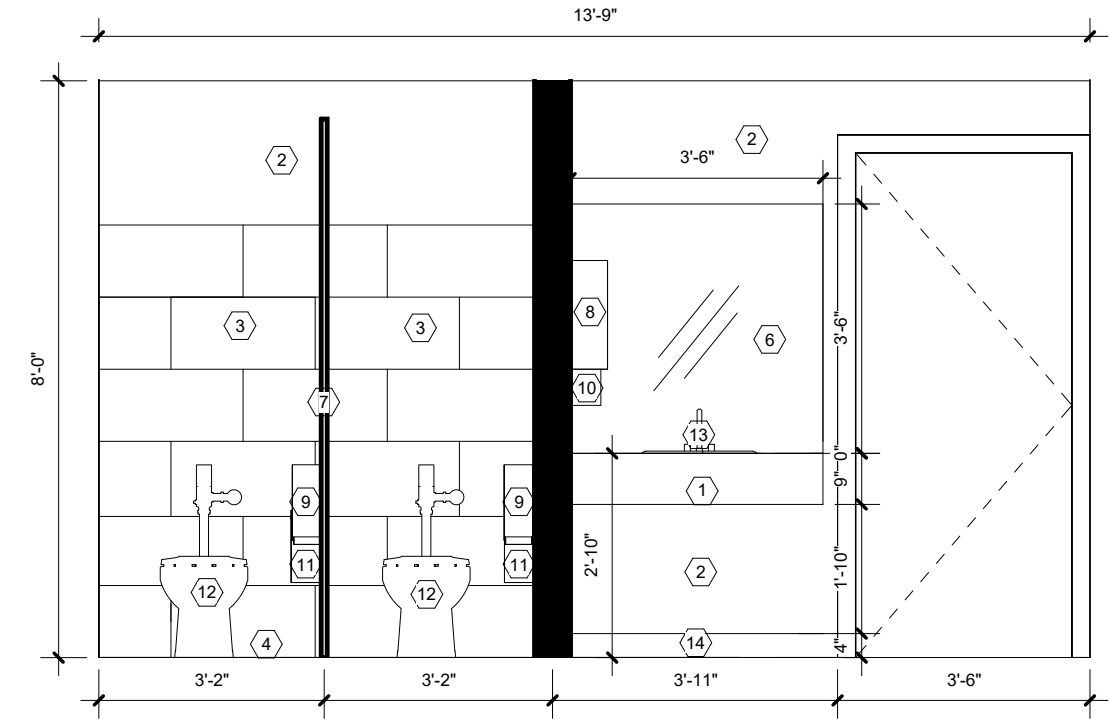

4 WEST WOMEN'S RESTROOM ELEVATION
3/8" = 1'-0"



SHEET NOTES:

1. PAINT BOTH SIDES OF DOOR AND FRAME.
2. CONTRACTOR TO VERIFY PARTITION SIZES.
3. FINISH ALL TILE PRODUCTS WITH TILE TRIM.
4. REFER TO FINISH SCHEDULE ON SHEET IN601 FOR FINISH CODE LEGEND, AND BASIS-OF-DESIGN FINISHES, MATERIALS, PATTERNS, AND COLORS.


FINISH LEGEND:

- 1 CO1
- 2 PT2
- 3 CERAMIC WALL TILE
- 4 TILE TO TILE TRANSITION
- 5 BCT1
- 6 MR
- 7 P
- 8 FOR REFERENCE ONLY PAPER TOWEL DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 9 FOR REFERENCE ONLY TOILET PAPER DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 10 FOR REFERENCE ONLY SOAP DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 11 FOR REFERENCE ONLY SANITARY TISSUE DISPOSAL, GOVERNMENT ISSUED AND INSTALLED
- 12 TL1
- 13 SINK FIXTURE
- 14 RB1

SHEET ABBREVIATIONS

CO	COUNTERTOP
BCT	BABY CHANGING TABLE
MR	MIRROR
P	PARTITION
TL	TOILET
RB	RUBBER WALL BASE

KEY PLAN:

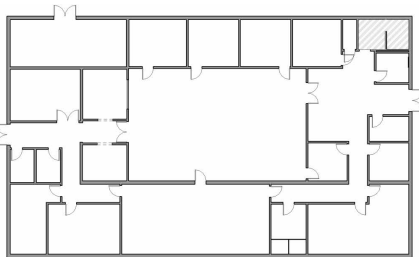

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076


APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH


F528

WOMEN'S RESTROOM ELEVATIONS


Project Status	100%
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ
IN403	
Scale	3/8" = 1'-0"

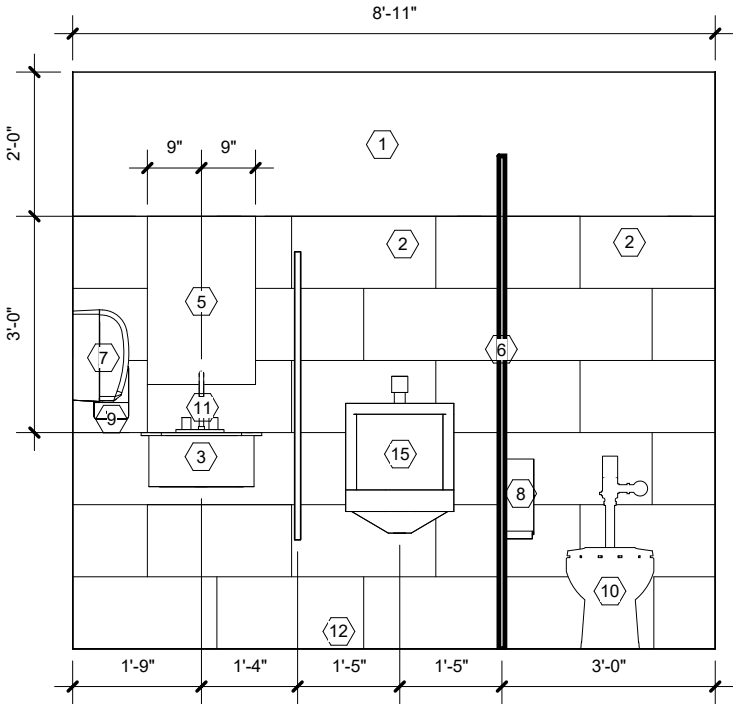


1 EAST MEN'S RESTROOM ELEVATION
3/8" = 1'-0"

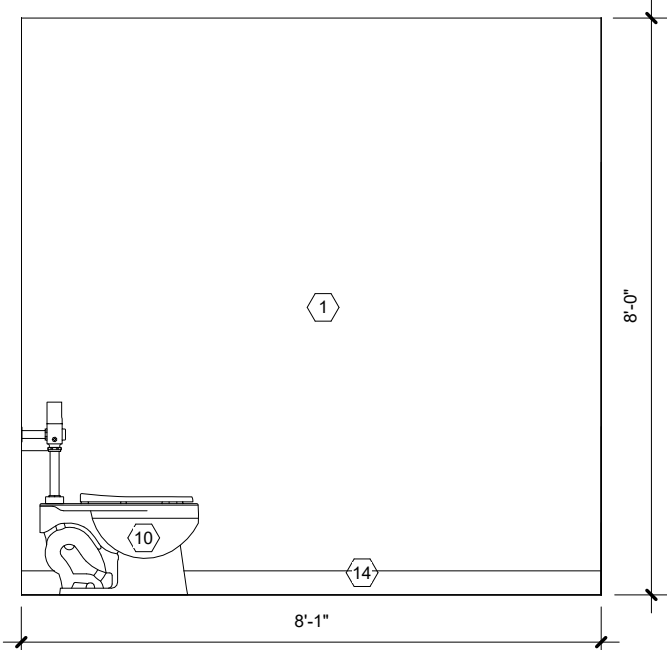


2 SOUTH MEN'S RESTROOM ELEVATION
3/8" = 1'-0"

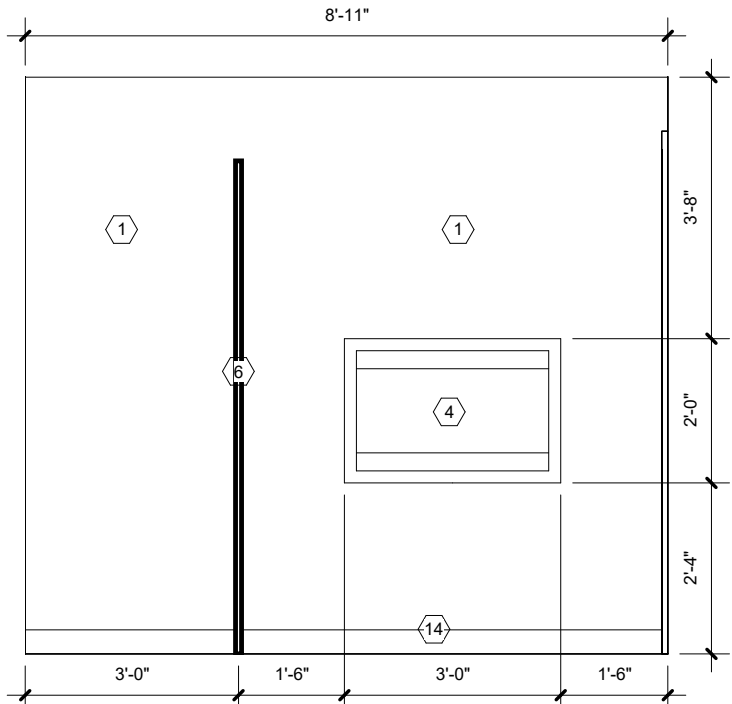

3 WEST MEN'S RESTROOM ELEVATION
3/8" = 1'-0"

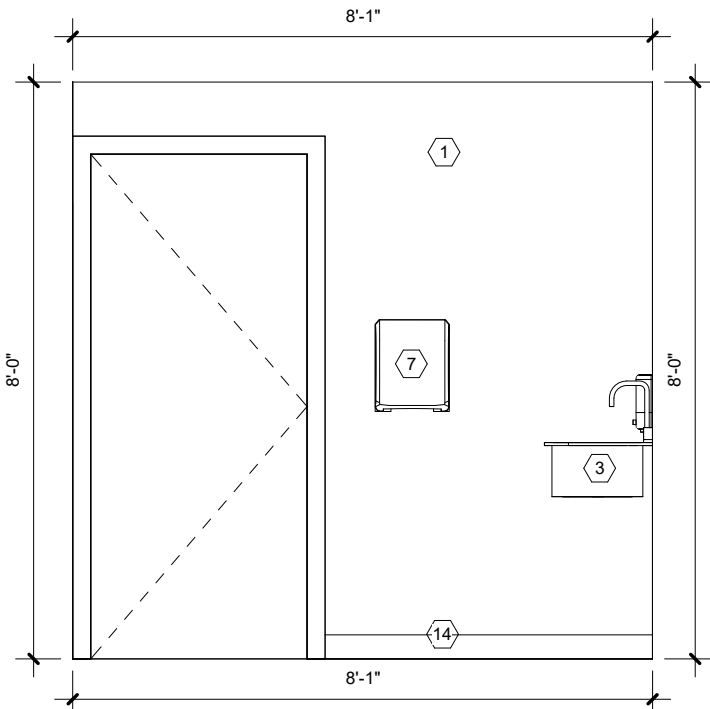

4 NORTH MEN'S RESTROOM ELEVATION
3/8" = 1'-0"



SHEET NOTES:

1. PAINT BOTH SIDES OF DOOR AND FRAME.
2. CONTRACTOR TO VERIFY PARTITION SIZES.
3. FINISH ALL TILE PRODUCTS WITH TILE TRIM.
4. REFER TO FINISH SCHEDULE ON SHEET IN601 FOR FINISH CODE LEGEND, AND BASIS-OF-DESIGN FINISHES, MATERIALS, PATTERNS, AND COLORS.


FINISH LEGEND:

- 1 PT2
- 2 CERAMIC WALL TILE
- 3 S3
- 4 BCT
- 5 MR
- 6 P
- 7 FOR REFERENCE ONLY PAPER TOWEL DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 8 FOR REFERENCE ONLY TOILET PAPER DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 9 FOR REFERENCE ONLY SOAP DISPENSER, GOVERNMENT ISSUED AND INSTALLED
- 10 TL1
- 11 SINK FIXTURE
- 12 TILE TO TILE TRANSITION
- 13 URINAL SCREEN
- 14 RB1
- 15 UL1

SHEET ABBREVIATIONS

BCT	BABY CHANGING TABLE
MR	MIRROR
P	PARTITION
RB	RUBBER WALL BASE
S	SINK
TL	TOILET
UL	URINAL

KEY PLAN:

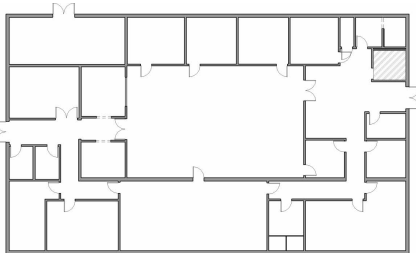

UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

APPENDIX C

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

MEN'S RESTROOM ELEVATIONS

Project Status 100%

Project Number 1019545

Date 15 APR 2026

Drawn by J.WRIGHT

Checked by J.ORTIZ

IN404

Scale 3/8" = 1'-0"

ROOM FINISH SCHEDULE							
ROOM NUMBER	ROOM NAME	FLOOR FINISH	BASE FINISH	CEILING FINISH	WALL PAINT	WALL FINISH	COMMENTS
01	MECHANICAL	NIC	NIC	NIC	NIC	NIC	NIC
02	SPOUSE ROOM	CPT1	RB1	NA	NA	NA	
03	CONFERENCE ROOM	CPT1	RB1	NA	NA	NA	
04	CLASSROOM	CPT1	RB1	ACT1	PT1	NA	
05	MEDITATION ROOM	CPT1	RB1	NA	NA	NA	
06	JANITOR'S CLOSET	VCT1	RB1	PT3	PT3	NA	TS1
07	WOMEN'S RESTROOM	CT1	TB1	PT2	PT2	CT3	TS1, C01,GR1, P1
08	MEN'S RESTROOM	CT1	TB1	PT2	PT2	CT3	TS1, GR1, P1, P2
09	LIBRARY	CPT1	RB1	ACT1	PT1	NA	
10	HALLWAY	CPT1	RB1	ACT1	PT3	NA	TH1
11	CATHOLIC ROOM	CPT1	RB1	ACT1	PT1	NA	
12	COMMUNITY ROOM	CPT1	RB1	ACT1	PT1	NA	
13	ISLAMIC ROOM	CPT1	RB1	ACT1	PT1	NA	
14	STORAGE	CPT1	RB1	ACT1	PT1	NA	
15	AIRMEN'S LOUNGE	CPT1	RB1	ACT1	NIC	NA	
16	STORAGE	CPT1	RB1	ACT1	PT1	NA	
17	STORAGE	CPT1	RB1	ACT1	PT1	NA	
18	MEN'S RESTROOM	VCT1	RB1	PT2	PT2	NA	TS1
19	WOMEN'S RESTROOM	VCT1	RB1	PT2	PT2	NA	TS1
20	HALLWAY	CPT1	RB1	ACT1	PT3	NA	TH1
21	STORAGE	CPT1	RB1	PT3	PT2	NA	TH1
22	KITCHEN	CT1	RB1	PT3	PT3	CT2	TH1, CO1, HD1, GR1, PT4
23	STORAGE	VCT1	RB1	PT3	PT3	NA	TH1
24	DINNING	CPT1	RB1	ACT1	PT3	NA	

FLOOR FINISH SCHEDULE					
TYPE	DESCRIPTION	MANUFACTURER	STYLE / FINISH	COLOR	COMMENTS
CPT1	PBG	PBG	PBG	PBG	PBG
CT1	CERAMIC TILE	DALTILE	CORE FUNDAMENTALS CHOICE	WEATHERED WHITE SQ20	12" X 12" X 5/16"
VCT1	VINYL COMPOSITION TILE	ARMSTRONG	STANDARD EXCELON IMPERIAL TEXTURE	BLUE CLOUD 51933	12" X 12"

WALL FINISH SCHEDULE					
TYPE	DESCRIPTION	MANUFACTURER	STYLE / FINISH	COLOR	COMMENTS
CT2	CERAMIC TILE	TILEBAR	PORTMORE / GLOSSY	WHITE	3"X8"
CT3	CERAMIC TILE	TILEBAR	NASHVILLE / MATTE	WHITE	3"X8"
PT1	PAINT	SHERWIN WILLIAMS	SATIN	MINDFUL GRAY SW 7016	
PT2	PAINT	SHERWIN WILLIAMS	SATIN	UPWARD SW 6239	
PT3	PAINT	SHERWIN WILLIAMS	SATIN	ALABASTER SW 7008	

WALL BASE FINISH SCHEDULE					
TYPE	DESCRIPTION	MANUFACTUER	STYLE / FINISH	COLOR	COMMENTS
RB1	WALL BASE	MOHAWK GROUP	COVE	CHARCOAL	4"
TB1	TRANSITION	SCHLUTER	COVE BASE PROFILE	CHROME	FLOOR TILE TO WALL TILE

CEILING FINISH SCHEDULE					
TYPE	DESCRIPTION	MANUFACTURER	STYLE / FINISH	COLOR	COMMENTS
ACT1	ACOUSTICAL CEILING TILE	ARMSTRONG	FL EDGE/PAPER BACK	WHITE	2' X 2' X 5/8"
PT1	PAINT	SHERWIN WILLIAMS	SATIN	MINDFUL GRAY SW 7016	
PT2	PAINT	SHERWIN WILLIAMS	SATIN	UPWARD SW 6239	
PT3	PAINT	SHERWIN WILLIAMS	SATIN	ALABASTER SW 7008	

SHEET NOTES:	
1.	REFER TO APPENDIX D FOR BASIS-OF-DESIGN.
SHEET ABBREVIATIONS:	
ACT	ACOUSTICAL CEILING TILE
BCT	BABY CHANGING TABLE
CO	COUNTERTOP
CPT	CARPET
CT	CERAMIC TILE
F	FAUCET
GB	GRAB BARS
GR	GROUT
HD	HARDWARE
KR	KITCHEN RANGE
MR	MIRROR
NIC	NOT IN CONTRACT
P	PARTITION
PBG	PROVIDED BY GOVERNMENT
PT	PAINT
RL	RECESSED LIGHTIING FIXTUR3E
RB	RUBBER WALL BASE
S	SINK
TB	TRANSITION BASE
TH	THRESHOLD
TL	TOILET
TS	TRANSITION STRIP
UL	URINAL
VCT	VINYL COMPOSITION TILE



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

FINISH SCHEDULE

Project Status	100%
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ
IN601	
Scale	

MISCELLANEOUS SCHEDULE							
TYPE	DESCRIPTION	MANUFACTURER	MODEL NUMBER	DIMENSIONS	STYLE / FINISH	COLOR	COMMENTS
BCT1	BABY CHANGING TABLE	RUBBERMAID COMMERCIAL PRODUCTS	7818-88	33.5" L x 21.5" W x 4" H	PLATINUM	PLATINUM	
CO1	COUNTERTOP	CORIAN SOLID SURFACE			COUNTERTOP	ARROWROOT	
F1	FAUCET FIXTURE	DELTA	B2518LF		FOUNDATIONS	POLISH / CHROME	TO GO WITH S2,S3
F2	FAUCET FIXTURE	ELKAY	LK800GN08T4		GOOSE NECK	CHROME	TO GO WITH S1
GB1	GRAB BAR	GLACIER BAY	20135-03202-36	36 " L x 1 1/4"	STAINLESS STEEL	STAINLESS STEEL	
GB2	GRAB BAR	GLACIER BAY	20135-03202-42	42" L x 1 1/4"	STAINLESS STEEL	STAINLESS STEEL	
GR1	GROUT	LATICRETE			NA	SMOKE GREY	
HD1	HARDWARE	BRAINERD			PULL	MATTE BLACK	4"
KR1	KITCHEN RANGE	THOR KITCHEN	LRG60E/ LRG60ELP	59 7/8" x 29" x 37 1/2"	STAINLESS STEEL	STAINLESS STEEL	
MR1	MIRROR	MATCH EXISTING			MATCH EXISTING	MATCH EXISTING	
MR2	MIRROR	MATCH EXISTING			MATCH EXISTING	MATCH EXISTING	
P1	PARTITION	ASI GLOBAL PARTITIONS			SOLID PLASTIC, FLOOR MOUNTED	GREY	
P2	URINAL PARTITION	ASI GLOBAL PARTITIONS			SOLID PLASTIC, FLOOR MOUNTED	GREY	
PT4	CABINET PAINT	SHERWIN WILLIAMS			EGGSHELL	MINDFUL GRAY SW 7016	CABINETS
RL	RECESSED LIGHTING FIXTURE	HALO	HLBSL609FS5	6.69" x 6.69" x 1.16"	WHITE	WHITE	
S1	TRIPLE BOWL SINK	ELKAY	LTR542210	54" x 22" x 10-1/8"	DROP-IN	STAINLESS STEEL	F2, ROOM 22 KITCHEN
S2	LAVATORY	PROFLO		17" x 20 1/2"	DROP-IN	WHITE	F1, ROOM 07 WOMEN'S RESTROOM
S3	LAVATORY	PROFLO	PF5414WH	19" x 17"	WALL HUNG	WHITE	F1, 08 MEN'S RESTROOM
TH1	THRESHOLD	M-D PRODUCTS			FLUTED SADDLE	ALUMINUM	5"
TL1	TOILET	AMERICAN STANDARD		28-1/4" x 14" x 15"		WHITE	
TS1	TRANSITION STRIP	ROPPE			TILE TO CARPET	BLACK	1/4"
UL1	URINAL	AMERICAN STANDARD	6002001.020	14-7/16" x 14-5/16" x 22-5/8"	WALL HUNG	WHITE	

SHEET NOTES:

1.
- REFER TO APPENDIX D FOR BASIS-OF-DESIGN.

SHEET ABBREVIATIONS:

ACT	ACOUSTICAL CEILING TILE
BCT	BABY CHANGING TABLE
CO	COUNTERTOP
CPT	CARPET
CT	CERAMIC TILE
F	FAUCET
GB	GRAB BARS
GR	GROUT
HD	HARDWARE
KR	KITCHEN RANGE
MR	MIRROR
NIC	NOT IN CONTRACT
P	PARTITION
PBG	PROVIDED BY GOVERNMENT
PT	PAINT
RL	RECESSED LIGHTIING FIXTUR3E
RB	RUBBER WALL BASE
S	SINK
TB	TRANSITION BASE
TH	THRESHOLD
TL	TOILET
TS	TRANSITION STRIP
UL	URINAL
VCT	VINYL COMPOSITION TILE



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

CHAPEL ACTIVITY CENTER (CAC)
INTERIOR REFRESH

F528

FINISH SCHEDULE

Project Status	
Project Number	1019545
Date	15 APR 2026
Drawn by	J.WRIGHT
Checked by	J.ORTIZ
IN602	
Scale	

APPENDIX D – SCHEDULE E

APPENDIX D

Schedule E																
Chapel Activity Center Interior Refresh, F528											DATE: April 2026					
											To Be Completed by ASRC/CEEC					
	Item or Description of Item	Product Data	Shop Drawings	Samples	O&M	MFG REC	COC	WTY	SDS	MISC	Date Received.	Date Approved	Date Disapproved	Date Resubmitted	Date Approved	Date Disapproved
1	Project Schedule															
2	Schedule of Values															
3	Warranties															
4	O&M Manuals															
5	Hazmat/SDS															
6	Inventory of Installed Property															
7	As-Builts															
8	1.04.C.2.g.2 - Asbestos Training Certificates															
9	1.04.C.2.g.3 - Asbestos Work Plan															
10	1.04.C.2.g.4 - Air Clearance Testing															
11	1.04.C.4.c - Floor Adhesive															

COC = Certificate of Compliance MFG REC = Manufacturer's Recommendations
 MSDS = Material Safety Data Sheet WTY = Warranty Data

APPENDIX D

Schedule E																
Chapel Activity Center Interior Refresh, F528											DATE: April 2026					
											To Be Completed by ASRC/CEEC					
	Item or Description of Item	Product Data	Shop Drawings	Samples	O&M	MFG REC	COC	WTY	SDS	MISC	Date Received.	Date Approved	Date Disapproved	Date Resubmitted	Date Approved	Date Disapproved
12	1.04.C.4.c - Ceramic Tile															
13	1.04.C.4.c - Rubber Wall Base															
14	1.04.C.4.c - Transition Strips															
15	1.04.C.5 - Interior Paints															
16	1.04.C.6 - Ceiling Tiles															
17	1.04.C.7.a.1 - Kitchen Cabinets															
18	1.04.C.8 - Appliances															