


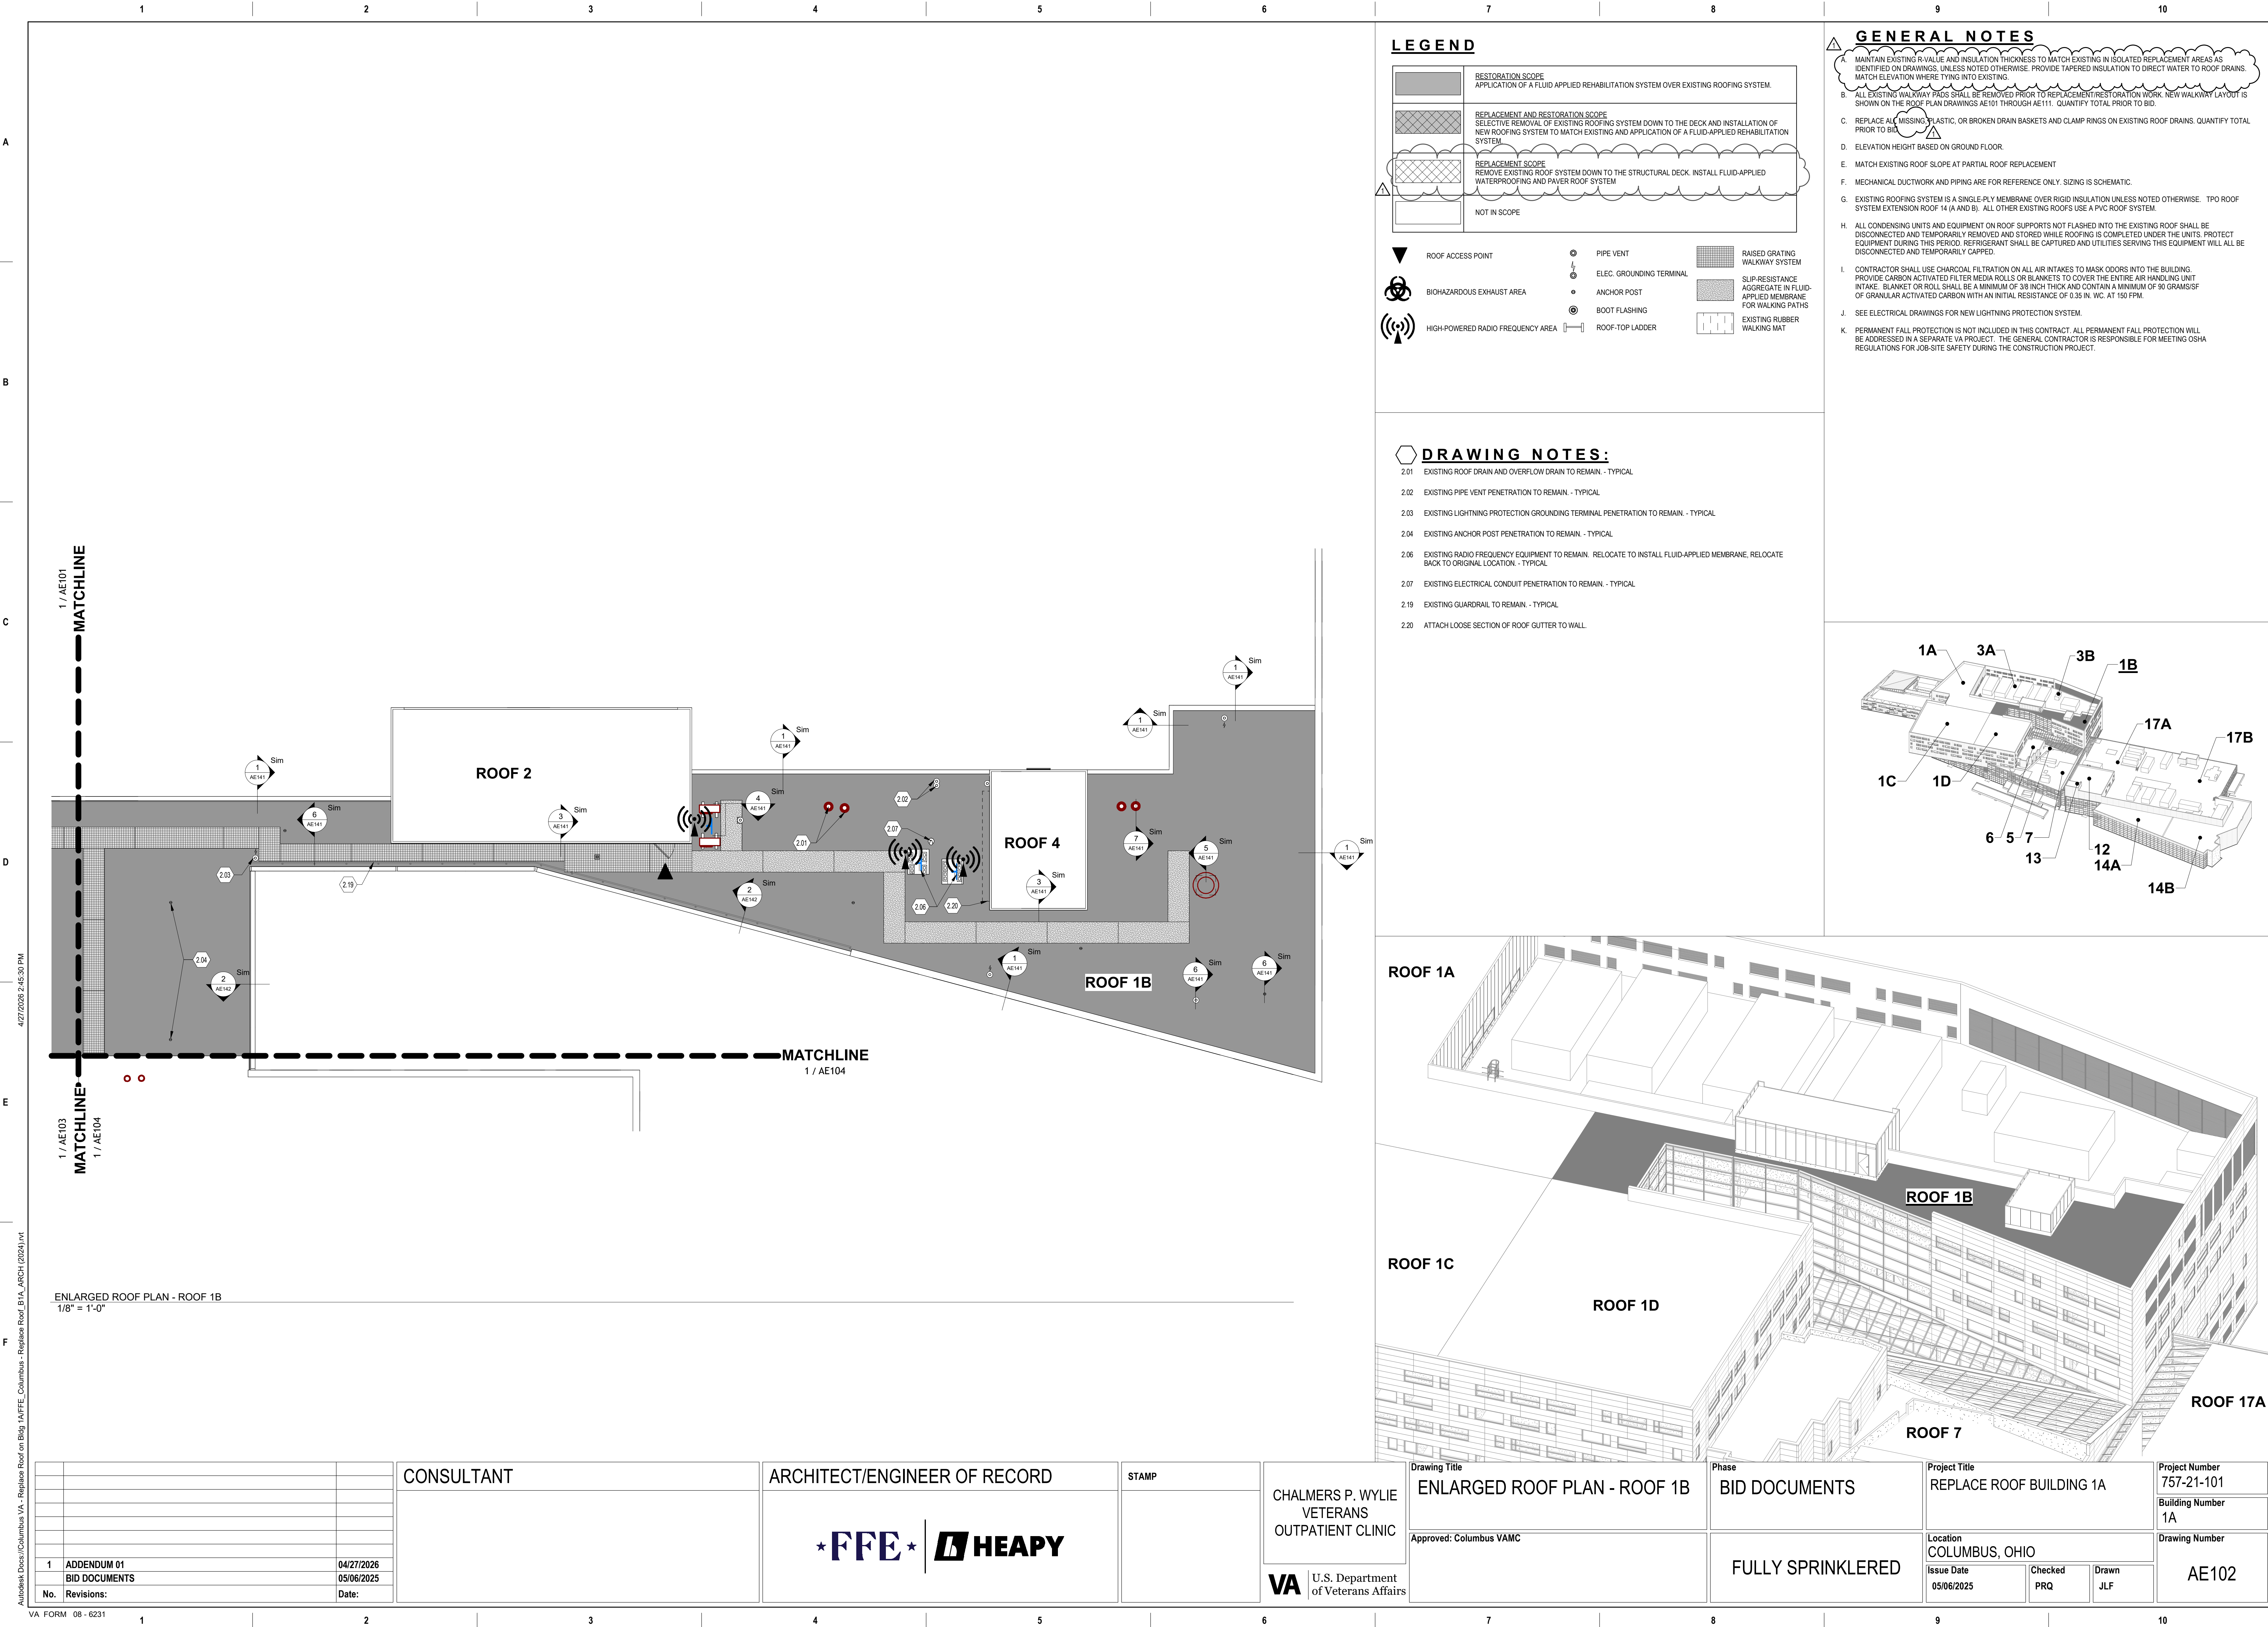

LEGEND

	RESTORATION SCOPE APPLICATION OF A FLUID APPLIED REHABILITATION SYSTEM OVER EXISTING ROOFING SYSTEM.
	REPLACEMENT AND RESTORATION SCOPE SELECTIVE REMOVAL OF EXISTING ROOFING SYSTEM DOWN TO THE DECK AND INSTALLATION OF NEW ROOFING SYSTEM TO MATCH EXISTING AND APPLICATION OF A FLUID-APPLIED REHABILITATION SYSTEM.
	REPLACEMENT SCOPE REMOVE EXISTING ROOF SYSTEM DOWN TO THE STRUCTURAL DECK. INSTALL FLUID-APPLIED WATERPROOFING AND PAPER ROOF SYSTEM.
	NOT IN SCOPE

	ROOF ACCESS POINT		PIPE VENT		RAISED GRATING WALKWAY SYSTEM
	BIOHAZARDOUS EXHAUST AREA		ELEC. GROUNDING TERMINAL		SLIP-RESISTANCE AGGREGATE IN FLUID-APPLIED MEMBRANE FOR WALKING PATHS
	HIGH-POWERED RADIO FREQUENCY AREA		ANCHOR POST		EXISTING RUBBER WALKING MAT
			BOOT FLASHING		
			ROOF-TOP LADDER		

DRAWING NOTES:

- 2.01 EXISTING ROOF DRAIN AND OVERFLOW DRAIN TO REMAIN - TYPICAL
- 2.02 EXISTING PIPE VENT PENETRATION TO REMAIN - TYPICAL
- 2.03 EXISTING LIGHTNING PROTECTION GROUNDING TERMINAL PENETRATION TO REMAIN - TYPICAL
- 2.04 EXISTING ANCHOR POST PENETRATION TO REMAIN - TYPICAL
- 2.06 EXISTING RADIO FREQUENCY EQUIPMENT TO REMAIN. RELOCATE TO INSTALL FLUID-APPLIED MEMBRANE, RELOCATE BACK TO ORIGINAL LOCATION - TYPICAL
- 2.07 EXISTING ELECTRICAL CONDUIT PENETRATION TO REMAIN - TYPICAL
- 2.19 EXISTING GUARDRAIL TO REMAIN - TYPICAL
- 2.20 ATTACH LOOSE SECTION OF ROOF GUTTER TO WALL

GENERAL NOTES

- A. MAINTAIN EXISTING R-VALUE AND INSULATION THICKNESS TO MATCH EXISTING IN ISOLATED REPLACEMENT AREAS AS IDENTIFIED ON DRAWINGS. UNLESS NOTED OTHERWISE. PROVIDE TAPERED INSULATION TO DIRECT WATER TO ROOF DRAINS. MATCH ELEVATION WHERE TYING INTO EXISTING.
- B. ALL EXISTING WALKWAY PADS SHALL BE REMOVED PRIOR TO REPLACEMENT/RESTORATION WORK. NEW WALKWAY LAYOUT IS SHOWN ON THE ROOF PLAN DRAWINGS AE101 THROUGH AE111. QUANTIFY TOTAL PRIOR TO BID.
- C. REPLACE ALL MISSING PLASTIC, OR BROKEN DRAIN BASKETS AND CLAMP RINGS ON EXISTING ROOF DRAINS. QUANTIFY TOTAL PRIOR TO BID.
- D. ELEVATION HEIGHT BASED ON GROUND FLOOR.
- E. MATCH EXISTING ROOF SLOPE AT PARTIAL ROOF REPLACEMENT
- F. MECHANICAL DUCTWORK AND PIPING ARE FOR REFERENCE ONLY. SIZING IS SCHEMATIC.
- G. EXISTING ROOFING SYSTEM IS A SINGLE-PLY MEMBRANE OVER RIGID INSULATION UNLESS NOTED OTHERWISE. TPO ROOF SYSTEM EXTENSION ROOF 14 (A AND B). ALL OTHER EXISTING ROOFS USE A PVC ROOF SYSTEM.
- H. ALL CONDENSING UNITS AND EQUIPMENT ON ROOF SUPPORTS NOT FLASHED INTO THE EXISTING ROOF SHALL BE DISCONNECTED AND TEMPORARILY REMOVED AND STORED WHILE ROOFING IS COMPLETED UNDER THE UNITS. PROTECT EQUIPMENT DURING THIS PERIOD. REFRIGERANT SHALL BE CAPTURED AND UTILITIES SERVING THIS EQUIPMENT WILL ALL BE DISCONNECTED AND TEMPORARILY CAPPED.
- I. CONTRACTOR SHALL USE CHARCOAL FILTRATION ON ALL AIR INTAKES TO MASK ODORS INTO THE BUILDING. PROVIDE CARBON ACTIVATED FILTER MEDIA ROLLS OR BLANKETS TO COVER THE ENTIRE AIR HANDLING UNIT INTAKE. BLANKET OR ROLL SHALL BE A MINIMUM OF 3/8 INCH THICK AND CONTAIN A MINIMUM OF 90 GRAMS/SF OF GRANULAR ACTIVATED CARBON WITH AN INITIAL RESISTANCE OF 0.35 IN. WC. AT 150 FPM.
- J. SEE ELECTRICAL DRAWINGS FOR NEW LIGHTNING PROTECTION SYSTEM.
- K. PERMANENT FALL PROTECTION IS NOT INCLUDED IN THIS CONTRACT. ALL PERMANENT FALL PROTECTION WILL BE ADDRESSED IN A SEPARATE VA PROJECT. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR MEETING OSHA REGULATIONS FOR JOB-SITE SAFETY DURING THE CONSTRUCTION PROJECT.

