




JORDAN RIVER NATIONAL FISH HATCHERY HATCHERY BUILDING INSULATION & CEILING REPLACEMENT PROJECT


UNITED STATES DEPARTMENT OF THE
INTERIOR
FISH AND WILDLIFE SERVICE
MIDWEST REGION NO.3

PROJECT DRAWING SET CODE:
3F-MI-547-517

Infrastructure Management Division
5600 American Blvd. West, Suite 990
Bloomington, MN 55437-1458

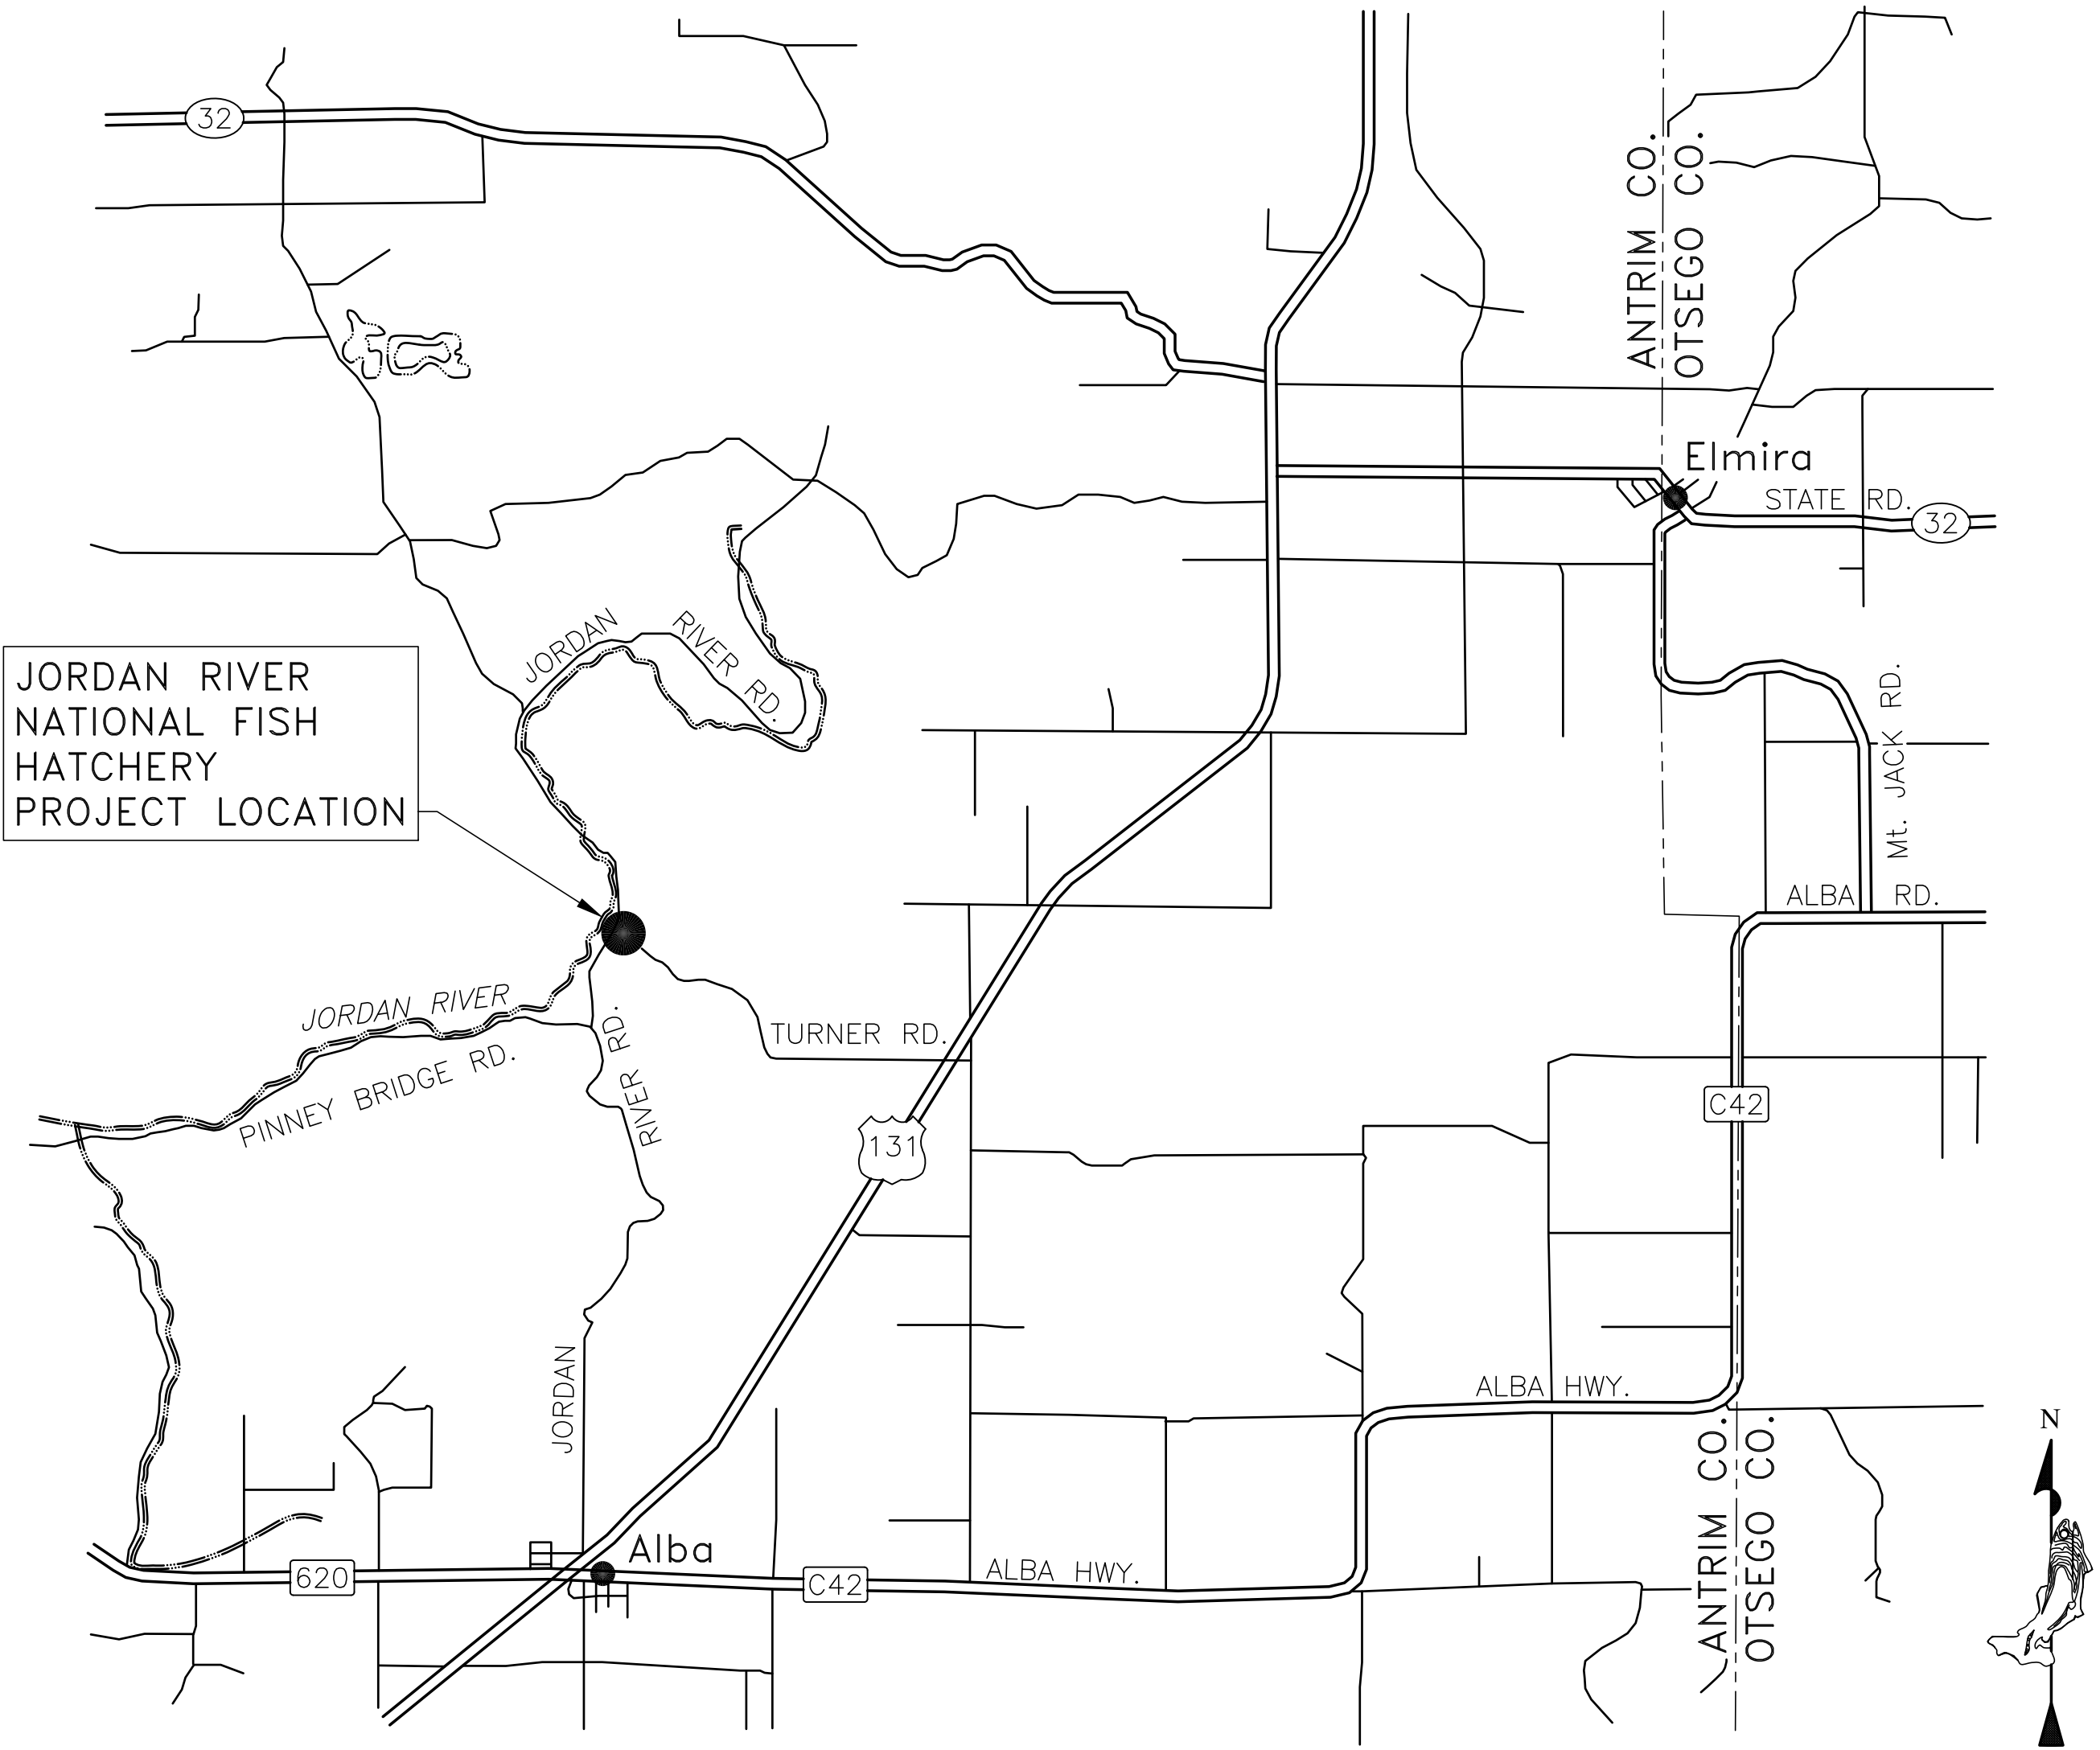

LOCATION MAP
NO SCALE

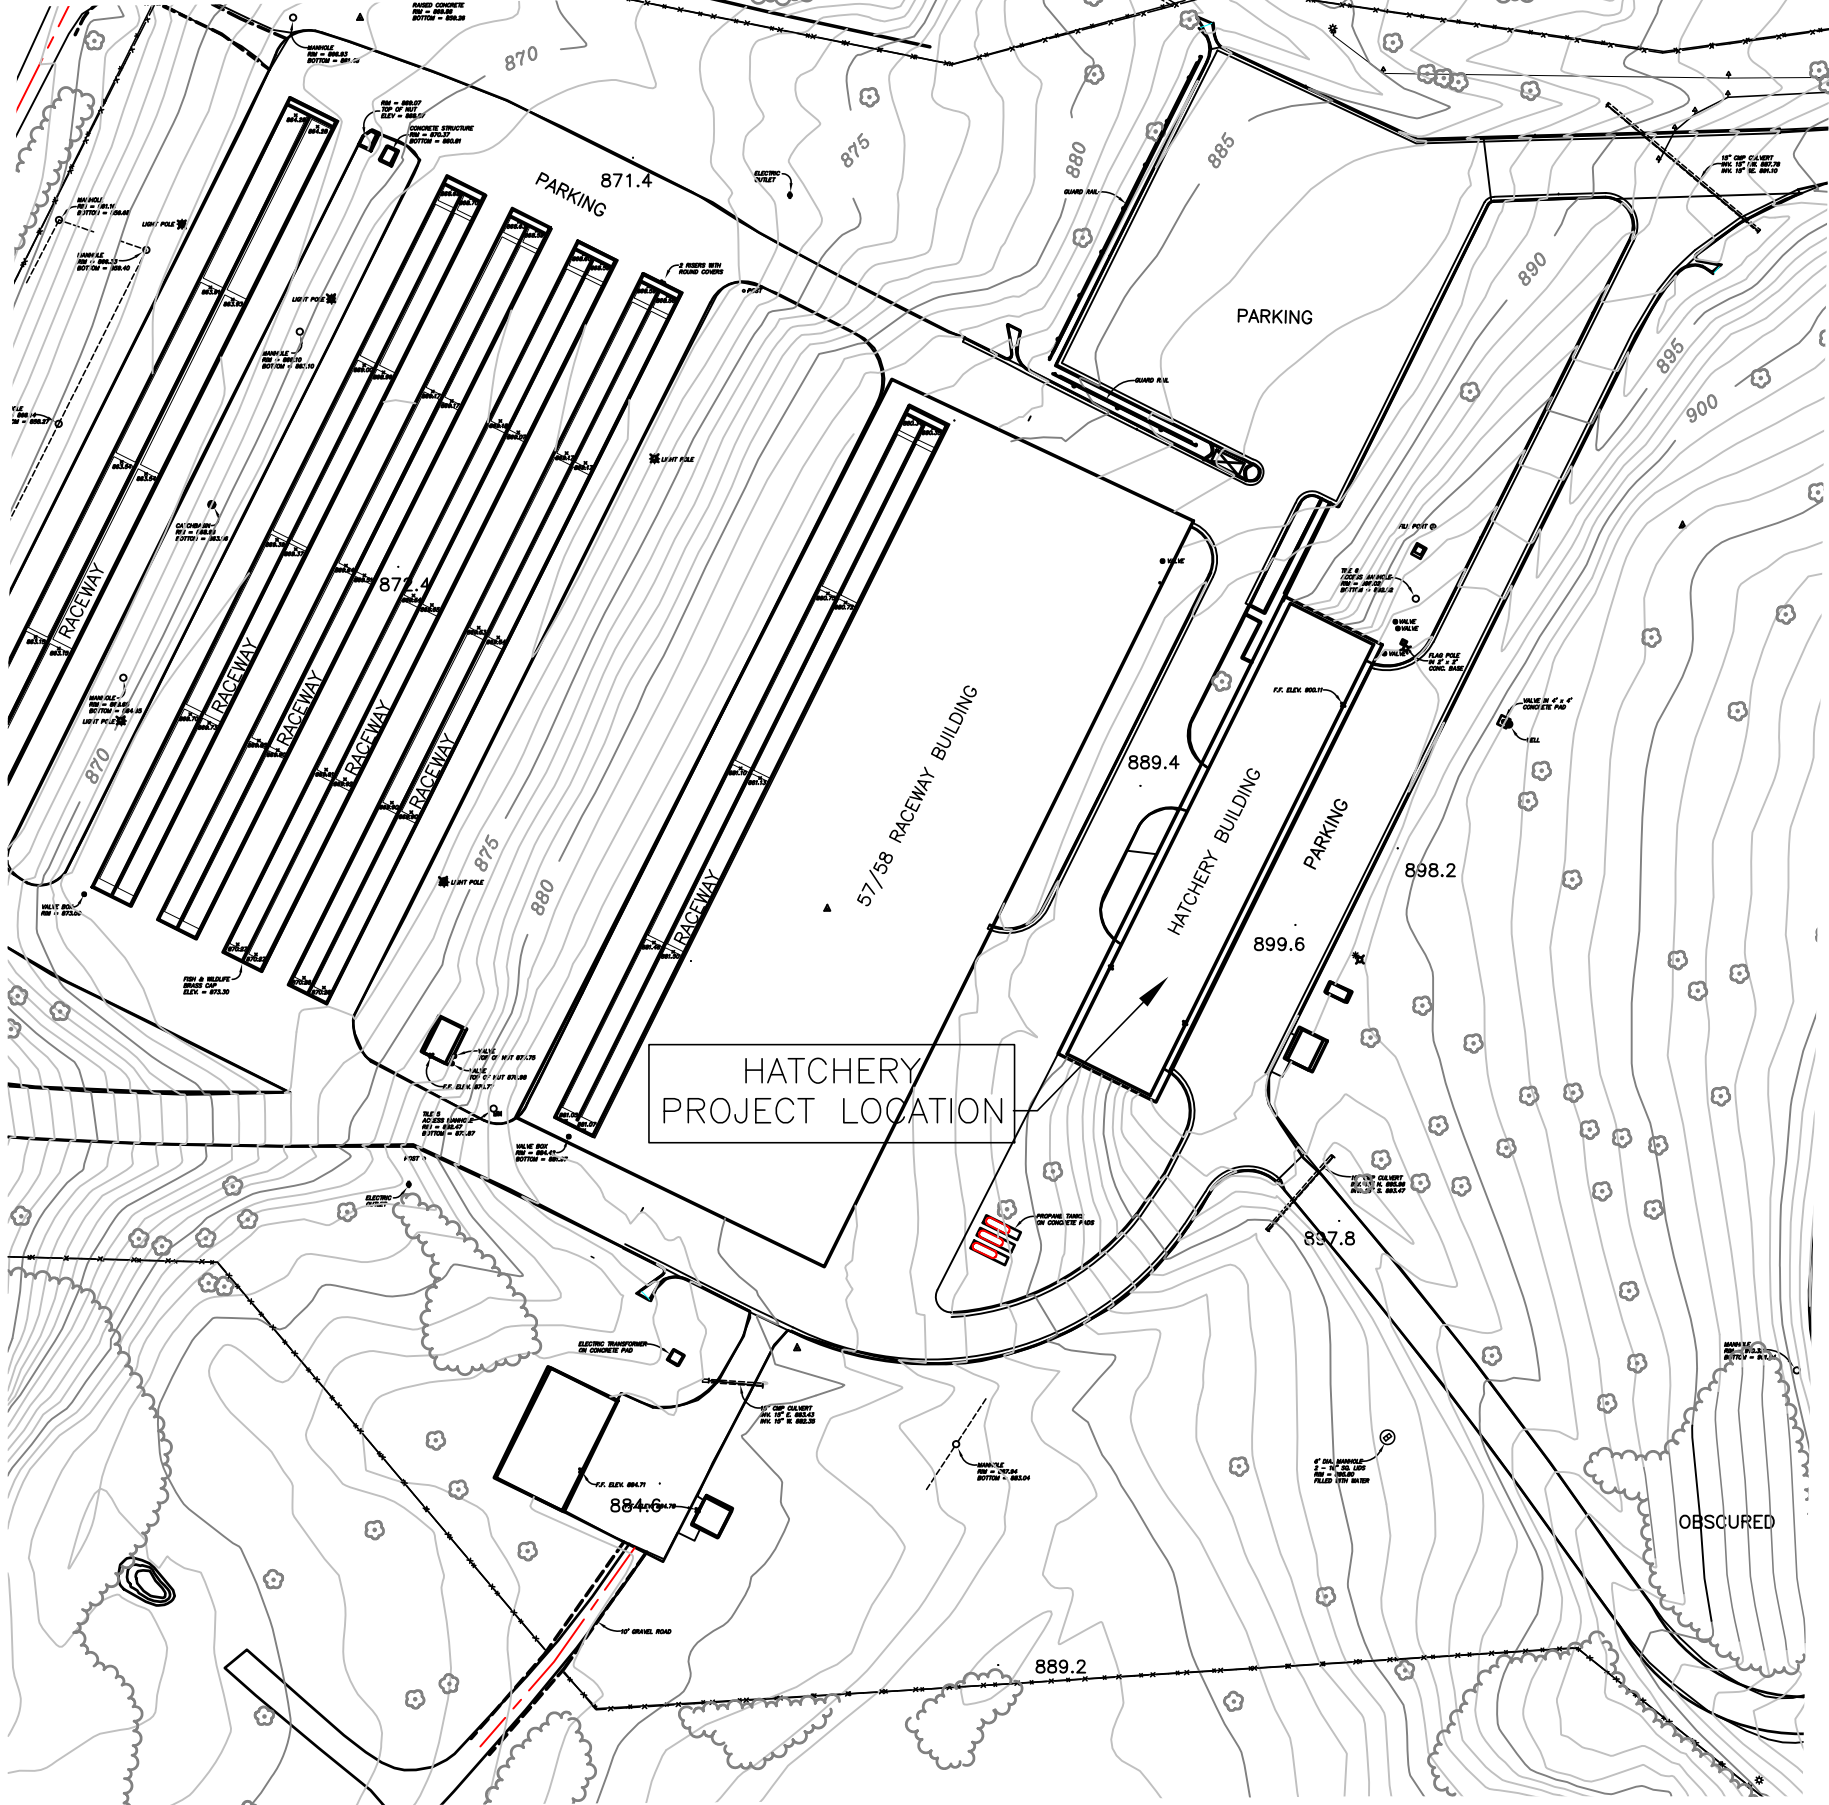

SITE MAP
NO SCALE




STATE COUNTY MAP
NO SCALE

DRAWING INDEX		
SHT NO.	DESCRIPTION	CADD NAME
1	COVER SHEET, VICINITY/LOCATION MAPS AND DRAWING INDEX	JRV517G4
2	ATTIC INSULATION & CEILING REPLACEMENT PLANS	JRV518A0
3	ACOUSTICAL CEILING & LIGHTING REPLACEMENT	JRV519A0
4	BUILDING SECTION A	JRV520A2
5	BUILDING SECTION B	JRV521A2

- ENVIRONMENTAL REQUIREMENTS:
- All construction material that can be recycled shall be recycled. Contractor shall provide manifest/Load Ticket for all material disposed of or recycled during this project.
 - All demolition material that can be recycled shall be recycled. Contractor shall provide manifest/Load Ticket for all material disposed of or recycled during this project.
 - All hazardous materials and universal waste shall be disposed of properly and a manifest shall be provided to document where waste was properly disposed.
 - All products installed on this site shall be asbestos free. Contractor will be responsible for removal, purchase of new products, and installation of new product.

GENERAL DRAWING NOTE:
1. THE U.S. FISH AND WILDLIFE SERVICE, REGION 3 CADD DRAWINGS ARE DRAWN ON A 22" X 34" STANDARD "D" SIZE SHEET (FULL SIZE) 100%, WHEN PLOTTING DRAWINGS AT DIFFERENT PERCENTAGES BAR SCALES ON DRAWINGS SHALL BE USED FOR MEASURING.

REVISION	DATE	DESCRIPTION	BY
JORDAN RIVER NATIONAL FISH HATCHERY			
ANTRIM COUNTY		MICHIGAN	
INSULATION & CEILING REPLACEMENT			
INDEX OF SHEETS, COUNTY, LOCATION, & SITE MAPS			
DRAWING SET CODE: 3R-MI-547-517			
DESIGNED: TAC		DRAWN: TAC	CHECKED: AJM
DATE: 04/01/25		CAD FILE NAME: JRV517G4	SH 1 OF 5

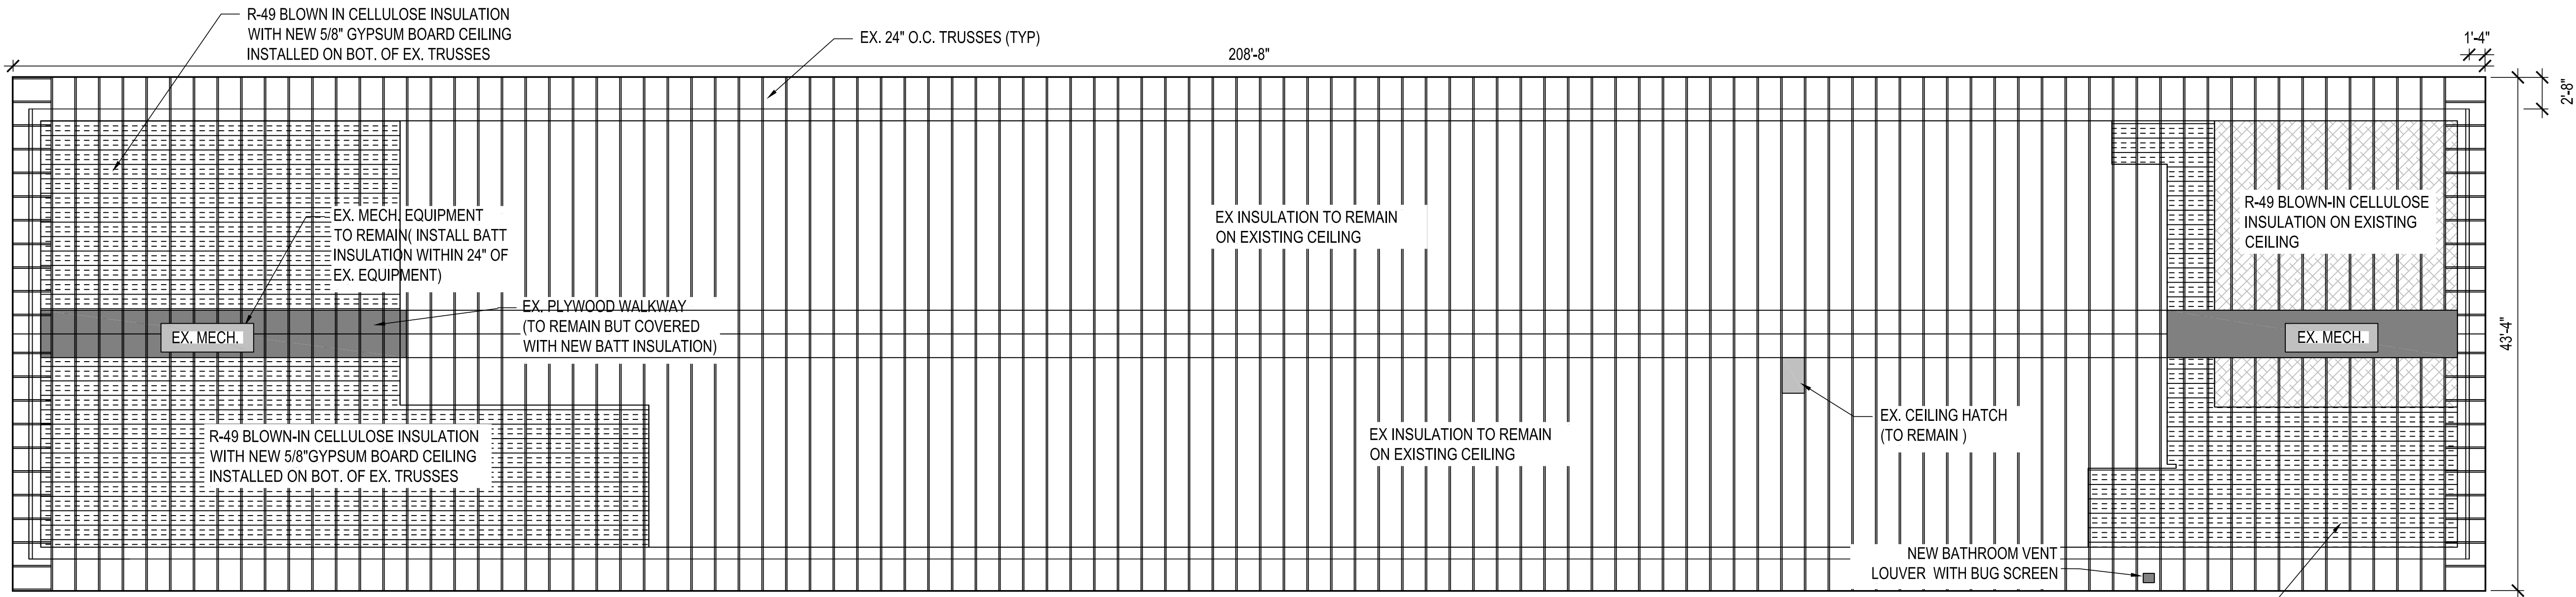


1 ATTIC INSULATION & CEILINGS REPLACEMENT PLAN
SCALE: 1/8" = 1'-0"

- R-49 BLOWN-IN CELLULOSE INSULATION ON NEW CEILING
- R-49 BLOWN-IN CELLULOSE INSULATION ON EXISTING CEILING
- R-49 BATT INSULATION ON EXISTING PLYWOOD WALKWAY


- BASE BID WORK:
- REMOVE EX. INSULATION FROM ATTIC WHERE SPECIFIED. REMOVE EX. PLASTIC SHEETING THAT IS HOLDING UP EX. INSULATION WHERE NEW CEILING IS PLANNED.
 - REMOVE EX. CEILINGS, LIGHTING, AND GRID IN ROOMS 200, 201, 202, 203, 204, 205, 207, & 208. CEILING & LIGHTING IN STAIRWAY TO REMAIN.
 - INSTALL NEW 5/8"GYPSUM BOARD CEILING ON EX. TRUSSES IN ROOMS 200, 201, 202, 203, 204, 205, 207, 208, AND STAIRWAYS, AND CLOSETS. TAPE AND SEAL ALL JOINTS & PENETRATIONS FOR INSTALLATION OF INSULATION. (GYPSUM BOARD ABOVE STAIRWAY MAY BE INSTALLED ON TOP OF TRUSSES IF BOTTOM OF TRUSS IS NOT ACCESSIBLE)
 - INSTALL R-49 INSULATION IN ATTIC ABOVE ROOMS SPECIFIED
 - INSTALL NEW ACOUSTICAL CEILING, GRID, AND LED TROFFERS IN ROOMS 200, 201, 202, 203, 204, 205, 207, & 208. CEILING & LIGHTING IN STAIRWAY TO REMAIN.
 - ADD FLEX DUCT TO RE-INSTALL AND ADJUST LOCATIONS OF THE EXISTING HVAC DIFFUSERS IN NEW CEILINGS.
 - ADD JUNCTION BOXES AND WIRING FROM EXISTING LIGHTING CIRCUITS TO POWER NEW LIGHTING. REMOVE EX. LIGHTING SWITCHES AND INSTALL NEW DIMMER SWITCHES.

- ADDITIVE #1 WORK:
- REMOVE EX. INSULATION FROM ATTIC WHERE SPECIFIED. REMOVE EX. PLASTIC SHEETING THAT IS HOLDING UP EX. INSULATION WHERE NEW CEILING IS PLANNED.
 - REMOVE EX. CEILINGS, LIGHTING, AND GRID IN ROOMS 213, 214, & 215. CEILING & LIGHTING IN ROOM 212 AND STAIRWAY TO REMAIN.
 - INSTALL NEW 5/8"GYPSUM BOARD CEILING ON EX. TRUSSES IN ROOMS 213, 214, & 215. TAPE AND SEAL ALL JOINTS & PENETRATIONS FOR INSTALLATION OF INSULATION. (GYPSUM BOARD ABOVE STAIRWAY MAY BE INSTALLED ON TOP OF TRUSSES IF BOTTOM OF TRUSS IS NOT ACCESSIBLE)
 - INSTALL R-49 INSULATION IN ATTIC ABOVE ROOMS 212, 213, 214, 215, & STAIRWAY.
 - INSTALL NEW ACOUSTICAL CEILING, GRID, AND LED TROFFERS IN ROOMS 213, 214, & 215. CEILING & LIGHTING IN ROOM 212 AND STAIRWAY TO REMAIN.
 - ADD FLEX DUCT TO RE-INSTALL AND ADJUST LOCATIONS OF THE EXISTING HVAC DIFFUSERS IN NEW CEILINGS.
 - ADD JUNCTION BOXES AND WIRING FROM EXISTING LIGHTING CIRCUITS TO POWER NEW LIGHTING. REMOVE EX. LIGHTING SWITCHES & INSTALL NEW DIMMER SWITCHES. INSTALL NEW 150 CFM (MIN.) BATHROOM VENT IN ROOM 213. VENT FAN TO EXTERIOR SOFFIT.

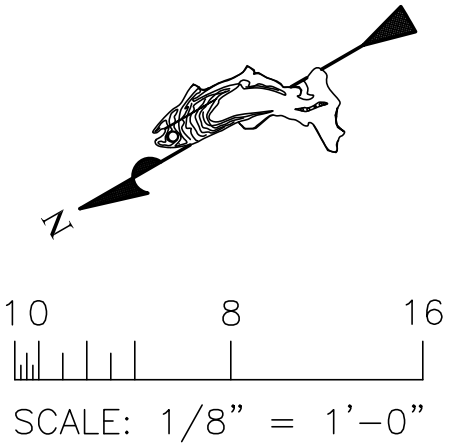

△			
REVISION	DATE	DESCRIPTION	BY
JORDAN RIVER NATIONAL FISH HATCHERY			
ANTRIM COUNTY		MICHIGAN	
INSULATION & CEILING REPLACEMENT			
ATTIC INSULATION AND CEILING REPLACEMENT PLAN			
DRAWING SET CODE: 3F-MI-547-517			
DESIGNED: TAC		DRAWN: TAC	CHECKED: AJM
DATE: 04/01/25		CAD FILE NAME: JRV518A0.DWG	SH 2 OF 5


1 SECOND FLOOR (CEILING & LIGHTING PLAN)
SCALE: 1/8" = 1'-0"

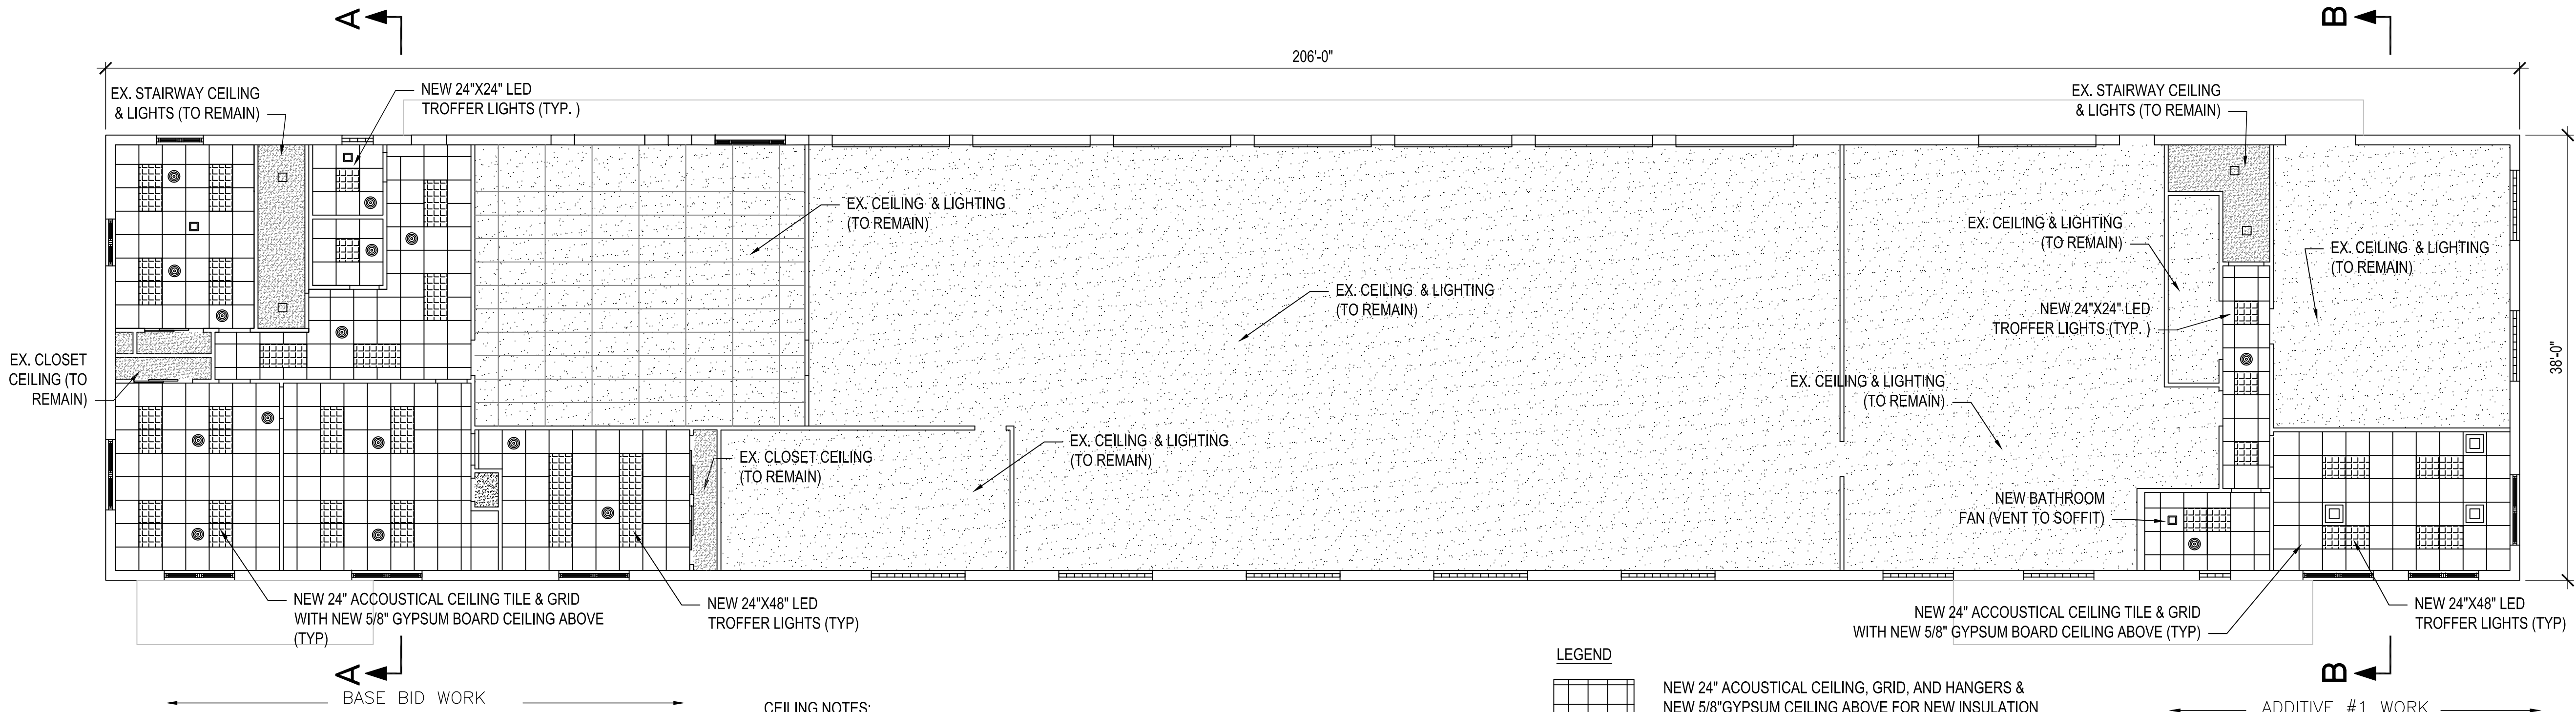

- CEILING NOTES:
- EX. CLOSETS SHALL REQUIRE NEW GYPSUM BOARD CEILING AT TRUSS LEVEL FOR NEW INSULATION .
 - PROVIDE NEW FLEXIBLE ELECTRICAL WHIP TO NEW LIGHTING FROM EXISTING LIGHTING CIRCUITS. INSTALL NEW JUNCTION BOXES AS REQUIRED.
 - REMOVE AND REINSTALL EXISTING DROP-CEILING MOUNTED EQUIPMENT(NOT SHOWN) SUCH AS SMOKE DETECTORS, FIRE ALARMS, EMERGENCY LIGHTING, DUCTS, LOUVERS, DIFFUSERS, FANS, AND SENSORS. ADJUST LIGHTING LOCATIONS IF NEEDED TO ALLOW FOR EXISTING MECHANICAL EQUIP OR PIPING.


- LEGEND
- NEW 24" ACOUSTICAL CEILING, GRID, AND HANGERS & NEW 5/8" GYPSUM CEILING ABOVE FOR NEW INSULATION
 - EXISTING AC BOARD CEILING & EX. LIGHTING (TO REMAIN)
 - NEW LED LIGHTING TROFFER
 - EX. HVAC DIFFUSERS
 - CEILING EXHAUST FAN

2 SECOND FLOOR (FLOOR PLAN FOR REFERENCE ONLY)
SCALE: 1/8" = 1'-0"


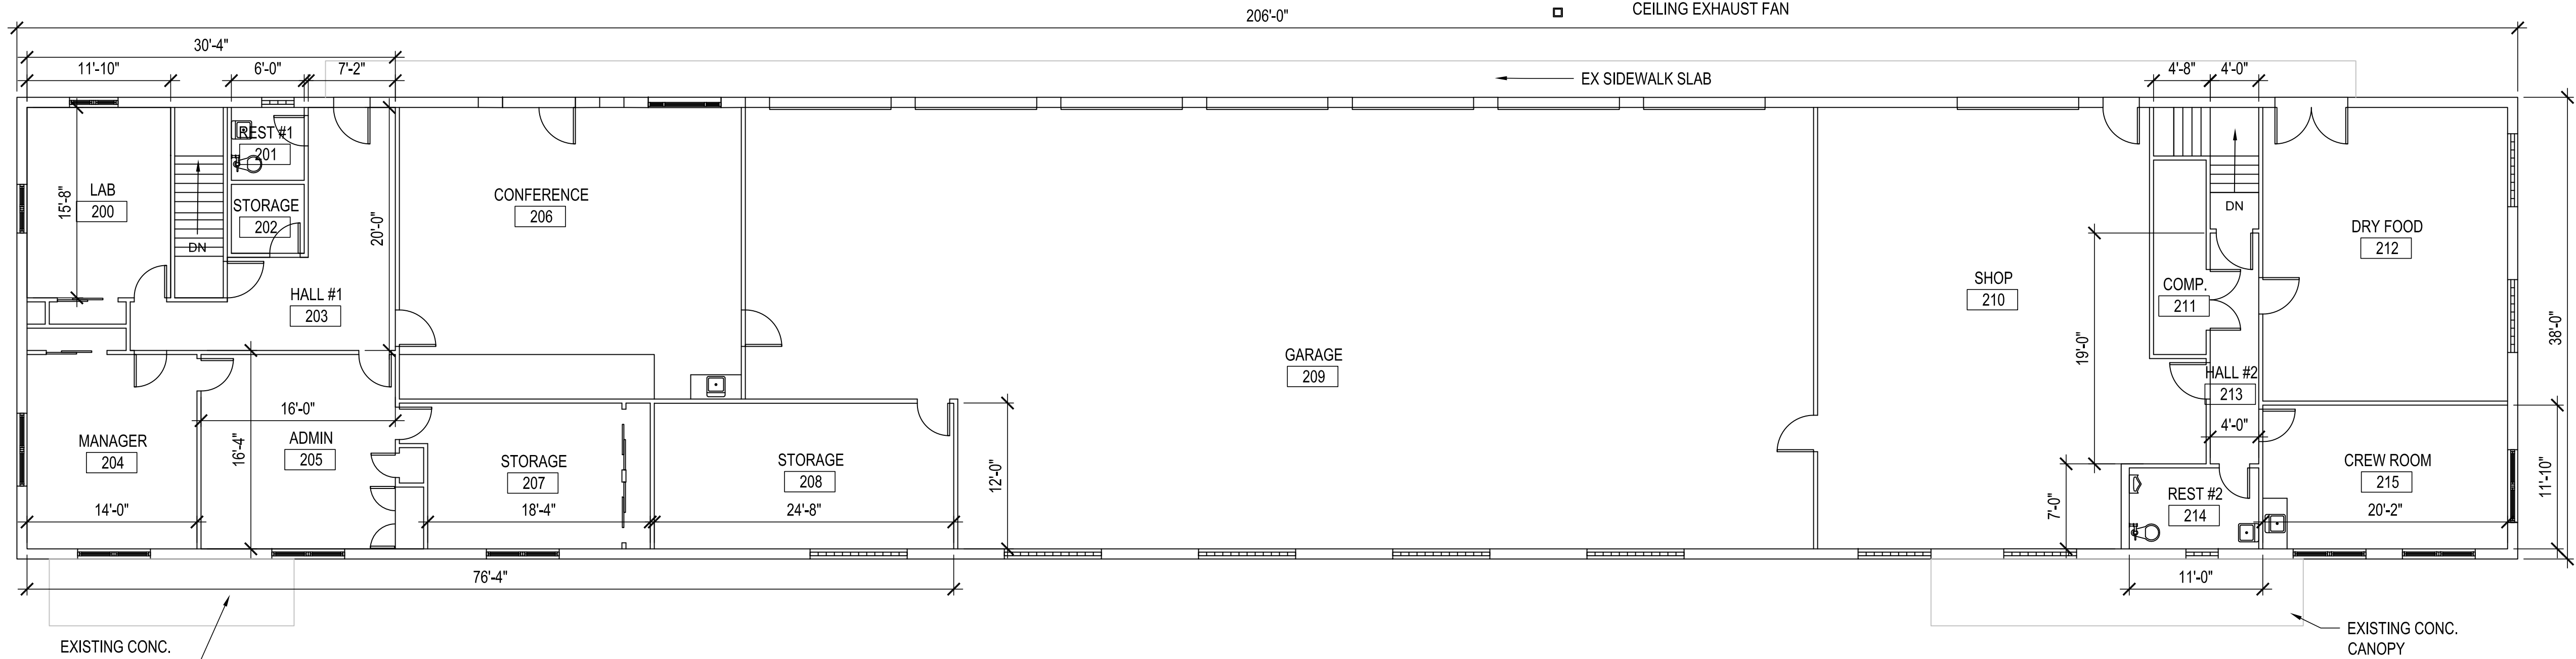


- ENVIRONMENTAL REQUIREMENTS:
- EXISTING FLOURESCENT LIGHTS AND BALLAST SHALL BE DISPOSED OF IN ACCORDANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS REGARDING POTENTIAL PCB's. THE CONTRACTOR SHALL PROVIDE WRITTEN DOCUMENTATION OF PROPER DISPOSAL.

</			

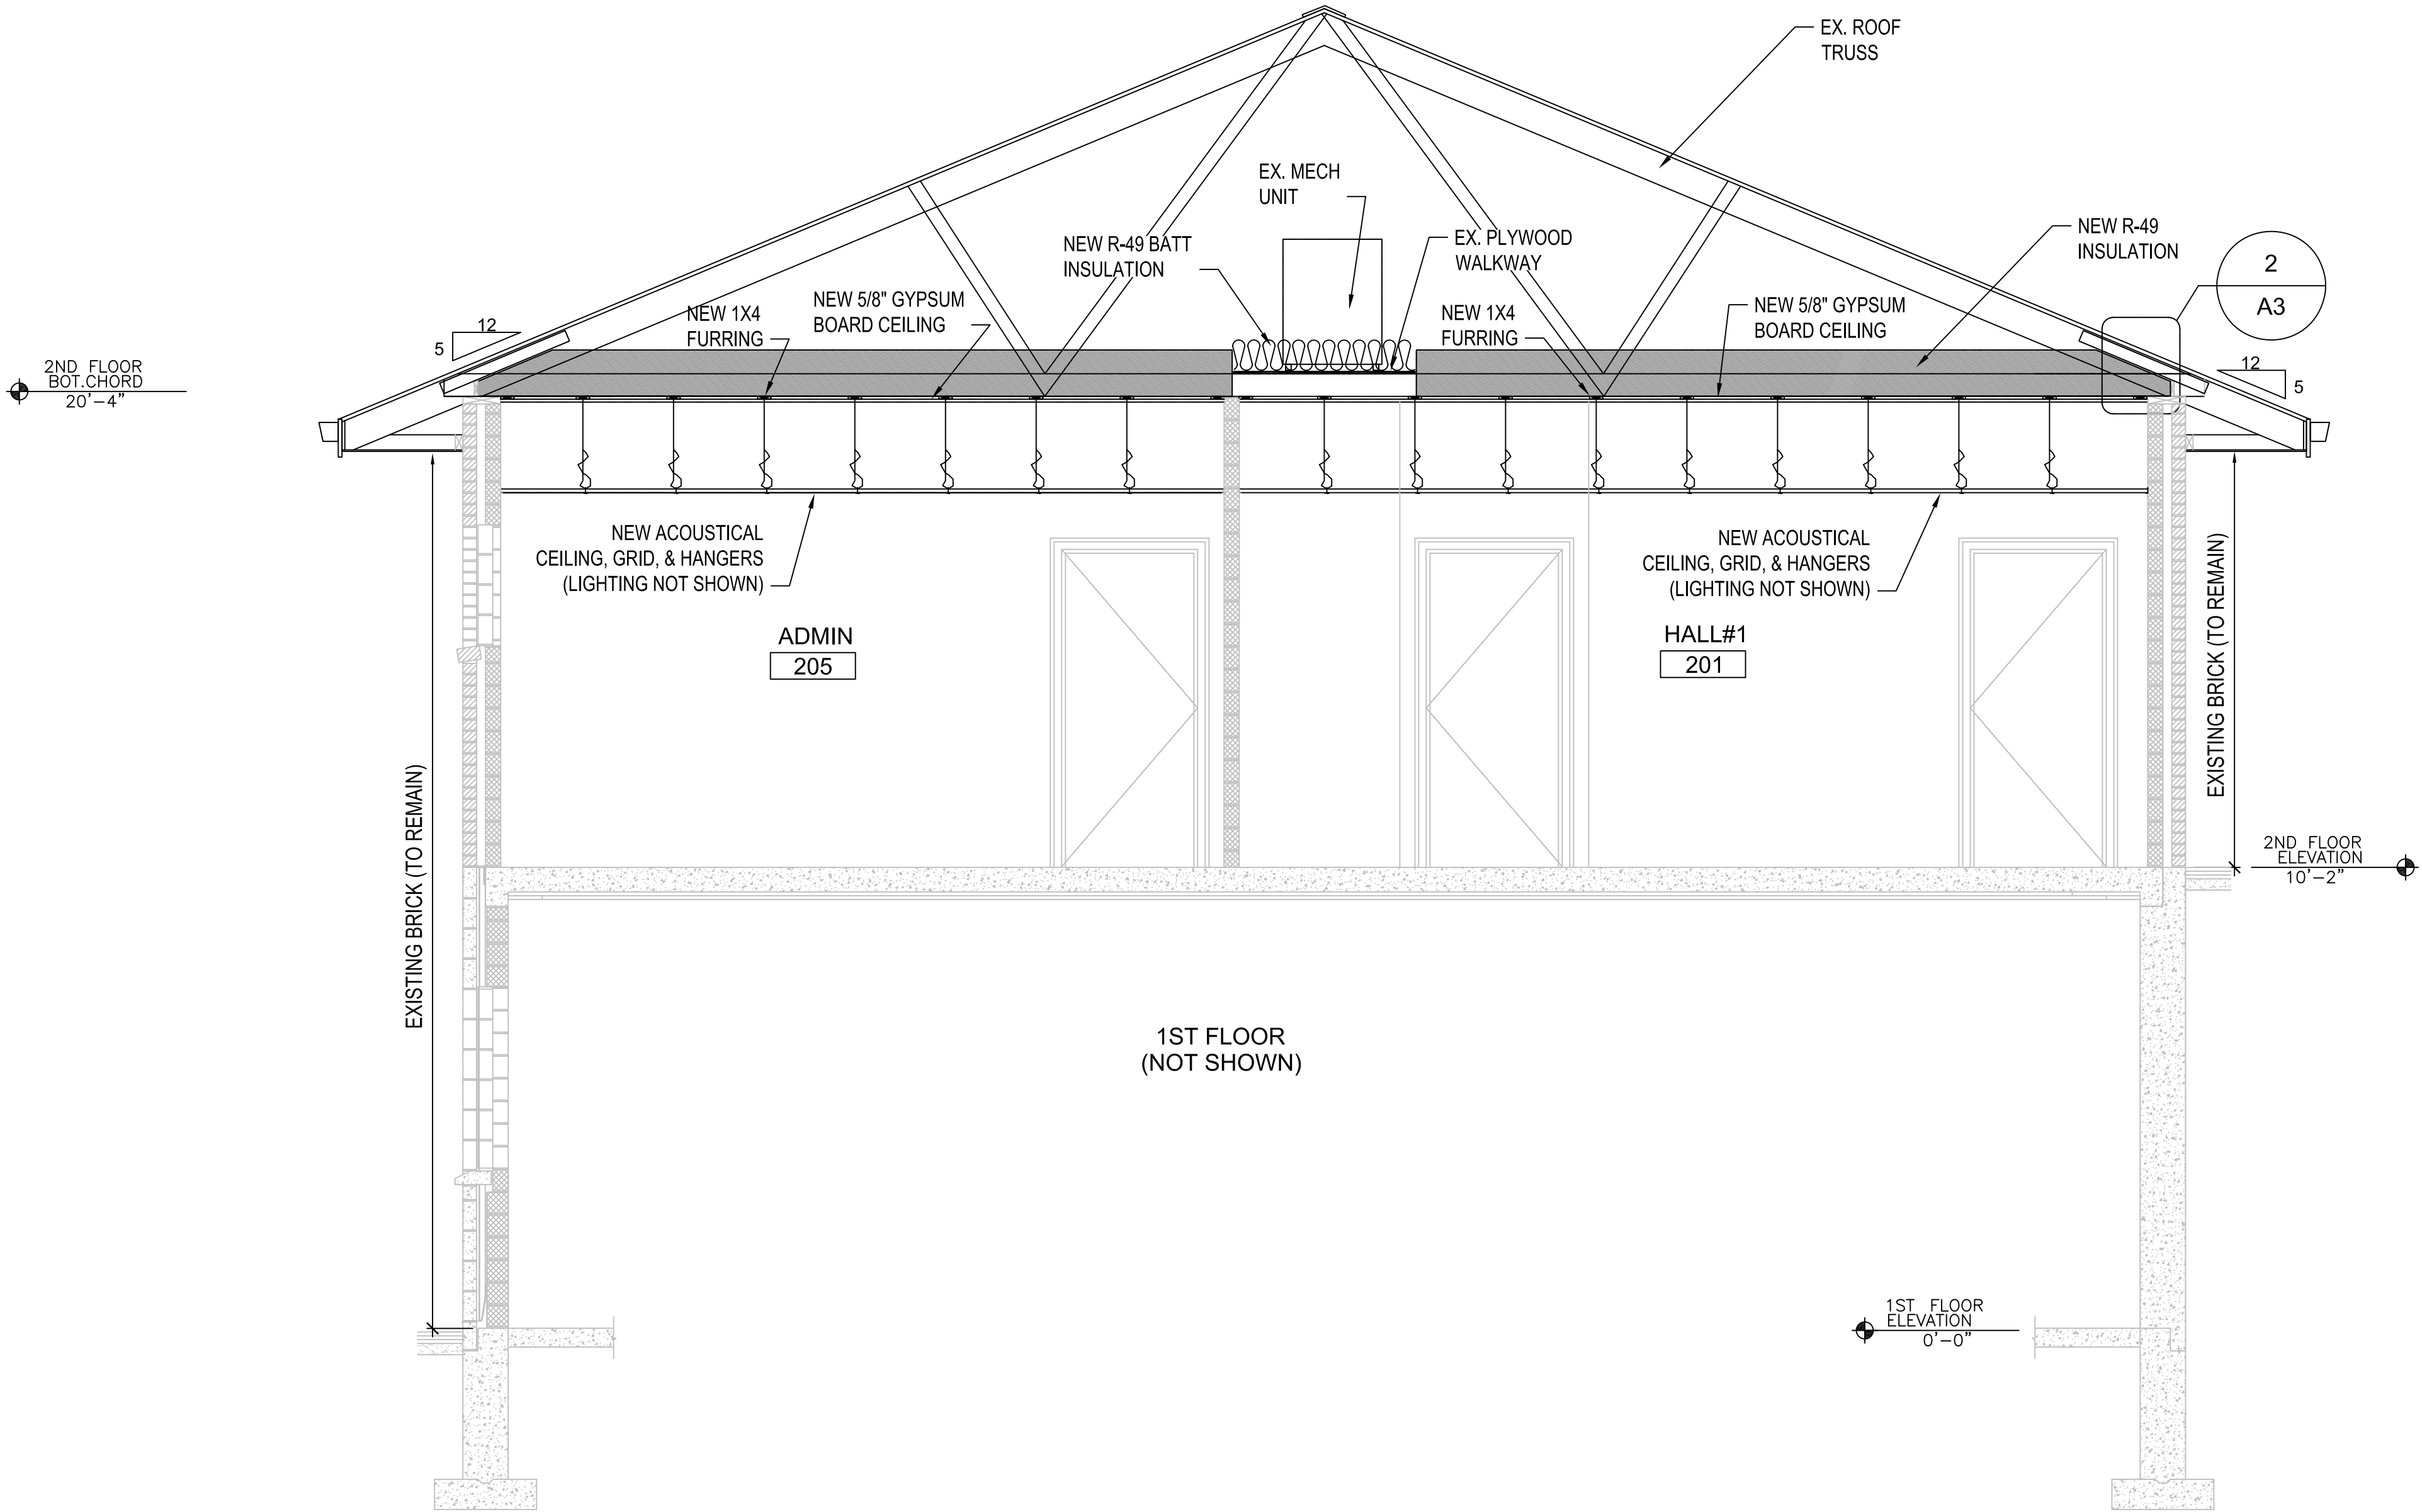


1 SECTION A-A
SCALE: 3/8" = 1'-0"

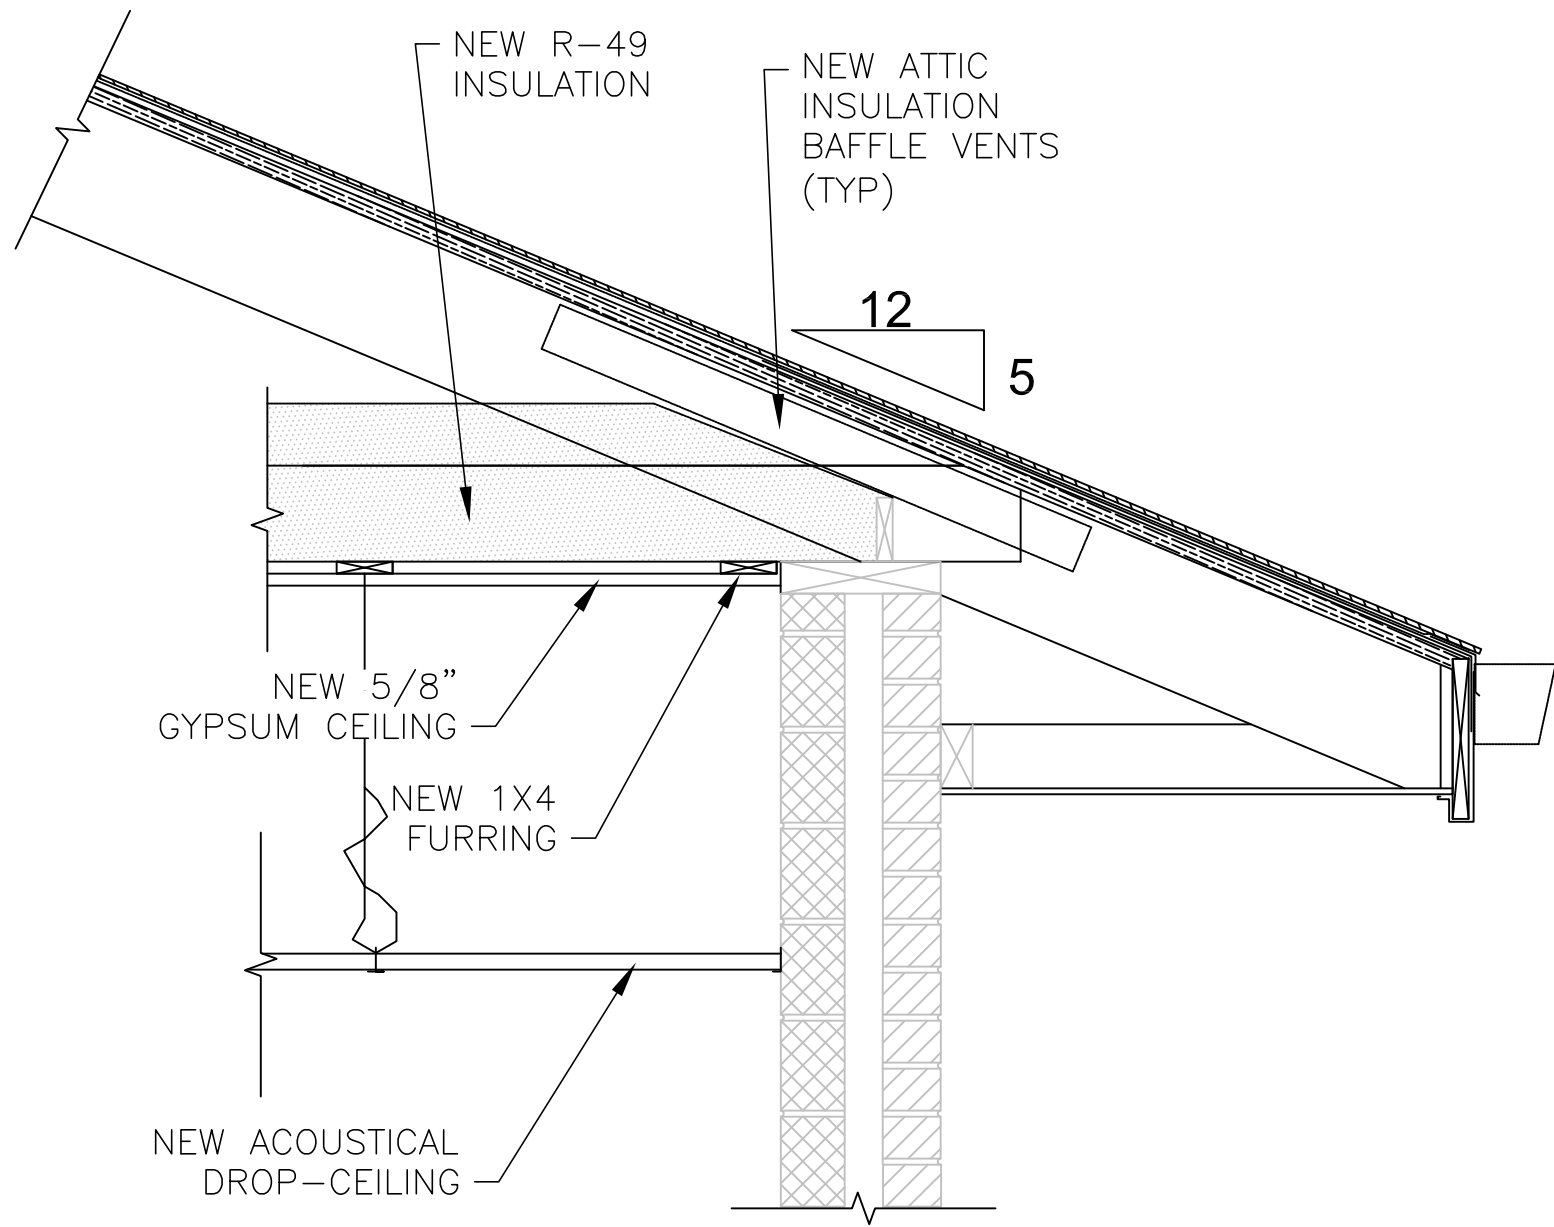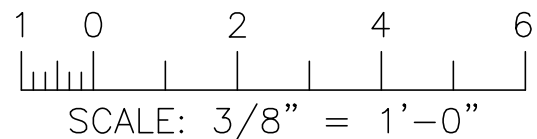


2
A3
TYPICAL ROOF VENTING DETAIL
SCALE: 1" = 1'-0"

- GENERAL NOTES:
- DEMOLITION AND DISPOSAL OF EXISTING INSULATION, PLASTIC SHEETING, LIGHTING, DROP CEILING AND OTHER EXISTING ITEMS TO BE REMOVED ARE NOT SHOWN ON THESE DRAWINGS BUT IS REQUIRED.
 - THE POTENTIAL CONTRACTOR IS ENCOURAGED TO VISIT THE EXISTING BUILDING IN ORDER TO BETTER UNDERSTAND THE EXISTING CONDITIONS OF THE BUILDING.
 - SOME EX. INSULATION HAS FALLEN FROM THE ATTIC THROUGH THE EXISTING PLASTIC AND ONTO THE EXISTING DROP CEILING.
 - EX. FURNITURE SHALL BE MOVED TO THE GARAGE PRIOR TO THE START OF CONSTRUCTION. THE EX. IT EQUIPMENT CAN NOT BE MOVED AND SHALL BE PROTECTED DURING CONSTRUCTION.
 - THE CONTRACTOR SHALL BE REQUIRED TO WORK AROUND THE EXISTING MECHANICAL, ELECTRICAL, AND IT SYSTEMS IN THE ATTIC AND THOSE RUN THROUGH THE EX. DROP-CEILING. THE CONTRACTOR MAY DISCONNECT AND RE-INSTALL EXISTING SYSTEMS AS NEEDED TO MAKE THE IMPROVEMENTS.
 - EX. CEILING MOUNTED EQUIPMENT SUCH AS SMOKE DETECTORS, FIRE ALARMS, MECH. DUCTS, VENTS, DIFFUSERS SHALL BE RE-INSTALLED INTO THE NEW CEILINGS. ADJUST CEILING HEIGHT IF NEEDED TO ALLOW FOR CLEARANCE.
 - ATTIC BAFFLE VENTS SHALL BE REQUIRED TO BE INSTALLED BETWEEN THE TRUSSES IN ALL AREAS TO RECEIVE NEW INSULATION.

			
REVISION	DATE	DESCRIPTION	BY
JORDAN RIVER NATIONAL FISH HATCHERY			
ANTRIM COUNTY		MICHIGAN	
INSULATION & CEILING REPLACEMENT BUILDING SECTION A			
DRAWING SET CODE: 3F-MI-547-517			
DESIGNED: TAC		DRAWN: TAC	CHECKED: AJM
DATE: 04/01/25		CAD FILE NAME: JRV520A2.DWG	SH 4 OF 5

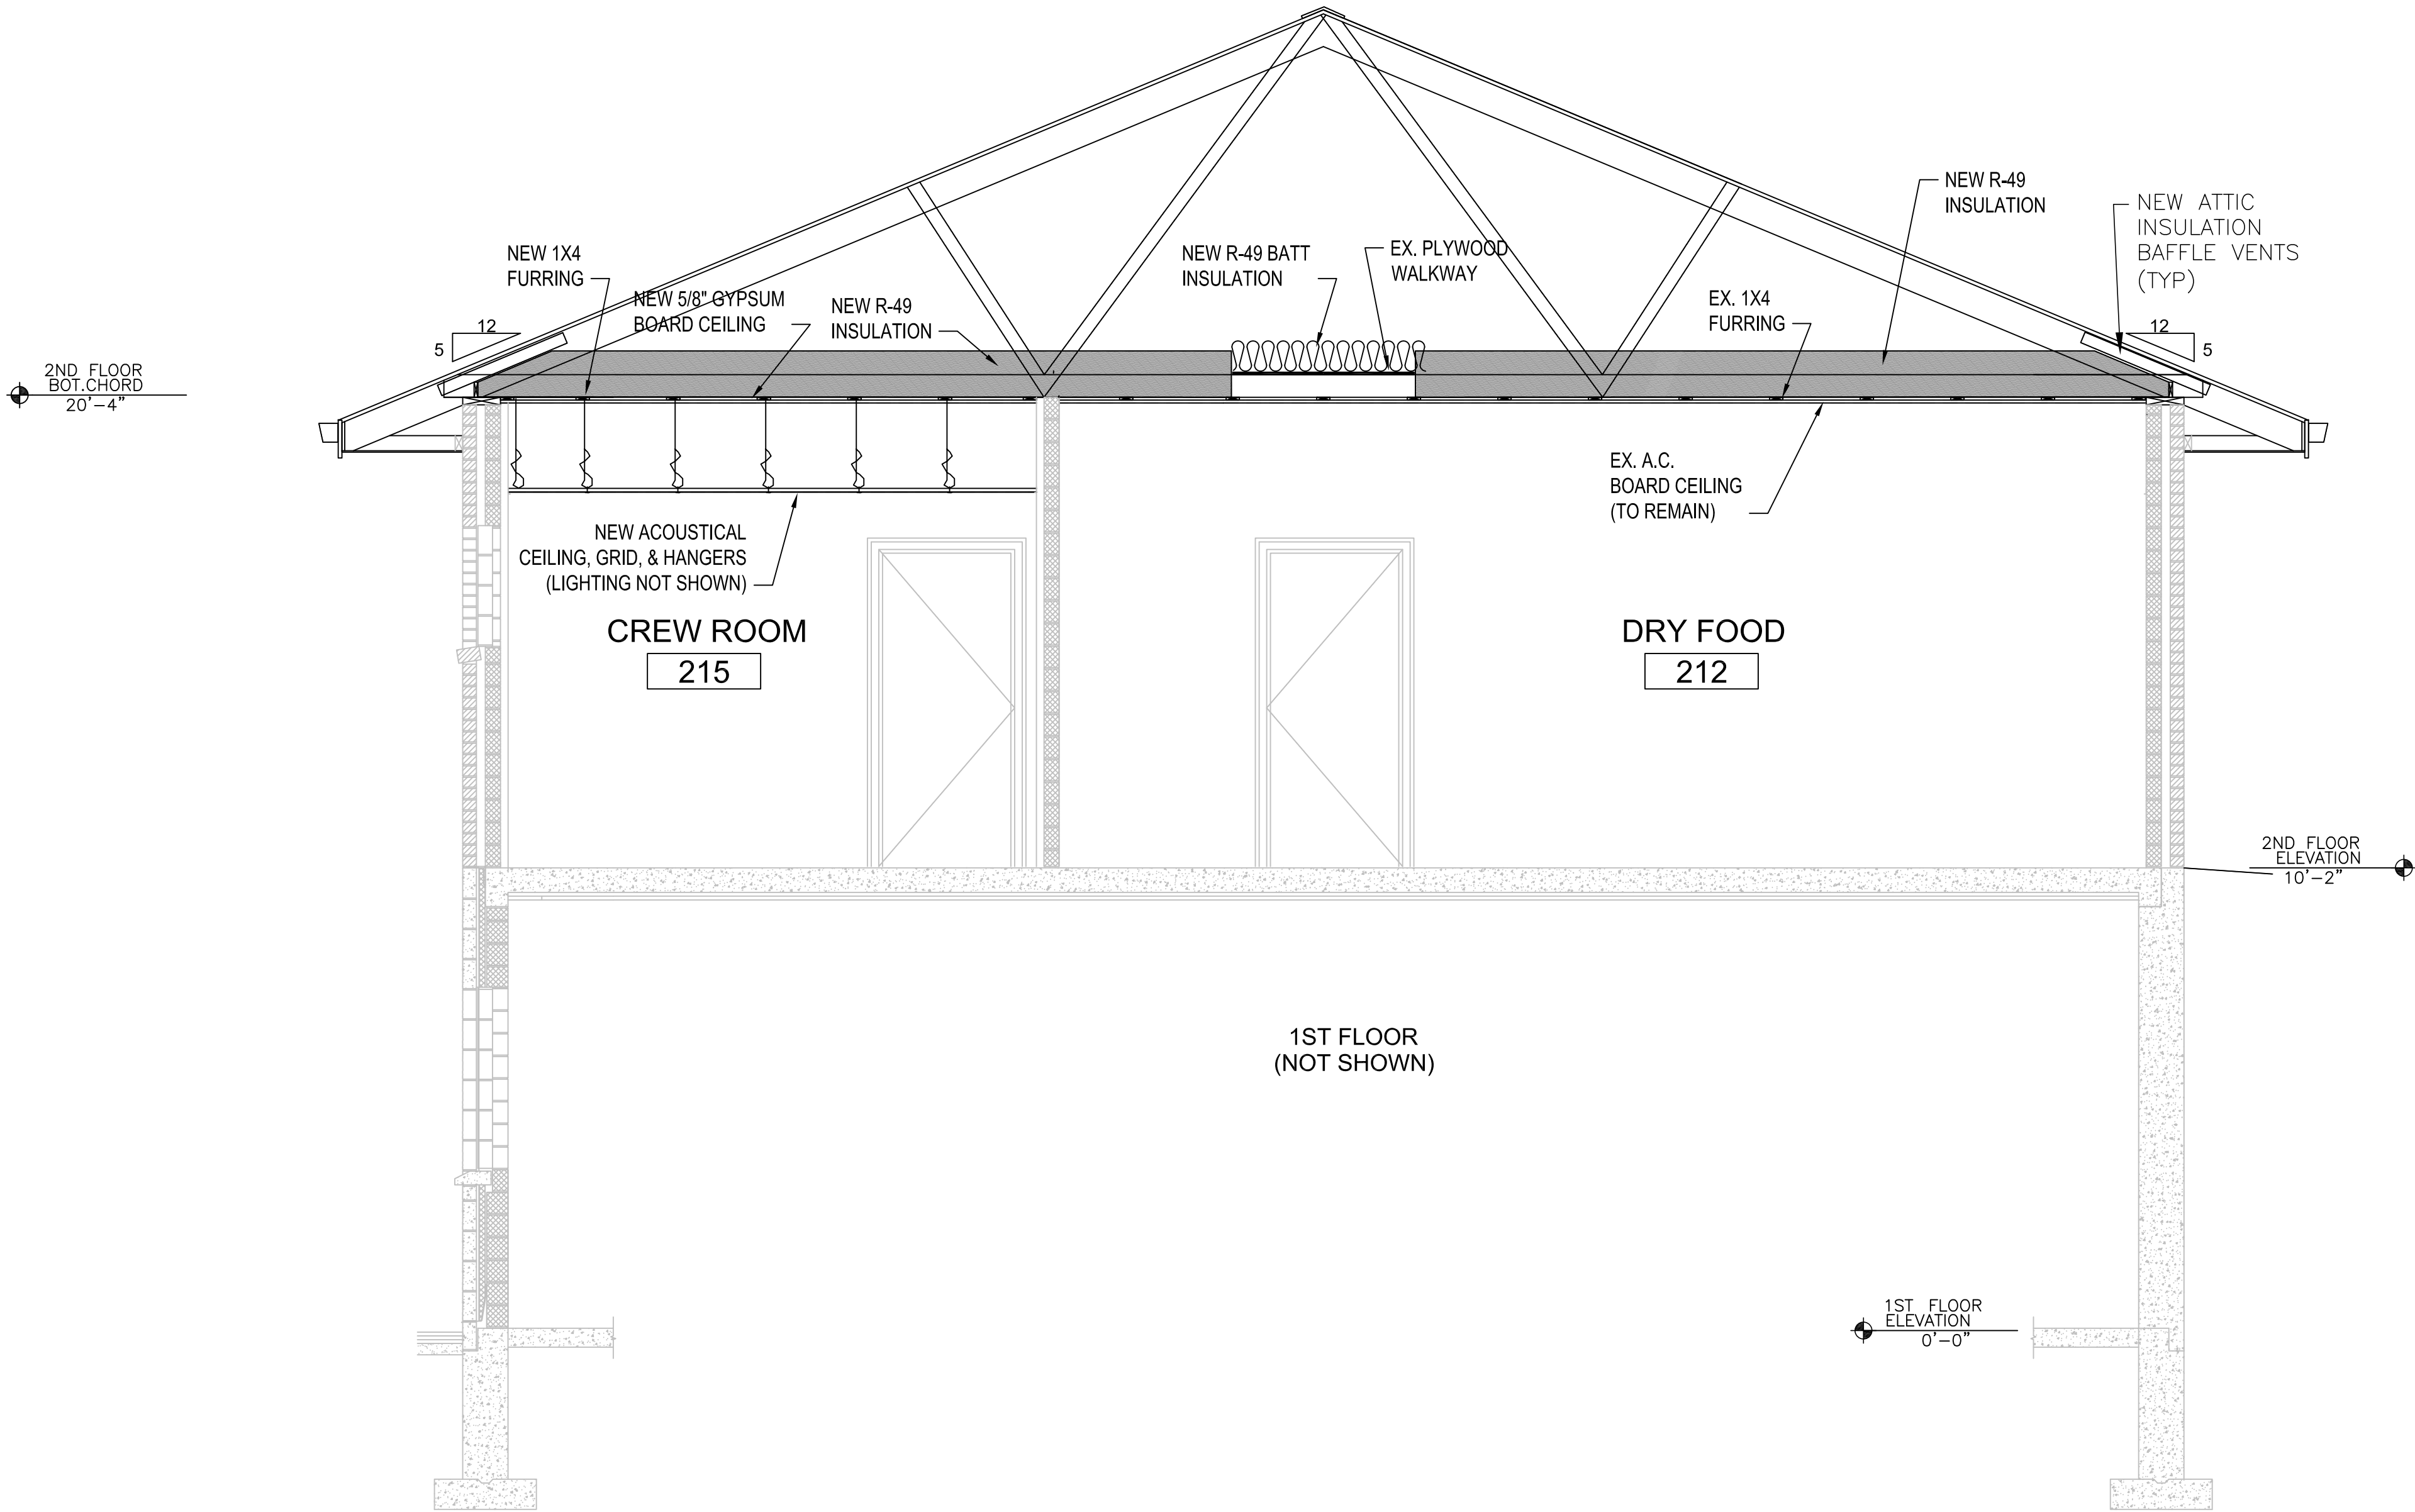

- GENERAL NOTES:
1. THE POTENTIAL CONTRACTOR IS ENCOURAGED TO VISIT THE EXISTING BUILDING IN ORDER TO BETTER UNDERSTAND THE EXISTING CONDITIONS OF THE BUILDING.
 2. THE CONTRACTOR SHALL BE REQUIRED TO WORK AROUND THE EXISTING MECHANICAL, ELECTRICAL, AND IT SYSTEMS IN THE ATTIC. THE CONTRACTOR MAY DISCONNECT AND RE-INSTALL EXISTING SYSTEMS AS NEEDED TO MAKE THE IMPROVEMENTS.
 3. THE EXISTING ASBESTOS CEMENT (AC) BOARD CEILING IS INTENDED TO REMAIN. IF THE CONTRACTOR FINDS AREAS OF CEILING BOARD THAT SHOW THE NEED TO BE REPLACED AFTER THE REMOVAL OF THE EX. INSULATION, NOTIFY THE CONTRACTING OFFICER IMMEDIATELY.
 4. SEAL AROUND EXISTING PENETRATIONS AS NEEDED TO PREVENT NEW INSULATION FROM FALLING THROUGH.
 5. THE CONTRACTOR SHALL PROVIDE ATTIC INSULATION VENT BAFFLES BETWEEN THE TRUSS RAFTERS TO ALLOW FOR ATTIC VENTING AFTER INSTALLATION OF NEW INSULATION. PROVIDE BAFFLES BETWEEN EACH TRUSS.
 6. ATTIC BAFFLE VENTS SHALL BE INSTALLED BETWEEN TRUSSES ON ALL AREAS THAT RECEIVE NEW INSULATION.

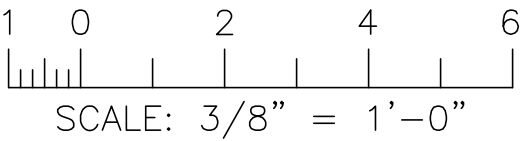

1 SECTION B-B
SCALE: 3/8" = 1'-0"

△			
REVISION	DATE	DESCRIPTION	BY
JORDAN RIVER NATIONAL FISH HATCHERY			
ANTRIM COUNTY		MICHIGAN	
INSULATION & CEILING REPLACEMENT BUILDING SECTION B			
DRAWING SET CODE: 3F-MI-547-517			
DESIGNED: TAC		DRAWN: TAC	CHECKED: AJM
DATE: 04/01/25		CAD FILE NAME: JRV521A2.DWG	SH 5 OF 5