

**LEASE# 36C26326L0002, Exhibit D – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

SECTION 1	GENERAL REQUIREMENTS AND DESCRIPTION OF AGENCY REQUIREMENTS.....	4
SECTION 2	GENERAL TERMS, CONDITIONS, AND STANDARDS	4
SECTION 3	AGENCY SPECIFIC SHELL REQUIREMENTS (L100 SECTION 3).....	4
3.01	FLAGPOLE	4
3.02	CEILINGS	4
3.03	FLOOR COVERING AND PERIMETERS - SHELL	4
3.04	RESTROOMS	4
3.05	ACOUSTICAL REQUIREMENTS	4
3.06	SPECIFIC REQUIREMENTS: PORTABLE FIRE EXTINGUISHERS (SHELL)	4
SECTION 4	DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES	4
SECTION 5	AGENCY SPECIFIC TENANT IMPROVEMENT COMPONENTS (L100 SECTION 5)	4
5.01	SPECIAL REQUIREMENTS: INTERIOR DESIGN CRITERIA GOAL	5
5.02	SPECIAL REQUIREMENTS: PAINTING.....	5
5.03	SPECIAL REQUIREMENTS: INTERIOR FINISHES.....	5
5.04	SPECIAL REQUIREMENTS: HANDRAILS, CHAIR RAILS AND WALL GUARDS.....	9
5.05	SPECIAL REQUIREMENTS: CORNER GUARDS	10
5.06	SPECIAL REQUIREMENTS: CASEWORK AND COUNTERTOPS:	10
5.07	SPECIAL REQUIREMENTS: WAYFINDING.....	12
5.08	SPECIAL REQUIREMENTS: DOORS – SUITE ENTRY	12
5.09	SPECIAL REQUIREMENTS: DOORS – INTERIOR.....	13
5.10	SPECIAL REQUIREMENTS: DOORS – HARDWARE AND ACCESSORIES.....	13
5.11	SPECIAL REQUIREMENTS: AUTOMATIC DOORS.....	17
5.12	SPECIAL REQUIREMENTS: BUILDING KEYING AND ACCESSORIES.....	18
5.13	SPECIAL REQUIREMENTS: LIGHTING: INTERIOR	19
5.14	SPECIAL REQUIREMENTS: GROUNDING.....	19
5.15	SPECIAL REQUIREMENTS: ELECTRICAL SERVICE	19
5.16	SPECIAL REQUIREMENTS: ELECTRICAL – GENERAL.....	19
5.17	SPECIAL REQUIREMENTS: ELECTRICAL CALCULATIONS	20
5.18	SPECIAL REQUIREMENTS: ELECTRICAL DISTRIBUTION EQUIPMENT	20
5.19	SPECIAL REQUIREMENTS: ELECTRICAL ROOMS	20

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

5.20	SPECIAL REQUIREMENTS: BRANCH CIRCUIT DISTRIBUTION AND WIRING DEVICES	20
5.21	SPECIAL REQUIREMENTS: CONDUITS AND BOXES.....	21
5.22	TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012).....	21
5.23	TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008)	21
5.24	SPECIAL REQUIREMENTS: IT CLOSETS AND POLICE/ACCESS CONTROL ROOM	21
5.25	SPECIAL REQUIREMENTS: TELECOMMUNICATIONS CABLING EXPANSION.....	22
5.26	SPECIAL REQUIREMENTS: VA WIRELESS INTERNET SYSTEM	33
5.27	SPECIAL REQUIREMENTS: NURSE CALL SYSTEM	33
5.28	SPECIAL REQUIREMENTS: PUBLIC ADDRESS/INTERCOM SYSTEM	34
5.29	SPECIAL REQUIREMENTS: VIDEO TELECONFERENCING SYSTEM (VTEL):.....	34
5.30	SPECIAL REQUIREMENTS: CABLE/SATELLITE TV SERVICE & WIRING	34
5.31	SPECIAL REQUIREMENTS: GUEST WIRELESS INTERNET ACCESS	35
5.32	SPECIAL REQUIREMENTS: PLUMBING.....	35
5.33	SPECIAL REQUIREMENTS: APPROVED ANSI EYEWASH STATION	35
5.34	SPECIAL REQUIREMENTS: EXTERIOR SIGNAGE	35
5.35	SPECIAL REQUIREMENTS: UTILITIES, PERMITS AND CODE ISSUES:	37
5.36	SPECIAL REQUIREMENTS: OSHA REQUIREMENTS:	37
5.37	SPECIAL REQUIREMENTS: ACCESSIBILITY STANDARDS.....	37
5.38	SPECIAL REQUIREMENTS: MECHANICAL.....	38
5.39	SPECIAL REQUIREMENTS: MISC. ROOM ACCESSORIES.....	39
5.40	SPECIAL REQUIREMENTS: LOCKERS	39
5.41	SPECIAL REQUIREMENTS: TOILET, BATHROOM ACCESSORIES	39
5.42	SPECIAL REQUIREMENTS: PARKING LOT EMPLOYEE AREA.....	40
5.43	SPECIAL REQUIREMENTS: PARKING LOT MRI TRAILER LOCATION AND UTILITY HOOKUPS	40
5.44	SPECIAL REQUIREMENTS: ACOUSTICS/NOISE/PRIVACY CONTROL.....	40
5.45	SPECIAL REQUIREMENTS: OPERATION OF BUILDING EQUIPMENT:	41
5.46	SPECIAL REQUIREMENTS: CIRCULATION SYSTEMS:.....	41
SECTION 6 TERM 41	AGENCY SPECIFIC REQUIREMENTS FOR UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE	
SECTION 7	AGENCY SPECIFIC FSL I & II REQUIREMENTS (L100 SECTION 7)	41
7.01	SPECIFIC REQUIREMENT: US POSTAL SERVICE MAILBOX (FSL II).....	42

LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC

7.02 SPECIAL REQUIREMENTS: TEMPORARY SECURITY UPGRADE DUE TO IMMEDIATE THREAT
(FSL I) 42

7.03 SPECIAL REQUIREMENTS: DEVELOPMENT, IMPLEMENTATION, AND PERIODIC REVIEW OF
OCCUPANT EMERGENCY PLANS (FSL I)..... 42

7.04 SPECIAL REQUIREMENTS: INTRUSION DETECTION SYSTEM (FSL II) 42

7.05 SPECIAL REQUIREMENTS: ELECTRONIC PHYSICAL ACCESS CONTROL SYSTEM (FSL II) 43

7.06 SPECIAL REQUIREMENTS: PANIC OR DURESS BUTTON SYSTEM (FSL II)..... 44

7.07 SPECIAL REQUIREMENTS: CLINIC LOCKDOWN FEATURE (FSL II) 45

7.08 SPECIAL REQUIREMENTS: CCTV SYSTEM (FSL II)..... 45

7.09 SPECIAL REQUIREMENTS: BUILDING FEATURES (FSL I)..... 45

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

SECTION 1 GENERAL REQUIREMENTS AND DESCRIPTION OF AGENCY REQUIREMENTS

Agency Specific Requirements (ASRs) fall into four main categories:

- 1) Room Schedule and Build-Out Details—A breakdown of the agency's ABOA square footage requirement to show how the space will be used.
- 2) Design Schematic Layout—A generic layout showing the ideal space configuration, which offerors use to adapt the layout to their offered space.
- 3) Special Requirements—Non-office standard build-out requirements, such as special wall types, gun vaults, interview counters, and other similar special areas.
- 4) General Requirements—Build-out requirements that apply to the entire space, such as IT and tenant requested security requirements (at Level I and II).

All requirements of the lease, lease exhibits and ASRs are deemed included in Shell rent unless otherwise specified. (Reference Lease Section 3.07)

When contradictions exist between the lease and exhibits, the most stringent requirements shall apply.

SECTION 2 GENERAL TERMS, CONDITIONS, AND STANDARDS

Incorporated into lease.

SECTION 3 AGENCY SPECIFIC SHELL REQUIREMENTS (L100 SECTION 3)

3.01 FLAGPOLE

1. In addition to Lease Section 3.17 FLAGPOLE
 - a. The National League of Families POW/MIA flag shall be provided by the VA to be hung below the U.S. Flag. Lessor shall provide all clips for hanging of the flags.

3.02 CEILINGS

1. In addition to Lease Section 3.20.D CEILINGS:
 - a. Ceilings shall be a flat plane in each room and shall be suspended and finished as follows unless an alternate equivalent is pre-approved by the LCO:
 - i. Eating/Galley areas, vestibules, vending, refreshment, and reception areas shall be plastered or spackled and taped gypsum board unless otherwise approved by the government.

3.03 FLOOR COVERING AND PERIMETERS - SHELL

1. In addition to Lease Section 3.30 FLOOR COVERING AND PERIMETERS - SHELL:
 - a. Porcelain tile shall be used in all restrooms.

3.04 RESTROOMS

1. In addition to Lease Section 3.37 RESTROOMS
 - a. In addition to 3.37.D, each main restroom shall contain the following additional items:
 - i. A nurse call with pull cord
 - ii. A baby changing station.

3.05 ACOUSTICAL REQUIREMENTS

1. In addition to Lease Section 3.44 ACOUSTICAL REQUIREMENTS
 - a. In addition to 3.44.C, Rooms separated from adjacent spaces by ceiling high partitions (not including doors) shall not be less than the following noise isolation class (NIC) standards when tested in accordance with ASTM E-336:
 - i. Rooms not specifically listed: NIC 35

3.06 SPECIFIC REQUIREMENTS: PORTABLE FIRE EXTINGUISHERS (SHELL)

1. Portable fire extinguishers recessed in cabinets shall be provided, inspected, and maintained by the building owner in accordance with National Fire Protection Association (NFPA) 10, Standard for Portable Fire Extinguishers. Recessed cabinets shall be conspicuously marked. Documentation shall be provided to the St Cloud VA regarding all required Joint Commission, Life Safety Code and city/county maintenance and testing of the fire extinguishers. Contractor shall inspect the fire extinguishers and cabinets and provide inspection report to the VA on a monthly basis and provide an action plan for remedying any extinguishers or cabinets found deficient or out of compliance with all applicable codes.

SECTION 4 DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES

Incorporated into lease.

SECTION 5 AGENCY SPECIFIC TENANT IMPROVEMENT COMPONENTS (L100 SECTION 5)

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

5.01 SPECIAL REQUIREMENTS: INTERIOR DESIGN CRITERIA GOAL

To provide a supportive interior environment that is conducive to the required occupancy or use, is respectful of the public monies, promotes staff performance, and expresses progressive high-quality design.

CONCEPT: The design is to pivot from the facility's mission and its profile. This includes a working knowledge of the profile and characteristics of said function and said project. Important considerations are a focus on Patient Centered Care and creating a Healing Environment to improve the health and well-being of our Veteran Patients. This clinic is a "One-PACT" design, with facility specific design elements included.

FUNCTION: Functional requirements dictate maintainable colors, textures, patterns, material selections, combination of materials and installation techniques. Materials must be chosen for longevity and good appearance retention.

Design attention will be given to all spaces. Areas which could initiate the design may be the lobby or administrative suite, but extensions of the same quality and variety is required for the corridors, staff areas, and all other areas. The design must offer a distinctive and clear lead for the planning and selecting of interior furnishings. Designs that narrow choices of procurement furnishings are inappropriate. A working understanding of the limits of Government sources is to be considered. This consideration will produce a good environment for the furnishings.

Designs that use "life-time-of-the-building" materials in colors, patterns and designs that transcend time are endorsed. Trendy colors and patterns are to be restricted to cycle replacement materials, such as paint and wall coverings.

5.02 SPECIAL REQUIREMENTS: PAINTING

1. Coordinate with VA Interior Designer during development of Design Intent Drawings. Paint colors will be selected by the VA.

5.03 SPECIAL REQUIREMENTS: INTERIOR FINISHES

The VA must review and approve any deviation from this document or lease prior to start of final construction documents. The Interior Design concept and materials, finishes, colors, patterns and textures must be approved by the Contracting Officer.

Unless specified otherwise for particular rooms or areas, finish materials, including vinyl wall covering, vinyl composition tile flooring, sheet vinyl, carpet, and ceramic wall and floor tile finish, as specified herein, shall meet the general requirements noted in this document similar to those noted below.

Room, floor, and door finishes/sizes that are not detailed in this document are detailed in PG 18-14 Room Finishes, Door, and Hardware Schedule and can be found at ([HTTPS://WWW.CFM.VA.GOV/TIL/ROOM/ROOMFINISHES.PDF](https://www.cfm.va.gov/til/room/roomfinishes.pdf))

Provide three distinct color pallets for the VA choose from at the DID workshop. These selections shall be incorporated into the design drawings.

PORCELAIN WALL TILE:

DESCRIPTION: Porcelain Wall Tile shall be installed in the following locations:

Public Bathrooms

Staff Bathrooms

Shower Rooms

Any other locations where indicated during development of DID

SPECIFICATIONS

Comply with ANSI A137.1, Standard Grade, except as modified:

Inspection procedures listed under the Appendix of ANSI A137.1.

Mosaic tile may be mounted or joined together by a resinous bonding material along tile edges.

Does not use back mounted tiles unless certified by manufacturer as noted in paragraph 1.3.D.

Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.

Factory-Applied Temporary Protective Coating:

Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of petroleum paraffin wax, applied hot.

Do not coat unexposed tile surfaces.

Pre-wax tiles set or grouted with furan or epoxy or latex modified mortars.

MATERIALS

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

WALL TILE

Size: 12"x12"

TRIM SHAPES:

Conform to applicable requirements of adjoining floor and wall tile.
Use slip resistant trim shapes for horizontal surfaces of wet areas.
Use trim shapes sizes conforming to size of adjoining field wall tile including existing spaces.
Internal and External Corners:
Square internal and external corner joints are not acceptable.
External corners including edges: Use bullnose shapes.
Internal corners: Use cove shapes.
Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
For unglazed ceramic mosaic and glazed wall tile installed in Portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.
For unglazed ceramic mosaic and glazed wall tile installed in dry set Portland cement mortar, latex Portland cement mortar, and organic adhesive (thin set methods), use cove and surface bullnose shapes as applicable.

CEMENTITIOUS BACKER UNITS

Use in showers, restrooms or wet areas.
ANSI A118.9.
Use cementitious backer units in maximum available lengths.
Water Absorption less than 20 Percent by weight, tested in accordance with ASTM C948

JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
Tape Embedding Material: Latex Portland cement mortar complying with ANSI A118.4.
Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

SETTING MATERIALS OR BOND COATS

Conform to TCA Handbook for Ceramic Tile Installation.
Portland Cement Mortar: ANSI A108.1.
Latex Portland Cement Mortar: ANSI A118.4.
For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
Dry Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
Organic Adhesives: ANSI A136.1, Type 1.
Elastomeric Liquid Applied Waterproofing Membrane and Bond Coat:
TCA F122-02.
ANSI A118.10.
One component polyurethane, liquid applied material having the following additional physical properties:
Hardness: Shore "A" between 40 60.
Elongation: Between 300 600 percent.
No volatile compounds.
Coal tar modified urethanes are not acceptable.

GROUTING MATERIALS

Coloring Pigments:

Pure mineral pigments, limeproof and nonfading, complying with ASTM C979.
Add coloring pigments to grout by the manufacturer.
Job colored grout is not acceptable.
Use is required in Commercial Portland Cement Grout, Dry Set Grout, and Latex Portland Cement Grout.
Commercial Portland Cement Grout: ANSI A118.6
Dry Set Grout: ANSI A118.6 color as specified.
Latex Portland Cement Grout: ANSI A118.6 color as specified.
Unsanded grout mixture for joints 3.2 mm (1/8 inch) and narrower.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

Color to be selected by VA, provide color selection chart.

FLOORING, TILE:

DESCRIPTION:
Porcelain tile

SPECIFICATIONS

Comply with ANSI A137.1, Standard Grade, except as modified:
Inspection procedures listed under the Appendix of ANSI A137.1.
Slip Resistant Tile for Floors:
Coefficient of friction, when tested in accordance with ASTM C1028, required for level of performance:
Not less than 0.7 (wet condition) for bathing areas.
Not less than 0.8 on ramps for wet and dry conditions.
Not less than 0.6, except 0.8 on ramps as stated above, for wet and dry conditions for other areas.

MATERIALS

Size
Housekeeping Closet floors shall be 2"x2" porcelain tile.
Public and Staff restrooms the flooring shall be no smaller than 12"x24", the walls no smaller than 12"x12".
Shower floors shall have a 2"x2" tile. If there is a floor drain, during the design process the VA will review what size tile is appropriate for that area. All sizes will be determined during the finish selection process.
Color to be selected during the design phase by VA, provide color selection chart.
Grout, setting and joint materials as specified by manufacturer.

FLOORING, RESILIENT BASE, STAIR TREADS AND ACCESSORIES:

DESCRIPTION

Perimeter base shall be rubber or vinyl base except where ceramic tile or sheet vinyl self-cove is specified. . Base shall be 1/8-inch-thick, 4 inches high with molded top. Cove style shall be used throughout; except, where carpet occurs, use straight style. Use only products by the same manufacturer and from the same production run.

MATERIALS

ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Type TP Rubber, Thermoplastics, Group 2-layered with molded top. Style B-cove.
Where carpet occurs, use Style A-straight.
Use only one type of base throughout.
Product: Brand name or equal to Johnsonite, Color: Fawn, No. 80.t. Another color may be selected by the VA Interior Designer during design.

FLOORING, LUXURY VINYL TILE (LVT)

DESCRIPTION:

Luxury Vinyl Tile (LVT) shall be provided at locations required. LVT shall be non-asbestos, 1/8-inch-thick, uniform color throughout. Use adhesives, underlayment, primers and polish recommended by the floor resilient material manufacturer.

SPECIFICATIONS:

Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E 648.
Smoke density: Less than 450 per ASTM E662.

MATERIALS:

VINYL COMPOSITION TILE

ASTM F1700, Class III, Printed Film Vinyl Tile, Type B.
Thickness: 3.2 mm.
Size: 12" x 24" or as selected during design.
Provide products with recycled content with not less than 29 percent.

ADHESIVES

Comply with applicable regulations regarding toxic and hazardous materials Green Seal (GS-36) for commercial adhesive.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

Use low-VOC adhesive during installation. Water based is preferred over solvent based adhesives.

PRIMER (FOR CONCRETE SUBFLOORS)

As recommended by the adhesive and tile manufacturer.

LEVELING COMPOUND (FOR CONCRETE FLOORS)

Provide cementitious products with latex or polyvinyl acetate resins in the mix. Determine the type of underlayment selected for use by the condition to be corrected.

EDGE STRIPS

28 mm (1-1/8 inch) wide unless shown otherwise.

Bevel from maximum thickness to minimum thickness for flush joint unless shown otherwise.

STANDARDS FOR POLISH AND CLEANERS

Cleaners RFCI CL-1.

Polish: ASTM D4078.

RESILIENT SHEET FLOORING

DESCRIPTION:

Flooring shall be installed in areas indicated within the lease documents.

MATERIALS

Rubber Sheet Flooring (RF): ASTM F1860; Type I rubber, without backing.

Wear Surface: Smooth.

Total Thickness: 3 mm (0.080 inches).

Back of Sheet: manufacturers pre-applied adhesive.

Sheet Size: Provide maximum size sheet produced by manufacturer to minimize

Basis of Design: Nora Environcare

Approved equal permitted.

INSTALLTION

Per manufacturers requirements.

ACCOUSTICAL CEILINGS:

DESCRIPTION:

Except for specific areas requiring special treatment, all suspended acoustic tile ceilings shall be 2 foot by 2 foot lay-in panels in a standard 15/16-inch grid. Color shall be white. Ceiling suspension system shall be heavy duty.

MATERIALS

METAL SUSPENSION SYSTEM

ASTM C635, heavy-duty system, except as otherwise specified.

Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.

Galvanized cold-rolled steel, bonderized.

Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.

Exposed grid suspension system for support of lay-in panels:

Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.

Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.

On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise.

Products:

Brand name or equal to Chicago Metallic, No. 1420.01 12' Ang., 15/16 x 15/16, White. No. 511-01 12' runner, White; No. 514-01 4' Tee; No. 502-01 2' Tee, Heavy Duty.

PERIMETER SEAL

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
Thickness as required to fill voids between back of wall molding and finish wall.
Not less than 9 mm (3/8 inch) wide strip.

WIRE

ASTM A641.

For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).

For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

ANCHORS AND INSERTS

Use anchors or inserts to support twice the loads imposed by hangers attached thereto.

Power Actuated Drive Pins:

Fed. Spec. FF-P.395, Type and Class as required to resist twice the imposed load.

Threaded Stud: Style SC for concrete, Style SS for steel.

Eye Pin: Style EP

Clips:

Galvanized steel.

Designed to rigidly secure framing members together.

Designed to sustain twice the loads imposed by hangers or items supported.

CARRYING CHANNELS FOR SECONDARY FRAMING

Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.

Ceiling grid components shall not be used for secondary frames or hangers.

ACOUSTICAL UNITS (TILES)

General:

ASTM E1264, weighing 3.6 kg/m² (3/4 psf) minimum for mineral fiber panels or tile.

Class A Flame Spread: ASTM 84

Minimum NRC (Noise Reduction Coefficient):

0.75 unless specified otherwise: ASTM C423.

0.85 in conference rooms, private offices, and open offices using acoustical clouds with a minimum of 70% coverage.

Minimum CAC (Ceiling Attenuation Class): 40 unless specified otherwise: ASTM E413.

Manufacturers' standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces.

The teamwork areas shall be designed with additional acoustical abatement techniques such as sound clouds in addition to the ACT.

Lay-in panels:

Square or reveal edges Color: White.

5.04 SPECIAL REQUIREMENTS: HANDRAILS, CHAIR RAILS AND WALL GUARDS

1. Provide chair rail at locations indicated for seating in the waiting room as well as exam, consult, telehealth, conference, shared medical appointment rooms.
2. The wheelchair storage area near the front entrance/waiting room shall be provided with rigid wall protection placed from the floor/base cove level up to 48" high. Provide handrails and wall guards (crash rails) in this area for maximum patient assistance. Other rooms to receive rigid wall protection are detailed on the detailed space plan as wainscoting in those locations.
3. SPECIFICATIONS:
 - a. Handrail/Wall Guard Combination:
 - i. Snap-on covers of resilient material, minimum 2 mm (0.078-inch) thick, shall be free-floated on a continuous, extruded aluminum retainer, minimum 1.8 mm (0.072-inch) thick, anchored to wall at maximum 760 mm (30 inches) on center.
 - ii. Prefabricated and closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners shall be field adjustable to assure close alignment with handrails and wall guards (crash rails). Screw or bolt closure caps to aluminum retainer. Installation shall be in accordance with manufacturer's recommendations.
 - iii. Equal to InPro Corporation 800 Series, Ergonomic Profile, Color: TBD by VA during design. Other color options may be approved by VA based upon the color palette options provided by the interior designer.
 - b. Wall Guards (Crash Rails):

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- i. Snap-on covers of resilient material, minimum 2.8 mm (0.110-inch) thick, shall be free-floated over 50 mm (two-inch) wide aluminum retainer clips, minimum 2.3 mm (0.090-inch) thick, anchored to wall at maximum 600 mm (24 inches) on center, supporting a continuous aluminum retainer, minimum 1.6 mm (0.062-inch) thick; or, shall be free-floated over a continuous extruded aluminum retainer, minimum 2.3 (0.090-inch) thick anchored to wall at maximum 600 mm (24 inches) on center.
 - ii. Prefabricated and closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners shall be field adjustable to assure close alignment with handrails and wall guards (crash rails). Screw or bolt closure caps to aluminum retainer. Installation shall be in accordance with manufacturer's recommendations.
 - iii. Equal to InPro Corporation, Color: TBD by VA during design. Other color options may be approved by VA based upon the color palette options provided by the interior designer.
- c. Chair Rail
 - i. Provide chair rail in locations indicated.
 - ii. Color: TBD by VA during design. Other color options may be approved by VA based upon the color palette options provided by the interior designer.
 - iii. Material shall be presented for selection during DID.
 - iv. Equal to solid surface material matching solid surface countertops. Other options may be approved by the VA based on the discussions during DID.
- d. Rigid Wall Protection
 - i. Provide rigid wall protection in locations indicated
 - ii. Provide material for wall protection to 48" AFF (minimum) with all housekeeping and storage rooms.
 - iii. Protection placed within public view shall match other materials within view
 - iv. Protection placed in areas outside of public view can be selected from a palette of standard colors
 - v. Equal to InPro Corporation Palladium, Colors: TBD by VA during design. Other color options may be approved by VA based upon the color palette options provided by the interior designer.

5.05 SPECIAL REQUIREMENTS: CORNER GUARDS

1. Provide Resilient, Shock Absorbing Corner Guards on all outside corners within the clinic space.: Surface mounted type of 6 mm 1/4-inch corner formed to corner profile. Installation shall be in accordance with manufacturer's recommendations.
2. SPECIFICATIONS:
3. Snap on corner guard formed from resilient material, minimum 2 mm (0.078 inch) thick; free floating on a continuous 1.6 mm (0.063 inch) thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required.
4. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.
5. Product: Equal to InPro Corporation, Color: TBD by VA during design. Other color options may be approved by VA based upon the color palette options provided by the interior designer.
6. Use surface applied (full height from finished floor to a minimum of 8'-0" AFF) resilient-type corner guards on walls.
7. MATERIALS:
8. Aluminum Extruded:
9. ASTM B221, Alloy 6063, Temper T5 or T6.
10. Resilient Material:
11. Extruded and injection molded acrylic vinyl or extruded polyvinyl chloride meeting following requirements:
12. Minimum impact resistance of 1197 ps (25 ft lbs per sq.ft) when tested in accordance with ASTM D256 (Izod impact, ft.lbs. per inch notch).
13. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
14. Rated self-extinguishing when tested in accordance with ASTM D635.
15. Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
16. Integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE LCH scales.
17. Same finish on exposed surfaces.

5.06 SPECIAL REQUIREMENTS: CASEWORK AND COUNTERTOPS:

Casework and countertops shall be in accordance with the requirements in this section. Type(s), quantities, and locations shall be determined via language within Exhibit C – Litchfield CBOC – Sample Floor Plan, Exhibit C.2 – Detailed Space Plan Litchfield CBOC, and/or Litchfield – Equipment List. Consult with the CO/COR if discrepancies exist across documentation

CASEWORK

MATERIALS – as detailed in documentation – if no details exist, the below information shall be used.

LUMBER

Grading and Marking:

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

Lumber shall bear the grade mark, stamp, or other identifying marks indicating grades of material.

Such identifying marks on a material shall be in accordance with the rule or standard under which the material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.

The inspection agency for lumber shall be approved by the Board of Review, American Lumber Standards Committee, to grade species used.

Sizes:

Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes shall be within manufacturing tolerances allowed

Millwork, standing and running trim, and rails: Actual size as shown or specified.

Hardwood: MM-L-736, species as specified for each item.

Softwood: PS-20, exposed to view appearance grades:

Use C select or D select, vertical grain for transparent finish including stain transparent finish.

Use edge grain wood members exposed to weather.

PARTICLEBOARD

Specification: NPA A208.1

Plastic Laminate Particleboard Cores:

Use Type 1, Grade 1-M-3, or Type 2, Grade 2-M-2, unless otherwise specified.

Use Type 2, Grade 2-M-2, exterior bond, use no particleboard on countertops throughout

General Use: Type 1, Grade 1-M-3 or Type 2, Grade 2-M-2.

PLASTIC LAMINATE

NEMA LD-3.

Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish.

General Purpose, Type HGL.

Color: TO BE CHOSEN BY VA FROM INTERIOR DESIGN PALLETTE OPTIONS AND RECOMMENDATIONS PROVIDED BY THE CONTRACTOR.

Cabinet Interiors including Shelving: Both of following options to comply with NEMA, CLS as a minimum.

Plastic laminate clad particle board.

Resin impregnated decorative paper thermally fused to particle board.

Backing sheet on bottom of plastic laminate covered wood tops: Backer, Type HGP.

Post Forming Fabrication, Decorative Surfaces: Post forming, Type HGP.

CAST PLASTIC

ANSIZ24.3 and .6 and Fed. Spec. WW-P-541E/Gen.

Windowsills: 13 mm (1/2 inch) thick with bullnose edge, adhesively joined with inconspicuous seams.

Color: TO BE CHOSEN BY VA FROM INTERIOR DESIGN PALLETTE OPTIONS AND RECOMMENDATIONS PROVIDED BY THE CONTRACTOR.

CEMENT BOARD (WINDOW SOFFITS AT ACOUSTIC TILE CEILINGS)

4' x 8' x 1/2" Fiber Cement Sheet Product.

Equal to Cement Board Fabricators, Louisville, KY, Minerit Heavy Duty – HD.

MELAMINE MILLWORK INTERIORS

White Melamine shall be used for all interior cabinet surfaces.

All shelves shall be fabricated to allow for height adjustability and/or individual shelf removal.

ADHESIVE

For Plastic Laminate: Fed. Spec. A-A-1936.

For Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.

HARDWARE

Rough Hardware:

Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.

Fasteners:

Bolts with Nuts: FF-N-836.

Expansion Bolts: A-A-1922A.

Screws: Fed. Spec. FF-S-111.

Finish Hardware

Cabinet Hardware: ANSI A156.9.

Door/Drawer Pulls: Stanley No. 4484-626.

Drawer Slides: Equal to Blum 230M Series, length as required.

Adjustable Shelf Rests: 5 mm, Nickel.

Concealed Hinges: Equal to Blum 75 MSS80MB, 125° opening.

Cabinet Locks: Equal to EO7525, Stanley/Best Corporation lock. Medication cabinets shall be key locked and firmly anchored in place.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

MOISTURE CONTENT

Moisture content of lumber and millwork at time of delivery to site.

Interior finish lumber, trim, and millwork 32 mm (1-1/4 inches) or less in nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.

Exterior treated or untreated finish lumber and trim 100 mm (4 inches) or less in nominal thickness: 15 percent.

Moisture content of other materials shall be in accordance with the standards under which the products are produced.

SOLID SURFACE

Type(s), quantities, and locations shall be determined via language within Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Exhibit C.2 – Detailed Space Plan Litchfield CBOC, and/or Litchfield – Equipment List.

All casework base cabinetry shall have solid surface countertops.

Consult with the CO/COR if discrepancies exist across documentation

MATERIAL

Basis of Design (SSM): Color and texture of finish, Color: TO BE CHOSEN BY VA FROM INTERIOR DESIGN PALLETTE OPTIONS AND RECOMMENDATIONS PROVIDED BY THE CONTRACTOR.

Acrylic Resin Sheet Material: a homogeneous, filled, 100-percent-acrylic-resin sheet meeting ANSI Z124.3, Type 6.

Fire Performance: Class A surface burning characteristics in accordance with ASTM E84.

Flame Spread Index: 25 or less.

Smoke Developed Index: 450 or less.

MOH's Hardness: 6.0, minimum.

Indoor Air Quality: Greenguard-certified for "Indoor Air Quality" and Children and Schools".

Tolerances: Variation in component size +/- 1/8 inch over a ten-foot length.

FABRICATION

General:

Except as otherwise specified, use AWI Custom Grade for architectural woodwork and interior millwork.

Plastic Laminate Work:

Factory glued to a particle board core, thickness as shown or specified.

Cover exposed edges with plastic laminate.

Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter including back splashes and end splashes of countertops.

Use backing sheet on concealed large panel surface when decorative face does not occur.

Counter or Work Tops:

Type of Construction: integral, coved back- and end-splashes and edge profile indicated. Fabricate splashes for scribe fit.

To the extent practicable, fabricate each top as a single linear piece. Where field joints are required use plain butt type joints, designed for assembly with adhesive and concealed splines.

Fabrication must follow manufacturer's recommendations. Use multiple thicknesses and pieces of sheet material together with adhesives, bonding agents, and tools to build-up and shape tops to the required profiles and configurations.

Make cut-outs for sinks, mechanical and electrical fittings and other accessories.

5.07 SPECIAL REQUIREMENTS: WAYFINDING

1. A "way finding" process needs to be designed into every project. Visitors and staff need to know where they are, what their destination is, how to get there and have the ability to return. Identification, personalization of occupied spaces and orientation are all to be addressed in the design. Way finding is to be thought of broadly as building elements, color, texture and pattern cues, as well as a coordinated set-up for signage and artwork.
2. Interior signage shall conform to ADA/UFAS Standards (28 CFR Part 36) accessibility Guidelines, in addition to the requirements listed below.
3. Building owner will develop and submit a signage plan for review and approval by the Contracting Officer during design development.
4. The building owner will furnish and install interior signs for all rooms, areas, conditions or features in the facility.
5. See the most recent VA Signage Design Manual ([HTTPS://WWW.CFM.VA.GOV/TIL/SPCLRQMTS.ASP#SIGN](https://www.cfm.va.gov/TIL/SPCLRQMTS.ASP#SIGN)) and details below.
6. Fire Extinguisher Sign:
 - a. Provide sign at fire extinguisher cabinets.
 - b. Sign shall be ceiling mounted or wall mounted "flag type", extending perpendicular to the wall or ceiling surface for maximum visibility along the primary sight line of the installed location.
7. Main Suite Identification Sign:
 - a. Provide a sign on exterior adjacent to the suite entrance, if the offered space is within a structure such as a mall and has interior access.
 - b. Signage shall be raised style, with standoff from wall structure, in VA blue and sized to be highly observable in the space allowed.
 - c. Refer to graphics in SPECIAL REQUIREMENTS: EXTERIOR SIGNAGE for sample of VA approved artwork.
 - d. Signage shall be mounted on the wall near the main patient entrance to the clinic, and clearly differentiate the entrance from other tenant entrances.

5.08 SPECIAL REQUIREMENTS: DOORS – SUITE ENTRY

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

1. Suite entry doors shall have a minimum clear opening of 48" wide x 84" high (per leaf).
 - a. Doors shall be one of the following:
 - i. flush, solid core, 1 3/4-inch-thick, wood door with a natural wood veneer face;
 - ii. Fully Insulated, 16-gauge hollow steel;
 - iii. insulated tempered glass as part of an extruded metal store front system; or other equivalent pre-approved by the Government.
 - b. Suite entry doors shall be equipped with an ADA compliant automatic push button automatic door opener in accordance with section Special Requirements – Automatic Doors.
 - c. Provide electric strikes and other hardware as need for auto door openers to function.
 - d. Provide Fire Rated Doors where required by occupancy type.
 - e. Suite Entry Doors shall have VA PIV card readers in accordance with other sections within this document.
 - f. Suite Entry Hinges pivots, and pins shall be installed in a manner which prevents removal when the door is closed and locked.
 - g. The opening dimensions and operations shall conform to the governing building, fire safety, accessibility, and energy codes and/or requirements.
 - h. Fire door assemblies shall be listed and labeled. Labels on fire door assemblies shall be maintained in a legible condition. Fire door assemblies and their accompanying hardware, including frames and closing devices shall be installed in accordance with the requirements of NFPA 80, Standard for Fire Doors and Other Opening Protectives.
2. Exterior doors and all common area doors shall have door handles or door pulls with heavyweight hinges.
 - a. All doors shall have corresponding doorstops (wall or floor mounted) and silencers.
 - b. All public use doors and restroom doors shall be equipped with kick plates.
 - c. All doors shall have automatic door closers.
 - d. All Building exterior doors shall have locking devices installed to reasonably deter unauthorized entry.

5.09 SPECIAL REQUIREMENTS: DOORS – INTERIOR

1. Provide and install doors per the following documentation:
 - a. This document
 - b. Exhibit C.2 - Detailed Space Plan Litchfield CBOC
2. Doors within the Space shall be provided as part of the TIs and shall have a minimum clear opening of 36" wide x 80" high. Specific door sizes shall be cross referenced with the VA Design Guides for appropriate sizing.
3. Sliding "barn" style doors (no pocket doors) shall be painted hard coat polyester finish aluminum frame, top-hung, with 5-Ply veneered solid core leaf.
 - a. Sliding door assemblies shall include soft closer, handles, and sound control gasketing.
 - b. Provide lock and handle hardware as specified.
 - c. All accessories and frame to include top track, floor guide, valances, and roller systems shall be designed and manufactured as a complete sliding door system, field fabrications are not allowed.
 - d. Doors shall meet all sound abatement requirements of the lease.
 - e. Reference Model: Aurora Doors High Performance Sliding Door System or approved equal.
4. Doors shall be operable with a single effort and shall meet the requirements of ABAAS/ADA/UFAS Standards (28 CFR Part 36), NFPA 101, Life Safety Code or the International Building Code (current as of the Lease Award Date).
 - a. Provide Fire Rated Doors where required by occupancy type.
5. Provide metal door frames for wood swinging leaf doors.
6. All corridor-to-corridor doors shall have 100 sq. in. glass vision panels and shall swing in opposite directions from each other.
 - a. Doors in fire partitions and smoke barriers shall have fire rated glazing vision panels and be held open with electromagnetic holders, except doors which should remain closed for functional reasons.
7. Final door sizes shall be determined through discussions with the VA during DID development. This is due to changing needs when the building layout changes from a standard VA design.

5.10 SPECIAL REQUIREMENTS: DOORS – HARDWARE AND ACCESSORIES

1. Doors designated by the Government to be locking, shall be equipped with 6-pin, tumbler cylinder locks and strike plates.
2. Any exterior entrance shall have a high security lock, with appropriate key control procedures, as determined by Government specifications.
3. The exterior side of the door shall have a lock guard or astragal to prevent tampering of the latch hardware.
4. Doors used for egress only shall not have any operable exterior hardware.
5. All security-locking arrangements on doors used for egress shall comply with requirements of NFPA 101 or the International Building Code current as of the Lease Award Date.
6. Swinging Leaf doors shall have door handles or door pulls with heavyweight hinges.
7. All doors shall have corresponding doorstops (wall- or floor-mounted) and silencers.
 - a. Conform to ANSI A156.16.
 - b. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.

LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC

- c. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- d. Substitute overhead stops, Type C02541, when wall bumpers would not provide an effective door stop.
- e. Where drywall partitions occur, use overhead stops, Type C02541.
- f. Provide stop Type L02011 or L02181, as applicable for exterior doors.
- g. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- h. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- i. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- j. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.
- k. Provide door stops on doors where combination closer magnetic holders are specified.
- 8. Safety Glass
 - a. There are two (2) types of safety glass that may be required in Interior Spaces;
 - i. tempered safety glass and
 - 1. Tempered Glass shall be used in all other Observation Windows and Doors with vision panels, including side lights.
 - ii. laminated glass
 - 1. Laminated Fire Glass shall be used in fire rated assemblies
- 9. Locks and Latches
 - a. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1 3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.
 - b. In addition to above requirements, locks and latches shall comply with following requirements:
 - i. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. Knobs for series 4000 lock and latch sets shall have 57 mm (2 1/4 inch) diameters. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
 - ii. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets shall have lever handles similar to Falcon S-lever Design. Lever handle shall be fabricated from wrought stainless steel. No substitute lever design or material shall be accepted. All locks and latchsets shall be furnished with curved lip strike and wrought box. Furnish armored fronts for all mortise locks.
 - iii. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.
 - c. Corridor, Entry and Office doors shall be equipped with a multi-pin tumbler, interchangeable core tumbler cylinder locks and strike plates.
 - d. All locks shall be master keyed in accordance with information provided within this document.
 - i. Furnish at least two master keys for each lock to the Government.
 - e. Sliding "barn" style (no pocket doors) doors at patient care rooms shall have an ADA Thumb turn inside with keyed cylinder outside lockset, and ladder pull style door handles.
 - f. Push-button combination locks will be considered for light security use rooms and shall be proposed during design.
 - i. Push-button locks shall provide a key override to permit an existing building key to override the entry code.
 - g. Electromagnetic locks shall not be used without prior approval from St Cloud VA Police.
 - h. Locksets and handles shall be stainless steel finish.
- 10. Electric Strikes
 - a. Use fail-secure electric strikes with fire-rated devices.
 - b. Use fail-secure electric devices to maintain a secure perimeter around the core clinic area in coordination with the Clinic Lockdown System.
- 11. Door Hold Opens shall be provided (at a minimum) at the following locations:
 - a. Waiting area into secure corridor
 - b. Doors that may be used for delivering supplies to the clinic.
 - c. Storage rooms
- 12. PIV/HID card readers (at a minimum) as detailed in this lease:
 - a. Medication,
 - b. Communication room
 - c. Police/Access Control
 - d. Laboratory
 - e. Doors to PACT Teamwork area from Patient Corridors
 - f. Reception to Secure Corridor (card reader both sides)
 - g. Public side of clinic to group room, conference room, office, or secure corridor

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- h. Publicly accessible group or conference room to secure corridor;
- i. Clean and Soiled Utility Rooms
- 13. Any exterior entrance, and all doors listed above shall have a high security lock with PACS System Compatible PIV card reader, electric strike, and all associated hardware, compatible with the PIV System in use at the St Cloud VA Health Care System.
 - a. Should the access control system fail, it shall fail in a fail-secure mode with the door locked.
 - b. Hinge pins and hasps shall be secured against unauthorized removal by using spot welds or pinned mounting bolts.
 - c. The exterior side of the door shall have a lock guard or astragal to prevent tampering of the latch hardware. Offices, exam rooms and other selected doors shall be keyed individually;
 - d. Doors used for egress only shall not have any operable exterior hardware.
 - e. All security-locking arrangements on doors used for egress shall comply with requirements of ADA/UFAS Standards (28 CFR Part 36) and NFPA101 or the International Building Code current as of the award date of this Lease, and Special Requirements: Security Standards.
- 14. Refer to section SPECIAL REQUIREMENTS: COMPUTER AND TELECOMMUNICATIONS ROOM for additional requirements pertaining to doors and hardware.
- 15. Final door hardware shall be determined through discussions with the VA during DID development. This is due to changing needs when the building layout changes from a standard VA design.
- 16. Door hardware selection should maximize the use of electronic strikes over other electronic devices such as electronic crash bars or electronically released door handles.
- 17. Hinges (Butt and Continuous)
 - a. Butt Hinges The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified.
 - i. Exterior Doors Type A5112 (SSTL) for doors 900 mm (3 feet) wide or less and Type A5112 (SSTL) for doors over 900 mm (3 feet) wide. Hinges for exterior doors shall have non-removable pins.
 - ii. Interior Doors Type A5112 (SSTL) 2 for doors 900 mm (3 feet) wide or less and Type A5112 (SSTL) for doors over 900 mm (3 feet) wide.
 - iii. Automatic doors hung on butts Type A5112 (SSTL) for exterior doors and aluminum doors, and Type A5112 (SSTL) for other doors.
 - iv. Labeled Wood Fire Doors Type A5112 (SSTL); these hinges shall be thru bolted to door with hex nuts and bolts.
 - b. Continuous Hinges: ANSI/BHMA A156.26 Grade 1-300, unless otherwise specified by owner. Listed under Category N in BHMA's "Certified Product Directory."
 - i. General Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete:
 - ii. Fire Pins Steel pins to hold labeled fire doors in place if required by tested listing.
 - iii. Continuous, Gear-Type Hinges Extruded-aluminum, pinless, geared hinge leaves; joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings.
- 18. Door Closing Devices
 - a. Closing devices shall be products of one manufacturer for each type required.
 - b. The closer shall have 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
 - c. Where specified, closer shall have hold-open feature.
 - d. Size Requirements: Size closers in accordance with manufacturer's recommendations or provide multi-size closers
- 19. Armor Plates, Combination Kick-Mop Plates, and Door Edging
 - a. Conform to ANSI Standard A156.6.
 - b. Provide protective plates and door edging as specified below:
 - i. Kick-mop plates and armor plates plastic or metal, Type J100 series, color as required.
 - ii. Provide kick-mop plates for both sides of each door, except where noted as not required. Kick-mop plates shall be 125 mm (5 inches) high. On push side of doors where jamb stop extends to floor, make combination kick-mop plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other combination kick-mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
 - iii. Kick-mop plates are not required on following door sides:
 - 1. Armor plate side of doors;
 - 2. Exterior side of exterior doors;
 - 3. Closet side of closet doors;
 - 4. Storage side of doors to or from storage spaces; and
 - 5. Both sides of aluminum entrance doors.
 - iv. Armor plates for doors are listed under "Hardware Sets". Armor plates shall be 875 mm (35 inches) high and 38 mm (1 1/2 inches) less than width of doors, except on pairs of metal doors. Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt cross bar.
 - v. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick-mop plate in place of armor plate. Size of stretcher plate and kick-mop plate shall be 125 mm (5 inches) high.
- 20. Door Hardware Guidance

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- a. Where hardware set for a single door is specified for a pair of doors; equip each leaf of such pair of doors with set noted. Disregard breaks in hardware set numbering sequence. Verify all hardware sets with the contracting officer and Medical Center staff prior to ordering or installation any door hardware. Hardware changes may be required during design based on clinic layout and room function.
- b. Modifications may be made during design process based on finalized room locations and functions.
- c. Door sizes and hardware requirements shall meet all applicable safety and code regulations.
- d. Base hardware requirements are detailed below but are subject to change depending on clinical layouts and changes required during design.

HW-3G

Exam, Consult, Offices, Tele-Retinal, Telemedicine, Conference/Training Room, Procedure Room, Radiology Viewing Room, Workroom, Staff Lounge

Each Door to Have:

- | | | |
|---|--------------------------|--|
| | Hinges | |
| 1 | Office Lock | |
| 1 | Stop as detailed above | |
| 1 | Coat Hook | |
| 1 | Threshold | |
| 1 | Auto Door Bottom | |
| 2 | Sets Self-Adhesive Seals | |

OMIT VIEWER IF DOOR PROVIDED WITH VISION LITE.

OMIT COAT HOOK WHERE GLASS LITE PREVENTS INSTALLATION.

HW-5A – Barn Doors

Barn Doors between Exam/Consult rooms and PACT areas

Each Door to Have:

- | | | |
|---|---------------------------------|-----------------------------|
| | Hardware | QUANTITY & TYPE AS REQUIRED |
| 2 | End Cap | |
| 1 | Fascia | |
| 1 | Barn Door Track Kit | |
| 1 | Sliding Door Lock (Office Lock) | |

NOTE: Barn Door Track Kit includes track, hangers, stops, and guides.

HW-2H

Patient Toilets, Public Toilets, Lab Toilets, Lactation Room, Shower Room, Radiology Dressing Room, Procedure Room Toilet, Staff Toilets

Each Door to Have:

- | | | |
|---|---|-----------------------------|
| | Hinges | QUANTITY & TYPE AS REQUIRED |
| 1 | Hospital Privacy Latch w/ Rescue Hardware and occupancy indicator | |
| 1 | Kick Plate | |
| 1 | Mop Plate (@ Inswing Doors) | |
| 1 | Edge Guard (@ Wood Doors) | |
| 1 | Overhead Stop | |
| 3 | Silencers | |

HW-5D

Soiled Utility Closet, Housekeeping, Locker Room, Clean Utility Room, Recycled Utility Room, Building Maintenance Rooms

Each Door to Have:

- | | | |
|---|------------------------------|-----------------------------|
| | Hinges | QUANTITY & TYPE AS REQUIRED |
| 1 | Storeroom Lock | |
| 1 | Kick Plate | |
| 1 | Closer | |
| 1 | Floor Stop (@ Inswing Doors) | |
| 3 | Silencers | |

HW-SH-3

Police/Access Control, IT Communications

Each Door to Have:

- | | | |
|---|--------------------------|-----------------------------|
| | Hinges | QUANTITY & TYPE AS REQUIRED |
| 1 | Transfer Hinge | |
| 1 | Electrified Lock/Strike | |
| 1 | Power Supply | |
| 1 | Closer | |
| 1 | Floor Stop | |
| 1 | Threshold | |
| 1 | Auto Door Bottom | |
| 2 | Sets Self-Adhesive Seals | |
| 1 | Alarm Contact | |

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- 1 Power Supply as required
- 1 Access Control Reader by security contractor
- 1 Set Wiring Diagrams by hardware supplier

HW-2AM

Laboratory, Doors to PACT Teamwork area from Patient Corridors, Reception to Secure Corridor (card reader both sides), Public side of clinic to group room, conference room, office, or secure corridor, Publicly accessible group or conference room to secure corridor, Clean and Soiled Utility Rooms, Storage Rooms, Others identified during DID

Each Door to Have:

- | | |
|--|-------------|
| Hinges | AS REQUIRED |
| 1 Transfer Hinge | |
| 1 Electrified Lock/Strike | |
| 1 Power Supply | |
| 1 Storeroom Lock | |
| 1 Kick Plate | |
| 1 Closer | |
| 1 Door Hold Open | |
| 1 Floor Stop (@ Inswing Doors) | |
| 1 Gasket | |
| 1 Power Supply as required | |
| 1 Access Control Reader by security contractor | |
| 1 Set Wiring Diagrams by hardware supplier | |

21. Additional Door Hardware Information/Narrative:

- a. Doors from Reception to clinical (secure) side shall have a PIN + card reader on both sides requiring card access in both directions.
- b. Doors from waiting area into patient corridor shall have manual hold-opens to allow staff to assist patients with entry into the clinic.
- c. Doors from waiting area into patient corridor shall have remote door release to allow reception staff to "buzz" staff into the secure corridor.
- d. All rooms that allow passage from public side to the secure side shall provide a card reader limiting access into the clinic. Example: Door from Waiting Room into Group Room shall have card reader access to enter the Group Room AND door from Group Room into patient corridor (secure side) shall have card reader access to enter the patient corridor. Locations of card readers shall be based on facility layout and shall be determined during design meetings/review.
- e. Electrified locks/strikes shall be fail-safe/fail-secure based on VA determination to best meet the clinical and security needs and NPFA 101. Coordinate system upon review of Communication PA and Alarms Para 3.9 Clinic Lockdown System and other applicable lease documents. Final review shall be performed by the VA prior to approval.

5.11 SPECIAL REQUIREMENTS: AUTOMATIC DOORS

1. Design automatic doors to operate manually in event of power failure.
2. Equip controls with safety devices for pedestrian protection.
3. Provide door operator controls and equipment that are easily accessible. Design automatic doors to open from both sides and with the use of a touch pad or VA PIV proximity card.
 - a. At a minimum, there will be automatic door operators on all entrance and vestibule doors, on corridor doors leading to the clinic exam/treatment core, and on public restrooms greater than single use occupancy.
4. Other automatic door openers may be required depending upon individual building layouts and issues.
5. A touch pad shall be provided at the reception desk which will allow staff to open the corridor door between the waiting room and the clinic space beyond to in order to allow other staff or patients through the door.
6. This door shall also be opened with a VA PIV card by nursing staff on the waiting room side of the door using a card reader near the door.
7. One type of automatic door equipment shall be used throughout the building. Equipment installer shall have specialized experience and shall be approved by the manufacturer.
8. STANDARDS:
 - a. Door equipment shall comply with the requirements of BHMA 156.10. Provide operators which will move the doors from the fully closed to fully opened position in three seconds maximum time interval, when speed adjustment is at maximum setting.
 - b. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Special Requirements: Electrical
9. PRODUCTS
 - a. SWING DOOR OPERATORS
 - i. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm (2'-0" to 5'-0") width, weight not to exceed 300 kg (600 pounds), electric operated for overhead mounting within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- door operator shall be provided with an interlock so that the motor will not operate when doors are magnetically locked or when locked by the access control system.
- ii. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
 - iii. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
 - iv. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable:
 - v. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
 - vi. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. A minimum 1/8 Hp "DC" shunt-wound permanent magnet motor with sealed ball bearings shall be attached to transmission system. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
 - vii. Connecting hardware shall have driven arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.
 - viii. Electrical Control: Operator shall have a self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator. All connecting harnesses shall have interlocking plugs.
- b. MICROPROCESSOR CONTROLS
- i. The system shall include a multi-function microprocessor control providing adjustable hold open time (1–30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed:
 - ii. With push-to-operate function enabled, the control shall provide a means of initiating a self-start activation circuit by slightly pushing the door open at any point in the door swing.
 - iii. Power assist shall provide a two second impulse in the close direction to overcome restrictions with locking devices of pressure differentials, allowing the unit to operate in standard time delay mode, and permitting the door to close from the full open position after the hold time is satisfied.
 - iv. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position toggle switch with functions for ON, OFF, and HOLD OPEN.
- c. POWER UNITS
- i. Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Special Requirements: Electrical.
- d. DOOR CONTROLS
- i. Opening and closing actions of doors shall be actuated by controls and safety devices specified and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation
- e. CONTROLS:
- i. Manual Push Plate Wall Switch: Recess type, cast aluminum or stainless-steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-inch) high letters "To Operate Door--Push" engraved on face of plate.
 - ii. Push Button: Standard push button for door activation. Locate push button at reception desk area, coordinate final location with VA Project Engineer.
 - iii. St Cloud VA PIV Card Reader: Card reader(s) specified in Special Requirements: Electronic Physical Access Control and Security System shall be interfaced with the automatic door operators at indicated locations to open the doors.
- f. SAFETY DEVICE
- i. General: Area over which doors swing or slide shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device.
 - ii. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.
 - iii. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.

5.12 SPECIAL REQUIREMENTS: BUILDING KEYING AND ACCESSORIES

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

1. All cylinders shall be keyed into Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 7 pin type. Contractor to work with VA COR to determine key core requirements.
2. All locks in this system will be controlled by the Master Key (M) except the IT Server Room and Police/Access Control Room. The designation for the master key must be designated, e.g., M (Master Key). There are typically 5 to 6 change keys utilized under the master key, but provisions should be made for a total of 10 change keys under the master.
 - a. See the "Key Schedule" for additional information.
3. The lessor is responsible for providing and keying all cores.
4. Stamp all keys with change number and key set symbol.
5. Key Cabinet : The lessor shall provide a key cabinet for storage of excess keys.
 - a. ANSI Standard A156.5. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and two paracentric keys. All locks shall be nickel plated with solid brass pin tumbler cylinder keyed as directed. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent.
 - b. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1 1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."
 - c. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.
 - d. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the Resident Engineer.

5.13 SPECIAL REQUIREMENTS: LIGHTING: INTERIOR

1. PENDANT STYLE FIXTURES: Pendant style lighting fixtures shall be used in the reception area, the increase between the number of fixtures required in the Building shell and the Space layout is part of the TIs. Fixtures shall be presented for selection to the VA during design.
2. UNDER CABINET LIGHTING: Under cabinet lighting shall be included in the design in the Lab.

5.14 SPECIAL REQUIREMENTS: GROUNDING

1. Provide an equipment-grounding conductor with each circuit.

5.15 SPECIAL REQUIREMENTS: ELECTRICAL SERVICE

1. Provide underground secondary-voltage electrical service from the serving electric utility. All requirements of the electric utility shall be met, including location of service source, above-ground and underground equipment locations, required easements and/or rights-of-access, above-ground equipment protection and screening requirements, meter location and provisions for meter-reading access, co-location of service conductors in common trench with other utility services, and all other applicable requirements of the electric utility.

5.16 SPECIAL REQUIREMENTS: ELECTRICAL – GENERAL

1. The building owner shall provide all the necessary electrical facilities for the project. The work will include, but is not limited to, new electric utility source connections, secondary power distribution, essential electrical systems, lighting systems, receptacles and power connections for all equipment, telephone, data, fire alarm, other required signal systems, and lightning protection.
2. The building owner shall be responsible for meeting the applicable requirements of applicable codes and standards. All codes, regulations and standards used as a basis of design shall be the latest editions, including amendments. This solicitation contains some, but not all, of the criteria pertinent to the design of electrical systems for VA occupied spaces. Unless otherwise indicated, the standards and codes of the following organizations shall be followed:
 - a. National Fire Protection Association (NFPA).
 - b. Underwriters' Laboratories, Inc. (UL).
 - c. Institute of Electrical and Electronic Engineers (IEEE).
 - d. National Electrical Manufacturers Association (NEMA).
 - e. American National Standards Institute (ANSI).
 - f. American Society for Testing Materials (ASTM).
 - g. Illuminating Engineering Society of North America (IESNA).

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- h. Joint Commission on Accreditation of Healthcare Organizations (JCAHO), Manual of Hospital Accreditation Environment of Care Guidelines and Standards
 - i. Society of Cable Telecommunications Engineers (SCTE),
 - j. Telecommunications Industry Association and Electronic Alliance Standards Association (EIA/TIA) 568 and/or 569A, Communications Cabling Circuits and Equipment
 - k. The building shall be inspected for compliance with the NEC and local codes by the local authority having jurisdiction. A certificate of compliance shall be furnished to VA.
 - l. All electrical equipment shall be U.L. approved.
 - m. All wiring shall be solid copper, not stranded, minimum conductor size #12 AWG except that fire alarm and control systems shall be sized per manufacturer's recommendations and requirements. Install all wiring for all building electrical and signal systems in conduit/raceway systems.
 - n. The rules and regulations of the local electric company shall be followed where applicable.
- 5.17 SPECIAL REQUIREMENTS: ELECTRICAL CALCULATIONS**
- 1. The Engineer shall perform the following calculations: short circuit calculations, load calculations, voltage drop calculations and lighting calculations.
- 5.18 SPECIAL REQUIREMENTS: ELECTRICAL DISTRIBUTION EQUIPMENT**
- 1. Provide electrical distribution equipment sized to accommodate the NEC calculated load. The service entrance bus and main device shall be sized to accommodate 25% future load and shall contain associated fully bussed overcurrent device mounting space.
- 5.19 SPECIAL REQUIREMENTS: ELECTRICAL ROOMS**
- 1. An electrical room is an area located within a building or structure which contains secondary distribution equipment with related panel boards or any combination of these.
 - 2. Construction: Any pipe or duct system foreign to the electrical installation shall not enter or pass through an Electrical Room. The Engineer shall ensure that foreign piping such as water pipes, steam pipes, medical gas pipes, soil pipes, sanitary drains, storm drains, A/C ducts and other unrelated systems are not installed in or pass through the Electrical Room. Only HVAC ducting and sprinkler piping serving only the Electrical Room shall not be considered foreign to the electrical installation; it shall not pass thru the room and serve other areas.
 - 3. Transformer and Switchboard: The utility transformer shall be located outdoors, as close as possible to the electrical room containing the service entrance switchboard.
 - 4. The service entrance switchboard, and other associated electrical equipment, shall be located in a main electrical room.
- 5.20 SPECIAL REQUIREMENTS: BRANCH CIRCUIT DISTRIBUTION AND WIRING DEVICES**
- 1. Receptacle Types: shall generally be NEMA 5-20 polarized type which shall accept attachment plugs having separate grounding prongs. Safety receptacles, isolated ground receptacles, weatherproof receptacles, ground fault interrupter receptacles or other special purpose receptacles shall be provided as required. All receptacles shall be Underwriters Laboratories listed in the size, type and configuration required.
 - 2. Receptacle Locations (General): Duplex floor or wall electrical receptacles shall be provided in a ratio of one (1) for every 50 occupiable square feet of space or one (1) per wall, whichever is greater. Duplex floor receptacles in rooms over 400 sq. ft. shall be provided on the basis of one (1) per twelve (12) linear feet of wall surface. Dedicated duplex or special receptacles, 20 amps or larger, are to be provided for selected pieces of equipment such as refrigerators and vending machines.
 - 3. Workstations and offices with personal computers are to be provided with at least one quadruple (double duplex) receptacles and two individual duplex outlets; or the equivalent or greater number of duplex outlets; for the personal computer (PC), monitor and printer. Where laser printers are used, provide a separate receptacle on a separate circuit for these units. Duplex receptacles shall be provided in toilets, corridors, and dispensing areas for maintenance purposes. Receptacles are to be circuited separately from the lighting.
 - 4. Corridors: Provide receptacles on a dedicated circuit for cleaning machines. The receptacles shall be no more than 75 feet apart.
 - 5. Offices, Exam, Procedure and rooms not otherwise identified: Provide receptacles with spacing not to exceed 6 linear feet as measured around the floor line, including doorways. All linear wall space, 5 feet and longer shall have at least one receptacle. A 120-volt quadruple receptacle or two receptacles shall be provided for each desk and/or wall mounted workstation.
 - 6. Lab shall have a minimum of 15 duplex outlets for countertop equipment. This total does not include power for workstation as detailed elsewhere in this section.
 - 7. Receptacles shall be circuited based upon the load on expected equipment items, in addition to the NEC requirements for the maximum quantity of receptacles on a single circuit. In no case shall more than nine (9) receptacles be connected to a single circuit. Receptacle circuits serving computer equipment shall contain dedicated neutral conductors. General-use receptacle circuits may share a neutral between no more than three (3) circuits.
 - 8. Placement of receptacles shall be determined via language below, Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Litchfield Equipment List, and/or Exhibit C.2 – Detailed Space Plan Litchfield CBOC.
 - a. Provide the greatest quantity if discrepancies exist across documentation.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

9. TV and Message Board Power Receptacles: Provide in areas such as waiting rooms where televisions are indicated on the drawings.
 - a. Coordinate the height with the mounting height of the televisions.
10. Electrical Closets: Provide a receptacle with its centerline located 40 inches above the finished floor adjacent to the room door. Provide a minimum of five duplex outlets within the room each on individual 20-amp circuits and double duplex as noted in the space plan.
11. Computer and Telecommunication (HUB) Closets: Provide a quadruple (double duplex) receptacle with its centerline located 18 inches above the finished floor at the center of rear wall below plywood backboard. Provide a quadruple receptacle with its centerline located 40 inches above the floor near a wall corner. Provide a minimum of five duplex outlets within the room each on individual 20-amp circuits.
12. Ground Fault Interrupter Receptacles: Ground fault interrupter type receptacles shall be installed where required by NFPA 70 (National Electrical Code).
13. Emergency Power Receptacles: If there is emergency power supplied to the leased space, the bodies of all receptacles connected to an emergency circuit shall be red in color. Wall plates for these receptacles shall also be red with the word "emergency" engraved in 1/4-inch white letters on the plate.
14. Kitchens and Break Rooms: Provide a separate locking type attachment plug and receptacle for each piece of equipment. Each piece of equipment, such as refrigerators and microwaves, shall be supplied with an individual duplex outlet on a dedicated circuit. This also applies to other refrigerators or freezers installed in other rooms such as the laboratory and the medication room.
15. Faceplates: All faceplates shall be 302 stainless steel and shall not be oversized.

5.21 SPECIAL REQUIREMENTS: CONDUITS AND BOXES

1. All conduit runs shall contain no more than two 45-degree (or one 90-degree bend with access before and after bend) bends (no LB/condulets) between pull and junction boxes, manholes or telecommunications closets.

5.22 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012)

1. Telecommunications floor or wall outlets shall be provided as part of the TIs. At a minimum, each outlet shall house a quantity of two (2) 4 pair wire jack for data. The Lessor shall ensure that all outlets and associated wiring, copper, coaxial cable, optical fiber, or other transmission medium used to transmit telecommunications (voice, data, video, Internet, or other emerging technologies) service to the workstation shall be safely concealed under raised floors, in floor ducts, walls, columns, or molding. All outlets/junction boxes shall be provided with rings and pull strings to facilitate the installation of cable. Some transmission medium may require special conduit, inner duct, or shielding as specified by the Government.

5.23 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008)

1. Provide sealed conduit to house the agency telecommunications system when required.

5.24 SPECIAL REQUIREMENTS: IT CLOSETS AND POLICE/ACCESS CONTROL ROOM

1. General Requirements: Provide a climate controlled, secure (electronic access control system with control cabinet contained within this room, must work with St Cloud VA PIV + PIN cards) and protected room in an area dictated by System Design. Only approved VA personnel will have access to the rack and to the room. Security of computerized information shall be strictly maintained at all times.
2. An access control system shall be provided for all exterior doors and selected interior doors. The computer head-end equipment system room shall be protected by the access control system and the access control system cabinet shall be located within the Police/Access Control Room. The system shall be compatible with St Cloud VA issued PIV + PIN proximity cards.
3. The room locksets installed shall be capable of being opened (overridden) with only one key which shall be retained by the St Cloud VA staff. A deadbolt lock independent of other door access hardware shall be provided, with key set retained by the St Cloud VA Staff. Electronic Physical Access Control Systems (PACS) for additional information.
4. Minimum Room Construction Requirements (both rooms):
 - a. The Contractor shall provide a secure, double locked (Lockable access hardware and separate independent deadbolt lock) rooms to house the necessary equipment and network devices to service the clinic space.
 - b. Other Room Access Means: Ceiling overhead areas which enable entry into a secure room from an unsecured room must be barricaded by the installation of a suitable partition or ceiling which deters "up and over" access.
 - c. Exterior walls of brick and masonry construction are acceptable. Exterior walls which are composed of wood frame and siding require an interior backing of steel security screen mesh or sheet partition. Exterior walls shall have no windows.
 - d. Interior walls shall be full height (floor to underside of slab above). These walls shall be a minimum of 5/8" gypsum board on both sides. In the event where full height walls are not feasible, the ceiling shall be gypsum board with security mesh.
 - e. The room shall have an audible intrusion detection system. The features shall match those of the exterior door intrusion detection system. These rooms shall be partitioned separately within the building security system with keypads within the respective rooms.
 - f. The room must be designed with adequate space (100 square feet minimum) to accommodate all provided and planned Special Systems, Head-end Cabinets, and Uninterruptible Power Supply (UPS) Systems.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- g. See VA Electrical Design Manual, Chapter 8 Information Technology Room Requirements, to include subchapters or paragraphs, for Equipment Room requirements in addition to the information provided in this document. Contact the St Cloud VA OI&T staff for resolution of any conflicting information issues.
- h. The door to the room must:
 - i. Open inward, provide at least five feet of clearance between the door and any network equipment.
 - ii. Be at least 45mm (1-3/4 in thick) steel or solid core wood, set in a steel frame, access control system with a uniquely keyed override mortise lock with deadlock pin feature. This key shall be retained by VA specified staff only. No grills or glass shall be allowed.
 - iii. Have hinge pins hidden, retained with lock-pins or spot welded to prevent their removal.
 - iv. Doors shall have a mortise lock with a deadlock pin feature and automatically latch on closure. The mechanism must be resistant to "pick" or "jimmy" attempts.
 - v. The door must have a separate and uniquely keyed deadbolt lock as a secondary lock. This key shall be different than the override key for the access control hardware. VA staff shall determine who retains this deadbolt key.
 - vi. All NFPA Life Safety Code standards must be followed.
- 5. Room Location: When selecting the site, avoid locations restricted by building infrastructure. Room should be located near the clinic rooms and shall not be labeled with any identifiable placard. No windows shall be allowed.
- 6. All IT and security equipment within the rooms requires emergency power or battery back-up able to sustain operations for 72 hours.
- 7. Additional Police/Access Control Room Requirements
 - a. Minimum ceiling height shall be 8 ft. above finish floor.
 - b. No ventilation grills or air ducts that serve the rooms shall exceed 100 square inches in size.
 - c. No pipe or duct system foreign to the room shall enter or pass through this room. The Design Engineer shall ensure that foreign piping such as water pipes, steam pipes, medical gas pipes, soil pipes, sanitary drains, storm drains, A/C ducts and other unrelated systems are not installed in or pass through the room. Only HVAC ducting and sprinkler piping serving only the room shall not be considered foreign to the installation; and they shall not pass thru the room and serve other areas.
 - d. The room must have lighting controlled by a wall switch directly inside the closet by the entry. Lighting fixtures shall be flush-mounted and shall ensure a lighting level of 100 foot-candles on working surfaces with a near (natural) light color rendition.
 - e. Climate: the room shall be provided with a dedicated thermostat and dedicated VAV integral to the building HVAC system. This room shall receive 24/7 HVAC and not be subjected to occupancy or setback changes.
 - i. The HVAC system shall be capable of maintaining the internal space between 68 degrees and 80 degrees Fahrenheit, with humidity control. The relative humidity shall not exceed 55 percent.
- 8. Additional Computer/Telecommunications Room Requirements
 - a. A minimum of 3 ft. shall be provided around each cabinet unless the cabinets are installed joined or side by side where the 3 ft. rule applies around the entire assembly.
 - b. Minimum ceiling height shall be 8 ft. above finish floor.
 - c. The room shall have a finished floor of material consisting of antistatic properties.
 - d. No ventilation grills or air ducts that serve the rooms shall exceed 100 square inches in size.
 - e. No pipe or duct system foreign to the OI&T Closet shall enter or pass through the IT/telecom room. The Design Engineer shall ensure that foreign piping such as water pipes, steam pipes, medical gas pipes, soil pipes, sanitary drains, storm drains, A/C ducts and other unrelated systems are not installed in or pass through the IT/telecom room. Only HVAC ducting and sprinkler piping serving only the room shall not be considered foreign to the installation; and they shall not pass thru the room and serve other areas.
 - f. The room must have lighting controlled by a wall switch directly inside the closet by the entry. Lighting fixtures shall be flush-mounted and shall ensure a lighting level of 100 foot-candles on working surfaces with a near (natural) light color rendition.
 - g. Provide a ¾ inch thick plywood board around the interior perimeter of the room for mounting telecommunications and OI&T equipment.
 - h. Provide a quadruple receptacle with its centerline located 18 inches above the finished floor at the center of rear wall below plywood backboard. Provide a quadruple receptacle with its centerline located 40 inches above the floor near a wall corner. Provide a minimum of five additional duplex outlets within the room each on individual 20-amp circuits at 40 inches above the floor and spread around the room.
 - i. Provide Telecommunication Ducts/Cellular Floors when required by system design.
 - j. Climate: The room shall be provided with standalone heating and/or cooling equipment, and that system shall be backed up by the general HVAC system provided for the remainder of the leased space.
 - i. The HVAC system shall be capable of maintaining the internal space between 68 degrees and 80 degrees Fahrenheit, with humidity control. The relative humidity shall not exceed 55 percent. Heating and cooling requirements shall include router, switch, back-up batteries and associated rectifiers. Heat load requirements shall be verified by the Contractor during the DID workshop.

5.25 SPECIAL REQUIREMENTS: TELECOMMUNICATIONS CABLING EXPANSION

- 1. Furnish and install telecommunications cabling, equipment, and accessories per Lease Exhibits, VA Requirements, and DID documents.

PART 1 - GENERAL

- 1. RELATED DOCUMENTS

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- a. Drawings and General Provisions of the contract, including General and Supplementary Conditions and Division 1 Specification Sections.
2. SUMMARY
 - a. This section includes installation, testing, documentation and training for a fully functional local area network cabling infrastructure.
 - b. Furnish and install Horizontal UTP Copper cabling, patch panels, patch cords, termination units, horizontal cross-connects, information outlets, respective cable termination connections, and other items necessary to "terminate" selected information outlets (IO) as shown on the Drawings.
 - c. Existing Telecommunication Demolition – Existing cables and jacks scheduled to be removed shall be documented with telecommunication closet location and identification of the termination location in the telecommunication closet.
3. WORK PROVIDED UNDER OTHER SECTIONS
 - a. Data cabling pathways, power wiring devices, lighting, cooling and other work related to the Local Area Network infrastructure will be provided by the Electrical Contractor unless noted otherwise.
4. WORK FURNISHED, INSTALLED, AND CONNECTED BY OTHER
 - a. Electronic data communication equipment is not specified under this contract.
5. SUBMITTALS
 - a. Submit a complete list of all proposed equipment and materials, including manufacturer's specifications and product cut sheets prior to purchase.
 - b. Faceplate labeling shall follow VA scheme as shown in Section 2.32 Part 3 Para 2.f.ii
 - c. Telecommunications Maintenance Manual: Furnish one (1) complete Telecommunications Maintenance Manual containing the following:
 - i. Descriptions of network cabling equipment and normal operating procedures.
 - ii. Riser Diagrams showing complete installed UTP and Fiber cabling.
 - iii. Proof of Performance Report outlining the operating parameters tested, complete test results, and a summary of industry standards used for each parameter.
 - iv. Warranty information.
6. APPLICABLE PUBLICATIONS, STANDARDS, CODES, TESTING LABORATORIES, GUIDELINES
 - a. ANSI/EIA/TIA Standard 568B.1, 568B.2, AND 568B.3
 - b. ANSI/EIA/TIA Standard 569
 - c. ANSI/EIA/TIA Standard 606
 - d. ANSI/EIA/TIA Standard 607
 - e. ANSI/TIA-1179-A
 - f. Technical Service Bulletins TSB-36, TSB-40, TSB 67
 - g. NFPA 70e National Electrical Code.
 - h. Provide products specified in this section that are listed and labeled.
 - i. The terms "listed" and "labeled": As defined in the "National Electrical Code", Article 10G0.
 - i. ANSI/TIA-1179-A: Healthcare Facility Telecommunications Infrastructure
 - j. <https://www.cfm.va.gov/till/dguide/OIT-InfrastrucStdsTelecommSpaces.pdf>
7. GUARANTEES AND WARRANTIES
 - a. Guarantee system, in writing, against defects in workmanship and associated material not covered by cabling infrastructure warranty, for one year after final acceptance. During this time, the entire infrastructure shall be kept in proper operating condition at no additional labor or material cost to the Owner or Government.
8. QUALITY ASSURANCE
 - a. Contractor shall be currently licensed to install low-voltage cabling infrastructures in the state where the facility is located.
 - b. Contractor shall meet manufacturer's requirements for the provision and installation of specified equipment.
 - c. Contractor shall provide proof of certification as a structured cabling infrastructure installer for the system provided under this bid.
 - d. Contractor shall utilize the following test equipment, or better, and shall have operators trained for use of such equipment:
 - i. Copper Cable Test Equipment:
 1. Fluke / MicroTest (level 3 tester)
 2. Agilent WireScope 350 (level 3 tester).
 3. Prior approved equal.
 - ii. Fiber Optic Cable Test Equipment: (if fiber is included in the installation)
 1. OTDR (Tier 2 Testing):
 2. Fluke OptiFiber Pro OTDR
 3. Ideal Quad Micro OTDR
 4. JDSU equal
 5. Prior approved equal.
 - iii. OLTS (Tier 1 Certification):
 1. Fluke CertiFiber Pro Optical Loss Test Set
 2. Ideal Technologies LanTEK II-1000
 3. JDSU equal
 4. Prior approved equal.
9. PROJECT/SITE CONDITIONS

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- a. Examine areas and conditions under which the system is to be installed and notify COR in writing of conditions detrimental to proper completion of the work. Do not proceed with that portion of the work affected until unsatisfactory conditions have been corrected in an acceptable manner.
10. MANUFACTURER
- a. Subject to compliance with specified requirements, provide specified materials, or prior approved equal to the referenced products included for the design of the Local Area Network Cabling infrastructure.
11. UPGRADED PRODUCTS
- a. Due to the fast-changing technology, products shall be the most current and up-to-date quality and labor-saving versions available for the application, unless otherwise restricted.
- b. Prior to bidding, provide written notification of any discrepancies in model or part numbers specified. Corrections will be clarified by addendum.
- c. Prior to bidding, provide written notification to COR of announced discontinuation or upgrade replacements of specified materials.
- d. Provide necessary supplies, mounting hardware and accessories required to install specified materials.
12. PRODUCT SUBSTITUTION
- a. Manufacturer substitutions will be considered only if the contractor proves the specifications of the product match or exceed what is specified by the Government. In addition, substituted products shall integrate with all other products to product a viable system.
13. Approved Material List:

CATEGORY	ITEM	PART #	MANUFACTURER	NOTES
Face Plates				
Angled	2 Port	CFPSL2EIY	Panduit	Qty determined by design
Angled	4 Port	CFPSL4EIY	Panduit	Qty determined by design
Angled	6 Port	CFPSL4EIY	Panduit	Qty determined by design
Angled	8 Port	CFPSL6EIY	Panduit	Qty determined by design
Stainless	Wall phone	KWPY	Panduit	Qty determined by design
Low Voltage Station Outlet Brackets				
	Single Gang	LV-1	Arlington	
	Double Gang	LV-2	Arlington	
Jacks				
Data and Voice	Cat 6A Black	CJ6X88TGBL	Panduit	Qty determined by design
Biomed	Cat 6A Violet	CJ6X88TGVV	Panduit	Qty determined by design
	Wall Phone Jack	CJ6X88TGBL	Panduit	Qty determined by design
Patch Panels				
	24 Port angled	CPA24BLY	Panduit	Total ports should be 20% greater than information outlets designed in space
	48 Port angled	CPA48BLY	Panduit	Total ports should be 20% greater than information outlets designed in space
	24 Port flat	CP24BLY	Panduit	Total ports should be 20% greater than information outlets designed in space
	48 Port flat	CP48BLY	Panduit	Total ports should be 20% greater than information outlets designed in space

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

	24 Port Patch Panel-Voice	VP24382TV25Y	Panduit	Populated with 24 RJ45 and 1 RJ21 Female connectors
TR Closet Racks				
	2 Post Rack	48353-715	CPI	96"H X 19"W, 51U
	Ladder Rack	Cable Runway (10250-712)	CPI	Black 12" Wide
	Rack to Runway Mounting Plate 3"	10595-712	CPI	9-12" Runway Width, Black
	Wall Angle Support Kit	11421-712	CPI	Black
CATEGORY	ITEM	PART #	MANUFACTURER	NOTES
	Cable Runway Radius Drop	12100-712	CPI	For 12" Runway Width Black As needed to support proper cable bend radius
	Floor Mount Kit	40604-003	CPI	½" Concrete Floor
	Vertical Cable Manager 6" Single Sided	30092-715	CPI	Qty determined by design
	Vertical Cable Manager 10" Single Sided	30093-715	CPI	Qty determined by design
	Vertical Cable Manager 6" Double Sided	30095-715	CPI	Qty determined by design
	Vertical Cable Manager 10" Double Sided	30096-715	CPI	Qty determined by design
Cable Pathway Supports				
<i>or approved equal</i>	Cable trays	Flextray	B-line	or approved equal
	Ladder Rack	Cable Runway	CPI	black
	4" J-Hook	181120	Caddy	or approved equal
	2" J-Hook	181100	Caddy	or approved equal
Fasteners				
	Velcro 3/4"	HLS-75R0	Panduit	
Cable				

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

	Cat6A Black, Riser	7143858		General
	Cat6A Black, Plenum	7141858 or 7141888		General
	25 pair copper	2133033.99		General
Fire Stop				
	Hilti	Firestop Speed Sleeve		
	3M	Firestop Sleeve		
CATEGORY	ITEM	PART #	MANUFACTURER	NOTES
	STI	Firestop Sleeve		
TR CLOSET RACK Grounding				
	#6 CU 19-Strand Green			Qty determined by design
	Lug #6 long Barrel 2 Hole	YA6C-2TC14	Burndy	Qty determined by design
	Tag	LTYK	Panduit	Qty determined by design
	Bonding Washer	RGW-100-1	Panduit	Qty determined by design
	Ground Bar 19"x3/4"x1/4"	DGTB420	nVent Hoffman	Qty determined by design
	Main Ground Bar	GB2B0312TPI-1	Panduit	Qty determined by design
Cross connect				
	1 Pr Wh/Gn 24 ga Roll 1000'		General	Qty determined by design
	66 Block – Bridged	SM66M4-24	Siemon	Qty (2). Female 25pr Telco Connector
	Amphenol Cable	UTPCH20L25Y	Panduit	25pr RJ21 Male to male connector. Up to 20ft.
	Bridge Clips	SA1-100	Siemon	Qty (100)
Patch Cords / Station Cords Cat 6A (unbooted RJ45)				
DATA	Black - 3'	UTP28X3BL	Panduit	Qty is equal to 30% of total information outlets.
	Black - 5'	UTP28X5BL	Panduit	Qty is equal to 30% of total information outlets.
	Black - 7'	UTP28X7BL	Panduit	Qty is equal to 30% of total information outlets.
	Black - 14'	UTP28X14BL	Panduit	Qty is equal to 10% of total information outlets.
Printers	Red 3'	UTP28X3RD	Panduit	Qty is equal to 5% of total information outlets.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

	Red 5'	UTP28X5RD	Panduit	Qty is equal to 5% of total information outlets.
	Red 7'	UTP28X7RD	Panduit	Qty is equal to 5% of total information outlets.
	Red 14'	UTP28X14RD	Panduit	Qty is equal to 5% of total information outlets.
BioMed	Purple 3'	UTP28X3VL	Panduit	Qty is equal to 5% of total information outlets.
	Purple 5'	UTP28X5CVL	Panduit	Qty is equal to 5% of total information outlets.
	Purple 7'	UTP28X7VL	Panduit	Qty is equal to 5% of total information outlets.
	Purple 14'	UTP28X14VL	Panduit	Qty is equal to 5% of total information outlets.
	Blue 3'	UTP28X3BU	Panduit	Qty is equal to 5% of total information outlets.
CATEGORY	ITEM	PART #	MANUFACTURER	NOTES
	Blue 5'	UTP28X5BU	Panduit	
	Blue 7'	UTP28X7BU	Panduit	
	Blue 14'	UTP28X14BU	Panduit	
	Orange 3'	UTP28X3OR	Panduit	
	Orange 5'	UTP28X5OR	Panduit	
	Orange 7'	UTP28X7OR	Panduit	
	Orange 14'	UTP28X14OR	Panduit	
	Yellow 3'	UTP28X3YL	Panduit	
	Yellow 5'	UTP28X5YL	Panduit	
	Yellow 7'	UTP28X7YL	Panduit	
	Yellow 14'	UTP28X14YL	Panduit	
	Green 3'	UTP28X3GR	Panduit	
	Green 5'	UTP28X5GR	Panduit	
	Green 7'	UTP28X7GR	Panduit	
	Green 14'	UTP28X14GR	Panduit	
	Gray 3'	UTP28X3IG	Panduit	
	Gray 5'	UTP28X5IG	Panduit	
	Gray 7'	UTP28X7IG	Panduit	
	Gray 14'	UTP28X14IG	Panduit	

14. MANUFACTURER'S CERTIFICATION

- a. Manufacturer of cabling products shall be ISO9001 Certified.

15. UTP COPPER CABLE LENGTHS, TERMINATIONS, MARKINGS

- a. Copper Cable runs shall be compliant with EIA/TIA recommended lengths: Horizontal cables shall not exceed 295 feet. Cable runs shall be continuous with no allowance for splicing.

PART 2 - PRODUCTS

1. MANUFACTURERS

- a. Manufacturers: Subject to compliance with requirements, provide a certified structured cabling infrastructure by: General Cable or approved equal.
b. Data Cable: Part Number 7141858 or 7141888, Cat 6A, black.

2. EQUIPMENT RACK:

- a. Rack: locking cabinets. Floor standing. Anchor to floor and provide connection to electrical ground bus bar, green, #6, 19-strand, using a compression 2-hole lug (Burdyn YA6C-2TC14) and tag with a grounding tag

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

(Panduit # LTYK). Run dedicated electrical circuit in conduit from ceiling above cabinet and terminate to 4 outlet box in cabinet.

- i. Provide products equal to or better than the following:
 1. Hoffman PROLINE CONNECTEK PNC2089B communications cabinet. They should be equipped with vented removable side panels, rack mount fan, power distribution and vertical cable management. The lockable cabinets will be keyed the same and installed side by side with the adjoining side panels removed and the cabinets firmly attached to each other. The cabinets can be ordered without the adjoining side panels if there is a cost savings. The exact layout of the accessories inside the cabinet will be determined at the pre-construction meeting.
 - ii. Prior approved equal may be used.
 - b. Rack position in room- to be agreed on at pre-construction meeting. Racks require 3' clear space on the sides and 4' on the front and rear.
 - c. The quantity of racks required for the project shall be determined by providing 30% greater capacity than currently programmed.
3. CABLE SUPPORT
 - a. Supply velcro straps, length and strength as required to properly organize and bundle cables. Vinyl/plastic tie wraps are prohibited throughout except where allowed within these documents.
 - b. Install cables in conduit and wireway systems provided by the Electrical Contractor. Coordinate with the Electrical Contractor for specific requirements. Conduit and wireway systems can only contain low voltage cable for VA connections.
4. CATEGORY 6A CHANNEL
 - a. The Category 6A - 4 pair UTP channel consists of all cable and components with up to four connections that comprise the full 100-meter circuit from the LAN Electronics to the workstation device. The channel shall support applications such as 10Base-T, 100Base-T, 77 channel broadband video, 10 Gbps Ethernet.
 - b. The channel shall include the patch panels, horizontal cabling, and the station cord, and shall have a positive PSACR across the full frequency range of 1MHz - 250MHz.
 - c. All components shall be backward compatible with existing Category 3, 4, 5, 5e, and 6 networks.
 - d. The cabling channel with specified manufacturers above shall exceed Category 6A requirements.
5. INFORMATION OUTLETS
 - a. Activations: Outlets as shown on the design drawings will be required at each location shown on the plans with tabs down unless plans show otherwise.
 - b. Modular Faceplates: Ivory, smooth nylon, UL rated 94V-O high impact, flame-retardant, thermoplastic, integral label card and cover, sized as follows:
 - i. Data information outlets: Devices shown on plans as data information outlets shall be four position faceplates. Panduit 4 position face plate Part Number CFPSL4EIY.
 - c. Modular Information outlets: Modular single information outlet designed for high-performance networking applications. Panduit gigaspeed information outlet:
 - i. Data outlet Cat 6A Black 568B: Panduit CJ6X88TGBL
 - d. Minimum electrical requirements:
 - i. Insulation resistance: 500 MΩ minimum
 - ii. Dielectric withstand voltage 1,000 VAC RMS, 60 Hz, minimum contact-to-contact and 1,500 VAC RMS, 60 Hz minimum from any contact to exposed conductive surface.
 - iii. Contact resistance: 20 MΩ maximum
 - iv. Current rating: 1.5A at 68 degrees F per IEC Publication 512-3, Test 5b
 - e. Dust Cover/Blank: Contractor shall provide dust covers for each unused outlet as required to close all faceplate openings.
 - f. Where data jacks are fished into a hollow wall space without a raceway, Arlington LV-1 or approved equal shall be used. Metal types such as Caddy brand are not allowed.
6. MODULAR PATCH PANELS
 - a. Furnish and install Modular Patch Panels (angled patch panels where cable management is on both sides of equipment rack). The panels shall be 19-in. wide for rack mounting. The panels shall accommodate Panduit Cat 6A Black 568B Data Jacks. All cables shall be secured to the strain relief bar using vinyl/plastic tie wraps. Provide labeling strip above each jack. Contractor shall be responsible for sizing the modular patch panels according to the following specifications:
 - i. Number of Modular Patch Panel Ports shall be 125 percent of the total number of terminated information outlets required for the VRT project.
 - ii. Patch panels shall be 24 port or 48 port.
7. PATCH CORDS
 - a. Provide CAT 6A Patch Cords, Panduit UTP28X, 28 AWG, twisted, jacketed, with 8-position Modular Plug at each end.
 - i. Data Color: Black (BL)
 - ii. Printer color: Red (RD)
 - iii. Biomedical color: Purple (VL Violet)
 - iv. Video color: Yellow (YL)
 - v. Security/Video: Pink (PK)
 - b. Lengths of patch cords shall comply with EIA/TIA 568B recommended lengths: Patch cords shall not exceed 20 feet. Provide varying lengths to suit data closet installation. Coordinate final length selection with COR prior to ordering.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- c. Data Lengths: As specified in parts list
 - d. Cord quantities: As estimated in parts list with final numbers determined after final design of clinic is completed. Contractor to provide necessary cabling.
8. STATION CORD
- a. Provide UTP Station Cord interconnection between the work location equipment and the data outlet. Cord shall be CAT 6A Panduit UTP28X, 28 AWG, twisted, jacketed. An 8-position modular plug will be terminated to each end of the cords. These cords will match the installed Patch Cords in order to maintain the integrity of the Cat 6A Local Area Network UTP cabling infrastructure.
 - b. Provide UTP Station Cords of the lengths specified in the parts list. Coordinate final length selection with VA.
 - i. Station cord lengths for wall mounted phones shall not meet this requirement. Provide minimum suitable length of phone cord for connection to phone.
 - ii. Data lengths - As specified in parts list.
 - iii. Cord quantities – One for each workstation shown on the drawings plus 10% spares.
9. HORIZONTAL UTP CABLE
- a. Furnish and install copper Unshielded Twisted-Pair (UTP) horizontal cable as follows:
 - i. General Cable Gigaspeed, plenum rated, 23 AWG bare solid copper conductor. The cable shall conform to UL Type CMP listing for plenum and riser applications.
 - ii. Each cable sheath shall contain 4 pairs of unshielded copper twisted-pairs with each pair having a different twist ratio of 12 to 24 twists per foot. Each pair shall be separated by a pair isolator.
 - iii. The cables shall exceed the requirements of:
 - 1. EIA/TIA 568B Commercial Building Wiring Standard Horizontal Cable Section for category 6A.
 - 2. Plenum - UL 910, CMP.
 - iv. The cables shall meet the following representative electrical and transmission characteristics:
 - 1. Mutual Capacitance - nom. = 14 nF/1000 ft.
 - 2. DC Resistance - max. = 29 ohms/1000 ft. (9.4 ohms/100m).
 - 3. Gbps 4 Pair Cable Performance Characteristics as follows:

Frequenc y MHz	Attenuation DB/100m	Power Sum NEXT dB	Attenuation to Crosstalk Ratio dB/90m	Structural Return Loss DB
1	2.0	75.3	75.3	23.0
4	3.8	66.3	64.5	23.6
8	5.3	61.8	54.5	25.4
10	5.9	60.3	58.5	26.0
16	7.5	57.3	51.7	26.0
20	8.4	55.8	49.4	26.0
25	9.4	54.3	46.9	25.5
31.25	10.6	52.9	44.3	25.0
62.5	15.3	48.4	35.1	23.5
100	19.7	45.3	27.6	23.0
200	28.8	40.8	14.0	21.0
250	32.6	39.3	8.7	20.5

- 4. Provide colors for each defined system as follows: Blue
10. FIBER OPTIC CABLE:
- a. Fiber optic cable shall be Government specified. The cable shall have (TBD) strands of single-mode fiber. Provide fiber with the following optical characteristics:
 - i. Supports 10Gb/s Ethernet using 850nm VCSEL to 300m.
 - ii. Fiber tension rating - 600 lbs.
 - iii. Fiber minimum bending radius during installation - 20 x diameter.
 - iv. Fiber Identification: Individually color-coated PVC buffer.
 - v. Buffer Material: Plenum PVC
 - vi. Jacket Material: Plenum PVC (color as selected by owner).
 - vii. Strength Material: Aramid Yarn
 - viii. Operating Temperature: 0 to + 50 deg. C

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- ix. Storage Temperature: -40 to +70 deg. C
- x. EIA Fiber Cable tests:

1. <u>TEST</u> 2. Impact 3. Compression 4. Flexure 5. Tensile Bending 6. Temperature Bending 7. Twist Testing 8. Flame Test (OFNP)	<u>REFERENCE</u> - EIA-RS-455, FOTP-25 - EIA-RS-455, FOTP-41 - EIA-RS-455, FOTP-104 - EIA-RS-455, FOTP-33 - EIA-RS-455, FOTP-37 - EIA-RS-455, FOTP-85 - UL 910 (NEC) [CSA OFN-FT4, FT6]
---	--
- 11. FIBER TERMINATION UNITS:
 - a. Furnish and install Government specified front access sliding shelf connector panel equipped with SC couplings and cover plate for all Data racks. Units shall provide top or bottom cable entry, fiber termination, cross connection, interconnection, routing, fiber identification labels, fiber storage and radius organizers.
- 12. FIBER TERMINATION CONNECTORS: N/A
- 13. FIBER PATCH AND WORKSTATION CORDS: N/A

PART 3 - EXECUTION


- 1. GENERAL
 - a. Install equipment and components in accordance with manufacturer's written instructions, in compliance with NEC, and with recognized industry practices. Ensure that all work complies with specifications and serves the intent of the construction documents. Cabling and equipment shall be installed in accordance with good engineering practices as established by the EIA/TIA and the NEC.
- 2. INSTALLATION
 - a. Cabling - General:
 - i. Provide dedicated horizontal cable runs from data closets to all "terminated" information outlets as described above and indicated on the Drawings.
 - ii. Provide faceplates for all information outlets.
 - iii. Where data or voice outlets are shown on plans, this Contractor shall provide jack termination, faceplate, and cabling.
 - iv. Provide Modular Information Outlets in outlet boxes for all "terminated" data information outlets.
 - v. Excess cable behind faceplate connections shall be pulled back into ceiling spaces and secured in such a manner as to prevent damage to cabling or connections.
 - vi. A minimum 10-foot loop of extra horizontal cable shall be secured in the accessible ceiling space.
 - vii. Tighten connectors and terminals, including screws and bolts, in accordance with equipment manufacturer's published torque tightening values for equipment connectors.
 - viii. Avoid excessive and sharp bends that may damage cabling. Do not exceed manufacturer's recommended pulling tensions for backbone and horizontal cables.
 - ix. Allow sufficient slack (10 feet) in cable to prevent premature deterioration of cable system components and to assist in the maintenance and servicing of cable and/or other building systems and components.
 - x. Provide Cable Trays as necessary to route and support cables to just above the lockable cabinets. All cables shall be properly supported.
 - xi. Provide Velcro straps to bundle and organize cabling for a quality and professional installation. *Vinyl/plastic tie wraps are prohibited throughout except where allowed within these documents.*
 - xii. Fittings or connections are allowed only at the input and output of devices. Splicing shall not be accepted in cable runs. Spliced cable runs shall be rejected and replaced with continuous cables, prior to acceptance.
 - xiii. Separation of Wires: Comply with EIA/TIA 568 rules for separation of UTP cables from potential EMI sources.
 - xiv. All cabling outside the data closet shall be routed in conduit or cable tray, installed by the electrical contractor.
 - 1. Conduit fill shall not exceed 40%. This applies to both raceways and sleeves. Each conduit end not terminated in a box shall be equipped with a protective insulator or sleeve to cover the conduit end to protect the wire or cable during installation and remaining in the conduit.
 - xv. Special wiring requirements in addition to the standard wiring from low voltage room to wall plates
 - 1. Direct cable from block in low voltage room to alarm/security system
 - 2. Direct cable from block in low voltage room to emergency phones at reception desk, nursing station and one other location
 - 3. Direct cable from block in low voltage room to multipurpose business machines at reception area and nursing station
 - 4. 25-pair copper cable from demarc room to low voltage room- cable must be in continuous conduit if it passes through space not leased to the VA. Terminated to 66 block in demarc room and RJ45 patch panel in lockable cabinet in low voltage closet. Length of cable not to exceed 295 feet, including 10-foot service loop at in low voltage closet.
 - 5. 12 pair copper cable from demarc room to low voltage room for business phones lines. Terminated on block in demarc and block on wall in low voltage room. Block should be next to block used for a, b and c above

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

6. Cat 6a cables with RJ45's from building demarc to low voltage closet with 10-foot service loop at each end.
7. Approximately 20 data connections will be needed in the lab area. Wall plates with 4 data jacks can be used.
- b. Sleeving: All cabling penetrating a wall or floor and not in a raceway shall be sleeved. A penetrator sleeve system and method for using same provides an encasement for wires and cables passing through a wall or floor. The system should include appropriate securing devices for tightly retaining the penetrant in place. This will also create a space between the penetrant and surrounding structure, which must be fire stopped in order to restore the fire-resistance rating of the parent assembly. The penetrant shall be one of the following;
 - i. EMT conduit with bushed ends.
 - ii. Prefabricated fire-rated pathway. Recommend the following or approved equivalent. Follow manufacturer's conduit fill recommendations.
 1. EZ-PATH Fire Rated Pathway
 2. Spec Seal Ready Sleeve
- c. Firestopping: Provide fire stopping after cabling installation at all fire wall/floor penetrations.
- d. Grounding: The general contractor shall be responsible for installing a ground bus adjacent to the cabinets. Ground all cabinets and cable runway to this ground bus. The contractor shall provide a #6 copper conductor from each rack/runway to the ground bus. Ground equipment per manufacturers' instructions and NEC requirements.
- e. Demarc room and extended demarc cable.
 - i. Backboards for the demarc room and the low voltage room(s) shall be 20 mm (3/4 inch) thick, type ACX fire retardant plywood, covered with two coats of fire-retardant white paint with a minimum area of 1.2 x 2.4 m (4 x 8 ft)
 - ii. If space allows, backboard should be positioned with long side horizontal and vertically centered on the wall
 - iii. Backboard in the demarc room should be as close as possible to the external teleco entry point and separated as much as possible from the electrical boxes
 - iv. In existing facilities where the demarc room is shared with other occupants a minimum area of approximately 6 sq ft will be needed on wall mounted plywood
 - v. One 25-pair cable will be installed from the building demarc to the Government low voltage closet. Adequate service loops will be included on both ends to allow termination and potential moves. If the cable passes through spaces not controlled by the government, it will be in continuous conduit. The maximum length of this cable is 295 feet.
 - vi. Cat 6A cables with RJ45 connectors will be installed from the building demarc to the low voltage closet with 10-foot service loops at each end.
 - vii. Exact placement of backboards and low voltage cabinet will be agreed on by contractor and Government prior to installation
- f. Labeling, in accordance with VA Standards:
 - i. Use Owner's room numbers for labeling. Confirm room numbers with Owner's Representative prior to labeling. See attached graphical information for labeling of face plates.
 - ii. Utilize the following labeling scheme:


LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC

Face Plate Labelling Conventions

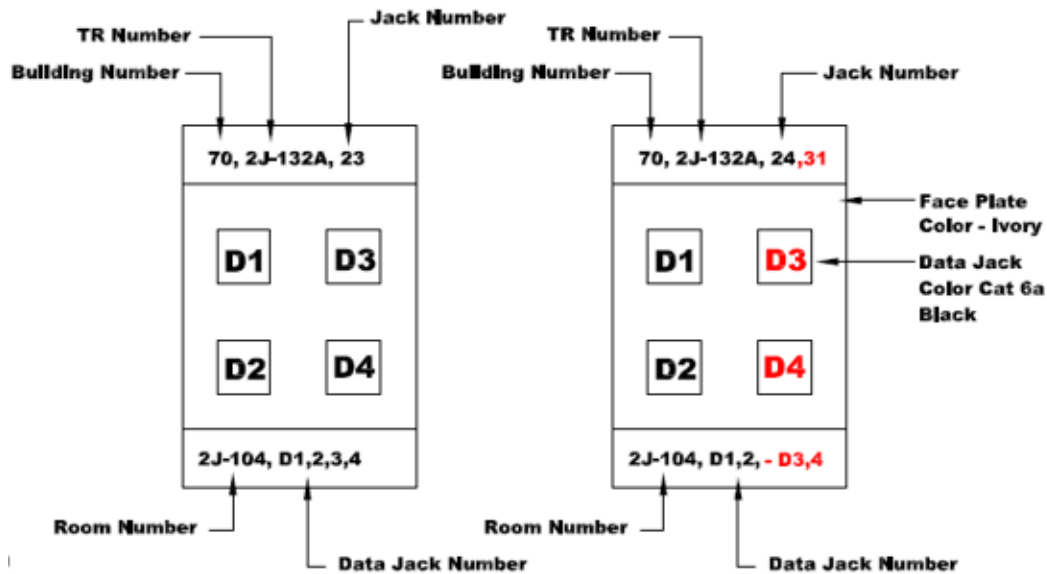

1. Follow Labelling Convention Above
2. All Jacks are data.
3. The standard is to install 2 data, any more or less is the exception.

Patch Panel Labeling Conventions

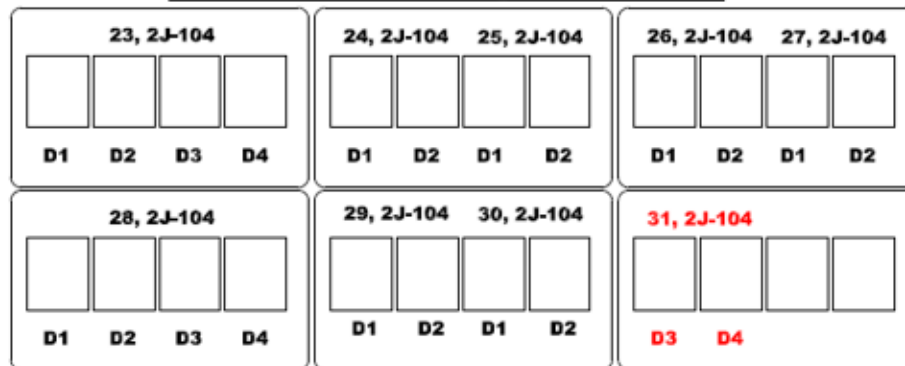

1. Follow Labelling Convention Above
2. Jacks are installed in consecutive order.
3. Additional Data Jacks in existing face plates, will use next consecutive Jack Number.

- Utilize manufacturer designed labeling method at Outlet and Patch Panels. Labeling method shall be permanent and minimally susceptible to vandalism. Labels shall be permanent, and contractor shall replace fallen labels as part of the warranty.
- Final labeling scheme to be agreed on at pre-con meeting.
- Jack and Block Terminations as follows: 568B
- Label Faceplates for outlet locations. Jack numbering will begin at the first jack on the left-hand wall as you enter the room and be labeled clockwise around the room. Continue the numbering sequence throughout the area served by that data closet.
- Label patch panel terminations with the identical numbers used at the outlets.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- viii. Label both ends of each cabling run within 6 inches of termination points with Panduit Pan Ty marker and flag ties, a label machine, or approved equal. Label the room end of the cable with the data closet identification number (closet number and jack number) and label the data closet end of the cable with the room jack number (room number, voice and data jack number).
 - ix. Whenever possible, cross connect riser pairs shall be run sequentially.
- 3. **COPPER CABLE TESTING**
 - a. Testing of all copper wiring shall be performed prior to system cutover.
 - b. Cables shall be tested for all Category 6A 100% Channel parameters using the specified level 3 tester. Test all Category 6A Channel parameters, including attenuation, NEXT, PS NEXT, FEXT, ELFEXT, return loss, and delay skew.
 - c. Patch cord, workstation cord, and cable lengths shall be recorded as part of the testing.
 - d. Faults shall be corrected and retested.
 - e. Test information along with manufacturer and model number of test equipment shall be recorded and provided to Owner as part of the project Telecommunications Manual.
 - f. Provide proof of factory calibration of test meter within 6 months of the beginning of testing.
 - g. The “* pass” option on the test meter must be set to the “on” state. The “* pass” symbol indicates a channel that is within 1 db of failing.
 - h. Provide test data in electronic format with corresponding software for viewing of testing documentation on CD-ROM provided from the test meter. Contractor shall provide one CD-ROM to Owner and one to Engineer.
 - i. Provide all cross connect information (X-Conn) to COR.
- 4. **GENERAL FIBER OPTIC TEST REQUIREMENTS: N/A**
- 5. **FIBER TEST PROCEDURES: N/A**
- 6. **FIBER TRANSMISSION LOSS TEST REPORT: N/A**

Placement of data outlets shall be determined via language above, Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Litchfield – Equipment List and/or Exhibit C.2 – Detailed Space Plan Litchfield CBOC.

Provide the greatest quantity if discrepancies exist across documentation

Lab shall have a minimum for 15 data outlets for equipment. This quantity does not include data for workstation(s) and/or telephones.

Provide sealed conduit to house the agency telecommunications system when required.

5.26 SPECIAL REQUIREMENTS: VA WIRELESS INTERNET SYSTEM

- 1. Provide wiring for VA installed WI-FI network devices. Provide wiring for “Wi-Fi” Connectivity for up to 40 individual Wireless Access Points. The VA Telecommunications staff will provide locations for this wiring to be routed for optimal device placement prior to installation.

5.27 SPECIAL REQUIREMENTS: NURSE CALL SYSTEM

- 1. Provide a nurse call system with a localized audible and visible alarm for each lactation room, blood draw stations, physical therapy, PFT room, restrooms accessible by the general public or patients, and procedure/exam internal restroom.
- 2. Furnish and install a complete and fully functional and operable Nurse Call System for each location noted in the space plan.
 - a. Placement of nurse call outlets shall be determined via language within Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Litchfield – Equipment List, and/or Exhibit C.2 – Detailed Space Plan Litchfield CBOC.
 - b. Provide the greatest quantity if discrepancies exist across documentation
- 3. Equipment: Active electronic type shall use solid-state components, fully rated for continuous duty unless otherwise indicated. Select equipment for normal operation on input power usually supplied between 110 to 130 VAC, 60 Hz.
 - a. Meet all FCC requirements regarding equipment listing, low radiation and/or interference of RF signal(s). The system shall be designed to prevent direct pickup of signals from within and outside the building structure.
 - b. All equipment face plates utilized in the system shall be stainless steel or anodized aluminum.
- 4. Call Initiation, Annunciation and Response:
 - a. Light and Tones:
 - i. Calls may be initiated through:
 - 1. Emergency Station pull cord / push button.
 - ii. Once a call is initiated, it must be annunciated at the following locations:
 - 1. The Corridor dome light associated with the initiating device.
 - 2. A local master control station indicating the call location.
 - 3. All calls must be displayed until they are cleared by the nursing staff ONLY from the initiating device location.
 - b. All master control stations must provide a label indicating the location of the call to direct staff appropriately.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- c. At a minimum, master control stations shall be located at reception and each teamwork area. Each teamwork area is comprised of 4 workstations. Additional locations will be discussed during design.
- 5. Emergency Pull with Audio:
 - a. Bathroom Pull Chord Emergency Station Spectrom PTM01-C, brand source or equal.
 - b. Push Button Emergency Station Spectrom PTM01-C, brand source or equal.
- 6. Corridor Lights
 - a. 2-Segment LED lightbars. One outside of each door with an associated nurse call
 - b. LED corridor light.

5.28 SPECIAL REQUIREMENTS: PUBLIC ADDRESS/INTERCOM SYSTEM

- 1. Provide a public-address system. The system will also allow each area receptionist to address waiting areas, teamwork areas, breakroom, and the entire clinic. Public address central equipment shall be located in Police/Access Control Room. Public Address System be capable of playing the radio.
- 2. The intercom shall also be installed at the main facility entrance and primary/ancillary employee entrances. The intercom shall communicate directly with the reception area. The intercom shall have voice and video capabilities as well as remote entry capabilities to allow staff to allow entry from a remote location.
- 3. System(s) shall be as manufactured by Bogen, JBL, Dukane, AI Phone or approved equivalent, as updated to most current technology or manufacturer.

5.29 SPECIAL REQUIREMENTS: VIDEO TELECONFERENCING SYSTEM (VTEL):

- 1. Provide cabling and outlets for the Telehealth/V-TEL system. The Telehealth/V-TEL will be installed in the telemedicine rooms and other spaces as indicated in the space plan. The VA shall provide equipment required for the Telehealth/V-TEL system. Install a CAT 6A enhanced cable from a data outlet in designated room(s) to Computer/Telephone Equipment Room. Cable from each room shall terminate in center of Computer/Telephone Equipment room with thirty (30) feet of excess cable and shall be tagged to indicate room that cable serves.
- 2. Additional wall backing will be required for rooms identified as telehealth, tele-retinal, and other remote medical exam rooms.
- 3. Coordinate size/location of backing with VA during DID.

5.30 SPECIAL REQUIREMENTS: CABLE/SATELLITE TV SERVICE & WIRING

- 1. Provide Premises wiring for broadband distribution of television signal, including individual outlets. The system shall support the distribution of broadband signals from various sources including but not limited to programming from local cable provider, city offices, satellite receivers as well as programming generated locally. The contractor shall provide all necessary cables, connectors and hardware for a complete and functional broadband television distribution system. Outlet locations shall be as indicated on the drawings, in no case less than in the main waiting room, sub-waiting rooms, employee break room, and all conference/group room(s).

2. SERVICE REQUIREMENTS

- a. The Lessor shall provide antenna, satellite, cable TV service to the clinic locations identified during design and maintenance of television system for one year from Date of Substantial Completion.
- b. Channels shall include a minimum of 10 channels which shall include local news and public broadcasting channels.

3. PERFORMANCE REQUIREMENTS

- a. The broadband television distribution system shall be installed to meet the following requirements:
 - i. Carrier to noise ratio must be greater than 55dB.
 - ii. Cross-modulation no less than -57dB.
 - iii. Operating band width on all passive devices shall be between 5 MHz and 1000 MHz.
 - iv. Composite second order distortion less than -60dB.
 - v. Composite triple beat distortion less than -60dB.
 - vi. The amplitude difference between two adjacent channels shall be no greater than 2dB.
 - vii. The system shall be free of any signal leakage.
 - viii. The RF signal level at any outlet shall be no greater than +15dB and no less than +5dB.
 - ix. Isolation between any two outlets shall be a minimum of +20dB for any frequencies between 5MHz and 1000 MHz.
 - x. Signal at each outlet: 3 dBmV across 75 ohms, minimum, plus 5 dB, minus 0 dB.

4. MATERIALS

a. ACCESSORIES

i. Splitter:

- 1. Blonder Tongue SXRS series or approved equal.
- 2. Frequency Response: 5 - 1000 MHZ.
- 3. Isolation: 21 dB minimum.
- 4. Return Loss: 16 dB minimum.
- 5. Insertion Loss: 6.8 dB maximum.
- 6. RFI shielding: 120 dB minimum.
- 7. Quantity as required for television locations as shown on drawings. All waiting rooms to receive CATV outlets at a minimum. Provide a cable from each outlet to the OI&T/IRM room as indicated on the drawings.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- ii. Receptacles:
 - 1. Manufacturer: Panduit CMFSR series, or approved equal.
 - 2. Mini-com self-terminating F connector.
 - 3. Provide with matching Panduit Mini-Com faceplate or an approved equal, color to match other wall plates
 - iii. Branch Distribution Cable:
 - 1. Description: RG 6/F. Plenum rated.
 - 2. Product: Comm/Scope or equal.
 - iv. Conduit
 - 1. Electrical Metallic Tubing
 - 2. Size: Minimum 3/4 inch with larger sizes where required.
 - v. Outlets
 - 1. Four-inch square box with single gang plaster ring.
5. EXECUTION
- a. Install in accordance with manufacturer's instructions.
 - b. Provide proper grounding of television system components and wiring.
 - c. Provide raceway system or utilize cable tray system for all cable.
 - d. Provide cable continuous from the outlets to the OI&T/IRM room splitter locations. Provide a trunk cable from the building demarcation main trunk cable to the new splitters in the OI&T/IRM room.
 - e. System connections will be made to provide the features described and specified herein.
 - f. Additional connections and cabling may be required to provide a complete system.
 - g. System connections will be made to provide the features described and specified herein. Additional connections and cabling may be required to provide a complete system.
 - h. Cabling terminated at each piece of equipment shall be cut to length and terminated with the appropriate connector. The use of tie wraps is necessary to maintain the cabling in a neat manner.
 - i. Equipment utilizing screw terminals shall have the conductors tinned prior to tightening into the terminals.
 - j. Cable should be run in one piece without splices made. In the event a splice is absolutely necessary it shall be done to provide proper impedance. Video cable shall use a female to female BNC type barrel with crimped BNC connectors on each end. Splices must be accessible and not internal to conduit as per code regulations
 - k. All National, State and Local Electrical, Fire and Building Codes apply to this project. The contractor must be aware of and adhere to these codes. The Owner shall not be liable for failure of the contractor in the following code. Any portion of the installation that does not meet code shall be removed and re-installed up to code shall be removed and re-installed up to code by the contractor at their own expense.
 - l. All cables and T.V. outlet plates shall be labeled by number or origination and termination designation. Labels must be permanent and legible. Peel off numbers is not acceptable unless clear heat shrink is used over the numbers.
 - m. All cables and T.V. outlet plates shall be labeled by number or origination and termination designation. Labels must be permanent and legible. Peel off numbers is not acceptable unless clear heat shrink is used over the numbers.

5.31 SPECIAL REQUIREMENTS: GUEST WIRELESS INTERNET ACCESS

- 1. Provide Guest Wireless Internet Service with Institute of Electrical and Electronics Engineers (IEEE) 802.11N Specification "Wi-Fi" Connectivity for up to 20 individual nodes. Wi-Fi may be unsecured and may be from common or adjacent multi-tenant space, provided the system is managed by the Lessor and is not another tenant's signal. Ensure sufficient signal strength to provide "Excellent" signal strength in the Waiting and Reception areas, and "High" signal strength throughout the rest of the Clinic Proper. Guest Wireless Internet Service must be completely separated from any VA Network and Information Technology Systems. Placement of the Guest Wi-Fi equipment shall be outside of VA occupied space, when possible. Otherwise, placement shall be inside the Police/Access Control Room.

5.32 SPECIAL REQUIREMENTS: PLUMBING

- 1. Submit complete and coordinated drawings to include riser diagrams, legend, notes and details. Submit specifications and final calculations.

5.33 SPECIAL REQUIREMENTS: APPROVED ANSI EYEWASH STATION

- 1. Emergency Eyewash Stations shall comply with the following: Provide Speakman SEF 1800-CA (or approved equal)
- 2. The lessor shall provide the VA Engineering Safety with the unit and location for approval prior to installation. Counter or sink mounted eyewash stations are approved for use.
- 3. Install thermostatic mixing valve per VA Design Standards.
 - a. Minimum locations:
 - i. Lab sink(s)
 - ii. Procedure room sink

5.34 SPECIAL REQUIREMENTS: EXTERIOR SIGNAGE

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

1. Provide highly visible exterior signage.
2. Signage shall be VA blue and sized per the VA signage guide. See [HTTPS://WWW.CFM.VA.GOV/TIL/SIGNS/SIGNAGE04-EXTERIOR.PDF](https://www.cfm.va.gov/til/signs/signage04-EXTERIOR.PDF) for more information. The successful offeror will be provided with a copy of the VA Sign Guide for incorporation of the Standards in the Signage Design.
3. Signage font type and spatial relationship shall be as indicated below.
 - a. Size of Text and Symbols shall meet the following criteria, at a minimum:

Text					Symbols			
Viewing Distance Up To:		Letter Height		Application	Viewing Distance Up To:		Letter Height	
7.5 M	25'	25 mm	1"		7.5 M	25'	75 mm	3"
12 M	40'	40 mm	1 1/2"		10.5 M	35'	100 mm	4"
15 M	50'	50 mm	2"		15 M	50'	125 mm	5"
24 M	80'	75 mm	3"		18 M	60'	150 mm	6"
33 M	110'	100 mm	4"		30 M	100'	200 mm	8"
48 M	160'	150 mm	6"		34.5 M	115'	225 mm	9"
75 M	250'	225 mm	9"		39 M	130'	250 mm	10"
97.5 M	325'	300 mm	12"		45 M	150'	300 mm	12"
150 M	500'	450 mm	18"					
195 M	650'	600 mm	24"					

4. Signage shall be mounted on the building at a minimum, and an additional sign shall be mounted in any building marquee system that advertises building occupants along the main roadways. Building Mounted Signs must be electrically illuminated. Marquee mounted signs or stand-alone signs at roadways shall be illuminated unless no other signage at these locations is illuminated.
5. The VA has developed a new logo/signature for use in signage. It replaces any logos in existence prior to All new signs must incorporate the new graphical representation. Examples of the application of the new standard are indicated below. The master art and typography shall not be altered. The font, Size relationship between elements and the letter spacing shall remain as presented in the master art.
6. An Architectural Rendering of the exterior building signage shall be included with the signage submittal for Government review and approval. Coordinate views with the COR prior to development.
7. Example of a marquee sign:




8. Example of an illuminated building mounted sign:



9. Example of an illuminated monument sign:

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

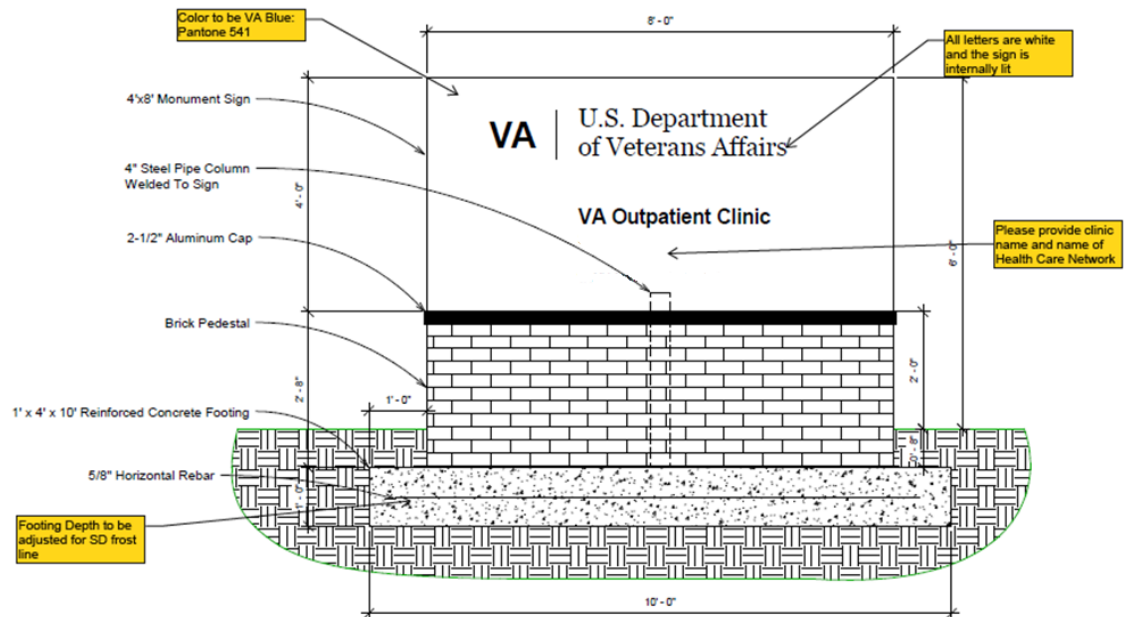

10. NOTE: The St Cloud VA is willing to consider signage options that match other existing building signage that the building owner may already be using. Submit a request to match existing signage and documentation or signage specification cut sheets for VA review and approval.

5.35 SPECIAL REQUIREMENTS: UTILITIES, PERMITS AND CODE ISSUES:

1. UTILITIES: The building owner shall ensure that public utilities necessary for operation are available and operable at the site at the time of final inspection. The building owner is required to pay any deposits and hook-up fees relative to utilities (water-tap fee, water connection fee, sewer connection fee, sewer tap fee, etc.).
2. OCCUPANCY PERMIT: Space offered must have a current occupancy permit issued by the local jurisdiction.
3. Building owner shall inspect, test and maintain building systems, fire and life safety systems and equipment as required by the more stringent of NFPA guidelines or local codes. Building owner shall submit documentation as acceptable to the Contracting Officer of tests, report and maintenance logs.
4. CODE VIOLATIONS: Equipment, services, or utilities furnished, and activities of other occupants, shall be free of safety, health, and fire hazards. When hazards or code violations are detected, they must be promptly corrected at the building owner's expense. Where requirements conflict, the decision of the Contracting Officer shall be final.

5.36 SPECIAL REQUIREMENTS: OSHA REQUIREMENTS:

1. The building owner agrees to comply with all Occupational Safety and Health Administration (OSHA) Safety and Health Standards located in 29 CFR.
2. The guarding of openings and holes in floors and walls must comply with 29 CFR 1910.23.
3. The design and construction of fixed stairs for use in other than fire exits must comply with 29 CFR 1910.24.
4. The design and construction of fixed ladders must comply with 29 CFR 1910.27 or must be clearly marked or secured to prevent Government employee use.
5. Physical hazards must be color-coded according to 29 CFR 1910.144 and, where applicable, identified by signs according to 29 CFR 1910.145.
6. If the building owner finds it necessary to bring flammable/combustible liquids onto the premises, the provisions of 29 CFR 1910.106 shall govern the handling, use and storage of same.
7. Construction, repair, and alteration work done for/by the building owner shall comply with the current edition of the OSHA Safety and Health Standards for Construction Industry, 29 CFR 1926, and applicable portions of 29 CFR 1910.

5.37 SPECIAL REQUIREMENTS: ACCESSIBILITY STANDARDS

1. The design, construction, and alteration of facilities shall comply with local codes and ordinances, and the requirements contained in the ADA Standards for Accessible Design (28 CFR Part 36). In addition, all VA facilities must comply with the Uniform Federal Accessibility Standards (UFAS) and VA Program Guide PG-18-13, "Barrier Free Design Guide" – ([HTTPS://WWW.CFM.VA.GOV/TIL/](https://www.cfm.va.gov/til/))

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

2. The building owner shall comply with the stricter of these standards for each requirement as determined by the Government. Building owners are cautioned that, in most cases, the following requirements in the "Barrier Free Design Guide" are more stringent.
3. If the building owner finds it necessary to bring flammable/combustible liquids onto the premises, the provisions of 29 CFR 1910.106 shall govern the handling, use and storage of same.
4. Construction, repair, and alteration work done for/by the building owner shall comply with the current edition of the OSHA Safety and Health Standards for Construction Industry, 29 CFR 1926, and applicable portions of 29 CFR 1910.

5.38 SPECIAL REQUIREMENTS: MECHANICAL

1. Provide complete and final engineering calculations of all systems. In addition to specifications, provide complete selection data, including catalogue cuts and calculations, for all HVAC equipment and drawings showing all equipment schedules. Complete the coordination requirements with fire protection, electrical, plumbing, architectural (louvers, ceiling access panels, reflected ceiling plans, etc.), and structural work (operating weights of ceiling and floor mounted equipment, concrete and steel supports, roof and floor openings, etc.). Submit complete HVAC floor plans for all areas showing all ductwork, heating zones, controls and piping at 1/8-inch scale or larger. Submit complete HVAC floor plans for all required mechanical equipment rooms with at least two cross-sections taken at right angles to each other at 1/4-inch scale. Show all equipment located on roof and/or grade.
2. The building owner and design engineer, as general guidance, shall use the technical information and standards contained in this document. In order to provide the latitude needed for design, new concepts, etc., deviations may be made from the technical requirements provided professional judgment is made that a safe, adequate, quality design will result, and approval is obtained from the Contracting Officer. Deviations from those requirements included in Public Laws, Federal Regulations, Executive Orders, and similar regulations and user's special requirements are not permitted. This solicitation contains VA criteria pertinent to the design of HVAC systems for VA Facilities. Where VA Criteria is lacking or missing, follow industry standards such as ASHRAE, ARI, NFPA, etc.
3. DESIGN FEATURES: Air conditioning systems shall be designed to operate below 40 degrees F outdoor temperature without refrigeration, unless such refrigeration is used effectively as a heat pump with overall energy savings.
4. INDOOR DESIGN CONDITIONS: The following table lists summer and winter indoor dry bulb and relative humidity design conditions for tenant all spaces other than IT Closets. The design shall comply with the VA HVAC Design Manual [HTTPS://WWW.CFM.VA.GOV/TIL/DMANUAL/DMHVAC.PDF](https://www.cfm.va.gov/til/dmanual/dmhvac.pdf). Utilize this general HVAC design information for all rooms and spaces not specifically provided with HVAC criteria requirements in this document.

Cooling Temperature:	72 degrees
Heating Temperature:	70 degrees
Minimum % Outside Air:	15%
Noise Criteria:	NC-40
Relative Humidity/ Cooling:	60% (UNO)
Relative Humidity/ Heating:	30% (UNO)
Minimum Air Changes/hour:	6 (UNO)
Room Pressure:	0 (UNO)
AC Load-Equipment:	2.9 W/SF
AC Load-Lighting:	2.0 W/SF
Number of People:	As detailed by number of workstations/seating/designs

5. SUPPLY AIR REQUIREMENTS: The supply air volume shall be established to meet the cooling load requirements of the occupied space adjusted for special exhaust airflow requirements, outdoor air requirements, and space pressurization relationships.
6. OUTSIDE AIR REQUIREMENT: The minimum outside air shall be as per latest ASHRAE Standard 62, but not less than 15% of the supply air.
7. VIBRATION CRITERIA: Equipment vibration provisions shall comply with the latest ASHRAE Handbook Applications.
8. REFRIGERATION EQUIPMENT SIZING: The capacity of the refrigeration system including accessories shall be based on the sum of the total cooling requirements of all connected air handling units. No additional safety factors should be required.
9. PIPE SIZING CRITERIA: Pipe sizing shall be based on "Cameron Hydraulic Data" with C=100 for open systems and C=150 for closed systems. For closed systems, the limited maximum pressure drop shall be 4.0 feet of water per 100 equivalent feet of piping. Additionally, the pipe velocity is limited to 4.0 feet per second in occupied areas and 8.0 feet per second in piping over 1-1/4 inches in diameter. For open systems, the maximum pressure drop is limited to 4.0 feet of water per 100 feet of installed pipe. The maximum velocity for an open system is 10 feet per second.
10. ROOM TEMPERATURE CONTROL: All private offices and individual rooms shall have independent and individual temperature control. No more than 3 exam rooms may be covered by an independent temperature control. Open office areas may be zoned control, with zones no larger than 1500 square feet. Except for small HVAC systems or factory-packaged systems, the automatic control systems shall be Direct Digital Controls (DDC) type with electric or electronic operators. Final selection of the type of controls shall be confirmed with VA before proceeding with complete design of automatic temperature control system. The building owner shall provide complete flow and control diagrams for air, water, glycol, and steam systems and the sequence of operation for all HVAC systems and sub-systems. The diagrams shall show complete operating description including starting, interlocks, part load operation, smoke control features, volumetric controls, alarms, and emergency or power failure associated with operation of HVAC systems. Temperature and humidity controls shall be electronic. Control wiring and tubing shall be concealed. Use of wire mold will not be acceptable. Mount

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

room thermostats at 5 feet above the finished floor. A list of thermostat locations and their associated rooms shall be provided with the as-built drawings for clinical use in understanding ability to adjust temperatures. A list of thermostat locations and their associated rooms shall be provided with the as-built drawings for clinical use in understanding ability to adjust temperatures.

11. AIR SYSTEMS: Use only all air VAV systems except for spaces requiring constant air changes/hour, and/or critical pressure differentials with respect to the adjoining spaces. Use constant volume system for such spaces. The leakage of the air through the supply air distribution ductwork shall be computed on the basis of the method described in the SMACNA Air Duct Leakage Test Manual. The maximum leakage amount shall not exceed 4% of the adjusted supply air volume at 2 inches water gage pressure.
12. DUCT SIZING CRITERIA: Duct systems shall be designed in accordance with the general rules outlined in the latest ASHRAE Guide and Data Books, SMACNA Manuals and Design Guide Section of the Associated Air Balance Council Manual. Supply duct system, with total external static pressure 2 inches and larger, shall be designed for a maximum duct velocity of 2500 fpm for duct mains and a maximum static pressure of 0.25 inch of water gage per 100 ft. Static pressure loss and regain shall be considered in calculating the duct sizes. Size supply branch ducts for a maximum duct velocity of 1500 fpm. All other duct systems such as return and exhaust, including branch ducts, shall be designed for a maximum velocity of 1500 fpm for the duct mains and a maximum static pressure of 0.10 inch of water gage per 100 ft, with the minimum duct area of 48 sq in, that is, 8 in x 6 in size. Flexible duct connections at air terminal units, if used, shall be in accordance with VA standard details.
13. RETURN AIR FANS: Air-handling units using return air shall be furnished with return air fans for economizer cycle capability and pressure relationship and to facilitate positive control of air balance.
14. DUCTED SUPPLY/RETURN/EXHAUST REQUIREMENTS: Return and exhaust air shall be ducted for all spaces, i.e., air shall not be taken through ceiling plenums, mechanical equipment rooms, corridors or furred spaces. Circulation of air directly between functional areas is not permitted.
15. AIR HANDLING UNITS: Provide draw-through type air handling units. Air-handling units comprised of coils, fans, filters, etc. shall be of double wall construction. These units shall be factory fabricated. Fully weatherized roof top units constructed in standard section of modules would be acceptable.
16. AIR FILTERS: Filter Efficiencies shall comply with test method specified by ASHRAE standard 52.1 and MERV values based on ASHRAE standard 52.2.
17. VARIABLE AIR VOLUME (VAV) SYSTEMS: VAV systems shall be single duct with hot water terminal reheat. The terminal units shall be pressure-independent with factory set, but field adjustable, maximum and minimum air volumes settings.
18. GENERAL EXHAUST SYSTEMS: The exhaust systems shall be conventional, low pressure, low velocity type serving toilets, janitor closets, trash rooms, etc. In general, each supply air system shall have a corresponding general exhaust system to comply with outdoor air requirements. The exhaust system may or may not be interlocked with supply air system. It shall shut down when supply air system shuts down during unoccupied hours to conserve energy, except exhaust fans shall continue to run when smoke is detected in the areas served by these fans.
19. SMOKE AND FIRE CONTROL: The HVAC systems shall be designed to meet the requirements of the National Fire Protection Association codes, NFPA 45, 72, 90A, 99, and 101, and the additional provisions outlined in this section. The building owner shall comply with local building codes that contain provisions in excess of these requirements. The subdivision of the building spaces into smoke zones shall conform to NFPA 101.
20. BALANCING: Ventilation and air conditioning balancing must be accomplished by an independent third party hired by the building owner and a report furnished before the building is occupied. Ventilation balancing shall be performed only after substantial completion of all shell and subdividing partitions that may affect airflow patterns. Balancing companies must meet certification requirements of Associates Air Balance Council (AABC) or the National Environmental Balancing Bureau (NEBB).

5.39 SPECIAL REQUIREMENTS: MISC. ROOM ACCESSORIES

1. Placement and details of room accessories shall be determined via Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Exhibit C.2 – Detailed Space Plan Litchfield, CBOC and/or Litchfield - Equipment List.
2. Consult the CO/COR if discrepancies exist across documentation

5.40 SPECIAL REQUIREMENTS: LOCKERS

1. Placement and details of lockers shall be determined via Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Exhibit C.2 – Detailed Space Plan Litchfield CBOC and/or Litchfield - Equipment List.
2. Lockers should be placed in the Staff Locker Rooms – total staff planned is approximately: 30 employees
3. Consult the CO/COR if discrepancies exist across documentation

5.41 SPECIAL REQUIREMENTS: TOILET, BATHROOM ACCESSORIES

1. Lessor shall provide and install manufactured items usually used in dressing rooms, toilets, baths, locker rooms and at sinks in related spaces. Lessor to provide a list of suggested items at the Interior Design review meeting for VA Review. Products referenced below are St Cloud VAHCS standard items, but approved equals may be provided upon St Cloud VA Review and approval. Lessor shall coordinate the requirements of this specification with the Janitorial Requirements of

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

this lease. All devices must be shown on the DID and CD equipment plans and coordinated for proper installation and workflow. Quantities and locations as shown on the drawings.

2. At a minimum, each restroom shall include:
 - a. A mirror and shelf above the lavatory.
 - b. A toilet paper dispenser in each water closet stall that will hold at least two rolls and allow easy, unrestricted dispensing.
 - c. A coat hook on the inside face of the door to each water closet stall and on several wall locations by the lavatories.
 - d. At least one modern paper towel dispenser, soap dispenser, and waste receptacle for every two lavatories.
 - e. A sanitary napkin dispenser in women's restrooms with a waste receptacle in each water closet stall.
 - f. A disposable toilet seat cover dispenser.
 - g. A counter area of at least 2 feet, 0 inches in length, exclusive of the lavatories (however, it may be attached to the lavatories) with a mirror above and a ground-fault interrupter-type convenience outlet located adjacent to the counter area. The counter should be installed to minimize pooling or spilling of water at the front edge.
 - h. A floor drain.
 - i. Newly installed restroom partitions shall be made from recovered materials as listed in EPA's CPG.
 - j. Nurse call with pull cord (patient restrooms only)
 - k. Baby Changing Table (patient restrooms only)
3. Placement and details of accessories shall be determined via Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Exhibit C.2 – Detailed Space Plan Litchfield, MN, and/or Litchfield - Equipment List.
4. A minimum of one bariatric toilet shall be installed within the clinic. This toilet shall have a 1,000 lb. capacity and should be placed in the procedure room restroom.
5. Consult the CO/COR if discrepancies exist across documentation.

5.42 SPECIAL REQUIREMENTS: PARKING LOT EMPLOYEE AREA

1. If employee parking is not physically separated from patient parking, visual aids shall be installed to inconspicuously identify staff parking areas. This may be achieved by striping patient parking stalls with yellow paint and employee parking stalls with white paint. Alternatively, a single line striped through the lot to aid employees in parking "beyond" the line.

5.43 SPECIAL REQUIREMENTS: PARKING LOT MRI TRAILER LOCATION AND UTILITY HOOKUPS

The parking lot shall be designed to accommodate a temporary imaging/MRI trailer to be placed and utilized at times to be determined in the future by the VA.

- a. Utility Connections
 - i. Power shall be separately metered in order to track and properly fund electrical expenses. Provide lockable NEMA rated outdoor disconnect and receptacle enclosure.
 - i. 480v 3-phase, 125 KVA, fused at 150 Amps for connection to the mobile trailer.
 - ii. 3-phase, 5 wire, wye connection, with ground and neutral (not less than AWG #1/0)
 - ii. Telecommunication connections (quantity of 8) shall be placed in a NEMA rated outdoor enclosure that is lockable for connection to the mobile trailer.
- b. Parking Pad
 - i. A concrete pad shall be designed as a minimum size of 18'x60'
 - ii. Anticipated trailer weight is approximately 60,000 lbs.
 - iii. The pad must not exceed 0.125" deviation in 10'
 - iv. Nonferrous reinforcement materials are recommended for reinforcement within the concrete pad.
- c. Placement
 - i. The developer shall consider the Gauss Field for final placement.
 - ii. Pad placement shall allow for ease of mobilization and demobilization of the trailer and corresponding vehicular movement.

5.44 SPECIAL REQUIREMENTS: ACOUSTICS/NOISE/PRIVACY CONTROL

1. Lessor shall provide optimum acoustical isolation between:
 - a. patient rooms and public spaces/corridors
 - b. patient rooms and other patient rooms
 - c. patient rooms and offices
 - d. Patient rooms and teamwork area(s)
 - e. check-in area and adjacent check-in area
 - f. check-in area and waiting room
2. The acoustical performance of all Patient Care Rooms is a critical design element for creating calm and quiet care environments, maintaining patient privacy and creating a positive work environment. Every aspect of design should consider acoustic impacts. Sound masking systems shall be considered in the approach to ensure STC ratings are achieved and the rooms functionally operate as planned. Sound masking systems can serve the dual purpose of overhead paging.
3. Sound masking systems shall be installed to ensure STC ratings are achieved and the rooms functionally operate as planned. Sound masking systems can serve the dual purpose of overhead paging.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

4. The sound masking system must be capable of being zoned on both a global and local level for sound. Global zoning must accommodate the entire CBOC space and local zoning will be designed in accordance with the space plan for those areas requiring special attention; i.e. patient rooms, exam rooms, reception areas, provider offices, clerical work areas, open areas, patient check in areas, special work areas, executive areas. All zoning must allow both volume and frequency adjustments within each zone.
5. The lessor shall design and install an electronic sound masking system that amplifies the requirements detailed within this lease. The lessor shall not reduce construction, architectural, or mechanical requirements as detailed in this lease due to the electronic sound masking system. All requirements shall be met prior to the added benefit of the electronic system.
6. Reception/Check-in Privacy dividers shall be designed and installed to provide sound and visual isolation between patients when checking in for appointments. These shall be placed to optimize staff visualization into the waiting room. They shall be fabricated with matching millwork and solid surface elements with the rest of the clinic.
7. Gypsum board half walls shall be built in the waiting room to allow for added privacy between patients waiting to check in for appointments and patients waiting to be called for their appointment. Placement shall be discussed during design.
8. Lessor shall provide acoustical considerations in large open spaces which include, but may not be limited to, waiting room(s), shared medical appointment room(s), group rooms, and teamwork area(s).
9. Acoustical considerations may include, but are not limited to: increased CAC ACT, acoustical cloud systems, fiberglass insulation over ACT around room perimeter, return air boots, wall construction from deck to deck, increased wall insulation, door sweeps, door gasketing, electronic sound masking, etc.
10. The space shall be constructed by following the newest edition of the FGI Guidelines for Design and Construction of Outpatient Facilities, (Currently 2018) and shall include considerations for sound absorption, building system noise, sound isolation between rooms, and speech privacy. A full review of the guidelines shall be performed by the Lessor during design to verify all requirements are met. Provide a minimum Sound Transmission Class (STC) rating as detailed in the guidelines. The FGI guidelines have been modified as detailed below to be more specific to VA needs:

Minimum Sound Isolation Performance Between Enclosed Rooms		
Adjacency Combination		STC
Patient Care and Diagnostic Areas		
Examination/Telehealth/Consult Room	Corridor (with entrance)	35
Examination/Telehealth/Consult Room	Examination room	50
Examination/Telehealth/Consult Room	Public space (to include offices, reception, waiting room, toilets)	50
Lab/Imaging	Corridor (with entrance)	35
Lab/Imaging	Treatment room	50
Group Room/Shared Medical Appt	Corridor (with entrance)	35
Group Room/Shared Medical Appt	Public space (to include offices, reception, waiting room, toilets)	50
Public Areas		
Toilet room	Public space	45
Public space	Offices not designated as patient care	50

5.45 SPECIAL REQUIREMENTS: OPERATION OF BUILDING EQUIPMENT:

1. The building owner shall furnish, operate, and maintain all building equipment and systems in accordance with applicable technical publications, manuals, and standard procedures. Mains, lines, (electricity, gas, water, and sewer utilities), and meters for utilities shall be provided by the building owner. Exposed ducts, piping, and conduits are not permitted in occupied spaces.

5.46 SPECIAL REQUIREMENTS: CIRCULATION SYSTEMS:

1. The building owner is responsible for the final design of horizontal and vertical circulation systems within the building. Building owner shall integrate the design of circulation systems with building entrances, functional elements, way finding systems and signage.
2. Circulation system components include entrances, lobbies, major corridors, vertical circulation, waiting areas, and departmental corridors. Within this hierarchy, departmental corridors are defined as the spaces necessary for circulation between rooms or functional areas within a single department. Major corridors serve multiple departments or functional groupings, providing circulation to and from building entries and lobby.

SECTION 6 AGENCY SPECIFIC REQUIREMENTS FOR UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE TERM

Incorporated into lease.

SECTION 7 AGENCY SPECIFIC FSL I & II REQUIREMENTS (L100 SECTION 7)

Security Requirements shall be in accordance with Department of Homeland Security / Interagency Security Committee publication "The Risk Management Process: An Interagency Security Committee (ISC) Standard dated November 2016". The Government has

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

designated a security Level 2 for this facility. Security standards will be assessed based upon tenant agency mix, size of space requirement, number of employees, use of the space, location of the facility, configuration of the site and lot, and public access into and around the facility. The construction and security requirements as outlined in this document are also in accordance with the Interagency Security Committee (ISC) Risk Management Process. These publications will be provided in electronic format to the successful offeror at the time of the Design Intent Drawing Workshop. Refer to Schedule for Completion of Space.

7.01 SPECIFIC REQUIREMENT: US POSTAL SERVICE MAILBOX (FSL II)

1. Provide Lockable, USPS approved Mailbox with mail slot and normally locked access door for removal of larger envelopes. Mailbox to be suitable for letter and legal-size envelopes, including USPS approved padded envelopes.
2. Mailbox must be clearly marked in accordance with US Postal Regulations, including but not limited to, US MAIL, and any other informative language required by USPS.
3. Mailbox may match other styles in the shell structure or be installed outside in accordance with the USPS delivery protocols in the successful offeror's postal delivery area.
4. Mailbox must not have external identification that would identify the box as Veteran's Administration mail to casual observers.

7.02 SPECIAL REQUIREMENTS: TEMPORARY SECURITY UPGRADE DUE TO IMMEDIATE THREAT (FSL I)

The Government reserves the right, at its own expense and with its own personnel, to temporarily heighten security in the building under lease during heightened security conditions due to emergency situations such as terrorist attacks, natural disaster, and civil unrest.

7.03 SPECIAL REQUIREMENTS: DEVELOPMENT, IMPLEMENTATION, AND PERIODIC REVIEW OF OCCUPANT EMERGENCY PLANS (FSL I)

The Lessor shall cooperate and participate in the development of an Occupant Emergency Plan (OEP) and if necessary, a supplemental Sheltering-in Place (SIP) Plan. Periodically, the Government may request that the Lessor assist in reviewing and revising the OEP and SIP plan(s).

7.04 SPECIAL REQUIREMENTS: INTRUSION DETECTION SYSTEM (FSL II)

1. Lessor shall provide an intrusion detection system. The intrusion detection alarm system shall detect entry into the room and broadcast a local alarm of sufficient volume to cause an illegal entrant to abandon a burglary attempt. The system shall report to a panel(s) with audible and visible alarms and to the local community police. The alarm keypads shall be placed at all entries into the facility.
2. The system shall cover perimeter entry and exit doors, and ground-floor windows. Basic Security-in-Depth IDS components include:
 - a. magnetic door switch(s),
 - b. alarm system keypad,
 - i. Keypads shall be placed at all entries into the facility and within the IT Closet and Police/Access Control Room (separate partitions)
 - c. passive infrared sensor(s) (PIR),
 - d. an alarm panel (to designated monitoring center)
 - e. appropriate communication method i.e. telephone and/or Internet connection,
 - f. glass-break detector,
 - g. magnetic window switches or shock sensors.
3. INTRUSION DETECTION SYSTEM SHALL MEET THE FOLLOWING REQUIREMENTS:
 - a. An internal, automatic charging DC standby power supply and a primary AC power operation.
 - b. A remote, key operated activation/deactivation switch installed outside the room and adjacent to the room entrance door frame and/or a central alarm ON- OFF control in a central monitoring location. For personal safety reasons, alarm switches and panels will be located outside of the protected space.
 - c. An automatic reset capability following intrusion detection.
 - d. A local alarm level of 80 dB (min) to 90 dB (max) within the configuration of the protected area.
 - e. An integral capability for the attachment of wiring for remote alarm and intrusion indicator equipment (visual or audio).
 - f. A low nuisance alarm rate. Shall not exceed a rate of one (1) alarm per seven (7) days per zone within the first 60 days after installation and acceptance. Sensor adjustments will be made and then shall not exceed one (1) alarm per 30 days.
 - g. The Lessor will contract with a Security Monitoring Company to provide 24hour, 7-day, 365 day per year monitoring of Intrusion Detection.
 - h. Intrusion Detection Alarms shall be reported to Local Police and to a provided VA staff contact list.
4. Installation & Execution:
 - a. The alarms shall utilize a separate dedicated phone line or connect to an existing building shell system that provides this function and is addressable to indication the location of the alarm.
 - b. The main system controller shall be capable of integrating the intrusion detection system and electronic physical access control system for configuration and user interface capability.
 - c. The remote alarms will be in addition to locally broadcast alarms in the protected areas.
5. INTRUSION DETECTION SYSTEM COMPONENTS:
 - a. Refer to Electronic Physical Access and Control System for Description of master control system.
 - b. Glass Break Sensors:
 - i. Description: Microprocessor based Glass Break Sensor with Built-in Door/Window Contact.
 - ii. Approved equal

LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC

- c. Door Position Indicators
 - i. Description: 100 V Max Voltage Magnetic recessed mount compact door position contact
 - ii. Approved equal
- d. Motion Detectors
 - i. Description: 50ft x 70ft EN51131-2-2 Grade 3 Compliant Sensor with Alarm Memory, Temperature Compensation, anti-mask capability, draft and insect immunity
 - ii. Approved equal
- 6. The communication method shall be independent of the government installed systems and run as separate lines into the building. For example, a secondary phone line shall be installed for the security system.
- 7. Technical review of the proposed system shall be coordinated with the Government security representative, at the direction of the Lease Contracting Officer, prior to installation.
- 8. System testing and acceptance shall be conducted by the Government prior to occupancy.

7.05 SPECIAL REQUIREMENTS: ELECTRONIC PHYSICAL ACCESS CONTROL SYSTEM (FSL II)

- 1. Electronic Physical Access Control Systems (PACS). Dual card readers for PIV/HID. Access control systems shall be provided for exterior doors and selected interior doors. The head-end system shall be located in the Police/Access Control Room at the VA CBOC site. The system shall be compatible with St Cloud VA issued PIV proximity cards. The main system controller shall be integrated with the intrusion detection system and electronic physical access control system for configuration and user interface capability.
- 2. PACS SYSTEM SHALL MEET THE FOLLOWING REQUIREMENTS
 - a. UL Listed Components conforming to NFPA 70
 - b. Installation by a certified business specializing in manufacturing the products specified in this section with minimum three years documented experience and with service facilities and an authorized installer within 100 miles of project.
 - c. Access Safeguard. To prevent learning codes through keypad observations or use of stolen or found access cards.
 - d. Time Sensitive. The ability to program access by user, by shift and day.
 - e. Area Sensitive. The ability to program access by door and area for each individual user.
 - f. Fail-Secure. The ability to maintain access security if the system goes down (i.e., bypass key).
 - g. Access Record/Audit Trail. The ability to provide for periodic or on demand print-out of names and time/dates of individual accessing. Records of access or audit trails will not be used for employee time and attendance purposes.
 - h. User Coverage. The number of individual access codes that the system will accommodate.
 - i. Personal Identify Number (PIN) Codes. Access control systems protecting PACS high security areas, such as controlled substance storage, primary computer and communications rooms, and security offices, require a PIN as a secondary personal authentication to be used in addition to card readers. "Scramble Pad" type PIN readers are recommended when PIN systems are installed. See the table below for specific VA-identified required locations.
 - i. Compliance with Federal Standards. New installations or retrofitted access control systems will be compliant with technology described in Federal Information Processing Standard (FIPS) Publication 201, Personal Identity Verification of Federal Employees and Contractors, and the document "PACS Implementation Guidance, Version 2.3 (December 20, 2005), published by the Physical Access Interagency Interoperability Working Group of the VHA Government Smart Card Interagency Advisory Board. This requires that such systems will meet the ISO/IEC 14443 a/b, Parts 1-4 standard for contactless (proximity) card systems, or the ISO/IEC 7816 Standard for contact-type cards. Further information on VA Smart Card operated PACS requirements can be found in the most recent edition of the document: "Physical Access Control Recommendations for the Department of Veterans Affairs." Guidance and assistance with the standards can be obtained from the OS&LE.
 - j. Proximity Card Readers meeting the specifications of this section are required in the following locations:
 - i. Medication,
 - ii. Secure Corridors,
 - iii. Reception to Secure Corridor,
 - iv. Secure corridor to reception
 - v. Public side of clinic to group room, conference room, office, or secure corridor
 - vi. Publicly accessible group or conference room to secure corridor,
 - vii. Clean and Soiled Utility Rooms
 - viii. Door from waiting into the main clinic space
 - ix. Door from reception into clinical space
 - k. Combination Proximity/PIN readers are required for HIGH PACS Assurance Level in the following locations:
 - i. IT server room
 - ii. Police/Access Control
 - iii. All entrances leading into government space, either from the exterior or non-government parts of the building. One entrance shall incorporate a vestibule which will require two card readers.
 - l. Other locations as detailed within all lease documents within this package may require card readers based on how the building functions with shared tenants.

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- m. Lessor shall provide all door hardware and accessories as necessary for a complete, functional physical access and control system
- 3. PACS SYSTEM COMPONENTS
 - a. Access Control Panel:
 - b. Encoded Card Readers (Proximity card Reader):
 - i. Description: Proximity card reader, indoor/outdoor rated, 5"x 5" square polycarbonate housing with approximately a 8" read range. The card reader shall be fully compatible with the PIV badges being used at the VA hospital.
 - c. Approved equals shall be accepted provided they work correctly with the VA PIV badges.
 - d. Encoded Card Readers with Keypad (Combination Proximity/PIN):
 - i. Description: Proximity card reader with integral 10 button keypad, indoor/outdoor rated, 5"x 5" square polycarbonate housing with approximately a 8" read range. The card reader shall be fully compatible with the PIV badges presently being used at the VA hospital.
 - e. Approved equals shall be accepted provided they work correctly with the VA PIV badges.
 - f. Request to Exit Sensors:
 - i. Description: Surface mount with passive infrared sensor with a 8' by 10' coverage pattern. White plastic enclosure.
 - g. Door Position Switches:
 - i. Description: 1-inch diameter steel door contact with DPDT contacts, white in color.
 - h. System Cable:
 - i. Description: Plenum rated cable with aluminum foil shield, copper drain wire, yellow PVC jacket. Cable shall include integral #18-4/C unshielded, #22-3PR shielded, #22-2/C unshielded, and #22-4/C unshielded conductors for card reader, REX and door contact functions.
 - i. Computer System
 - i. Description: Lessor shall provide entire computer system and monitor(s) to operate and run the system.

7.06 SPECIAL REQUIREMENTS: PANIC OR DURESS BUTTON SYSTEM (FSL II)

1. Lessor shall provide a panic alarm system. The system shall report to a panel(s) with audible and visible alarms and to the local police. There shall be push button panic/duress buttons located in the office, exam rooms, procedure room, telemedicine rooms and selected other locations as required and determined during the design process. This system will be used to provide rapid notification to clinic staff during an actual incident. Duress (alarm activation) buttons may be hardwired or wireless; the system may contain a combination thereof. The alarm master panel shall be observable from the VA Staffed side of the main reception desk area and protected from manipulation by unauthorized staff by positioning away from main reception counters.
2. Rooms where panic alarms are located shall be outfitted with an alarm light and audible annunciator located on the outside of the alarmed space for rapid notification of responding staff. The exact location of panic/duress alarm switches will be determined by the VA during the design process.
3. Placement of data outlets shall be determined via language above, Exhibit B.1 – Litchfield CBOC – Sample Floor Plan, Litchfield – Equipment List and/or Exhibit C.2 – Detailed Space Plan Litchfield CBOC.
 - a. Provide the greatest quantity if discrepancies exist across documentation
4. Placement of duress annunciations shall be at the following locations:
 - a. Reception area
 - b. Team Work Area
 - c. Police/Access Control Room
5. All alarm switches or buttons shall be tested by the Lessor, and observed by VA Staff, once per month to ensure operational effectiveness. Test results shall be recorded, and a report furnished to the VA Contracting Officer's Representative each month. Deficiencies must be reported to the Lessor's Representative for immediate correction, at the Lessors expense.
6. All components of the panic alarm system shall be fully compatible and shall not require the addition of interface equipment or software upgrades to ensure a fully operational system.
7. MATERIALS
 - a. General: provide specified product or approved equal
 - b. Battery Backup:
 - i. System shall be provided with a battery backup to ensure operation for a minimum estimated time of 4 hours.
 - ii. Omit if emergency power is available and main power and control unit is on an emergency circuit.
 - c. Call Initiation, Annunciation and Response:
 - i. Light and Tones:
 1. Calls may be initiated through:
 - a. Duress (Alarm Activation) Button
 2. Once a call is initiated, it must be annunciated at the following locations:
 - a. The Corridor dome light associated with the initiating device.
 - b. A local master control station indicating the call location.
 3. All calls must be displayed until they are cleared by the nursing staff ONLY from the initiating device location.
8. INSTALLATION:

**LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements
Litchfield, MN
COMMUNITY BASED OUTPATIENT CLINIC**

- a. Data cabling pathways, power wiring devices, lighting, cooling and other work related to the Duress Alarm System infrastructure must comply with AND NFPA Standard 70 National Electrical Code in effect at the time of award, or local code, whichever is more stringent
- b. Refer to SPECIAL REQUIREMENTS: ELECTRICAL – GENERAL of the lease for general electrical specifications.
- c. All conductors shall be run in conduit.
- 9. MONITORING:
 - a. The lessor shall be required to include all monitoring services for the leased clinic.
 - b. The VA will provide a list of staff contacts for reporting all alarm events.
 - c. All costs associated with this system (installation and monitoring) are the responsibility of the lessor.
 - d. VA Police will coordinate monthly system checks of the system and will coordinate with the building manager and monitoring service.
 - e. Deficiencies within the system will be reported to the lessor and repaired within 10 business days.
- 10. TRAINING:
 - a. The lessor shall be required to train all VA clinic and police staff on the use and programming of the system installed within the clinic.
 - b. Training shall be provided by personnel that are knowledgeable of the system operations and shall include a quick reference guide and Operation and Maintenance Manuals.

7.07 SPECIAL REQUIREMENTS: CLINIC LOCKDOWN FEATURE (FSL II)

- 1. A clinic lockdown button shall be wall mounted near the reception desk in the event of a scenario where the clinic shall need to be immediately locked for security purposes. This button shall operate independently of the panic and alarm systems detailed within the lease. Upon activation of the system, all card readers shall deactivate, and exterior doors shall lock preventing outside entry into the clinic. All doors will be manually unlocked via staff keys until deactivation of the system. System deactivation shall be done via Electronic Physical Access Control and Security System.
- 2. Lessor is responsible to provide hardware and associated features on doors to meet the intent of this function. Additional information may be found in supplemental lease documentation.
- 3. During development of the DID, VA Police and Security staff will provide additional information on the programming needs for this item.

7.08 SPECIAL REQUIREMENTS: CCTV SYSTEM (FSL II)

- 1. The lessor shall provide a CCTV Surveillance Camera system
 - a. Time Lapse Video Recording: Twenty-Four-hour coverage and recording are required.
 - b. A camera will be required at each entrance into government space, patient waiting area, and patient corridors, as well as the identified government parking spaces.
 - c. Time-lapse video recordings (digital storage) are also required as a source of evidence and investigative leads.
 - d. Government specifications are available from the Contracting Officer. Camera systems must be integrated with intrusion control systems.
- 2. Cameras:
 - a. Cameras shall be charge coupled device (CCD) cameras and conform to National Television System Committee (NTSC) formatting criteria.
 - b. Cameras shall be color and programmable to digitally switch from color to black and white at dusk and vise versa at dawn.
 - c. Cameras shall be rated for continuous operation.
 - d. Each camera function and activity shall be addressed within the system by a unique twenty (20) character user defined name. The use of codes or mnemonics identifying the CCTV action shall not be accepted.
 - e. Cameras shall have built-in video motion detection that automatically monitors and processes activity information from each camera based upon how the surveillance field-of-view is programmed.
 - f. When the camera is used as part of a CCTV system computer network, a video encoder shall be used to convert the signal from the NTSC criteria to Moving Picture Experts Group (MPEG) format.
 - g. The use of wireless cameras may also be considered upon presentation and approval from the Local VA Police.
- 3. Monitoring
 - a. The entire system shall be provided for the monitoring of the camera feeds from within the Police/Access Control Room including computers, monitors, keyboard, mouse, etc.
 - b. The government intends to install a large monitor in the Reception area. Infrastructure will be required to be installed to provide the power and monitor feed (for up to 6 camera feeds) to this monitor. The government will provide the monitor/bracket.
 - c. All cameras shall be home run to a monitoring and recording device located in the Police/Access control room.

7.09 SPECIAL REQUIREMENTS: BUILDING FEATURES (FSL I)

- 1. Exterior Windows:
 - a. Exterior windows shall be numbered to allow rapid response of critical first responders. Numbers should be easily visible and large enough to be seen from a safe distance. External number shall be placed in the upper right corner of the window. Interior numbers should match the exterior number, be placed in the lower left corner of the window frame (or conspicuous visible location). Further information can be provided by VA Police.
- 2. Exterior Doors:

LEASE# 36C26321L0007, Exhibit C.1 – Agency Specific Requirements**Litchfield, MN****COMMUNITY BASED OUTPATIENT CLINIC**

- a. Exterior doors shall be numbered to allow rapid response of critical first responders. Numbers should be easily visible and large enough to be seen from a safe distance. External number shall be placed in the upper right corner of the door. Interior numbers should match the exterior number, be placed in the upper left corner of the door frame (or conspicuous visible location). Further information can be provided by VA Police.