

April 28, 2026

Design Percent Completion: 100%

Statement of Work

PAINT INTERIOR WALLS, F336

VANCE AIR FORCE BASE, OKLAHOMA

FACILITY PROJECT ID 1021202

PREPARED BY CHELSI MOOTZ



INDEX

PART 1	GENERAL	2
1.01.	PROJECT DESCRIPTION	2
1.02.	INSTRUCTIONS TO BIDDERS	2
1.03.	LOCATION OF WORK	2
1.04.	SCOPE OF WORK	2
1.05.	CHANGES	5
1.06.	WARRANTY	5
1.07.	SCHEDULE OF WORK	5
1.08.	WORK RESTRICTIONS	5
1.09.	CONTRACTOR’S REPRESENTATIVE	7
1.10.	PROVIDED SERVICES AND UTILITIES	8
1.11.	INSPECTION	9
1.12.	EXCESS MATERIALS (EXCLUDING HAZARDOUS MATERIALS OR WASTE)	9
1.13.	SPECIAL MATERIALS	9
1.14.	MATERIALS	9
PART 2	EXECUTION	11
2.01.	SITE SAFETY REQUIREMENTS	11
2.02.	INSTALLATION	11
PART 3	SITE INFORMATION	12
PART 4	APPENDICES	13
4.01.	APPENDIX A – SITE PHOTOS	13
4.02.	APPENDIX B – BID FORM	13
4.03.	APPENDIX C – DRAWINGS	13

PART 1 GENERAL

1.01. PROJECT DESCRIPTION

- A. The work covered under this Statement of Work shall consist of removing wallpaper and painting the walls in the Child Development Center (CDC) and any incidental work necessary to provide a complete and usable finished product.

1.02. INSTRUCTIONS TO BIDDERS

- A. As part of the bid package the Contractor shall submit a completed copy of *APPENDIX B – BID FORM*, along with all required documentation as stated in Sam.gov.

1.03. LOCATION OF WORK

- A. Location of work to be accomplished under this statement of work is at Vance Air Force Base (AFB). Vance AFB is located three miles south of the City of Enid, Oklahoma. Facility 336 is located north of the intersection of Fields Street and Phillips Avenue.

1.04. SCOPE OF WORK

- A. The Contractor shall furnish all supervision, labor, equipment, consumable materials, supplies, tools, and other items to complete the construction as listed in the Scope of Work. All quotes shall include all shipping charges for completion of the project. The contractor will coordinate all work with *ASRC Federal (ASRC)* Construction Management prior to execution. The list of items below are to be considered the general Scope of Work for the project.
- B. The Contractor shall field verify location of work, dimensions, and existing site conditions prior to commencing work. The Contractor shall contact ASRC Construction Management for any discrepancies with the Scope of Work.
- C. This project includes removing wallpaper and painting walls in the CDC in certain rooms. Refer to *APPENDIX C – DRAWINGS* for exact room locations. Additional details are described below:
 - 1. DEMOLITION:
 - a. Wallpaper Removal: All wallpaper and adhesive must be completely removed from surfaces prior to the application of paint.
 - b. Method: Wallpaper shall be removed using steam only. The use of chemical strippers is strictly prohibited within the Facility.

-
- c. Wall Base Removal: Carefully remove and dispose of the existing wall base (cove base) throughout the designated work areas prior to wall preparation.
2. NEW CONSTRUCTION:
 - a. PAINT:
 1. Material Standard: Sherwin Williams brand was utilized as the standard of design. The Contractor may utilize the standard or submit an equivalent product to ASRC Construction Management for review and approval.
 2. Product Safety: To comply with CDC safety standards, all paints and primers must be Low-VOC or Zero-VOC and highly durable/washable.
 3. Paint Color: Mindful Gray
 4. Finish Color: Eggshell
 5. Walls and Execution:
 - a. *Fixture Detachment: Carefully detach and safely store all safety mounted bookshelves, wire racks, and similar wall-mounted equipment to allow for unobstructed wall preparation and painting. The Contractor must document the original locations to ensure accurate reinstallation.*
 - b. *Prepare all surfaces prior to applying coat of paint. This includes removing wallpaper and adhesive, repairing any dents, holes, or other imperfections on the surface.*
 - c. *Upon removal of wallpaper, the Contractor shall apply a Knockdown texture to all bare surfaces to match the existing adjacent wall texture. The Contractor must ensure a seamless transition between old and the new surfaces.*
 - d. *Contractor to apply the **minimum of two coats** of paint in required locations.*
 - e. *Contractor to protect doors, window frames, and hardware from being painted.*
 - f. *Contractor to protect and work around cameras, fire alarms, and other wall-mounted sensors in the facility.*

- [illegible]

Take special care to protect Government property. Return areas damaged as a result of construction under this contract to their original condition. Protection of existing vegetation, structures, equipment, utilities, and improvements, perform the following:

1. Remove or alter existing work or facilities in such a manner as to prevent injury or damage to any portion of the existing work or facilities to remain.
2. Repair or replace portions of existing work altered during construction operations to match existing or adjoining work, as approved by ASRC Construction Management. At the completion of operations, existing work must be in a condition equal or better than that which existed before any new work started.

1.05. CHANGES

- A. No oral statement by any person other than the Contracting Officer will in any manner or degree modify or otherwise affect the terms of this contract.

1.06. WARRANTY

- A. The Contractor shall provide a standard 1-year Warranty for all labor and material from date of the base's acceptance of completion. For warranted items furnish the Manufacturer's original warranty accompanied by a copy of the supplier's receipt showing place of purchase, telephone number of supplier, address, delivery order if applicable and ticket number.

1.07. SCHEDULE OF WORK

- A. The Contractor shall be responsible for establishing a schedule to meet construction time.
- B. The Contractor shall submit a schedule of all project work in advance to ASRC Construction Management indicating all work activities including required interruptions of utilities, facilities activities, or traffic flow.
- C. The Contractor shall complete work on this contract such that interferences to necessary activities within and adjacent to the construction site are minimized and all Government property and personnel are always protected from incidental damage.
- D. The Contractor shall coordinate work of all trades to prevent any conflicts. The Contractor shall resolve any conflicts of components before proceeding with construction.

1.08. WORK RESTRICTIONS

- A. EXISTING UNDERGROUND UTILITIES

Any underground utilities within the work areas will initially be located and identified with paint markings on the surface by Vance AFB personnel. The Contractor shall maintain all utility markings, after base personnel have located them, for the duration of the contract. The Contractor shall obtain an approved Air Force Form 103, BASE CIVIL ENGINEERING WORK CLEARANCE REQUEST before beginning any underground work. ***The Contractor shall notify ASRC Construction Management at least two weeks in advance of desired commencement of work.*** The Contractor is responsible for repairing any utilities damaged during construction.

B. WORK HOURS, ACCESS, AND PASSES

All Contractor employees, including subcontractors, subcontractors' employees, suppliers, and suppliers' employees are required to comply with the Installation Security Requirements regarding personnel, vehicle, and equipment security passes and access to the jobsite. Nothing in the contract is to be construed in any way to limit the authority of the Commanding Officer to prescribe new, or to enforce existing security regulations governing the admission or exclusion of persons and the conduct of persons while on VAFB, including but not limited to, the rights of search of all persons or vehicles on the Installation.

1. Access to Buildings / Occupied Buildings: The Contractor may work in or around existing occupied buildings. The Contractor is responsible, via the ASRC Construction Management, to obtain access to building and facilities and arrange for them to be opened and closed. Do not enter the building(s) without prior approval of the ASRC Construction Management. Keep the existing buildings and their contents secure at all times. Provide temporary closures as required to maintain security.
2. Passes: Contractor employees and representatives performing work under this contract are required to be either United States citizens or documented legal residents (status verified by prime contractor) and have a Real ID driver's license. All Contractor employees must obtain the required passes. Failure to obtain security and base access passes must not be a cause for contract performance time extension. The Contractor is required to immediately turn in all terminated employee's passes to the issuing office.
3. Contractor Vehicles: All vehicles must display a valid state license plate and safety inspection sticker, if applicable, and must be maintained in good condition. The company name must be displayed in a clearly visible manner and size on each Contractor vehicle used in the course of work. Registration, proof of insurance and driver's licenses are required to obtain a station vehicle pass.
4. **Work Hours:** Normal working hours are strictly limited to the weekend window, beginning Friday at 6:00 p.m. and concluding Monday at 4:00 a.m. **To account for the extended time required for the Contractor to complete the work, performance must be scheduled over consecutive weekends and/or during a federal holiday weekend.**
 - a. **Additional Work Days:** In the event the mission scope necessitates an additional day of work beyond the designated weekend window, the Contractor must provide 48 hour notice to the Contractor Officer to facilitate a scheduled one-day shutdown of the CDC.

-
- b. Mission Readiness:** All rooms, areas, and surfaces must be fully restored, cleaned, and mission ready for use prior to the CDC opening on Monday morning (or the Monday following an authorized shutdown).
 - c. Operational Interference:** The Contractor shall execute all mission requirements exclusively during these designated windows to eliminate interference with the CDC's weekday operational schedule, unless otherwise directed by the Contracting Officer.
 - d. Authorization Requirements:** All performance shall occur within the weekend window except when prior approval is granted for scheduled "shutdowns" or unforeseen emergency requirements. The Contractor is strictly prohibited from disrupting facility services or utilities during standard operational hours (Monday through Friday) without explicit, advance authorization from ASRC Construction Management.
 - e. The Contractor shall execute all mission requirements exclusively during this designated weekend window to eliminate interference with the CDC's weekday operational schedule, unless otherwise directed by the Contracting Officer.
 - f. All performance shall occur within the weekend window except when prior approval is granted for scheduled "shutdowns" or unforeseen emergency requirements. The Contractor is strictly prohibited from disrupting facility services or utilities during standard operational hours (Monday through Friday) without explicit, advance authorization from ASRC Construction Management.
5. Contractor employees must conduct themselves in a proper, efficient, courteous, and businesslike manner. Remove from the site any individual whose continued employment is deemed by the ASRC Construction Management to be contrary to the public interest or inconsistent with the best interests of National Security.

1.09. CONTRACTOR'S REPRESENTATIVE

- A. Superintendent:** A representative of the Contractor shall directly supervise accomplishment of this work. The representative will be responsible for coordinating all phases of work with the ASRC Construction Management. The representative shall always be on the job site when work is being performed and shall have authority to execute no cost field changes on behalf of the Contractor if agreed to by all parties involved.

1. Qualifications: Must have a minimum of 3 years of experience as a Superintendent on previous projects of similar size and complexity. Provide a Superintendent Resume for the proposed on-site Project Superintendent describing experience with references and qualifications to ASRC Construction Management for approval. ASRC Construction Management reserves the right to interview the proposed on-site Project Superintendent at any time in order to verify the submitted qualifications.
- B. Quality Control (QC): A representative of the Contractor responsible for all quality control of the job site and will be held responsible by the ASRC Construction Management for the removal and installation of all products in accordance with the statement of work. The representative shall be competent and familiar with all phases of work under their authority.
 1. Qualifications: Must have a minimum of 2 years combined experience as a Superintendent, Inspector, QC manager, Project Manager, or Construction Manager on similar size and type construction contracts which included major trades included in this statement of work. The individual must be familiar with the requirements of EM 385-1-1 and have experience in the areas of hazard identification and safety compliance.
- C. A single representative of the Contractor for supervising the project, ensuring quality control (QC) and site safety is permitted provided that the representative is competent and familiar with all phases of work under their authority, it is qualified to perform these duties and meets all requirements as stated in sections 1.09.A.1 and 1.09.B.1.
- D. Contractor Personnel: Provide ASRC Construction Management the name(s) of the supervisory person(s) authorized to act for the Contractor. Provide, and update as required, a list of the key personnel for the Contractor and Subcontractors including addresses and telephone numbers (main and cell) for use in the event of an emergency.

1.10. PROVIDED SERVICES AND UTILITIES

- A. All reasonable required amounts of electric power will be made available to the Contractor at the discretion of ASRC Construction Management from the nearest suitable and available connection.
- B. All reasonable required amounts of water will be made available to the Contractor at the discretion of ASRC Construction Management.
- C. The Contractor shall be required to provide their own latrines that are staked down to prevent being turned over.

1.11. INSPECTION

- A. The work shall be conducted in accordance with the Statement of Work and is subject to the inspection of the ASRC Construction Management and Government Representative to ensure strict compliance with the terms of the statement of work.

1.12. EXCESS MATERIALS (EXCLUDING HAZARDOUS MATERIALS OR WASTE)

- A. All waste materials resulting from execution of work shall become the property of the Contractor. The Contractor shall haul all non-hazardous waste off Vance AFB and dispose of it in a legal manner.
- B. The Contractor shall be required to control all foreign objects debris (FOD) from exiting the job site at all times.
- C. At no time shall the Contractor dispose of any recyclable materials in the landfill. All recyclable material shall be taken to an approved recycling center at no cost to the government.

1.13. SPECIAL MATERIALS

- A. Prohibited Material: The manufacturer of materials to be used shall certify the products do not contain mercury, toluene, chlorinated solvents, hydrolysable chlorine derivatives, ethylene base glycol ethers and their acetates, nor any carcinogen, as defined in 29 CFR 1910.1200. Materials used shall not contain lead and hexavalent chromium compounds.
- B. At no time shall class 1 Ozone Depleting Chemical (ODC's) be specified and shall not be used unless otherwise allowed by ASRC Construction Management.

1.14. MATERIALS

- A. All materials must meet the Buy American Act.
- B. Material Submittals:
 - 1. Copies of all materials and shop drawings are to be submitted to ASRC Construction Management and must be approved prior to purchasing any items.
 - 2. All hazardous chemicals used on the project are required to have Safety Data Sheets (SDS) approved by the Vance Environmental Office prior to transport to the installation.
 - 3. All hazardous waste generated by the project shall become the property of Vance AFB for legal disposal.

-
4. The Contractor shall use the Short-Term Hazardous Material Inventory and Usage Report Form to get Hazardous Materials authorized for use inside the fence.

C. List of Materials

1. Refer to Section 1.04 Scope of Work, within this Statement of Work.
2. Refer to *APPENDIX C – DRAWINGS*.

D. Material Delivery: The Contractor shall have all materials delivered during normal working hours and will have a representative present to receive shipments. The Contractor shall ensure all delivery vehicles have sufficient project information and are prepared to undergo inspection upon entering the Installation. This includes name and address of the project site, name of prime contractor and a point of contact for delivery. Material will be delivered to a location for staging as approved by ASRC Construction Management.

E. Attic Stock: The Contractor shall provide any paint, sealant, and wall base that is leftover as attic stock. The Contractor shall deliver attic stock to a location at Vance AFB as directed by ASRC Construction Management.

PART 2 EXECUTION

2.01. SITE SAFETY REQUIREMENTS

- A. All work shall be done in compliance with the safety standards as defined in DAFMAN 91-203, Air Force Occupational Safety, Fire, and Health Standards.
- B. The Contractor shall comply with all applicable standards and provisions of the Occupational Safety and Health Act (OSHA) (29 CFR OSHA 1926).
- C. The Contractor shall take all necessary and prudent safety precautions to ensure safety of the workforce and other exposed personnel.
- D. The Contractor shall coordinate all requests for entry to the airfield or Air Force control/restricted areas through ASRC Construction Management.

2.02. INSTALLATION

- A. Project Duration:
 - 1. The total period of performance is 80 calendar days as described below.
 - a. Non-Performance Period: The Contractor shall have up to 45 calendar days of nonperformance for mobilization and material lead time. If material lead time exceeds this number of days, the nonperformance period may be extended with coordination of the ASRC Construction Management and approval by Contracting Officer.
 - b. Performance Period: All work shall be completed within 35 calendar days.
- B. Installation shall include all items listed in this statement of work, and any incidental work necessary to provide a complete and usable finished product.
- C. Contractor shall remove equipment and material from the site upon completion of work as directed by ASRC Construction Management.

PART 3 SITE INFORMATION

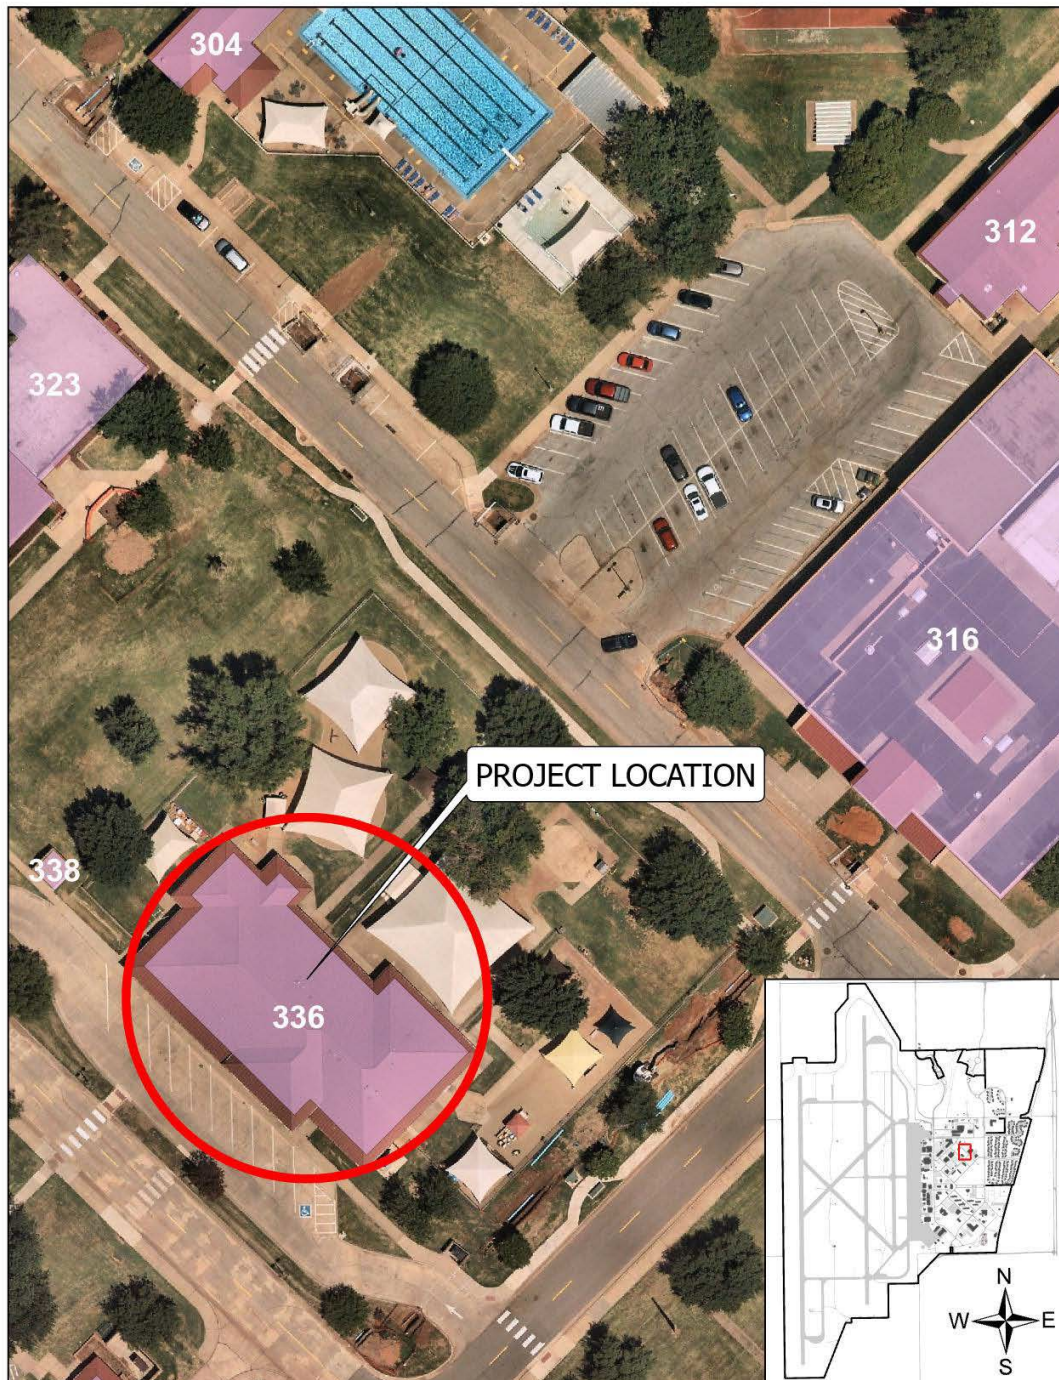


Figure 1: Project Location

PART 4 APPENDICES

4.01. APPENDIX A – SITE PHOTOS

4.02. APPENDIX B – BID FORM

4.03. APPENDIX C – DRAWINGS

G101 – PHASING PLAN

END OF STATEMENT OF WORK

APPENDIX A – SITE PHOTOS



Figure 2: Hallway



Figure 3: Hallway



Figure 4: Hallway



Figure 5: Hallway



Figure 6: Classroom 2



Figure 7: Classroom 3



Figure 8: Classroom 2



Figure 9: Classroom 2



Figure 10: Classroom 2



Figure 11: Classroom 4

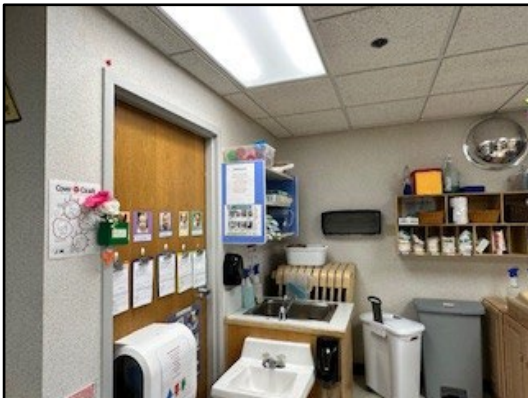


Figure 12: Classroom 4



Figure 13: Classroom 4



Figure 14: Classroom 4



Figure 15: Classroom 4



Figure 16: Classroom 7



Figure 17: Classroom 7



Figure 18: Classroom 7



Figure 19: Classroom 7

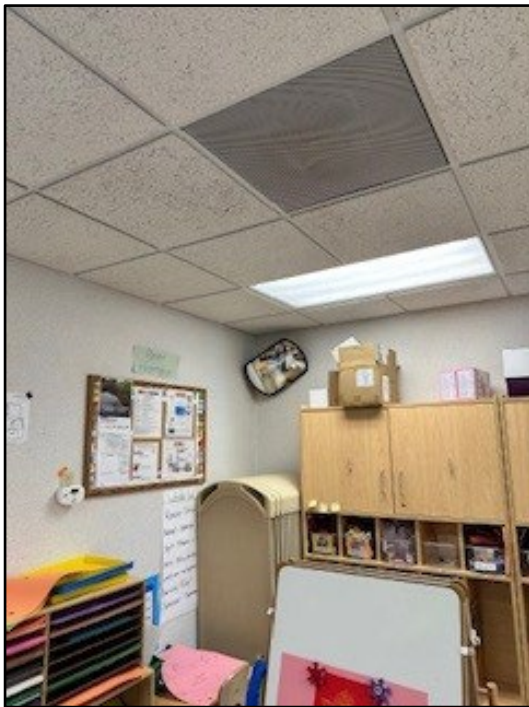


Figure 20: Classroom 7



Figure 21: Classroom 7



Figure 22: Classroom 1



Figure 23: Up Close of Wallpaper near the Ceiling



Figure 24: Storage Closet between Classrooms 2 and 3

APPENDIX B - BID FORM



Fac. Proj. ID: 1021202

Proj. Name: Paint Interior Walls, F336

ITEM	DESCRIPTION	UNIT	QTY	UNIT PRICE	TOTAL
Base Bid					
1	Furniture Removal and Reinstallation	LS	1		\$ -
2	Demolition - Wallpaper & Wall Base	LS	1		\$ -
3	Primer	LS	1		\$ -
4	Paint & Sealant	LS	1		\$ -
5	Wall Base	LS	1		\$ -
6	Clean-Up	LS	1		\$ -
7	Total Cost Base Bid (Sum of lines 1 through 6)				\$ -

Contractor's Name

Date


Contractor's Signature

Address:

Phone Number: _____

E-mail address: _____

APPENDIX C – DRAWINGS

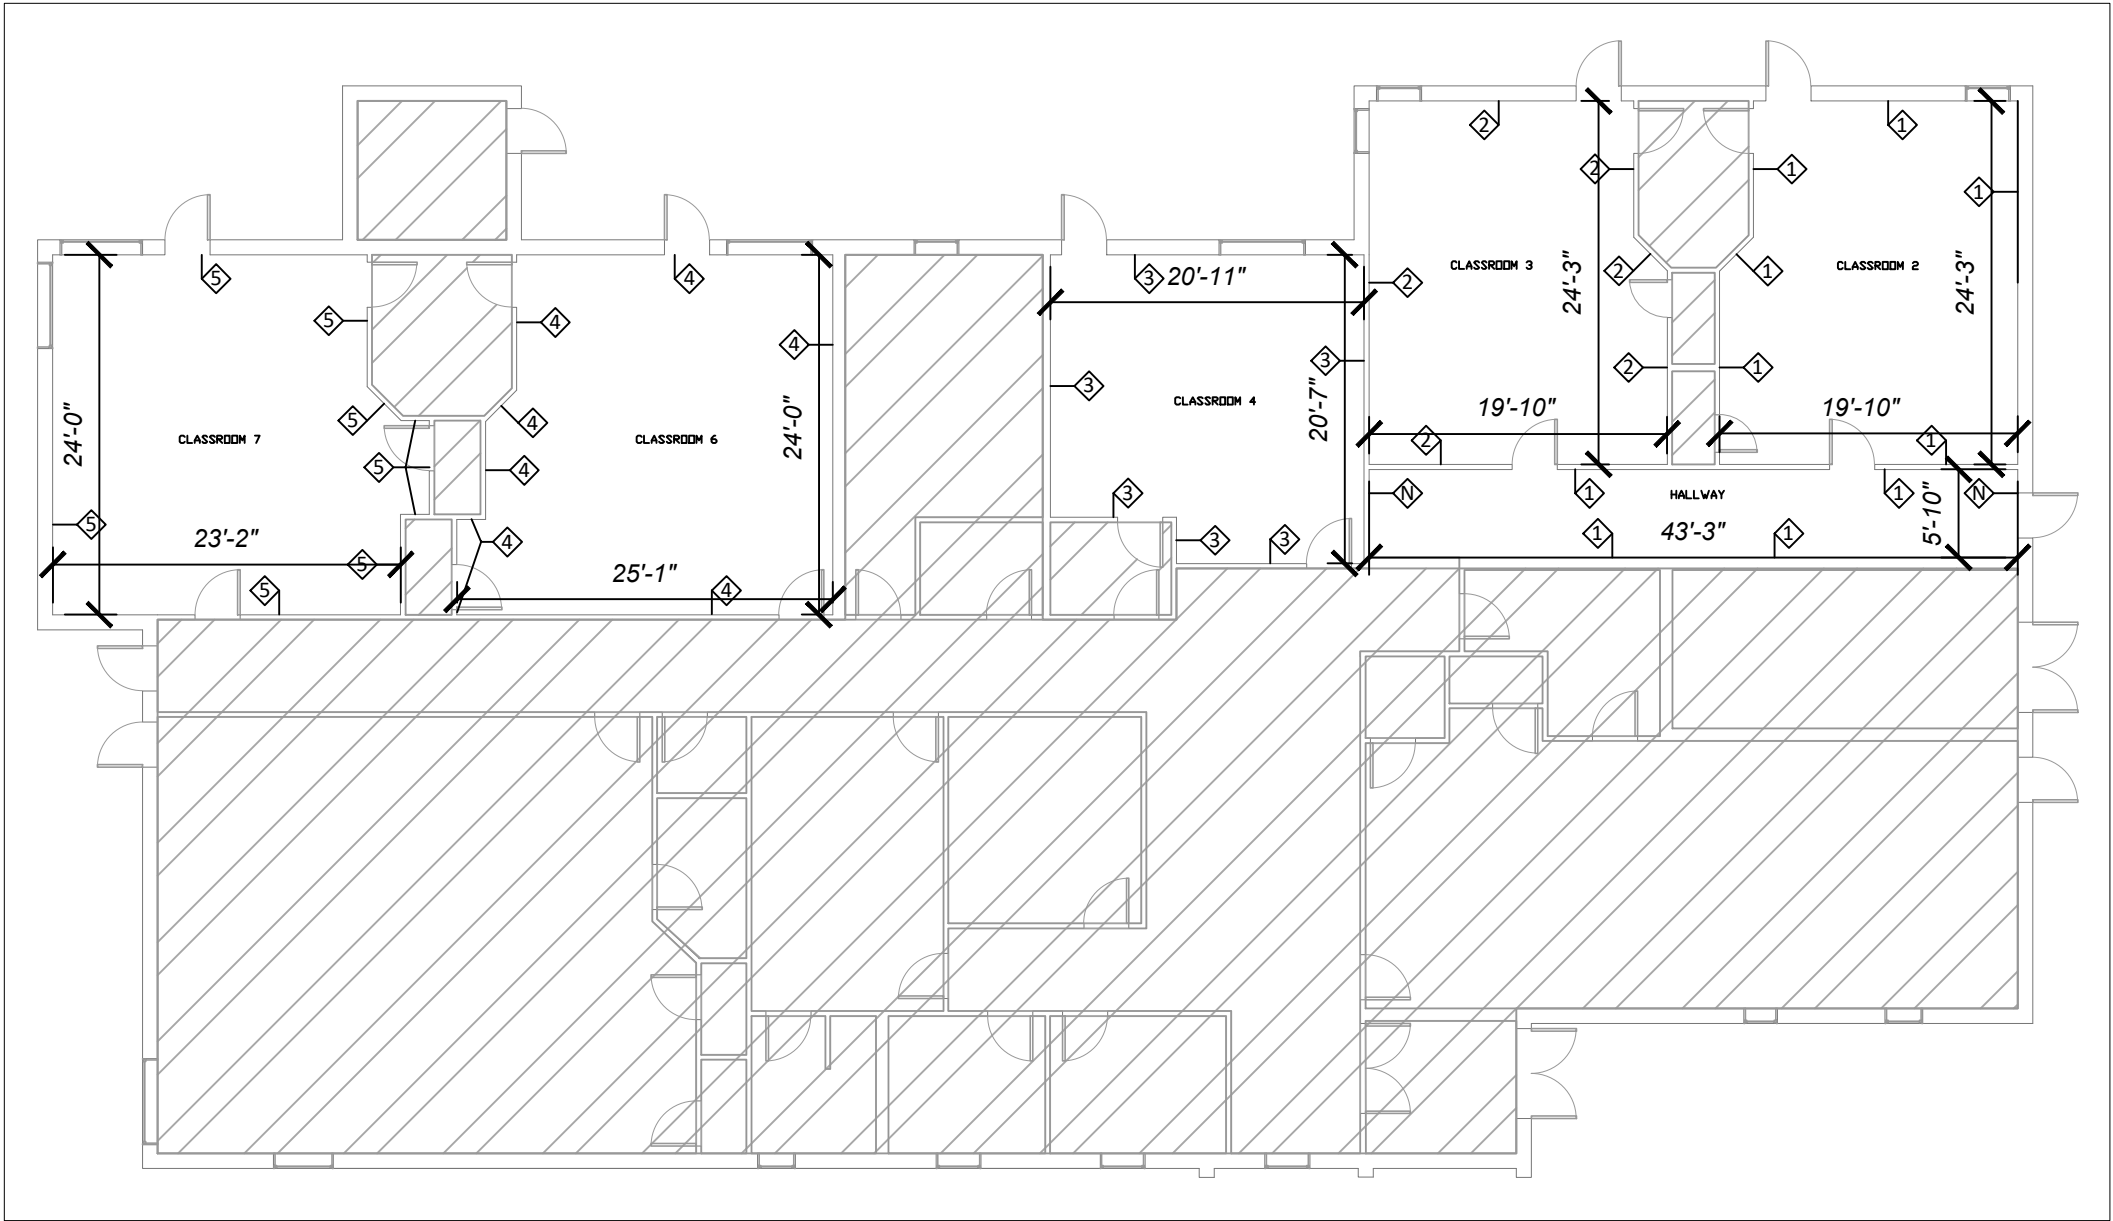

1 PHASING PLAN
5/64" = 1'-0"

GENERAL NOTES

1. ROOM DIMENSIONS PROVIDED FOR REFERENCE ONLY. CEILING HEIGHTS ARE TYPICALLY 8'-0". CONTRACTOR IS TO CONFIRM ALL DIMENSIONS.
2. CONTRACTOR IS TO TEMPORARILY RELOCATE ALL FURNITURE AND MIRRORS, BOLTED AND UNBOLTED, FOR EACH PHASE OF WORK. THIS FURNITURE IS TO BE PROTECTED AND PRESERVED, AND PLACED BACK IN ORIGINAL CONFIGURATION ONCE PHASE IS COMPLETE.
3. CONTRACTOR IS TO PROTECT AND WORK AROUND CAMERAS, FIRE ALARMS, AND OTHER WALL-MOUNTED SENSORS IN THE FACILITY.
4. CONTRACTOR IS TO PROTECT DOORS, WINDOW FRAMES, AND HARDWARE FROM BEING PAINTED.
5. CONTRACTOR IS TO DEMO ANY WALLPAPER AND PATCH AND REPAIR ANY DAMAGE TO WALLS BEFORE PAINTING.
6. REFER TO STATEMENT OF WORK FOR FINISH DETAILS.

PHASING LEGEND	
1	PHASE ONE
2	PHASE TWO
3	PHASE THREE
4	PHASE FOUR
5	PHASE FIVE
	NO WORK



UNITED STATES AIR FORCE
AIR EDUCATION
TRAINING COMMAND
VANCE AIR FORCE BASE
ENID, OKLAHOMA



140 CHANNEL STREET
SUITE 138
VANCE AIR FORCE BASE
ENID, OKLAHOMA
580.213.7076

REVISION #	DESCRIPTION	DATE

DRAWN BY: DKM
CHECKED BY: CM
FP NUMBER: FP1021202
DATE: 28APR2026
DESIGN STAGE: 100%

PAINT INTERIOR WALLS,
F336
PHASING PLAN