

STATEMENT OF WORK

Replacement of HPU Components & Re-packing of Main Service Gate Cylinders 14957 Falls of Rough Road Falls of Rough, Kentucky 40119-9801

GENERAL REQUIREMENTS

This scope of work includes removal and replacement of electric motors, hydraulic pumps, valves, and various pipe and fittings as well as repacking two (2) hydraulic cylinders. Prices shall include mobilization & de-mobilization, fuel, labor, material, equipment, disposal, and all applicable permits and licenses required to replace the components listed below at Rough River Lake.

LINE ITEM 01: Replace existing hydraulic system components.

The contractor shall remove and replace the existing HPU components including motors, pumps, valves, fittings, and piping with new components of equal performance attributes. New components must be of modern design with readily available spare parts. All system components must meet or exceed the specifications required in UFGS 35 05 40.14

GENERAL HYDRAULIC SYSTEM REQUIREMENTS

- a. All HPU components to be replaced are located below the disconnect fitting(s) of the supply and return lines, on top of the hydraulic oil reservoir. See Attachment.
- b. Contractor shall request shutdown of hydraulic system minimum 48 hours in advance.
- c. Contractor must return the hydraulic system to a fully functional, operable status within 24hrs of shutdown. Due to this restriction, the Contractor shall preassemble pumps, motor, valves, ect on new "lid" for hydraulic oil reservoir before removing old components. See "LINE ITEM 002: Fabricate new hydraulic reservoir lid and mount new HPU components" for details.
- d. The contractor shall conduct an operational test of the new HPU in the presence of the TPOC or Lake Manager. Test shall exhibit proper gate movement and prove system is free of leaks or operational defects. After acceptance, the contractor shall take possession the old HPU components and dispose of according to state, local, and federal guidelines.
- e. In the event the system is not deemed operationally acceptable, the contractor must remedy the failure within 8-hours or re-install the old HPU for operation until the problem is solved to the satisfaction of the TPOC and or Lake Manager.
- f. Contractor shall drain HPU system as necessary and dispose of hydraulic fluid according to state, local, and federal regulations.
- g. New HPU components shall be installed a similar location, with intent to function the same as existing system.
- h. Contractor shall set hydraulic system for constant operation at 1,000psi. System shall be balanced so that both pumps output same pressure and volume.
- i. The contractor shall submit shop drawings and data sheets for all materials and components to the TPOC for approval before purchasing, fabricating, or installing.
- j. See attachment R89-12.2-61 as-built drawing of HPU. Exact sizes, quantities, and specifications shall be verified by contractor.
- k. HPU is located on the 2nd level (EL 536) of the control tower. Personnel may access this level from spiral staircase located on the operating level (EL 551). HPU components may be lifted/lowered thru floor opening via 1/2T or 5T hoist. Floor opening is approx. 7ft x 3ft-6".

Overhead hoists are central to floor opening and will NOT reach installed location of HPU on West wall of control tower. Contractor shall provide method for placing HPU in final location.

- l. Overhead Hoist(s) must be operated by USACE personnel. Contractor shall submit schedule requesting USACE operator. Additional operator requests must be made minimum 48hrs in advance. Contractor shall supply rigging necessary to complete lift.
- m. HPU shall be filled to operating level with new Hallmark Premium Hydraulic ISO 46.
- n. All electrical work shall be performed by a licensed Electrician in the State of Kentucky and IAW with NFPA 70 (NEC) and USACE Safety Manual EM 385-1-1.

HYDRAULIC COMPONENT SPECIFICATIONS:

ELECTRIC MOTORS

The new HPU assembly shall include two (2) pump motors and shall conform to the applicable requirements of NEMA MG 1.

- a. Motors shall be continuous duty, TEFC.
- b. Minimum of 5 hp and operate on 220/440 volts, 60 Hz, 3 phase.
Note: Available power is 480Y /277V 3 phase system. See attached photo of MCC.
- c. Winding insulation shall be either class A, F, or H.
- d. Feature NEMA 4X terminal box.
- e. Noise level not to exceed 60 dB
- f. Shall be mounted in similar fashion as existing components.

HYDRAULIC PUMPS

The new HPU assembly shall include two (2) electric motor-driven hydraulic pumps

- a. Continuous operation of 7.5gpm at 1200 rpm. (1800rpm also acceptable)
- b. Designed to operate at 1,000PSI, maximum of 3,000PSI.
- c. Fixed displacement, Vane type.
- d. Hydraulically balanced types.
- e. Shaft must ride in bearings at both ends.
- f. Shall be mounted in similar fashion as existing components.

VALVES

All valves shall be designed for use with hydraulic fluids. New valves shall be installed in similar location as existing components.

- a. Pressure Relief Valves - Field adjustable, piston type with a body designed for a set operating pressure of 1000 psi.
- b. Check Valves
 - 1. Supply check valves shall be the ball or poppet type with a body designed for high shock and 3000 psi service.
- c. Shut off valves
 - 1. Body must be made of 316L Stainless Steel.

PIPE AND FLEX LINES

- a. Pipe shall be 316L stainless with a minimum burst pressure of 7500psi.
- b. Any flexible rubber lines shall be replaced with braided stainless steel flex lines featuring stainless steel crimped hose ends. Both ends shall be female JIC with ends that swivel until tightened. Hose must be compliant with SAE J517.
- c. All tube/pipe shall be replaced with 316L seamless stainless steel meeting ASTM A213 and ASTM A269 standards.
- d. All fittings shall be swaged or flare type. Bite-type shall not be used. Fitting / hose assemblies shall be compliant with SAE J517.

LINE ITEM 02: Fabricate new reservoir lid and mount HPU components

- a. Lid must be made of A36 carbon steel with a minimum thickness of ½”.
- b. Lid may be drilled and threaded to fasten equipment to. Additional plate may be fully welded into place to achieve correct thread engagement for fasteners ½” and larger.
- c. Nuts CANNOT be used in areas that would require the removal of reservoir lid.
- d. Lid must be sealed to existing hydraulic reservoir using 1/8” thick synthetic rubber gasket and fastened with existing bolts in existing locations.
- e. Any thru bolt MUST be sealed with PTFE thread sealer. Erroneous holes must be welded, and ground smooth.
- f. New lid must house all components as existing, including oil fill, air filter, and lifting lugs.
- g. Lid shall be painted “machine gray” with an industrial grade epoxy enamel.

LINE ITEM 03: Repair HPU storage reservoir.

Contractor shall remove, clean and reseal two (2) leaking access panels and one (1) leaking sight glass in HPU reservoir.

- a. Contractor shall drain HPU reservoir and dispose of oil according to state, local, and federal regulations.
- b. Sealing surfaces shall be cleaned and prepped according to manufacturer’s specification.
- c. Sight glass fittings shall be resealed with PTFE thread sealer as necessary.
- d. New 1/8” thick synthetic rubber gasket shall be used to seal access panels.
- e. See attachment for location of repairs.

LINE ITEM 04: Install pressure gauge near position indicators.

- a. Contractor shall install pressure gauge on main pressure line feeding the 4-way valves located on operating floor (EL551).
- b. Location of gauge should be within clear eyesight of personnel while operating 4-way valves. Final location to be approved by TPOC or Lake Manager before work commences. See attached for approximate location of gauge.
- c. Added pipe and fittings shall be 316L Stainless steel. PTFE thread sealant shall be used to prevent any leaks.
- d. Gauge shall feature the following:
 1. 0-2,000psi range
 2. Minimum 4” dia face with stainless steel casing
 3. Liquid filled and vibration resistant.

OPTION ITEM 05: Remove and replace service gate packing

Option can be awarded up to 60 days after NTP.

The contractor shall replace indicator rod packing, oil packing, and water packing for two (2) hydraulic cylinders (Main Service Gate #1 and Main Service Gate #3). The contractor shall replace packing one cylinder at a time. Cylinders will NOT require disassembly to remove/install packing. Contractor shall request a shutdown no less than 48hrs in advance to replace packing(s). Contractor shall be responsible for containment and clean-up of any fluid leakage due to packing replacement. See attachment for details.

- a. Indicator rod packing is located on top of the cylinder and can be accessed from floor located EL 462. See attachment for location.
 1. Existing packing is split-ring Chevron Garlock No.431.
 2. 1” ID x 1-3/4” OD stacked 1-1/4”.

- b. Oil packing is located on the bottom of the cylinder housing and accessed via opening in bonnet on EL 449.
 - 1. Existing packing is split-ring Chevron Garlock No.431
 - 2. 6" ID x 7" OD stacked 2".
- c. Water packing is located in the bonnet casting and can be accessed via an opening in the bonnet located EL449.
 - 1. Existing packing is split-ring Chevron Garlock No.430.
 - 2. 6"ID x 7" OD stacked 1-1/2".

RESPONSIBILITIES AND SITE CONDITIONS:

- a. Existing break areas, offices, latrines, and showers are not available for contractor use. It is recommended that the contractor bring portable restrooms.
- b. Parking of vehicles and designated laydown area is to be coordinated with the Lake Manager during pre-construction conference.
- c. All deliveries will be coordinated with the Lake Manager at least 48 hours in advance.
- d. Contractor shall keep work area clean and orderly.
- e. All waste materials shall be removed, and under no circumstance be dumped into the lake.
- f. Access to the facility shall not be impeded.
- g. Any damage caused by construction to the existing buildings, structures, utilities, or other areas of the project site shall be fully restored to the condition present before start of construction at the contractor's expense.

TECHNICAL POINT OF CONTACT & PROJECT REPRESENTATIVE:

TPOC: DJ Scalf
USACE Engineering Technician
Office: (502) 315-6732
Gov Cell: (502) 658-4055
Email: Donald.L.Scalf@usace.army.mil

Project Lake Manager: Jon Fillingham
Natural Resources Supervisory Project Manager
Office: (270) 257-2061
Email: Jon.P.Fillingham@usace.army.mil

TABLE OF CONTENTS
SPECIFICATIONS/DESCRIPTION

Section

1.	Project Information
2.	Performance Work Statement
3.	Technical Point of Contact (TPOC)
4.	Pre-Work Conference
5.	Working Hours
6.	Contract Start and Completion Dates
7.	Contractor Submittals
8.	Permits and Licenses
9.	Identification of Contract Employees and Vehicles
10.	Safety Requirements
11.	Required Security Training and Planning
12.	Accident Reporting
13.	Damage Reports
14.	Contractor Employees' Conduct and Competency
15.	Damage or Loss of Contractor's Supplies and Property
16.	Supervision
17.	Environmental Program
18.	Contract Discrepancy Report (CDR)
19.	Meetings
20.	Quality Control
21.	Quality Assurance
22.	Deficiencies
23.	Interruptions to Systems
24.	Government Furnished Materials and Equipment
25.	Contractor Furnished Items
26.	Safeguarding Government Property
27.	Minimum Manpower Requirements
28.	Minimum Personnel Qualifications
29.	Veterans Employment Emphasis for U.S. Army Corps of Engineers Contracts
30.	Cooperation with other Contractors, Lessees, and Volunteers
31.	Reports
32.	Applicable Publications
33.	Warranty
34.	Wage Rates
35.	Definitions
36.	Index of Exhibits

Specifications/Description

1. Project Information:

USACE Rough River Lake
14957 Falls of Rough Road
Falls of Rough, Kentucky 40119-9801

2. Performance Work Statement:

The contractor shall furnish all personnel, equipment supplies, materials, and incidentals necessary to remove and replace of the HPU components and repack two (2) hydraulic cylinders. The system includes the pumps, motors, hydraulic gages and all necessary piping and valves. Prices should include mobilization & de-mobilization, fuel, labor, material, and equipment.

3. Technical Point of Contacts (TPOC):

TPOC: DJ Scalf
USACE Engineering Technician
Office: (502) 315-6732
Gov Cell: (502) 658-4055
Email: Donald.I.scalf@usace.army.mil

Project Lake Manager: Jon Fillingham
Natural Resources Supervisory Project Manager
Office: (270) 257-2061
Email: Jon.P.Fillingham@usace.army.mil

4. Pre-Work Conference:

Prime contractor or prime contractors representative will be required to attend a pre-work conference prior to beginning work during which the Contractor's plan of work, safety procedures, start date and other items in this contract will be discussed.

5. Working Hours:

- a. Normal working hours, except as otherwise specified, will be Monday through Friday, 7:00 a.m. to 4:00 p.m. Central Time. Work inside Government buildings or other secured areas will be performed during the above referenced work hours. Work that interferes with other ongoing functions at the project will be scheduled around normal working hours, as specified by the Project Manager.

Holiday Work. The eleven (11) Federal holidays observed are:

New Year's Day (January 1st)
Martin Luther King Day (3rd Monday in January)
President's Day (3rd Monday in February)
Memorial Day (Last Monday in May)

Juneteenth (June 19th)
Independence Day (July 4th)
Labor Day (1st Monday in September)
Columbus Day (2nd Monday in October)
Veterans Day (November 11th)
Thanksgiving Day (4th Thursday in November)
Christmas Day (December 25th)

When one of the above designated holidays falls on a Sunday, the following Monday is observed as a legal holiday. When a legal holiday falls on a Saturday, the preceding Friday is observed as a holiday. Work will be scheduled around the above listed Federal holidays except as specified herein or as approved by the TPOC.

- b. Inclement Weather Work. The Contractor will maintain the schedule of services regardless of inclement weather. Exceptions may be approved by the TPOC when severe conditions make it impractical or dangerous to perform the work.

When one of the above designated holidays falls on a Sunday, the following Monday is observed as a legal holiday. When a legal holiday falls on a Saturday, the preceding Friday is observed as a holiday. Work will be scheduled around the above listed Federal holidays except as specified herein or as approved by the TPOC.

- c. Inclement Weather Work.
The Contractor will maintain the schedule of services regardless of inclement weather. Exceptions may be approved by the TPOC when severe conditions make it impractical or dangerous to perform the work.

6. CONTRACT START AND COMPLETION DATES:

Work under this contract will begin within 14 calendar days of Notice to Proceed (NTP) and complete within 120 calendar days after receiving NTP.

7. CONTRACTOR SUBMITTALS:

Unless otherwise specified, the Contractor will submit the following information to the TPOC prior to the pre-work conference for this contract:

- a. Contractor Representatives. List of names of Contractor Representatives.
- b. Work Schedules. Shall outline physical start and completion dates, as well as major milestones
- c. Accident Prevention Plan (APP). See EM 385-1-1 for the mandatory ENG Form 6293 (Accident Prevention Plan Worksheet).
- d. Warranty Management Plan: Shall be submitted and approved before final invoice is paid.
- e. Emergency Contacts. A prioritized list, including phone numbers, of those persons (normally Contractor Representatives) to call in case of emergencies.
- f. Operators. A list of names of qualified equipment/vehicle operators, including experience, training, and qualification to operate specific equipment.
- g. Certificate of Insurance.
- h. Performance Bond. (Where applicable)
- i. Security Requirements.
- j. Product Data
- k. Motor spec data
- l. Pump spec data
- m. Materials specifications
- n. Paint Color Samples

8. PERMITS AND LICENSES:

The Contractor will obtain, at own expense, any required licenses, permits or certifications necessary to perform the specified services. Required licenses, permits and certifications will be kept current during the period the work is performed. The Contractor is also responsible for all costs associated with the training of Contractor personnel to acquire and maintain valid licenses, permits or certifications

necessary to perform the contract services specified herein. The Contractor, Contractor personnel and any persons acting on behalf of the Contractor will comply with all applicable Federal, State, and local laws and regulations, including any subsequent changes to these laws and regulations.

Minimum Personnel and Training Requirements. The Contractor will provide an adequate number of fully trained and qualified personnel to perform the work specified herein. Contractor personnel will be properly trained to perform their assigned work in a safe and effective manner. Training will include but is not limited to instruction on the proper and safe use and operation of Contractor equipment and any Contractor provided tools, supplies and materials required to perform the specified services. Only properly trained and qualified employees will be used in the performance of services specified herein. The Contractor will also assume responsibility for training or Orienting Contractor personnel to perform the services specified in the contract. In the event the Contracting Officer or his/her Authorized Representative determines that the Contractor does not have a qualified employee performing the specified work, the Contractor will be required to provide qualified personnel or subcontract the work to a person or persons who are trained and qualified to perform the work. The Contractor acknowledges that the employment of undocumented migrant workers to perform services under this contract will not be permitted.

9. IDENTIFICATION OF CONTRACT EMPLOYEES AND VEHICLES:

All Contractor employees will be in good appearance while performing services. Employees must wear long pants, shirt with no vulgar or obscene graphics with at least sleeves equivalent of a t-shirt, and durable work type shoes. Vehicles and any motorized equipment utilized for transportation will be in good operating condition with no display of obscene or vulgar material such as stickers, flags, or etc. Vehicles will be maintained in accordance with federal, state, and local laws.

10. SAFETY REQUIREMENTS:

- a. General. Performance of all services will assure complete safety to public visitors, Contractor employees, and all other persons in the area. The Contractor will comply with any pertinent requirements contained in the Corps of Engineers Safety Manual (EM 385-1-1), current at the time of award and any subsequent revisions to that document. Furthermore, the Contractor will comply with pertinent occupational safety and health standards for general industry (29 CFR Part 1910) as required by the Occupational Safety and Health Administration (OSHA). If the Contractor fails or refuses to promptly comply with safety and security requirements as specified herein, the TPOC or any other project employee may stop all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to any such work stoppage will be made subject to any claims for extension of time or for excess costs or damages sustained by the Contractor. Also, the Contractor will not be paid for work not performed as a result of the stop order.
- b. The Contractor will comply with the Occupational Safety and Health Act (OSHA), the Corps of Engineers Manual, EM 385-1-1, https://www.publications.usace.army.mil/Portals/76/Publications/EngineerManuals/EM_385-1-1.pdf or latest version and as otherwise stated herein. Special attention will be given to the requirements for safety meetings.

The Contractor will inform the TPOC a minimum of 7 calendar days prior to a Contractor monthly safety meeting, to permit a government representative to attend.

- c. Accident Prevention Plan (APP). The Contractor will prepare an Accident Prevention Plan to assure that requirements of the safety program are provided as specified. This plan must be accepted by the Contracting Officer prior to commencement of any work. One copy of the Accident Prevention Plan will be provided to the Contracting Officer and the TPOC one week prior to the pre-work conference. The Accident Prevention Plan must be written in English and articulate the specific work, work process, equipment, and materials to be used, hazards pertaining to the contract work, and the control measures that will be implemented. Follow the mandatory ENG Form 6293 (Accident Prevention Plan Worksheet).
- d. Activity Hazard Analysis (AHA). The Contractor will use Activity Hazard Analyses (AHA's) as one of many tools to insure safe performance of work. It is the Contractor's responsibility to prepare

the AHA. Sample AHA's may be available at the project office for review and use by the Contractor to assist in the development of site-specific Activity Hazard Analyses prior to the Contractor performing the job. The Contractor is encouraged to revise or add to these sample AHA's as necessary to address changing conditions. Prior to performing jobs with inherent hazards, the Contractor will review, at a "Toolbox" safety meeting, the approved AHA's with those employees who will perform that work each time the work is ordered. The Government may request advanced notification of the time and date of the above AHA "Toolbox" safety meeting for Contractor employees so that the Government may attend such reviews.

The Government will require the Contractor to prepare an AHA for any jobs for which an adequate AHA does not already exist. A copy of this AHA will be submitted to the TPOC and must be accepted before the Contractor starts the job. This copy of the AHA will become the property of the Government. Guidance is included, which will be used by the Contractor as a guide for the preparation of required AHA's.

A copy of the approved AHA's will be available at all times to workers at each associated job site and a copy will be provided to the Government.

- e. Public Safety. The Contractor will ensure that reasonable precautions are taken to protect the public at all times where work is being performed. The Contractor will immediately report to the TPOC any potential hazards found by his employees on the project. The Accident Prevention Plan will include procedures to be taken to provide for public safety. Additionally, the Contractor will not allow any persons, except employees, into work areas that are not otherwise open to the public; nor will the Contractor transport in Contractor work vehicles any persons, except employees, during times the Contractor is on the project performing work under a contract.
- f. Personal Protective Apparel and Equipment. Protective apparel and equipment, as identified in the AHA, will be provided to eliminate or minimize hazards to personnel. As a minimum, each employee will wear a short-sleeved shirt, long trousers, and appropriate footwear during all contract work. Face shields, spectacles with side-shields, or goggles, and hearing protection will be worn by employees when required by safety manual. Fire extinguisher(s) and first aid kit(s) meeting the Safety Manual standards will also be provided and easily accessible to all employees.
- g. Contractor Employees Certified in First Aid & CPR. The Contractor will schedule employees, so the appropriate numbers of certified personnel are on duty to administer First Aid and CPR as required by the Safety Manual.

Copies of their certification will be provided in accordance with regulations. **Two people per crew will be trained in First Aid and CPR. Individuals working alone will be trained in First Aid.**

- h. Hazard Communication Program. The Contractor will be responsible for implementing a hazard communication program for Contractor employees, as required by the Safety Manual. The Contractor will provide Material Safety Data Sheets (MSDS) and/or Safety Data Sheets (SDS) for review by the TPOC prior to use of any hazardous substance on the project and provide a plan for the proper handling, transportation, storage, and usage of hazardous substances on the project.

11. REQUIRED SECURITY TRAINING AND PLANNING:

- a. General security requirements and guidance:
The security requirements described below apply to all contract personnel (including employees of the prime Contractor ("Contractor") and all subcontractor employees) supporting the performance requirements of this contract. The Contractor is responsible for compliance with these security requirements. Questions regarding security matters shall be addressed to the designated Government representative (e.g., Contracting Officer Representative (COR), Requiring Activity (RA) representative, or Contracting Officer (if a COR or other RA representative is not appointed)). Contract personnel are critical to the overall security and safety of US Army Corps of Engineers (USACE) installations, facilities and activities, and security awareness training contributes to those efforts. The Department of Defense (DoD) and Army security training requirements

specified below, if applicable, are performance requirements; all applicable contract personnel shall complete initial training within 30 days of contract award or the date new contract personnel begin performance on the contract. Within five business days from the completion of training, the Contractor shall provide written documentation (e.g., email or memorandum) to the Government representative. The documentation shall include the names of contract personnel trained and which training they completed; the Contractor shall maintain training records as part of their contract files and be prepared to provide copies of training certificates to the Government representative. Contractor personnel and vehicles are subject to search when entering federal installations. Additionally, all contract personnel shall comply with Force Protection Condition (FPCON) measures, Random Antiterrorism Measures (commonly referred to as "RAMs"), and Health Protection Condition (HPCON) measures. The Contractor is responsible for meeting performance requirements during elevated FPCON and/or HPCON levels in accordance with applicable RA plans and procedures—this includes identifying mission essential and non-mission essential personnel. In addition to the changes otherwise authorized by the changes clause of this contract, should the FPCON or HPCON levels at any individual facility or installation change, the Government may implement security changes that affect contract personnel. The Contractor shall ensure all contract personnel are aware of their security responsibilities, including any site-specific requirements identified in local policies or procedures.

b. **Physical security and access control requirements:**

All contract personnel requiring physical access to a federal installation or facility shall comply with the access control procedures of that location. Contract personnel requiring unescorted access to meet contract performance requirements on a DoD installation in the US shall be vetted by the installation/facility Provost Marshal/Directorate of Emergency Services/Security Office using the National Crime Information Center-Interstate Identification Index (commonly referred to as "NCIC-III") and Terrorist Screening Database (commonly referred to as "TSDB"). Contract personnel shall comply with all personal identity verification requirements specified in installation/facility policies and procedures.

Contract personnel who do not meet requirements for unescorted access to USACE facilities shall coordinate escorted access with the Government representative, as needed. Contract personnel who receive keys, access cards, or lock combinations that provide access to government-owned property shall comply with key and lock control procedures of the RA.

c. **Suspicious Activity Reporting training (e.g., iWATCH, CorpsWatch, or See Something, Say Something):**

All contract personnel shall receive initial and annual refresher training from the RA representative on the local suspicious activity reporting program. This locally developed training provides contract personnel with general information on suspicious behavior, and guidance on reporting suspicious activity to the project manager, security representative or law enforcement entity.

d. **Pre-screen candidates using E-Verify Program:**

Contractors shall comply with the requirements set forth in FAR clause 52.222-54 Employment Eligibility Verification and FAR Subpart 22.18 in using the E-Verify Program at (<https://www.e-verify.gov/>) (website subject to change) to meet the contract employment eligibility requirements. Contractors are encouraged to cooperate with Federal and State agencies responsible for enforcing labor requirements to include eligibility for employment under United States immigration laws in accordance with FAR 22.102-1(i). An initial list of verified/eligible candidates shall be provided to the COR no later than three business days after the initial contract award. When contracts are with individuals, the individuals will be required to complete a Form I-9, Employment Eligibility Verification, and submit it to the Contracting Officer to become part of the official contract file.

e. **SUPPLEMENTAL SECURITY REQUIREMENTS:**

All Contractors and subcontractor employee(s) working on this contract who require access to any Louisville District Lake Projects and Lock and Dam Projects shall receive authorization to be on site at these facilities based upon a favorable background investigation in accordance with "Homeland Security Presidential Directive 12: Policy for a Common Identification Standard for Federal Employees and Contractors" (HSPD 12). The Louisville District Security Management Office shall submit contractor(s) personal information to complete the basic background investigation in order to make a recommendation to the Contracting Office of an employee's suitability for work on Government property. The Procuring Contracting Officer (PCO) has the right to deny any contractor or subcontractor employee from working on the contract based upon the results of the background investigation provided by the Louisville District Security Office. The Government, Contractor, and subcontractors shall not permit any employee(s) access to drawings, blueprints, records, photos, sites, or projects until the Louisville District Security Management Office has completed an Operations Security (OPSEC) review of such items and determined they can be released.

FOR ALL LOUISVILLE DISTRICT CONTRACTS:

Contractors shall submit a complete investigation packet for each contractor and subcontractor employee to the Louisville District Security Management office within 10 working days after award of any contract, or prior to the individual being permitted access to Louisville District facilities.

The Contractor must also provide the following: (1) Name of the Contract Specialist with whom he/she is working, (2) Project Name, (3) Contract Number (4) Task Order Number when applicable, and (5) US Citizens Security Access Form each employee working on site must have a background investigation form submitted directly to the Louisville District Security Office.

The Contractor must provide a full legal name, complete SSN#, Date of Birth, Place of Birth (City and State) and Driver's license number if available. It is the Contractor's responsibility to ensure the above information is accurate and legible, otherwise delays may occur.

Contractors shall have background checks completed for their employees annually in the case of Contracts with an initial period of performance (POP) greater than 1 year and those Contracts with Options or Modifications Which Extend the POP beyond 1 year. For instance, if the employee was cleared in May of 2022, they shall be cleared again in May of 2023. It is the Contractor's responsibility to ensure that each employee's security is up to date. Failure to comply may lead to possible removal from the project/job site.

The Contractor must ensure if new employees are brought in to work on an existing Contract with the U.S. Army Corps of Engineers (USACE), they must process the employee through the Louisville District USACE Security Office for background purposes.

FOR CONTRACTORS REQUIRING DOD COMMON ACCESS CARDS (CAC):

The documents listed below are required: SF 85, Questionnaire for Non-Sensitive Positions (see <http://www.opm.gov/forms/> to print form). Fingerprints are captured electronically at the closest Army Recruiting Station to the contractor's home of record or at the USACE, Louisville District Security Office.

Contractor shall report any changes in personnel, or at any time conditions change at least 5 working days prior to individual(s) need to have access to the site. The Contractor shall provide the same information as listed above for all new employees.

Following submission of paperwork, the Louisville District Security Office will conduct an initial criminal check based upon the information provided. If there are no issues, the Louisville District Security Office will make recommendations to the PCO or their Designated Representative. The Louisville District Security Office cannot give approval due to unfavorable report(s). The Louisville District Security Office shall coordinate with Office of Counsel and will jointly make recommendations to the PCO and/or the Designated Representative should a background investigation come back with derogatory information. The PCO will make the determination whether to allow the Contractor personnel to work on the site based on Security and Office of Counsel recommendations, and the PCO will advise the Contractor of the decision.

FOREIGN NATIONALS:

The Contractor shall provide the package listed above, as well as additional materials noted below for all Foreign Nationals. The Contractor is to expect additional time in the approval process for all Foreign Nationals due to the level of review and elevation of the review to Headquarters staff to complete. All Foreign Nationals must comply with the following paragraph:

In accordance with Engineering Regulation 380-1-18, "Technology Transfer, Disclosure of Information and Contacts with Foreign Representatives" dated 1 August 1996, Section 4, all foreign nationals who work on Corps of Engineers' contracts shall be approved by the Headquarters US Army Corps of Engineers (HQ USACE) Foreign Disclosure Officer before beginning work on this contract; this regulation includes subcontractor employees. The Contractor shall submit to the Security Management Office, the names of all foreign nationals proposed for performance under this contract, along with documentation to verify legal admittance into the United States. Such documentation shall include at least one of the following: a U.S. passport, Certificate of U.S. Citizenship (INS Form N-560 or N-561), Certificate of Naturalization (INS Form N-550 or N-570), Alien Registration Card with photograph (INS Form I-151 or I-551), Employment Authorization Card (INS Form I-688A), etc.

In order to assure forms are properly completed, and to minimize time delays, the Contractor is encouraged to work closely with the Louisville District Security Office. The Government will return for correction incomplete forms, illegible forms, etc. which will delay the contractor / subcontractor from beginning work.

Security requirements are subject to change in accordance with HSPD-12, Office of Personnel Management, regulation, or policy changes, etc. The Government shall add any changes to security requirements by modification to the contract.

The Contractor shall contact the Louisville District Security Office by phone, letter, or email at the following numbers/addresses:

CELRL-SM
600 Martin Luther King Jr. Pl
Louisville, KY 40202

Primary Email: DLL-CELRL-Security-SM@usace.army.mil

Alternate (if no response in 72 hours):

James R. Milner, phone (502) 315-6916; James.R.Milner@usace.army.mil
Jason Almodovar, phone (502) 315-6754; Jason.Almodovar@usace.army.mil

12. ACCIDENT REPORTING:

The Contractor is responsible for reporting all accidents to the Project Manager immediately. Prompt action will be taken to ensure immediate and appropriate medical treatment. The Contractor will

maintain an accurate record of any accidents in the manner and on the forms prescribed by the Project Manager. For property damage accidents of \$2,000 or more, the Contractor will complete and submit to the Project Manager a copy of ENG Form 3394. The Contractor will maintain an OSHA 300 Log of On – The – Job injuries and first aid treatments.

The Contractor will also provide a monthly record of all exposure and accident experience incidental to the performance of services under the contract. This reporting requirement includes exposure and accident experience of both the Prime Contractor and any subcontractor(s). A Monthly Record of Work-Related Injuries/Illnesses & Exposure form will be available from the Project Manager. The Monthly Record of Work-Related Injuries/Illnesses & Exposure report will be provided to the Project Manager by the 5th working day of the month for the previous month.

13. DAMAGE REPORTS:

All instances where Government materials, supplies, property, and/or equipment are damaged will be reported immediately to the Project Manager. When the damage was caused by contract employees, a written report of the incident and extent of such damage will be submitted to the Project Manager, within 2 workdays (less weekends and holidays) of occurrence. For property damage accidents of \$2,000 or more the Contractor will complete and submit to the Project Manager a copy of ENG 3394.

14. CONTRACTOR EMPLOYEES' CONDUCT AND COMPETENCY:

All contract employees will conduct themselves in a proper and courteous manner at all times. Since the majority of work is performed in the presence of the general public, the conduct of all employees is critical and will be closely monitored. Contract employees will comply with all provisions of Title 36, Chapter III, Part 327, CFR and obey all posted signs and regulations in the performance of the work under this contract. Being under the influence of or consuming alcoholic beverages or controlled substances by the Contractor or employees while on duty is prohibited.

- a. Employee Dismissal. The Contractor expressly agrees to dismiss any employee or subcontractor employee whose continued employment is deemed by the Project Manager to be inconsistent with the best interests of the public or the U.S. Army Corps of Engineers. The KO or the Project Manager may require the Contractor to immediately remove from the work site any employee or subcontractor who is incompetent, endangers persons or property, or whose physical or mental condition would impair their ability to satisfactorily perform the work. Notification to the Contractor will be promptly made in writing if time and circumstances permit. Otherwise, notification will be verbal and confirmed in writing as soon as possible. No removal will reduce the Contractor's obligation to perform all work required under this contract nor be the basis for time extension. Immediate replacement of the employee will be made.

15. DAMAGE OR LOSS OF CONTRACTOR'S SUPPLIES AND PROPERTY:

The Contractor is responsible for taking the action necessary to protect Contractor supplies, materials and equipment, and the personal property of Contractor employees from loss, damage, or theft. The Government assumes no responsibility for theft, damage, etc., of the above. The Government is not responsible for providing storage areas or facilities for the storage of Contractor supplies, materials, and equipment.

With prior approval, the Project Manager may provide a location for the temporary storage of large equipment to prevent the transportation of such equipment to/from the work site while a particular service is being performed. However, the Government assumes no liability for the loss or destruction of Contractor equipment while it is stored on Government property.

16. SUPERVISION:

The Contractor is responsible for providing on-site supervision and quality control inspections of work performed under the contract. The level of supervision and inspections will be sufficient to assure

that services are performed in accordance with contractual requirements and all applicable Federal, state, and local laws and regulations. The Contractor or a Contractor Representative will personally supervise the work or be readily available by phone or other means of communication to respond to any contract issue that may arise when work is in progress. The Contractor Representative(s) will conduct overall management coordination and be the central point of contact with the Government for performance of all work under the contract.

Contractor Representative will have full authority to contractually commit the Contractor for prompt action on all matters pertaining to administration of this contract and will be the on-site Contractor employee who is responsible for safety.

The names and telephone numbers of all individuals authorized to act on behalf of the Contractor as Contractor Representatives will be submitted in writing to the TPOC before work is performed.

The Contractor will maintain copies of contract work requirements, specifications, Activity Hazard Analysis, etc., at each work site which relate to each person's work responsibilities and will review them to insure employees' comprehension of a job prior to initiating work.

17. ENVIRONMENTAL PROGRAM:

The Contractor will comply with Federal, State, and local laws, regulations, and standards regarding environmental protection. All environmental protection matters will be coordinated with the TPOC. Any of the facilities operated by the Contractor may be inspected by the TPOC, or other Federal, State, and local officials without advance notice. Access for inspection will be granted upon request.

Citations against Government facilities operated by the Contractor for non-compliance with environmental standards are a matter for resolution between the Government and the issuing office.

The Contractor will conduct all operations and maintenance activities in a manner to prevent contamination of Government land and property. The Contractor will ensure all lubricants, petroleum products, paints, cleaning materials, or any other hazardous substances are not spilled, leaked, or disposed of on Government property and are disposed of in accordance with environmental regulations. If spills or contamination occur, the Contractor will be responsible for cleanup and any associated costs in accordance with Federal, State and Local Law. Such spills will be reported to the TPOC immediately.

18. CONTRACT DISCREPANCY REPORT (CDR):

A CDR is a formal document used by the Government to process defects in services. As initially issued to the Contractor, the CDR describes the discrepancy or problem. The CDR will be discussed with the Contractor or his representative when it is issued. The Contractor will provide his written response on the CDR form within 24 hours of issuance. The Contractor's response must identify the cause and corrective action taken and Identify Contractor action to prevent recurrence.

Upon finalization of the CDR, the Contractor and the TPOC must sign the form. The Contractor will be given a copy of the completed form. Should the Contractor not concur with any decision, etc., the Contractor may so state, in writing, and request a final decision by the Contracting Officer. The Contracting Officer monitors all CDR's issued, and CDR's are the principal evidence used by the Contracting Officer in determining Government contract actions such as termination or decision not to exercise options.

19. MEETINGS:

The Contractor is required to attend a pre-work meeting to be scheduled by the TPOC. The Contractor or his authorized representative will report each month with the schedule and location determined by the TPOC to discuss contract work items. Specific topics of discussion at the Monthly meetings may include issuing inspections, quality control, and upcoming work. If a CDR is issued,

mutual effort will be made to resolve any and all problems identified to preclude their recurrence. The TPOC may alter this reporting schedule, or change the reporting method, time, or place if mutually agreeable between the TPOC and the Contractor. A tour of the work site will be conducted following the discussions. It is recommended that the Contractor's on-site representative or superintendent also attend this meeting. During the pre-work conference, the Contractor will also provide any required submittals not previously submitted.

20. QUALITY CONTROL:

The Contractor will have a Quality Control program to assure the requirements of the contract are provided as specified. The primary purpose of Quality Control is to identify and correct deficiencies in the quality of services performed before the level of performance is unacceptable.

The program will include, but not be limited to the following:

- a. An inspection system covering all the services stated in the contract specifications.
- b. A method of identifying and correcting deficiencies in the quality of services performed before the level of performance is unacceptable.
- c. A file of all inspections conducted by the Contractor and the corrective actions taken. These files will be made available for inspection upon request by the TPOC.
- d. A method of insuring that employees have full knowledge of work assignments, and that appropriate technical expertise is utilized with each work assignment.
- e. A method of coordinating each work crew's activities with the TPOC and/or inspector.

The Contractor may use any or all portions of this plan to prepare a plan of his own. A signed plan, including Contractor specific information, will be provided to the Contracting Officer and the TPOC, and accepted, prior to the Pre-Work Conference. If changes to this program occur, updated copies will be provided to the Contracting Officer and TPOC. Failure to provide appropriate Quality Control may result in issuance of a CDR, and/or termination of the contract.

21. QUALITY ASSURANCE:

The Government will monitor the Contractor's performance in each functional area under this contract and reserves the rights to use whatever additional surveillance procedures are deemed appropriate. The Government will keep a record of all complaints received by the public concerning Contractor performance. Upon receipt of a written complaint by the public, the Government will attempt to verify the complaint and furnish the Contractor a copy of the findings. Should the Government verification reveal a nonperformance by the Contractor, a CDR may be issued.

A Government employee shall not be considered an Inspector unless he identifies himself as such to the Contractor, the Contractor Representative, or Quality Control Inspector. No Inspector is authorized to change any provision of the specifications without written authorization of the Contracting Officer, nor shall the presence or absence of an inspector relieve the Contractor from any requirements of the Contract.

22. DEFICIENCIES:

If the Contractor fails to perform, or if performance in any area is judged unsatisfactory by the TPOC, the Government will take corrective action. If any of the services do not conform to contract requirements, the Government may require the Contractor to perform the services again in conformity with contract requirements, at no cost to the Government.

23. INTERRUPTIONS TO SYSTEMS:

Contractor will coordinate with Lake Project Manager or TPOC so that the contractors work will not interrupt the projects mission. Any authorized interruptions will be kept to an absolute minimum, and all repairs or replacements of equipment or components will be accomplished in an expeditious and efficient manner.

24. GOVERNMENT FURNISHED MATERIALS AND EQUIPMENT:

Forms: All Department of Defense forms, required by the Government to be used under this contract, will be provided by the Government during the contract period. The Government reserves the right to modify or supersede these forms during the contract period.

Control: The Contractor will provide control to ensure Government furnished equipment, property, or items are utilized only for contract purposes. Any work to be performed within these facilities must be performed during regular working hours when Government employees are available to unlock these facilities for the Contractor.

Safety Manual: Prospective contractors may review a copy of the Safety and Health Requirements Manual EM 385-1-1 at the Project Office. The Contractor can find a copy of Safety Manual EM 385-1-1 online at: https://www.publications.usace.army.mil/Portals/76/Publications/EngineerManuals/EM_385-1-1.pdf

Latest revision is dated 15 March 2024.

25. CONTRACTOR FURNISHED ITEMS:

General: The contractor will furnish all personnel, equipment, fuel, tools, supplies and materials necessary. The contractor's work and responsibility will include all planning, programming, administration, management, supervision, communications, and inspection necessary to assure that all work is conducted in accordance with the contract requirements and all applicable Federal, State and Local laws and regulations.

Equipment: The Government requires, that the Contractor provide adequate equipment to perform the work required within the specified time period. Also, all equipment used by the Contractor must meet safety requirements outlined in EM 385-1-1.

Contractor Equipment and Supply Inspection: The apparent Contractor will make available for inspection all service equipment, tools, and samples of supplies he proposes to use for work under this contract, along with proof of ownership or lease agreement.

26. SAFEGUARDING GOVERNMENT PROPERTY:

The Contractor will cooperate with Government personnel in safeguarding Government property. The Contractor will be responsible for promptly reporting all acts of vandalism, larceny, or pilferage to Government property, and malfunctioning Government equipment to the TPOC. The Contractor will establish security procedures and safeguards that are compatible with the Government's existing procedures, to protect all equipment, materials, supplies, tools, and other resources. The Contractor will cooperate with, and provide any assistance necessary to, the Government during any audits, usage checks of expendable property, and inventories of nonexpendable property under control of the Contractor. Any item of value found on the work sites will be placed into the custody of the TPOC for return to the owner if ownership can be established. The Contractor will inform the TPOC of any information he or his employees receive about lost and/or found articles from the public.

27. MINIMUM MANPOWER REQUIREMENTS:

The Contractor will provide an adequate number of fully qualified personnel to perform the work specified herein. Personnel required to handle emergency situations will be available on call, 24 hours per day, 7 days per week. At least 50 percent of the cost of contract performance incurred for personnel will be expended for employees of the primary contractor.

28. MINIMUM PERSONNEL QUALIFICATIONS:

Employees, technical personnel, and consultants will have the education, experience, or knowledge, as evidenced by license, certificate, or diploma, etc., to provide a comprehensive understanding of the systems and components. All employees will be subject to such Government or other applicable regulations that are applicable during the time spent on Government property. If the TPOC decides the Contractor employee performing the specified work is unqualified, the Contractor will immediately provide qualified personnel to accomplish the work.

29. VETERANS EMPLOYMENT EMPHASIS FOR U.S. ARMY CORPS of ENGINEERS CONTRACTS

In addition to complying with the requirements outlined in FAR Part 22.13, FAR Provision 52.222-38, FAR Clause 52.222-35, FAR Clause 52.222-37, DFARS 222.13 and Department of Labor regulations, U.S. Army Corps of Engineers (USACE) contractors and subcontractors at all tiers are encouraged to promote the training and employment of U.S. veterans while performing under a USACE contract. While no set-aside, evaluation preference, or incentive applies to the solicitation or performance under the resultant contract, USACE contractors are encouraged to seek out highly qualified veterans to perform services under this contract. The following resources are available to assist USACE contractors in their outreach efforts:

- U.S. Department of Labor Veterans' Employment and Training Service (VETS): <https://www.dol.gov/vets/>
- Federal Veteran Employment Information: <https://www.fedshirevets.gov/>
- Veterans Opportunity to Work (VOW) Program: <https://www.benefits.va.gov/vow/>
- U.S. Army Warrior Transition Command Employment Index: <https://wct.army.mil/modules/employers/index.html>
- Hiring Our Heroes: <https://www.uschamberfoundation.org/hiring-our-heroes>

30. COOPERATION WITH OTHER CONTRACTORS, LESSEES, AND VOLUNTEERS:

The Contractor will fully cooperate with such other Contractors, lessees, volunteers, and Government employees. The Contractor will not commit or permit any act which will interfere with the performance of work by another Contractor, volunteer, lessee, or Government employee. The TPOC can alter the work schedules of the other Contractor, lessee, Government employees, volunteer, or the Contractor to avoid possible conflicts. Any such change (or failure to make such a change) by the TPOC will not be the basis for a claim by the Contractor.

31. REPORTS:

The Contractor shall, in an accurate and timely manner, prepare all reports, forms, permits etc., as required in this contract. A partial list of these reports, forms, permits, etc., follows:

- a. Supplies Furnished and Used
- b. Contractor Portion of Any CDR
- c. Checklists Worksheet (ENG Form 5007-R)
- d. Vehicle Operational Record Form (CEORH Form 2813 Test)
- e. Activity Hazard Analysis (AHA)
- f. OPSEC Training

The Contractor shall report ALL contractor labor hours (including subcontractor labor hours) required for performance of services provided under this contract for US Army Corps of Engineers, Louisville District (UIC W07202) via a secure data collection site. The Contractor is required to completely fill in all required data fields using the following web address: <https://www.sam.gov/>.

Reporting inputs will be for the labor executed during the period of performance during each Government fiscal year (FY), which runs October 1 through September 30. While inputs may be reported any time during the FY, all data shall be reported no later than October 31 of each calendar year, beginning with 2021. Contractors may direct questions to the help desk at help desk at: <https://www.sam.gov/>.

32. APPLICABLE PUBLICATIONS:

Performance of all services will assure complete safety to public visitors, Government employees, contractor employees, and all other persons in the area. The contractor will comply with any pertinent requirements contained in the Corps of Engineers Safety Manual (EM 385-1-1), https://www.publications.usace.army.mil/Portals/76/Publications/EngineerManuals/EM_385-1-1.pdf current at the time of award.

The Contractor will perform technical work in accordance with applicable publications. They include but are not limited to:

MANUFACTURER'S RECOMMENDATIONS:

- a. Operating Manuals
- b. Repair Manuals
- c. Maintenance Manuals

INDUSTRIAL STANDARDS AND CODES (Latest Editions):

- Underwriter's Laboratories, Inc.
- National Electrical Code
- National Warm Air & Air Conditioning Association
- National Association of Fan Manufacturers
- National Fire Protection Association
- Sheet Metal Manufacturers
- American Welding Society
- American National Standards Institute
- American Concrete Institute
- Portland Concrete Association
- Asphalt Institute
- American Institute of Steel Construction
- National Association of Architectural Metal
- Manufacturers Architectural Aluminum Manufacturers Association
- The Aluminum Association
- American Society for Testing and Materials
- Flat Glass Marketing Association
- American Association of Nurserymen, Inc.
- OSHA Safety Standards
- Uniform Plumbing Code
- International Plumbing Code

33. WARRANTY:

The contractor warrants that products and work performed under this contract is free of defects on materials and workmanship for work performed by the contractor or supplier for a period of 1 year from the date the Government takes possession. Any equipment, supply, or material that has a manufacture warranty will be provided to the TPOC before or upon completion date.

34. WAGE RATES:

Department of Labor wage rates apply to this work and are included. The contractor is required to provide payroll documents for all work performed under this contract.

35. DEFINITIONS:

As used throughout this description/specification, the following terms will have the meaning set forth below:

Completion Date. All work must be completed by the completion date.

Contractor. The term Contractor refers to the prime Contractor, subcontractors, and all Contractor employee and personnel. The prime contractor will be responsible for ensuring all subcontractors comply with the provisions of this contract.

Contractor Quality Control Inspector (QCI). Person designated by the Contractor to perform the Contractor's Quality Control program. A QCI will be responsible for implementing the Contractor Accident Prevention Plan and will have the authority to determine for the Contractor if work is ready for government inspection and make decisions for the Contractor on re-performance.

Contractor Representative (CR). Individual(s) selected to represent the interests of the Contractor with regards to all matters and activities involving this contract and will be the onsite Contractor employee who is responsible for safety.

Contracting Officer (KO). A person with the authority to enter into, administer, and/or terminate contracts for the Government, and make related determinations and findings. The term includes certain authorized representatives of the Contracting Officer.

Technical Point of contact (TPOC). Person designated as the authorized representative of the Contracting Officer.

EM 385-1-1. Corps of Engineers Safety and Health Requirements Manual, located on the web at https://www.publications.usace.army.mil/Portals/76/Publications/EngineerManuals/EM_385-1-1.pdf or latest version. Click on Organization, then Safety and Occupational Health, then Publications.

Inspector. Individual designated by the TPOC to perform Quality Assurance.

Policing. The picking up of trash, debris, ashes, garbage, and miscellaneous waste, and disposing of the same in accordance with contract specifications.

Quality Assurance. A method used by the Government to provide a measure of control over the quality of services provided by the Contractor.

Quality Control. A method used by the Contractor to control the quality of services he/she provides for the Government.

Project Manager. A uniformed individual designated responsibility for overseeing the general operation, and administration of the project. i.e., Project Manager, Maintenance Leader.

Trash. A variety of unsalvageable waste material such as metal, glass, rags, tin cans, rubbish, plastic bottles, paper, wrappings, containers, cartons, and similar material.

36. INDEX OF EXHIBITS:

Exhibits	Description
Exhibit A	Site Map
Exhibit B	Sample Form
Exhibit C	Quality Control Plan Sample
Exhibit D attached)	Project photos and drawing (see

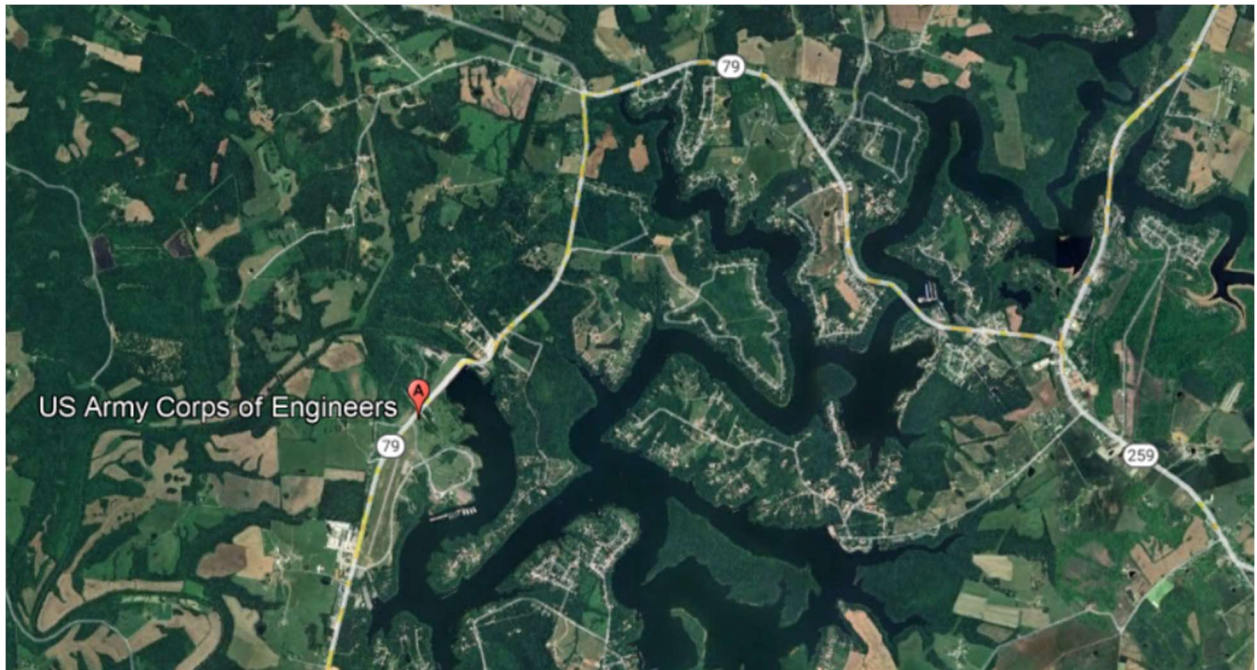


EXHIBIT A: Site map

U.S. Army Corps of Engineers, Louisville District
ACTIVITY HAZARD ANALYSIS (AHA)
 The proponent agency is CELRL-SO.

Activity Date:		Contract Num:		Project Site:																															
Overall Risk Assessment Code (RAC) (Use highest code)			Prepared by:		Date Prepared:																														
Reviewed By (USACE):		Job:		Phone:																															
Remarks By Reviewer: 																																			
Recommended Protective Clothing & Equipment:			E = EXTREMELY HIGH RISK H = HIGH RISK M = MODERATE RISK L = LOW RISK Probability <table border="1" style="font-size: 0.8em;"> <tr> <th></th> <th>FREQUENT</th> <th>LIKELY</th> <th>OCCASIONAL</th> <th>SELDOM</th> <th>UNLIKELY</th> </tr> <tr> <td>Catastrophic</td> <td>E</td> <td>E</td> <td>H</td> <td>H</td> <td>M</td> </tr> <tr> <td>Critical</td> <td>E</td> <td>H</td> <td>H</td> <td>M</td> <td>L</td> </tr> <tr> <td>Marginal</td> <td>H</td> <td>M</td> <td>M</td> <td>L</td> <td>L</td> </tr> <tr> <td>Negligible</td> <td>M</td> <td>L</td> <td>L</td> <td>L</td> <td>L</td> </tr> </table>				FREQUENT	LIKELY	OCCASIONAL	SELDOM	UNLIKELY	Catastrophic	E	E	H	H	M	Critical	E	H	H	M	L	Marginal	H	M	M	L	L	Negligible	M	L	L	L	L
	FREQUENT	LIKELY	OCCASIONAL	SELDOM	UNLIKELY																														
Catastrophic	E	E	H	H	M																														
Critical	E	H	H	M	L																														
Marginal	H	M	M	L	L																														
Negligible	M	L	L	L	L																														
☐ Gloves 05.A.08	☐ Safety Glasses 05.B.01																																		
☐ Hard Hat 05.D.01	☐ Fall Protection 05.H																																		
☐ Safety Boot 05.E	☐ Reflective Vests 05.F																																		
☐	☐																																		
☐	☐																																		

	Job Steps	Hazards	Actions to Eliminate or Minimize Hazards	EM 385-1-1 (PARA REF)	RAC
-					
-					

	EQUIPMENT	TRAINING	INSPECTION
-			
-			

	COMPETENT/QUALIFIED PERSON(S) - SIGNATURE	TITLE	DATE
-			
-			

	Personnel Involved - SIGNATURE	TITLE	DATE
-			
-			

REVIEWER (Last, First MI)	DATE (YYYYMMDD)	REVIEWER'S SIGNATURE
		X

EXHIBIT C: Quality Control Plan Sample

Prior to beginning work, each employee will be trained to perform the task he or she has been hired to perform. This training will consist of a review and thorough explanation of the contract specifications and requirements, followed by 'on-the-job' training to ensure that the contract requirements are understood. All members of a crew will be cross-trained, so that they understand all aspects of a particular type of work. Following training, each employee will be provided with a checklist of work that they are required to perform, which will serve to ensure that all aspects of a particular job are completed on time. The employee will mark each item as it is completed (with completion time), and will sign and date each sheet to ensure accountability for completed work.

Prior to start of the contract, the Contractor will designate a Quality Control Inspector (QCI) in writing. The designated QCI will perform inspections of completed work as soon as possible to ensure that the work meets contract specifications. The inspection schedule will depend on the type of work being completed; items of a routine nature will be inspected based on a random or planned sampling schedule. 100% of unusual items, items which are more important, or highly visible items will be inspected.

Allowable reject levels for all items of work will be zero.

Upon discovery of any deficiency, corrective action will be initiated immediately. The QCI will immediately either correct the deficiency personally, direct another employee to correct the deficiency, or direct the employee who marked the item as 'complete' to correct the deficiency. The QCI will meet with the employee who was responsible for initial completion of the work and review contract specifications for the work which was inadequately performed. The QCI will determine what actions caused the inadequate work and take immediate steps to ensure that the work is correctly performed the next time it is scheduled.

A Quality Control Inspection Report will be completed by the QCI for each day's work. This report will document what work was completed, what facilities were inspected, the time the inspections were performed, and the results of these inspections. This report will also document any deficiencies noted during inspections and corrective actions taken on deficiencies. This report will be provided to the Corps of Engineers the same day the work is scheduled, or the next morning prior to 9:00 a.m. by e-mail, fax, or in person.

If a Contract Discrepancy Report (CDR) is issued by the government, the Contractor will review the CDR with the QCI within one day of receipt of the CDR, and will meet with the Corps of Engineers representative as soon as possible. Prior to meeting with the Corps representative, the Contractor will meet with the QCI and the individual/crew responsible for completing the work to determine the cause of the contract discrepancy and what actions will be required to prevent any reoccurrence. The Contractor will document these actions on the CDR for submittal to the government.

The contractor will modify these procedures as required to ensure that contract specifications are met.

EXHIBIT D: Project Photos and Drawing (see attached)