

Location Maps

ODNR DNAP SCENIC RIVERS NOTE:

Raccoon Creek is a designated ODNR scenic river. Matthew Smith, Assistant Regional Scenic River Manager, shall be invited to the preconstruction meeting between the contractor and NRCS. Matthew Smith shall be notified of the project start date one week prior to the commencement of work. Periodic inspection of the project by Matthew Smith may take place. Matthew Smith shall be contacted one week prior to the completion of the project. Matthew Smith can be contacted at matthew.smith@dnr.ohio.gov and/or 440-225-5582.

IN-WATER-WORK NOTE

In-water work is restricted between March 15 – June 30. Construction activities shall be performed during low flow conditions to the greatest extent practicable.

TREE CLEARING RESTRICTIONS NOTE

All tree clearing must occur between October 1 and March 31. For the purposes of this note, a tree is defined as having a trunk 3 inches or greater in diameter at a height of 4.5 feet above the ground surface, and a minimum height of 15 feet.

EXCESS SPOIL MATERIAL NOTE

Excess or unsuitable material encountered during excavation shall not be spoiled or graded within the floodplain.

SPECIAL NOTE

IF POTENTIAL CULTURAL RESOURCE ITEMS ARE DISCOVERED DURING CONSTRUCTION, IMMEDIATELY STOP WORK AND NOTIFY THE CULTURAL RESOURCES COORDINATOR AT 614-255-2487.

SURVEY COORDINATE SYSTEM AND DATUM

All coordinates and elevations are measured on the NAD83 2011 Ohio State Plane South coordinate system and NAVD88.


NOTICE TO LANDOWNERS AND EXCAVATORS

LANDOWNERS OR OPERATORS, SPONSORING ORGANIZATIONS, AND CONTRACTORS ARE LIABLE FOR ANY DAMAGE RESULTING FROM DISRUPTION OF A UTILITY SERVICE CAUSED BY CONSTRUCTION ACTIVITIES. NRCS MAKES NO REPRESENTATION ON THE EXISTENCE OR NON-EXISTENCE OF UTILITIES ON THIS SITE.

EXCAVATOR MUST NOTIFY ALL UTILITIES AT LEAST 48 HOURS, AND NOT MORE THAN 10 DAYS, PRIOR TO THE PLANNED COMMENCEMENT OF EXCAVATION.

CALL OHIO811 (1-800-362-2764 OR 811) FOR A LISTING OF OUPS AND OGPUPS MEMBERS AND LIMITED BASIS PARTICIPANT MEMBERS.

GALLIA COUNTY

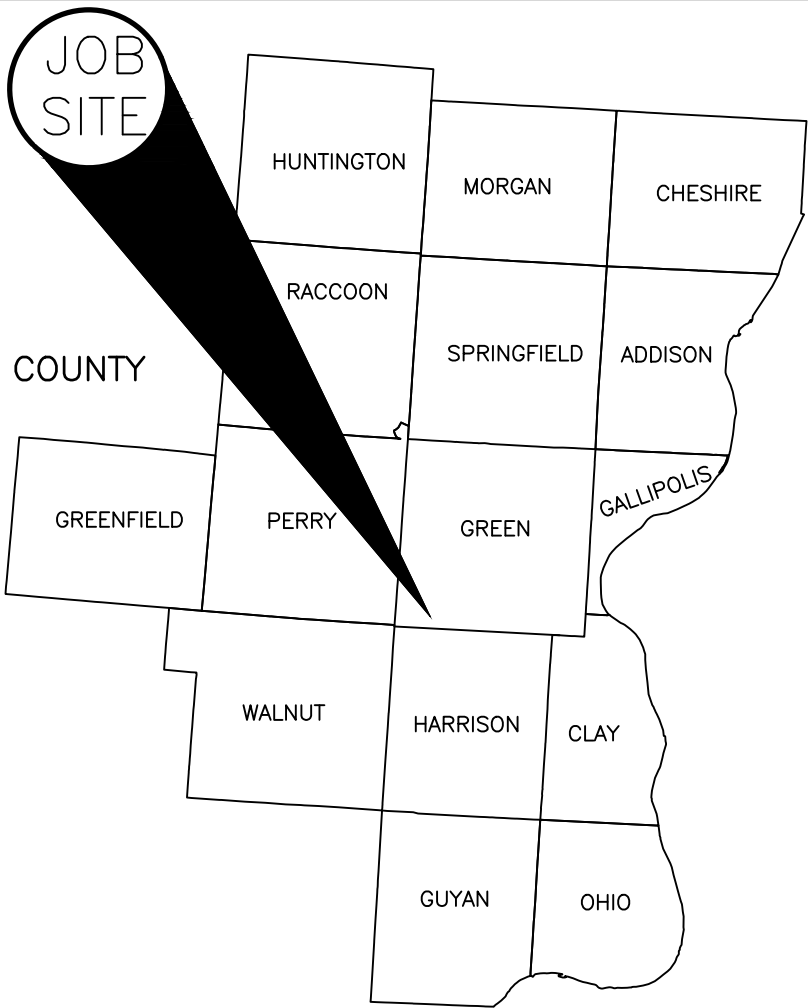

NOTES FOR UTILITIES LOCATED WITHIN THE CONSTRUCTION AREA:

- NRCS and Sponsor have arranged to have the overhead utility lines temporarily moved to allow vertical space for pile driving equipment. Buckeye Rural Electric Coop to temporarily move the line and return it to it's original position after construction. Buckeye Rural Electric Coop shall be contacted by the contractor at minimum 30 days prior to the start of construction to coordinate the temporary relocation of the power line.
- Gallia Rural Water has a water main located along the west side of Blessing Rd. In addition to the initial locate, Gallia Rural Water shall be contacted via phone at 740-446-9221 at minimum 2 working days prior to the start of construction and at minimum 2 working days prior to the start of sheet pile vibration.

UTILITIES AT EXCAVATION SITE				
OHIO I.D.# A407300596_REV 00A				
UTILITY INFORMATION 1/				
NAME	ADDRESS	PHONE NUMBER	NO REPLY	OUPS MEMBER & LIMITED BASIS PARTICIPANT
Gallia Rural Water	542 Burnett Rd. Gallipolis, OH	(740) 446-9221		X
AT&T	150 E Gay St, Columbus, OH	(800) 288-2020		X
Buckeye Rural Elec. Co-Op	PO Box 200 Rio Grande, OH	(877) 567-9649		X
1/ IF NO UTILITIES ARE IDENTIFIED IN THE WORK LIMITS, CHECK THIS BOX → ☐				

SHEET INDEX

Sheet No.	TITLE
1	COVER SHEET
2	PLAN VIEW
3	WORK LIMITS
4	SHEET PILE PROFILE
5	PILE TABLE
6-9	CROSS SECTIONS
10	DETAILS
11	EROSION CONTROL BLANKET

BLESSING ROAD EWP
COVER SHEET


GREEN TWP

GALLIA COUNTY, OHIO

Dated	01/25
Designed	Logan Veley
Drawn	Logan Veley
Checked	J. Adine-Kuchta/G. Wells
Approved	BLAKE ARTHUR
Digitally signed by BLAKE ARTHUR Date: 2025.05.08 16:44:18 -0400	


 United States Department of Agriculture Natural Resources Conservation Service	Job Class VI
	Drawing No. Blessing Rd EWP_2025
	Sheet 1 of 11

- NOTES:
1. Construction equipment shall not be driven within 5' of the road-side face of the sheet pile wall.
 2. Racoon Creek frequently experiences recreational use. Equipment, materials, and the construction site shall be left in a safe configuration when NRCS and contractors are not present on site.

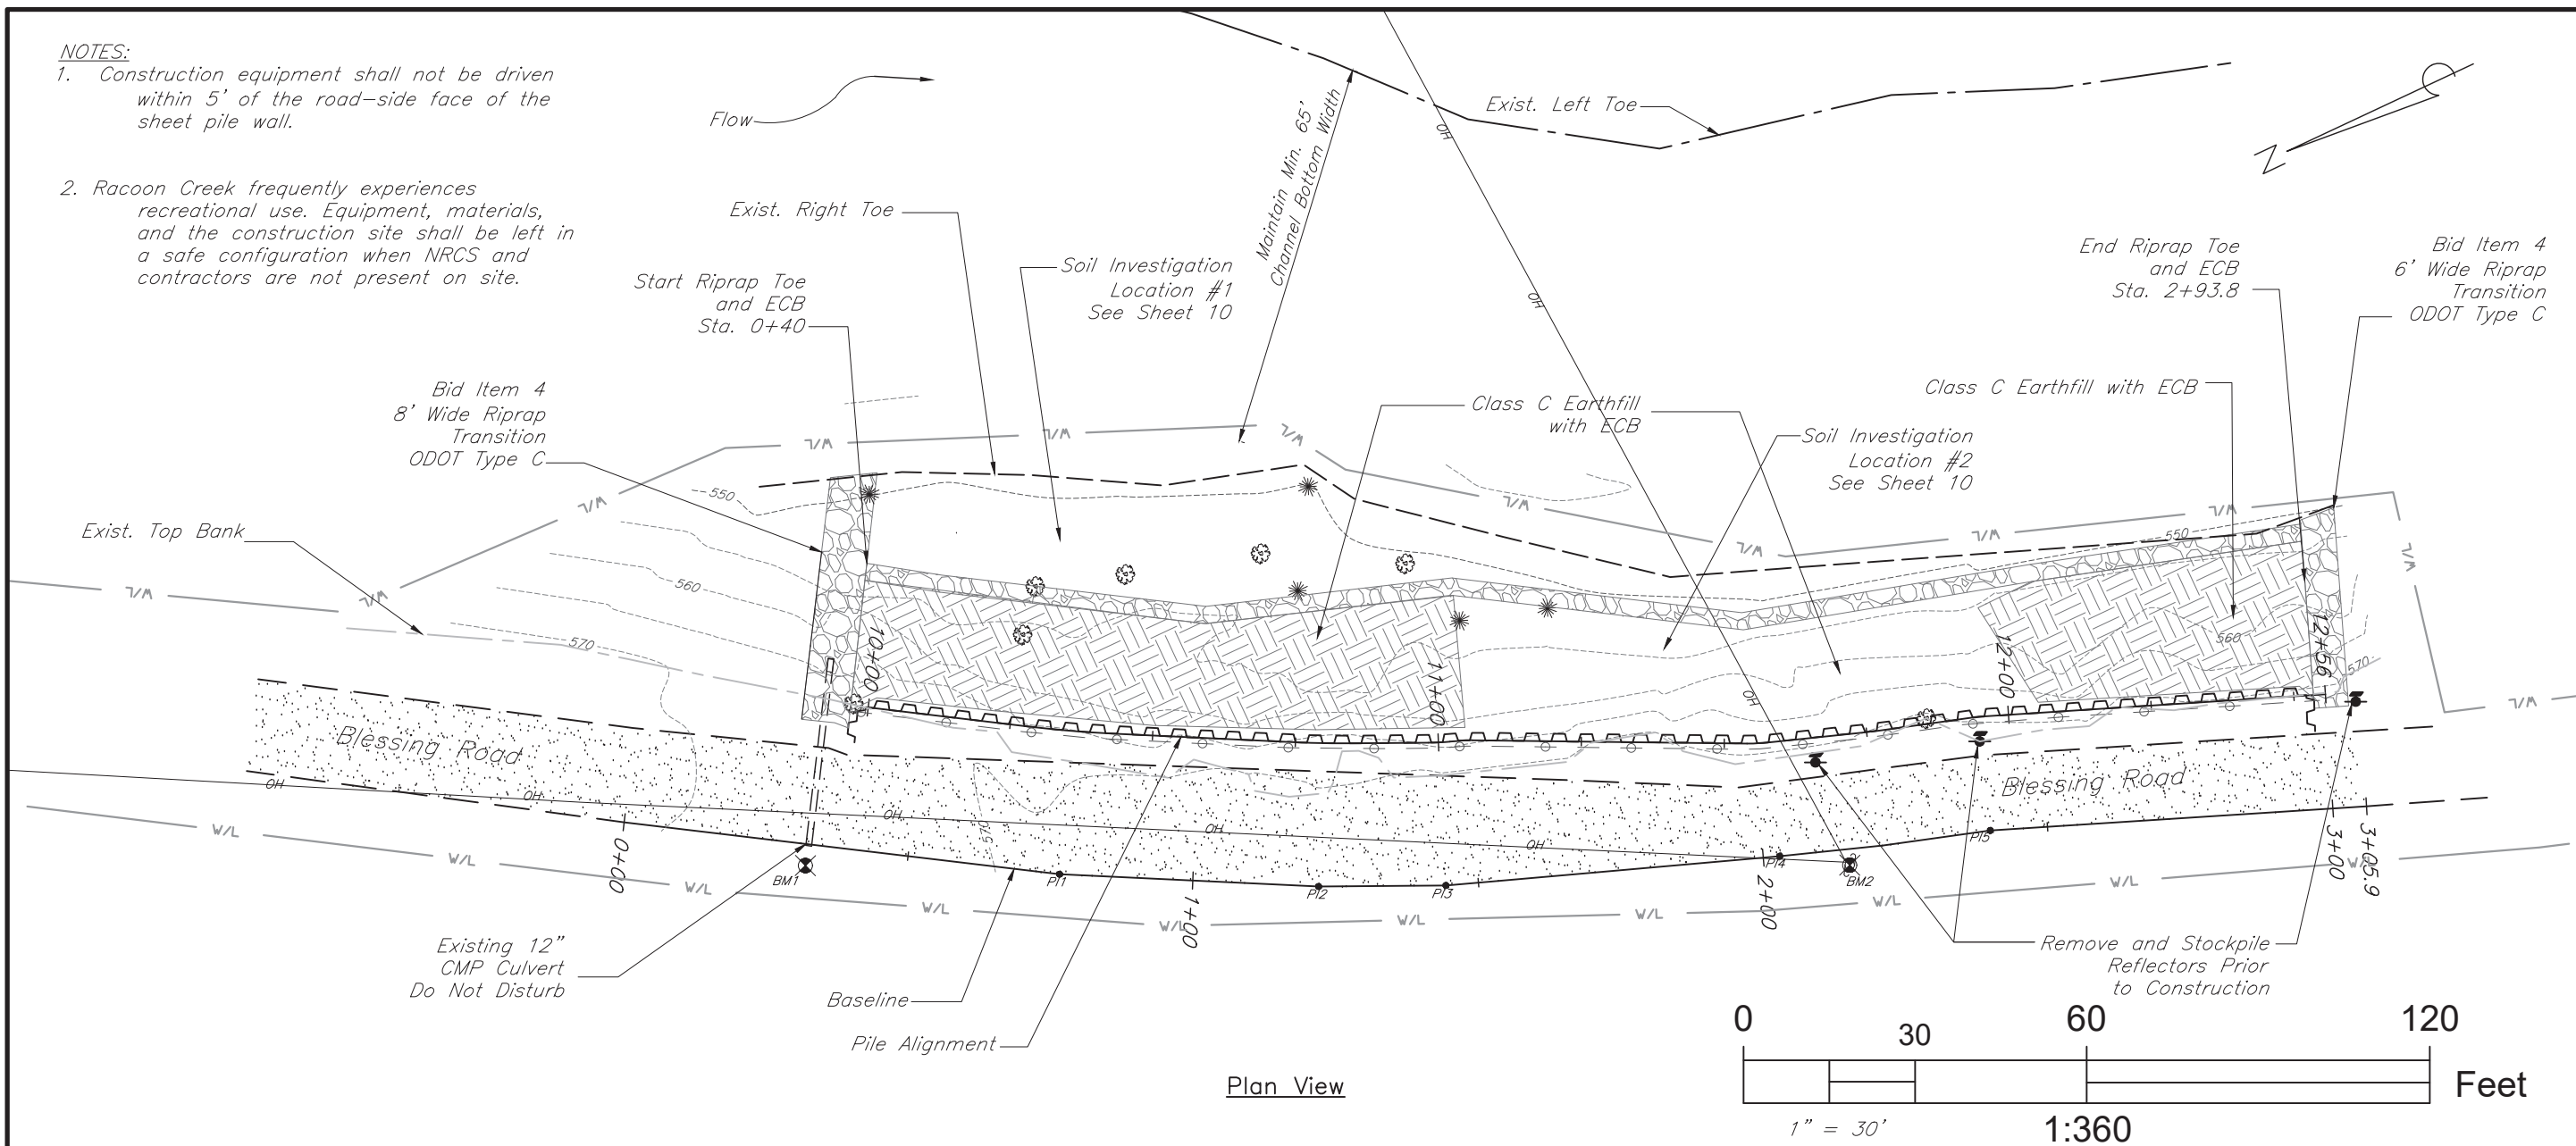

Plan View

LEGEND

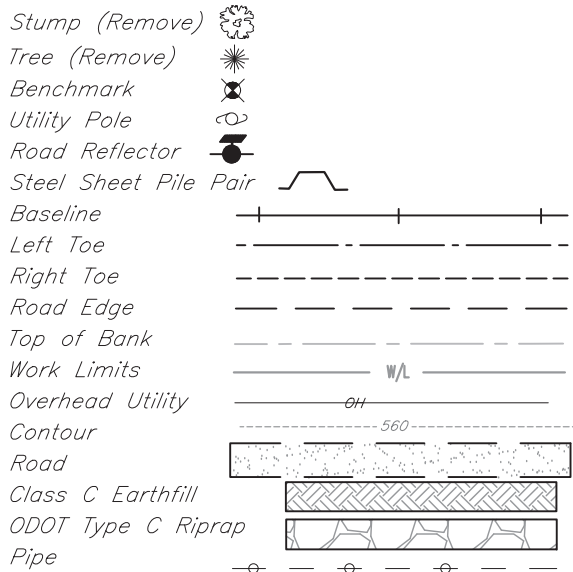

BASELINE LAYOUT POINTS

POINT	STATION	NORTHING	EASTING	DESCRIPTION
BL1	0+00	278,396.4	2,020,770.4	Begin Baseline
BL2	3+05.9	278,119.1	2,020,644.2	End Baseline
PI1	0+76.6	278,331.3	2,020,729.9	P.I. #1
PI2	1+22.0	278,291.1	2,020,708.9	P.I. #2
PI3	1+44.3	278,270.8	2,020,699.6	P.I. #3
PI4	2+03.0	278,215.8	2,020,679.6	P.I. #4
PI5	2+39.9	278,180.5	2,020,668.1	P.I. #5

BENCHMARK AND BASELINE DESCRIPTION

BM1 - Hub near the culvert inlet on west side of Blessing Rd., 2' right of baseline Sta. 0+32. Marked with stake and white ribbon.

Northing - 278,370.9
Easting - 2,020,750.2
Elevation - 569.30

BM2 - Nail driven in north side of utility pole on west side of Blessing Rd., 2' right of baseline Sta. 2+14. Marked with stake and white ribbon.

Northing - 278,205.4
Easting - 2,020,673.0
Elevation - 573.52

Additional benchmark can be set by the NRCS engineer upon request.


BASELINE: West edge of road along Blessing Road. Baseline begins at Sta. 0+00 and extends to approx. Sta. 3+06 at south end of work area. See table on this sheet for layout data.

Date	01/25
Designed	Logan Veley
Drawn	Logan Veley
Checked	J. Adine-Kuchta/G. Wells
Approved	BLAKE ARTHUR

BLESSING ROAD EWP
PLAN VIEW
GREEN TWP
GALLIA COUNTY, OHIO

United States Department of Agriculture
USDA
Natural Resources Conservation Service

File No.
Drawing No.
Sheet 2 of 11

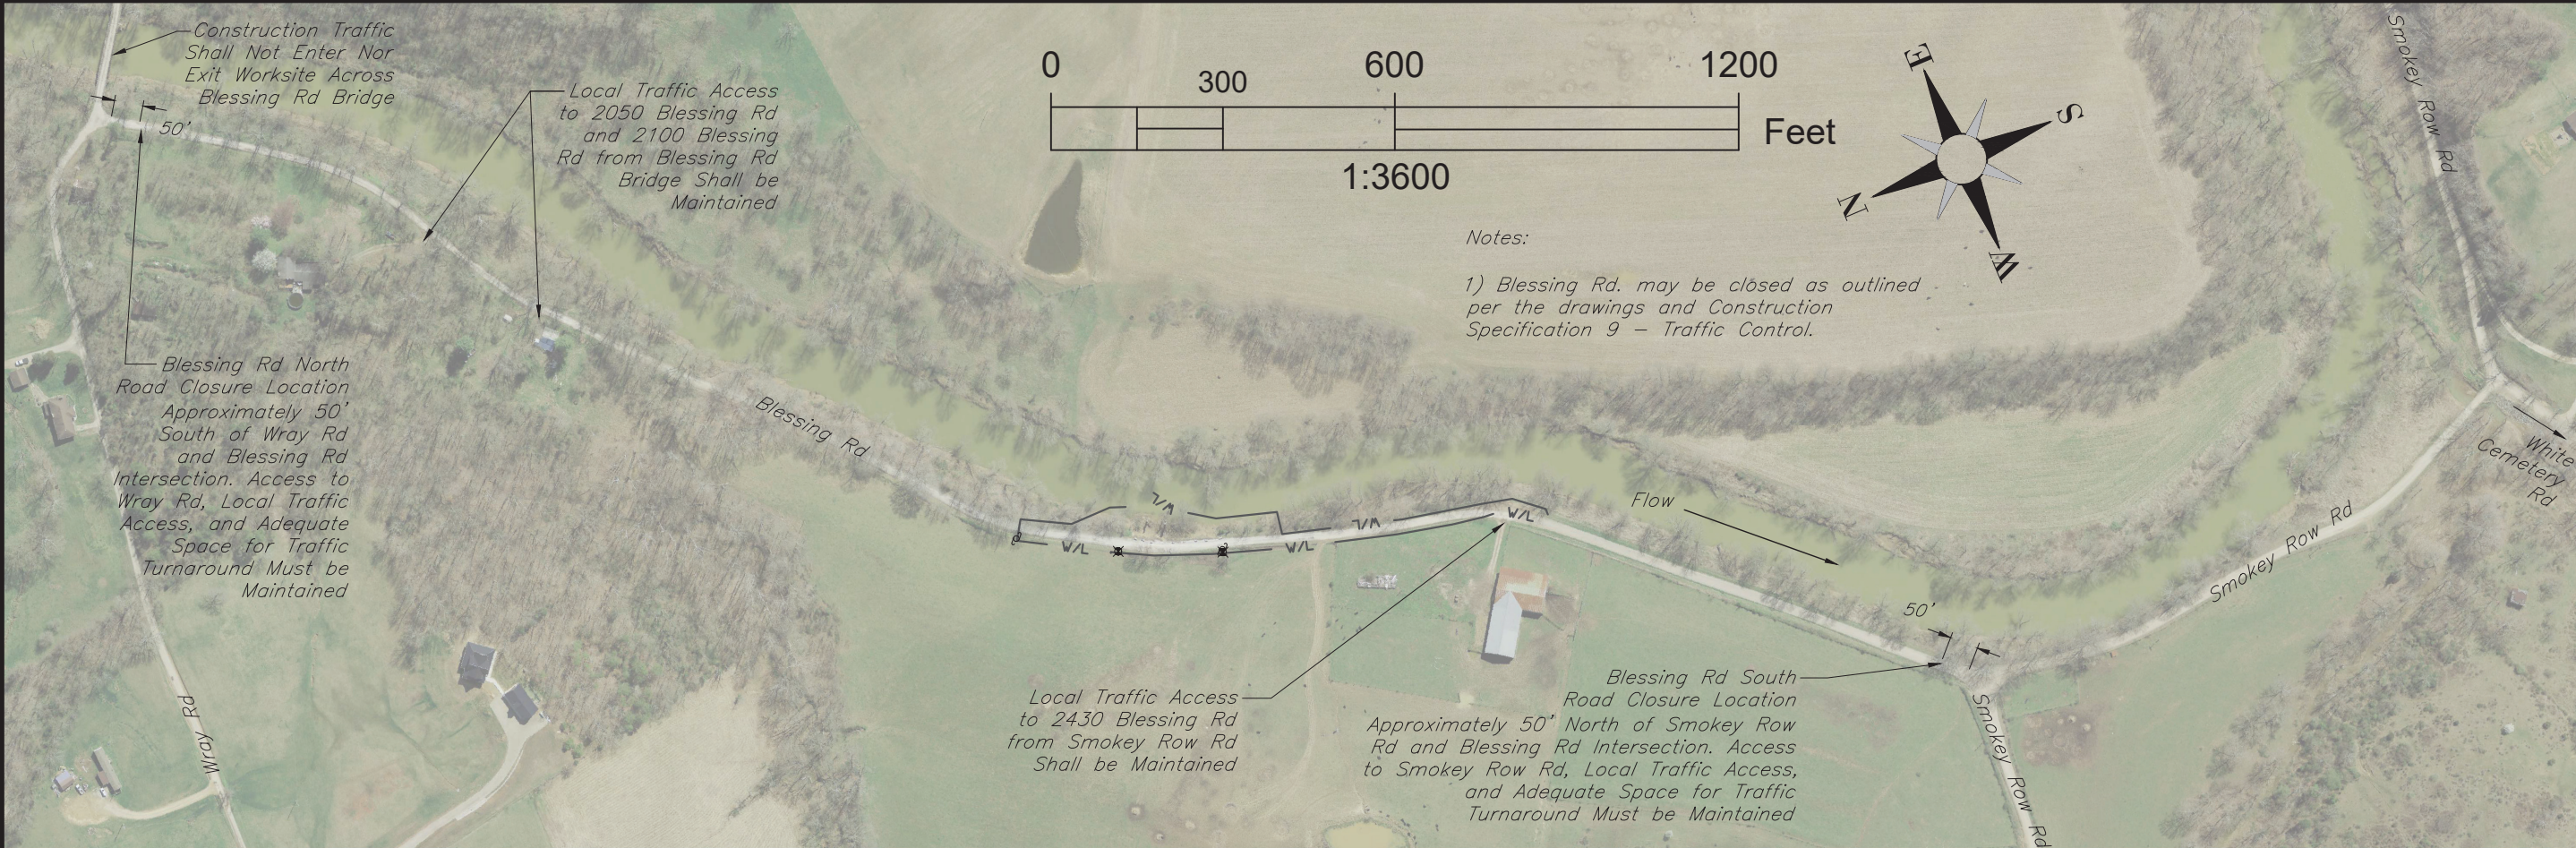


LEGEND




WORK LIMITS

- 1) Work limits start at 176' north (upstream) of BM1 and road culvert. North work limit is marked by the utility pole along the west side of Blessing Rd.
- 2) West work limit is established by the existing pasture fence along the west side of Blessing Rd.
- 3) West work limit extends south across Blessing Rd 20' north of the barn access road.
- 4) West work limit extends from the barn access road to 72' south of the barn access road along the east side of Blessing Rd.
- 5) Northeast work limit extends 10' east of Blessing Rd from 176' north of BM1 to 100' north of BM1.
- 6) East work limit extends generally 5' east of the existing right toe of the stream from 100' north of BM1 to 108' south of BM2.
- 7) East work limits then extend approximately 5' east of Blessing Rd from 108' south of BM2 to the existing pull off area across from barn access road.
- 8) Southeast work limit extends from the east edge of Blessing Rd to 20' east of the road along the existing berm and pull off area.

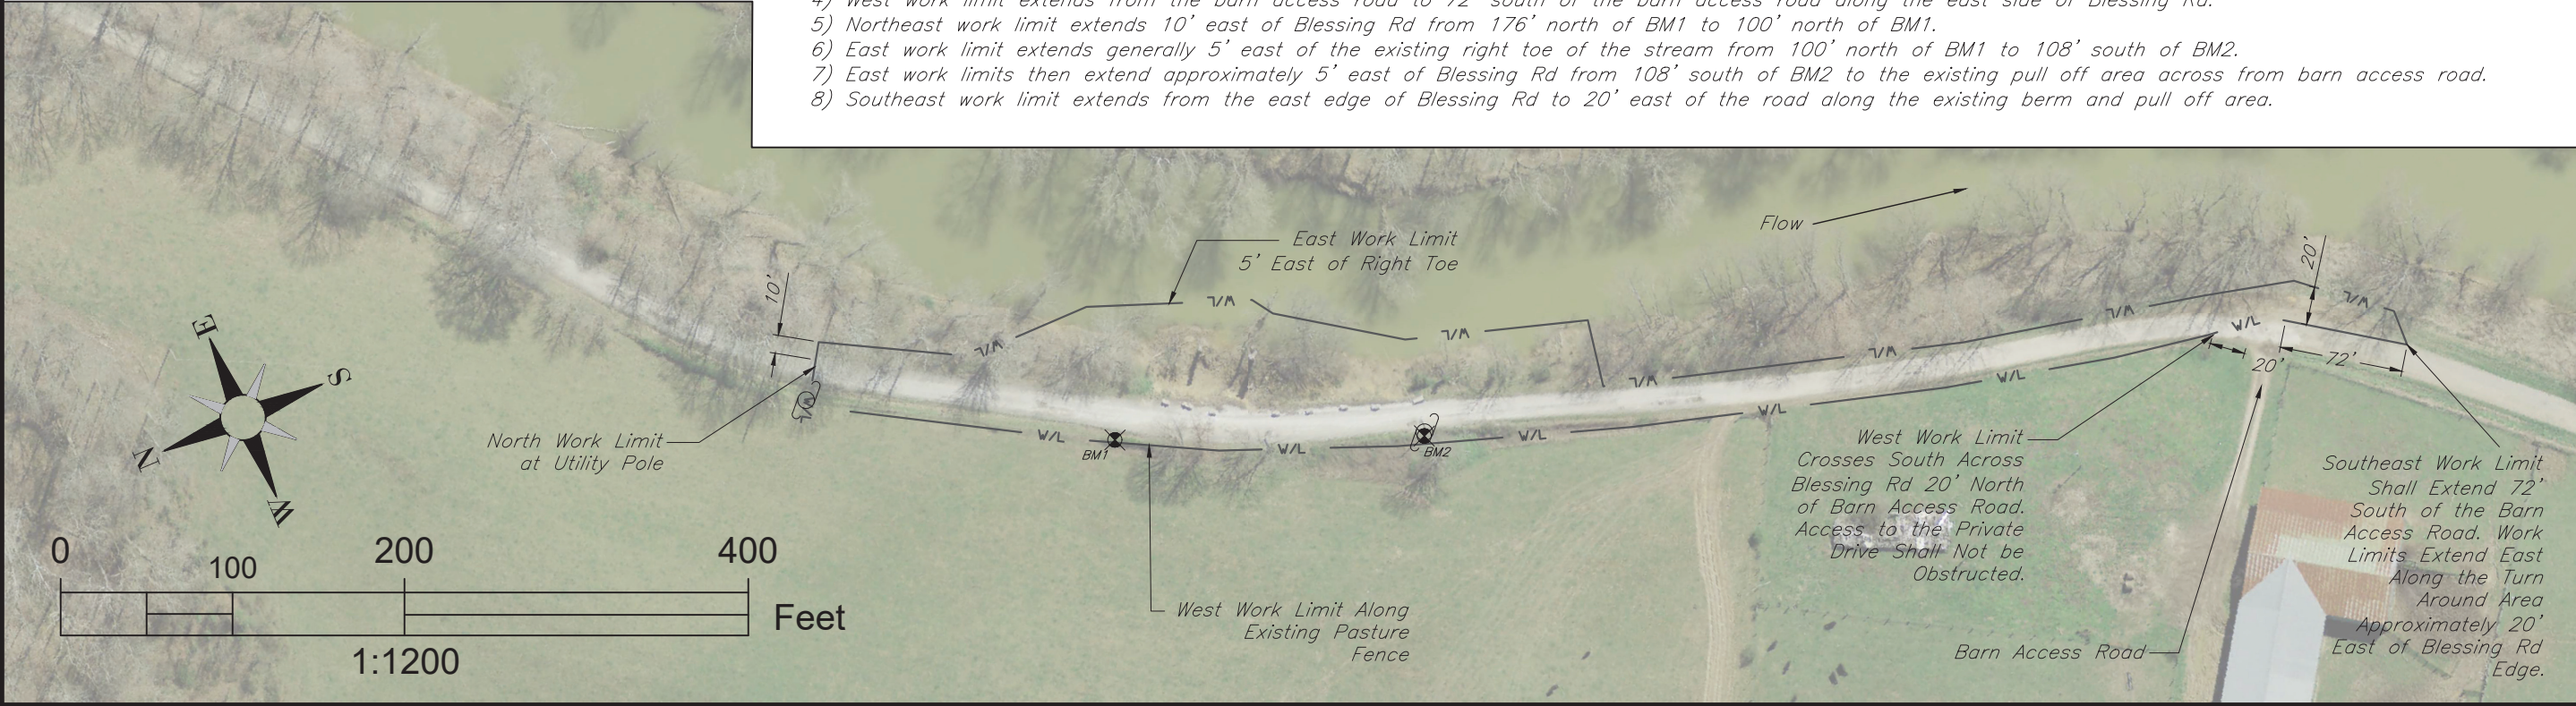

United States Department of Agriculture Natural Resources Conservation Service	Blessing Road EWP		GALLIA COUNTY, OHIO	
	WORK LIMITS		GREEN TWP	
	Designed	Logan Veley	Date	01/25
	Drawn	Logan Veley		01/25
File No.	Checked	J. Adine-Kuchta/G. Wells	03/25	
Drawing No.	Approved		Digitally signed by BLAKE ARTHUR DN: cn=BLAKE ARTHUR, o=USDA, ou=USDA, email=blake.athur@aphis.usda.gov Date: 2025.04.10 15:49:23 -0400	
Sheet 3 of 11				

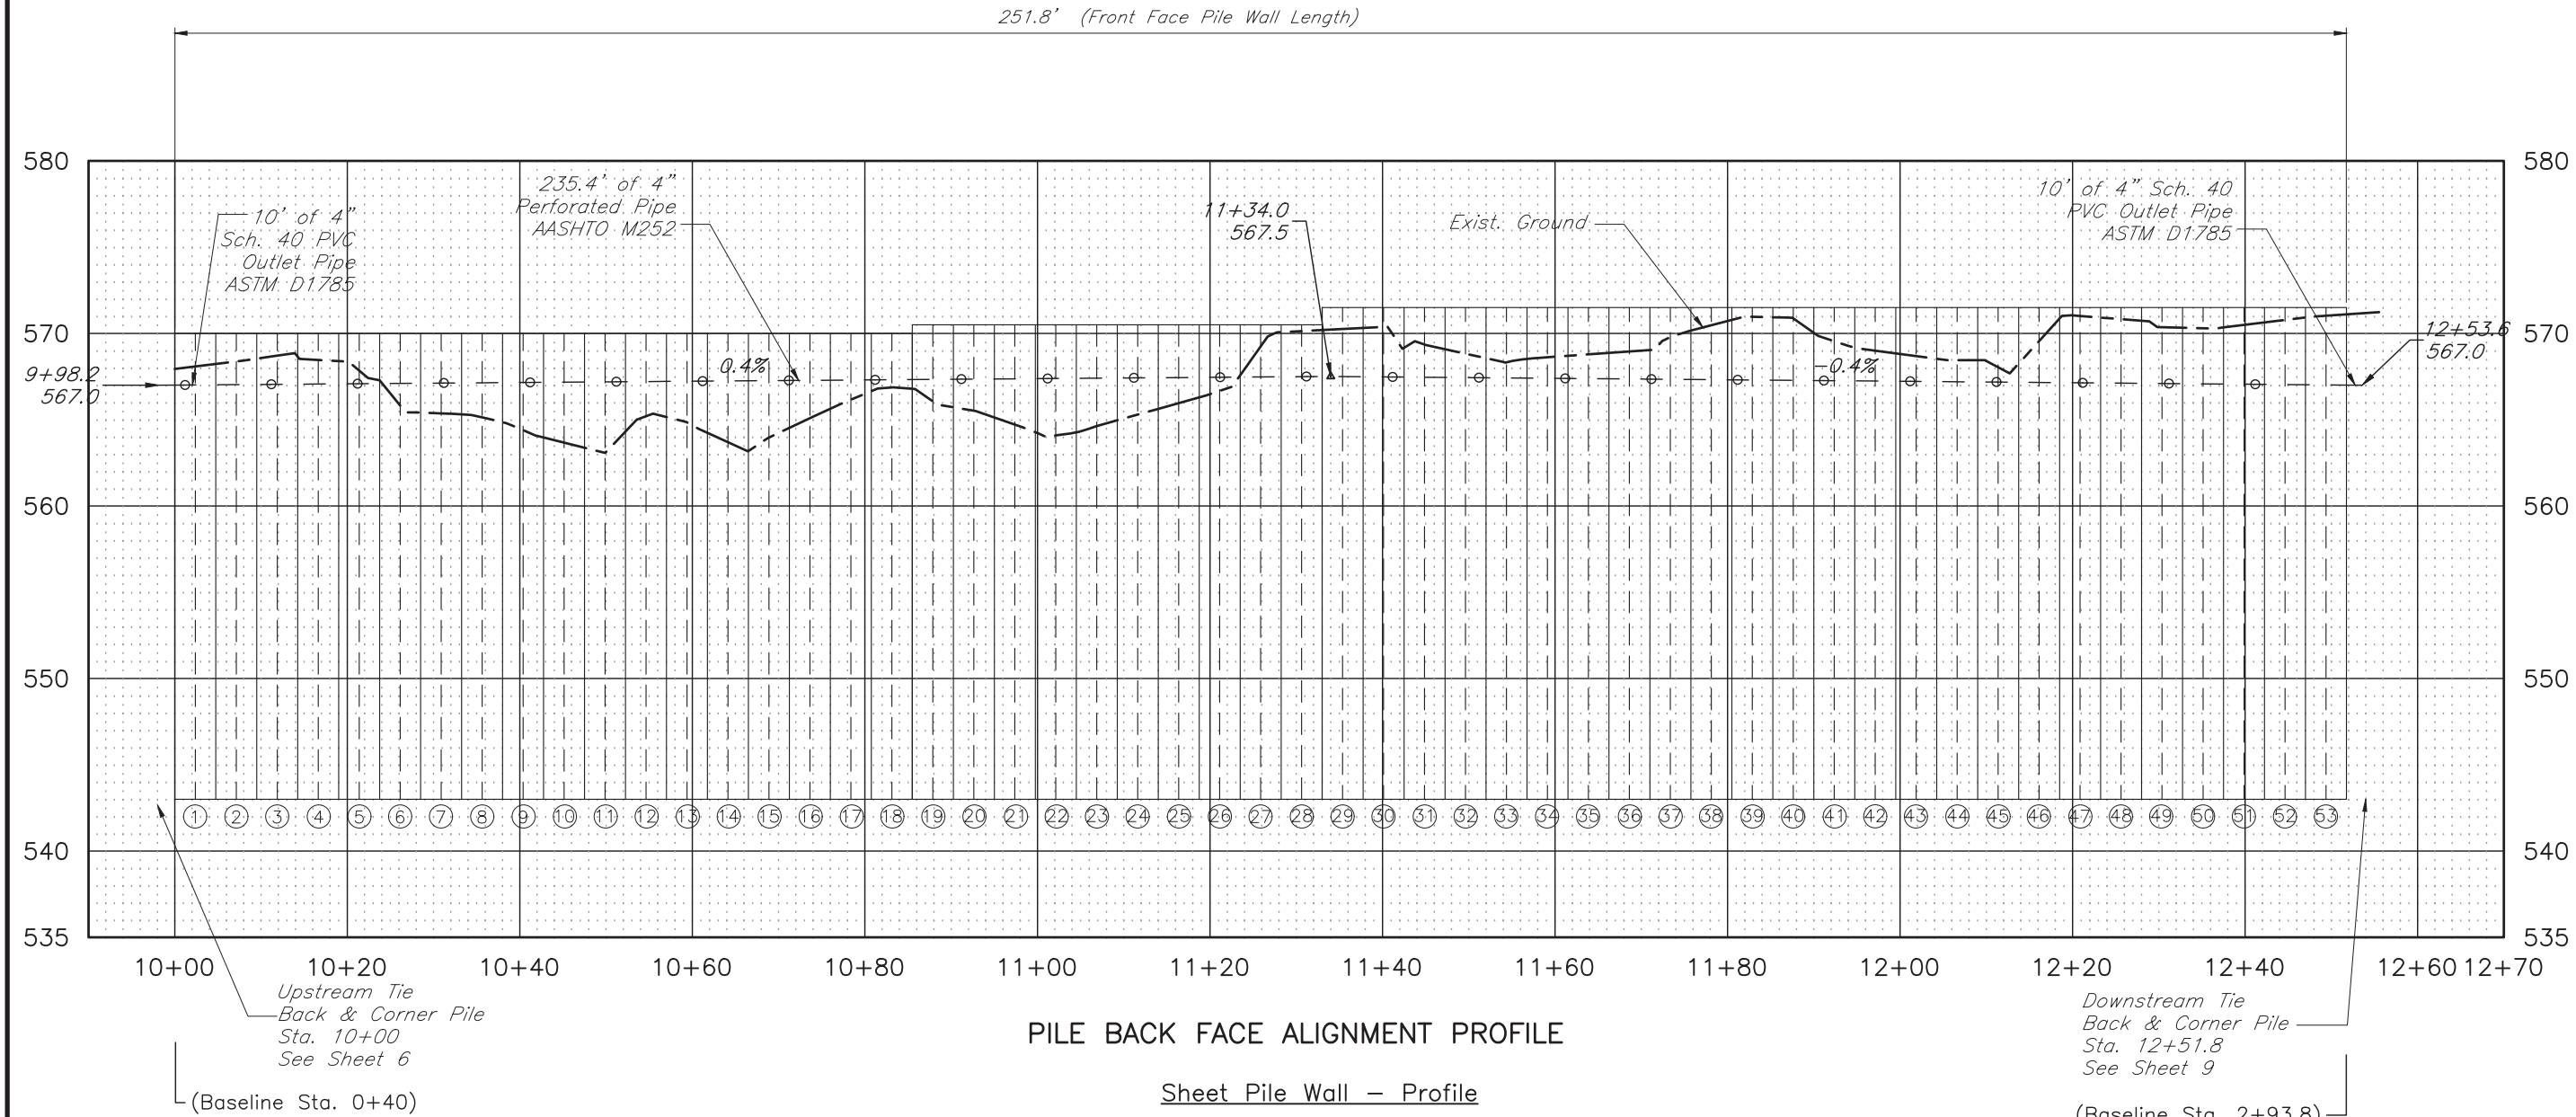

PILE BACK FACE ALIGNMENT PROFILE

Sheet Pile Wall – Profile
⑩ Denotes Pile Pair Number
(As viewed from Blessing Rd.)

Designed	Logan Veley	Date	01/25
Drawn	Logan Veley		
Checked	J. Adine-Ruchta/G. Wells		03/25
Approved	BLAKE ARTHUR		
Digitally signed by BLAKE ARTHUR Date: 2025.04.10 15:59:42 -0400			

BLESSING ROAD EWP

PILE LAYOUT PROFILE

GALLIA COUNTY, OHIO

GREEN TWP

File No.

Drawing No.

Sheet 4 of 11

Sheet Pile Elevations, Lengths, & Offsets – Pile Wall

PILE PAIR	PILE PAIR TOP ELEVATION	PILE PAIR BOTTOM ELEVATION	PILE PAIR LENGTH	PILE ALIGNMENT STATION	BASELINE STATION	BASELINE OFFSET TO PILE BACK
1	570.0'	543.0'	27.0'	10+02.4	0+42.3	25.0'
2	570.0'	543.0'	27.0'	10+07.1	0+47.0	25.0'
3	570.0'	543.0'	27.0'	10+11.9	0+51.9	25.0'
4	570.0'	543.0'	27.0'	10+16.6	0+56.6	25.0'
5	570.0'	543.0'	27.0'	10+21.4	0+61.4	25.0'
6	570.0'	543.0'	27.0'	10+26.1	0+66.1	25.0'
7	570.0'	543.0'	27.0'	10+30.9	0+70.8	25.0'
8	570.0'	543.0'	27.0'	10+35.6	0+75.6	25.0'
9	570.0'	543.0'	27.0'	10+40.4	0+82.2	25.0'
10	570.0'	543.0'	27.0'	10+45.1	0+86.8	25.0'
11	570.0'	543.0'	27.0'	10+49.9	0+91.7	25.0'
12	570.0'	543.0'	27.0'	10+54.6	0+96.4	25.0'
13	570.0'	543.0'	27.0'	10+59.4	1+01.2	25.0'
14	570.0'	543.0'	27.0'	10+64.1	1+05.9	25.0'
15	570.0'	543.0'	27.0'	10+68.9	1+10.6	25.0'
16	570.0'	543.0'	27.0'	10+73.6	1+15.4	25.0'
17	570.0'	543.0'	27.0'	10+78.4	1+20.2	25.0'
18	570.0'	543.0'	27.0'	10+83.1	1+26.3	25.0'
19	570.5'	543.0'	27.5'	10+87.9	1+31.0	25.0'
20	570.5'	543.0'	27.5'	10+92.6	1+35.8	25.0'
21	570.5'	543.0'	27.5'	10+97.4	1+40.6	25.0'
22	570.5'	543.0'	27.5'	11+02.1	1+47.2	25.0'
23	570.5'	543.0'	27.5'	11+06.9	1+51.9	24.8'
24	570.5'	543.0'	27.5'	11+11.6	1+56.5	24.3'
25	570.5'	543.0'	27.5'	11+16.4	1+61.5	23.9'
26	570.5'	543.0'	27.5'	11+21.1	1+66.2	23.4'
27	570.5'	543.0'	27.5'	11+25.9	1+70.9	22.9'
28	570.5'	543.0'	27.5'	11+30.6	1+75.7	22.5'
29	571.5'	543.0'	28.5'	11+35.4	1+80.4	22.0'
30	571.5'	543.0'	28.5'	11+40.1	1+85.1	21.5'
31	571.5'	543.0'	28.5'	11+44.9	1+89.8	21.0'
32	571.5'	543.0'	28.5'	11+49.6	1+94.5	20.6'
33	571.5'	543.0'	28.5'	11+54.4	1+99.3	20.0'
34	571.5'	543.0'	28.5'	11+59.1	2+04.4	20.0'
35	571.5'	543.0'	28.5'	11+63.9	2+09.2	20.0'
36	571.5'	543.0'	28.5'	11+68.6	2+13.8	20.0'
37	571.5'	543.0'	28.5'	11+73.4	2+18.6	20.0'
38	571.5'	543.0'	28.5'	11+78.1	2+24.1	20.0'
39	571.5'	543.0'	28.5'	11+82.9	2+28.8	20.0'
40	571.5'	543.0'	28.5'	11+87.6	2+33.5	20.0'
41	571.5'	543.0'	28.5'	11+92.4	2+38.3	20.0'
42	571.5'	543.0'	28.5'	11+97.1	2+41.6	20.0'
43	571.5'	543.0'	28.5'	12+01.9	2+46.3	20.0'
44	571.5'	543.0'	28.5'	12+06.6	2+51.1	20.0'
45	571.5'	543.0'	28.5'	12+11.4	2+55.8	20.0'
46	571.5'	543.0'	28.5'	12+16.1	2+60.6	20.0'
47	571.5'	543.0'	28.5'	12+20.9	2+65.3	20.0'
48	571.5'	543.0'	28.5'	12+25.6	2+70.1	20.0'
49	571.5'	543.0'	28.5'	12+30.4	2+74.8	20.0'
50	571.5'	543.0'	28.5'	12+35.1	2+79.5	20.0'
51	571.5'	543.0'	28.5'	12+39.9	2+84.3	20.0'
52	571.5'	543.0'	28.5'	12+44.6	2+89.0	20.0'
53	571.5'	543.0'	28.5'	12+49.4	2+93.8	20.0'

* Offset distance from Baseline is to the backfill side of the piles.

Sheet Pile Elevations & Lengths – Tie Backs

PILE PAIR	PILE PAIR TOP ELEVATION	PILE PAIR BOTTOM ELEVATION	PILE PAIR LENGTH	DESCRIPTION
US Corner	569.5'	543.0'	26.5'	Upstream Tie-Back SKZ20 B3 Corner Pile
54	569.5'	543.0'	26.5'	Upstream Tie-Back
DS Corner	571.0'	543.0'	28.0'	Downstream Tie-Back SKZ20 B2 Corner Pile
55	571.0'	543.0'	28.0'	Downstream Tie-Back

BLESSING ROAD EWP

PILE LAYOUT PROFILE

GREEN TWP

GALLIA COUNTY, OHIO



United States
Department of
Agriculture

Natural Resources
Conservation Service

File No.

Drawing No.

Designed
Logan Veley

Drawn
Logan Veley

Checked
J. Adine-Kuchta/G. Wells
Blake Arthur

Date
01/25




Date
01/25

Date
03/25

Date
Digitally signed by Blake Arthur
Date: 2025.04.10 15:50:00 -0400



Approved

Existing Road Culvert Detail Not To Scale

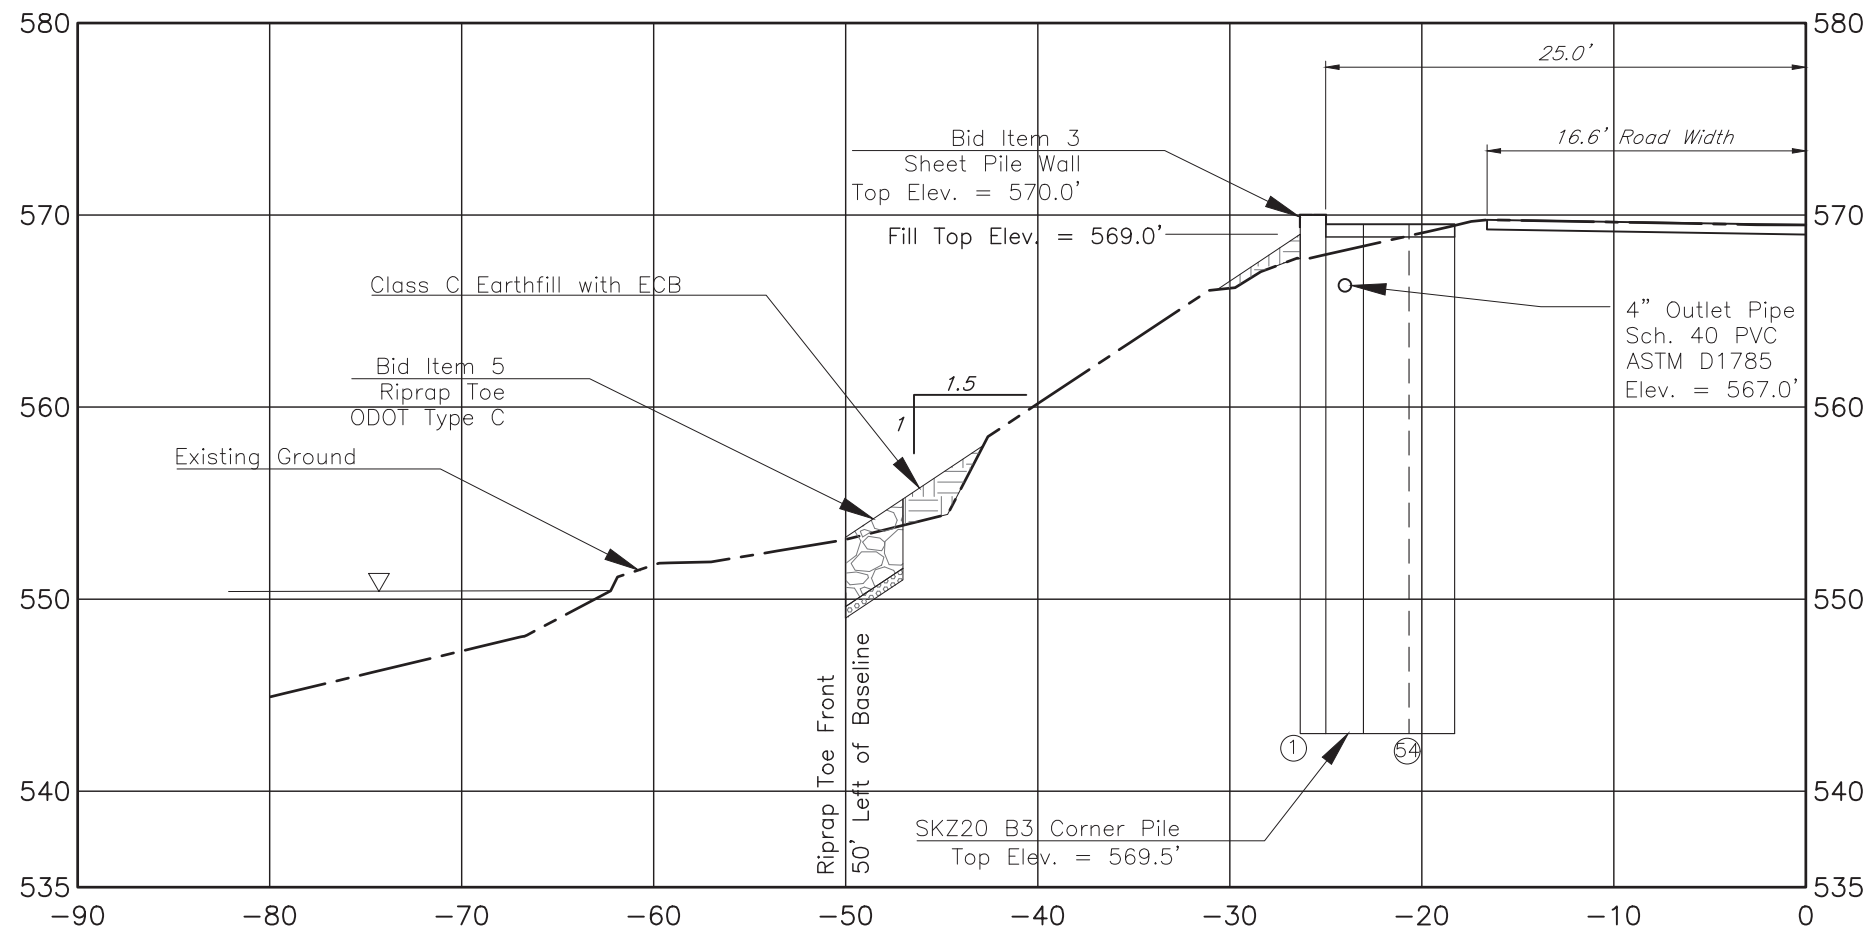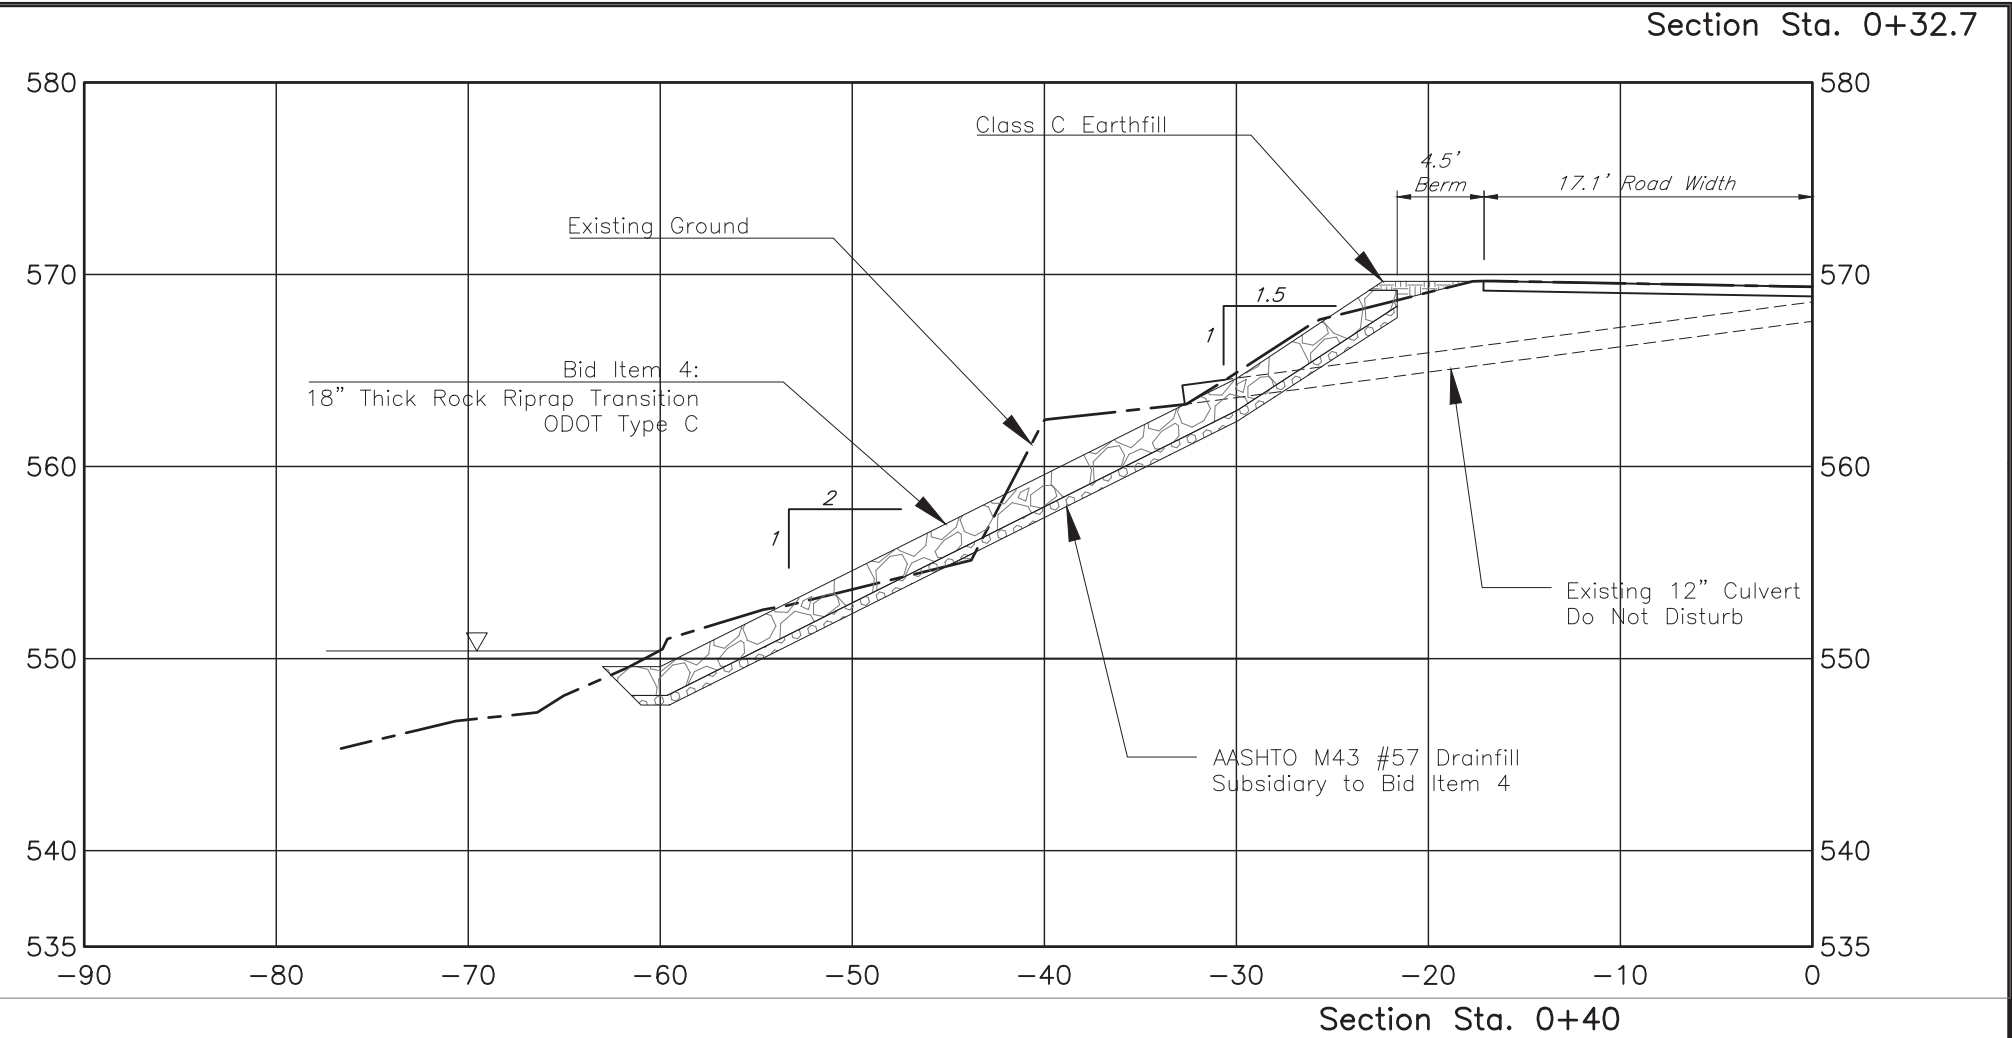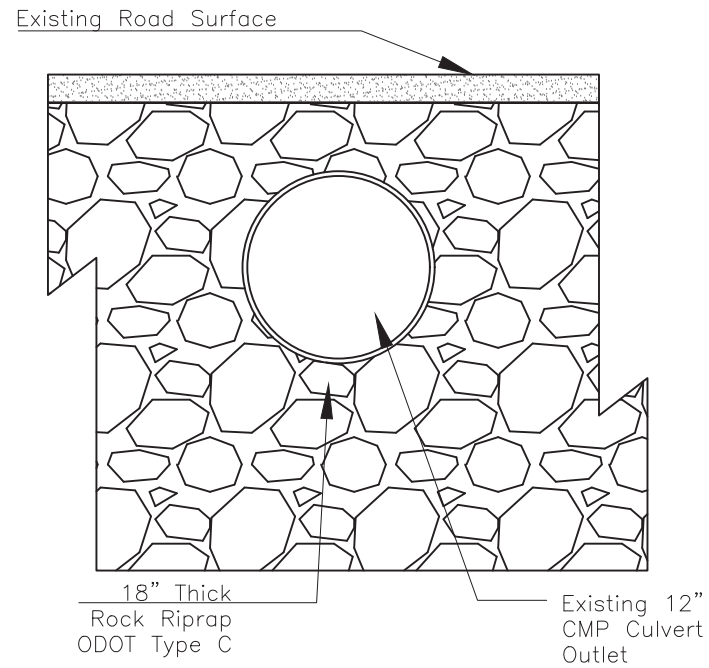


- NOTES:**
- Construction equipment shall not be driven within 5' of the road-side face of the sheet pile wall.
 - Riprap transition is not shown in section Sta. 0+40 for clarity of corner and tieback piles.

⑩ Denotes Pile Pair Number

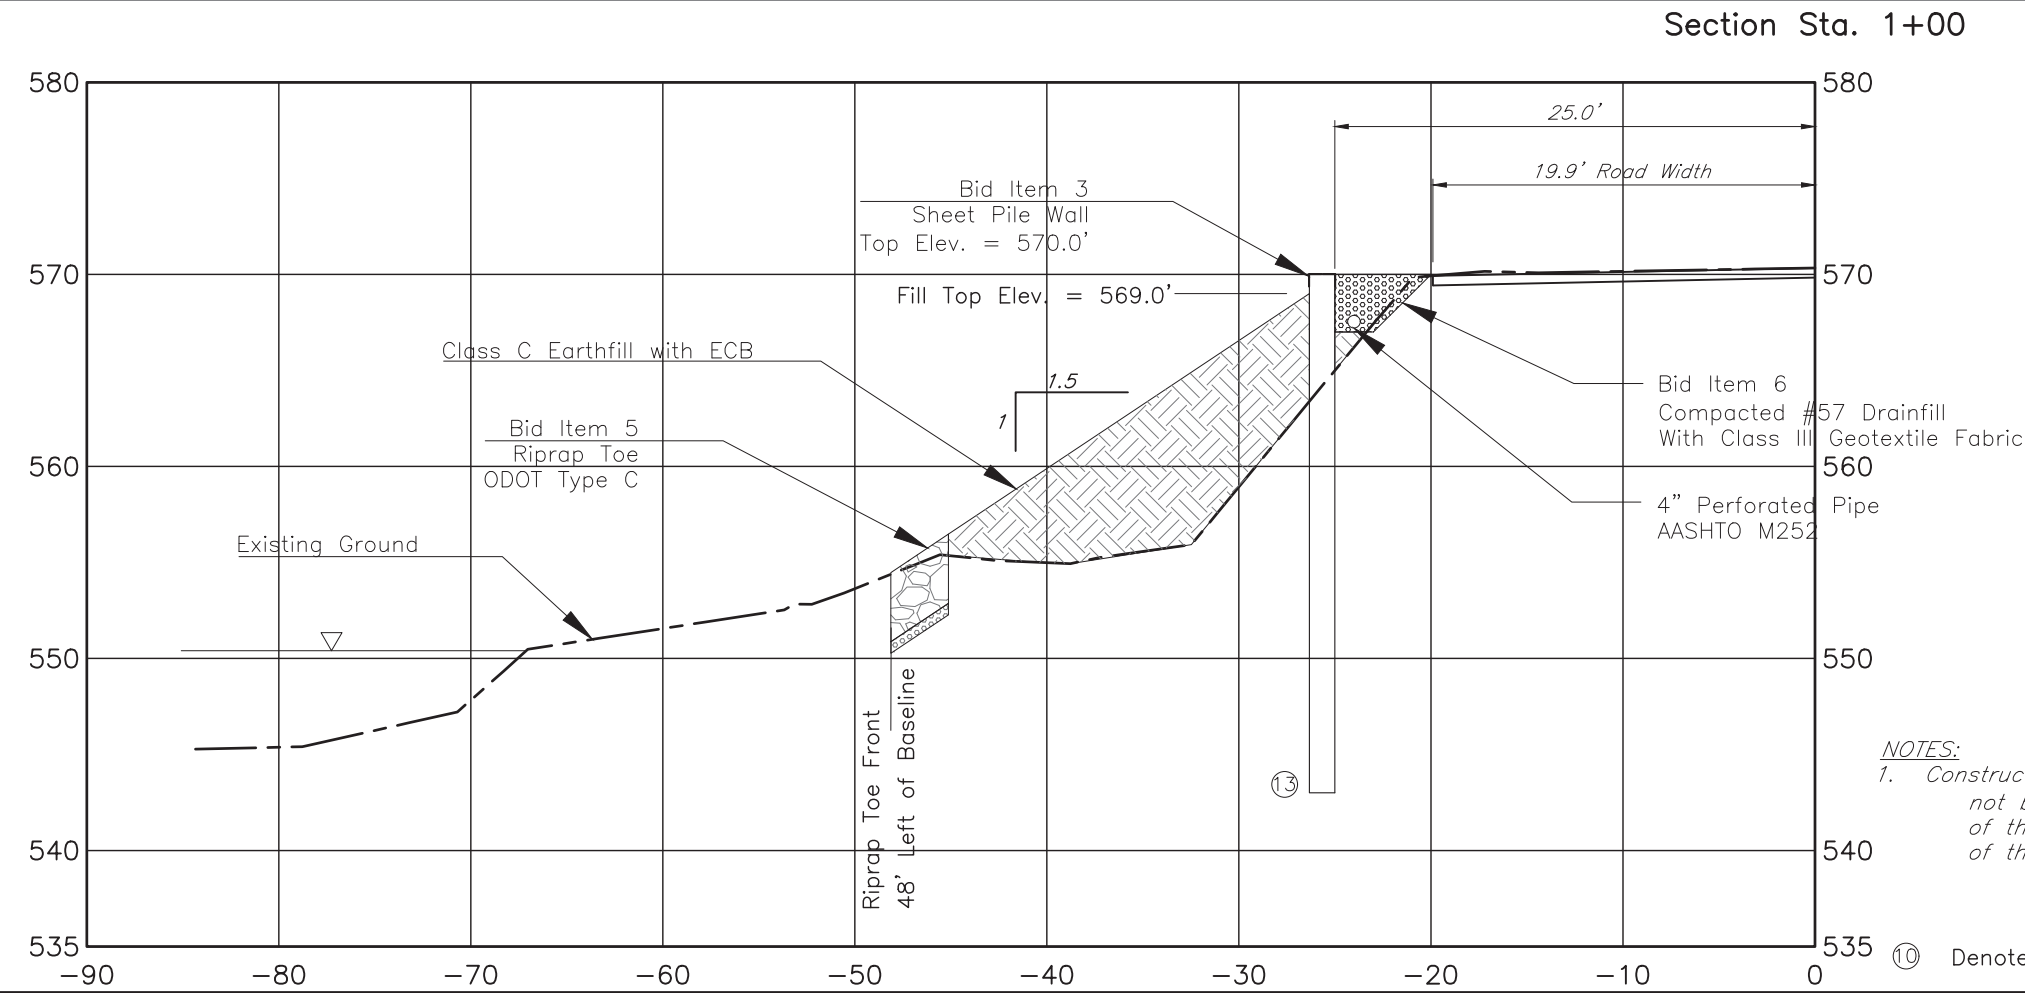
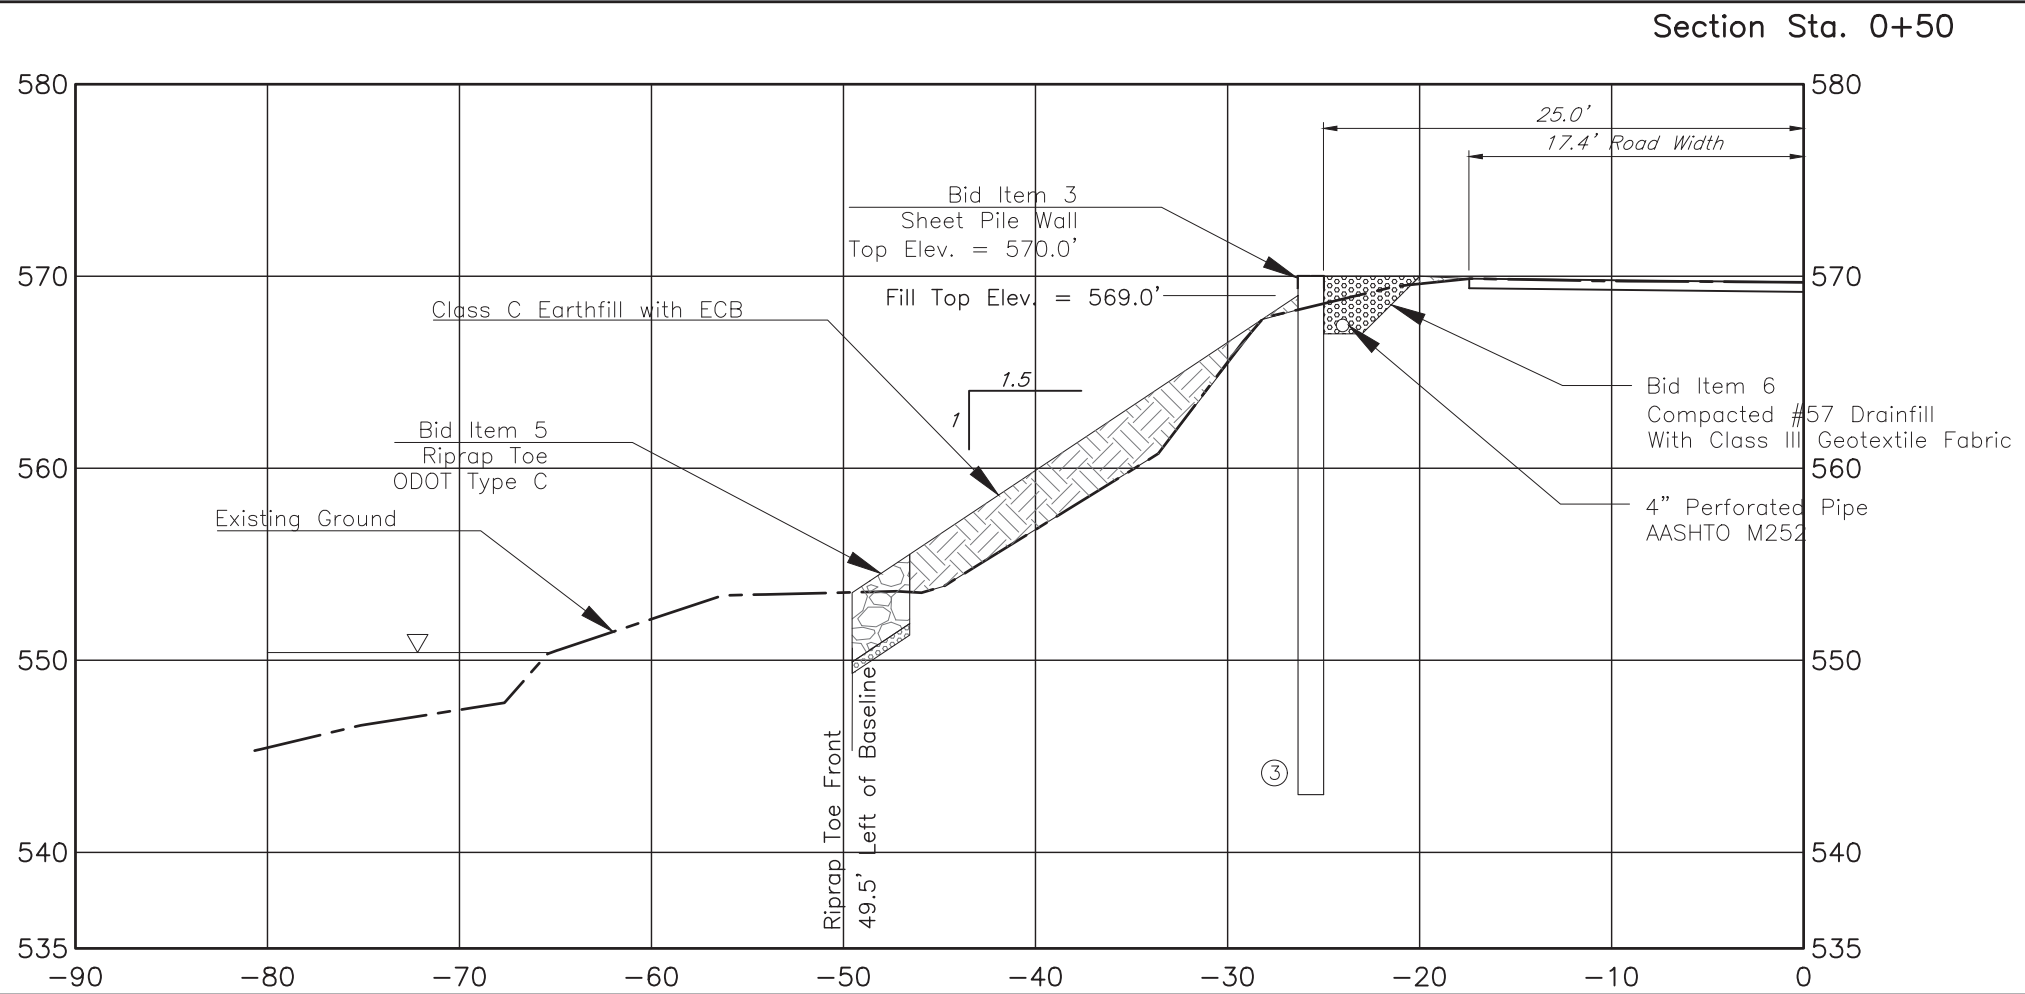


 United States Department of Agriculture Natural Resources Conservation Service	Date 01/25	Designed Logan Veley
	01/25	Drawn Logan Veley
	03/25	Checked J. Adame-Kuchta/G. Wells
	Approved BLAKE ARTHUR Date: 2025.04.10 15:50:33 -0000	
Blessing Road EWP		
CROSS SECTIONS STA. 0+50 - 1+00		
GREEN TWP		
GALLIA COUNTY, OHIO		

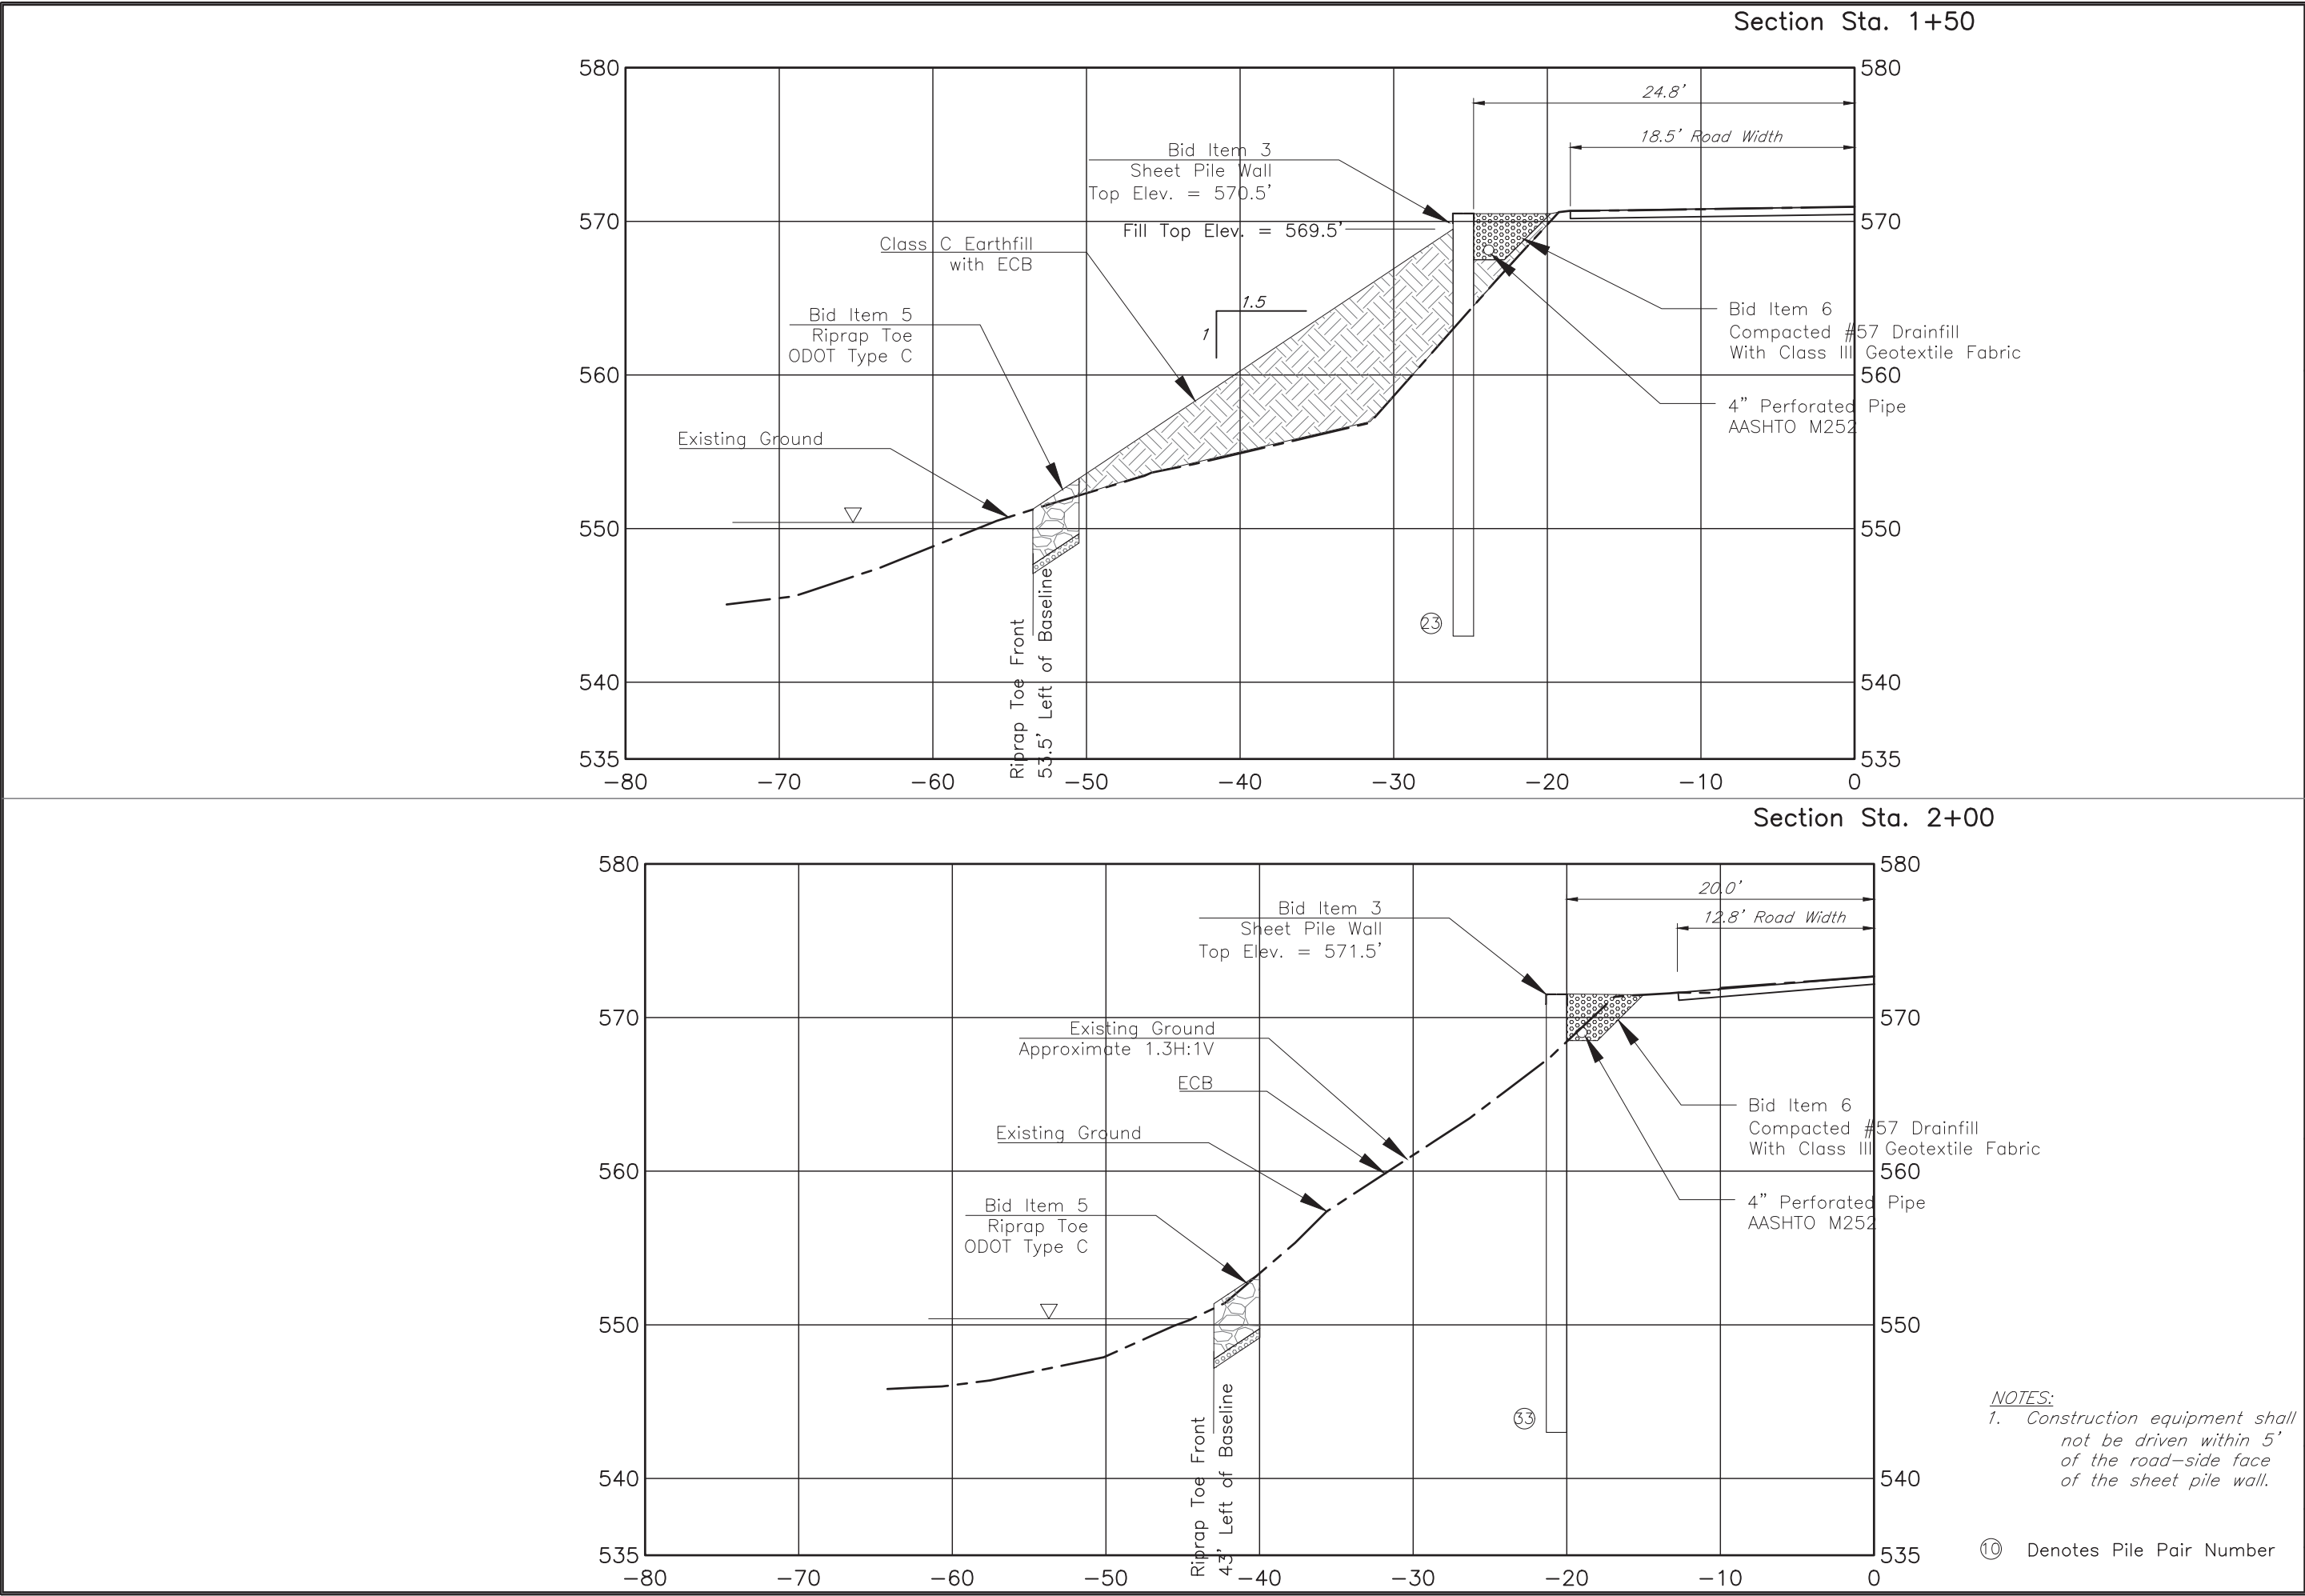

 United States Department of Agriculture Natural Resources Conservation Service	Blessing Road EWP		GALLIA COUNTY, OHIO	
	CROSS SECTIONS STA. 1+50 - 2+00		GREEN TWP	
	File No.		Drawing No.	
	Sheet 8 of 11			

Designed	Logan Veley	Date	01/25
Drawn	Logan Veley	Date	01/25
Checked	J. Adine-Kuchta/G. Wells	Date	03/25
Approved	BLAKE ARTHUR	Date	2025.04.10 15:50:55 -0400

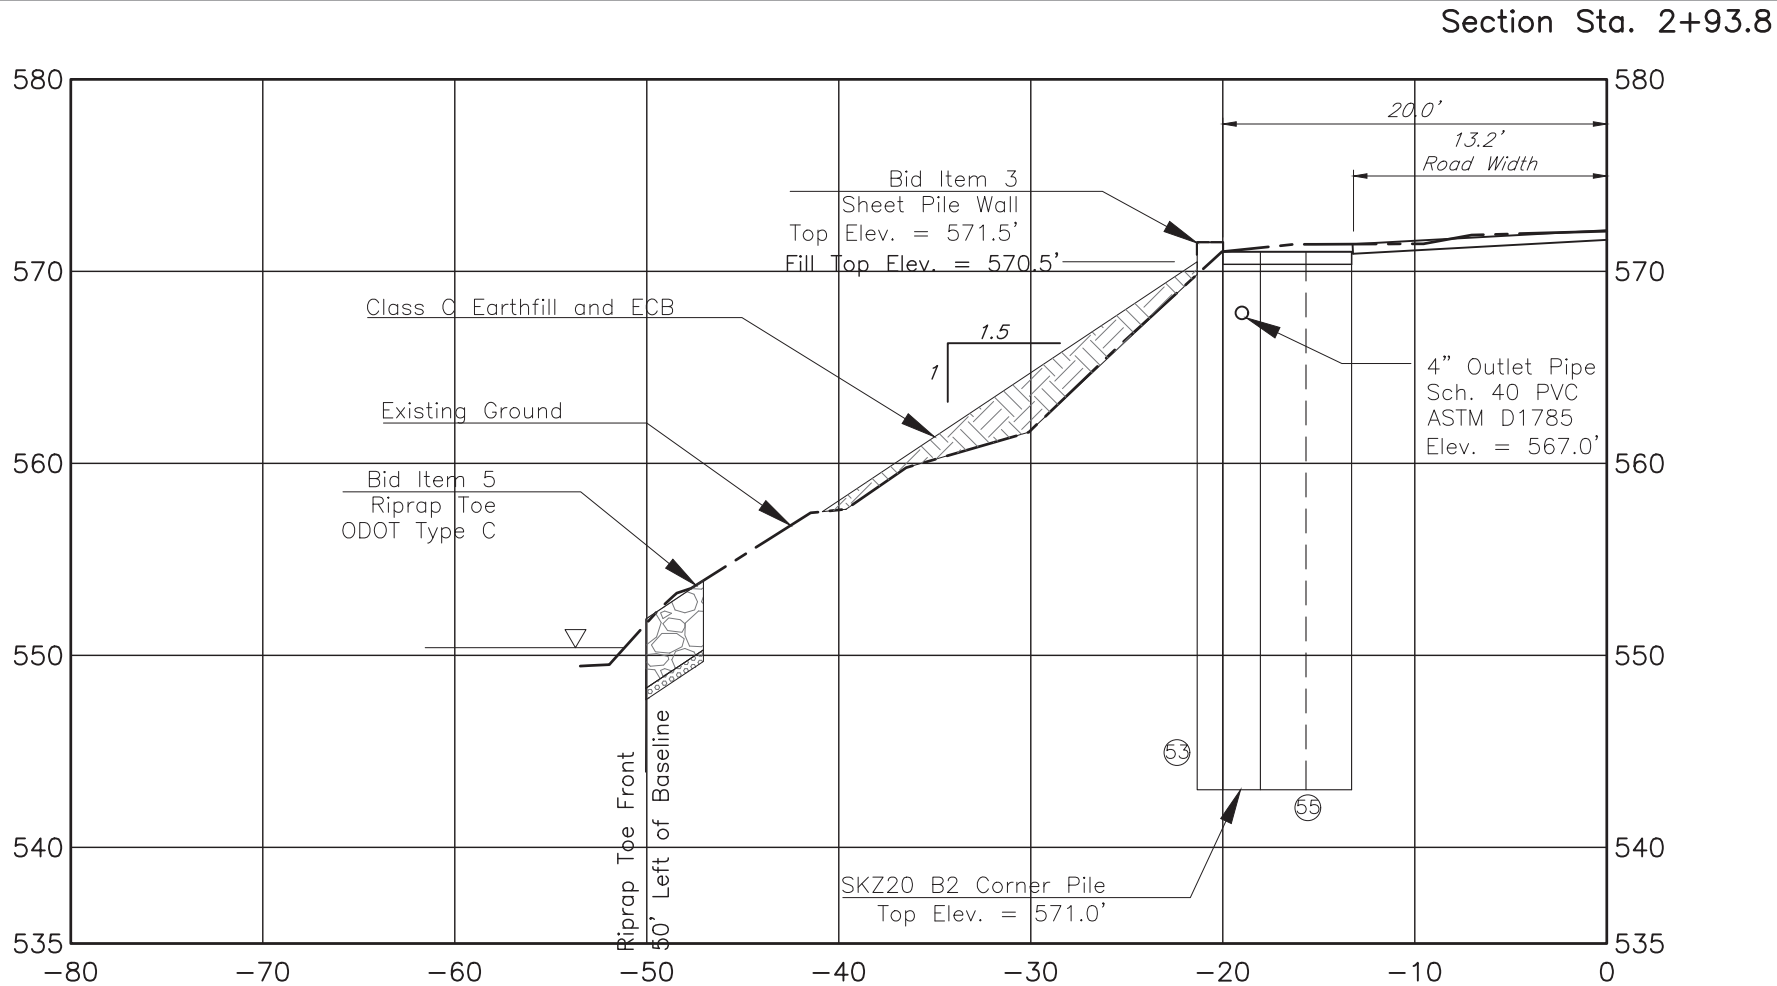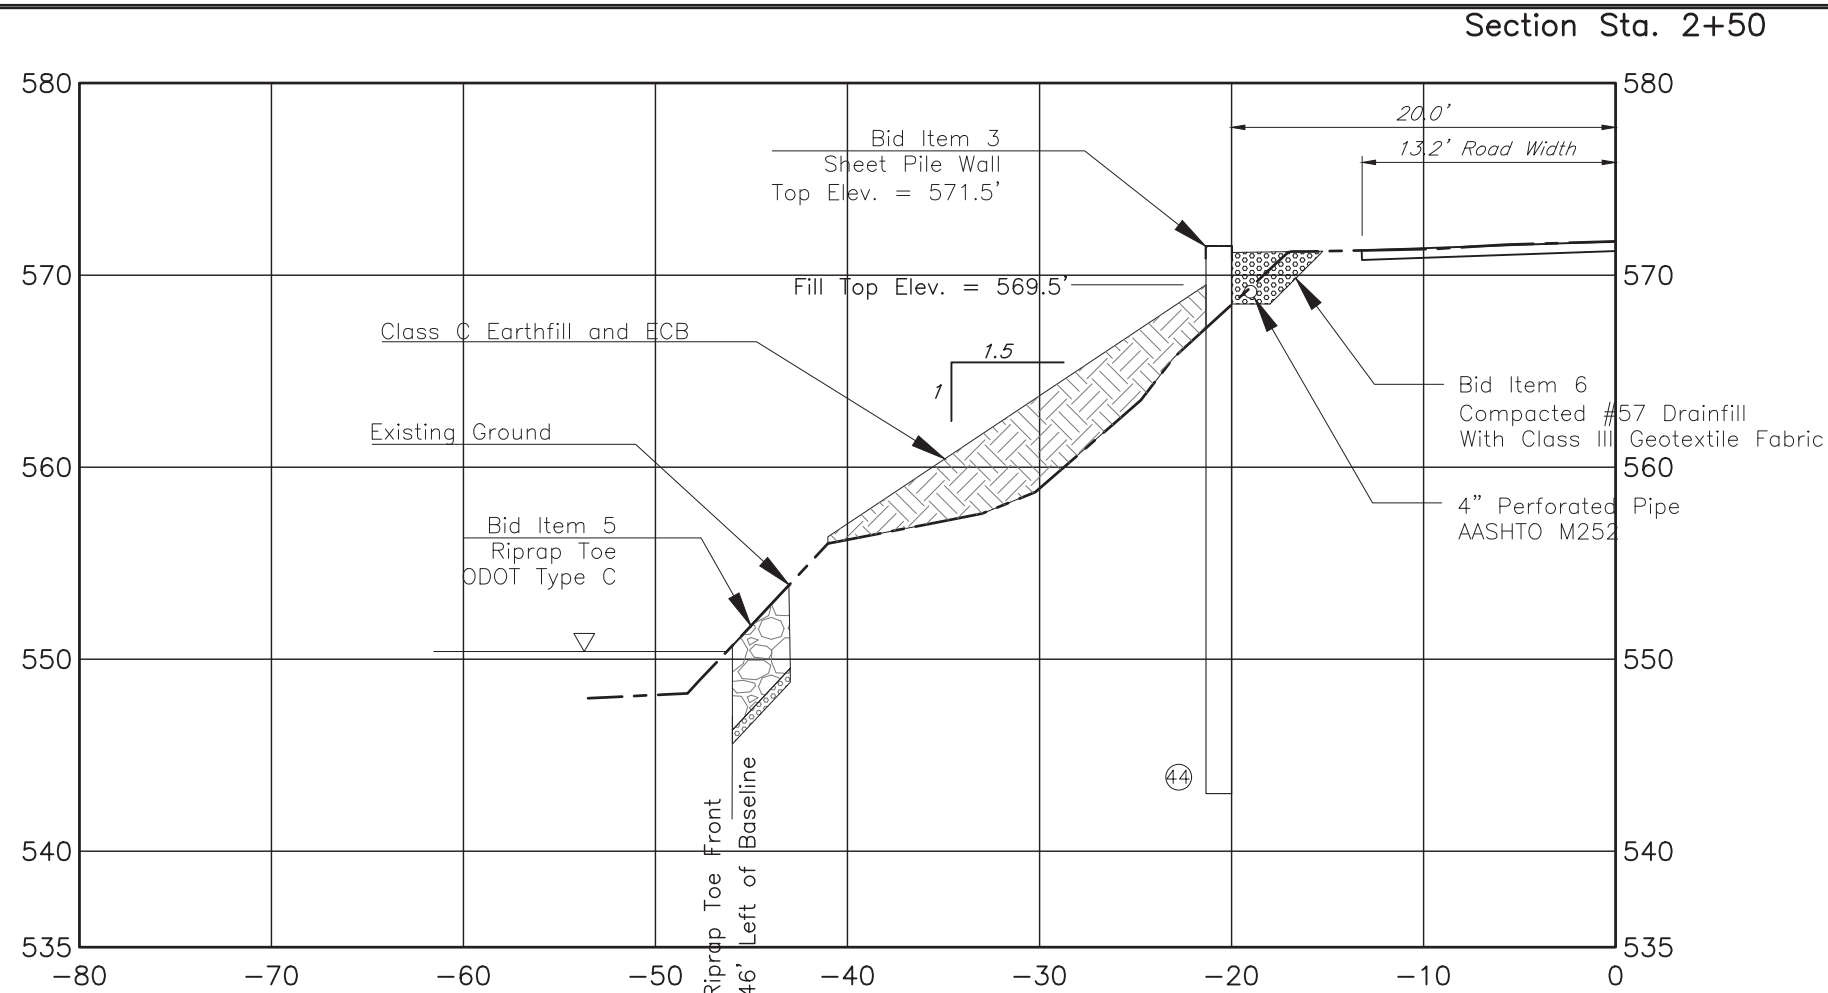

- NOTES:**
- Construction equipment shall not be driven within 5' of the road-side face of the sheet pile wall.
 - Riprap transition is not shown in section Sta. 2+93.8 for clarity of corner and tie-back piles.

⑩ Denotes Pile Pair Number

Designed	Logan Veley	Date	01/25
Drawn	Logan Veley	Checked	01/25
		Approved	03/25
			Digitally signed by BLAKE ARTHUR
			Date: 2025.04.10 15:12:04-0400

BLESSING ROAD EWP

CROSS SECTIONS STA. 2+50 - 2+93.8

GREEN TWP


GALLIA COUNTY, OHIO










File No.


Drawing No.

Sheet 9 of 11

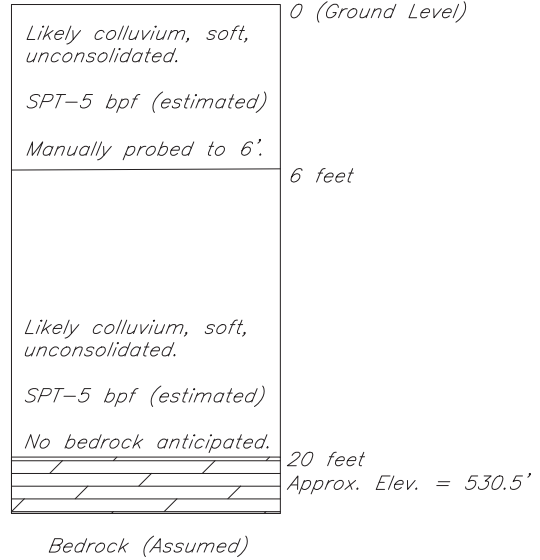


Soil Investigation #1 & #2 Log
Not to Scale

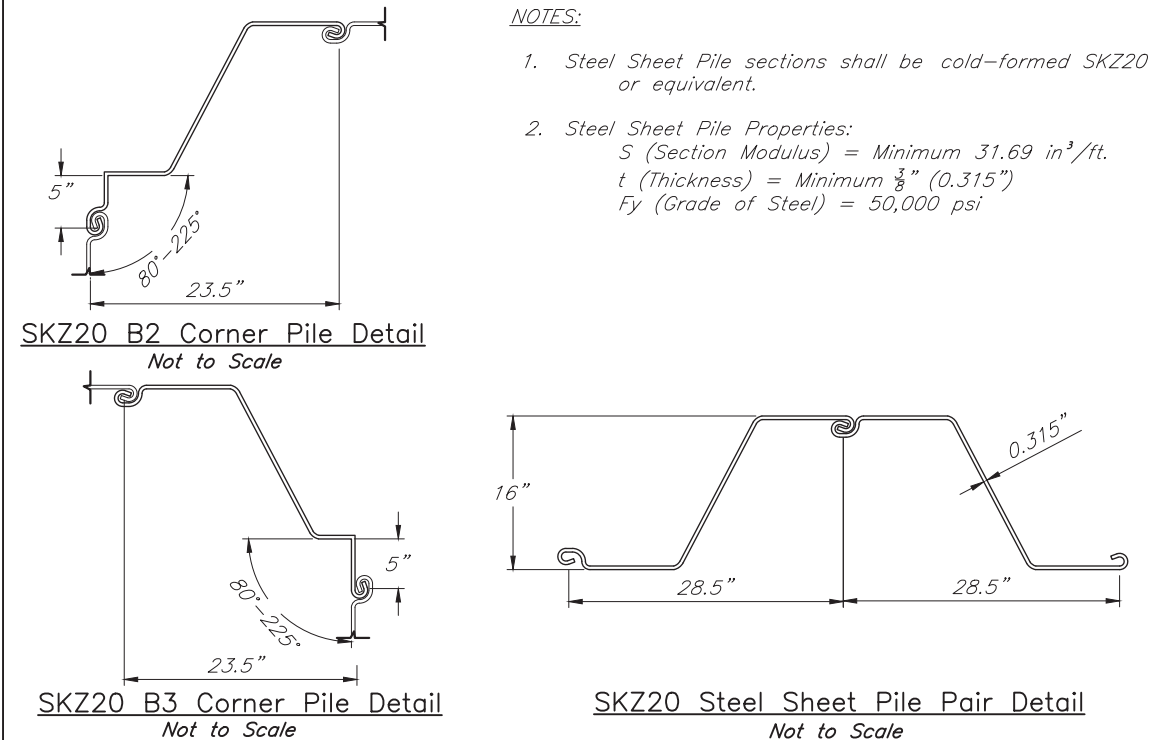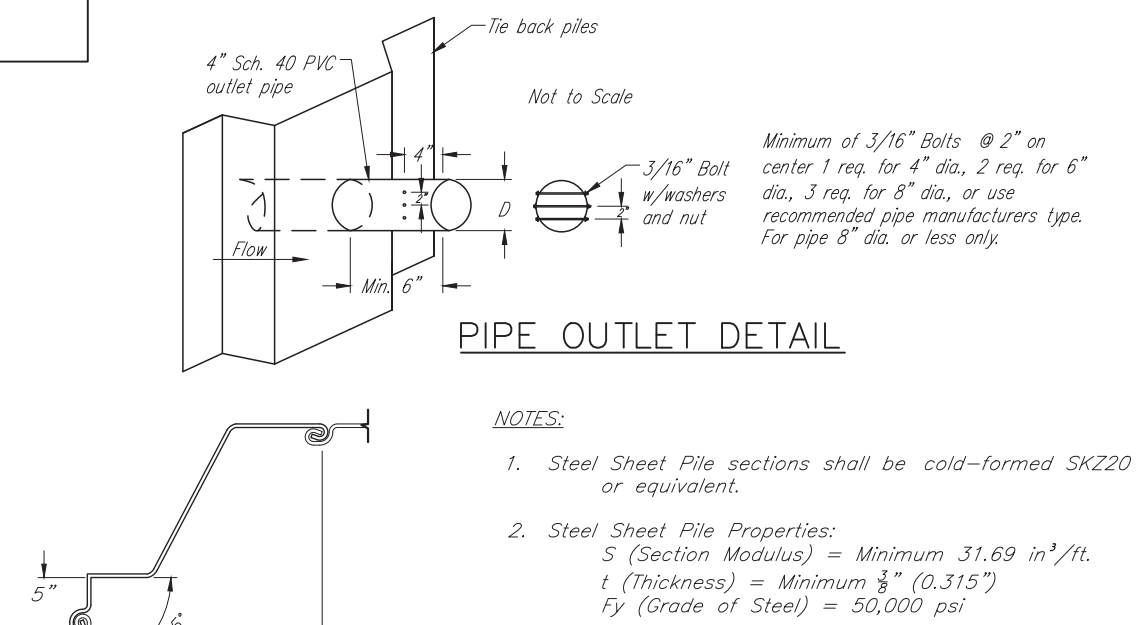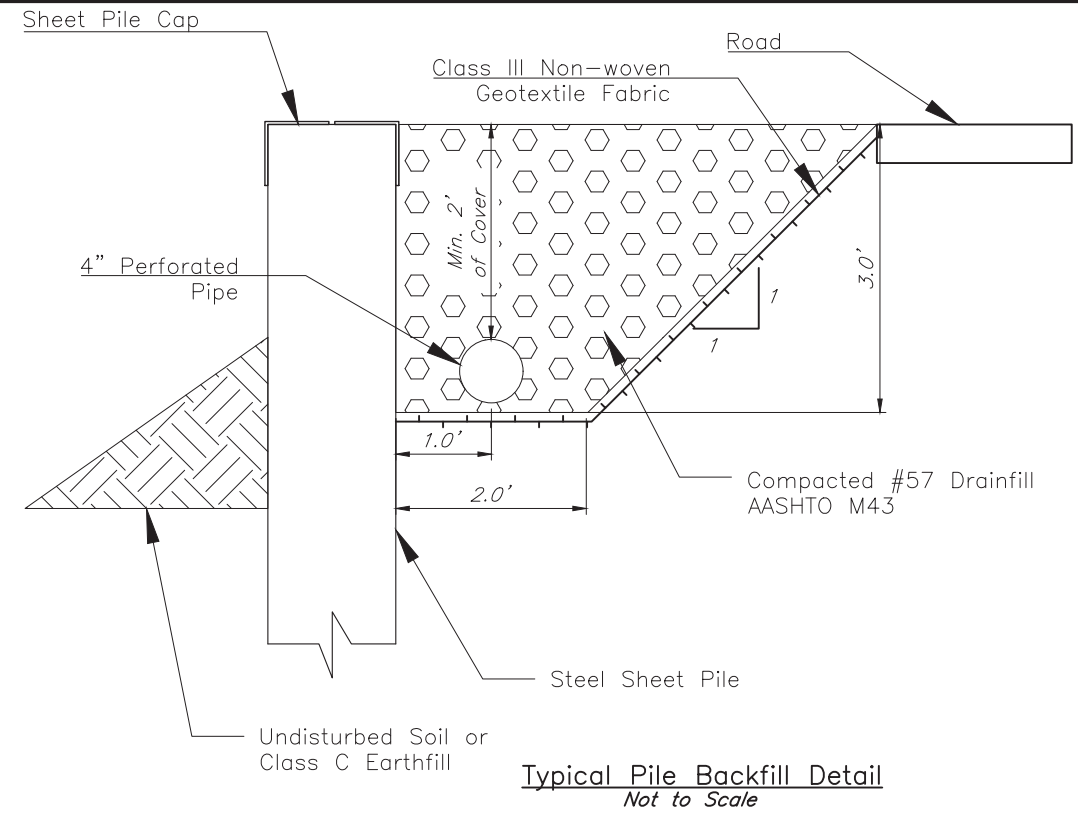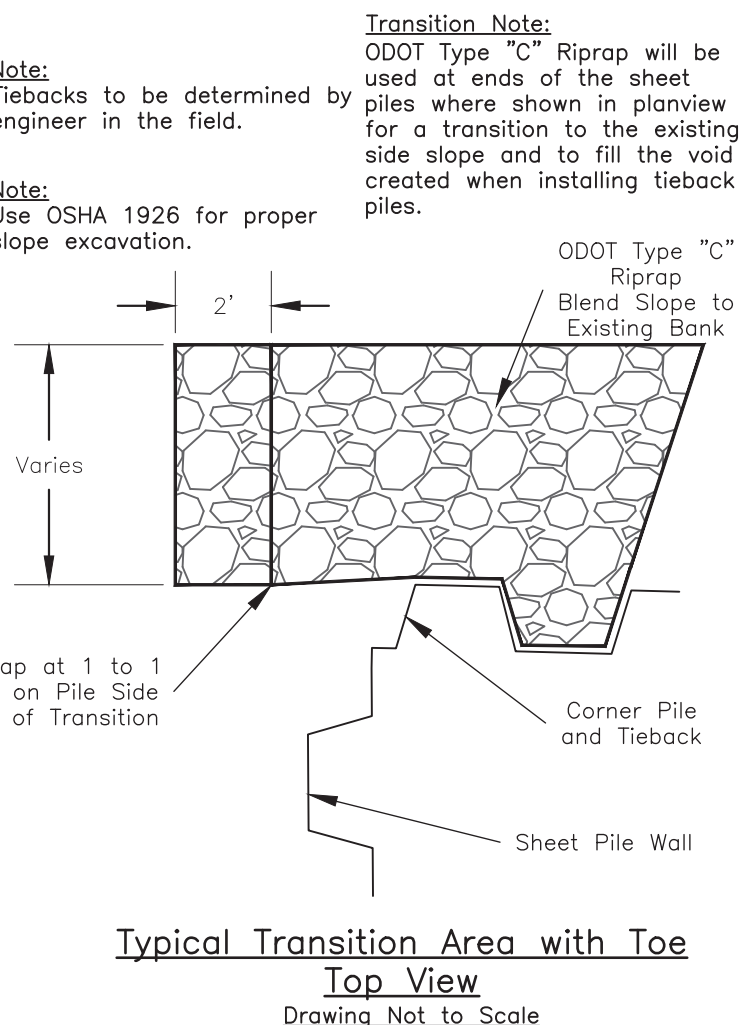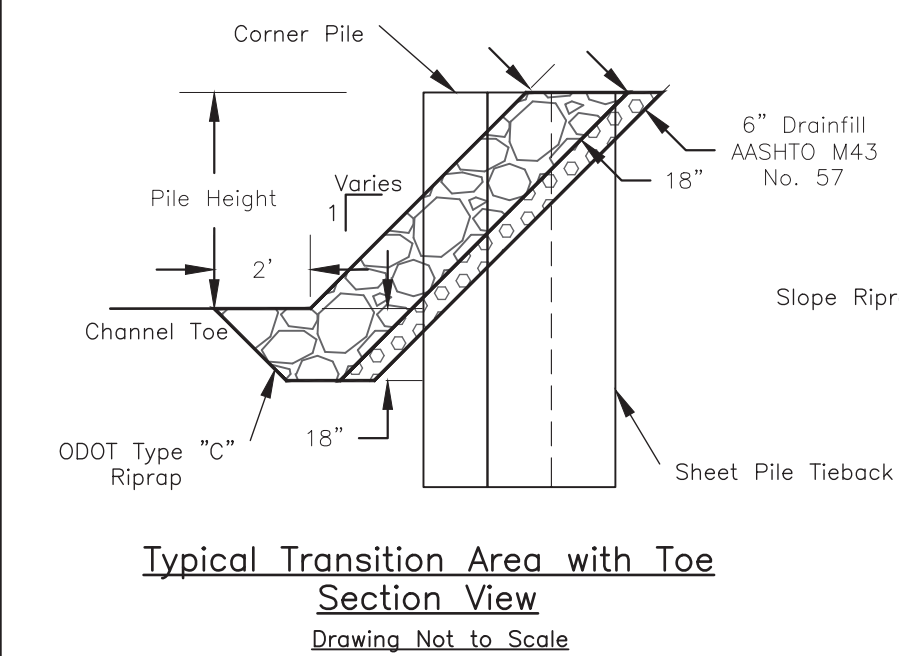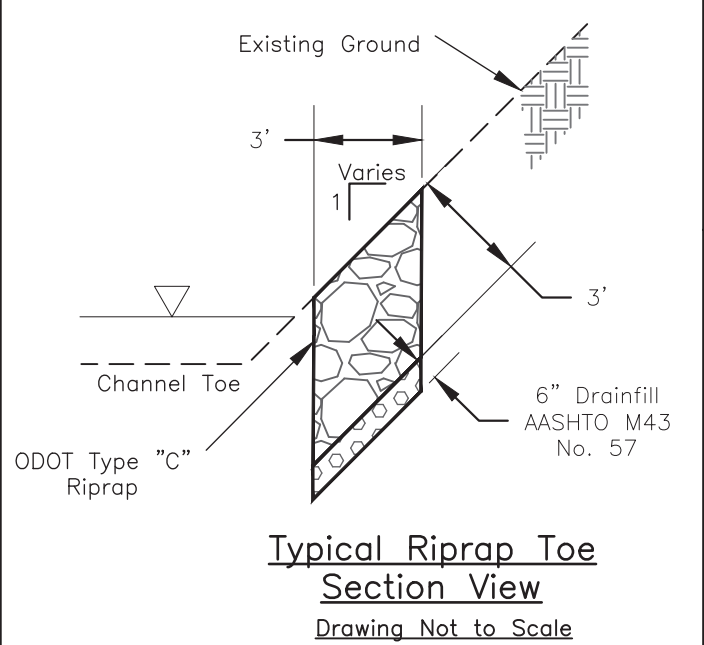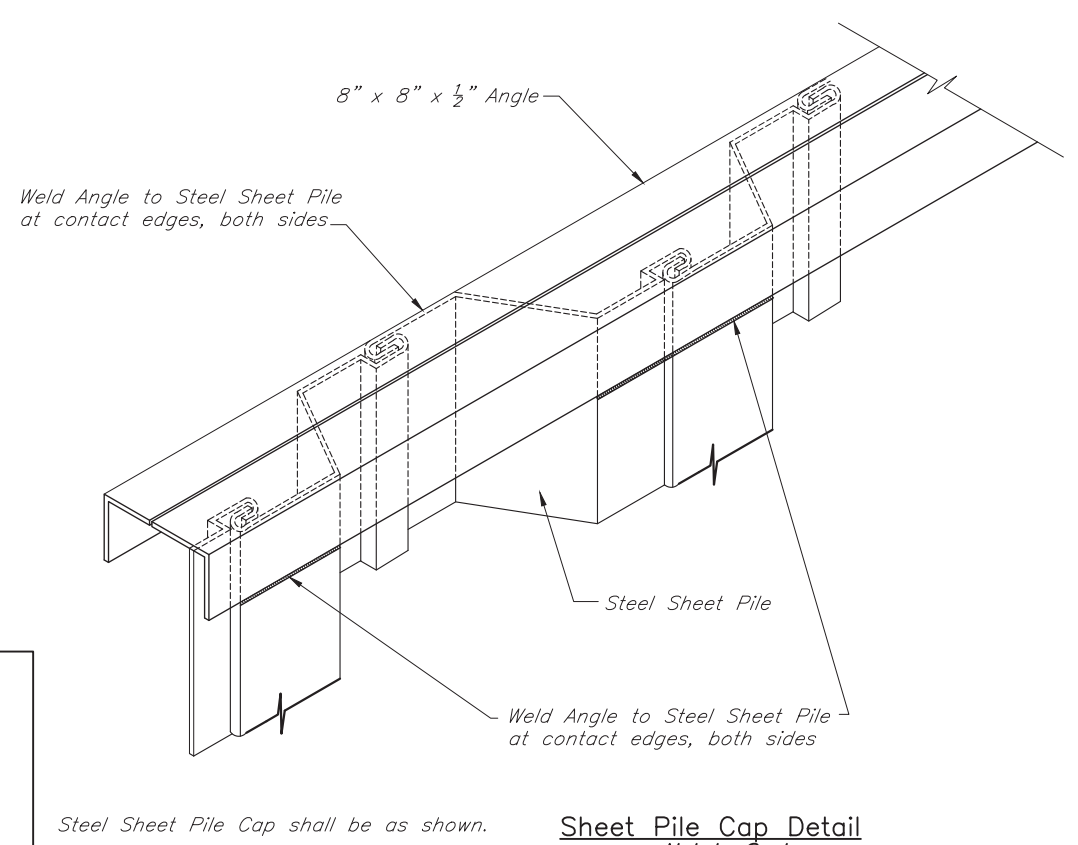

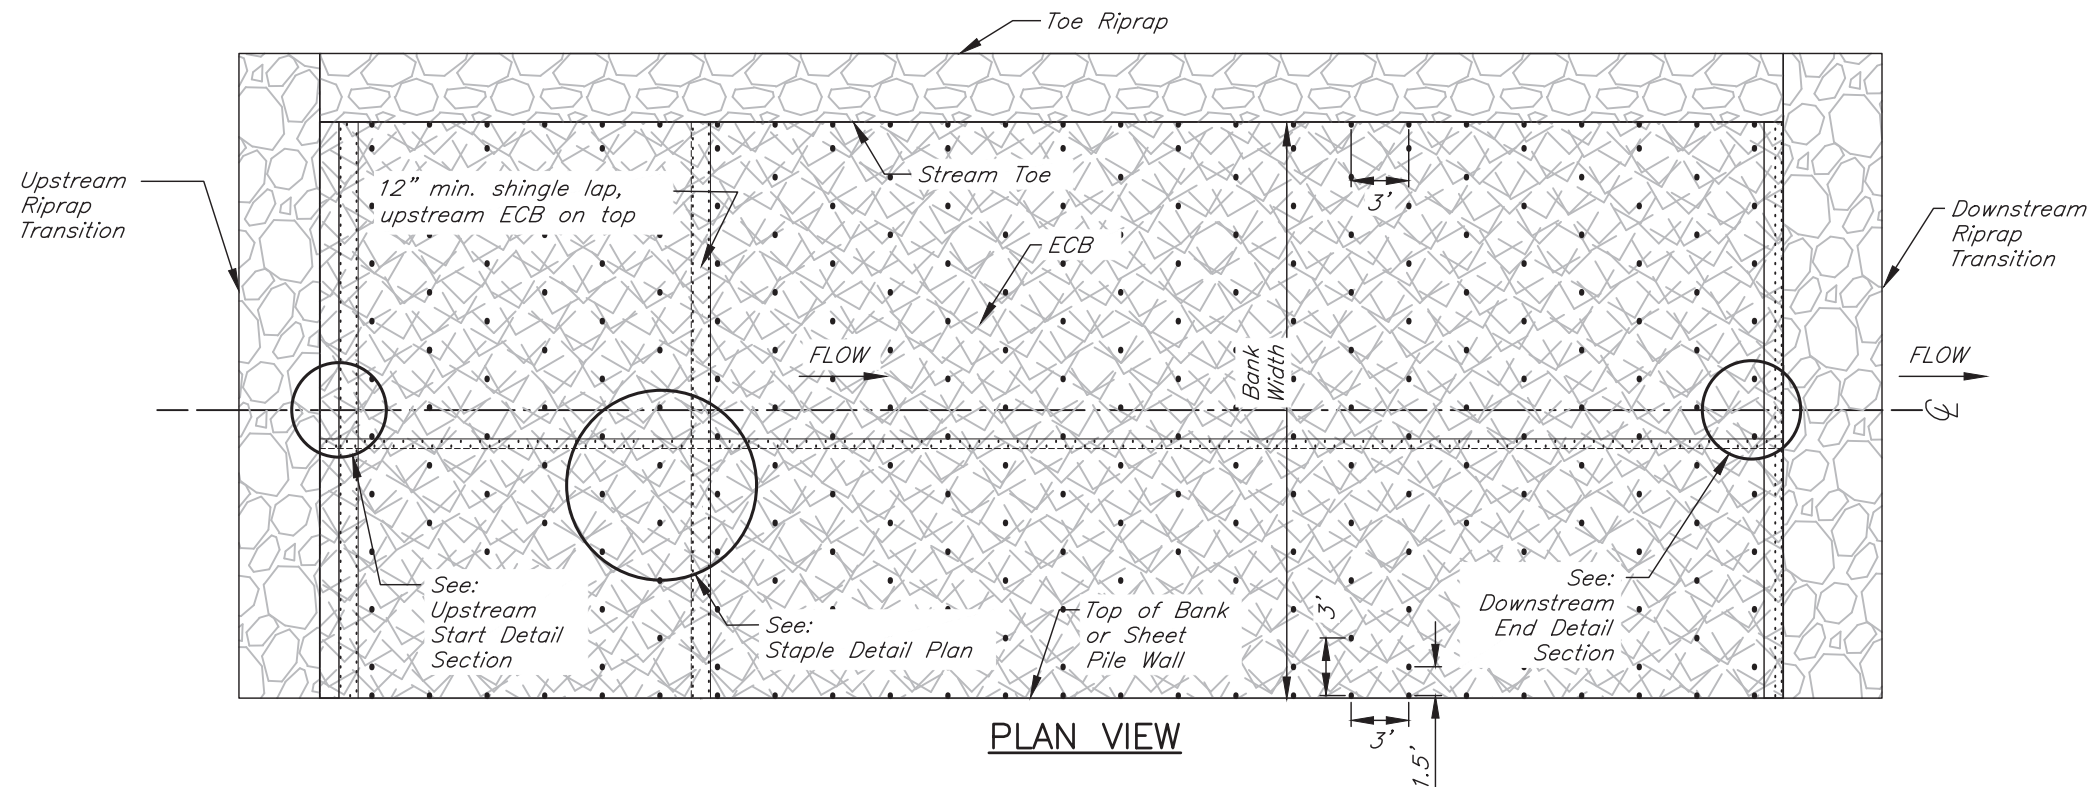


PLAN VIEW


Views are
Not to Scale

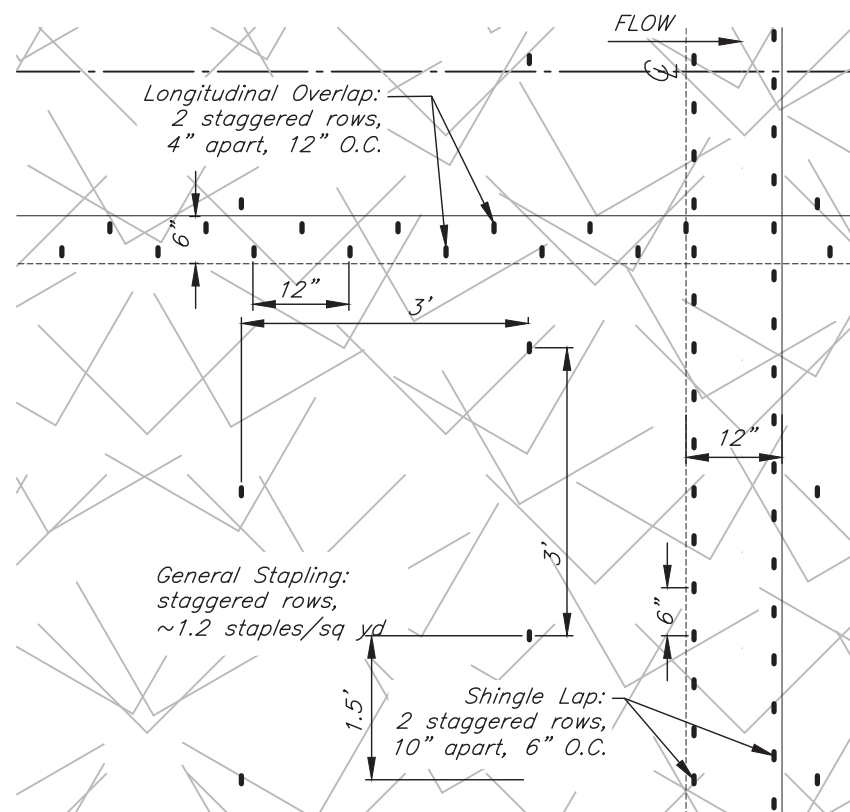


STAPLE DETAIL PLAN

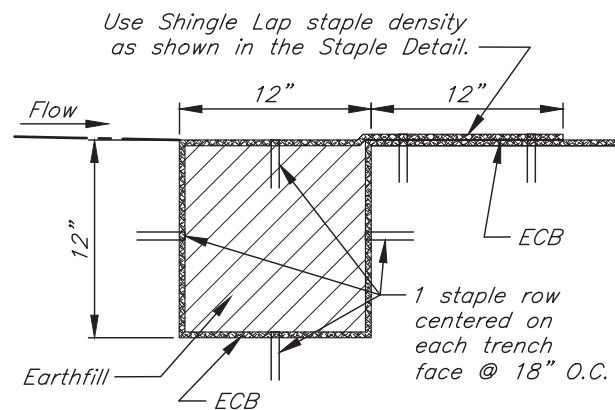

UPSTREAM START DETAIL SECTION

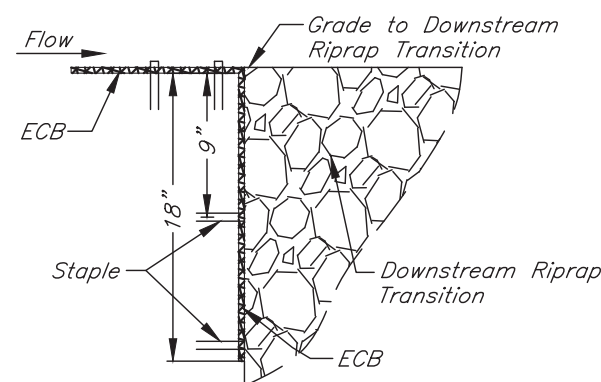

DOWNSTREAM END DETAIL SECTION

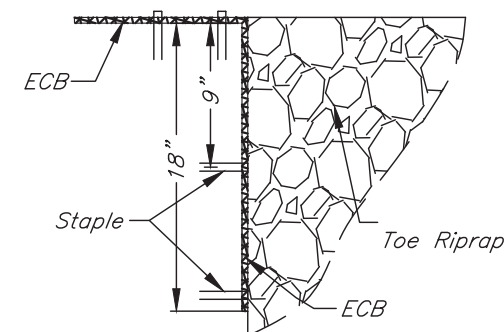

TOE RIPRAP DETAIL SECTION

NOTES:

1. Available Rolled Erosion Control Products include ECB— Erosion Control Blanket.
2. All constructed finished grades, seedbed preparation, fertilizing, and seeding shall be approved by NRCS before installation of the ECB.
3. Erosion Control Blanket (ECB) shall be double-netted using a mulch medium comprised of straw, coconut fiber, straw/coconut fiber, wood excelsior, or equivalent material. ECB minimum dry weight per surface area requirements (ASTM D6475) shall be 0.5 lb/sq. yd. ECB will have a 12-month (short term) typical function longevity as described in FWHA FP-14.
4. ECB shall be laid parallel to the direction of flow. Spread evenly without stretching to allow maximum contact with the soil.
5. U-Staples are to have a 1" crown and be 11 gauge or heavier wire. Manufacturers may have an alternative fastener type compatible with their ECB material which may be used with the approval of the engineer. Staples must be a minimum of 6" in length. Longer staples may be required in loose or sandy soils.
6. Staples shall be inset 1" min. from all blanket edges.
7. Earth backfill for Upstream and Downstream Details— Use 4" lifts compacted to a density equivalent to that of the surrounding native soil. Care should be taken to not tear the ECB.

BLESSING RD EWP

Erosion Control Blanket (ECB)
for Streambank Revegetation



File No.

Drawing No.

Sheet 11 of 11

Date 02/25
Designed Logan Veley
Drawn Logan Veley
Checked J. Adine-Kuchta/G. Wells
Digitally signed by BLAKE ARTHUR
Date: 2025.04.10 15:52:08 -0400
Approved BLAKE ARTHUR
Gallia County, Ohio