


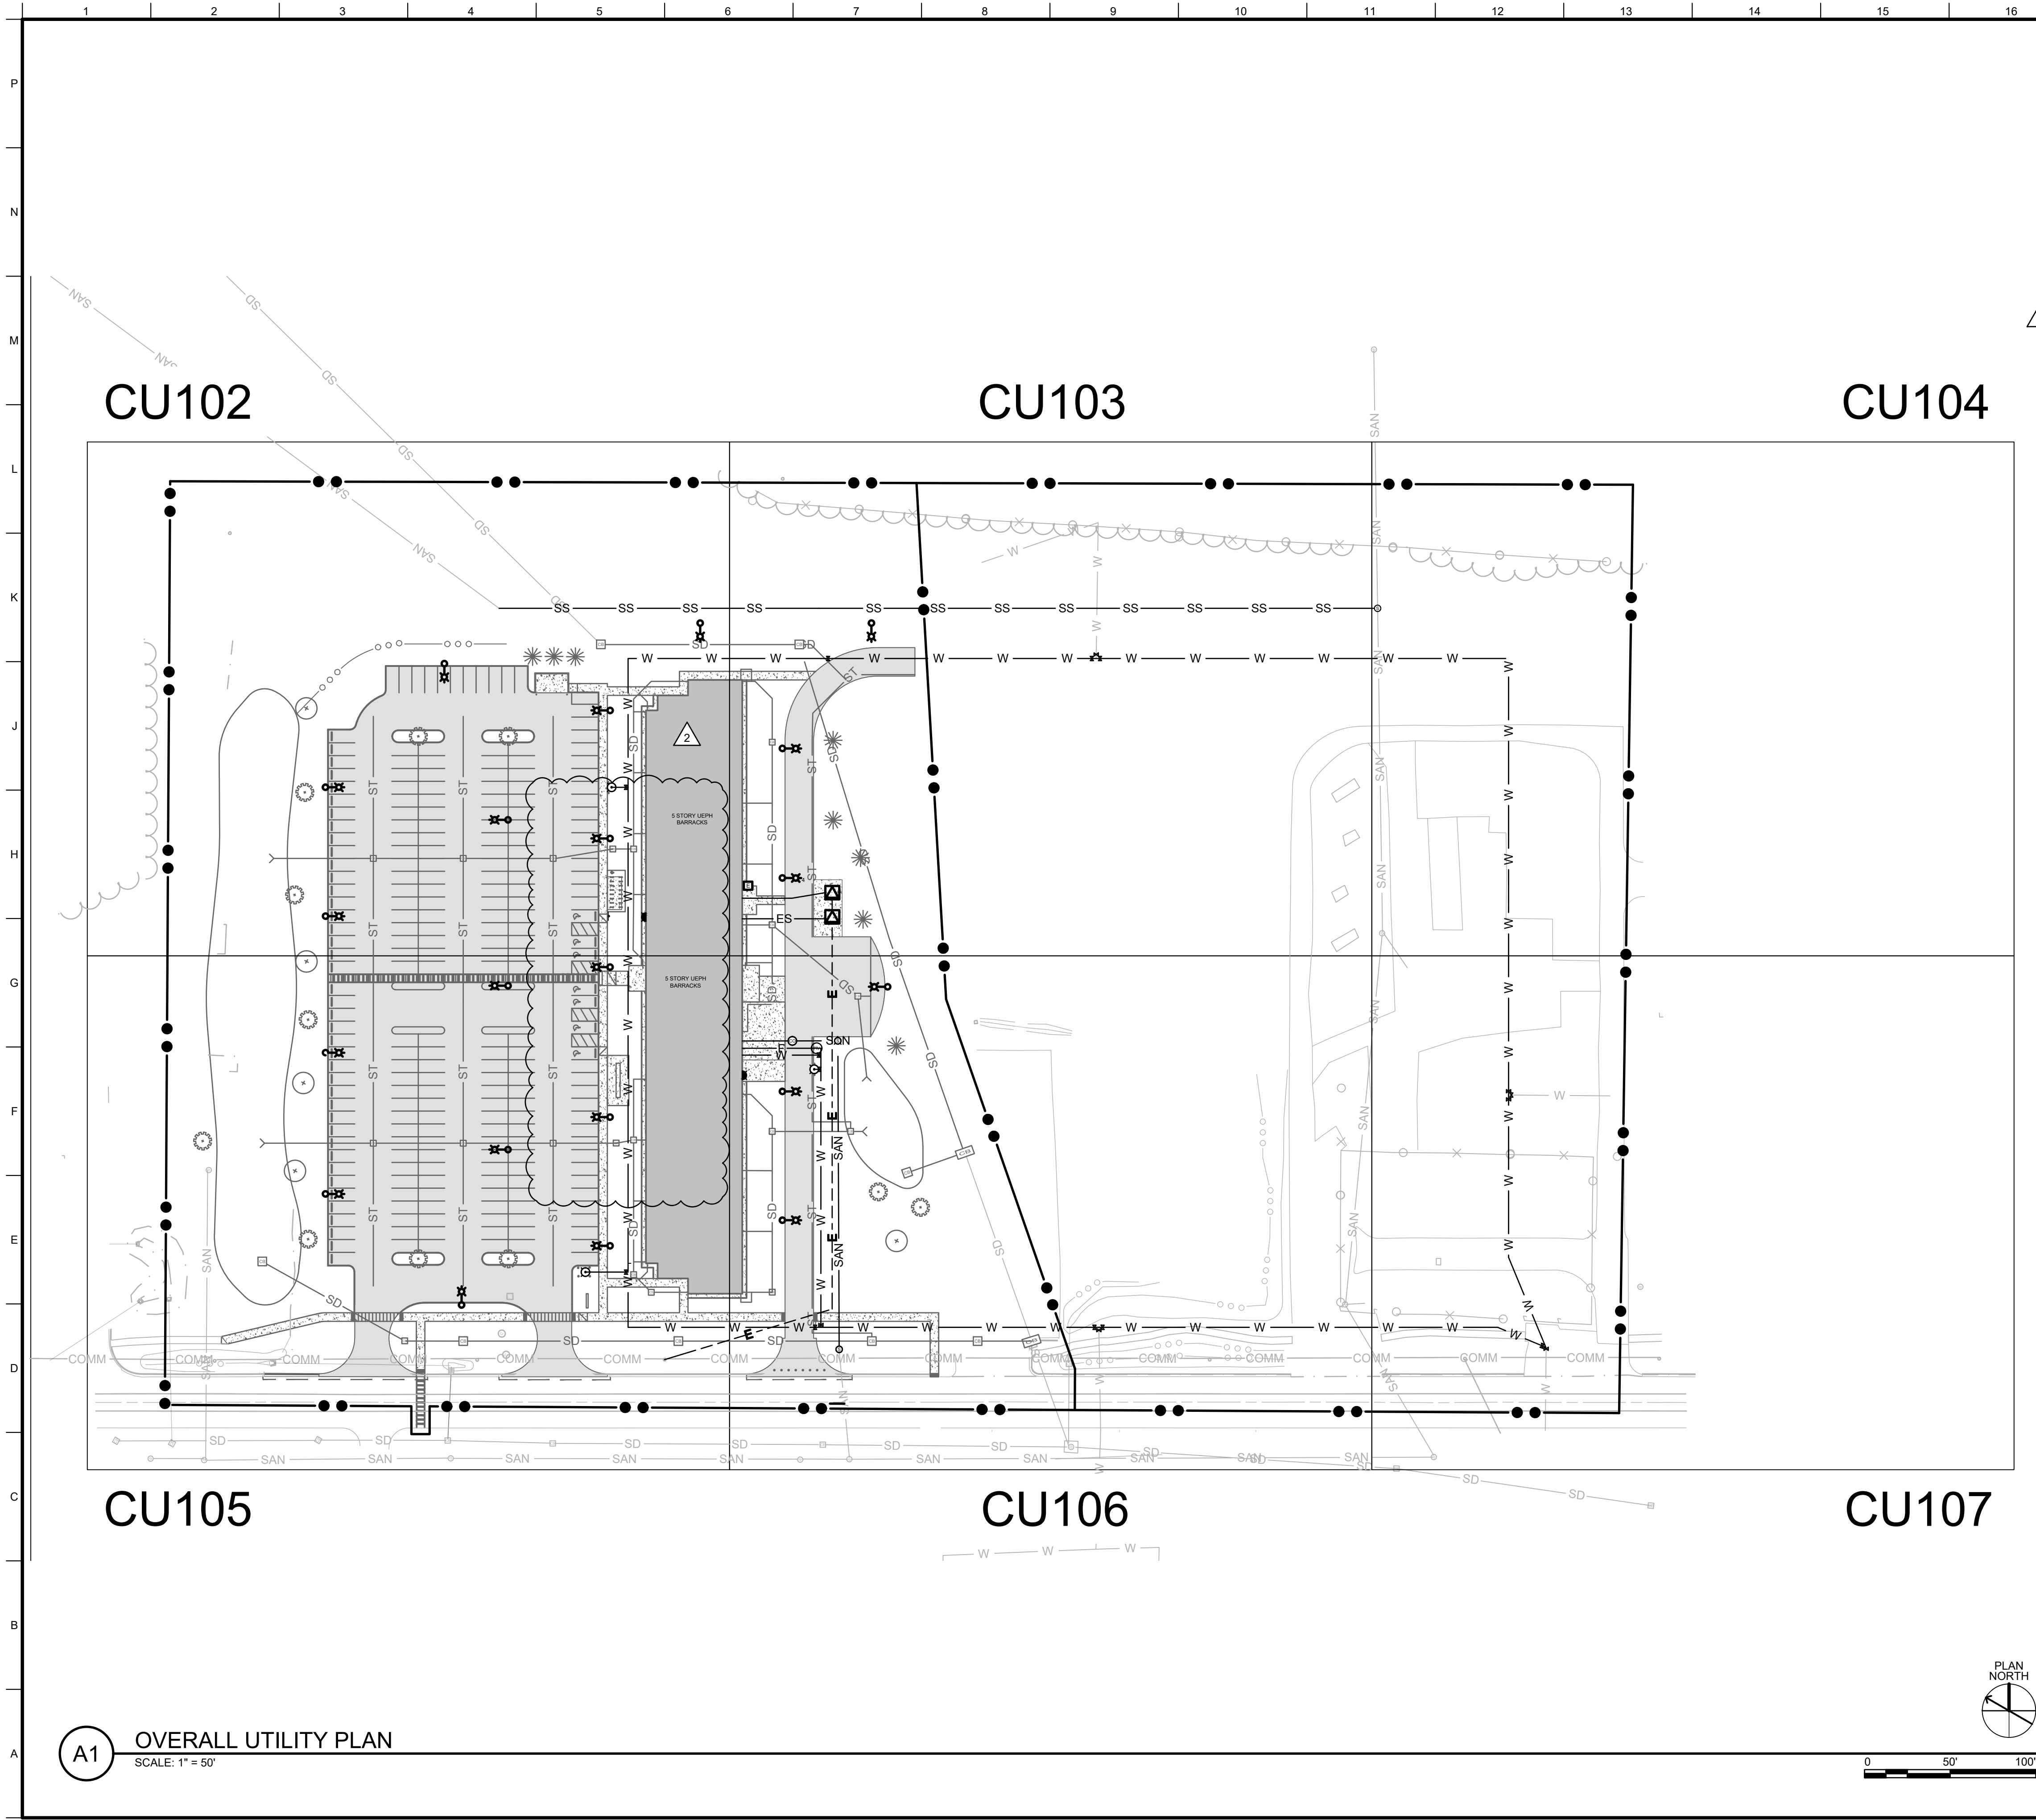



GENERAL SHEET NOTES - UTILITY

- CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL UTILITIES AND FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHALL BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION.
- LOCATION OF EXISTING UTILITIES ARE PROVIDED FROM SURVEY, BASE MAPS, AND UTILITY FEATURES. ACTUAL LOCATION MUST BE VERIFIED BY CONTRACTOR IN THE FIELD.
- SANITARY SEWER AND WATER UTILITIES ARE OWNED AND OPERATED BY JACOBS.
- SEE SHEETS CU501-502 FOR UTILITY DETAILS.
- SEE SHEETS CU201-202 FOR UTILITY PROFILES.
- SEE CG SHEET SERIES FOR GRADING AND STORM SEWER INFORMATION.
- JACOBS TO APPLY THRUST BLOCKS TO WATER MAIN UNTIL 5 FEET OUTSIDE OF THE BUILDING BASED ON CH2M DETAIL. SEE SHEET CU502 DETAIL A1.
- ALL EXISTING AND PROPOSED MANHOLES, VALVE BOXES, HANDHOLES, CLEANOUTS, FIRE HYDRANTS, CASTINGS, AND ANY OTHER APPURTENANCE MUST BE ADJUSTED TO MATCH FINISHED GRADE.
- CONTRACTOR MUST BE VACATED FROM THE FY27 UEPH BARRACKS WORK SITE PRIOR TO FY27 BARRACKS AWARD (MAY 2027).
- FOR ELECTRICAL AND TELECOMMUNICATION SITE PLANS, SEE SHEET SERIES ES AND TS RESPECTIVELY.
- AT THE BUILDING CONNECTION, THE WATER LINE MUST HAVE 54 INCHES OF COVER AT MINIMUM IN ORDER TO PASS UNDER THE GRADE BEAMS.

LEGEND - UTILTIY

- CONTRACTOR WORK LIMITS AND FY27 DEMARCATION
- W — W — WATER LINE SIZE AS NOTED
- F — F — FIRE WATER LINE AS NOTED
- SAN — SANITARY LINE - 8 INCH SDR35 PVC
- SS — SS — FORCE MAIN - 6 INCH C900 PVC
- S — SANITARY MANHOLE, SEE SHEET CU502 DETAIL A8
- CO — SANITARY CLEANOUT, SEE SHEET CU501 DETAIL A15
- — FIRE HYDRANT, SEE SHEET CU501 DETAIL A1
- PIV — POST INDICATOR VALVE, SEE SHEET CU501 DETAIL H8
- WATER LINE GATE VALVE, SIZE AS NOTED (CONTRACTOR TO CONFIRM SIZES OF EXISTING WATER LINES WHERE GATE VALVES ARE TO BE INSTALLED)

KEYPLAN

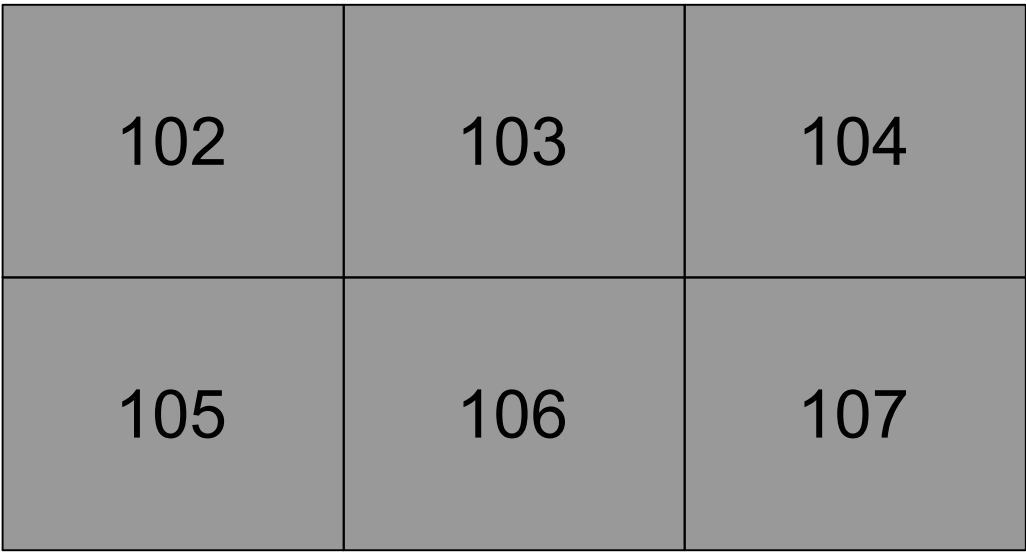


ISSUE DATE:	DESIGNED BY:	U.S. ARMY CORPS OF ENGINEERS
FEB 2026	C. CARTER	LOUISVILLE DISTRICT
SOLICITATION NO.:	DRAWN BY:	600 DR. MARTIN LUTHER KING JR. PLACE
	S. MACFARLAND	LOUISVILLE, KY 40202
CONTRACT NO.:	CHECKED BY:	
	M. BARRY	
REVISED IN ACCORDANCE WITH AMENDMENT 0002	DATE:	APRIL 2026
REVISED IN ACCORDANCE WITH AMENDMENT 0001	DATE:	APRIL 2026
MARK	DESCRIPTION	
2		
1		

U.S. ARMY CORPS OF ENGINEERS	DESIGNED BY:	U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT	C. CARTER	LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE	DRAWN BY:	600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202	S. MACFARLAND	LOUISVILLE, KY 40202
	CHECKED BY:	
	M. BARRY	
	DATE:	
	DATE:	

FT. CAMPBELL, KY	OVERALL UTILITY PLAN
UEPH BARRACKS	
FY26, PN 99248, P2 511686	

SHEET ID
CU101

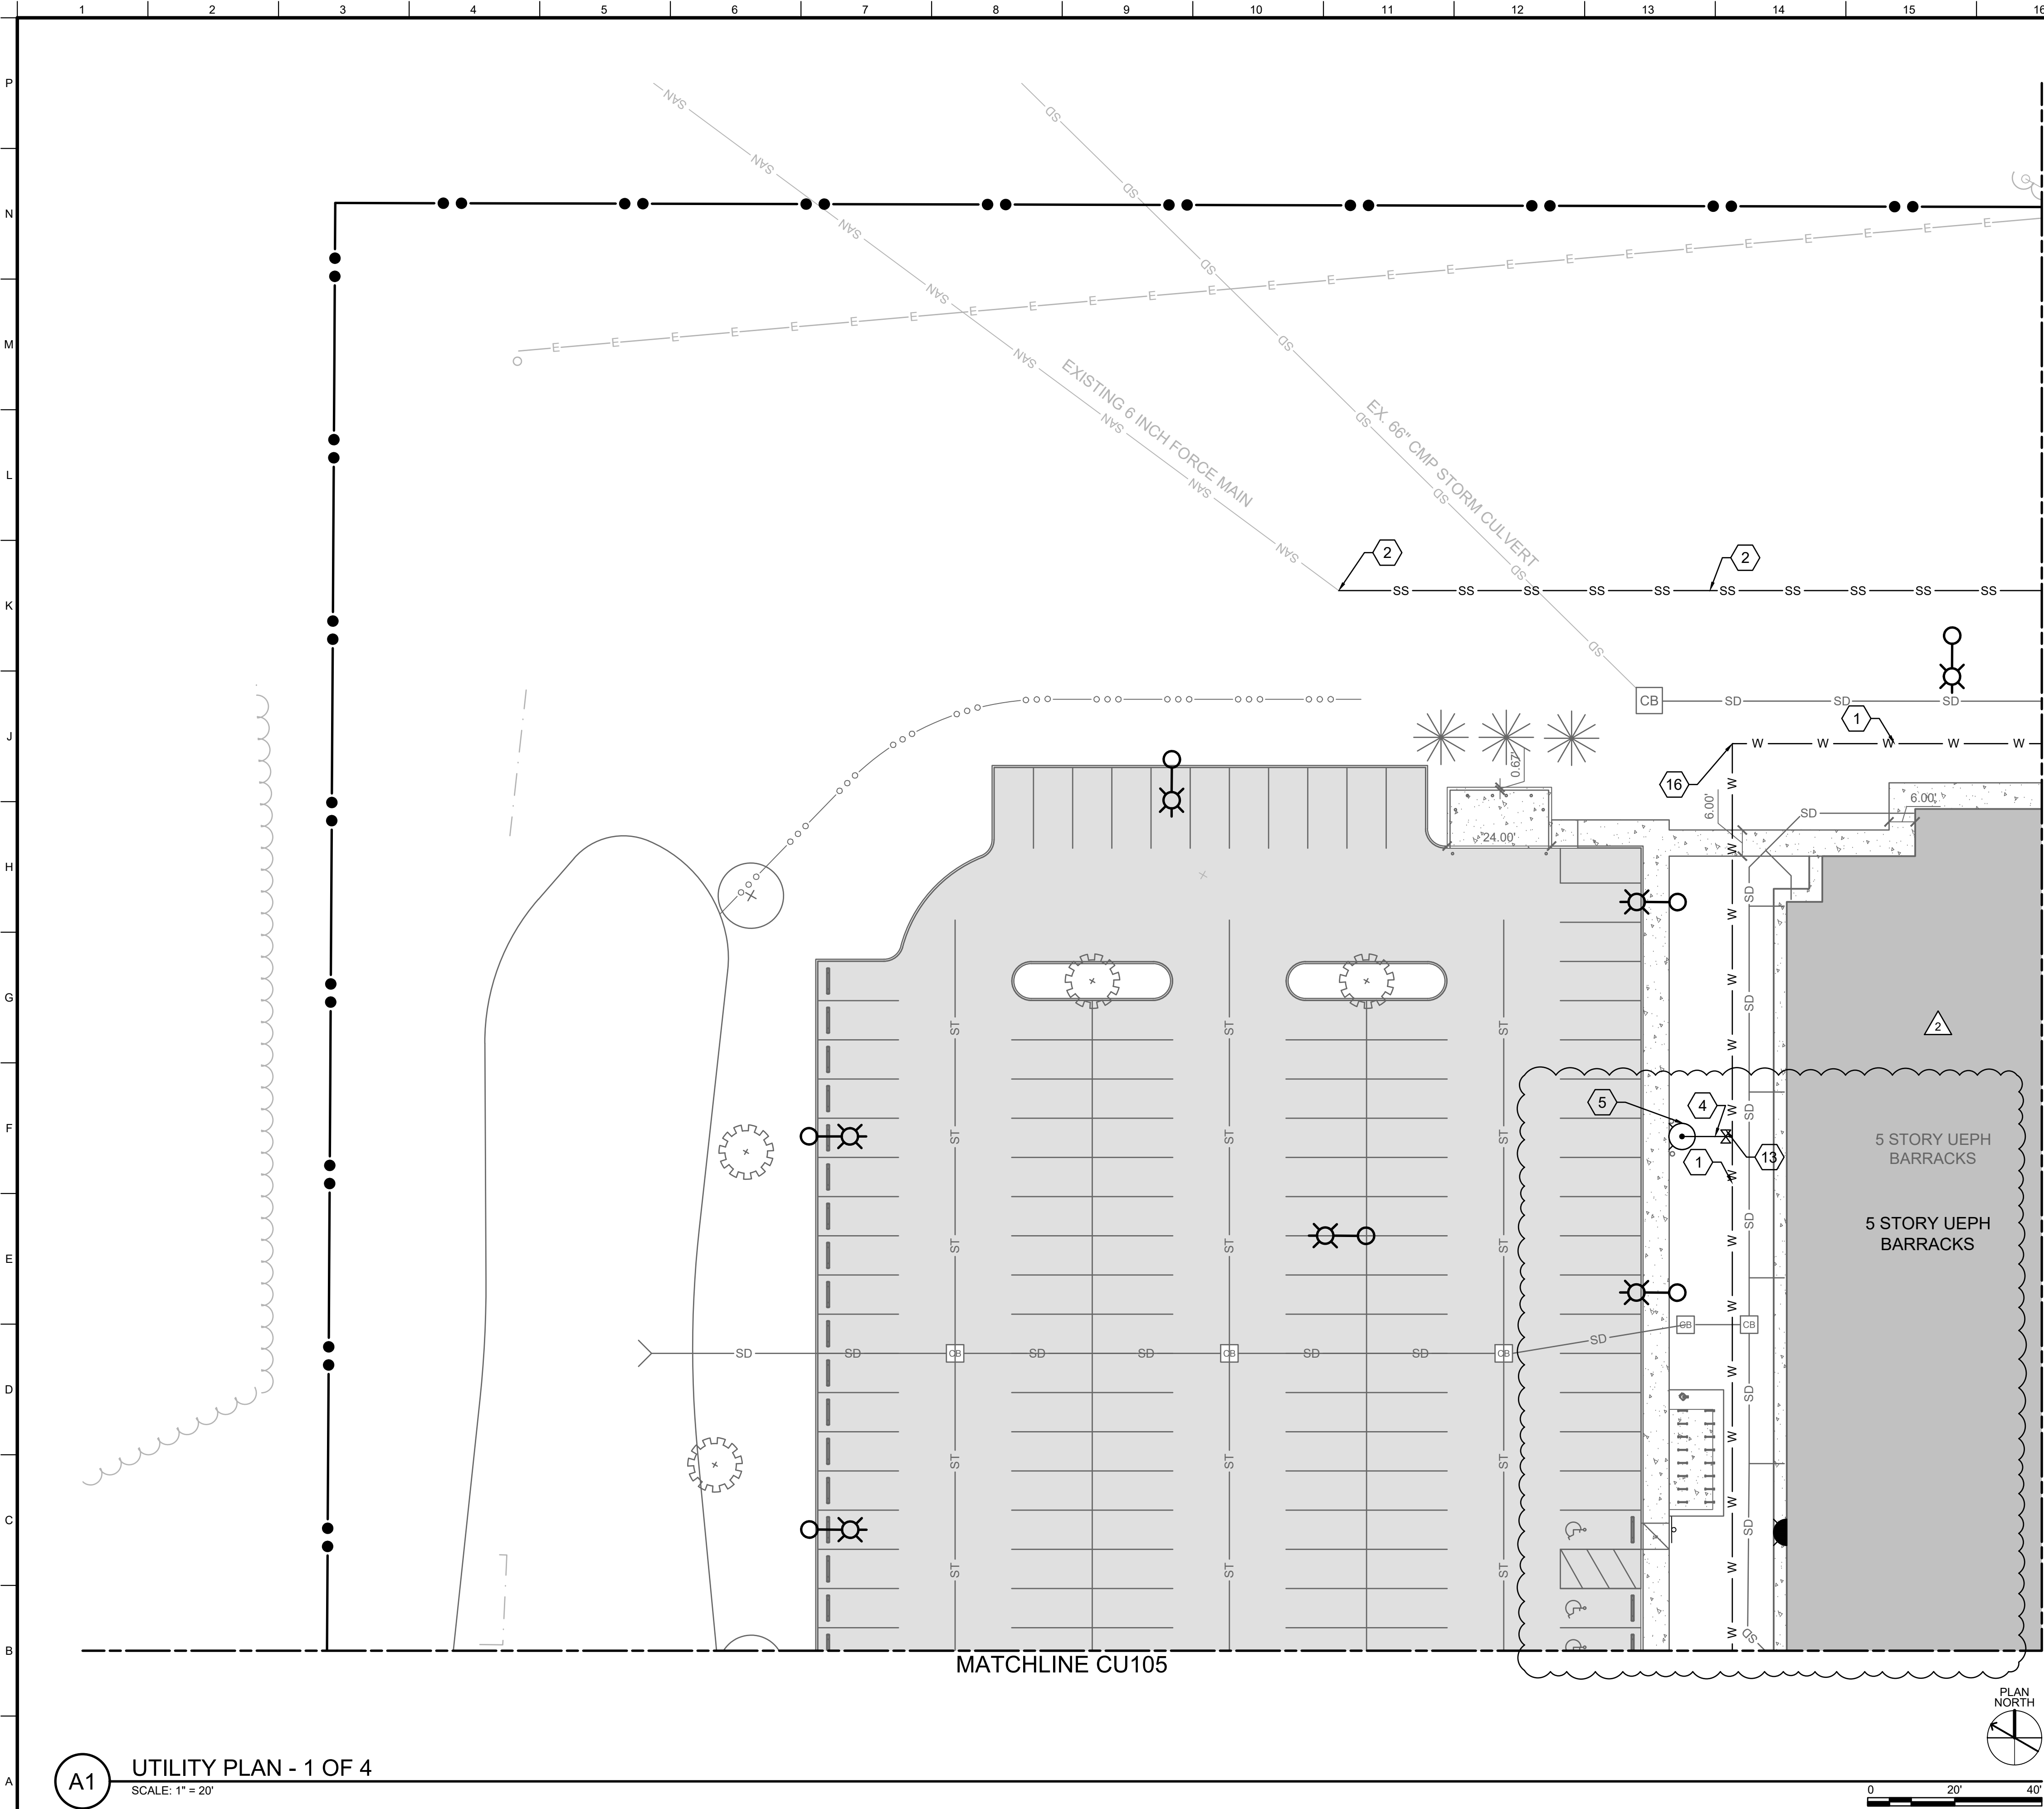

- GENERAL SHEET NOTES - UTILITY
- CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL UTILITIES AND FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHALL BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION.
 - LOCATION OF EXISTING UTILITIES ARE PROVIDED FROM SURVEY, BASE MAPS, AND UTILITY FEATURES. ACTUAL LOCATION MUST BE VERIFIED BY CONTRACTOR IN THE FIELD.
 - SANITARY SEWER AND WATER UTILITIES ARE OWNED AND OPERATED BY JACOBS.
 - SEE SHEETS CU501-502 FOR UTILITY DETAILS.
 - SEE SHEETS CU201-202 FOR UTILITY PROFILES.
 - SEE CG SHEET SERIES FOR GRADING AND STORM SEWER INFORMATION.
 - JACOBS TO APPLY THRUST BLOCKS TO WATER MAIN UNTIL 5 FEET OUTSIDE OF THE BUILDING BASED ON CH2M DETAIL. SEE SHEET CU502 DETAIL A1.
 - ALL EXISTING AND PROPOSED MANHOLES, VALVE BOXES, HANDHOLES, CLEANOUTS, FIRE HYDRANTS, CASTINGS, AND ANY OTHER APPURTENANCE MUST BE ADJUSTED TO MATCH FINISHED GRADE.
 - CONTRACTOR MUST BE VACATED FROM THE FY27 UEPH BARRACKS WORK SITE PRIOR TO FY27 BARRACKS AWARD (MAY 2027).
 - FOR ELECTRICAL AND TELECOMMUNICATION SITE PLANS, SEE SHEET SERIES ES AND TS RESPECTIVELY.
 - AT THE BUILDING CONNECTION, THE WATER LINE MUST HAVE 54 INCHES OF COVER AT MINIMUM IN ORDER TO PASS UNDER THE GRADE BEAMS.

- SHEET KEYNOTES - UTILITY
- 12 INCH C900 PVC WATER LINE LOOP WITH VALVES TO BE CONSTRUCTED BY JACOBS PRIOR TO CONSTRUCTION.
 - FORCE MAIN REALIGNMENT TO BE CONSTRUCTED BY JACOBS PRIOR TO CONSTRUCTION. SEE SHEET CU201 FOR PROFILE INFORMATION.
 - JACOBS TO PROVIDE 6 INCH C900 PVC DOMESTIC WATER LINE SERVICE TO FACILITY.
 - JACOBS TO PROVIDE 6 INCH C900 PVC FIRE PROTECTION WATER LINE.
 - JACOBS TO PROVIDE FIRE HYDRANT SEE SHEET CU501 DETAIL A1.
 - JACOBS TO PROVIDE POST INDICATOR VALVE SEE SHEET CU501, DETAIL H8.
 - JACOBS TO PROVIDE 8" SDR 35 PVC SANITARY SEWER LINE.
 - JACOBS TO PROVIDE SANITARY SEWER CLEANOUT, SEE SHEET CU501, DETAIL A15.
 - JACOBS TO PROVIDE SANITARY SEWER MANHOLE, SEE SHEET CU502, DETAIL A8.
 - 8 INCH WATER MAIN SERVICE TO FACILITY TO BE CONSTRUCTED BY JACOBS.
 - JACOBS TO TIE FORCE MAIN TO PROPOSED SANITARY SEWER MANHOLE. SEE SHEET CU502, DETAIL H1.
 - JACOBS TO PROVIDE 12 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 6 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 8 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 8 INCH C900 PVC WATER MAIN SERVING FACILITY.
 - JACOBS TO PROVIDE 90 DEGREE BEND.
 - JACOBS TO PROVIDE 22.5 DEGREE BEND.

- LEGEND - UTILTIY
- | | |
|--|---|
| | CONTRACTOR WORK LIMITS AND FY27 DEMARCATION |
| | WATER LINE SIZE AS NOTED |
| | FIRE WATER LINE AS NOTED |
| | SANITARY LINE - 8 INCH SDR35 PVC |
| | FORCE MAIN - 6 INCH C900 PVC |
| | SANITARY MANHOLE, SEE SHEET CU502 DETAIL A8 |
| | SANITARY CLEANOUT, SEE SHEET CU501 DETAIL A15 |
| | FIRE HYDRANT, SEE SHEET CU501 DETAIL A1 |
| | POST INDICATOR VALVE, SEE SHEET CU501 DETAIL H8 |
| | WATER LINE GATE VALVE, SIZE AS NOTED
(CONTRACTOR TO CONFIRM SIZES OF EXISTING WATER LINES WHERE GATE VALVES ARE TO BE INSTALLED) |


KEYPLAN

102	103	104
105	106	107

US Army Corps of Engineers®

ISSUE DATE: FEB 2026	SOLICITATION NO.:	CONTRACT NO.:	REVISION IN ACCORDANCE WITH AMENDMENT 0002	DATE
DESIGNED BY: C. CARTER	DRAWN BY: S. MACFARLAND	CHECKED BY: M. BARRY	2	APRIL 2026
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202			1	APRIL 2026
FT. CAMPBELL, KY UEPH BARRACKS FY26, PN 99248, P2 511686			MARK	DESCRIPTION
UTILITY PLAN				
SHEET ID			CU102	

CERTIFIED FINAL W912QR26RA016_Plans-0002

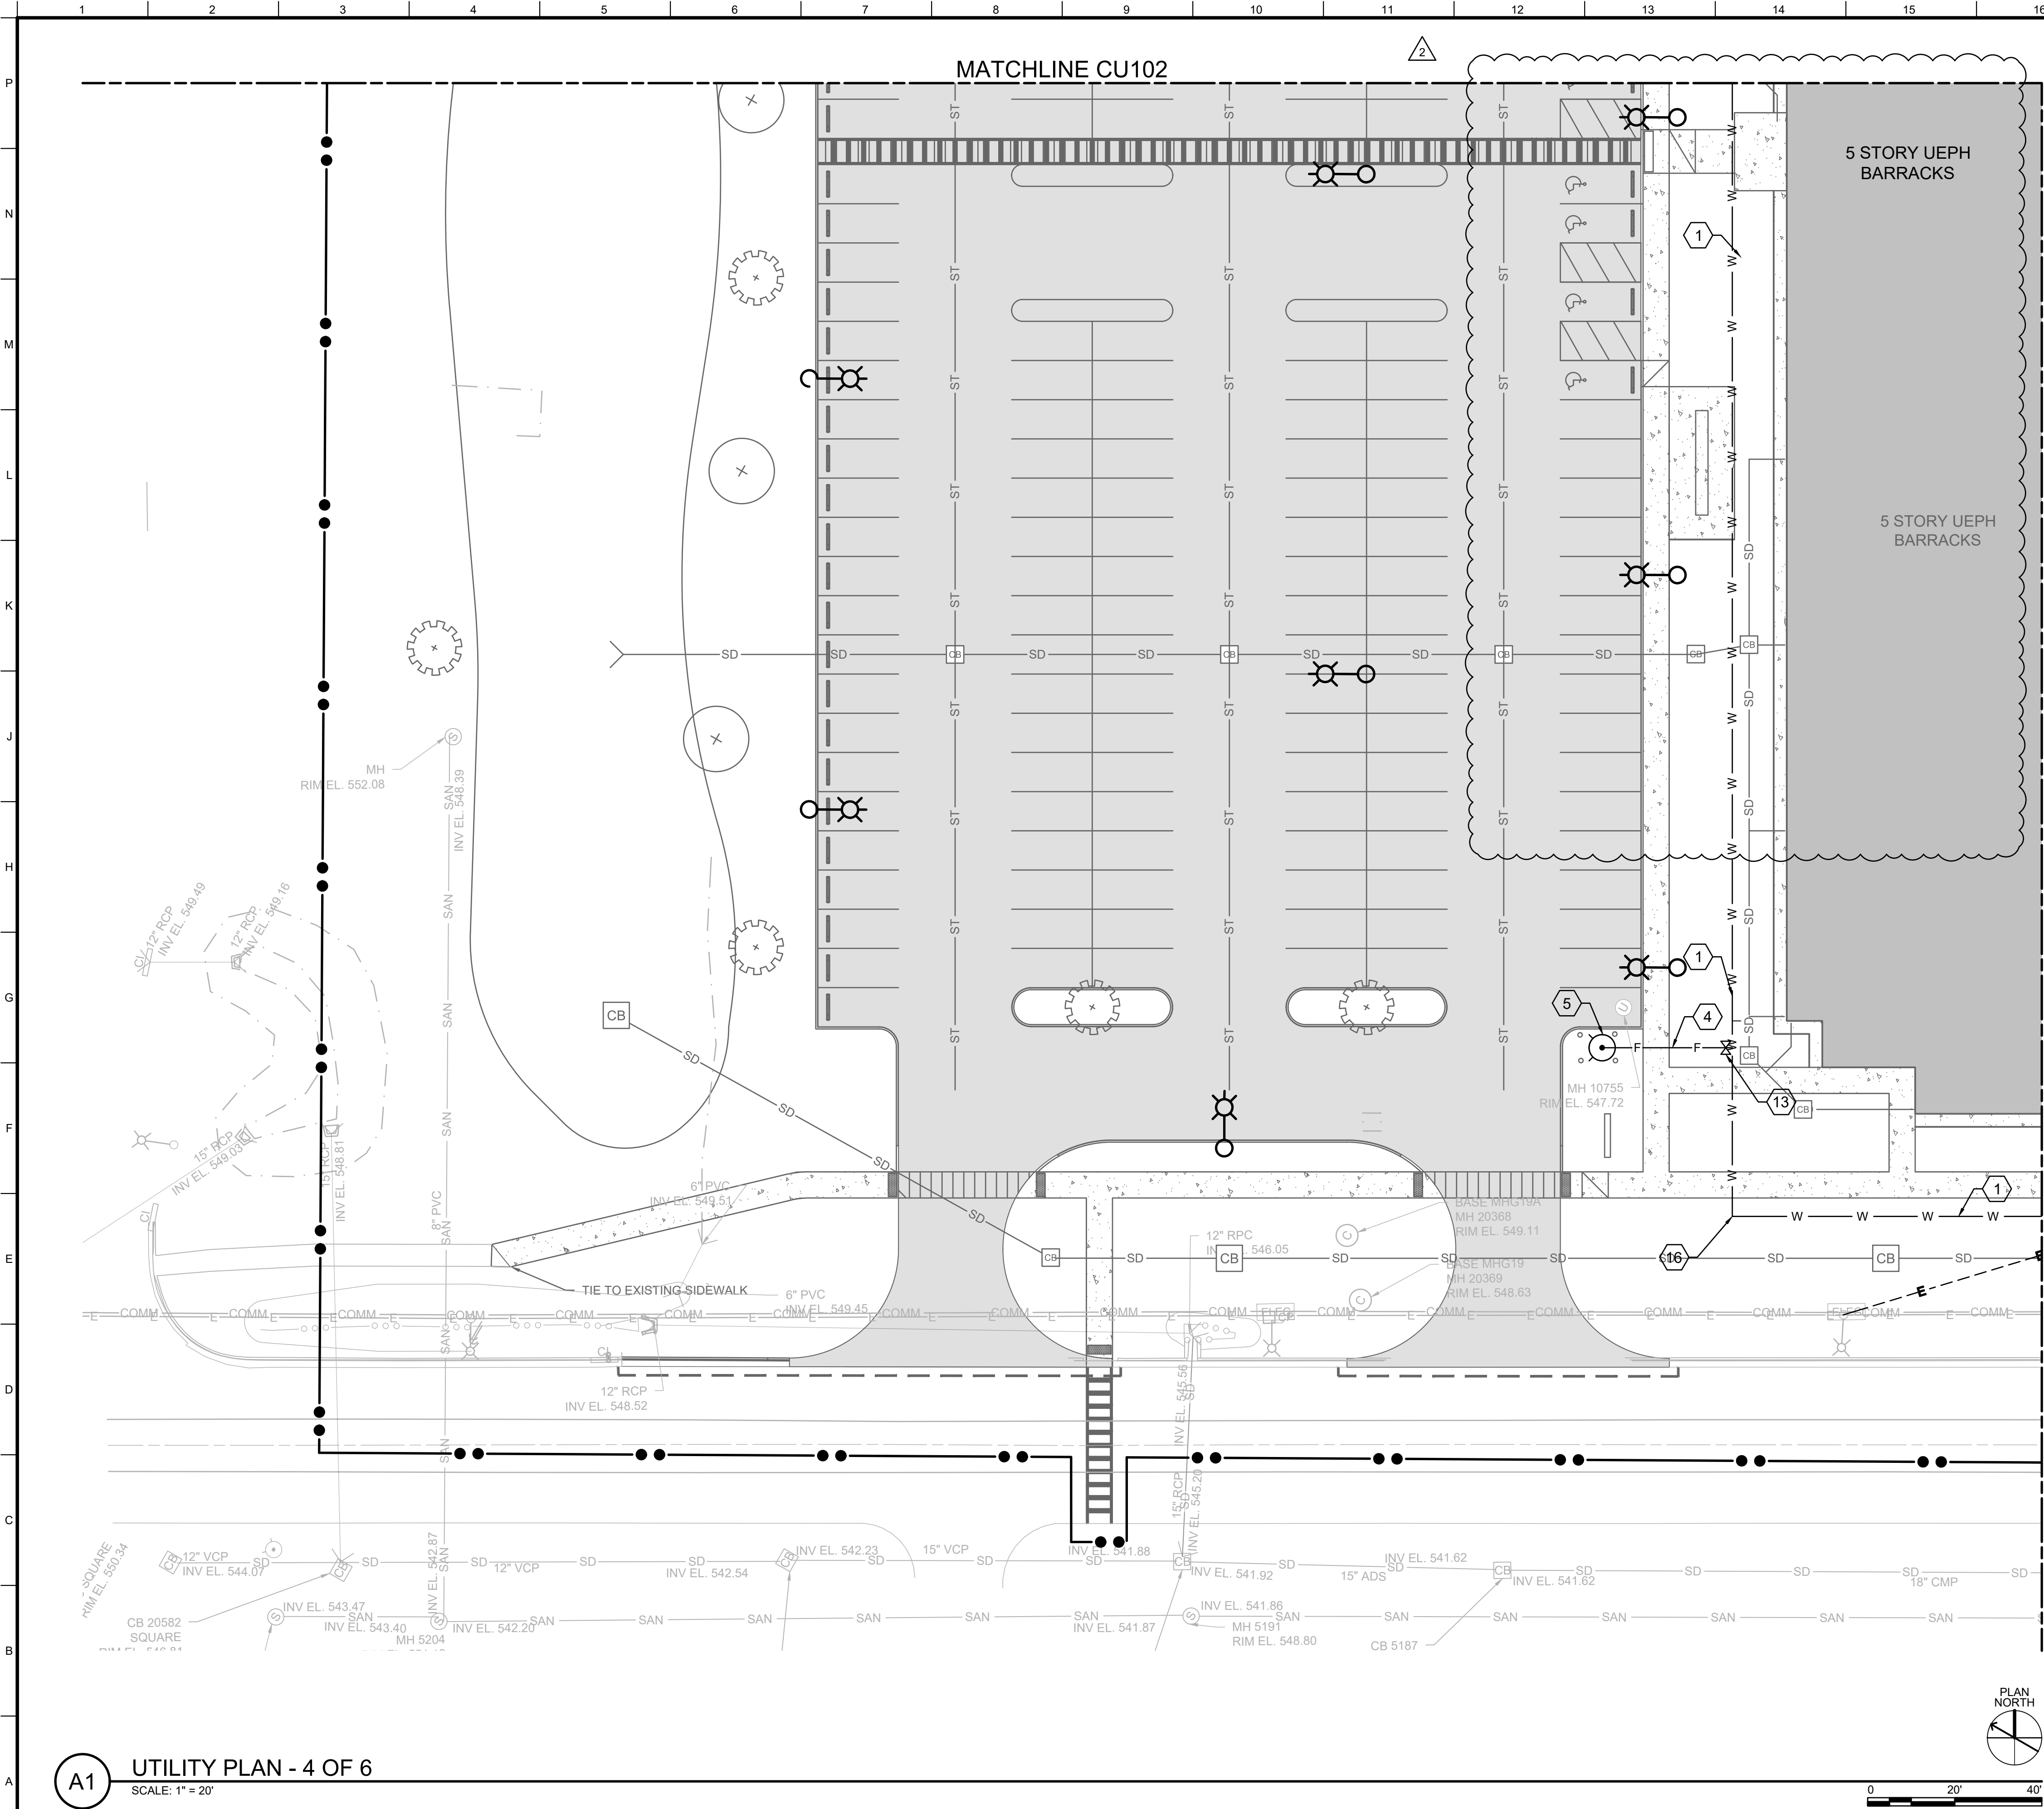

- GENERAL SHEET NOTES - UTILITY
- CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL UTILITIES AND FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHALL BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION.
 - LOCATION OF EXISTING UTILITIES ARE PROVIDED FROM SURVEY, BASE MAPS, AND UTILITY FEATURES. ACTUAL LOCATION MUST BE VERIFIED BY CONTRACTOR IN THE FIELD.
 - SANITARY SEWER AND WATER UTILITIES ARE OWNED AND OPERATED BY JACOBS.
 - SEE SHEETS CU501-502 FOR UTILITY DETAILS.
 - SEE SHEETS CU201-202 FOR UTILITY PROFILES.
 - SEE CG SHEET SERIES FOR GRADING AND STORM SEWER INFORMATION.
 - JACOBS TO APPLY THRUST BLOCKS TO WATER MAIN UNTIL 5 FEET OUTSIDE OF THE BUILDING BASED ON CH2M DETAIL. SEE SHEET CU502 DETAIL A1.
 - ALL EXISTING AND PROPOSED MANHOLES, VALVE BOXES, HANDHOLES, CLEANOUTS, FIRE HYDRANTS, CASTINGS, AND ANY OTHER APPURTENANCE MUST BE ADJUSTED TO MATCH FINISHED GRADE.
 - CONTRACTOR MUST BE VACATED FROM THE FY27 UEPH BARRACKS WORK SITE PRIOR TO FY27 BARRACKS AWARD (MAY 2027).
 - FOR ELECTRICAL AND TELECOMMUNICATION SITE PLANS, SEE SHEET SERIES ES AND TS RESPECTIVELY.
 - AT THE BUILDING CONNECTION, THE WATER LINE MUST HAVE 54 INCHES OF COVER AT MINIMUM IN ORDER TO PASS UNDER THE GRADE BEAMS.

- SHEET KEYNOTES - UTILITY
- 12 INCH C900 PVC WATER LINE LOOP WITH VALVES TO BE CONSTRUCTED BY JACOBS PRIOR TO CONSTRUCTION.
 - FORCE MAIN REALIGNMENT TO BE CONSTRUCTED BY JACOBS PRIOR TO CONSTRUCTION. SEE SHEET CU201 FOR PROFILE INFORMATION.
 - JACOBS TO PROVIDE 6 INCH C900 PVC DOMESTIC WATER LINE SERVICE TO FACILITY.
 - JACOBS TO PROVIDE 6 INCH C900 PVC FIRE PROTECTION WATER LINE.
 - JACOBS TO PROVIDE FIRE HYDRANT SEE SHEET CU501 DETAIL A1.
 - JACOBS TO PROVIDE POST INDICATOR VALVE SEE SHEET CU501, DETAIL H8.
 - JACOBS TO PROVIDE 8" SDR 35 PVC SANITARY SEWER LINE.
 - JACOBS TO PROVIDE SANITARY SEWER CLEANOUT, SEE SHEET CU501, DETAIL A15.
 - JACOBS TO PROVIDE SANITARY SEWER MANHOLE, SEE SHEET CU502, DETAIL A8.
 - 8 INCH WATER MAIN SERVICE TO FACILITY TO BE CONSTRUCTED BY JACOBS.
 - JACOBS TO TIE FORCE MAIN TO PROPOSED SANITARY SEWER MANHOLE. SEE SHEET CU502, DETAIL H1.
 - JACOBS TO PROVIDE 12 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 6 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 8 INCH GATE VALVE, SEE SHEET CU501 DETAIL A8.
 - JACOBS TO PROVIDE 8 INCH C900 PVC WATER MAIN SERVING FACILITY.
 - JACOBS TO PROVIDE 90 DEGREE BEND.
 - JACOBS TO PROVIDE 22.5 DEGREE BEND.

- LEGEND - UTILTIY
- CONTRACTOR WORK LIMITS AND FY27 DEMARCATION
 - W WATER LINE SIZE AS NOTED
 - F FIRE WATER LINE AS NOTED
 - SAN SANITARY LINE - 8 INCH SDR35 PVC
 - SS FORCE MAIN - 6 INCH C900 PVC
 - S SANITARY MANHOLE, SEE SHEET CU502 DETAIL A8
 - CO SANITARY CLEANOUT, SEE SHEET CU501 DETAIL A15
 - FH FIRE HYDRANT, SEE SHEET CU501 DETAIL A1
 - PIV POST INDICATOR VALVE, SEE SHEET CU501 DETAIL H8
 - WATER LINE GATE VALVE, SIZE AS NOTED (CONTRACTOR TO CONFIRM SIZES OF EXISTING WATER LINES WHERE GATE VALVES ARE TO BE INSTALLED)

KEYPLAN

102	103	104
105	106	107

US Army Corps of Engineers®

DESIGNED BY: C. CARTER	ISSUE DATE: FEB 2026	SOLICITATION NO.:	CONTRACT NO.:
DRAWN BY: S. MACFARLAND	CHECKED BY: M. BARRY	REVISD IN ACCORDANCE WITH AMENDMENT 0002	APRIL 2026
SUBMITTED BY:	SIZE:	MARK	DATE
	ANS/D	1	APRIL 2026


U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY
UEPH BARRACKS
FY26, PN 99248, P2 511686

UTILITY PLAN

SHEET ID

CU105

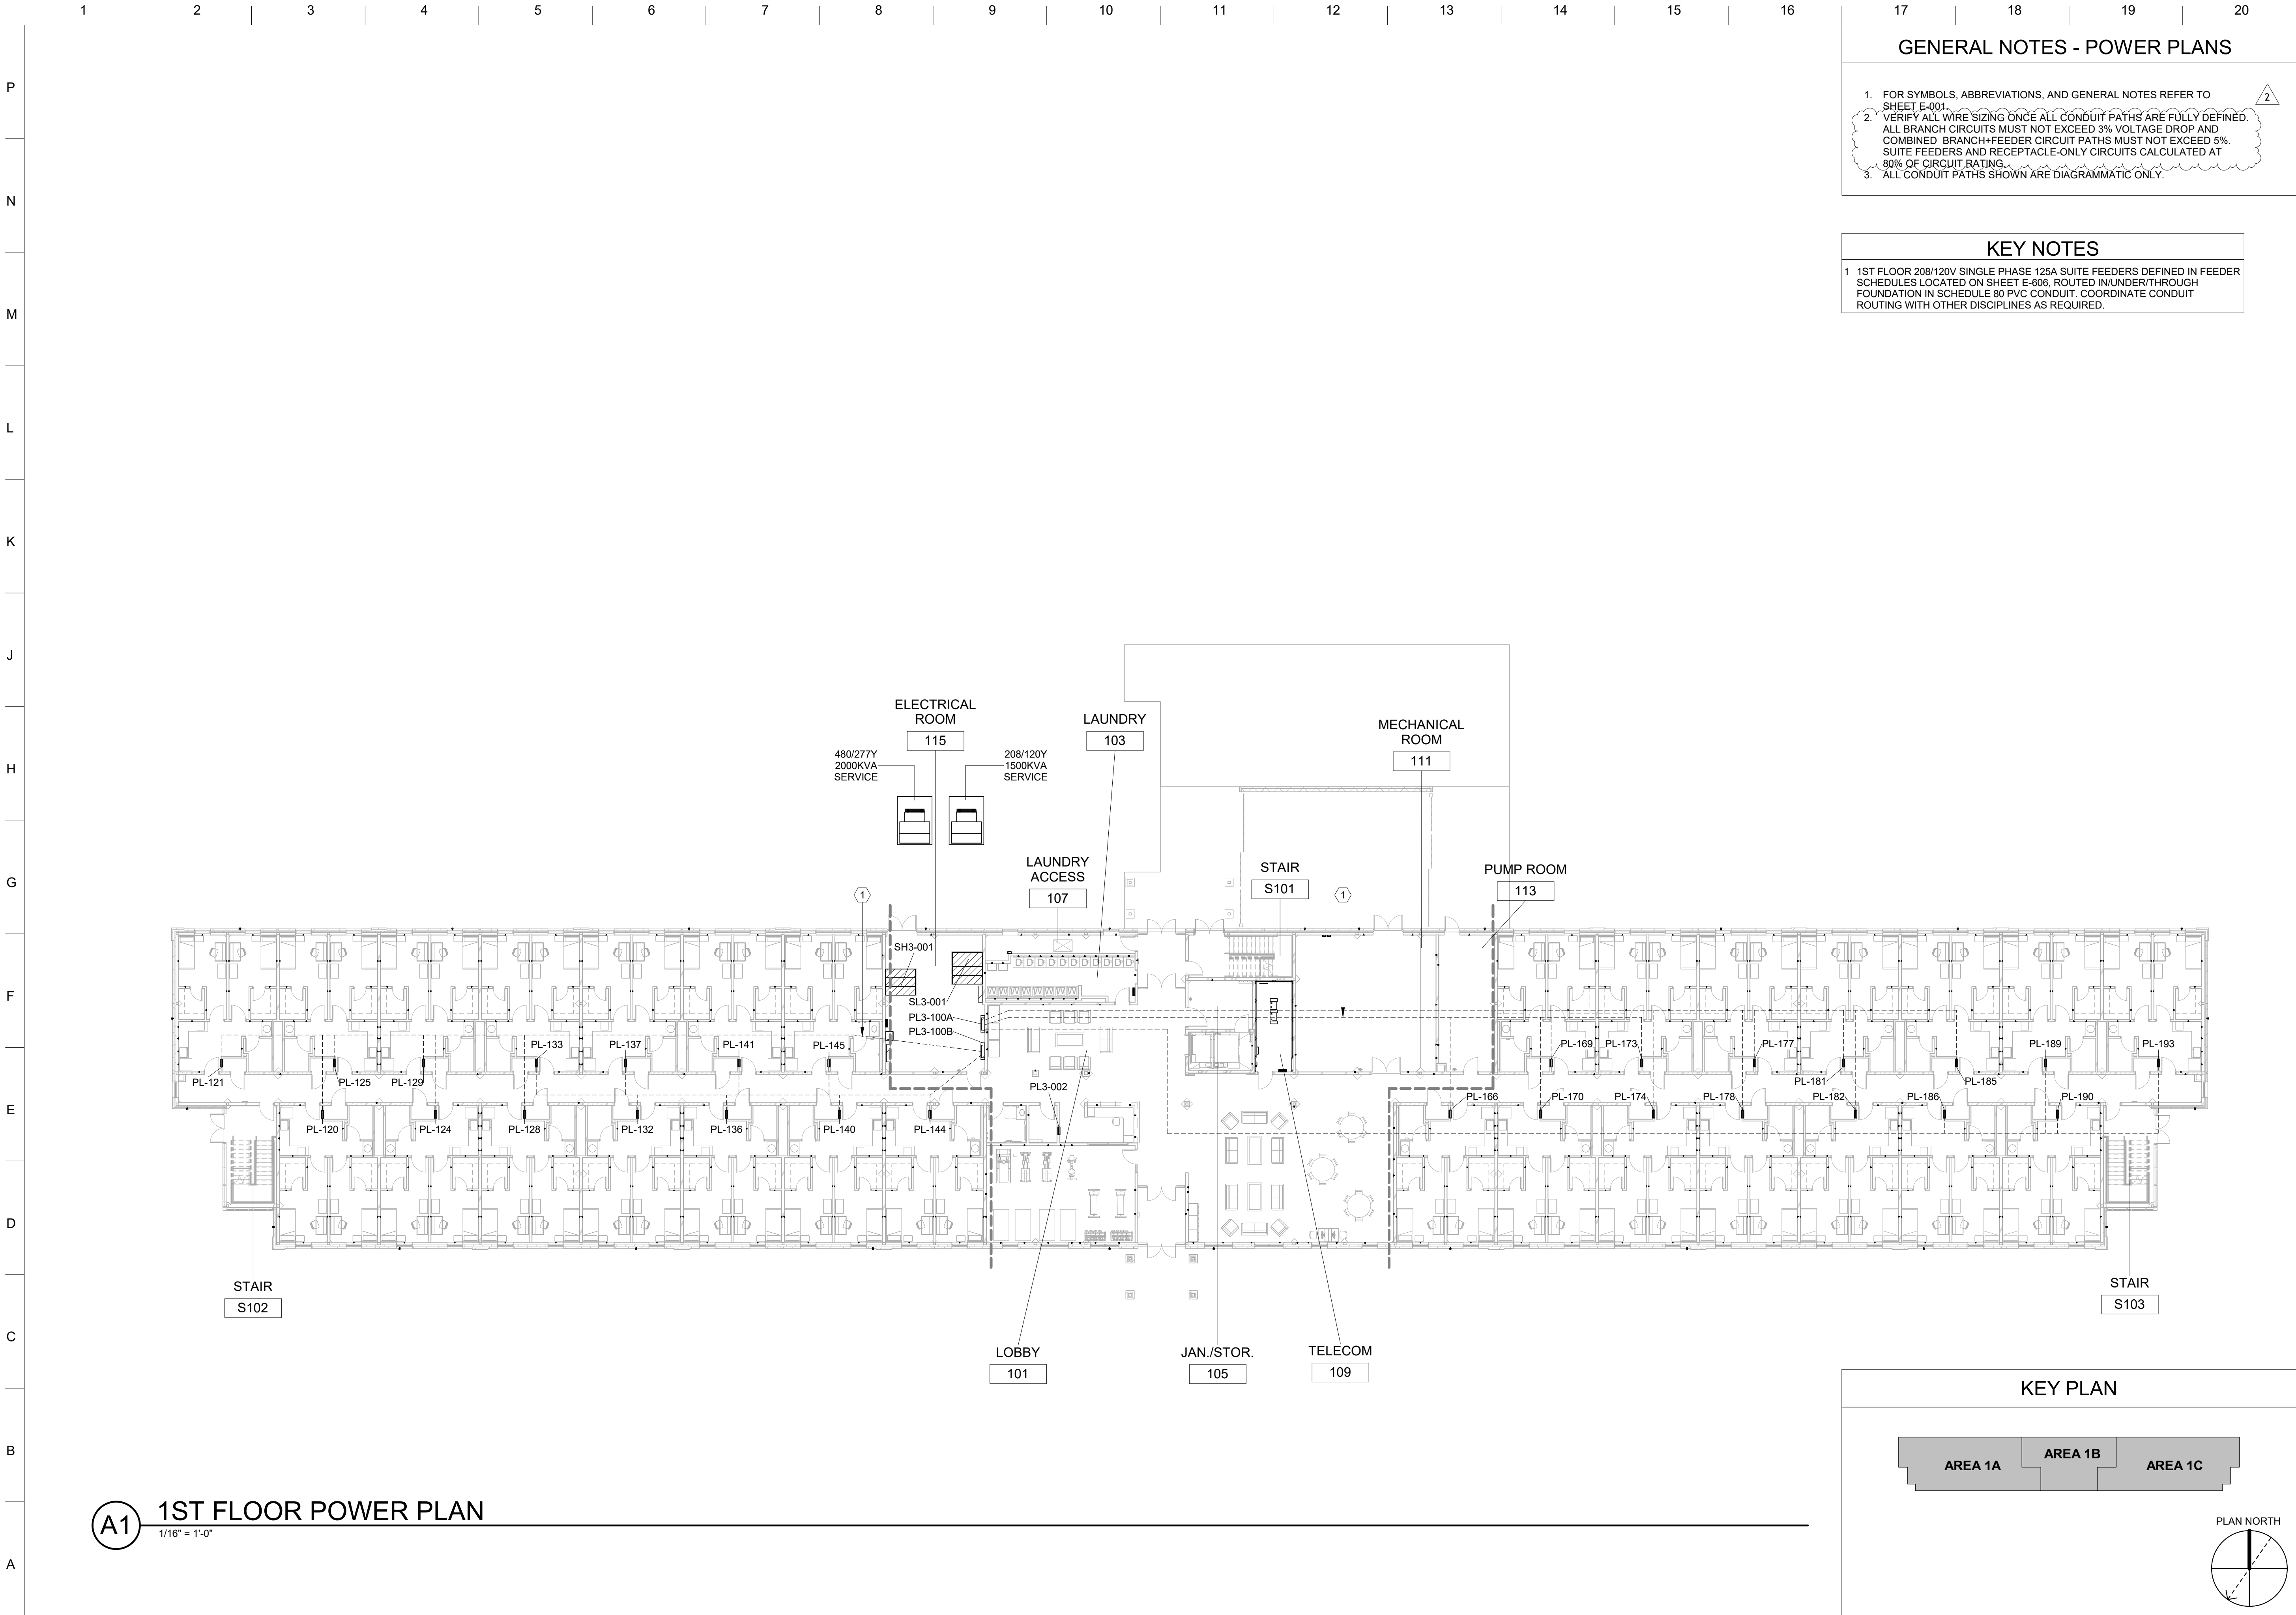




1. FOR SYMBOLS, ABBREVIATIONS, AND GENERAL NOTES REFER TO SHEET E-001.
2. VERIFY ALL WIRE SIZING ONCE ALL CONDUIT PATHS ARE FULLY DEFINED. ALL BRANCH CIRCUITS MUST NOT EXCEED 3% VOLTAGE DROP AND COMBINED BRANCH+FEEDER CIRCUIT PATHS MUST NOT EXCEED 5%. SUITE FEEDERS AND RECEPTACLE-ONLY CIRCUITS CALCULATED AT 80% OF CIRCUIT RATING.
3. ALL CONDUIT PATHS SHOWN ARE DIAGRAMMATIC ONLY.



- 1 #10 AWG CONDUCTORS (MIN) REQUIRED TO MAINTAIN BRANCH CIRCUIT VOLTAGE DROP BELOW 3% IN ALL CIRCUIT CONDUCTORS.
- 2 #6 AWG CONDUCTORS (MIN) REQUIRED TO MAINTAIN BRANCH CIRCUIT VOLTAGE DROP BELOW 3% BETWEEN JBOX AND POWER PANEL.
- 3 #8 AWG CONDUCTORS (MIN) REQUIRED TO MAINTAIN BRANCH CIRCUIT VOLTAGE DROP BELOW 3%.
- 4 CORRIDOR RECEPTACLE OUTLETS AT 18' ABOVE FINISHED FLOOR, NO POINT ALONG A CORRIDOR WALL CAN BE MORE THAN 25 FEET FROM A RECEPTACLE TO MEET BOTH NEC 210.63(A) AND UFC 3-520.01 3-6.1.2(g) REQUIREMENTS.
- 5 REFERENCE SHEET E-401 FOR TYPICAL SILE AND LAUNDRY ROOM ENLARGED VIEWS.
- 6 SPLICE LARGER HOMERUN CABLE TO SMALLER CONDUCTORS IN ACCESSIBLE SPACE AT APPROXIMATE LOCATION SHOWN (IN JUNCTION BOX).
- 7 EXTERIOR GFCI RECEPTABLES, LINE SIDE CONNECTIONS ONLY - INSTALL WHERE INDICATED AT 18 INCHES AFF, WITHIN 10FT FROM EXTERIOR DOORS THEN AT 50' INTERVALS ALONG PERIMETER OF BUILDING.

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: J. MOORE	ISSUE DATE: FEBRUARY 2026
	CHECKED BY: J. MOORE	SOLICITATION NO.:
	CHECKED BY: B. GADDIE	CONTRACT NO.:
	SUBMITTED BY: M. BARRY	
	APPROVED BY: ANS/D	

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686

SHEET ID

E-122

CERTIFIED FINAL W912QR26RA016 Plans-0002

Plot Date: 4/21/2026 1:20:48 PM
File Path: C:\Users\H2EDDUM9\Documents\511686 Rev\2025 E_UEPH_H2EDDUM9.mt



1. FOR SYMBOLS, ABBREVIATIONS, AND GENERAL NOTES REFER TO SHEET E-001.
2. VERIFY ALL WIRE SIZING ONCE ALL CONDUIT PATHS ARE FULLY DEFINED. ALL BRANCH CIRCUITS MUST NOT EXCEED 3% VOLTAGE DROP AND COMBINED BRANCH+FEEDER CIRCUIT PATHS MUST NOT EXCEED 5%. SUITE FEEDERS AND RECEPTACLE-ONLY CIRCUITS CALCULATED AT 80% OF CIRCUIT RATING.
3. ALL CONDUIT PATHS SHOWN ARE DIAGRAMMATIC ONLY.

[illegible]

Plot Date: 4/21/2026 3:07:14 PM
File Path: C:\Users\H2EDJUM9\Documents\511686_Riv\2025_E_UEPH_H2EDJUM9.mxd

- 1 DEDICATED VENDING MACHINE OUTLETS. GFCI IS INCORPORATED WITH CIRCUIT PROTECTIVE DEVICE IN RESPECTIVE SUPPLY PANEL.
- 2 REFERENCE SHEET E-502, DETAIL A1 FOR ASHRAE 90.1 SWITCHED OUTLET REQUIREMENTS AND BASIC WIRING OF OUTLETS TO OCCUPANCY SENSOR CONTROLLER/RELAY (OS)
- 3 MOUNT GFCI PROTECTED RECEPTACLES 12" ABOVE VANITY/COUNTERTOPS. RECEPTACLES DESIGNATED AS "GFCI" HAVE TRADITIONAL RESET/TEST BUTTONS AT THE OUTLET LOCATION. ALL OTHER RECEPTACLES ARE GFCI/AJFCI PROTECTED WITH COMBINATION BREAKERS (AT SUITE LOAD CENTER) AS SPECIFIED IN SUITE PANEL SCHEDULE.
- 4 UNLESS OTHERWISE SPECIFIED, MOUNT ALL LOBBY, DAYROOM, CORRIDOR, STAIRWELLS, JANITOR CLOSET, FITNESS ROOM AND VESTIBULE RECEPTACLE OUTLETS AT 18" AFF
- 5 WATER FOUNTAIN/CHILLER GFCI RECEPTACLE OUTLETS (QTY (2) DUPLEX), MOUNTED AS REQUIRED FOR EQUIPMENT MOUNTING AND CLEARANCE.
- 6 CQ STATION DEDICATED OUTLETS MOUNTED ABOVE DESK SURFACE, 3' AFF
- 7 FOR ALL TEN (10) FITNESS ROOM EQUIPMENT OUTLETS ON DEDICATED 20A BRANCH CIRCUITS - UTILIZE NEMA 5-20 RECEPTACLES, SPACED 5' APART AND 18" AFF. UTILIZE #10 AWG CONDUCTORS FOR ALL THESE DEDICATED BRANCH CIRCUITS.
- 8 GFCI OUTLETS, LINE SIDE CONNECTIONS ONLY - COORDINATE OUTLET LOCATION WITH VENDOR FOR MECHANICAL
- 9 #8 AWG CONDUCTORS (MIN) REQUIRED TO MAINTAIN BRANCH CIRCUIT VOLTAGE DROP BELOW 3%.
- 10 #10 AWG CONDUCTORS (MIN) REQUIRED TO MAINTAIN BRANCH CIRCUIT VOLTAGE DROP BELOW 3% IN ALL CIRCUIT CONDUCTORS.
- 11 WALL-MOUNT TV RECEPTACLE MOUNTED AT 7' AFF.
- 12 DEDICATED CIRCUIT FOR WATER SOFTENING UNITS. GFCI RECEPTACLE OUTLETS, EACH W/ LED INDICATOR LIGHT TO VERIFY CIRCUITS ARE ENERGIZED, MOUNT 4FT AFF.
- 13 REFERENCE SHEET E-401 FOR TYPICAL SUITE AND LAUNDRY ROOM ENLARGED VIEWS.
- 14 TELECOM ROOM OUTLETS INSTALLED ON BACKBOARDS TO BE SPACED NO FURTHER THAN 1 FT APART. REFERENCE ENLARGED TELECOM ROOM PLANS ON SHEET T-401 FOR FURTHER SPACING DETAILS, RACK-MOUNTED OUTLET INSTALLATION AND OTHER TELECOMMUNICATION COORDINATION DETAILS.
- 15 EXTERIOR HVAC EQUIPMENT SERVICE GFCI RECEPTACLES, LINE SIDE CONNECTIONS ONLY - COORDINATE OUTLET LOCATION AND QUANTITY WITH MECHANICAL.
- 16 EXTERIOR GFCI RECEPTACLES, LINE SIDE CONNECTIONS ONLY - INSTALL WHERE INDICATED AT 18 INCHES AFF, WITHIN 10FT FROM EXTERIOR DOORS THEN AT 50FT INTERVALS AROUND PERIMETER OF BUILDING.
- 17 DDC NETWORK AND POWER OUTLET APPROXIMATE LOCATION. PROVIDE AT LEAST ONE WALL-MOUNTED DDC TELECOMMUNICATIONS OUTLET WITHIN INDICATED UTILITY ROOMS AND ONE DEDICATED ELECTRICAL OUTLET IN ELECTRICAL AND MECHANICAL ROOMS (ALL FLOORS) TO ACCOMMODATE CONTROLS, ENERGY MANAGEMENT AND/OR REPORTING SYSTEMS. MOUNT IN LOCATION AS REQUIRED BY CONTROL SYSTEM.

A diagram labeled "PLAN NORTH" showing a circle with a vertical line and a dashed line at 45 degrees.

SHEET ID

E-123

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686

FIRST FLOOR POWER PLAN ENLARGED AREA "B"

CEPTIEIED EINAI W912QR26RA016 Plans-0002

CERTIFIED FINAL

AMENDMENT 0002	DESCRIPTION
4/21/2026 1:19:12 PM	

- ## KEY NOTES

-

STAIR
S103

AREA 1C

A circle with a vertical radius pointing upwards. A dashed line extends from the center at a 45-degree angle from the vertical radius, pointing towards the bottom-left. An arrow points to the end of this dashed line.

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40203

SHEET ID

CERTIFIED FINAL W912QR26RA016 Plans-0002

Plot Date: 4/21/2026 1:19:12 PM

4/21/2026 1:19:12 PM



A circle with a vertical radius drawn as a thick solid line. A dashed line is drawn from the center to the circumference at a 45-degree angle from the vertical radius. An arc indicates the 45-degree angle between the two lines.




A circle with a vertical radius drawn as a thick solid line. A dashed line extends from the center to the circumference at a 45-degree angle from the vertical radius. An arc indicates the 45-degree angle between the two lines.

AMENDMENT 0002	DESCRIPTION
4/22/2026 8:11:06 AM	

- ## KEY NOTES


- | MARK | DESCRIPTION |
|------|----------------|
| 2 | AMENDMENT 0002 |
- Plot Date: 4/22/2026 8:11:06 AM
- File Path: \\f:\users\jared\img\Documents\...

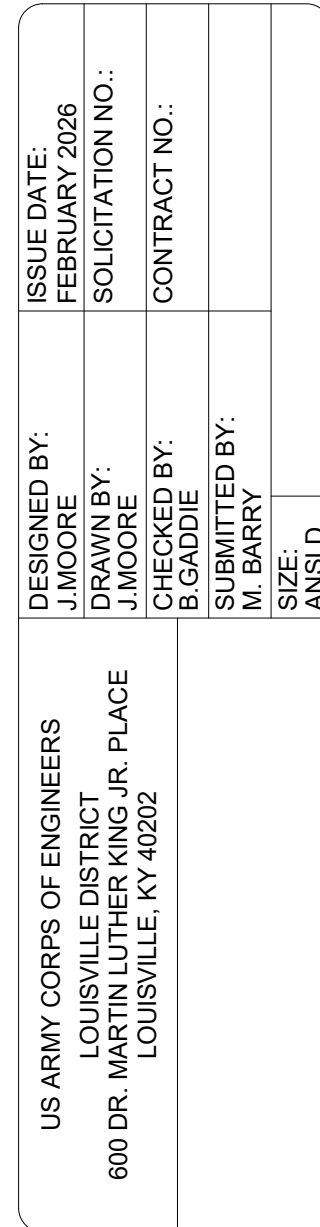

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686

E-135

AREA




PLAN NORTH


CERTIFIED FINAL W912QR26RA016 Plans-0002



CERTIFIED FINAL

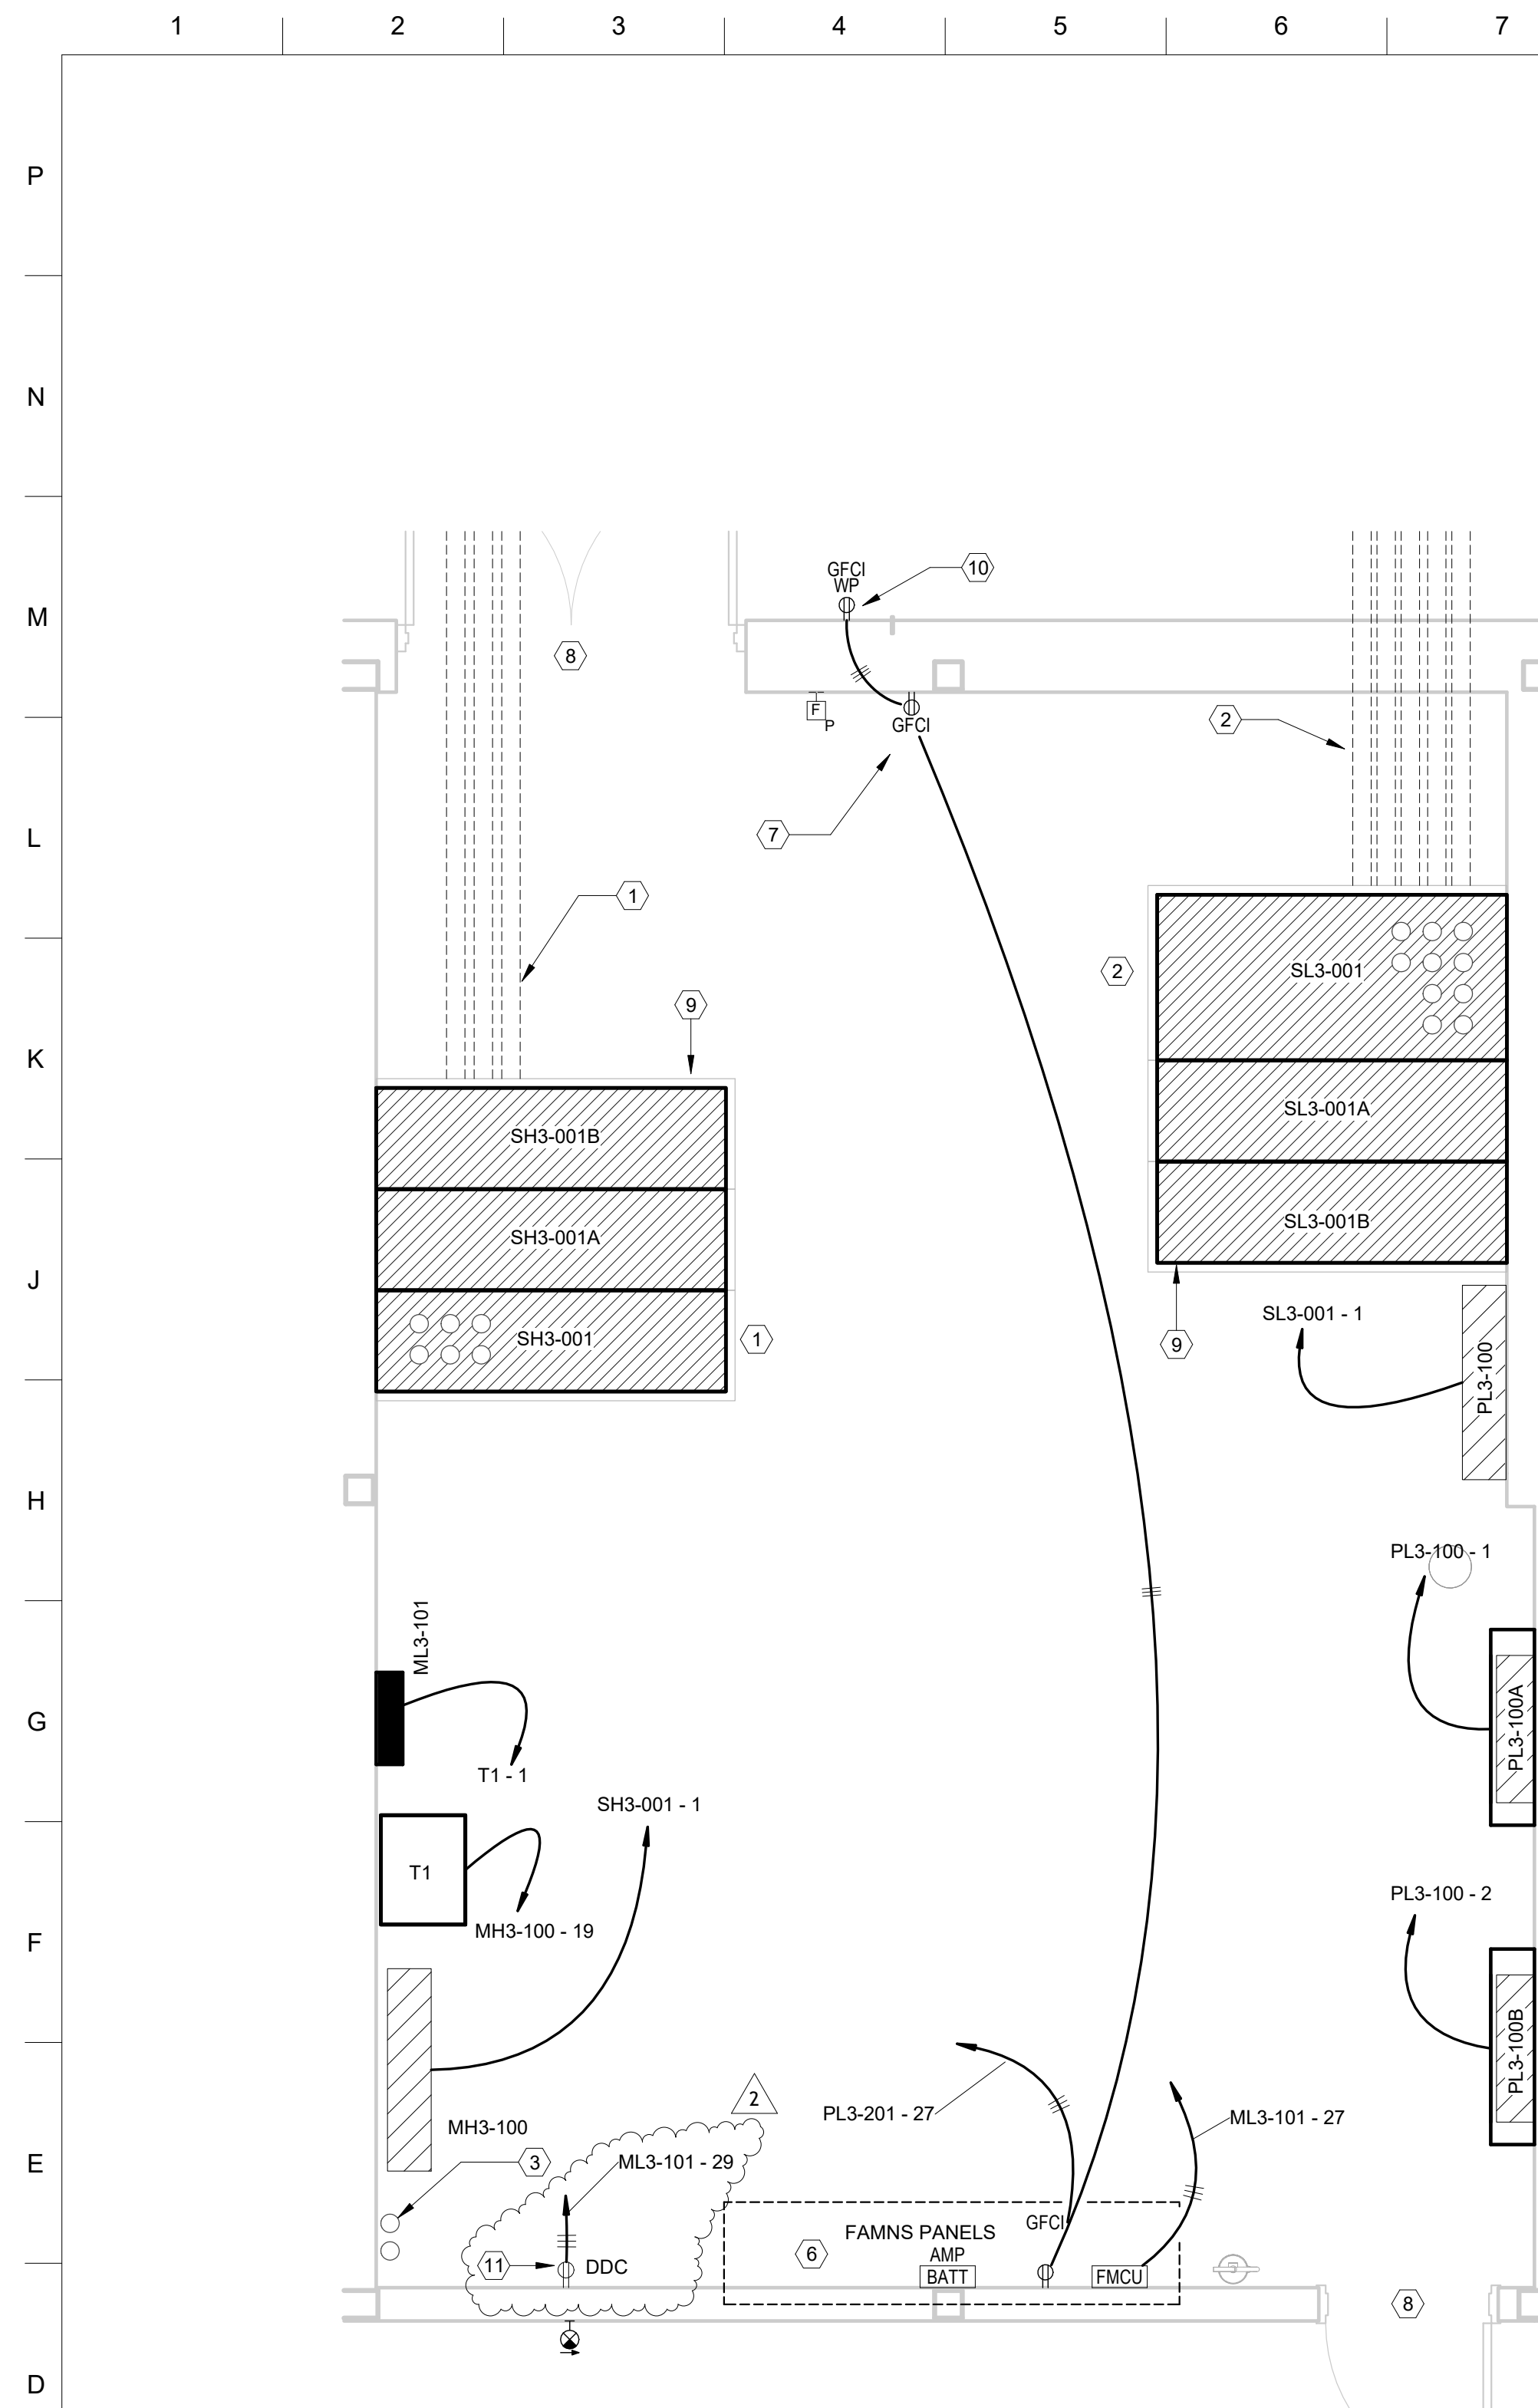


(C1) 1ST FLOOR ELECTRICAL ROOM
3/8" = 1'-0"

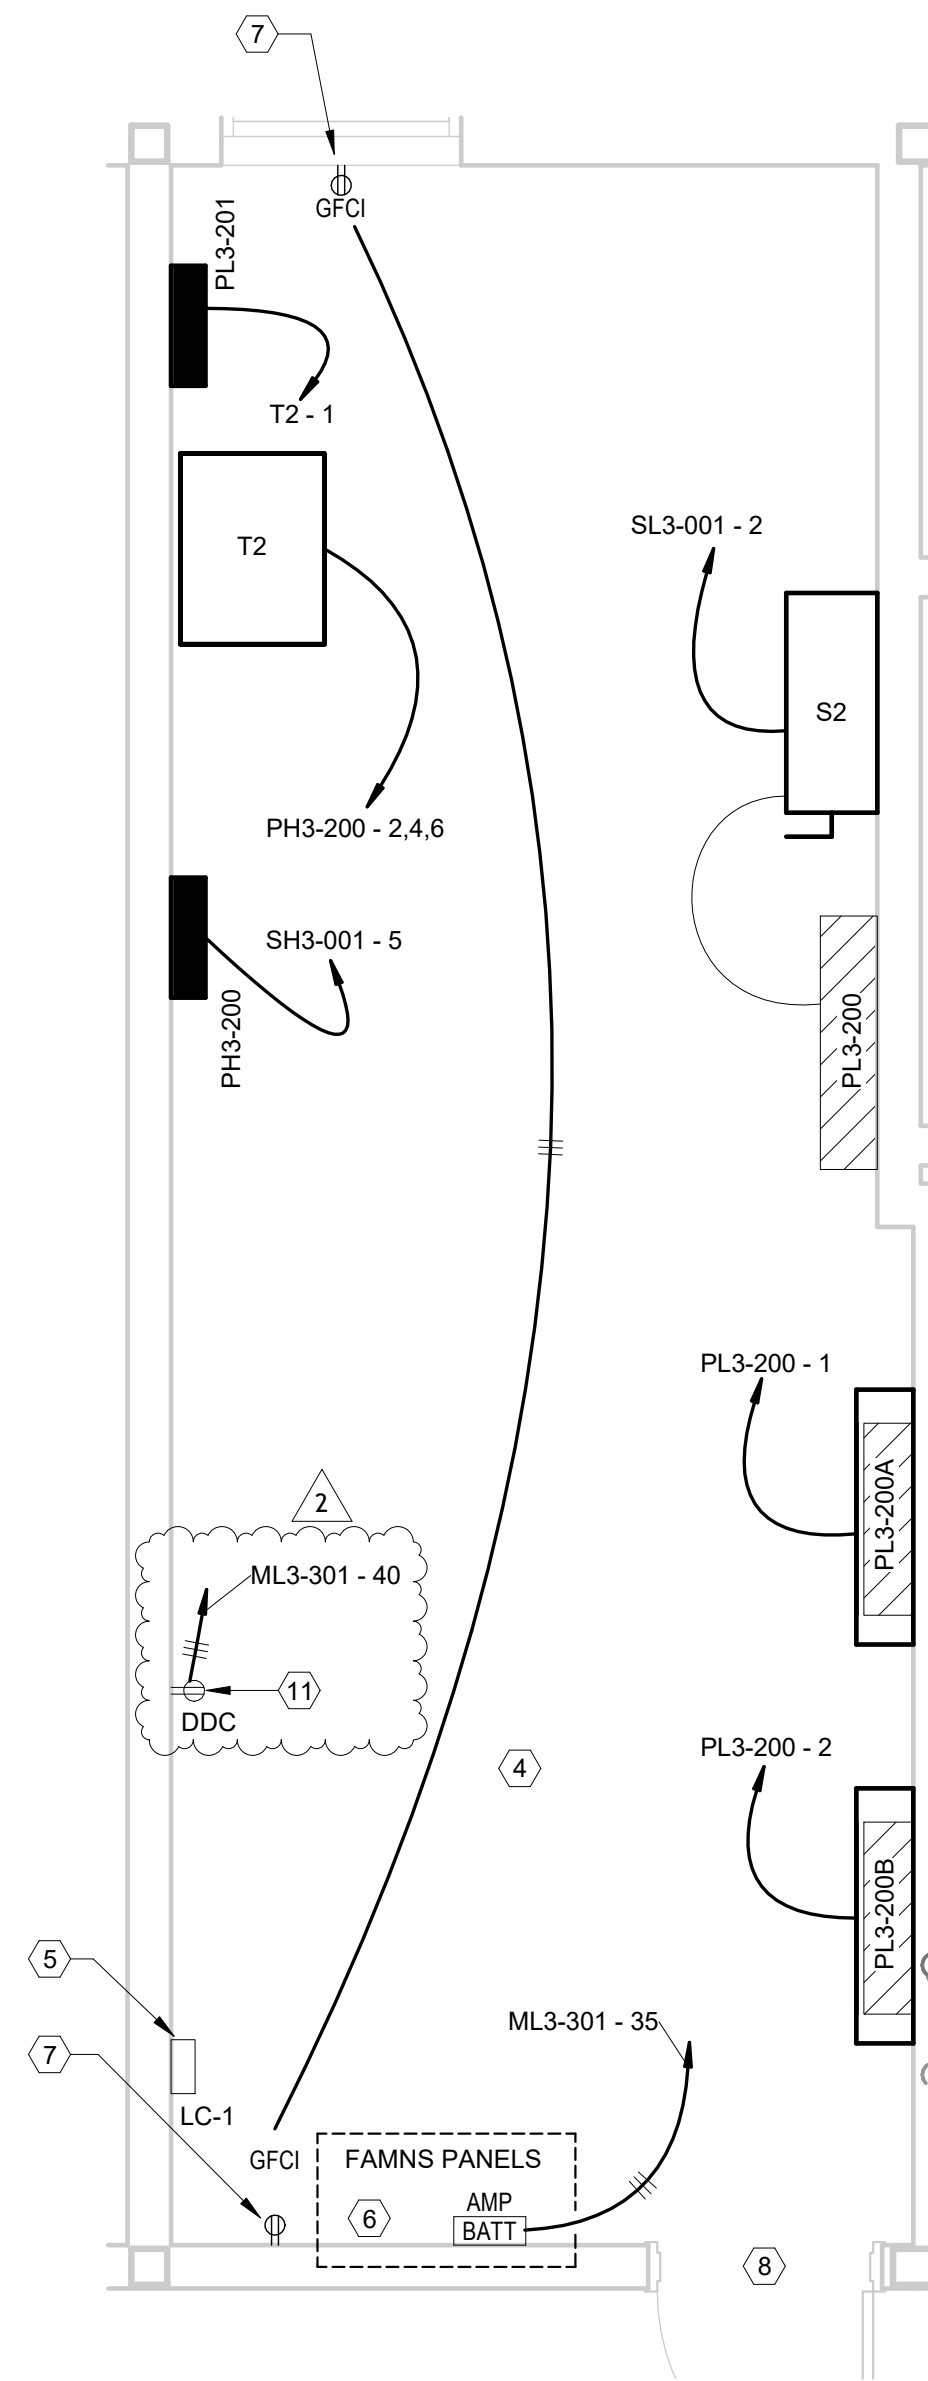

(C9) 2ND FLOOR ELECTRICAL ROOM
3/8" = 1'-0"

GENERAL NOTES - POWER PLANS

1. FOR SYMBOLS, ABBREVIATIONS, AND GENERAL NOTES REFER TO SHEET E-001.
2. VERIFY ALL WIRE SIZING ONCE ALL CONDUIT PATHS ARE FULLY DEFINED. ALL BRANCH CIRCUITS MUST NOT EXCEED 3% VOLTAGE DROP AND COMBINED BRANCH+FEEDER CIRCUIT PATHS MUST NOT EXCEED 5%. SUITE FEEDERS AND RECEPTACLE-ONLY CIRCUITS CALCULATED AT 80% OF CIRCUIT RATING.
3. ALL CONDUIT PATHS SHOWN ARE DIAGRAMMATIC ONLY.



**US Army Corps
of Engineers ®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISIANA DISTRICT 600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: J. MOORE	ISSUE DATE: FEBRUARY 2026
	DRAWN BY: J. MOORE	SOLICITATION NO.:
	CHECKED BY: B. GADDIE	CONTRACT NO.:
	SUBMITTED BY: M. BARRY	
	SIZE:	
	ANSI D	


FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686


SHEET ID

E-402

CERTIFIED FINAL

Plot Date: 4/22/2026 8:25:45 AM
File Path: C:\Users\H2EDDJM9\Documents\511686 Rev\2025 E UEPH H2EDDJM9.rvt



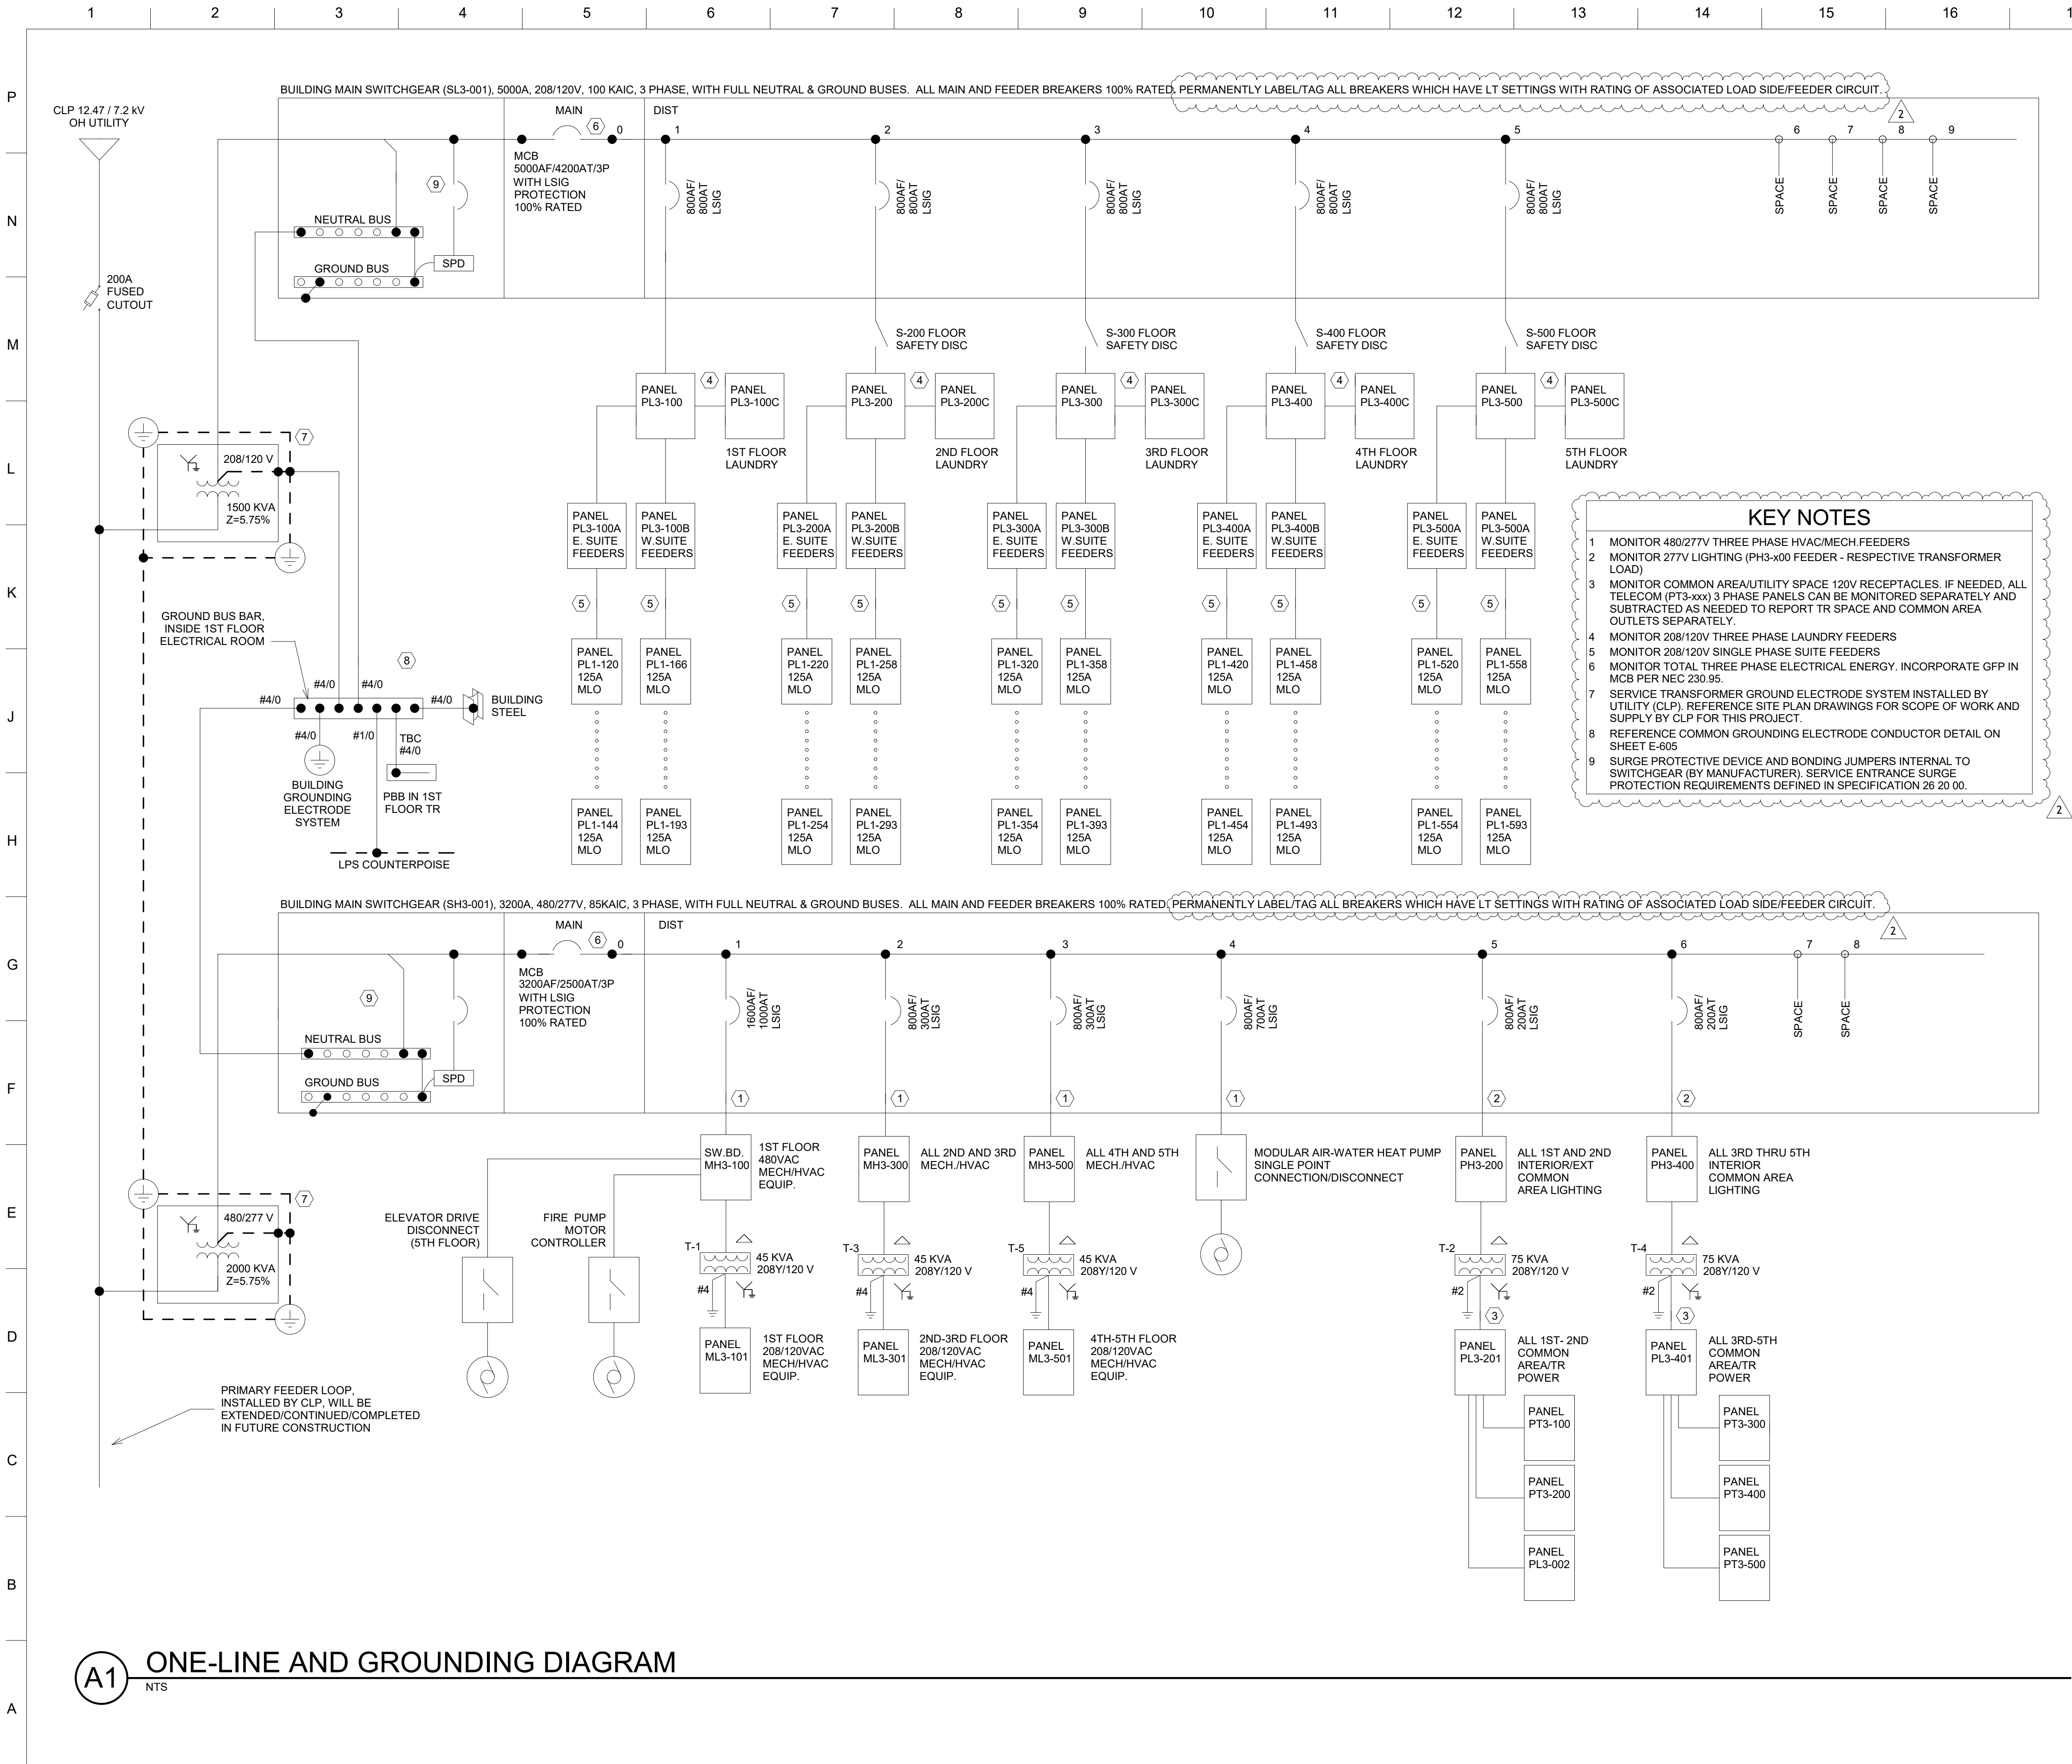

GENERAL NOTES

- THE CONTRACTOR SHALL PROVIDE ALL EQUIPMENT, DEVICES, APPURTENANCES, ETC. TO COMPLY WITH THE ELECTRICAL ENERGY METERING REQUIREMENTS OF ASHRAE 90.1, PARAGRAPH 8.4.3 IN ORDER TO MONITOR, RECORD, & REPORT (TO FTC BASE ENERGY MONITOR) EACH OF THE FOLLOWING CATEGORIES INDEPENDENTLY:
 - A. TOTAL ELECTRICAL ENERGY
 - B. SUITE FEEDERS (10 TOTAL-EAST/WEST FEEDS/FLOOR)
 - C. LAUNDRY AREAS (5 FEEDERS)

FOR 280Y/120V SERVICE:

- A. TOTAL ELECTRICAL ENERGY
- B. SUITE FEEDERS (10 TOTAL-EAST/WEST FEEDS/FLOOR)
- C. LAUNDRY AREAS (5 FEEDERS)

FOR 480Y/277V SERVICE:

- A. TOTAL ELECTRICAL ENERGY
- B. HVAC/MECH. SYSTEMS
- C. COMMON AREA INTERIOR LIGHTING
- D. EXTERIOR LIGHTING
- E. COMMON AREA/MAINTENANCE RECEPTACLE CIRCUITS.

REFERENCE KEYNOTES ON THIS SHEET IN ADDITION TO LOGIC DESCRIBED IN RISER DIAGRAMS FOR FEED MONITORING LOCATIONS AND FURTHER INFORMATION.

- PROVIDE FULL LENGTH 100% RATED NEUTRAL BAR AND A GROUNDING BAR IN EACH SECTION OF SWITCHGEAR, SWITCHBOARDS AND PANELBOARDS.
- GROUNDING DIAGRAMS INCORPORATED INTO THIS DRAWING ONLY SHOW SALIENT FEATURES BASED ON CLP, TELECOM AND LPS BONDING WHICH IS DONE UPSTREAM MCB IN SWITCHGEAR. NOT ALL GROUND/BONDING CONDUCTORS ARE INDICATED IN THIS DRAWING. ALL GROUNDING AND BONDING FOR ELECTRICAL EQUIPMENT AND CONNECTIONS SHOWN IN THIS SINGLE LINE MUST BE DONE IN ACCORDANCE WITH NEC ARTICLE 250 UNLESS EXCEEDED BY FTC DESIGN GUIDE REQUIREMENTS.
- REFERENCE SHEETS E-608 THRU E-619 FOR PANEL SCHEDULES.
- PROVIDE SURGE PROTECTION FOR EITHER THE CIRCUIT OR THE PANEL THE CIRCUIT IS CONNECTED TO FOR ALL CIRCUITS EXITING THE BUILDING SUCH AS BUT NOT LIMITED TO EXTERIOR LIGHTING, EXTERIOR HVAC EQUIPMENT, AND CATV EQUIPMENT CIRCUITS. ALSO PROVIDE SURGE PROTECTION FOR ALL LIGHTING PANELS FEEDING BRANCH CIRCUITS WITH LED FIXTURES. NOT ALL REQUIRED SURGE PROTECTIVE DEVICES (SPDS) ARE SHOWN IN PANEL SCHEDULES. SPDS MAY BE REQUIRED IN ADDITIONAL LOCATIONS BASED ON FINAL EQUIPMENT INSTALLED AND ITS LOCATION. SURGE PROTECTIVE DEVICES SHALL BE FED BY A DEDICATED BREAKER AND INSTALLED EXTERNAL TO PANELBOARDS IN A SEPARATE ENCLOSURE. AND EXTERNAL TO SWITCHBOARD OR IN A SEPARATE METAL CLAD COMPARTMENT OF THE SWITCHBOARD.
- VERIFY AND CHANGE AS NECESSARY THE CIRCUIT BREAKER RATING, FEEDER, AND CONDUIT SIZES FOR ACTUAL EQUIPMENT INSTALLED.
- THE CONTRACTOR MUST SUBMIT ARC FLASH HAZARD ANALYSIS BASED ON INSTALLED CONDUIT AND CONDUCTOR SIZE, TYPE AND LENGTH, EQUIPMENT SIZING, RATINGS, ARRANGEMENTS, AND SETTINGS PER POWER SYSTEM STUDIES SPECIFICATION 26.05.73. SUBMIT AS PART OF THE FAULT CURRENT AND PROTECTIVE COORDINATION STUDY ALONG WITH THE SYSTEM MODEL. CONTRACTOR SHALL PROVIDE ARC FLASH LABELS ON ALL PANELS INDICATING THE ARC FLASH HAZARD LEVEL BASED ON THE RESULTS FROM THE ARC FLASH HAZARD ANALYSIS. ADJUST AIC RATINGS OF EQUIPMENT REQUIRED BASED ON ACTUAL EQUIPMENT RATINGS.
- PROVIDE ARC FLASH WARNING SIGNS ON SWITCHBOARDS, PANELBOARDS, INDUSTRIAL CONTROL PANELS, METER SOCKET ENCLOSURES, AND MOTOR CONTROL CENTERS AS REQUIRED PER PER POWER SYSTEM STUDIES SPECIFICATION 26.05.73 and NFPA 70 (NEC) ARTICLE 110.16. REFERENCE NFPA 70 ARTICLE 110.16, NFPA 70E, AND UFC 3-560-01, ELECTRICAL SAFETY, O & M.

GENERAL FTC LOCAL GROUNDING REQUIREMENTS (APPLY WHERE REQUIRED PER FY21 TDG):

ALL CONDUCTOR TO CONDUCTOR (WIRE-TYPE) GROUNDING CONNECTIONS SHALL BE CONNECTED USING EXOTHERMICALLY WELDING OR WITH RANGE-TAKING COMPRESSION TAP CONNECTOR.

ALL CONNECTIONS TO DRIVEN GROUND RODS SHALL BE EXOTHERMICALLY WELDED OR USE COMPRESSION CONNECTOR.

ALL GROUNDING CONNECTIONS TO STRUCTURAL METAL FRAMES OF BUILDINGS OR STRUCTURES SHALL BE BOLTED, RIVETED, WELDED OR COMPRESSION (I.E. RANGE-TAKING COMPRESSION TAP CONNECTOR).


EQUIPMENT PAD GROUNDING CONDUCTORS SHALL BE A MINIMUM 4/0 CU.

GROUND RODS ARE REQUIRED.

GROUNDING SHALL NOT BE ACCOMPLISHED AT WATER LINES.

SPLIT-BOLTS, OR ANY REVERSIBLE TYPE CONNECTOR, SHALL NOT BE USED ON ANY SUBSTATION GROUNDED OR GROUNDING CONNECTIONS, INCLUDING ABOVE GROUND.

SPLIT-BOLTS, OR ANY REVERSIBLE TYPE CONNECTOR, SHALL NOT BE USED ON ANY EXTERIOR GROUNDING SYSTEM.



US Army Corps of Engineers®

ISSUE DATE	ISSUE DESCRIPTION	DATE
2026	2	April 2026

DESIGNED BY: J. MOORE	SOLUTION NO.: J. MOORE	CONTRACT NO.:
DRAWN BY: J. MOORE	CHECKED BY: B. GADDIE	SUBMITTED BY: M. BARRY
US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	SIZE: ANSI D	

FT. CAMPBELL, KY. UEPH BARRACKS PN 98248, FY2026, P2 511886	ONE-LINE DIAGRAMS
---	-------------------

SHEET ID

E-604

4/21/2026 8:35:23 AM
C:\Users\Fred\Documents\11886_Riv40206_E_UEPH_REDRAW.dwg

Plot Date:
File Path:


CERTIFIED FINAL W912QR26RA016_Plans-0002

Panel	Load	Voltage	Wire Size	Conduit Size	Rating	Length
SL3-001	PL3-100	208 V	3 runs of 3-#300, 1-#300, 1-#1/0	3"	800 A	18'
SL3-001	PL3-200	208 V	3 runs of 3-#300, 1-#300, 1-#1/0	3"	800 A	30'
SL3-001	PL3-300	208 V	3 runs of 3-#300, 1-#300, 1-#1/0	3"	800 A	43'
SL3-001	PL3-400	208 V	3 runs of 3-#300, 1-#300, 1-#1/0	3"	800 A	56'
SL3-001	PL3-500	208 V	3 runs of 3-#300, 1-#300, 1-#1/0	3"	800 A	69'
PL3-100	PL3-100A	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	13'
PL3-100	PL3-100B	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	18'
PL3-100	PL3-100C	208 V	3-#4/0, 1-#4/0, 1-#4	2 1/2"	225 A	40'
PL3-200	PL3-200A	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	13'
PL3-200	PL3-200B	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	18'
PL3-200	PL3-200C	208 V	3-#4/0, 1-#4/0, 1-#4	2 1/2"	225 A	40'
PL3-300	PL3-300A	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	13'
PL3-300	PL3-300B	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	18'
PL3-300	PL3-300C	208 V	3-#4/0, 1-#4/0, 1-#4	2 1/2"	225 A	40'
PL3-400	PL3-400A	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	13'
PL3-400	PL3-400B	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	18'
PL3-400	PL3-400C	208 V	3-#4/0, 1-#4/0, 1-#4	2 1/2"	225 A	40'
PL3-500	PL3-500A	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	13'
PL3-500	PL3-500B	208 V	2 runs of 3-#350, 1-#350, 1-#1	3"	600 A	18'
PL3-500	PL3-500C	208 V	3-#4/0, 1-#4/0, 1-#4	2 1/2"	225 A	40'


Panel	Load	Voltage	Wire Size	Conduit Size	Rating	Length
SH3-001	MH3-100	480 V	4 runs of 3-#250, 1-#250, 1-#2/0	3"	1000 A	23'
SH3-001	MAWHP	480 V	3 runs of 3-#250, 1-#250, 1-#1/0	3"	700 A	113'
SH3-001	MH3-500	480 V	3-#350, 1-#350, 1-#4	3"	300 A	74'
SH3-001	MH3-300	480 V	3-#350, 1-#350, 1-#4	3"	300 A	48'
SH3-001	PH3-200	480 V	3-#3/0, 1-#3/0, 1-#6	2 1/2"	200 A	36'
SH3-001	PH3-400	480 V	3-#3/0, 1-#3/0, 1-#6	2 1/2"	200 A	61'
PH3-200	T2 - 75kVA PRIMARY FEED / PL3-201	480 V	3-#1, 1-#1, 1-#6	2"	125 A	26'
PH3-400	T4 - 75kVA PRIMARY FEED / PL3-401	480 V	3-#1, 1-#1, 1-#6	2"	125 A	26'
MH3-100	T1 - 45kVA PRIMARY FEED / ML3-101	480 V	3-#4, 1-#4, 1-#8	1 1/2"	70 A	21'
MH3-300	T3 - 45kVA PRIMARY FEED / ML3-301	480 V	3-#4, 1-#4, 1-#8	1 1/2"	70 A	25'
MH3-500	T5 - 45kVA PRIMARY FEED / ML3-501	480 V	3-#4, 1-#4, 1-#8	1 1/2"	70 A	25'
T2	PL3-201	208 V	2 runs of 3-#3/0, 1-#3/0, 1-#3	2 1/2"	400 A	16'
T4	PL3-401	208 V	2 runs of 3-#3/0, 1-#3/0, 1-#3	2 1/2"	400 A	16'
T1	ML3-101	208 V	3-#3/0, 1-#3/0, 1-#6	2 1/2"	200 A	16'
T3	ML3-301	208 V	3-#3/0, 1-#3/0, 1-#6	2 1/2"	200 A	16'
T5	ML3-501	208 V	3-#3/0, 1-#3/0, 1-#6	2 1/2"	200 A	16'
PL3-201	PT3-100 1ST FLOOR TELECOM ROOM	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	107'
PL3-201	PL3-002 CQ STATION PANEL	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	71'
PL3-201	PT3-200 2ND FLOOR TELECOM ROOM	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	112'
PL3-401	PT3-500 - 5TH FLOOR TELECOM ROOM	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	125'
PL3-401	PT3-400 - 4TH FLOOR TELECOM ROOM	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	112'
PL3-401	PT3-300 - 3RD FLOOR TELECOM ROOM	208 V	3-#2, 1-#2, 1-#8	1 1/2"	100 A	107'

KEY NOTES

- 1 REFERENCE ONE-LINE DRAWING FOR 208Y/120V SECONDARY SIDE GEC SIZES
- 2 REFERENCE BUSBAR CONSTRUCTION DETAIL (ON THIS SHEET) FOR ASSEMBLY REQUIREMENTS.
- 3 FEEDER LENGTHS AND CONDUIT SIZES INDICATED IN SCHEDULE ARE FOR REFERENCE ONLY. THESE VALUES ARE TO ONLY BE USED FOR INITIAL COST ESTIMATES. VOLTAGE DROP CALCULATIONS AND INITIAL WIRE SIZING. FINAL OVERALL LENGTH, WIRE AND CONDUIT SIZES CAN ONLY BE DETERMINED BY ACTUAL EQUIPMENT LOCATION, ANY NEC REQUIRED DERATING OF CABLING, AND CONDUIT ROUTING BASED ON MECHANICAL, PLUMBING AND HVAC SYSTEM COORDINATION.
- 4 REFERENCE ONE-LINE DIAGRAMS, SHEET E-604, FOR ACTUAL BREAKER SETTINGS FOR ALL 3-PHASE FEEDER CIRCUITS.

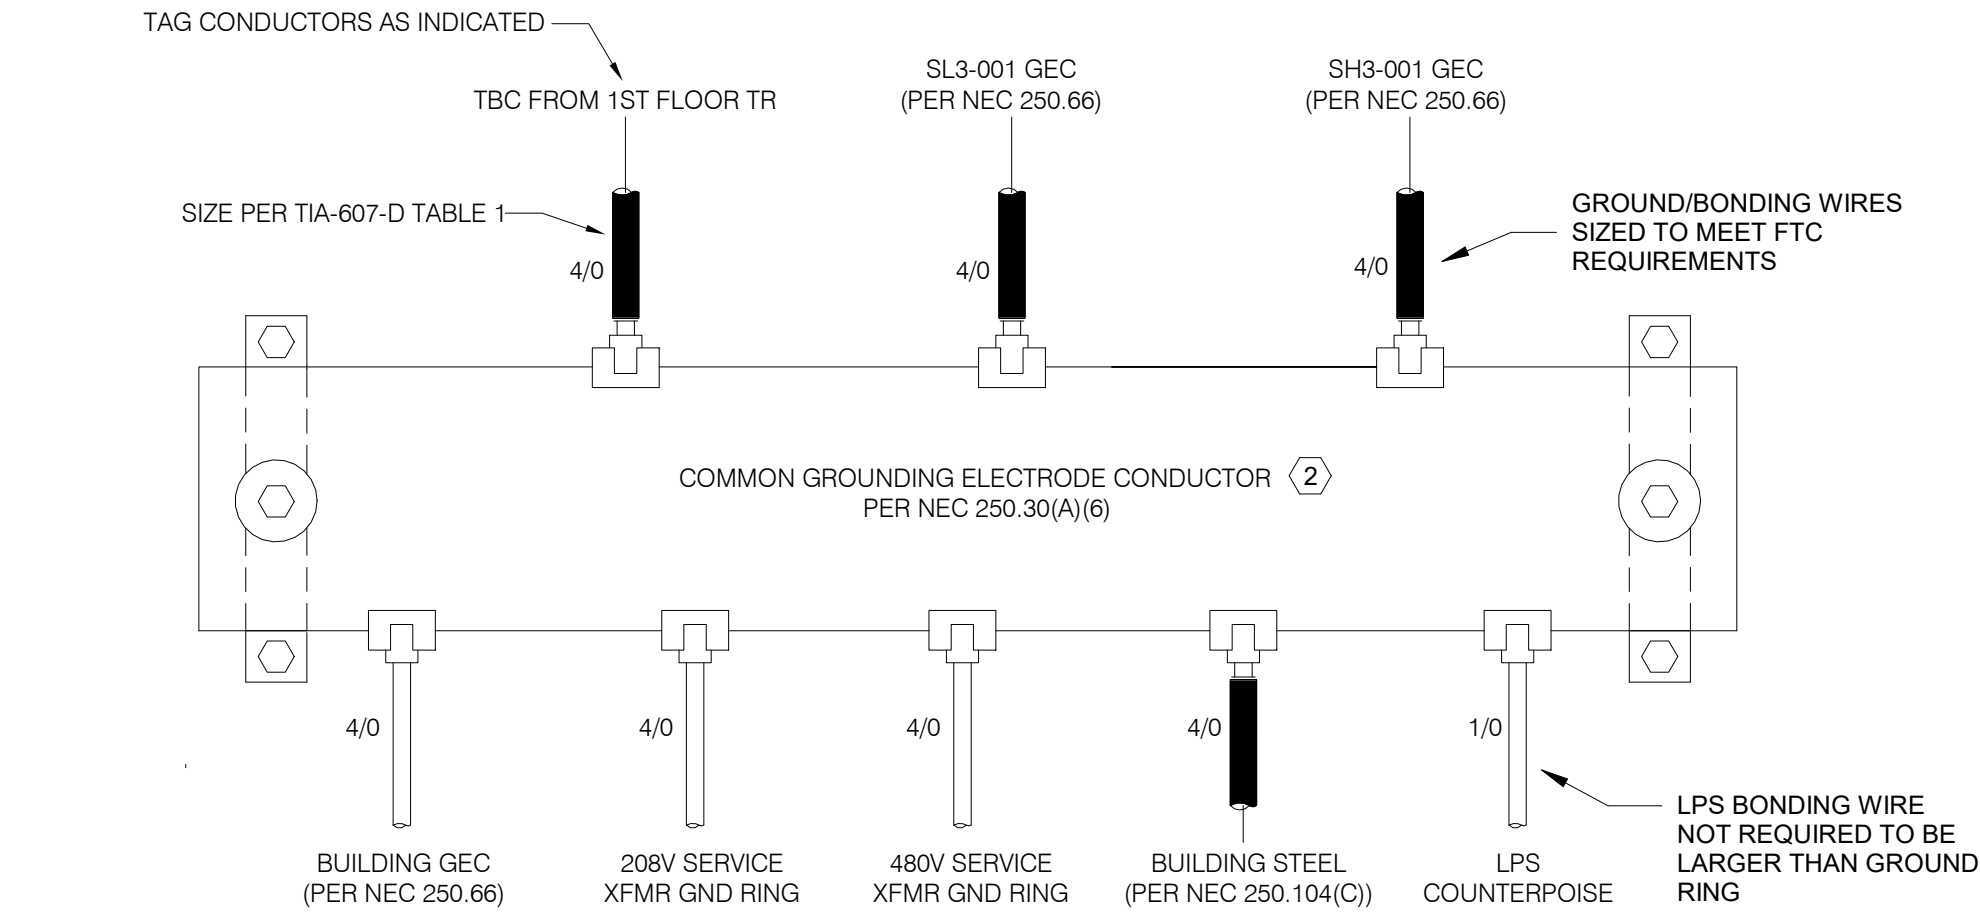

K12 COMMON GROUNDING BUSBAR DETAIL

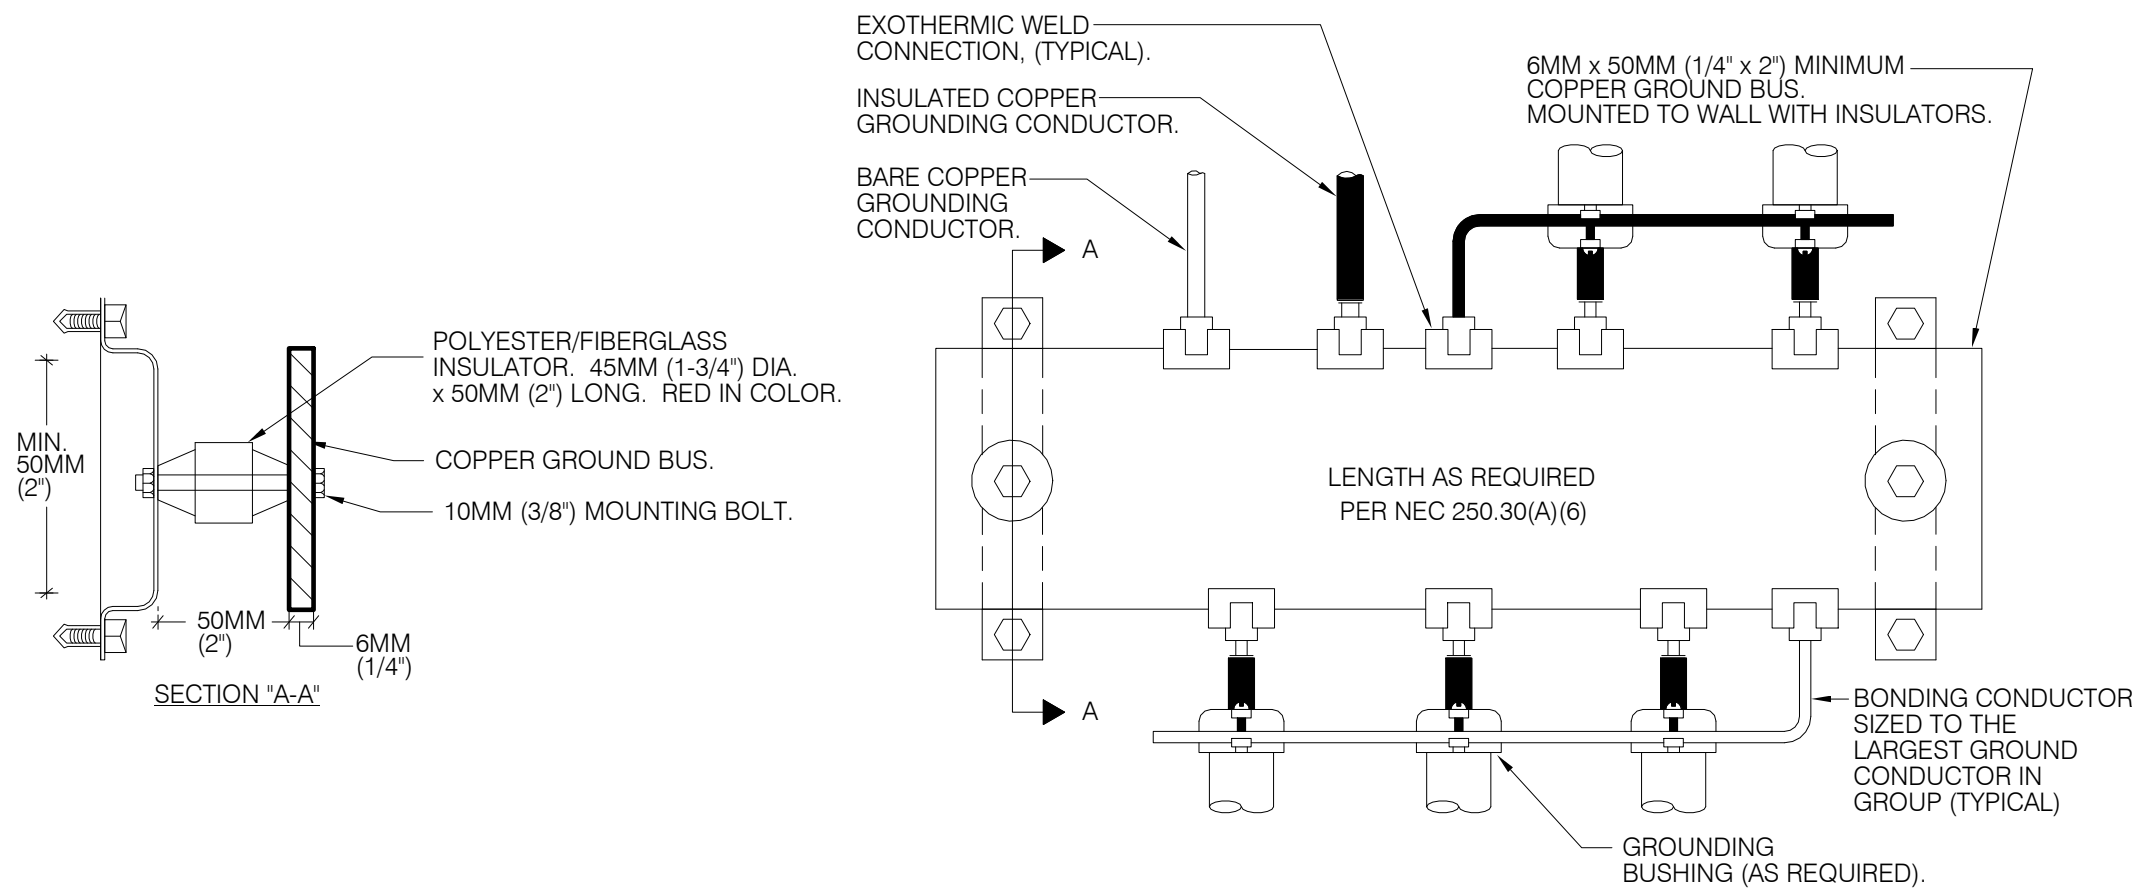

D11 GROUNDING BUSBAR CONSTRUCTION



**US Army Corps
of Engineers ®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: J. MOORE	ISSUE DATE: FEBRUARY 2026
	CHECKED BY: J. MOORE	SOLICITATION NO.:
	SUBMITTED BY: B. GADDIE	CONTRACT NO.:
	PROJECT NAME: SIZE:	
	ANSI: D	

FT. CAMPBELL, KY.
UEFH BARRACKS
PN 99248, FY2026, P2 511686

SHEET ID

E-605

Plot Date: 4/21/2026 9:14:01 AM

CERTIFIED FINAL

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
P																				
N																				
M																				
L																				
K																				
J																				
H																				
G																				
F																				
E																				
D																				
C																				
B																				
A																				

Branch Panel: PL-121

Location: LIVING 121A

Supply From: PL3-100A

Mounting: FLUSH

Enclosure: NEMA1

Volts: 120/208

Phases: 1

Wires: 3

A.I.C. Rating: 10kA

Mains Type: MLO

Mains Rating: 125 A

Feeder Rating: 125 A

Notes: Typical flush-mount panel schedule for all suite panels/individual dwellings. Reference notes below for required GFCI/AFCI incorporation into this panel.

CKT	Circuit Description	Trip	Poles	A		B		Poles	Trip	Circuit Description	CKT
1	RANGE RECEPTACLE (3)	50 A	2	4000 VA	804 VA	4000 VA	804 VA	2	20 A	FCU	2
3											4
5	MICROWAVE (1)	20 A	1	1500 VA	180 VA	180 VA	101 VA	1	20 A	VANITY GFCI RECEPTACLE (2)	6
7	REFRIGERATOR (1)	20 A	1					1	20 A	COMMON AREA / BATHROOM LIGHTS (1)	8
9	SABC#1 (1)	20 A	1	1500 VA	42 VA			1	20 A	SLEEPING AREA #1 LIGHTS (2)	10
11	SABC#2 (1)	20 A	1			1500 VA	42 VA	1	20 A	SLEEPING AREA #2 LIGHTS (2)	12
13	SLEEPING AREA #1 OUTLETS (2)	20 A	1	1080 VA	540 VA			1	20 A	COMMON AREA OUTLETS (2)	14
15	SLEEPING AREA #2 OUTLETS (2)	20 A	1			1080 VA	261 VA	1	20 A	RANGE HOOD / COUNTER LIGHTS (1)	16
17	Space	--	1	--	--			1	--	Space	18
19	Space	--	1			--	--	1	--	Space	20
21	Space	--	1	--	--			1	--	Space	22
23	Space	--	1			--	--	1	--	Space	24
Total Load:				9646 VA		7968 VA					
Total Amps:				91 A		77 A					

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Electric Range - 3.5 kW to 8.75 kW	8000 VA	80.00%	6400 VA		
HVAC	1608 VA	100.00%	1608 VA	Total Conn. Load:	17614 VA
Lighting - Dwelling Unit	7800 VA	60.00%	4680 VA	Total Est. Demand:	12894 VA
LITES	206 VA	100.00%	206 VA	Total Conn.:	85 A
				Total Est. Demand:	62 A

Notes:

(1) AF/GF - Arc fault + ground fault circuit interrupter combination breaker (AFCI/GFCI)

(2) AF - Arc fault interrupter combination breaker (AFCI)

(3) GF - Ground fault circuit interrupter combination breaker (GFCI)

"Lighting - Dwelling Unit" and "LITES" Load Classification covers GP rec. and other loads allowed for Feeder calcs per 2023 NEC art. 220.40/Table 220.45. "LITES" indicates 6" downlighting.

Branch Panel: PH3-200													
Location: ELECTRICAL ROOM 215				Volts: 480/277 Wye				A.I.C. Rating: 65kA					
Supply From: SH3-001				Phases: 3				Mains Type: MAIN CB					
Mounting: SURFACE				Wires: 4				Mains Rating: 250 A					
Enclosure: NEMA 1								MCB Rating: 250 A					
Notes: 1st and 2nd floor lighting and common area receptacle load. Upstream SH3 feed breaker set to 200A (100% rated), MCB in this panel to serve as local disconnect.													
CKT	Circuit Description	Trip	Poles	A		B		C		Poles	Trip	Circuit Description	CKT
1	Space	--	1	--	2314...					3	125 A	T2 - 75kVA PRIMARY FEED / PL3-201	2
3	Space	--	1			--	2054...						4
5	Space	--	1					--	21560...				6
7	1ST FLOOR EXIT SIGNS*	20 A	1	77 VA	72 VA					1	20 A	2ND FLOOR EXIT SIGNS*	8
9	1ST FLOOR EAST CORRIDOR LIGHTING	20 A	1			220 VA	190 VA			1	20 A	2ND FLOOR WEST CORRIDOR LIGHTING	10
11	1ST FLOOR WEST CORRIDOR LIGHTING	20 A	1					220 VA	219 VA	1	20 A	2ND FLOOR EAST CORRIDOR LIGHTING	12
13	1ST FLOOR CENTRAL HALL/VEST....	20 A	1	367 VA	345 VA					1	20 A	2ND FLOOR CENTRAL HALL LIGHTING	14
15	1ST FLR CQ STATION - ABA RESTROOM...	20 A	1			125 VA	303 VA			1	20 A	EAST STAIRWELL LIGHTING	16
17	CENTRAL STAIRWELL LIGHTING	20 A	1					424 VA	303 VA	1	20 A	WEST STAIRWELL LIGHTING	18
19	1ST FLR TELECOM/JAN. RM. LIGHTING	20 A	1	299 VA	299 VA					1	20 A	2ND FLR TELECOM/JANITOR RM. LIGHTING	20
21	1ST FLOOR MECH./PUMP RM. LIGHTING	20 A	1			887 VA	685 VA			1	20 A	2ND FLOOR MECH./W. STORAGE LIGHTING	22
23	1ST FLOOR ELECTRICAL ROOM LIGHTING	20 A	1					443 VA	322 VA	1	20 A	2ND FLOOR ELECTRICAL ROOM LIGHTING	24
25	1ST FLOOR LAUNDRY ROOM LIGHTING	20 A	1	260 VA	260 VA					1	20 A	2ND FLOOR LAUNDRY ROOM LIGHTING	26
27	1ST FLOOR FITNESS ROOM LIGHTING	20 A	1			350 VA	161 VA			1	20 A	2ND FLOOR STORAGE EAST	28
29	1ST FLOOR DAYROOM LIGHTING	20 A	1					478 VA	948 VA	1	20 A	PARKING LOT / AREA LIGHTING	30
31	1ST FL BLDING-MTD/MAIL KIOSK EXT. LTG.	20 A	1	88 VA	443 VA					1	20 A	ELEVATOR SUMP PIT AND SHAFT...	32
33	Space	--	1			--	--			1	--	Space	34
35	Space	--	1					--	--	1	--	Space	36
37	Space	--	1	--	--					1	--	Space	38
39	Space	--	1			--	--			1	--	Space	40
41	Space	--	1					--	--	1	--	Space	42
43	Space	--	1	--	--					1	--	Space	44
45	Space	--	1			--	--			1	--	Space	46
47	Space	--	1					--	--	1	--	Space	48
49	Space	--	1	--	--					1	--	Space	50
51	Space	--	1			--	--			1	--	Space	52
53	Space	--	1					--	--	1	--	Space	54
Total Load:				25658 VA		23470 VA		24918 VA					
Total Amps:				93 A		85 A		91 A					
Legend:													
*Install red fire alarm / mass notification identification and lockout kit to prevent accidental de-activation of system.													
Load Classification		Connected Load		Demand Factor		Estimated Demand		Panel Totals					
HVAC		458 VA		100.00%		458 VA							
Lighting - Exterior		948 VA		100.00%		948 VA		Total Conn. Load: 74046 VA					
LIGHTS		3305 VA		94.00%		3107 VA		Total Est. Demand: 45990 VA					
LITES		4535 VA		78.00%		3537 VA		Total Conn. Current: 89 A					
Receptacle - Dedicated		1080 VA		100.00%		1080 VA		Total Est. Demand Current: 55 A					
Receptacle - General		63720 VA		57.85%		36860 VA							
Notes:													
"Lighting - Exterior" load represents parking lot and area lighting, "LIGHTS" load represents 2x2, 2x4, Exit and Stairwell Lighting, "LITES" represents all other types of downlighting in general/common areas.													
-													

Branch Panel: PL3-002

Location: STORAGE 108
Supply From: PL3-201
Mounting: FLUSH
Enclosure: NEMA1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 10kA
Mains Type: MAIN CB
Mains Rating: 100 A
MCB Rating: 100 A

Notes: Flush mount panel located at CQ station. Reference notes below for required GFCI/AFCI incorporation into this panel.

CKT	Circuit Description	Trip	Poles	A		B		C		Poles	Trip	Circuit Description	CKT
1	ABA TOILET GFCI RECEPTACLE (2)	20 A	1	180 VA	360 VA					1	20 A	WATER FOUNTAIN/CHILLER GFCI REC. (2)	2
3	JANITOR GFCI RECEPTACLE (2)	20 A	1			180 VA	720 VA			1	20 A	CQ STATION DEDICATED BRANCH (2)	4
5	DAY ROOM NORTH WALL OUTLETS (2)**	20 A	1					1080...	1440...	1	20 A	DAY ROOM WEST WALL OUTLETS (2)**	6
7	FITNESS ROOM DED. OUTLET 1 (2)**	20 A	1	1920...	1920...					1	20 A	FITNESS ROOM DED. OUTLET 7 (2)**	8
9	FITNESS ROOM, N. VEST., N. EXT REC. (1)**	20 A	1			1800...	1920...			1	20 A	FITNESS ROOM DED. OUTLET 8 (2)**	10
11	FITNESS ROOM DED. OUTLET 9 (2)**	20 A	1					1920...	1920...	1	20 A	FITNESS ROOM DED. OUTLET 6 (2)**	12
13	FITNESS ROOM DED. OUTLET 4 (2)**	20 A	1	1920...	1920...					1	20 A	FITNESS ROOM DED. OUTLET 10 (2)**	14
15	FITNESS ROOM DED. OUTLET 5 (2)**	20 A	1			1920...	1920...			1	20 A	FITNESS ROOM DED. OUTLET 2 (2)**	16
17	FITNESS ROOM DED. OUTLET 3 (2)**	20 A	1					1920...	--	1	--	Space	18
19	Space	--	1	--	--					1	--	Space	20
21	Space	--	1			--	--			1	--	Space	22
23	Space	--	1					--	--	1	--	Space	24
Total Load:				8220 VA		8460 VA		8280 VA					
Total Amps:				69 A		71 A		69 A					

Legend:
*All outlets/receptacles on this circuit are controlled by motion sensor(s)
**Branch circuits require conductors larger than 12ga to maintain 3% max. Vdrop. Reference keynotes in plan drawings.

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Receptacle - General	24960 VA	70.03%	17480 VA		
				Total Conn. Load:	24960 VA
				Total Est. Demand:	17480 VA
				Total Conn.:	69 A
				Total Est. Demand:	49 A

Notes:
(1) AF/GF - Arc fault + ground fault circuit interrupter combination breaker (AFCI/GFCI)
(2) AF - Arc fault interrupter combination breaker (AFCI)
(3) GF - Ground fault circuit interrupter combination breaker (GFCI)

12

13

14

15

16

17

18

19

20

1

2

3

4

5

6

7

8

9

10

11

P

N

M

L

K

J

H

G

F

E

D

C

B

A

Feeder Panel: PL3-300A

Location: ELECTRICAL ROOM 315
Supply From: PL3-300
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MLO
Mains Rating: 600 A
Feeder Rating: 600 A

Notes: 3rd floor east wing suite feeder panel - 16 units total.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT
1	Space	--	1	--	--	--	1	--	Space	2
3	Space	--	1	--	--	--	1	--	Space	4
5	SUITE LOAD CENTER PL320	125 A	2	7968...	7968...	9646... 9646...	2	125 A	SUITE LOAD CENTER PL321	6
7										8
9	SUITE LOAD CENTER PL324	125 A	2		9646...	9646...	2	125 A	SUITE LOAD CENTER PL325	10
11						7968... 7968...				12
13	SUITE LOAD CENTER PL328	125 A	2	9646...	9646...		2	125 A	SUITE LOAD CENTER PL329	14
15					7968... 7968...					16
17	SUITE LOAD CENTER PL332	125 A	2	7968...	7968...	9646... 9646...	2	125 A	SUITE LOAD CENTER PL333	18
19										20
21	SUITE LOAD CENTER PL336	125 A	2		9646...	9646...	2	125 A	SUITE LOAD CENTER PL337	22
23						7968... 7968...				24
25	SUITE LOAD CENTER PL340	125 A	2	9646...	9646...		2	125 A	SUITE LOAD CENTER PL341	26
27					7968... 7968...					28
29	SUITE LOAD CENTER PL344	125 A	2			9646... 9646...	2	125 A	SUITE LOAD CENTER PL345	30
31					7968... 7968...					32
33	SUITE LOAD CENTER PL350	125 A	2			9646... 9646...	2	125 A	SUITE LOAD CENTER PL354	34
35						7968... 7968...				36
Total Load:				86392 VA	89747 VA	105683 VA				
Total Amps:				720 A	752 A	885 A				

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
Electric Range - 3.5 kW to 8.75 kW	128000 VA	28.00%	35840 VA	
HVAC	25728 VA	100.00%	25728 VA	Total Conn. Load: 281821 VA
Lighting - Dwelling Unit	124800 VA	36.18%	45150 VA	Total Est. Demand: 109821 VA
LITES	3293 VA	94.21%	3103 VA	Total Conn.: 782 A
				Total Est. Demand: 305 A

Notes:

"Lighting - Dwelling Unit" and "LITES" Load Classification covers GP rec. and other loads allowed for feeder calcs per 2023 NEC art. 220.40/Table 220.45. "LITES" indicates 6" downlighting and uses the same demand factor reduction. Note differences in PL3-x00A,B panel breaker arrangements in all associated schedules. All 208/120V feed breakers in PL3-x00A,B panels are physically arranged and connected to 3 phase buses to permit the greatest possible balanced load at service entrance switchgear SL3-001 / 208/120V service transformer.

Branch Panel: PL3-300C

Location: LAUNDRY 303
Supply From: PL3-300
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MAIN CB
Mains Rating: 225 A
MCB Rating: 225 A

Notes: Typical surface-mount panel schedule for all laundry areas. Reference notes below for required GFCI/AFCI incorporation into this panel.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT
1	DRYER (3)	40 A	2	2675... 2675...	2675... 2675...		2	40 A	DRYER (3)	2
3										4
5	DRYER (3)	40 A	2	2675... 2675...		2675... 2675...	2	40 A	DRYER (3)	6
7										8
9	DRYER (3)	40 A	2	2675... 2675...	2675... 2675...		2	40 A	DRYER (3)	10
11						2675... 2675...				12
13	DRYER (3)	40 A	2	2675... 2675...			2	40 A	DRYER (3)	14
15					2675... 2675...					16
17	DRYER (3)	40 A	2	2675... 2675...		2675... 2675...	2	40 A	DRYER (3)	18
19										20
21	DRYER (3)	40 A	2		2675... 1800...		1	20 A	WASHER (1)	22
23						2675... 1800...	1	20 A	WASHER (1)	24
25	WASHER (1)	20 A	1	1800... 1800...			1	20 A	WASHER (1)	26
27	WASHER (1)	20 A	1		1800... 1800...		1	20 A	WASHER (1)	28
29	WASHER (1)	20 A	1			1800... 1800...	1	20 A	WASHER (1)	30
31	LAUNDRY GP RECEPTACLES (1)	20 A	1	900 VA 1800...			1	20 A	IRONING RECEPTACLE 1 (1)	32
33	IRONING RECEPTACLE 2 (1)	20 A	1		1800... --		1	--	Space	34
35	Space	--	1			-- --	1	--	Space	36
Total Load:				27700 VA	25925 VA	24125 VA				
Total Amps:				233 A	218 A	201 A				

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
Appliance - Dwelling Unit	14400 VA	75.00%	10800 VA	Total Conn. Load: 77750 VA
Electric Clothes Dryer	58850 VA	47.00%	27660 VA	Total Est. Demand: 42960 VA
Receptacle - General	4500 VA	100.00%	4500 VA	Total Conn.: 216 A
				Total Est. Demand: 119 A

Notes:

(1) AF/GF - Arc fault + ground fault circuit interrupter combination breaker (AFCI/GFCI)
(2) AF - Arc fault interrupter combination breaker (AFCI)
(3) GF - Ground fault circuit interrupter combination breaker (GFCI)

US Army Corps of Engineers®

ISSUE DATE: FEBRUARY 2026
SOLICITATION NO.: J.MOORE
CONTRACT NO.: B.GADDIE

DESIGNED BY: J.MOORE
DRAWN BY: J.MOORE
CHECKED BY: B.GADDIE
SUBMITTED BY: M. BARRY

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886

PANEL SCHEDULES - 3RD FLOOR 208/120V SUITE FEEDER AND LAUNDRY PANELS

4/21/2026 12:38:11 PM
C:\Users\FEDCOM\Documents\1886_Rvw0206_E_UEPH_FEEDDRA016.rvt

Plot Date:
File Path:

2

AMENDMENT 0002

DESCRIPTION

MARK

SHEET ID

E-614

CERTIFIED FINAL

W912QR26RA016_Plans-0002

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
P																			
N																			
M																			
L																			
K																			
J																			
H																			
G																			
F																			
E																			
D																			
C																			
B																			
A																			

Feeder Panel: PL3-400A

Location: ELECTRICAL ROOM 415
Supply From: PL3-400
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MLO
Mains Rating: 600 A
Feeder Rating: 600 A

Notes: 4th floor east wing suite feeder panel - 16 units total.

CKT	Circuit Description	Trip	Poles	A		B		C		Poles	Trip	Circuit Description	CKT
1	SUITE LOAD CENTER PL420	125 A	2	9646...	9646...	7968...	7968...			2	125 A	SUITE LOAD CENTER PL421	2
3								9646...	9646...				4
5	SUITE LOAD CENTER PL424	125 A	2	7968...	7968...					2	125 A	SUITE LOAD CENTER PL425	6
7													8
9	SUITE LOAD CENTER PL428	125 A	2			9646...	9646...			2	125 A	SUITE LOAD CENTER PL429	10
11								7968...	7968...				12
13	SUITE LOAD CENTER PL432	125 A	2	9646...	9646...	7968...	7968...			2	125 A	SUITE LOAD CENTER PL433	14
15													16
17	SUITE LOAD CENTER PL436	125 A	2					9646...	9646...	2	125 A	SUITE LOAD CENTER PL437	18
19				7968...	7968...								20
21	SUITE LOAD CENTER PL440	125 A	2			9646...	9646...			2	125 A	SUITE LOAD CENTER PL441	22
23								7968...	7968...				24
25	SUITE LOAD CENTER PL444	125 A	2	9646...	9646...					2	125 A	SUITE LOAD CENTER PL445	26
27						7968...	7968...						28
29	SUITE LOAD CENTER PL450	125 A	2					9646...	9646...	2	125 A	SUITE LOAD CENTER PL454	30
31				7968...	7968...								32
33	Space	--	1			--	--			1	--	Space	34
35	Space	--	1					--	--	1	--	Space	36

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Electric Range - 3.5 kW to 8.75 kW	128000 VA	28.00%	35840 VA		
HVAC	25728 VA	100.00%	25728 VA	Total Conn. Load:	281821 VA
Lighting - Dwelling Unit	124800 VA	36.18%	45150 VA	Total Est. Demand:	109821 VA
LITES	3293 VA	94.21%	3103 VA	Total Conn.:	782 A
				Total Est. Demand:	305 A

Notes:

"Lighting - Dwelling Unit" and "LITES" Load Classification covers GP rec. and other loads allowed for feeder calcs per 2023 NEC art. 220.40/Table 220.45. "LITES" indicates 6" downlighting and uses the same demand factor reduction. Note differences in PL3-x00A,B panel breaker arrangements in all associated schedules. All 208/120V feed breakers in PL3-x00A,B panels are physically arranged and connected to 3 phase buses to permit the greatest possible balanced load at service entrance switchgear SL3-001 / 208/120V service transformer.

Panelboard: PL3-400

Location: ELECTRICAL ROOM 415
Supply From: SL3-001A
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MLO
Mains Rating: 800 A
Feeder Rating: 800 A

Notes: 4th floor suites (all 32) and 4th floor laundry.

CKT	Circuit Description	# of Poles	Frame Size	Trip Rating	Load	Remarks
1	PL3-400A	3	800 A	600 A	281821 VA	4th Floor East Suites
2	PL3-400B	3	800 A	600 A	281821 VA	4th Floor West Suites
3	PL3-400C	3	250 A	225 A	77750 VA	4th Floor Laundry
4	Space	1	--	--	--	
5	Space	1	--	--	--	
6	Space	1	--	--	--	
7	Space	1	--	--	--	
8	Space	1	--	--	--	
Total Conn. Load:					641393 VA	
Total Amps:					1780 A	

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
HVAC	51456 VA	100.00%	51456 VA		
Lighting - Dwelling Unit	249600 VA	30.59%	76350 VA	Total Conn. Load:	641393 VA
Appliance - Dwelling Unit	14400 VA	75.00%	10800 VA	Total Est. Demand:	231341 VA
LITES	6587 VA	64.60%	4255 VA	Total Conn. Current:	1780 A
Electric Clothes Dryer	58850 VA	47.00%	27660 VA	Total Est. Demand Current:	642 A
Electric Range - 3.5 kW to 8.75 kW	256000 VA	22.00%	56320 VA		
Receptacle - General	4500 VA	100.00%	4500 VA		

Notes:

All feeder breakers (supplying attached PL3-xxx panels) are equipped with solid state trip units that have LI/LSI settings.

Feeder Panel: PL3-400B

Location: ELECTRICAL ROOM 415
Supply From: PL3-400
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MLO
Mains Rating: 600 A
Feeder Rating: 600 A

Notes: 4th floor west wing suite feeder panel - 16 units total.

CKT	Circuit Description	Trip	Poles	A		B		C		Poles	Trip	Circuit Description	CKT
1	SUITE LOAD CENTER PL493	125 A	2	9646...	9646...					2	125 A	SUITE LOAD CENTER PL490	2
3					7968...	7968...							
5	SUITE LOAD CENTER PL489	125 A	2					9646...	9646...	2	125 A	SUITE LOAD CENTER PL486	6
7				7968...	7968...								
9	SUITE LOAD CENTER PL485	125 A	2			9646...	9646...			2	125 A	SUITE LOAD CENTER PL482	10
11							7968...	7968...					
13	SUITE LOAD CENTER PL481	125 A	2	9646...	9646...					2	125 A	SUITE LOAD CENTER PL478	14
15					7968...	7968...							
17	SUITE LOAD CENTER PL477	125 A	2					9646...	9646...	2	125 A	SUITE LOAD CENTER PL474	18
19				7968...	7968...								
21	SUITE LOAD CENTER PL473	125 A	2			9646...	9646...			2	125 A	SUITE LOAD CENTER PL470	22
23							7968...	7968...					
25	SUITE LOAD CENTER PL469	125 A	2	9646...	9646...					2	125 A	SUITE LOAD CENTER PL466	26
27					7968...	7968...							
29	SUITE LOAD CENTER PL462	125 A	2					9646...	9646...	2	125 A	SUITE LOAD CENTER PL458	30
31				7968...	7968...								
33	Space	--	1			--	--			1	--	Space	34
35	Space	--	1					--	--	1	--	Space	36

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Electric Range - 3.5 kW to 8.75 kW	128000 VA	28.00%	35840 VA		
HVAC	25728 VA	100.00%	25728 VA	Total Conn. Load:	281821 VA
Lighting - Dwelling Unit	124800 VA	36.18%	45150 VA	Total Est. Demand:	109821 VA
LITES	3293 VA	94.21%	3103 VA	Total Conn.:	782 A
				Total Est. Demand:	305 A

Notes:

"Lighting - Dwelling Unit" and "LITES" Load Classification covers GP rec. and other loads allowed for feeder calcs per 2023 NEC art. 220.40/Table 220.45. "LITES" indicates 6" downlighting and uses the same demand factor reduction. Note differences in PL3-x00A,B panel breaker arrangements in all associated schedules. All 208/120V feed breakers in PL3-x00A,B panels are physically arranged and connected to 3 phase buses to permit the greatest possible balanced load at service entrance switchgear SL3-001 / 208/120V service transformer.

Branch Panel: PL3-400C

Location: LAUNDRY 403
Supply From: PL3-400
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MAIN CB
Mains Rating: 225 A
MCB Rating: 225 A

Notes: Typical surface-mount panel schedule for all laundry areas. Reference notes below for required GFCI/AFCI incorporation into this panel.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT	
1	DRYER (3)	40 A	2	2675...	2675...			2	40 A	DRYER (3)	2
3					2675...	2675...					
5	DRYER (3)	40 A	2	2675...	2675...		2675...	2	40 A	DRYER (3)	6
7					2675...	2675...					
9	DRYER (3)	40 A	2		2675...	2675...		2	40 A	DRYER (3)	10
11						2675...	2675...				
13	DRYER (3)	40 A	2	2675...	2675...			2	40 A	DRYER (3)	14
15					2675...	2675...					
17	DRYER (3)	40 A	2			2675...	2675...	2	40 A	DRYER (3)	18
19				2675...	2675...						20
21	DRYER (3)	40 A	2		2675...	1800...		1	20 A	WASHER (1)	22
23						2675...	1800...				
25	WASHER (1)	20 A	1	1800...	1800...			1	20 A	WASHER (1)	26
27	WASHER (1)	20 A	1		1800...	1800...		1	20 A	WASHER (1)	28
29	WASHER (1)	20 A	1			1800...	1800...	1	20 A	WASHER (1)	30
31	LAUNDRY GP RECEPTACLES (1)	20 A	1	900 VA	1800...			1	20 A	IRONING RECEPTACLE 1 (1)	32
33	IRONING RECEPTACLE 2 (1)	20 A	1		1800...	--		1	--	Space	34
35	Space	--	1			--	--	1	--	Space	36
Total Load:				27700 VA	25925 VA	24125 VA					
Total Amps:				233 A	218 A	201 A					

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
Appliance - Dwelling Unit	14400 VA	75.00%	10800 VA		
Electric Clothes Dryer	58850 VA	47.00%	27660 VA	Total Conn. Load:	77750 VA
Receptacle - General	4500 VA	100.00%	4500 VA	Total Est. Demand:	42960 VA
				Total Conn.:	216 A
				Total Est. Demand:	119 A

Notes:

(1) AF/GF - Arc fault + ground fault circuit interrupter combination breaker (AFCI/GFCI)

(2) AF - Arc fault interrupter combination breaker (AFCI)

(3) GF - Ground fault circuit interrupter combination breaker (GFCI)



US Army Corps
of Engineers ®

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

Switchboard: MH3-100

Location: ELECTRICAL ROOM 115
Supply From: SH3-001
Mounting: FLOOR
Enclosure: NEMA 1

Volts: 480/277 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MLO
Bus Rating: 1200 A

Notes: Main mechanical systems located on 1st floor and mechanical yard

CKT	Circuit Description	# of Poles	Frame Size	Trip Rating	Load	FN/Note
1	ELECTRIC BOILER EB-1 ELEMENT#1	3	400 A	250 A	160041 VA	
2	ELECTRIC BOILER EB-1 ELEMENT#2	3	400 A	225 A	131691 VA	
3	DOMESTIC WATER HEATER - MECHANICAL YARD	3	250 A	125 A	67093 VA	
4	FIRE PUMP CONTROL PANEL / 20HP MOTOR CONTROL**	3	125 A	60 A	22447 VA	DOL or Softstart
5	SPRINKLER SYSTEM JOCKEY PUMP 1/2HP MOTOR CONTROL**	3	125 A	20 A	915 VA	DOL or Softstart
6	DOMESTIC BOOST PUMP BP-1 (VFD-DRIVEN 25HP MOTOR)	3	125 A	60 A	36581 VA	VFD Accounted for in trip rating
7	DOMESTIC BOOST PUMP BP-2 (VFD-DRIVEN 25HP MOTOR)*	3	125 A	60 A	36581 VA	VFD Accounted for in trip rating
8	DOMESTIC WATER HEATER - 1ST FLOOR	3	125 A	90 A	54040 VA	
9	CHWP-1 (PRIMARY) -15HP MOTOR*	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
10	CHWP-2 (PRIMARY) -15HP MOTOR*	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
11	CHWP-3 (SECONDARY) - 25HP MOTOR*	3	125 A	60 A	36581 VA	VFD Accounted for in trip rating
12	CHWP-4 (SECONDARY) - 25HP MOTOR*	3	125 A	60 A	36581 VA	VFD Accounted for in trip rating
13	HWP-8 (SECONDARY) -15HP MOTOR*	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
14	HWP-7 (SECONDARY) -15HP MOTOR	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
15	HWP-6 (PRIMARY) -15HP MOTOR*	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
16	HWP-5 (PRIMARY) -15HP MOTOR	3	125 A	40 A	25773 VA	VFD Accounted for in trip rating
17	MAU - 1ST FLOOR LAUNDRY	3	125 A	15 A	2747 VA	
18	ELEVATOR DRIVE	3	125 A	60 A	33588 VA	Adjust trip settings as required
19	T1 - 45kVA PRIMARY FEED / ML3-101	3	150 A	70 A	15485 VA	1st Floor 208/120V Mech. Loads
20	Space	1	--	--	--	
Total Conn. Load:					789008 VA	
Total Amps:					949 A	

Legend:

*Estimated demand can be subtracted from Total Est. Demand VA (non-coincident loads).
**Install fire pump identification and lockout kit to prevent accidental de-activation of system.

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
HVAC	357082 VA	100.00%	357082 VA	
Elevator	33588 VA	100.00%	33588 VA	Total Conn. Load: 789008 VA
Domestic Water Equipment	158294 VA	100.00%	158294 VA	Total Est. Demand: 573907 VA
Lighting - Dwelling Unit	360 VA	100.00%	360 VA	Total Conn.: 949 A
Fire Alarm/Pumps	24562 VA	100.00%	24562 VA	Total Est. Demand: 690 A
Non-Coincident Mech*	215122 VA	0.01%	22 VA	

Notes:

Branch Panel: ML3-101

Location: ELECTRICAL ROOM 115
Supply From: T1
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 10kA
Mains Type: MAIN CB
Mains Rating: 225 A
MCB Rating: 175 A

Notes: 1st Floor Mechanical/HVAC 208/120V/1P Equipment.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT
1	HOT WATER BACKUP PUMP P-9 (PRIMARY)	20 A	2	1144 VA	1144...				HOT WATER BACKUP PUMP P-10 (RESERVE)	2
3					1144...	1144...				4
5	CUH - 1ST FLOOR NORTH/SOUTH VESTIBULES	20 A	2	291 VA	146 VA				CUH - 1ST FLOOR EAST CORRIDOR	6
7						291 VA	146 VA			8
9	CUH - 1ST FLOOR WEST CORRIDOR	20 A	2		146 VA	804 VA			FCU - DAY ROOM (EAST)	10
11						146 VA	804 VA			12
13	FCU - FITNESS ROOM	20 A	2	804 VA	804 VA				FCU - 1ST FLOOR LOBBY	14
15					804 VA	804 VA				16
17	FCU - DAY ROOM (WEST)	20 A	2	804 VA	114 VA				FCU - 1ST FLOOR EAST STAIRWELL	18
19						804 VA	114 VA			20
21	FCU - 1ST FLOOR WEST STAIRWELL	20 A	2		208 VA	64 VA			1ST FLOOR RCP/TMV	22
23						208 VA	312 VA		1ST FLOOR WATER SOFTENER VALVES	24
25	UH - LDRY ACC. / MECH. / ELEC. / PUMP RM.	20 A	1	528 VA	204 VA				HXP - 1ST FLOOR HOT WATER CIRC. PUMP	26
27	FMCU PANELS - 1ST FLOOR ELEC. RM*	20 A	1		1200...	180 VA			1ST FLOOR MECHANICAL ROOM DDC	28
29	1ST FLOOR ELECTRICAL ROOM DDC	20 A	1	--	--	180 VA	--	1	Space	30
31	Space	--	1	--	--			1	Space	32
33	Space	--	1	--	--	--	--	1	Space	34
35	Space	--	1	--	--			1	Space	36
37	Space	--	1	--	--			1	Space	38
39	Space	--	1	--	--	--	--	1	Space	40
41	Space	--	1	--	--			1	Space	42
43	Space	--	1	--	--			1	Space	44
45	Space	--	1	--	--	--	--	1	Space	46
47	Space	--	1	--	--			1	Space	48
49	Space	--	1	--	--			1	Space	50
51	Space	--	1	--	--	--	--	1	Space	52
53	Space	--	1	--	--			1	Space	54
Total Load:				5983 VA	6497 VA	3005 VA				
Total Amps:				54 A	58 A	25 A				

Legend:

*Install red fire alarm / mass notification identification and lockout kit to prevent accidental de-activation of system.

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
HVAC	11057 VA	100.00%	11057 VA	
Lighting - Dwelling Unit	360 VA	100.00%	360 VA	Total Conn. Load: 15485 VA
Fire Alarm/Pumps	1200 VA	100.00%	1200 VA	Total Est. Demand: 13197 VA
Domestic Water Equipment	580 VA	100.00%	580 VA	Total Conn. Current: 43 A
Non-Coincident Mech*	2288 VA	0.01%	0 VA	Total Est. Demand Current: 37 A

Notes:

Branch Panel: MH3-300

Location: ELECTRICAL ROOM 315
Supply From: SH3-001
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 480/277 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 65kA
Mains Type: MAIN CB
Mains Rating: 400 A
MCB Rating: 400 A

Notes: 2nd and 3rd Floor Mechanical/HVAC 480V/3P Equipment. Upstream SH3 feed breaker set to 300A (100% rated), MCB in this panel to serve as local disconnect.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT
1				5037... 916 VA						2
3	T3 - 45kVA PRIMARY FEED / ML3-301	70 A	3		5814... 916 VA				MAU - 2ND FLOOR LAUNDRY	4
5						4914... 916 VA				6
7				916 VA	4157...					8
9	MAU - 3RD FLOOR LAUNDRY	15 A	3		916 VA	4157...			DOAS-1 - 2ND FLOOR MECH. ROOM	10
11						916 VA	4157...			12
13				2816...	2816...					14
15	DOAS-2 - 2ND FLOOR MECH. ROOM	30 A	3		2816...	2816...			DOAS-3 - 3RD FLOOR MECH. ROOM	16
17						2816...	2816...			18
19				1801...	1801...					20
21	DOMESTIC WATER HEATER - 2ND FLOOR	90 A	3		1801...	1801...			DOMESTIC WATER HEATER - 3RD FLOOR	22
23						1801...	1801...			24
25	Space	--	1	--	--			1	Space	26
27	Space	--	1	--	--			1	Space	28
29	Space	--	1	--	--	--	--	1	Space	30
31	Space	--	1	--	--			1	Space	32
33	Space	--	1	--	--			1	Space	34
35	Space	--	1	--	--	--	--	1	Space	36
Total Load:				52683 VA	53460 VA	52560 VA				
Total Amps:				190 A	193 A	190 A				

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
Domestic Water Equipment	108616 VA	100.00%	108616 VA	
HVAC	46967 VA	100.00%	46967 VA	Total Conn. Load: 158703 VA
Lighting - Dwelling Unit	720 VA	100.00%	720 VA	Total Est. Demand: 158703 VA
Fire Alarm/Pumps	2400 VA	100.00%	2400 VA	Total Conn.: 191 A
				Total Est. Demand: 191 A

Notes:

Branch Panel: ML3-301

Location: ELECTRICAL ROOM 315
Supply From: T3
Mounting: SURFACE
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 10kA
Mains Type: MAIN CB
Mains Rating: 225 A
MCB Rating: 175 A

Notes: 2nd and 3rd Floor Mechanical/HVAC 208/120V/1P Equipment.

CKT	Circuit Description	Trip	Poles	A	B	C	Poles	Trip	Circuit Description	CKT
1				804 VA	146 VA					2
3					804 VA	146 VA			CUH - 2ND FLOOR SOUTH-MID CORRIDOR	4
5	CUH - 2ND FLOOR EAST CORRIDOR	20 A	2			146 VA	146 VA		CUH - 2ND FLOOR WEST CORRIDOR	6
7				146 VA	146 VA					8
9					804 VA	146 VA			CUH - 3RD FLOOR SOUTH-MID CORRIDOR	10
11	FCU - 3RD FLOOR LOBBY	20 A	2			804 VA	146 VA		CUH - 3RD FLOOR WEST CORRIDOR	12
13						804 VA	146 VA			14
15	CUH - 3RD FLOOR EAST CORRIDOR	20 A	2	146 VA	146 VA				CUH - 3RD FLOOR WEST CORRIDOR	16
17					146 VA	146 VA				18
19	FCU - 2ND FLOOR EAST STAIRWELL	20 A	2			114 VA	114 VA		FCU - 3RD FLOOR EAST STAIRWELL	20
21				114 VA	114 VA					22
23	FCU - 2ND FLOOR WEST STAIRWELL	20 A	2		208 VA	208 VA			FCU - 3RD FLOOR WEST STAIRWELL	24
25	HXP - 2ND FLOOR HOT WATER CIRC....	20 A	1	204 VA	204 VA				HXP - 3RD FLOOR HOT WATER CIRC....	26
27	DOAS-1 AUX - 2ND FLOOR MECH*	20 A	1		960 VA	960 VA			DOAS-2 AUX - 2ND FLOOR MECH*	28
29	DOAS-3 AUX - 3RD FLOOR MECH*	20 A	1			960 VA	624 VA		UH - 2ND F. LDYR / MECH. / ELEC. / STRG	30
31	GLYCOL MAKEUP GFP-1 - 3RD FLOOR...	20 A	1	864 VA	624 VA				UH - 3RD F. LDYR / MECH. / ELEC. / STRG	32
33	GLYCOL MAKEUP GFP-2 - 3RD FLOOR...	20 A	1		864 VA	64 VA			2ND FLOOR RCP/TMV	34
35	FMCU PANELS - 2ND FLOOR ELEC. RM**	20 A	1			1200... 64 VA			3RD FLOOR RCP/TMV	36
37	FMCU PANELS - 3RD FLOOR ELEC. RM**	20 A	1	1200 VA	180 VA				2ND FLOOR MECHANICAL ROOM DDC	38
39	3RD FLOOR MECHANICAL ROOM DDC	20 A	1		180 VA	180 VA			2ND FLOOR ELECTRICAL ROOM DDC	40
41	3RD FLOOR ELECTRICAL ROOM DDC	20 A	1			180 VA	--	1	Space	42
43	Space	--	1	--	--			1	Space	44
45	Space	--	1	--	--			1	Space	46
47	Space	--	1	--	--	--	--	1	Space	48
49	Space	--	1	--	--			1	Space	50
51	Space	--	1	--	--			1	Space	52
53	Space	--	1	--	--	--	--	1	Space	54
Total Load:				5037 VA	5814 VA	4914 VA				
Total Amps:				42 A	49 A	41 A				

Legend:

* Install circuits only if required
**Install red fire alarm / mass notification identification and lockout kit to prevent accidental de-activation of system.

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
HVAC	12108 VA	100.00%	12108 VA	
Lighting - Dwelling Unit	720 VA	100.00%	720 VA	Total Conn. Load: 15764 VA
Fire Alarm/Pumps	2400 VA	100.00%	2400 VA	Total Est. Demand: 15764 VA
Domestic Water Equipment	536 VA	100.00%	536 VA	Total Conn. Current: 44 A
				Total Est. Demand Current: 44 A

Notes:

US Army Corps of Engineers

DESIGNED BY: J.MOORE
DRAWN BY: J.MOORE
CHECKED BY: B.GADDIE
SUBMITTED BY: M.BARRY
SIZE: ANSI D

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886
PANEL SCHEDULES - 1ST - 3RD FLOOR
MECHANICAL AND DOMESTIC WATER

ISSUE DATE: FEBRUARY 2026
SOLICITATION NO.: J.MOORE
CONTRACT NO.:
AMENDMENT 0002
MARK
2

DATE
April 2026

DESCRIPTION

4/22/2026 8:56:19 AM
C:\Users\FEDCOM\Documents\1586_FW40205_E_UEPH_SCHEDULE.dwg

Plot Date:
File Path:

SHEET ID

E-617

CERTIFIED FINAL

W912QR26RA016_Plans-0002

P

N

M

L

K

J

H

G

F

E

D

C

B

A

Switchgear: SH3-001

Location: ELECTRICAL ROOM 115
Supply From: 480Y/277V SERVICE (CLP
Mounting: FLOOR
Enclosure: NEMA 1

Volts: 480/277 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 85kA (1)
Mains Type: MAIN CE
Mains Rating: 3200 A
MCB Rating: 2500 A

Notes: This schedule covers all sections/units of 480Y277 V switchgear. All main and feeder breakers in this switchgear must be 100% rated

CKT	Circuit Description	# of Poles	Frame Size	Trip Rating	Load	Remarks
1	MH3-100	3	1600 A	1000 A	789008 VA	1ST FLOOR MECH. LOADS
2	MH3-300	3	800 A	300 A	158703 VA	2ND- 3RD FLOOR MECH. LOADS
3	MH3-500	3	800 A	300 A	147998 VA	4TH - 5TH FLOOR MECH. LOADS
4	MAWHP	3	800 A	700 A	537074 VA	HEAT PUMP FEEDER (DEDICATED)
5	PH3-200	3	800 A	200 A	74046 VA	1ST - 2ND FLOOR REC. / LTNG
6	PH3-400	3	800 A	200 A	51130 VA	3RD - 5TH FLOOR REC. / LTNG
7	Space	3	--	--	--	
8	Space	3	--	--	--	

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
HVAC	974689 VA	100.00%	974689 VA		
Lighting - Exterior	948 VA	100.00%	948 VA	Total Conn. Load:	1757959 VA
Lighting - Dwelling Unit	1800 VA	100.00%	1800 VA	Total Est. Demand:	1489231 VA
Fire Alarm/Pumps	29362 VA	100.00%	29362 VA	Total Conn. Current:	2114 A
LIGHTS	6004 VA	67.48%	4052 VA	Total Est. Demand Current:	1791 A
LITES	9559 VA	55.40%	5296 VA		
Elevator	37428 VA	100.00%	37428 VA		
Domestic Water Equipment	375526 VA	100.00%	375526 VA		
Receptacle - Dedicated	2700 VA	100.00%	2700 VA		
Receptacle - General	104820 VA	54.77%	57410 VA		
Non-Coincident Mech*	215122 VA	0.01%	22 VA		

* Indicates non-coincident cooling loads which will not run concurrently with heating loads (worst-case used for Est. Demand requirements). Estimated demand can be subtracted from Total Est. Demand (VA).

(1) A/C values for all equipment listed in schedules were derived from short circuit calculations, performed on a fully coordinated system supplied power from an infinite 12.47kV bus providing primary power to both service transformers through common CLP-specified primary-side fuse. A/C values given for estimation purposes only and need to be verified prior to full specification by contractor.

Switchgear: SL3-001

Location: ELECTRICAL ROOM 115
Supply From: 208Y/120V SERVICE (CLP
Mounting: FLOOR
Enclosure: NEMA 1

Volts: 120/208 Wye
Phases: 3
Wires: 4

A.I.C. Rating: 100kA (1
Mains Type: MAIN CB
Mains Rating: 5000 A
MCB Rating: 4200 A

Notes: This schedule covers all sections/units of 208Y120 V switchgear. All main and feeder breakers in this switchgear must be 100% rated

CKT	Circuit Description	# of Poles	Frame Size	Trip Rating	Load	Remarks
1	PL3-100	3	800 A	800 A	570938 VA	1ST FLOOR SUITES/LAUNDRY
2	PL3-200	3	800 A	800 A	641393 VA	2ND FLOOR SUITES/LAUNDRY
3	PL3-300	3	800 A	800 A	641393 VA	3RD FLOOR SUITES/LAUNDRY
4	PL3-400	3	800 A	800 A	641393 VA	4TH FLOOR SUITES/LAUNDRY
5	PL3-500	3	800 A	800 A	641393 VA	5TH FLOOR SUITES/LAUNDRY
6	Spare	1	800 A	600 A	0 VA	SPARE
7	Space	3	--	--		
8	Space	3	--	--		

Legend:	Total Conn. Load:	3136509 VA
	Total Amps:	8706 A

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
HVAC	250848 VA	100.00%	250848 VA	
Lighting - Dwelling Unit	1216800 VA	26.15%	318150 VA	Total Conn. Load: 3136509 VA
Appliance - Dwelling Unit	72000 VA	75.00%	54000 VA	Total Est. Demand: 925679 VA
LITES	32111 VA	41.07%	13189 VA	Total Conn. Current: 8705 A
Electric Clothes Dryer	294250 VA	25.00%	73563 VA	Total Est. Demand Current: 2569 A
Electric Range - 3.5 kW to 8.75 kW	1248000 VA	16.00%	199680 VA	
Receptacle - General	22500 VA	72.22%	16250 VA	

Notes:

(1) AIC values for all equipment listed in schedules were derived from short circuit calculations, performed on a fully coordinated system supplied power from an infinite 12.47KV bus providing primary power to both service transformers through common CLP-specified primary-side fuse. AIC values given for estimation purposes only and need to be verified prior to full specification by contractor.



**US Army Corps
of Engineers®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: JMOORE	ISSUE DATE: FEBRUARY 2026
	DRAWN BY: JMOORE	SOLICITATION NO.:
	CHECKED BY: B GADDIE	CONTRACT NO.:
	SUBMITTED BY: M. BARRY	
	APPROVED BY: ANSI D	



FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, F'2026, P2 511686

SHEET ID

E-619

Plot Date: 4/22/2026 9:03:06 AM

CERTIFIED FINAL

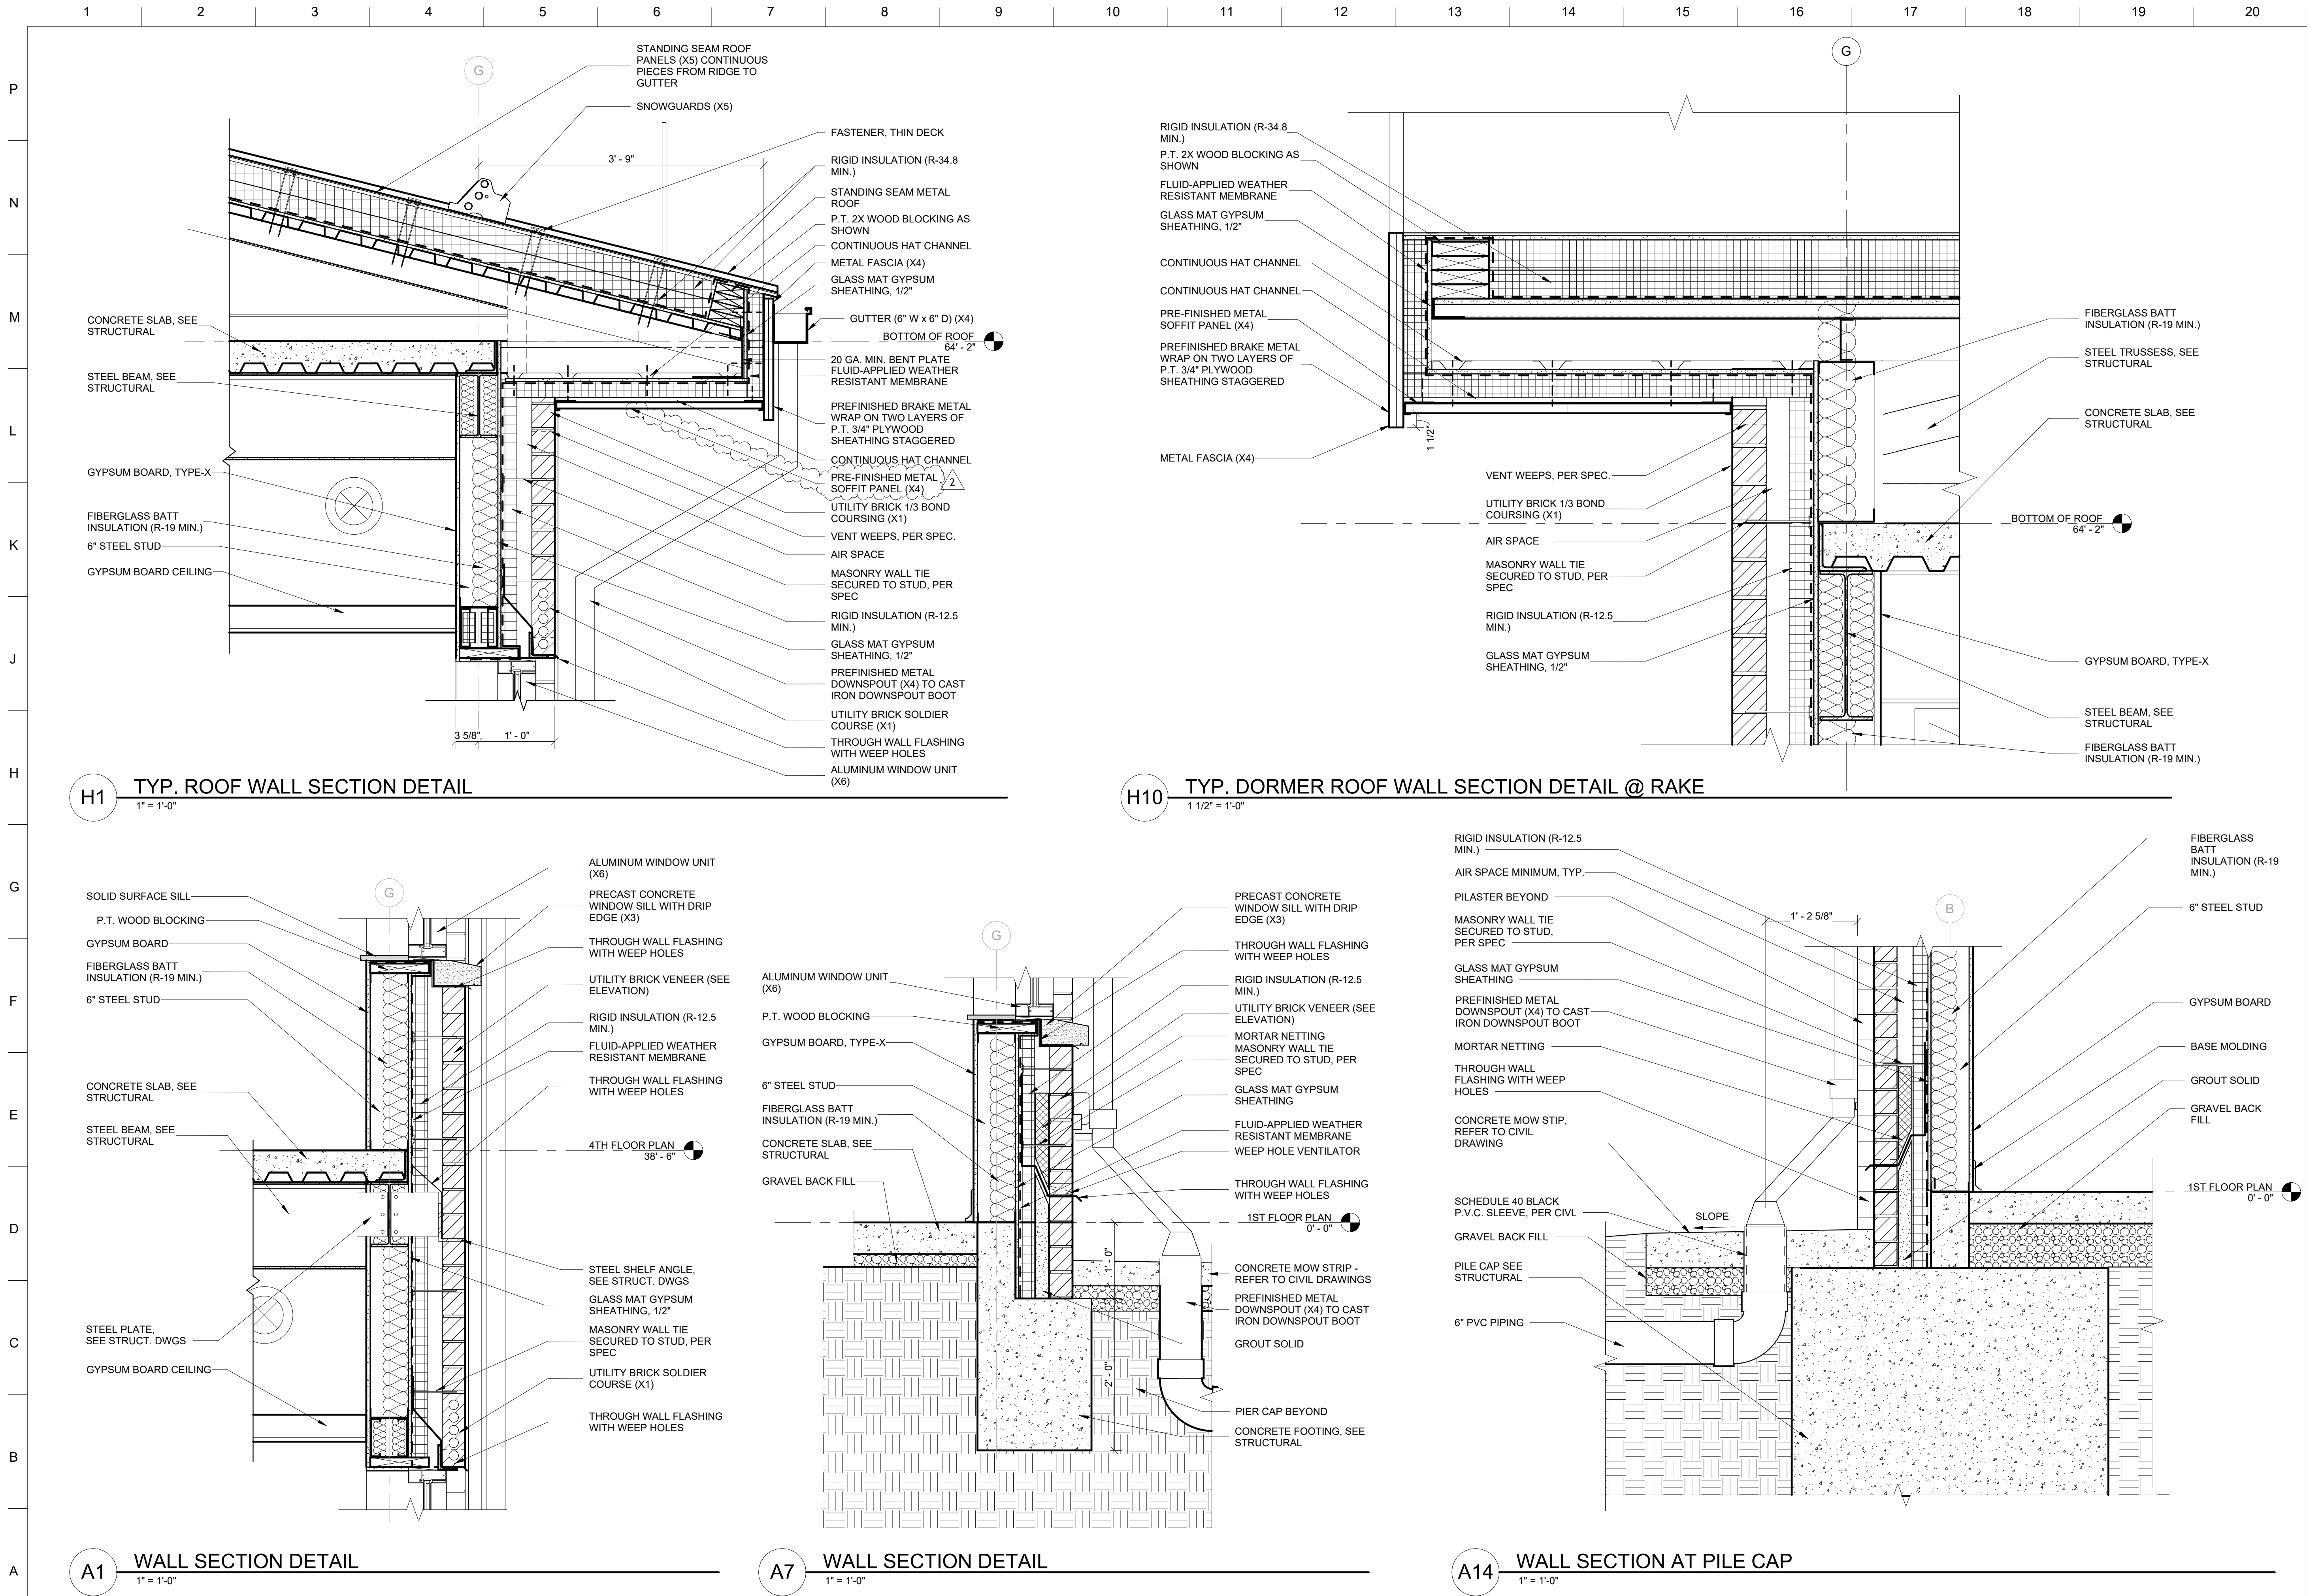

ISSUE DATE:	DESCRIPTION	DATE
DESIGNED BY: K. SANTOS	2	AMENDMENT 0002
CHECKED BY: M. BARRY		
SUBMITTED BY: M. BARRY		
SIZE: ANSI D		
ISSUE DATE: FEBRUARY 2026		APRIL 2026
SOLICITATION NO.:		
CONTRACT NO.:		


DESIGNED BY: K. SANTOS	US ARMY CORPS OF ENGINEERS
CHECKED BY: M. BARRY	LOUISVILLE DISTRICT
SUBMITTED BY: M. BARRY	600 DR. MARTIN LUTHER KING JR. PLACE
SIZE: ANSI D	LOUISVILLE, KY 40202

FT. CAMPBELL, KY	W912QR26RA016_Plans-0002
UEPH BARRACKS	
PN 99248, FY2026, P2 511686	
WALL SECTION DETAILS	


SHEET ID
A-501

Plot Date: 4/23/2026 11:11:06 AM
File Path: C:\Users\UEPH\Documents\11686_Ren0206_A_UEPH_1\eddas.vrt

CERTIFIED FINAL






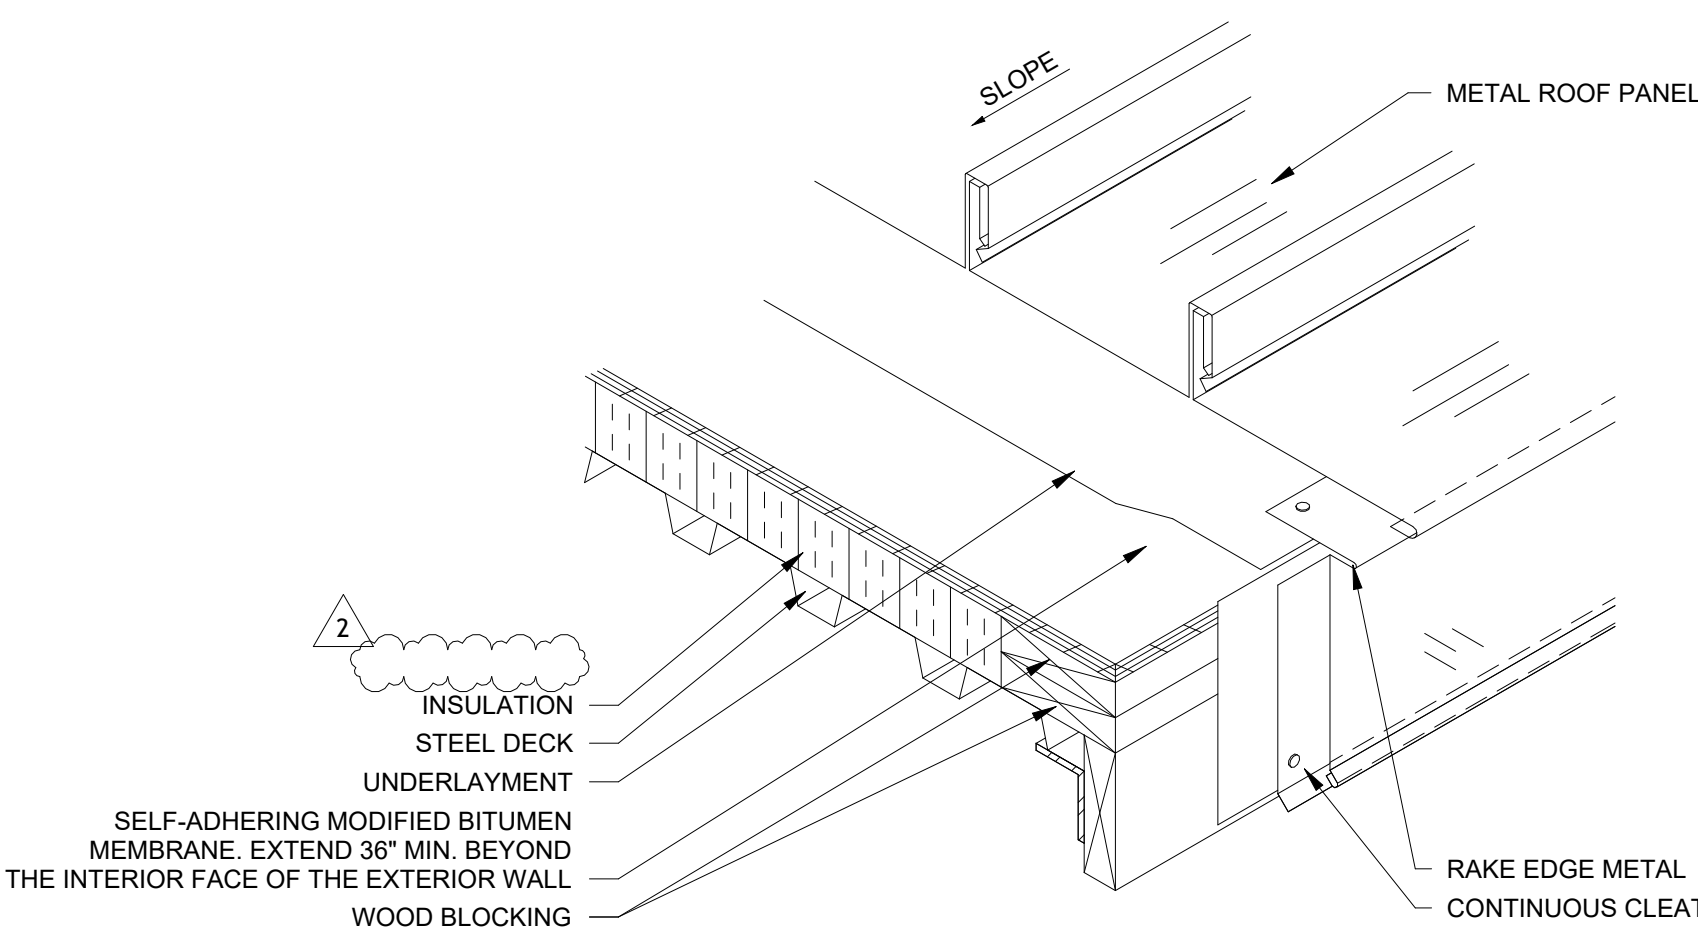



H8 RAKE EDGE
1 1/2" = 1'-0"

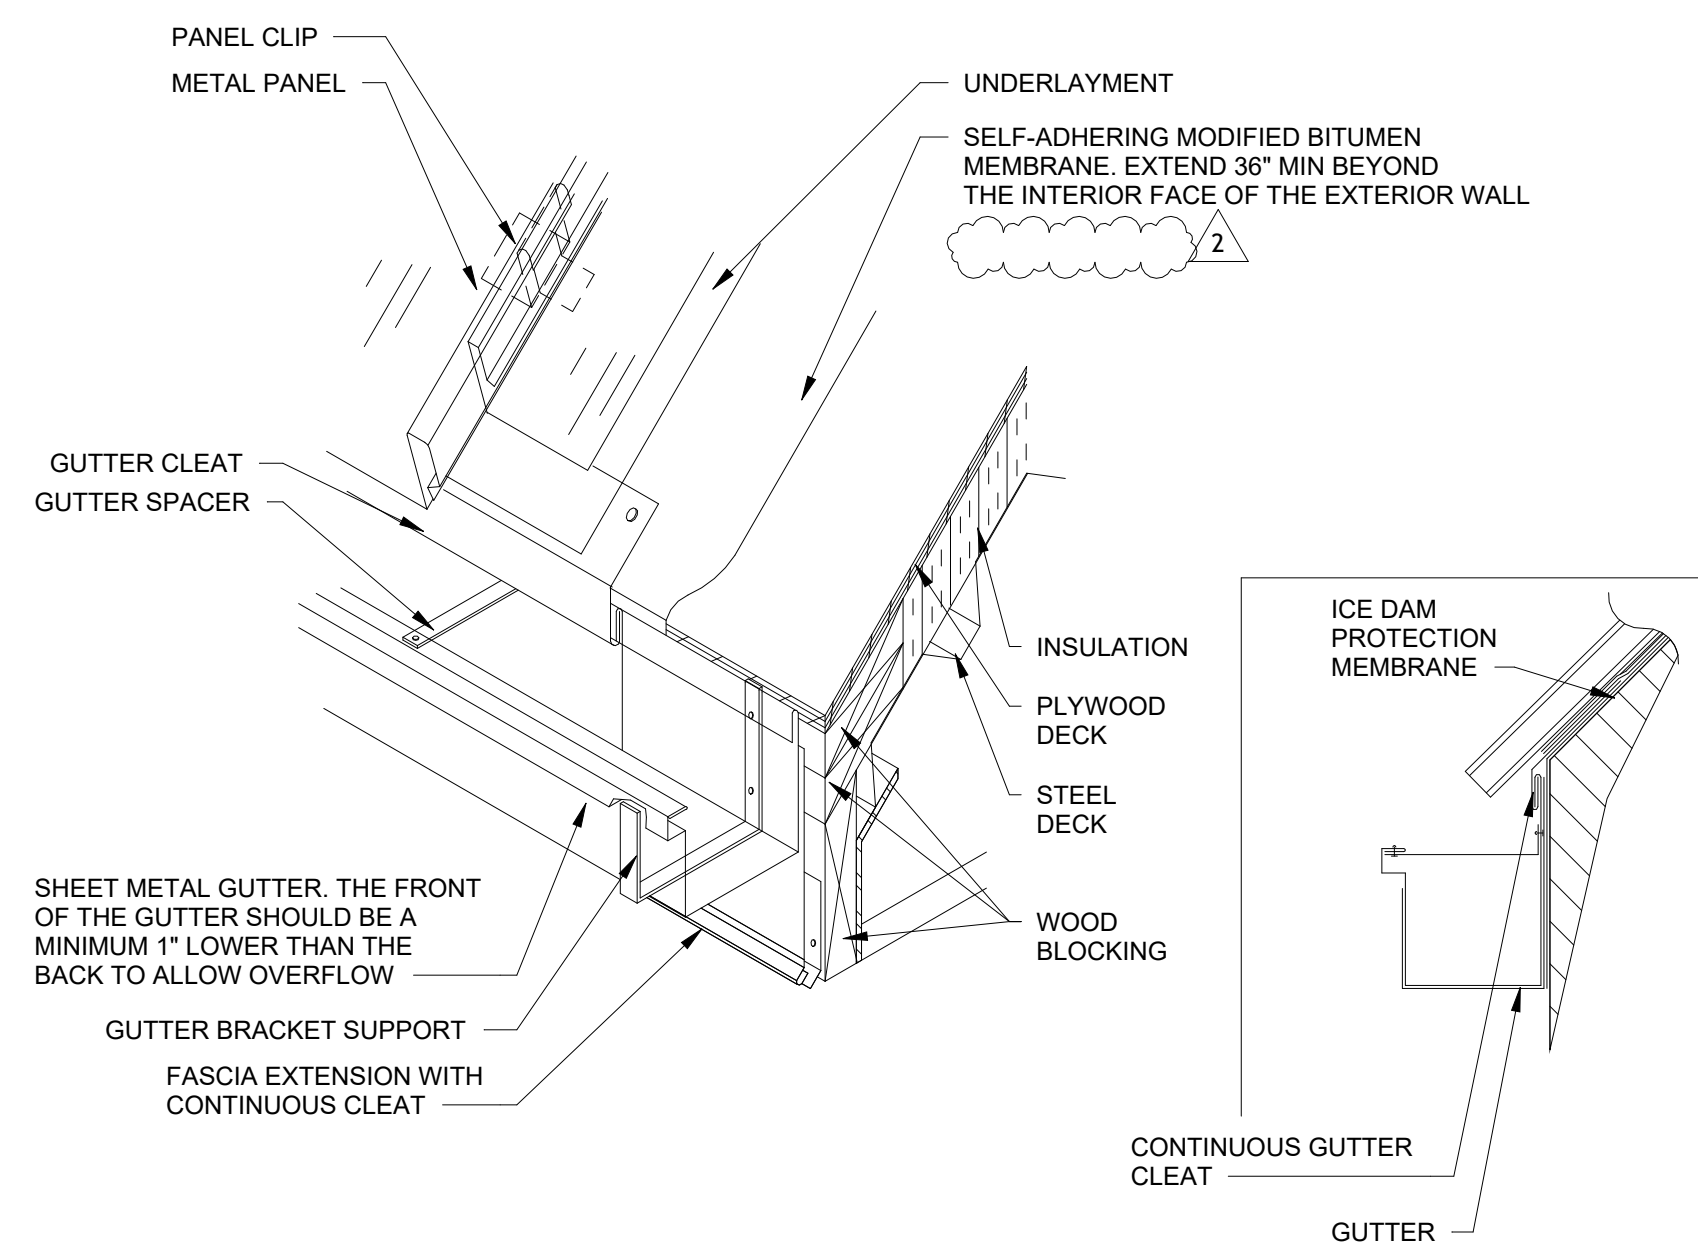

A8 DOWNSLOPE EDGE METAL WITH GUTTER (2)
1 1/2" = 1'-0"

A-512



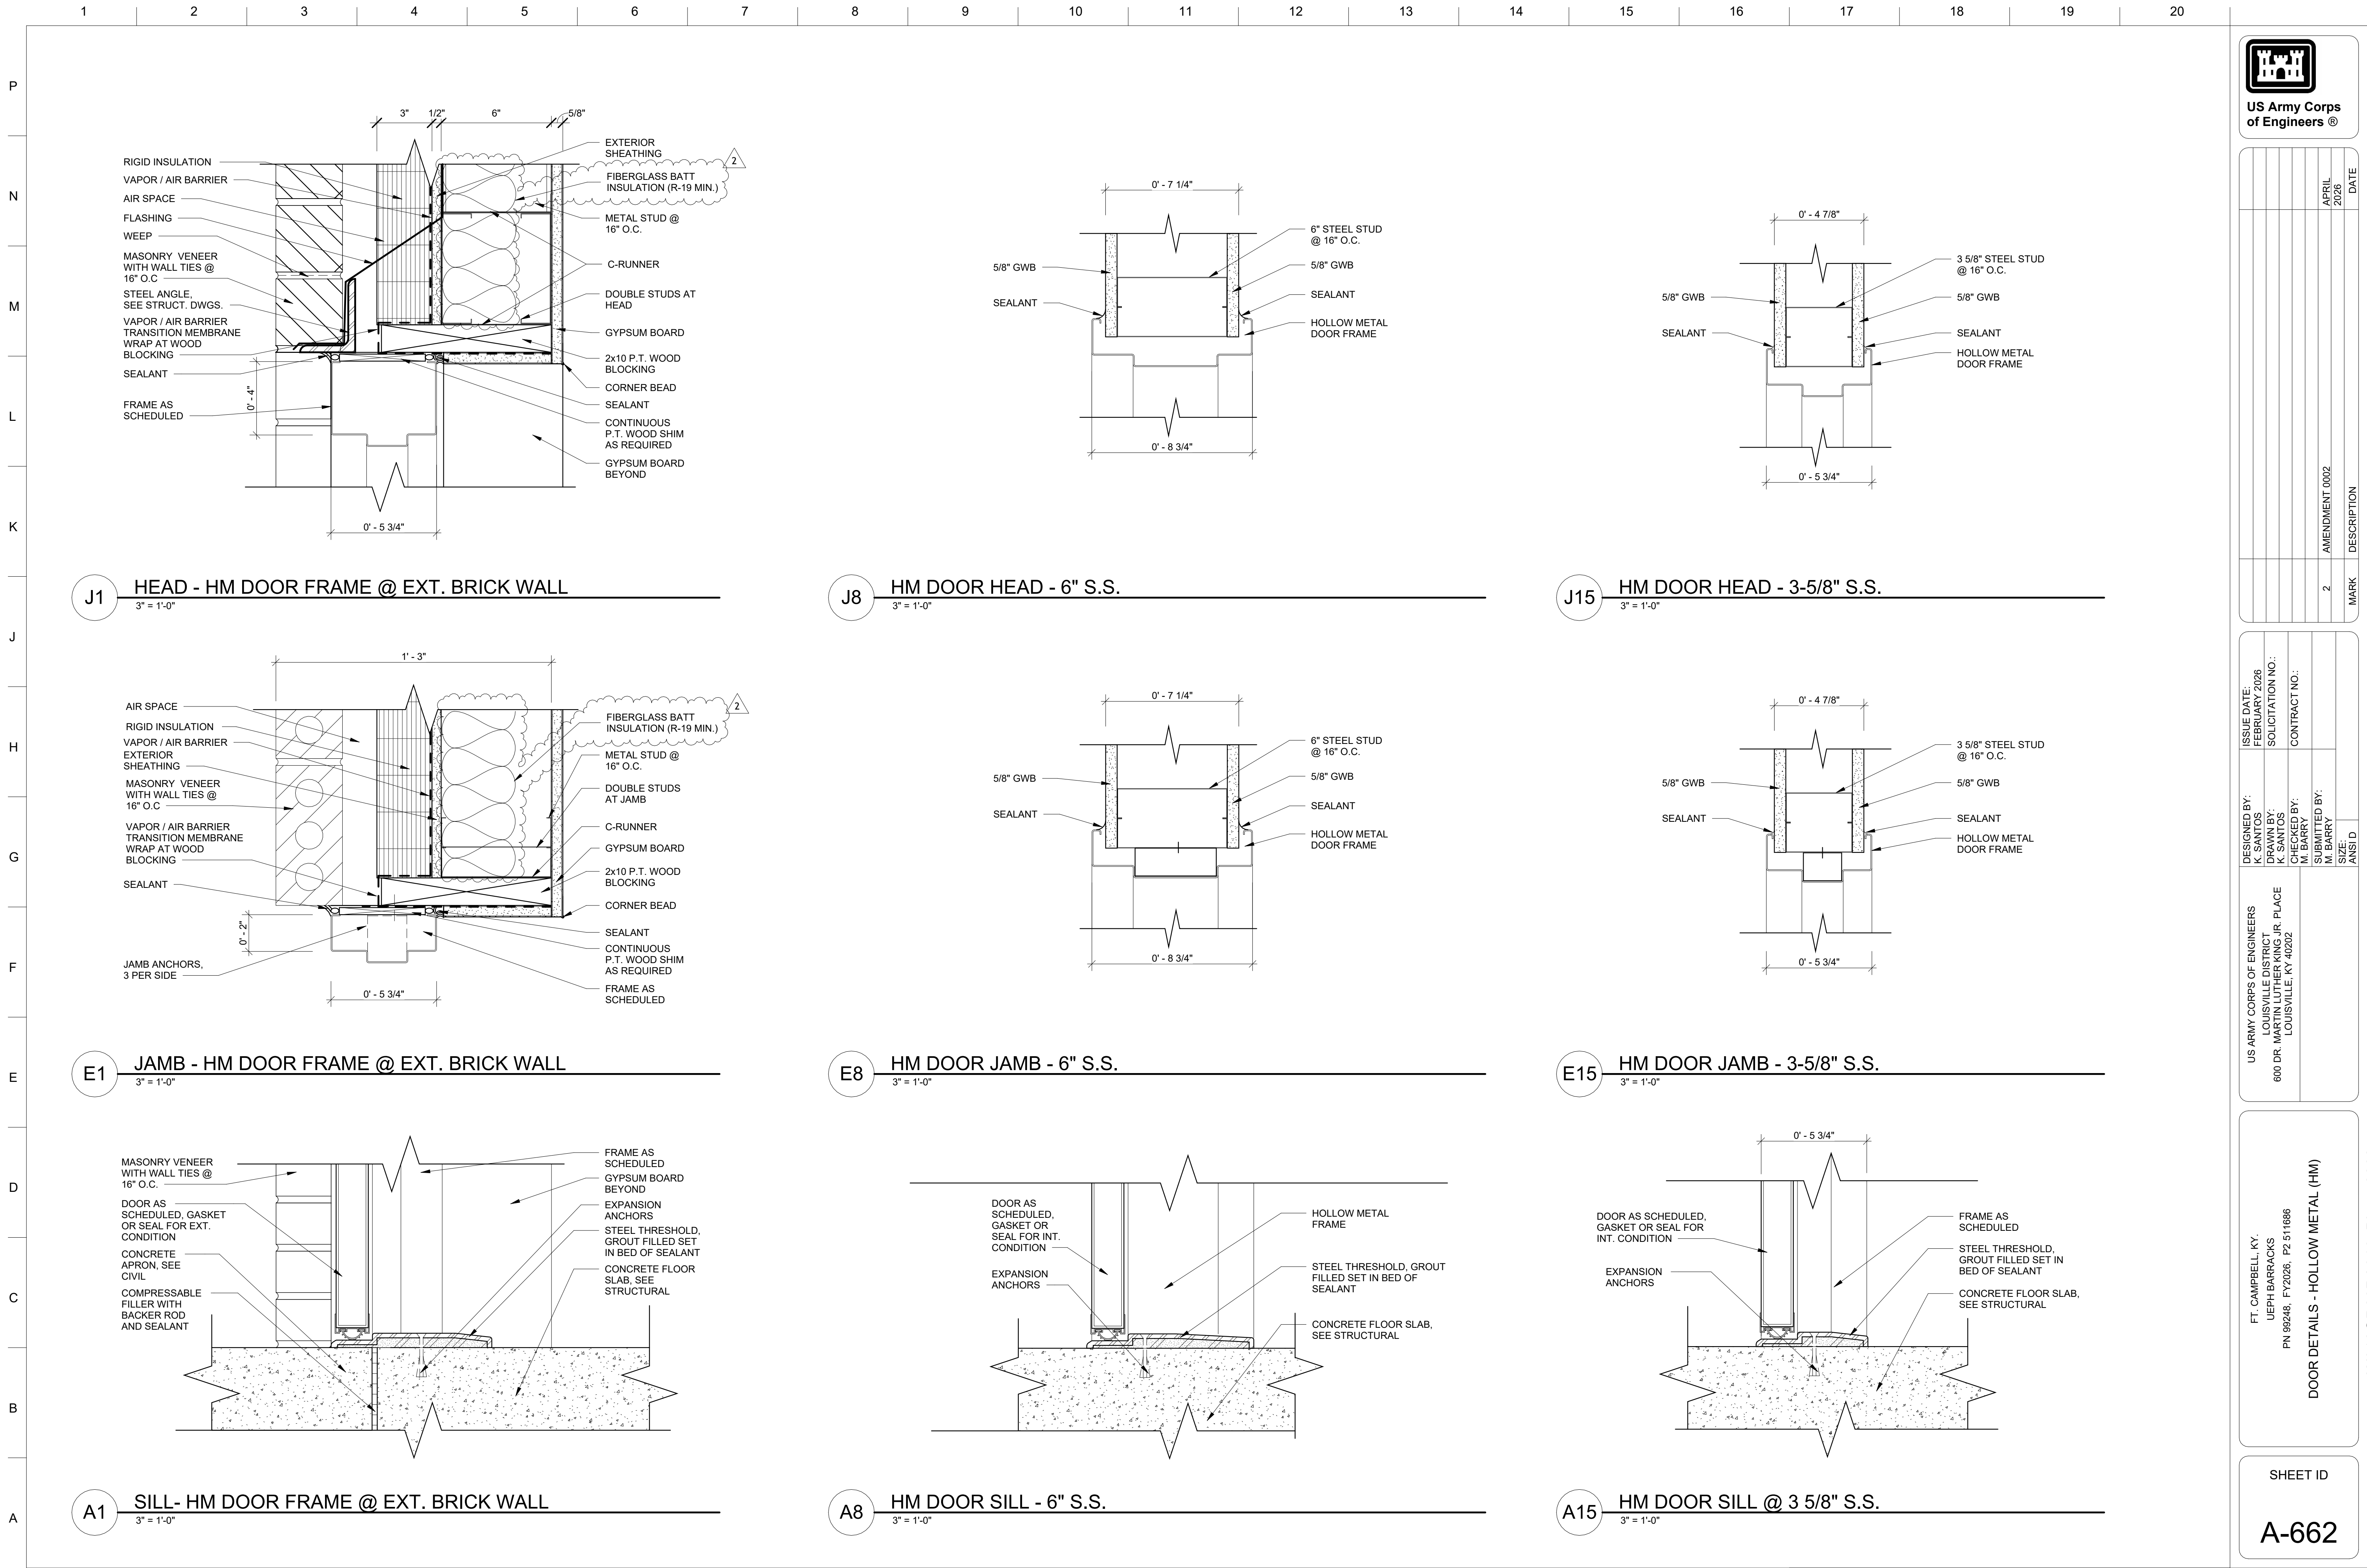


MARK		DESCRIPTION	DATE
2	AMENDMENT 0002		APRIL 2026

DESIGNED BY: K. SANTOS K. SANTOS	ISSUE DATE: FEBRUARY 2026 SOLICITATION NO.:	CONTRACT NO.:
CHECKED BY: M. BARRY	SUBMITTED BY: M. BARRY	ANSI D


US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY. UEPH BARRACKS PN 99248, FY2026, P2 511686	DOOR DETAILS - HOLLOW METAL (HM)
---	----------------------------------


SHEET ID
A-662

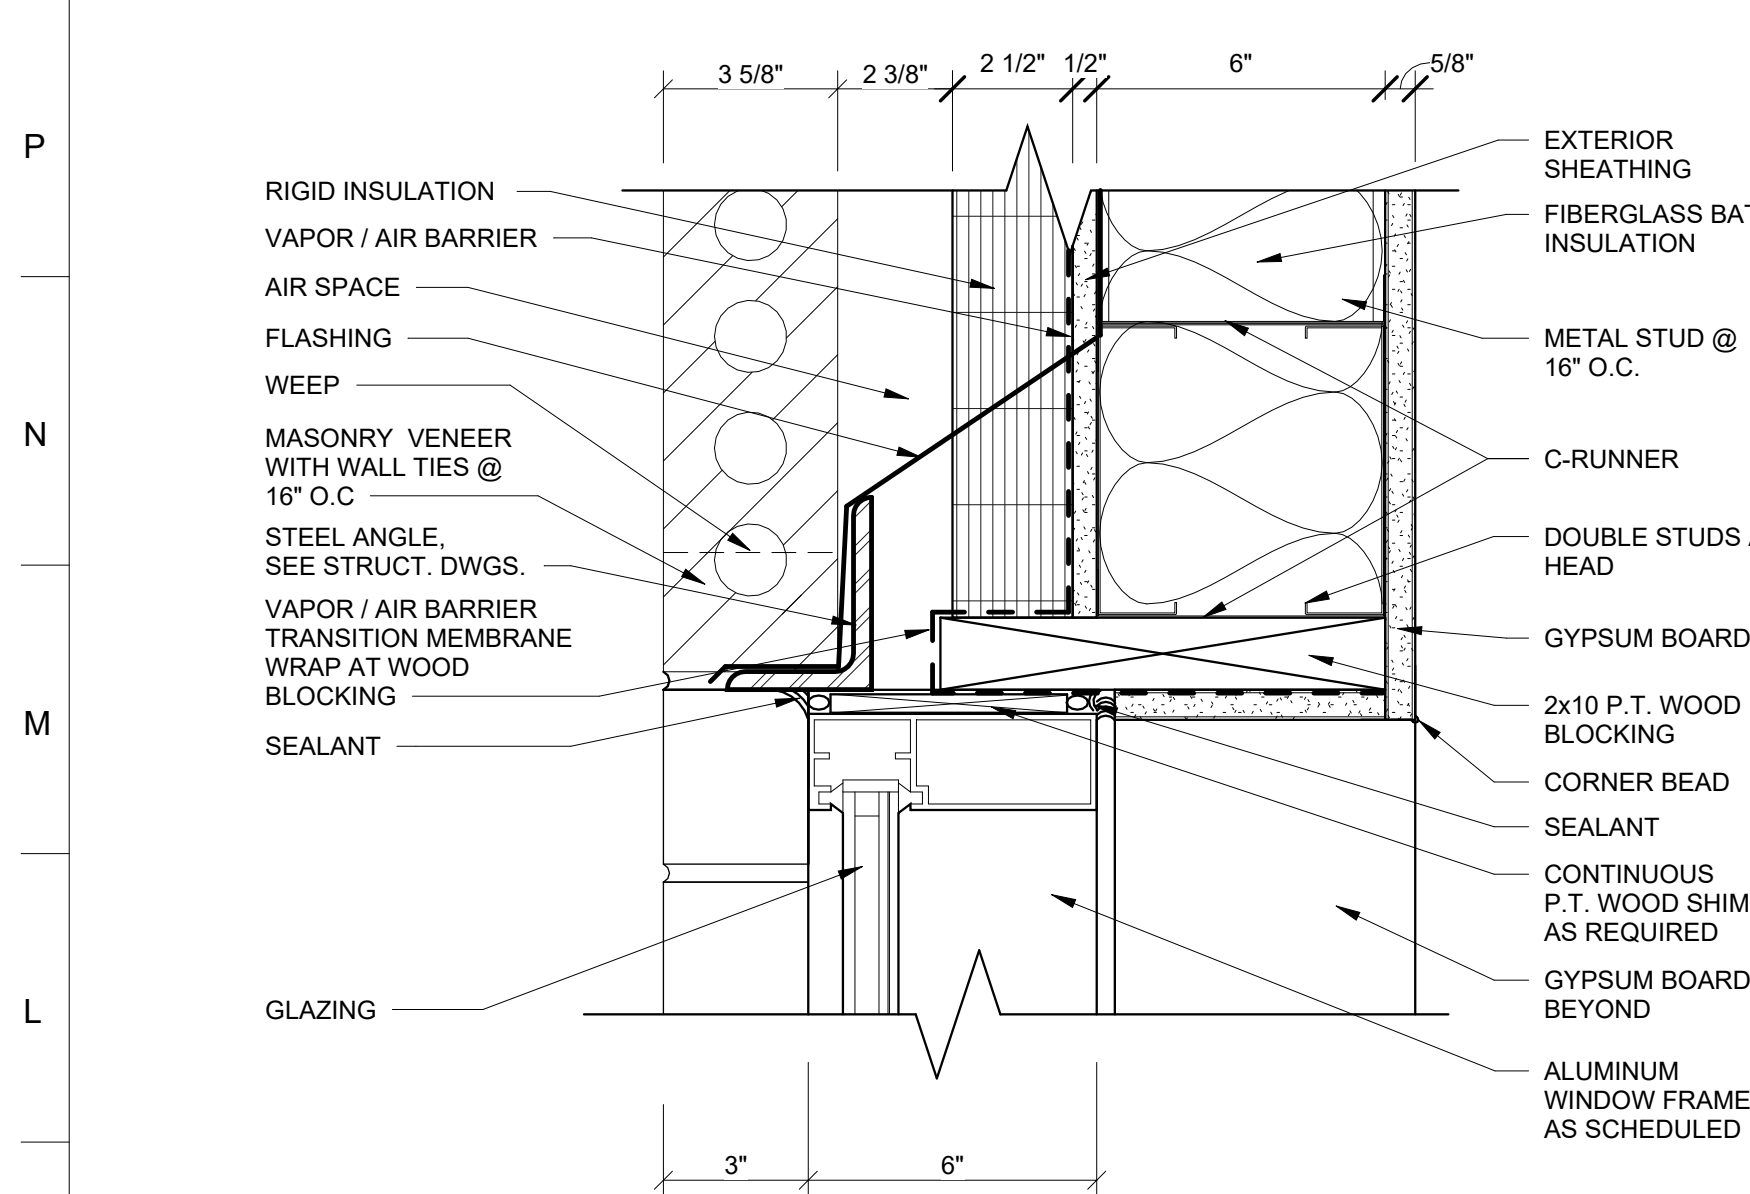

K1 HEAD - ALUMINUM WINDOW @ EXT. BRICK WALL
3" = 1'-0"

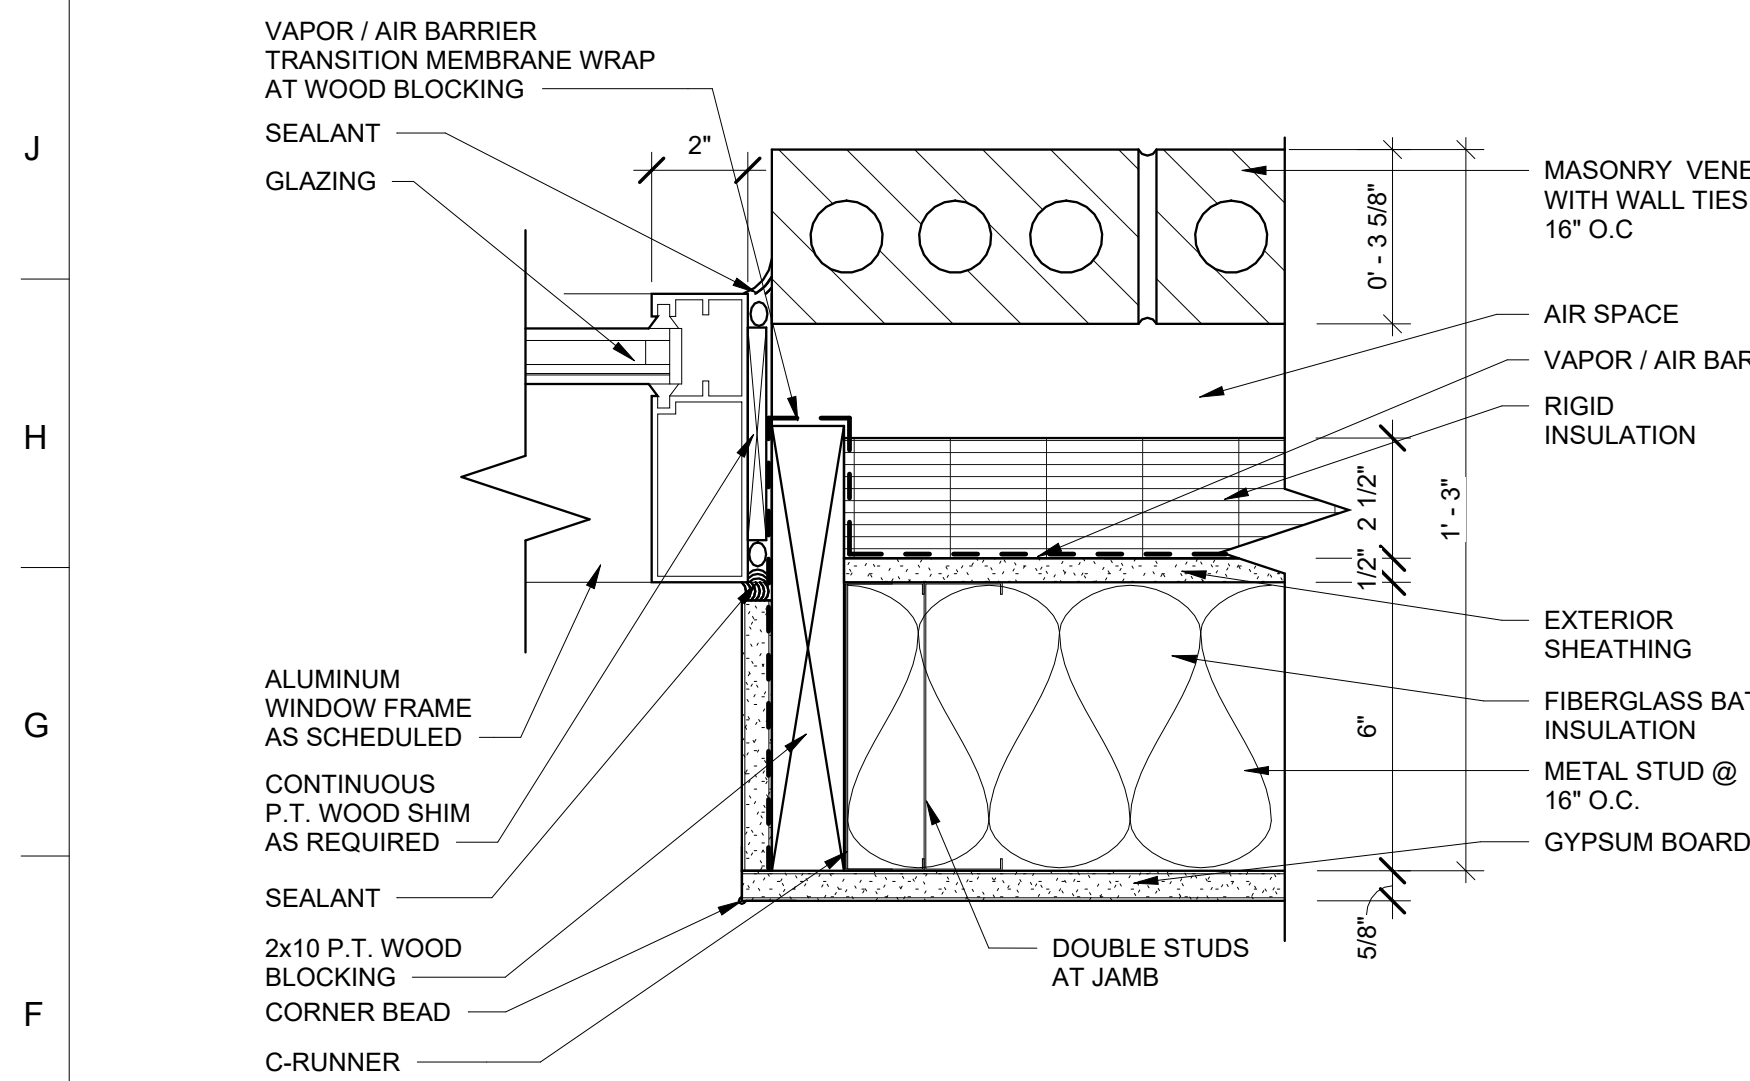


E1 JAMB - ALUMINUM WINDOW @ EXT. BRICK WALL
3" = 1'-0"

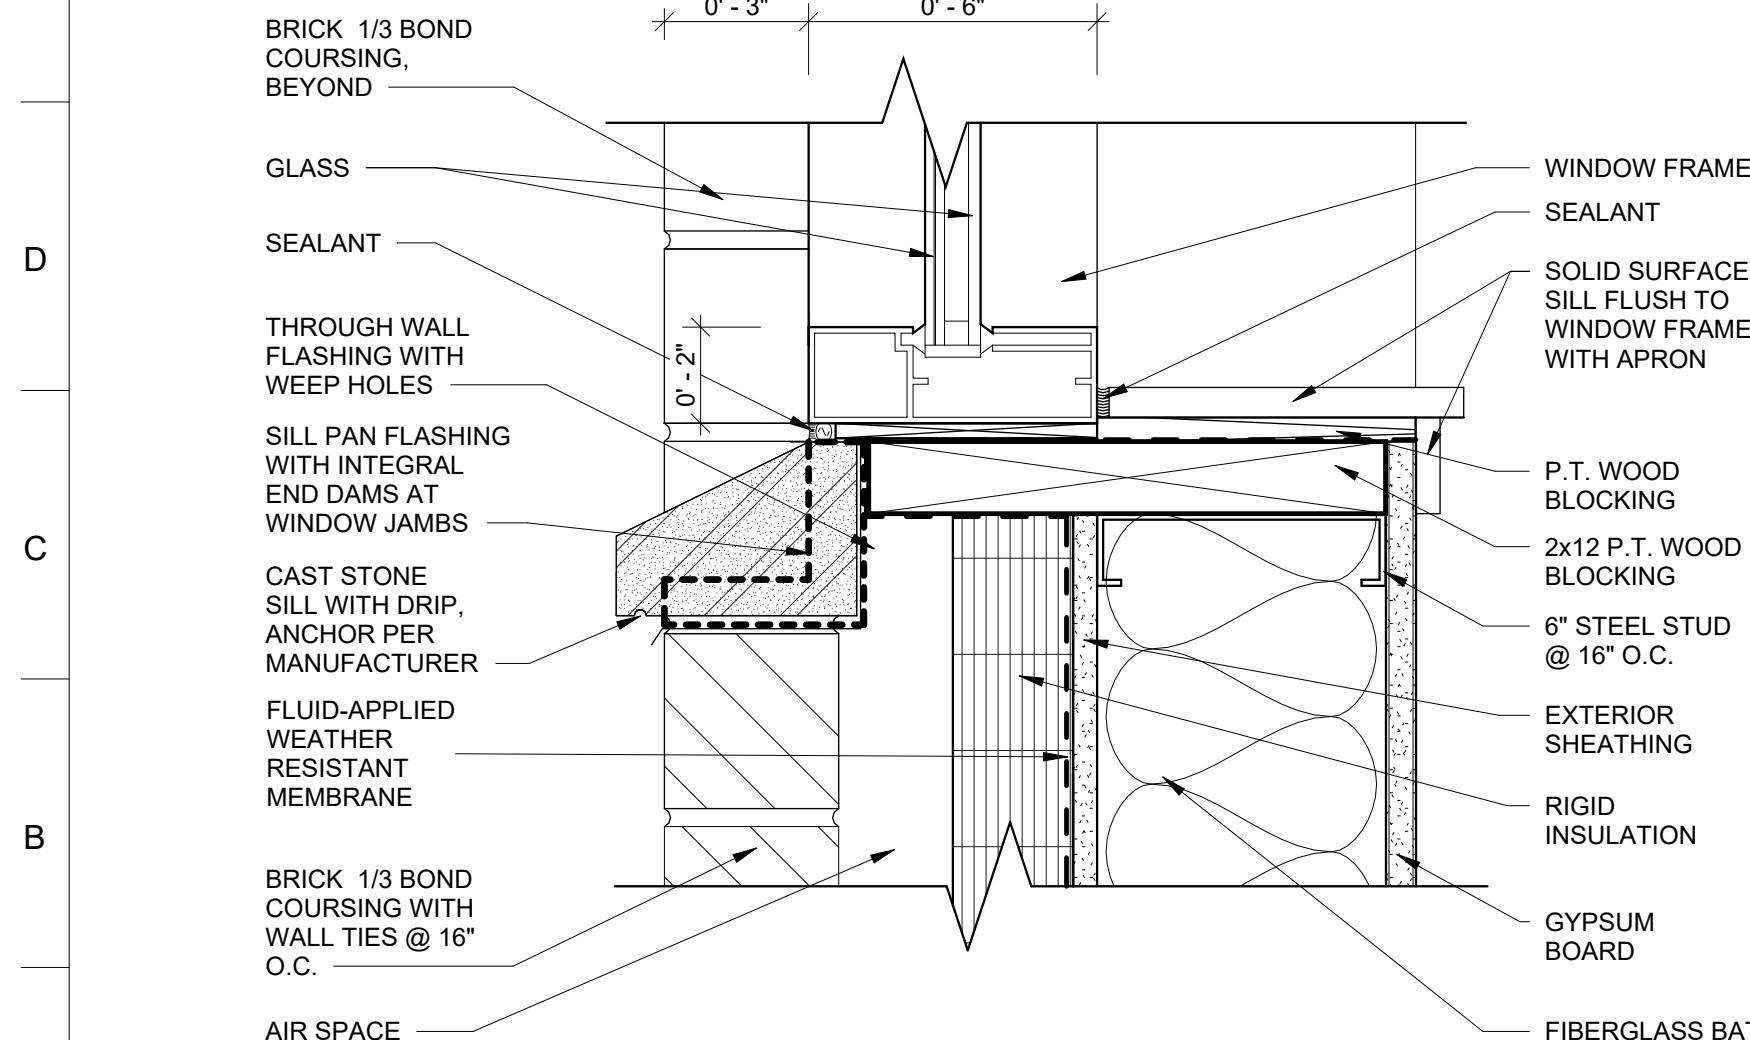


A1 SILL - ALUMINUM WINDOW @ EXT. BRICK WALL
3" = 1'-0"


USACE_WINDOW SCHEDULE										
COUNT	MARK	R.O.		DESCRIPTION	FRAME		GLAZING	DETAILS		
		WIDTH	HEIGHT		FINISH	MATERIAL		HEAD	JAMB	SILL
321	A	3' - 4"	6' - 0"	ALUMINUM FIXED WINDOW (A)	ANOD	INS AL	GL-1	K1 / A-671	E1 / A-671	A1 / A-671
20	B	6' - 0"	6' - 0"	ALUMINUM FIXED WINDOW (B)	ANOD	INS AL	GL-1	K1 / A-671	E1 / A-671	A1 / A-671
5	C	3' - 0"	5' - 5"	HOLLOW METAL FIXED WINDOW (C)	ANOD	HM	GL-3	A7 / A-671	A11 / A-671	A16 / A-671
1	D	8' - 6"	4' - 0"	ALUMINUM FIXED WINDOW (D)	ANOD	AL	GL-4	E7 / A-671	E11 / A-671	E17 / A-671

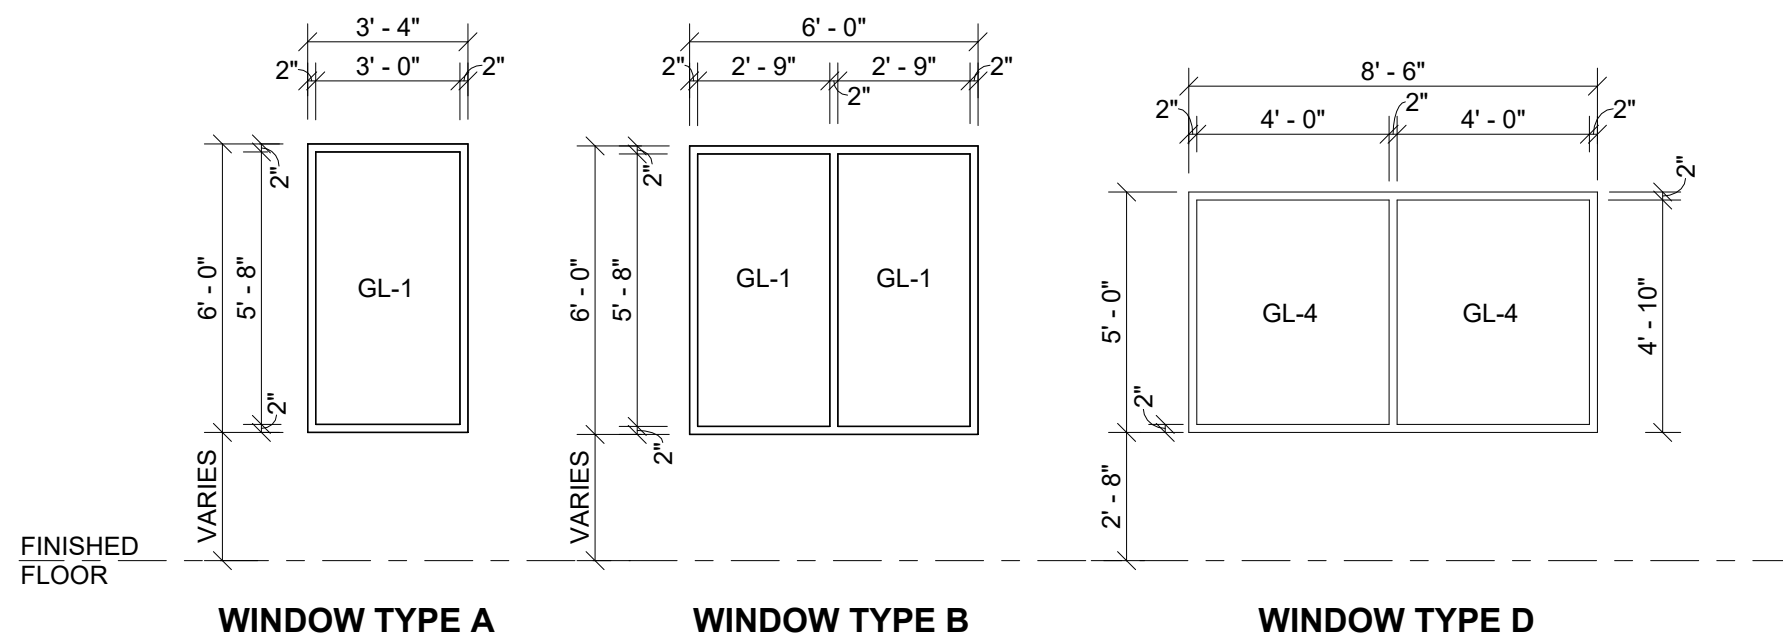


ALUMINUM FRAME TYPE ELEVATIONS
1/4" = 1'-0"

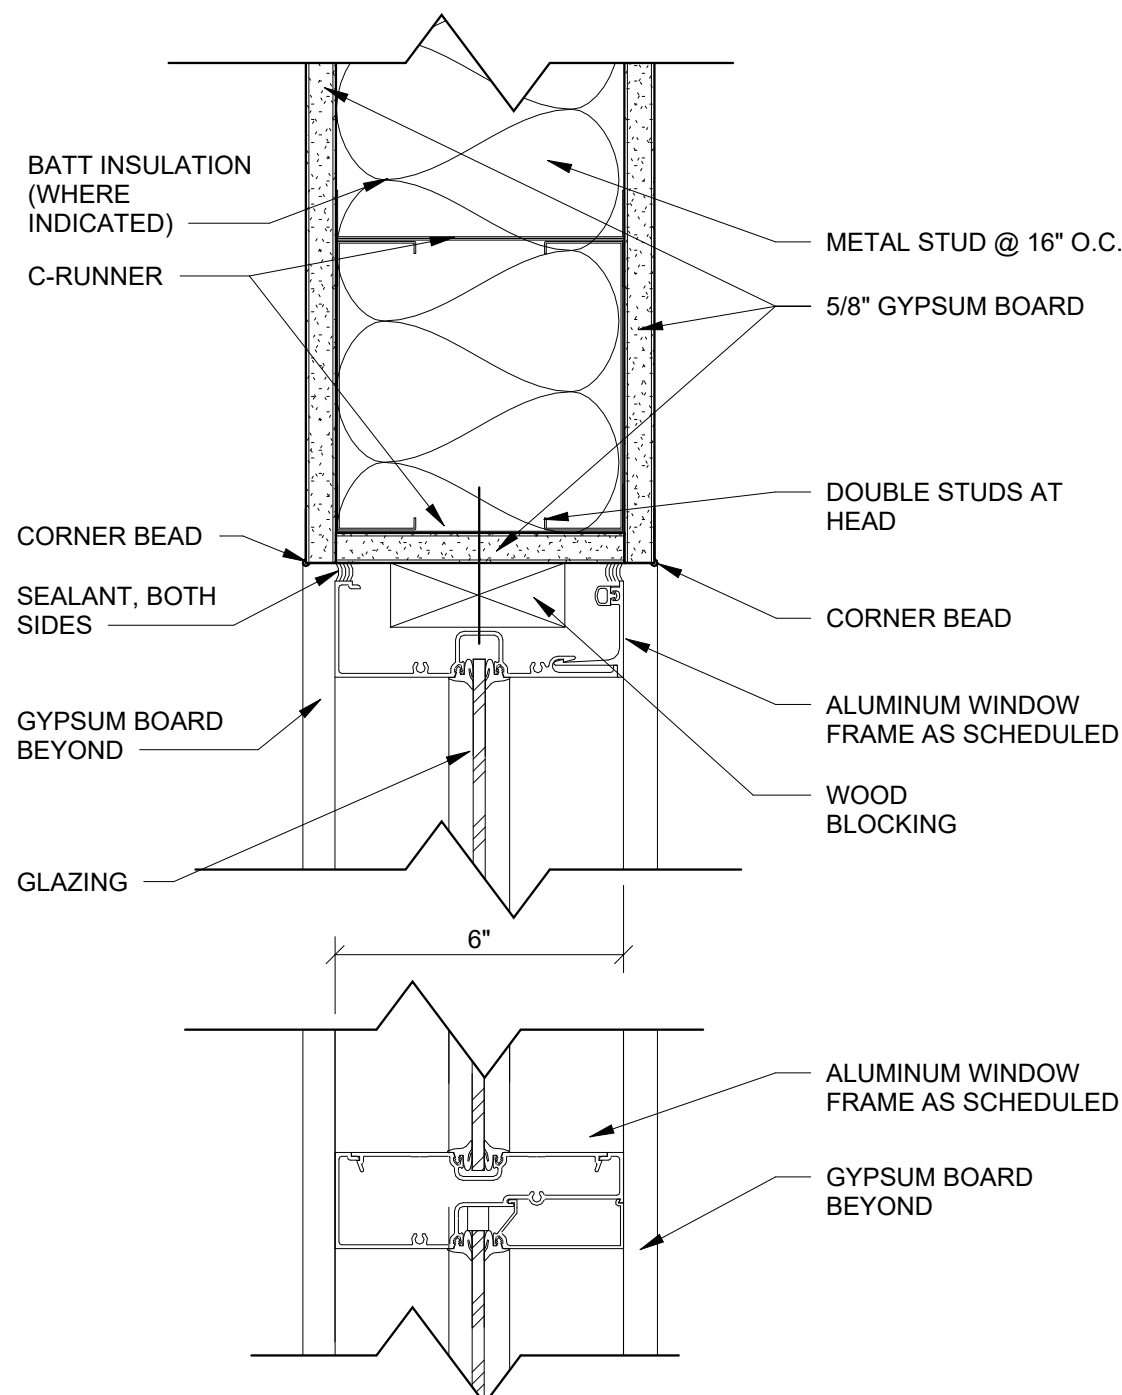


E7 HEAD - AL WINDOW & MULLION - 6" S.S.
3" = 1'-0"

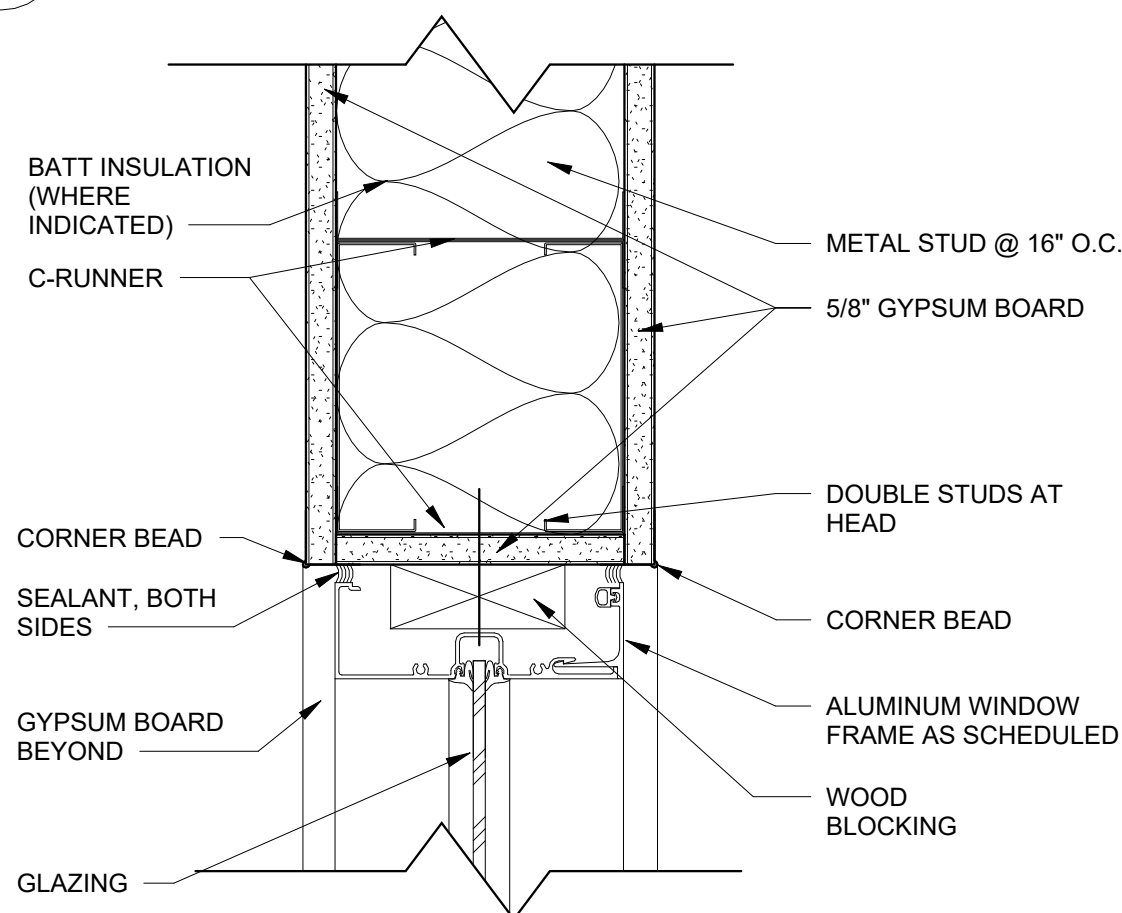


A7 HEAD - ALUMINUM WINDOW - 6" S.S.
3" = 1'-0"

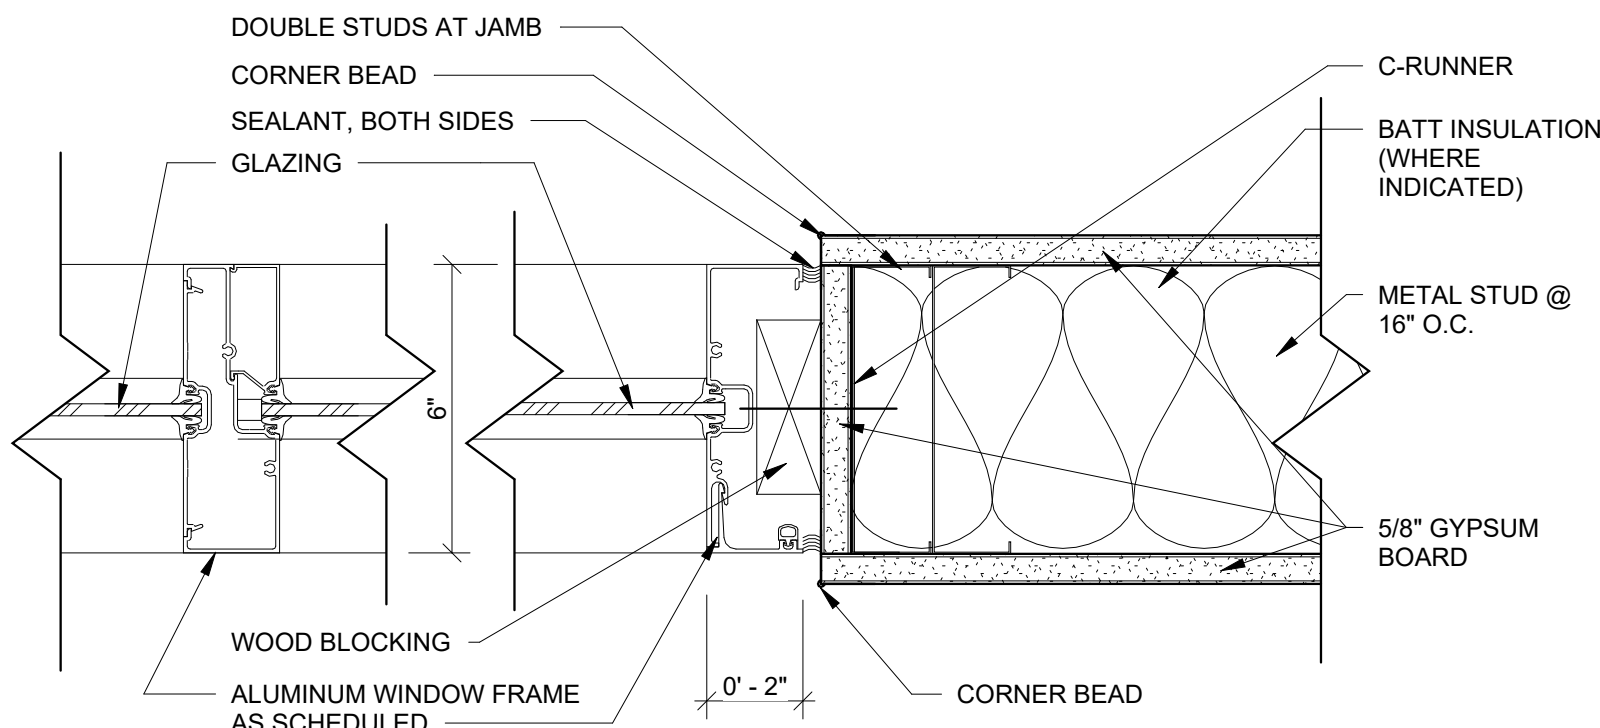


E11 JAMB - AL WINDOW & MULLION - 6" S.S.
3" = 1'-0"

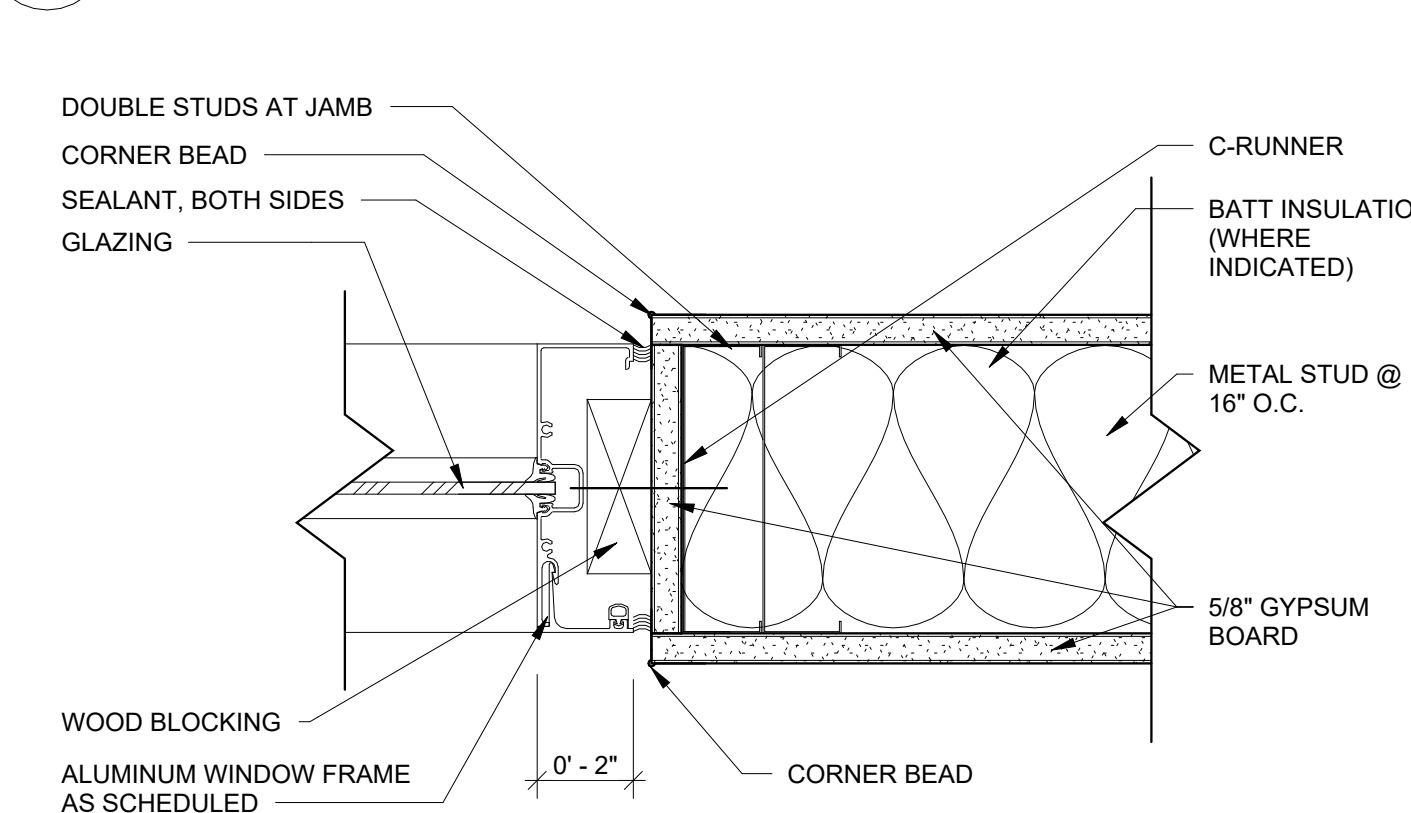


A11 JAMB - ALUMINUM WINDOW - 6" S.S.
3" = 1'-0"

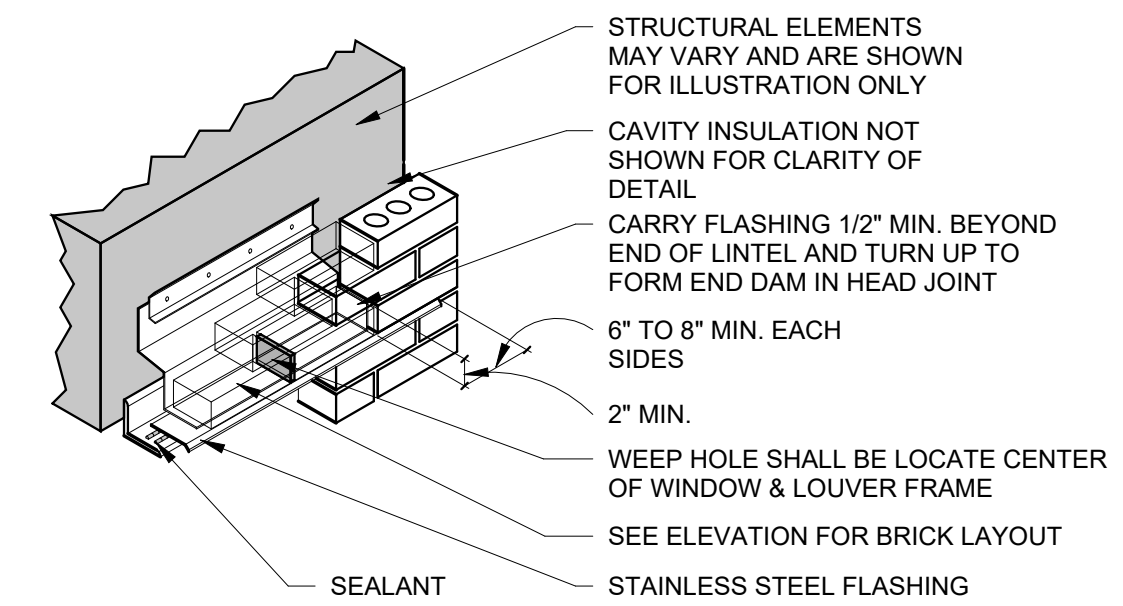

G17 TYP. WINDOW HEAD ISO. FL. DET.
3/4" = 1'-0"

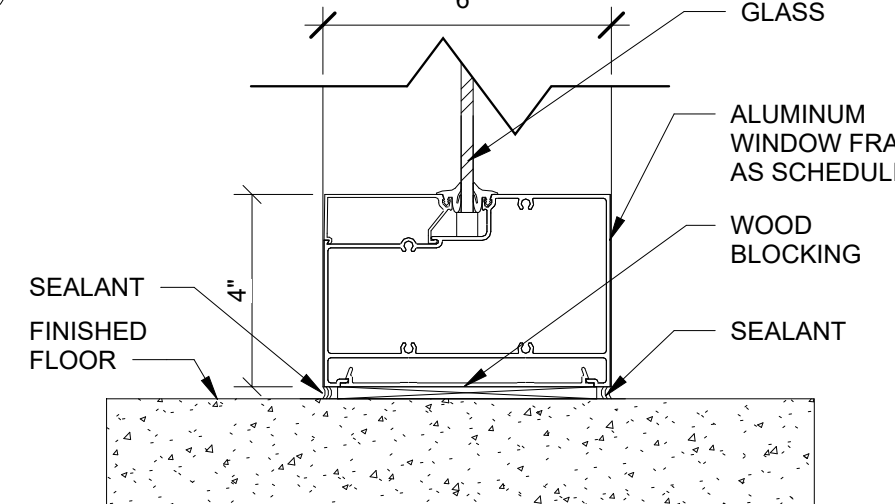

E17 SILL - 4" AL WINDOW - 6" S.S.
3" = 1'-0"

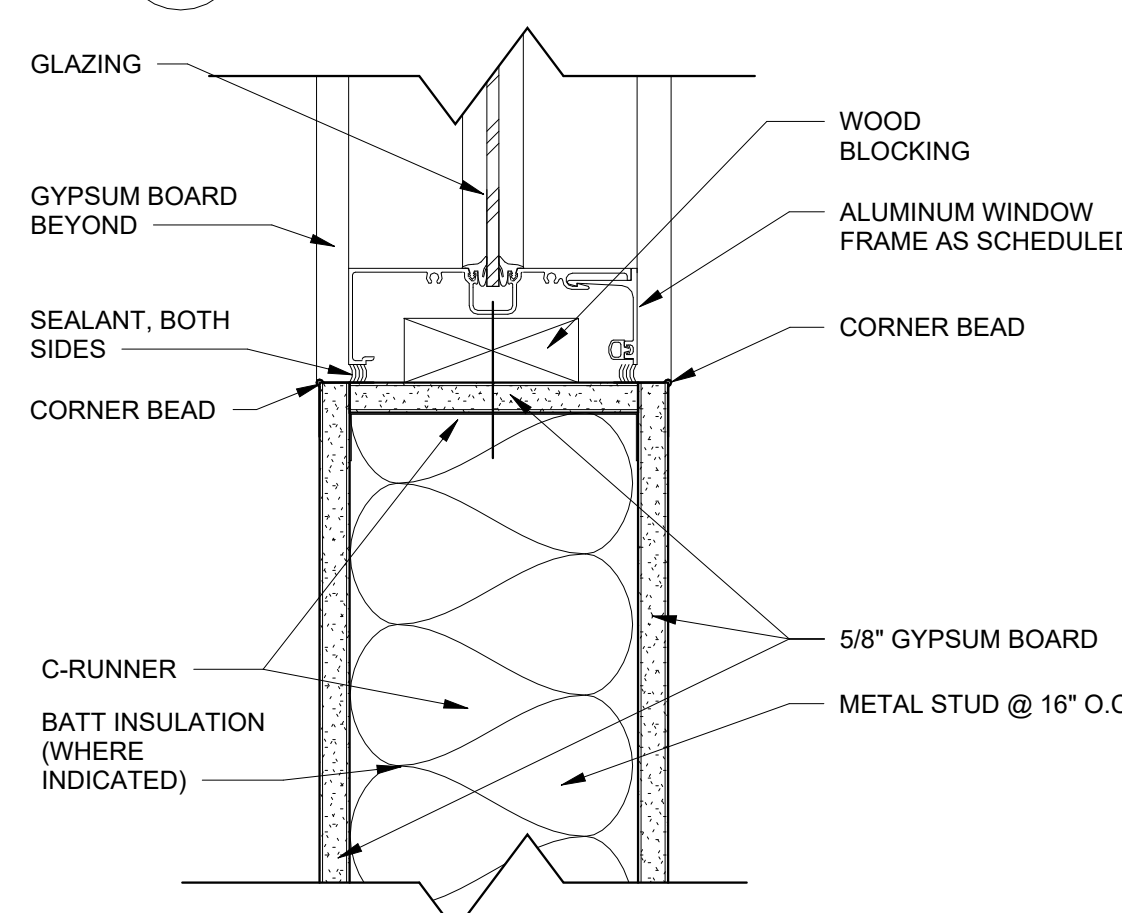

A16 SILL - ALUMINUM WINDOW - 6" S.S.
3" = 1'-0"

GENERAL NOTES - WINDOWS

- REFERENCE SPEC SECTION 08 44 00 CURTAIN WALL AND GLAZED ASSEMBLIES FOR FURTHER INFORMATION REGARDING CURTAIN WALL AND GLAZED ASSEMBLIES.
- REFERENCE SPEC SECTION 08 51 13 ALUMINUM WINDOWS FOR FURTHER INFORMATION REGARDING ALUMINUM WINDOWS.
- REFERENCE STRUCTURAL DRAWINGS FOR LINTELS NOT INCLUDED IN LINTEL SCHEDULE.
- ALL CURTAINWALL MULLIONS SHALL BE 2" WIDTH UNLESS OTHERWISE NOTED.
- SEALANT TYPICAL AT ALL JOINTS OF ALL ASSEMBLIES.

GLAZING SCHEDULE

- GL-1 1" INSULATING GLASS UNIT
- INNER LIGHT SHALL BE 7/16" LAMINATED GLASS
- AIRSPACE SHALL BE 3/8"
- OUTER LIGHT SHALL BE 1/4" TEMPERED LOW-E, TINTED GLASS
- GL-2 1" INSULATING GLASS UNIT
- INNER LIGHT SHALL BE 7/16" LAMINATED SPANDREL GLASS
- AIRSPACE SHALL BE 3/8"
- OUTER LIGHT SHALL BE 1/4" TEMPERED LOW-E, TINTED GLASS
- GL-3 FIRE RATED, TEMPERED GLASS
- GL-4 1/4" TEMPERED GLASS
- GL-5 1" INSULATING FIRE RATED GLASS UNIT
- INNER LIGHT SHALL BE 7/16" LAMINATED GLASS
- AIRSPACE SHALL BE 3/8"
- OUTER LIGHT SHALL BE 1/4" TEMPERED LOW-E, TINTED GLASS

WINDOW ABBREVIATIONS

- AL ALUMINUM
HM HOLLOW METAL
MTL METAL
PNT PAINTED
INS INSULATED
ANOD ANODIZED



US Army Corps
of Engineers ®

DATE	DESCRIPTION	MARK
APRIL 2026	AMENDMENT 0002	2


ISSUE DATE: FEBRUARY 2026	DESIGNED BY: K. SANTOS	US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202
SOLICITATION NO.:	CHECKED BY: M. BARRY	
CONTRACT NO.:	SUBMITTED BY: M. BARRY	

FT. CAMPBELL, KY UEPH BARRACKS PN 99248, FY2026, P2 511686	WINDOW AND FRAMES SCHEDULES AND TYPES AND DETAILS
--	--

SHEET ID

A-671

WINDOW TYPE C
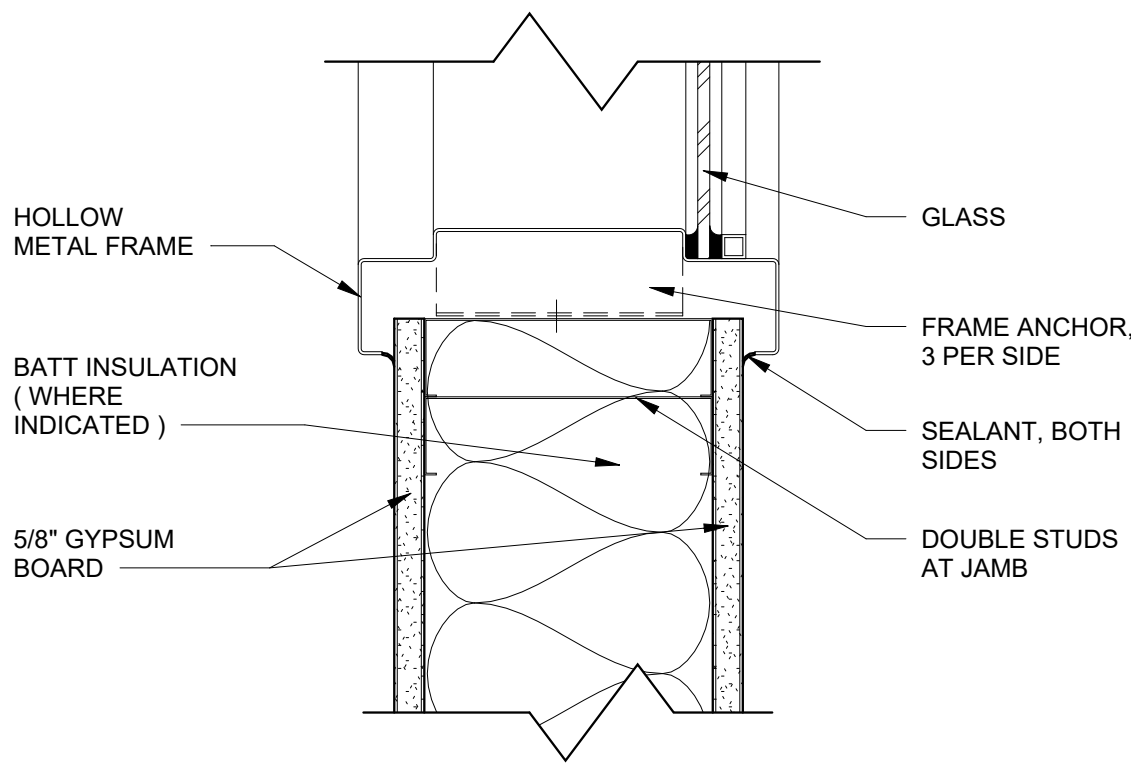
$$1/4'' = 1'-0''$$


AMENDMENT 0002
DESCRIPTION
4/24/2026 9:44:52 AM

- | | |
|------|--------------|
| AL | ALUMINUM |
| HM | HOLLOW METAL |
| MTL | METAL |
| PNT | PAINTED |
| INS | INSULATED |
| ANOD | ANODIZED |

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	ISSUE DATE: FEBRUARY 2008
DESIGNED BY: DRAWN BY: K. SANTOS	SOLICITATION NO.:
CHECKED BY: M. BARRY	CONTRACT NO.:
SUBMITTED BY: M. BARRY	PROJECT NO.:
ANSI D	

WINDOW AND FRAMES SCHEDULES AND TYPES AND DETAILS


SHEET ID

A-672


CERTIFIED FINANCIAL STATEMENTS

Plot Date: 4/24/2026 9:44:52 AM
File Path: C:\Users\H2ENDDK4\SidDocument


C:\Users\H2EDDK4\Documents\511698 Revit2025 & IEPH b2eddkas.rvt

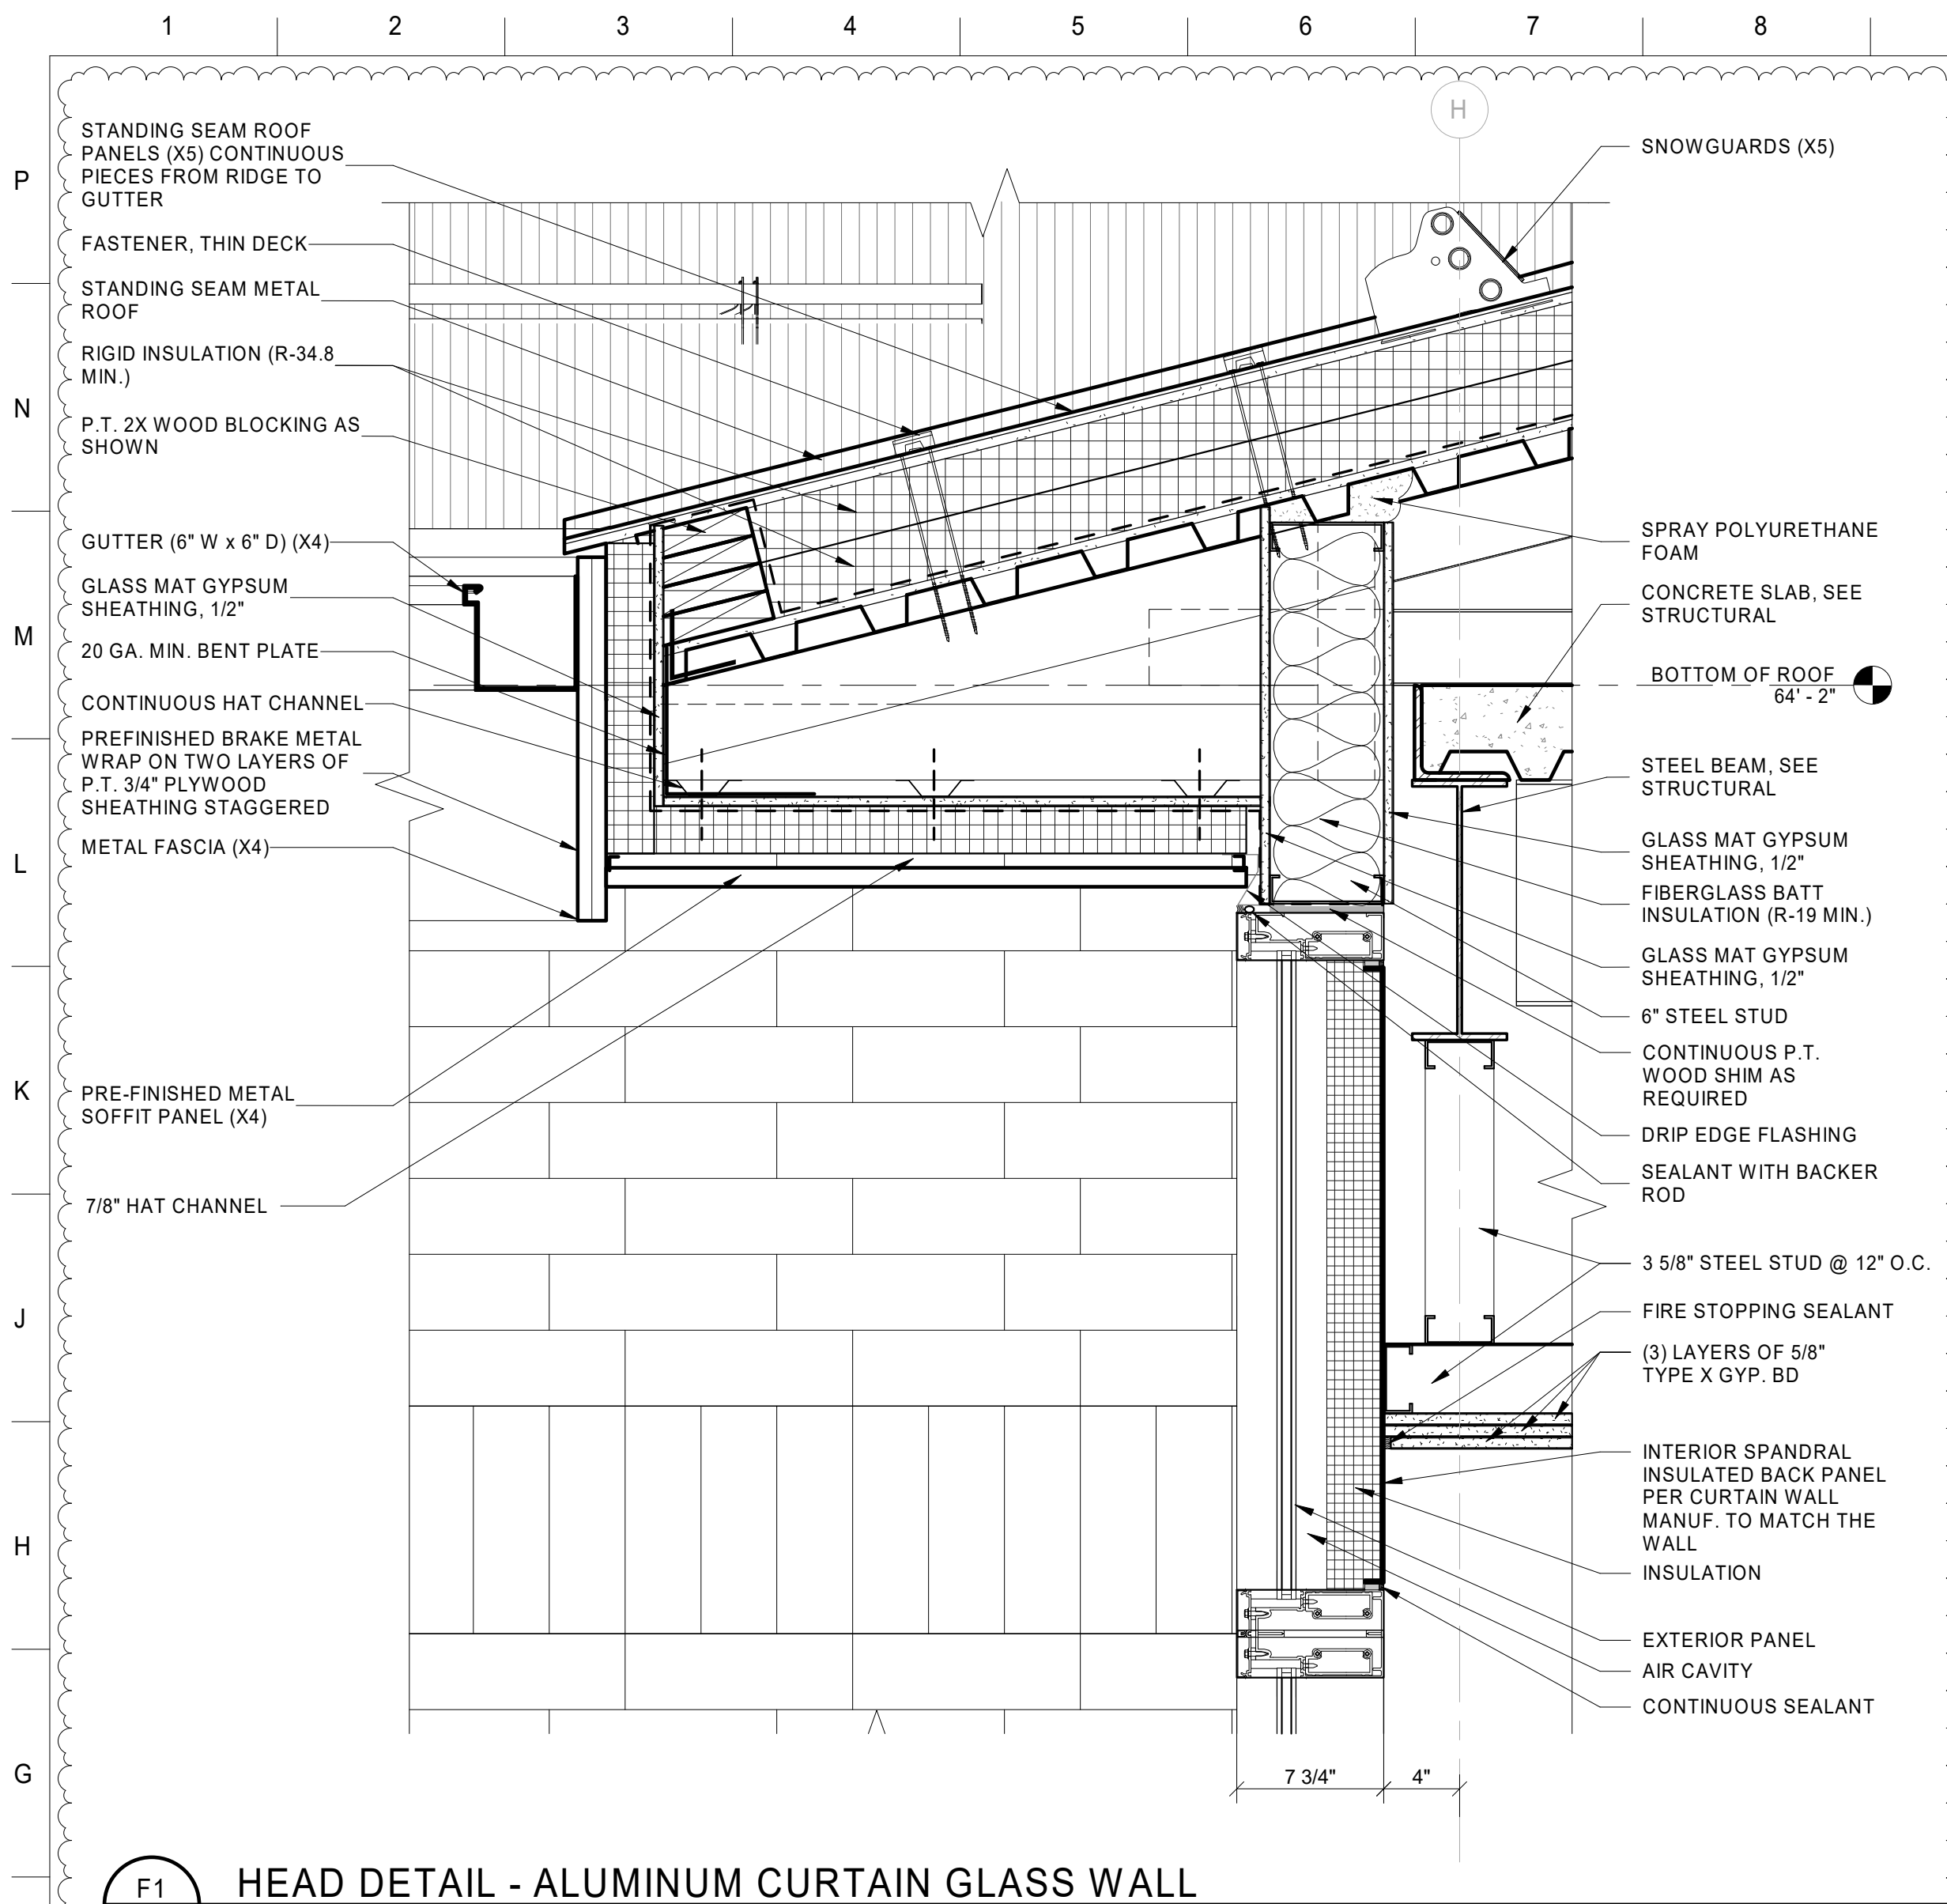


K9 JAMB CNR DTL - ALUM. CURTAIN GLASS WALL - COL. 2 / H
1 1/2" = 1'-0"

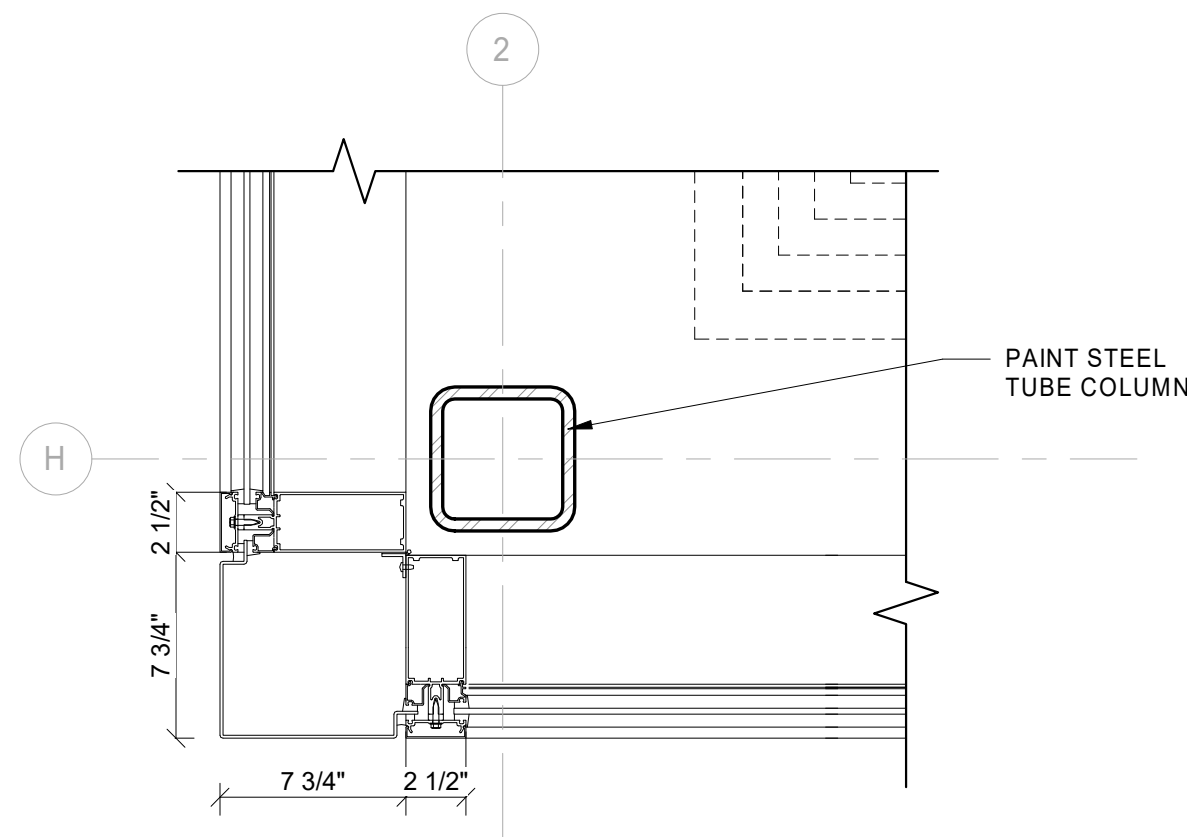


H9 HEAD DETAIL - INTERMEDIATE MULLION
1 1/2" = 1'-0"

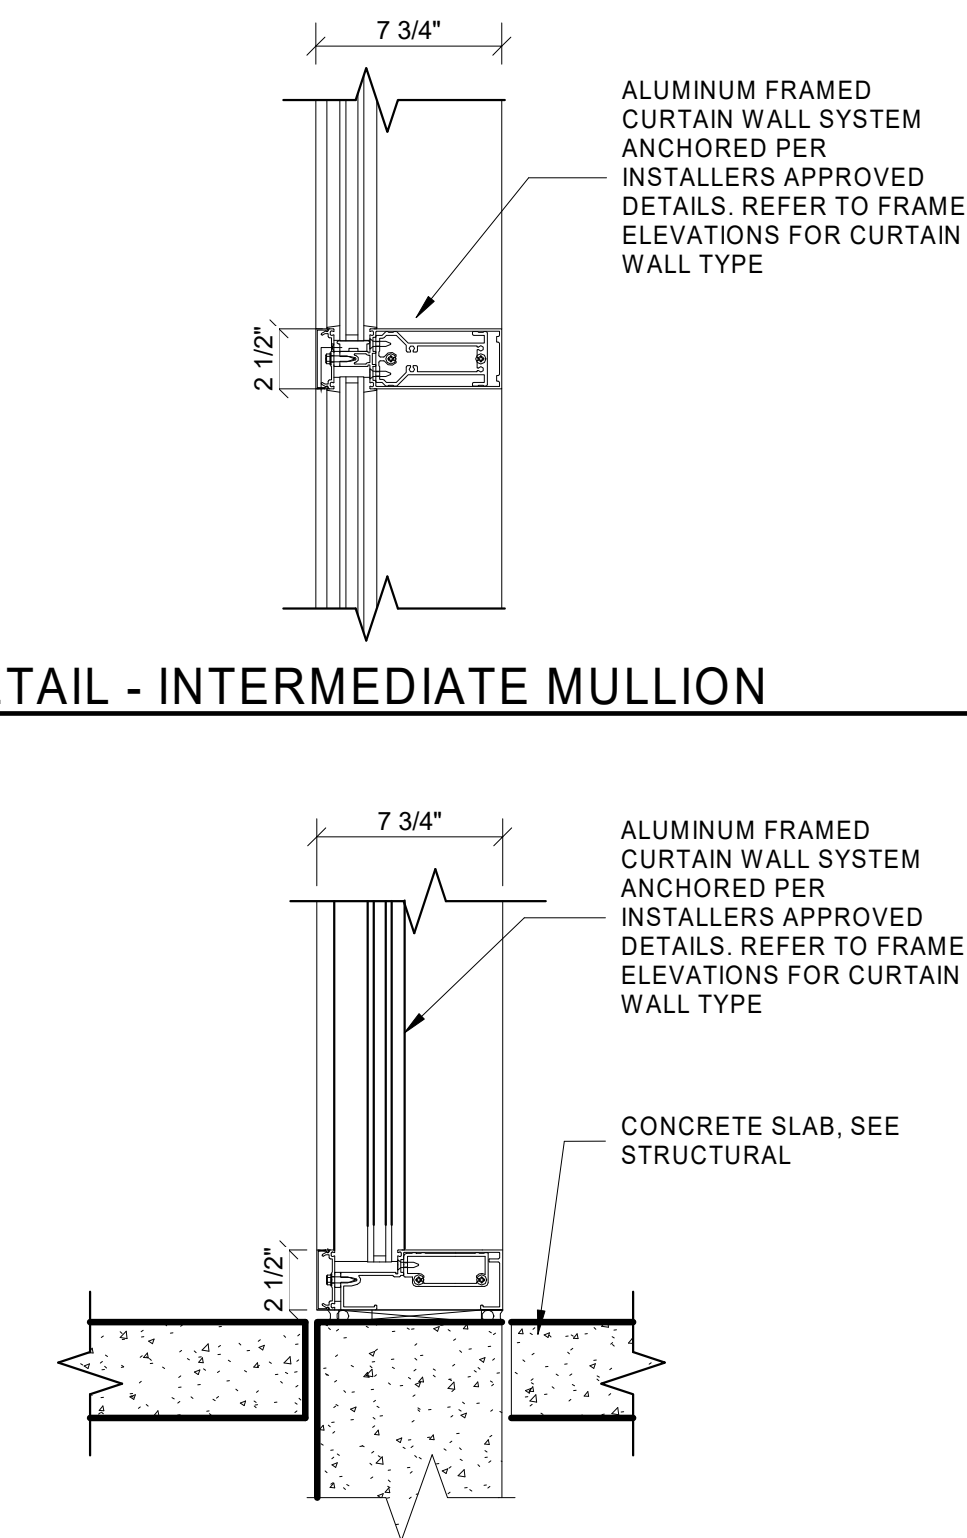


E9 SILL DETAIL - CURTAIN WALL ALUMINUM WINDOW
1 1/2" = 1'-0"

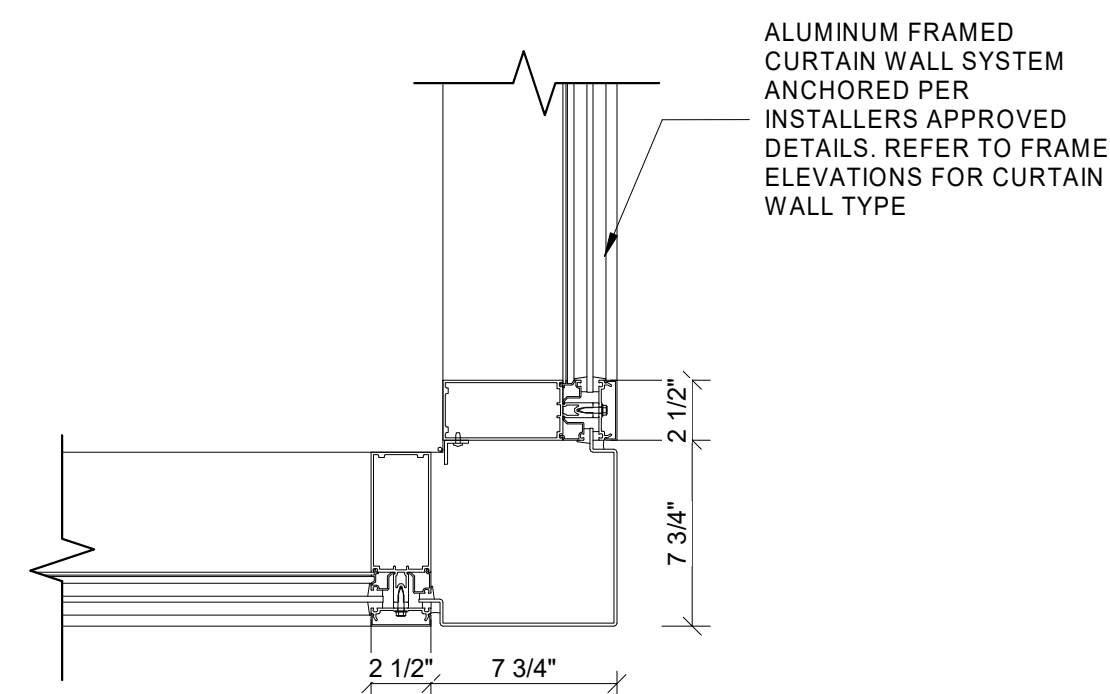


A9 JAMB DETAIL - CURTAIN WALL CORNER MULLION
1 1/2" = 1'-0"

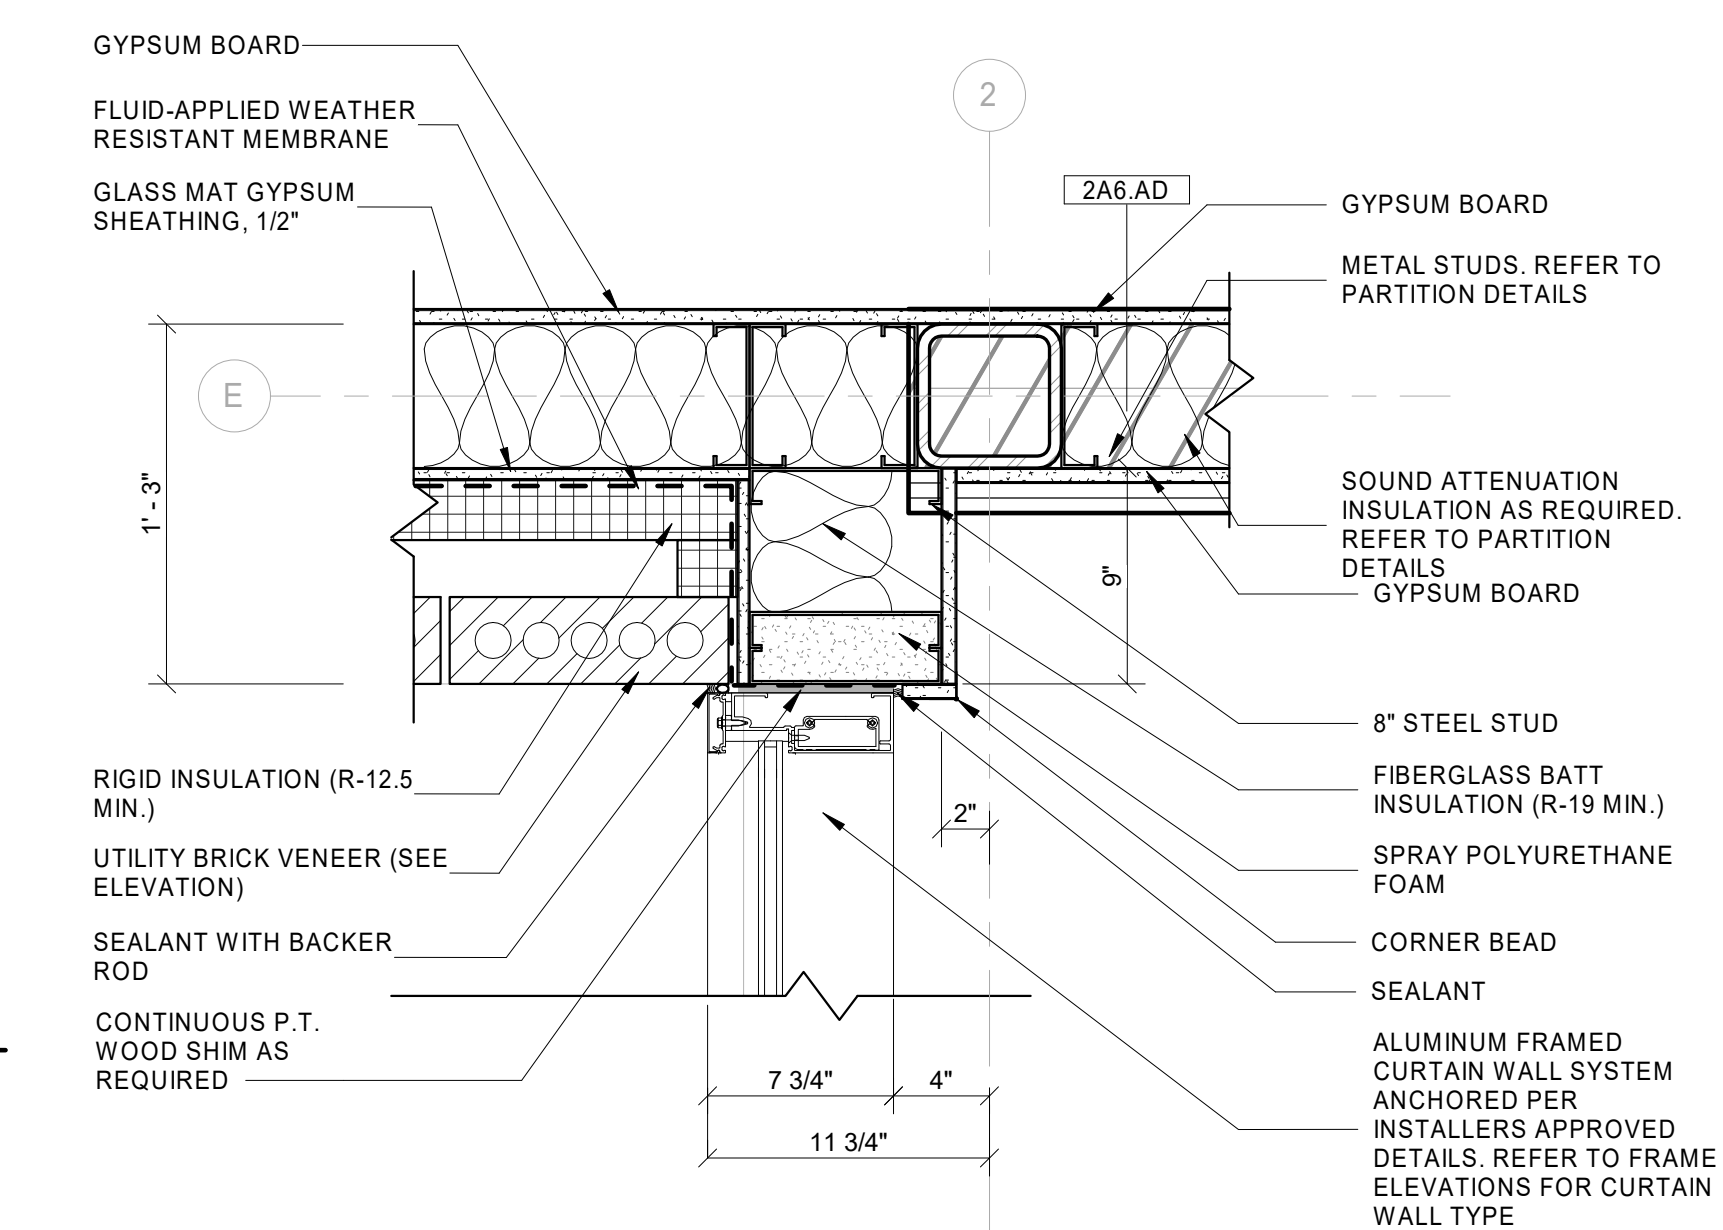


K15 JAMB DTL - ALUMINUM CURTAIN GLASS WALL - COL. 2 / E
1 1/2" = 1'-0"

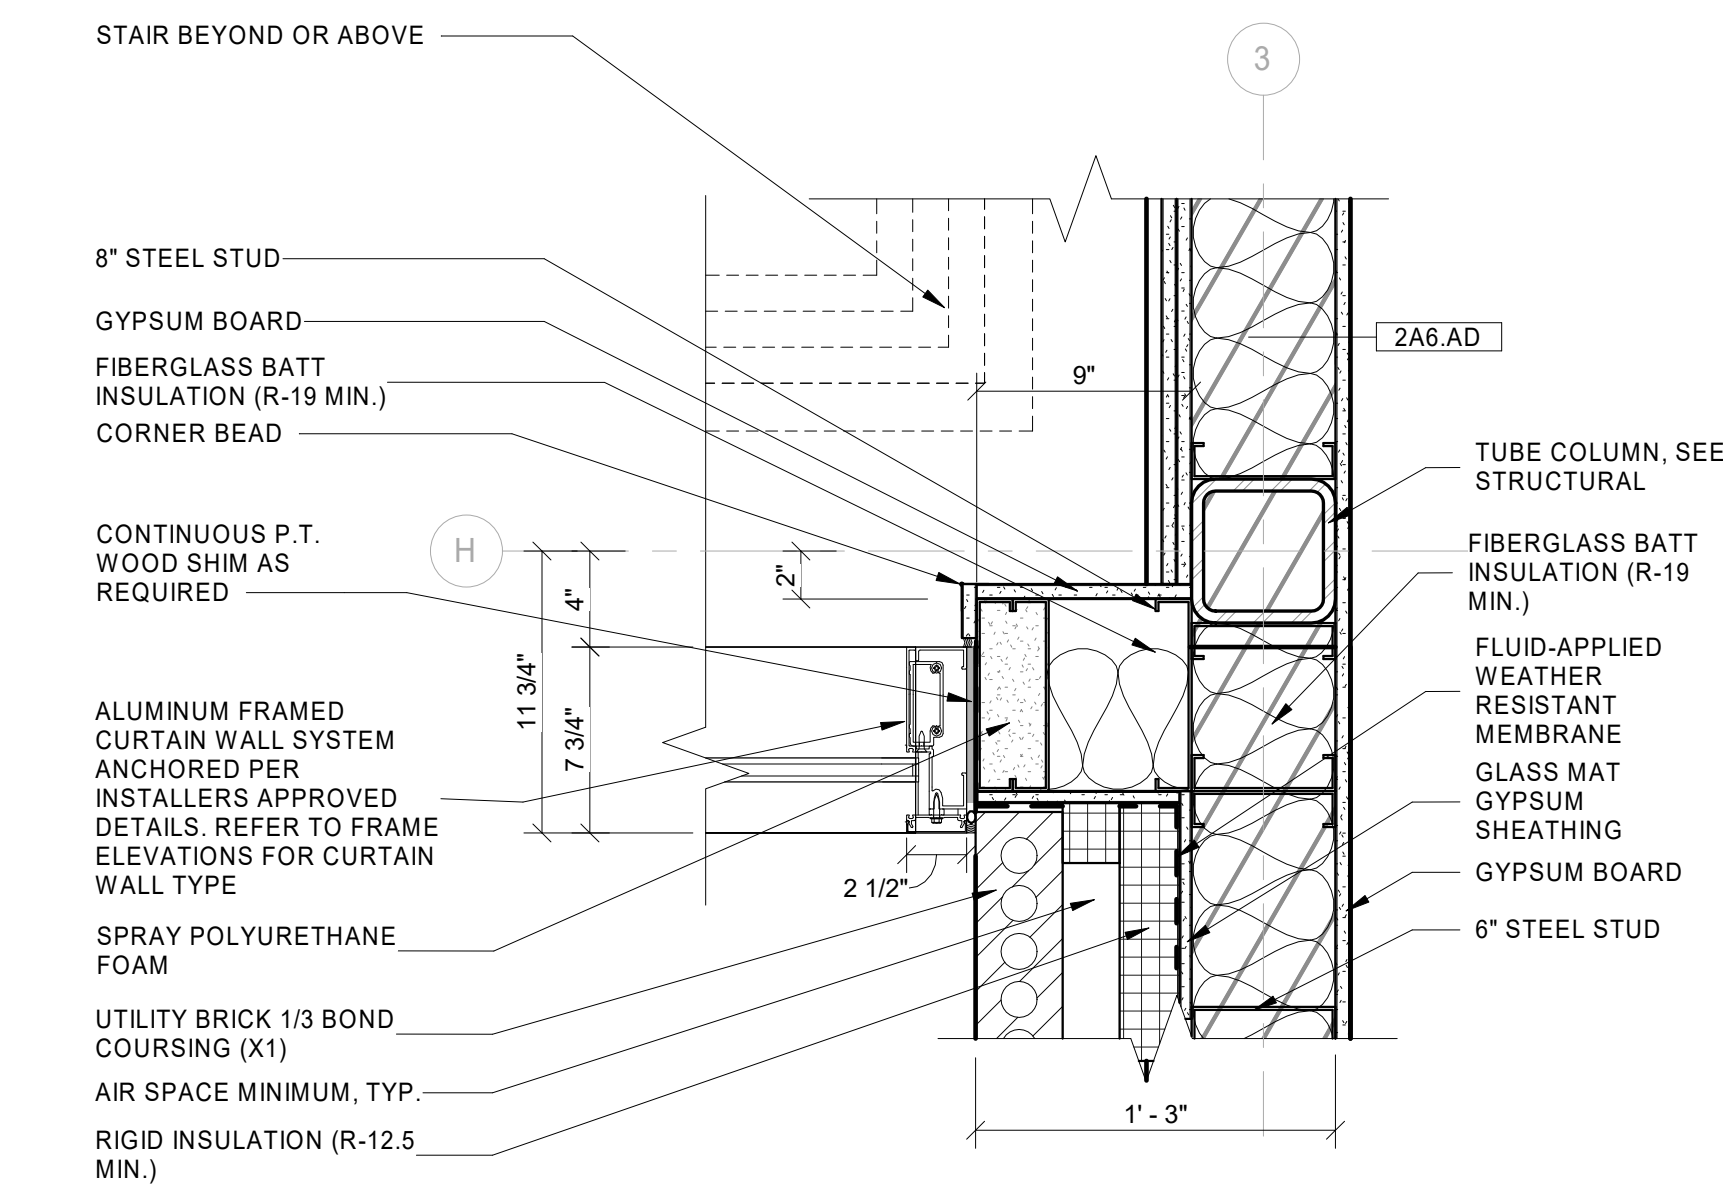

E15 JAMB DTL - ALUMINUM CURTAIN GLASS WALL - COL. 3 / H
1 1/2" = 1'-0"

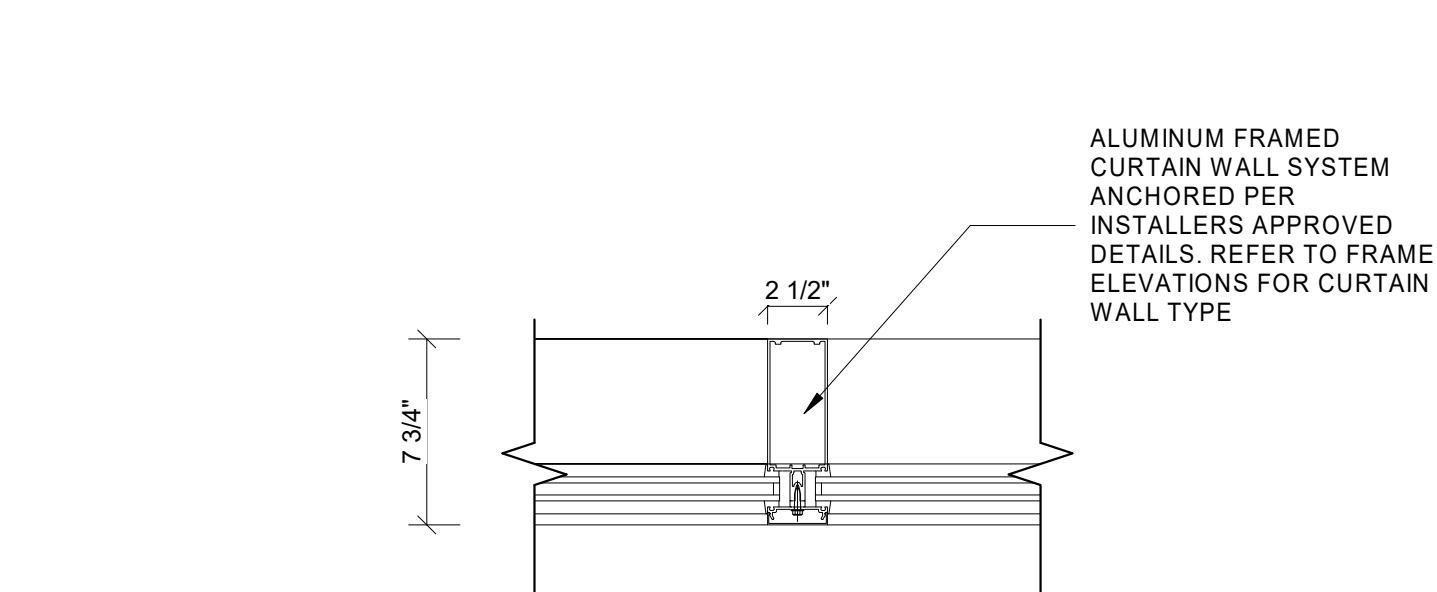

A15 JAMB DETAIL - INTERMEDIATE MULLION
1 1/2" = 1'-0"

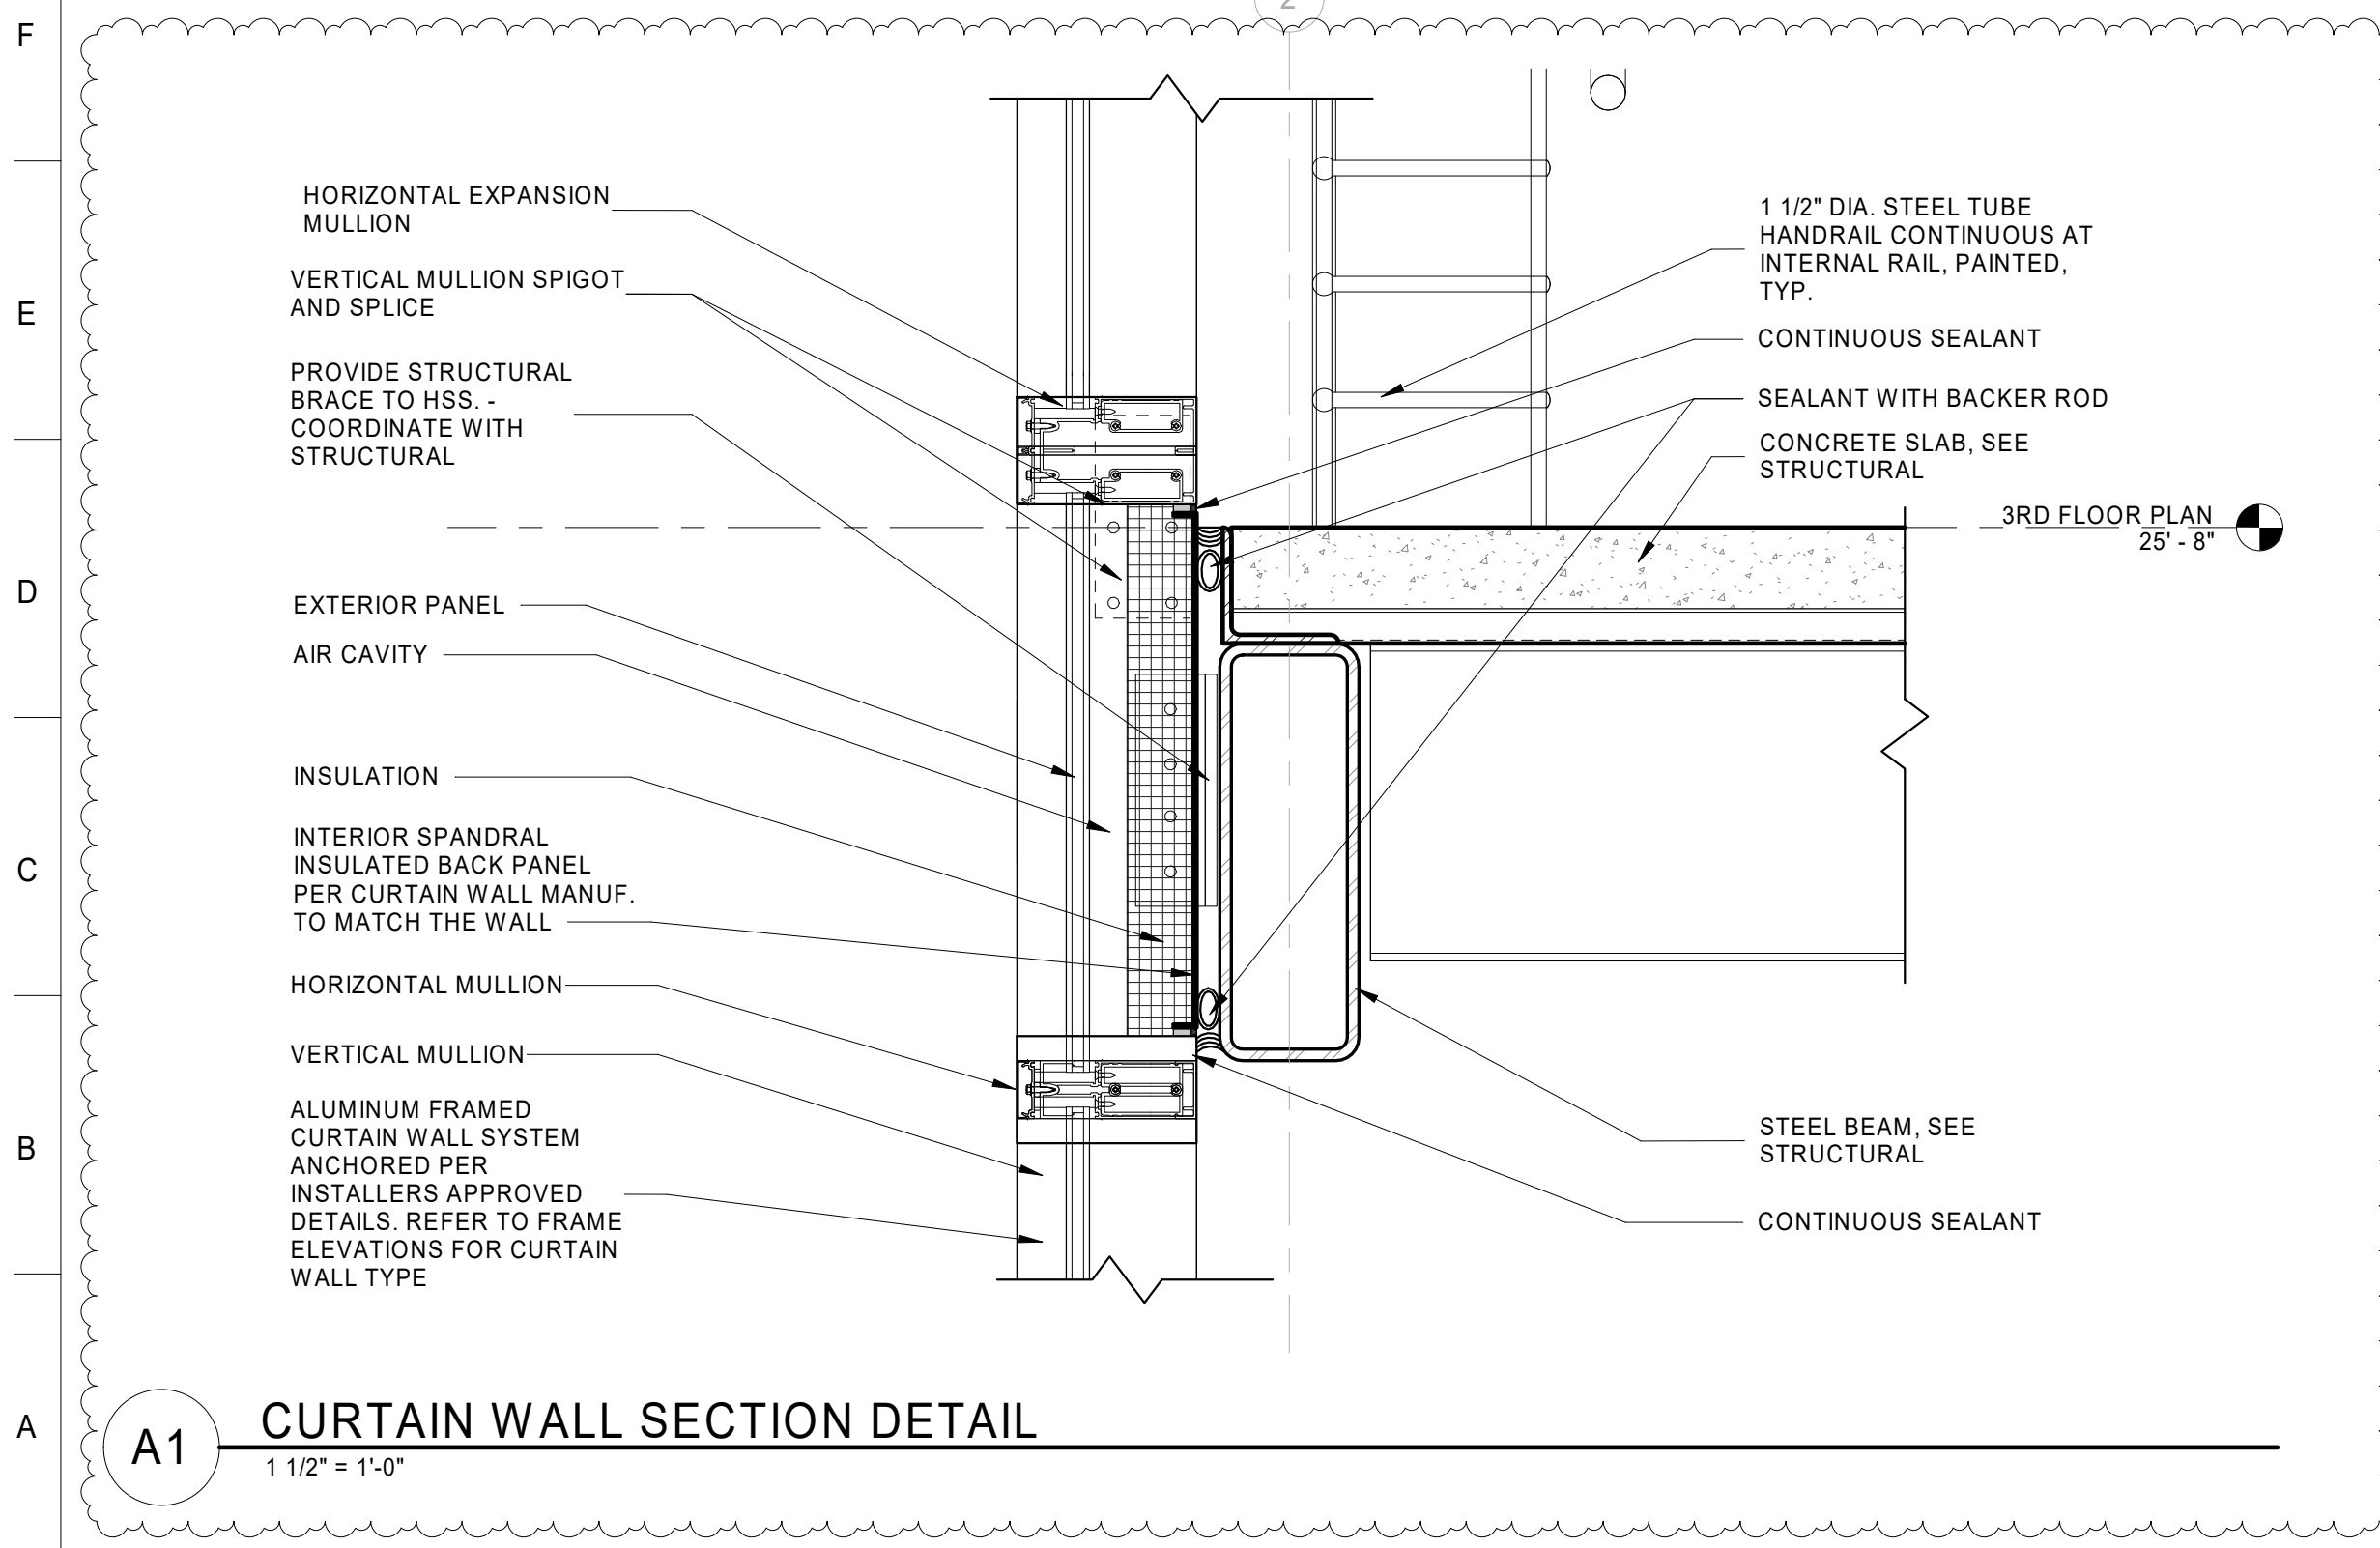

A1 CURTAIN WALL SECTION DETAIL
1 1/2" = 1'-0"



US Army Corps of Engineers®

ISSUE DATE:	DESCRIPTION	DATE
4/17/2026	AMENDMENT 0002	APRIL 2026

DESIGNED BY: K. SANTOS
DRAWN BY: K. SANTOS
CHECKED BY: M. BARRY
SUBMITTED BY: M. BARRY

ISSUE DATE: FEBRUARY 2026
SOLICITATION NO.:
CONTRACT NO.:
ANSI D

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511886

ALUMINUM CURTAIN GLASS WALL DETAILS


SHEET ID

A-682

CERTIFIED FINAL

W912QR26RA016_Plans-0002


Plot Date: 4/17/2026 10:09:40 AM
File Path: C:\Users\kcammon\Documents\1686_Plan\2026_A_UEPH_C3barrack.nct

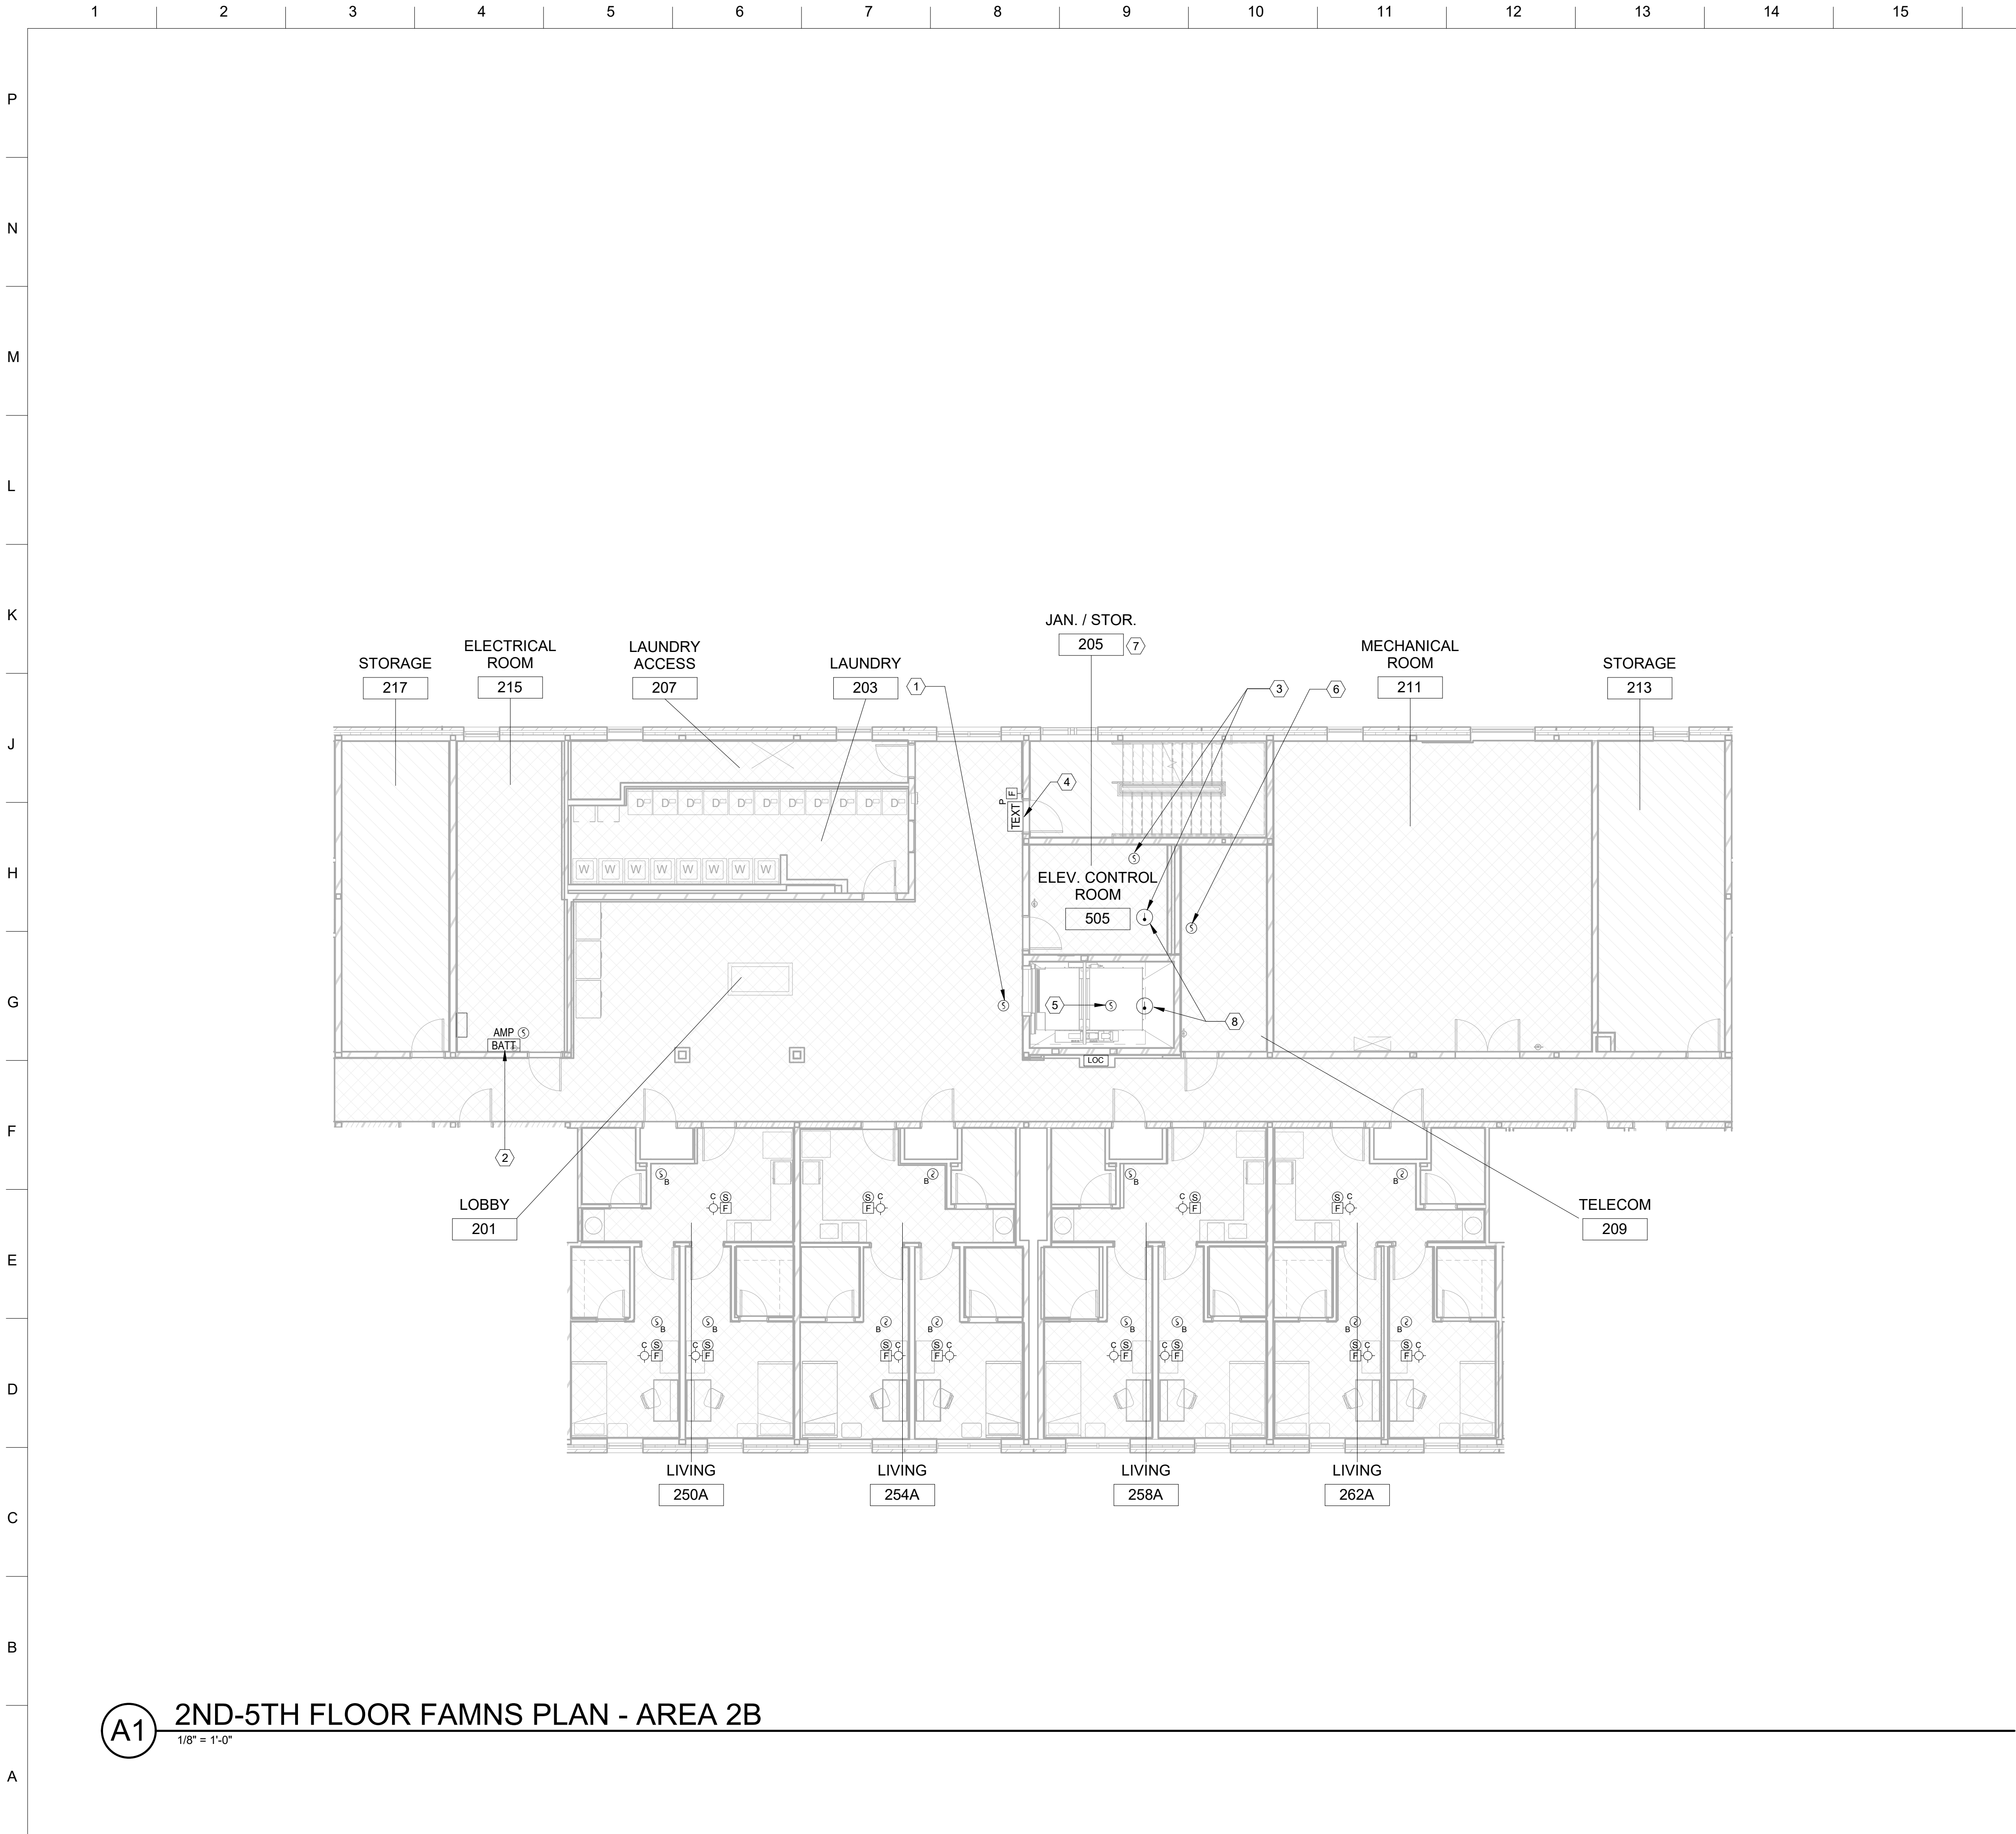


GENERAL NOTES - FAMNS PLANS

- FOR SYMBOLS, ABBREVIATIONS, AND GENERAL NOTES REFER TO SHEET FA-001.
- SEE SHEET FA-701 FOR FIRE ALARM RISER AND NOTES.
- SEE MECHANICAL/PLUMBING/FIRE PROTECTION SHEETS AS APPROPRIATE FOR LOCATIONS OF EQUIPMENT.
- PROVIDE NOTIFICATION APPLIANCES FOR ALL SPACES AS IDENTIFIED IN THE NOTIFICATION DEVICE COVERAGE LEGEND.

NOTIFICATION DEVICE COVERAGE LEGEND



AUDIBLE/VISIBLE COVERAGE ZONE





AUDIBLE COVERAGE ZONE

KEY NOTES

- SMOKE DETECTOR FOR ELEVATOR RECALL AND SHUTDOWN. SEE ASSOCIATED DETAIL ON SHEET FA-701
- FA BOOSTER/SIGNAL AMPLIFIER AND BATTERY MOUNTING LOCATION (TYP ALL UPPER FLOORS).
- SMOKE AND HEAT DETECTORS INSTALLED IN ELEVATOR CONTROL ROOM LOCATED IN THIS SPACE ON THE 5TH FLOOR ONLY (AS INDICATED IN THIS DRAWING). THIS SPACE MUST HAVE BOTH AUDIBLE/VISIBLE FAMNS COVERAGE ON THE 5TH FLOOR ONLY.
- WALL-MOUNT FAMNS TEXT DISPLAY SIGNS, NON-SCROLLING, MOUNTED AT 7'3" ABOVE EGRESS STAIRWELL DOORS ON ALL FLOORS. FAMNS TEXT SIGNS ADDED TO MEET ECB 2018-17 REQUIREMENTS.
- TOP OF HOIST SMOKE DETECTOR FOR ELEVATOR ELECTRICAL AND MECHANICAL EQUIPMENT AT TOP OF SHAFT.
- SMOKE DETECTORS INSTALLED IN ALL TELECOMMUNICATIONS SPACES TO MEET VERY EARLY WARNING SMOKE DETECTION REQUIREMENTS FOR ALARM/ALERT PURPOSES ONLY, AS ESTABLISHED IN UFC 3-600-01.
- SPACES ADJACENT TO ELEVATOR SHAFT ON FLOORS 1 THROUGH 4 ARE FOR JANITORIAL/STORAGE USE WHICH REQUIRE ONLY AUDIBLE COVERAGE/FAMNS NOTIFICATION DEVICES.
- TOH AND ELEVATOR CONTROL ROOM HEAT DETECTORS TO BE INSTALLED WITHIN TWO FEET OF SPRINKLERS.

KEY PLAN



DATE	DESCRIPTION	MARK
April 2026		2
	AMENDMENT 0002	

ISSUE DATE: FEBRUARY 2026	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: J.MOORE	DRAWN BY: J.MOORE	CHECKED BY: B.GADDIE
US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	SUBMITTED BY: M. BARRY	
SIZE: ANSI D		

FT. CAMPBELL, KY. UEPH BARRACKS PN 99248, FY2026, P2 511886	SECOND THRU FIFTH FLOOR FAMNS PLAN ENLARGED AREA "B"
---	---


SHEET ID
FA-106


Plot Date: 4/21/2026 9:39:08 AM
File Path: C:\Users\FRED\Documents\511886_PN99248_E_UEPH_L2ED0406.rvt

CERTIFIED FINAL W912QR26RA016_Plans-0002


NOTE: MATRIX SHOWS OVERALL FAMNS OPERATION. REFERENCE SPECIFICATION 28 31 76 FOR DETAILS AND FURTHER REQUIREMENTS FOR ALARM, SUPERVISORY AND TROUBLE CONDITIONS.

D3



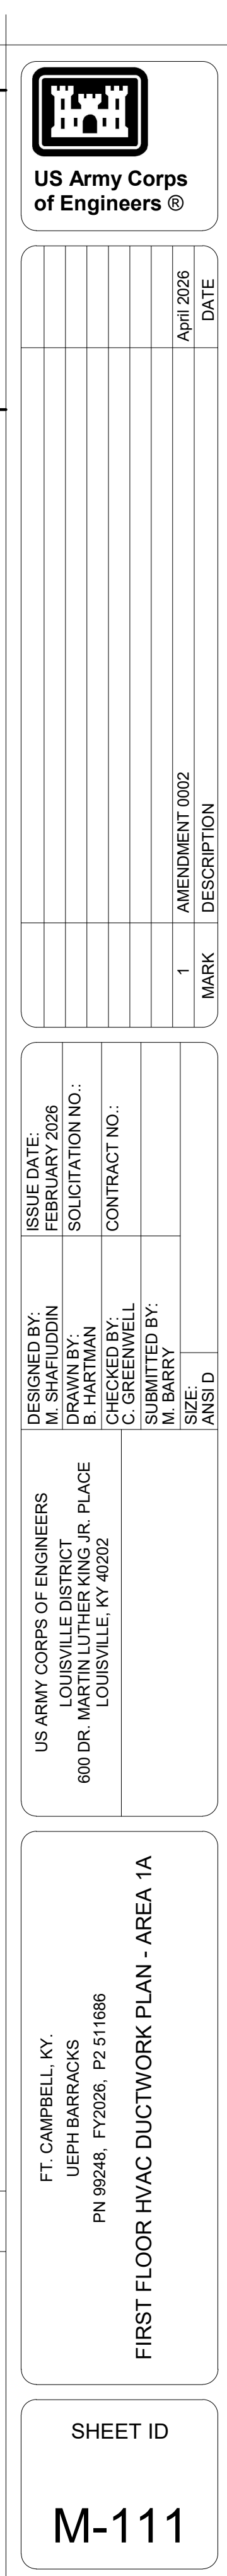


CERTIFIED FINAL

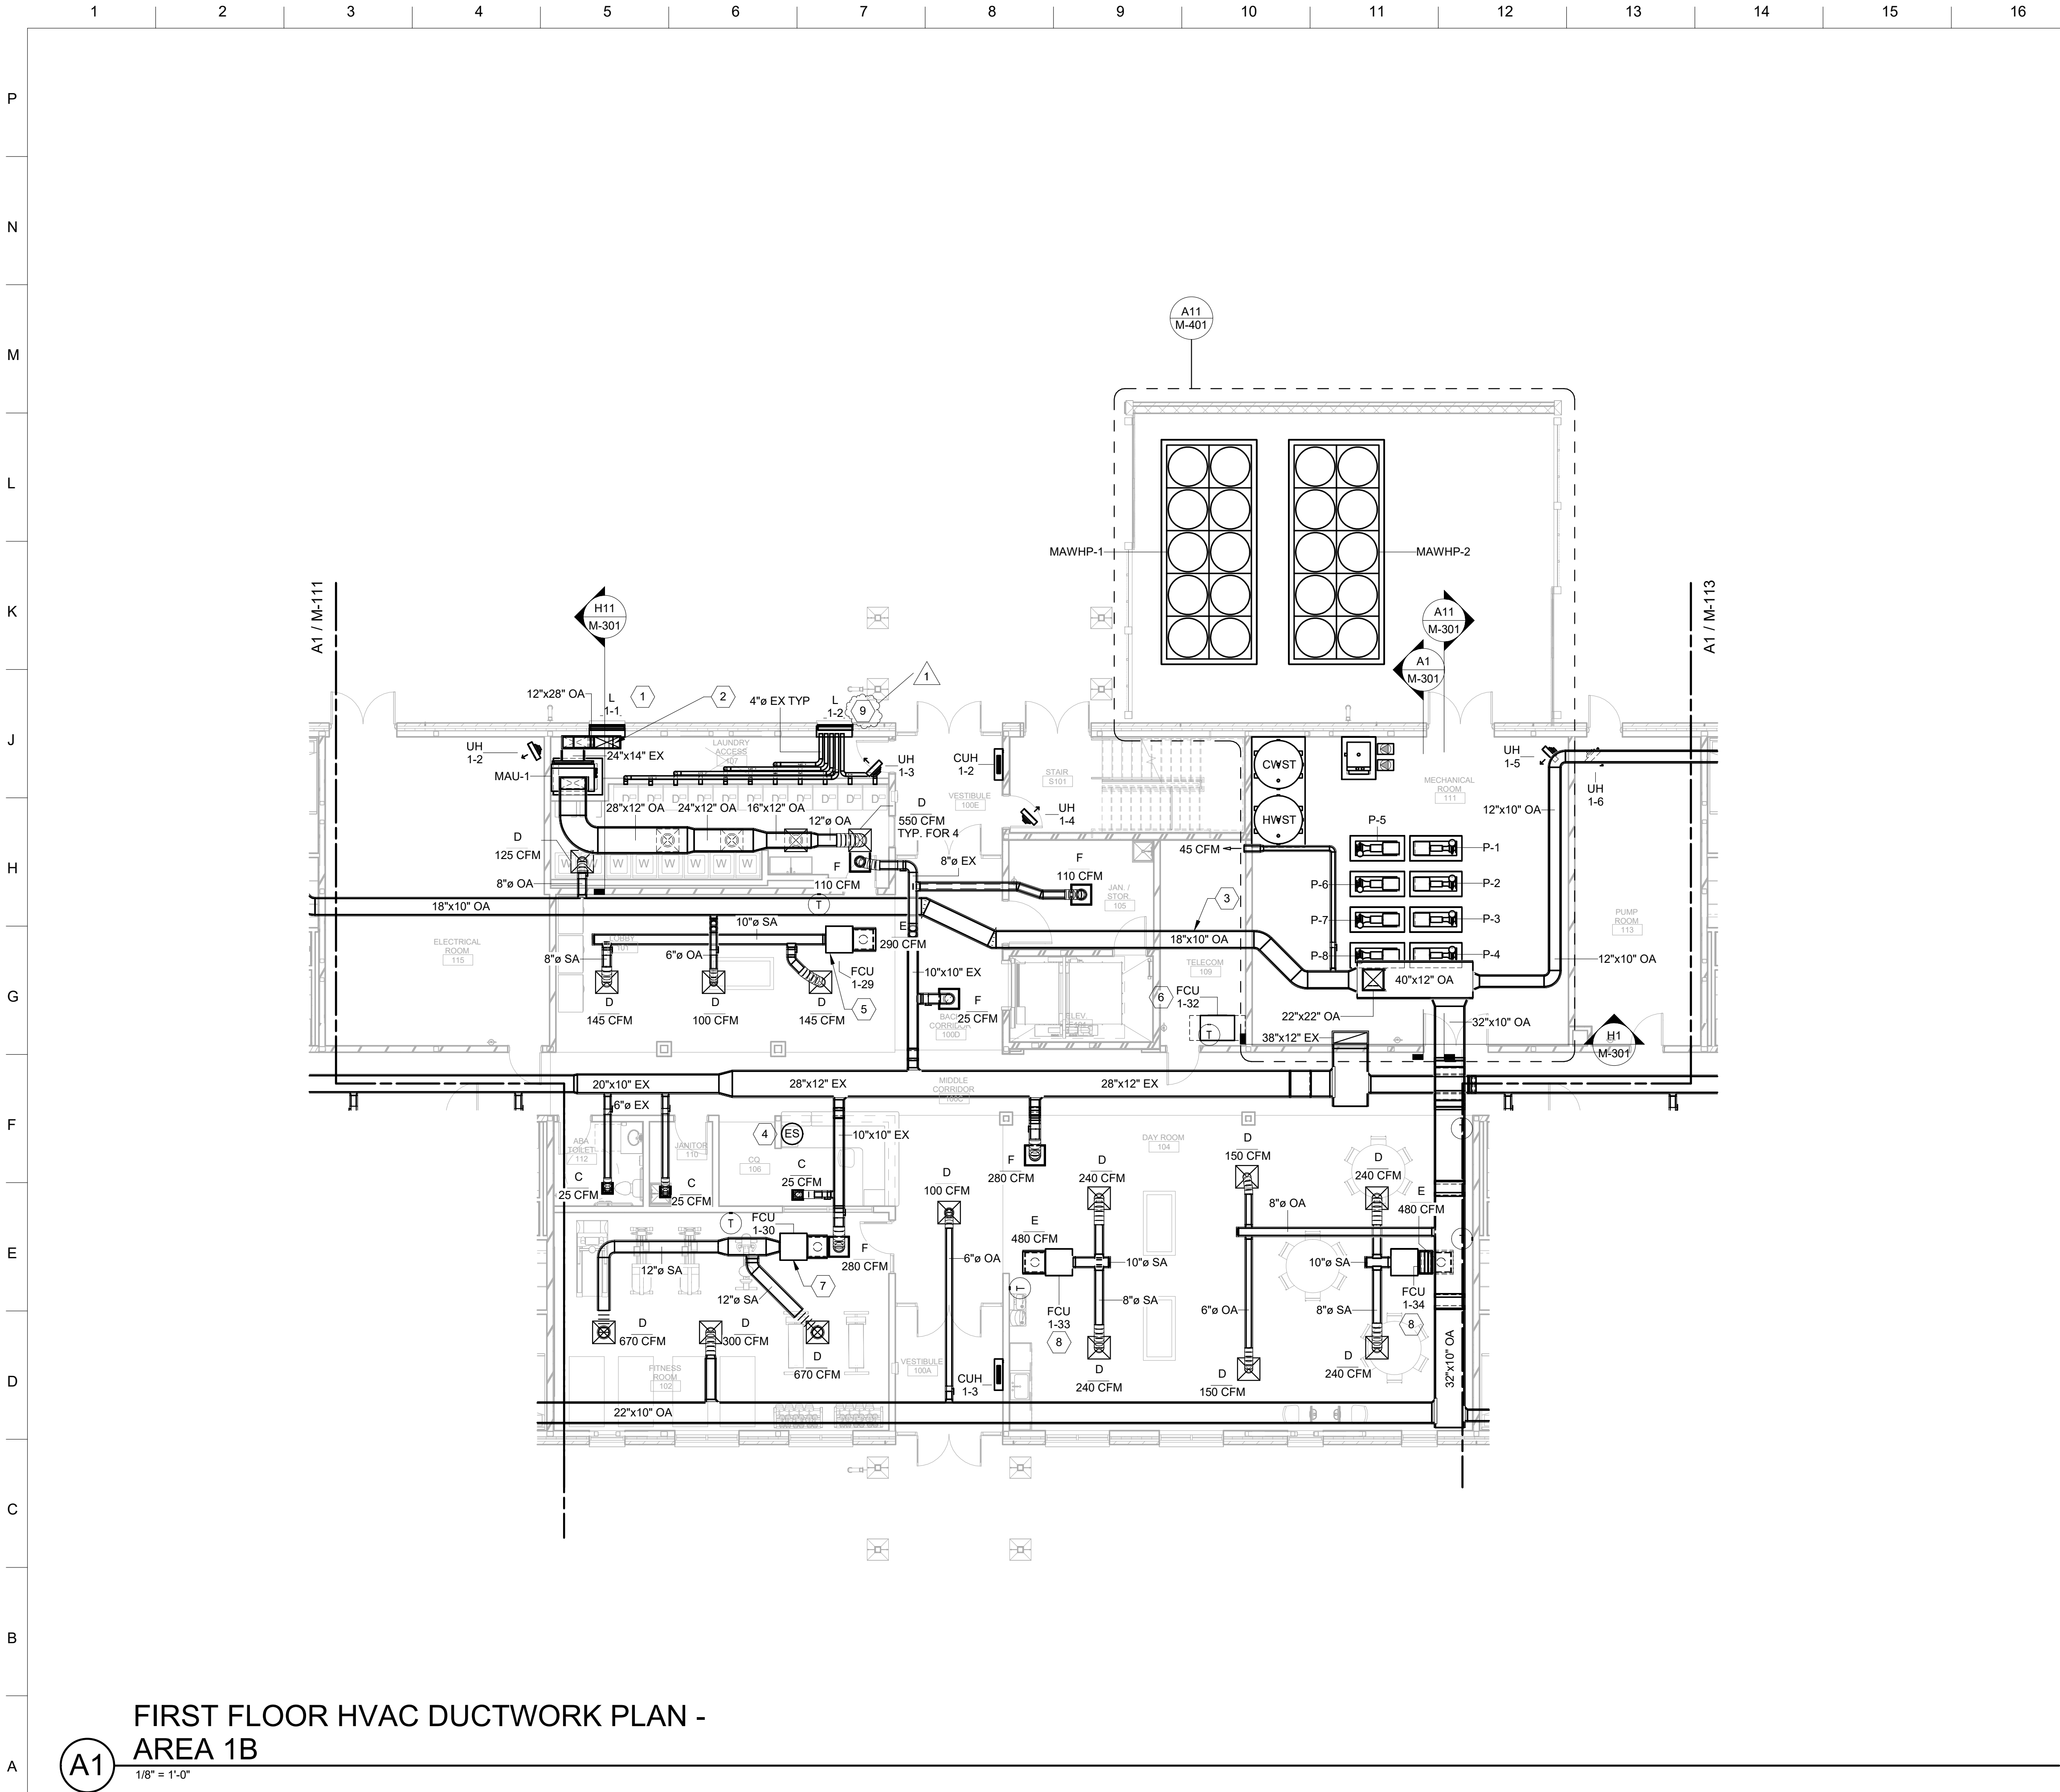

SHEET KEYNOTES

1. THE LOUVER ON THE FIRST FLOOR IS BLANKED OFF TO COMPLY WITH ATPF REQUIREMENTS. OUTDOOR AIR TO MAU-1 COMES FROM FLOOR ABOVE. SEE SHEET M-122.
2. 28"x12" OUTDOOR AIR INTAKE UP THRU FLOOR TO THE LOUVER L 2-1 ON SECOND FLOOR. INSTALL FIRE DAMPER AT THE SLAB AND PROVIDE ACCESS DOOR IN THE DUCT.
3. VENTILATION DUCT FROM DOAS UNIT RUNNING IN A FIRE RATED SOFFIT. REFER TO THE ARCHITECTURAL PLANS FOR THE FIRE RATING DETAILS.
4. EMERGENCY SHUT DOWN SWITCH.
5. RUN LOBBY FAN COIL UNIT FCU 1-29 CONDENSATE DRAIN PIPE TO THE JANITORS CLOSET-105.
6. EXTEND FCU-32 CONDENSATE DRAIN PIPE TO THE FLOOR DRAIN IN THE MECHANICAL ROOM-111.
7. EXTEND FCU 1-30 CONDENSATE DRAIN PIPE TO THE JANITORS CLOSET-110.
8. PROVIDE OPEN SIDE DRAIN UNDER SINK AT DAY ROOM TO COLLECT CONDENSATE DRAIN FROM FCU 1-33 AND FCU 1-34.
9. ALL AIR INTAKE AND EXHAUST LOUVER PLENUMS MUST BE DOUBLE WALL CONSTRUCTION PER SPECIFICATION 23 30 00, 2.12.17



US Army Corps
of Engineers®


MARK	DESCRIPTION	DATE
1	AMENDMENT 0002	April 2026

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: M. SHAFIUDIN	ISSUE DATE: FEBRUARY 2026
	DRAWN BY: B. HARTMAN	SOLICITATION NO.:
	CHECKED BY: C. GREENWELL	CONTRACT NO.:
	SUBMITTED BY: M. BARRY	
SIZE: ANSI D		


FT. CAMPBELL, KY. UEPH BARRACKS PN 98248, FY2026, P2 511886	FIRST FLOOR HVAC DUCTWORK PLAN - AREA 1B
---	--

SHEET ID
M-112

KEY PLAN



PLAN NORTH





4/28/2026 9:19:32 AM
C:\user\redacted\Documents\11886_Ren2025_M_UEPH_RED089.rvt

Plot Date:
File Path:

W912QR26RA016_Plans-0002

CERTIFIED FINAL

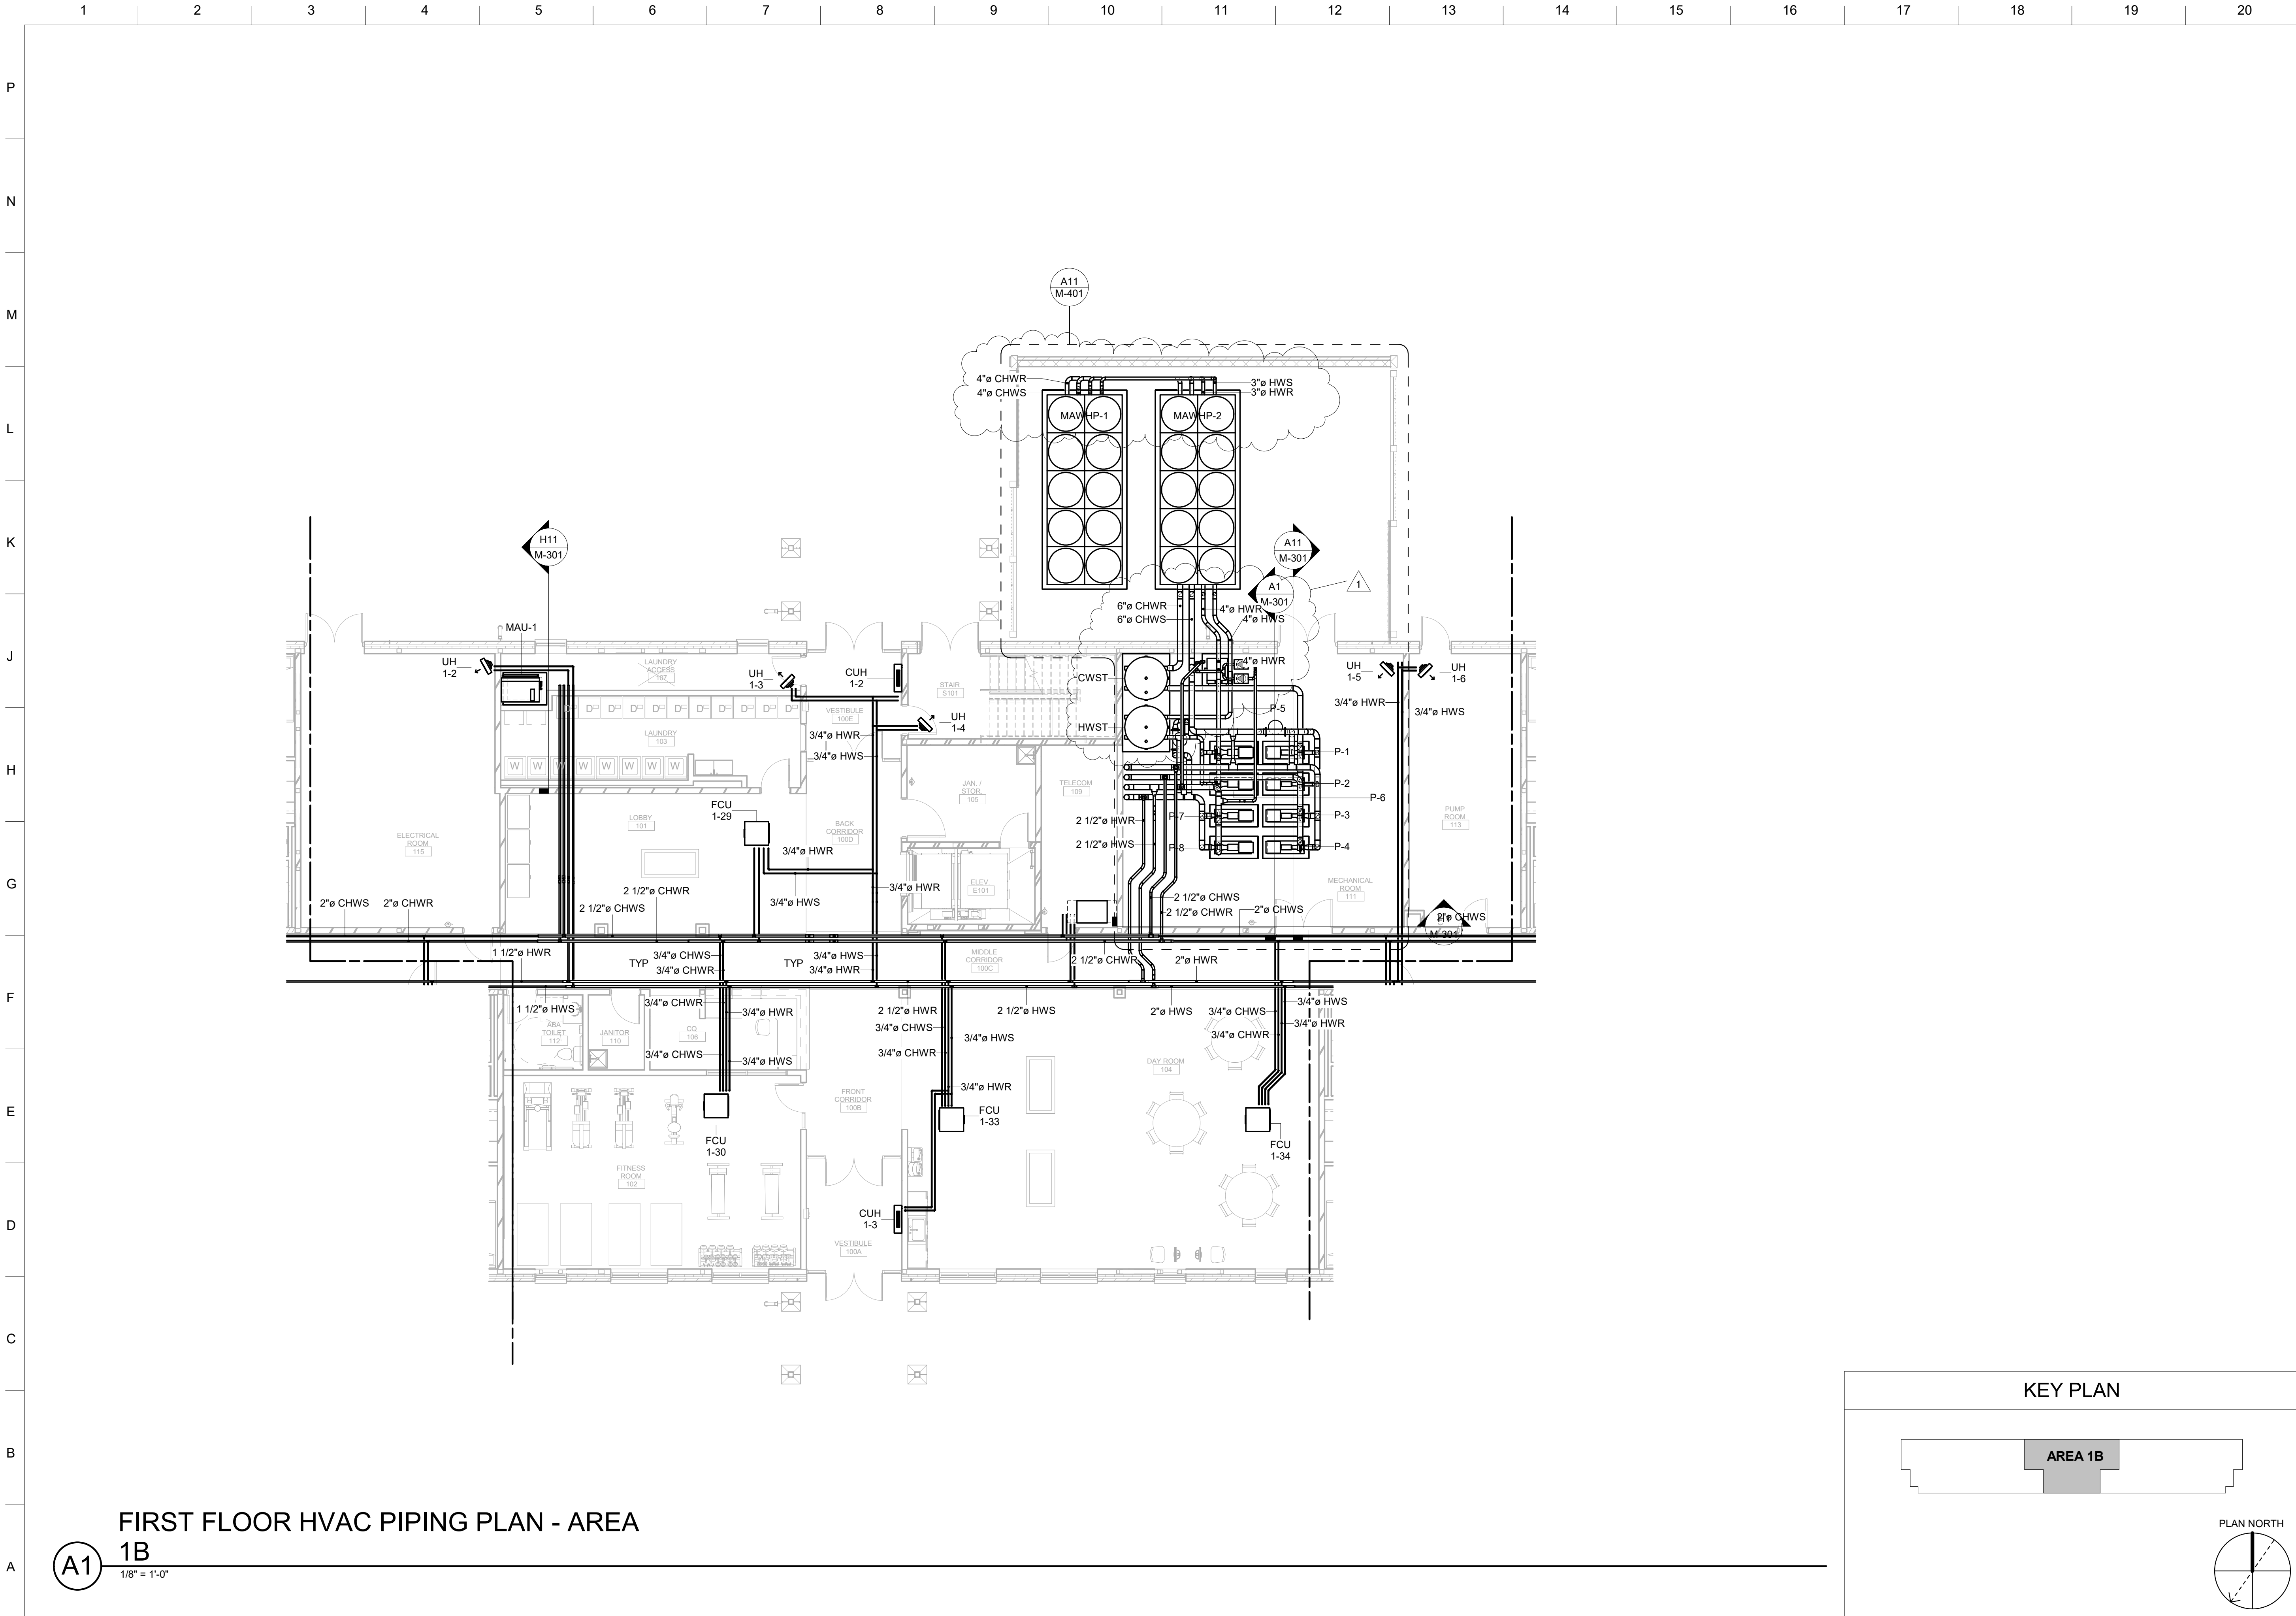


ISSUE DATE	ISSUE DESCRIPTION	DATE
1	AMENDMENT 002	April 2026

DESIGNED BY: M. SHAFIUDIN	ISSUE DATE: FEBRUARY 2026
DRAWN BY: B. HARTMAN	SOLICITATION NO.:
CHECKED BY: C. GREENWELL	CONTRACT NO.:
SUBMITTED BY: M. BARRY	
SIZE: ANSI D	

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	FT. CAMPBELL, KY. UEPH BARRACKS PN 98248, FY2026, P2 511886
---	---

SHEET ID
M-116

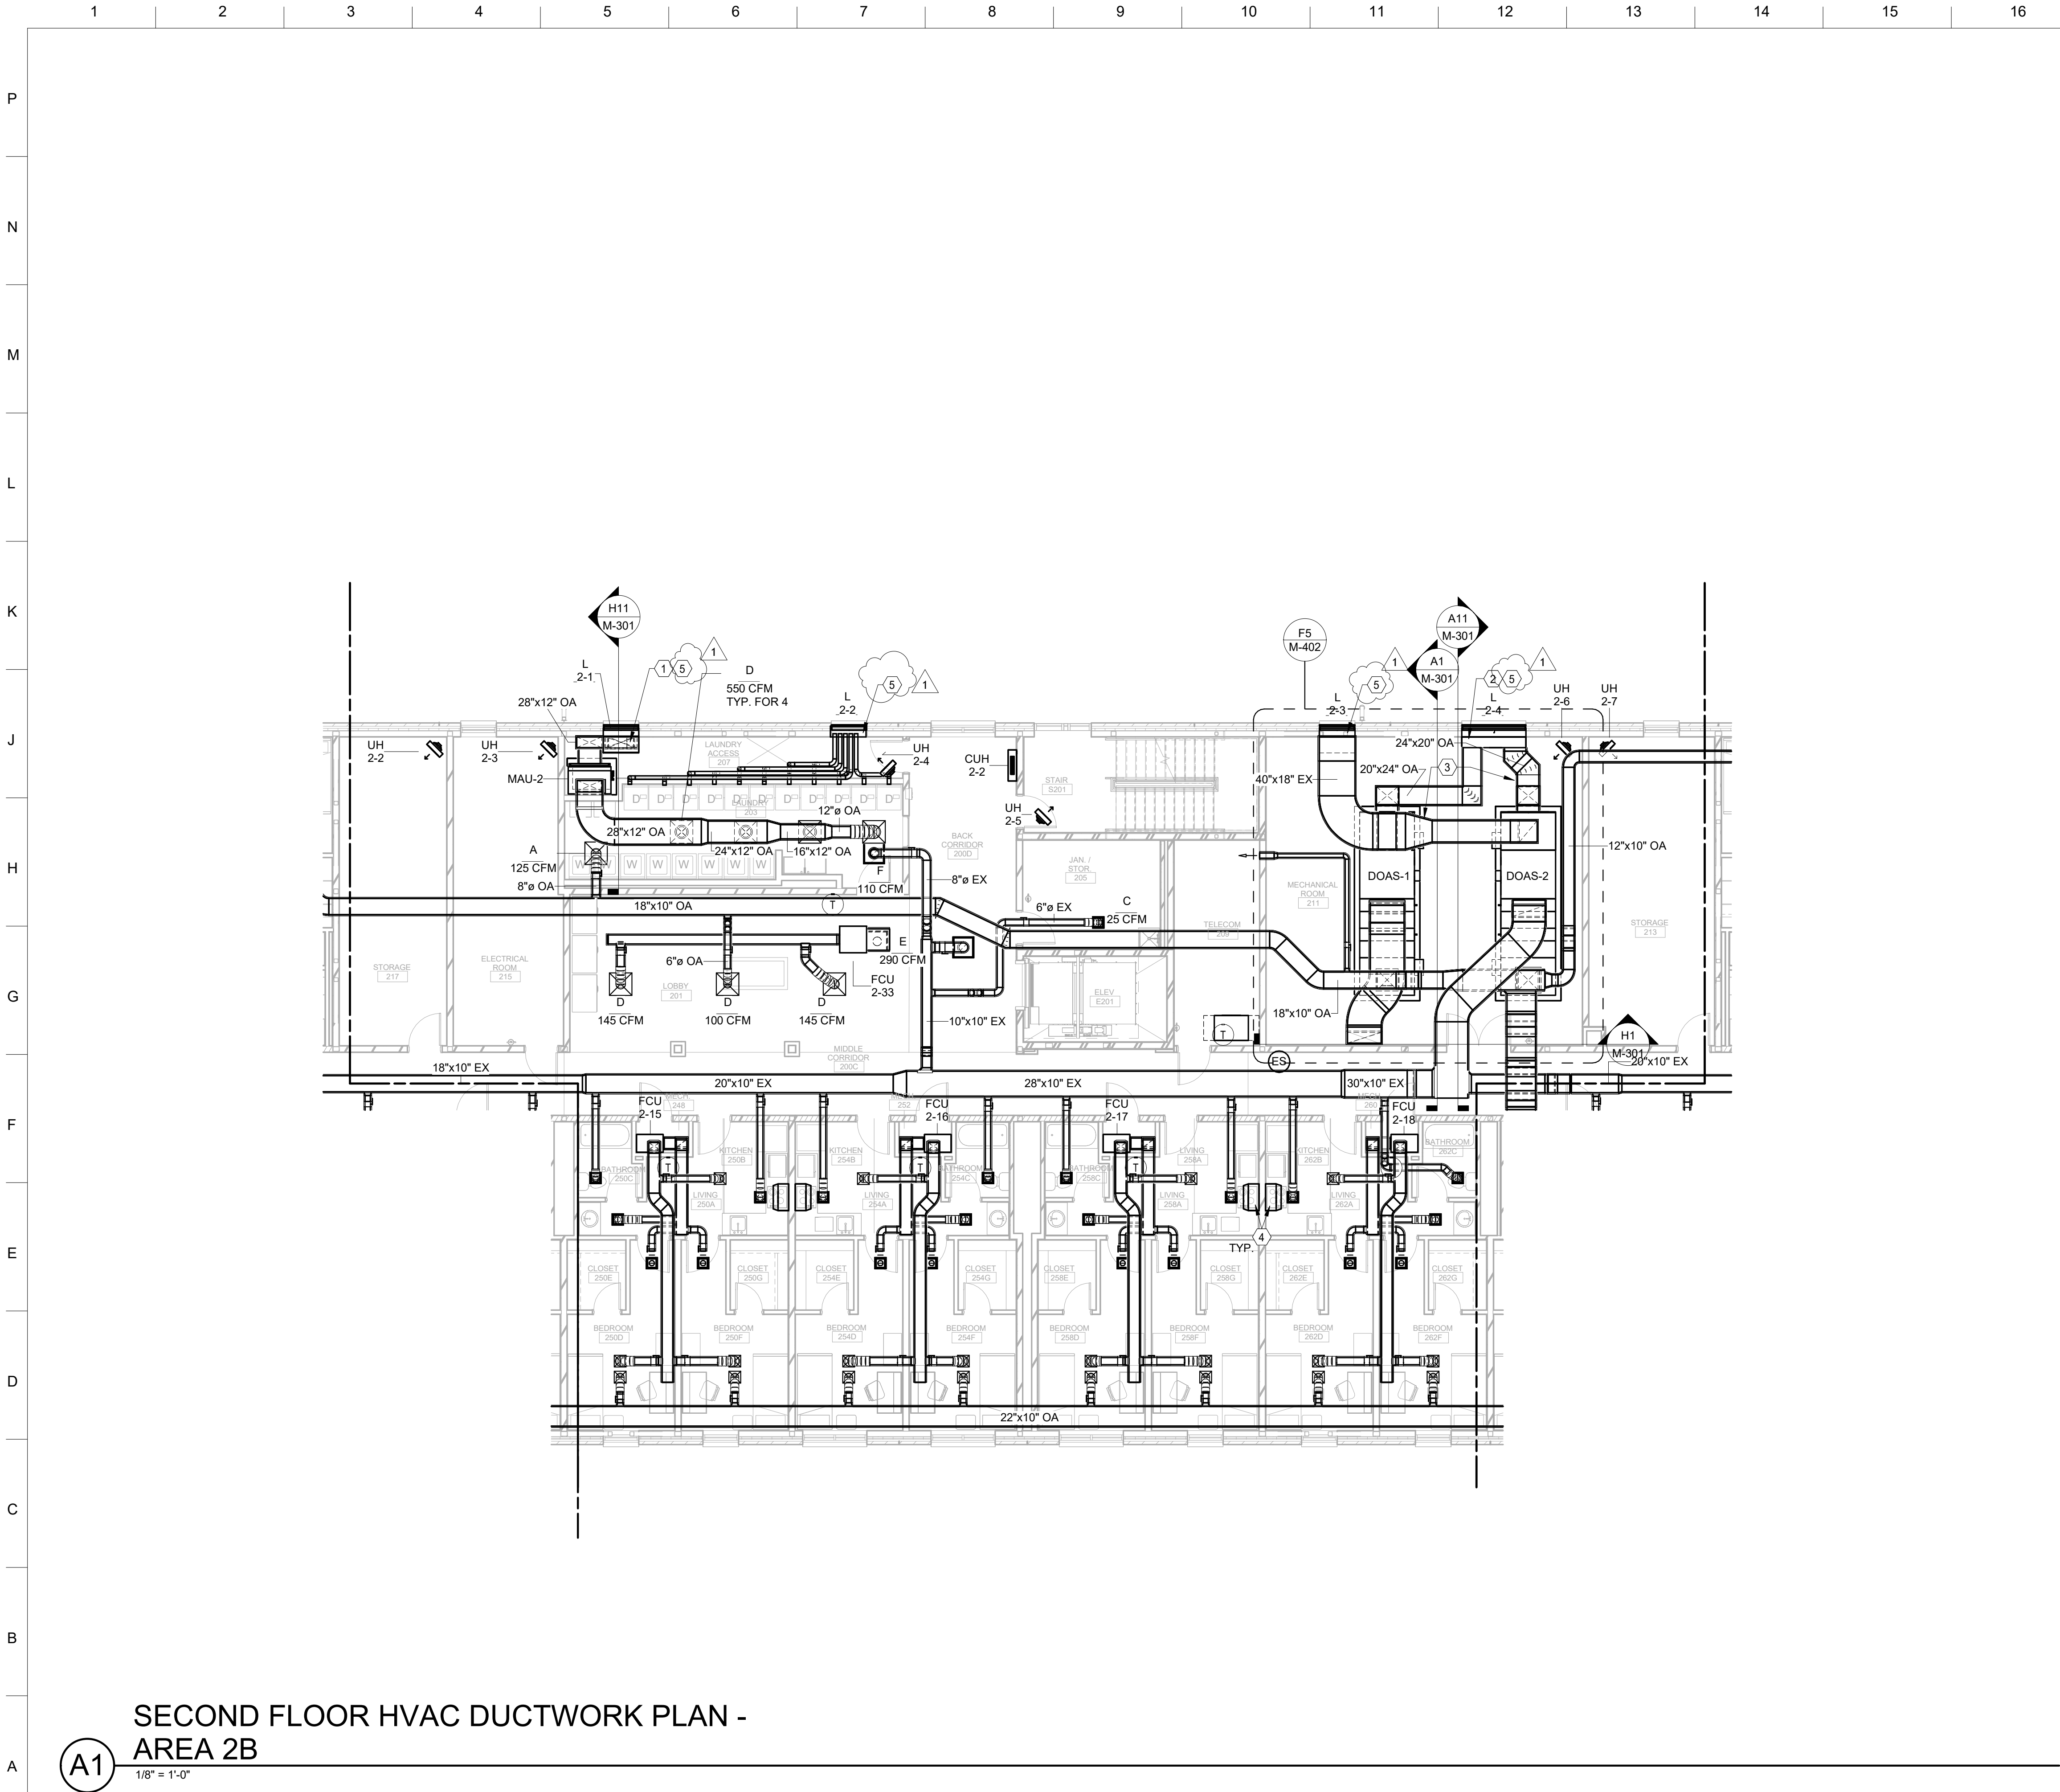


SECOND FLOOR HVAC DUCTWORK PLAN - AREA 2B

1/8" = 1'-0"

SHEET KEYNOTES

- 28"x12" OUTDOOR AIR DUCT DOWN THROUGH FLOOR OPENING TO MAU-1 ON FIRST FLOOR. PROVIDE FIRE DAMPER.
- 6"x6" REMOVABLE TYPE LOUVERS TO FACILITATE THE REMOVAL OF THE LARGEST PIECE OF THE INSTALLED EQUIPMENT THROUGH THE OPENING TO THE OUTSIDE OF THE BUILDING.
- ALL OUTDOOR AIR INTAKE AND THE EXHAUST AIR DUCTWORK TO DOAS UNITS SHALL BE ASSEMBLY/DISASSEMBLY TYPE TO FACILITATE THE REMOVAL OF THE EQUIPMENT THROUGH THE LOUVER OPENING.
- CONTRACTOR FURNISHED AND INSTALLED, UL LISTED, DUCTLESS TYPE KITCHEN HOOD (TYP.).
- ALL AIR INTAKE AND EXHAUST LOUVER PLENUMS MUST BE DOUBLE WALL CONSTRUCTION PER SPECIFICATION 23 30 00, 2.12.17



US Army Corps of Engineers®

ISSUE DATE:	ISSUE DESCRIPTION:	DATE:
1	AMENDMENT 0002	April 2026

DESIGNED BY: M. SHARFUDIN	ISSUE DATE: FEBRUARY 2026
DRAWN BY: B. HARTMAN	SOLICITATION NO.:
CHECKED BY: C. GREENWELL	CONTRACT NO.:
SUBMITTED BY: M. BARRY	
SIZE: ANSI D	


US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886
SECOND FLOOR HVAC DUCTWORK PLAN - AREA 2B


SHEET ID


M-122

KEY PLAN



PLAN NORTH



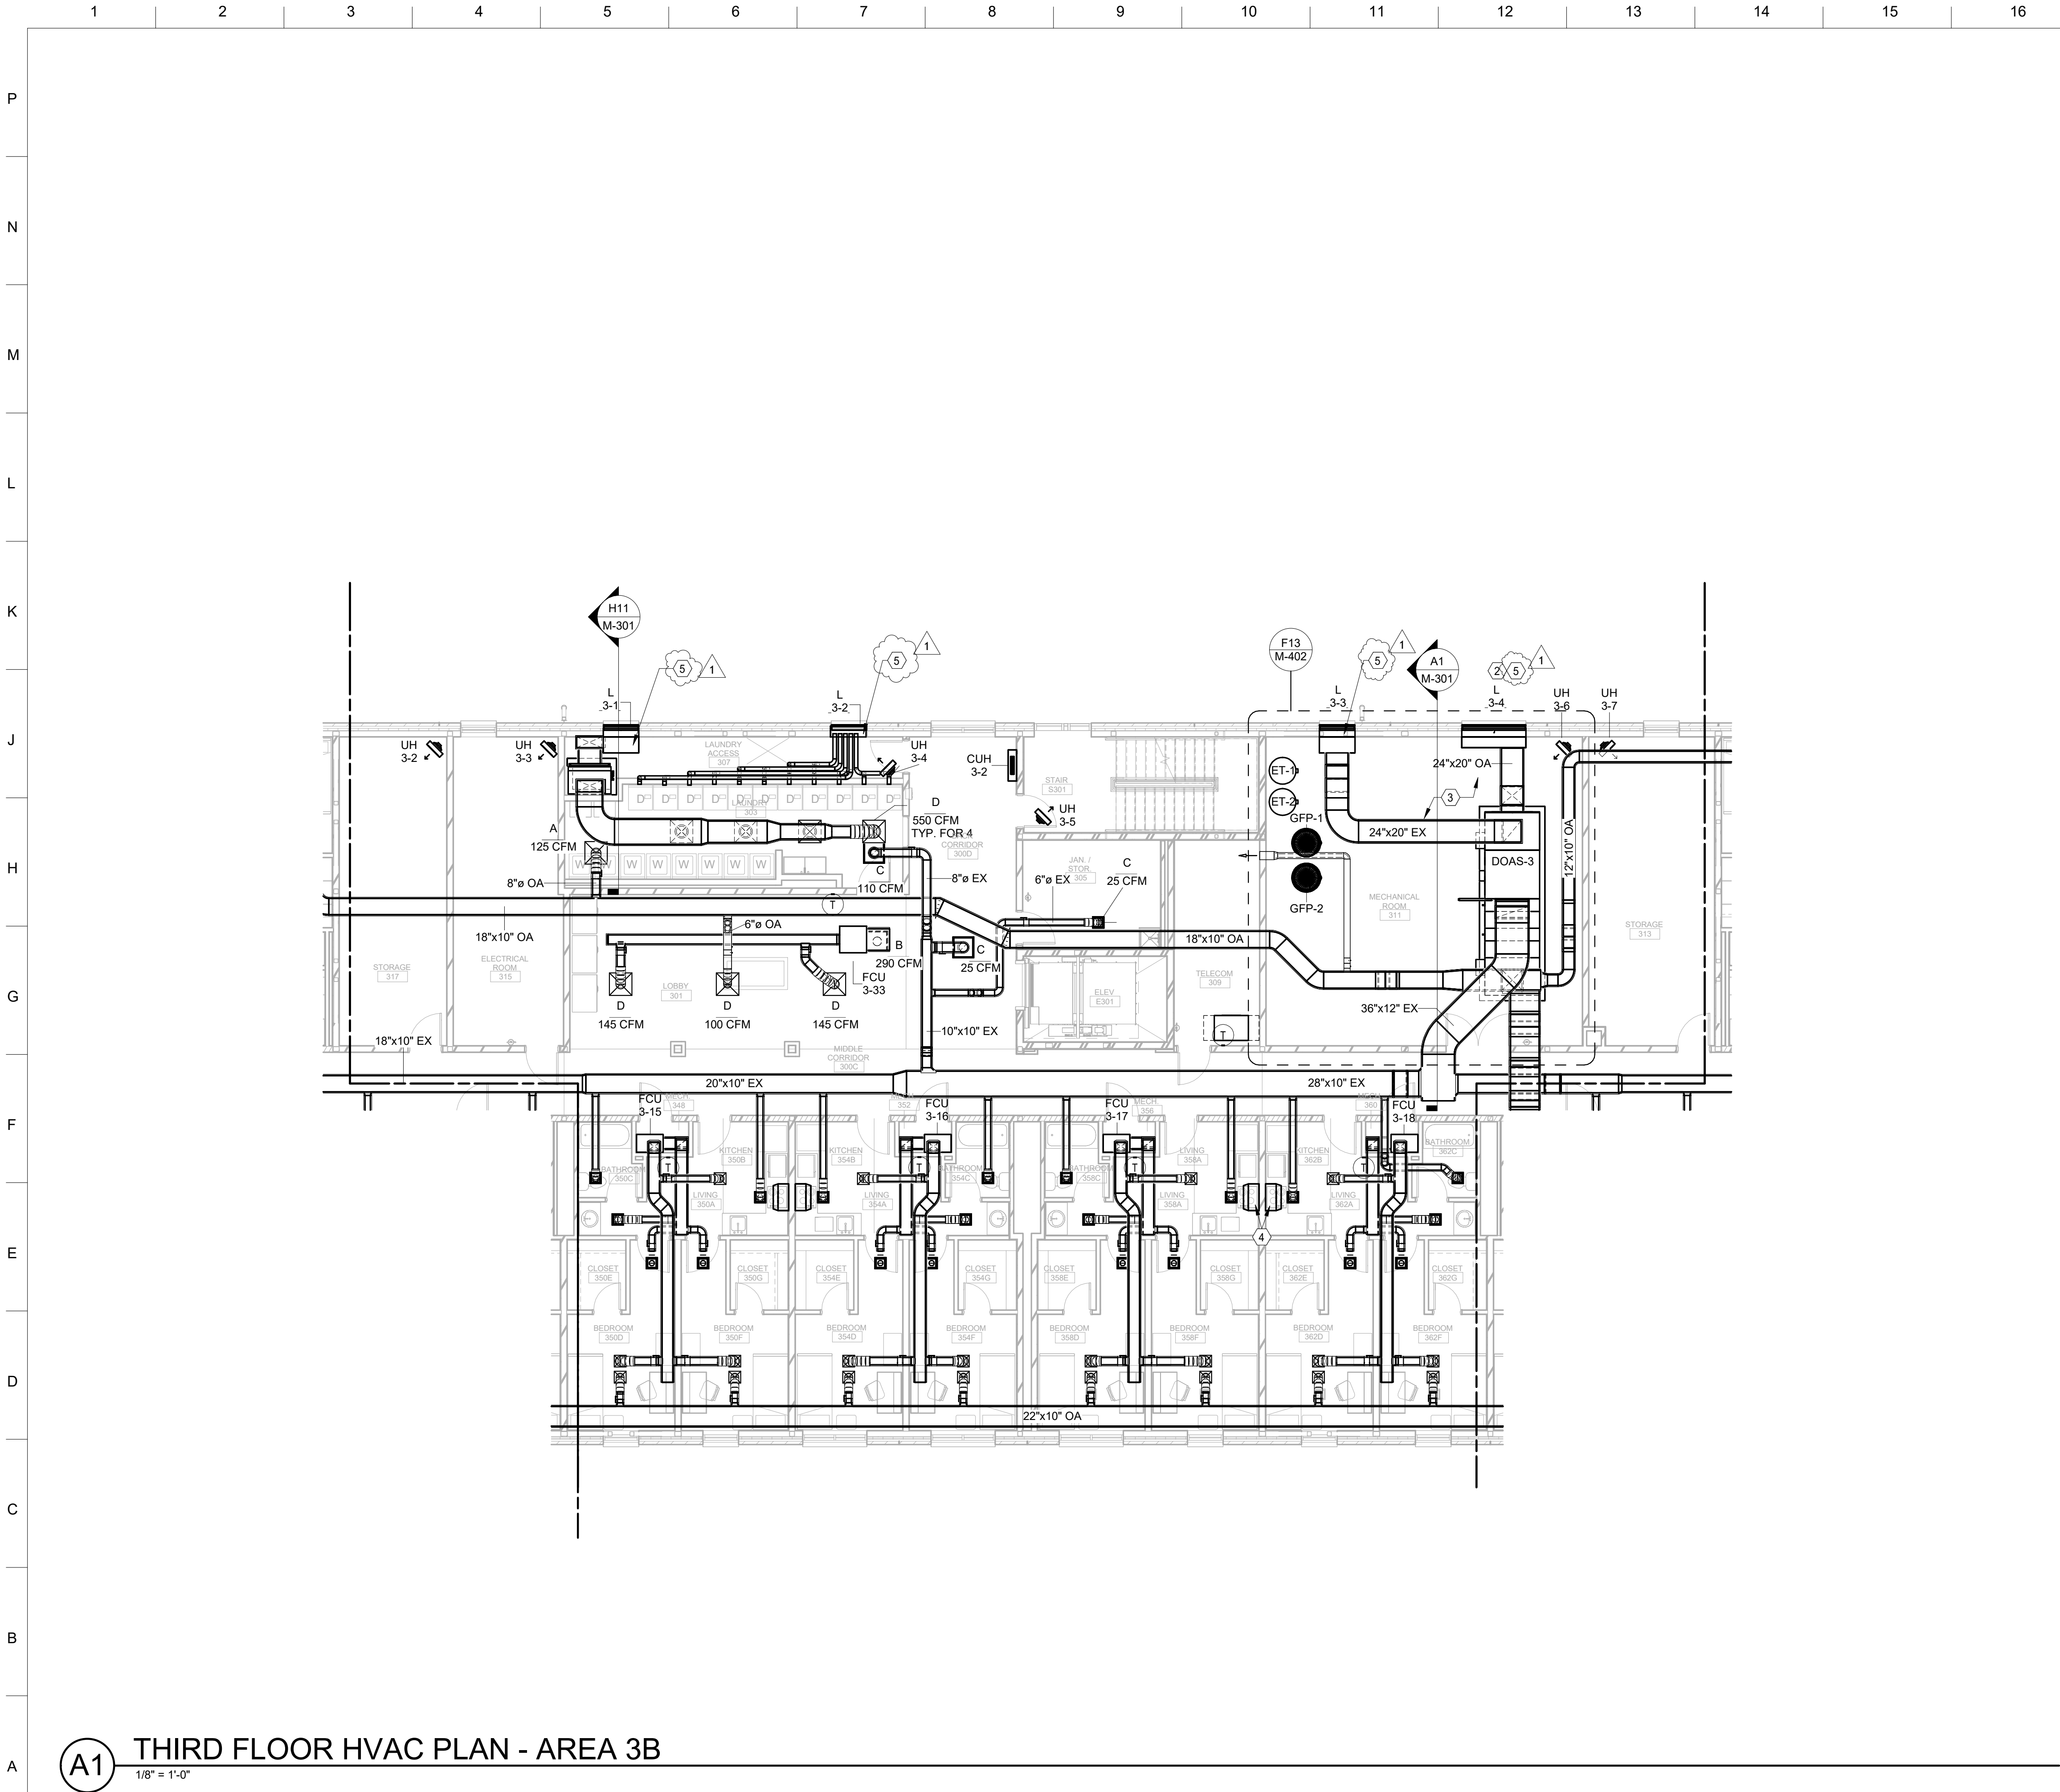

A1 THIRD FLOOR HVAC PLAN - AREA 3B

1/8" = 1'-0"

SHEET KEYNOTES

- 28"x12" OUTDOOR AIR DUCT DOWN THROUGH FLOOR OPENING TO MAU-1 ON FIRST FLOOR. PROVIDE FIRE DAMPER.
- 6'x6' REMOVABLE TYPE LOUVERS TO FACILITATE THE REMOVAL OF THE LARGEST PIECE OF THE INSTALLED EQUIPMENT THROUGH THE OPENING TO THE OUTSIDE OF THE BUILDING.
- ALL OUTDOOR AIR INTAKE AND THE EXHAUST AIR DUCTWORK TO DOAS UNITS SHALL BE ASSEMBLY/DISASSEMBLY TYPE TO FACILITATE THE REMOVAL OF THE EQUIPMENT THROUGH THE LOUVER OPENING.
- CONTRACTOR FURNISHED AND INSTALLED, UL LISTED, DUCTLESS TYPE KITCHEN HOOD (TYP.).
- ALL AIR INTAKE AND EXHAUST LOUVER PLENUMS MUST BE DOUBLE WALL CONSTRUCTION PER SPECIFICATION 23 30 00, 2.12.17



**US Army Corps
of Engineers®**


AMENDMENT 002	DATE
1	April 2026

ISSUE DATE: FEBRUARY 2026	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: M. SHARFUDIN	DRAWN BY: B. HARTMAN	CHECKED BY: C. GREENWELL
US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	SUBMITTED BY: M. BARRY	SIZE: ANSI D


FT. CAMPBELL, KY. UEPH BARRACKS PN 98248, FY2026, P2 511886	THIRD FLOOR HVAC DUCTWORK PLAN - AREA 3B
---	--


SHEET ID
M-132

KEY PLAN



PLAN NORTH



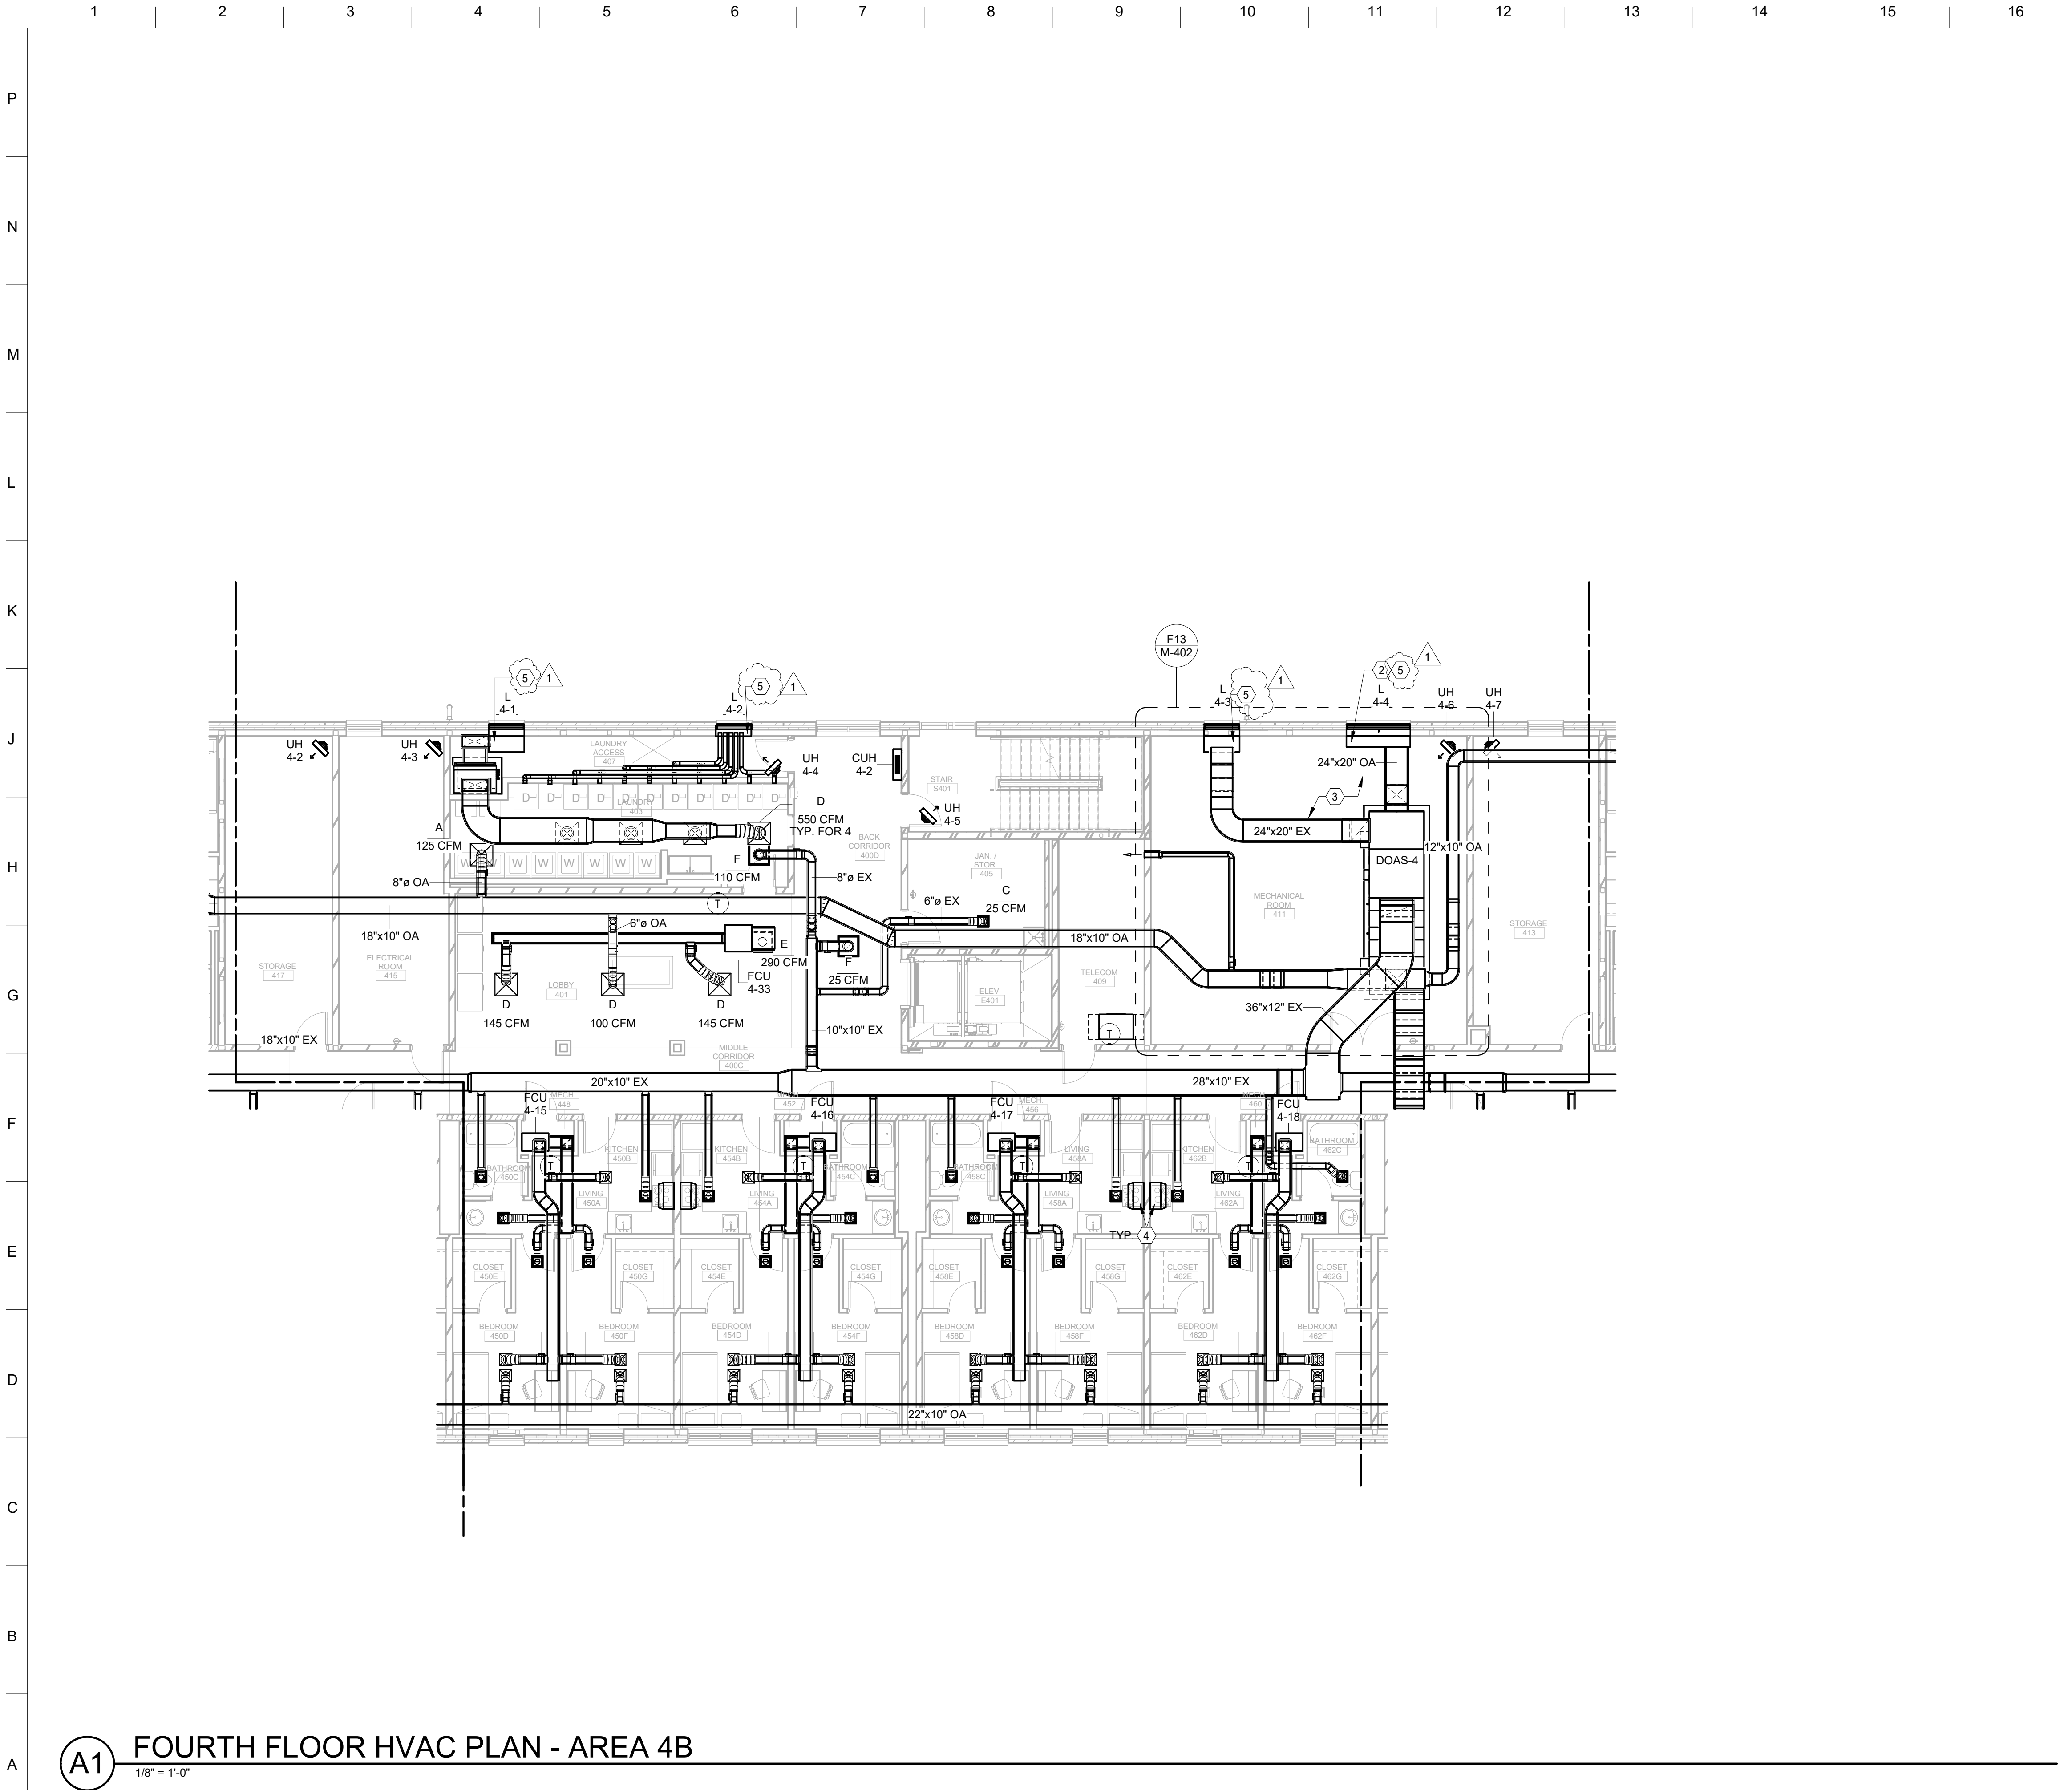

A1 FOURTH FLOOR HVAC PLAN - AREA 4B

1/8" = 1'-0"

SHEET KEYNOTES

1. 28"x12" OUTDOOR AIR DUCT DOWN THROUGH FLOOR OPENING TO MAU-1 ON FIRST FLOOR. PROVIDE FIRE DAMPER.
2. 6'x6' REMOVABLE TYPE LOUVERS TO FACILITATE THE REMOVAL OF THE LARGEST PIECE OF THE INSTALLED EQUIPMENT THROUGH THE OPENING TO THE OUTSIDE OF THE BUILDING.
3. ALL OUTDOOR AIR INTAKE AND THE EXHAUST AIR DUCTWORK TO DOAS UNITS SHALL BE ASSEMBLY/DISASSEMBLY TYPE TO FACILITATE THE REMOVAL OF THE EQUIPMENT THROUGH THE LOUVER OPENING.
4. CONTRACTOR FURNISHED AND INSTALLED, UL LISTED, DUCTLESS TYPE KITCHEN HOOD (TYP.).
5. ALL AIR INTAKE AND EXHAUST LOUVER PLENUMS MUST BE DOUBLE WALL CONSTRUCTION PER SPECIFICATION 23 30 00, 2.12.17



**US Army Corps
of Engineers®**

AMENDMENT 0002	DATE
1	April 2026

DESIGNED BY: M. SHARUDDIN	ISSUE DATE: FEBRUARY 2026
DRAWN BY: B. HARTMAN	SOLICITATION NO.:
CHECKED BY: C. GREENWELL	CONTRACT NO.:
SUBMITTED BY: M. BARRY	
SIZE: ANSI D	


US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886
FOURTH FLOOR HVAC DUCTWORK PLAN - AREA
4B


SHEET ID


M-142

KEY PLAN



PLAN NORTH




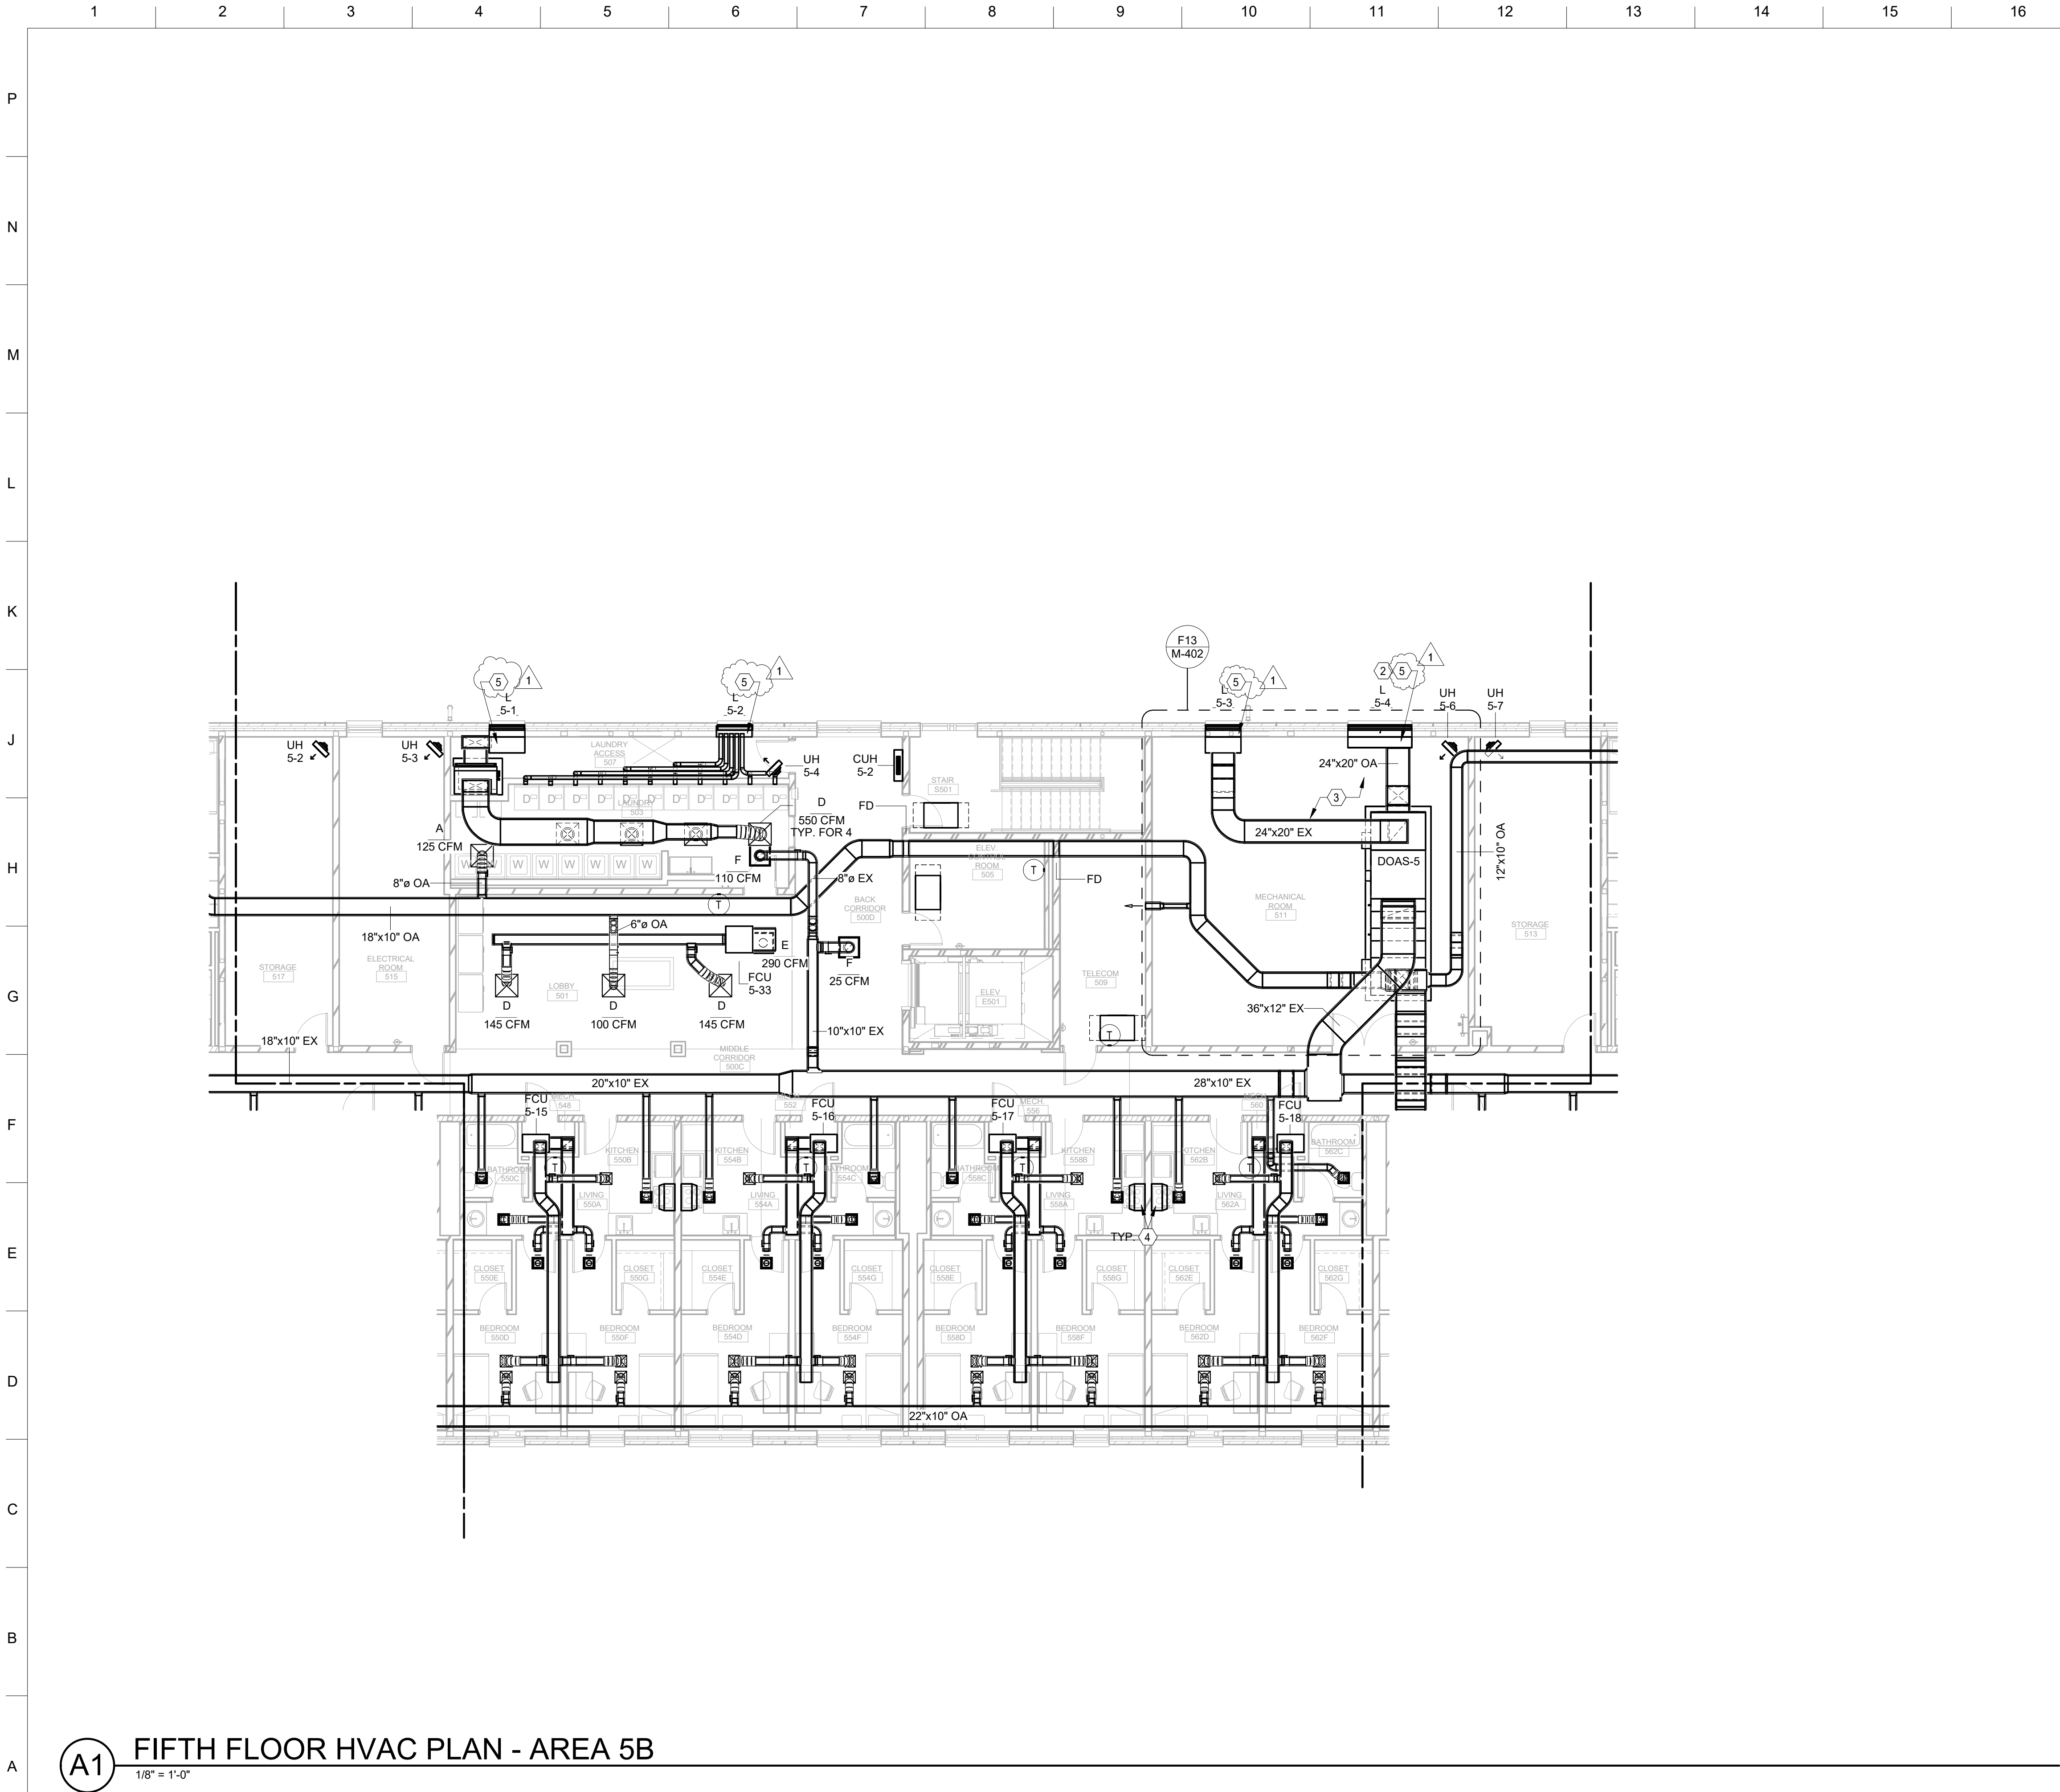

A1 FIFTH FLOOR HVAC PLAN - AREA 5B
1/8" = 1'-0"

SHEET KEYNOTES

- 28"x12" OUTDOOR AIR DUCT DOWN THROUGH FLOOR OPENING TO MAU-1 ON FIRST FLOOR. PROVIDE FIRE DAMPER.
- 6'x6' REMOVABLE TYPE LOUVERS TO FACILITATE THE REMOVAL OF THE LARGEST PIECE OF THE INSTALLED EQUIPMENT THROUGH THE OPENING TO THE OUTSIDE OF THE BUILDING.
- ALL OUTDOOR AIR INTAKE AND THE EXHAUST AIR DUCTWORK TO DOAS UNITS SHALL BE ASSEMBLY/DISASSEMBLY TYPE TO FACILITATE THE REMOVAL OF THE EQUIPMENT THROUGH THE LOUVER OPENING.
- CONTRACTOR FURNISHED AND INSTALLED, UL LISTED, DUCTLESS TYPE KITCHEN HOOD (TYP.).
- ALL AIR INTAKE AND EXHAUST LOUVER PLENUMS MUST BE DOUBLE WALL CONSTRUCTION PER SPECIFICATION 23 30 00, 2.12.17



**US Army Corps
of Engineers®**

AMENDMENT 002	DATE
1	April 2026

DESIGNED BY: M. SHARUDDIN	ISSUE DATE: FEBRUARY 2026
DRAWN BY: B. HARTMAN	SOLICITATION NO.:
CHECKED BY: C. GREENWELL	CONTRACT NO.:
SUBMITTED BY: M. BARRY	
SIZE: ANSI D	


US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886
FIFTH FLOOR HVAC DUCTWORK PLAN - AREA 5B


SHEET ID

M-152

KEY PLAN




PLAN NORTH



Plot Date: 4/28/2026 9:20:10 AM
File Path: C:\Users\FEDD68\Documents\511886_Ren2025_M_UEPH_FEDD68.dwt

CERTIFIED FINAL W912QR26RA016_Plans-0002

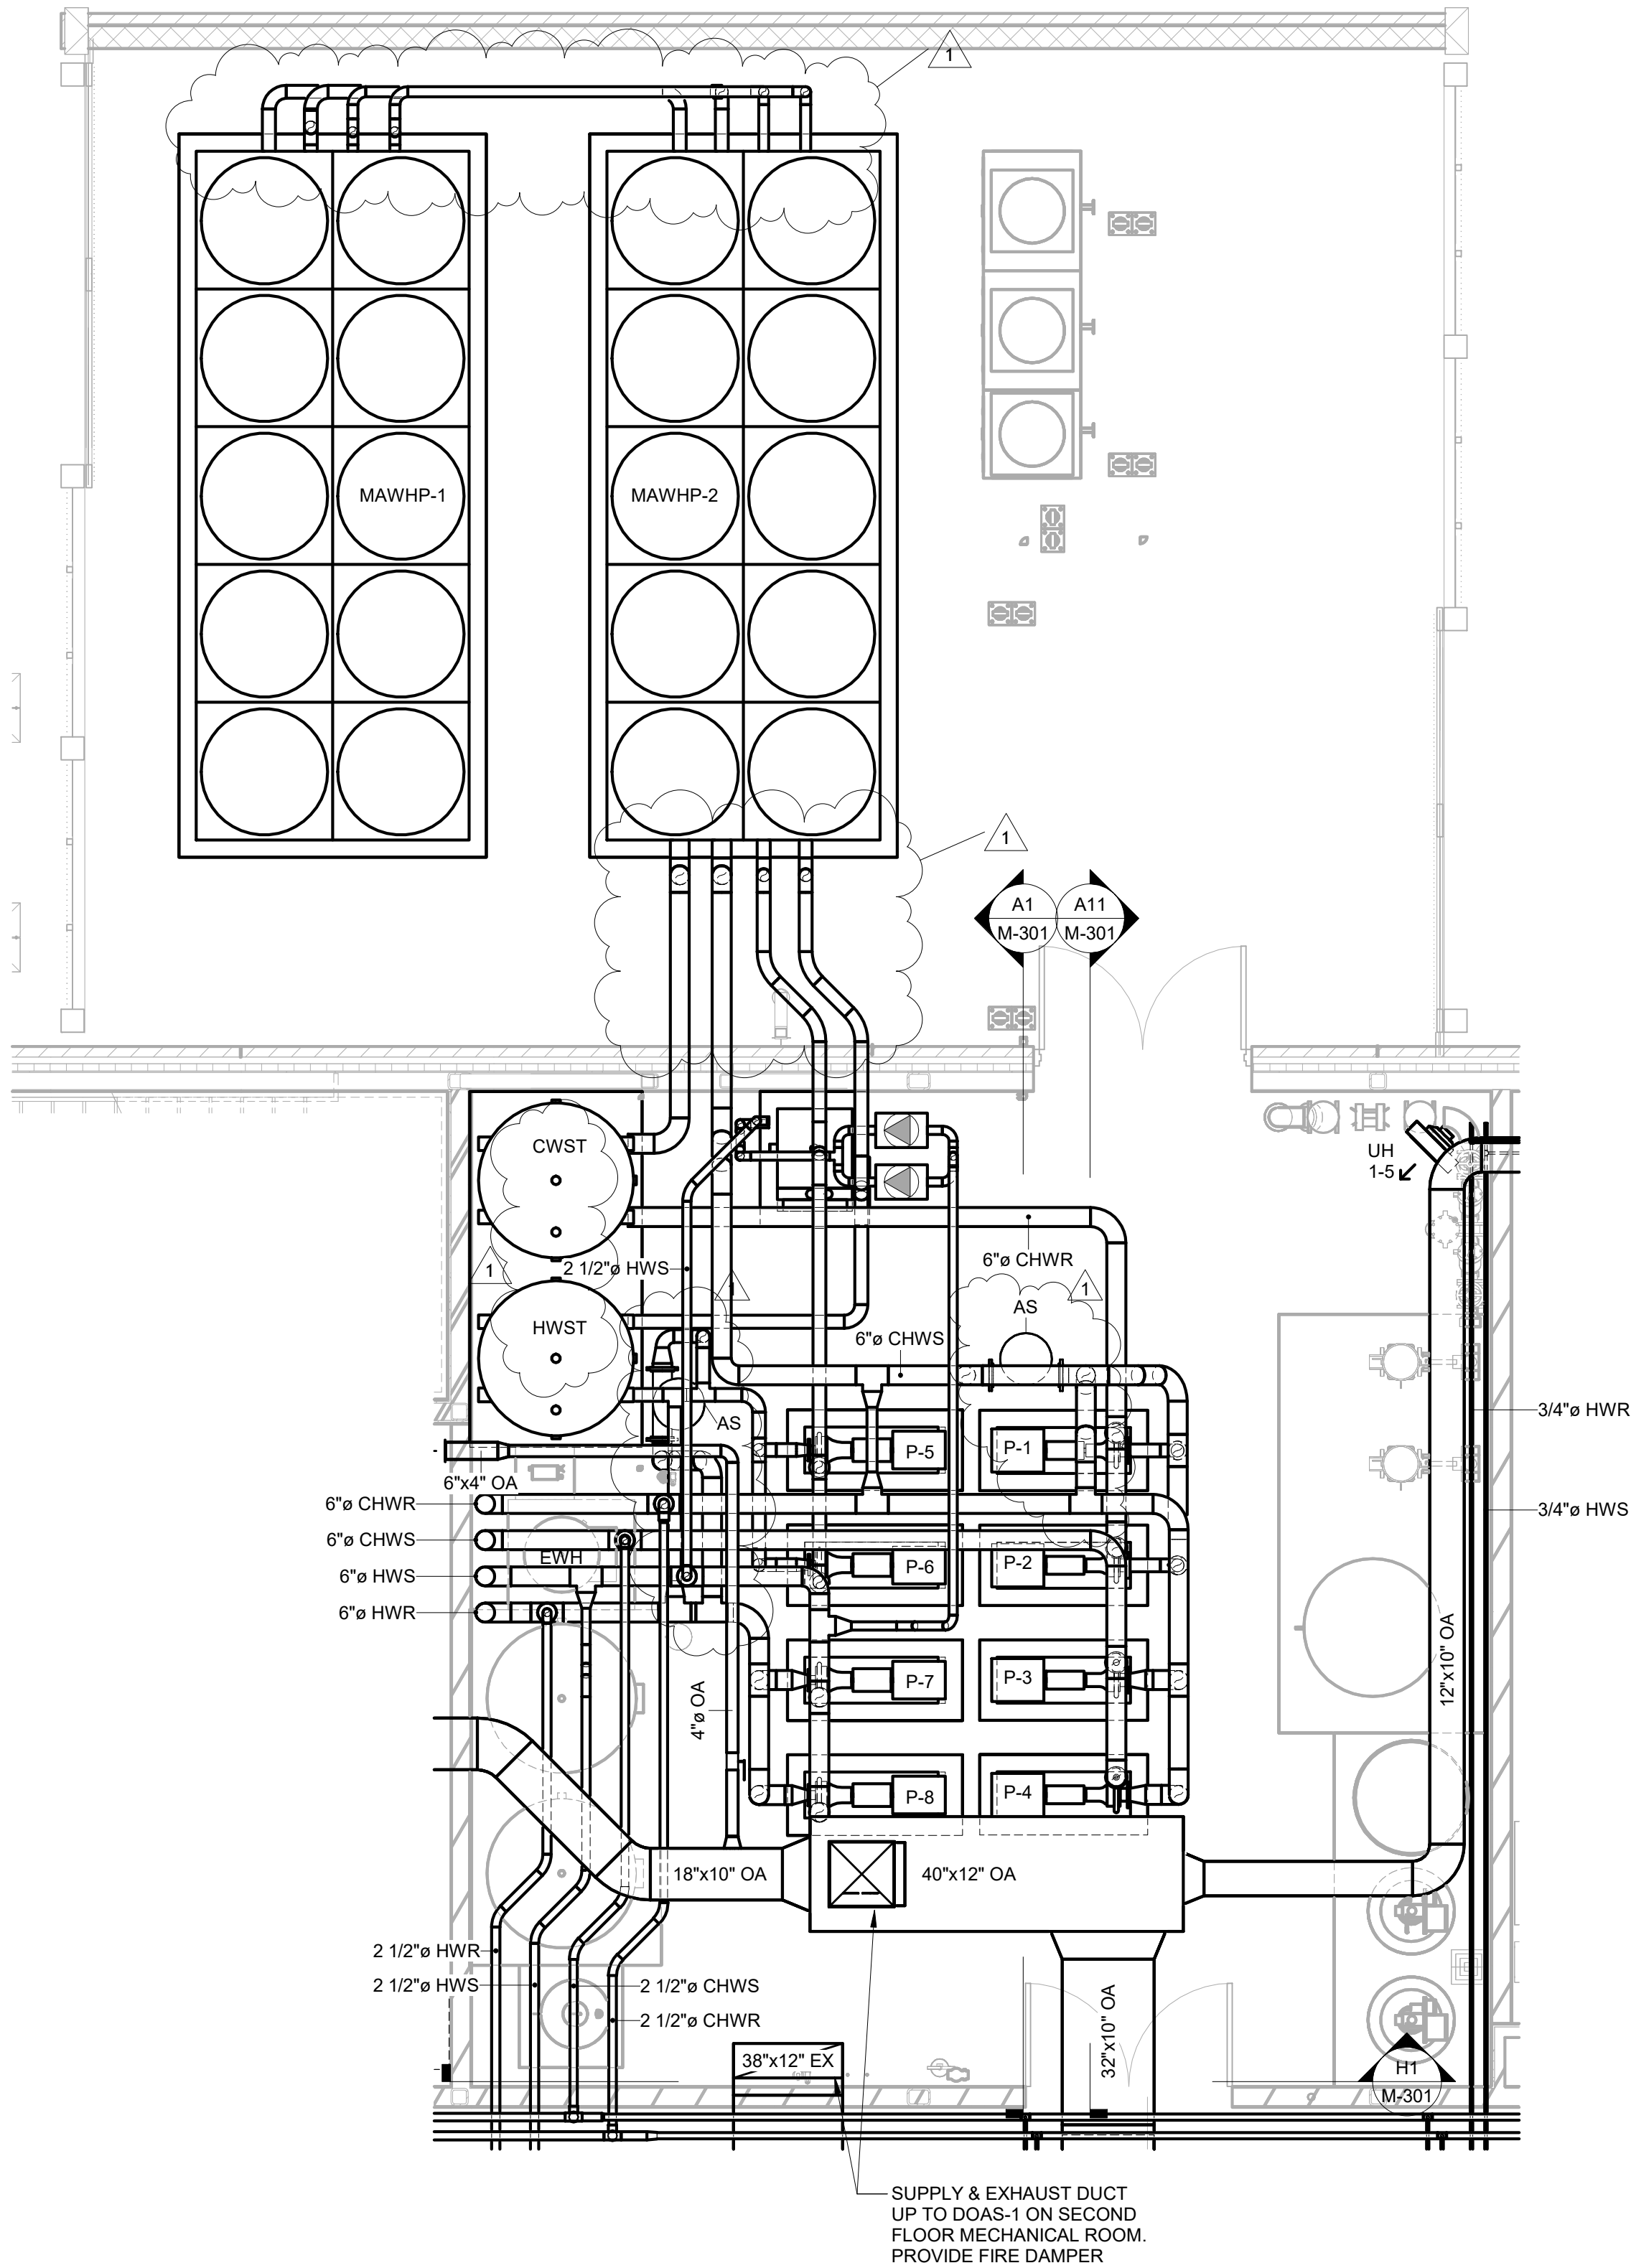[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40203	DESIGNED BY: M. SHAFIUDIN B. HARTMAN CHECKED BY: C. GREENWELL SUBMITTED BY: M. BARRY	ISSUE DATE: FEBRUARY 2026 SOLICITATION NO.: CONTRACT NO.:
ANSI D		


FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, F1/2026, P2 511686

SHEET ID


M-401

Plot Date: 4/28/2026 9:19:17 AM
File Path: C:\Users\H2EDDM\SS\Documents\511686_Rev12025_M_UEPH_H2EDDM58.rvt

CERTIFIED FINAL

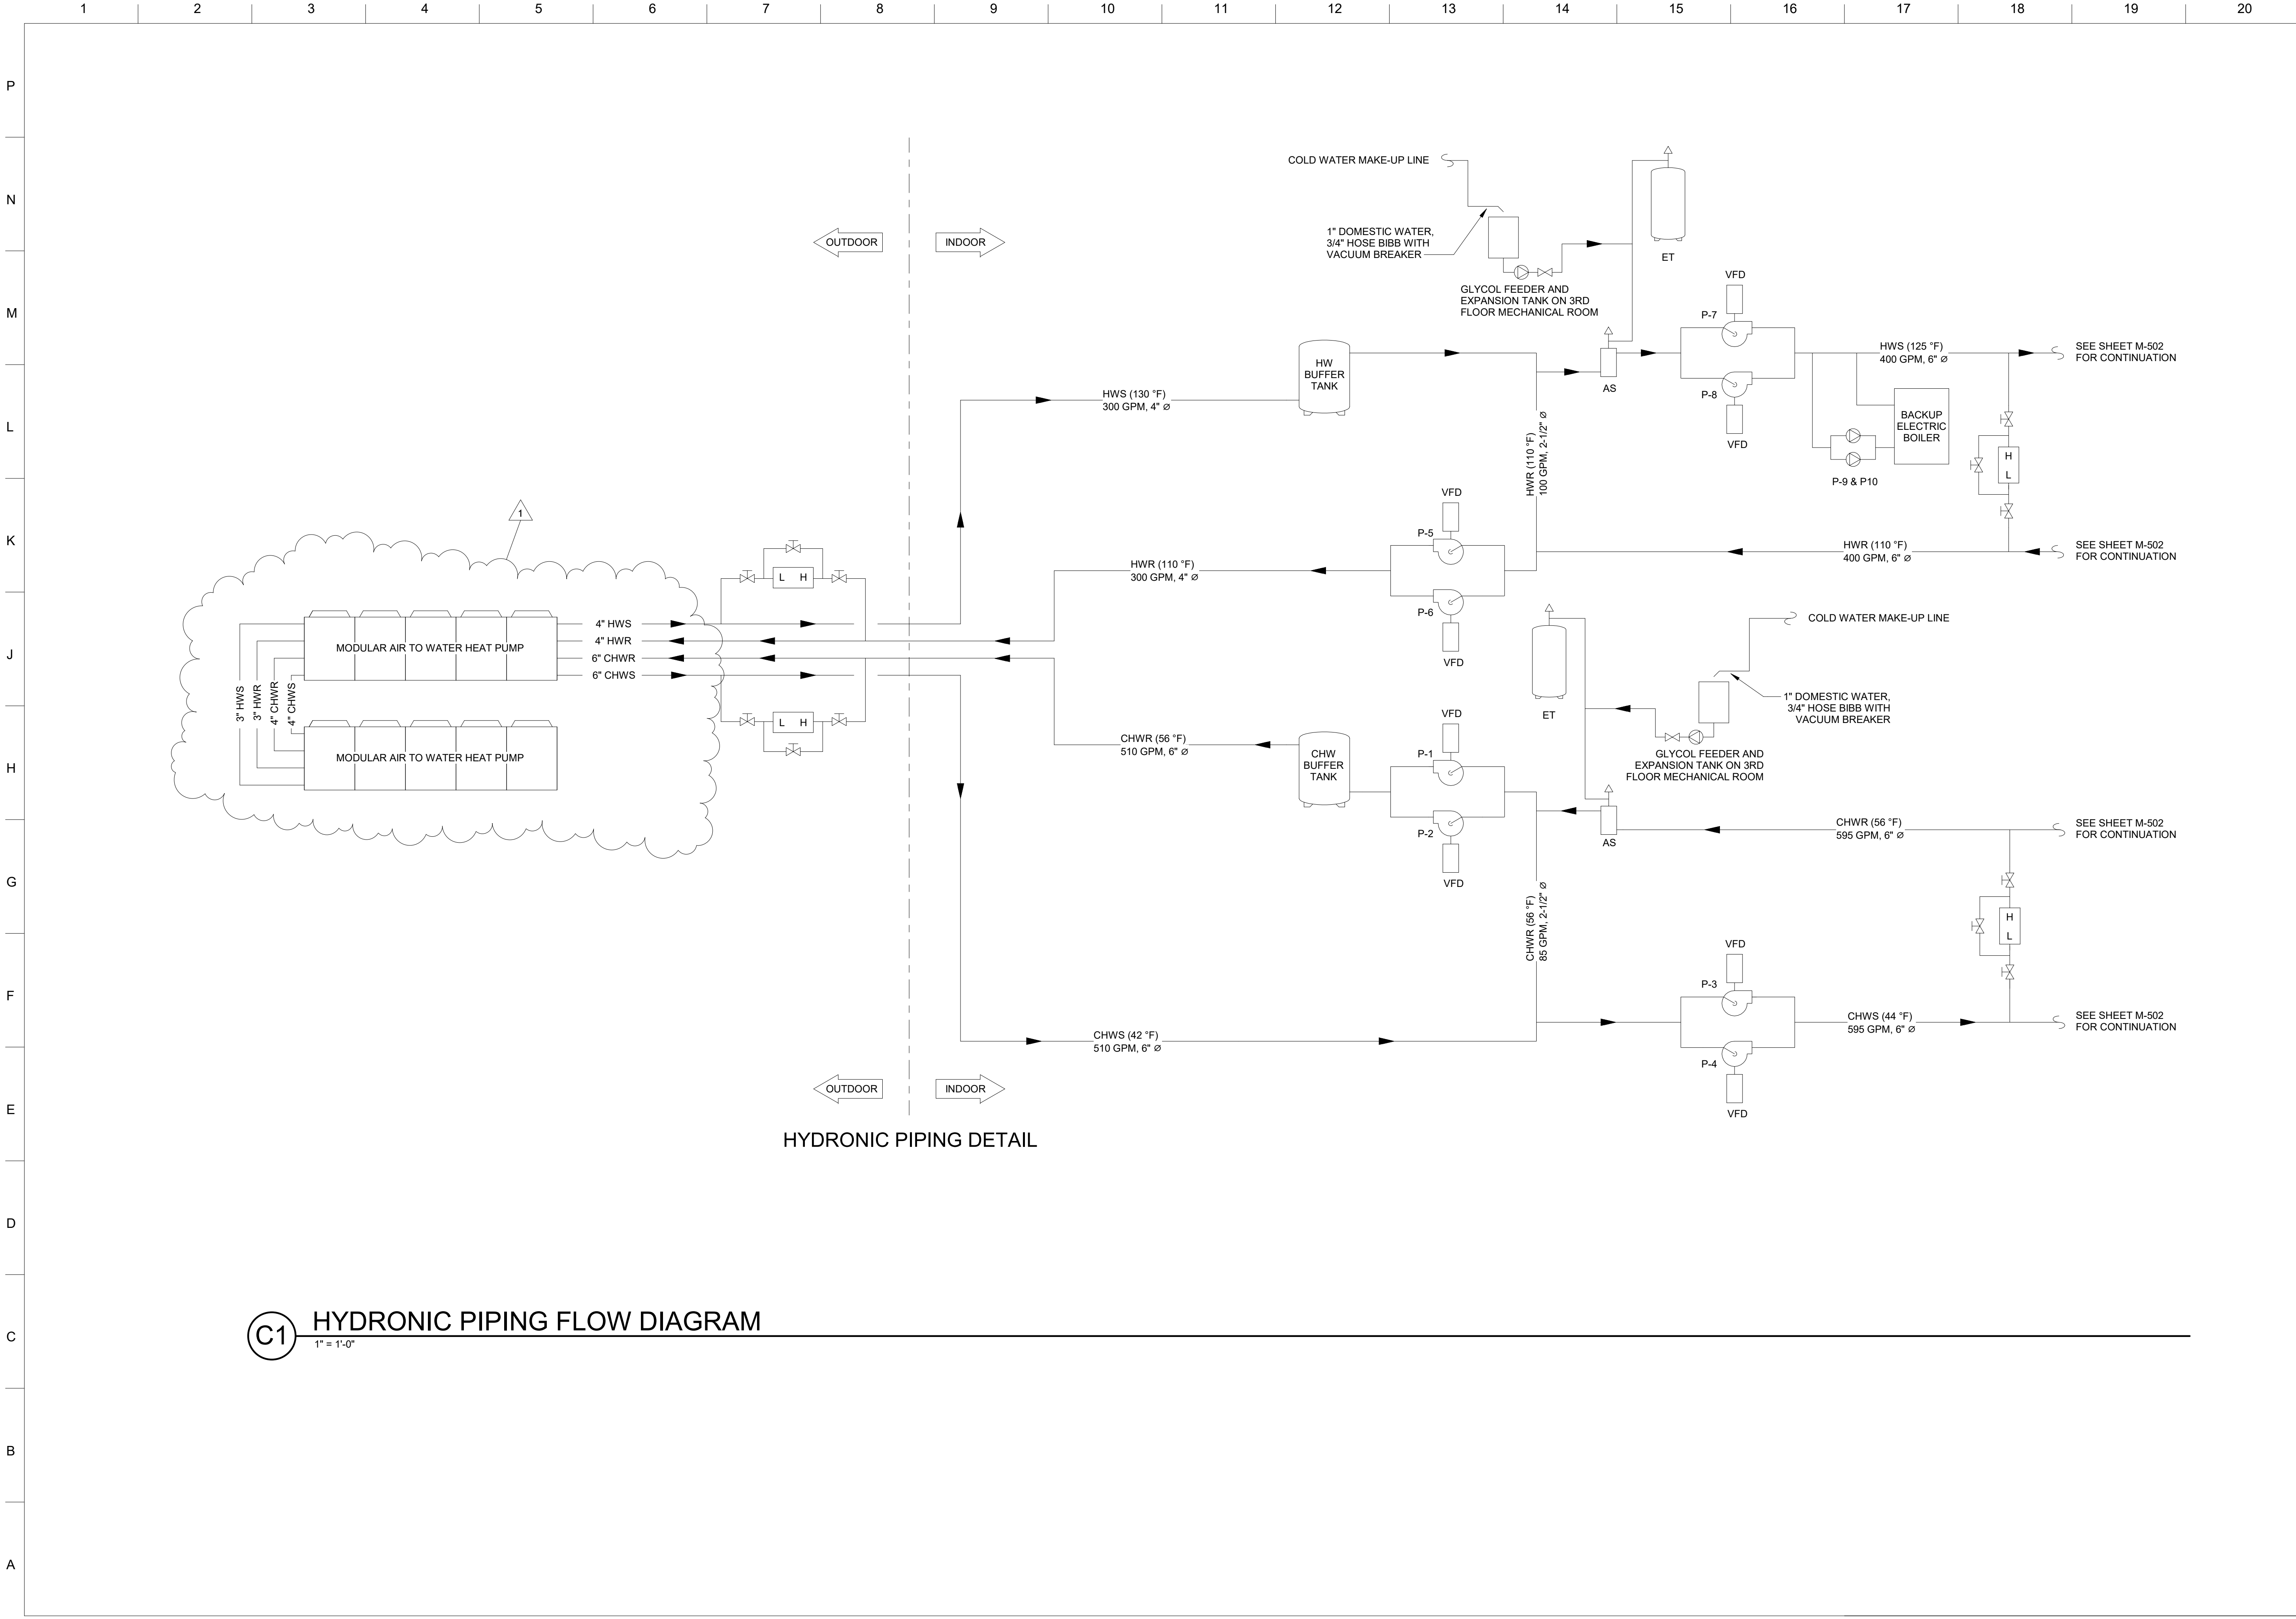

C1 HYDRONIC PIPING FLOW DIAGRAM
1" = 1'-0"



DATE	DESCRIPTION	MARK
April 2026	1	AMENDMENT 0002

DESIGNED BY: M. SHARFUDIN	ISSUE DATE: FEBRUARY 2026
DRAWN BY: B. HARTMAN	SOLICITATION NO.:
CHECKED BY: C. GREENWELL	CONTRACT NO.:
SUBMITTED BY: M. BARRY	SIZE: ANSI D

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	
---	--

FT. CAMPBELL, KY. UEPH BARRACKS PN 98248, FY2026, P2 511886 MECHANICAL DETAILS

SHEET ID M-501

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

MARK

LOCATION

SERVICE

SUPPLY FAN

SUPPLY AIR (CFM)

EXT STATIC (IN. W.C.)

POWER (HP)

EXHAUST FAN

MAXIMUM CFM

POWER (HP)

EXT STATIC (IN. W.C.)

SUMMER DESIGN ENERGY RECOVERY

OUTSIDE AIR

EAT DB (°F)

EAT WB (°F)

LAT DB (°F)

LAT WB (°F)

EXHAUST AIR

EAT DB (°F)

EAT WB (°F)

WINTER DESIGN ENERGY RECOVERY

OUTSIDE AIR

EAT DB (°F)

EAT WB (°F)

LAT DB (°F)

LAT WB (°F)

EXHAUST AIR

EAT DB (°F)

EAT WB (°F)

DOAS-1

SECOND FLOOR MECHANICAL ROOM

FIRST FLOOR

3645

1.76

5

3215

3

1.75

91

76

80.6

67.5

75

63

17

15

50.8

41.4

70

53

DOAS-2

SECOND FLOOR MECHANICAL ROOM

SECOND FLOOR

3325

1.78

3

2835

2

1.75

91

76

80.6

67.5

75

63

17

15

50.6

41.3

70

53

DOAS-3

THIRD FLOOR MECHANICAL ROOM

THIRD FLOOR

3325

1.76

3

2835

2

1.76

91

76

80.6

67.5

75

63

17

15

50.6

41.3

70

53

DOAS-4

FOURTH FLOOR MECHANICAL ROOM

FOURTH FLOOR

3325

1.76

3

2835

2

1.76

91

76

80.6

67.5

75

63

17

15

50.6

41.3

70

53

DOAS-5

FIFTH FLOOR MECHANICAL ROOM

FIFTH FLOOR

3325

1.76

3

2835

2

1.76

91

76

80.6

67.5

75

63

17

15

50.6

41.3

70

53

MINIMUM COOLING CAPACITY (MBH)

AIRSIDE

COOLING COIL

WATER SIDE

MINIMUM HEATING CAPACITY (MBH)

AIRSIDE

HEATING COIL

WATERSIDE

ELECTRICAL

REMARKS

LAT DB (°F)

LAT WB (°F)

DESIGN FLOW (GPM)

EWT (°F)

PD (FT. WG)

LAT DB (°F)

DESIGN FLOW (GPM)

EWT (°F)

PD (FT. WG)

VOLTS

HERTZ

PH

MCA

MOCP

360

49

48.6

65

44

6.4

230.5

3645

33.4

125

17.9

460

60

3

18.3

15

1 THRU 18

336

49

48.6

61

44

4

210

3325

30.5

125

14.6

460

60

3

12.3

15

1 THRU 18

336

49

48.6

61

44

4

210

3325

30.5

125

14.6

460

60

3

12.3

15

1 THRU 18

336

49

48.6

61

44

4

210

3325

30.5

125

14.6

460

60

3

12.3

15

1 THRU 18

336

49

48.6

61

44

4

210

3325

30.5

125

14.6

460

60

3

12.3

15

1 THRU 18

NOTES:

1. FACTORY INSTALLED AND WIRED, FULLY PROGRAMMABLE, TRANE DDC CONTROLS COMPLETE WITH ALL END-DEVICES, SENSORS, SWITCHES, CONTROL VALVES AND ACTUATORS.

2. DIRECT DRIVE PLENUM FANS, MOTOR SHAFT GROUND RING, VFD PER MOTOR, INDIVIDUAL OVERLOAD PER MOTOR

3. FACTORY INSTALLED VFD PER MOTOR WITH FACTORY OVERLOADS PER MOTOR – 3 YEAR PARTS AND LABOR WARRANTY ON VFDS. START-UP BY MANUFACTURER

4. FACTORY INSTALLED OUTDOOR AIRFLOW MEASURING STATIONS

5. PROVIDE MERV 13 ON OUTDOOR AIR INTAKE AND MERV 8 PLEATED MEDIA FILTERS ON EXHAUST SIDE OF ERV. FILTER MAGNEHELIC GAUGE

6. ASHRAE 111 CLASS 6 LEAKAGE CASING (<1.0 PERCENT LEAKAGE) AND PANEL DEFLECTION LESS THAN 0.0042 INCHES AT +/- 8 INCHES W.G. 2-INCH R13 FOAM-INJECTED CASING, NO THROUGH-METAL CASING. THERMAL BREAKS DOORS. TR-VALUE OF 0.6.

7. PROVIDE T&B TEST PORTS ON DOORS AND SIDES OF UNIT – FACTORY INSTALLED TO PRESERVE LEAK- TIGHT INTEGRITY OF UNIT CASING

8. UNIT CASING PANELS SHALL BE DOUBLE-WALL CONSTRUCTION

9. CUSTOM SIZEABLE SA OPENING. COORDINATE WITH INSTALLING CONTRACTOR

10. THERMAL DUAL PANE WINDOWS

11. PROVIDE EXTENDED DRAIN AND VENT CONNECTIONS THROUGH CASING ON WATER COILS

12. 8" INTEGRAL BASE RAIL

13. REMOVABLE COIL ACCESS PANEL, EACH COIL MODULE

14. FACTORY PRESSURE TEST COILS TO 450PSIG

15. STAINLESS STEEL COILING COIL DRAIN/PAN, CASING AND SUPPORTS. SS DOOR HINGES – NO EXCEPTIONS

16. ACCESS DOORS: GANGED SINGLE LATCH MECHANISM, REMOVABLE DOORS, TRUE THERMAL BREAK CONSTRUCTION REQUIRED 50,000 HR MOVABLE (MAGNETICALLY ATTACHED) MARINE LED LIGHTS FACTORY WIRED TO EXTERNAL SWITCH WITH GFCI OUTLET UL LISTING

17. OSHPD CERTIFICATION. PROVIDE CERTIFICATION ID WITH SUBMITTAL PACKAGE

18. OEM TWO YEAR PARTS AND LABOR WARRANTY – ENTIRE UNIT

19. SUBMIT SOUND DATA PER AHRI STD 260. NO EXCEPTIONS

MARK

LOCATION

SYSTEM

TYPE

FLUID

MAXIMUM FLUID TEMPERATURE (°F)

MAXIMUM FLOW (GPM)

TOTAL HEAD PRESSURE (FT. W.C.)

MINIMUM PUMP EFFICIENCY (%)

HP

RPM

ELECTRICAL

REMARKS

VOLTS

PH

HERTZ

P-1

111- MECHANICAL ROOM

CHILLED WATER (PRIMARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

56

510

60

83.3

15

1579

460

3

60

1.2

P-2

111- MECHANICAL ROOM

CHILLED WATER (PRIMARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

56

510

60

83.3

15

1579

460

3

60

1.2

P-3

111- MECHANICAL ROOM

CHILLED WATER (SECONDARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

56

595

80

76.7

20

1682

460

3

60

1.2

P-4

111- MECHANICAL ROOM

CHILLED WATER (SECONDARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

56

595

80

76.7

20

1682

460

3

60

1.2

P-5

111- MECHANICAL ROOM

HOT WATER (PRIMARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

130

300

60

74.2

7.5

1718

460

3

60

1.2

P-6

111- MECHANICAL ROOM

HOT WATER (PRIMARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

130

300

60

74.2

7.5

1718

460

3

60

1.2

P-7

111- MECHANICAL ROOM

HOT WATER (SECONDARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

130

400

80

73.9

15

1649

460

3

60

1.2

P-8

111- MECHANICAL ROOM

HOT WATER (SECONDARY)

BASE MOUNTED END SUCTION PUMP

30% PROPYLENE GLYCOL

130

400

80

73.9

15

1649

460

3

60

1.2

P-9

111- MECHANICAL ROOM

HOT WATER (BACKUP)

INLINE CENTRIFUGAL PUMP

30% PROPYLENE GLYCOL

130

100

25

60

1.5

1800

208

1

60

2

P-10

111- MECHANICAL ROOM

HOT WATER (BACKUP)

INLINE CENTRIFUGAL PUMP

30% PROPYLENE GLYCOL

130

100

25

60

1.5

1800

208

1

60

2

NOTES:

1. ELECTRICAL CONTRACTOR SHALL PROVIDE AND INSTALL PUMP VFD COMPLYING WITH THE SPECIFICATION 26.29.23.

2. REFER TO ELECTRICAL DRAWING E-607 FOR THE ELECTRICAL POWER REQUIREMENTS.

MARK

QUANTITY

LOCATION

SERVICE

TANK VOLUME (GALLONS)

MINIMUM WORKING PRESSURE (PSI)

HEIGHT (INCHES)

DIAMETER (INCHES)

MINIMUM INSULATION

NOTES

CWST

1

111-MECHANICAL ROOM

CHILLED WATER

940

125

128

52

2"

SEE BELOW

HWST

1

111-MECHANICAL ROOM

HOT WATER

940

125

128

52

2"

SEE BELOW

NOTES:

1. GLASS LINED TANK.

2. 150 psi WORKING PRESSURE.

3. TEMPERATURE AND PRESSURE GAUGE

4. 150 psi TEMPERATURE AND PRESSURE RELIEF VALVE.

5. ASME CERTIFIED.

SYSTEM

DUCT PRESSURE CLASS

SUPPLY / OUTSIDE AIR

RETURN / EXHAUST AIR

DUCT TEST PRESSURE IN. W.C.

NOTES

INCHES OF WATER COLUMN (IN. W.C.)

ROUND/OVAL

RECTANGULAR

SUPPLY AIR DUCT

RETURN AIR DUCT

EXHAUST AIR DUCT

OUTSDIE AIR DUCT

DUCT SEAL CLASS

DUCT LEAK CLASS

DUCT SEAL CLASS

DUCT LEAK CLASS

DUCT SEAL CLASS

DUCT LEAK CLASS

DOAS-1 to 5

2

1

1

1

A

2

A

4

A

4

1

1,2

EXHAUST

-

-

1

-

-

-

-

A

4

1

1,2

MAU-1 to 5

2

1

1

1

A

2

A

4

A

4

1

1,2

NOTE 1: TEST IN ACCORDANCE WITH UFGS 23 05 93.00 06, TESTING, ADJUSTING, AND BALANCING FOR HVAC AND THE PROCEDURES IN SMACNA HVAC AIR DUCT LEAKAGE TEST MANUAL.

NOTE 2: DESPITE SMACNA HVAC AIR DUCT LEAKAGE TEST MANUAL, UTILIZE THE DUCT LEAKAGE AND SEAL CLASSES INDICATED IN THIS TABLE FOR THE LISTED DUCT PRESSURE CLASSIFICATIONS AND DUCT CONSTRUCTION TYPES.

NOTE 3: TESTING MAY BE DONE AT POSITIVE PRESSURE FOR NEGATIVE PRESSURE SYSTEMS.

NOTE 4: ALL NEW DUCT SYSTEMS MUST BE TESTED.

NOTE 5: ALL DUCTWORK SHALL BE TESTED IF SECTION UNDER TESTS SURFACE AREA IS A MINIMUM 100 SF AND A MINIMUM OF 45 CFM IS FLOWING THROUGH IT.

MARK

LOCATION

SERVICE

TYPE

GALLONS

SIZE

REMARKS

LENGTH (IN.)

DIAMETER (IN.)

ET-1

311-MECHANICAL ROOM

CHILLED WATER

BLADDER

39

48.5

16

ET-2

311-MECHANICAL ROOM

HOT WATER

BLADDER

147

53

30

EXPANSION TANK SCHEDULE

MARK

LOCATION

SERVICE

TYPE

GALLONS

SIZE

REMARKS

LENGTH (IN.)

DIAMETER (IN.)

ET-1

311-MECHANICAL ROOM

CHILLED WATER

BLADDER

39

48.5

16

ET-2

311-MECHANICAL ROOM

HOT WATER

BLADDER

147

53

30

DUCTWORK CONSTRUCTION AND LEAKAGE TESTING TABLE

US ARMY CORPS OF ENGINEERS

LOUISVILLE DISTRICT

600 DR. MARTIN LUTHER KING JR. PLACE

LOUISVILLE, KY 40202

DESIGNED BY:

M. SHARUDDIN

DRAWN BY:

B. HARTMAN

CHECKED BY:

C. GREENWELL

SUBMITTED BY:

M. BARRY

SIZE:

ANSI D

ISSUE DATE:

FEBRUARY 2026

SOLICITATION NO.:

CONTRACT NO.:

1

AMENDMENT 0002

DESCRIPTION

4/28/2026 9:20:13 AM

C:\userfiles\cdm\documents\11866_Rw42026_M_UEPH_VCED0489.rvt

Plot Date:

File Path:

FT. CAMPBELL, KY.

UEPH BARRACKS

PN 98248, FY2026, P2 511886

MECHANICAL EQUIPMENT SCHEDULES

SHEET ID

M-602

CERTIFIED FINAL

W912QR26RA016_Plans-0002

1234567891011121314151617181920

P

N

M

L

K

J

H

G

F

E

D

C

B

A

FAN COIL UNIT SCHEDULE 5TH FLOOR

MARK	LOCATION	AREA SERVED	DESIGN CFM	ESP (IN H2O)	COOLING						HEATING						MOTOR			REMARKS	
					MAX COIL WPD (FT)	MAX FLOW RATE (GPM)	EWT (°F)	LWT (°F)	EAT DB (°F)	EAT WB (°F)	LAT DB (°F)	MAX COIL WPD (FT)	MAX FLOW RATE (GPM)	EWT (°F)	LWT (°F)	EAT DB (°F)	LAT DB (°F)	V/HZ/PH	MCA		MOCF
FCU 5-1	MECH CLOSET 519	UNIT-521	580	0.85	3	3	44	56	78	65	55	3	2	125	110	65	90	208/60/1	9.7	15	
FCU 5-2	MECH CLOSET 518	UNIT-520	620	0.85	3	3	44	56	78	65	55	3	2	125	110	65	90	208/60/1	9.7	15	
FCU 5-3	MECH CLOSET 523	UNIT-525	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-4	MECH CLOSET 522	UNIT-524	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-5	MECH CLOSET 527	UNIT-529	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-6	MECH CLOSET 526	UNIT-528	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-7	MECH CLOSET 531	UNIT-533	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-8	MECH CLOSET 530	UNIT-532	510	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-9	MECH CLOSET 535	UNIT-537	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-10	MECH CLOSET 534	UNIT-536	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-11	MECH CLOSET 539	UNIT-541	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-12	MECH CLOSET 538	UNIT-540	510	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-13	MECH CLOSET 543	UNIT-545	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-14	MECH CLOSET 542	UNIT-544	510	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-15	MECH CLOSET 548	UNIT-550	490	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-16	MECH CLOSET 552	UNIT-554	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-17	MECH CLOSET 556	UNIT-558	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-18	MECH CLOSET 560	UNIT-562	490	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-19	MECH CLOSET 564	UNIT-566	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-20	MECH CLOSET 568	UNIT-570	510	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-21	MECH CLOSET 567	UNIT-569	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-22	MECH CLOSET 572	UNIT-574	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-23	MECH CLOSET 571	UNIT-573	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-24	MECH CLOSET 576	UNIT-578	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-25	MECH CLOSET 575	UNIT-577	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-26	MECH CLOSET 580	UNIT-582	510	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-27	MECH CLOSET 579	UNIT-581	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-28	MECH CLOSET 584	UNIT-586	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-29	MECH CLOSET 583	UNIT-585	480	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-30	MECH CLOSET 588	UNIT-590	500	0.85	3	2.5	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-31	MECH CLOSET 587	UNIT-539	610	0.85	3		44	56	78	65	55	3	2	125	110	65	90	208/60/1	9.7	15	
FCU 5-32	MECH CLOSET 591	UNIT-593	620	0.85	3	3	44	56	78	65	55	3	2	125	110	65	90	208/60/1	9.7	15	
FCU 5-33	CEILING SPACE	501-LOBBY	400	0.85	3	2	44	56	78	65	55	3	1.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-34	CEILING SPACE	509-TELECOM	400	0.85	3	2.5	44	56	78	65	55	3	2.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-35	CEILING SPACE	505-ELEV MC ROOM	400	0.85	3	2.5	44	56	78	65	55	3	2.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-36	CEILING SPACE	STAIR S-502	400	0.85	3	2.5	44	56	78	65	55	3	2.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-37	CEILING SPACE	STAIR S-501	400	0.85	3	2.5	44	56	78	65	55	3	2.5	125	110	65	90	208/60/1	9.7	15	
FCU 5-38	CEILING SPACE	STAIR S-503	600	0.85	3	3.5	44	56	78	65	55	3	3.5	125	110	65	90	208/60/1	9.7	15	

BACKUP ELECTRIC HOT WATER BOILER SCHEDULE

MARK	Service	Type	GPM (MINIMUM)	GPM (DESIGN)	OUTPUT CAPACITY (KW)	WATER TEMPERATURE (°F)		MAXIMUM PD (FT. H2O)	ASME WORKING PRESSURE (PSIG)	ELECTRICAL				REMARKS
						ENTERING	LEAVING			VOLTS	HERTZ	PH	MOP	
EB-1	BACKUP HEAT	ELECTRIC	8	102	299	120	140	0.1	125	480	60	3	250	

NOTES:
1. PROVIDE BOILER WITH 125 psi VESSEL & PRV, BACnet INTERFACE AND SYSTEM CONTROL.

AIR SEPARATOR SCHEDULE

MARK	QTY	MODEL NUMBER	SIZE (IN.)	CAPACITY (GPM)	CONNECTION TYPE	ASME RATED	OPTIONS
AS	2	R-6F	6	700	FLANGED	TRUE	107A - AUTOMATIC AIR VENT, MBV-3H - MANUAL BLOWDOWN VALVE

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

DESIGNED BY:
M. SHARUDDIN
DRAWN BY:
B. HARTMAN
CHECKED BY:
C. GREENWELL
SUBMITTED BY:
M. BARRY

ISSUE DATE:
FEBRUARY 2026
SOLICITATION NO.:
CONTRACT NO.:

1
MARK
DESCRIPTION
AMENDMENT 0002
DATE
April 2026

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511866

MECHANICAL EQUIPMENT SCHEDULE

SHEET ID

M-605

CERTIFIED FINAL

W912QR26RA016_Plans-0002

Plot Date: 4/28/2026 9:20:14 AM
File Path: C:\Users\UEPH\Documents\1866_Ren2025_M_UEPH_FEDDMS04

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

POINT SCHEDULE INSTRUCTIONS FOR THE BUILDING CONTROLS

SYMBOL

[]

< ->

~

N/A

MEANING

"SQUARE BRACKETS" ("[]") ARE USED TO INDICATE SELECTIONS OR ENTRIES MADE BY THE DESIGNER

"ANGLE BRACKETS" ("< ->") ARE USED TO INDICATE SELECTIONS OR ENTRIES THAT MUST BE MADE BY THE BUILDING CONTROL SYSTEM CONTRACTOR.

A TILDE ("~") IS USED IN A CELL WHERE THERE COULD BE A VALID ENTRY, BUT NO ENTRY IS REQUIRED (I.E. IT'S SPECIFICALLY USED TO MEAN "I COULD HAVE PUT A VALUE HERE BUT I CHOSE NOT TO ENTER ONE")

AN "N/A" (OR A GREYED OUT CELL, OR A COMBINATION OF N/A AND A GREYED OUT CELL) IS USED WHEN THERE IS NO POSSIBILITY OF A VALID ENTRY FOR THAT PARTICULAR CELL.

GENERAL:

1) **FUNCTION:** DESCRIBE THE FUNCTIONALITY OF THIS GROUP OF POINTS. FUNCTIONAL BLOCKS FROM SEQUENCE OF OPERATION.

2) **POINT NAME:** THE POINT NAME, USING THE POINT NAMING CONVENTION IN UFC 3-410-02, APPENDIX E.

3) **DESCRIPTION:** FUNCTIONAL DESCRIPTION OF THE POINT.

4) **DDC HARDWARE ID:** UNIQUE IDENTIFIER FROM THE EQUIPMENT SCHEDULE.

5) **SETTING:** SHOWS ALL SETTINGS RELATED TO THE POINT. VALUES ESTABLISHED IN THE CONTROLLER BY THE BUILDING CONTROL SYSTEM CONTRACTOR, EITHER BY DIP SWITCHES, HARDWARE SETTINGS, OR ENGINEERING SOFTWARE SUCH AS CONTROLLER PROGRAMMING OR CONFIGURATION SOFTWARE.

6) **RANGE:** SHOWS THE RANGE OF VALUES ASSOCIATED WITH THE POINT. IN GENERAL, THE FOLLOWING TYPES OF POINTS ARE PROVIDED:
ZONE SETPOINTS
SWITCH SETTINGS
OCCUPANCY MODES

USE THESE RANGES WHEN CONFIGURING DEVICES, AND DOCUMENT THE RANGES USED WHEN DESIGNER DID NOT PROVIDE AN ENTRY.

7) **I/O TYPE:** INPUT/OUTPUT SIGNAL TYPE (IF ANY) ASSOCIATED WITH THE POINT.
AI: THE VALUE COMES FROM A HARDWARE (PHYSICAL) ANALOG INPUT
AO: THE VALUE IS OUTPUT AS A HARDWARE (PHYSICAL) ANALOG OUTPUT
BI: THE VALUE COMES FROM A HARDWARE (PHYSICAL) BINARY INPUT
BO: THE VALUE IS OUTPUT AS A HARDWARE (PHYSICAL) BINARY OUTPUT
PULSE: THE VALUE COMES FROM A HARDWARE (PHYSICAL) PULSE ACCUMULATOR INPUT
NET-IN: THE VALUE IS PROVIDED FROM THE NETWORK (GENERALLY FROM ANOTHER DEVICE)
NET-OUT: THE VALUE IS PROVIDED TO ANOTHER CONTROLLER OVER THE NETWORK

THE ABSENCE OF A "NET-IN" OR "NET-OUT" TAG DOES NOT MEAN THAT THE POINT DOES NOT NEED TO BE EXPOSED ON THE NETWORK, MERELY THAT THE POINT IS NOT SHARED AS PART OF A SEQUENCE.
A POINT MIGHT REQUIRE TWO ENTRIES, FOR EXAMPLE AN AI THAT IS ALSO USED BY ANOTHER DEVICE ("AI / NET-OUT").

8) **HOA REQUIRED:** INDICATES WHICH HARDWARE OUTPUTS REQUIRE HAND OFF AUTO (HOA) SWITCHES. PROVIDE HOAS FOR "Y" IN THIS COLUMN

9) **CONFIG TYPE** (CONFIGURATION TYPE): PROVIDE THE APPROPRIATE CONFIGURATION CAPABILITY IN ACCORDANCE WITH THE SPECIFICATION. PROVIDE A MEANS FOR CONFIGURATION (SUCH AS A CONFIGURATION PAGE ON THE SYSTEM GRAPHIC) FOR EACH POINT THAT IS "OPERATOR CONFIGURABLE" IN ACCORDANCE WITH THE INTEGRATION REQUIREMENTS.
H = HARDWARE (VIA SWITCHES OR ADJUSTMENTS DIRECTLY ON THE DEVICE).
C = CONFIGURABLE
O OR OC = OPERATOR CONFIGURABLE

10) **M&C VIEW AND OVDR:** THIS COLUMN INDICATES WHETHER A POINT IS TO BE DISPLAYED ON A WORKSTATION VIA MONITORING AND CONTROL (M&C) SOFTWARE, AND WHETHER THE POINT MUST BE OVERRIDABLE FROM THE M&C DISPLAY.
V: VIEW. THE POINT MUST BE DISPLAYED ON THE SYSTEM GRAPHICS
O: OVERRIDE. THE POINT MUST BE DISPLAYED AND OVERRIDABLE VIA THE SYSTEM GRAPHICS
VO: VIEW AND OVERRIDE. THE POINT MUST BE DISPLAYED AND OVERRIDABLE VIA THE SYSTEM GRAPHICS (FUNCTIONALLY EQUIVALENT TO "O")

BUILDING CONTRACTOR: FOR V, EXPOSE THE POINT TO THE NETWORK SO IT WILL BE VISIBLE TO THE UMCS. FOR O, OR VO, PROVIDE BOTH THE VALUE ON THE NETWORK AND AN OVERRIDE FOR THE VALUE IN ACCORDANCE WITH THE SPECIFICATION POINTS AND OVERRIDE CAPABILITY. NOTE THAT ADDITIONAL COLUMNS PROVIDING PROTOCOL SPECIFIC POINT DETAILS WILL NEED TO BE FILLED OUT AS WELL.
UMCS CONTRACTOR: FOR V, DISPLAY THE POINT ON THE SYSTEM GRAPHIC. FOR O, OR VO, DISPLAY THE VALUE ON THE SYSTEM GRAPHIC AND PROVIDE THE CAPABILITY TO OVERRIDE THE POINT USING THE OVERRIDE CAPABILITY PROVIDED BY THE BUILDING CONTRACTOR.

11) **LDP VIEW AND OVDR:** THIS COLUMN INDICATES WHETHER A POINT IS TO BE DISPLAYED ON AN LDP, AND WHETHER THE POINT MUST BE OVERRIDABLE FROM THE LDP.
V: VIEW. THE POINT MUST BE DISPLAYED ON THE LDP
O: OVERRIDE. THE POINT MUST BE DISPLAYED AND OVERRIDABLE VIA THE LDP
VO: VIEW AND OVERRIDE. THE POINT MUST BE DISPLAYED AND OVERRIDABLE VIA THE LDP (FUNCTIONALLY EQUIVALENT TO "O")

BUILDING CONTRACTOR: FOR V, DISPLAY THE VALUE ON THE LDP. FOR O, OR VO, BOTH DISPLAY THE VALUE ON THE LDP AND PROVIDE THE CAPABILITY TO OVERRIDE THE POINT FROM THE LDP. NOTE THAT, DEPENDING ON HOW THE OVERRIDES ARE IMPLEMENTED, A REQUIREMENT FOR OVERRIDES FROM BOTH THE M&C SERVER AND AN LDP MAY REQUIRE ADDITIONAL CONFIGURATION IN THE DEVICE AS WELL AS ADDITIONAL POINTS IN THE DEVICE AND MULTIPLE ENTRIES IN THE POINTS SCHEDULE.

12) **TREND REQUIRED:** A "Y" IN THIS COLUMN INDICATES THE POINT SHOULD BE TRENDED. FOR EACH POINT WITH A "Y" SET UP A TREND IN ACCORDANCE WITH THE SPECIFICATION. ALL TRENDED POINTS SHOULD ALSO HAVE A "V" IN THE M&C VIEW AND OVERRIDE COLUMN.

UMCS CONTRACTOR: FOR EACH POINT WITH A "Y", PROVIDE TREND DATA UPLOAD CAPABILITY IN IN ACCORDANCE WITH THE SPECIFICATION. PROVIDE A M&C SOFTWARE INTERFACE TO ACCESS THE TREND INFORMATION.

13) **ALARMING:**
ALARM CONDITION: SHOW THE CONDITIONS UNDER WHICH AN ALARM OCCURS, INCLUDING ANY TIME DELAYS. WHEN TRUE, WILL CAUSE AN ALARM TO BE GENERATED.
BUILDING CONTRACTOR: PERFORM ALARM GENERATION IN DDC HARDWARE IN ACCORDANCE WITH THE SPECIFICATION.

ALARM PRIORITY: INDICATES WHICH ALARMS ARE:
INFO: INFORMATIONAL (IN ALARM UNTIL ACKNOWLEDGED OR THE CONDITION CLEARS ITSELF)
CRIT: CRITICAL (IN ALARM UNTIL ACKNOWLEDGED AND THE CONDITION CLEARS ITSELF).
BUILDING CONTRACTOR: CONFIGURE HARDWARE TO ASSIGN THIS PRIORITY AS PART OF ALARM GENERATION.

M&C ROUTING: SHOW THE NAME OF THE ALARM ROUTING GROUP THAT IS TO BE USED FOR EACH ALARM TO BE HANDLED BY THE UMCS. THE ROUTING GROUP DEFINES THE DESTINATIONS FOR EACH ALARM MESSAGE AND, AS SPECIFIED IN UMCS UFGS 25 10 10, EACH GROUP REQUIRES SOME COMBINATION OF A POP-UP MESSAGE FOR A USER SESSION, AN EMAIL TO ONE OR MORE INDIVIDUALS, EMAIL TO SMS FOR ONE OR MORE INDIVIDUALS, OR PRINTING TO ONE OR MORE PRINTERS.
UMCS CONTRACTOR: PROVIDE ALARM ROUTING IN ACCORDANCE WITH THE ROUTING DEFINITION FOR THAT ALARM ROUTING GROUP.

PROTOCOL-SPECIFIC COLUMNS

1) **PRIMARY POINT INFORMATION:**
OBJECT TYPE & INSTANCE NUMBER: DOCUMENT THE BACNET OBJECT USED FOR THE POINT. IF ANY, ANY POINT (EXCEPT FOR POINTS ONLY USED WITHIN NIAGARA FRAMEWORK) THAT IS DISPLAYED AT THE FRONT END, DISPLAYED ON AN LDP, IS TRENDED, IS USED BY ANOTHER DEVICE ON THE NETWORK, OR HAS AN ALARM CONDITION MUST HAVE A BACNET OBJECT ASSOCIATED WITH IT AND BE DOCUMENTED HERE.

IF THE PROPERTY OF INTEREST IS NOT PRESENT VALUE, ALSO DOCUMENT THE PROPERTY THAT CONTAINS THE VALUE (FOR EXAMPLE, A LOOP OBJECT MAY USE THE SETPOINT PROPERTY). IN THAT CASE, ADD THE PROPERTY IDENTIFIER AFTER THE OBJECT TYPE / INSTANCE NUMBER.

ANALOG INPUT (AI)
ANALOG VALUE (AV)
ANALOG OUTPUT (AO)
BINARY INPUT (BI)
BINARY VALUE (BV)
BINARY OUTPUT (BO)
MULTI-STATE VALUE (MSV)
LOOP (LOOP)

THIS IS NOT A COMPLETE LIST OF OBJECT TYPES WHICH MAY BE USED.

NIAGARA ID: LIST THE NIAGARA STATION ID OF THE NIAGARA FRAMEWORK SUPERVISORY GATEWAY THAT THE POINT IS MAPPED INTO.

NETWORK DATA EXCHANGE: GETS DATA FROM AND SENDS DATA TO: DDC HARDWARE IDS OF DEVICES OBTAINING OR PROVIDING INFORMATION WITH THE POINT. DOCUMENT OTHER BACNET DEVICES THAT THIS POINT IS SHARED WITH, THIS SPECIFICALLY IS FOR <NET-IN> AND <NET-OUT> POINTS, BUT MAY INCLUDE OTHER POINTS AS WELL. DO NOT INCLUDE THE FRONT END AS A POSSIBLE DEVICE, BUT DO INCLUDE ALL OTHER DDC HARDWARE SUCH AS LDPs THAT VIEW OR OVERRIDE THE POINT.

BACNET PROVIDES MULTIPLE METHODS FOR DATA TO BE EXCHANGED BETWEEN DEVICES.

ANY POINT WITH A VALUE THAT IS OBTAINED FROM OTHER DDC HARDWARE, REGARDLESS OF METHOD USED, MUST HAVE AN ENTRY IN THE GETS DATA FROM COLUMN. LIKEWISE, ANY POINT WITH DATA THAT IS PROVIDED TO OTHER DDC HARDWARE, REGARDLESS OF METHOD USED, MUST HAVE AN ENTRY IN THE SENDS DATA TO COLUMN.

2) **OVERRIDES:** OBJECT TYPE AND INSTANCE NUMBER: FOR ANY POINT (EXCEPT FOR POINTS WITHIN A NIAGARA FRAMEWORK SUPERVISORY GATEWAY) REQUIRING AN OVERRIDE, DOCUMENT THE OBJECT USED FOR OVERRIDING THE POINT.
"COMMANDABLE": INDICATES THAT THE POINT'S OBJECT IS COMMANDABLE (OVERRIDABLE VIA USE OF THE PRIORITY ARRAY)
OBJECT TYPE AND INSTANCE NUMBER: IF THE POINT IS NOT COMMANDABLE, SPECIFY THE (OTHER) OBJECT, THAT WHEN WRITTEN TO, WILL OVERRIDE THE POINT.

UMCS CONTRACTOR: USE THIS INFORMATION / OBJECT ID WHEN OVERRIDING THE POINT OVER THE NETWORK.

3) **TREND OBJECT LOCATION, TYPE AND INSTANCE NUMBER:** INDICATES THE OBJECT ID OF THE TREND LOG OBJECT AND WHETHER THE OBJECT IS LOCAL OR REMOTE TO THE DEVICE CONTAINING THE POINT.
"-": WHEN NO TREND WAS REQUIRED
"L" OR "R": AND THE OBJECT TYPE AND INSTANCE NUMBER FOR THE TREND LOG (OR TREND LOG MULTIPLE) OBJECT. USE "L" (LOCAL) WHEN THE OBJECT IS IN THE SAME DEVICE AS THE POINT AND AN "R" (REMOTE) WHEN IT'S IN A DIFFERENT DEVICE.

BUILDING CONTRACTOR: PROVIDE THIS INFORMATION. IF THE TREND IS REMOTE, INCLUDE THE DDC HARDWARE ID FOR THE REMOTE DEVICE IN THE NOTES. CONFIGURE TRENDLOG OBJECT AND CONFIGURE BUFFER_FULL EVENT TO REQUEST TREND UPLOAD.
UMCS CONTRACTOR: PROVIDE ON-REQUEST (VIA BUFFER_FULL EVENT) UPLOADING OF TREND DATA FROM THIS OBJECT.

4) **ALARM INFORMATION:**
ALARM TYPE: INDICATES HOW ALARM GENERATION IS PERFORMED.
"INTRINSIC": ALARM IS GENERATED USING INTRINSIC REPORTING
"LOCAL ALGORITHMIC": ALARM IS GENERATED USING ALGORITHMIC REPORTING WITH AN EVENT ENROLLMENT OBJECT IN THAT DEVICE
"REMOTE ALGORITHMIC": ALARM IS GENERATED USING ALGORITHMIC REPORTING WITH AN EVENT ENROLLMENT OBJECT IN A DIFFERENT DEVICE
"NIAGARA FRAMEWORK": ALARM IS GENERATED USING THE NIAGARA FRAMEWORK
NOTE THAT "NIAGARA FRAMEWORK" IS ONLY ALLOWED IF THE NIAGARA FRAMEWORK IS USED BY THE PROJECT. NOTE THAT "LOCAL ALGORITHMIC" AND "REMOTE ALGORITHMIC" ARE PROHIBITED IF THE NIAGARA FRAMEWORK IS SELECTED.

BUILDING CONTRACTOR: PROVIDE THIS INFORMATION. WHEN "LOCAL ALGORITHMIC" OR "REMOTE ALGORITHMIC" FILL OUT THE EVENT ENROLLMENT OBJECT INSTANCE NUMBER COLUMN AS WELL. IF "REMOTE ALGORITHMIC" IS USED, INDICATE THE DDC HARDWARE ID OF THE DEVICE CONTAINING THE EVENT ENROLLMENT OBJECT IN THE NOTES.

NOTIFICATION CLASS OBJECT INSTANCE NUMBER: FOR INTRINSIC AND ALGORITHMIC ALARMS, INDICATES THE NOTIFICATION CLASS OBJECT USED FOR ALARM GENERATION.
UMCS CONTRACTOR: USE THE NOTIFICATION CLASS OBJECT WHEN CONFIGURING ALARM NOTIFICATIONS AT THE FRONT END.

EVENT ENROLLMENT OBJECT INSTANCE NUMBER: INDICATES THE EVENT ENROLLMENT OBJECT USED FOR ALGORITHMIC ALARM GENERATION.
BUILDING CONTRACTOR: PROVIDE AS REQUIRED.

CONFIGURATION INFORMATION: INDICATE THE MEANS OF CONFIGURATION ASSOCIATED WITH THE POINT.
BACNET:
OPERATOR CONFIGURABLE POINTS: BACNET OBJECT AND PROPERTY INFORMATION (NAME, TYPE, IDENTIFIERS) CONTAINING THE CONFIGURABLE VALUE. INDICATE WHETHER THE PROPERTY IS WRITABLE ALWAYS, OR ONLY WHEN OUT_OF_SERVICE IS TRUE.
CONFIGURABLE POINTS: INDICATE ONE OF:
BACNET OBJECT AND PROPERTY INFORMATION AS FOR OPERATOR CONFIGURABLE POINTS.
THE CONFIGURABLE SETTINGS FROM WITHIN THE ENGINEERING SOFTWARE FOR THE DEVICE
THE HARDWARE SETTINGS ON THE DEVICE

NIAGARA FRAMEWORK SUPERVISORY GATEWAYS: INDICATE THE POINT WITHIN THE NIAGARA FRAMEWORK SUPERVISORY GATEWAY USED TO CONFIGURE THE VALUE.

DESIGNED BY:
M. SHARUDDIN

DRAWN BY:
B. HARTMAN

CHECKED BY:
C. GREENWELL

SUBMITTED BY:
M. BARRY

SIZE:
ANSI D

ISSUE DATE:
FEBRUARY 2026

SOLICITATION NO.:

CONTRACT NO.:

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE, KY 40202

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 98248, FY2026, P2 511886

POINT SCHEDULE INSTRUCTIONS

1

AMENDMENT 0002

DESCRIPTION

MARK

4/28/2026 9:20:15 AM
C:\user\redacted\documents\11886_Ren2026_MUEPH-UEEDMS04

Plot Date:
File Path:

DELEGATED DESIGN

M-701

BACnet MSTP IS PREFERRED BY FORT CAMPBELL.
IP-BASED FIELD CONTROLLERS ARE NOT ACCEPTABLE EXCEPT JACE 9000 RUNNING A 4.1-4.15 OPERATING SYSTEM.
DISTECH AND HONEYWELL CONTROLLERS ARE THE PREFERRED BRANDS.

1

CERTIFIED FINAL W912QR26RA016_Plans-0002



US Army Corps of Engineers

**US Army Corps
of Engineers ®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: M. SHATTUDDIN CHECKED BY: B. HARTMAN C. GREENWELL	ISSUE DATE: FEBRUARY 2026 SOLICITATION NO.: CONTRACT NO.:
	SUBMITTED BY: M. BARRY	APPROVED BY: ANS I D

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686
CONTROL SYSTEM NETWORK

CONTROL SYSTEM NETWORK

SHEET ID

M-702

120

WATER METER

COLUMN IS USED FOR BACNET (WITH NIAGARA)

FUNCTION	NAME	DESCRIPTION	DDC HARDWARE ID	SETTINGS (WITH UNITS)	RANGE (WITH UNITS)	IO TYPE	HOA REQ'D	CONFIG. TYPE	M&C VIEW AND OVRD	LDP VIEW AND OVRD	TREND REQ'D	ALARMS			PRIMARY POINT INFORMATION		NETWORK DATA EXCHANGE		OVERRIDES	ALARM INFORMATION		CONFIGURATION INFORMATION
												ALARM CONDITION	ALARM PRIORITY	M&C ROUTING	OBJECT TYPE AND INSTANCE NUMBER (AND PROPERTY ID)	NIAGARA ID	DATA FROM	DATA TO	OBJECT TYPE & INSTANCE NUMBER OR COMMANDABLE	ALARM TYPE (PROVIDE DDC ID FOR REMOTE IN NOTES)	NOTIFICATION CLASS OBJECT INSTANCE NUMBER	
Flow	WATER-F	WATER FLOW RATE	<__>	N/A	0 - <__> [CU FT / MIN][CFM]	<PULSE><AI>	N/A	N/A	V	N/A	X	<EXCESSIVE FLOW>	CRIT	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	WATER-F-TOT	TOTAL WATER FLOW	<__>	N/A	0 - <__> [CU FT]	<PULSE><AI>	N/A	N/A	V	N/A	N/A	N/A	N/A	N/A	<__>	<__>	<__>	<__>	N/A	N/A	<__>	
		FLOW RATE CONFIGURATION	N/A	<__>	<<__> [CU FT] PER PULSE><__>	<PULSE><AI>	N/A	C	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	<__>	

NOTES:
1) THE CONTRACTOR SHALL COMPLETE THE POINTS SCHEDULE AS INDICATED IN THE SPECIFICATION AND IN ACCORDANCE WITH THE POINTS SCHEDULE INSTRUCTIONS DRAWING.
2) UNIT MANUFACTURERS PROOFS AND SAFETIES: THE CONTRACTOR SHALL SHOW EACH PROOF AND SAFETY AS A SEPARATE ROW.
3) UNIT STATUS: SERVES AS A MONITORED POINT AT THE M&C SOFTWARE (FRONT-END) AND AS A HEATING/COOLING REQUEST TO THE BOILER, HEAT EXCHANGER, AND/OR CHILLER SERVING THIS SYSTEM.
THIS NOTE IS USED ONLY FOR BACNET (NO NIAGARA) 4) DDC HW ID FOR DEVICE CONTAINING TREND OBJECT FOR REMOTE TRENDING FOR THIS SYSTEM: <__>
THIS NOTE IS USED ONLY FOR BACNET (NO NIAGARA) 5) DDC HW ID FOR DEVICE CONTAINING EVENT ENROLLMENT OBJECT FOR REMOTE ALARMING FOR THIS SYSTEM: <__>
THIS NOTE IS USED ONLY FOR LNS LONWORKS (NO NIAGARA) 6) DDC HW IF FOR DEVICE CONTAINING SIMPLE SCHEDULER OBJECT (OR SYSTEM SCHEDULER SEQUENCE OF OPERATIONS) FOR THIS SYSTEM: <__>

ELECTRIC METER

COLUMN IS USED FOR BACNET (WITH NIAGARA)

FUNCTION	NAME	DESCRIPTION	DDC HARDWARE ID	SETTINGS (WITH UNITS)	RANGE (WITH UNITS)	IO TYPE	HOA REQ'D	CONFIG. TYPE	M&C VIEW AND OVRD	LDP VIEW AND OVRD	TREND REQ'D	ALARMS			PRIMARY POINT INFORMATION		NETWORK DATA EXCHANGE		OVERRIDES	ALARM INFORMATION		CONFIGURATION INFORMATION
												ALARM CONDITION	ALARM PRIORITY	M&C ROUTING	OBJECT TYPE AND INSTANCE NUMBER (AND PROPERTY ID)	NIAGARA ID	DATA FROM	DATA TO	OBJECT TYPE & INSTANCE NUMBER OR COMMANDABLE	ALARM TYPE (PROVIDE DDC ID FOR REMOTE IN NOTES)	NOTIFICATION CLASS OBJECT INSTANCE NUMBER	
REQUIRED POINTS	PWR-TOT	REAL POWER (TOTAL)	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KWH-TOT	TOTAL kWh (TOTAL ENERGY)	<__>	N/A	0 - <__> kWh	N/A	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	PWR-DEMAND-PEAK	HISTORICAL PEAK DEMAND POWER	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	PWR-DEMAND	DEMAND POWER	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	V	[~]	X	[__][~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	VOLT-A	RMS VOLTAGE FOR PHASE A	<__>	N/A	0 - <__> VOLTS RMS	<AI>	N/A	N/A	V	[~]	X	VOLT-A < [0.9*NOMINAL]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	VOLT-B	RMS VOLTAGE FOR PHASE B	<__>	N/A	0 - <__> VOLTS RMS	<AI>	N/A	N/A	V	[~]	X	VOLT-B < [0.9*NOMINAL]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	VOLT-C	RMS VOLTAGE FOR PHASE C	<__>	N/A	0 - <__> VOLTS RMS	<AI>	N/A	N/A	V	[~]	X	VOLT-C < [0.9*NOMINAL]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	AMP-A	RMS CURRENT FOR PHASE A	<__>	N/A	0 - <__> AMPS RMS	<AI>	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	AMP-B	RMS CURRENT FOR PHASE B	<__>	N/A	0 - <__> AMPS RMS	<AI>	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
AMP-C	RMS CURRENT FOR PHASE C	<__>	N/A	0 - <__> AMPS RMS	<AI>	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>		
HZ-AVG	AVERAGE LINE FREQUENCY	<__>	N/A	0 - <__> HZ	N/A	N/A	N/A	V	[~]	X	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
OPTIONAL POINTS	PWR-A	REAL POWER FOR PHASE A	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	PWR-B	REAL POWER FOR PHASE B	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	PWR-C	REAL POWER FOR PHASE C	<__>	N/A	0 - <__> WATTS	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	HZ-A	FREQUENCY FOR PHASE A	<__>	N/A	0 - <__> HZ	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	HZ-B	FREQUENCY FOR PHASE B	<__>	N/A	0 - <__> HZ	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	HZ-C	FREQUENCY FOR PHASE C	<__>	N/A	0 - <__> HZ	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVA-TOT	TOTAL kVA	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVA-A	kVA FOR PHASE A	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVA-B	kVA FOR PHASE B	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVA-C	kVA FOR PHASE C	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVAR-TOT	TOTAL REACTIVE POWER	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVAR-A	REACTIVE POWER FOR PHASE A	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVAR-B	REACTIVE POWER FOR PHASE B	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVAR-C	REACTIVE POWER FOR PHASE C	<__>	N/A	0 - <__> kVA	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVARH-TOT	TOTAL kVARh (TOTAL REACTIVE...	<__>	N/A	0 - <__> kVAh	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
	KVARH-A	kVARh (TOTAL REACTIVE ENERGY...	<__>	N/A	0 - <__> kVAh	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
KVARH-B	kVARh (TOTAL REACTIVE ENERGY...	<__>	N/A	0 - <__> kVAh	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>		
KVARH-C	kVARh (TOTAL REACTIVE ENERGY...	<__>	N/A	0 - <__> kVAh	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>		
PF-AVG	AVERAGE POWER FACTOR	<__>	N/A	-1 TO 1	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
PF-A	POWER FACTOR FOR PHASE A	<__>	N/A	-1 TO 1	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
PF-B	POWER FACTOR FOR PHASE B	<__>	N/A	-1 TO 1	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	
PF-C	POWER FACTOR FOR PHASE C	<__>	N/A	-1 TO 1	N/A	N/A	N/A	[~]	[~]	[~]	[~]	[~]	[INFO] [CRIT]	[__]	<__>	<__>	<__>	<__>	<__>	<__>	<__>	

NOTES:
1) THE CONTRACTOR SHALL COMPLETE THE POINTS SCHEDULE AS INDICATED IN THE SPECIFICATION AND IN ACCORDANCE WITH THE POINTS SCHEDULE INSTRUCTIONS DRAWING.
2) UNIT MANUFACTURERS PROOFS AND SAFETIES: THE CONTRACTOR SHALL SHOW EACH PROOF AND SAFETY AS A SEPARATE ROW.
3) UNIT STATUS: SERVES AS A MONITORED POINT AT THE M&C SOFTWARE (FRONT-END) AND AS A HEATING/COOLING REQUEST TO THE BOILER, HEAT EXCHANGER, AND/OR CHILLER SERVING THIS SYSTEM.
4) DDC HW ID FOR DEVICE CONTAINING TREND OBJECT FOR REMOTE TRENDING FOR THIS SYSTEM: <__>
5) DDC HW ID FOR DEVICE CONTAINING EVENT ENROLLMENT OBJECT FOR REMOTE ALARMING FOR THIS SYSTEM: <__>
6) DDC HW IF FOR DEVICE CONTAINING SIMPLE SCHEDULER OBJECT (OR SYSTEM SCHEDULER SEQUENCE OF OPERATIONS) FOR THIS SYSTEM: <__>

US Army Corps of Engineers®

ISSUE DATE: FEBRUARY 2026

SOLICITATION NO.:

CONTRACT NO.:

DESIGNED BY: M. SHAFIUDIN

DRAWN BY: B. HARTMAN

CHECKED BY: C. GREENWELL

SUBMITTED BY: M. BARRY

SIZE: ANSI D

US ARMY CORPS OF ENGINEERS

LOUISVILLE DISTRICT

600 DR. MARTIN LUTHER KING JR. PLACE

LOUISVILLE, KY 40202

FT. CAMPBELL, KY.

UEPH BARRACKS

PN 98248, FY2026, P2 511886

ENERGY CONTROLS MONITORING

SHEET ID

M-717

AMENDMENT 0002

DESCRIPTION

1

MARK

4/28/2026 9:20:17 AM

C:\userfiles\cdm\documents\1886_Ren2025_M_UEPH-UEEDMS-04

Plot Date:

File Path:


4/28/2026 9:20:17 AM

C:\userfiles\cdm\documents\1886_Ren2025_M_UEPH-UEEDMS-04

W912QR26RA016_Plans-0002

CERTIFIED FINAL

US Army Corps
of Engineers®



**US Army Corps
of Engineers®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: J. MOORE	ISSUE DATE: FEBRUARY 2026
	CHECKED BY: J. MOORE	SOLICITATION NO.:
	SUBMITTED BY: M. BARRY	CONTRACT NO.:
	B. GADDIE	
	ANSI D	



FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686

SHEET ID
T-001

Plot Date: 4/24/2026 7:44:46 AM
File Path: C:\Users\H2EDDJM9\Documents\511686 Rev12025 E_UEPH H2EDDJM9.M

CERTIFIED FINAL


W912QR26RA016_Plans-0002

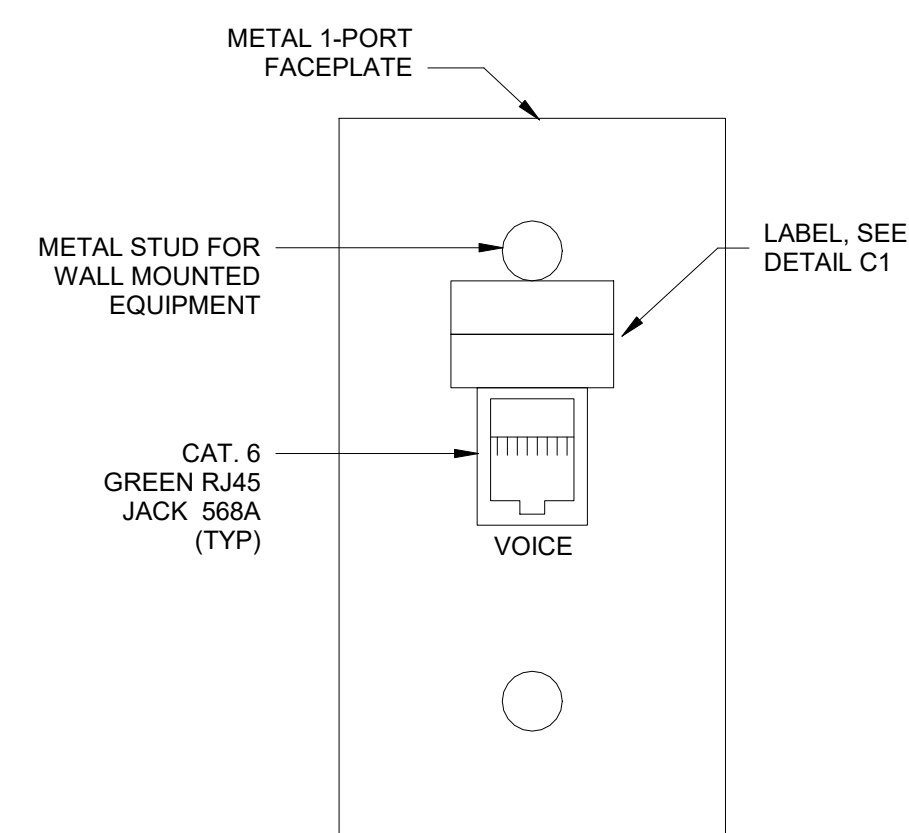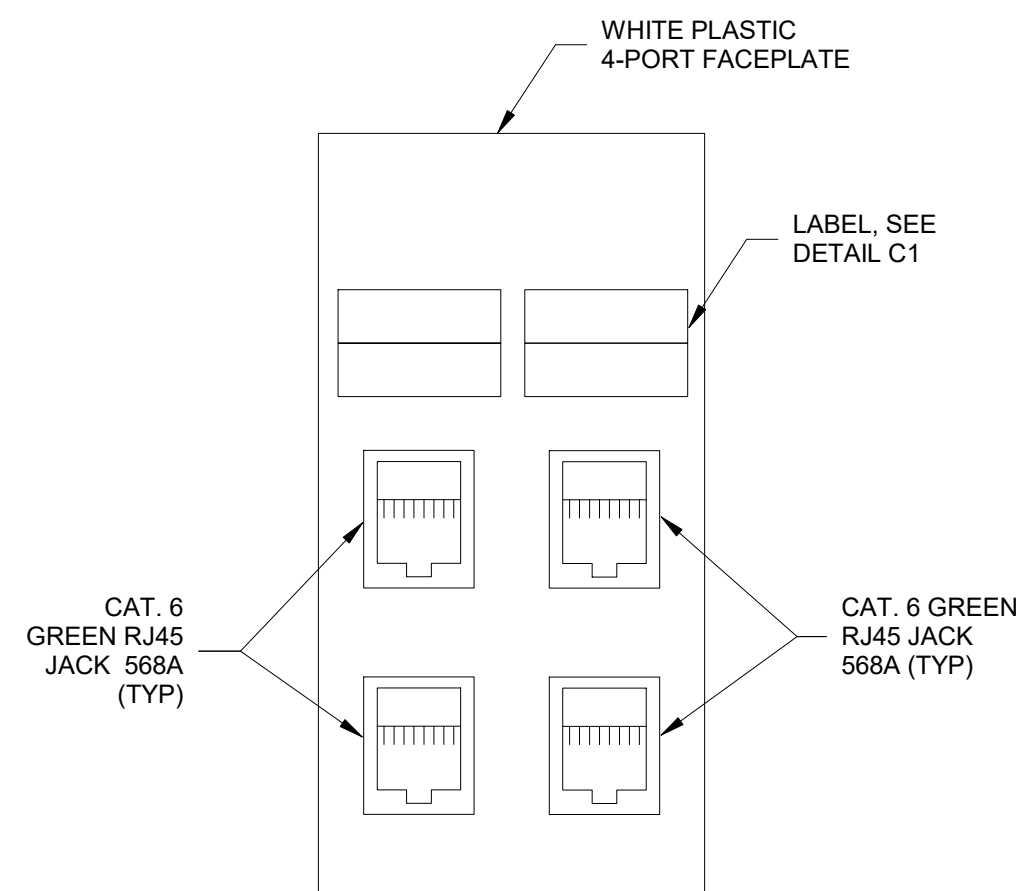

(J16) TELEPHONE OUTLET
NOT TO SCALE



1. PROVIDE OUTLET AND CABLE COLORS AS:
VOICE OUTLETS : GREEN
DATA OUTLETS : GREEN
2. ALL LABELING DESIGNATIONS SHALL BE DONE USING A STANDARD COMMERCIAL LABELING PRODUCT TO ENSURE LEGIBILITY. HANDWRITTEN LABELS MUST NOT BE USED FOR THE FINAL CONFIGURATION.
3. ALL INDIVIDUAL DATA AND VOICE PATCHES SHALL BE CONSOLIDATED INTO THEIR OWN RESPECTIVE DATA OR VOICE DEDICATED PATCH PANELS.

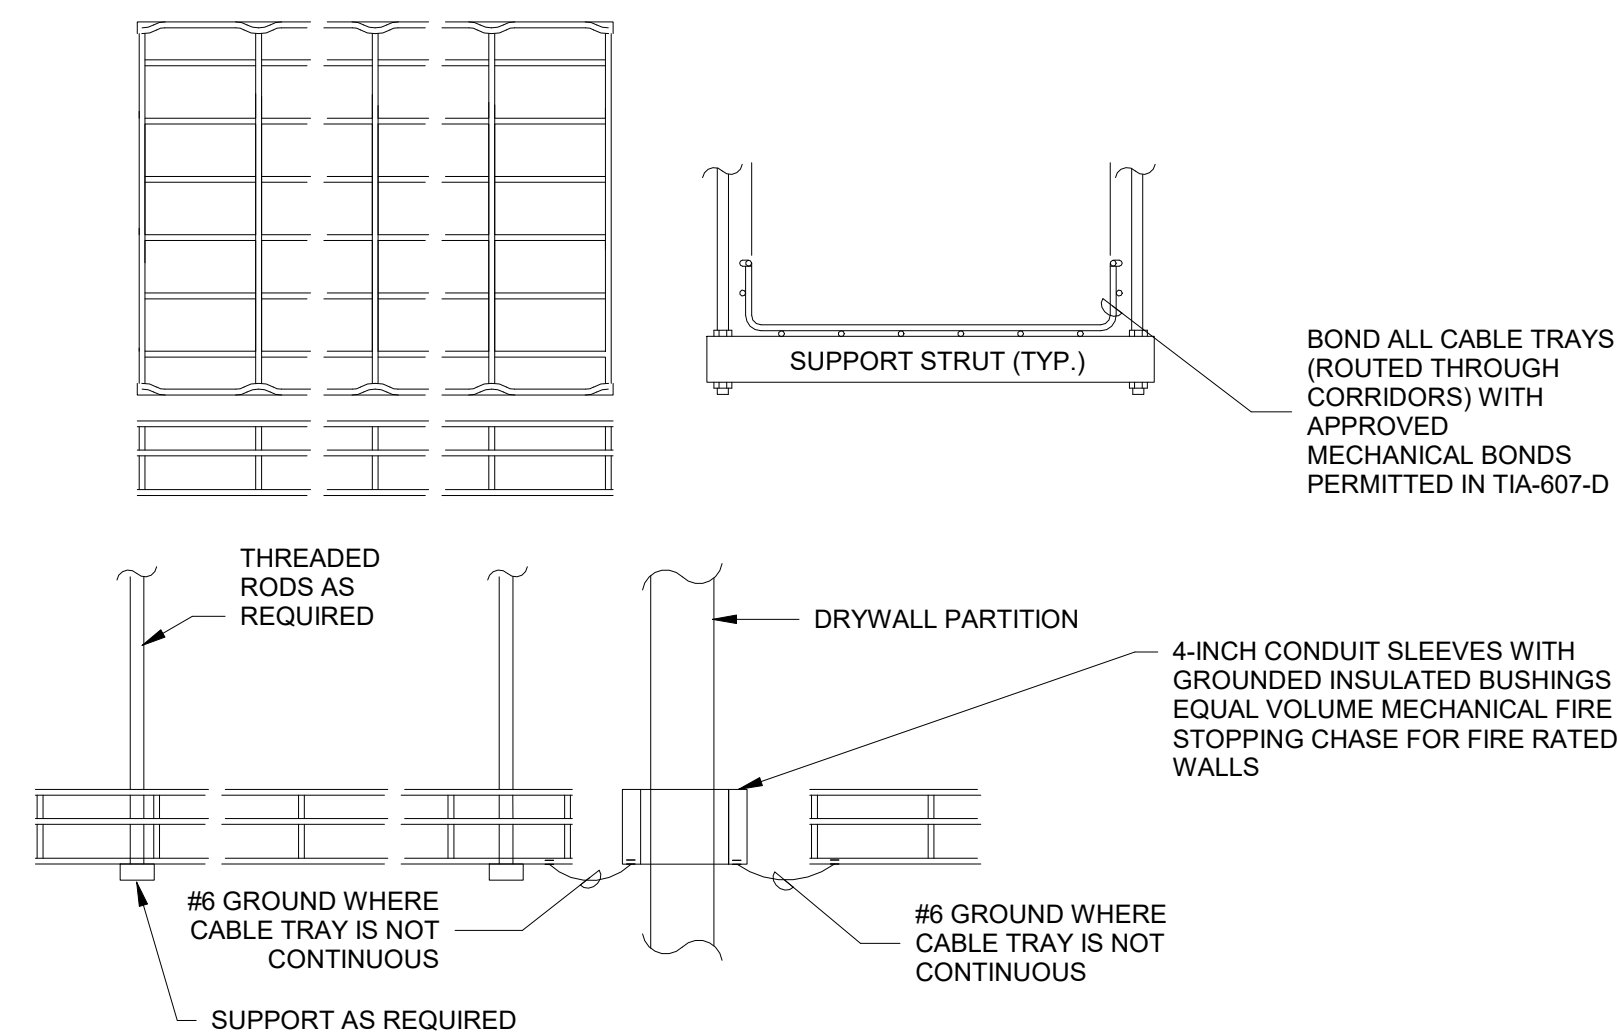

STRUCTURE

INSULATED GROUND BUSHING WITH #6 AWG TO CABLE TRAY

12 MIN.

1" THREADED ROD

7/16" SUPPORT STRUT

1 INCH CONDUIT TO CABLE TRAY WITH PULL STRING AND CABLING

TYPICAL WALL/COUNTERTOP OR CEILING OUTLET

D16 TYPICAL OUTLET/DROPOUT DETAIL
NOT TO SCALE

TYPICAL WALL FACEPLATE LABELING SCHEME

C1 NOT TO SCALE


2	AMENDMENT 0002	April 2026
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY 40202	DESIGNED BY: J.MOORE	ISSUE DATE: FEBRUARY 2026
	DRAWN BY: J.MOORE	SOLICITATION NO.:
	CHECKED BY: B.GADDIE	CONTRACT NO.:
	SUBMITTED BY: M. BARRY	
	SIZE:	


FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686

SHEET ID


T-503

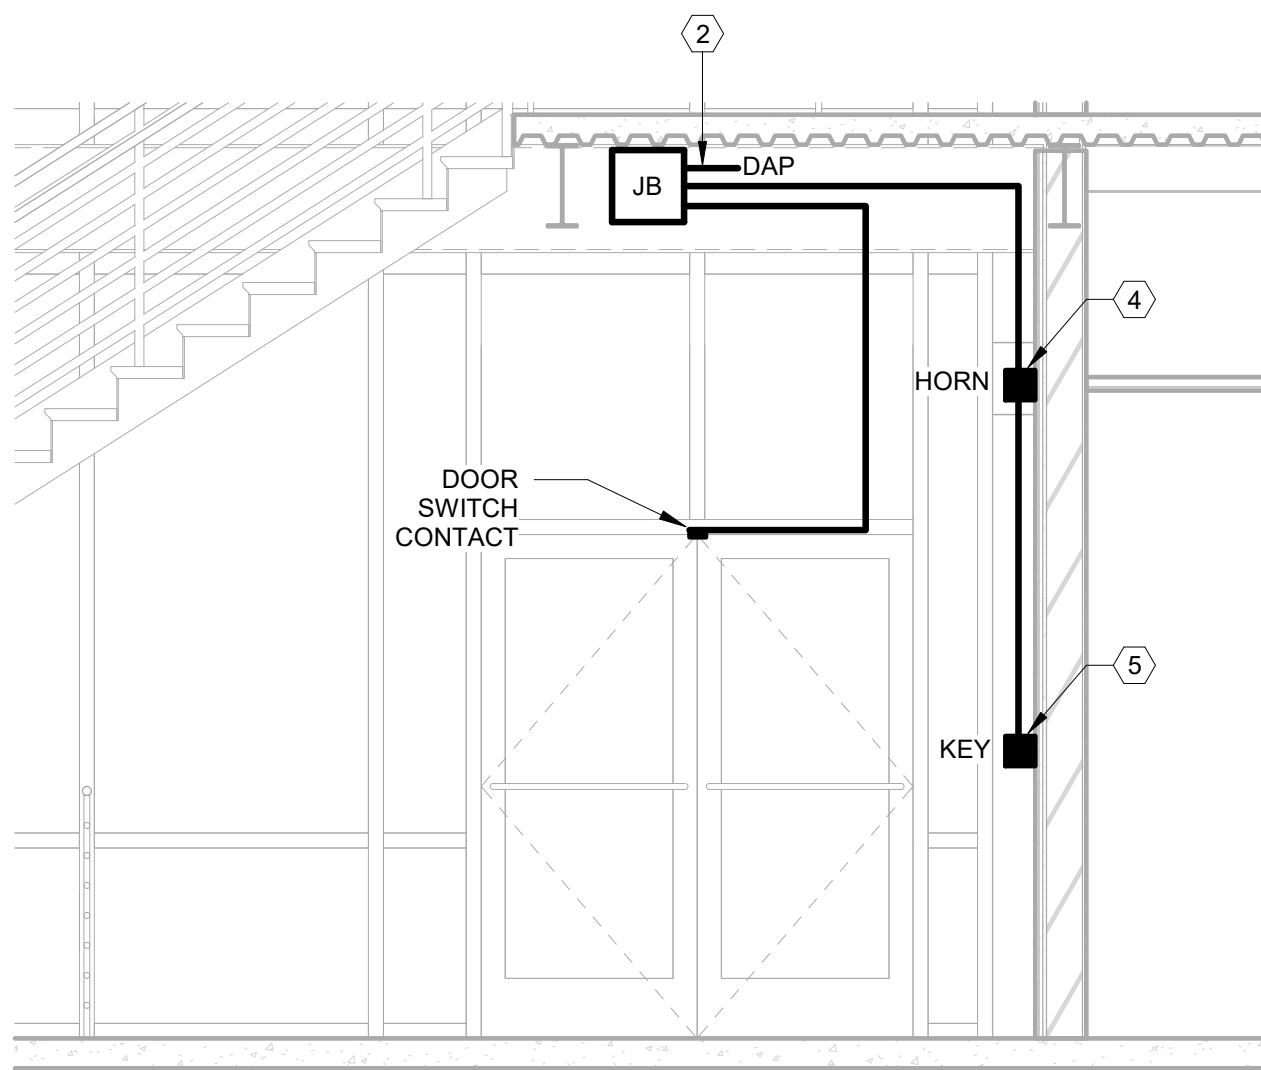


(K1) E. STAIR EXT. EXIT DOOR SECTION
3/8" = 1'-0"

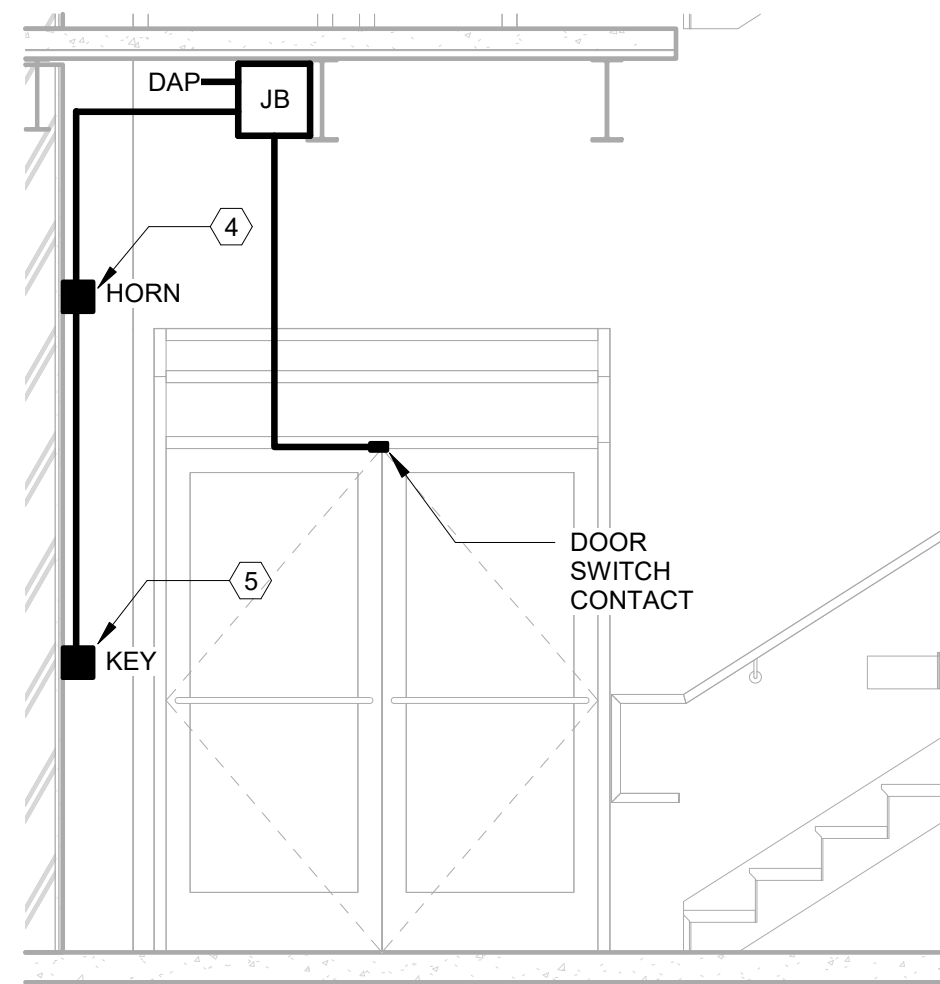


(K7) S. STAIR EXT. EXIT DOOR SECTION
3/8" = 1'-0"

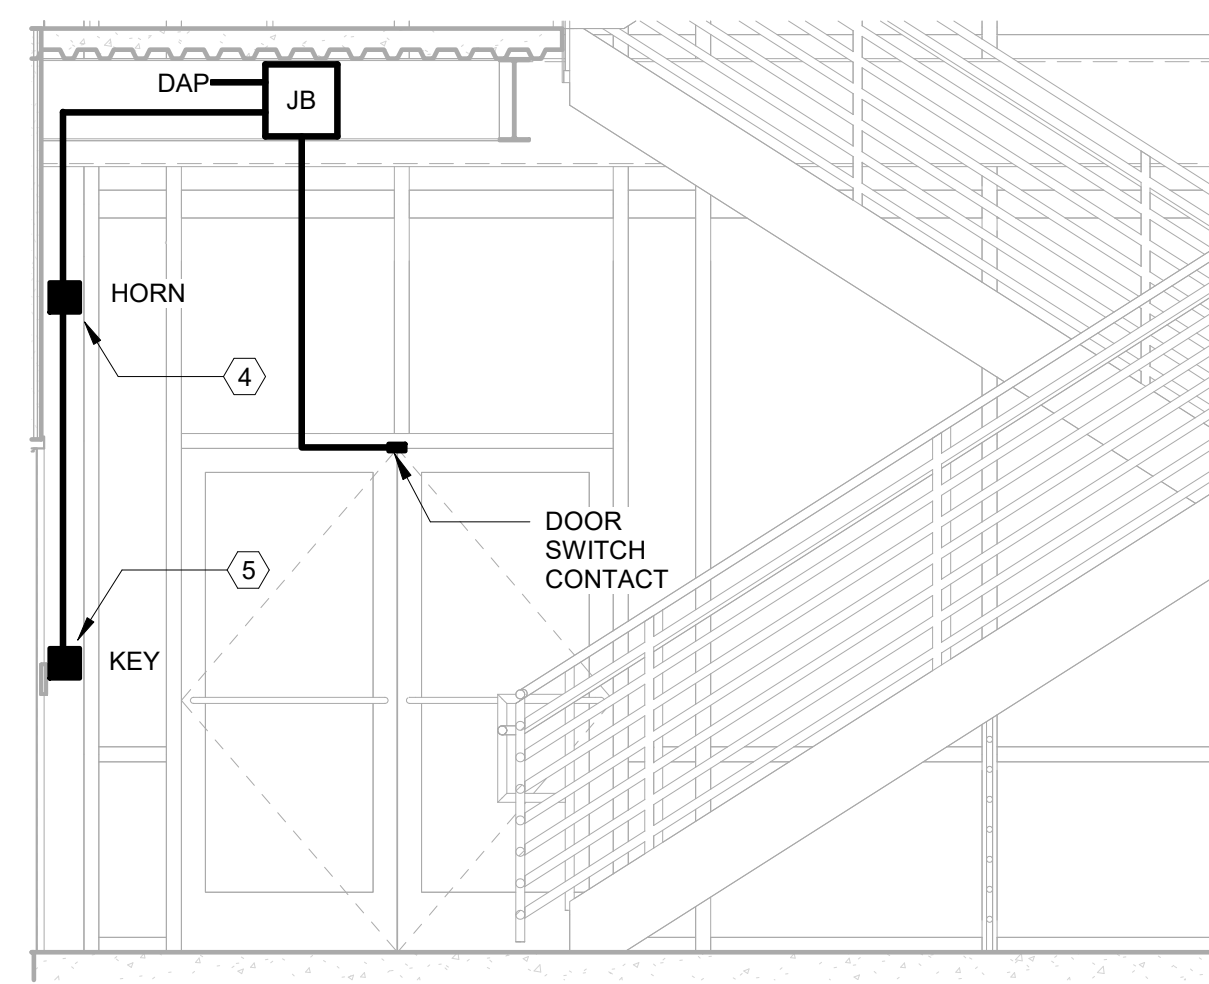


K12 W. STAIR EXT. EXIT DOOR SECTION
3/8" = 1'-0"

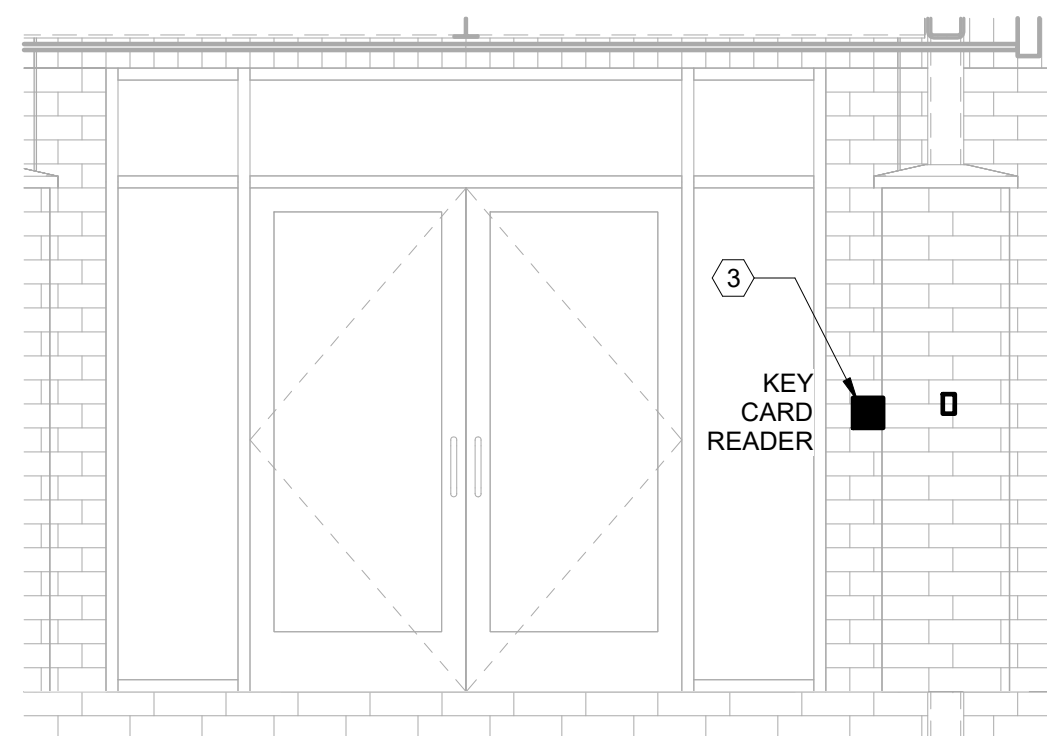

E1 NORTH-SOUTH VEST. DOOR EXTERIOR
3/8" = 1'-0"

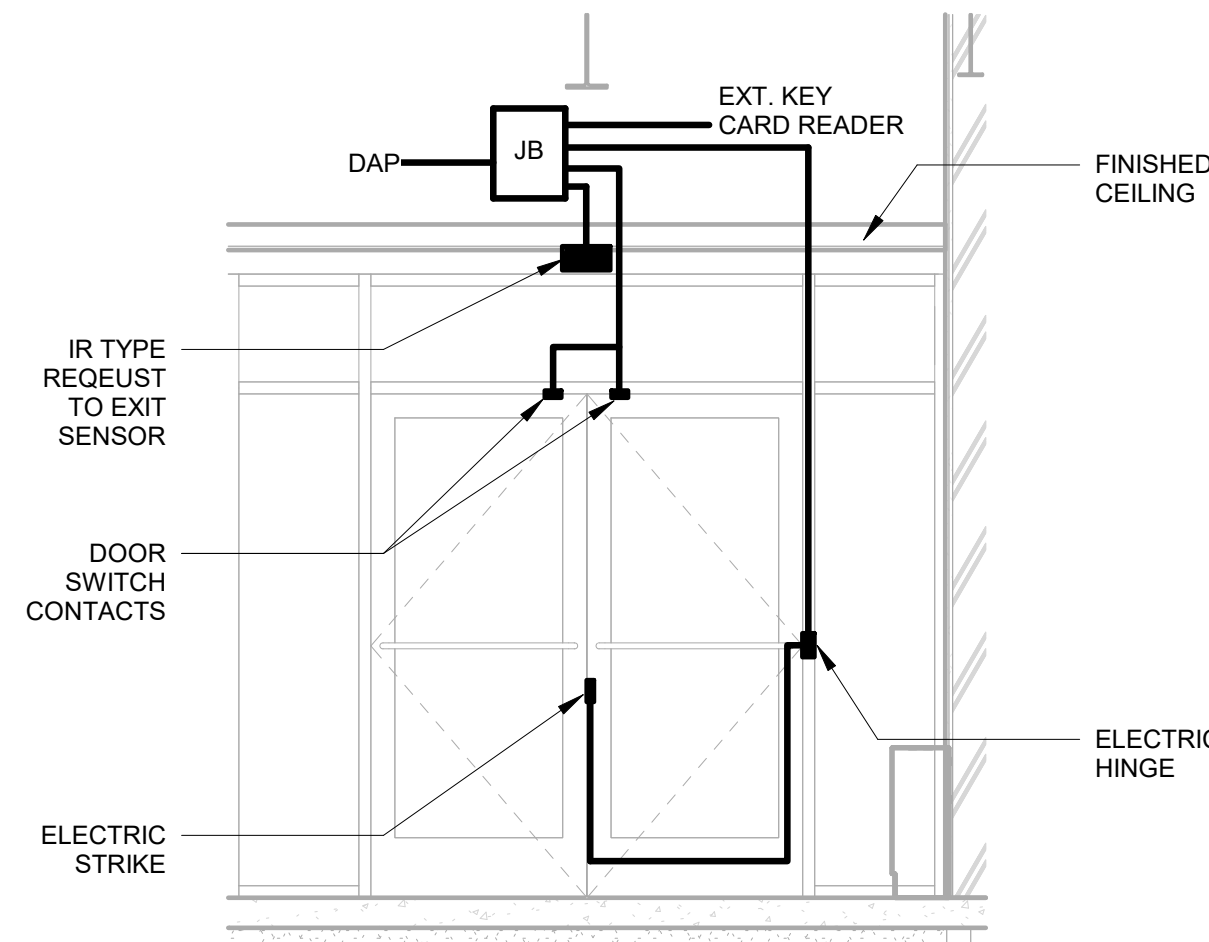

(E7) NORTH-SOUTH VEST. DOOR INTERIOR
3/8" = 1'-0"

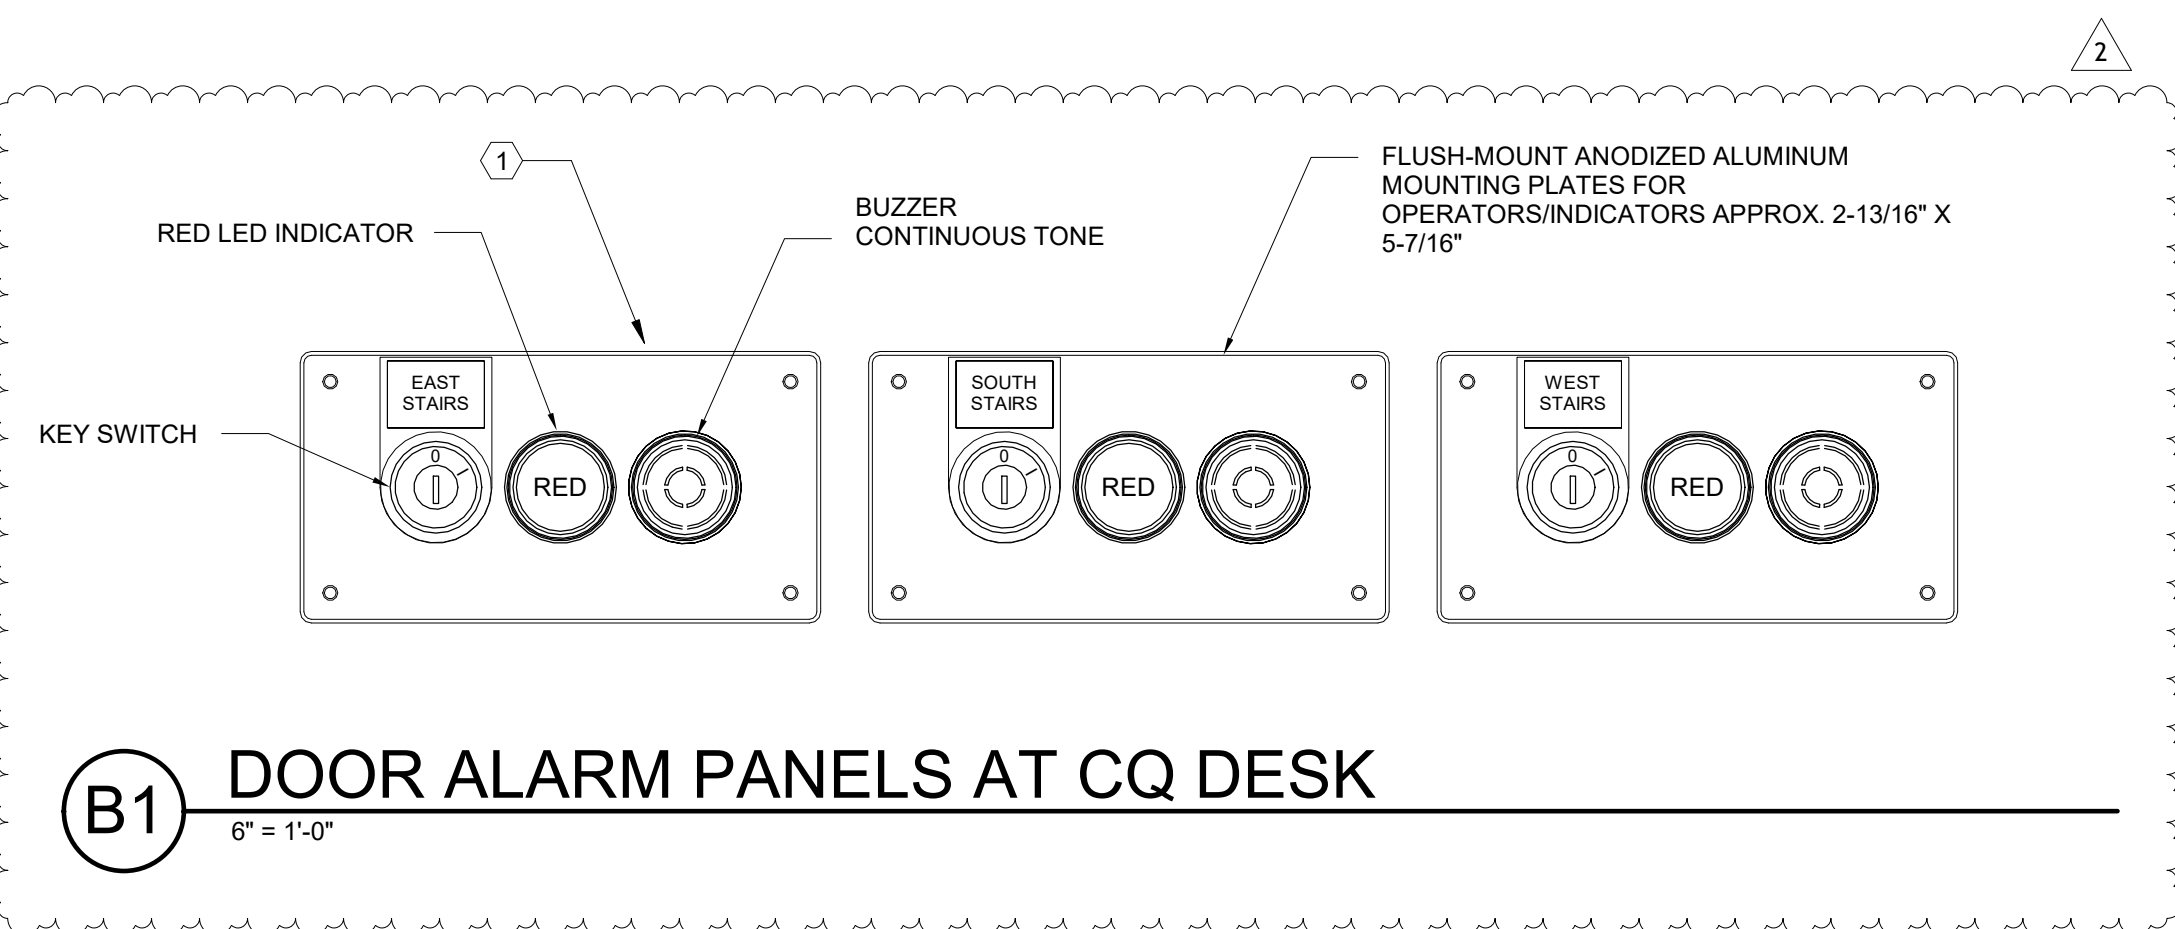

B1 DOOR ALARM PANELS AT CQ DESK
6" = 1'-0"

GENERAL NOTES - DOOR ALARMS

EACH STAIR EXIT DOOR ON THE FIRST FLOOR AND OTHER EXIT DOORS NOT DIRECTLY VISUALLY OBSERVABLE FROM THE CQ DESK MUST EACH BE PROVIDED WITH A HARD-WIRED CONTACT SWITCH CONNECTED TO AN ALARM SYSTEM. ALARM SYSTEM MUST SOUND AN ALARM AFTER A SIXTY-SECOND DELAY IF DOOR IS LEFT OPEN - BOTH AT THE DOOR LOCATION, AND AT THE CQ STATION. SWITCHING OFF ACTIVATED ALARM MUST BE BY KEY AT THE SPECIFIC DOOR AND AT THE CQ DESK. IT MUST BE VISUALLY OBSERVABLE BY THE CQ MONITORING STATION AND ALL CONDUIT MUST BE COMPLETELY CONCEALED. DEVELOP AND TEST SYSTEM FOR COMPLETE COMPLIANCE WITH CURRENT BASE REQUIREMENTS AS ESTABLISHED BY FTC DPW ENGINEERING. FOR CARD READERS AND OTHER SPECIAL SECURITY/ACCESS RELATED COMPONENTS CONTACT FTC DPW ENGINEERING.

CENTRALIZED DOOR ACCESS PANEL (DAP) REQUIRED TO HAVE BATTERY BACKUP/UPS IN ORDER TO MAINTAIN OPERATION DURING POWER OUTAGES

SEQUENCE OF OPERATIONS FOR STAIR DOORS:

IF ALARMED DOOR IS OPENED WHILE SYSTEM IS ACTIVATED, ALARM HORN AT THAT DOOR LOCATION AND AT THE C.Q. DESK WILL OPERATE.

IF KEY IS USED AT THE SPECIFIC DOOR LOCATION OR AT C.Q. DESK TO DEACTIVATE THE ALARM SYSTEM FOR THAT DOOR, THEN ALARM WILL NOT OPERATE AT THAT DOOR OPENING.

ALL OTHER DOORS WILL REMAIN ACTIVATED INDEPENDENT OF OTHER DOORS

RED LIGHT AT C.Q. ANNUNCIATION PANEL WILL OPERATE SHOWING WHICH DOOR IS OPENED.

ALARM AND CONTACT MONITORING SHALL RESET AFTER USE TO NORMAL OPERATION AUTOMATICALLY AFTER PRESET TIME. TIME SHALL BE DETERMINED BY FTC DPW ENGINEERING.

KEY NOTES

1. INSTALL ALL THREE DOOR ALARM ANNUNCIATOR PANELS AT CO STATION, READILY ACCESSIBLE, FLUSH-MOUNT AND ADJACENT TO POWER RECEPTACLES AND DATA PORTS LOCATED ABOVE DESKTOP ON CASEWORK BACKPLASH. CONTRACTOR TO SUPPLY AND INSTALL ALL EQUIPMENT, CONTROLS AND COMPONENTS INDICATED IN THIS DETAIL AND ON THIS SHEET.
2. POWER AND CONTROL WIRING TO/FROM DOOR ACCESS PANEL LOCATED IN "STANDARD TELECOM" RACK.
3. EXTERNAL ENTRY KEYCARD READER MOUNTED TO RIGHT CANOPY SUPPORT POST, ADJACENT TO DOOR, 4FT AFF (TYP).
4. HORN-SOUNDER MOUNTED TO WALL, 9FT AFF.
5. HORN-SOUNDER ALARM DISABLE KEYCARD READER MOUNTED IN WALL ADJACENT TO DOOR INTERIOR, 4FT AFF.



**US Army Corps
of Engineers®**

[illegible]

US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. JAMES R. PLACE LOUISVILLE, KY 40202	ISSUE DATE: FEBRUARY 2028 SOLICITATION NO.: CONTRACT NO.:	DESIGNED BY: J. MOORE DRAWN BY: J. MOORE CHECKED BY: P. MOORE SUBMITTED BY: M. BARRY	SIZE: C
---	--	---	------------

FT. CAMPBELL, KY.
UEPH BARRACKS
PN 99248, FY2026, P2 511686
DOOR ALARM RISER AND DETAILS

DOOR AL ARMBRISER AND DETAILS

SHEET ID

T-504